



HUAKE TESTING


4.5 Spurious Emission

4.5.1 Test Specification


Test Requirement:	FCC CFR47 Part 15 Section 15.407				
Test Method:	KDB 789033 D02 v02r01				
Frequency Range:	9kHz to 40GHz				
Measurement Distance:	3 m				
Antenna Polarization:	Horizontal & Vertical				
Operation Mode:	Transmitting mode with modulation				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. The limit of frequency below 1GHz and which fall in restricted bands should comply 15.209.				

Test Setup:


For Radiated Emissions below 30MHz

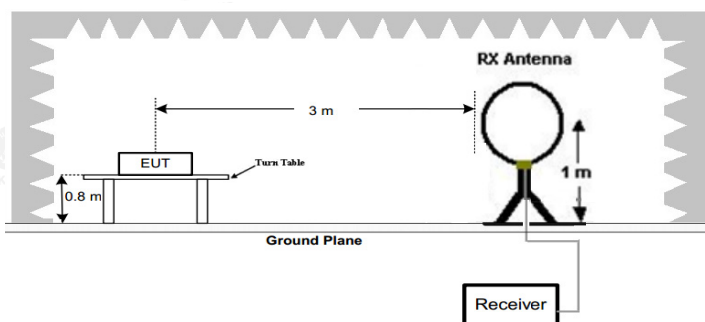

30MHz to 1GHz

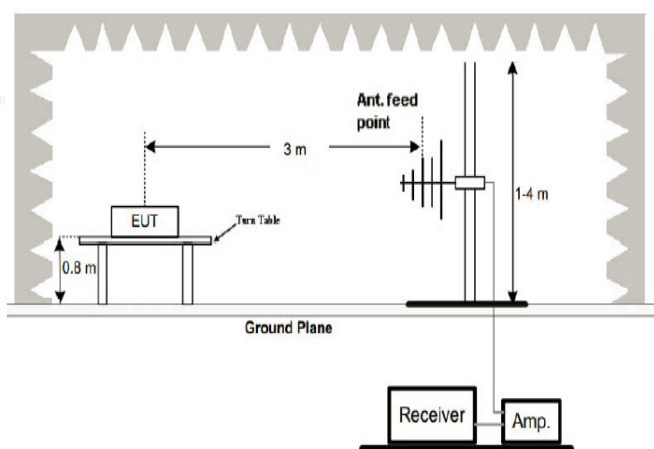

Above 1GHz

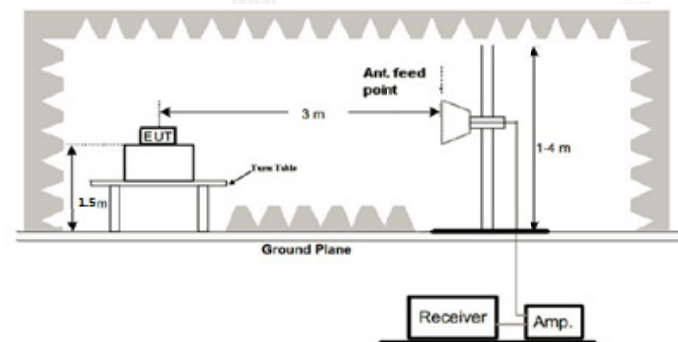

Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Results:	PASS



4.5.2 Test Instruments

Radiated Emission Test Site (966)

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-025	Feb. 06, 2026	Feb. 05, 2027
Spectrum analyzer	KEYSIGHT	N9020A	HKE-117	Feb. 06, 2026	Feb. 05, 2027
Spectrum analyzer	R&S	FSV3044	HKE-126	Feb. 06, 2026	Feb. 05, 2027
Preamplifier	Schwarzbeck	EMC051845SE	HKE-006	Feb. 04, 2026	Feb. 03, 2027
Preamplifier	Agilent	83051A	HKE-016	Feb. 04, 2026	Feb. 03, 2027
Preamplifier	QJD	QJD18-40-50	HKE-030	Feb. 05, 2026	Feb. 04, 2027
6dB Attenuator	Pasternack	6dB	HKE-007	Feb. 06, 2026	Feb. 05, 2027
EMI Test Receiver	R&S	ESR-7	HKE-010	Feb. 06, 2026	Feb. 05, 2027
Broadband Antenna	Schwarzbeck	VULB9168	HKE-167	Feb. 06, 2026	Feb. 05, 2028
Loop Antenna	COM-POWER	AL-130R	HKE-014	Feb. 06, 2026	Feb. 05, 2028
Horn Antenna	Schwarzbeck	9120D	HKE-013	Feb. 06, 2026	Feb. 05, 2028
EMI Test Software	Tonscend	JS32-RE 5.0.0	HKE-082	/	/
RSE Test Software	Tonscend	JS36-RSE 5.0.0	HKE-184	/	/




4.5.3 Test Data

All the test modes completed for test. Only the worst result was reported as below:

Below 1GHz Test Results

Antenna polarity: Horizontal

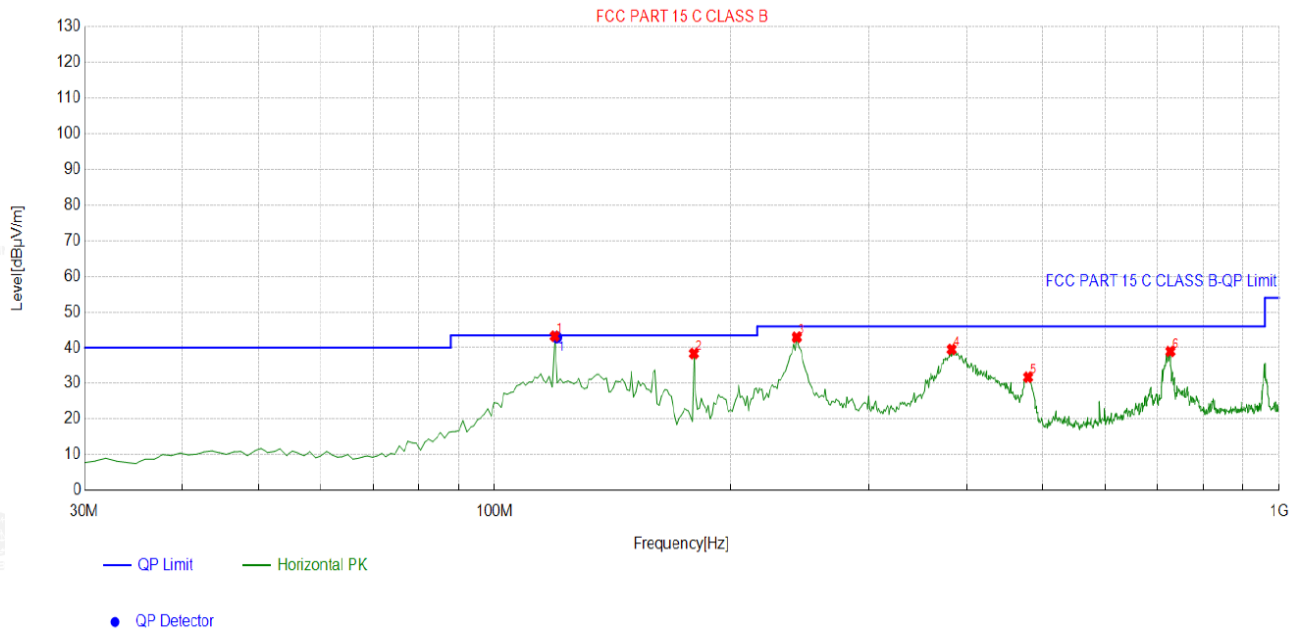

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	119.329	-16.17	59.41	43.24	43.50	0.26	100	168	Horizontal
2	179.530	-16.44	54.81	38.37	43.50	5.13	100	142	Horizontal
3	242.643	-13.37	56.30	42.93	46.00	3.07	100	146	Horizontal
4	382.462	-10.22	49.76	39.54	46.00	6.46	100	139	Horizontal
5	478.589	-8.22	39.96	31.74	46.00	14.26	100	38	Horizontal
6	726.186	-3.82	42.79	38.97	46.00	7.03	100	142	Horizontal


Final Data List									
NO.	Freq. [MHz]	Factor [dB]	QP Reading [dBμV/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	119.997	-16.17	59.10	42.93	43.50	0.57	100	168	Horizontal

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



HUAKE TESTING

Antenna polarity: Vertical

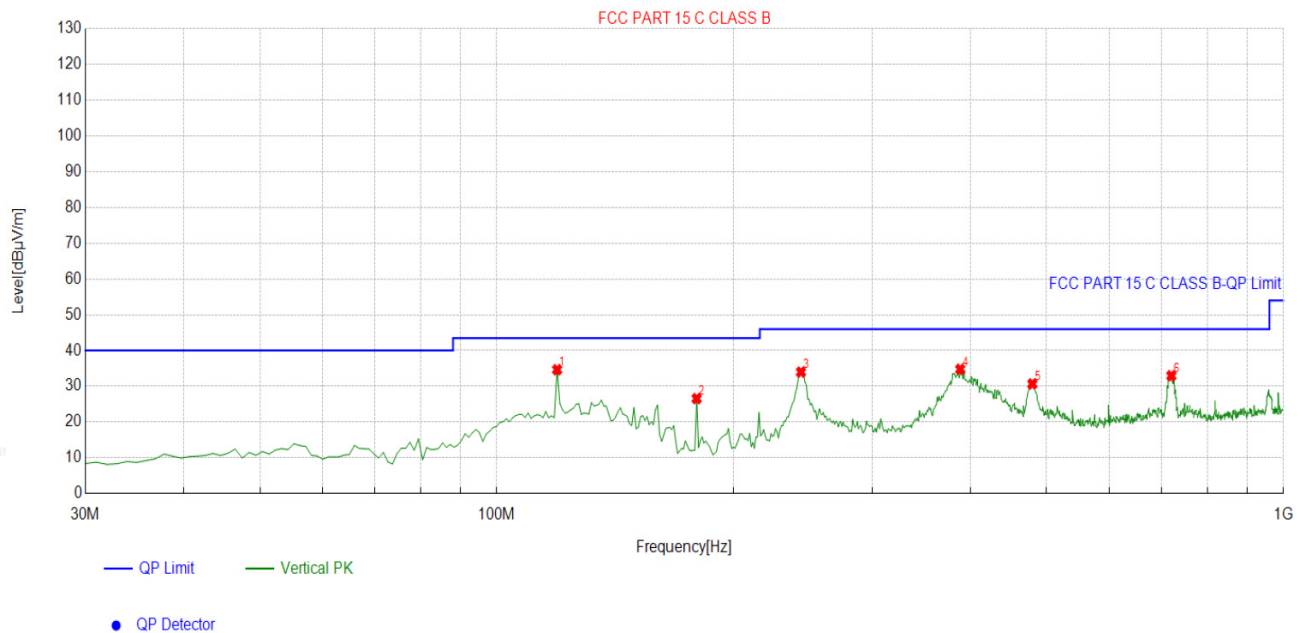

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	119.329	-16.17	50.82	34.65	43.50	8.85	100	136	Vertical
2	179.530	-16.44	43.02	26.58	43.50	16.92	100	140	Vertical
3	243.614	-13.34	47.32	33.98	46.00	12.02	100	118	Vertical
4	388.288	-10.00	44.76	34.76	46.00	11.24	100	71	Vertical
5	479.560	-8.19	38.86	30.67	46.00	15.33	100	278	Vertical
6	720.360	-3.96	36.93	32.97	46.00	13.03	100	107	Vertical

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level

Harmonics and Spurious Emissions Frequency Range (9kHz-30MHz)

Frequency (MHz)	Level@3m (dBμV/m)	Limit@3m (dBμV/m)
--	--	--
--	--	--
--	--	--
--	--	--

Note: 1. Emission Level=Reading+ Cable loss-Antenna factor-Amp factor.


2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement.

Above 1GHz Test Results

All the test modes completed for test. Only the worst result was reported as below:

For 1GHz to 5.15GHz

Antenna polarity: Horizontal

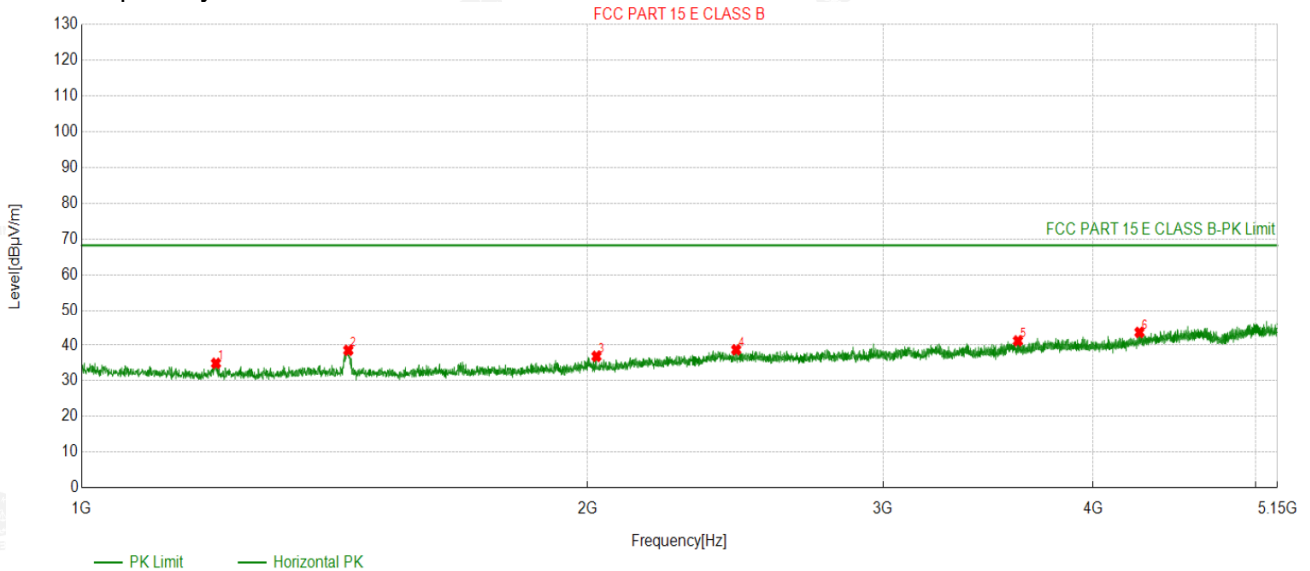


Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	PK Level [dBμV/m]	Factor [dB]	PK Limit [dBμV/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1202.125	54.38	34.92	-19.46	68.20	33.28	150	270	Horizontal
2	1441.189	57.24	38.57	-18.67	68.20	29.63	150	220	Horizontal
3	2025.152	53.80	36.88	-16.92	68.20	31.32	150	230	Horizontal
4	2452.645	53.23	38.73	-14.50	68.20	29.47	150	240	Horizontal
5	3608.535	52.36	41.22	-11.14	68.20	26.98	150	300	Horizontal
6	4262.641	52.18	43.60	-8.58	68.20	24.60	150	100	Horizontal

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



Antenna polarity: Vertical

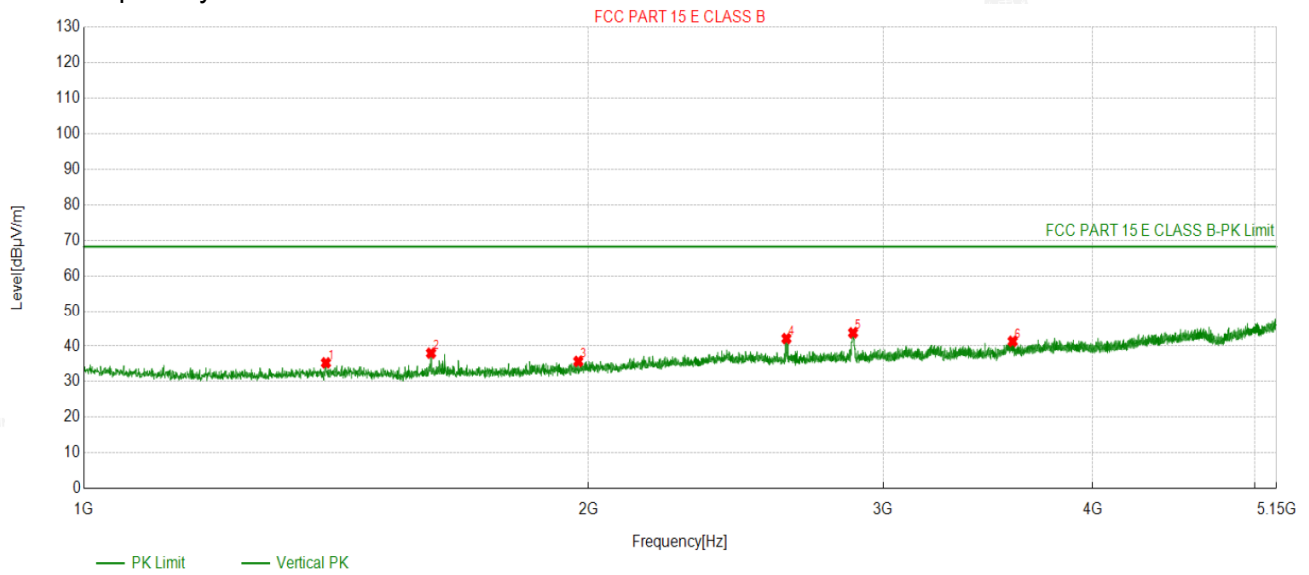

Suspected Data List


NO.	Freq. [MHz]	Reading [dBμV/m]	PK Level [dBμV/m]	Factor [dB]	PK Limit [dBμV/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1394.704	53.84	35.28	-18.56	68.20	32.92	150	130	Vertical
2	1611.356	56.68	38.00	-18.68	68.20	30.20	150	350	Vertical
3	1972.857	52.88	35.69	-17.19	68.20	32.51	150	200	Vertical
4	2626.132	56.72	42.10	-14.62	68.20	26.10	150	130	Vertical
5	2878.062	57.74	43.71	-14.03	68.20	24.49	150	220	Vertical
6	3584.048	52.72	41.32	-11.40	68.20	26.88	150	220	Vertical

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



For 5.35GHz to 18GHz


Antenna polarity: Horizontal

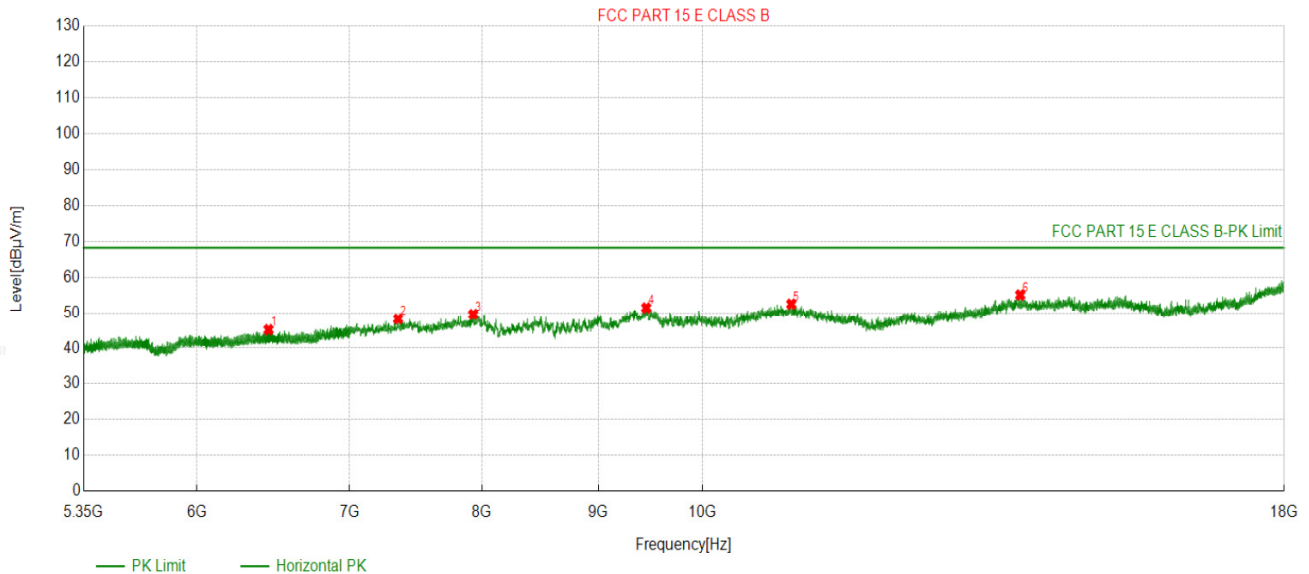

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	PK Level [dBμV/m]	Factor [dB]	PK Limit [dBμV/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	6449.009	52.21	45.16	-7.05	68.20	23.04	150	131	Horizontal
2	7350.935	51.80	48.25	-3.55	68.20	19.95	150	169	Horizontal
3	7930.693	51.71	49.55	-2.16	68.20	18.65	150	262	Horizontal
4	9446.644	51.04	51.43	0.39	68.20	16.77	150	146	Horizontal
5	10938.39	50.63	52.49	1.86	68.20	15.71	150	109	Horizontal
6	13785.47	49.80	55.06	5.26	68.20	13.14	150	21	Horizontal

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor;
Margin = Limit – Level

Antenna polarity: Vertical

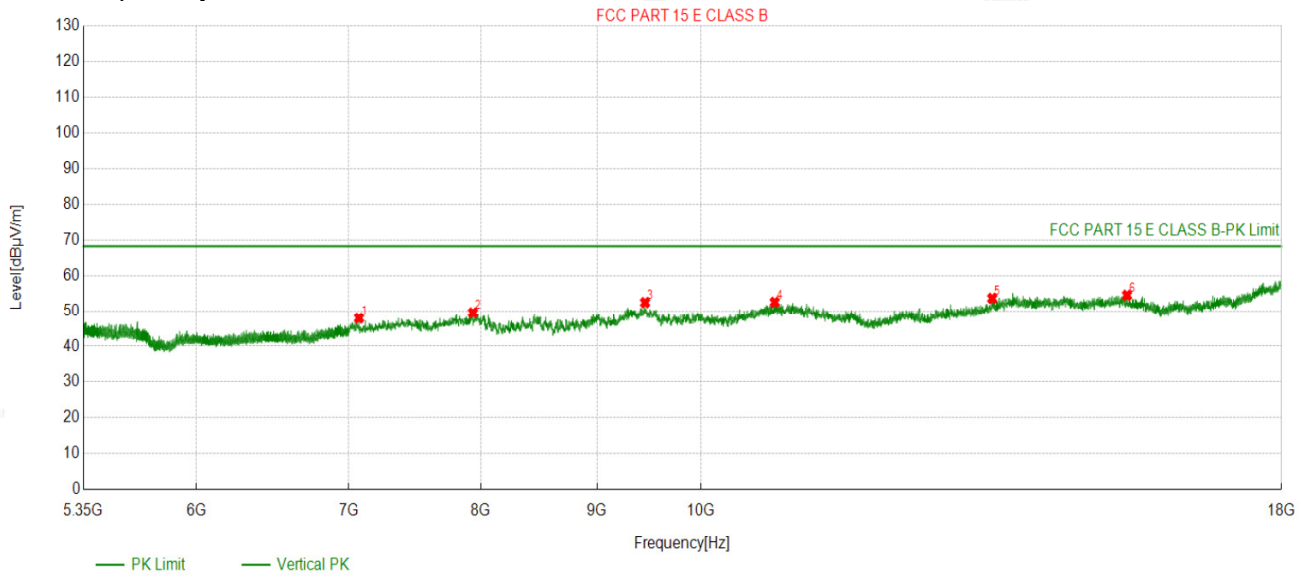

Suspected Data List


NO.	Freq. [MHz]	Reading [dBμV/m]	PK Level [dBμV/m]	Factor [dB]	PK Limit [dBμV/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	7072.607	51.97	47.91	-4.06	68.20	20.29	150	58	Vertical
2	7937.293	51.48	49.45	-2.03	68.20	18.75	150	113	Vertical
3	9448.844	51.97	52.38	0.41	68.20	15.82	150	279	Vertical
4	10774.47	51.14	52.48	1.34	68.20	15.72	150	191	Vertical
5	13429.04	49.18	53.58	4.40	68.20	14.62	150	63	Vertical
6	15392.73	48.11	54.46	6.35	68.20	13.74	150	81	Vertical

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



For 18GHz to 40GHz

Antenna polarity: Horizontal

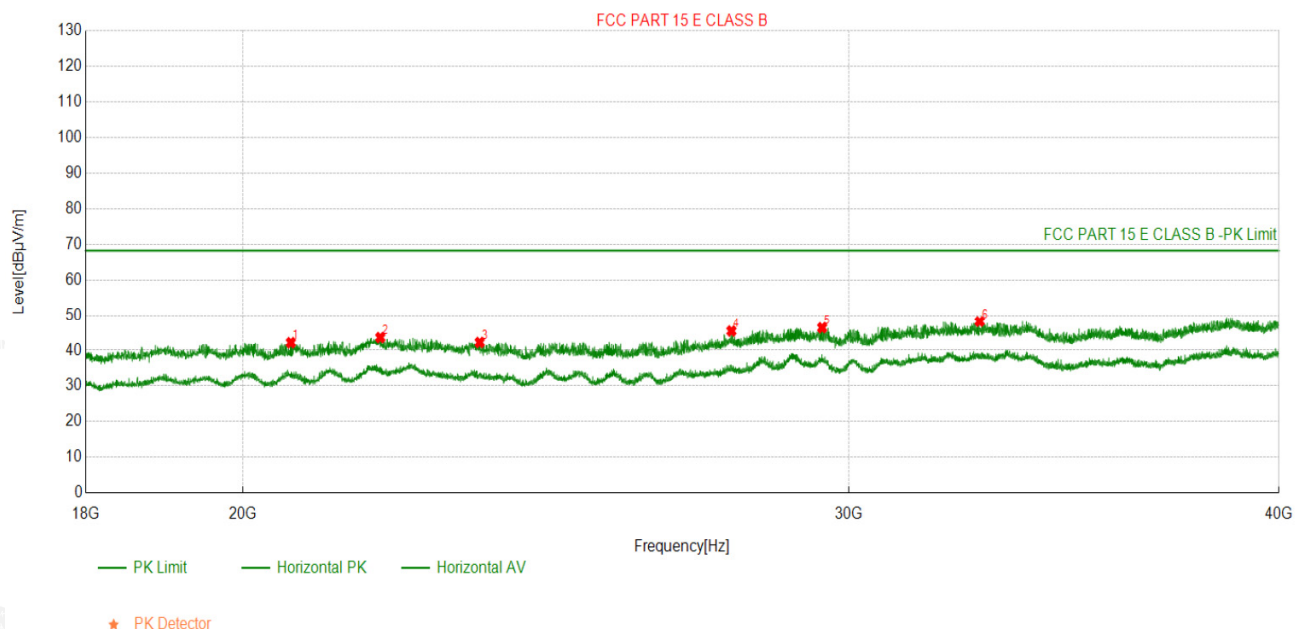


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	PK Level [dBμV/m]	Factor [dB]	PK Limit [dBμV/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	20649.065	36.32	42.14	5.82	68.20	26.06	150	110	Horizontal
2	21922.992	37.89	43.56	5.67	68.20	24.64	150	240	Horizontal
3	23430.143	36.51	42.19	5.68	68.20	26.01	150	50	Horizontal
4	27729.373	37.01	45.42	8.41	68.20	22.78	150	310	Horizontal
5	29465.347	37.43	46.34	8.91	68.20	21.86	150	150	Horizontal
6	32739.274	37.57	48.17	10.60	68.20	20.03	150	240	Horizontal

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level

Antenna polarity: Vertical

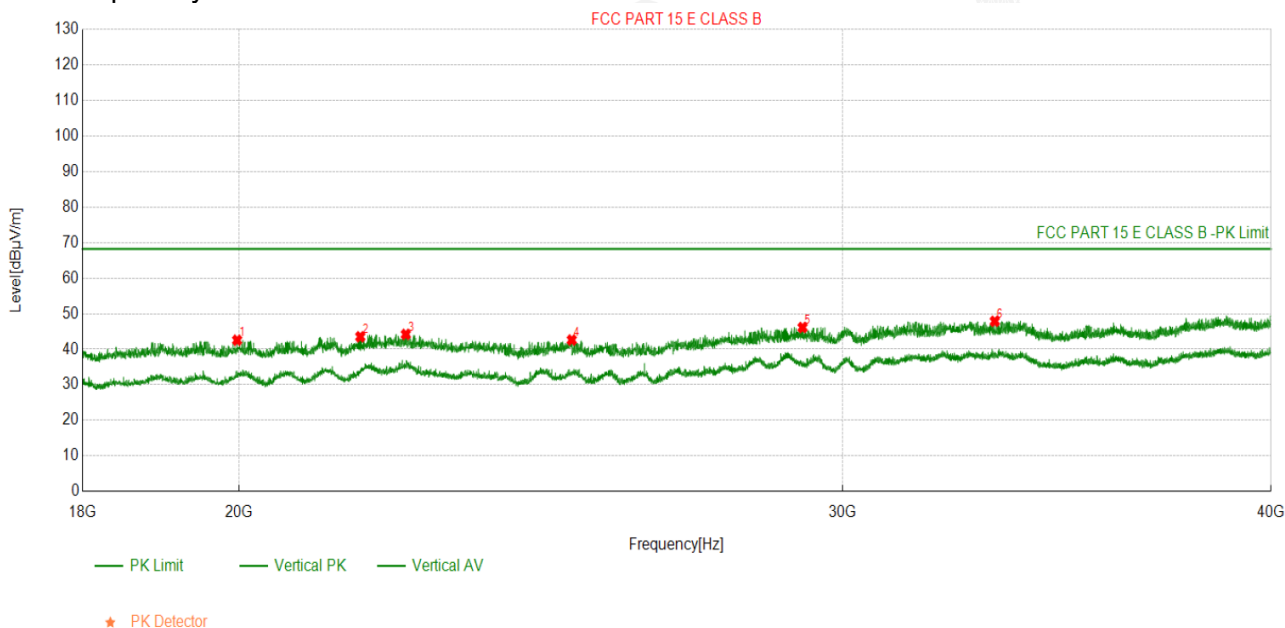


Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	PK Level [dBμV/m]	Factor [dB]	PK Limit [dBμV/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	19971.397	36.37	42.56	6.19	68.20	25.64	150	170	Vertical
2	21694.169	38.07	43.53	5.46	68.20	24.67	150	120	Vertical
3	22367.437	38.50	44.19	5.69	68.20	24.01	150	60	Vertical
4	25005.501	36.19	42.61	6.42	68.20	25.59	150	50	Vertical
5	29199.120	37.15	46.13	8.98	68.20	22.07	150	100	Vertical
6	33223.322	36.94	47.88	10.94	68.20	20.32	150	110	Vertical

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



4.6 Band Edge

4.6.1 Test Specification

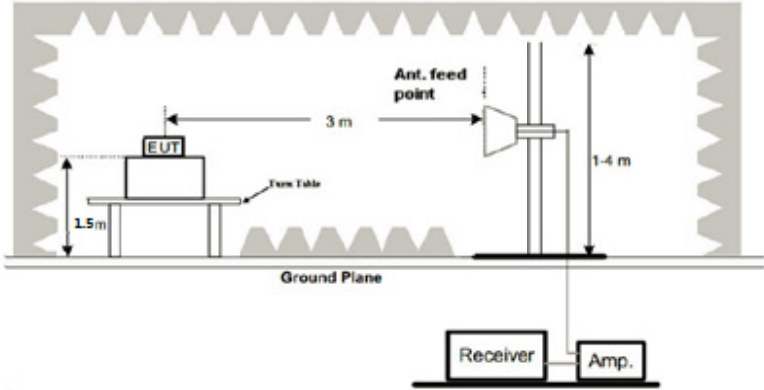Test Requirement:	FCC CFR47 Part 15E Section 15.407
Test Method:	ANSI C63.10: 2020
Limit:	For band I&II&III: $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2 = 68.2 \text{ dB}\mu\text{V}/\text{m}$, for $\text{EIRP}(\text{dBm}) = -27\text{dBm}$ For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of $-27 \text{ dBm}/\text{MHz}$ at 75 MHz or more above or below the band edge increasing linearly to $10 \text{ dBm}/\text{MHz}$ at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of $15.6 \text{ dBm}/\text{MHz}$ at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of $27 \text{ dBm}/\text{MHz}$ at the band edge. For band IV(5715-5725MHz&5850-5860MHz): $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2 = 78.2 \text{ dB}\mu\text{V}/\text{m}$, for $\text{EIRP}(\text{dBm}) = -27\text{dBm}$; For band IV(other un-restricted band): $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2 = 68.2 \text{ dB}\mu\text{V}/\text{m}$, for $\text{EIRP}(\text{dBm}) = -27\text{dBm}$
Test Setup:	
Test Mode:	Transmitting mode with modulation

Test Procedure:	1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi peak or average method as specified and then reported in a data sheet.
Test Result:	PASS



4.6.2 Test Instruments

Radiated Emission Test Site (966)

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-025	Feb. 06, 2026	Feb. 05, 2027
Spectrum analyzer	KEYSIGHT	N9020A	HKE-117	Feb. 06, 2026	Feb. 05, 2027
Spectrum analyzer	R&S	FSV3044	HKE-126	Feb. 06, 2026	Feb. 05, 2027
Preamplifier	Schwarzbeck	EMC051845S E	HKE-006	Feb. 04, 2026	Feb. 03, 2027
Preamplifier	Agilent	83051A	HKE-016	Feb. 04, 2026	Feb. 03, 2027
Preamplifier	QJD	QJD18-40-50	HKE-030	Feb. 05, 2026	Feb. 04, 2027
6dB Attenuator	Pasternack	6dB	HKE-007	Feb. 06, 2026	Feb. 05, 2027
EMI Test Receiver	R&S	ESR-7	HKE-010	Feb. 06, 2026	Feb. 05, 2027
Broadband Antenna	Schwarzbeck	VULB9168	HKE-167	Feb. 06, 2026	Feb. 05, 2028
Loop Antenna	COM-POWER	AL-130R	HKE-014	Feb. 06, 2026	Feb. 05, 2028
Horn Antenna	Schwarzbeck	9120D	HKE-013	Feb. 06, 2026	Feb. 05, 2028
EMI Test Software	Tonscend	JS32-RE 5.0.0	HKE-082	/	/
RSE Test Software	Tonscend	JS36-RSE 5.0.0	HKE-184	/	/




4.6.3 Test Data

All the test modes completed for test. Only the worst result was reported as below:

802.11n(HT20)-5180


Antenna polarity: Horizontal

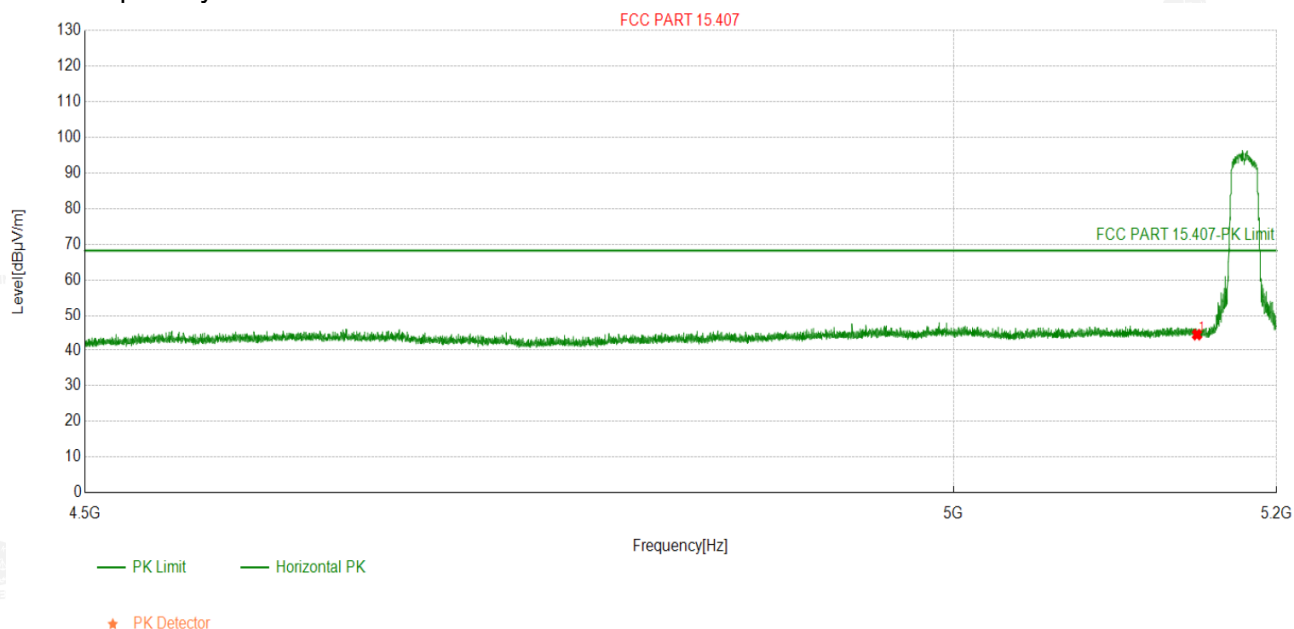

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	PK Level [dBμV/m]	Factor [dB]	PK Limit [dBμV/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5150.000	49.14	44.36	-4.78	68.20	23.84	150	193	Horizontal

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level

Antenna polarity: Vertical

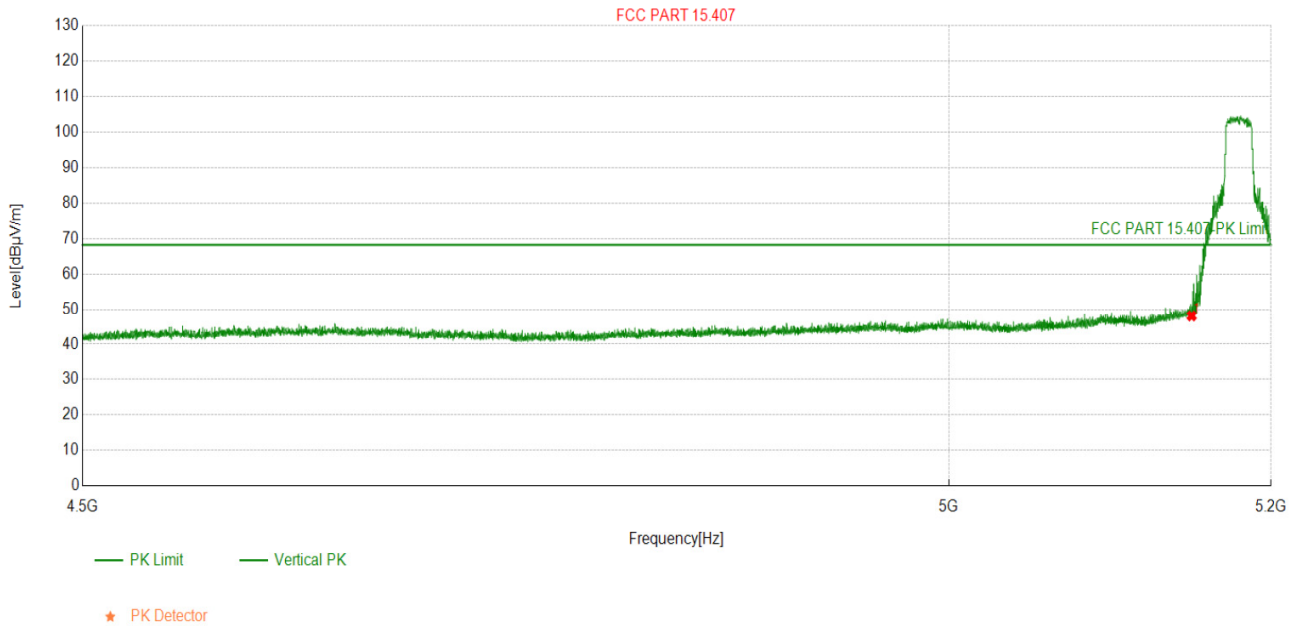


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	PK Level [dBμV/m]	Factor [dB]	PK Limit [dBμV/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5150.000	52.82	48.04	-4.78	68.20	20.16	150	351	Vertical

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level

802.11n(HT20)-5240

Antenna polarity: Horizontal

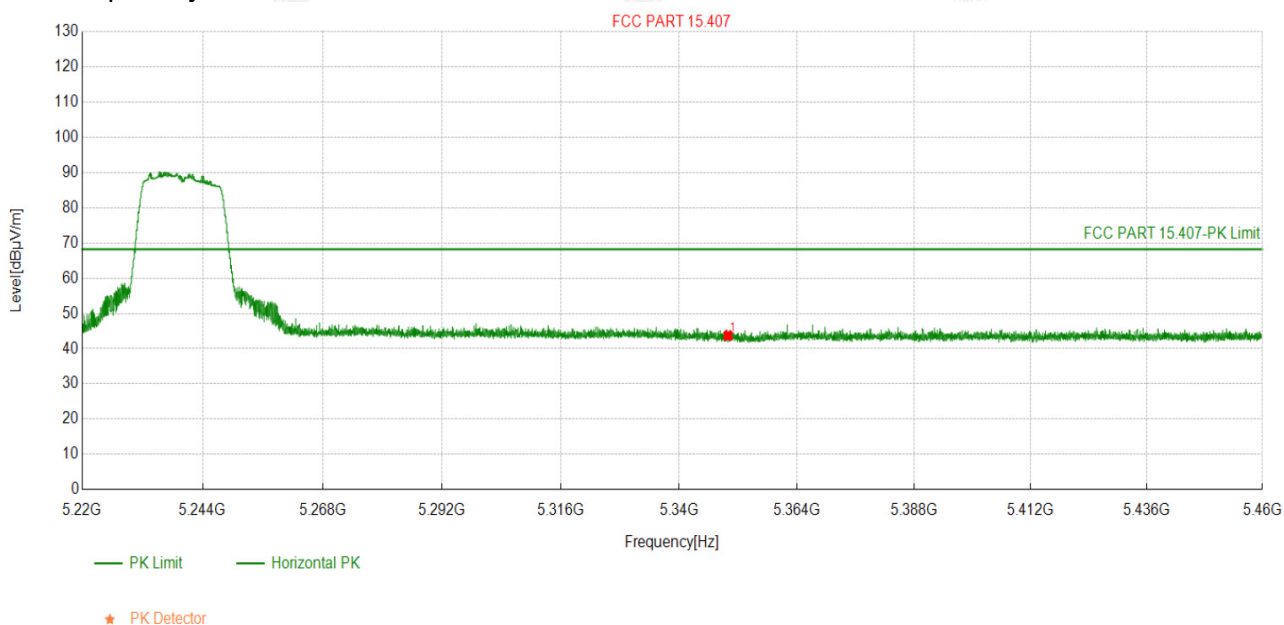


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	PK Level [dBμV/m]	Factor [dB]	PK Limit [dBμV/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5350.000	49.16	43.72	-5.44	68.20	24.48	150	210	Horizontal

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level

Antenna polarity: Vertical

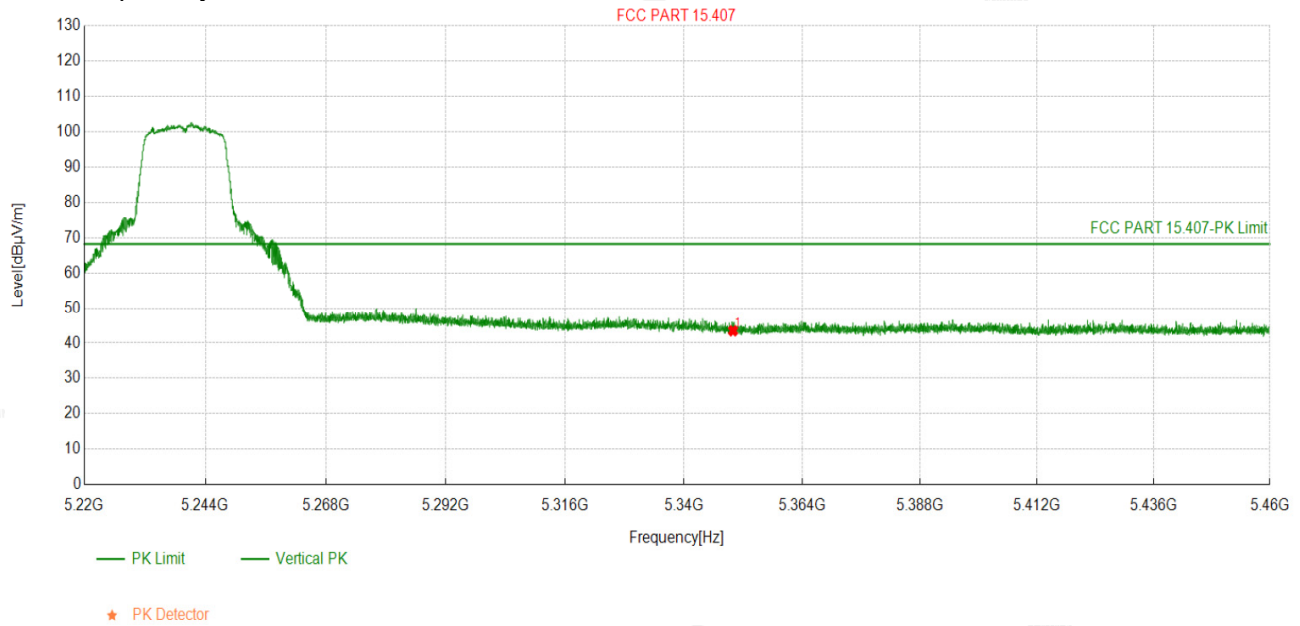

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	PK Level [dBμV/m]	Factor [dB]	PK Limit [dBμV/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5350.000	48.87	43.43	-5.44	68.20	24.77	150	30	Vertical

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



4.7 Frequency Stability Measurement

4.7.1 Test Specification

Test Requirement:	FCC Part15 Section 15.407(g)
Test Method:	ANSI C63.10: 2020
Limit:	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 35 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.
Test Setup:	<pre>graph LR; SA[Spectrum Analyzer] --- EUT[EUT]; EUT --- TCh[Temperature Chamber]; TCh --- P[AC/DC Power supply];</pre>
Test Procedure:	- The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage. - Turn the EUT on and couple its output to a spectrum analyzer. - Turn the EUT off and set the chamber to the highest temperature specified. - Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. - Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. - The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.
Test Result:	PASS
Remark:	N/A



4.7.2 Test Instruments

RF Test Room

Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-025	Feb. 06, 2026	Feb. 05, 2027
Spectrum analyzer	KEYSIGHT	N9020A	HKE-117	Feb. 06, 2026	Feb. 05, 2027
Power meter	KEYSIGHT	E4419B	HKE-144	Feb. 06, 2026	Feb. 05, 2027
Power Sensor	Agilent	E9304A H18	HKE-165	Feb. 06, 2026	Feb. 05, 2027
RF cable	Times	1-40G	/	Feb. 06, 2026	Feb. 05, 2027
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Feb. 06, 2026	Feb. 05, 2027
RF Test Software	Tonscend	JS1120-3 Version 3.5.39	HKE-083	/	/

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.7.3 Test Result

Mode	Voltage (V)	FHL (5180MHz)	Deviation (KHz)	FHH (5240MHz)	Deviation (KHz)
5.2G Band	4.25V	5179.976	-24	5240.014	14
	5V	5180.012	12	5239.982	-18
	5.75V	5179.989	-11	5239.981	-19

Mode	Temperature (°C)	FHL (5180MHz)	Deviation (KHz)	FHH (5240MHz)	Deviation (KHz)
5.2G Band	-30	5180.023	23	5240.014	14
	-20	5179.971	-29	5240.026	26
	-10	5179.964	-36	5239.976	-24
	0	5179.972	-28	5239.983	-17
	10	5180.026	26	5240.019	19
	20	5180.027	27	5239.975	-25
	30	5180.013	13	5240.028	28
	40	5179.981	-19	5239.974	-26
	50	5180.012	12	5240.025	25

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

4.8 Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction



The antenna used in this product is External Antenna, need professional installation, not easy to remove. It conforms to the standard requirements. and the best case gain of the antenna is Antenna port 1: 5.49dBi and Antenna port 2: 5.48dBi.

WIFI ANTENNA



5. Test Setup Photos of the EUT



Radiated Emission

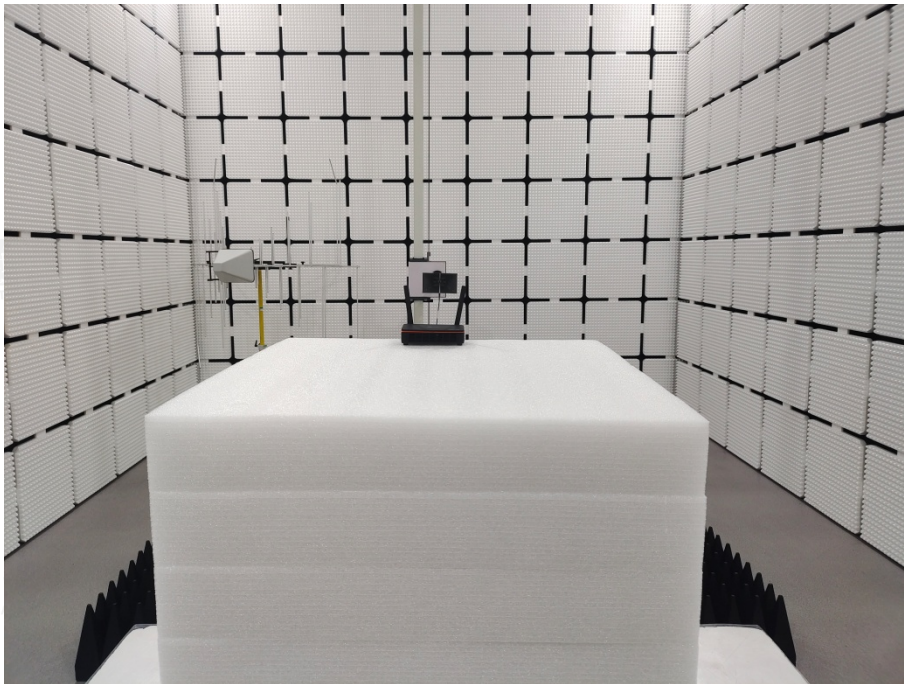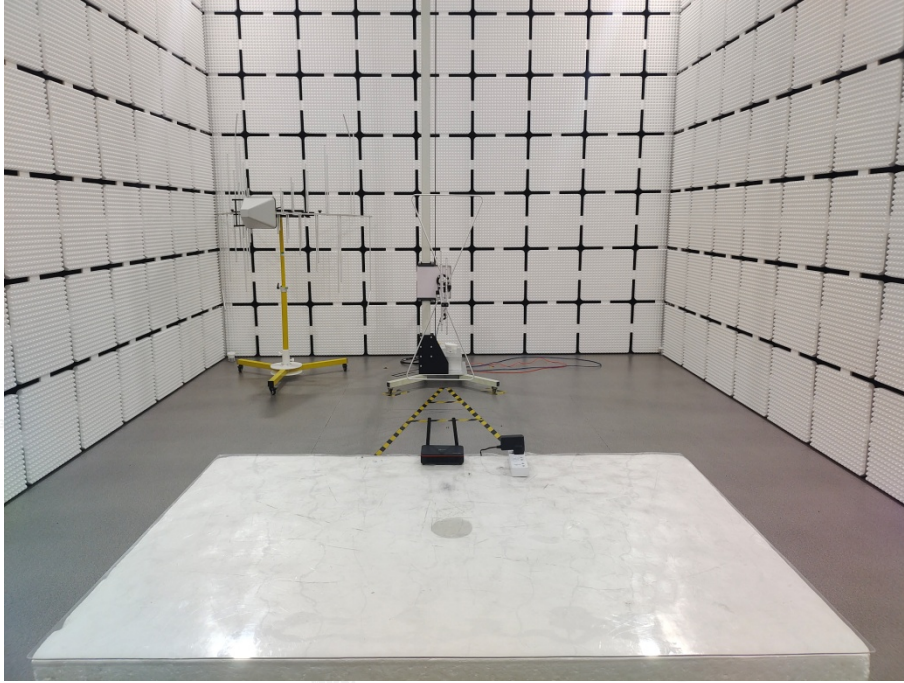

AC Conducted Emission



RF Conducted Emission

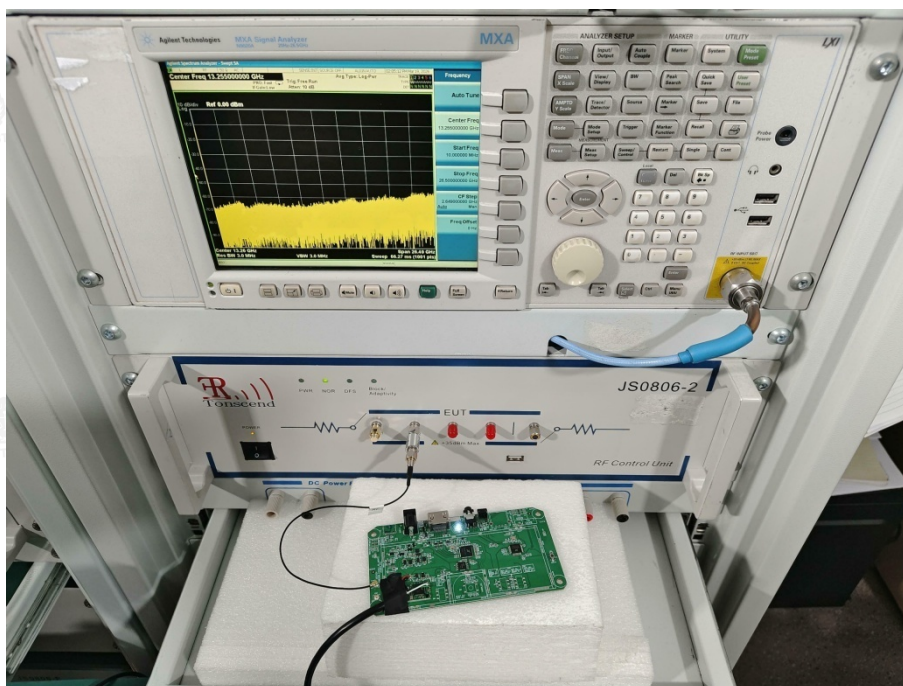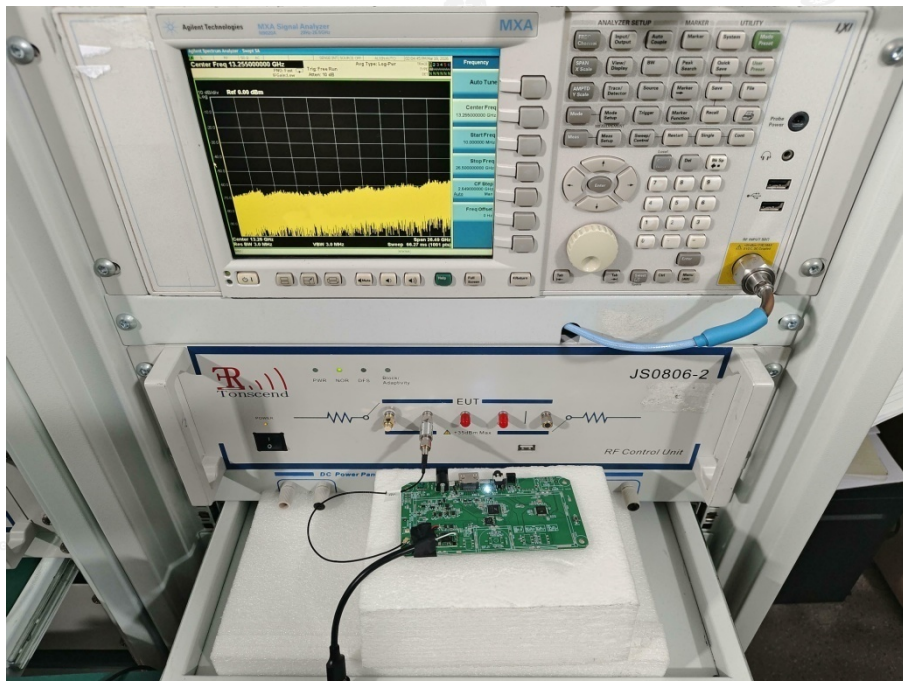

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

6. Photos of the EUT

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos

-----End of test report-----