

Test Report No:
2590330R-RFUSV01S-A

TEST REPORT

FCC Rules&Regulations

Product Name	bike rear light
Brand Name	LEZYNE
Model No.	REACT DRIVE
FCC ID	2AD4S-1LED43F
Applicant's Name / Address	Lezyne USA, Incorporated 5470 Kietzke Ln., Ste 300, Reno Nevada 89511, United States
Manufacturer's Name / Address	Lezyne USA, Incorporated 5470 Kietzke Ln., Ste 300, Reno Nevada 89511, United States
Test Method Requested, Standard	FCC CFR Title 47 Part 15 Subpart C Section 15.247 ANSI C63.10-2020, ANSI C63.10-2020+Cor.1-2023, ANSI C63.10a-2024
Verdict Summary	IN COMPLIANCE
Documented By	 Jennie She
Approved By	 Rueyyan Lin
Date of Receipt	Sep. 11, 2025
Date of Issue	Apr. 14, 2026
Report Version	V1.0

INDEX

	page
Competences and Guarantees.....	4
General Conditions	4
Revision History	5
Summary of Test Result.....	6
Comments and Remarks	6
1. General Information.....	7
1.1. EUT Description	7
1.2. EUT Information	7
1.3. Testing Applied Standards.....	8
1.4. Testing Location Information	8
1.5. Measurement Uncertainty	9
1.6. List of Test Equipment	10
2. Test Configuration of EUT	11
2.1. Test Condition.....	11
2.2. Test Frequency Mode	11
2.3. Duty Cycle	12
2.4. The Worst Case Measurement Configuration.....	13
2.5. Tested System Details.....	14
2.6. Configuration of Tested System	14
3. Occupied Bandwidth & DTS Bandwidth.....	15
3.1. Test Setup	15
3.2. Test Limit	15
3.3. Test Procedures	15
3.4. Test Result of Occupied Bandwidth & DTS Bandwidth.....	15
4. Maximum Conducted Output Power	16
4.1. Test Setup	16
4.2. Test Limit	16
4.3. Test Procedures	16
4.4. Test Result of Maximum Conducted Output Power	16
5. Maximum Power Spectral Density	17
5.1. Test Setup	17
5.2. Test Limit	17
5.3. Test Procedures	17
5.4. Test Result of Maximum Power Spectral Density	17
6. Antenna Port Conducted Emission	18
6.1. Test Setup	18

6.2.	Test Limit	18
6.3.	Test Procedure	18
6.4.	Test Result of Antenna Port Conducted Emission	18
7.	Transmitter Radiated Spurious Emission	19
7.1.	Test Setup	19
7.2.	Test Limit	20
7.3.	Test Procedure	20
7.4.	Test Result of Transmitter Radiated Spurious Emission (Below 30 MHz)	21
7.5.	Test Result of Transmitter Radiated Spurious Emission	21

Appendix A. Test Result of Occupied Bandwidth & DTS Bandwidth

Appendix B. Test Result of Maximum Conducted Output Power

Appendix C. Test Result of Maximum Power Spectral Density

Appendix D. Test Result of Antenna Port Conducted Emission

Appendix E. Test Result of Transmitter Radiated Spurious Emission

Appendix F. Test Setup Photograph

Competences and Guarantees

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

General Conditions

1. The test results relate only to the samples tested.
2. The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.
3. This report must not be used to claim product endorsement by TAF or any agency of the government.
4. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.
5. Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Revision History

Version	Description	Issued Date
V1.0	Initial issue of report	Apr. 14, 2026

Summary of Test Result

Report Clause	Test Items	Result (PASS/FAIL)	Remark
-	AC Power Line Conducted Emission	N/A	Note 1
3	Occupied Bandwidth & DTS Bandwidth	PASS	-
4	Maximum Conducted Output Power	PASS	-
5	Maximum Power Spectral Density	PASS	-
6	Antenna Port Conducted Emission	PASS	-
7	Transmitter Radiated Spurious Emission	PASS	-
Note 1: The manufacturer declares that the Bluetooth and Ant+ functions can not be performed in charging mode. Therefore, It's not necessary to apply to AC Power Line Conducted Emission test.			

Comments and Explanations
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Comments and Remarks

The product specification and testing instructions for the EUT declared in the report are provided by the manufacturer who will take all responsibilities for the accuracy.

1. General Information

1.1. EUT Description

Frequency Range	2400 ~ 2483.5 MHz
Operating Frequency	1 Mbps: 2402 ~ 2480 MHz 2 Mbps: 2402 ~ 2480 MHz
Channel Number	1 Mbps: 40 Channels 2 Mbps: 40 Channels
Mode	Bluetooth LE
Type of Modulation	GFSK

Antenna Information				
Ant.	Brand Name	Model No.	Type	Gain (dBi)
1	Unictron	AA055U	Chip	1.8

1.2. EUT Information

EUT Power Type	From Battery and Charging by USB Type-C			
EUT Function	☒	Point-to-multipoint	☐	Point-to-point

1.3. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2020, ANSI C63.10-2020+Cor.1-2023, ANSI C63.10a-2024

The following reference test guidance is not within the scope of accreditation of TAF:

- ♦ KDB 558074 D01 v05r02

1.4. Testing Location Information

Testing Location Information		
Test Laboratory : DEKRA Testing and Certification Co., Ltd.		
1 (TAF: 3024)	ADD: No.372-2, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 31061, Taiwan, R.O.C. TEL: +886-3-582-8001 FAX: +886-3-582-8958 Test site Designation No. TW3024 with FCC. Conformity Assessment Body Identifier (CABID) TW3024 with ISED.	
2 (TAF: 3024)	ADD: No.372, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 31061, Taiwan, R.O.C. TEL: +886-3-582-8001 FAX: +886-3-582-8958 Test site Designation No. TW3024 with FCC. Conformity Assessment Body Identifier (CABID) TW3024 with ISED.	
Test site number for address 1 includes HC-SR02 and HC-CB10. Test site number for address 2 includes HC-CB02, HC-CB03, HC-CB04, HC-SR10 and HC-SR12.		

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted Emission	HC-SR12	Kevin Teng	24.9 / 51.3	2025/09/30
Radiated Emission	HC-CB02	Cyril Chen	20~25 / 60~65	2025/09/26~2025/09/27

1.5. Measurement Uncertainty

Uncertainties have been calculated according to the DEKRA internal document with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Test item	Uncertainty
Occupied Bandwidth & DTS Bandwidth	± 282.55 Hz
Maximum Conducted Output Power	± 1.16 dB
Maximum Power Spectral Density	± 2.47 dB
Antenna Port Conducted Emission	± 2.47 dB
Transmitter Radiated Spurious Emission	± 3.52 dB below 1 GHz ± 3.56 dB above 1 GHz

1.6. List of Test Equipment

HC-SR12

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal. Date	Next Cal. Date
Signal & Spectrum Analyzer	R&S	FSV40	101869	10Hz-40GHz	2025/06/17	2026/06/16
High Speed Peak Power Meter Dual Input	Anritsu	ML2496A	1602004	0.3-40 GHz	2024/10/29	2025/10/28
Pulse Power Sensor	Anritsu	MA2411B	1531043	0.3-40 GHz	2024/10/29	2025/10/28

HC-CB02

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal. Date	Next Cal. Date
Signal Analyzer	R&S	FSVA40	101455	10 Hz-40 GHz	2024/10/04	2025/10/03
EXA Signal Analyzer	Keysight	N9010A	MY51440132	10 Hz-44 GHz	2024/12/10	2025/12/09
Trilog Broadband Antenna	Schwarzbeck	VULB 9168	1272	30 MHz-2 GHz	2025/05/13	2026/05/12
Pre-Amplifier	EMCI	EMC01820I	980365	30M-8 GHz,20 dB	2025/03/20	2026/03/19
Pre-Amplifier	EMEC	EM01G18GA	060741	1G-18 GHz,50 dB	2025/04/14	2026/04/13

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

2. Test Configuration of EUT

2.1. Test Condition

EUT Operational Condition	
Testing Voltage	DC 5V


2.2. Test Frequency Mode

Test Software Version	nRF Connect for Desktop
-----------------------	-------------------------

Modulation	Frequency (MHz)	Power Setting
GFSK (1 Mbps)	2402	7
	2440	2
	2480	3
GFSK (2 Mbps)	2402	8
	2440	2
	2480	3

2.3. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
GFSK (1 Mbps)	2.100	2.500	84.00	0.76	0.476
GFSK (2 Mbps)	1.060	1.870	56.68	2.47	0.943

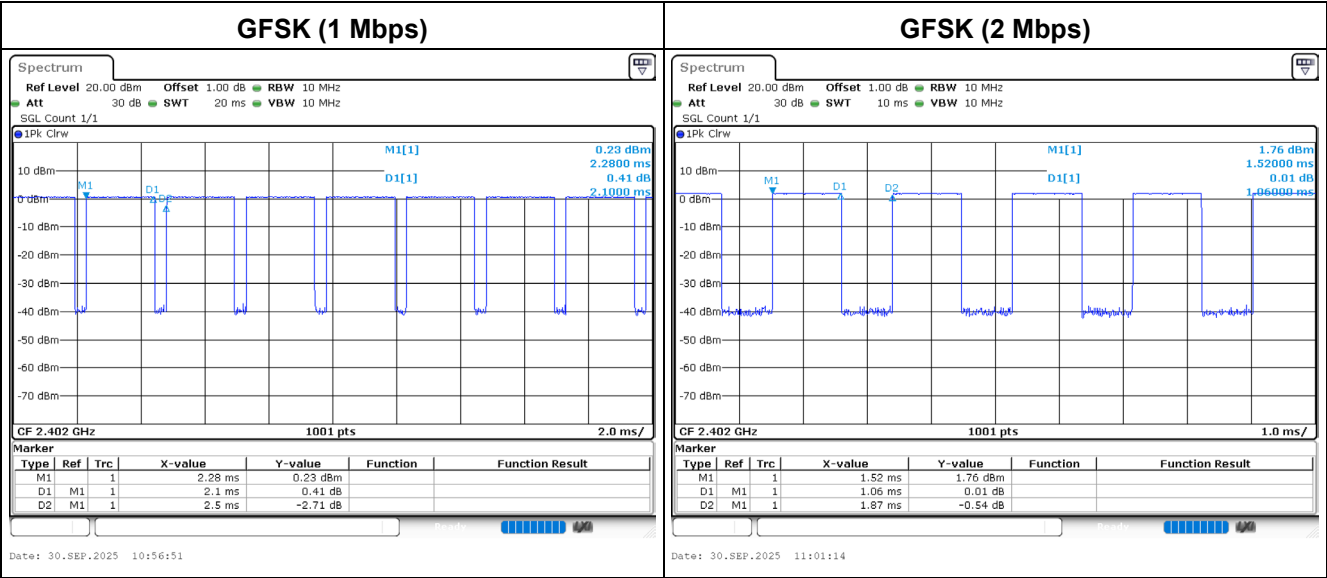

2.4. The Worst Case Measurement Configuration

Tests Item	Occupied Bandwidth & DTS Bandwidth Maximum Conducted Output Power Maximum Power Spectral Density Antenna Port Conducted Emission
Test Condition	Conducted measurement at transmit chains

Tests Item	Transmitter Radiated Spurious Emission
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode	Transmit
The EUT was performed at X axis, Y axis and Z axis position for radiated spurious emission test. The worst case was found at X axis, so the measurement will follow this same test configuration.	

Note:


1. Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
2. For radiated spurious emission below 1 GHz has performed all modes of operation were investigated and the worst-case emissions are reported.

2.5. Tested System Details

No.	Equipment	Brand Name	Model No.	Serial No.
1	DC Power Supply	Topward	6030D	809508
2	Notebook	DELL	Latitude E7740	N/A


Note: The DC power supply is used for testing only.

2.6. Configuration of Tested System

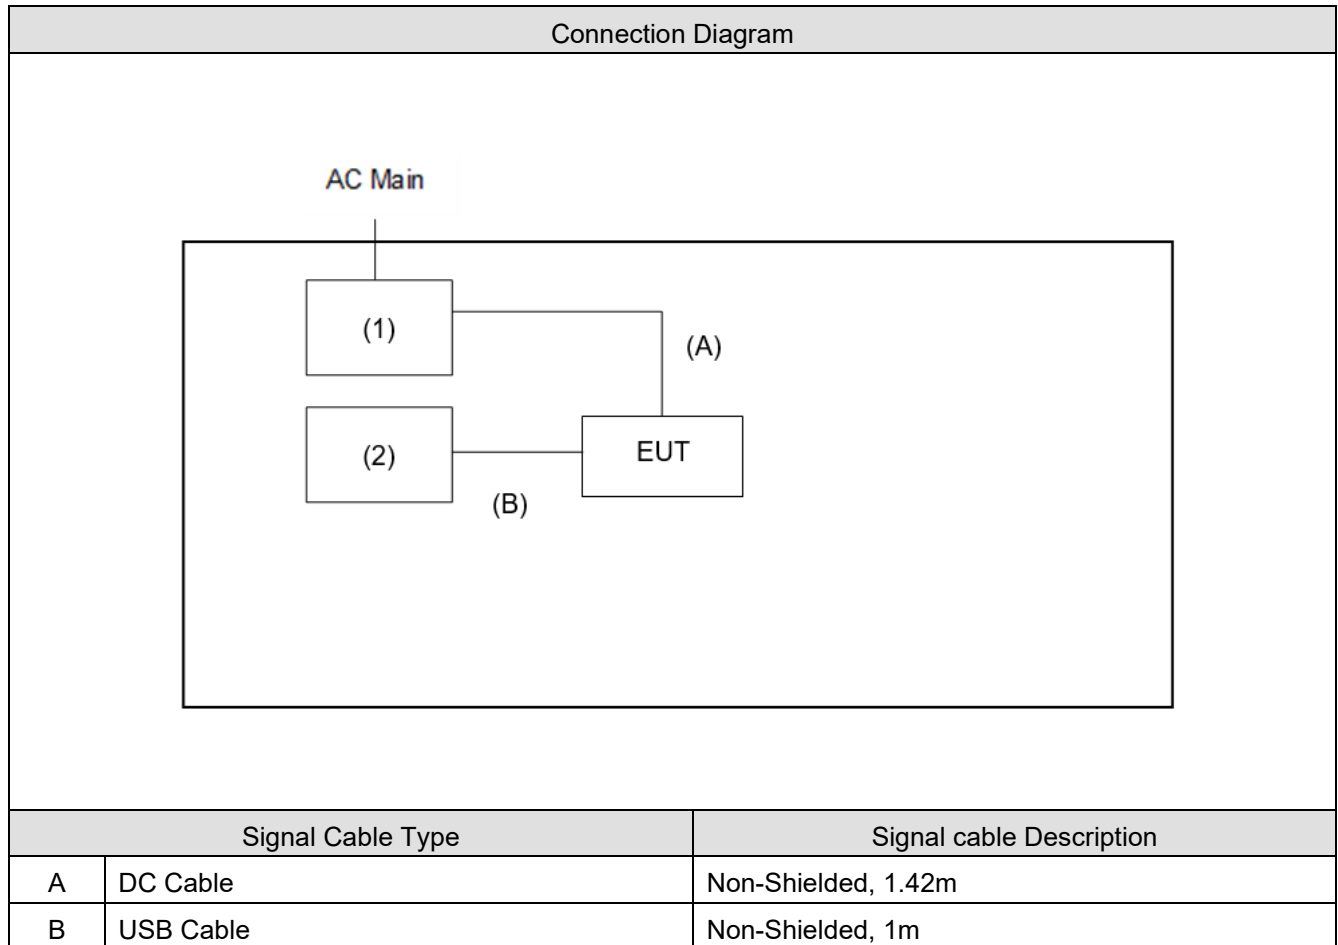

3. Occupied Bandwidth & DTS Bandwidth

3.1. Test Setup

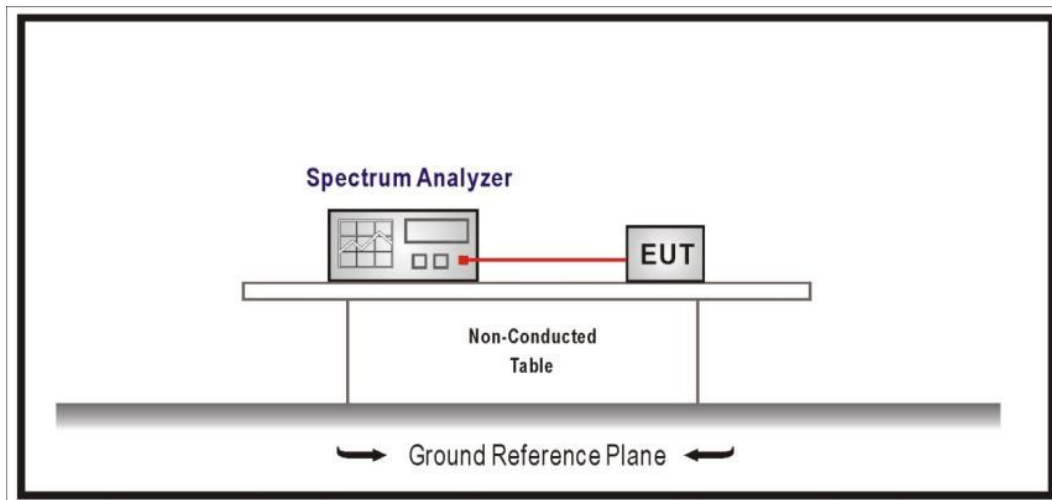

3.2. Test Limit

The 6 dB bandwidth: ≥ 500 kHz.

Occupied Bandwidth: N/A

3.3. Test Procedures


The EUT was setup according to ANSI C63.10; tested according to DTS test procedure of KDB 558074.

3.4. Test Result of Occupied Bandwidth & DTS Bandwidth

Refer as Appendix A

4. Maximum Conducted Output Power

4.1. Test Setup

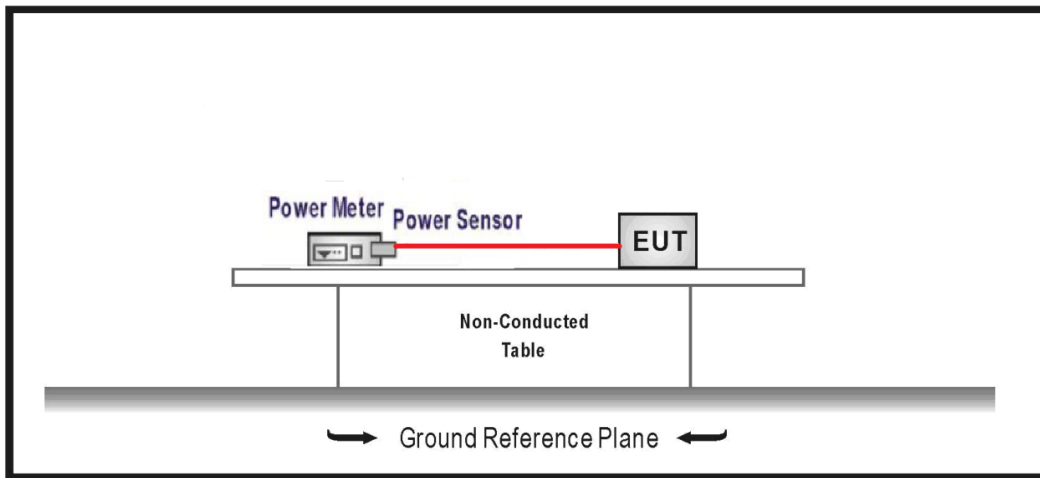

4.2. Test Limit

The Maximum Conducted Output Power shall be less 1 Watt.

4.3. Test Procedures


The EUT was setup according to ANSI C63.10; tested according to DTS test procedure of KDB 558074.

4.4. Test Result of Maximum Conducted Output Power

Refer as Appendix B

5. Maximum Power Spectral Density

5.1. Test Setup

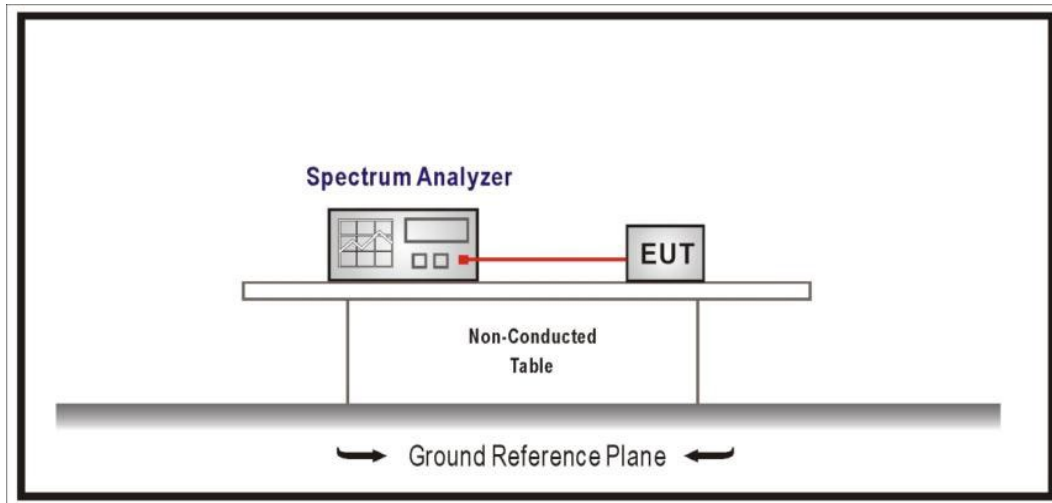

5.2. Test Limit

The peak power spectral density conducted from the intentional radiated to the antenna shall not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.3. Test Procedures


The EUT was setup according to ANSI C63.10; tested according to DTS test procedure of KDB 558074.

5.4. Test Result of Maximum Power Spectral Density

Refer as Appendix C

6. Antenna Port Conducted Emission

6.1. Test Setup

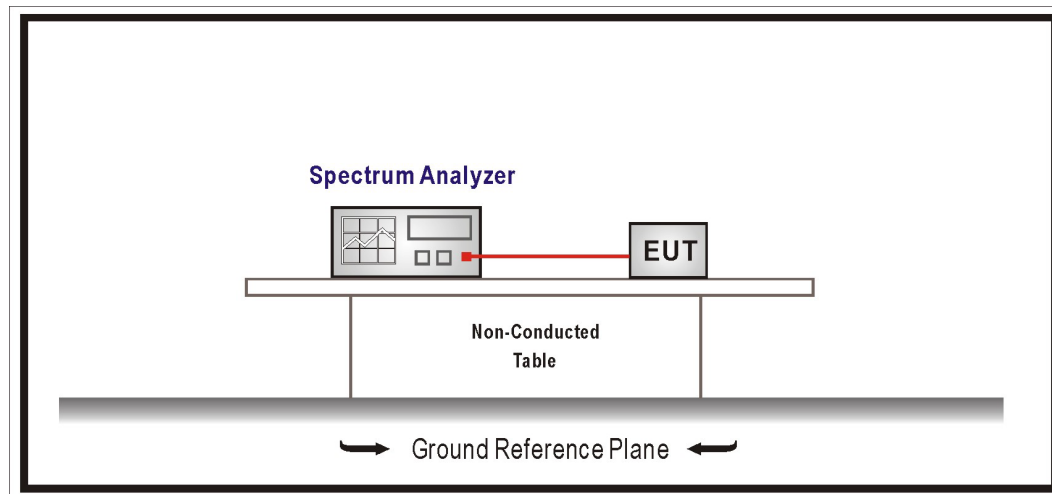

6.2. Test Limit

RF output power procedure	Limit (dBc)
Peak output power procedure	20
Average output power procedure	30

Remarks:

1. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limit.
2. If the transmitter complies with the conducted power limit based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

6.3. Test Procedure

The EUT was setup according to ANSI C63.10 and tested according to DTS test procedure of KDB 558074.


6.4. Test Result of Antenna Port Conducted Emission

Refer as Appendix D


7. Transmitter Radiated Spurious Emission

7.1. Test Setup


9 kHz ~ 30 MHz

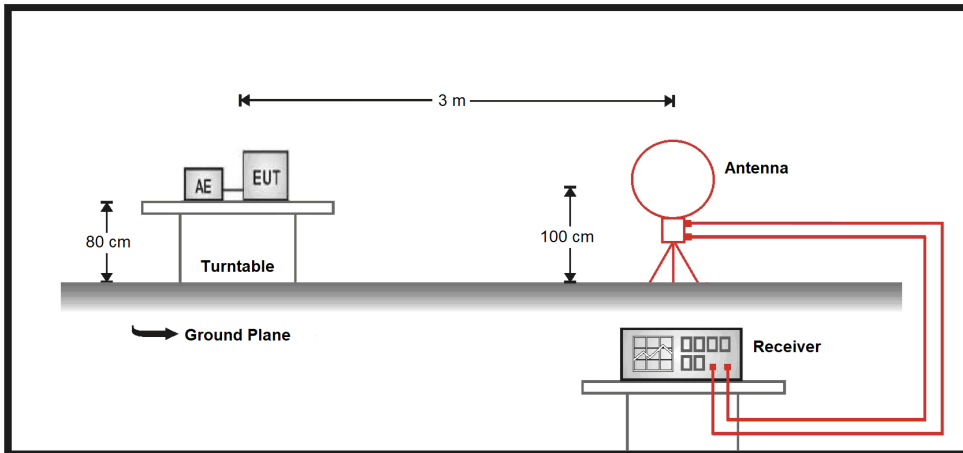

30 MHz ~ 1 GHz

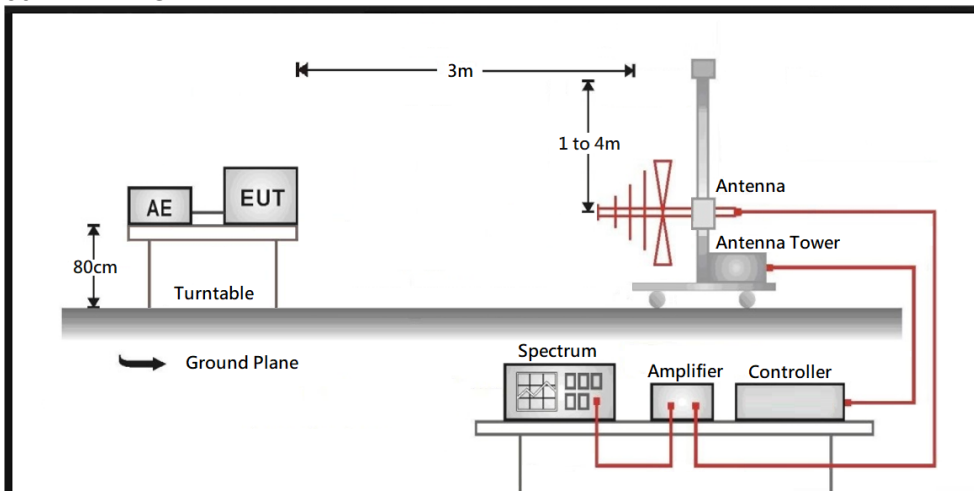

Above 1 GHz

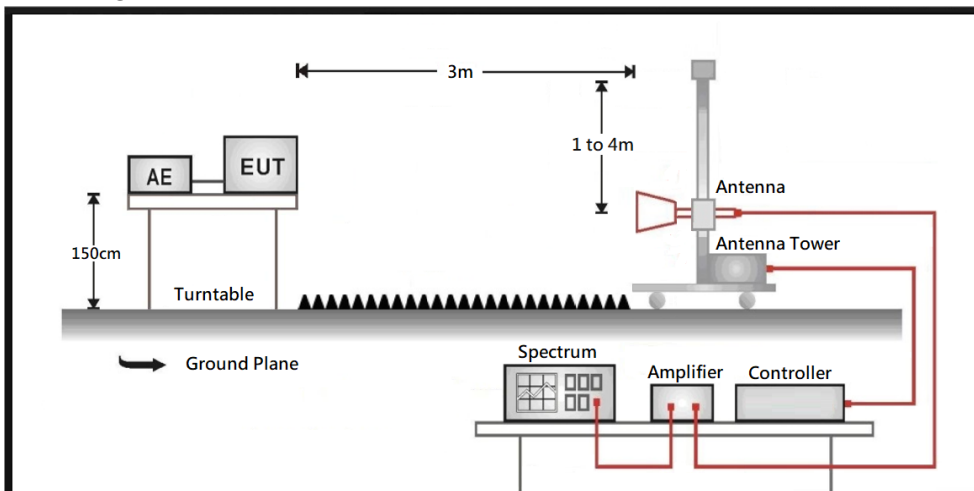

7.2. Test Limit

Frequency (MHz)	Field strength (uV/m)	Field strength (dBuV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	20 log (2400/F(kHz))	300
0.490 – 1.705	24000/F(kHz)	20 log (24000/F(kHz))	30
1.705 - 30	30	29.5	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

Remarks:

1. Field strength (dBuV/m) = 20 log Field strength (uV/m)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

7.3. Test Procedure

The EUT was setup according to ANSI C63.10 and tested according to DTS test procedure of KDB 558074.

The EUT and its simulators are placed on a turn table which is 0.8 or 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10 on radiated measurement.

On any frequency or frequencies from 9 kHz(include The the lowest oscillator frequency generated within the device up to the 10th harmonic) to 1000 MHz, the limit shown are based on measuring equipment employing a quasi-peak detector function and on any frequency or frequencies above 1000 MHz the radiated limit shown are based upon the use of measurement instrumentation employing an average detector function. When average radiated emission measurement are included emission measurement below 1000 MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

The bandwidth below 1 GHz setting on the field strength meter is 120 kHz and above 1 GHz is 1 MHz.

7.4. Test Result of Transmitter Radiated Spurious Emission (Below 30 MHz)







The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

7.5. Test Result of Transmitter Radiated Spurious Emission

Refer as Appendix E







Appendix A.1 Test Result of Occupied Bandwidth

Modulation	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)
GFSK (1 Mbps)	2402	1.04	-
	2440	1.05	-
	2480	1.05	-
GFSK (2 Mbps)	2402	2.03	-
	2440	2.03	-
	2480	2.04	-

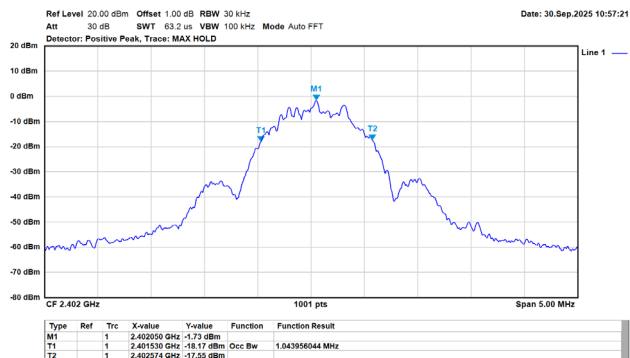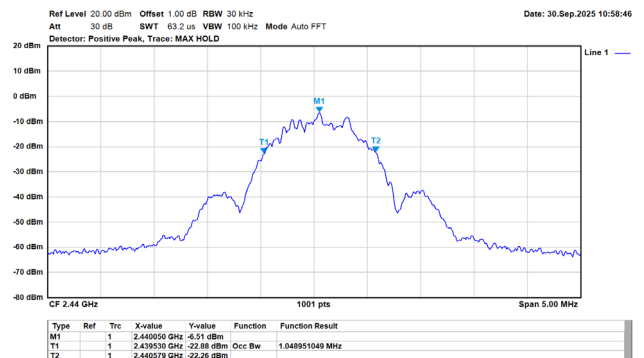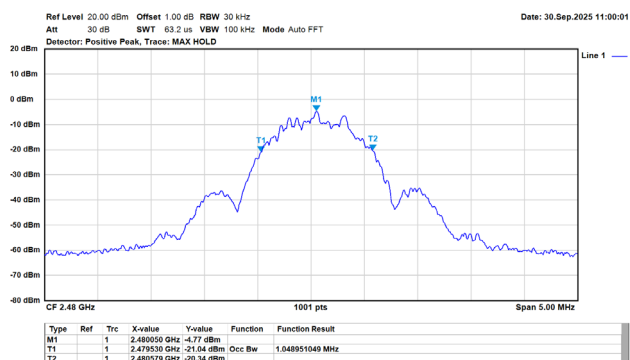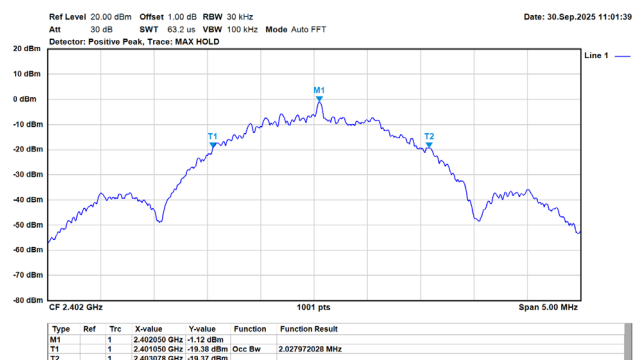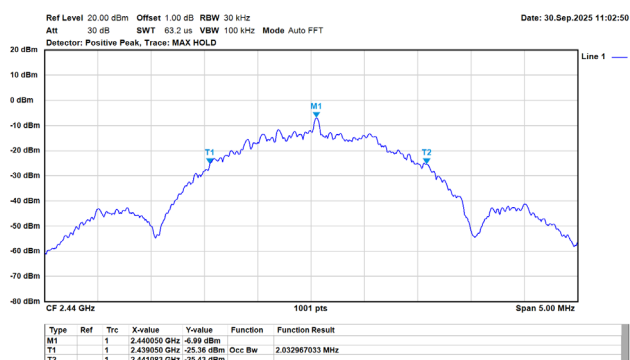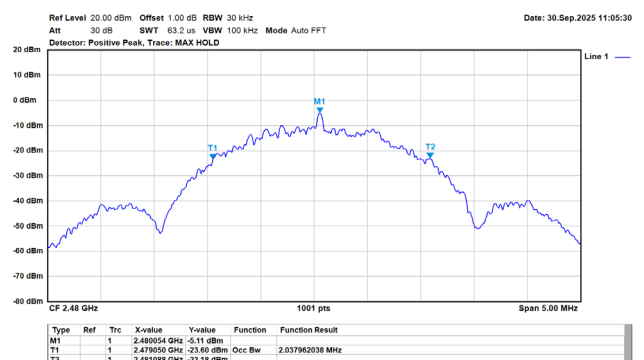GFSK (1 Mbps) / 2402 MHz**GFSK (1 Mbps) / 2440 MHz****GFSK (1 Mbps) / 2480 MHz****GFSK (2 Mbps) / 2402 MHz****GFSK (2 Mbps) / 2440 MHz****GFSK (2 Mbps) / 2480 MHz**

Appendix A.2 Test Result of DTS Bandwidth

Modulation	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
GFSK (1 Mbps)	2402	0.70	0.50	Pass
	2440	0.69	0.50	Pass
	2480	0.71	0.50	Pass
GFSK (2 Mbps)	2402	1.15	0.50	Pass
	2440	1.14	0.50	Pass
	2480	1.15	0.50	Pass

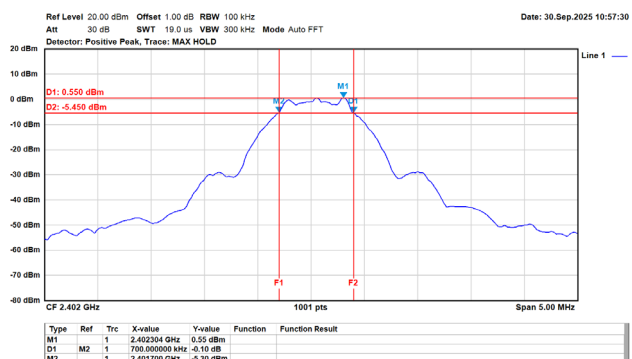
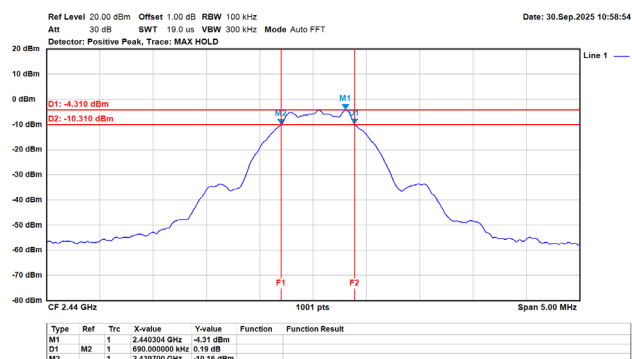
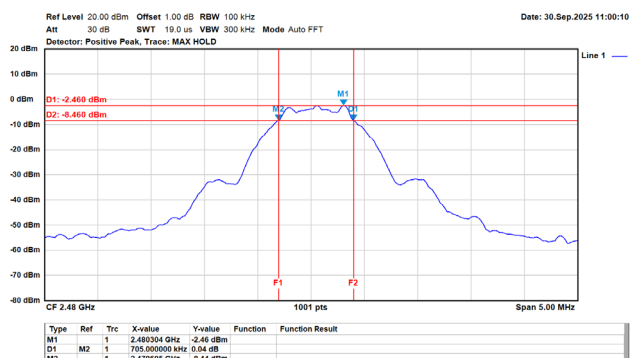
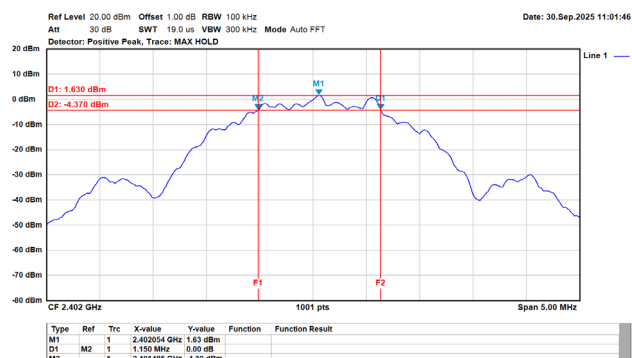
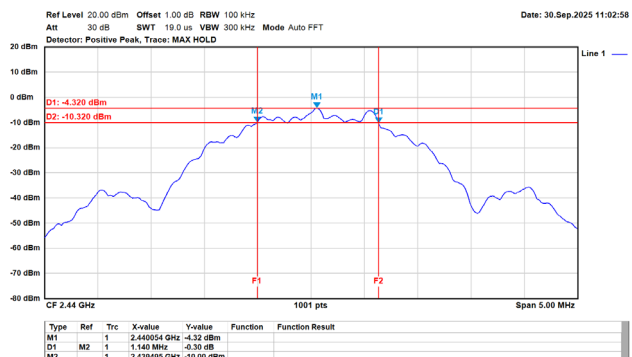
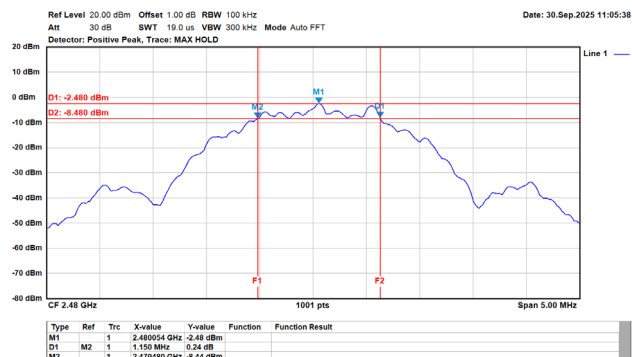
GFSK (1 Mbps) / 2402 MHz**GFSK (1 Mbps) / 2440 MHz****GFSK (1 Mbps) / 2480 MHz****GFSK (2 Mbps) / 2402 MHz****GFSK (2 Mbps) / 2440 MHz****GFSK (2 Mbps) / 2480 MHz**

Appendix B. Test Result of Maximum Conducted Output Power


Modulation	Frequency (MHz)	Maximum Conducted Output Power (dBm)		Limit (dBm)	Result
		Average	Peak		
GFSK (1 Mbps)	2402	0.770	0.810	30.00	Pass
	2440	-3.610	-3.520	30.00	Pass
	2480	-1.990	-1.920	30.00	Pass
GFSK (2 Mbps)	2402	1.860	1.900	30.00	Pass
	2440	-3.620	-3.520	30.00	Pass
	2480	-2.000	-1.930	30.00	Pass

Appendix C. Test Result of Maximum Power Spectral Density



Modulation	Frequency (MHz)	Measure Value (dBm/3kHz)	Limit (dBm/3kHz)	Result
GFSK (1 Mbps)	2402	-15.49	8.00	Pass
	2440	-20.14	8.00	Pass
	2480	-18.52	8.00	Pass
GFSK (2 Mbps)	2402	-16.29	8.00	Pass
	2440	-22.17	8.00	Pass
	2480	-20.41	8.00	Pass

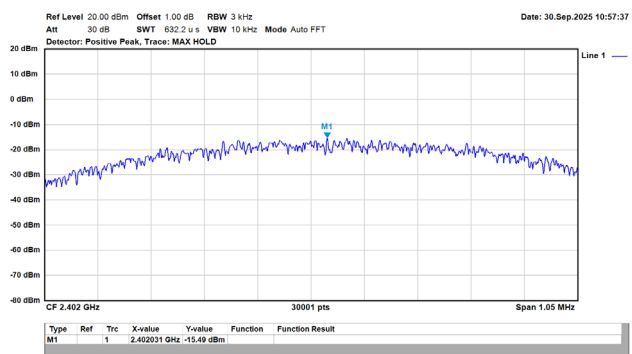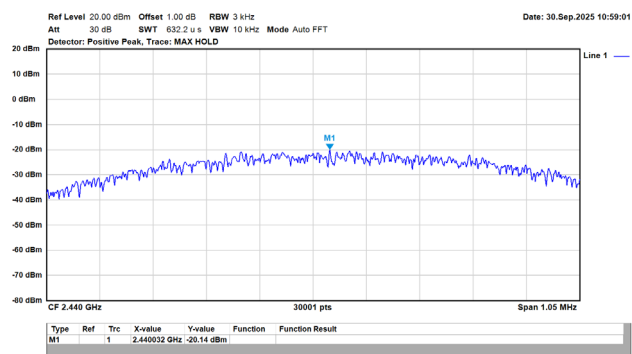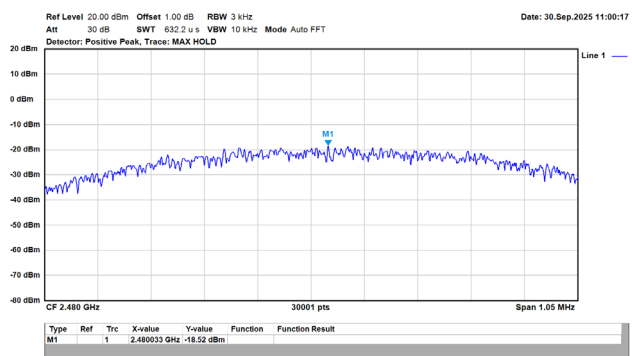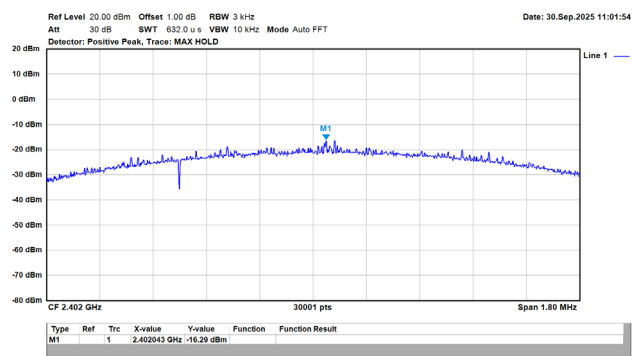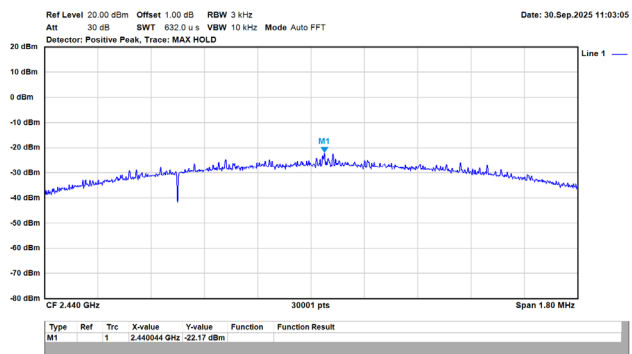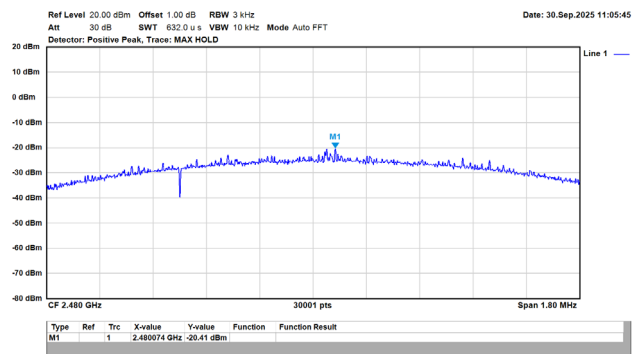GFSK (1 Mbps) / 2402 MHz**GFSK (1 Mbps) / 2440 MHz****GFSK (1 Mbps) / 2480 MHz****GFSK (2 Mbps) / 2402 MHz****GFSK (2 Mbps) / 2440 MHz****GFSK (2 Mbps) / 2480 MHz**



Appendix D. Test Result of Antenna Port Conducted Emission

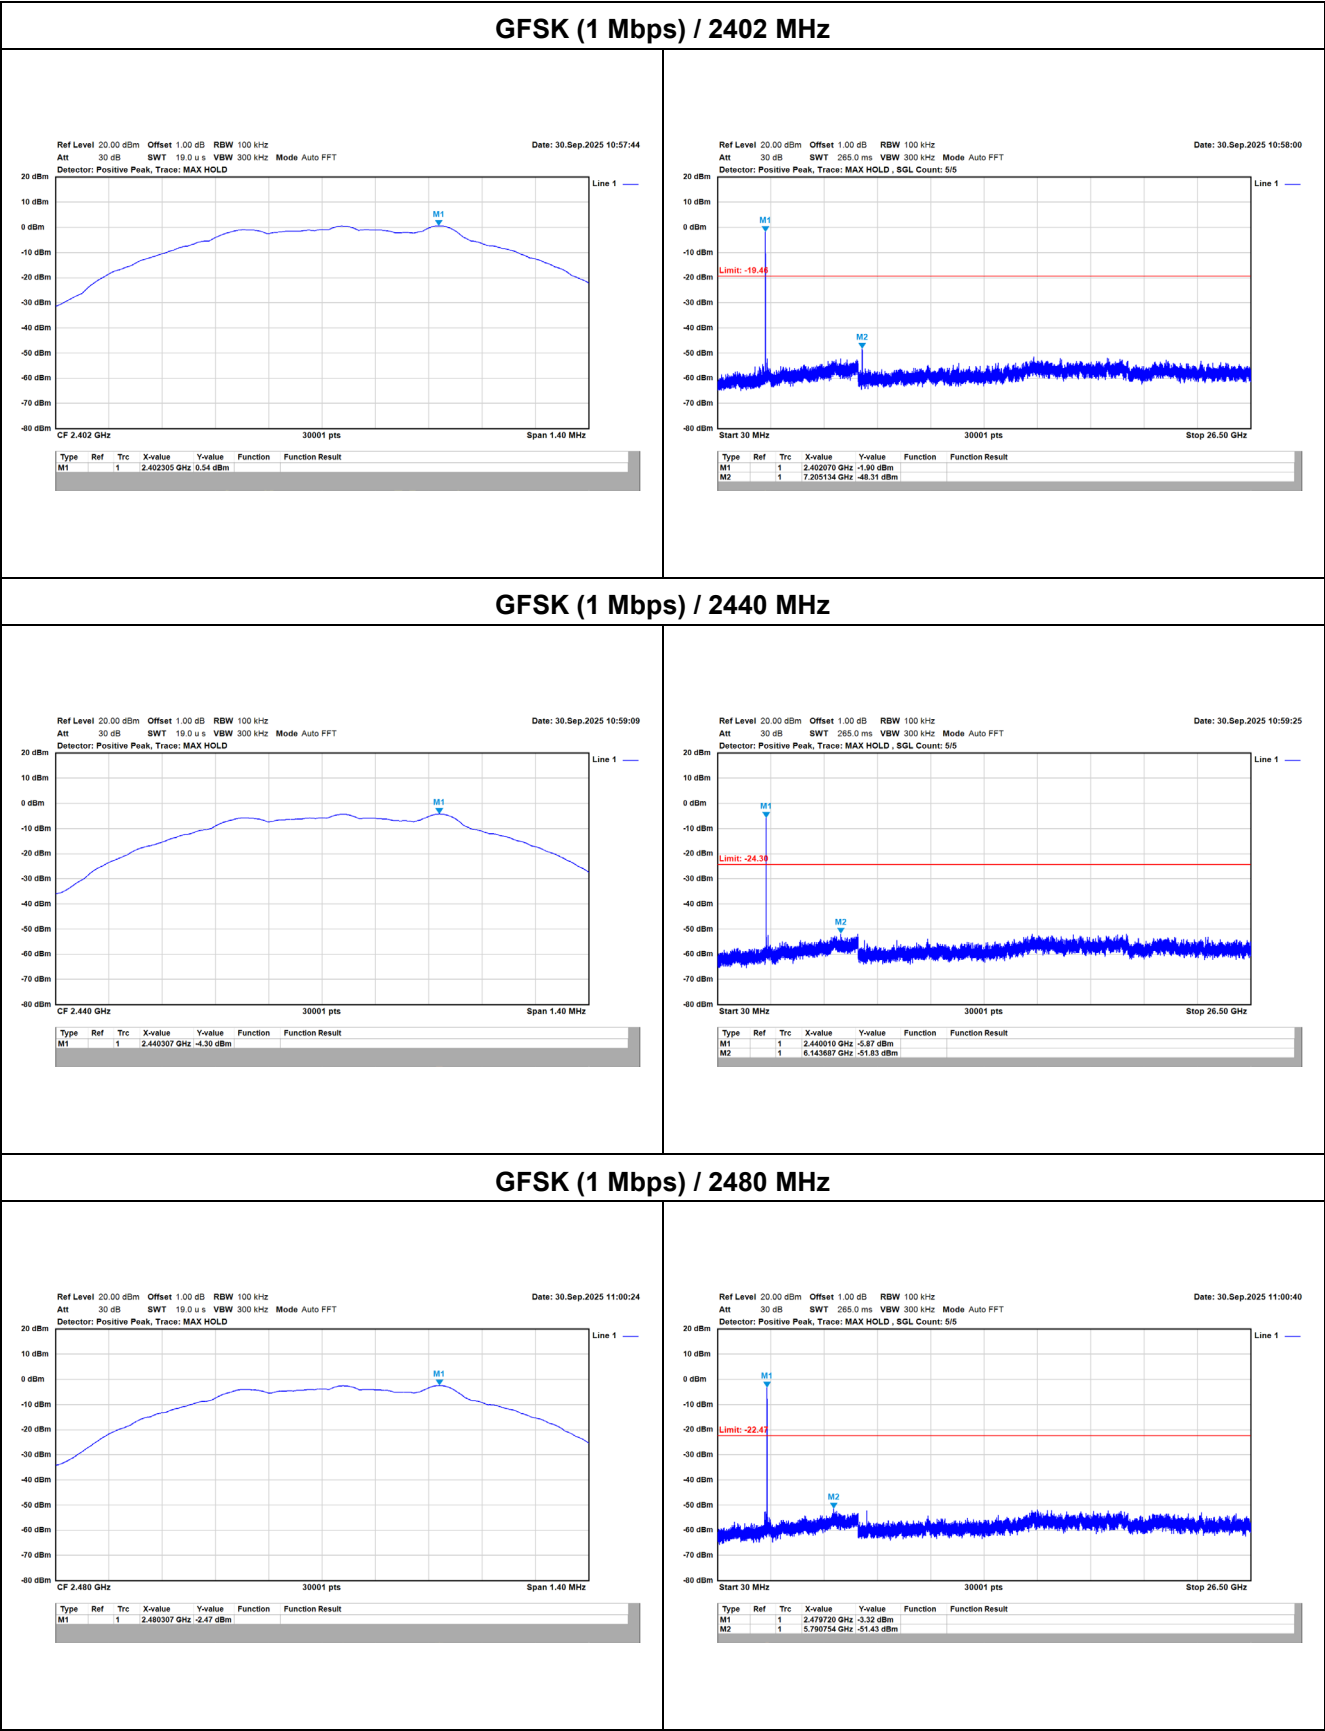



GFSK (2 Mbps) / 2402 MHz





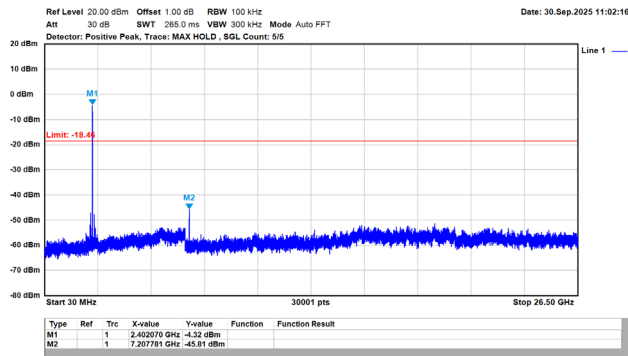
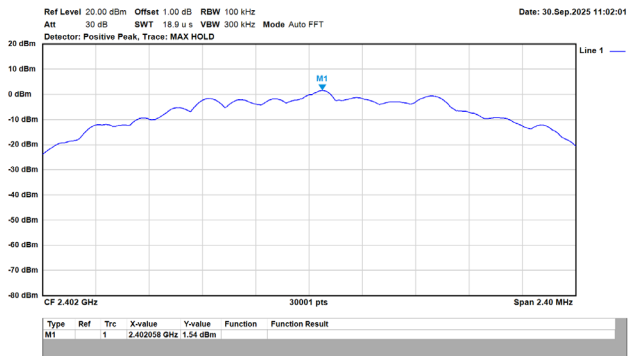


GFSK (2 Mbps) / 2440 MHz

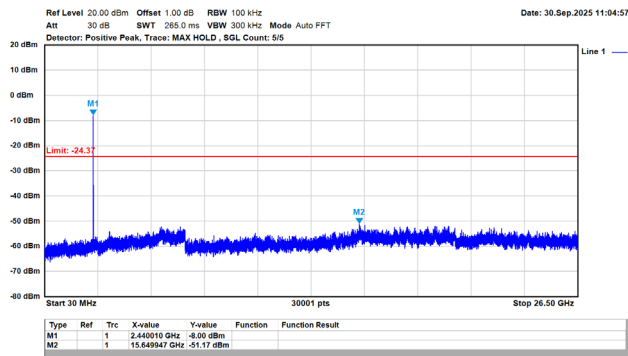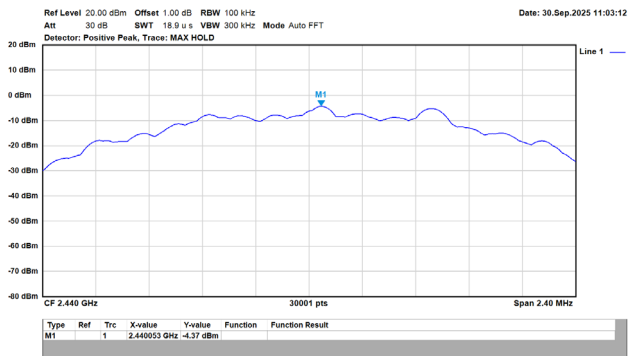

GFSK (2 Mbps) / 2480 MHz

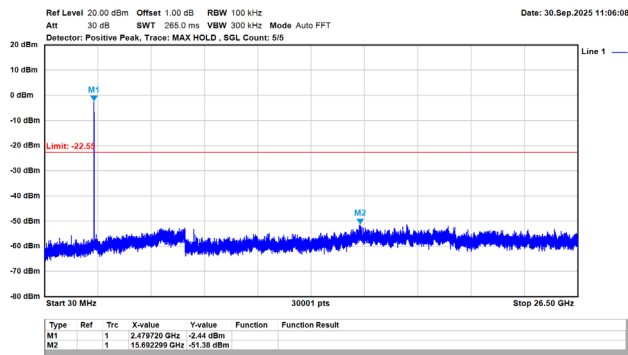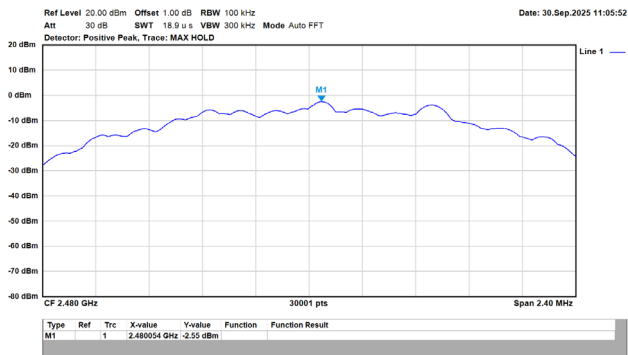


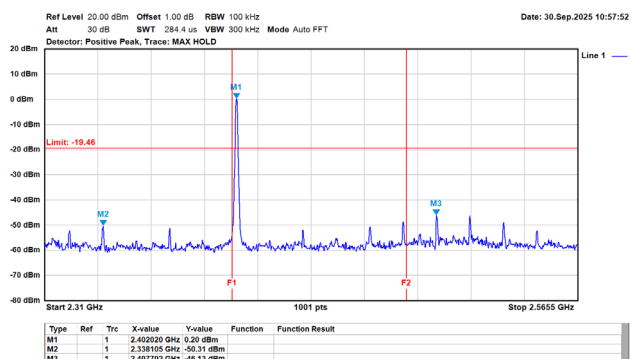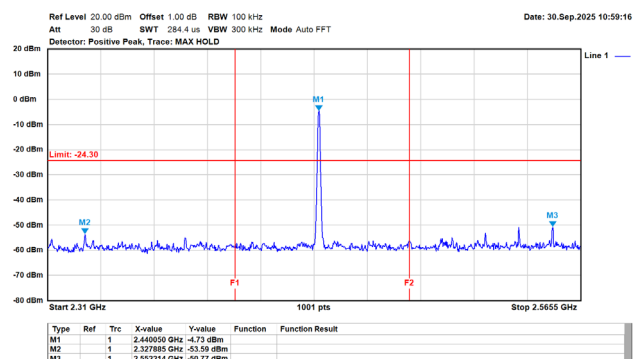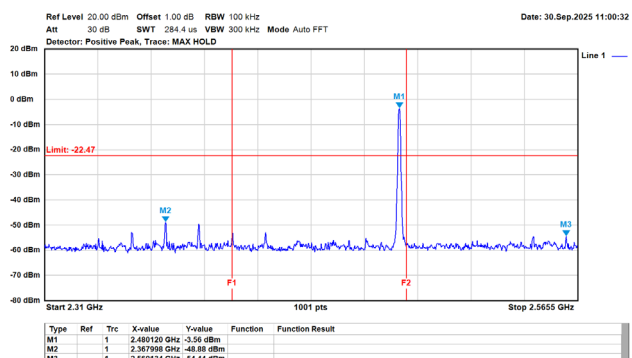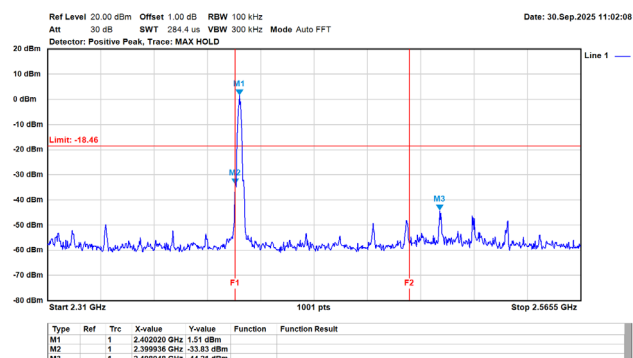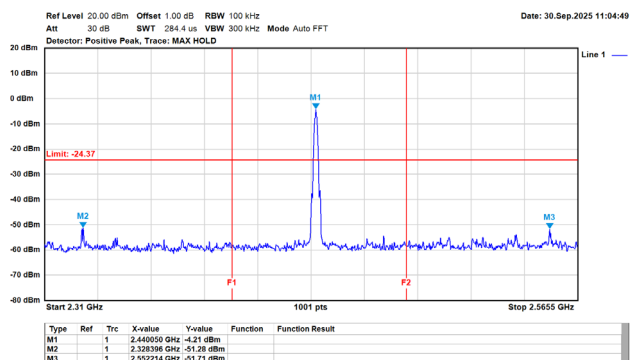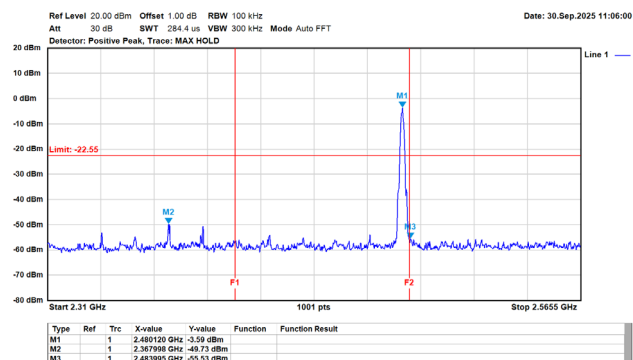GFSK (1 Mbps) / 2402 MHz (Band Edge)**GFSK (1 Mbps) / 2440 MHz (Band Edge)****GFSK (1 Mbps) / 2480 MHz (Band Edge)****GFSK (2 Mbps) / 2402 MHz (Band Edge)****GFSK (2 Mbps) / 2440 MHz (Band Edge)****GFSK (2 Mbps) / 2480 MHz (Band Edge)**

Appendix E. Test Result of Transmitter Radiated Spurious Emission

30 MHz ~ 1 GHz

Site :HC-CB02
Condition :3m Horizontal
Mode :BLE_1M_TX_LF
Test by :Cyril Chen

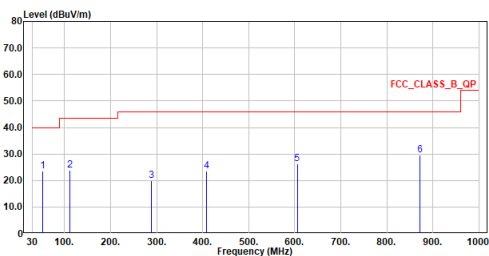


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	52.989	23.43	40.00	-16.57	25.18	-1.75	QP
2	111.965	23.83	43.50	-19.67	29.41	-5.58	QP
3	288.020	19.98	46.00	-26.02	22.29	-2.31	QP
4	408.009	23.65	46.00	-22.35	22.88	0.77	QP
5	605.307	26.27	46.00	-19.73	20.93	5.34	QP
6	871.475	29.67	46.00	-16.33	20.48	9.19	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :BLE_1M_TX_LF
Test by :Cyril Chen

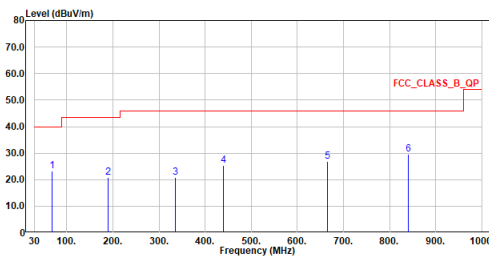


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	67.927	23.22	40.00	-16.78	27.03	-3.81	QP
2	188.983	20.78	43.50	-22.72	25.91	-5.13	QP
3	335.259	20.77	46.00	-25.23	21.81	-1.04	QP
4	440.019	25.40	46.00	-20.60	23.58	1.82	QP
5	665.641	26.97	46.00	-19.03	20.63	6.34	QP
6	840.629	29.58	46.00	-16.42	20.47	9.11	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Above 1 GHz

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :BLE_1M_TX_2402MHz
Test by :Cyril Chen

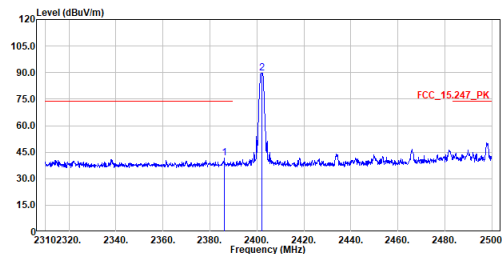


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2386.095	41.78	74.00	-32.22	30.07	11.71	Peak
2	2402.245	89.58	74.00	15.58	77.81	11.77	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :BLE_1M_TX_2402MHz
Test by :Cyril Chen

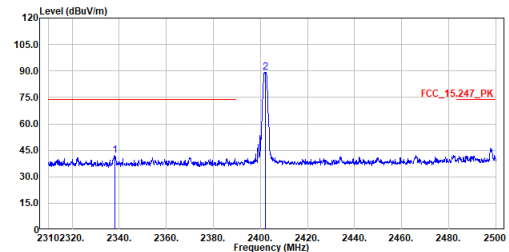


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2338.025	42.06	74.00	-31.94	30.54	11.52	Peak
2	2402.245	89.00	74.00	15.00	77.23	11.77	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :BLE_1M_TX_2402MHz
Test by :Cyril Chen

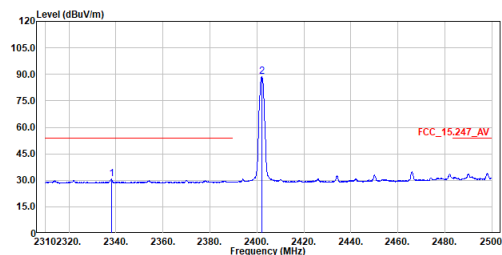


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2338.025	30.68	54.00	-23.32	19.16	11.52	Average
2	2402.055	88.82	54.00	34.82	77.05	11.77	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :BLE_1M_TX_2402MHz
Test by :Cyril Chen

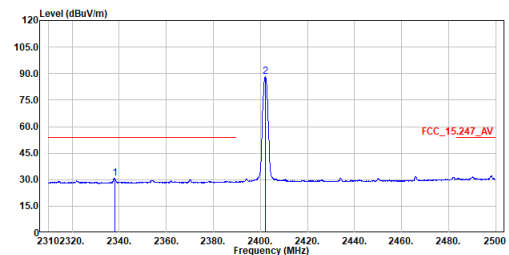


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2338.025	30.99	54.00	-23.01	19.47	11.52	Average
2	2402.150	88.21	54.00	34.21	76.44	11.77	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
Mode :BLE_1M_TX_2402MHz
Test by :Cyril Chen

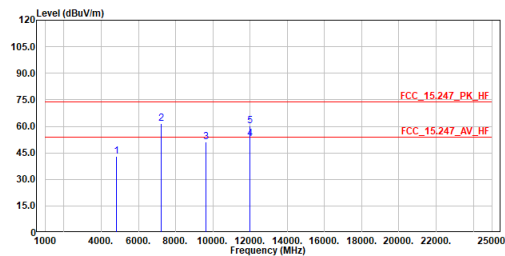


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4804.000	42.95	74.00	-31.05	57.93	-14.98	Peak
2	7206.000	61.75	74.00	-12.25	69.87	-8.12	Peak
3	9608.000	51.39	74.00	-22.61	56.36	-4.97	Peak
4	12010.000	53.05	54.00	-0.95	54.81	-1.76	Average
5	12010.000	60.38	74.00	-13.62	62.14	-1.76	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
Mode :BLE_1M_TX_2402MHz
Test by :Cyril Chen

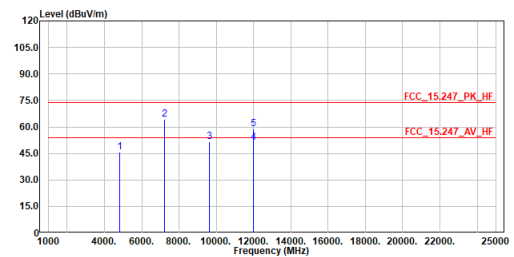


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4804.000	45.77	74.00	-28.23	60.75	-14.98	Peak
2	7206.000	64.42	74.00	-9.58	72.54	-8.12	Peak
3	9608.000	51.76	74.00	-22.24	56.73	-4.97	Peak
4	12010.000	51.21	54.00	-2.79	52.97	-1.76	Average
5	12010.000	58.69	74.00	-15.31	60.45	-1.76	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :BLE_1M_TX_2440MHz
Test by :Cyril Chen

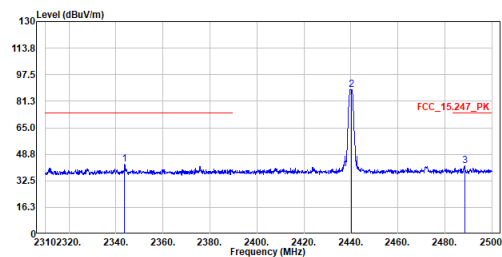


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2343.725	42.53	74.00	-31.47	31.00	11.53	Peak
2	2440.245	88.54	-----	-----	76.61	11.93	Peak
3	2488.410	41.67	74.00	-32.33	29.54	12.13	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :BLE_1M_TX_2440MHz
Test by :Cyril Chen

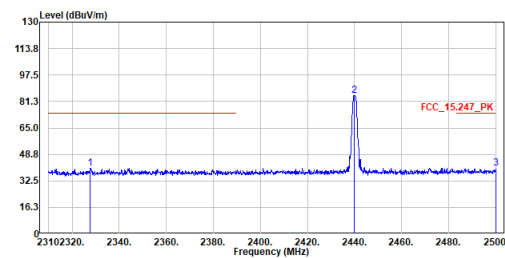


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2327.765	40.42	74.00	-33.58	28.94	11.48	Peak
2	2439.770	84.81	-----	-----	72.88	11.93	Peak
3	2500.000	40.03	74.00	-33.97	27.86	12.17	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :BLE_1M_TX_2440MHz
Test by :Cyril Chen

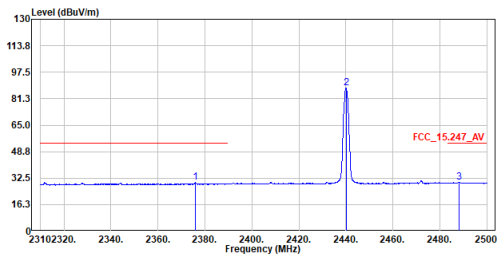


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2375.835	29.82	54.00	-24.18	18.15	11.67	Average
2	2440.055	87.75	-----	-----	75.82	11.93	Average
3	2488.220	30.13	54.00	-23.87	18.00	12.13	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :BLE_1M_TX_2440MHz
Test by :Cyril Chen

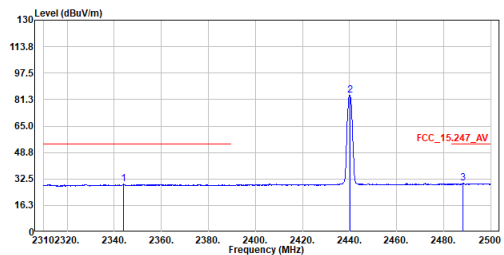


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2344.105	29.22	54.00	-24.78	17.68	11.54	Average
2	2440.055	83.98	-----	-----	72.05	11.93	Average
3	2488.125	29.86	54.00	-24.14	17.73	12.13	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
Mode :BLE_1M_TX_2440MHz
Test by :Cyril Chen

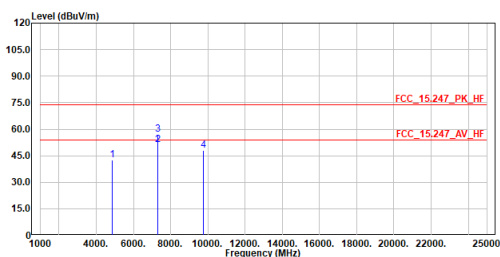


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4880.000	42.65	74.00	-31.35	57.33	-14.68	Peak
2	7320.000	51.29	54.00	-2.71	59.27	-7.98	Average
3	7320.000	57.14	74.00	-16.86	65.12	-7.98	Peak
4	9760.000	48.04	74.00	-25.96	52.72	-4.68	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
Mode :BLE_1M_TX_2440MHz
Test by :Cyril Chen

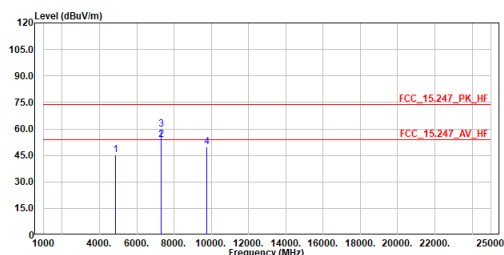


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4880.000	45.38	74.00	-28.62	60.06	-14.68	Peak
2	7320.000	53.82	54.00	-0.18	61.80	-7.98	Average
3	7320.000	59.61	74.00	-14.39	67.59	-7.98	Peak
4	9760.000	49.86	74.00	-24.14	54.54	-4.68	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :BLE_1M_TX_2480MHz
Test by :Cyril Chen

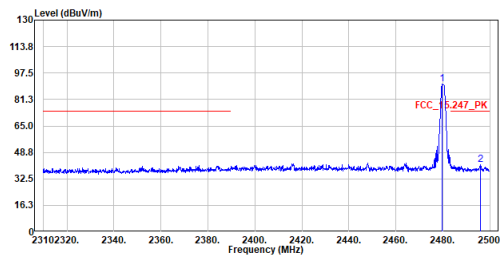


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	2479.765	90.51	-----	-----	78.42	12.09	Peak
2	2496.105	41.18	74.00	-32.82	29.02	12.16	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :BLE_1M_TX_2480MHz
Test by :Cyril Chen

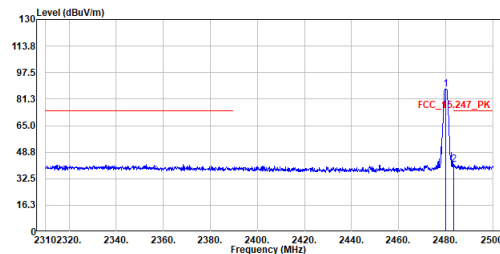


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	2480.050	87.55	-----	-----	75.46	12.09	Peak
2	2483.510	41.41	74.00	-32.59	29.31	12.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :BLE_1M_TX_2480MHz
Test by :Cyril Chen

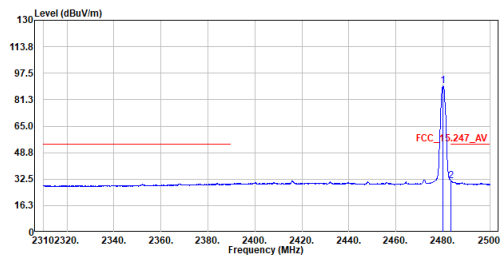


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	2480.050	89.71	-----	-----	77.62	12.09	Average
2	2483.510	31.22	54.00	-22.78	19.12	12.10	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :BLE_1M_TX_2480MHz
Test by :Cyril Chen

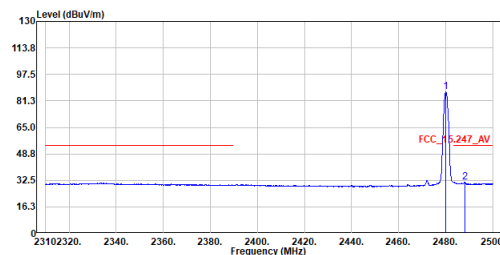


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	2480.050	86.73	-----	-----	74.64	12.09	Average
2	2488.030	31.47	54.00	-22.53	19.34	12.13	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
Mode :BLE_1M_TX_2480MHz
Test by :Cyril Chen

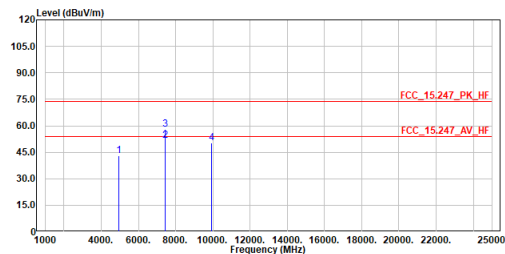


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4960.000	42.90	74.00	-31.10	57.27	-14.37	Peak
2	7440.000	51.72	54.00	-2.28	59.54	-7.82	Average
3	7440.000	58.04	74.00	-15.96	65.86	-7.82	Peak
4	9920.000	50.18	74.00	-23.82	54.57	-4.39	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
Mode :BLE_1M_TX_2480MHz
Test by :Cyril Chen

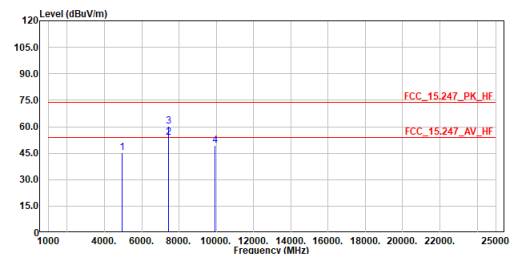


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4960.000	45.19	74.00	-28.81	59.56	-14.37	Peak
2	7440.000	53.86	54.00	-0.14	61.68	-7.82	Average
3	7440.000	60.33	74.00	-13.67	68.15	-7.82	Peak
4	9920.000	49.40	74.00	-24.60	53.79	-4.39	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :BLE_2M_TX_2402MHz
Test by :Cyril Chen

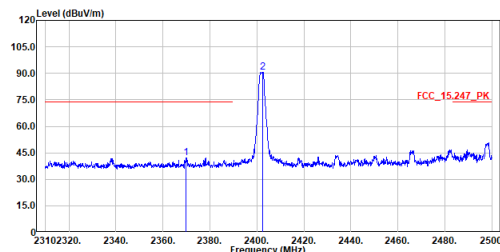


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2369.755	42.32	74.00	-31.68	30.68	11.64	Peak
2	2402.530	90.58	-----	-----	78.81	11.77	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :BLE_2M_TX_2402MHz
Test by :Cyril Chen

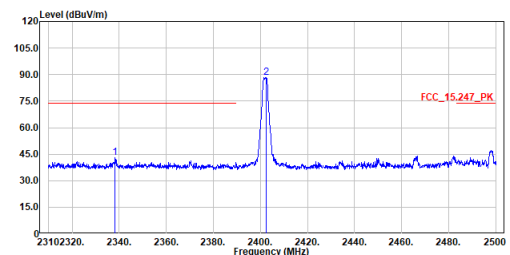


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2338.310	43.12	74.00	-30.88	31.60	11.52	Peak
2	2402.530	88.12	-----	-----	76.35	11.77	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :BLE_2M_TX_2402MHz
Test by :Cyril Chen

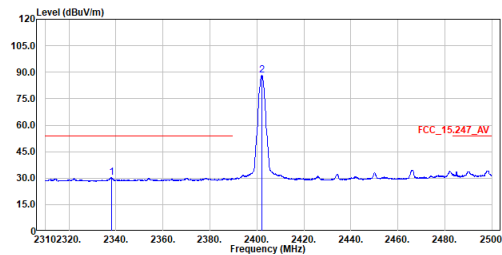


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2338.120	30.43	54.00	-23.57	18.91	11.52	Average
2	2402.055	88.27	-----	-----	76.50	11.77	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :BLE_2M_TX_2402MHz
Test by :Cyril Chen

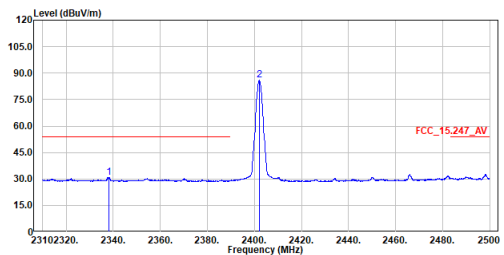


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2338.120	30.84	54.00	-23.16	19.32	11.52	Average
2	2402.055	85.84	-----	-----	74.07	11.77	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
Mode :BLE_2M_TX_2402MHz
Test by :Cyril Chen

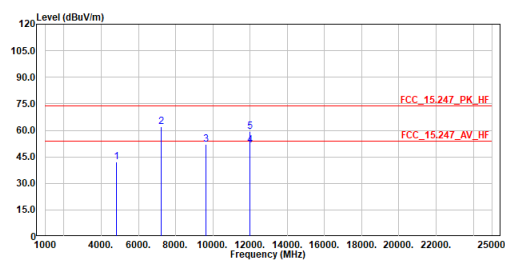


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4804.000	42.19	74.00	-31.81	57.17	-14.98	Peak
2	7206.000	62.17	74.00	-11.83	70.29	-8.12	Peak
3	9608.000	52.25	74.00	-21.75	57.22	-4.97	Peak
4	12010.000	51.74	54.00	-2.26	53.50	-1.76	Average
5	12010.000	59.51	74.00	-14.49	61.27	-1.76	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
Mode :BLE_2M_TX_2402MHz
Test by :Cyril Chen

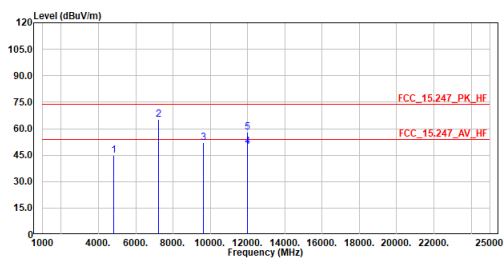


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4804.000	44.82	74.00	-29.18	59.80	-14.98	Peak
2	7206.000	65.24	74.00	-8.76	73.36	-8.12	Peak
3	9608.000	51.91	74.00	-22.09	56.88	-4.97	Peak
4	12010.000	49.87	54.00	-4.13	51.63	-1.76	Average
5	12010.000	57.95	74.00	-16.05	59.71	-1.76	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :BLE_2M_TX_2440MHz
Test by :Cyril Chen

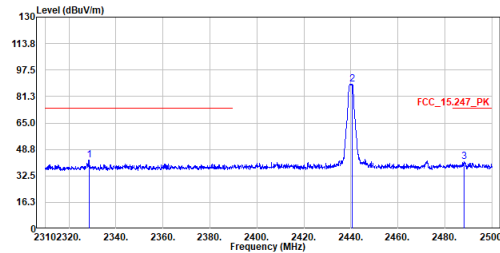


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2328.525	42.27	74.00	-31.73	30.79	11.48	Peak
2	2440.530	88.69	-----	-----	76.76	11.93	Peak
3	2488.220	41.17	74.00	-32.83	29.04	12.13	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :BLE_2M_TX_2440MHz
Test by :Cyril Chen

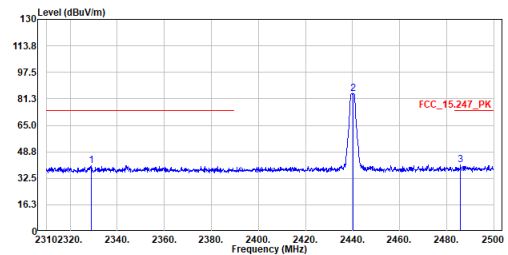


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2328.905	40.25	74.00	-33.75	28.77	11.48	Peak
2	2440.855	84.57	-----	-----	72.64	11.93	Peak
3	2485.845	40.51	74.00	-33.49	28.40	12.11	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :BLE_2M_TX_2440MHz
Test by :Cyril Chen

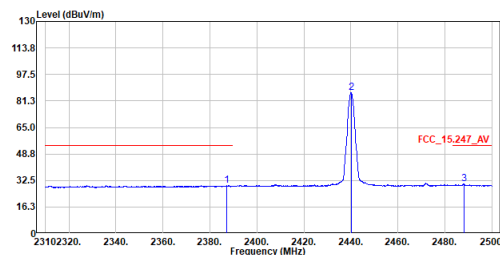


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2387.235	29.32	54.00	-24.68	17.60	11.72	Average
2	2440.055	86.37	-----	-----	74.44	11.93	Average
3	2488.125	30.26	54.00	-23.74	18.13	12.13	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :BLE_2M_TX_2440MHz
Test by :Cyril Chen

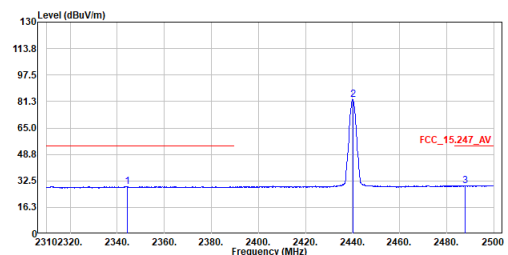


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2344.295	29.17	54.00	-24.83	17.63	11.54	Average
2	2440.150	82.25	-----	-----	70.32	11.93	Average
3	2487.935	29.64	54.00	-24.36	17.51	12.13	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
Mode :BLE_2M_TX_2440MHz
Test by :Cyril Chen

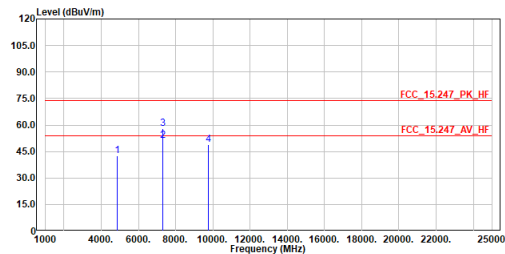


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4880.000	42.56	74.00	-31.44	57.24	-14.68	Peak
2	7320.000	51.02	54.00	-2.98	59.00	-7.98	Average
3	7320.000	57.98	74.00	-16.02	65.96	-7.98	Peak
4	9760.000	48.69	74.00	-25.31	53.37	-4.68	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
Mode :BLE_2M_TX_2440MHz
Test by :Cyril Chen

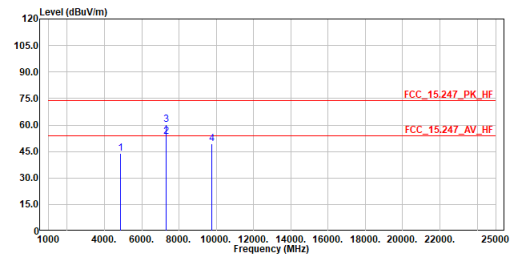


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4880.000	43.81	74.00	-30.19	58.49	-14.68	Peak
2	7320.000	53.22	54.00	-0.78	61.20	-7.98	Average
3	7320.000	60.25	74.00	-13.75	68.23	-7.98	Peak
4	9760.000	49.57	74.00	-24.43	54.25	-4.68	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :BLE_2M_TX_2480MHz
Test by :Cyril Chen

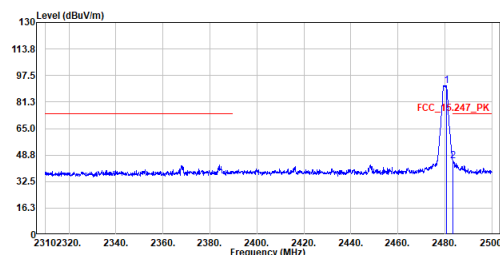


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2480.525	91.06	-----	-----	78.97	12.09	Peak
2	2483.510	44.92	74.00	-29.08	32.82	12.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :BLE_2M_TX_2480MHz
Test by :Cyril Chen

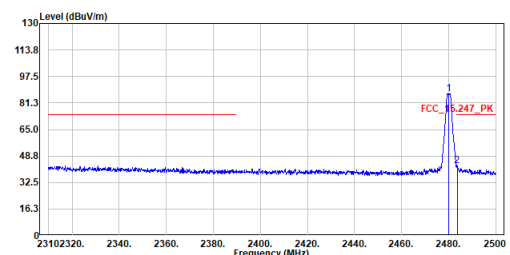


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2480.850	86.72	-----	-----	74.63	12.09	Peak
2	2483.565	42.61	74.00	-31.39	30.51	12.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :BLE_2M_TX_2480MHz
Test by :Cyril Chen

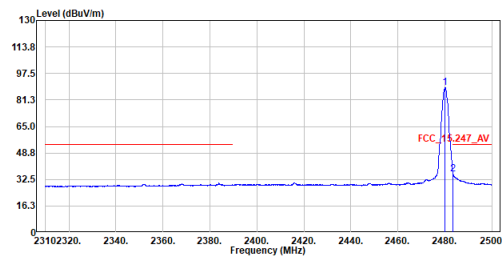


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2480.050	88.75	-----	-----	76.66	12.09	Average
2	2483.510	35.79	54.00	-18.21	23.69	12.10	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :BLE_2M_TX_2480MHz
Test by :Cyril Chen

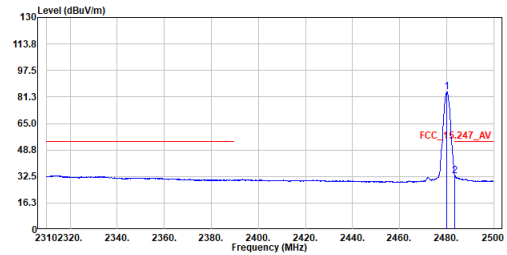


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2480.050	84.37	-----	-----	72.28	12.09	Average
2	2483.510	32.96	54.00	-21.04	20.86	12.10	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
Mode :BLE_2M_TX_2480MHz
Test by :Cyril Chen

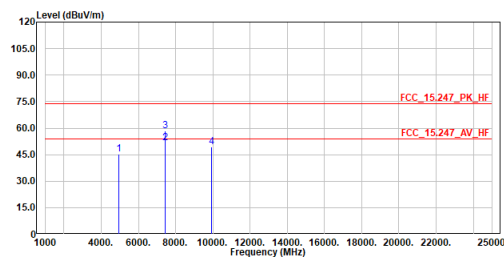


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4960.000	45.35	74.00	-28.65	59.72	-14.37	Peak
2	7440.000	51.49	54.00	-2.51	59.31	-7.82	Average
3	7440.000	58.53	74.00	-15.47	66.35	-7.82	Peak
4	9920.000	49.21	74.00	-24.79	53.60	-4.39	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
Mode :BLE_2M_TX_2480MHz
Test by :Cyril Chen

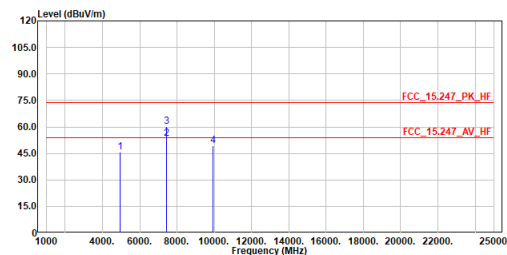

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4960.000	45.51	74.00	-28.49	59.88	-14.37	Peak
2	7440.000	53.62	54.00	-0.38	61.44	-7.82	Average
3	7440.000	68.42	74.00	-13.58	68.24	-7.82	Peak
4	9920.000	49.49	74.00	-24.51	53.88	-4.39	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.