

S

T

S

L

A

B



FCC TESTREPORT

Report No: STS1502037

Issued for

VIDAR INTERNATIONAL CO., LTD.

**10F, Shuihetian Industrial Park, Tianfu Road, Qiaotou Block, Fuyong
Street, Bao'an District, Shenzhen City, Guangdong Province, P.R. China**

Product Name:	Bluetooth stereo headset
Brand Name:	VIDAR
Model No.:	See page 7
FCC ID:	2AD5HBH02
Test Standard:	FCC Part 15.247

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS. All Test Data Presented in this report is only applicable to presented Test sample.

Shenzhen STS Test Services Co., Ltd.

1/F, Building B, Zhuoke Science Park, Chongqing Road, Fuyong,





TEST RESULT CERTIFICATION

Applicant's name VIDAR INTERNATIONAL CO., LTD.
Address 10F,ShuihetianIndustrial Park,Tianfu Road, Qiaotou Block, Fuyong Street,
Bao'an District, Shenzhen City, Guangdong Province, P.R. China
Manufacture's Name VIDAR INTERNATIONAL CO.,LTD.
Address 10F,ShuihetianIndustrial Park,Tianfu Road, Qiaotou Block, Fuyong Street,
Bao'an District, Shenzhen City, Guangdong Province, P.R. China

Product description

Product name Bluetooth stereo headset
Band name VIDAR
Model and/or type reference BH02
Ratings DC 3.7V by Battery

Standards FCC Part15.247

Test procedure ANSI C63.4-2009

This device described above has been tested by STS, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests.. Jan.23.2015 &Jan.26,2015

Date of Issue..... Jan.27,2015

Test Result **Pass**

Testing Engineer :

(Tony Liu)

Technical Manager :

(Vita Li)

Authorized Signatory :

(Bovey Yang)





Table of Contents	Page
1. SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.1 DESCRIPTION OF TEST MODES	9
2.2 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	9
2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3. EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
3.1.2 TEST PROCEDURE	14
3.1.3 TEST SETUP	14
3.1.4 EUT OPERATING CONDITIONS	14
3.1.5 TEST RESULTS	15
3.2 RADIATED EMISSION LIMITS	17
3.3 TEST PROCEDURE	18
3.4 DEVIATION FROM TEST STANDARD	18
3.5 TEST SETUP	19
3.6 EUT OPERATING CONDITIONS	20
3.7 TEST RESULTS (WORST CASE: GFSK)	21
BAND EDGE TEST (WORST CASE: GFSK)	34
4. CONDUCTED SPURIOUS EMISSIONS	38
4.1 REQUIREMENT	38
4.2 TEST PROCEDURE	38
4.3 TEST SETUP	38
4.4 EUT OPERATION CONDITIONS	38
4.5 TEST RESULTS	39
5. NUMBER OF HOPPING CHANNEL	45
5.1 APPLIED PROCEDURES / LIMIT	45
5.2 TEST PROCEDURE	45
5.3 TEST SETUP	45
5.4 EUT OPERATION CONDITIONS	45



Table of Contents	Page
5.5TEST RESULTS	46
6. AVERAGE TIME OF OCCUPANCY	47
6.1 APPLIED PROCEDURES / LIMIT	47
6.2 TEST PROCEDURE	47
6.3 TEST SETUP	47
6.4 EUT OPERATION CONDITIONS	47
6.5TEST RESULTS	48
7. HOPPING CHANNEL SEPARATION MEASUREMENT	50
7.1 APPLIED PROCEDURES / LIMIT	50
7.2 TEST PROCEDURE	50
7.3 TEST SETUP	50
7.4 EUT OPERATION CONDITIONS	50
7.5TEST RESULTS	51
8. BANDWIDTH TEST	52
8.1APPLIED PROCEDURES / LIMIT	52
8.2 TEST PROCEDURE	52
8.3 TEST SETUP	52
8.4 EUT OPERATION CONDITIONS	52
8.5TEST RESULTS	53
9. OUTPUT POWER TEST	56
9.1 APPLIED PROCEDURES / LIMIT	56
9.2 TEST PROCEDURE	56
9.3 TEST SETUP	56
9.4 EUT OPERATION CONDITIONS	56
9.5TEST RESULTS	57
10. ANTENNA REQUIREMENT	61
10.1 STANDARD REQUIREMENT	61
10.2 EUT ANTENNA	61
APPENDIX-PHOTOS OF TEST SETUP	62



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247(a)(1)	Hopping Channel Separation	PASS	
15.247(b)(1)	Peak Output Power	PASS	
15.247(c)	Radiated Spurious Emission	PASS	
15.247(d)	Conducted Spurious Emission	PASS	
15.247(a)(iii)	Number of Hopping Frequency	PASS	
15.247(a)(iii)	Dwell Time	PASS	
15.247(a)(1)	Bandwidth	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

Note:N/A means not applicable



1.1 TEST FACILITY

Shenzhen STS Test Services Co., Ltd.

Add. : 1/F, Building 2, Zhuoke Science Park, Chongqing Road, Fuyong, Baoan District, Shenzhen, China.

FCC Registration No.: 842334; IC Registration No.: 12108A-1

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %** °

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.18\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.71\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Bluetooth stereo headset
Trade Name	VIDAR
Test Model	BH02
Series Model	BS61 , BS51 , BS62 , BS55 , BS56 , BS50 , BS52 , BS53 , BS23 , BS33 , BS38 , BS60 , BS06 , BS31 , BS29 , BS03 , BS18 , BS18S , BS16 , BH02 , BH03 , BH08 , BH05 , BH06 , BH09 , BH10 , BH11 , BH12 , BH13 , BH15 , BS66
Difference description	All the same except for the model name.
Channel List	Please refer to the Note 2.
Bluetooth	Frequency:2402 – 2480 MHz Modulation: GFSK, π /4-DQPSK, 8DPSK
Battery	Rated Voltage: 3.7V Charge Limit: 4.2V
Hardware version number	V1.0
Software versioning number	StereoHeadset1510G_prelabel005_20141103_Patch228446421E4FCE
Connecting I/O Port(s)	Please refer to the User's Manual

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

3. Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	PCB Antenna	NA	2.3	BT Antenna

The EUT antenna is PCB Antenna. no antenna other than that furnished by the responsible party shall be used with the device.



2.1 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Low channel TX
Mode 2	Middle channel TX
Mode 3	High channel TX
Mode 4	Hopping on

For Conducted Emission	
Final Test Mode	Description
Mode1	Keeping TX

For Radiated Emission	
Final Test Mode	Description
Mode 1	Low channel TX
Mode 2	Middle channel TX
Mode 3	High channel TX
Mode 4	Hopping on

Note:

(1)The measurements are performed at the highest, middle, lowest available channels.

2.2 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS


Test software Version	Test program: N/A		
Frequency	2402 MHz	2441 MHz	2480 MHz
Parameters(1Mbps)	DEF	DEF	DEF
Parameters(2Mbps)	DEF	DEF	DEF
Parameters(3Mbps)	DEF	DEF	DEF

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

Radiated Spurious Emission Test

Configure 1: (Normal hopping)

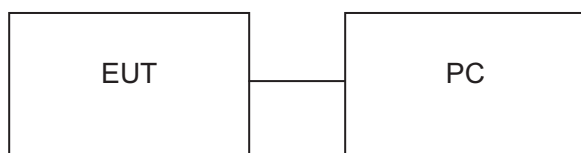

Configure 2: (Control continuous TX)

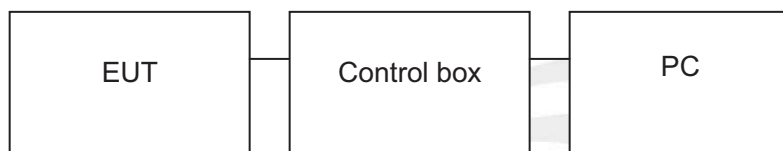

Conducted Emission Test





2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Bluetooth stereo headset	VIDAR	BH02	N/A	EUT
2	Battery	N/A	N/A	N/A	Accessory
3	PC	N/A	A1465	N/A	FCC DOC
4	Control box	N/A	N/A	N/A	A.E

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	80	USB Cable

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.
- (4) N/A means not applicable.



2.5EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Spectrum Analyzer	Agilent	E4407B	MY50140340	2014.10.25	2015.10.24
Test Receiver	R&S	ESCI	101427	2014.10.25	2015.10.24
Bilog Antenna	TESEQ	CBL6111D	34678	2014.10.27	2015.10.26
50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2014.06.06	2015.06.06
Horn Antenna	R&S	9120D	152265	2014.10.27	2015.10.26
Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2014.07.06	2015.07.05
Amplifier	EM	EM-30180	060538	2014.12.22	2015.12.21
Loop Antenna	ARA	PLA-1030/B	1029	2014.06.08	2015.06.07
Power Meter	Anritsu	ML2495A	1204003	2014.10.25	2015.10.24
Power Sensor	Anritsu	MA2411B	100309	2014.10.25	2015.10.24

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	102086	102086	2014.10.25	2015.10.24
LISN	R&S	ENV216	101242	2014.10.25	2015.10.24
LISN	EMCO	3810/2NM	000-23625	2014.10.25	2015.10.24
50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2014.06.06	2015.06.06
Passive Voltage Probe	R&S	ESH2-Z3	100196	2014.06.06	2015.06.06
Absorbing clamp	R&S	MDS-21	100668	2014.10.27	2015.10.26

3.EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

Operating frequency band. In case the emission fall within the restricted band specified on Part 15.247&207(a) limit in the table below has to be followed.

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- a. The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The diagram illustrates a test setup for an Electromagnetic Interference (EMI) test. It features a **Vertical Reference Ground Plane** on the left, a **Horizontal Reference Ground Plane** at the bottom, and a **Test Receiver** on the right. The **EUT** (Equipment Under Test) is positioned on a stand, with a **LISN** (Line Impedance Stabilization Network) connected to its power input. The distance between the Vertical Reference Ground Plane and the EUT is marked as **40cm**. The height of the EUT stand above the Horizontal Reference Ground Plane is marked as **80cm**. The Test Receiver is connected to the EUT via a cable. A large, faint watermark of a person is visible in the background.


**Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes**

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.1.5TEST RESULTS

EUT :	Bluetooth Speaker	Model Name. :	
Temperature :	23℃	Relative Humidity :	50%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC3.7V	Test Mode :	keeping TX

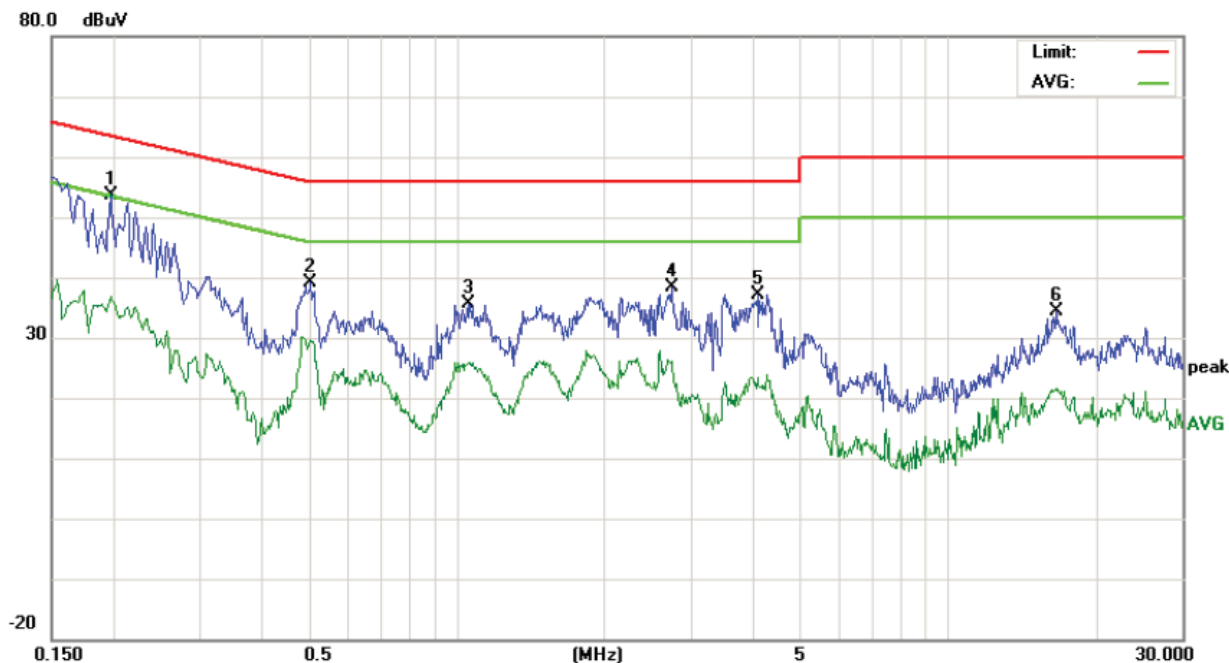

Site: Conduction

Phase: L1

Temperature: 26

Limit: FCC Class B Conduction(QP)

Power:

Humidity: 60 %

EUT:Bluetooth Stereo headset

M/N:BH02


Mode: Keeping TX

Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1980	43.34		26.75	10.21	53.55		36.96	63.69	53.69	-10.14	-16.73	P	
2	0.5060	28.72		19.20	10.39	39.11		29.59	56.00	46.00	-16.89	-16.41	P	
3	1.0580	25.21		15.58	10.37	35.58		25.95	56.00	46.00	-20.42	-20.05	P	
4	2.7460	27.98		15.57	10.49	38.47		26.06	56.00	46.00	-17.53	-19.94	P	
5	4.1020	26.84		12.96	10.38	37.22		23.34	56.00	46.00	-18.78	-22.66	P	
6	16.6020	24.14		11.54	10.12	34.26		21.66	60.00	50.00	-25.74	-28.34	P	



EUT :	Bluetooth Speaker	Model Name. :	
Temperature :	23 °C	Relative Humidity :	50%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC3.7V	Test Mode :	keeping TX

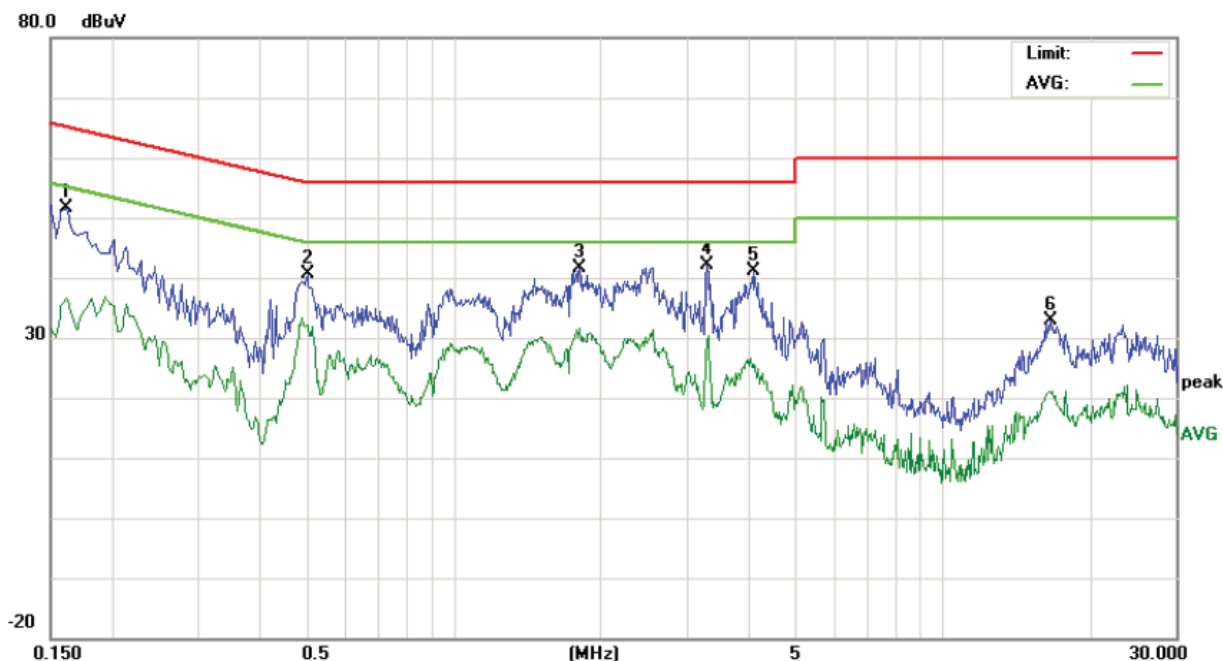

Site: Conduction

Phase: **N**

Temperature: 26

Limit: FCC Class B Conduction(QP)

Power:

Humidity: 60 %

EUT:Bluetooth Stereo headset

M/N:BH02

Mode: Keeping TX

Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1620	41.47		26.53	10.17	51.64		36.70	65.36	55.36	-13.72	-18.66	P	
2	0.5020	30.14		21.73	10.40	40.54		32.13	56.00	46.00	-15.46	-13.87	P	
3	1.8180	31.25		21.38	10.28	41.53		31.66	56.00	46.00	-14.47	-14.34	P	
4	3.3060	31.62		18.95	10.53	42.15		29.48	56.00	46.00	-13.85	-16.52	P	
5	4.0939	30.67		15.11	10.39	41.06		25.50	56.00	46.00	-14.94	-20.50	P	
6	16.6340	22.70		10.76	10.12	32.82		20.88	60.00	50.00	-27.18	-29.12	P	



3.2 RADIATED EMISSION LIMITS

3.2.1 Radiated Emission Limits

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on Part 15.247&205(a), then the Part 15.247&209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (30MHz - 1000MHz)

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower



Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier harmonic(Peak/AV)
RB / VB (emission in restricted band)	RBW 1MHz / VBW 1MHz Peak detector for Pk value RBW 1MHz / VBW 10Hz Peak detector for AV value

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.3 TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then QuasiPeak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.4 DEVIATION FROM TEST STANDARD


No deviation

3.5 TESTSETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

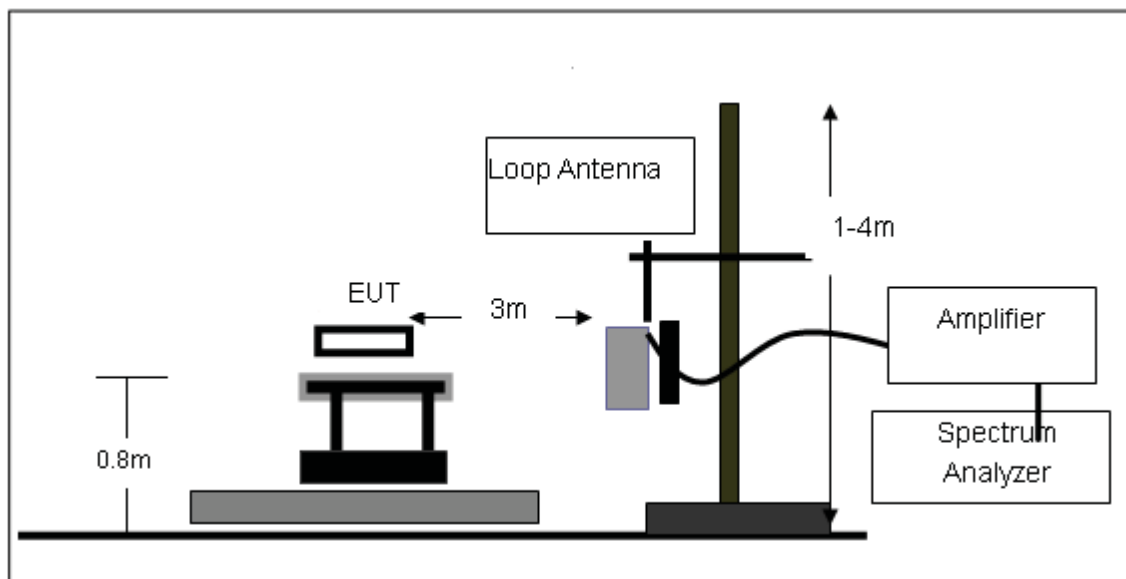

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

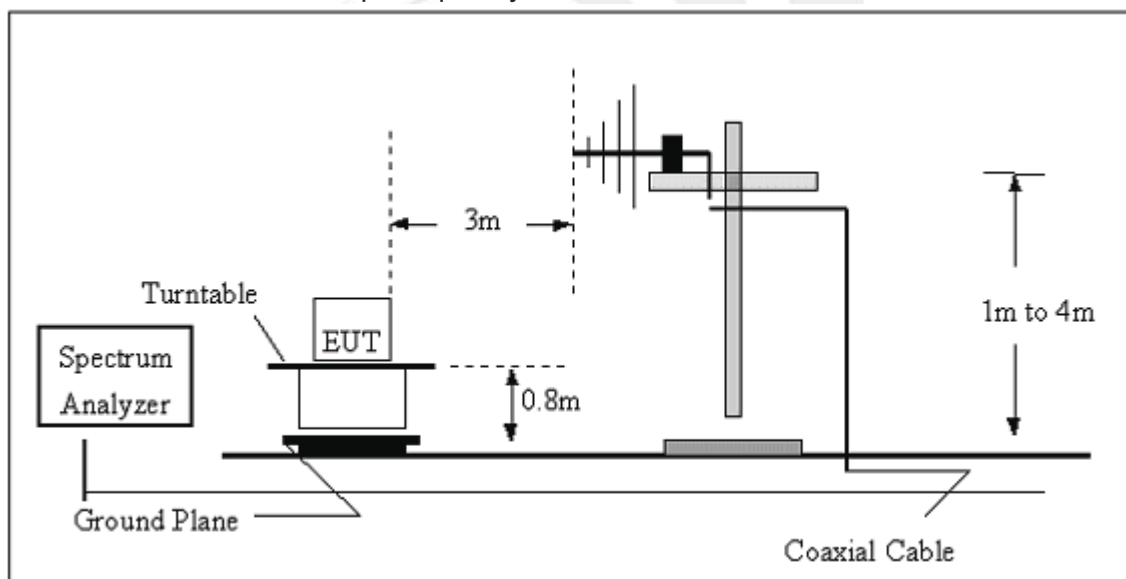

(C) Radiated Emission Test-Up Frequency Above 1GHz

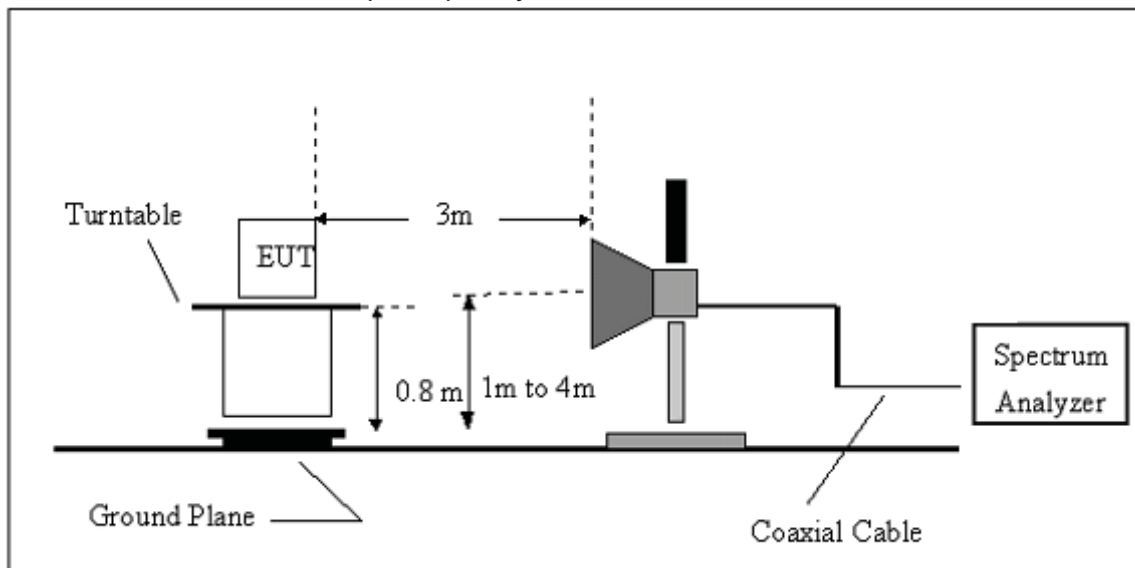

3.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

REMARK : GFSK(1Mbps), $\pi/4$ -DQPSK(2Mbps), 8-DPSK(3Mbps) all have been tested , GFSK(1Mbps) is found as worst case and only reported



3.7 TEST RESULTS(WORST CASE:GFSK)

Below 30 MHz

EUT :	Bluetooth stereo headset	Model Name. :	BH02
Temperature :	23 °C	Relative Humidity :	50%
Pressure :	1010hPa	Polarization :	---
Test Voltage :	DC 3.7V		
Test Mode :	TX Mode		


Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);


Limit line = specific limits(dBuV) + distance extrapolation factor.

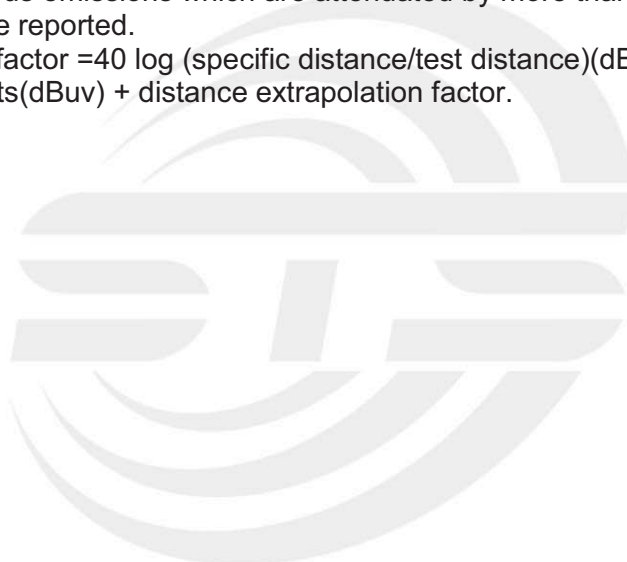



Between 30MHz – 1000 MHz

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

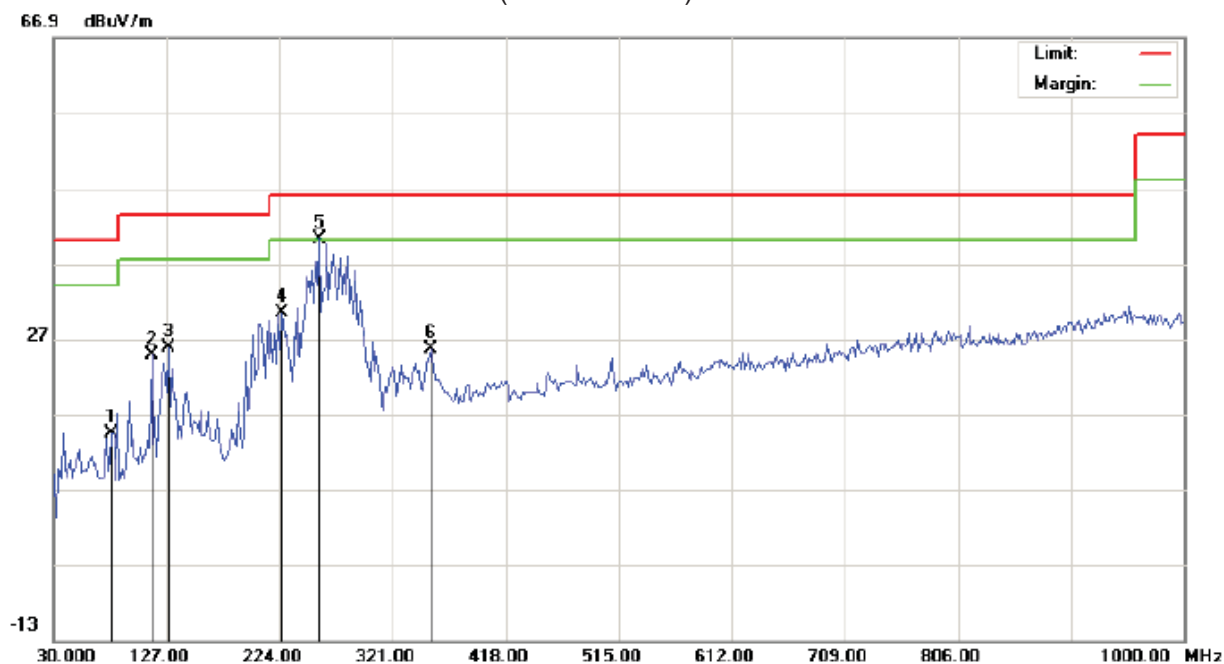

Site: site #1

Polarization: *Horizontal*

Temperature: 26

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT: Bluetooth Stereo headset

Distance: 3m

M/N: BH02

Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		80.1167	4.62	9.80	14.42	40.00	-25.58	peak			
2		114.0667	13.37	11.45	24.82	43.50	-18.68	peak			
3		128.6167	12.51	13.30	25.81	43.50	-17.69	peak			
4		225.6167	17.52	12.97	30.49	46.00	-15.51	peak			
5	*	257.9500	26.08	14.14	40.22	46.00	-5.78	peak			
6		353.3333	6.81	18.76	25.57	46.00	-20.43	peak			

RESULT: PASS



RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL



Site: site #1

Polarization: **Vertical**

Temperature: 26

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT: Bluetooth Stereo headset

Distance: 3m

M/N: BH02

Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	38.0833	19.80	6.39	26.19	40.00	-13.81	peak			
2		131.8500	10.72	11.80	22.52	43.50	-20.98	peak			
3		190.0500	13.10	11.52	24.62	43.50	-18.88	peak			
4		251.4833	17.39	13.94	31.33	46.00	-14.67	peak			
5		358.1833	4.06	18.79	22.85	46.00	-23.15	peak			
6		799.5333	1.64	27.31	28.95	46.00	-17.05	peak			

RESULT: PASS**Note:** 1. Factor=Antenna Factor+ Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL



Site: site #1

Polarization: *Horizontal*

Temperature: 26

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT: Bluetooth Stereo headset

Distance: 3m

M/N: BH02

Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		38.0833	7.14	9.43	16.57	40.00	-23.43	peak			
2		128.6167	12.75	13.30	26.05	43.50	-17.45	peak			
3		251.4833	25.43	13.94	39.37	46.00	-6.63	peak			
4	*	264.4166	25.14	14.34	39.48	46.00	-6.52	peak			
5		408.3000	3.16	19.32	22.48	46.00	-23.52	peak			
6		713.8500	0.73	25.59	26.32	46.00	-19.68	peak			

RESULT: PASS



RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL



Site: site #1

Polarization: **Vertical**

Temperature: 26

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT: Bluetooth Stereo headset

Distance: 3m

M/N: BH02

Mode: Middle Channel TX

Note:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	38.0833	20.84	6.39	27.23	40.00	-12.77	peak			
2		131.8500	10.54	11.80	22.34	43.50	-21.16	peak			
3		190.0500	13.67	11.52	25.19	43.50	-18.31	peak			
4		251.4833	16.67	13.94	30.61	46.00	-15.39	peak			
5		346.8667	5.75	18.53	24.28	46.00	-21.72	peak			
6		799.5333	3.76	27.31	31.07	46.00	-14.93	peak			

RESULT: PASS**Note:** 1. Factor=Antenna Factor+ Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

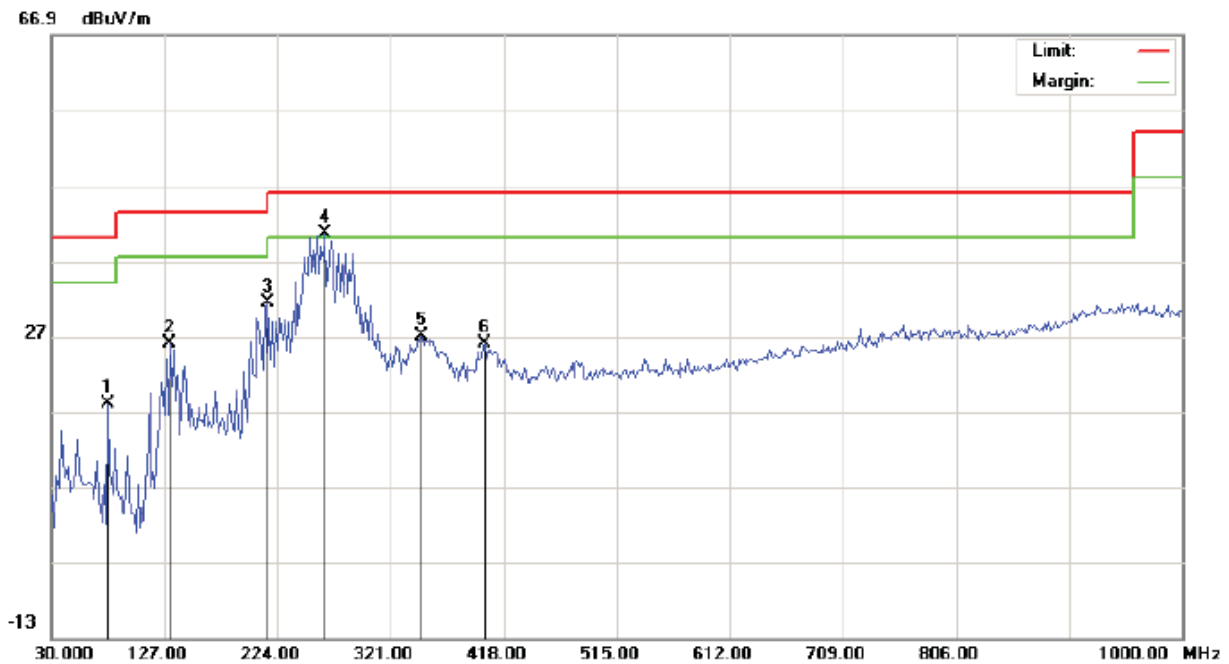

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Bluetooth Stereo headset

M/N: BH02

Mode: High Channel TX

Note:

Polarization: *Horizontal*

Power:

Distance: 3m

Temperature: 26

Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		78.5000	15.90	2.17	18.07	40.00	-21.93	peak			
2		131.8500	14.27	11.80	26.07	43.50	-17.43	peak			
3		215.9167	20.90	10.56	31.46	43.50	-12.04	peak			
4	*	264.4166	26.19	14.34	40.53	46.00	-5.47	peak			
5		346.8667	8.50	18.53	27.03	46.00	-18.97	peak			
6		401.8333	6.97	19.13	26.10	46.00	-19.90	peak			

RESULT: PASS



RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL



Site: site #1

Polarization: **Vertical**

Temperature: 26

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT: Bluetooth Stereo headset

Distance: 3m

M/N: BH02

Mode: High Channel TX

Note:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	38.0833	22.22	6.39	28.61	40.00	-11.39	peak			
2		130.2332	16.63	11.13	27.76	43.50	-15.74	peak			
3		199.7500	19.59	9.06	28.65	43.50	-14.85	peak			
4		251.4833	18.01	13.94	31.95	46.00	-14.05	peak			
5		345.2500	6.93	18.42	25.35	46.00	-20.65	peak			
6		406.6833	7.21	19.27	26.48	46.00	-19.52	peak			

RESULT: PASS**Note:** 1. Factor=Antenna Factor+ Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



Above 1000 MHz

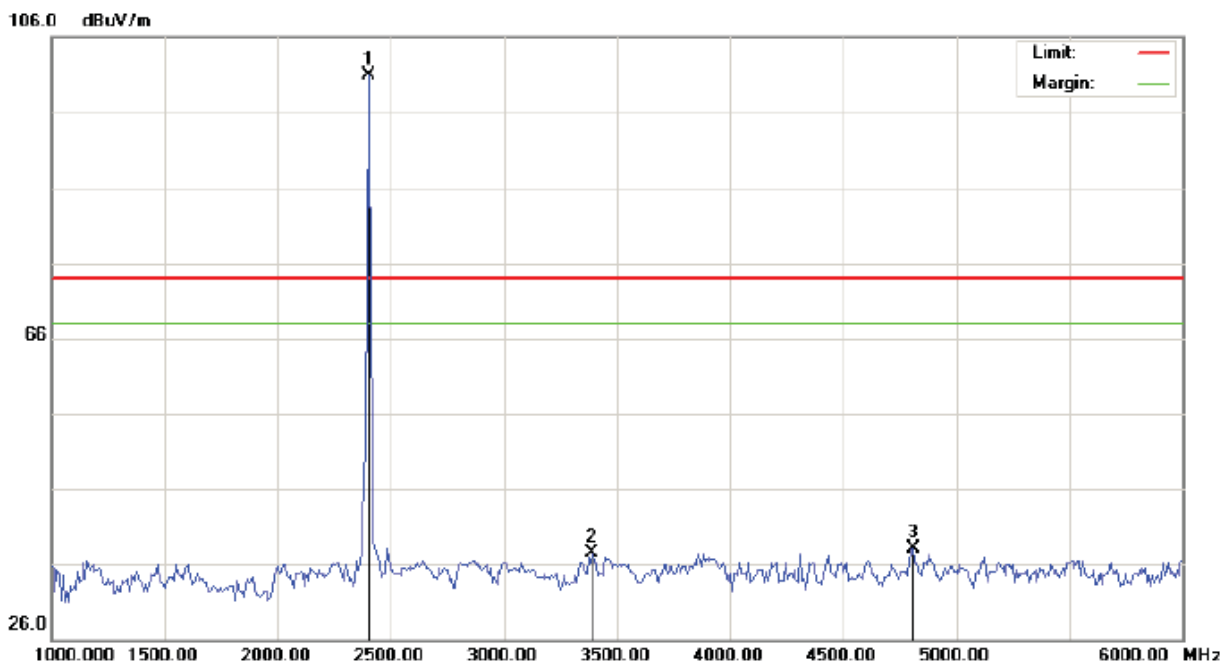RADIATED EMISSION ABOVE 1GHZ (1-10th Harmonics)-LOW CHANNEL-HORIZONTAL

Site: site #1

Polarization: *Horizontal*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

Power:

Humidity: 60 %

EUT: Bluetooth stereo headset

Distance:


M/N: BH02

Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2402.000	90.57	10.32	100.89	74.00	26.89	peak			
2		3391.667	25.58	12.01	37.59	74.00	-36.41	peak			
3		4808.333	30.36	7.70	38.06	74.00	-35.94	peak			

RESULT: PASS

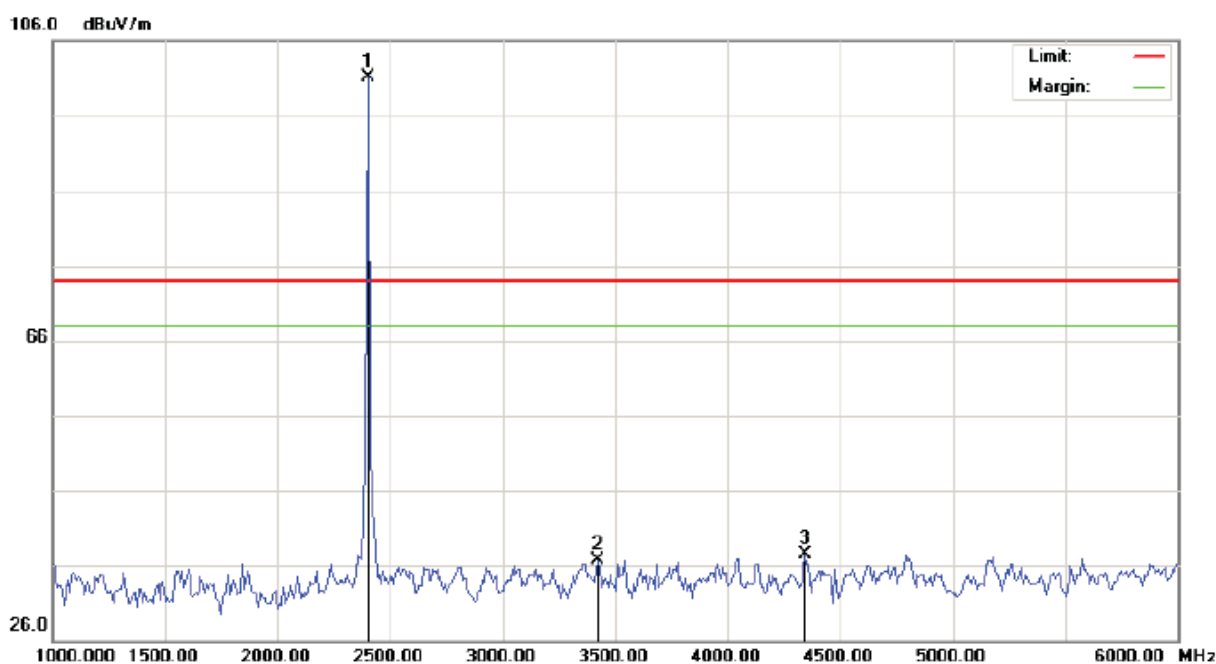RADIATED EMISSION ABOVE 1GHZ (1-10th Harmonics)-LOW CHANNEL –VERTICAL

Site: site #1

Polarization: **Vertical**

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

Power:

Humidity: 60 %

EUT: Bluetooth stereo headset

Distance:


M/N: BH02

Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2402.000	90.70	10.32	101.02	74.00	27.02	peak			
2		3425.000	24.71	12.04	36.75	74.00	-37.25	peak			
3		4341.667	28.00	9.52	37.52	74.00	-36.48	peak			

RESULT: PASS

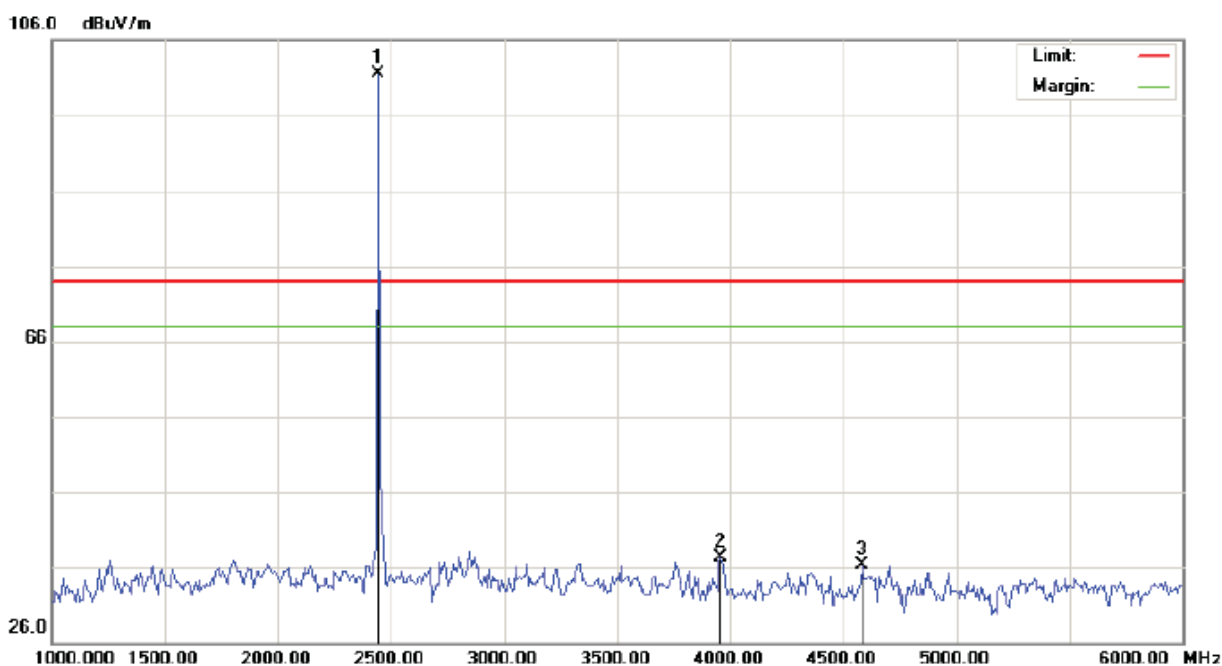RADIATED EMISSION ABOVE 1GHZ (1-10th Harmonics)-MIDDLE CHANNEL-HORIZONTAL

Site: site #1

Polarization: *Horizontal*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

Power:

Humidity: 60 %

EUT: Bluetooth stereo headset

Distance:


M/N: BH02

Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2441.000	91.11	10.36	101.47	74.00	27.47	peak			
2		3958.333	22.32	14.93	37.25	74.00	-36.75	peak			
3		4583.333	29.18	7.11	36.29	74.00	-37.71	peak			

RESULT: PASS

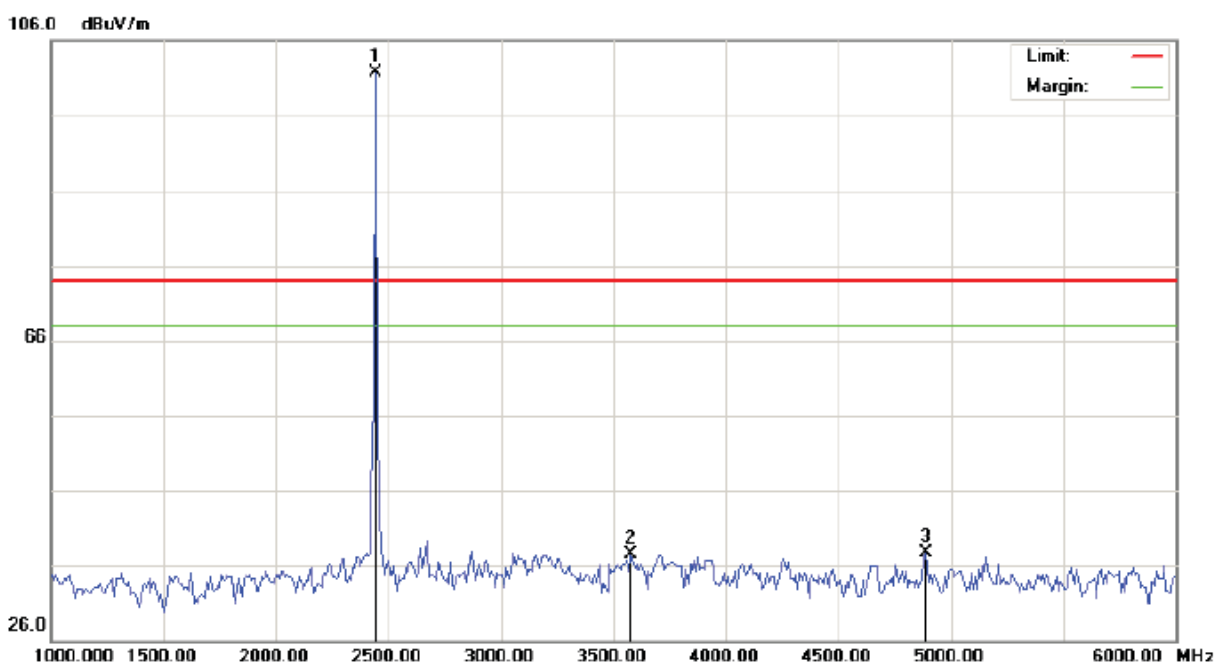RADIATED EMISSION ABOVE 1GHZ (1-10th Harmonics)- MIDDLE CHANNEL –VERTICAL

Site: site #1

Polarization: **Vertical**

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

Power:

Humidity: 60 %

EUT: Bluetooth stereo headset

Distance:


M/N: BH02

Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2441.000	91.41	10.36	101.77	74.00	27.77	peak			
2		3575.000	25.02	12.57	37.59	74.00	-36.41	peak			
3		4891.667	29.75	7.92	37.67	74.00	-36.33	peak			

RESULT: PASS

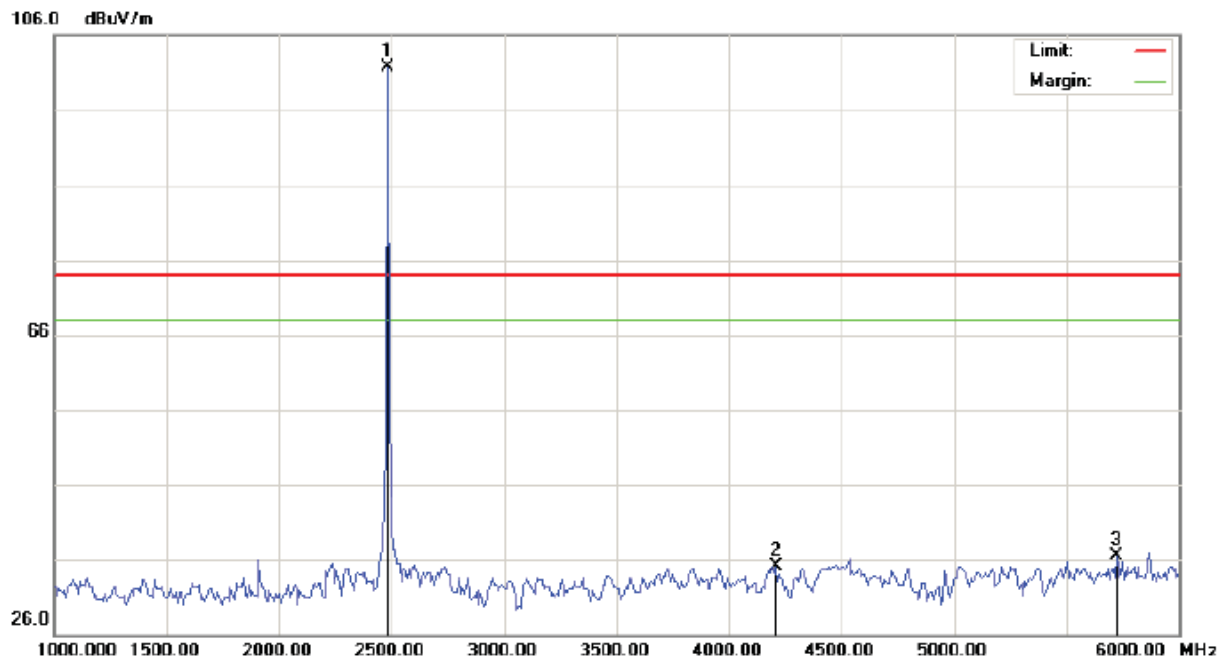RADIATED EMISSION ABOVE 1GHZ (1-10th Harmonics)-HIGH CHANNEL-HORIZONTAL

Site: site #1

Polarization: **Horizontal**

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

Power:

Humidity: 60 %

EUT: Bluetooth stereo headset

Distance:


M/N: BH02

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	91.39	10.41	101.80	74.00	27.80	peak			
2		4208.333	23.47	11.73	35.20	74.00	-38.80	peak			
3		5725.000	38.12	-1.71	36.41	74.00	-37.59	peak			

RESULT: PASS

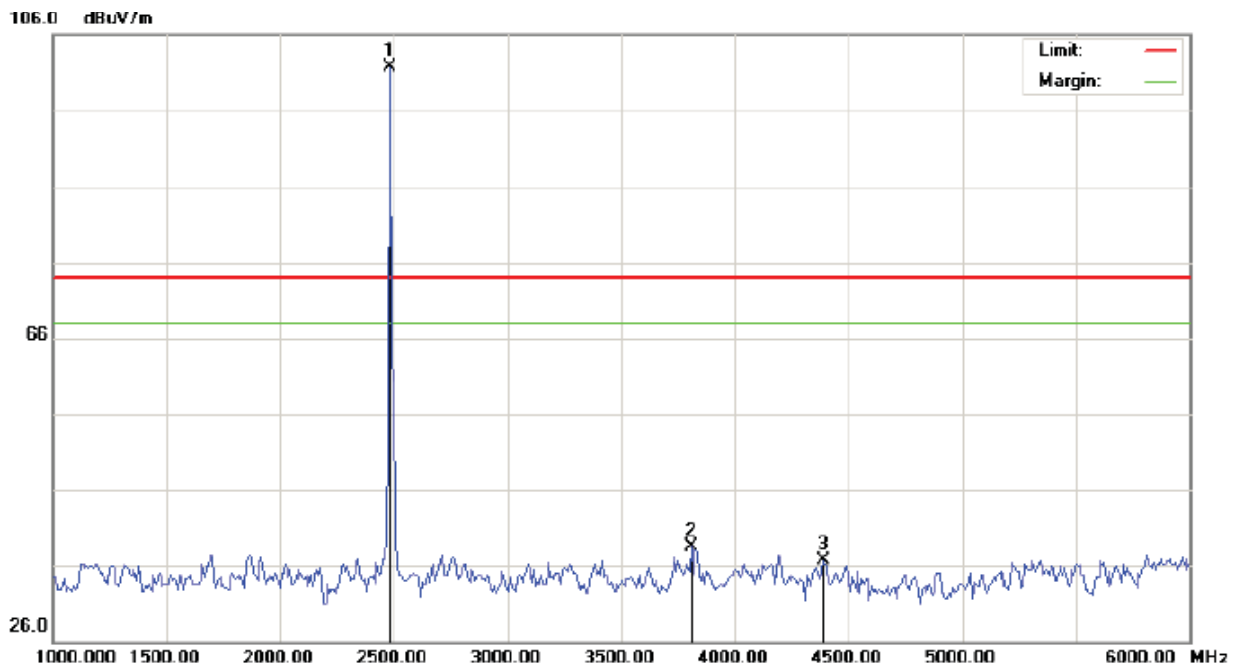RADIATED EMISSION ABOVE 1GHZ (1-10th Harmonics)-HIGH CHANNEL –VERTICAL

Site: site #1

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

EUT: Bluetooth stereo headset

M/N: BH02

Mode: High Channel TX

Note:

Polarization: **Vertical**

Power:

Distance:

Temperature: 26

Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	91.26	10.41	101.67	74.00	27.67	peak			
2		3808.333	24.48	14.01	38.49	74.00	-35.51	peak			
3		4391.667	28.02	8.69	36.71	74.00	-37.29	peak			

RESULT: PASS**Note:** 6~25GHz at least have 20dB margin. No recording in the test report.


Factor=Antenna Factor+ Cable loss-Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.



BAND EDGE TEST(Worst case:GFSK)

TEST PLOT OF BAND EDGE FOR LOW CHANNEL (1Mbps)-Horizontal

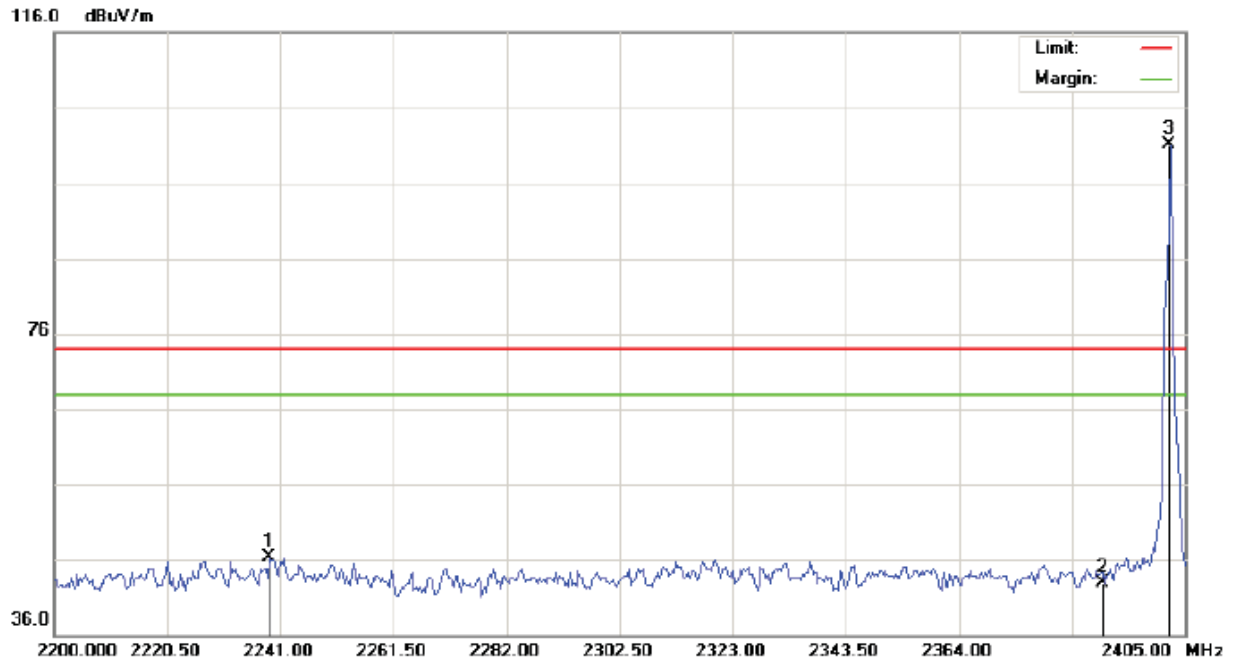

Site: site #1

Polarization: **Horizontal**

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

Power:

Humidity: 60 %

EUT: Bluetooth stereo headset

Distance:

M/N: BH02


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2238.950	36.20	10.14	46.34	74.00	-27.66	peak			
2		2390.000	32.50	10.31	42.81	74.00	-31.19	peak			
3	*	2402.000	90.72	10.32	101.04	74.00	27.04	peak			



TEST PLOT OF BAND EDGE FOR LOW CHANNEL (1Mbps)-Vertical

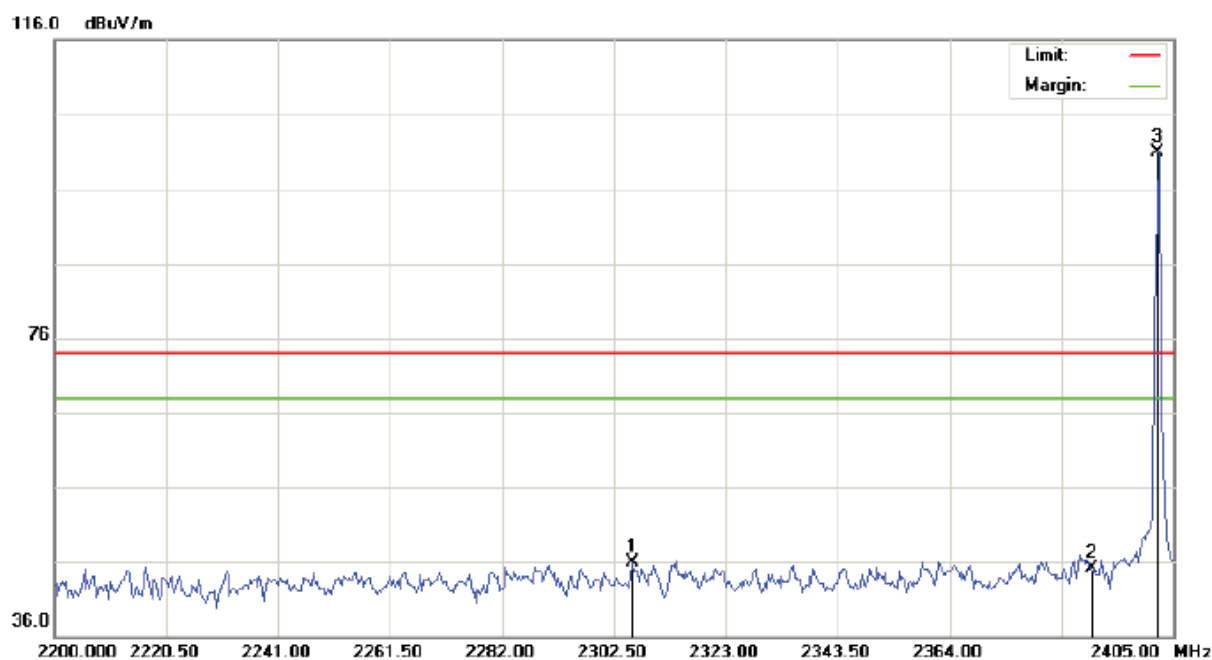

Site: site #1

Polarization: *Vertical*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

Power:

Humidity: 60 %

EUT: Bluetooth stereo headset

Distance:

M/N: BH02


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2305.917	35.68	10.22	45.90	74.00	-28.10	peak			
2		2390.000	34.71	10.31	45.02	74.00	-28.98	peak			
3	*	2402.000	90.59	10.32	100.91	74.00	26.91	peak			



TEST PLOT OF BAND EDGE FOR HIGH CHANNEL (1Mbps)-Horizontal

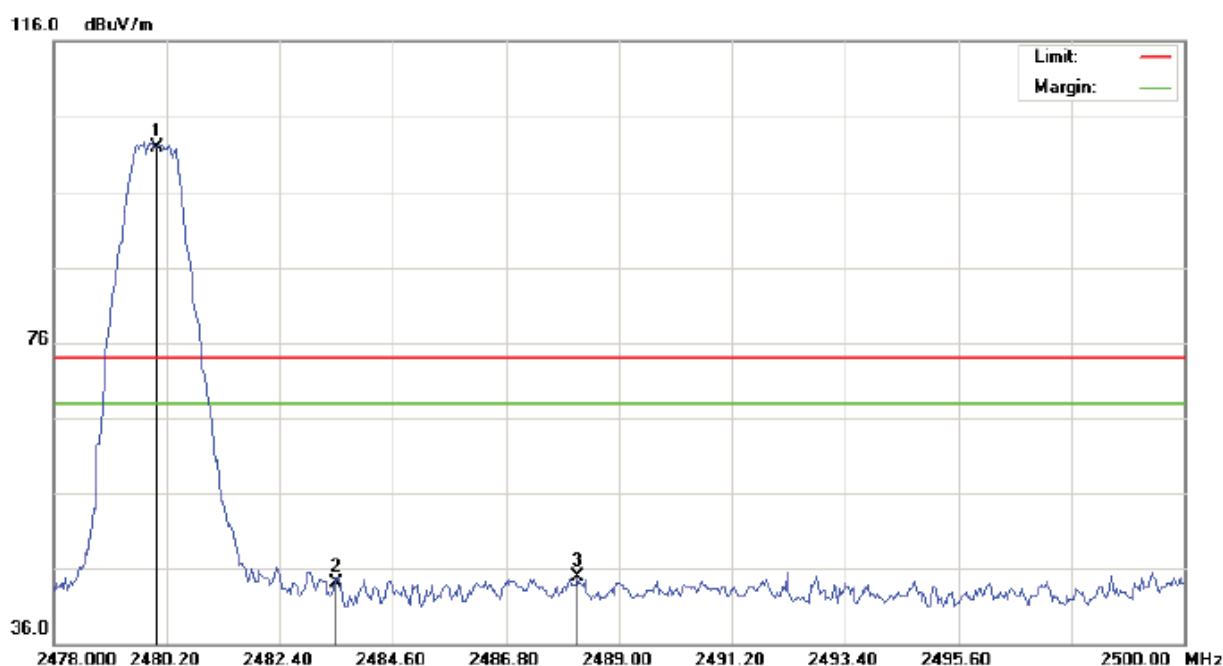

Site: site #1

Polarization: **Horizontal**

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

Power:

Humidity: 60 %

EUT: Bluetooth stereo headset

Distance:

M/N: BH02


Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	91.55	10.41	101.96	74.00	27.96	peak			
2		2483.500	33.69	10.41	44.10	74.00	-29.90	peak			
3		2488.193	34.48	10.42	44.90	74.00	-29.10	peak			



TEST PLOT OF BAND EDGE FOR HIGH CHANNEL (1Mbps)-Vertical

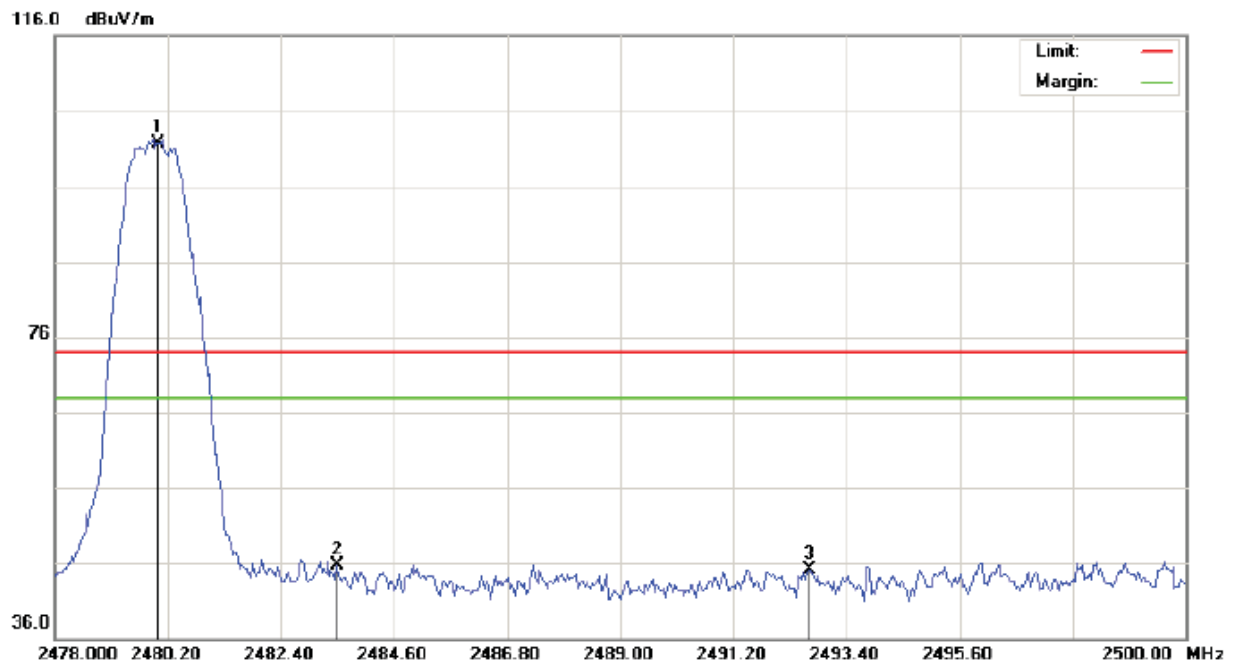

Site: site #1

Polarization: **Vertical**

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

Power:

Humidity: 60 %

EUT: Bluetooth stereo headset

Distance:

M/N: BH02

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	91.32	10.41	101.73	74.00	27.73	peak			
2		2483.500	35.26	10.41	45.67	74.00	-28.33	peak			
3		2492.667	34.77	10.42	45.19	74.00	-28.81	peak			

RESULT: PASS**Note:** 1. Factor=Antenna Factor+ Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

4. CONDUCTED SPURIOUS EMISSIONS

4.1 REQUIREMENT


According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

4.2 TEST PROCEDURE

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/100 KHz
Trace-Mode:	Max hold

4.3 TEST SETUP

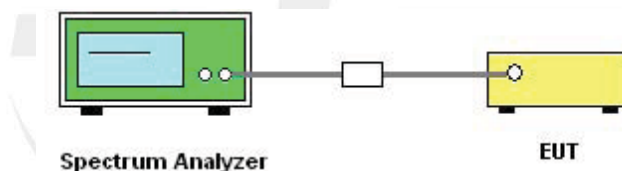

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. Make the measurement with the spectrum analyzer's resolution bandwidth(RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

4.4 EUT OPERATION CONDITIONS



The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

REMARK: GFSK(1Mbps), $\pi/4$ -DQPSK(2Mbps),8-DPSK(3Mbps) all have been tested , GFSK(1Mbps) is found as worst case and only reported





4.5 TEST RESULTS

EUT :	Bluetooth stereo headset	Model Name :	BH02
Temperature :	25°C	Relative Humidity :	50%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	Low Channel(GFSK)		

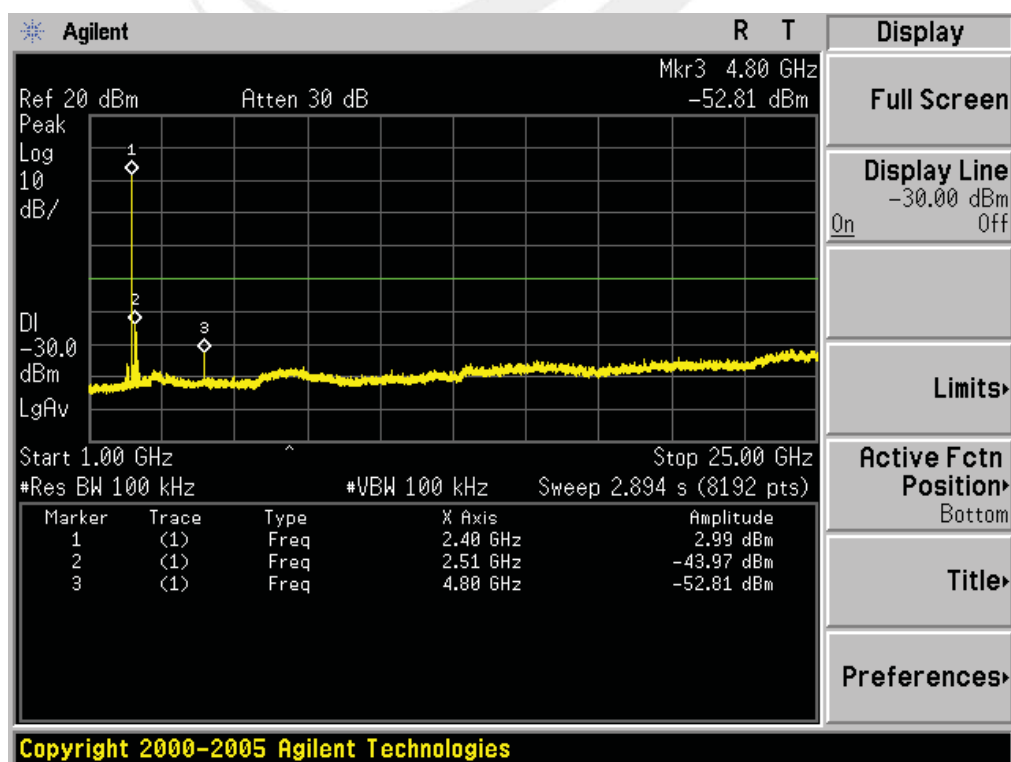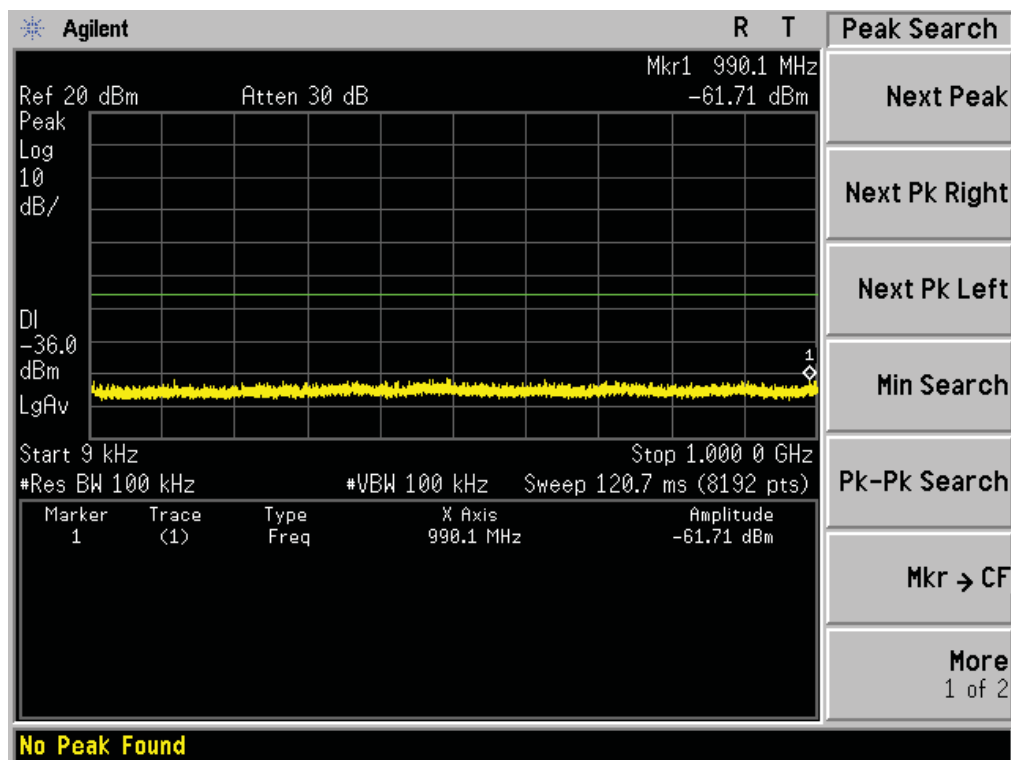





EUT :	Bluetooth stereo headset	Model Name :	BH02
Temperature :	25°C	Relative Humidity :	50%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	Middle(GFSK)		

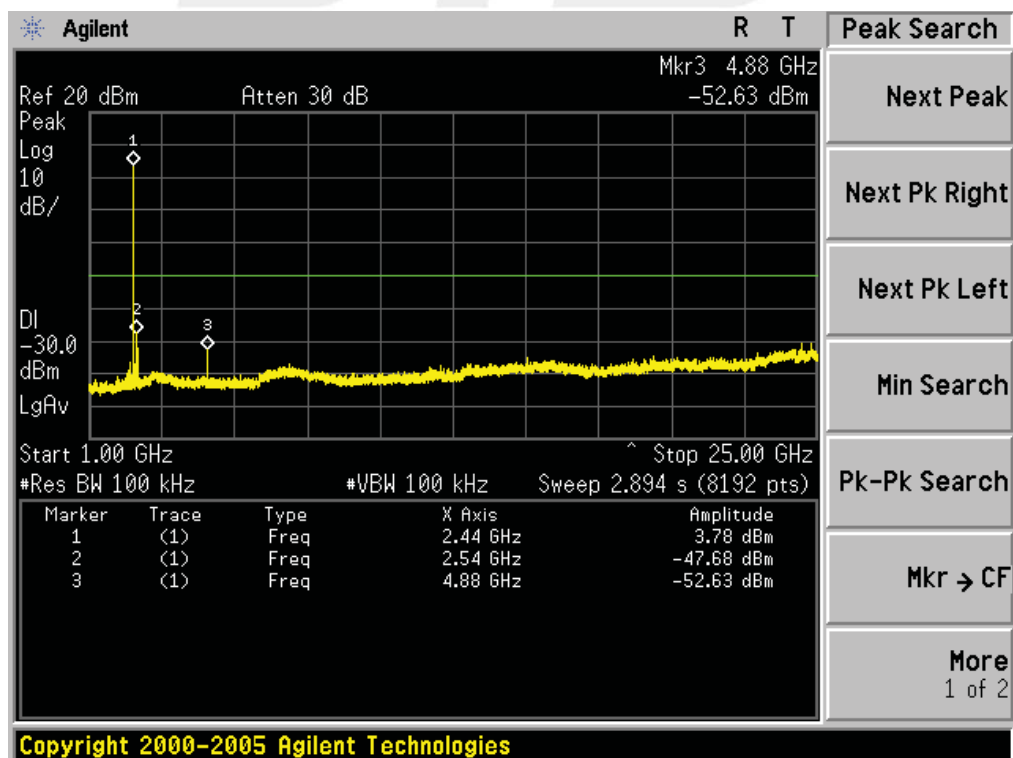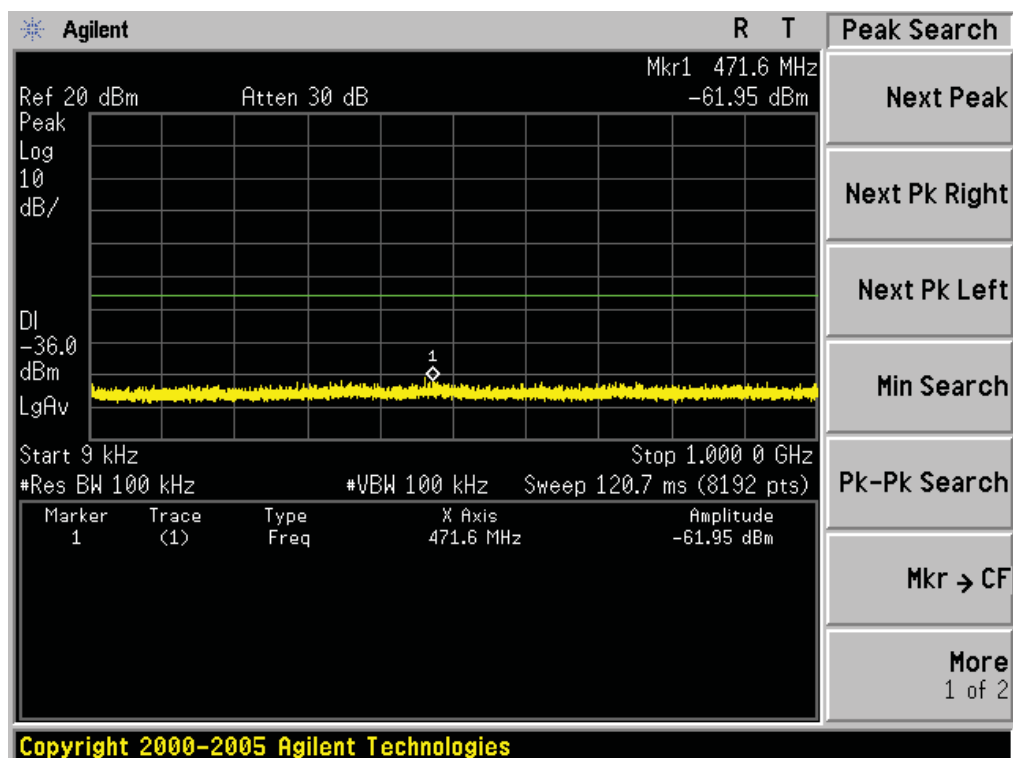



EUT :	Bluetooth stereo headset	Model Name :	BH02
Temperature :	25°C	Relative Humidity :	50%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	High(GFSK)		

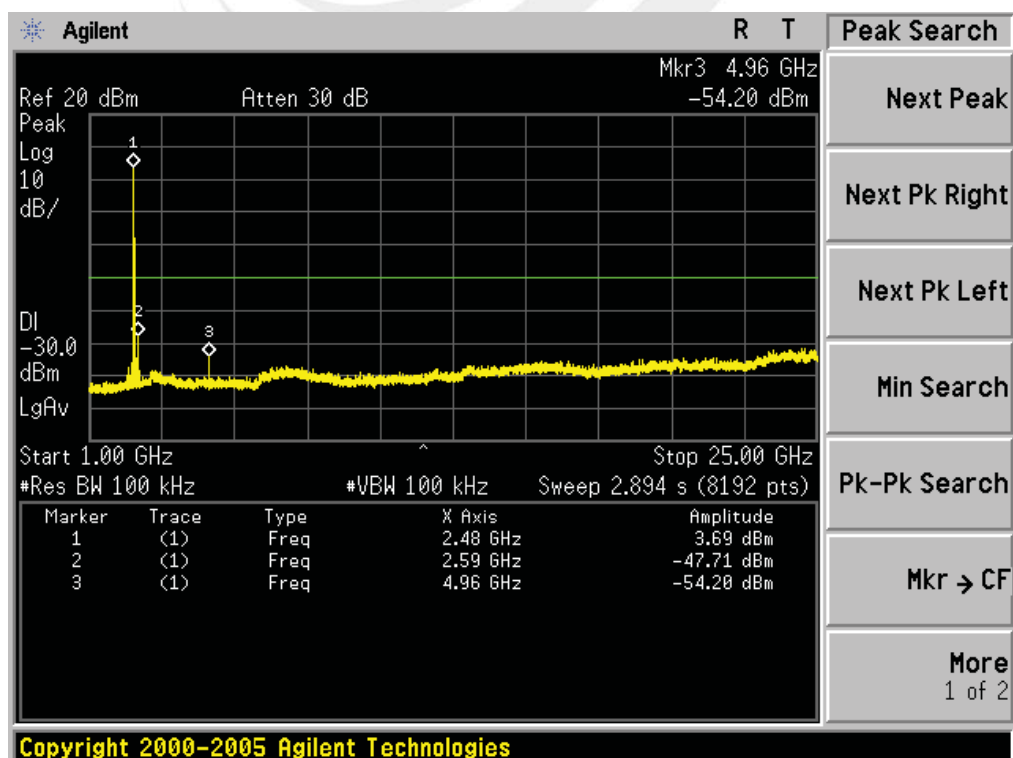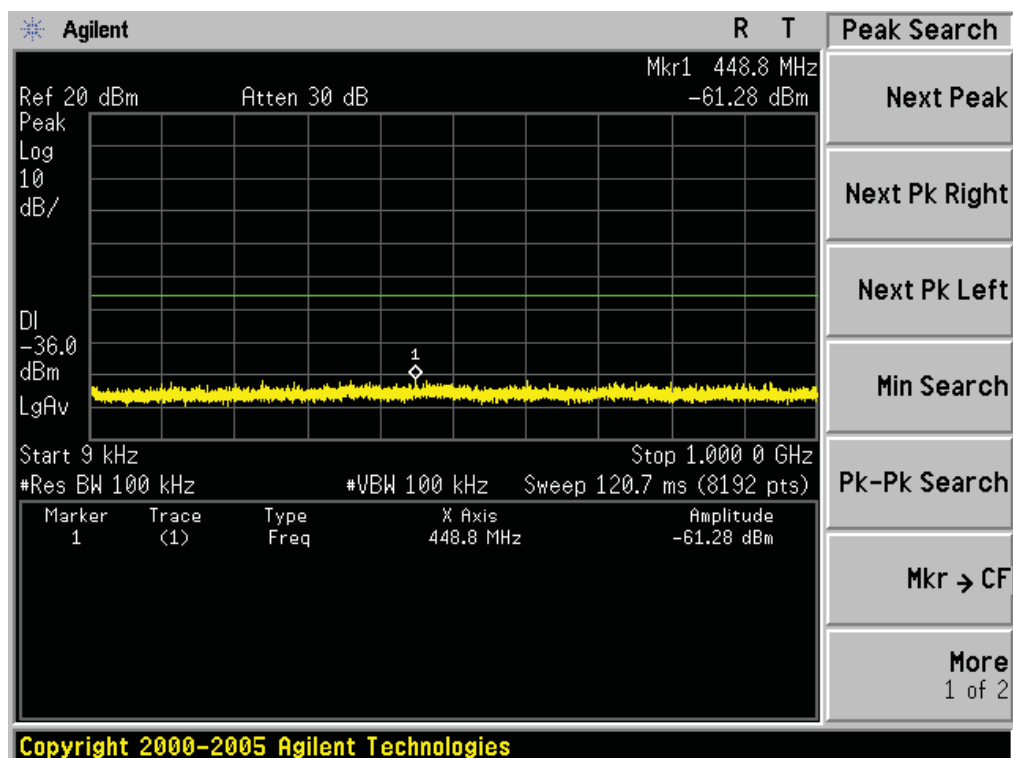





CONDUCTED TEST RESULT FOR BANDEDGE

Mode	Channel	Carrier Frequency [MHz]	Frequenc y Hopping
GFSK	LCH	2402	Off
			On
GFSK	HCH	2480	Off
			On
$\pi/4$ DQPSK	LCH	2402	Off
$\pi/4$ DQPSK	HCH	2480	Off
8DPSK	LCH	2402	Off
8DPSK	HCH	2480	Off

Test Graph

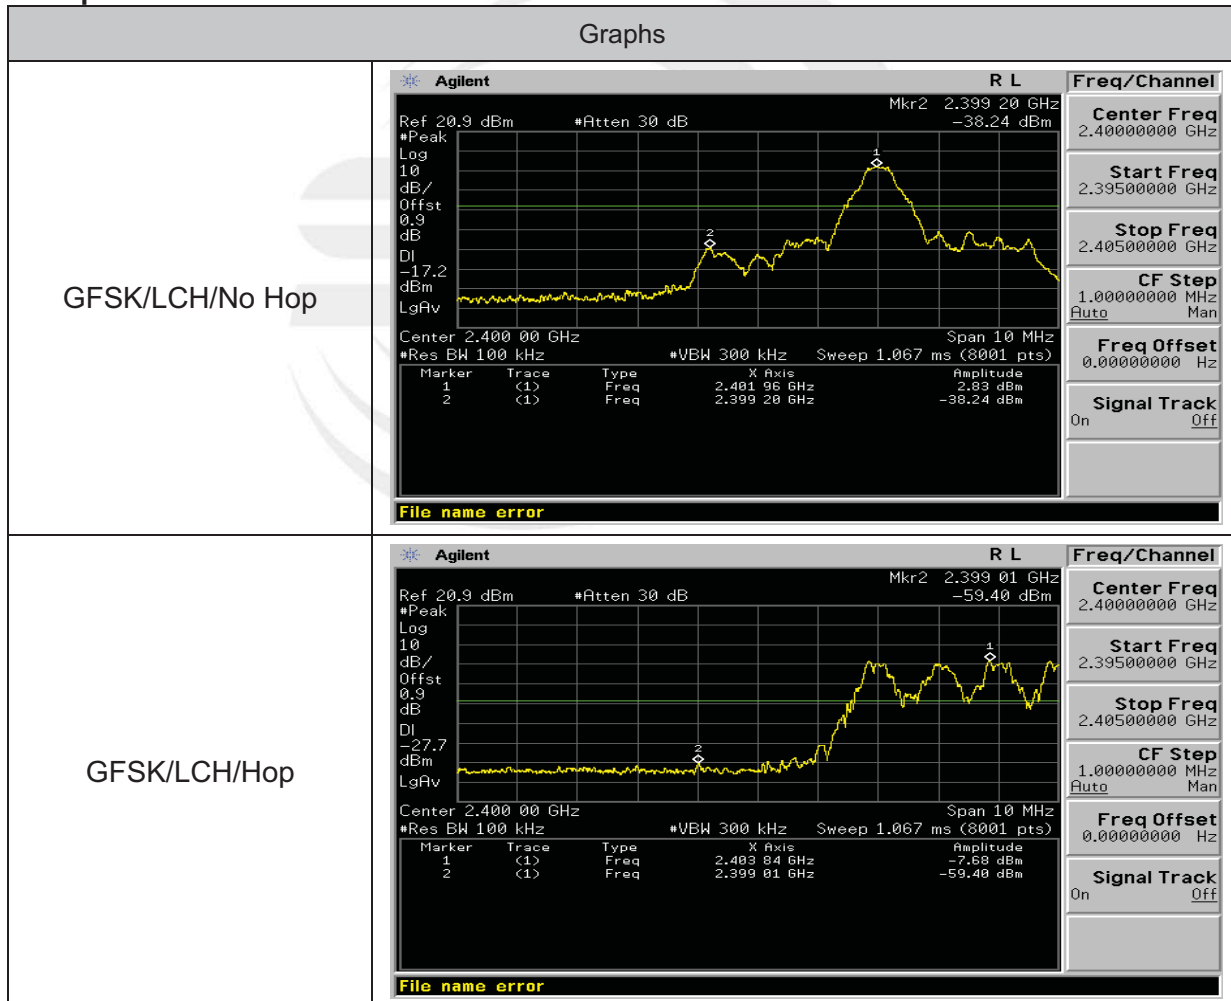

GFSK/HCH/No Hop	Agilent R L Freq/Channel Ref 20.9 dBm #Atten 30 dB Mkr2 2.483 55 GHz -56.11 dBm #Peak Log 10 dB/ Offst 0.9 dB DI -15.9 dBm LgAv 1 Center 2.483 50 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms (8001 pts) Span 10 MHz <table><tr><th>Marker</th><th>Trace</th><th>Type</th><th>X Axis</th><th>Amplitude</th></tr><tr><td>1</td><td>(1)</td><td>Freq</td><td>2.480 00 GHz</td><td>4.07 dBm</td></tr><tr><td>2</td><td>(1)</td><td>Freq</td><td>2.483 55 GHz</td><td>-56.11 dBm</td></tr></table> File name error Center Freq 2.48350000 GHz Start Freq 2.47850000 GHz Stop Freq 2.48850000 GHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.480 00 GHz	4.07 dBm	2	(1)	Freq	2.483 55 GHz	-56.11 dBm
Marker	Trace	Type	X Axis	Amplitude												
1	(1)	Freq	2.480 00 GHz	4.07 dBm												
2	(1)	Freq	2.483 55 GHz	-56.11 dBm												
GFSK/HCH/Hop	Agilent R L Freq/Channel Ref 20.9 dBm #Atten 30 dB Mkr2 2.486 89 GHz -57.67 dBm #Peak Log 10 dB/ Offst 0.9 dB DI -27.1 dBm LgAv 1 Center 2.483 50 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms (8001 pts) Span 10 MHz <table><tr><th>Marker</th><th>Trace</th><th>Type</th><th>X Axis</th><th>Amplitude</th></tr><tr><td>1</td><td>(1)</td><td>Freq</td><td>2.479 84 GHz</td><td>-7.07 dBm</td></tr><tr><td>2</td><td>(1)</td><td>Freq</td><td>2.486 89 GHz</td><td>-57.67 dBm</td></tr></table> File name error Center Freq 2.48350000 GHz Start Freq 2.47850000 GHz Stop Freq 2.48850000 GHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.479 84 GHz	-7.07 dBm	2	(1)	Freq	2.486 89 GHz	-57.67 dBm
Marker	Trace	Type	X Axis	Amplitude												
1	(1)	Freq	2.479 84 GHz	-7.07 dBm												
2	(1)	Freq	2.486 89 GHz	-57.67 dBm												
π /4DQPSK/LCH/No Hop	Agilent R L Freq/Channel Ref 20.9 dBm #Atten 30 dB Mkr2 2.399 49 GHz -38.76 dBm #Peak Log 10 dB/ Offst 0.9 dB DI -21.8 dBm LgAv 2 Center 2.400 00 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms (8001 pts) Span 10 MHz <table><tr><th>Marker</th><th>Trace</th><th>Type</th><th>X Axis</th><th>Amplitude</th></tr><tr><td>1</td><td>(1)</td><td>Freq</td><td>2.401 97 GHz</td><td>-1.76 dBm</td></tr><tr><td>2</td><td>(1)</td><td>Freq</td><td>2.399 49 GHz</td><td>-38.76 dBm</td></tr></table> File name error Center Freq 2.40000000 GHz Start Freq 2.39500000 GHz Stop Freq 2.40500000 GHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.401 97 GHz	-1.76 dBm	2	(1)	Freq	2.399 49 GHz	-38.76 dBm
Marker	Trace	Type	X Axis	Amplitude												
1	(1)	Freq	2.401 97 GHz	-1.76 dBm												
2	(1)	Freq	2.399 49 GHz	-38.76 dBm												
π /4DQPSK/HCH/No Hop	Agilent R L Freq/Channel Ref 20.9 dBm #Atten 30 dB Mkr2 2.483 78 GHz -60.89 dBm #Peak Log 10 dB/ Offst 0.9 dB DI -22.2 dBm LgAv 1 Center 2.483 50 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms (8001 pts) Span 10 MHz <table><tr><th>Marker</th><th>Trace</th><th>Type</th><th>X Axis</th><th>Amplitude</th></tr><tr><td>1</td><td>(1)</td><td>Freq</td><td>2.479 81 GHz</td><td>-2.17 dBm</td></tr><tr><td>2</td><td>(1)</td><td>Freq</td><td>2.483 78 GHz</td><td>-60.89 dBm</td></tr></table> File name error Center Freq 2.48350000 GHz Start Freq 2.47850000 GHz Stop Freq 2.48850000 GHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.479 81 GHz	-2.17 dBm	2	(1)	Freq	2.483 78 GHz	-60.89 dBm
Marker	Trace	Type	X Axis	Amplitude												
1	(1)	Freq	2.479 81 GHz	-2.17 dBm												
2	(1)	Freq	2.483 78 GHz	-60.89 dBm												

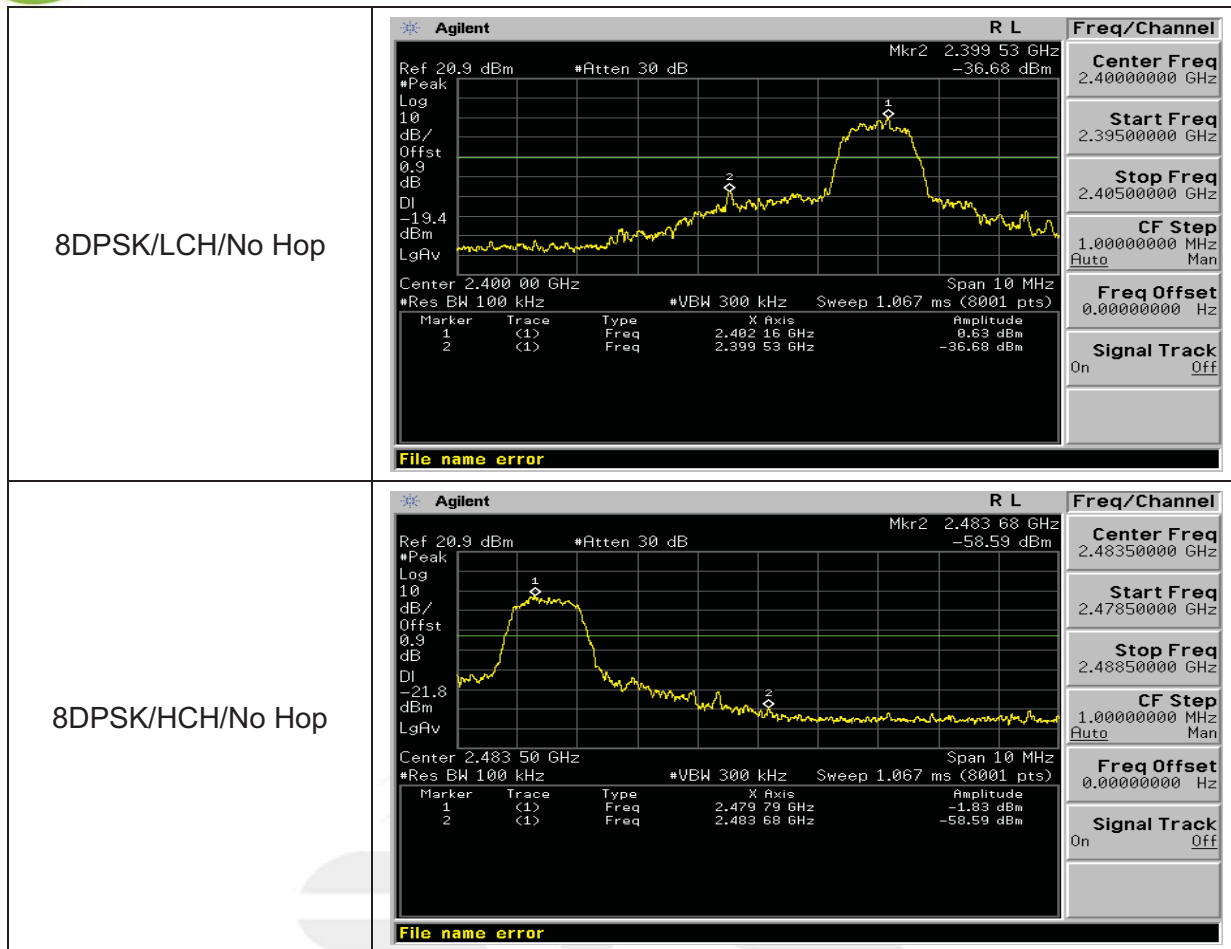

5. NUMBER OF HOPPING CHANNEL

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	FrequencyRange (MHz)	Result
15.247 (a)(1)(iii)	Number of Hopping Channel	≥ 15	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating FrequencyRange
RB	100KHz
VB	300KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100K, VBW=300K, Sweep time = Auto.

5.3 TEST SETUP



5.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.




5.5 TEST RESULTS

EUT :	Bluetooth stereo headset	Model Name :	BH02
Temperature :	25°C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	Hopping Mode		

Number of Hopping Channel	79
---------------------------	----

Hopping channel

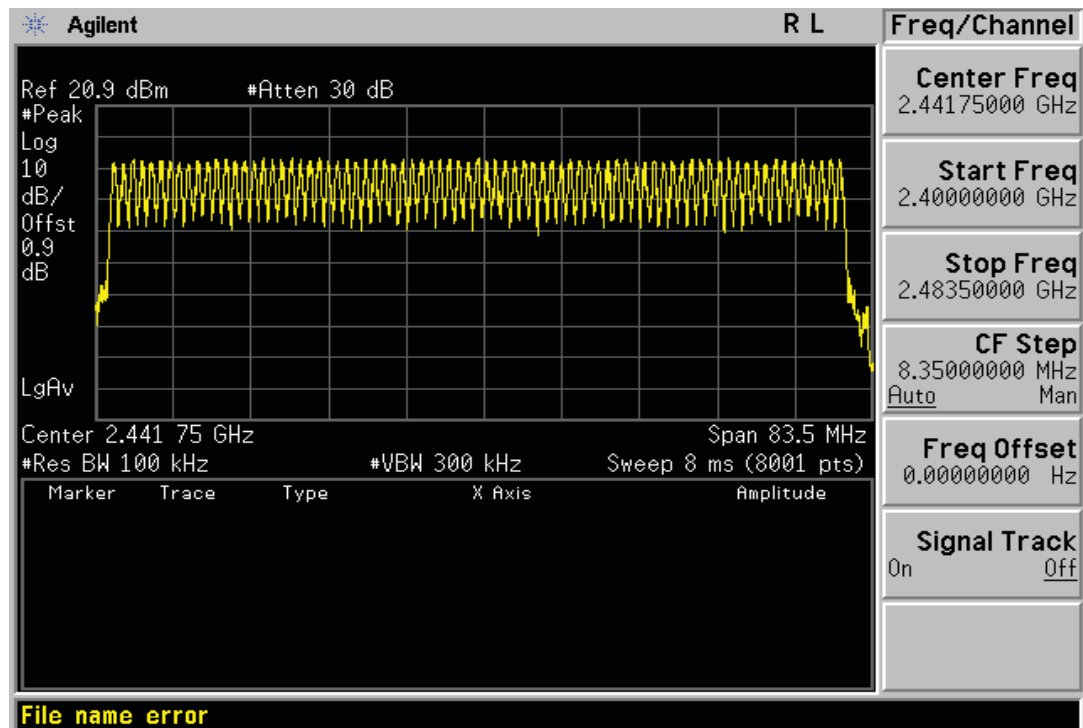

Note: All modes (3 modulation) have been tested, the test result was pass

6. AVERAGE TIME OF OCCUPANCY

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	FrequencyRange (MHz)	Result
15.247 (a)(1)(iii)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS

6.2 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyzer
- Set RBW of spectrum analyzer to 1MHz and VBW to 3MHz.
- Use a video trigger with the trigger level set to enable triggering only on full pulses.
- Sweep Time is more than once pulse time.
- Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- Measure the maximum time duration of one single pulse.
- Set the EUT for DH5, DH3 and DH1 packet transmitting.
- Measure the maximum time duration of one single pulse.
- DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds.
- DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds.
- DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds.

6.3 TEST SETUP



6.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



6.5TEST RESULTS


EUT :	Bluetooth Speaker	Model Name :	ES-56556BT
Temperature :	25℃	Relative Humidity :	50%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	8DPSK(3Mbps)DH5 (Worst case)		

Data Packet	Frequency	Pulse Duration	Dwell Time	Limits
		(ms)	(s)	(s)
DH5	2402 MHz	2.899	0.31	0.4
DH5	2441 MHz	2.899	0.31	0.4
DH5	2480 MHz	2.899	0.31	0.4

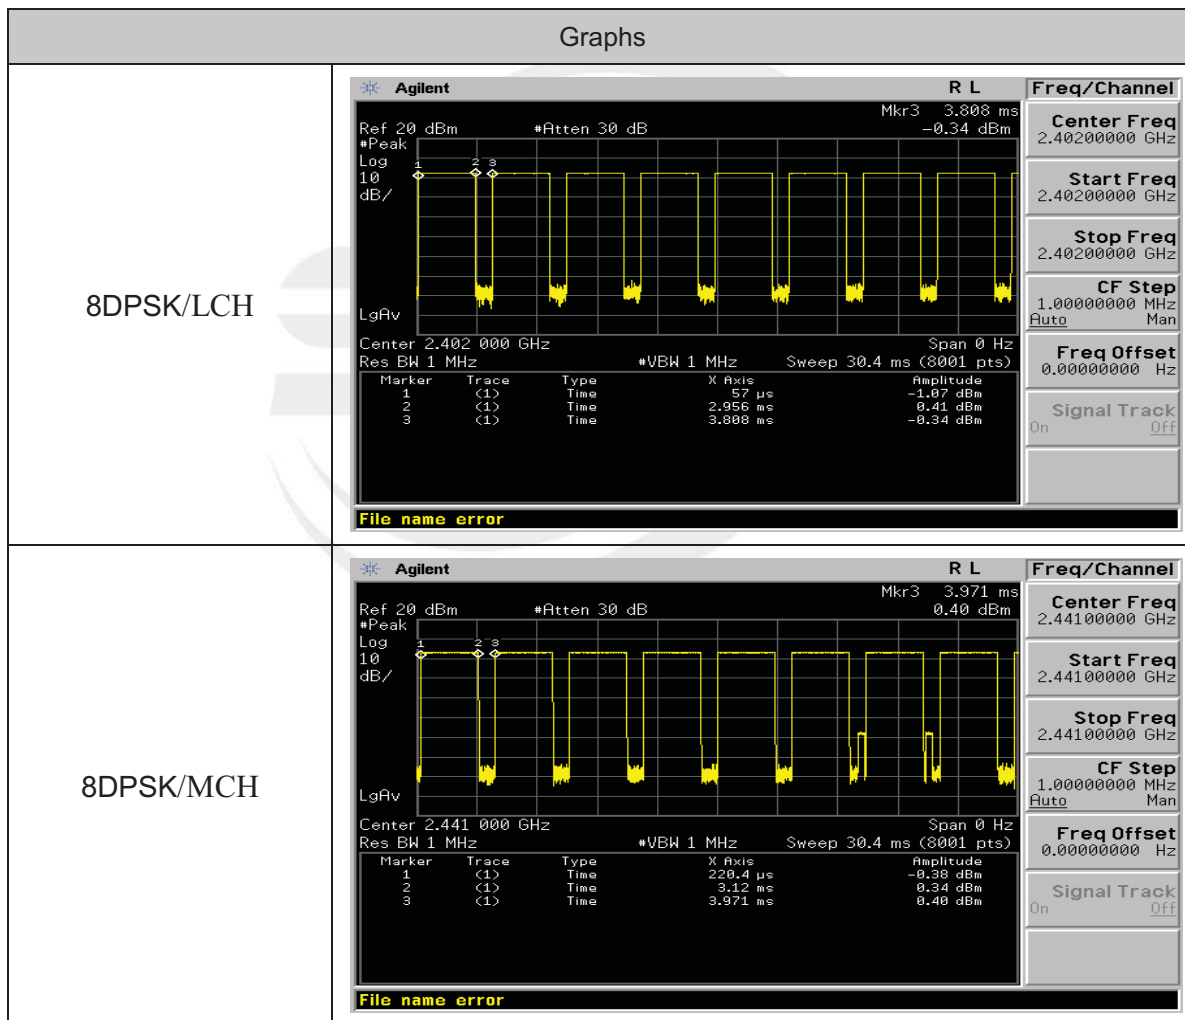



GFSK/HCH

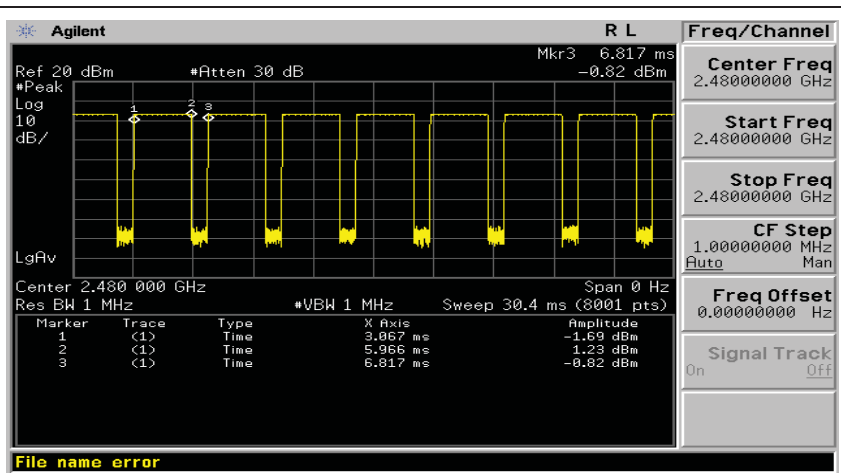

7. HOPPING CHANNEL SEPARATION MEASUREMENT

7.1 APPLIED PROCEDURES / LIMIT


Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 20 dB bandwidth of the hopping channel, whichever is greater.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

7.2 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- The resolution bandwidth of 30 kHz and the video bandwidth of 30 kHz were utilised for 20 dB bandwidth measurement.
- The resolution bandwidth of 30 kHz and the video bandwidth of 30 kHz were utilised for channel separation measurement.

7.3 TEST SETUP

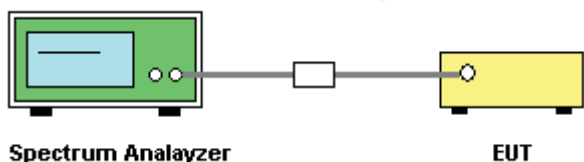

7.4 EUT OPERATION CONDITIONS


The EUT was programmed to be in continuously transmitting mode.



7.5TEST RESULTS

Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
8DPSK	Hop	1.115	PASS

Note:All modes were tested,only the worst case record in the report.

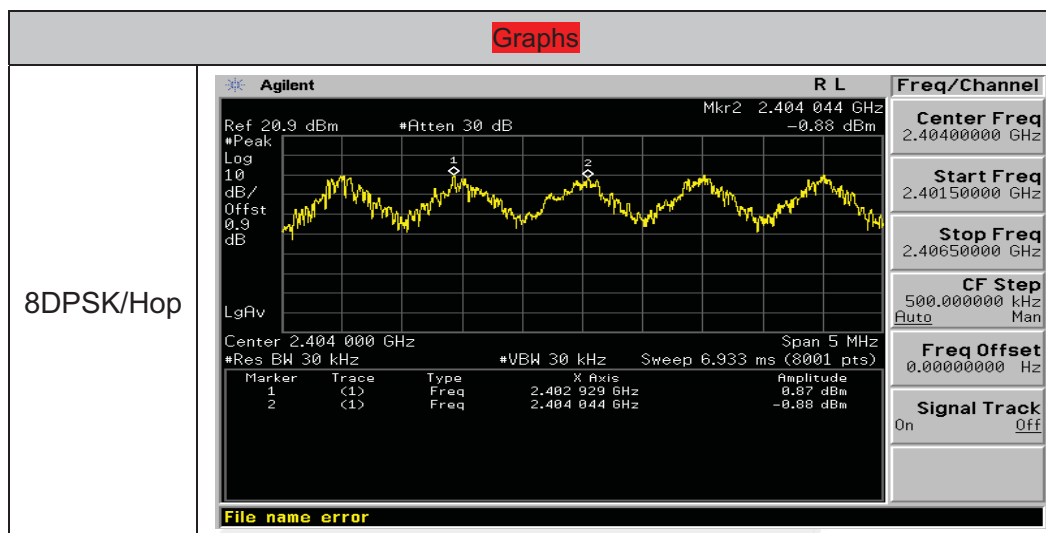Test Graph



8. BANDWIDTH TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C

Section	Test Item	Limit	FrequencyRange (MHz)	Result
15.247 (a)(1)	Bandwidth	(20dB bandwidth)	2400-2483.5	PASS

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 30KHz, VBW $\geq$ RBW, Sweep time = Auto.

8.3 TEST SETUP



8.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



8.5TEST RESULTS

Mode	Channel.	20dB BW [MHz]	99% BW [MHz]	Verdict
GFSK	LCH	0.947	0.866	PASS
GFSK	MCH	0.938	0.858	PASS
GFSK	HCH	0.933	0.873	PASS
π /4DQPSK	LCH	1.237	1.179	PASS
π /4DQPSK	MCH	1.320	1.194	PASS
π /4DQPSK	HCH	1.226	1.177	PASS
8DPSK	LCH	1.262	1.180	PASS
8DPSK	MCH	1.346	1.201	PASS
8DPSK	HCH	1.265	1.196	PASS

Test Graph

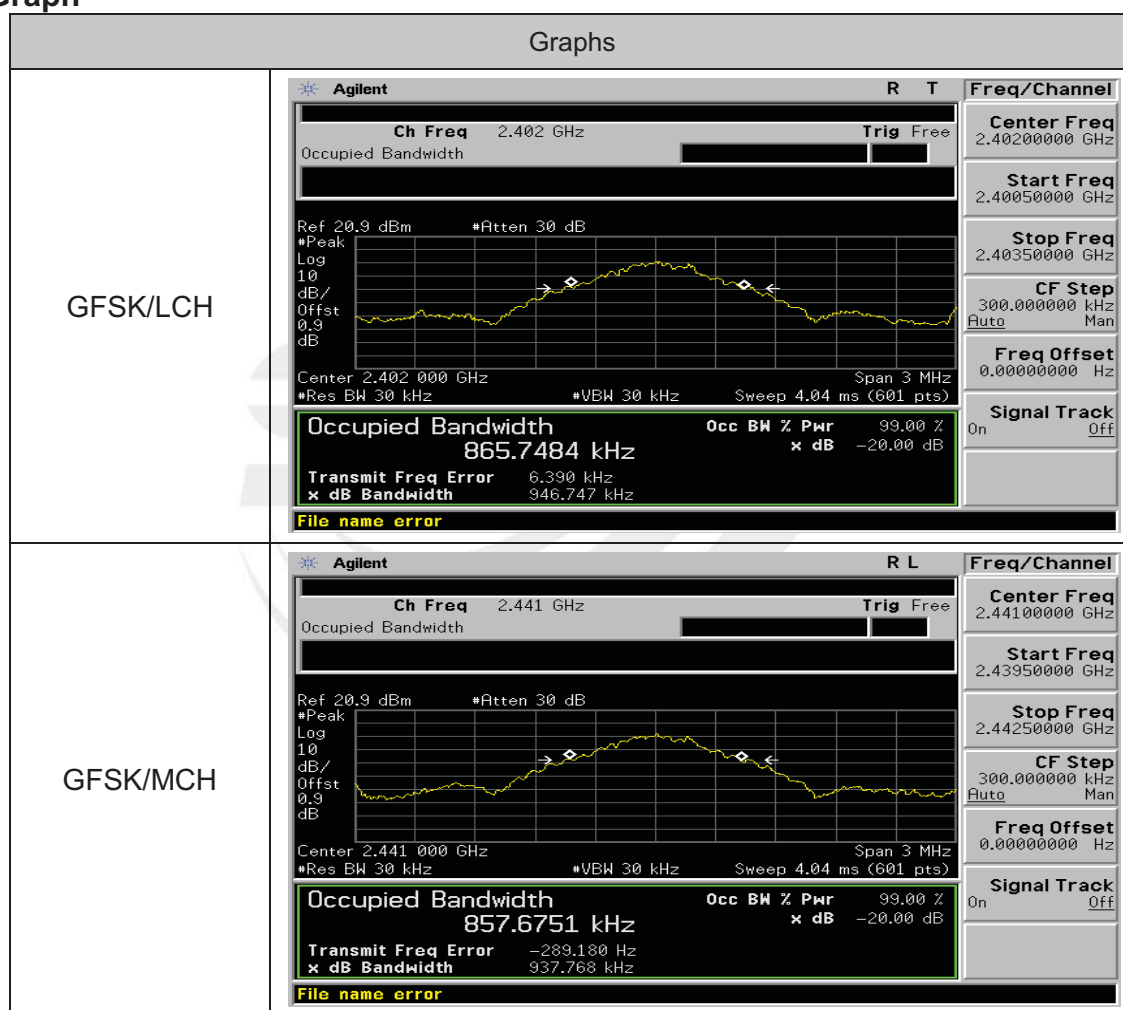



GFSK/HCH	Agilent R T Freq/Channel Ch Freq 2.48 GHz Trig Free Center Freq 2.4800000 GHz Start Freq 2.4785000 GHz Stop Freq 2.4815000 GHz CF Step 300.00000 kHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 20.9 dBm #Atten 30 dB Peak Log 10 dB/Offst 0.9 dB Center 2.480 000 GHz Span 3 MHz Res BW 30 kHz #VBW 30 kHz Sweep 4.04 ms (601 pts) Occupied Bandwidth 873.2149 kHz Occ BW % Pwr 99.00 % x dB -20.00 dB Transmit Freq Error -2.999 kHz x dB Bandwidth 932.456 kHz File name error
π /4DQPSK/LCH	Agilent R L Freq/Channel Ch Freq 2.402 GHz Trig Free Center Freq 2.4020000 GHz Start Freq 2.4005000 GHz Stop Freq 2.4035000 GHz CF Step 300.00000 kHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 20.9 dBm #Atten 30 dB Peak Log 10 dB/Offst 0.9 dB Center 2.402 000 GHz Span 3 MHz Res BW 30 kHz #VBW 30 kHz Sweep 4.04 ms (601 pts) Occupied Bandwidth 1.1794 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB Transmit Freq Error -1.056 kHz x dB Bandwidth 1.237 MHz File name error
π /4DQPSK/MCH	Agilent R L Freq/Channel Ch Freq 2.441 GHz Trig Free Center Freq 2.4410000 GHz Start Freq 2.4395000 GHz Stop Freq 2.4425000 GHz CF Step 300.00000 kHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 20.9 dBm #Atten 30 dB Peak Log 10 dB/Offst 0.9 dB Center 2.441 000 GHz Span 3 MHz Res BW 30 kHz #VBW 30 kHz Sweep 4.04 ms (601 pts) Occupied Bandwidth 1.1940 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB Transmit Freq Error -2.405 kHz x dB Bandwidth 1.320 MHz File name error
π /4DQPSK/HCH	Agilent R T Freq/Channel Ch Freq 2.48 GHz Trig Free Center Freq 2.4800000 GHz Start Freq 2.4785000 GHz Stop Freq 2.4815000 GHz CF Step 300.00000 kHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 20.9 dBm #Atten 30 dB Peak Log 10 dB/Offst 0.9 dB Center 2.480 000 GHz Span 3 MHz Res BW 30 kHz #VBW 30 kHz Sweep 4.04 ms (601 pts) Occupied Bandwidth 1.1767 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB Transmit Freq Error -2.160 kHz x dB Bandwidth 1.226 MHz File name error



8DPSK/LCH	Agilent R L Freq/Channel Ch Freq 2.402 GHz Trig Free Center Freq 2.40200000 GHz Start Freq 2.40050000 GHz Stop Freq 2.40350000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 20.9 dBm *Atten 30 dB Peak Log 10 dB/Offst 0.9 dB Center 2.402 000 GHz Span 3 MHz *Res BW 30 kHz *VBW 30 kHz Sweep 4.04 ms (601 pts) Occupied Bandwidth 1.1798 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB Transmit Freq Error -3.848 kHz x dB Bandwidth 1.262 MHz File name error
8DPSK/MCH	Agilent R L Freq/Channel Ch Freq 2.441 GHz Trig Free Center Freq 2.44100000 GHz Start Freq 2.43950000 GHz Stop Freq 2.44250000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 20.9 dBm *Atten 30 dB Peak Log 10 dB/Offst 0.9 dB Center 2.441 000 GHz Span 3 MHz *Res BW 30 kHz *VBW 30 kHz Sweep 4.04 ms (601 pts) Occupied Bandwidth 1.2006 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB Transmit Freq Error -7.248 kHz x dB Bandwidth 1.346 MHz File name error
8DPSK/HCH	Agilent R L Freq/Channel Ch Freq 2.48 GHz Trig Free Center Freq 2.48000000 GHz Start Freq 2.47850000 GHz Stop Freq 2.48150000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 20.9 dBm *Atten 30 dB Peak Log 10 dB/Offst 0.9 dB Center 2.480 000 GHz Span 3 MHz *Res BW 30 kHz *VBW 30 kHz Sweep 4.04 ms (601 pts) Occupied Bandwidth 1.1964 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB Transmit Freq Error -8.764 kHz x dB Bandwidth 1.265 MHz File name error

9. OUTPUT POWER TEST

9.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	FrequencyRange (MHz)	Result
15.247 (b)(i)	Peak Output Power	1 W or 0.125W	2400-2483.5	PASS
		Or if channel separation > 2/3 bandwidth provided the system operate with an output power no greater than 125 mW(20.96dBm)		

9.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting :GFSK(1Mbps):RBW= 1.5MHz, VBW= 1.5MHz, Sweep time = Auto.
- Spectrum Setting : $\pi/4$ -DQPSK(2Mbps):RBW= 1.5MHz, VBW= 1.5MHz, Sweep time = Auto.
- Spectrum Setting :8-DPSK(3Mbps):RBW= 1.5MHz, VBW= 1.5MHz, Sweep time = Auto.

9.3 TEST SETUP



9.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



9.5TEST RESULTS

**PEAK OUTPUT POWER MEASUREMENT RESULT
FOR GFSK MODULATION**


Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	3.35	21	Pass
2.441	4.11	21	Pass
2.480	4.27	21	Pass


**PEAK OUTPUT POWER MEASUREMENT RESULT
FOR $\pi/4$ -DQPSK MODULATION**

Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	2.2	21	Pass
2.441	2.68	21	Pass
2.480	2.53	21	Pass

**PEAK OUTPUT POWER MEASUREMENT RESULT
FOR 8-DPSK MODULATION**

Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	2.43	21	Pass
2.441	2.98	21	Pass
2.480	2.84	21	Pass

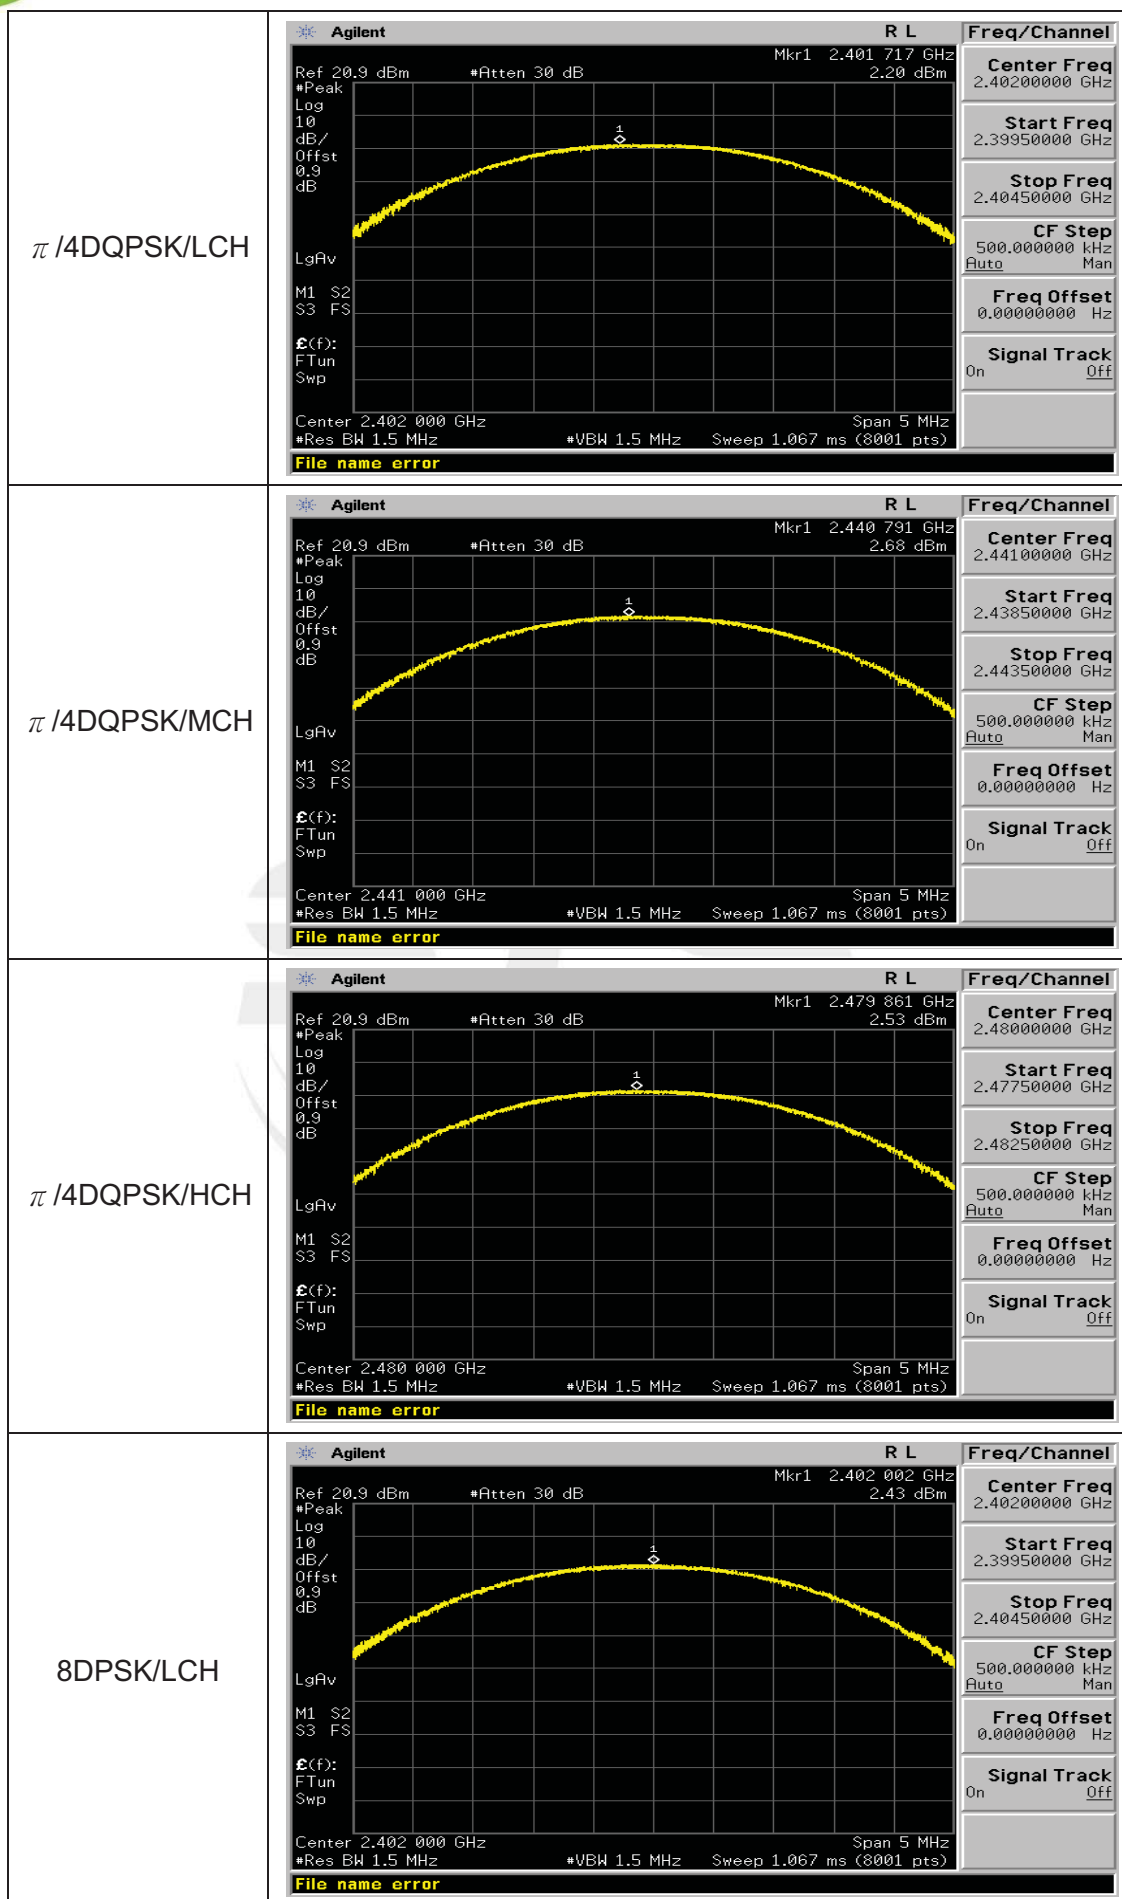

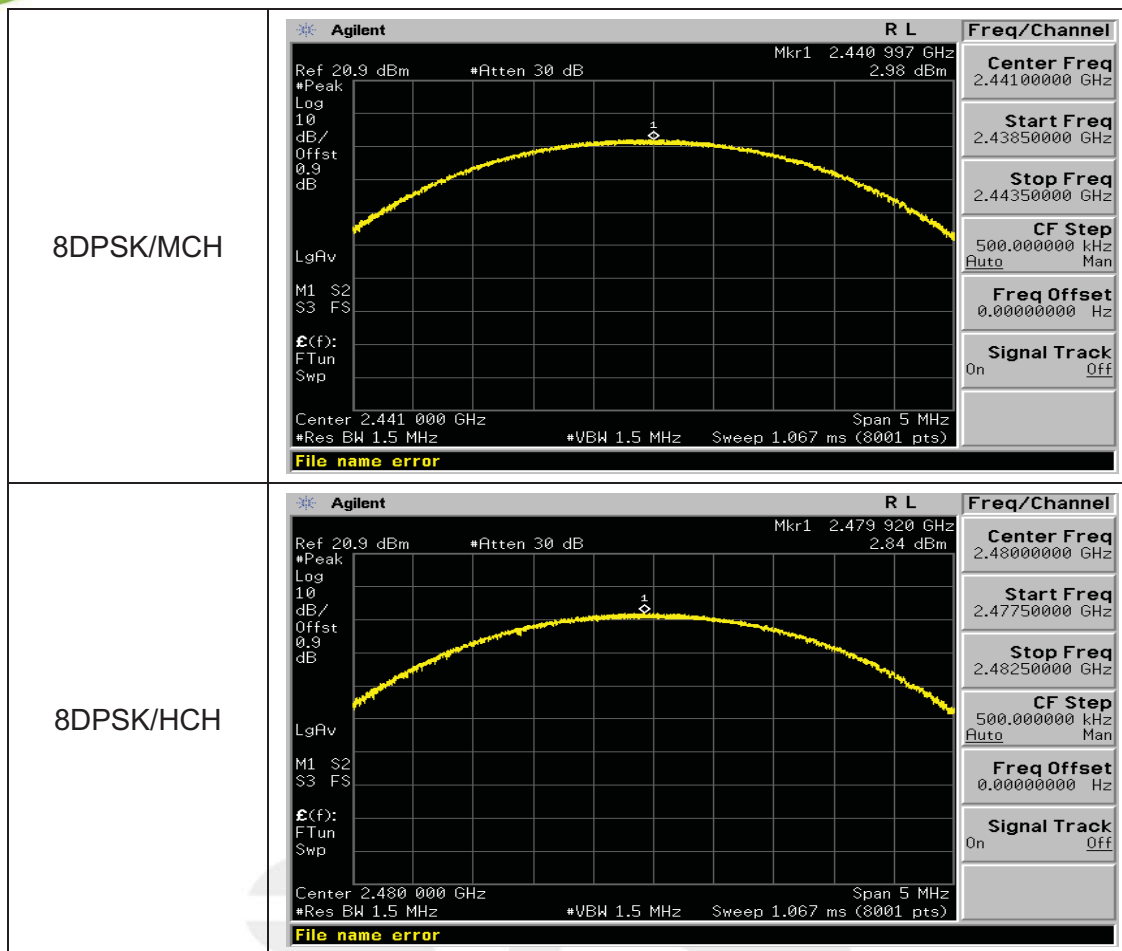



10. ANTENNA REQUIREMENT

10.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.



10.2 EUT ANTENNA

The EUT antenna is PCB Antenna. It comply with the standard requirement.



APPENDIX-PHOTOS OF TEST SETUP

Radiated Measurement Photos

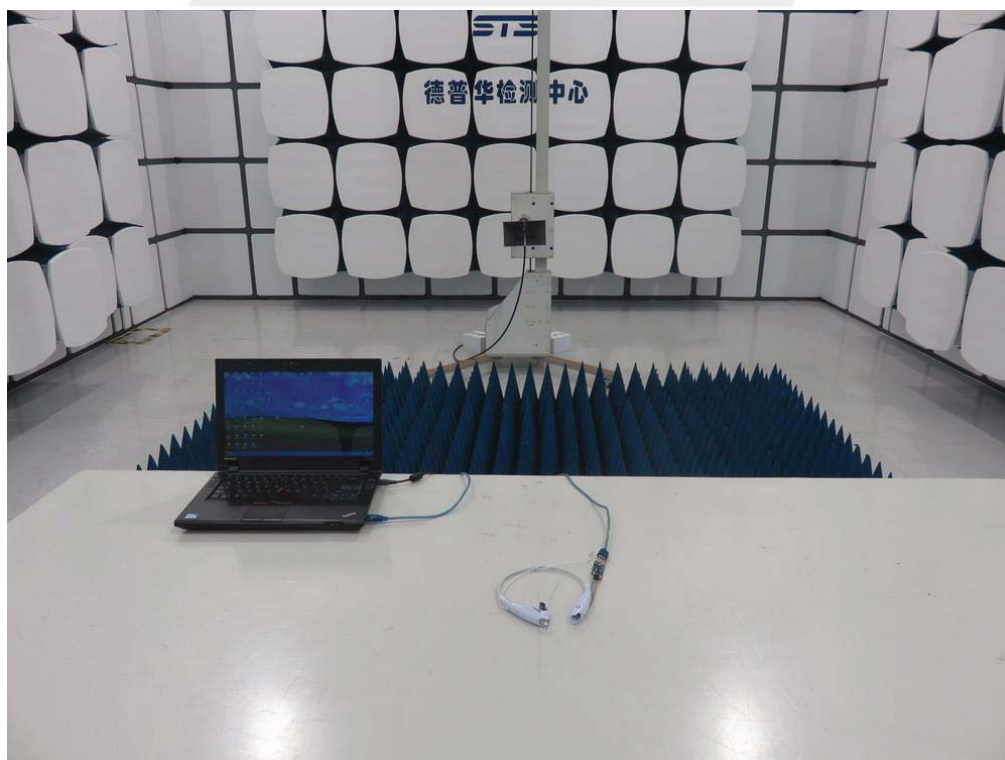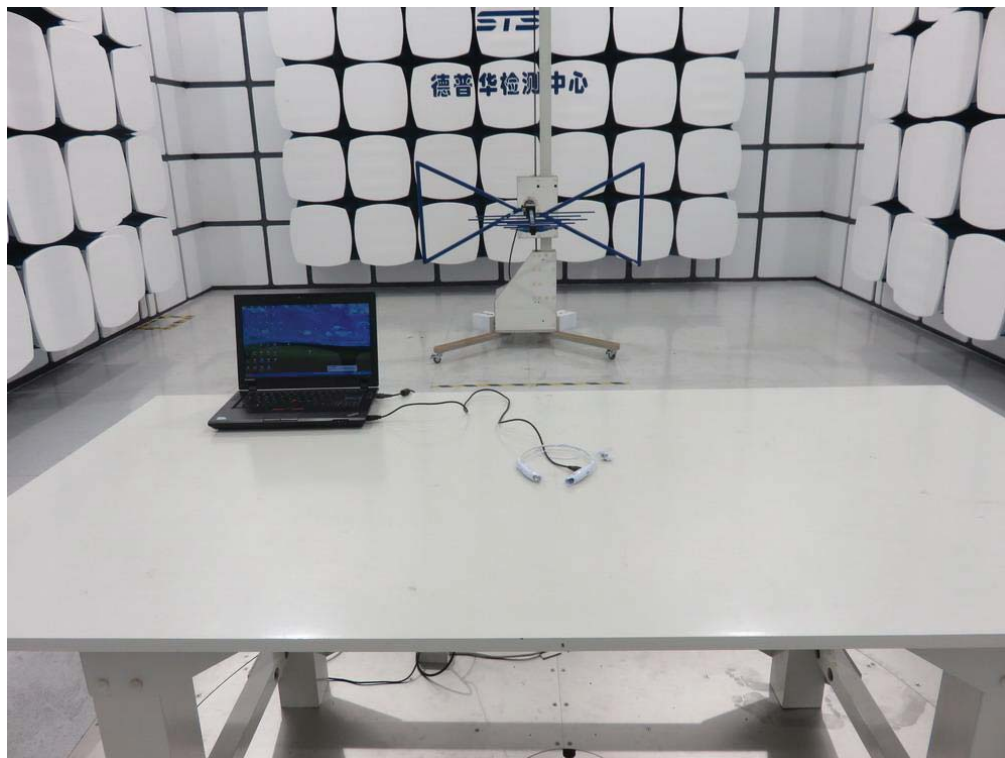



Conduction Measurement Photos

