



FG7008N

User Manual

Guangzhou Gaoke Communications Technology Co., LTD.

FG7008N

User Manual

Version: [FG7008N-13-12-100](#)

We are enthusiastic for providing tech support in every way. You can get in touch with local dealer as well as contact to Customer Service Department directly.

Guangzhou Gaoke Communications Technology Co., LTD.

Address: GaoKe Science Park, No.168 Gaopu Road, Guangzhou, P.R.C

Tel: Central: +86-20-82598555 Customer services: +86-20-82598191

Fax: +86-20-82598121 +86-20-82599989

P.C.: 510663

Website: www.gktel.cn

E-mail: info@gktel.com.cn

Copyright

Copyright by Guangzhou Gaoke Communications Technology Company Limited.

All rights are reserved.

No Part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Guangzhou Gaoke Communications Technology Company Limited.



is the trademarks of Guangzhou Gaoke Communications Technology Company Limited. No the trademarks may be counterfeited.

Disclaimer

Guangzhou Gaoke Communications Technology Company Limited reserves the right to change the document from time to time at its sole discretion, and not to make the notice to anyone in advance.

Preface

Version Statement

This Manual is provided for FG7008N gateway, the software version must be at least 1.10.

Brief Introduction

This manual provides technical information on how to configure and operate application for your FG7008N unit.

Chapter 1: Provides an overview of FG7008N

Chapter 2: Introduces the product

Chapter 3: Introduces the configuration via WEB-based Management

Intended Audience

System administrators.

Network engineers.

Maintenance technicians.

Style Convention

Table 1 Style convention used in this manual

Style	Meanings
\	Multi-level catalogs or menus are separated by ‘\’ character. For instance “file\new\directory” means the menu item “directory” in menu “new” which in turn in the menu “file”.
	Used to highlight important area in diagrams.
<>	Indicates the input data from operating terminal.
[]	Indicates one parameter configuration or a function.
{ XX XX }	Indicates a syntax of CLI command options, multiple command options in one “{}”, separated by “ ”, means exclusive single selection.
<i>host</i> (italic)	Indicates user specified parameters. e.g. for command: tftp <i>host</i> {get put} {sys cfg} <i>filename</i> The <i>host</i> and <i>filename</i> should be replaced by user specified real parameters, such as: tftp 138.0.0.1 get sys sysfile.bin

Table 2 Convention for Mouse Operation

Operation	Meanings
Click	Press and release a mouse button quickly
Double click	Quickly press and release a mouse button twice
Drag	Press a mouse button and move the mouse

Table 3 Convention for Keyboard Operation

Style	Meanings
Ctrl + C	“+”means an operation which presses down several keys in the keyboard in the same time. E.g. “Ctrl + C” means press down the key of “Ctrl” and “C” in the same time.

CONTENTS

1	OVERVIEW	1
2	PRODUCT INTRODUCTION	2
2.1	APPEARANCE.....	2
2.2	HARDWARE INTERFACE	3
2.3	FEATURES	4
2.4	WORKING ENVIRONMENT	5
3	CONFIGURATION INTRODUCTION.....	6
3.1	LOGIN.....	6
3.2	HOME	6
3.3	NETWORK CONFIGURATION.....	7
3.3.1	<i>Network Status</i>	7
3.3.2	<i>WAN Configuration</i>	8
3.3.3	<i>LAN Configuration</i>	14
3.3.4	<i>WLAN</i>	17
3.3.5	<i>3G Modem</i>	23
3.3.6	<i>Port Management</i>	25
3.3.7	<i>IPv6 Configuration</i>	26
3.4	DATA SERVICE	28
3.4.1	<i>Status</i>	28
3.4.2	<i>DHCP Server</i>	29
3.4.3	<i>NAT Config</i>	31
3.4.4	<i>Firewall Config</i>	34
3.4.5	<i>QoS</i>	45
3.4.6	<i>DDNS</i>	50
3.4.7	<i>VPN</i>	52
3.4.8	<i>Routing</i>	60
3.4.9	<i>Advanced Parameters</i>	63
3.4.10	<i>Multicast</i>	64
3.4.11	<i>USB Storage</i>	64
3.5	VOIP SERVICE.....	66
3.5.1	<i>SIP Service</i>	66
3.5.2	<i>User</i>	68
3.5.3	<i>Supplementary</i>	69
3.5.4	<i>Codec Parameters</i>	72
3.5.5	<i>DSP Parameters</i>	73
3.5.6	<i>Digitmap</i>	74
3.5.7	<i>Signal Tone</i>	75
3.5.8	<i>FXS Parameters</i>	76
3.5.9	<i>Centrex</i>	77
3.5.10	<i>Phone Book</i>	79
3.6	SYSTEM	79
3.6.1	<i>Time Management</i>	79

3.6.2	Upgrade.....	81
3.6.3	Reboot System.....	82
3.6.4	Backup/Restore.....	82
3.6.5	Diagnostic	82
3.6.6	User Management	84
3.6.7	System Log.....	84
3.6.8	TR069.....	85
3.6.9	SNMP	87
3.6.10	User Access Right	88
3.7	APPLY	89
3.8	PRINT FUNCTION	89
4	CLI INTRODUCTION	95
4.1	LOGIN.....	95
4.2	NETWORK.....	96
4.2.1	3G Modem	96
4.2.2	Port Management	98
4.2.3	Wan Parameter	100
4.2.4	Lan Parameter.....	109
4.3	DATA SERVICE	错误！未定义书签。
4.3.1	DHCP Server.....	错误！未定义书签。
4.3.2	NAT Config.....	错误！未定义书签。
4.3.3	Firewall Config.....	错误！未定义书签。
4.3.4	QoS.....	错误！未定义书签。
4.3.5	DDNS.....	错误！未定义书签。
4.3.6	VPN.....	错误！未定义书签。
4.3.7	Routing	错误！未定义书签。
4.3.8	Advanced Parameters	错误！未定义书签。
4.3.9	Multicast.....	错误！未定义书签。
4.4	VOIP SERVICE.....	错误！未定义书签。
4.4.1	SIP Service	错误！未定义书签。
4.4.2	User	错误！未定义书签。
4.4.3	Supplementary	错误！未定义书签。
4.4.4	Codec Parameters.....	错误！未定义书签。
4.4.5	DSP Parameters	错误！未定义书签。
4.4.6	Digitmap	错误！未定义书签。
4.4.7	Signal Tone	错误！未定义书签。
4.4.8	Centrex.....	错误！未定义书签。
4.4.9	Phone Book	错误！未定义书签。
4.4.10	Save and Reload VOIP Parameter	错误！未定义书签。
4.5	SYSTEM	错误！未定义书签。
4.5.1	Time Management.....	错误！未定义书签。
4.5.2	Reboot System.....	错误！未定义书签。
4.5.3	Backup/Restore.....	错误！未定义书签。
4.5.4	Diagnostic	错误！未定义书签。
4.5.5	System Log.....	错误！未定义书签。
4.5.6	TR069.....	错误！未定义书签。

4.5.7	SNMP	错误! 未定义书签。
-------	------------	------------

1 Overview

A new series of ALL IN ONE INTELLIGENT Gateway FG7008N is perfectly designed for SOHO, small and medium sized business (SMB) requiring application-based solutions of low-capital investment to communicate with various kinds of users, the complete VoIP features are built in. Comparing with other Voice equipments, FG7008N has integrated high data capacity of WIFI 300Mbps and GE LAN. Robust VPN functions support office users to create remote multiple accessing of site-site encrypted private connections over public Internet. Multi-access way of FG7008N has includes Ethernet, Optical and 3G.

2 Product Introduction

2.1 Appearance



Figure 2-1 FG7008N Front View

Table 2-1 LED

LED	Status	Indication
PWR	Off	Power is off
	Solid Green	Device is running
INTERNET	Off	Power is off
	Slow Flash Green	INTERNET type WAN PPPoE connection authenticate failed
	Solid Green	INTERNET type WAN connection is up
SFP	Off	No optical signal is detected
	Solid Green	Optical signal is detected
WAN	Off	No Ethernet signal is detected
	Flash Green	User data going through Ethernet port
	Solid Green	Ethernet interface is ready to work
LAN1~LAN4	Off	No Ethernet signal is detected
	Flash Green	User data going through Ethernet port
	Solid Green	Ethernet interface is ready to work

Phone1&2	Off	Phone is onhook
	Solid Green	Phone is offhook
VPN	Off	No VPN connection
	Solid Green	VPN is established
REG	Off	All accounts register failure
	Solid Green	All accounts register successfully
	Flash Green	Some accounts register successfully and rest register fails



Figure 2-2 FG7008N Rear View

- WAN: 1000/100/10Mbps ethernet ports.
- LAN(N): 1000/100/10Mbps ethernet ports.
- SFP: Gigabit fiber interface.
- SD: Interface for SD card.
- FXS: Analog telephone interface.
- POWER: DC power input connector.
- Reset button: Use the button to restore the device to the factory defaults.
- WPS: WIFI WPS switch.

2.2 Hardware Interface

Table 2-2 Hardware interface

LAN	4 100/1000BASE-T ports
WAN	1 FE ethernet port or 1 GE optical port
WIFI	4 WIFI access point, support 802.11b/g/n

SFP	1 Gigabit fiber interface
USB	1 USB 2.0 port, use for storage or 3G modem

2.3 Features

Data Network

- **WAN:** 1xGE, 1xSFP and 1xUSB port for 2G/3G USB Modem Connectivity
- **LAN:** 2x10/100/1000 Mbps Ethernet Port
- **WAN Access Mode:** Static IP address, PPPoE, DHCP, PPTP and L2TP
- **Networking Interface:** Multi WAN, Bridge Mode, 802.1Q
- **QOS:** Destination/Source MAC/IP, Application, DSCP, Supports Bandwidth Control
- **Advance Routing:** Static Route, Policy Route, DNS Proxy, RIP
- **Internal Address Management:** DHCP Server, IP and MAC Address Bind, DHCP Relay
- **Networking Protocols:** TCP/IP (IPv4/v6), UDP, RTP, SNTP, NAT, DHCP, DNS, DDNS, DLNA
- **VPN:** IPSEC, PPTP, L2TP
- **IPTV:** IGMP Proxy/Snooping, IPTV Bridge

Management

- **Management Protocol:** CLI, SNMPV1/2, Tr069, Web
- **LED Indications:** Total 12 LEDs for Power, WAN/LAN, Phone
- **Control Button:** WPS Button, WLAN Button, Power Switch, Reset Button

NAT

- **Supports ALG, DMZ, PAT**

Firewall & Security

- **Firewall Protection:** IDS&IPS, Block Ping/ICMP/IDENT, SPI Firewall, Portscan restriction
- **Access control:** Blocking by URL, IP Address, Mac Address, Protocol Type, Port

WIFI WLAN

- **Standard:** IEEE 802.11b/g/n(2.4GHz)
- **Security:** WEP, WPA, WPA2, WPA-PSK, WPA2-PSK
- **WIFI Features:** WMM, WLAN-LAN Isolation, Multi SSID(X4), AP Isolation
- **Antenna Type:** 2R2T

Voice Capacity and Functions

- **Analog User/Co line:** 2/4/8xLines FXS/FXO

Centrex Functions List

- Call Forward on Busy
- Call Forward on No Answer
- Call Forward Unconditional
- Caller ID
- Caller ID on Call Waiting
- Call Waiting

- Three-way Calling
- Ring groups

USB storage/Print

- Support USB storage
- Support print sharing

2.4 Working Environment

Environment requirement includes storage temperature, working temperature and humidity.

- 1) Storage Temperature: -40°C - 70°C
- 2) Long Time Working Temperature: -10°C - 50°C
- 3) Short Time Working Temperature: -15°C - 60°C
- 4) Environment Humidity: 5% - 95% RH, no coagulation

3 Configuration Introduction

3.1 Login

The Web interface is ready for accessing about one minute after the device power on. The default LAN IP address is 192.168.100.1, you can access the Web interface via either WAN port or LAN port. Enter IP address in the address bar of web browser and then press ENTER, you can get access to the Login interface. There are two languages provided: Chinese and English.



The screenshot shows the login page for the FG7008N device. At the top, there is a dark header with the word "Login" in yellow. Below the header, the text "FG7008N" is displayed in a large, bold font. Underneath, the version "v1.1.60" is shown. The login form consists of three fields: "Username" with the value "super", "Password" with masked characters "•••••", and "Language" with a dropdown menu set to "English". A blue "Login" button is located at the bottom right of the form.

Figure 3-1 Login Interface

3.2 Home

After successful login, you will see the main menus on the top of the Web-based GUI.

The **System Status** page provides the current status information about the Gateway. All information is read-only.

Choose the menu **Home** to load the following page.

Home Network Data Service VoIP Service System Apply Logout	
System Status	
Serial Number:	1111111111
Software Version:	R3621-W1_AM_v1.1.7
CPU Usage(%):	0%
Memory Usage(used/total):	47%
System Time:	2000-01-02 00:01:44
Uptime:	01 Day 00 Hour 01 Min
WAN MAC Address:	00:0e:b4:09:ad:20
Connection Mode:	Static IP
IP Address:	10.55.1.1
Netmask:	255.255.0.0
Default Gateway:	--
DNS:	--
LAN MAC Address:	00:0e:b4:09:ad:21
IP Address:	192.168.1.1
Netmask:	255.255.255.0
☐ Autorefresh Refresh	

Figure 3-2 System Status

3.3 Network Configuration

3.3.1 Network Status

The Status page shows all WAN and LAN interfaces configuration, and all physical ports connection status related to this device.

3.3.1.1 WAN Status

Choose the menu **Network**→**Status**→**WAN** to load the following page.

Network ==> Status									
WAN LAN Link Status									
Name	Mode	Status	IP Address	Netmask	Gateway	VLAN			
						Enable	VID	PRI	
DATA	Static IP	--	10.55.1.1	255.255.0.0	--	No	--	--	--
VOICE	--	--	--	--	--	--	--	--	--
MGMT	--	--	--	--	--	--	--	--	--
OTHER1	--	--	--	--	--	--	--	--	--
OTHER2	--	--	--	--	--	--	--	--	--

Figure 3-3 WAN Status

3.3.1.2 LAN Status

Choose the menu **Network**→**Status**→**LAN** to load the following page.

Network ==> Status			
WAN LAN Link Status			
IP Address	Netmask	NAT	Description
192.168.1.1	255.255.255.0	Yes	VLAN1

Figure 3-4 LAN Status

3.3.1.3 Link Status

Choose the menu **Network**→**Status**→**Link Status** to load the following page.

Network ==> Status				
WAN LAN Link Status				
Port	Auto Negotiation	Connect Status	Speed	Duplex Mode
WAN	Enable	Link Up	1000Mbps	Full Duplex
LAN1		Link Down		
LAN2		Link Down		
LAN3	Enable	Link Up	100Mbps	Full Duplex
LAN4	Enable	Link Up	100Mbps	Full Duplex

Figure 3-5 Link Status

3.3.2 WAN Configuration

The device supports 5 WAN interfaces:DATA,VOICE,MGMT,OTHER1,OTHER2; Every WAN interface provides the following five Internet connection types: Static IP,DHCP,PPPoE,PPTP,L2TP.

Choose the menu **Network**→**WAN** to load the configuration show page.

Network ==> WAN					
Interface Name	Enable	Type	VLAN Enable	VID	PRI
DATA	Yes	Static IP	No	--	--
VOICE	No	--	Yes	7	6
MGMT	No	--	Yes	10	2
OTHER1	No	--	No	--	--
OTHER2	No	--	No	--	--

Figure 3-6 WAN page

Select an **Interface Name** to load the configuration page.

1) Static IP

If a static IP address has been provided by your ISP, please choose the Static IP connection type to configure the parameters for WAN port manually.

Network ==> WAN

Interface Name	DATA	
Enable	☒	
Type	Static IP ▾	
VLAN Enable	☒	
VLAN ID	1 (1,4094)	
Priority Level	0 (0,7)	
Primary DNS	0.0.0.0	
Secondary DNS	0.0.0.0	
IP Address	0.0.0.0 *	
Netmask	0.0.0.0 *	
Gateway	☒ 0.0.0.0	

Figure 3-7 WAN-Static IP

The following items are displayed on this screen:

- ▶ **Enable:** Enable this WAN interface (DATA can't be disabled).
- ▶ **Type:** Select Static IP if your ISP has assigned a static IP address for your.
- ▶ **VLAN Enable:** Optional. Enable VLAN to configure VLAN ID and VLAN Priority Level.
- ▶ **VLAN ID:** Optional. VLAN ID of this WAN interface.
- ▶ **Priority Level:** Optional. VLAN Priority Level of this WAN interface.
- ▶ **Primary DNS:** Enter the IP address of your ISP's Primary DNS (Domain Name Server). If you are not clear, please consult your ISP. It's not allowed to access the Internet via domain name if the Primary DNS field is blank.
- ▶ **Secondary DNS:** Optional. If a Secondary DNS Server address is available, enter it.
- ▶ **IP Address:** Enter the IP address assigned by your ISP. If you are not clear, please consult your ISP.
- ▶ **Netmask:** Enter the Subnet Mask assigned by your ISP.
- ▶ **Gateway:** Optional. Enter the Gateway assigned by your ISP.

2) DHCP

If your ISP (Internet Service Provider) assigns the IP address automatically, please choose the DHCP connection type to obtain the parameters for WAN port automatically.

Network ==> WAN

Interface Name	DATA
Enable	☒
Type	DHCP
VLAN Enable	☒
VLAN ID	1 (1,4094)
Priority Level	0 (0,7)
Primary DNS	0.0.0.0
Secondary DNS	0.0.0.0

Appoint Server IP	
Vendor Class Identifier	☐
Enterprise Code	
Manufacture Name	
Device Class	
Device Type	
Device Version	

Figure 3-8 WAN-DHCP

The following items are displayed on this screen:

- ▶ **Enable:** Enable this WAN interface (DATA can't be disabled).
- ▶ **Type:** Select DHCP if your ISP assigns the IP address automatically.
- ▶ **VLAN Enable:** Optional. Enable VLAN to configure VLAN ID and VLAN Priority Level.
- ▶ **VLAN ID:** Optional. VLAN ID of this WAN interface.
- ▶ **Priority Level:** Optional. VLAN Priority Level of this WAN interface.
- ▶ **Primary DNS:** Enter the IP address of your ISP's Primary DNS (Domain Name Server) manually. If you are not clear, please consult your ISP. It's not allowed to access the Internet via domain name if the Primary DNS field is blank.
- ▶ **Secondary DNS:** Optional. If a Secondary DNS Server address is available, enter it.
- ▶ **Appoint Server IP:** Optional. If network has multiple DHCP servers, enter the IP address of your ISP'S DHCP server
- ▶ **Vendor Class Identifier:** Optional. This option (60) is used by DHCP clients to optionally identify the vendor type and configuration of a DHCP client.
- ▶ **Enterprise Code:** Optional.
- ▶ **Manufacture Name:** Optional.
- ▶ **Device Class:** Optional.
- ▶ **Device Type:** Optional.
- ▶ **Device Version:** Optional.

3) PPPoE

If your ISP (Internet Service Provider) has provided the account information for the PPPoE connection,

please choose the PPPoE connection type (Used mainly for DSL Internet service).

Network ==> WAN

Interface Name	VOICE
Enable	☒
Type	PPPoE
VLAN Enable	☒
VLAN ID	7 (1,4094)
Priority Level	6 (0,7)
Primary DNS	0.0.0.0
Secondary DNS	0.0.0.0
Username	123 *
Password	*** *
AC Name	
Service Name	
LCP Interval	10 [1,3000]; default:10
LCP Max Fails	5 [1,10]; default:5

Save Return

Figure 3-9 WAN-PPPoE

The following items are displayed on this screen:

- ▶ **Enable:** Enable this WAN interface (DATA can't be disabled).
- ▶ **Type:** Select PPPoE if your ISP provides xDSL Virtual Dial-up connection.
- ▶ **VLAN Enable:** Optional. Enable VLAN to configure VLAN ID and VLAN Priority Level.
- ▶ **VLAN ID:** Optional. VLAN ID of this WAN interface.
- ▶ **Priority Level:** Optional. VLAN Priority Level of this WAN interface.
- ▶ **Primary DNS:** Enter the IP address of your ISP's Primary DNS (Domain Name Server) manually. If you are not clear, please consult your ISP. It's not allowed to access the Internet via domain name if the Primary DNS field is blank.
- ▶ **Secondary DNS:** Optional. If a Secondary DNS Server address is available, enter it.
- ▶ **Username:** Enter the Account Name provided by your ISP. If you are not clear, please consult your ISP.
- ▶ **Password:** Enter the Password provided by your ISP.
- ▶ **Service Name /AC Name:** Optional. The service name and AC (Access Concentrator) name, which should not be configured unless you are sure it is necessary for your ISP. In most cases, leaving these fields blank will work.
- ▶ **LCP Interval:** PPPoE will send an LCP echo-request frame to the peer every **LCP interval** seconds.
- ▶ **LCP Max Fails:** PPPoE will presume the peer to be dead if **LCP Max Fails** LCP echo-requests are send without receiving a valid LCP echo-reply.

4) L2TP

If your ISP (Internet Service Provider) has provided the account information for the L2TP connection, please choose the L2TP connection type.

Network ==> WAN

Interface Name	VOICE
Enable	☒
Type	L2TP
VLAN Enable	☒
VLAN ID	7 (1,4094)
Priority Level	6 (0,7)
Primary DNS	0.0.0.0
Secondary DNS	0.0.0.0

☒ Static
 ☐ DHCP

IP Address	138.1.60.1 *
Netmask	255.255.0.0
Gateway	☐ 138.1.60.2
Server IP	0.0.0.0 *
Username	user *
Password	password *

Figure 3-10 WAN-L2TP

The following items are displayed on this screen:

- ▶ **Enable:** Enable this WAN interface (DATA can't be disabled).
- ▶ **Type:** Select L2TP if your ISP provides a L2TP connection.
- ▶ **VLAN Enable:** Optional. Enable VLAN to configure VLAN ID and VLAN Priority Level.
- ▶ **VLAN ID:** Optional. VLAN ID of this WAN interface.
- ▶ **Priority Level:** Optional. VLAN Priority Level of this WAN interface.
- ▶ **Primary DNS:** Enter the IP address of your ISP's Primary DNS (Domain Name Server). If you are not clear, please consult your ISP. It's not allowed to access the Internet via domain name if the Primary DNS field is blank.
- ▶ **Secondary DNS:** Optional. If a Secondary DNS Server address is available, enter it.
- ▶ **Server IP:** Enter the Server IP provided by your ISP.
- ▶ **Username:** Enter the Account Name provided by your ISP. If you are not clear, please consult your ISP.
- ▶ **Password:** Enter the Password provided by your ISP.

Secondary Connection: Here allow you to configure the secondary connection. DHCP and Static IP connection types are provided.

If **Static** is selected:

- ▶ **IP Address:** If Static IP is selected, configure the IP address of WAN port.
- ▶ **Netmask:** If Static IP is selected, configure the subnet mask of WAN port.
- ▶ **Gateway:** Optional. If Static IP is selected, configure the default gateway of WAN port.

If **DHCP** is selected:


- ▶ **Appoint Server IP:** Optional. If network has multiple DHCP servers, enter the IP address of your ISP's DHCP server.
- ▶ **Vendor Class Identifier:** Optional. This option (60) is used by DHCP clients to optionally identify the

vendor type and configuration of a DHCP client.

- ▶ **Enterprise Code:** Optional.
- ▶ **Manufacture Name:** Optional.
- ▶ **Device Class:** Optional.
- ▶ **Device Type:** Optional.
- ▶ **Device Version:** Optional.

5) PPTP

If your ISP (Internet Service Provider) has provided the account information for the PPTP connection, please choose the PPTP connection type.

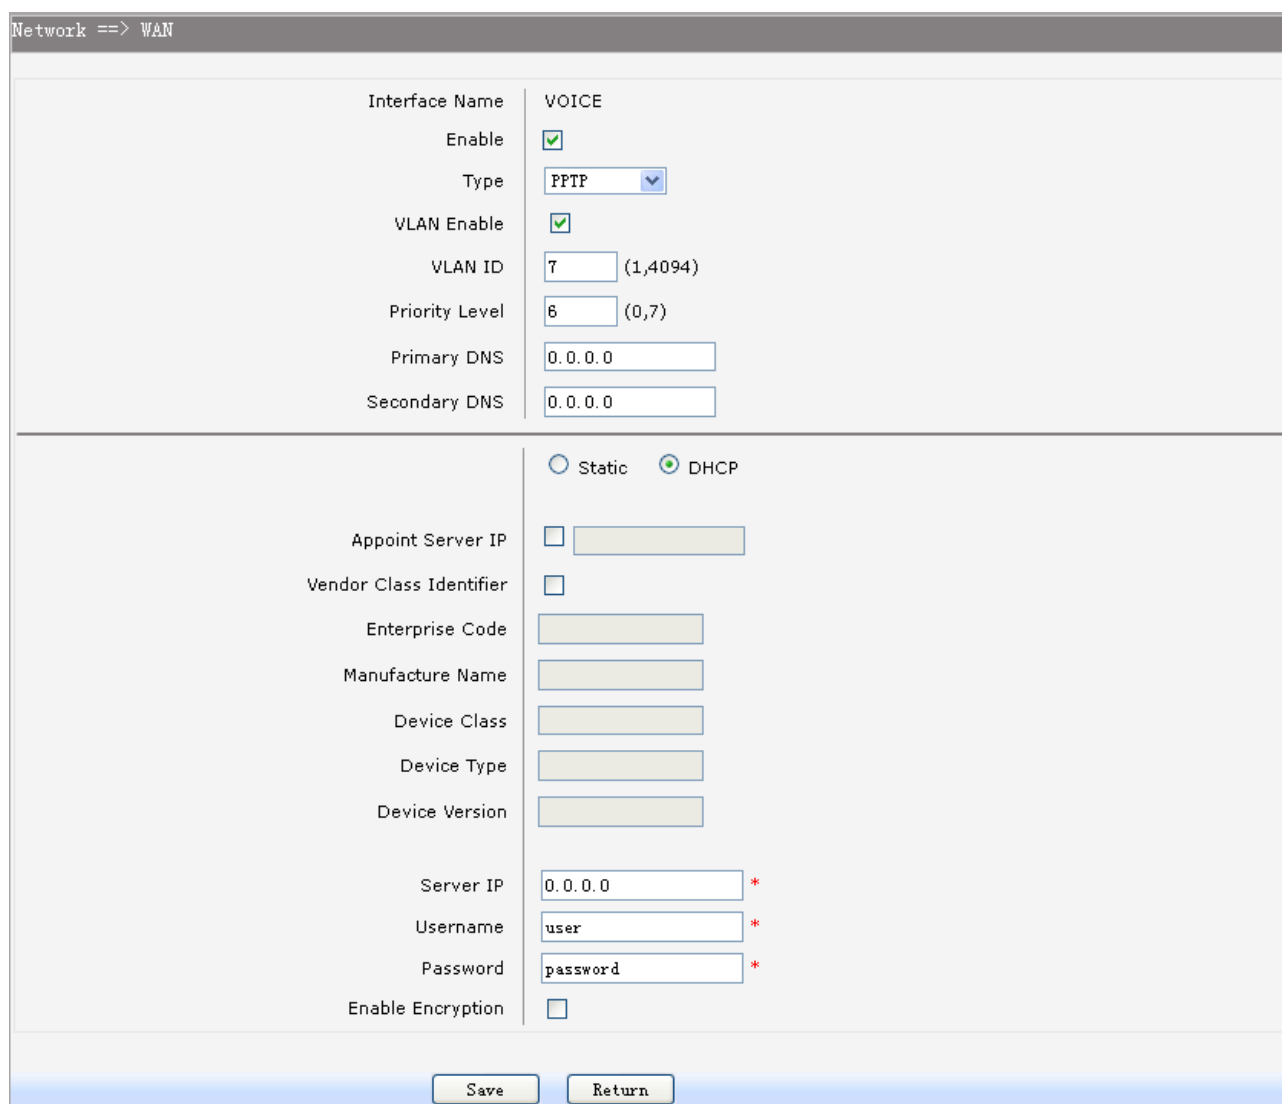

Network ==> WAN

Interface Name	VOICE
Enable	☒
Type	PPTP
VLAN Enable	☒
VLAN ID	7 (1,4094)
Priority Level	6 (0,7)
Primary DNS	0.0.0.0
Secondary DNS	0.0.0.0

☐ Static
 ☒ DHCP

Appoint Server IP	
Vendor Class Identifier	
Enterprise Code	
Manufacture Name	
Device Class	
Device Type	
Device Version	
Server IP	0.0.0.0 *
Username	user *
Password	password *
Enable Encryption	☐

Figure 3-11 WAN-PPTP

The following items are displayed on this screen:

- ▶ **Enable:** Enable this WAN interface (DATA can't be disabled).
- ▶ **Type:** Select PPTP if your ISP provides a PPTP connection.
- ▶ **VLAN Enable:** Optional. Enable VLAN to configure VLAN ID and VLAN Priority Level.
- ▶ **VLAN ID:** Optional. VLAN ID of this WAN interface.
- ▶ **Priority Level:** Optional. VLAN Priority Level of this WAN interface.
- ▶ **Primary DNS:** Enter the IP address of your ISP's Primary DNS (Domain Name Server)

- manually. If you are not clear, please consult your ISP. It's not allowed to access the Internet via domain name if the Primary DNS field is blank.
- ▶ **Secondary DNS:** Optional. If a Secondary DNS Server address is available, enter it.
 - ▶ **Server IP:** Enter the Server IP provided by your ISP.
 - ▶ **Username:** Enter the Account Name provided by your ISP. If you are not clear, please consult your ISP.
 - ▶ **Password:** Enter the Password provided by your ISP.
 - ▶ **Enable Encryption:** Enable PPTP link encryption.

Secondary Connection: Here allow you to configure the secondary connection. DHCP and Static IP connection types are provided.

If **Static** is selected:

- ▶ **IP Address:** If Static IP is selected, configure the IP address of WAN port.
- ▶ **Netmask:** If Static IP is selected, configure the subnet mask of WAN port.
- ▶ **Gateway:** Optional. If Static IP is selected, configure the default gateway of WAN port.

If **DHCP** is selected:

- ▶ **Appoint Server IP:** Optional. If network has multiple DHCP servers, enter the IP address of your ISP's DHCP server.
- ▶ **Vendor Class Identifier:** Optional. This option (60) is used by DHCP clients to optionally identify the vendor type and configuration of a DHCP client.
- ▶ **Enterprise Code:** Optional.
- ▶ **Manufacture Name:** Optional.
- ▶ **Device Class:** Optional.
- ▶ **Device Type:** Optional.
- ▶ **Device Version:** Optional.

3.3.3 LAN Configuration

On this page, you can configure the parameters for LAN port.

Choose the menu **Network**→**LAN** to load the following page. There are three parts on this page.

Network ==> LAN

Interface Name	IP	Netmask	NAT	VID	LAN Bind	WAN Bind
VLAN1	192.168.1.1	255.255.255.0	Yes	--	1,2,3,4	D

1 Total 1 Pages, 1 Rows

WAN Bind Note: D(DATA); V(VOICE); M(MGMT); O1(OTHER1); O2(OTHER2);

[Add](#) [Del](#)

Port	Route/Bridge	VLAN ID List	Note Message
LAN1	Route		Route:route to WAN
LAN2	Route		Transparent bridge:not modify the packets;
LAN3	Route		Tagged bridge:LAN untagged, WAN tagged; only 1 VID supported
LAN4	Route		Promisc Mode:Tagged packets in bridge mode, untagged packets in route mode;most 5 VIDs supported(e.g. 8,10,13).

[Save](#) [Refresh](#)

[Advanced Parameters](#)

☐ LAN Isolate

Auto Bridge	DHCP Vendor ID	STB Data Service		IPTV VLAN		STB Data VLAN
		IP Address	Netmask	VID	PRI	
☒	albis sagem	192.168.111.1	255.255.255.0	6	4	Automatic ☐ 7

[Save](#) [Refresh](#)

Figure 3-12 LAN page

1) Part 1: Configure LAN interfaces

Click the **Interface Name** of existent LAN interface you want to modify. If you want to delete the entry, select it and click the **Del** (the VLAN1 is default existed, can't be removed).

Click the **Add** button to add a new entry.

Network ==> LAN==> Static IP

Interface Name	VLAN1 *
IP Address	192.168.1.1 *
Netmask	255.255.255.0 *
NAT	☒
Assign NAT IP	☐ 0.0.0.0
Enable DHCP Server	☒
Start IP	192.168.1.100
End IP	192.168.1.200
Netmask	255.255.255.0
Gateway	192.168.1.1
Primary DNS	192.168.1.1
Secondary DNS	
Lease Time(Second)	86400

[Advanced Parameter](#)

LAN Port	☒ LAN1	☒ LAN2	☒ LAN3	☒ LAN4
WAN Subinterface	☒ DATA	☐ VOICE	☐ MGMT	☐ OTHER1 ☐ OTHER2

[Save](#) [Return](#)

Figure 3-13 Configure LAN Interface

The following items are displayed on this part.

- ▶ **Interface Name:** Name of this LAN interface.
- ▶ **IP Address:** Enter the IP address for this LAN interface.
- ▶ **Netmask:** Enter the subnet mask for this LAN interface.
- ▶ **NAT:** Optional Enable or disable NAT for this LAN interface
- ▶ **Assign NAT IP:** Optional If NAT is selected. NAT IP address can be assigned.
- ▶ **Enable DHCP Server:** Enable or disable DHCP server on this LAN interface.
- ▶ **Start IP:** If **Enable DHCP Server** is selected, enter the Start IP address to define a range for the DHCP server to assign dynamic IP addresses. This address should be in the same IP address subnet with the IP address of this LAN interface.
- ▶ **End IP:** If **Enable DHCP Server** is selected, enter the End IP address to define a range for the DHCP server to assign dynamic IP addresses. This address should be in the same IP address subnet with the IP address of this LAN interface.
- ▶ **Netmask:** If **Enable DHCP Server** is selected, enter the **Netmask** to define a range for the DHCP server to assign dynamic IP addresses.
- ▶ **Gateway:** Optional .If **Enable DHCP Server** is selected, enter the Gateway address to be assigned.
- ▶ **Primary DNS:** Optional. If **Enable DHCP Server** is selected, enter the Primary DNS server address to be assigned.
- ▶ **Secondary DNS:** Optional. If **Enable DHCP Server** is selected, enter the Secondary DNS server address to be assigned.
- ▶ **Lease Time(Second):** If **Enable DHCP Server** is selected, specify the length of time the DHCP server will reserve the IP address for each client. After the IP address expired, the client will be automatically assigned a new one.

Advanced Parameter

- ▶ **LAN Port:** Select the physical LAN port to bind the IP address of this LAN interface.
- ▶ **WAN Subinterface:** Select the WAN subinterface which the packet from this LAN interface can be sending to.

2) Part 2: Configure LAN Route/Bridge mode

The following items are displayed on this part.

- ▶ **Port:** The physical LAN port name (LAN1~LAN4).
- ▶ **Route/Bridge:** Mode of this physical LAN port. The following four modes are provided:
 - Route:** route to WAN
 - Transparent bridge:** not modify the packets;
 - Tagged bridge:** LAN untagged, WAN tagged; only 1 VID supported
 - Promisc Mode:** Tagged packets in bridge mode, untagged packets in route mode; most 5 VIDs supported (e.g. 8, 10, 13).
- ▶ **VLAN ID List:** If Tagged bridge/Promisc Mode is selected, configure the VID/VIDs.

3) Part 3: Configure IPTV

Choose the menu **Network→LAN→Advanced Parameters** to load this page.

The following items are displayed on this part.


- ▶ **LAN Isolate:** Check the box to prohibit the access between LAN interfaces.
- ▶ **Auto Bridge:** Check the box to dynamically create IPTV bridge for STB.
- ▶ **DHCP Vendor ID:** Vendor class identifier List (DHCP 60 option), support at most two vendor IDs.
- ▶ **IPAddress:** IP address of interface for STB data service.
- ▶ **Netmask:** Subnet mask of interface for STB data service.
- ▶ **VID:** VID of IPTV VLAN.
- ▶ **PRI:** Priority level of IPTV VLAN.
- ▶ **Automatic:** Check the box to automatically detect the VID of STB data service.

3.3.4 WLAN

Wi-Fi is a **WLAN** (Wireless Local Area Network) technology. It provides short-range wireless high-speed data connections between mobile data devices (such as laptops, PDAs or phones) and nearby Wi-Fi access points (special hardware connected to a wired network).

3.3.4.1 Basic Settings

Choose the menu **Network→WLAN→Basic Settings** to load the following page.

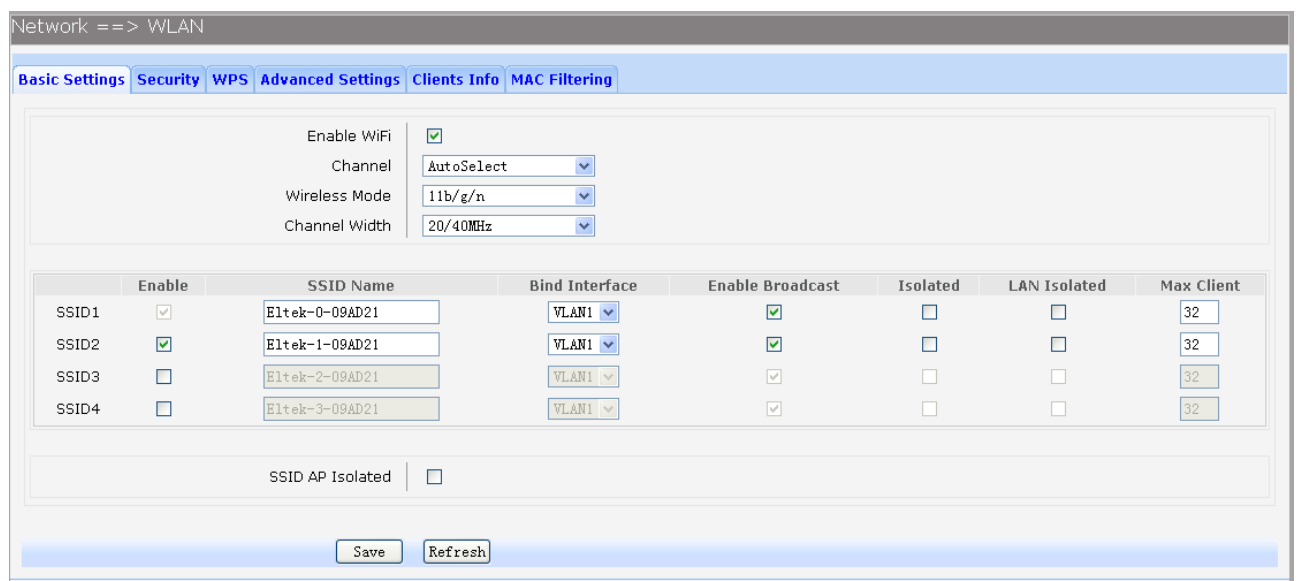

Enable	SSID Name	Bind Interface	Enable Broadcast	Isolated	LAN Isolated	Max Client
☒	Eltek-0-09AD21	VLAN1	☒	☐	☐	32
☒	Eltek-1-09AD21	VLAN1	☒	☐	☐	32
☐	Eltek-2-09AD21	VLAN1	☒	☐	☐	32
☐	Eltek-3-09AD21	VLAN1	☒	☐	☐	32

Figure 3-14 Configure WIFI Basic Settings

The following items are displayed on this screen:

- ▶ **Enable WiFi:** Enable or disable the WIFI AP function globally.
- ▶ **Channel:** This field determines which operating frequency will be used. The default channel is set to **AutoSelect**, so the AP will choose the best channel automatically. It is not necessary to change the wireless channel unless you notice interference problems with another nearby access point.
- ▶ **Wireless Mode:** Select the desired mode.
 - 11b:** Select if all of your wireless clients are 802.11b.
 - 11g:** Select if all of your wireless clients are 802.11g.
 - 11n:** Select only if all of your wireless clients are 802.11n.
 - 11b/g:** Select if you are using both 802.11b and 802.11g wireless clients.
 - 11b/g/n:** Select if you are using a mix of 802.11b, 11g and 11n wireless clients.

- **Channel Width:** Select any channel width from the drop-down list. The default setting is automatic, which can automatically adjust the channel width for your clients. If you choose to **11n** or **11b/g/n** Wireless mode, this configuration is required. Two values of width are provided: **20MHz** and **20/40MHz**.

The **Service Set Identifier (SSID)** is used to identify an 802.11 (Wi-Fi) network and it's discovered by network sniffing/scanning. FG7008N provides up to four SSID.

- **Enable:** Enable or disable this entry of SSID. SSID1 can't be disabled.
- **SSID Name:** Enter the name of SSID. The name of SSID must be unique in all wireless networks nearby.
- **Bind Interface:** Select a network interface to be bridged to the SSID.
- **Enable Broadcast:** When wireless clients survey the local area for wireless networks to associate with, they will detect the SSID broadcast by the device. If you select the **Enable Broadcast** checkbox, the device will broadcast its name (SSID) on the air.
- **Isolated:** Enable or disable isolate different clients from the same wireless station.
- **LAN Isolated:** Enable or disable isolation between the LAN and SSID.
- **Max Client:** Enter the maximum number of clients allowed to connect to the SSID.
- **SSID AP Isolated:** This function can isolate wireless stations on your network from each other. Wireless devices will be able to communicate with the Router but not with each other. To use this function, check this box. AP Isolation is disabled by default.

3.3.4.2 Security

Choose the menu **Network**→**WLAN**→**Security** to load the Security page. There are nine wireless security modes supported by the device: Open WEP, Shared WEP, WEP Auto, WPA-PSK, WPA2-PSK, WPAPSK/WPA2PSK, WPA, WPA2 and WPAWPA2.

If you do not want to use wireless security, select **Disable**, but it's strongly recommended to choose one of the following modes to enable security.

1) WPA-PSK, WPA2-PSK, WPAPSK/WPA2PSK: It's the WPA/WPA2 authentication type based on pre-shared passphrase. Choose one of these types, the following page is loaded.

Figure 3-15 Configure WIFI PSK Security


The following items are displayed on this screen:

- **SSID:** The SSID enabled in **WLAN**→**Basic Settings** page. Read only
- **Authentication:** The authentication type selected: WPA-PSK, WPA2-PSK, WPAPSK/WPA2PSK.
- **Algorithm:** When WPA2-PSK or WPAPSK/WPA2PSK is set as the Authentication Type, you can select either **TKIP**, or **AES** or **TKIP/AES** as Encryption. When WPA-PSK is set as the Authentication Type, you can select either TKIP or AES

as Encryption.

- ▶ **WPA Pre-Shared Key:** You can enter ASCII characters between 8 and 64 characters.
- ▶ **Renew Interval:** Specify the group key update interval in seconds. Enter 0 to disable the update.

2) Open WEP, Shared WEP, WEP Auto: It is based on the IEEE 802.11 standard. Choose one of these types, the following page is loaded.

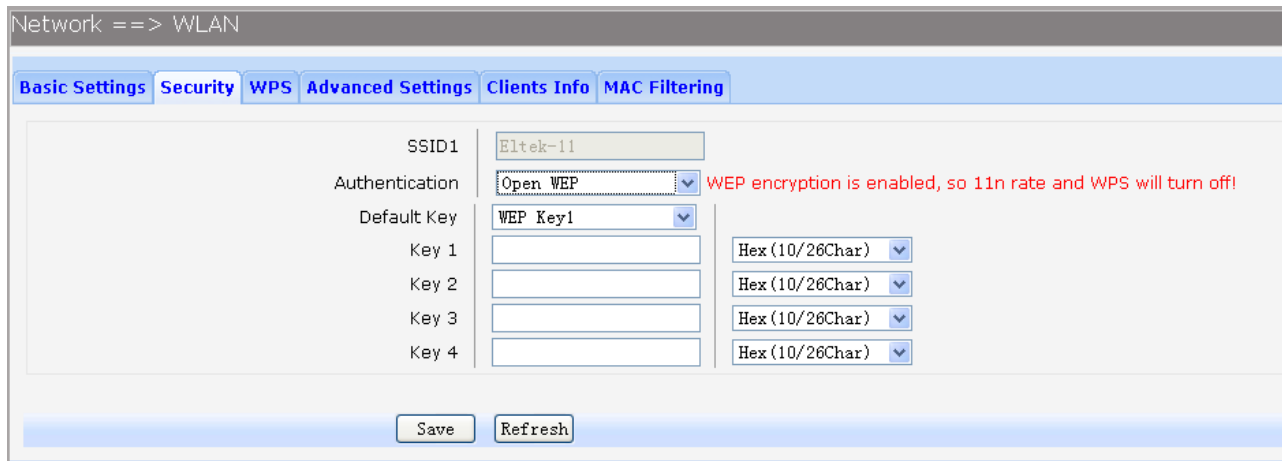


The screenshot shows the 'WLAN' configuration page with the 'Security' tab selected. The 'Authentication' is set to 'Open WEP'. A red warning message states: 'WEP encryption is enabled, so 11n rate and WPS will turn off!'. The 'Default Key' is 'WEP Key1'. There are four 'Key' fields (Key 1 to Key 4) and four dropdown menus for key format, all set to 'Hex (10/26Char)'. The 'Save' and 'Refresh' buttons are at the bottom.

Figure 3-16 Configure WIFI WEP Security

The following items are displayed on this screen:

- ▶ **SSID:** The SSID enabled in **WLAN**→**Basic Settings** page. Read only
- ▶ **Authentication:** The authentication type selected: Open WEP, Shared WEP, WEP Auto.
- ▶ **Default Key:** Select the default WEP key configure below.
- ▶ **Key:** Provide up to four key. You can select the key type HEX(10/26 char) or ASCII(5/13 char) for encryption and then enter the key. HEX(10/26 char) and ASCII(5/13 char) formats are provided.
Hex(10/26 char): format stands for any combination of hexadecimal digits (0-9, a-f, A-F) in the specified length.
ASCII(5/13 char): format stands for any combination of keyboard characters in the specified length.

3) WPA, WPA2, WPA/WPA2: It's based on Radius Server. Choose one of these types, the following page is loaded.

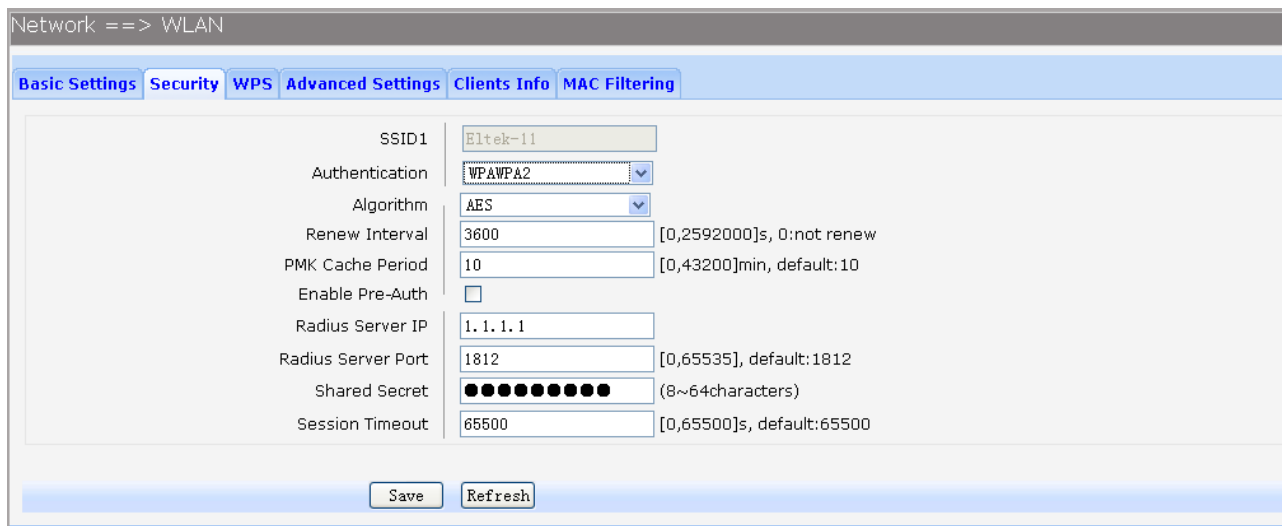

The screenshot shows the 'WLAN' configuration page with the 'Security' tab selected. The 'Authentication' is set to 'WPA/WPA2'. The 'Algorithm' is 'AES'. The 'Renew Interval' is '3600' [0,2592000]s, 0: not renew. The 'PMK Cache Period' is '10' [0,43200]min, default: 10. The 'Enable Pre-Auth' checkbox is unchecked. The 'Radius Server IP' is '1.1.1.1'. The 'Radius Server Port' is '1812' [0,65535], default: 1812. The 'Shared Secret' is represented by 16 black dots (8~64 characters). The 'Session Timeout' is '65500' [0,65500]s, default: 65500. The 'Save' and 'Refresh' buttons are at the bottom.

Figure 3-17 Configure WIFI WPA Security

The following items are displayed on this screen:

- ▶ **SSID:** The SSID enabled in **WLAN**→**Basic Settings** page.Read only
- ▶ **Authentication:** The authentication type selected: WPA, WPA2, WPA/WPA2.
- ▶ **Algorithm:** You can select either **TKIP**, or **AES** or **TKIP/AES**.
- ▶ **Renew Interval:** Specify the update interval in seconds. Enter 0 to disable the update.
- ▶ **PMK Cache Period:** Pairwise Master Key, PMK. Set WPA2 PMKID cache timeout period, after time out, the cached key will be deleted.This parameter is valid when you select WPA2 or WPA/WPA2.
- ▶ **Enable Pre-Auth:** This is used to speed up roaming before pre-authenticating IEEE 802.1X/EAP part of the full RSN authentication and key handshake before actually associating with a new AP. Default is disable. This parameter is valid when you select WPA2 or WPA/WPA2.
- ▶ **Rasius Server IP:** Enter the IP address of the Radius Server.
- ▶ **Rasius Server Port:** Enter the port that radius service used.
- ▶ **Shared Seret:** Enter the password for the Radius Server.
- ▶ **Session Timeout:** Specify the session timeout in seconds, Enter 0 to not limit the timeout.

3.3.4.3 WPS

Wi-Fi Protected Setup (WPS; originally Wi-Fi Simple Config) is a computing standard that attempts to allow easy establishment of a secure wireless home network.WPS currently supports two methods: Personal Information Number (PIN) and Push Button Configuration (PBC).The difference between the two methods is much pretty described in their names.

The **PIN** method involves entering a client device PIN, obtained either from a client application GUI or a label on a device, into the appropriate admin screen on a Registrar device.

The **PBC** method requires the user to push buttons on the Registrar and Client devices within a two-minute period to connect them. (The two-minute period also applies to the PIN method.) The buttons can be physical, as they typically are on AP / router devices or virtual, as is normal on client devices.

Choose the menu **Network**→**WLAN**→**WPS** to load the WPS page.

1) PIN Mode

If PIN mode is selected, the following page is loaded.

The screenshot shows a web interface for configuring WPS. At the top, there's a breadcrumb trail: "Network ==> WLAN". Below this is a navigation bar with tabs: "Basic Settings", "Security", "WPS" (which is active), "Advanced Settings", "Clients Info", and "MAC Filtering". The main content area has a section for "Enable WPS" with a checked checkbox. Below that is "WPS Mode" with two radio buttons: "PIN" (selected) and "PBC". At the bottom, there's a "PIN Set" section with a "PIN Code" input field and a "Connect" button.

Figure 3-18 Configure WIFI WPS-PIN

The following items are displayed on this screen:

- ▶ **Enable WPS:** Enable or disable the WIFI WPS function globally.
- ▶ **WPS Mode:** Choose the WPS mode: PIN.

- **PIN Code:** If PIN mode is chosen, enter the 8 digit PIN code, and then click Connect.

2) PBC Mode

If PBC mode is selected, the following page is loaded.

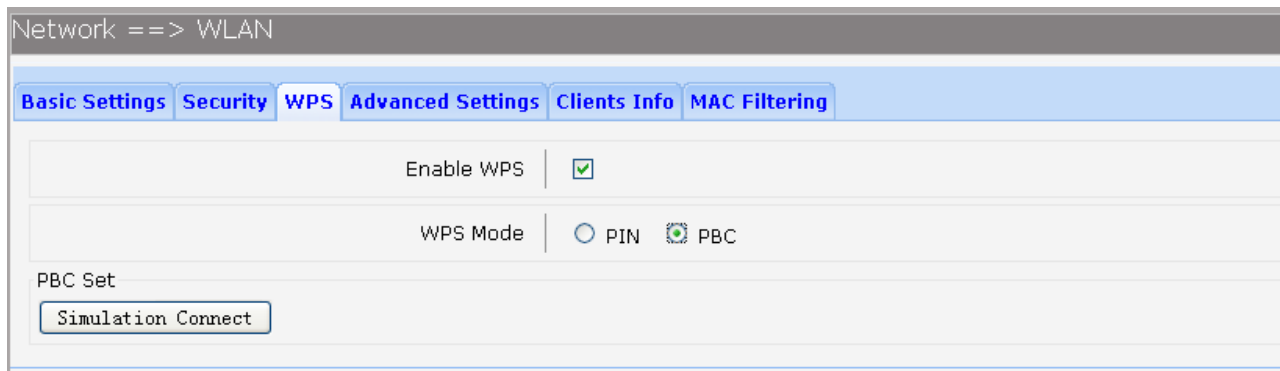


Figure 3-19 Configure WIFI WPS-PBC

The following items are displayed on this screen:

- **Enable WPS:** Enable or disable the WIFI WPS function globally.
- **WPS Mode:** Choose the WPS mode: PBC.
- **PBC Set:** If PBC mode is chosen, then click **Simulation Connect**.

3.3.4.4 Advanced Settings

Choose the menu **Network**→**WLAN**→**Advanced Settings** to load the following page.

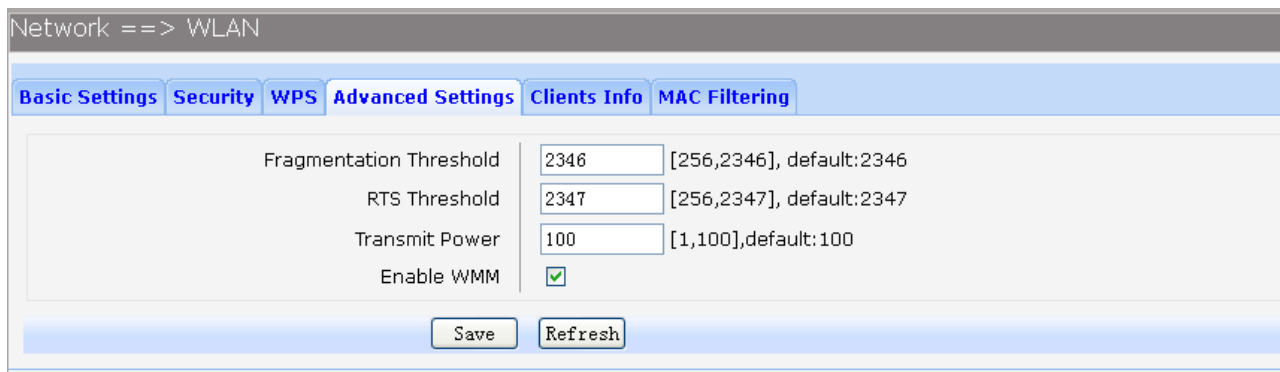


Figure 3-20 Configure WIFI Advanced Settings


The following items are displayed on this screen:

- **Fragmentation Threshold:** This value is the maximum size determining whether packets will be fragmented. Setting the Fragmentation Threshold too low may result in poor network performance since excessive packets. 2346 is the default setting and is recommended.
- **RTS Threshold:** Here you can specify the RTS (Request to Send) Threshold. If the packet is larger than the specified RTS Threshold size, the device will send RTS frames to a particular receiving station and negotiate the sending of a data frame. The default value is 2347.
- **Transmit Power:** Here you can specify the transmit power of device. 100 is the default setting and is recommended.
- **Enable WMM:** Enable or disable the WIFI WMM function globally. WMM function can guarantee the packets with high-priority messages, being transmitted

preferentially. It is strongly recommended enabled.

3.3.4.5 Clients Info

Choose the menu **Network**→**WLAN**→**Clients Info** to load the following page.

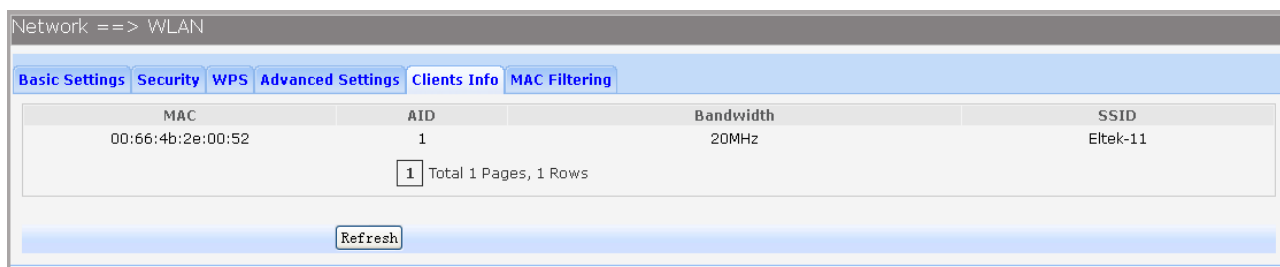

MAC	AID	Bandwidth	SSID
00:66:4b:2e:00:52	1	20MHz	Eltek-11

1 Total 1 Pages, 1 Rows

Refresh

Figure 3-21 View Wifi Clients Info

This page shows all connected WIFI client information, read only.


The following items are displayed on this screen:

- ▶ **MAC:** The MAC address of this client entry.
- ▶ **AID:** The AID(Association ID) field is a value assigned by an AP during association that represents the 16-bit ID of a STA.
- ▶ **Bandwidth:** Band width this client entry used.
- ▶ **SSID:** The SSID this client entry used when connecting WIFI.

3.3.4.6 MAC Filtering

You can control the wireless access by configuring the Wireless MAC Filtering function.

Choose the menu **Network**→**WLAN**→**MAC Filtering** to load the following page.

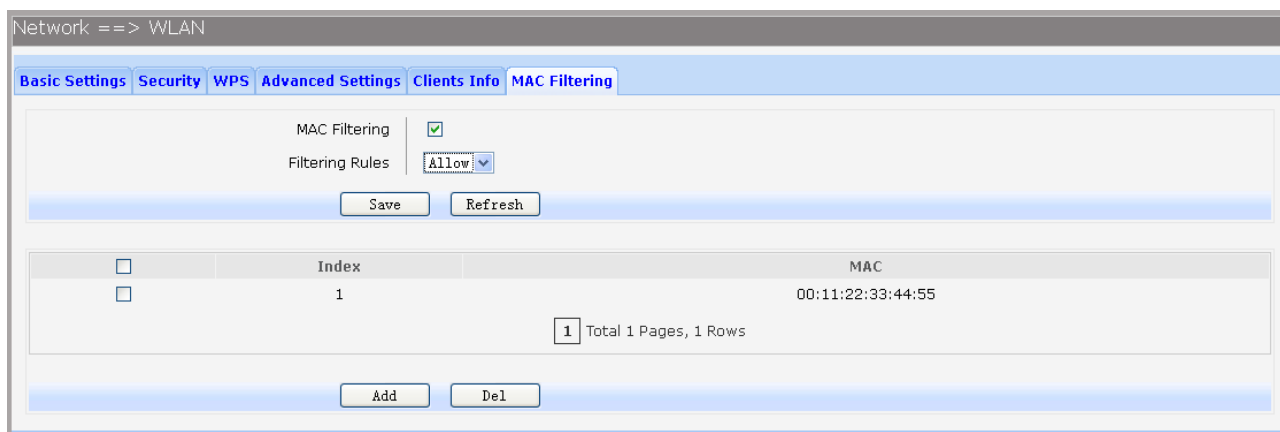

MAC Filtering ☒

Filtering Rules: Allow

Save Refresh

Index	MAC
1	00:11:22:33:44:55

1 Total 1 Pages, 1 Rows

Add Del

Figure 3-22 View Wifi MAC Filtering

The following items are displayed on this screen:

- ▶ **MAC Filtering:** Enable or disable the Wifi MAC filtering function globally.
- ▶ **Filtering Rules:** Two MAC filtering rules are provided:
 - Allow:** allow the stations specified by entries in the list to access.
 - Deny:** deny the stations specified by entries in the list to access.

To delete Wireless MAC Address filtering entries, select the entries and click the **Del** button. To Add a Wireless MAC Address filtering entry, click the **Add** button.

Network ==> WLAN ==> MAC Filtering

MAC *

Selected List

Figure 3-23 Add WIFI MAC Filtering Entry

Enter the appropriate MAC Address into the **MAC** field. The format of the MAC Address is XX:XX:XX:XX:XX:XX (X is any hexadecimal digit). Click **Add** button to add MAC address to the **Selected List**, click **Del** button to delete the selected MAC address in the **Selected List**.

3.3.5 3G Modem

Typically, 3G Modem WAN is used as uplink port as a backup. When inserting 3G Modem into USB port, the system recognized the SIM card and charges no problem. After dialing successful, 3G Modem will serve as a backup uplink usage.

1) Basic Settings

Choose the menu **Network**→**3G Modem** to load the following page.

Network ==> 3G Modem

Basic Settings

SP Network	Other	
Username	card	(Maximum 32 Characters)
Password	••••	(Maximum 32 Characters)
Dial Number	*99#	(Maximum 32 Characters)
APN	3GNET	(Maximum 32 Characters)
PIN	1234	(Maximum 32 Characters)
Connect Mode	Auto	
Online Mode	Always Online	

Figure 3-24 Configure 3G Modem-Basic Settings

The following items are displayed on this screen:

- ▶ **SP Network:** **Other** or **Swisscom**. If it is not the target user, you need to select the other.
- ▶ **Connect Mode:** **Manual** or **Auto**. The default is Auto.
- ▶ **Online Mode:** **always online** and **disconnect after idle interval**. The default is “always online”.
The default idle interval is 60 seconds.

If **Other** is selected, the following parameters appear:

- ▶ **Username:** 3G network dial-up username.
- ▶ **Password:** 3G network dial-up password.
- ▶ **Dial Number:** 3G network dial numbers.
- ▶ **APN:** 3G network access APN.
- ▶ **PIN:** 3G networks need to use dial-up PIN code, if not, can be set to empty.

2) Advanced Parameters

Choose the menu **Network→3G Modem→Advanced Parameters** to load the following page.

[-Advanced Parameters](#)

Authentication	Auto	
DNS		
TCP MSS	1460	[128,2048],default:1460
MTU	1500	[128,1500],default:1500
Data Link Backup	☐	
Heartbeat Address		

Figure 3-25 Configure 3G Modem-Advanced Parameters

The following items are displayed on this screen:

- ▶ **Authentication:** 3G dial-up authentication, **CHAP**, **PAP**, **Auto** are provided. Default is **Auto**.
- ▶ **DNS:** The default is obtained from the dial-up network devices automatically. You can also configure DNS manually.
- ▶ **TCP MSS:** Configure TCP maximum segment, we recommend using the default value.
- ▶ **MTU:** Configure 3G link MTU, the default value is recommended
- ▶ **Data Link Backup:** When enabled, if WAN uplink port is disconnected, the routing switches to the 3G

link.

- ▶ **Heartbeat Address:** Set the heartbeat detecting address of the link, the default configuration is not required.

3) Status

Status		
Device Status	Ready	
SIM Card Status	Ready	
Product Name	E353	
Manufacturer Name	huawei	
SP Name	CHN-CUGSM	
Signal Quality	17	
Connection Status	Connected	

Figure 3-26 Configure 3G Modem-Status

The following items are displayed on this screen:

- ▶ **Device Status:** Indicates whether to insert 3G module.
- ▶ **SIM Card Status:** Indicates whether to insert 3G modem in the SIM card, the ready state means the SIM card is detected.
- ▶ **Product Name:** 3G modem Product Type.
- ▶ **Manufacturer Name:** 3G modem vendor name.
- ▶ **SP Name:** 3G modem service provider name.
- ▶ **Signal Quality:** Signal quality of 3G Modem, up to 31.
- ▶ **Connection Status:** Connected or disconnected.

3.3.6 Port Management

3.3.6.1 Port Mirror

Port Mirror, the packets obtaining technology, functions to forward copies of packets from one/multiple ports (mirrored port) to a specific port (mirroring port). Usually, the mirroring port is connected to a data diagnose device, which is used to analyze the mirrored packets for monitoring and troubleshooting the network.

Choose the menu **Network**→**Port Management**→**Port Mirror** to load the following page.

Network ==> Port Management

Port Mirror

Media Type

Enable Port Mirror ☒

Destination Port: ☐ WAN ☒ LAN 1 ☐ LAN 2 ☐ LAN 3 ☐ LAN 4

Source Port: ☒ WAN ☐ LAN 2 ☐ LAN 3 ☐ LAN 4

Save


Figure 3-27 Port Mirror

The following items are displayed on this screen:

- ▶ **Enable Port Mirror:** Enable or disable port mirror.
- ▶ **Destination Port:** The duplicate of packets from **Source Port** will send to this destination port.
- ▶ **Source Port:** All packets received from **Source Port** will be duplicated and the duplicate will be send to **Destination Port**.

3.3.6.2 Media Type

Choose the menu **Network**→**Port Management**→**Media Type** to load the following page.

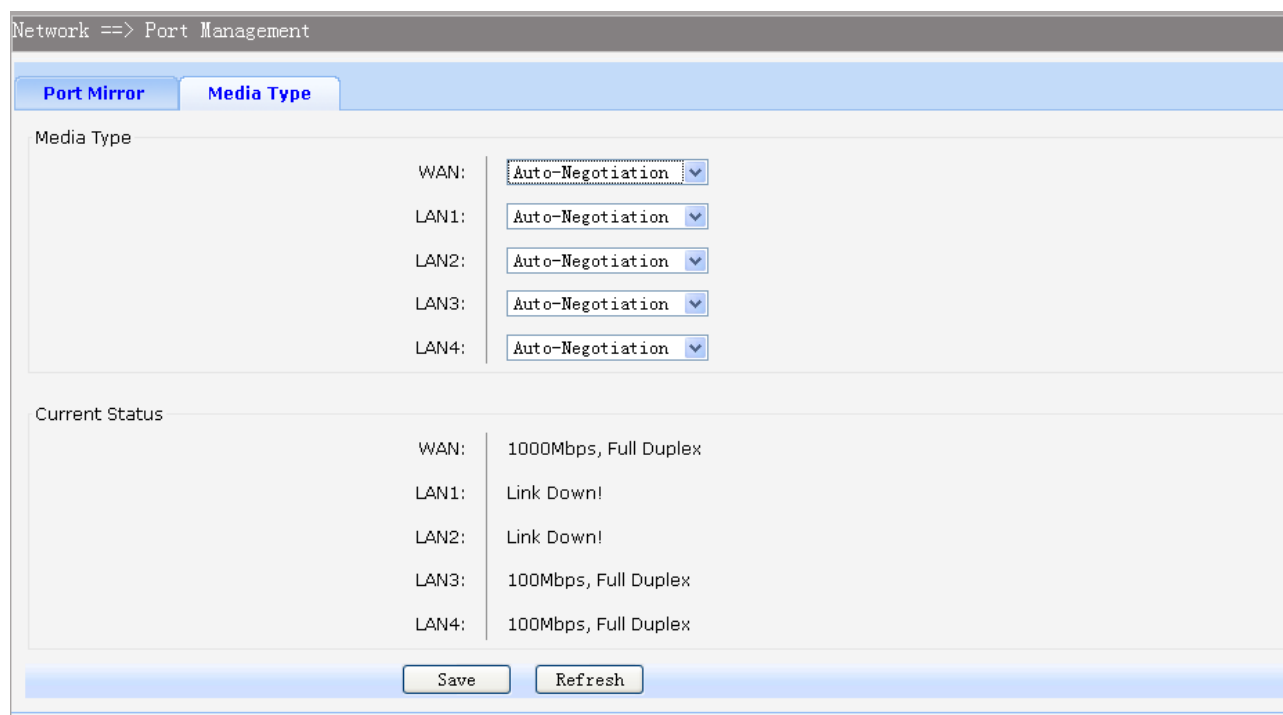

Media Type	
WAN:	Auto-Negotiation
LAN1:	Auto-Negotiation
LAN2:	Auto-Negotiation
LAN3:	Auto-Negotiation
LAN4:	Auto-Negotiation

Current Status	
WAN:	1000Mbps, Full Duplex
LAN1:	Link Down!
LAN2:	Link Down!
LAN3:	100Mbps, Full Duplex
LAN4:	100Mbps, Full Duplex

Figure 3-28 Media Type

The following items are displayed on this screen:

- ▶ **Media Type:** provides the following six modes to all physical ports: 10M Half Duplex, 10M Full Duplex, 100M Half Duplex, 100M Full Duplex, 1000M Full Duplex, Auto-Negotiation.
- ▶ **Current Status:** Current link status of all physical ports. Read only.

3.3.7 IPv6 Configuration

Choose the menu **Network**→**IPv6** to load the following page.

Network ==> IPv6

IP Stack Version | IPv4/v6

WAN Configuration

Enable WAN | ☒

Access Mode | IP

Link-Local Address | Auto

Global Unicast Address | Stateless

Default Gateway Address | Stateless

DNS | Stateless

Enable DHCP-PD | ☐

LAN Configuration

Enable LAN | ☒

Link-Local Address | Auto

Globe Unicast Address | Auto Enable DHCP-PD is Required

Address Auto Allocate Mode | SLAAC+RDNSS

Manual Allocate Address Prefix |

Prefix Life Time | 3600 * [0,65535], 0-no limited

Default Gateway Life Time | 3600 * [0,65535], 0-not as default route

Primary DNS |

Secondary DNS |

Save

Refresh

Figure 3-29 Configure IPv6

The following items are displayed on this screen:

- ▶ **IP Stack Version:** Choose the IP stack version to use. Provides the following three types: **IPv4,IPv6,IPv4/v6**.

WAN Configuration

- ▶ **Enable WAN:** If IPv6 or IPv4/v6 is chosen, select this to enable IPv6 stack on WAN.
- ▶ **Access Mode:** Select access mode of WAN: **IP** or **PPP**.
- ▶ **Link-Local Address:** Select type of Link-Local address: **Auto** or **Manual**. If Manual is selected, you should specify address manually.
- ▶ **Global Unicast Address:** **Stateless,Manual,DHCPv6**. If Manual is selected, you should specify address manually.
- ▶ **Default Gateway Address:** **Stateless,Manual**. If Manual is selected, you should specify address manually.
- ▶ **DNS:** **Stateless,Manual,DHCPv6**. If Manual is selected, you should specify DNS manually.
- ▶ **Enable DHCP-PD:** Whether to enable **DHCP-PD**(prefix delegation) on WAN.

LAN Configuration

- ▶ **Enable LAN:** If IPv6 or IPv4/v6 is choseN, select this to enable IPv6 stack on LAN.
- ▶ **Link-Local Address:** Select type of Link-Local address: **Auto** or **Manual**. If Manual is selected, you should specify address manually.
- ▶ **Global Unicast Address:** **Manual,Auto**. If Manual is selected, you should specify address manually.
- ▶ **Address Auto Allocate Mode:** **SLAAC+RDNSS**(Recursive DNS Server)

SLAAC(Stateless address autoconfiguration)+DHCPv6 DHCPv6

- ▶ **Manual Allocate Address Prefix:** Configure the manual allocate address prefix.
- ▶ **Prefix Life Time:** Enter the life time of prefix.
- ▶ **Default Gateway Life Time:** Enter the life time of default gateway.
- ▶ **Primary DNS:** Enter the primary DNS address.
- ▶ **Secondary DNS:** Enter the secondary DNS address.

3.4 Data Service

3.4.1 Status

The Status page shows the data services information, all information is read only.

3.4.1.1 Service State

The Service State page show all switch status of data services.

Choose the menu **Data Service**→**Status**→**Service State** to load the following page.


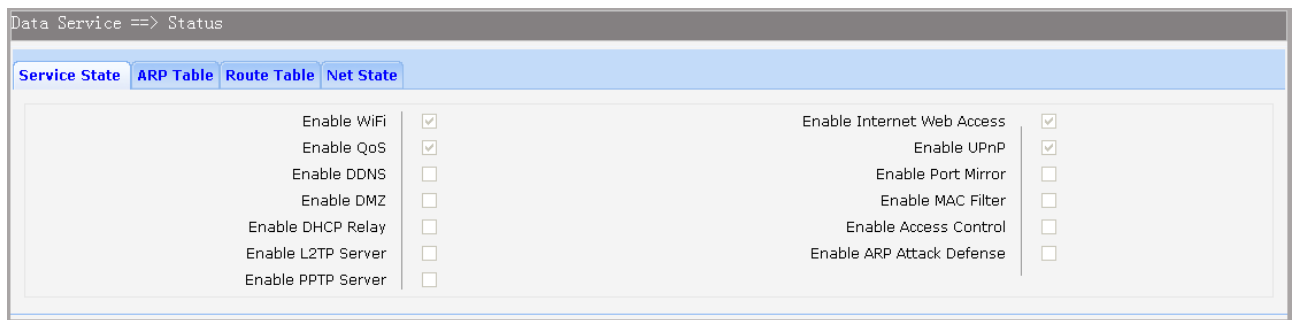


Figure 3-30 Service State

3.4.1.2 ARP Table

This page displays the ARP List;

Choose the menu **Data Service**→**Status**→**ARP Table** to load the following page.

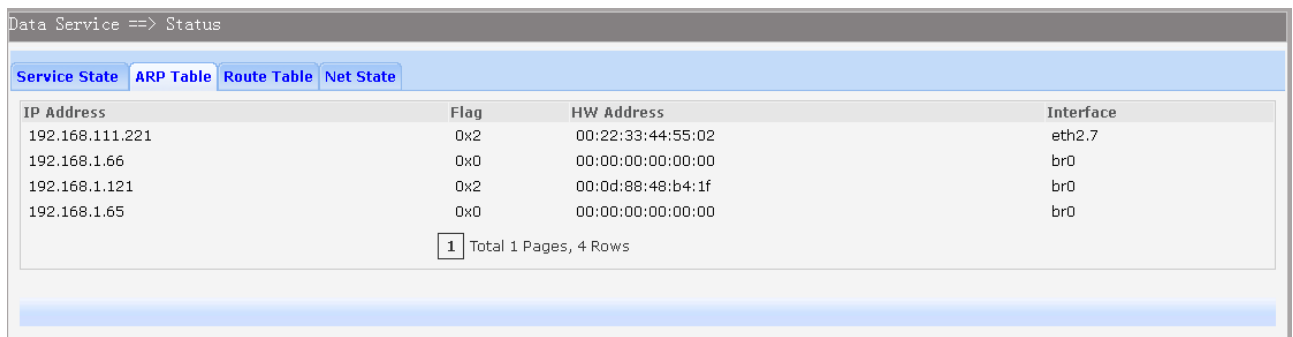

IP Address	Flag	HW Address	Interface
192.168.111.221	0x2	00:22:33:44:55:02	eth2.7
192.168.1.66	0x0	00:00:00:00:00:00	br0
192.168.1.121	0x2	00:0d:88:48:b4:1f	br0
192.168.1.65	0x0	00:00:00:00:00:00	br0

1 Total 1 Pages, 4 Rows

Figure 3-31 ARP Table

3.4.1.3 Route Table

Choose the menu **Data Service**→**Status**→**Route Table** to load the following page.

Data Service ==> Status

Service State	ARP Table	Route Table	Net State
Index	interface		
1	from all lookup local		
2	from all lookup 1		
3	from all fwmark 0x3e8 lookup 2		
4	from all fwmark 0x3e9 lookup 3		
5	from all fwmark 0x3ea lookup 4		
6	from all lookup main		
7	from all lookup default		

1 Total 1 Pages, 7 Rows

Figure 3-32 Route Table

3.4.1.4 Net State

Choose the menu **Data Service**→**Status**→**Net State** to load the following page.

Data Service ==> Status

Service State	ARP Table	Route Table	Net State
Protocol	Local Address	Foreign Address	State
TCP	0.0.0.0:1900	0.0.0.0:0	TCP_LISTEN
TCP	0.0.0.0:9100	0.0.0.0:0	TCP_LISTEN
TCP	0.0.0.0:80	0.0.0.0:0	TCP_LISTEN
TCP	0.0.0.0:22	0.0.0.0:0	TCP_LISTEN
TCP	0.0.0.0:23	0.0.0.0:0	TCP_LISTEN
TCP	0.0.0.0:24	0.0.0.0:0	TCP_LISTEN
TCP	192.168.1.1:80	192.168.1.1:2742	TCP_TIME_WAIT
TCP	192.168.1.1:80	192.168.1.1:2739	TCP_TIME_WAIT
TCP	192.168.1.1:80	192.168.1.1:2746	TCP_TIME_WAIT
TCP	192.168.1.1:80	192.168.1.1:2744	TCP_TIME_WAIT
TCP	192.168.1.1:80	192.168.1.1:2766	TCP_ESTABLISHED
TCP	192.168.1.1:80	192.168.1.1:2740	TCP_TIME_WAIT
TCP	192.168.1.1:80	192.168.1.1:2753	TCP_TIME_WAIT
TCP	192.168.1.1:80	192.168.1.1:2752	TCP_TIME_WAIT
TCP	192.168.1.1:80	192.168.1.1:2743	TCP_TIME_WAIT
TCP	192.168.1.1:80	192.168.1.1:2750	TCP_TIME_WAIT
TCP	192.168.1.1:80	192.168.1.1:2751	TCP_TIME_WAIT
TCP	192.168.1.1:80	192.168.1.1:2749	TCP_TIME_WAIT
TCP	192.168.1.1:80	192.168.1.1:2748	TCP_TIME_WAIT
TCP	192.168.1.1:80	192.168.1.1:2755	TCP_TIME_WAIT

1 2 Total 2 Pages, 40 Rows

Figure 3-33 Net State

3.4.2 DHCP Server

3.4.2.1 Static Address Assign

Choose the menu **Data Service**→**DHCP Server**→**Static Address Assign**, and then you can view and add address which is assigned for clients. When you specify a static IP address for a client on the LAN, that client will always receive the same IP address each time when it accesses the DHCP server. The Reserved IP addresses should be assigned to the devices that require permanent IP settings.

Data Service ==> DHCP Server

Static Address Assign Status DHCP Relay

☐	Index	IP	Netmask	MAC	Description
☐	1	192.168.0.30	255.255.0.0	01:02:03:04:05:06	Client1

1 Total 1 Pages, 1 Rows

Add Del

Figure 3-34 View Static Address Assign Configuration

Click the **Index** in the entry you want to modify. If you want to delete the entry, select it and click the **Del**. Click the **Add** button to add a new entry.

Data Service ==> DHCP

Client IP Address 192.168.0.30 * For example: 192.168.0.30

Client Mask 255.255.0.0 * For example: 255.255.0.0

Client MAC 01:02:03:04:05:06 * For example: 01:02:03:04:05:06

Description Client1

save Return

Figure 3-35 Add or Modify An Static Address Assign Entry

The following items are displayed on this screen:

- ▶ **Client IP Address:** The IP address reserved.
- ▶ **Client Mask:** The subnet mask of IP address reserved.
- ▶ **Client MAC:** The MAC address you want to reserve IP address.
- ▶ **Description:** The description of the entry to add or modify.

3.4.2.2 Status

Choose the menu **Data Service**→**DHCP Server**→**Status**, and then you can view the information about the clients attached to the DHCP server.

Data Service ==> DHCP Server

Static Address Assign Status DHCP Relay

Index	IP	MAC	Host Name
1	192.168.111.220	00:66:4b:2e:00:52	android-317afa1415717027

1 Total 1 Pages, 1 Rows

Figure 3-36 DHCP Client Status

3.4.2.3 DHCP Relay

A DHCP relay agent is any host that forwards DHCP packets between clients and servers. Relay agents are used to forward requests and replies between clients and servers when they are not on the same physical subnet. Relay agent forwarding is distinct from the normal forwarding of an IP router, where IP datagrams are switched between networks somewhat transparently. By contrast, relay agents receive DHCP messages and then generate a new DHCP message to send on another interface. It listens for client requests and adds vital configuration data, such as the client's link information, which is needed by the server to allocate the address for the client. When the DHCP server responds, the DHCP relay agent forwards the reply back to the DHCP client.

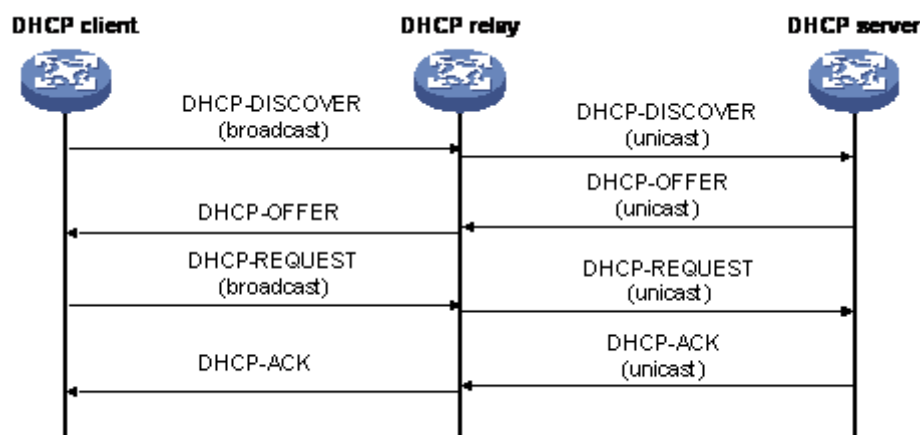


Figure 3-37 DHCP Relay Overview

Choose the menu **Data Service**→**DHCP Server**→**DHCP Relay** to load the following page.

Data Service ==> DHCP Server	
Static Address Assign Status DHCP Relay	
Enable DHCP Relay	☒
Client Interface 1	VLAN1
Client Interface 2	none
Client Interface 3	none
Client Interface 4	none
Server Interface	DATA
Server IP	138.0.60.2
Save Refresh	

Figure 3-38 Configure DHCP Relay

The following items are displayed on this screen:


- ▶ **Enable DHCP Relay:** Enable or disable DHCP Relay.
- ▶ **Client Interface:** The interface to listen for DHCP client requests. Up to four interfaces can be selected.
- ▶ **Server Interface:** Choose the interface which connects DHCP server.
- ▶ **Server IP:** Configure the DHCP server IP address.

3.4.3 NAT Config

Network Address Translation (NAT) is a network protocol used in IPv4 networks that allows multiple devices to connect a network protocol using the same public IPv4 address. NAT was originally designed in an attempt to help conserve IPv4 addresses. NAT modifies the IP address information in IPv4 headers while in transit across a traffic routing device.

3.4.3.1 Basic Settings

Choose the menu **Data Service**→**NAT Config**→**Basic Settings** to load the following page.

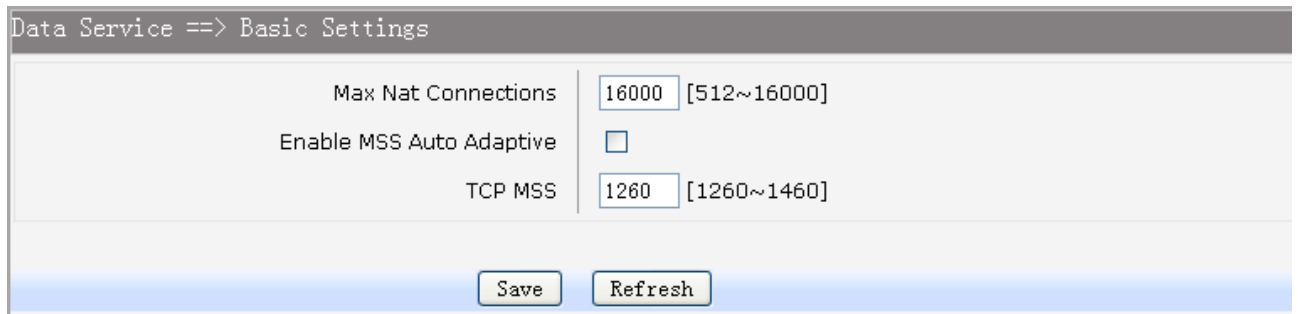

Data Service ==> Basic Settings

Max Nat Connections: 16000 [512~16000]

Enable MSS Auto Adaptive: ☐

TCP MSS: 1260 [1260~1460]

Save Refresh

Figure 3-39 Basic Settings


The following items are displayed on this screen:

- ▶ **Max Nat Connections:** Specify the maximum number of NAT connections.
- ▶ **Enable MSS Auto Adaptive:** Enable or disable auto adaptive the value of MSS(Maximum Segment Size).
- ▶ **TCP MSS:** If **Enable MSS Auto Adaptive** is not selected, configure this to specify the maximum segment size of the TCP protocol.

3.4.3.2 PAT Settings

Several internal addresses can be NATed to only one or a few external addresses by using a feature called overload, which is also referred to as PAT. PAT is a subset of NAT functionality, where it maps several internal addresses to a single external address. PAT statically uses unique port numbers on a single outside IP address to distinguish between the various translations.

Choose the menu **Data Service**→**NAT Config**→**PAT Settings** to load the following page.

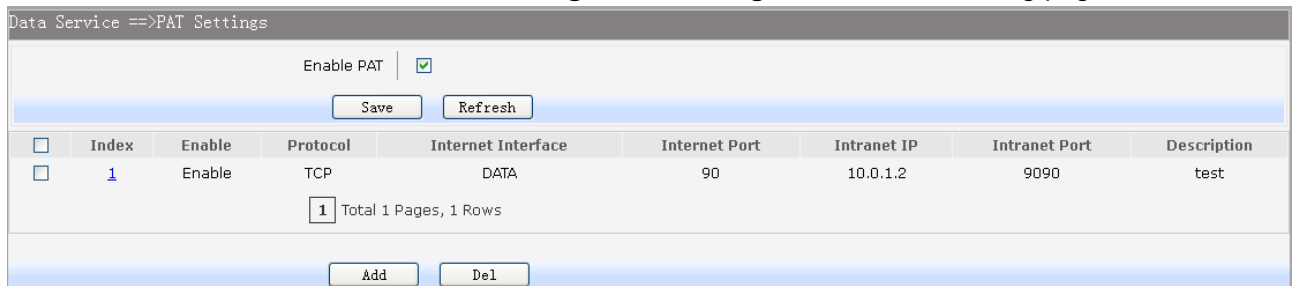

Data Service ==> PAT Settings

Enable PAT: ☒

Save Refresh

☐	Index	Enable	Protocol	Internet Interface	Internet Port	Intranet IP	Intranet Port	Description
☐	1	Enable	TCP	DATA	90	10.0.1.2	9090	test

1 Total 1 Pages, 1 Rows


Add Del

Figure 3-40 View PAT Settings

The following items are displayed on this screen:

- ▶ **Enable PAT:** Enable or disable PAT globally.

Click the **Index** in the entry you want to modify. If you want to delete the entry, select it and click the **Del**. Click the **Add** button to add a new entry.

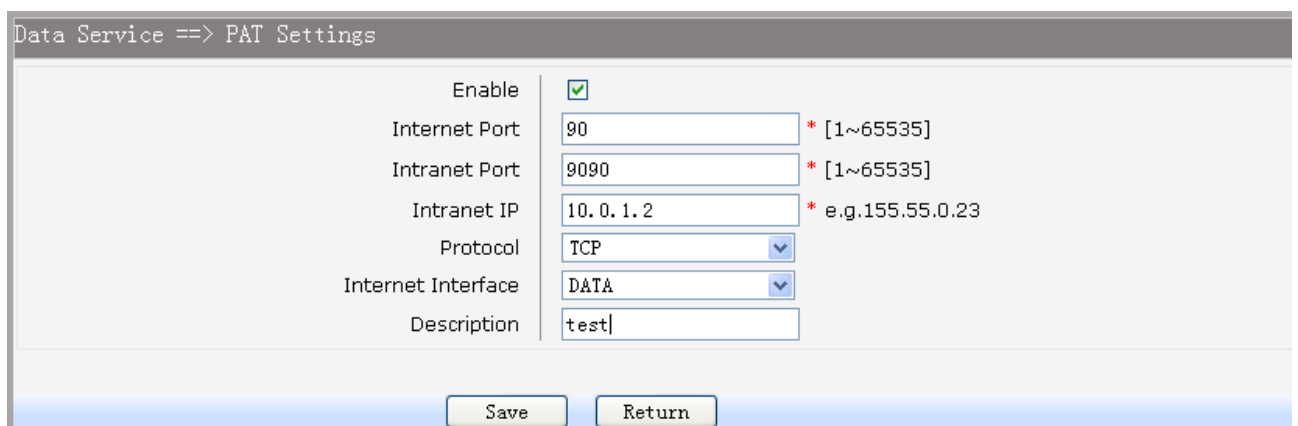

Data Service ==> PAT Settings

Enable: ☒

Internet Port: 90 * [1~65535]

Intranet Port: 9090 * [1~65535]

Intranet IP: 10.0.1.2 * e.g.155.55.0.23

Protocol: TCP

Internet Interface: DATA

Description: test

Save Return

Figure 3-41 Add or Modify PAT Entry

The following items are displayed on this screen:

- ▶ **Enable:** Enable or disable this PAT entry.
- ▶ **Internet Port:** Enter the service port provided for accessing external network. All the requests from internet to this service port will be redirected to the specified server in local network.
- ▶ **Intranet Port:** Specify the service port of the LAN host as virtual server.
- ▶ **Intranet IP:** Enter the IP address of the specified internal server for the entry. All the requests from the internet to the specified LAN port will be redirected to this host.
- ▶ **Protocol:** Specify the protocol used for the entry.
- ▶ **Internet Interface:** Specify the interface to receive requests from the internet for the entry.
- ▶ **Description:** Enter a name for Virtual Server entry.

3.4.3.3 DMZ Settings

In computer security, a DMZ or Demilitarized Zone (sometimes referred to as a perimeter network) is a physical or logical network that contains and exposes an organization's external-facing services to a larger and insecure network, usually the Internet. The purpose of a DMZ is to add an additional layer of security to an organization's local area network (LAN); an external attacker only has direct access to equipment in the DMZ, rather than any other part of the network.

Choose the menu **Data Service**→**NAT Config**→**DMZ Settings** to load the following page.

The screenshot shows the 'Data Service ==> DMZ Settings' page. At the top, there is an 'Enable DMZ' checkbox which is currently unchecked. Below this are 'Save' and 'Refresh' buttons. A table displays the following data:

☐	Index	Public IP	Private IP	Description
☐	1	10.0.11.11	192.168.1.2	test

Below the table, it says '1 Total 1 Pages, 1 Rows'. At the bottom are 'Add' and 'Del' buttons.

Figure 3-42 View DMZ Settings

The following items are displayed on this screen:

- ▶ **Enable DMZ:** Enable or disable DMZ globally.

Click the **Index** in the entry you want to modify. If you want to delete the entry, select it and click the **Del.** Click the **Add** button to add a new entry.

The screenshot shows the 'Data Service ==> DMZ Settings' page with input fields for editing an entry. The fields are:

- DMZ Public IP: 10.0.11.11 *
- DMZ Private IP: 192.168.1.2 *
- Description: test

At the bottom are 'Save' and 'Return' buttons.

Figure 3-43 Add or Modify DMZ Entry

The following items are displayed on this screen:


- ▶ **DMZ Public IP:** The public IP address for this DMZ entry.

- ▶ **DMZ Private IP:** The private IP address for this DMZ entry.
- ▶ **Description:** Enter a description string for this DMZ entry

3.4.3.4 ALG Settings

Application Layer Gateway (ALG) allows customized Network Address Translation (NAT) traversal filters to be plugged into the gateway to support address and port translation for certain application layer "control/data" protocols such as FTP, H.323, PPTP, etc.

Choose the menu **Data Service**→**NAT Config**→**ALG Settings** to load the following page.

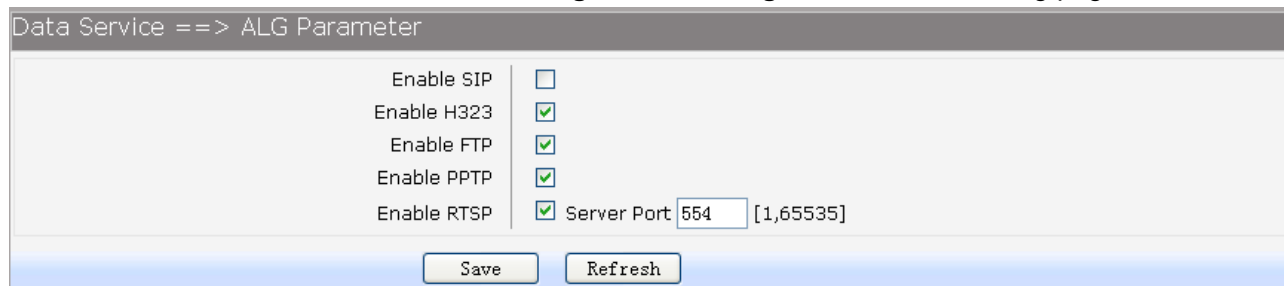

Data Service ==> ALG Parameter	
Enable SIP	☐
Enable H323	☒
Enable FTP	☒
Enable PPTP	☒
Enable RTSP	☒ Server Port 554 [1,65535]
Save Refresh	

Figure 3-44 ALG Settings

The following items are displayed on this screen:

- ▶ **Enable SIP:** Enable or disable SIP ALG.
- ▶ **Enable H323:** Allow Microsoft NetMeeting clients to communicate across NAT if selected.
- ▶ **Enable FTP:** Allow FTP clients and servers to transfer data across NAT if selected.
- ▶ **Enable PPTP:** Enable or disable PPTP ALG.
- ▶ **Enable RTSP:** Enable or disable RTSP ALG.

3.4.4 Firewall Config

3.4.4.1 Attack Defense

With Attack Defense function enabled, the device can distinguish the malicious packets and prevent the port scanning from external network, so as to guarantee the network security. Configure this for abnormal packets defense and flood attack defense. Flood attack is a commonly used DoS (Denial of Service) attack, including TCP SYN, UDP, ICMP, and so on.

Choose the menu **Data Service**→**Firewall Config**→**Attack Defense** to load the following page.

Data Service ==> Attack Defense

Enable Broadcast Storm Defense	☐	
Enable Block Ping	☐	
Enable TCP SYN Flood Defense	☒	20 [1~1000](packets/second)
Enable UDP Flood Defense	☐	50 [1~1000](packets/second)
Enable ICMP Defense	☒	10 [1~1000](packets/second)
Enable ARP Attack Defense	☐	
Enable Port Scan Defense	☐	
Enable Land Based Defense	☐	
Enable Ping Of Death Defense	☐	
Enable Teardrop Defense	☐	
Enable Fraggle Defense	☐	
Enable Smurf Defense	☐	

Save Refresh

Figure 3-45 Attack Defense

The following items are displayed on this screen:

- ▶ **Enable Broadcast Storm Defense:** Enable or disable **Broadcast Storm Defense**.
- ▶ **Enable Block Ping:** Enable or disable **Block Ping** function.
- ▶ **Enable TCP SYN Flood Defense:** Enable or disable **TCP SYN Flood Defense**.
- ▶ **Enable UDP Flood Defense:** Enable or disable **UDP Flood Defense**.
- ▶ **Enable ICMP Defense:** Enable or disable **ICMP Defense**.
- ▶ **Enable ARP Attack Defense:** Enable or disable **ARP Attack Defense**.
- ▶ **Enable Port Scan Defense:** A port scanner is a software application designed to probe a server or host for open ports. Check the box to prevent port scanning.
- ▶ **Enable Land Based Defense:** The Land Denial of Service attack works by sending a spoofed packet with the SYN flag - used in a "handshake" between a client and a host - set from a host to any port that is open and listening. If the packet is programmed to have the same destination and source IP address, when it is sent to a machine, via IP spoofing, the transmission can fool the machine into thinking it is sending itself a message, which, depending on the operating system, will crash the machine. Check the box to enable **Land Based Defense**.
- ▶ **Enable Ping Of Death Defense:** Ping of death is a denial of service (DoS) attack caused by an attacker deliberately sending an IP packet larger than the 65,536 bytes allowed by the IP protocol. Check the box to enable **Ping of Death Defense**.
- ▶ **Enable Teardrop Defense:** Teardrop is a program that sends IP fragments to a machine connected to the Internet or a network. Check the box to enable **Teardrop Defense**.
- ▶ **Enable Fraggle Defense:** A fraggle attack is a variation of a Smurf attack where an attacker sends a large amount of UDP traffic to ports 7 (echo) and 19 (chargen) to an IP Broadcast Address, with the

intended victim's spoofed source IP address. Check the box to enable **Fraggle Defense**.

► **Enable Smurf Defense:**

The Smurf Attack is a denial-of-service attack in which large numbers of Internet Control Message Protocol (ICMP) packets with the intended victim's spoofed source IP are broadcast to a computer network using an IP Broadcast address. Check the box to enable **Smurf Defense**.

3.4.4.2 Service Type

Service Type defines the entry with protocol and port range, which can be chosen in Internet Access-Ctrl page. Choose the menu **Data Service→Firewall Config→Service Type** to load the following page.

☐	Index	Name	Protocol	Port Range	Description
☐	1	type1	TCP	1000-2000	test

1 Total 1 Pages, 1 Rows

Add Del

Figure 3-46 View Service Type Configuration

Click the **Index** in the entry you want to modify. If you want to delete the entry, select it and click the **Del**. Click the **Add** button to add a new entry.

Data Service ==> Firewall

Name: type1 *

Protocol: TCP

Port Range: 1000 -- 2000 * [1~65535]

Description: test

Save Return

Figure 3-47 Add or Modify Service Type Entry

The following items are displayed on this screen:

- **Name:** Name of this entry, it will be list in Internet Access-Ctrl page.
- **Protocol:** Select the protocol for this entry. Four types are provided: TCP, UDP, ICMP and ALL.
- **Port Range:** Configure the port range for this entry.
- **Description:** Enter a description string for this entry

3.4.4.3 Internet Access-Ctrl

Each sub-page under this page is used to control Internet access.

3.4.4.3.1 Access Control

This sub-page is used to control Internet access through IP, port, and time.

Choose the menu **Data Service→Firewall Config→Internet Access-Ctrl→Access Control** to load the following page.

DataService ==> Internet Access-Ctrl

Access Control | User Authentication | Page Push

Enable Access Control ☒

Policy **Allow**

Save **Refresh**

☐	Index	Enable	Src IP Range	Dst IP Range	Service Name	Active Time	Description
☐	1	Enable	10.0.1.1--...	192.168.100.1--...	type1	00:00--23:59 (...)	rule1

1 Total 1 Pages, 1 Rows

Add **Del**

Figure 3-48 View Access Control Entry

The following items are displayed on this screen:

- ▶ **Enable Access Control:** Enable or disable access control from WAN.
- ▶ **Policy:** Default policy of access control: **Allow** or **Deny**. If Allow is selected, all packets will be allowed except the entries list on this page. If Deny is selected, all packets will be denied except the entries list on this page.

Click the **Index** in the entry you want to modify. If you want to delete the entry, select it and click the **Del**. Click the **Add** button to add a new entry.

DataService ==> Access Control

Action **Deny**

Enable Rule ☒

Description **rule1**

Source IP Range **10.0.1.1** to **10.0.1.200**

Destination IP Range **192.168.100.1** to **192.168.100.200**

Service Name **type1**

Active Time **00:00** -- **23:59** (hh:mm)

Active Day ☒ All ☒ Monday ☒ Tuesday ☒ Wednesday
☒ Thursday ☒ Friday ☒ Saturday ☒ Sunday

Save **Return**

Figure 3-49 Add or Modify Access Control Entry

The following items are displayed on this screen:

- ▶ **Action:** The policy of this entry, Allow or Deny. It is the inverse of **Policy**. Read only.
- ▶ **Enable Rule:** Enable or disable this rule.
- ▶ **Description:** Enter a description string for this rule
- ▶ **Source IP Range:** Enter the source IP range in dotted-decimal format (e.g. 192.168.1.23).
- ▶ **Destination IP Range:** Enter the destination IP range in dotted-decimal format (e.g. 192.168.1.23).
- ▶ **Service Name:** Choose a service type that defined in **Service Type** page.
- ▶ **Active Time:** Specify the time range for the entry to take effect.
- ▶ **Active Day:** Specify the day range for the entry to take effect.

3.4.4.3.2 User Authentication

This sub-page is used to control Internet access through username and password.

Choose the menu **Data Service**→**Firewall Config**→**Internet Access-Ctrl**→**User Authentication** to load the following page.

Index	Username	Password
1	gaoke	gktel

Figure 3-50 View User Authentication Entry

The following items are displayed on this screen:

- **Enable User Authentication:** Enable or disable user authentication globally. If enabled, only the following list of users and passwords can access the Internet. Press **Save** button if you have modified this parameter.

Click the **Index** in the entry you want to modify. If you want to delete the entry, select it and click the **Del**. Click the **Add** button to add a new entry.

Figure 3-51 Add or Modify User Authentication Entry

The following items are displayed on this screen:

- **Username:** Enter the username of this entry.
- **Password:** Enter the password of this entry.
- **Auth Mode:** Choose the authentication mode of this entry. Provides four modes:
 - Allow Multi-PC Access:** Allows multiple computers to access the Internet using this account.
 - Allow One PC Access:** Only allows one computer to access the Internet using this account.
 - Allow Special IP Access:** Allowing only specified IP computer uses this account to access the Internet.
 - Allow Special MAC Access:** Allowing only specified MAC computer uses this account to access the Internet

3.4.4.3.3 Page Push

HTTP Page push is a mechanism for sending unsolicited (asynchronous) data from web server to a web browser. When accessing the Internet for the first time, the specified HTTP page will be pushed to the browser when enabled.

Choose the menu **Data Service→Firewall Config→Internet Access-Ctrl→Page Push** to load the following page.

Figure 3-52 Configure Page Push

The following items are displayed on this screen:

- **Enable Page Push:** If enabled, push specified HTTP page to the browser when accessing the Internet for the first time.
- **Push Http Url:** Specifies the HTTP URL of the page you want to push.

3.4.4.4 Network Access-Ctrl

3.4.4.4.1 WEB

Choose the menu **Data Service→Firewall Config→Network Access-Ctrl→WEB** to load the following page.

Figure 3-53 Configure WEB Access-Ctrl

The following items are displayed on this screen:

- **HTTP Port:** Port used with HTTP access device.
- HTTP:** Hypertext Transfer Protocol.

- ▶ **HTTPS Port:** Port used with HTTPS access device.
HTTPS: it is the result of simply layering the Hypertext Transfer Protocol (HTTP) on top of the SSL/TLS protocol.

Internet Web Access:


- ▶ **Allow Access:** If enabled, allow user to access the device from the Internet via WEB.
- ▶ **IP Limit:** If enabled, allow only specific IP range to access the device from the Internet via WEB.
- ▶ **IP Range:** If **IP Limit** enabled, specifies the IPv4 address range that is only allowed to access to the device from the Internet via WEB.
- ▶ **IPv6 Range:** If **IP Limit** enabled, specifies the IPv6 address range that is only allowed to access to the device from the Internet via WEB.

Intranet Web Access:

- ▶ **Allow Access:** If enabled, allow user to access the device from the Intranet via WEB.
- ▶ **IP Limit:** If enabled, allow only specific IP range to access the device from the Intranet via WEB.
- ▶ **IP Range:** If **IP Limit** enabled, specifies the IPv4 address range that is only allowed to access the device from the Intranet via WEB.
- ▶ **IPv6 Range:** If **IP Limit** enabled, specifies the IPv6 address range that is only allowed to access the device from the Intranet via WEB.

3.4.4.4.2 TELNET

Choose the menu **Data Service**→**Firewall Config**→**Network Access-Ctrl**→**TELNET** to load the following page.

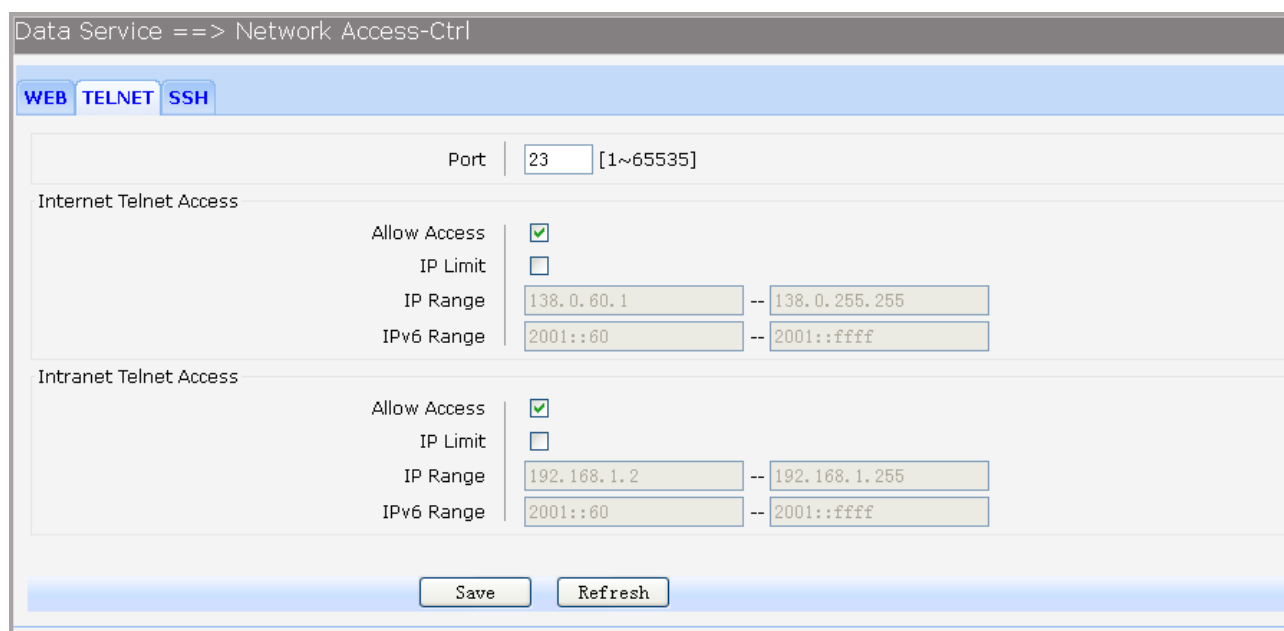

The screenshot shows the 'Data Service ==> Network Access-Ctrl' configuration page for TELNET. It has tabs for WEB, TELNET, and SSH. The TELNET tab is selected. The 'Port' is set to 23. Below, there are two sections: 'Internet Telnet Access' and 'Intranet Telnet Access'. Each section has 'Allow Access' (checked), 'IP Limit' (unchecked), 'IP Range' (138.0.60.1 to 138.0.255.255 for Internet, 192.168.1.2 to 192.168.1.255 for Intranet), and 'IPv6 Range' (2001::60 to 2001::ffff). At the bottom are 'Save' and 'Refresh' buttons.

Figure 3-54 Configure Telnet Access-Ctrl

The following items are displayed on this screen:

- ▶ **Port:** Port when using telnet tools access device.

Internet Web Access:

- ▶ **Allow Access:** If enabled, allow access to the device from the Internet via telnet.
- ▶ **IP Limit:** If enabled, allow only specific IP range to access the device from the Internet via telnet
- ▶ **IP Range:** If **IP Limit** enabled, specifies the IPv4 address range that only allow access to the

device from the Internet via telnet.

- ▶ **IPv6 Range:** If **IP Limit** enabled, specifies the IPv6 address range that only allow access to the device from the Internet via telnet.

Intranet Web Access:

- ▶ **Allow Access:** If enabled, allow access to the device from the Intranet via telnet.
- ▶ **IP Limit:** If enabled, allow only specific IP range to access the device from the Intranet via telnet
- ▶ **IP Range:** If **IP Limit** enabled, specifies the IPv4 address range that only allow access to the device from the Intranet via telnet.
- ▶ **IPv6 Range:** If **IP Limit** enabled, specifies the IPv6 address range that only allow access to the device from the Intranet via telnet.

3.4.4.4.3 SSH

Choose the menu **Data Service**→**Firewall Config**→**Network Access-Ctrl**→**SSH** to load the following page.

Data Service ==> Network Access-Ctrl

WEB TELNET **SSH**

Port: 22 [1~65535]

Internet SSH Access

Allow Access: ☐

IP Limit: ☐

IP Range: 138.0.60.1 -- 138.0.255.255

IPv6 Range: 2001::60 -- 2001::ffff

Intranet SSH Access

Allow Access: ☒

IP Limit: ☐

IP Range: 192.168.1.255 -- 192.168.1.255

IPv6 Range: 2001::60 -- 2001::ffff

Save Refresh

Figure 3-55 Configure SSH Access-Ctrl

The following items are displayed on this screen:

- ▶ **Port:** Port when using SSH tools access device.

Internet Web Access:

- ▶ **Allow Access:** If enabled, allow access to the device from the Internet via SSH.
- ▶ **IP Limit:** If enabled, allow only specific IP range to access the device from the Internet via SSH
- ▶ **IP Range:** If **IP Limit** enabled, specifies the IPv4 address range that only allow access to the device from the Internet via SSH.
- ▶ **IPv6 Range:** If **IP Limit** enabled, specifies the IPv6 address range that only allow access to the device from the Internet via SSH.

Intranet Web Access:

- ▶ **Allow Access:** If enabled, allow access to the device from the Intranet via SSH.
- ▶ **IP Limit:** If enabled, allow only specific IP range to access the device from the Intranet via SSH

- **IP Range:** If **IP Limit** enabled, specifies the IPv4 address range that only allow access to the device from the Intranet via SSH.
- **IPv6 Range:** If **IP Limit** enabled, specifies the IPv6 address range that only allow access to the device from the Intranet via SSH.

3.4.4.5 Filter Strategy

Each sub-page under this page is used to filter Internet access.

3.4.4.5.1 Keyword Filter

Choose the menu **Data Service**→**Firewall Config**→**Filter Strategy**→**Keyword Filter** to load the following page.

Click the **Index** in the entry you want to modify. If you want to delete the entry, select it and click the **Del.** Click the **Add** button to add a new entry.

Figure 3-56 Configure Keyword Filter

The following items are displayed on this screen:


- **Keyword Filter:** If enabled, packet filtering is enabled by keyword.
 - **Policy:** The policy for filtering web page, Deny and Allow.
- You can export all the keywords as a file. Of course, you can also import a file.

3.4.4.5.2 IP Filter

On this page, you can control the Internet access of local hosts by specifying their IP addresses.

Choose the menu **Data Service**→**Firewall Config**→**Filter Strategy**→**IP Filter** to load the following page.

Click the **Index** in the entry you want to modify. If you want to delete the entry, select it and click the **Del.** Click the **Add** button to add a new entry.

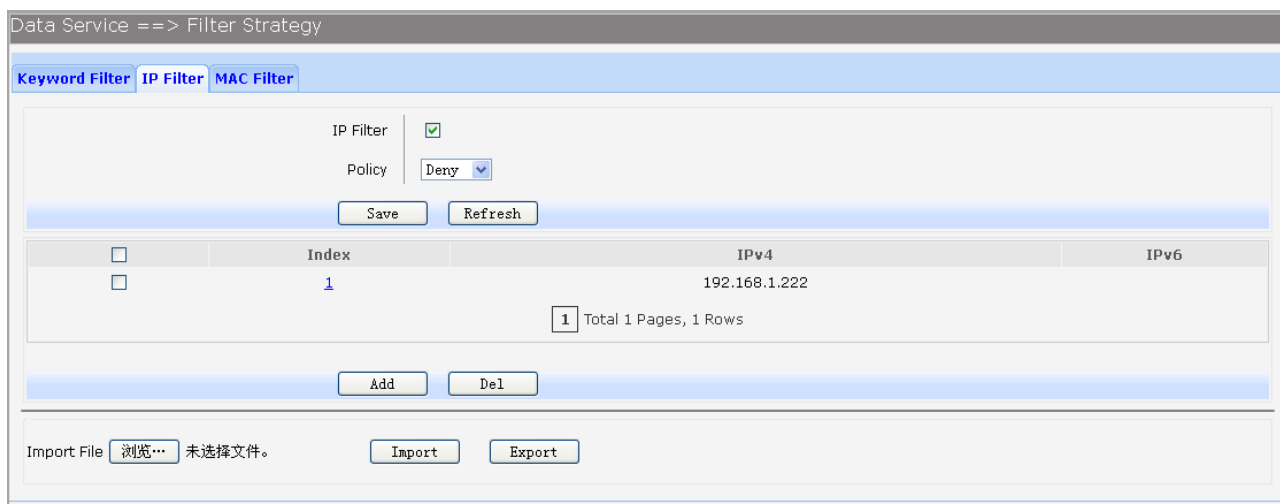

Data Service ==> Filter Strategy

Keyword Filter IP Filter **MAC Filter**

IP Filter ☒

Policy Deny

Save Refresh

	Index	IPv4	IPv6
☐	1	192.168.1.222	

1 Total 1 Pages, 1 Rows

Add Del

Import File 浏览... 未选择文件。 Import Export

Figure 3-57 Configure IP Filter

The following items are displayed on this screen:


- **IP Filter:** If enabled, packet filtering is enabled by IP address.
- **Policy:** The policy for IP address list. Deny and Allow.

You can export all the IP addresses as a file. Of course, you can also import a file.

3.4.4.5.3 MAC Filter

On this page, you can control the Internet access of local hosts by specifying their MAC addresses.

Choose the menu **Data Service**→**Firewall Config**→**Filter Strategy**→**MAC Filter** to load the following page.

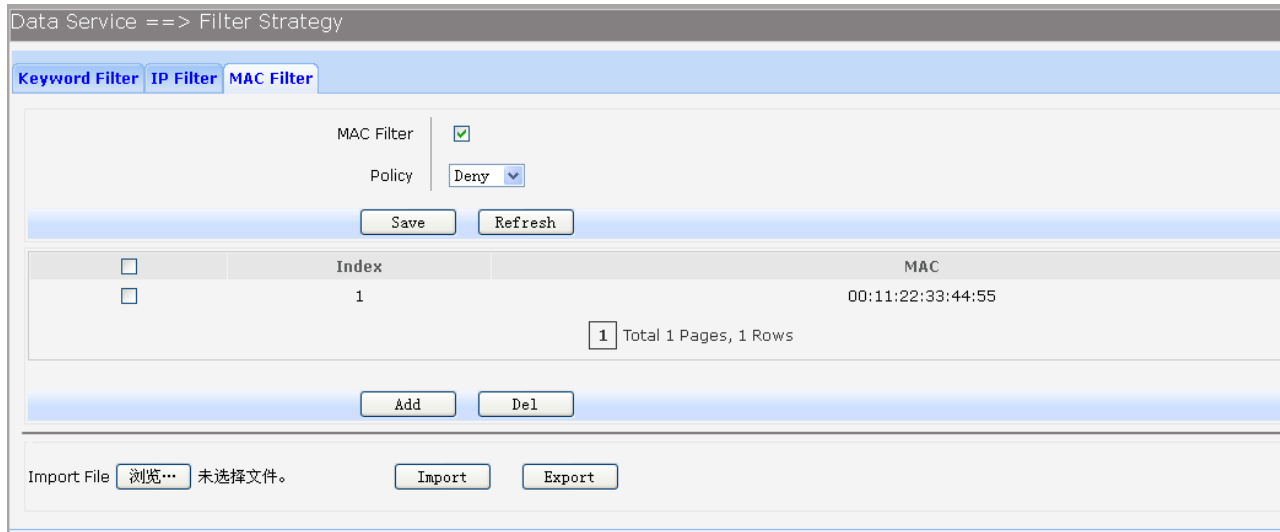

Data Service ==> Filter Strategy

Keyword Filter IP Filter **MAC Filter**

MAC Filter ☒

Policy Deny

Save Refresh

	Index	MAC
☐	1	00:11:22:33:44:55

1 Total 1 Pages, 1 Rows

Add Del

Import File 浏览... 未选择文件。 Import Export

Figure 3-58 Configure MAC Filter

The following items are displayed on this screen:

- **IP Filter:** If enabled, packet filtering is enabled by MAC.
- **Policy:** The policy for MAC list. Deny and Allow.

You can export all the MAC addresses as a file. Of course, you can also import a file.

If you want to delete an entry, select it and click the **Del**. Click the **Add** button to add a new entry.

There are two ways to add MAC:

Artificial designated MAC: You can manually enter a MAC.

Using Studying MAC: You can choose one or more MAC devices learned.

DataService ==> Filter Strategy ==> MAC Filter

☒ Artificial designated MAC
MAC: *

☐ Using Studing MAC

Studed MAC

Selected List

Figure 3-59 Add a MAC Filter Entry

3.4.4.6 IP&MAC Binding

Choose the menu **Data Service**→**Firewall Config**→**IP&MAC Binding** to load the following page.
There are two ways to add a binding entry: You can manually enter a pair of IP and MAC, and then press **Add Item**. Alternatively you can select a pair of IP and MAC in **Scan List** that device learned.

Data Service ==> IP&MAC Binding

IP MAC

Scan List

192.168.1.121 00:0d:88:48:b4:1f
192.168.1.65 00:00:00:00:00:00
192.168.111.221 00:22:33:44:55:02
192.168.1.66 00:00:00:00:00:00

Binding List


Figure 3-60 Configure IP&MAC Binding

3.4.5 QoS

3.4.5.1 Basic Settings

QOS feature is enabled by default, based on 802.1P, strict priority scheduling mode. The device supports four priority queues, when QoS feature enabled.

Choose the menu **Data Service**→**QoS**→**Basic Settings** to load the following page.

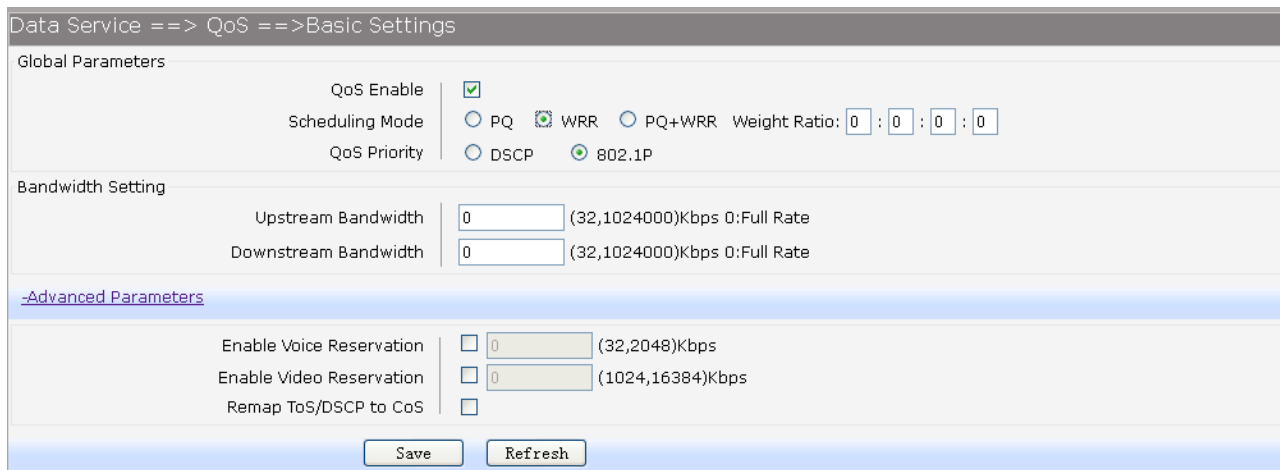

Data Service ==> QoS ==> Basic Settings

Global Parameters

QoS Enable ☒

Scheduling Mode ☐ PQ ☒ WRR ☐ PQ+WRR Weight Ratio: : : :

QoS Priority ☐ DSCP ☒ 802.1P

Bandwidth Setting

Upstream Bandwidth (32,1024000)Kbps 0:Full Rate

Downstream Bandwidth (32,1024000)Kbps 0:Full Rate

[Advanced Parameters](#)

Enable Voice Reservation ☐ (32,2048)Kbps

Enable Video Reservation ☐ (1024,16384)Kbps

Remap ToS/DSCP to CoS ☐

Figure 3-61 Configure QoS Basic Settings

The following items are displayed on this screen:

Global Parameters

- ▶ **QoS Enable:** Enable or disable QoS functionality.
- ▶ **Scheduling Mode:**
 - PQ:** PQ means strict priority, that is, when congestion occurs, first sending packets of high priority queue.
 - WRR:** All queues use weighted fair queuing scheme which is defined in **Weight Ratio**
 - PQ+WRR:** Only highest queue use strict priority; others use weighted fair queuing scheme.
- ▶ **QoS Priority:**
 - DSCP:** When you select DSCP value, corresponding to the following relationship.

DSCP priority value	Priority queue (queue 3 highest priority)
0-15	Queue 0
16 ~ 31	Queue 1
32 to 47	Queue 2
48 ~ 63	Queue 3

802.1P: Select the queue classification mode, when selecting 802.1P mode, depending on the value of 802.1p priority classification into different queues, corresponding to the following relationship.

801.1p priority value	Priority queue (queue 3 highest priority)
0 to 1	Queue 0
2.3	Queue 1
4.5	Queue 2
6-7	Queue 3

Bandwidth Setting

- ▶ **Upstream Bandwidth:** Configure the bandwidth of upstream.
- ▶ **Downstream Bandwidth:** Configure the bandwidth of downstream.

Advanced Parameters


- ▶ **Enable Voice Reservation:** Enable voice reservation and give the value to reserved for voice
- ▶ **Enable Video Reservation:** Enable video reservation and give the value to reserved for video
- ▶ **Remap Tos/DSCP to CoS:** Check the box that the system will remark 802.1P value with TOS/DSCP of upstream packets, the mapping relationship is as follows:

DSCP priority value	802.1p priority
0-7	0
8-15	1
16 ~ 23	2
24 ~ 31	3
32 to 39	4
40 ~ 47	5
48 ~ 55	6
56 to 63	7

3.4.5.2 Port Rate Limit

Rate limit for physical LAN ports, you can select the package type restrictions limiting the entrance. All multiples of 32kbps speed requirements

Choose the menu **Data Service**→**QoS**→**Port Rate Limit** to load the following page.

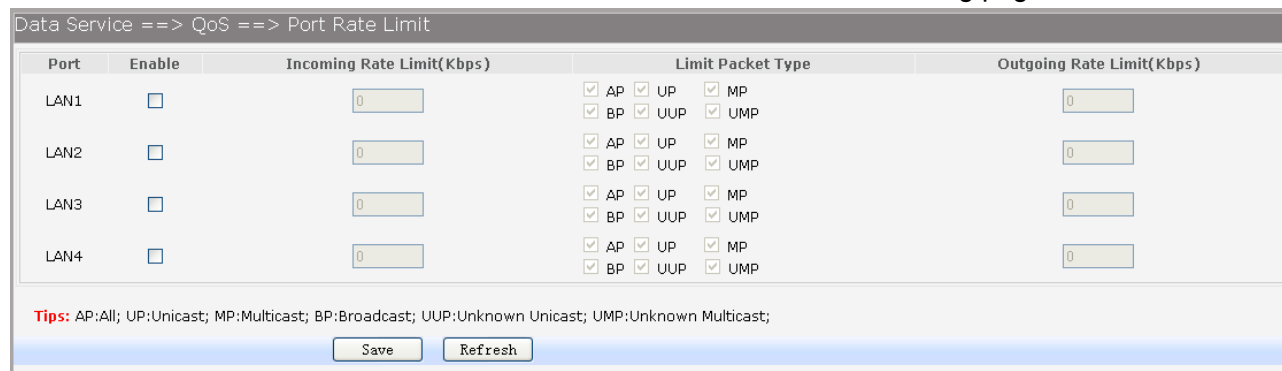

Data Service ==> QoS ==> Port Rate Limit

Port	Enable	Incoming Rate Limit(Kbps)	Limit Packet Type	Outgoing Rate Limit(Kbps)
LAN1	☐	0	☒ AP ☒ UP ☒ MP ☒ BP ☒ UUP ☒ UMP	0
LAN2	☐	0	☒ AP ☒ UP ☒ MP ☒ BP ☒ UUP ☒ UMP	0
LAN3	☐	0	☒ AP ☒ UP ☒ MP ☒ BP ☒ UUP ☒ UMP	0
LAN4	☐	0	☒ AP ☒ UP ☒ MP ☒ BP ☒ UUP ☒ UMP	0

Tips: AP:All; UP:Unicast; MP:Multicast; BP:Broadcast; UUP:Unknown Unicast; UMP:Unknown Multicast;

Save Refresh

Figure 3-62 Configure Qos Port Rate Limit

The following items are displayed on this screen:

- ▶ **Port:** Physical LAN port
- ▶ **Enable:** Enable or disable rate limit function.
- ▶ **Incoming Rate Limit:** Enter incoming maximum rate, which must be times of 32Kbps.
- ▶ **Limit Packet Type:** Select the packet type which is limited rate.
- ▶ **Outgoing Rate Limit:** Enter Outgoing maximum rate, which must be times of 32Kbps.

3.4.5.3 Flow Rate Limit

Choose the menu **Data Service**→**QoS**→**Flow Rate Limit** to load the following page.

DataService ==> QoS ==> Flow Rate Limit										
☐	Index	Protocol	IP Range	Start Time	End Time	Direction	Protocol Type	Port Range	CIR	PIR
☐	1	ANY	192.168.1.10~192.168.1.20	00:00	00:00	UP	--	--	0	0
1 Total 1 Pages, 1 Rows										
Add Del										

Figure 3-63 View QoS Flow Rate Limit Entry

Click the **Index** in the entry you want to modify. If you want to delete the entry, select it and click the **Del**. Click the **Add** button to add a new entry.

DataService ==> QoS ==> Flow Rate Limit	
IP Range	192.168.1.10 ~ 192.168.1.20
Active Time	00:00 -- 00:00 (hh:mm)
Active Day	☒ All ☒ Monday ☒ Tuesday ☒ Wednesday ☒ Thursday ☒ Friday ☒ Saturday ☒ Sunday
Direction	Up
Application Protocol	☒ Application ☐ Custom ☐ HTTP ☐ HTTPS ☐ FTP ☐ TFTP ☐ SMTP ☐ POP3 ☐ TELNET ☒ ANY
Limited Bandwidth(CIR)	0 (0~1024000)Kbps
Maximal Bandwidth(PIR)	0 (0~1024000)Kbps
Save Return	

Figure 3-64 Configure Qos Flow Rate Limit

The following items are displayed on this screen:

- ▶ **IP Range:** The IP range of LAN's PC.
- ▶ **Active Time:** If not configured, which means that all time are in active
- ▶ **Active Day:** If not configured, which means that all time in active
- ▶ **Direction:**
 - Up:** Check the frame from the direction of the LAN port to the WAN port, and match the source IP and destination port;
 - Down:** Check the frame from the direction of the WAN port to the LAN port, and match the destination IP and source port;
 - Bidirectional:** Limit both upstream and downstream speed.
- ▶ **Limited Bandwidth(CIR):** The limited bandwidth.
- ▶ **Maximal Bandwidth(PIR):** The maximum bandwidth.

If **Application** is selected:

- ▶ **Application Protocol:** Such as HTTP, HTTPS, FTP, TFTP, SMTP, POP3, TELNET, etc.

If **Custom** is selected, the following page will be loaded:

		☐ Application ☒ Custom
Protocol Type		☒ UDP ☐ TCP
Port Range		0 ~ 0 (0~65535)

Figure 3-65 Configure Custom of Qos Flow Rate Limit

The following items are displayed on this screen:

- ▶ **Protocol Type:** Custom protocol type, UDP or TCP.
- ▶ **Port Range:** Set port range.

3.4.5.4 Service

The device supports to remap scheduling priority and remark the value of DSCP or 802.1P according to the service type.

Choose the menu **Data Service**→**QoS**→**Service** to load the following page.

Data Service ==> QoS ==> Service

Name	Remap Queue Priority	Priority	Remark 802.1p	802.1p Value	Remark DSCP	DSCP Value
VOICE	☐	3	☐	0	☐	0
MGMT	☐	2	☐	0	☐	0
VIDEO	☐	1	☐	0	☐	0

Figure 3-66 View Qos Service

The following items are displayed on this screen:

- ▶ **Name:** Service name. Read only.
- ▶ **Remap Queue Priority:** Check the box to remap scheduling queue.
- ▶ **Priority:** There are four levels of priority. Priority 3 is highest, and priority 0 is the lowest
- ▶ **Remark 802.1p:** Check the box to enable 802.1p priority remarking.
- ▶ **802.1p Value:** The value of remarking 802.1P.
- ▶ **Remark DSCP:** Check the box to enable DSCP remarking.
- ▶ **DSCP Value:** The value of remarking DSCP.

3.4.5.5 ACL

Choose the menu **Data Service**→**QoS**→**ACL** to load the following page.

Data Service ==> QoS ==> ACL

Index	Rule Name	Rule Type	Rule	DEL
1	--	--	Detail	Del
2	--	--	Detail	Del
3	--	--	Detail	Del
4	--	--	Detail	Del
5	--	--	Detail	Del
6	--	--	Detail	Del
7	--	--	Detail	Del
8	--	--	Detail	Del
9	--	--	Detail	Del
10	--	--	Detail	Del
11	--	--	Detail	Del
12	--	--	Detail	Del
13	--	--	Detail	Del
14	--	--	Detail	Del
15	--	--	Detail	Del
16	--	--	Detail	Del
17	--	--	Detail	Del
18	--	--	Detail	Del
19	--	--	Detail	Del
20	--	--	Detail	Del
21	--	--	Detail	Del
22	--	--	Detail	Del
23	--	--	Detail	Del
24	--	--	Detail	Del

Figure 3-67 View Qos ACL

Click the **Del** in the entry you want to delete.

Click the **Index** or **Detail** in the entry you want to modify, and then the following page will be loaded:

Data Service ==> QoS ==> ACL Rule

Condition	
Rule Name	*
Physical Port	☐ LAN1 ☐ LAN2 ☐ LAN3 ☐ LAN4 ☐ WAN
Rule Type	☒ L2 Data ☐ L3 Data
SRC MAC	
DEST MAC	
Ether Type	0x (0x00~0xFFFF)
VLAN ID	(1~4094)
802.1p	(0~7)
Action	
Drop	☐
Remark VID	☐ (1~4094)
Remark 802.1P	☐ (0~7)
Remark DSCP	☐ (0~63)
Priority	☐ (0~3, 3: highest)
Maximal Bandwidth	(32,1024000)kbps;0: Full Rate
Save Return	

Figure 3-68 Modify Qos ACL

The following items are display on this page:

Condition:

- ▶ **Rule Name:** The custom name.
- ▶ **Physical Port:** Rule's source port
- ▶ **Rule Type:** Type of rule: **L2 data** or **L3 data**.

If **L3 Data** is selected:

Rule Type	☐ L2 Data ☒ L3 Data
Src IP/Netmask	/
Dest IP/Netmask	/
Protocol	☒ Ignore ☐ ICMP ☐ UDP ☐ TCP ☐ Other (0~255)
L4 Src Port	~ (0~65535)
L4 Dest Port	~ (0~65535)

Figure 3-69 L3 Data Rule Type

The following items are display on this page:

- ▶ **Src IP/Netmask:** The source IP address and netmask of packets, such is 192.168.100.1/255.255.255.0.
- ▶ **Dest IP/Netmask:** The destination IP address and netmask of packets.
- ▶ **Protocol:** E.g. ICMP, UDP, TCP, or custom IP protocol types.
- ▶ **L4 Src Port:** Source port range.
- ▶ **L4 Dest Port:** Destination port range.

If **L2 Data** is selected:

Rule Type	☒ L2 Data ☐ L3 Data
SRC MAC	
DEST MAC	
Ether Type	0x (0x00~0xFFFF)
VLAN ID	(1~4094)
802.1p	(0~7)

Figure 3-70 L2 Data Rule Type

The following items are display on this page:

- ▶ **SRC MAC:** Source MAC address of packets.
- ▶ **DEST MAC:** Destination MAC address of packets.
- ▶ **Ether Type:** The ether type of packets.
- ▶ **VLAN ID:** The VLAN id of packets.
- ▶ **802.1p:** The VLAN priority of packets.

Action

- ▶ **Drop:** Drop the packets matched with the rule.
- ▶ **Remark VID:** Change the VID of packets matched with the rule.
- ▶ **Remark 802.1p:** Change the 802.1P priority of packets matched with the rule.
- ▶ **Remark DSCP:** Change the DSCP of packets matched with the rule.
- ▶ **Priority:** Change the scheduling queue of packets matched with the rule.
- ▶ **Maximal Bandwidth:** Limit the bandwidth of packet matched with the rule.

3.4.6 DDNS

DDNS(Dynamic DNS) service allows you to assign a fixed domain name to a dynamic WAN ip address, which enables the Internet hosts to access the Router or the hosts in LAN using the domain names. Choose the menu **Data Service**→**DDNS** to load the following page.

Data Service ==> DDNS

DDNS Enable	☒	
Username	dydns	*
Password	•••••	*
First Url	dydns1.com	*
Second Url	dydns2.com	
Update Interval	600	*[0,65535]s
Server Type	DYNDNS	
Server Name	dydns.com	
Server Url	dydns.com	
Dyn DNS Server Name	dydns.com	
Dyn DNS Server Url	dydns.com	
System Item	dydns.com	
DDNS Status	DDNS_TASK_NOT_INIT	

Figure 3-71 Configure DDNS

The following items are display on this page:

- ▶ **DDNS Enable:** Active or inactive dynamic DNS service.
- ▶ **Username:** Enter account name of your DDNS account.
- ▶ **Password:** Enter password of your DDNS account.
- ▶ **First Url:** First domain name that you registered your DDNS service provider.
- ▶ **Second Url:** First domain name that you registered your DDNS service provider.
- ▶ **Update Interval:** How often, in seconds, the IP is updated.
- ▶ **Server Type:** optional DDNS server type, can select from pull-dwon list:
DYNDNS: For dyndns.org
FREEDNS: For freedns.afraid.org
ZONE: For zoneedit.com
NOIP: For no-ip.com
3322: For 3322.org
CUSTOM: For custom self-defined DDNS server type.
- ▶ **Server Name:** If CUSTOM is selected, specify server name of the device.
- ▶ **Server Url:** If CUSTOM is selected, specify server URL of the device.
- ▶ **Dyn DNS Server Name:** If CUSTOM is selected, specify dyndns DNS server name of custom self-defined.
- ▶ **Dyn DNS Server Url:** If CUSTOM is selected, specify dyndns DNS server URL of custom self-defined.
- ▶ **System Item:** If CUSTOM is selected, specify system item of custom self-defined.
- ▶ **DDNS Status:** Display the status of DDNS service. Read only.

Click the **Save** button when finished.

Click **Refresh** button to refresh the web page.

3.4.7 VPN

VPN (Virtual Private Network) is a private network established via the public network, generally via the Internet. However, the private network is a logical network without any physical network lines, so it is called Virtual Private Network.

With the wide application of the Internet, more and more data are needed to be shared through the Internet. Connecting the local network to the Internet directly, though can allow the data exchange, will cause the private data to be exposed to all the users on the Internet. The VPN (Virtual Private Network) technology is developed and used to establish the private network through the public network, which can guarantee a secured data exchange.

VPN adopts the tunneling technology to establish a private connection between two endpoints. It is a connection secured by encrypting the data and using point-to-point authentication. The following diagram is a typical VPN topology.

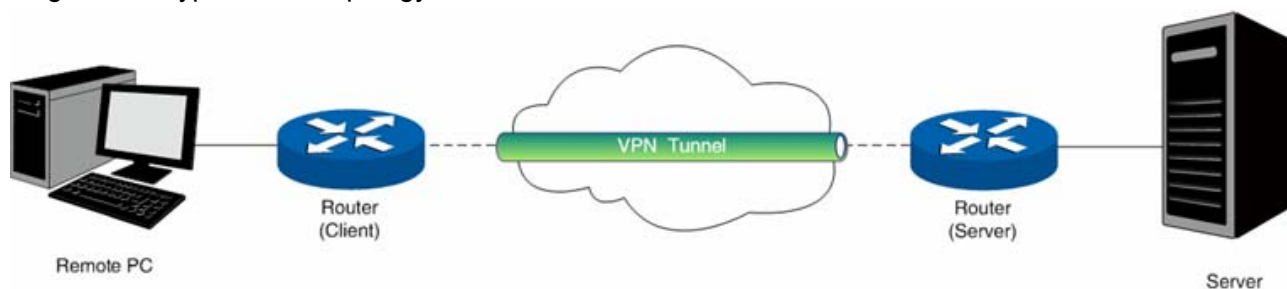


Figure 3-72 VPN – Network Topology

As the packets are encapsulated and de-encapsulated in the Router, the tunneling topology implemented by encapsulating packets is transparent to users. The tunneling protocols supported contain Layer 3 IPSEC and Layer 2 L2TP/PPTP.

3.4.7.2 PPTP Server

Layer 2 VPN tunneling protocol consists of L2TP (Layer 2 Tunneling Protocol) and PPTP (Point to Point Tunneling Protocol). Both L2TP and PPTP encapsulate packet and add extra header to the packet by using PPP (Point to Point Protocol).

Table depicts the difference between L2TP and PPTP.

Protocol	Media	Tunnel	Length of Header	Authentication
PPTP	IP network	Single tunnel	6 bytes at least	Not supported
L2TP	IP network of UDP	Multiple tunnels	4 bytes at least	Supported

Figure 3-73 Difference between L2TP and PPTP

Choose the menu **Data Service**→**VPN**→**PPTP Server** to load the following page.

Data Service ==> PPTP Server

Enable PPTP Server ☒

IP Address Pool Range to

Enable Authentication ☒

Enable Encryption ☒

☐	Index	Username	IP	Description
☐	1	pptp_user1	192.168.1.206	test

Figure 3-74 Configure PPTP Server

The following items are displayed on this screen:

- ▶ **Enable PPTP Server:** Enable or disable the PPTP server function globally.
- ▶ **IP Address Pool Range:** Specify the start and the end IP address for IP Pool. The start IP address should not exceed the end address and the IP ranges must not overlap.
- ▶ **Enable Authentication:** Specify whether to enable authentication for the tunnel.
- ▶ **Enable Encryption:** Specify whether to enable the encryption for the tunnel. If enabled, the PPTP tunnel will be encrypted by MPPE.

Click the **Index** in the entry you want to modify. If you want to delete the entry, select it and click the **Del**. Click the **Add** button to add a new entry.

Data Service ==> VPN ==> PPTP Server

Username *

Password *

Binding IP *

Description

Figure 3-75 Add or Modify PPTP Client Entry

The following items are displayed on this screen:

- ▶ **Username:** Enter the account name of PPTP tunnel. It should be configured identically on server and client.
- ▶ **Password:** Enter the password of PPTP tunnel. It should be configured identically on server and client.
- ▶ **Binding IP:** Enter the IP address of the client which is allowed to connect to this PPTP server.
- ▶ **Description:** Enter the humane readable description for this account.

3.4.7.3 L2TP Server

Choose the menu **Data Service**→**VPN**→**L2TP Server** to load the following page.

Data Service ==> L2TP Server

Enable L2TP Server ☒

Local IP

IP Address Pool Range to

Enable Authentication ☒ Auth Secret (1-127 Characters)

Enable Debug ☐

☐	Index	Username	IP	Description
☐	1	l2tp_user1	192.168.1.206	test

Total 1 Pages, 1 Rows

Index	Username	IP	State
Total 0 Pages, 0 Rows			

Figure 3-76 Configure L2TP Server

The following items are displayed on this screen:

- ▶ **Enable L2TP Server:** Enable or disable the L2TP server function globally.
- ▶ **Local IP:** Enter the local IP address of L2TP server.
- ▶ **IP Address Pool Range:** Specify the start and the end IP address for IP Pool. The start IP address should not exceed the end address and the IP ranges must not overlap.
- ▶ **Enable Authentication:** Specify whether to enable authentication for the tunnel. If enabled, enter the authentication secret.
- ▶ **Enable Debug:** Specify whether to enable the debug for L2TP.

Click the **Index** in the entry you want to modify. If you want to delete the entry, select it and click the **Del**. Click the **Add** button to add a new entry.

Data Service ==> VPN ==> L2TP Server

Username *

Password *

Binding IP *

Description

Figure 3-77 Add or Modify L2TP Client Entry

The following items are displayed on this screen:

- ▶ **Username:** Enter the account name of L2TP tunnel. It should be configured identically on server and client.
- ▶ **Password:** Enter the password of L2TP tunnel. It should be configured identically on server and client.
- ▶ **Binding IP:** Enter the IP address of the client which is allowed to connect to this L2TP server.
- ▶ **Description:** Enter the humane readable description for this account.

3.4.7.4 IPSEC

IPSEC (IP Security) is a set of services and protocols defined by IETF (Internet Engineering Task Force) to provide high security for IP packets and prevent attacks. To ensure a secured communication, the two IPSEC peers use IPSEC protocol to negotiate the data encryption algorithm and the security protocols for checking the integrity of the transmission data, and exchange the key to data de-encryption. IPSEC has two important security protocols, AH (Authentication Header) and ESP (Encapsulating Security Payload). AH is used to guarantee the data integrity. If the packet has been tampered during transmission, the receiver will drop this packet when validating the data integrity. ESP is used to check the data integrity and encrypt the packets. Even if the encrypted packet is intercepted, the third party still cannot get the actual information.

IKE: In the IPSEC VPN, to ensure a secure communication, the two peers should encapsulate and de-encapsulate the packets using the information both known. Therefore the two peers need to negotiate a security key for communication with IKE (Internet Key Exchange) protocols. Actually IKE is a hybrid protocol based on three underlying security protocols, ISAKMP (Internet Security Association and Key Management Protocol), Oakley Key Determination Protocol, and SKEME Security Key Exchange Protocol. ISAKMP provides a framework for Key Exchange and SA (Security Association) negotiation. Oakley describes a series of key exchange modes. SKEME describes another key exchange mode different from those described by Oakley. IKE consists of two phases. Phase 1 is used to negotiate the parameters, key exchange algorithm and encryption to establish an ISAKMP SA for securely exchanging more information in Phase 2. During phase 2, the IKE peers use the ISAKMP SA established in Phase 1 to negotiate the parameters for security protocols in IPSEC and create IPSEC SA to secure the transmission data.

3.4.7.4.1 IKE Safety Proposal

In this table, you can view the information of IKE Proposals.

Choose the menu **Data Service**→**VPN**→**IPSec**→**IKE Safety Proposal** to load the following page.

Data Service ==>VPN ==>IPSec

☐	Index	Proposal Name	Encryption Algorithm	Auth Algorithm	DH Group
☐	1	test1	3DES	SHA1	DH 1536 modp

1 Total 1 Pages, 1 Rows

Add Del

Figure 3-78 View IKE Safety Proposal Configuration

Click the **Index** in the entry you want to modify. If you want to delete the entry, select it and click the **Del.** Click the **Add** button to add a new entry.

Data Service ==> VPN==>IPSec ==> IKE Proposal

Proposal Name	test1 * (Maximum 128 Characters)
Encryption Algorithm	3DES
Auth Algorithm	SHA1
DH Group	DH 1536 modp

Save Return

Figure 3-79 Add or Modify IKE Safety Proposal Entry

The following items are displayed on this screen:

- ▶ **Proposal Name:** Specify a unique name to the IKE proposal for identification and management purposes. The IKE proposal can be applied to IPSEC proposal.
- ▶ **Encryption Algorithm:** Specify the encryption algorithm for IKE negotiation. Options include:
 - DES:** DES (Data Encryption Standard) encrypts a 64-bit block of plain text with a 56-bit key.
 - 3DES:** Triple DES, encrypts a plain text with 168-bit key.
 - AES:** Uses the AES algorithm for encryption.
- ▶ **Auth Algorithm:** Select the authentication algorithm for IKE negotiation. Options include:
 - MD5:** MD5 (Message Digest Algorithm) takes a message of arbitrary length and generates a 128-bit message digest.
 - SHA1:** SHA1 (Secure Hash Algorithm) takes a message less than 2^{64} (the 64th power of 2) in bits and generates a 160-bit message digest.
- ▶ **DH Group:** Select the DH (Diffie-Hellman) group to be used in key negotiation phase 1. The DH Group sets the strength of the algorithm in bits. Options include **DH 768 modp**, **DH 1024 modp** and **DH 1536 modp**.

3.4.7.4.2 IKE Safety Policy

In this table, you can view the information of IKE Policy.

Choose the menu Data Service→VPN→IPSec→IKE Safety Policy to load the following page.

Data Service ==>VPN ==>IPSec

IKE Safety Proposal	IKE Safety Policy	IPSEC Safety Proposal	IPSEC Safety Policy
-------------------------------------	-----------------------------------	---------------------------------------	-------------------------------------

☐	Index	Policy Name	Operation Mode	Enable Local ID	Local ID	Enable Remote ID	Remote ID	Auth Mode	Pre Share Key
☐	1	test2	Main Mode	Disable		Disable		PSK	123

1 Total 1 Pages, 1 Rows

Add Del

Figure 3-80 View IKE Safety Policy Configuration

Click the **Index** in the entry you want to modify. If you want to delete the entry, select it and click the **Del**. Click the **Add** button to add a new entry.

Data Service ==> VPN==>IPSec ==> IKE Policy

Policy Name	test2 * (Maximum 128 Characters)
Operation Mode	☐ Challenge Mode ☒ Main Mode
Enable Local ID	☐ (Maximum 256 Characters)
Enable Remote ID	☐ (Maximum 256 Characters)
Auth Mode	PSK
Pre Share Key	123 * (Maximum 256 characters)
Enable Safety Proposal1	☒ test1
Enable Safety Proposal2	☐ test1
Enable Safety Proposal3	☐ test1
Enable Safety Proposal4	☐ test1

Save Return

Figure 3-81 Add or Modify IKE Safety Policy Entry

The following items are displayed on this screen:

- ▶ **Policy Name:** Specify a unique name to the IKE policy for identification and management purposes. The IKE policy can be applied to IPSEC policy.
- ▶ **Operation Mode:** Select the IKE Exchange Mode in phase 1, and ensure the remote VPN peer uses the same mode.
Main: Main mode provides identity protection and exchanges more information, which applies to the scenarios with higher requirement for identity protection.
Challenge: Challenge Mode establishes a faster connection but with lower security, which applies to scenarios with lower requirement for identity protection.
- ▶ **Enable Local ID:** If enabled, enter a name for the local device as the ID in IKE negotiation.
- ▶ **Enable Remote ID:** If enabled, enter the name of the remote peer as the ID in IKE negotiation.
- ▶ **Auth Mode:** Select the authentication mode for this IKE policy entry.
PSK:
Certificate:
- ▶ **Pre Share Key:** Enter the Pre-shared Key for IKE authentication, and ensure both the two peers use the same key. The key should consist of visible characters without blank space.
- ▶ **Enable Safety Proposal:** Select the Proposal for IKE negotiation phase 1. Up to four proposals can be selected.

3.4.7.4.3 IPSEC Safety Proposal

In this table, you can view the information of IPSEC proposal.

Choose the menu **Data Service**→**VPN**→**IPSec**→**IPSEC Safety Proposal** to load the following page.

Data Service ==> VPN ==> IPsec

IKE Safety Proposal IKE Safety Policy IPSEC Safety Proposal IPSEC Safety Policy					
☐	Index	Proposal Name	Protocol Type	Encryption Algorithm	Auth Algorithm
☐	1	test3	ESP	3DES	SHA1

1 Total 1 Pages, 1 Rows

Add Del

Figure 3-82 View IPSEC Safety Proposal Configuration

Click the **Index** in the entry you want to modify. If you want to delete the entry, select it and click the **Del**. Click the **Add** button to add a new entry.

Data Service ==> VPN ==> IPsec

Proposal Name	test3	* (Maximum 128 Characters)
IPsec Protocol	ESP	
Encryption Algorithm	3DES	
Auth Algorithm	SHA1	

Save Return

Figure 3-83 Add or Modify IPSEC Safety Proposal Entry

The following items are displayed on this screen:

- ▶ **Proposal Name:** Specify a unique name to the IPSEC Proposal for identification and management purposes. The IPSEC proposal can be applied to IPSEC policy.
- ▶ **IPsec Protocol:** Select the security protocol to be used. Options include:
 - AH:** AH (Authentication Header) provides data origin authentication, data integrity and anti-replay services.
 - ESP:** ESP (Encapsulating Security Payload) provides data encryption in addition to origin authentication, data integrity, and anti-replay services.
 - ESP+AH:** Both ESP and AH security protocol.
- ▶ **Encryption Algorithm:** Select the algorithm used to encrypt the data for ESP encryption. Options include:
 - DES:** DES (Data Encryption Standard) encrypts a 64-bit block of plain text with a 56-bit key. The key should be 8 characters.
 - 3DES:** Triple DES, encrypts a plain text with 168-bit key. The key should be 24 characters.
 - AES:** Uses the AES algorithm for encryption. The key should be 16 characters.
- ▶ **Auth Algorithm:** Select the algorithm used to verify the integrity of the data. Options include:
 - MD5:** MD5 (Message Digest Algorithm) takes a message of arbitrary length and generates a 128-bit message digest.
 - SHA:** SHA (Secure Hash Algorithm) takes a message less than the 64th power of 2 in bits and generates a 160-bit message digest.

3.4.7.4.4 IPSEC Safety Policy

In this table, you can view the information of IPSEC policy.

Choose the menu **Data Service**→**VPN**→**IPSec**→**IPSEC Safety Policy** to load the following page.

Data Service ==>VPN ==>IPSec								
IKE Safety Proposal IKE Safety Policy IPSEC Safety Proposal IPSEC Safety Policy								
☐	Index	Policy Name	Enable IPSEC	Interface	VPN Mode	Local Subnet	Remote Address	Remote Subnet
☐	1	test4	Enable	DATA	Site2Site	192.168.1.1/255.255.255.0	10.0.2.3	10.0.1.1/255.255.0.0
1 Total 1 Pages, 1 Rows								
Add Del								

Figure 3-84 View IPSEC Safety Policy Configuration

Click the **Index** in the entry you want to modify. If you want to delete the entry, select it and click the **Del**. Click the **Add** button to add a new entry.

Data Service ==> VPN ==> IPSec ==> IPSec Policy	
Enable Isec	☒
IPSEC Policy Name	test4 * (Maximum 128 Characters)
Select Interface	DATA_WAN *
VPN Mode	☒ Site To Site ☐ PC To Site
Local Subnet IP	192.168.1.1
Local Subnet Netmask	255.255.255.0
Remote Address	10.0.2.3 * (IP Address or Domain Name)
Remote Subnet IP	10.0.1.1
Remote Subnet Netmask	255.255.0.0
IKE Safety Policy	test2
Enable Safety Proposal1	☒ test3
Enable Safety Proposal2	☐ test3
Enable Safety Proposal3	☐ test3
Enable Safety Proposal4	☐ test3
Save Return	

Figure 3-85 Add or Modify IPSEC Safety Policy Entry

The following items are displayed on this screen:

- ▶ **Enable Isec:** Enable or disable this IPSEC entry.
- ▶ **IPSEC Policy Name:** Specify a unique name to the IPSEC policy.
- ▶ **Select Interface:** Specify the local WAN port for this Policy.
- ▶ **VPN Mode:** Select the network mode for IPSEC policy. Options include:
 - Site To Site:** Select this option when the client is a network.
 - PC to Site:** Select this option when the client is a host.
- ▶ **Local Subnet IP & Local Subnet Netmask:** Specify IP address range on your local LAN to identify which PCs on your LAN are covered by this policy.
- ▶ **Remote Address:** If **PC to Site** is selected, specify IP address on your remote network to identify which PCs on the remote network are covered by this policy.
- ▶ **Remote Subnet IP & Remote Subnet Netmask:** Specify IP address range on your remote network to identify which PCs on the remote network are covered by this policy.
- ▶ **IKE Safety Policy:** Specify the IKE policy. If there is no policy selection, add new policy on **VPN→IPSec→IKE Safety Policy** page.
- ▶ **Enable Safety Prososal:** If enabled, Select IPSEC Proposal. If there is no policy selection, add new IPSEC proposal on **VPN→IPSec→IPSEC Safety Proposal** page. Up to

four IPSEC Proposals can be selected.

3.4.8 Routing

3.4.8.1 Static Route

3.4.8.1.1 IPv4

Choose the menu **Data Service**→**Routing**→**Static Route**→**IPv4** to load the following page.

Data Service ==> Static Route

IPv4

	Enable	Destination IP	Netmask	Next Hop Type	Next Hop Interface	Next Hop Address	Valid
1	☒	10.0.1.1	255.255.255.0	Interface	DATA		
2	☐			Interface	DATA		
3	☐			Interface	DATA		
4	☐			Interface	DATA		
5	☐			Interface	DATA		
6	☐			Interface	DATA		
7	☐			Interface	DATA		
8	☐			Interface	DATA		
9	☐			Interface	DATA		
10	☐			Interface	DATA		

Save

Figure 3-86 Configure IPv4 Static Route

The following items are displayed on this screen:

- ▶ **Enable:** Select it to add and modify the current route. Conversely, disable the current route.
- ▶ **Destination IP:** Enter the destination host the route leads to.
- ▶ **Netmask:** Enter the Subnet mask of the destination network.
- ▶ **Next Hop Type:** Include **Next Hop Interface** and **Next Hop Address**(see following option)
- ▶ **Next Hop Interface:** Specify the interface of next hop for current route
- ▶ **Next Hop Address:** Specify the address of next hop for current route
- ▶ **Valid:** Show the status of current route.

3.4.8.1.2 IPv6

The menu IPV6 is hidden if you don't enable Ipv6 stack, please refer to configuration index **Network**→**IPv6** for detail setting.

Choose the menu **Data Service**→**Route**→**Static Route**→**IPv6** to load the following page.

IPv4
IPv6

Enable	Destination IPv6/Prefix Length	Next Hop Type	Next Hop Interface	Next Hop Address	Valid
1 ☒	2010::20c:29ff:fe85:a330 / 64	Interface	WAN		Invalid
2 ☐		Interface	WAN		
3 ☐		Interface	WAN		
4 ☐		Interface	WAN		
5 ☐		Interface	WAN		
6 ☐		Interface	WAN		
7 ☐		Interface	WAN		
8 ☐		Interface	WAN		
9 ☐		Interface	WAN		
10 ☐		Interface	WAN		

Figure 3-87 Configure IPv6 Static Route

The configuration options of Ipv6 is similar to Ipv4, the prefix length is equal to mask of Ipv4 address.

3.4.8.2 Policy Route

Choose the menu **Data Service→Route→Policy Route** to load the following page.

Data Service ==> Policy Route

☐	Index	Enable	Src IP Range	Dst IP Range	Dst Port Range	Next Hop	Active Time
☐	1	YES	192.168.1.100-192.168.1.200	210.10.10.3-210.10.10.50	1000-2000	DATA	TimeInfo

1 Total 1 Pages, 1 Rows

Figure 3-88 View Policy Route

Click the **Index** in the entry you want to modify. If you want to delete the entry, select it and click the **Del**. Click the **Add** button to add a new entry.

DataService ==> Policy Route

Enable PolicyRoute ☒

Next Hop Type Interface

Interface DATA

Description policy1

Protocol ALL

Source IP 192.168.1.100 to 192.168.1.200

Destination IP 210.10.10.3 to 210.10.10.50

Destination Port 1000 to 2000 [0~65535]

Active Time 00:00 -- 23:59 (hh:mm)

Active Day ☒ All ☒ Monday ☒ Tuesday ☒ Wednesday
☒ Thursday ☒ Friday ☒ Saturday ☒ Sunday

Figure 3-89 Add or Modify Policy Route

The following items are displayed on this page:

- ▶ **Enable PoliceRoute:** Enable or disable the entry
- ▶ **Next Hop Type:** Select from pull-down list: **Interface**, **Address**.
- ▶ **Interface:** Specify the interface of next hop for the entry.
- ▶ **Address:** Specify the address of next hop for the entry.
- ▶ **Description:** Give description for the entry.
- ▶ **Protocol:** Specify the protocol, **TCP**, **UDP** or **ALL**.
- ▶ **Source IP:** Enter IP address or IP range of source in the rule entry.
- ▶ **Destination IP:** Enter IP address or IP range of destination in the rule entry.
- ▶ **Destination Port:** Specify port or port range of destination in the rule entry.
- ▶ **Active Time:** Specify the active time range for the rule entry.
- ▶ **Active Day:** Specify the active days for the rule entry.

3.4.8.3 RIP

The **Routing Information Protocol (RIP)** is one of the oldest distance-vector routing protocols, which employs the hop count as a routing metric.

3.4.8.3.1 RIP Service

Choose the menu **Data Service**→**RIP**→**RIP Service** to load the following page.

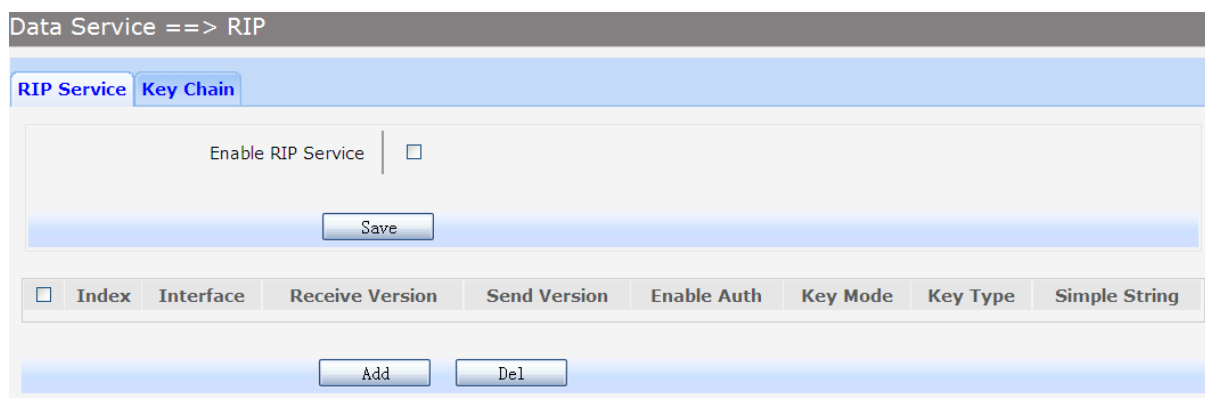


Figure 3-90 RIP Service Configuration

The following items are displayed on this page:

- ▶ **Enable RIP Service:** Enable or disable RIP service function globally.

Click the **Index** in the entry you want to modify. If you want to delete the entry, select it and click the **Del**. Click the **Add** button to add a new entry.

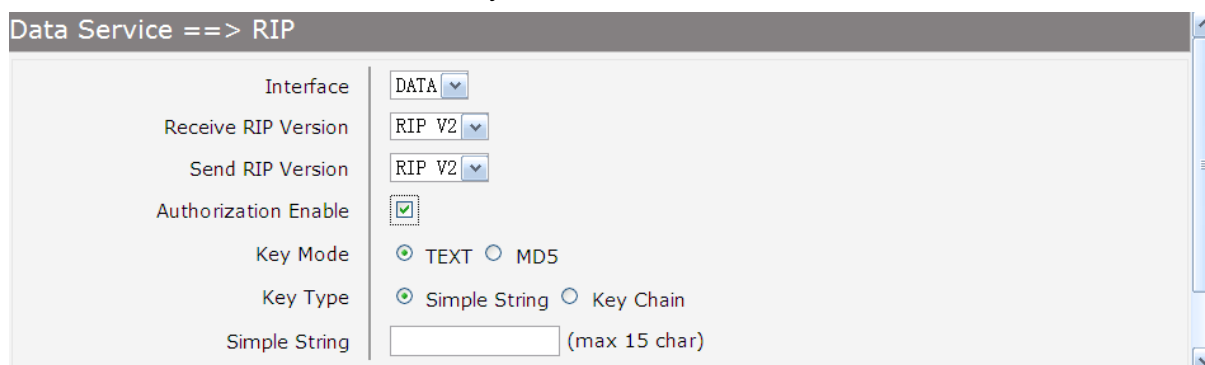


Figure 3-91 Add or Modify RIP Service Entry

The following items are displayed on this page:

- ▶ **Interface:** Specify the interface for the entry.

- **Receive RIP Version:** Specify receiving RIP version for the entry.
- **Send RIP Version:** Specify sending RIP version for the entry.
- **Authorization Enable:** Check the box to enable authorization.
- **Key Mode:** Specify the encryption mode of key, **TEXT**(plaintext),**MD5**(cipertext).
- **Key Type:** Specify the key from **Simple String** or **Key Chain**.
- **Simple String:** If select Simple String in item of Key Type, enter simple string as key.

3.4.8.3.2 Key Chain

Key Chain is a chain of keys used as RIP authorization key.

Choose the menu **Data Service**→**RIP**→**Key Chain** to load the following page.

Figure 3-92 View RIP Key Chain Configuration

The following items are displayed on this page:

- **Key Chain Name:** Enter the name of key chain.

Click the **Index** in the entry you want to modify. If you want to delete the entry, select it and click the **Del**. Click the **Add** button to add a new entry.

Figure 3-93 Add or Modify RIP Key Chain Entry

The following items are displayed on this page:

- **Key ID:** Enter the ID of the entry.
- **Key String:** Enter the Key of the entry.

3.4.9 Advanced Parameters

3.4.9.1 UPnP Parameter

The **Universal Plug and Play (UPnP)** technology is enabling a world in which music and other digital entertainment content is accessible from various devices in the home without regard for where the media is stored. Using UPnP devices the whole family can share in the fun together whether it's:

- 1) Viewing your best family photos via the TV
- 2) Watching home videos

3) Listening to favorite tunes throughout the house

The **Digital Living Network Alliance (DLNA)** is a non-profit collaborative trade organization established by Sony in June 2003, which is responsible for defining interoperability guidelines to enable sharing of digital media between multimedia devices. DLNA uses UPnP for media management, discovery and control.

Here, UPnP mainly for DLNA, DLNA server can be automatically discovered by sending NOTIFY via Multicast, and DLNA clients can search DLNA servers by sending M-SEARCH via Multicast.

Choose the menu **Data Service**→**Advanced Parameters**→**UPnP Parameter** to load the following page.

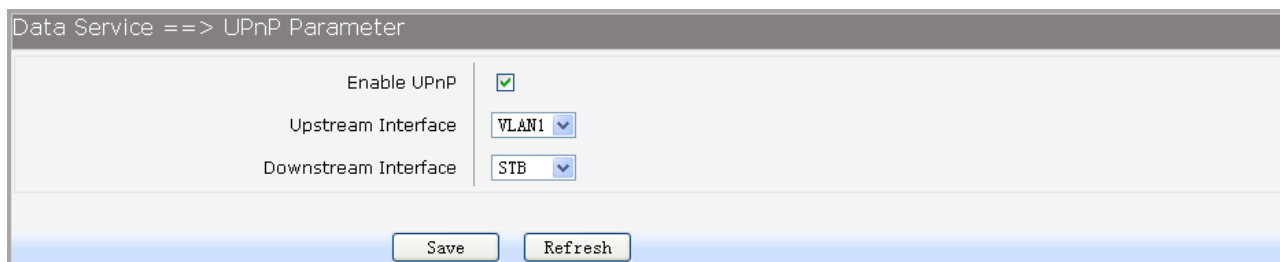


Figure 3-94 Configure UPnP

The following items are displayed on this screen:

- ▶ **Enable UPnP:** Enable or disable the UPnP function globally.
- ▶ **Upstream Interface:** The network interface connected to the DLNA server.
- ▶ **Downstream Interface:** The network interface connected to the DLNA client.

3.4.10 Multicast

Choose the menu **Data Service**→**Multicast** to load the following page.

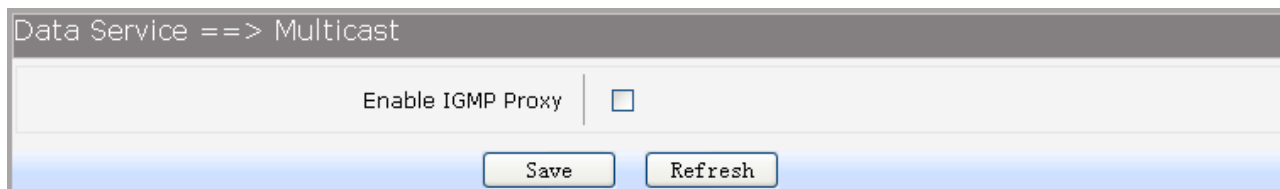


Figure 3-95 Configure Multicast

The following items are displayed on this screen:

- ▶ **Enable IGMP Proxy:** Enable or disable the IGMP proxy function globally. Currently, IGMP proxy is mainly used for IPTV.

3.4.11 USB Storage

USB Storage function let Windows OS share files of USB storage mounted on embedded device by Samba and ftp.

1) User Management

Manage the list of users which access USB storage.

Choose menu **Data Service**→**USB Storage** to load the following page.



Figure 3-96 View User Management Configuration

Click the **Index** in the entry you want to modify. If you want to delete the entry, select it and click the **Del**. Click the **Add** button to add a new entry.

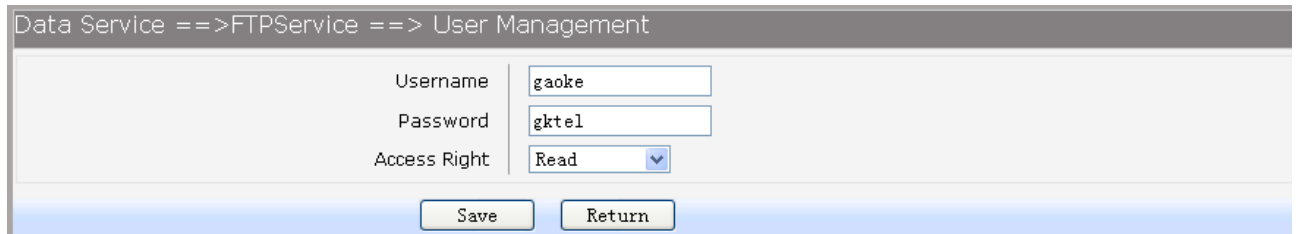


Figure 3-97 Add or Modify User Management Entry

The following items are displayed on this screen:

- ▶ **Username:** Enter user name of this entry.
- ▶ **Password:** Enter password of this entry.
- ▶ **Access Right:** Select access right from pull-down list, **Read** or **Read/Write**.

2) USB Storage

Scan the partitions of USB Storage by click **Rescan** button and umount specified partition by clicking **Umount** button. Click **start** to start service, click **stop** to stop service.

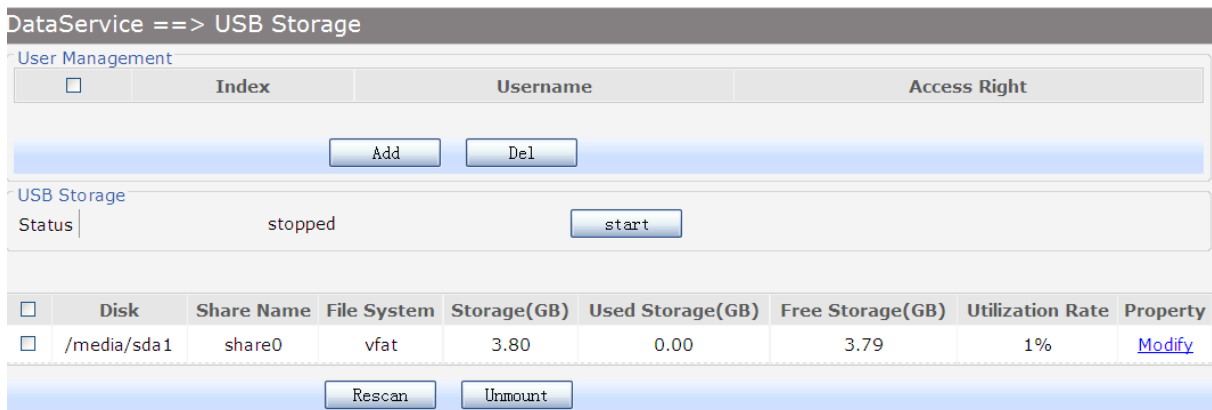


Figure 3-98 View USB Storage

Click **Modify** to load the following page:

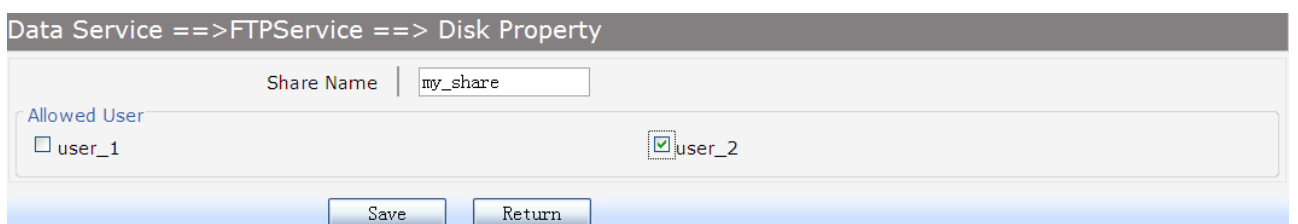


Figure 3-99 Modify USB Storage

The following items are displayed on this screen:

- **Share Name:** Enter the share name.
- **Allowed User:** Select the users need to access the partition of the entry.

3.5 VOIP Service

The **Session Initiation Protocol (SIP)** is a signaling protocol used for establishing sessions in an IP network. The protocol can be used for creating, modifying and terminating two-party (unicast) or multiparty (multicast) sessions. Sessions may consist of one or several media streams.

3.5.1 SIP Service

Choose the menu **VOIP Service**→**SIP Service** to load the following page.

VoIP Service ==> SIP Service

General Parameters

Primary Server Address	192.168.1.65	*
Primary Server Port	5060	[0 or 1024~65535]
Enable Backup Server	☐	
Backup Server Address		
Backup Server Port	5060	[0 or 1024~65535]
Enable Proxy Server	☐	
Proxy Address		
Proxy Port	5060	[0 or 1024~65535]
Enable Secondary Proxy	☐	
Secondary Proxy Address		
Secondary Proxy Port	0	[0 or 1024~65535]
Register Interval	1200	* [60~3600]s
RTP Port	9000 - 20000	* [1024 - 65535]
Local SIP Port	5060	* Default:5060

[+Advanced Parameters](#)

Figure 3-100 Configure General Parameters of SIP Service


The following items are displayed on this screen:

- **Primary Server Address:** Domain or IP of SIP server.
- **Primary Server Port:** Listening port of SIP server.
- **Enable Backup Server:** Enable or disable backup SIP server.
- **Backup Server Address:** Domain or IP of backup SIP server.
- **Backup Server Port:** Listening port of backup SIP server.
- **Enable Proxy Server:** Enable or disable Proxy server.
- **Proxy Address:** Domain or IP of proxy server.
- **Proxy Port:** Listening port of proxy server.
- **Enable Secondary Proxy:** Enable or disable backup proxy server.
- **Secondary Proxy Address:** Domain or IP of backup proxy server.
- **Secondary Proxy Port:** Listening port of backup proxy server.
- **Register Interval:** Enter the desired time interval at which the sip UA will send register

message.

- ▶ **RTP Port:** Local RTP port range.
- ▶ **Local SIP Port:** Local listening port.

Click **+Advanced Parameters** to load the following page.

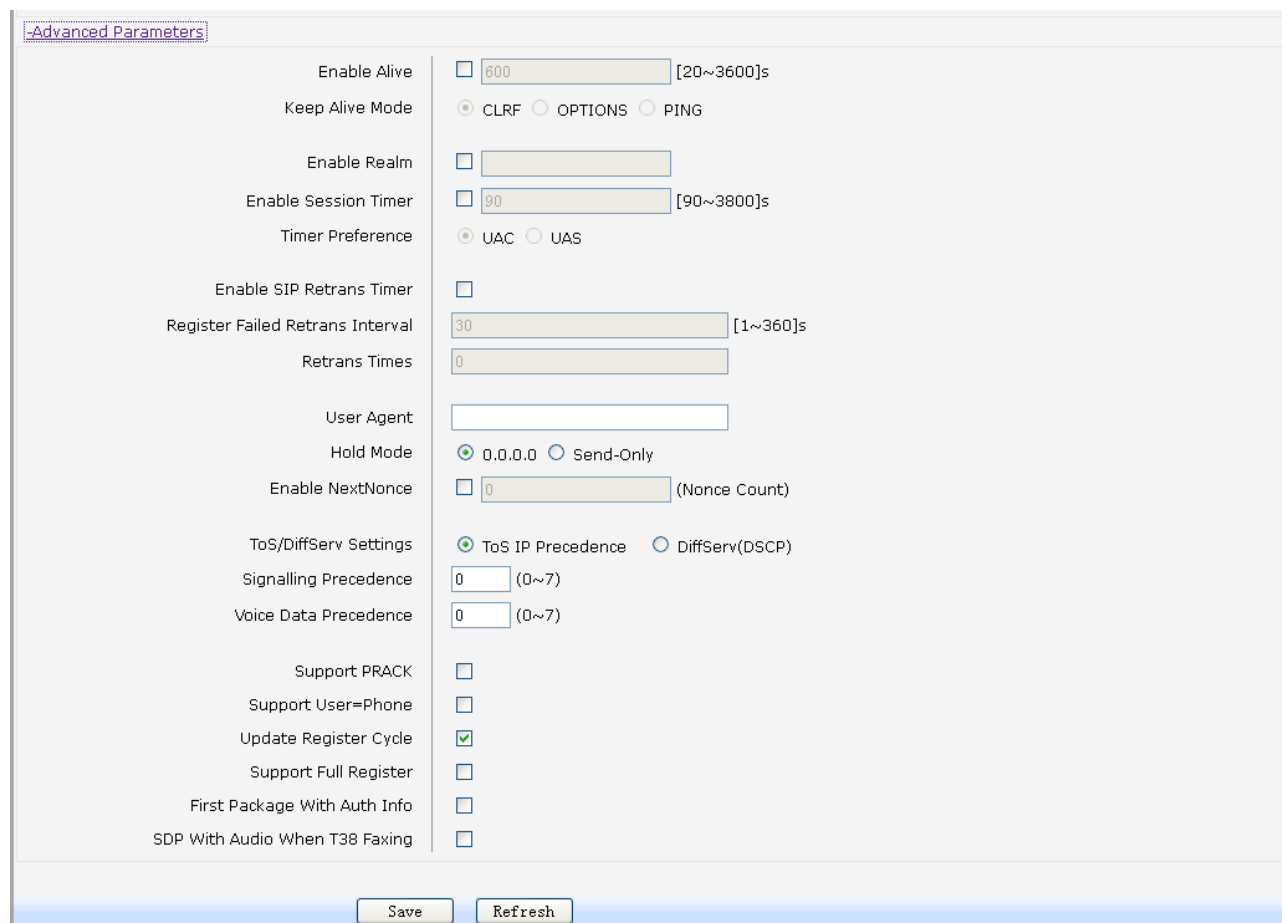

Advanced Parameters

Enable Alive	☐ 600 [20~3600]s
Keep Alive Mode	☒ CLRF ☐ OPTIONS ☐ PING
Enable Realm	☐ []
Enable Session Timer	☐ 90 [90~3800]s
Timer Preference	☒ UAC ☐ UAS
Enable SIP Retrans Timer	☐ []
Register Failed Retrans Interval	30 [1~360]s
Retrans Times	0
User Agent	[]
Hold Mode	☒ 0,0,0,0 ☐ Send-Only
Enable NextNonce	☐ 0 (Nonce Count)
ToS/DiffServ Settings	☒ ToS IP Precedence ☐ DiffServ(DSCP)
Signalling Precedence	0 (0~7)
Voice Data Precedence	0 (0~7)
Support PRACK	☐ []
Support User=Phone	☐ []
Update Register Cycle	☒ []
Support Full Register	☐ []
First Package With Auth Info	☐ []
SDP With Audio When T38 Faxing	☐ []

Save Refresh

Figure 3-101 Configure Advanced Parameters of SIP Service

The following items are displayed on this screen:

- ▶ **Enable Alive:** After successful registration, whether to send keep-alive packets.
- ▶ **Keep Alive Mode:** Keep alive mode: **CLRF**, **OPTIONS** or **PING**.
- ▶ **Enable Realm:** Check the box to enable SIP signaling packets with realm field information.
- ▶ **Enable Session Timer:** Enable or disable UAC / UAS session refresh mode.
- ▶ **Enable SIP Retrans Timer:** When registration fails, whether to initiate retransmission, retransmission cycle and time with configuration.
- ▶ **User Agent:** Check the box to enable signaling packets with **User Agent** field.
- ▶ **Hold Mode:** Select the SIP signal format of call hold.
- ▶ **Enable Next Nonce:** Enable SIP packets with nonce count field information, incremented each one and with a maximum value.
- ▶ **Support PRACK:** Enable or disable provisional response. If enabled, 1xx (except 100rel) messages are required to respond with ACK.
- ▶ **Support User=Phone:** Whether SIP signaling packets with User = Phone field information.
- ▶ **Update Register Cycle:** Based on server response to update registration period.

- **Support Full Register:** Each registration packets are generated, rather than re-issued.
- **First Package With Auth Info:** The first registration packet with authentication information.
- **SDP With Audio When T38 Faxing:** T38 fax signaling packet with audio information.

3.5.2 User

3.5.2.1 User

Choose the menu **VOIP Service**→**User**→**User** to load the following page.

☐	User	Account	Phone Number	Enable	Primary Reg-Status	Secondary Reg-Status
☐	FXS1	bgiad_test1	6001	Yes	Disabled	Disabled
☐	FXS2	--	--	No	Disabled	Disabled

1 Total 1 Pages, 2 Rows

Figure 3-102 User Configuration

Click the **Register** button to start the registering to the SIP server.

Click the **Unregister** button to start the un-registering to the SIP server.

Click the **User** in the entry you want to modify to load the following page.

Account

User: FXS1

Account: bgiad_test1 *

Auth Username: bgiad_test1

Password: ●●●●

Phone Number: 6001 *

Enable Register: ☒

Ring Group Identity: ☐

Figure 3-103 Configure User

The following items are displayed on this screen:

- **Account:** Account name registered to SIP server.
- **Auth Username:** Username of the account.
- **Password:** Password of the account.
- **Phone number:** Caller and called number of subscriber line.
- **Enable Register:** Enable registering.
- **Ring Group Identity:** Phone number configured as one hunt group, after saving, the configuration can be seen in the Centrex page.

3.5.2.2 Wildcard Group

Choose the menu **VOIP Service**→**User**→**Wildcard Group** to load the following page.

VoIP Service ==> User

User **Wildcard Group**

☐	Wildcard Group	Account	Register Status
☐	1	bgiad_test1	Not Register

Figure 3-104 Wildcard Group Configuration

Click the **Wildcard Group** in the entry you want to modify. If you want to delete the entry, select it and click the **Del**. Click the **Add** button to add a new entry.

VoIP Service ==> Wildcard Group

☒ Enable Group Register

Wildcard Group:

(Free Account List)

bgiad_test1
test2

(Register Group Account List)

(Register Account)

Figure 3-105 Add or Modify Wildcard Group Configuration

The following items are displayed on this screen:

- **Enable Group Register:** Enable or disable the group register function globally.

3.5.3 Supplementary

Choose the menu **VOIP Service**→**Supplementary** to load the following page.

VoIP Service ==> Supplementary

	User	Phone Number	Hotline	CID Restriction	DND	Call Waiting	CID	Abbr Dialing	Black&White List
☐	FXS1	6001	Disable	Disable	Disable	Disable	Enable	Abbr Dialing	Black&White List
☐	FXS2	1002	Disable	Disable	Disable	Disable	Enable	Abbr Dialing	Black&White List

Total 1 Pages, 2 Rows

Figure 3-106 User Supplementary

- Click the **User** in the entry you want to modify to load the following page. You can also select multiple, then click **Batch Edit** to batch configuration.

VoIP Service == > Supplementary ==> FXS1

Call Forward	
Call Forwarding Unconditional	☒
Call Number	(1-32 digits,*,#,null for disable)
Call Forwarding No Reply	☒
Call Number	(1-32 digits,*,#,null for disable)
Wait Time Long	[1,120]s
Call Forwarding On Busy	☒
Call Number	
Hotline	
Hotline Number	(max 32 digits,*,#)
Delay Time	0 (0~10 s)
Other	
CID Restriction	☐
Anonymous As UserName	☐
Enable No Disturb	☐
Enable Call Waiting	☐
Enable MWI	☐
Enable CID	☒
CID Mode	FSK
Save Return	

Figure 3-107 Modify Supplementary Configuration

The following items are displayed on this screen:

- ▶ **Call Forwarding Unconditional:** Enable or disable CFU function, if enabled, enter **Call Number**.
 - 1) Set by keypad service system: ***57*TN#**, TN is the phone number to be redirected to.
 - 2) Cancel by keypad service system: **#57#**.
- ▶ **Call Forwarding No Reply:** Enable or disable CFNR, if enabled, enter **Call Number** and **Wait Time Long**.
 - 1) Set by keypad service system: ***41*TN#**, TN is the phone number to be redirected to.
 - 2) Cancel by keypad service system: **#41#**.
- ▶ **Call Forwarding On Busy:** Enable or disable CFB function, if enabled, enter **Call Number**.
 - 1) Set by keypad service system: ***40*TN#**, TN is the phone number to be redirected to.
 - 2) Cancel by keypad service system: **#40#**.
- ▶ **Hotline Number:** Enter number to hotline function, empty expressed disable.
 - 1) Set **delay hotline** number by Keypad service system: ***52*TN#**, TN is the hotline number.
 - 2) Cancel **delay hotline** number by Keypad service system: **#52#**.
 - 3) Set **instant hotline** number by Keypad service system: ***42*TN#**, TN is the hotline number.
 - 4) Cancel **instant hotline** number by Keypad service system: **#42*EN#**, instant hotline can only be deactivated with other extension; EN is the extension number which needs to deactivate

- ▶ **Delay Time:** instant hotline.
Time 0 indicates immediate Hotline, Otherwise, indicates delay Hotline. The Delay Time must be configured on the WEB.
- ▶ **CID Restriction:** Enable or disable CID Restriction. If **Anonymous As UserName** is chosen, user name content is Anonymous also.
- ▶ **Enable No Disturb:** Allows block incoming calls at any time.
- ▶ **Enable Call Waiting:** When you talking, a third party phone comes in, you can hear the beep tone.
- ▶ **Enable MWI:** Enable or disable MWI (Message-waiting indicator) function.
- ▶ **Enable CID:** Enable or disable to send CID to phone.
- ▶ **CID Mode:** There are two methods used for sending caller ID information depending on the application and country specific requirements:
FSK: caller ID generation using Frequency Shift Keying (FSK)
DTMF: caller ID generation using DTMF signaling.

- 4) Abbreviated Dialing allows you to store selected phone numbers for quick and easy dialing. Each telephone number can be dialed by using a one to two-digit code with a simple prefix. Stored numbers may be up to 32 digits in length.
- If you want to add or remove abbreviated dialing numbers, click the **Abbr Dialing** to load the following page.

ABBR. Number	Phone Number
1	1001

Total 1 Pages, 1 Rows

Add Del Return

Figure 3-108 View Abbreviated Dialing Configuration

Click the **Del** button to delete the entries you select.

Click the **Add** button to add a new entry.

Abbreviated Number: 1 (1-2 digits)

Phone Number: 1001 *(1-31 digits,*,#)

Save Return

Figure 3-109 Add Abbreviated Dialing Entry

The following items are displayed on this screen:

- ▶ **Abbreviated Number:** Enter the abbreviated number.
- ▶ **Phone Number:** Enter the Actual phone number.

- 5) If you want to add or remove black&white list, click the **Black&White List** to load the following page.

Information	List Type
5123	Incoming Blacklist

<< 1 >>

Add Del Return

Figure 3-110 Black&White List Configuration

Click the **Information** in the entry you want to modify. If you want to delete the entry, select it and click the **Del**.

Click the **Add** button to add a new entry.

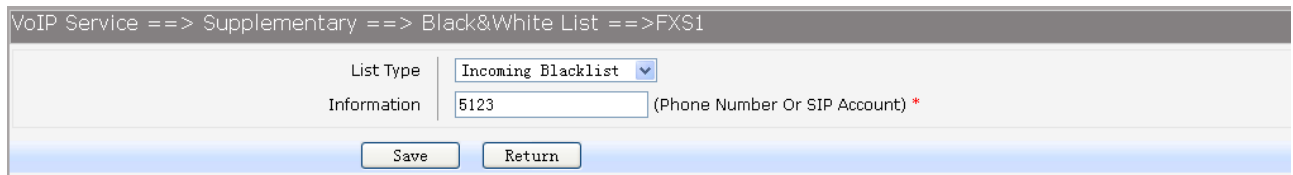


Figure 3-111 Add or Modify Black&White List Entry

The following items are displayed on this screen:

- ▶ **List Type:** Choose type of Black&White List, four types are provided:
Incoming Blacklist, Incoming Whitelist, Outgoing Blacklist, Outgoing Whitelist.
- ▶ **Information:** Enter the phone number or sip account.

3.5.4 Codec Parameters

1. Packet Period defines how long the device sends a RTP packet to the other side. The smaller the value, the more bandwidth usage. The larger the value, the more voice delay. Choose the menu **VOIP Service→Codec Parameters** to load the following page.

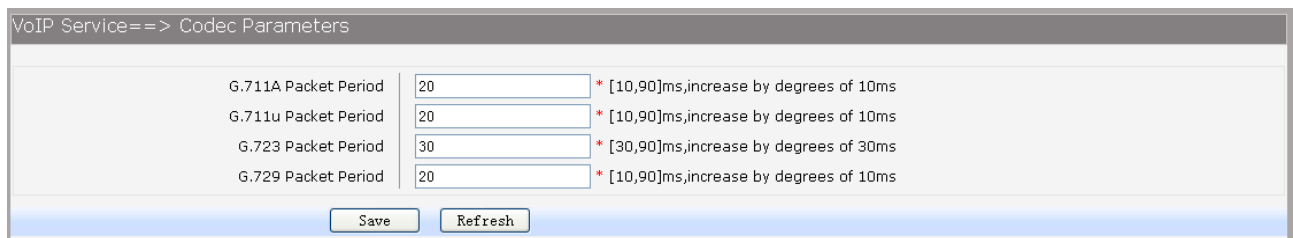


Figure 3-112 Configure Packet Period

- ▶ **G.711A Packet Period:** RTP packetization period of G.711A codec.
- ▶ **G.711u Packet Period:** RTP packetization period of G.711U codec.
- ▶ **G.723 Packet Period:** RTP packetization period of G.723 codec.
- ▶ **G.729 Packet Period:** RTP packetization period of G.729 codec.

2. Choose the menu **VOIP Service→Codec Parameters** to load the following page.

☐	User	Fax Mode	Codec First Priority	Codec Second Priority	Codec Third Priority	Codec Fourth Priority
☐	FXS1	Transparent	G.729	G.711U	G.723	G.711A
☐	FXS2	Transparent	G.711A	G.711U	G.723	G.729
1 Total 1 Pages, 2 Rows						
Batch Edit						

Figure 3-113 View Fax Mode&Codec Priority Configuration

To modify fax mode or codec priority of users, click the **User** in the entry you want to modify to load the following page. You can also select multiple, then click **Batch Edit** to batch configuration.

VoIP Service ==> Codec Parameters

Fax Mode: Fax Mode Transparent

Codec:

- Codec Answer Strategy: Use Answerer Priority
- Codec First Priority: G.729
- Codec Second Priority: G.711U
- Codec Third Priority: G.723
- Codec Fourth Priority: G.711A

Save Return

Figure 3-114 Add or Modify Fax Mode&Codec Priority

The following items are displayed on this screen:

- ▶ **Fax Mode:** Choose fax mode, three types are provided: **Transparent**, **T38**, **VBD**.
- ▶ **Codec Answer Strategy:** Two modes are provided:
 - Use Answerer Priority:** Codec selection decisions based on the priority level configuration
 - Use Offerer Priority:** Codec selection decision based on caller's priority.
- ▶ **Codec Priority:** If **Use Answerer Priority** is selected, set the priority of codec.

3.5.5 DSP Parameters

Choose the menu **VOIP Service**→**DSP Parameters** to load the following page.

VoIP Service ==> DSP Parameters

Echo Cancellation: ☒

Silence Detection / Suppression: ☐

Input Gain: 0 * [-10,12]db

Output Gain: 0 * [-10,12]db

Delay Level: Moderate *

DTMF Transfer Model: RFC2833 *

RFC2833 Load Type: 0 * [96,127]

T38 Max FAX Rate: Unlimited *

T38 Signaling Redundancy: 3 * [0~7]; default 6

T38 Data Redundancy: 0 * [0~3]; default 3

Ring Frequency: 20Hz *

Impedance Type: China Standard *

Save Refresh

Figure 3-115 Configure DSP Parameters

The following items are displayed on this screen:

- ▶ **Echo Cancellation:** Enable or disable echo cancellation.
- ▶ **Silence Detection/Suppression:** Enable or disable silence detection and silence suppression.
- ▶ **Input Gain:** Configure the input gain value.
- ▶ **Output Gain:** Configure the input gain value

- ▶ **Delay Level:** Choose the delay level, five levels are provided: **Minimum, Smaller, Moderate, Larger, Maximum.**
- ▶ **DTMF Transfer Model:** Select DTMF transmission mode: **In-Band, INFO, RFC2833.**
- ▶ **RFC2833 Load Type:** If RFC2833 is selected, specify payload type of RFC2833.
- ▶ **T38 Max FAX Rate:** Select the maximum rate, when using T38 fax mode: **Unlimited, 2400bps, 4800bps, 7200bps, 9600bps, 12000bps, 14400bps.**
- ▶ **T38 Signaling Redundancy:** Configure the redundancy of T38 signal.
- ▶ **T38 Data Redundancy:** Configure the redundancy of T38 data.
- ▶ **Ring Frequency:** Choose the ring frequency: **20Hz, 25Hz.**
- ▶ **Impedance Type:** Choose the impedance type: **600Ω, China Standard, Switzerland Standard.**

3.5.6 Digitmap

The destination number will be sent all in one time for SIP application, digitmap is used to determine exactly when there are enough digits entered from the user to place a call. If the number length of suited route item is fixed, the number will be sent when specified number of digits is received; the call will be disconnected when inter-digit timeout expires. If the number length of suited route item is indefinite, there are 3 ways to determine whether the digits is enough, press pound(#) key, timeout expires or digitmap comparing. If digits dialed partly matching with digitmap patterns, continue waiting of number receiving. If they match, send the number immediately. If not, send the number immediately too, in order to play the prompts.

Table 3-1 Digitmap Characters

Character	Description
0~9	Indicates specific digits in a telephone number expression.
X	Wildcard, matches any digit, excluding “#” and “*”.
*	Digit star
#	Digit pound
-	Connects the start and the end of a range
[]	Indicates the a range of numbers(not letters).
.	Matches an arbitrary number of occurrences of the preceding digit, including 0.
	Indicates a choice of matching expressions (OR).
T	Inter-digit timeout expires
S	Short timer expires, usually place at the middle of an expression

Digitmap Example: 8XXXXXXX|1[0-24]0[2[18].3]3XXSXX|[0-9*#][0-9*#][0-9*#].#[0-9*#].T

- “8XXXXXXX” denotes numbers start with 8, the length is 8.
- “1[0-24]0” denotes numbers include 100, 110, 120 and 140.
- “2[18].3” denotes numbers that start with 2 and end with 3, there can be arbitrary length of 1 or 8 after the first digit 2. 23, 213, 2183 is matched.
- “3XXSXX” denotes numbers start with 3, the length can be 3 or 5. If the short timer configured expires between the third digit and the fourth digit, the number will be sent.
- “[0-9*#][0-9*#][0-9*#].#” denotes numbers end with #, and the length is no less than 2.

- “[0-9*#].T” denotes any number that dialing time out.

Choose the menu **VOIP Service**→**Digitmap** to load the following page.

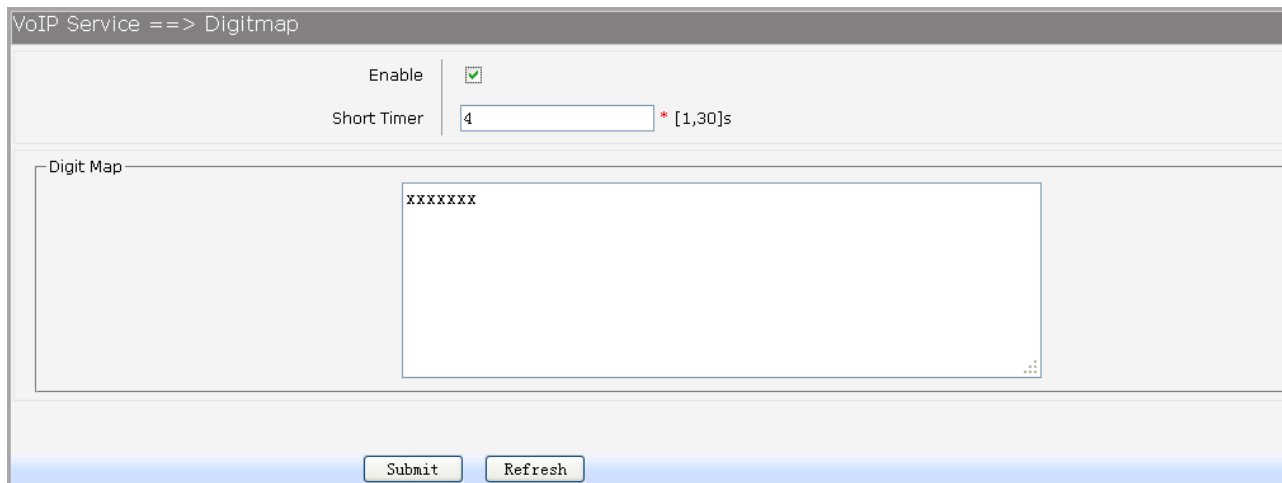



Figure 3-116 Configure Digitmap

The following items are displayed on this screen:

- ▶ **Enable:** Enable or disable digit map function.
- ▶ **Short Timer:** Enter the time of Short Timer in second.
- ▶ **Digit Map:** Enter the digit map rules.

3.5.7 Signal Tone

Choose the menu **VOIP Service**→**Signal Tone** to load the following page.

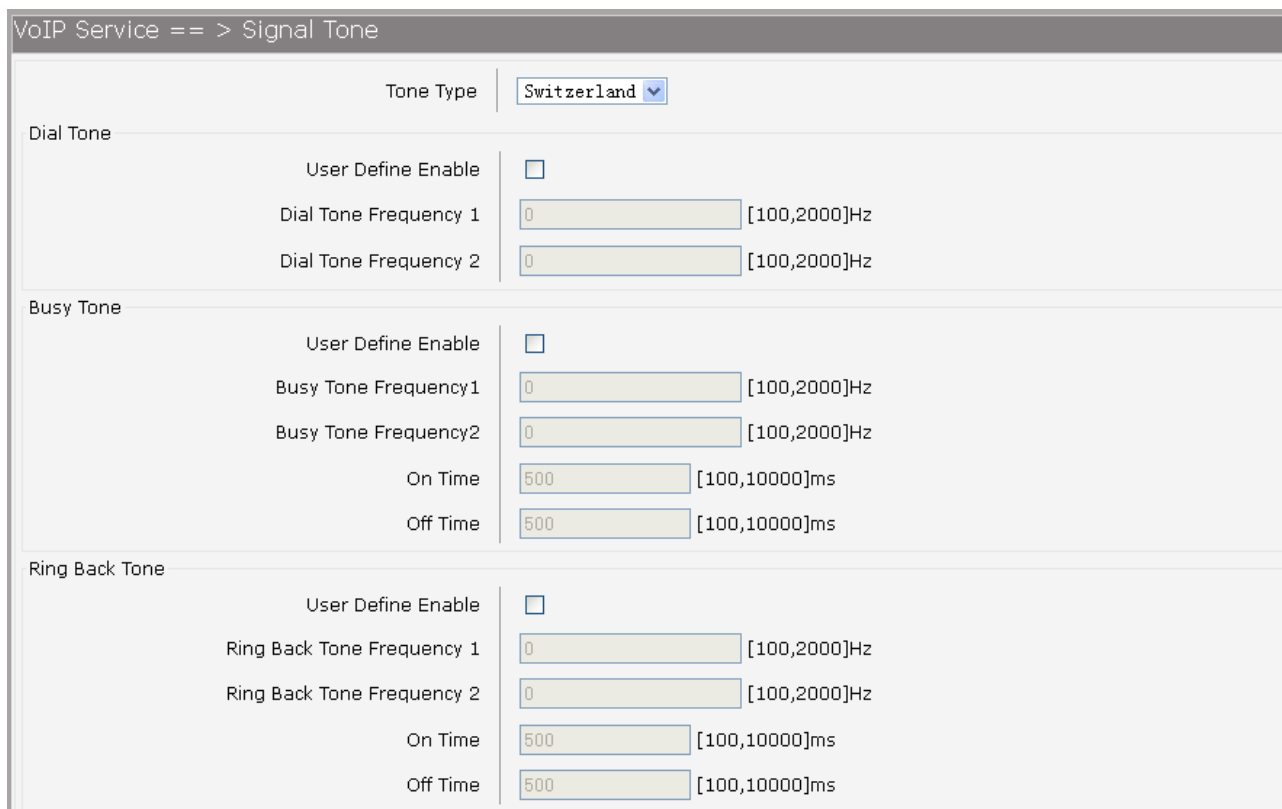

Distinction Ring		
Internal Ring On Time1	10	[1,100]*100ms
Internal Ring Off Time1	40	[1,100]*100ms
Internal Ring On Time2	0	[0,100]*100ms
Internal Ring Off Time2	0	[0,100]*100ms
External Ring On Time1	10	[1,100]*100ms
External Ring Off Time1	40	[1,100]*100ms
External Ring On Time2	0	[0,100]*100ms
External Ring Off Time2	0	[0,100]*100ms

Figure 3-117 Configure Signal Tone

The following items are displayed on this screen:

- ▶ **Tone Type:** Select the type of signal tone.

Dial Tone

- ▶ **User Define Enable:** Whether to use user-defined dial tone frequency.
- ▶ **Dial Tone Frequency 1:**
- ▶ **Dial Tone Frequency 2:**

Busy Tone

- ▶ **User Define Enable:** Whether to use user-defined busy tone frequency.
- ▶ **Busy Tone Frequency 1:**
- ▶ **Busy Tone Frequency 2:**
- ▶ **On Time:**
- ▶ **Off Time:**

Ring Back Tone

- ▶ **User Define Enable:** Whether to use user-defined ringback tone frequency.
- ▶ **Ring Back Tone Frequency 1:**
- ▶ **Ring Back Tone Frequency 2:**
- ▶ **On Time:**
- ▶ **Off Time:**

Distinction Ring: Specify the ring cadence for the FXS port. In these fields, you specify the on and off pulses for the ring. The ring cadence that should be configured differs between internal call and external call.

3.5.8 FXS Parameters

Choose the menu **VOIP Service**→**FXS Parameters** to load the following page.

VoIP Service ==> FXS Parameters

Min Flash Detect Time	80 *	[50,750]ms ; default:50
Max Flash Detect Time	500 *	[50,1200]ms ; default:500

Flash Key Enable	☒
Switch&Release Call	Flash+ 1 (0-9)
Three Party Call	Flash+ 3 (0-9)
Reject Key	Flash+ 0 (0-9)
Switch Call Key	Flash+ 2 (0-9)

Keep the hold call when onhook	☐
(#)Quick Dial Key	☒
Asterisk Func Key	☐
Tap Report	☐
Escape Seq	☐
CID Enable	☒
Callee Inverse Polarity	☐
Caller Inverse Polarity	☐

Figure 3-118 Configure FXS Parameters

The following items are displayed on this screen:

- ▶ **Min Flash Detect Time:** The minimum time to detect the flash.
- ▶ **Max Flash Detect Time:** The maximum time to detect the flash.
- ▶ **Flash Key Enable:** Whether to enable digit detect after flash.
- ▶ **Switch&Release Call:** If the digit specified is detected after flash, terminate the active call and recover the call on hold.
- ▶ **Three Party Call:** If the digit specified is detected after flash, enter the conference mode.
- ▶ **Reject Key:** If the digit specified is detected after flash, reject the call on hold.
- ▶ **Switch Call Key:** If the digit specified is detected after flash, hold the active call and recover the call on hold.
- ▶ **Keep the hold call when onhook:** If selected, when hanging up in this context, the telephone rings to notify the user there is still a call on hold.
- ▶ **(#)Quick Dial Key:** Whether to send telephone number immediately after receiving the # key.
- ▶ **Asterisk Func Key:** Whether to use the '*' key as flash key.
- ▶ **Tap Report:** Whether to report an event to server when flash detected.
- ▶ **Escape Seq:** Whether to use an escape characters when sending special DTMF.
- ▶ **CID Enable:** Whether to enable caller id globally.
- ▶ **Callee Inverse Polarity:** Whether to activate the Polarity Reversal for FXS callee.
- ▶ **Caller Inverse Polarity:** Whether to activate the Polarity Reversal for FXS caller.

3.5.9 Centrex

To control call each other of internal number in the same device, choose the menu

VOIP Service→**Centrex** to load the following page.

VoIP Service ==> Centrex

Enable Centrex ☒

☐	Group Number	Ring Policy	Ring Time	Phone Number
☐	1111	Alternate	20	Telephone Number

1 Total 1 Pages, 1 Rows

Figure 3-119 Centrex&Ring Group Configuration

The following items are displayed on this screen:

- **Enable Centrex:** Whether to enable centrex function globally.

A **hunt group** is a collection of extensions that ring in a particular order when the hunt group number is dialed. Hunt groups usually have a phone number associated with them, which are referred to as the group number. Ordinal hunt groups always start ringing the first extension in the list. Alternate hunt groups remember the last number that ringed first and begins ringing on the next number in the list. when the end of the list is reached, both wrap around to the first number in the list again. With a parallel hunt group, all extensions in the list will ring at the same time.

To delete an exist entry, select it and click the **Del**.

To modify ring policy or ring time configuration, please click the **Group Number** in the exist entry which you want to modify. You can also click the **Add** button to add a new entry.

VoIP Service ==> Ring Group

Group Number * (digital,*,#)

Ringing Policy

Ring Time * (5,90)s; default 20

Figure 3-120 Add or Modify RingGroup

The following items are displayed on this screen:

- **Group Number:** The phone number of this ring group.
- **Ringing Policy:** Phone ringing policy: **Alternate**, **Ordinal**, **Parallel**.
- **Ring Time:** Ring time of each member.

Click **Submit** button when finished, then you can **Add** telephone numbers to this Ring Group, you can also click the **Phone Number** in the exist entry to Add or Del telephone numbers.

VoIP Service ==> Centrex ==>Telephone Number

☐	Index	Telephone Number
☐	1	1001
☐	2	6001

1 Total 1 Pages, 2 Rows

Figure 3-121 Add or Delete Number of RingGroup

The following items are displayed on this screen:

- **Telephone Number:** The number will be added to the ring group.

3.5.10 Phone Book

Choose the menu **VOIP Service**→**Phone Book** to load the following page.

VoIP Service ==> Phone Book									
☐	Index	Prefix	Total Length	Modify Type	Modify Length	Modify Prefix Number	IP/Domain	Port	Description
☐	2	0	0	Unmodify	0		10.0.1.1	5050	book1
1 Total 1 Pages, 1 Rows									
Add Del									

Figure 3-122 Configure Phone Book

Click the **Index** in the entry you want to modify. If you want to delete the entry, select it and click the **Del**. Click the **Add** button to add a new entry.

VoIP Service ==> Phone Book	
Phone Prefix	0 * (digit,*,#)
Total Length	0 * (0,32); 0:is no limit
Prefix Mode	Unmodify
IP/Domain	10.0.1.1 *
Port	5050 [0 or 1024~65535]
Description	book1 *
Save Return	

The following items are displayed on this screen:

- **Phone Prefix:** The prefix of this phone book.
- **Total Length:** The total length of number to wait before sending.
- **Prefix Mode:** Mode of processing number prefix: **Unmodify**, **Remove**, **Add**, **Modify**.
- **IP/Domain:** The IP address or domain of destination.
- **Port:** The port of destination.
- **Description:** Description of this rule.

3.6 System

3.6.1 Time Management

Menu of time management is used to manage system time.

1) Manual Configuration

Choose the menu **Data Service**→**Time Management** and select **Manual Configuration** to load the following page.

Figure 3-123 Time Manual Configuration

The following items are displayed on this screen:

- ▶ **Configuration mode:** Specify configuration mode of time, **Auto Configuration** or **Manual Configuration**, default is **Manual Configuration**.
- ▶ **System Time:** Enter the system time under **Manual Configuration**.
- ▶ **Daylight Saving Time:** Enable or disable the Daylight Saving Time(DST).
- ▶ **Offset:** Enter the offset of DST.
- ▶ **Start Month:** Specify the start month of DST, range from 1 to 12 in one year.
- ▶ **Start Day of Week:** Specify the start weekday of DST, range from Sunday to Saturday.
- ▶ **Start Day of Week Last in Month:** Specify the order of start weekday in the month from pull-down list as following:
 - **First in Month**
 - **Second in Month**
 - **Third in Month**
 - **Fourth in Month**
 - **Last in Month**
- ▶ **Start Hour of Day:** Specify the start hour of DST, range from 0 to 23 in one day.
- ▶ **End Month:** Specify the end month of DST, range from 1 to 12 in one year.
- ▶ **End Day of Week:** Specify the end weekday of DST, range from Sunday to Saturday.
- ▶ **End Day of Week Last in Month:** Specify the order of end weekday in the month, similar as **Start Day of Week Last in Month**.
- ▶ **End Hour of Day:** Specify the end hour of DST, range from 0 to 23 in one day.

2) Auto Configuration

Choose **Auto Configuration** to load the following page:

System ==> Time Management

Configuration mode	Auto Configuration ☒ Manual Configuration ☐	
Enable NTP	☒	
NTP Service Mode	Client	
Primary NTP Server	ntp.ucsd.edu	(Maximum 128 Character)
Secondary NTP Server	ntp.univ-lyon1.fr	(Maximum 128 Character)
Time Zone	(GMT+01:00)CET-Germany, Italy, Switzerland, Tunisia	
Update Interval	3600	[60~36000]s; default:3600
Daylight Saving Time :	☐	
Offset :	0	Min
Start Month :	January	
Start Day of Week :	Sunday	
Start Day of Week Last in Month :	First in Month	
Start Hour of Day :	0	
Stop Month :	January	
Stop Day of Week :	Sunday	
Stop Day of Week Last in Month :	First in Month	
Stop Hour of Day :	0	

Save Refresh

Figure 3-124 Time Auto Configuration

The following items are displayed on this screen:

- ▶ **Enable NTP:** Enable or disable NTP service.
- ▶ **NTP Service Mode:** Specify CPE role as NTP Client or both Client and Server.
- ▶ **Primary NTP Server:** Specify the primary NTP server for role as NTP client.
- ▶ **Second NTP Server:** Specify the second NTP server for role as NTP client.
- ▶ **Time Zone:** Enter the local time zone.
- ▶ **Update Interval:** Specify update interval for role as NTP client.

3.6.2 Upgrade

3.6.2.1 Application

Firmware upgrade via WEB interface is available. There are 2 steps to complete firmware updating.

- 1) Choose menu "**System→Upgrade**", then select the right firmware file, click **Upgrade**, wait a few minutes for firmware downloading and programming.
- 2) Choose menu "**System →Reboot**", then click **Reboot** button to reset the device.

3.6.2.2 Configuration

3.6.2.2.1 Update Configuration

Configuration updating via WEB interface is available. There are 2 steps to complete configuration updating.

- 1) Choose menu "**System→Upgrade**", then select the right configuration file, click **Upgrade**, wait a few seconds for downloading and programming.
- 2) Choose menu "**System →Reboot**", then click **Reboot** button to reset the device.

3.6.2.2.2 Export Configuration

Configuration exporting via WEB interface is available. Click the "**Export Configuration File**" to export the configuration file.

Web interface configuration index: **System→Upgrade→(Configuration)**.

3.6.3 Reboot System

Choose menu“**System →Reboot**”, then click **Reboot** button to reset the device.

3.6.4 Backup/Restore

Choose the menu **System→Backup/Restore** to load the following page.

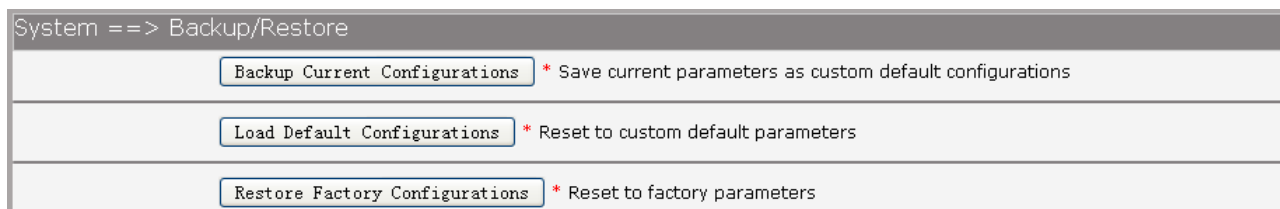


Figure 3-125 Backup/Restore Configurations

The following items are displayed on this screen:

- ▶ **Backup Current Configurations:** Save current parameters as customer default parameters.
- ▶ **Load Default Configurations:** To reset to customer default parameters.
- ▶ **Restore Factory Configurations:** To reset to factory parameters.

3.6.5 Diagnostic

3.6.5.1 Ping

Choose menu “**System→Diagnostic→Ping**”, and then you can use **Ping** function to check connectivity of your network in the following screen.

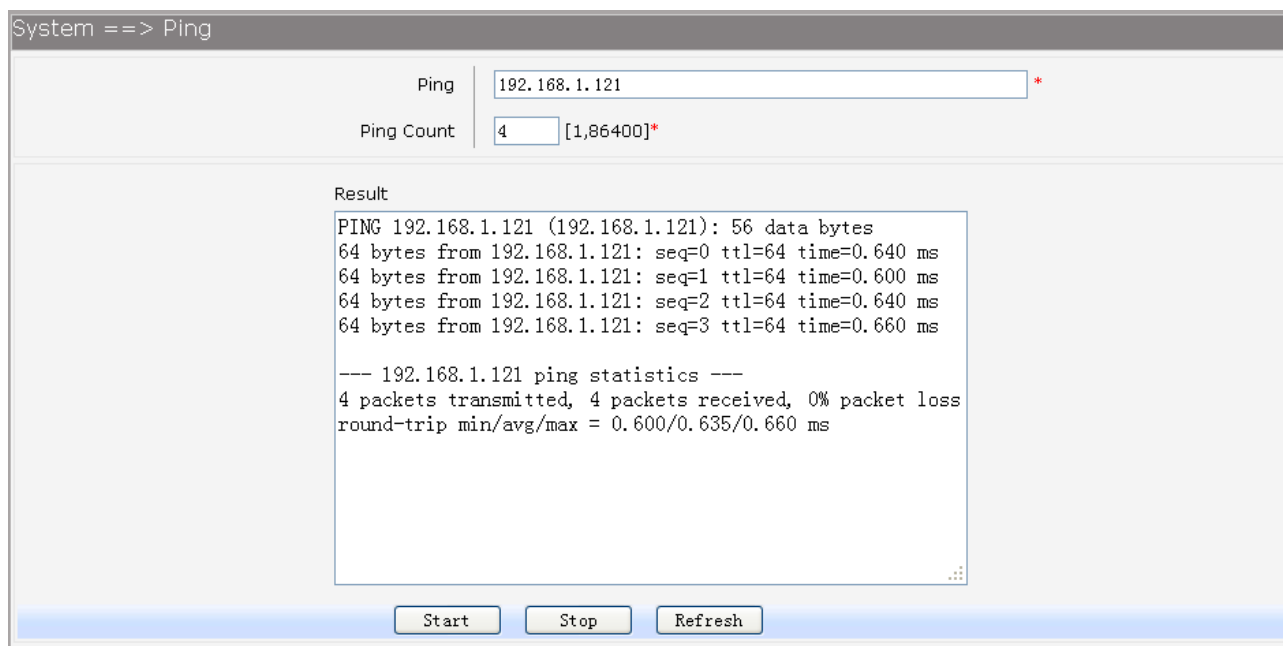


Figure 3-126 Ping Diagnostic

The following items are displayed on this screen:

- ▶ **Ping:** Enter the IP Address or Domain Name of the PC whose connection you wish to diagnose.

- **Ping Count:** Specifies the number of Echo Request messages sent.
 - **Result:** This page displays the result of diagnosis.
- Click **Start** button to check the connectivity of the Internet.
Click **Stop** button to stop sending the Echo Request messages.
Click **Refresh** button to refresh the web page.

3.6.5.2 Tcpcdump

You can use tcpcdump tool to capture the packets, and show the result of capture packets.

Choose the menu **System**→**Diagnostic**→**Tcpcdump** to load the following page.

Figure 3-127 Tcpcdump Diagnostic

The following items are displayed on this screen:

- **Interface:** By selecting the interface, only packets through this interface will be captured.
 - **Protocol:** By selecting the protocol, only packets of this protocol will be captured.
 - **Tcpcdump:** Enter some options of tcpdump(e.g. -n -s0 -c 100)
 - **Result:** This page displays the result of capture packets.
- Click **Start** button to capture the packets which correspond to the configuration requirement.
Click **Stop** button to stop capturing the packets.
Click **"*.pcap"** to open or download the capture packets file.
Click **"clean"** to delete all the packets file.
Click **Refresh** button to refresh the web page.

3.6.5.3 WAN Speed Test

Test the download speed and upload speed of WAN interface, and show the result on the web page.

Choose the menu **System**→**Diagnostic**→**WAN Speed Test** to load the following page.

Figure 3-128 WAN Speed Test

The following items are displayed on this screen:

- **Download URL:** Enter the URL to test the download speed of WAN. For example <http://speedtest1.szunicom.com/speedtest/random1000x1000.jpg>
 - **Upload URL:** Enter the URL to test the upload speed of WAN. For example <http://speedtest1.szunicom.com/speedtest/random2000x2000.jpg>
- Click the **Start** button to starting test.

3.6.6 User Management

You can change the factory default user password of the device.

Choose the menu **System**→**User Management** to load the following page.

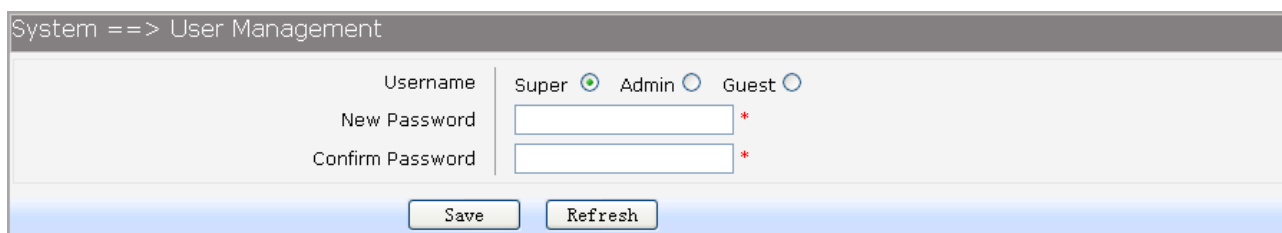


Figure 3-129 User Management

The following items are displayed on this screen:

- **Username:** You can select the user with different permissions. However, you can not select the user whose permission is higher than your permission.
- **New Password:** Enter the new password for specified user, not more than 32 characters, and the space is not supported.
- **Confirm Password:** Enter the new password again to confirm for specified user, not more than 32 characters, and the space is not supported.

Click the **Save** button when finished.

3.6.7 System Log

3.6.7.1 Log Config

Choose the menu **System**→**System Log**→**Log Config** to load the following page.

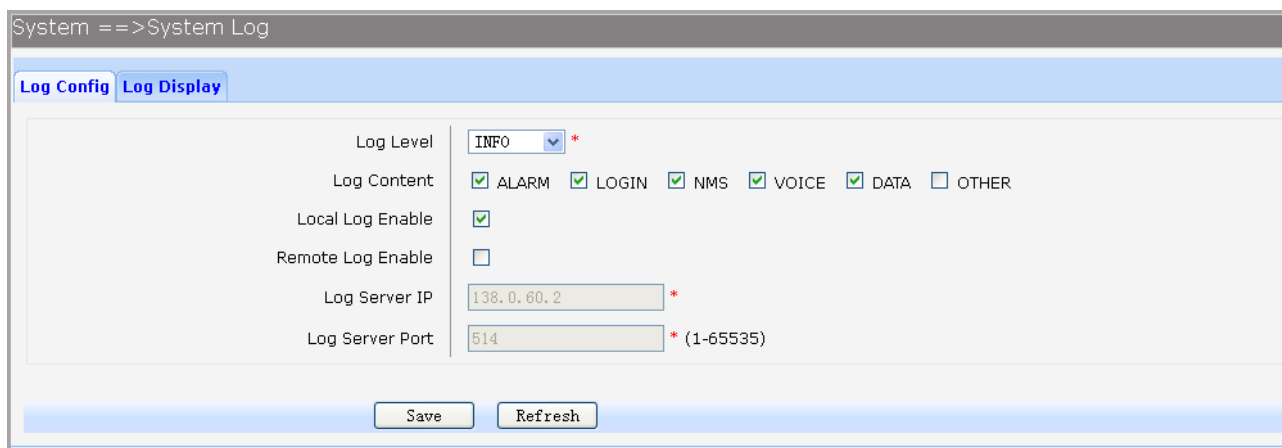


Figure 3-130 Configure System Log

The following items are displayed on this screen:

- **Log Level:** By selecting the log level, only logs of this level will be shown.
- **Log Content:** By selecting the log content, only logs of selected content will be shown.
- **Local Log Enable:** Check this box to enable local log function.
- **Remote Log Enable:** Check this box to enable remote log function, the logs will be send to the Log Server.
- **Log Server IP:** Enter the IP address of the Log Server.
- **Log Server Port:** Enter the port that Log service used.

Click the **Save** button when finished.

3.6.7.2 Log Display

Choose the menu **System**→**System Log**→**Log Display** to load the following page.

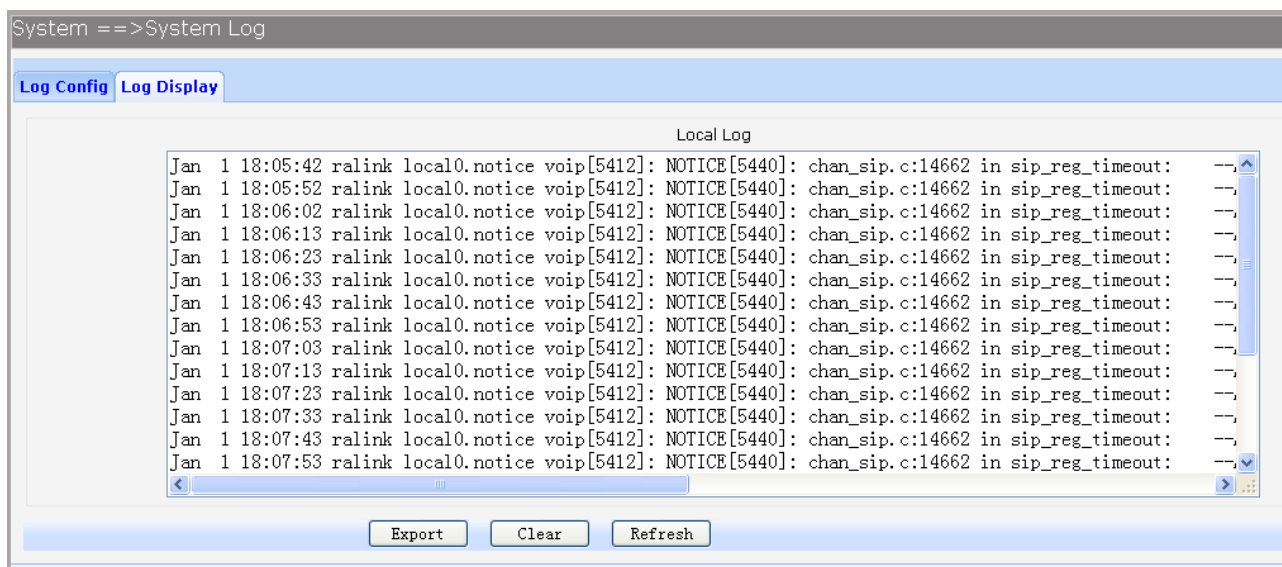


Figure 3-131 Display System Log

Click the **Export** button to export all the local logs as a file.

Click the **Clear** button to clear all the local logs from the device permanently, not just from the page.

Click **Refresh** button to refresh the web page.

3.6.8 TR069

TR-069 (Technical Report 069) is a Broadband Forum technical specification entitled CPE WAN Management Protocol (CWMP). It defines an application layer protocol for remote management of end-user devices. As a bi-directional SOAP/HTTP-based protocol, it provides the communication between customer-premises equipment (CPE) and Auto Configuration Servers (ACS). It includes both a safe auto configuration and the control of other CPE management functions within an integrated framework.

Choose the menu **System**→**TR069** to load the following page.

System ==> TR069 (WARNING:new settings are only valid after [Restarting](#))

Serial Number	000EB4B69000000eb409ad20
Enable	☒
ACS Address	192.168.1.121 *
ACS Port	8080 * (0,65535)
ACS Server Name	ACS-server/ACS *
SSL Enable	☐
Scheduler Send Inform	☒ 3600 (1,4294967295)s

Single Account Enable	☒
TR069 Account	acs *
TR069 password	●●● *

Connection Request Auth	☐
Connection Request Username	cpe
Connection Request Password	●●●
CPE Server Name	cpe
CPE Port	8099
Status	Connect Success
Fail Reason	Connected Success

Figure 3-132 Configure TR069

The following items are displayed on this screen:

- ▶ **Serial Number:** The serial number of device. Read only.
- ▶ **Enable:** Enable or disable the TR069 function globally.
- ▶ **ACS Address:** Enter the IP address or domain name of ACS.
- ▶ **ACS Port:** Enter the port of ACS.
- ▶ **ACS Server Name:** Enter the TR069 server name of ACS.
- ▶ **SSL Enable:** Enable or disable the SSL(Secure Sockets Layer) for TR069.
- ▶ **Scheduler Send Inform:** Whether or not the CPE must periodically send CPE information to Server using the Inform method call. Enter the duration in seconds of the interval if enabled.
- ▶ **Single Account Enable:** Whether or not the TR069 Account is enabled.
- ▶ **TR069 Account:** Username used to authenticate the CPE when making a connection to the ACS.
- ▶ **TR069 password:** Password used to authenticate the CPE when making a connection to the ACS.
- ▶ **Connection Request Auth:** Whether to authenticate an ACS making a Connection Request to the CPE.
- ▶ **Connection Request Username:** Username used to authenticate an ACS making a Connection Request to the CPE.
- ▶ **Connection Request Password:** Password used to authenticate an ACS making a Connection Request to the CPE.
- ▶ **CPE Server Name:** A part of the HTTP URL for an ACS to make a Connection

- **CPE Port:** Request notification to the CPE. In the form:http://host:port/**path**
A part of the HTTP URL for an ACS to make a Connection Request notification to the CPE. In the form:http://host:**port**/path
- **Status:** Connection Status when CPE making a connection to the ACS.
Read only.
- **Fail Reason:** Show reason for the failure when CPE making a connection to the ACS. Read only.

Click the **Save** button when finished.

Click **Refresh** button to refresh the web page.

3.6.9 SNMP

You can configure the SNMP parameters and view the registration status of SNMP. Choose the menu **System**→**SNMP** to load the following page.

Figure 3-133 Configure SNMP

The following items are displayed on this screen:

- **Register Enable:** Check this box to enable SNMP register.
- **Server Address or Domain:** Enter the IP address or domain name of register server.
- **Server Port:** Enter the port of Register Server.
- **TRAP Message Interval:** Set the sending interval between TRAP messages.
- **Regional Identity:** Set the identity of regional.
- **Device Identifier:** Set the identifier of device.
- **Enable Double Register Server:** Check this box to enable backup Register Server.
- **Backup Server Address or Domain:** Enter the IP Address or Domain Name of Backup Register Server.
- **Backup Server Port:** Enter the port of Backup Register Server.
- **Registration Status:** The status of registration.Read only.

Click the **Save** button when finished.

Click **Refresh** button to refresh the web page.

3.6.10 User Access Right

If the permission level of login user is super, you can see this web page. On this page, you can change the access right of the user to access the web pages.

Choose the menu **System**→**User Access Right** to load the following page.

System ==> User Access Right		
Index	Username	Access Detail
1	admin	detail
2	guest	detail

Figure 3-134 View users

If you want to change the user access right, click **detail** in the entry to load the following page.

System ==> WebAccessSetting	
☐ Network ☒ Status ☒ WAN ☒ LAN ☒ WLAN ☒ 3G Modem ☐ VLAN ☐ PortMirror ☐ IPv6	
☐ Data Service ☒ Status ☒ DHCP Server ☒ NAT Basic-Settings ☒ PAT Settings ☒ DMZ Settings ☐ ALG Settings ☒ Attack Defense ☒ Service Type ☒ Internet Access-Ctrl ☒ Management Access-Ctrl ☒ Filter Strategy ☐ IP&MAC Binding ☐ Basic Settings ☐ ACL ☐ Port Rate Limit ☐ Flow Rate Limit ☐ Service ☐ DDNS ☐ GRE VPN ☐ PPTP VPN ☐ L2TP VPN ☐ IPSec ☒ Static Route ☐ Policy Route ☐ RIP ☐ UPnP Parameter ☐ Apply Filter Control ☐ Multicast ☒ Share File	

VoIP Service	
☒	SIP Service
☒	User
☐	Supplementary
☒	Codec Parameters
☒	DSP Parameters
☐	Digitmap
☐	Signal Tone
☐	FXS Parameters
☐	Centrex
☐	Phone Book

System	
☒	Time Management
☒	Upgrade
☒	Reboot
☒	Backup/Restore
☒	Ping
☒	Tcpdump
☐	WAN Speed Test
☐	User Management
☐	System Log
☒	TR069
☐	SNMP

Save Return

Figure 3-135 Modify User Access Right

3.7 Apply

Follow the prompts, Some parameters will take effect after click the button of “**Apply**”.

Home | Network | Data Service | VoIP Service | System | **Apply** | Logout |

System ==> Time Management (WARNING: new settings are only valid after clicked [Apply])

Figure 3-136 Apply

3.8 Print Function

The device supports to link printer port and provides share printing capabilities to other computers. To use print function, you need do the following steps.

2. Add Printer

Open the windows of the Control Panel, select Printers and Faxes, and add the printer

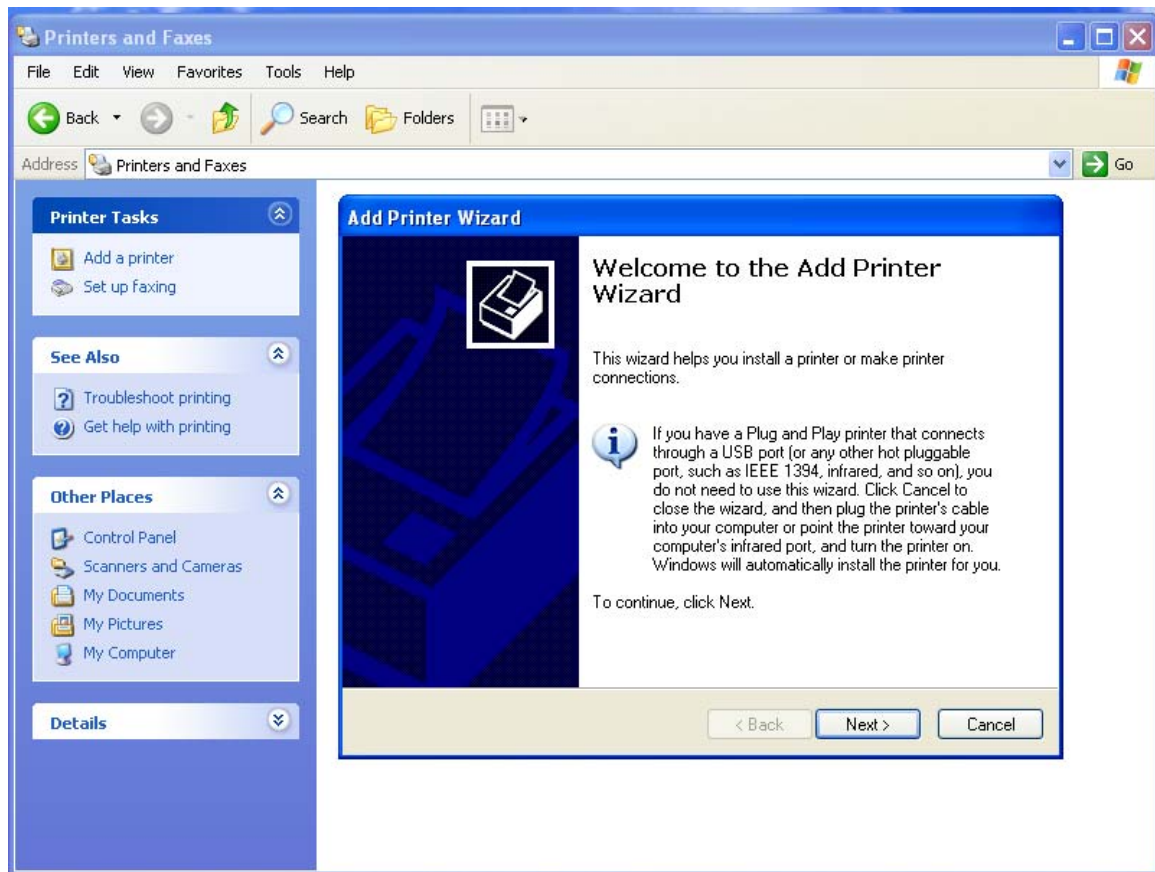


Figure 3-137 Add Printer

3. Connecting local printer

Select "Local printer attached to this computer."

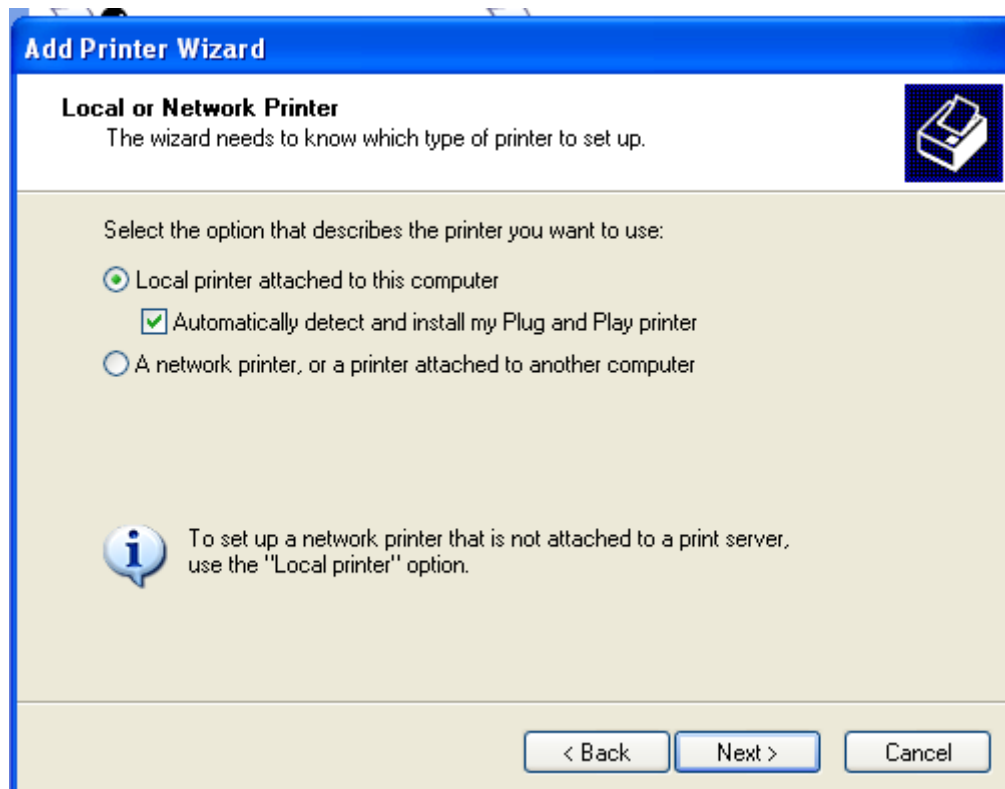


Figure 3-138 Connecting local printer

4. Create a new port

Select "Create a new port" and select "Standard TCP / IP Port"

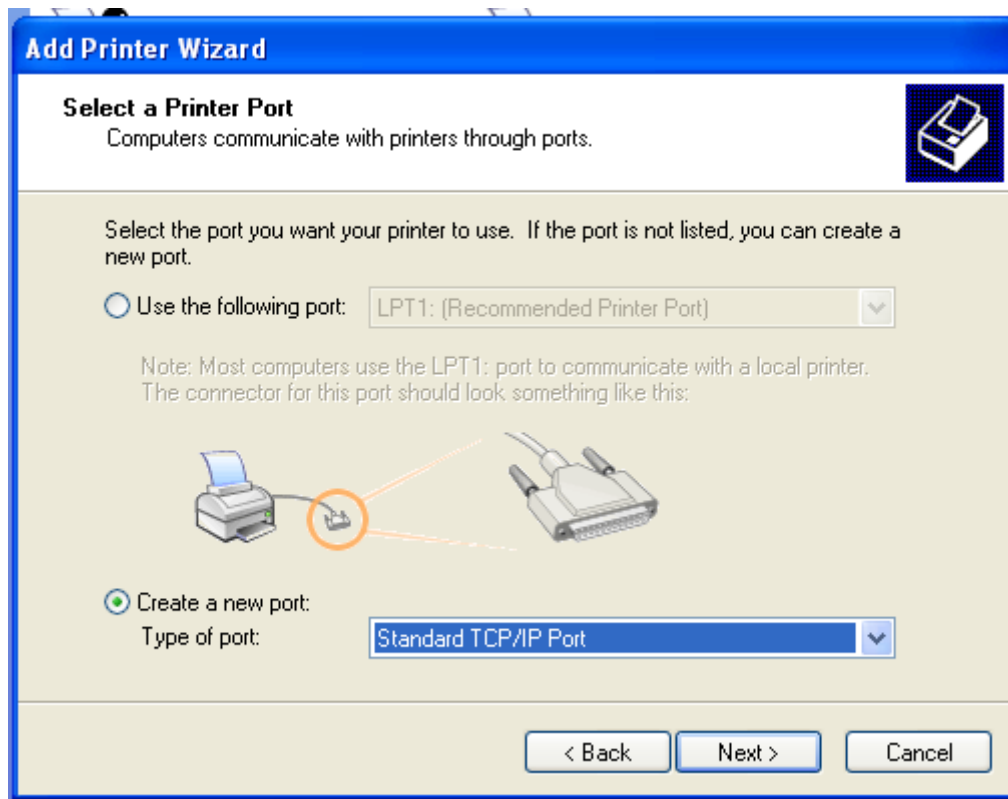


Figure 3-139 Create a new port

5. Add print device

Click Next, and add IP devices, assuming the device IP is 192.168.1.1.

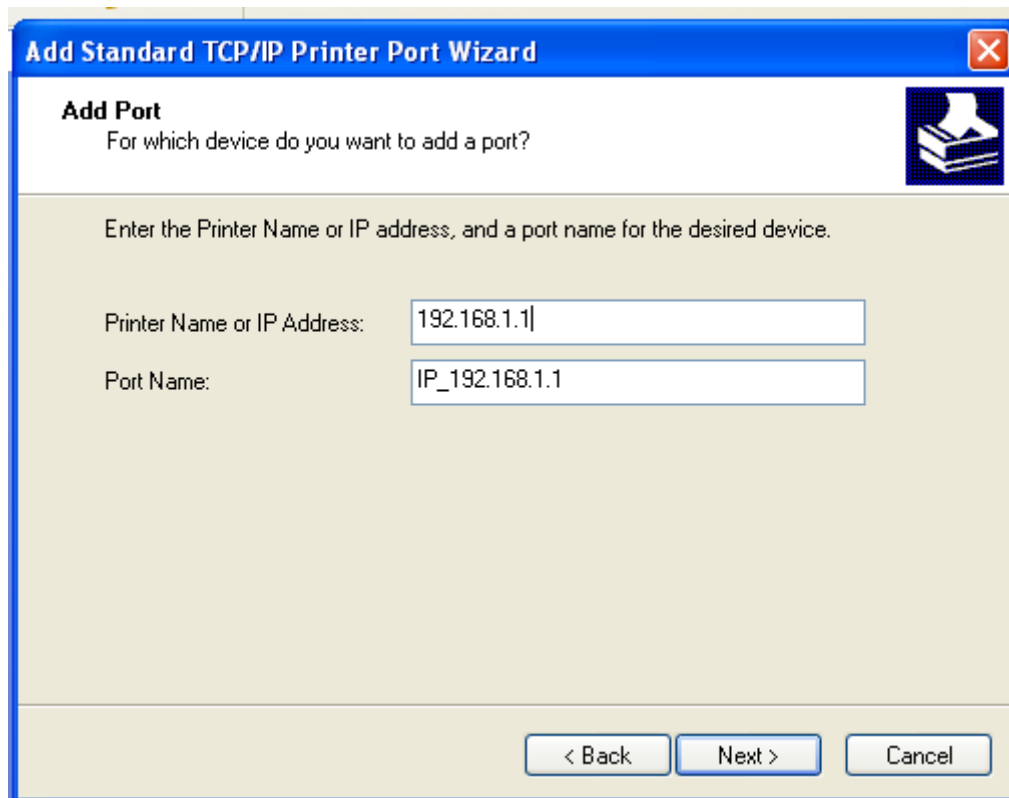


Figure 3-140 Add IP LAN devices

6. Configure printer port

Select "Custom", click "Settings" to confirm the agreement as "RAW (R)"

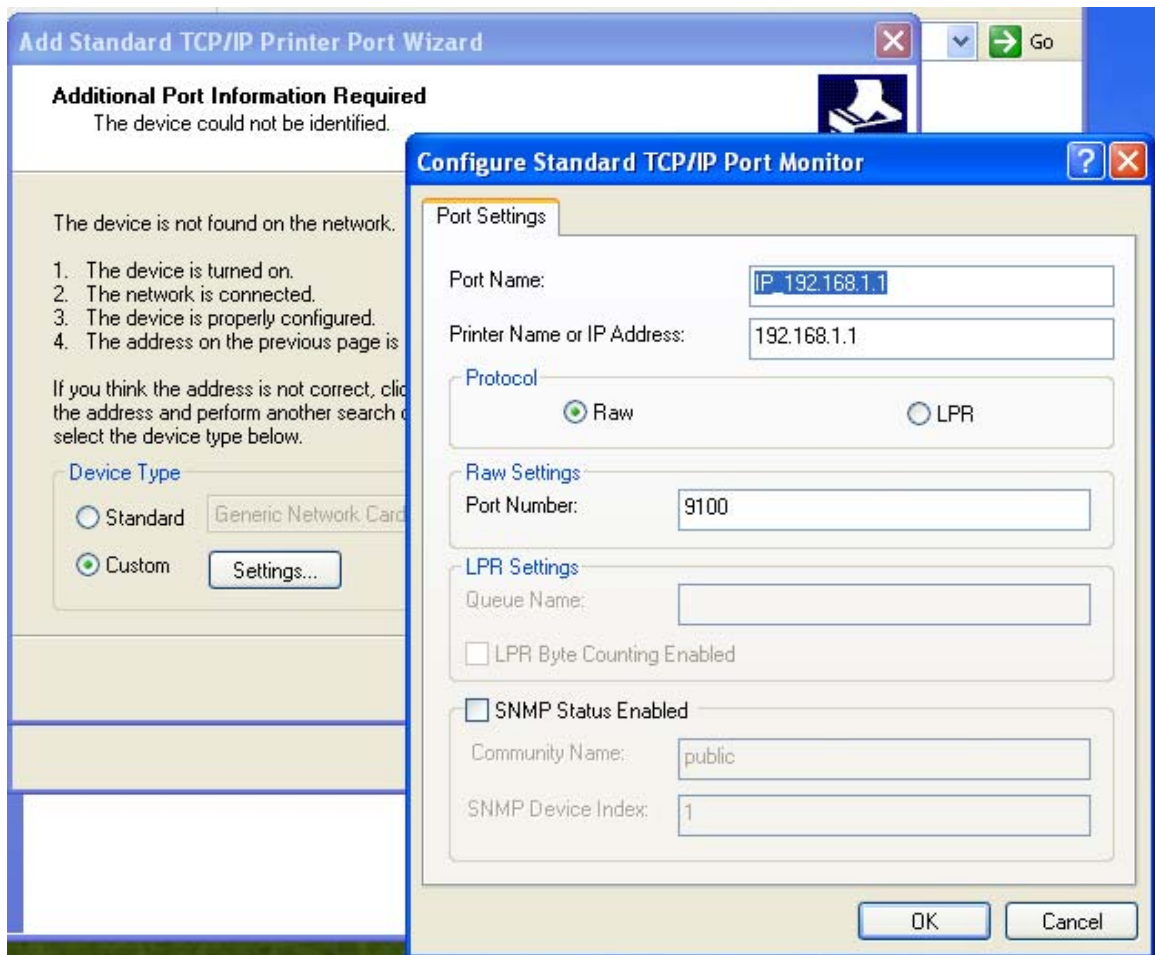


Figure 3-141 Configurer printer port

7. Add Printer Driver

According to the printer manufacturer and printer type, select the appropriate driver. If the computer has not printer driver, you need to install the printer driver.

After adding the printer, you can print through the USB printer.

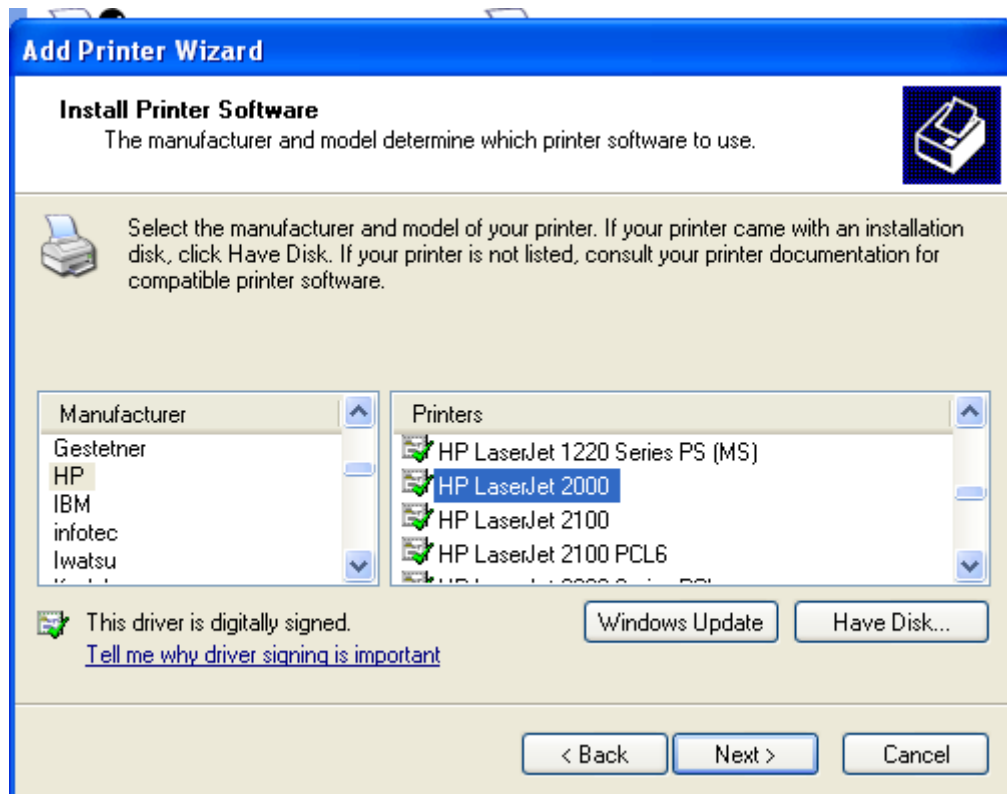


Figure 3-142 Add Printer Driver

4 CLI Introduction

4.1 Login

The CLI interface is ready for accessing about one minute after the device powers on. The default LAN IP address is 192.168.100.1, you can access the CLI interface via either WAN port or LAN port. Enter telnet with IP address and then press ENTER, you can get access to the Login interface. Such as IP address is 192.168.100.17, you can input “telnet 192.168.100.17”, and then press ENTER, it will show as below:

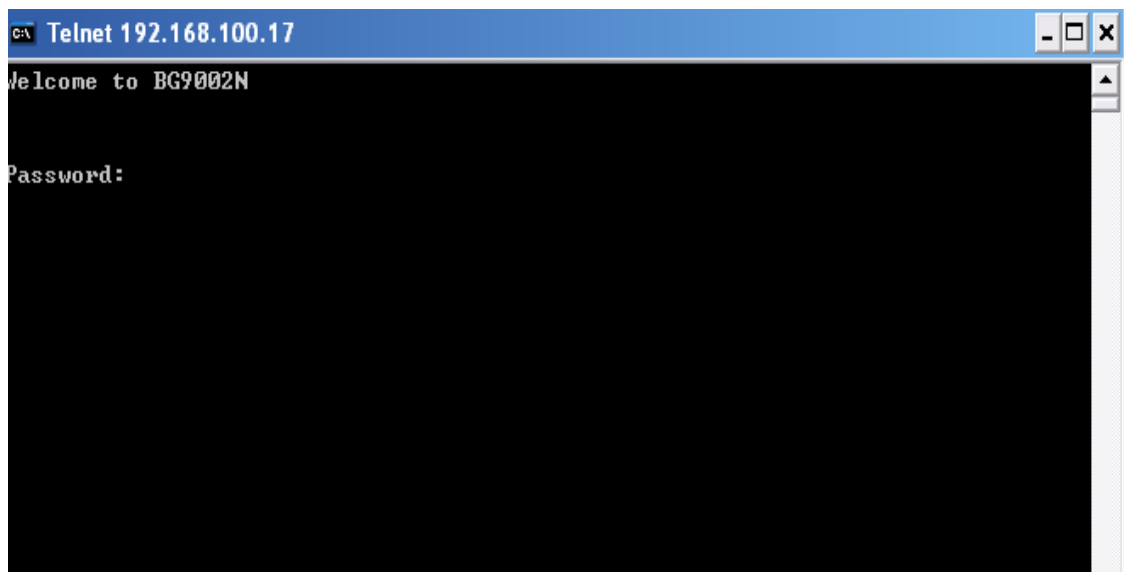


Figure 4-1 Telnet Login

And input the “password” and “en” and the privileged password, you will enter the CLI command interface:

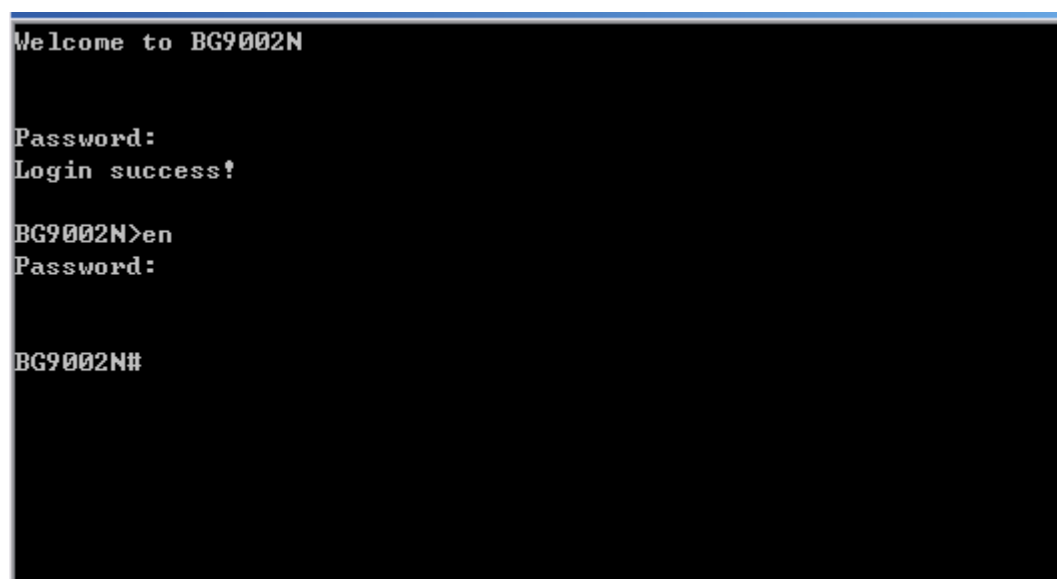


Figure 4-2 Telnet Command Interface

Input the command “set language” to set the CLI language:

```

Welcome to BG9002N

Password:
Login success!

BG9002N>en
Password:

BG9002N#set lang

BG9002N#set language
CLI语言<CLI language>:
0 -- 中文<Chinese>
1 -- 英文<English>
->[1]:1

BG9002N#

```

Figure 4-3 Set CLI Language

4.2 Network

4.2.1 3G Modem

The command “show 3gmodem” show the 3G modem information as below:

```

BG9002N#show 3gmodem

SP Network.....: Swisscom
Connect Mode.....: Manual
Online Mode.....:
  Disconnect After Idle Interval
Idle Interval.....: 60
Authentication.....: Auto
DNS.....: 192.168.5.6
TCP MSS.....: 1460
MTU.....: 1500
Data Link Backup.....: Enable
Heartbeat Address.....: 192.168.6.3

```

Figure 4-4 Show 3G Modem Information

The command “set 3gmodem” configure the 3G modem parameters as below.

```

BG9002N#set 3gmodem
->SP Network<0-Other,1-Swisscom>[1]:
->Connect Mode<0-Manual,1-Auto>[0]:
->Online Mode<0-Always Online,1-Disconnect After Idle Interval>[1]:
->Idle Interval<1~65535>[60]:
->Advanced Parameters? 'yes' or 'no'[no]:y
->Authentication <0-Auto,1-CHAP,2-PAP>[0]:
->DNS[192.168.5.6]:
->TCP MSS<128~2048>[1460]:
->MTU<128~1500>[1460]:
->Data Link Backup? 'yes' or 'no'[no]:y
->Heartbeat Address[0.0.0.0]:192.168.6.3
Really want to modify? 'yes' or 'no'[yes]:
The configuration will take effect after saved and reloaded!
BG9002N#
  
```

Figure 4-5 Configure 3G Modem Parameters

The following items are displayed on this screen:

- ▶ **SP Network:** **Other** or **Swisscom**. If it is not the target user, you need to select the other.
- ▶ **Connect Mode:** **Manual** or **Auto**. The default is Auto.
- ▶ **Online Mode:** **always online** and **disconnect after idle interval**. The default is “always online”.
The default idle interval is 60 seconds.

If **Other** is selected, the following parameters appear:

- ▶ **Username:** 3G network dial-up username.
- ▶ **Password:** 3G network dial-up password.
- ▶ **Dial Number:** 3G network dial numbers.
- ▶ **APN:** 3G network access APN.
- ▶ **PIN:** 3G networks need to use dial-up PIN code, if not, can be set to empty.

Advanced Parameters:

- ▶ **Authentication:** 3G dial-up authentication, **CHAP**, **PAP**, **Auto** are provided. Default is **Auto**.
- ▶ **DNS:** The default is obtained from the dial-up network devices automatically. You can also configure DNS manually.
- ▶ **TCP MSS:** Configure TCP maximum segment, we recommend using the default value.
- ▶ **MTU:** Configure 3G link MTU, the default value is recommended
- ▶ **Data Link Backup:** When enabled, if WAN uplink port is disconnected, the routing switches to the 3G link.
- ▶ **Heartbeat Address:** Set the heartbeat detecting address of the link, the default configuration is not required.

The command “show 3gmodem-status” show the 3G modem status as below:

```

BG9002N#show 3gmodem-status

Device Status.....: Unready
SIM Card Status.....: Unready
Product Name.....:
Manufacturer Name.....:
SP Name.....:
Signal Quality.....: 0
Connection Status.....: Disconnected

BG9002N#
  
```

Figure 4-6 Show 3G Modem Status

The following items are displayed on this screen:

- ▶ **Device Status:** Indicates whether to insert 3G module.
- ▶ **SIM Card Status:** Indicates whether to insert 3G modem in the SIM card, the ready state means the SIM card is detected.
- ▶ **Product Name:** 3G modem Product Type.
- ▶ **Manufacturer Name:** 3G modem vendor name.
- ▶ **SP Name:** 3G modem service provider name.
- ▶ **Signal Quality:** Signal quality of 3G Modem, up to 31.
- ▶ **Connection Status:** Connected or disconnected.

4.2.2 Port Management

4.2.2.1 Port Mirror

The command “show port-mirror” show the port mirror information as below:

```
BG9002N#show port-mirror
Destination mirror port.....: 4

Port 0.....: Not enable
Port 1.....: Ingress & Egress
Port 2.....: Not enable
Port 3.....: Not enable
Port 5.....: Not enable
Port 6.....: Not enable

BG9002N#_
```

Figure 4-7 Show Port Mirror Information

The command “set port-mirror” configure the port mirror parameters as below.

```
BG9002N#set port-mirror
->Enable Port Mirror 'yes' or 'no' [no]: y
->Destination Port(1~5)[4]:
->Source Port(0~6)[1]:
->Mirror Type(0-ingress, 1-egress, 2-both)[2]:
Really want to modify? 'yes' or 'no' [yes]:
The configuration will take effect after saved and reloaded!

BG9002N#_
```

Figure 4-8 Configure Port Mirror Parameters

The following items are displayed on this screen:

- ▶ **Enable Port Mirror:** Enable or disable port mirror.
- ▶ **Destination Port:** The duplicate of packets from **Source Port** will send to this destination port.
- ▶ **Source Port:** All packets received from **Source Port** will be duplicated and the duplicate will be send to **Destination Port**.

4.2.2.2 Media Type

The command “show port-status” show the port status information as below:

```

BG9002N#show port-status
Switch port:
  WAN <-> port5, LAN1~4 <-> port1~4
  But if WAN is fiber interface: LAN1~4 <-> port1~4

Port 1.....: Link down?
Port 2.....: Link down?
Port 3.....: 10Mbps, Half Duplex, Auto-neg: Enable
Port 4.....: Link down?
Port 5.....: Link down?

BG9002N#
  
```

Figure 4-9 Show Port Status Information

The command “show port media-type” show the port media type information as below:

```

BG9002N#set port media-type
Switch port:
  WAN <-> port5, LAN1~4 <-> port1~4
  But if WAN is fiber interface: LAN1~4 <-> port1~4

->Input port index<1~5>[1]:
->Connection type:
  0 - 10Mbps, Half Duplex
  1 - 10Mbps, Full Duplex
  2 - 100Mbps, Half Duplex
  3 - 100Mbps, Full Duplex
  4 - 1000Mbps, Full Duplex
  5 - Auto-Negotiation
->Input connection type[4]:
Really want to modify? 'yes' or 'no'[yes]:
The configuration will take effect after saved and reloaded!

BG9002N#
  
```

Figure 4-10 Show Port Media Type Information

The command “set port media-type” configure the port media type parameters as below.

```

BG9002N#show port media-type
WAN.....:1000Mbps, Full Duplex
LAN1.....:Auto-Negotiation
LAN2.....:Auto-Negotiation
LAN3.....:Auto-Negotiation
LAN4.....:Auto-Negotiation

BG9002N#
  
```

Figure 4-11 Configure Port Media Type Parameters

The following items are displayed on this screen:

- ▶ **Media Type:** provides the following six modes to all physical ports: 10M Half Duplex, 10M Full Duplex, 100M Half Duplex, 100M Full Duplex, 1000M Full Duplex, Auto-Negotiation.
- ▶ **Current Status:** Current link status of all physical ports. Read only.

4.2.3 Wan Parameter

4.2.3.1 Show Wan Parameter

The command “show wan” show the WAN interface configuration as below:

```
BG9002N#show wan
->Please select one interface name to show<
1----DATA
2----VOICE
3----MGMT
4----OTHER1
5----OTHER2>[1]:
```

Figure 4-12 Show Wan Parameter

The wan interfaces include DATA、VOICE、MGMT、OTHER1 and OTHER2.
Input “1” to show DATA parameter as below:

```
BG9002N#show wan
->Please select one interface name to show<
1----DATA
2----VOICE
3----MGMT
4----OTHER1
5----OTHER2>[1]:

Interface Name.....:DATA
Enable or not.....:yes
LINK TYPE.....:PPPOE
Vlan Enable.....:yes
VLAN ID.....:2
Priority Level.....:3
Primary DNS.....:10.0.0.1
MTU.....:1500
Username.....:pppoeuser
Password.....:*****
AC Name.....:dsfsdf
Service Name.....:fdgfdg
LCP Interval.....:10
LCP Max Fails.....:5
```

Figure 4-13 Show DATA Interface Parameter

Input “2” to show VOICE parameter as below:

```

BG9002N#show wan
->Please select one interface name to show<
1----DATA
2----VOICE
3----MGMT
4----OTHER1
5----OTHER2>[1]:2

Interface Name.....:VOICE
Enable or not.....:yes
LINK TYPE.....:DHCP
Ulan Enable.....:yes
VLAN ID.....:1
Priority Level.....:0
Primary DNS.....:192.168.100.9
Secondary DNS.....:138.1.60.1
MTU.....:1500
Specify Server Ip or not.....:yes
Server IP address.....:138.0.60.2
Vendor Class Identifier or not.....:yes
Enterprise Code.....:3
Manufacture name.....:company
Device Class.....:device1
Device Type.....:type1
Device version.....:version1
  
```

Figure 4-14 Show VOICE Interface Parameter

Input “3” to show MGMT parameter as below:

```

BG9002N#show wan
->Please select one interface name to show<
1----DATA
2----VOICE
3----MGMT
4----OTHER1
5----OTHER2>[1]:3

Interface Name.....:MGMT
Enable or not.....:yes
LINK TYPE.....:DHCP
Ulan Enable.....:yes
VLAN ID.....:3
Priority Level.....:1
Primary DNS.....:138.0.60.2
Secondary DNS.....:138.1.60.1
MTU.....:1500
Specify Server Ip or not.....:yes
Server IP address.....:138.0.60.2
Vendor Class Identifier or not.....:no
Enterprise Code.....:0
Manufacture name.....:company1
Device Class.....:device2
Device Type.....:type3
Device version.....:version2
  
```

Figure 4-15 Show MGMT Interface Parameter

Input “4” to show OTHER1 parameter as below:

```

BG9002N#show wan
->Please select one interface name to show<
1----DATA
2----VOICE
3----MGMT
4----OTHER1
5----OTHER2>[1]:4

Interface Name.....:OTHER1
Enable or not.....:yes
LINK TYPE.....:PPTP
Vlan Enable.....:yes
VLAN ID.....:4
Priority Level.....:0
Primary DNS.....:138.0.60.2
Secondary DNS.....:138.1.60.1
MTU.....:1500
Specify Server Ip or not.....:no
Vendor Class Identifier or not.....:no
Enterprise Code.....:0
Manufacture name.....:
Device Class.....:
Device Type.....:
Device version.....:
Server IP.....:138.0.60.2
PPTP Username.....:gkser
PPTP Password.....:*****
Enable Encryption or not.....:no

```

Figure 4-16 Show OTHER1 Interface Parameter

Input “5” to show OTHER2 parameter as below:

```

BG9002N#show wan
->Please select one interface name to show<
1----DATA
2----VOICE
3----MGMT
4----OTHER1
5----OTHER2>[1]:5

Interface Name.....:OTHER2
Enable or not.....:yes
LINK TYPE.....:L2TP
Vlan Enable.....:yes
VLAN ID.....:5
Priority Level.....:0
Primary DNS.....:138.0.60.2
Secondary DNS.....:138.1.60.1
MTU.....:1500
Specify Server Ip or not.....:yes
Server IP address.....:138.0.60.2
Vendor Class Identifier or not.....:yes
Enterprise Code.....:3
Manufacture name.....:comany5
Device Class.....:class5
Device Type.....:type5
Device version.....:version5
Server IP.....:138.0.60.1
L2TP username.....:gkser
L2TP password.....:*****

```

Figure 4-17 Show OTHER2 Interface Parameter

4.2.3.2 Configure Wan Parameter

The command “set wan” configure the wan interface parameter as below:

```

BG9002N#set wan
->Please select one interface name to show<
1----DATA
2----VOICE
3----MGMT
4----OTHER1
5----OTHER2>[1]:

```

Figure 4-18 Configure WAN Parameter

The wan interfaces include DATA、VOICE、MGMT、OTHER1 and OTHER2.
Input “1” to configure DATA parameter as below:

```

BG9002N#set wan
->Please select one interface name to show<
1----DATA
2----VOICE
3----MGMT
4----OTHER1
5----OTHER2>[1]:
->LINK TYPE<0-STATIC IP,1-PPPOE,2-DHCP,3-PPTP,4-L2TP>[1]:
->Vlan Enable[yes]:
->VLAN ID<1-4095>[2]:
->Priority Level<0-7>[3]:
->Primary DNS[10.0.0.1]:
->Secondary DNS[0.0.0.0]:
->MTU<512-1500>[1500]:
->Username[pppoeuser]:
->Password[*****]:
->AC Name[dsfsdf]:
->Service Name[fdgfdg]:
->LCP Interval<1-3000>[10]:
->LCP Max Fails[5]:
->Really want to modify? 'yes' or 'no'[yes]:

The configuration will take effect after saved and reset!
  
```

Figure 4-19 Configure DATA Interface Parameter

The following items are displayed on this screen:

- ▶ **Enable:** Enable this WAN interface (DATA can't be disabled).
- ▶ **Type:** Select PPPoE if your ISP provides xDSL Virtual Dial-up connection.
- ▶ **VLAN Enable:** Optional. Enable VLAN to configure VLAN ID and VLAN Priority Level.
- ▶ **VLAN ID:** Optional. VLAN ID of this WAN interface.
- ▶ **Priority Level:** Optional. VLAN Priority Level of this WAN interface.
- ▶ **Primary DNS:** Enter the IP address of your ISP's Primary DNS (Domain Name Server) manually. If you are not clear, please consult your ISP. It's not allowed to access the Internet via domain name if the Primary DNS field is blank.
- ▶ **Secondary DNS:** Optional. If a Secondary DNS Server address is available, enter it.
- ▶ **Username:** Enter the Account Name provided by your ISP. If you are not clear, please consult your ISP.
- ▶ **Password:** Enter the Password provided by your ISP.
- ▶ **Service Name /AC Name:** Optional. The service name and AC (Access Concentrator) name, which should not be configured unless you are sure it is necessary for your ISP. In most cases, leaving these fields blank will work.
- ▶ **LCP Interval:** PPPoE will send an LCP echo-request frame to the peer every **LCP interval** seconds.
- ▶ **LCP Max Fails:** PPPoE will presume the peer to be dead if **LCP Max Fails** LCP echo-requests are send without receiving a valid LCP echo-reply.

Input "2" to configure VOICE parameter as below:

```

BG9002N#set wan
->Please select one interface name to show<
1----DATA
2----VOICE
3----MGMT
4----OTHER1
5----OTHER2>[1]:2
->Enable or not[yes]:
->LINK TYPE<0-STATIC IP,1-PPPOE,2-DHCP,3-PPTP,4-L2TP>[2]:0
->Vlan Enable[nol]:y
->VLAN ID<1-4095>[1]:
->Priority Level<0-7>[0]:
->Primary DNS[192.168.100.9]:
->Secondary DNS[138.1.60.1]:
->MTU<512-1508>[1500]:
->IP Address[138.0.60.1]:
->Netmask[0.0.0.0]:255.255.255.0
->Enable Gateway or not[nol]:
->Really want to modify? 'yes' or 'no'[yes]:

The configuration will take effect after saved and reset!

```

Figure 4-20 Configure VOICE Interface Parameter

The following items are displayed on this screen:

- ▶ **Enable:** Enable this WAN interface (DATA can't be disabled).
- ▶ **Type:** Select Static IP if your ISP has assigned a static IP address for your.
- ▶ **VLAN Enable:** Optional. Enable VLAN to configure VLAN ID and VLAN Priority Level.
- ▶ **VLAN ID:** Optional. VLAN ID of this WAN interface.
- ▶ **Priority Level:** Optional. VLAN Priority Level of this WAN interface.
- ▶ **Primary DNS:** Enter the IP address of your ISP's Primary DNS (Domain Name Server). If you are not clear, please consult your ISP. It's not allowed to access the Internet via domain name if the Primary DNS field is blank.
- ▶ **Secondary DNS:** Optional. If a Secondary DNS Server address is available, enter it.
- ▶ **IP Address:** Enter the IP address assigned by your ISP. If you are not clear, please consult your ISP.
- ▶ **Netmask:** Enter the Subnet Mask assigned by your ISP.
- ▶ **Gateway:** Optional. Enter the Gateway assigned by your ISP.

Input "3" to configure MGMT parameter as below:

```

BG9002N#set wan
->Please select one interface name to show<
1----DATA
2----VOICE
3----MGMT
4----OTHER1
5----OTHER2>[1]:3
->Enable or not[nol]:y
->LINK TYPE<0-STATIC IP,1-PPPOE,2-DHCP,3-PPTP,4-L2TP>[0]:2
->Vlan Enable[nol]:y
->VLAN ID<1-4095>[1]:3
->Priority Level<0-7>[0]:1
->Primary DNS[138.0.60.2]:
->Secondary DNS[138.1.60.1]:
->MTU<512-1508>[1500]:
->Specify Server Ip or not[nol]:y
->Server IP address[138.0.60.2]:
->Vendor Class Identifier or not[nol]:
->Manufacture name[:company1
->Device Class[:device2
->Device Type[:type3
->Device version[:version2
->Really want to modify? 'yes' or 'no'[yes]:

The configuration will take effect after saved and reset!

```

Figure 4-21 Configure MGMT Interface Parameter

The following items are displayed on this screen:

- ▶ **Enable:** Enable this WAN interface (DATA can't be disabled).
- ▶ **Type:** Select DHCP if your ISP assigns the IP address automatically.
- ▶ **VLAN Enable:** Optional. Enable VLAN to configure VLAN ID and VLAN Priority Level.
- ▶ **VLAN ID:** Optional. VLAN ID of this WAN interface.
- ▶ **Priority Level:** Optional. VLAN Priority Level of this WAN interface.
- ▶ **Primary DNS:** Enter the IP address of your ISP's Primary DNS (Domain Name Server) manually. If you are not clear, please consult your ISP. It's not allowed to access the Internet via domain name if the Primary DNS field is blank.
- ▶ **Secondary DNS:** Optional. If a Secondary DNS Server address is available, enter it.
- ▶ **Appoint Server IP:** Optional. If network has multiple DHCP servers, enter the IP address of your ISP'S DHCP server
- ▶ **Vendor Class Identifier:** Optional. This option (60) is used by DHCP clients to optionally identify the vendor type and configuration of a DHCP client.
- ▶ **Enterprise Code:** Optional.
- ▶ **Manufacture Name:** Optional.
- ▶ **Device Class:** Optional.
- ▶ **Device Type:** Optional.
- ▶ **Device Version:** Optional.

Input "4" to configure OTHER1 parameter as below:

```

BG9002N#set wan
->Please select one interface name to show<
1----DATA
2----VOICE
3----MGMT
4----OTHER1
5----OTHER2>[1]:4
->Enable or not[nol]:y
->LINK TYPE<0-STATIC IP,1-PPPOE,2-DHCP,3-PPTP,4-L2TP>[0]:3
->The way of getting ip<0-STATIC IP,1-DHCP>[0]:1
->Vlan Enable[nol]:y
->VLAN ID<1-4095>[1]:4
->Priority Level<0-7>[0]:
->Primary DNS[138.0.60.2]:
->Secondary DNS[138.1.60.1]:
->MTU<512-1508>[1500]:
->Specify Server Ip or not[nol]:
->Vendor Class Identifier or not[nol]:
->Manufacture name[]:
->Device Class[]:
->Device Type[]:
->Device version[]:
->Server IP[138.0.60.2]:
->PPTP Username[gkser]:
->PPTP Password[*****]:
->Enable Encryption or not[nol]:
->Really want to modify? 'yes' or 'no'[yes]:

The configuration will take effect after saved and reset!

```

Figure 4-22 Configure OTHER1 Interface Parameter

The following items are displayed on this screen:

- ▶ **Enable:** Enable this WAN interface (DATA can't be disabled).
- ▶ **Type:** Select PPTP if your ISP provides a PPTP connection.
- ▶ **VLAN Enable:** Optional. Enable VLAN to configure VLAN ID and VLAN Priority Level.
- ▶ **VLAN ID:** Optional. VLAN ID of this WAN interface.
- ▶ **Priority Level:** Optional. VLAN Priority Level of this WAN interface.
- ▶ **Primary DNS:** Enter the IP address of your ISP's Primary DNS (Domain Name Server) manually. If you are not clear, please consult your ISP. It's not allowed to access the Internet via domain name if the Primary DNS field is blank.
- ▶ **Secondary DNS:** Optional. If a Secondary DNS Server address is available, enter it.
- ▶ **Server IP:** Enter the Server IP provided by your ISP.
- ▶ **Username:** Enter the Account Name provided by your ISP. If you are not clear, please consult your ISP.
- ▶ **Password:** Enter the Password provided by your ISP.
- ▶ **Enable Encryption:** Enable PPTP link encryption.

Secondary Connection: Here allow you to configure the secondary connection. DHCP and Static IP connection types are provided.

If **Static** is selected:

- ▶ **IP Address:** If Static IP is selected, configure the IP address of WAN port.
- ▶ **Netmask:** If Static IP is selected, configure the subnet mask of WAN port.

- ▶ **Gateway:** Optional. If Static IP is selected, configure the default gateway of WAN port.

If **DHCP** is selected:

- ▶ **Appoint Server IP:** Optional. If network has multiple DHCP servers, enter the IP address of your ISP's DHCP server.
- ▶ **Vendor Class Identifier:** Optional. This option (60) is used by DHCP clients to optionally identify the vendor type and configuration of a DHCP client.
- ▶ **Enterprise Code:** Optional.
- ▶ **Manufacture Name:** Optional.
- ▶ **Device Class:** Optional.
- ▶ **Device Type:** Optional.
- ▶ **Device Version:** Optional.

Input "5" to configure OTHER2 parameter as below:

```

BG9002N#set wan
->Please select one interface name to show<
1----DATA
2----VOICE
3----MGMT
4----OTHER1
5----OTHER2>[1]:5
->Enable or not[nol]:y
->LINK TYPE<0-STATIC IP,1-PPPOE,2-DHCP,3-PPTP,4-L2TP>[0]:4
->The way of getting ip<0-STATIC IP,1-DHCP,2-PPPOE>[0]:1
->Vlan Enable[nol]:y
->VLAN ID<1-4095>[1]:5
->Priority Level<0-7>[0]:
->Primary DNS[138.0.60.2]:
->Secondary DNS[138.1.60.1]:
->MTU<512-1508>[1500]:
->Specify Server Ip or not[nol]:y
->Server IP address[138.0.60.2]:
->Vendor Class Identifier or not[nol]:y
->Enterprise Code[0]:3
->Manufacture name[]:comany5
->Device Class[]:class5
->Device Type[]:type5
->Device version[]:version5
->Server IP[138.0.60.1]:
->L2TP username[gkser]:
->L2TP password[*****]:
->Really want to modify? 'yes' or 'no'[yes]:

The configuration will take effect after saved and reset!
  
```

Figure 4-23 Configure OTHER2 Interface Parameter

The following items are displayed on this screen:

- ▶ **Enable:** Enable this WAN interface (DATA can't be disabled).
- ▶ **Type:** Select L2TP if your ISP provides a L2TP connection.
- ▶ **VLAN Enable:** Optional. Enable VLAN to configure VLAN ID and VLAN Priority Level.
- ▶ **VLAN ID:** Optional. VLAN ID of this WAN interface.
- ▶ **Priority Level:** Optional. VLAN Priority Level of this WAN interface.
- ▶ **Primary DNS:** Enter the IP address of your ISP's Primary DNS (Domain Name Server). If

- you are not clear, please consult your ISP. It's not allowed to access the Internet via domain name if the Primary DNS field is blank.
- ▶ **Secondary DNS:** Optional. If a Secondary DNS Server address is available, enter it.
 - ▶ **Server IP:** Enter the Server IP provided by your ISP.
 - ▶ **Username:** Enter the Account Name provided by your ISP. If you are not clear, please consult your ISP.
 - ▶ **Password:** Enter the Password provided by your ISP.

Secondary Connection: Here allow you to configure the secondary connection. DHCP and Static IP connection types are provided.

If **Static** is selected:

- ▶ **IP Address:** If Static IP is selected, configure the IP address of WAN port.
- ▶ **Netmask:** If Static IP is selected, configure the subnet mask of WAN port.
- ▶ **Gateway:** Optional. If Static IP is selected, configure the default gateway of WAN port.

If **DHCP** is selected:

- ▶ **Appoint Server IP:** Optional. If network has multiple DHCP servers, enter the IP address of your ISP's DHCP server.
- ▶ **Vendor Class Identifier:** Optional. This option (60) is used by DHCP clients to optionally identify the vendor type and configuration of a DHCP client.
- ▶ **Enterprise Code:** Optional.
- ▶ **Manufacture Name:** Optional.
- ▶ **Device Class:** Optional.
- ▶ **Device Type:** Optional.
- ▶ **Device Version:** Optional.

4.2.4 Lan Parameter

4.2.4.1 Show Lan Parameter

The command "show lan" show the LAN configuration as below:

```
BG9002N#show lan

1----Static IP
2----Binding IP
3----Port Route/Bridge Mode
4----Advanced Parameters
Select the parameter to show[1]:
```

Figure 4-24 Show LAN Parameter

Input "1" to show LAN static IP configuration as below:

```

BG9002N#show lan

1----Static IP
2----Binding IP
3----Port Route/Bridge Mode
4----Advanced Parameters
Select the parameter to show[1]:

Interface Name.....:hello
IP Address.....:192.168.100.79
Netmask.....:255.255.255.0
Enable NAT or not.....:yes
Assign NAT IP or not.....:no
Enable DHCP Server or not.....:yes
Start IP.....:192.168.100.100
End IP.....:192.168.100.200
Netmask.....:255.255.255.0
Gateway.....:192.168.100.1
Primary DNS.....:192.168.100.1
Secondary DNS.....:192.168.100.1
Lease Time<Second>.....:86400
Binding LAN Port.....:LAN2 LAN3 LAN4
Binding WAN Subinterface.....:DATA VOICE MGMT OTHER1 OTHER2
  
```

Figure 4-25 Show Static IP Parameter

Input "2" to show binding IP configuration as below:

```

BG9002N#show lan

1----Static IP
2----Binding IP
3----Port Route/Bridge Mode
4----Advanced Parameters
Select the parameter to show[1]:2
->Input the ID to show<0-0>[0]:

Interface Name.....:vlan2
IP Address.....:192.168.100.22
Netmask.....:255.255.255.0
Enable NAT or not.....:yes
Assign NAT IP or not.....:yes
NAT IP.....:192.168.100.111
Enable DHCP Server or not.....:yes
Start IP.....:192.168.100.23
End IP.....:192.168.100.30
Netmask.....:255.255.255.0
Gateway.....:192.168.100.26
Primary DNS.....:192.168.100.11
Secondary DNS.....:192.168.100.12
Lease Time<Second>.....:36000
Binding LAN Port.....:LAN1 LAN2 LAN3 LAN4
Binding WAN Subinterface.....:DATA VOICE MGMT OTHER1 OTHER2
->Continue show or not[yes]:n
  
```

Figure 4-26 Show Binding IP Parameter

Input “3” to show port route/bridge mode as below:

```

BG9002N#show lan

1---Static IP
2---Binding IP
3---Port Route/Bridge Mode
4---Advanced Parameters
Select the parameter to show[1]:3
Lan Route/Bridge Mode:
LAN1.....:Route Mode
LAN2.....:Route Mode
LAN3.....:Route Mode
LAN4.....:Route Mode
  
```

Figure 4-27 Show Port Mode Parameter

Input “4” to show advanced parameters as below:

```

BG9002N#show lan

1---Static IP
2---Binding IP
3---Port Route/Bridge Mode
4---Advanced Parameters
Select the parameter to show[1]:4

LAN Isolate or not.....:no
Auto Bridge or not.....:yes
DHCP Vendor ID.....:albis sagem
STB Data Service IP Address.....:192.168.10.1
STB DATA Service Netmask.....:255.255.255.0
IPTV VLAN.....:8
IPTV PRI.....:4
STB Data VID Automatic or not.....:yes
  
```

Figure 4-28 Show Advanced Parameter

4.2.4.2 Configure Lan Parameter

The command “set lan” configure the LAN parameter as below:

```

BG9002N#set lan

1---Static IP
2---Binding IP
3---Port Route/Bridge Mode
4---Advanced Parameters
Select the parameter to configure[1]:
  
```

Figure 4-29 Configure LAN Parameter

Input “1” to configure static IP as below:

```

BG9002N#set lan

1----Static IP
2----Binding IP
3----Port Route/Bridge Mode
4----Advanced Parameters
Select the parameter to configure[1]:
->Interface Name[hello]:
->IP Address[192.168.100.79]:
->Netmask[255.255.255.0]:
->Enable NAT or not[yes]:
->Assign NAT IP or not[no]:
->Enable DHCP Server or not[yes]:
->Start IP[192.168.100.100]:
->End IP[192.168.100.200]:
->Netmask[255.255.255.0]:
->Gateway[192.168.100.1]:
->Primary DNS[192.168.100.1]:
->Secondary DNS[192.168.100.1]:
->Lease Time<Second>[86400]:
Binding LAN Port:
->LAN1[no]:
->LAN2[yes]:
->LAN3[yes]:
->LAN4[yes]:
Binding WAN Subinterface:
->DATA[yes]:
->VOICE[yes]:
->MGMT[yes]:
->OTHER1[yes]:
->OTHER2[yes]:
->Really want to modify? 'yes' or 'no'[yes]:

Operate success!
  
```

Figure 4-30 Configure Static IP Parameter

The following items are displayed on this part.

- ▶ **Interface Name:** Name of this LAN interface.
- ▶ **IP Address:** Enter the IP address for this LAN interface.
- ▶ **Netmask:** Enter the subnet mask for this LAN interface.
- ▶ **NAT:** Optional Enable or disable NAT for this LAN interface
- ▶ **Assign NAT IP:** Optional If NAT is selected. NAT IP address can be assigned.
- ▶ **Enable DHCP Server:** Enable or disable DHCP server on this LAN interface.
- ▶ **Start IP:** If **Enable DHCP Server** is selected, enter the Start IP address to define a range for the DHCP server to assign dynamic IP addresses. This address should be in the same IP address subnet with the IP address of this LAN interface.
- ▶ **End IP:** If **Enable DHCP Server** is selected, enter the End IP address to define a range for the DHCP server to assign dynamic IP addresses. This address should be in the same IP address subnet with the IP address of this LAN interface.
- ▶ **Netmask:** If **Enable DHCP Server** is selected, enter the **Netmask** to define a range for the DHCP server to assign dynamic IP addresses.

- ▶ **Gateway:** Optional .If **Enable DHCP Server** is selected, enter the Gateway address to be assigned.
- ▶ **Primary DNS:** Optional. If **Enable DHCP Server** is selected, enter the Primary DNS server address to be assigned.
- ▶ **Secondary DNS:** Optional. If **Enable DHCP Server** is selected, enter the Secondary DNS server address to be assigned.
- ▶ **Lease Time(Second):** If **Enable DHCP Server** is selected, specify the length of time the DHCP server will reserve the IP address for each client. After the IP address expired, the client will be automatically assigned a new one.
- ▶ **Binding LAN Port:** Select the physical LAN port to bind the IP address of this LAN interface.
- ▶ **Binding WAN Subinterface:** Select the WAN subinterface which the packet from this LAN interface can be sending to.

Input “2” to configure binding IP as below:

```

BG9002N#set lan
1----Static IP
2----Binding IP
3----Port Route/Bridge Mode
4----Advanced Parameters
Select the parameter to configure[1]:
->Interface Name[hellol]:
->IP Address[192.168.100.79]:
->Netmask[255.255.255.0]:
->Enable NAT or not[yes]:
->Assign NAT IP or not[no]:
->Enable DHCP Server or not[yes]:
->Start IP[192.168.100.100]:
->End IP[192.168.100.200]:
->Netmask[255.255.255.0]:
->Gateway[192.168.100.1]:
->Primary DNS[192.168.100.1]:
->Secondary DNS[192.168.100.1]:
->Lease Time<Second>[86400]:
Binding LAN Port:
->LAN1[no]:
->LAN2[yes]:
->LAN3[yes]:
->LAN4[yes]:
Binding WAN Subinterface:
->DATA[yes]:
->VOICE[yes]:
->MGMT[yes]:
->OTHER1[yes]:
->OTHER2[yes]:
->Really want to modify? 'yes' or 'no'[yes]:

Operate success!
  
```

Figure 4-31 Configure Binding IP Parameter

Input “3” to configure port route/bridge mode as below:

```

BG9002N#set lan

1----Static IP
2----Binding IP
3----Port Route/Bridge Mode
4----Advanced Parameters
Select the parameter to configure[1]:3
Lan Route/Bridge Mode:

0----Route Mode
1----Transparent Bridge
2----Tagged Bridge
3----Promisc Bridge
->LAN1<0-3>[0]:
->LAN2<0-3>[0]:1
->LAN3<0-3>[0]:2
->VID<1-4095>[0]:7
->LAN4<0-3>[0]:3
->VID1[0]:8
->Continue Set Vid or not[yes]:
->VID2[0]:9
->Continue Set Vid or not[yes]:
->VID3[0]:10
->Continue Set Vid or not[yes]:
->VID4[0]:11
->Continue Set Vid or not[yes]:
->VID5[0]:12
->Continue Set Vid or not[yes]:n
->Really want to modify? 'yes' or 'no'[yes]:

Operate success!
  
```

Figure 4-32 Configure Port Mode Parameter

The following items are displayed on this part.

- ▶ **Port:** The physical LAN port name (LAN1~LAN4).
- ▶ **Route/Bridge:** Mode of this physical LAN port. The following four modes are provided:
 - Route:** route to WAN
 - Transparent bridge:** not modify the packets;
 - Tagged bridge:** LAN untagged, WAN tagged; only 1 VID supported
 - Promisc Mode:** Tagged packets in bridge mode, untagged packets in route mode; most 5 VIDs supported (e.g. 8, 10, 13).
- ▶ **VLAN ID List:** If Tagged bridge/Promisc Mode is selected, configure the VID/VIDs.

Input “4” to configure advanced parameters as below:

```

BG9002N#set lan

1----Static IP
2----Binding IP
3----Port Route/Bridge Mode
4----Advanced Parameters
Select the parameter to configure[1]:4
->LAN Isolate or not[no]:y
->Auto Bridge or not[yes]:
->DHCP Vendor ID1[albis]:
->DHCP Vendor ID2[albis]:
->STB Data Service IP Address[192.168.10.1]:
->STB DATA Service Netmask[255.255.255.0]:
->IPTV VLAN<1-4095>[8]:
->IPTV PRI<0-7>[4]:
->STB Data VID Automatic or not[yes]:
->Really want to modify? 'yes' or 'no'[yes]:

Operate success!

```

Figure 4-33 Configure Advanced Parameter

The following items are displayed on this part.

- ▶ **LAN Isolate:** Check the box to prohibit the access between LAN interfaces.
- ▶ **Auto Bridge:** Check the box to dynamically create IPTV bridge for STB.
- ▶ **DHCP Vendor ID:** Vendor class identifier List (DHCP 60 option), support at most two vendor IDs.
- ▶ **IPAddress:** IP address of interface for STB data service.
- ▶ **Netmask:** Subnet mask of interface for STB data service.
- ▶ **VID:** VID of IPTV VLAN.
- ▶ **PRI:** Priority level of IPTV VLAN.
- ▶ **Automatic:** Check the box to automatically detect the VID of STB data service.

4.2.5 WLAN

4.2.5.1 Show WLAN Parameter

The command “show wlan” show the WLAN configuration as below:

```

BG9002N#show wlan

1----Basic Settings
2----Security
3----Advanced Settings
4----Client Info
5----WPS
6----MAC Filtering
->Select the parameter to show[1]:

```

Figure 4-34 Show WLAN Parameter

Input “1” to show basic settings as below:

```

BG9002N#show wlan

1----Basic Settings
2----Security
3----Advanced Settings
4----Client Info
5----WPS
6----MAC Filtering
->Select the parameter to show[1]:1

Enable WiFi.....: Enable
Channel.....: 0
Wireless Mode.....: 11b/g/n

SSID1 Information:
Enable SSID.....: Enable
SSID Name.....: Gaoke-09AC88
Bind Interface.....: VLAN1
Enable Broadcast.....: Enable
Isolated.....: Disable
LAN Isolated.....: Disable
Max Client.....: 32

SSID2 Information:
Enable SSID.....: Disable

SSID3 Information:
Enable SSID.....: Disable

SSID4 Information:
Enable SSID.....: Disable
BG9002N#

```

Figure 4-35 Show Basic Settings

Input “2” to show security configuration as below:

```

BG9002N#show wlan

1----Basic Settings
2----Security
3----Advanced Settings
4----Client Info
5----WPS
6----MAC Filtering
->Select the parameter to show[1]:2
->Select the SSID to set<0-3>[0]:

Authentication.....: WPAPSKWPA2PSK
Algorithm.....: AES
Renew interval.....: 3600
WPA Pre-Shared Key.....: *****
->Continue or not?<yes/no>[yes]:y
->Select the SSID to set<0-3>[0]: 1

The SSID is not enable!!!
BG9002N#

```

Figure 4-36 Show Security Parameter

Input “3” to show advanced settings as below:

```

BG9002N#show wlan

1----Basic Settings
2----Security
3----Advanced Settings
4----Client Info
5----WPS
6----MAC Filtering
->Select the parameter to show[1]:3

Fragmentation Threshold.....: 2346
RTS Threshold.....: 2347
Transmit Power.....: 100
Enable WMM.....: Enable
BG9002N#
  
```

Figure 4-37 Show Advanced Settings

Input “4” to show client information as below:

```

BG9002N#show wl

BG9002N#show wlan

1----Basic Settings
2----Security
3----Advanced Settings
4----Client Info
5----WPS
6----MAC Filtering
->Select the parameter to show[1]:4
  No client information!!!
BG9002N#
  
```

Figure 4-38 Show Client Information

Input “5” to show WPS configuration as below:

```

BG9002N#show wlan

1----Basic Settings
2----Security
3----Advanced Settings
4----Client Info
5----WPS
6----MAC Filtering
->Select the parameter to show[1]:5

Enable WPS.....:yes
BG9002N#
  
```

Figure 4-39 Show WPS Parameter

Input “6” to show MAC filtering configuration as below:

```

BG9002N#show wlan

1----Basic Settings
2----Security
3----Advanced Settings
4----Client Info
5----WPS
6----MAC Filtering
->Select the parameter to show[1]:6

Enable MAC Filter.....: Enable
Filtering Rules.....: Deny
+-----+-----+
| No |      MAC      |
+-----+-----+
| 0  | 12:45:90:87:90:34 |
+-----+-----+

BG9002N#

```

Figure 4-40 Show MAC Filtering Parameter

4.2.5.2 Configure WLAN Parameter

The command “set wlan” configure the WLAN parameter as below:

```

BG9002N#set wlan

1----Basic Settings
2----Security
3----Advanced Settings
4----WPS
5----MAC Filtering
->Select the parameter to configure[1]:

```

Figure 4-41 Configure WLAN Parameter

Input “1” to configure basic settings as below: