



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

# TEST REPORT

### FCC Standards : FCC 47CFR part 15 subpart C

Test Report No. : CTK-2015-00118  
Date of Issue : 2015-02-02  
FCC ID : 2AD5K-PSB100  
Model/Type No. : PSB-100  
Kind of Product : Bluetooth Headset  
Applicant : PARTRON CO., LTD  
Applicant Address : 22,Samsung1-ro2-gil, Hwaseong-si, Gyeonggi-do, Korea  
Manufacturer : PARTRON CO., LTD  
Manufacturer Address : 22,Samsung1-ro2-gil, Hwaseong-si, Gyeonggi-do, Korea  
Contact Person : Byun Jae Beom / Researcher  
Telephone : +82-31-201-7906  
Received Date : 2014-12-24  
Test period : Start : 2015-01-13 End : 2015-01-26

The test results presented in this report relate only to the object tested.

Tested by

Won-Jae, Hwang  
Test Engineer  
Date: 2015-02-02

Reviewed by

Young-Joon, Park  
Technical Manager  
Date: 2015-02-02



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

### REPORT REVISION HISTORY

| Date       | Revision                | Page No |
|------------|-------------------------|---------|
| 2015-02-02 | Issued (CTK-2015-00118) | All     |
|            |                         |         |
|            |                         |         |
|            |                         |         |
|            |                         |         |
|            |                         |         |
|            |                         |         |
|            |                         |         |
|            |                         |         |
|            |                         |         |

***This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.***



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

### TABLE OF CONTENTS

|                                                                 |    |
|-----------------------------------------------------------------|----|
| REPORT REVISION HISTORY .....                                   | 2  |
| 1.0 General Product Description .....                           | 4  |
| 1.1 Tested Frequency .....                                      | 4  |
| 1.2 Tested Mode .....                                           | 4  |
| 1.3 Device Modifications .....                                  | 5  |
| 1.4 Peripheral Devices .....                                    | 5  |
| 1.5 Calibration Details of Equipment Used for Measurement ..... | 5  |
| 1.6 Test Facility.....                                          | 5  |
| 1.7 Laboratory Accreditations and Listings.....                 | 6  |
| 2.0 Summary of tests.....                                       | 7  |
| 2.1 Transmitter Requirements.....                               | 8  |
| 2.1.1 Carrier Frequency Separation .....                        | 8  |
| 2.1.2 Number of Hopping Frequencies .....                       | 10 |
| 2.1.4 Time of Occupancy (Dwell Time) .....                      | 19 |
| 2.1.5 Maximum peak Conducted Output Power.....                  | 25 |
| 2.1.6 Band-edge.....                                            | 30 |
| 2.1.7 Field Strength of Emissions .....                         | 41 |
| 2.1.8 AC Conducted Emissions.....                               | 48 |
| APPENDIX A – Test Equipment Used For Tests .....                | 51 |

## 1.0 General Product Description

|                         |                                                                      |
|-------------------------|----------------------------------------------------------------------|
| Basic Model/Type No.    | PSB-100                                                              |
| Serial number           | Prototype                                                            |
| EUT condition           | Pre-production, not damaged                                          |
| Antenna type            | Chip antenna      Gain    1.27 dBi                                   |
| Frequency Range         | 2402 MHz - 2480 MHz                                                  |
| RF power                | 3.397 dBm Peak Conducted (GFSK)<br>2.212 dBm Peak Conducted (8-DPSK) |
| Number of channels      | 79                                                                   |
| Channel Spacing         | 1 MHz                                                                |
| Channel Access Protocol | Frequency Hopping                                                    |
| Type of Modulation      | GFSK(1 Mbps), DQPSK(2 Mbps), 8-DPSK(3 Mbps)                          |
| Power Source            | DC 3.7 V (Lithium Ion Rechargeable Battery)                          |

### 1.1 Tested Frequency

|                 | LOW  | MID  | HIGH |
|-----------------|------|------|------|
| Frequency (MHz) | 2402 | 2441 | 2480 |

### 1.2 Tested Mode

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| Tested Ch      | Modulation Technology | Modulation Type | Packet Type |
|----------------|-----------------------|-----------------|-------------|
| Low, Mid, High | FHSS                  | GFSK            | DH 5        |
| Low, Mid, High | FHSS                  | 8-DPSK          | 3DH 5       |



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

### 1.3 Device Modifications

The following modifications was applied by the applicant:

Not applicable

### 1.4 Peripheral Devices

| Device            | Manufacturer                     | Model No.      | Serial No.      |
|-------------------|----------------------------------|----------------|-----------------|
| Notebook Computer | INVENTEC CORPORATION             | Satellite A100 | -               |
| AC/DC Adaptor     | DELTA ELECTRONICS(JIANG SU), LTD | SADP-75PB B    | 0639 BF 0182584 |

### 1.5 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

### 1.6 Test Facility

The measurement facility is located at (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

### 1.7 Laboratory Accreditations and Listings

| Country       | Agency | Scope of Accreditation                                                                           | Logo                                                                                                        |
|---------------|--------|--------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| USA           | FCC    | 3 m & 10 m SAC and Conducted Test Site to perform FCC Part 15/18 measurements                    | <br>805871               |
| JAPAN         | VCCI   | 3 m & 10 m SAC and Conducted Test Site                                                           | <br>R-948, C-986, T-1843 |
| KOREA         | MSIP   | EMI (Electromagnetic Interference / Emission)<br>EMS (Electromagnetic Susceptibility / Immunity) | <br>No. 51, KR0025       |
| International | KOLAS  | EMC                                                                                              |                        |



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

### 2.0 Summary of tests

| FCC Part Section(s) | Parameter                     | Limit         | Test Condition | Status (note 1) |
|---------------------|-------------------------------|---------------|----------------|-----------------|
| 15.247(a)           | Carrier Frequency Separation  | > 25 kHz      | Conducted      | C               |
| 15.247(a)           | Number of Hopping Frequencies | > 15 hops     |                | C               |
| 15.247(a)           | 20 dB Bandwidth               | NA            |                | C               |
| 15.247              | Dwell Time                    | < 0.4 seconds |                | C               |
| 15.247(b)           | Transmitter Output Power      | < 0.125 Watts |                | C               |
| 15.247(d)           | Conducted Spurious emission   | > 20 dBc      |                | C               |
| 15.247(d)           | Band Edge                     | > 20 dBc      |                | C               |
| 15.209              | Field Strength of Harmonics   | 15.209(a)     | Radiated       | C               |
| 15.207              | AC Conducted Emissions        | 15.207(a)     | Line Conducted | C               |

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

The sample was tested according to the following specification:

- FCC Part 15.247, ANSI C63.4-2003

The tests were performed according to the method of measurements prescribed in DA 00-705.

## 2.1 Transmitter Requirements

### 2.1.1 Carrier Frequency Separation

#### Test Location

RF Test Room

#### Test Procedures

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to:

Span = 5 MHz (wide enough to capture the peaks of two adjacent channels)

RBW = 30 kHz ( $\geq 1\%$  of the span) Sweep = auto

VBW = 30 kHz ( $\geq$  RBW) Detector function = peak

Trace = max hold




Figure 1 : Measurement setup for the carrier frequency separation

#### Limit

§15.247(a)(1) Frequency hopping system operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-third of 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### Test Results

**Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)**

| Channel | Adjacent Hopping Channel Separation (kHz) | Two-third of 20dB bandwidth (kHz) | Minimum Bandwidth (kHz) | Result   |
|---------|-------------------------------------------|-----------------------------------|-------------------------|----------|
| 2441MHz | 995                                       | 633.8                             | 25                      | Complies |

**Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)**

| Channel | Adjacent Hopping Channel Separation (kHz) | Two-third of 20dB bandwidth (kHz) | Minimum Bandwidth (kHz) | Result   |
|---------|-------------------------------------------|-----------------------------------|-------------------------|----------|
| 2441MHz | 1005                                      | 836.7                             | 25                      | Complies |

See next pages for actual measured spectrum plots.



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

## CTK Co., Ltd.


(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501


www.e-ctk.com

### Carrier Frequency Separation

#### Data Rate : GFSK

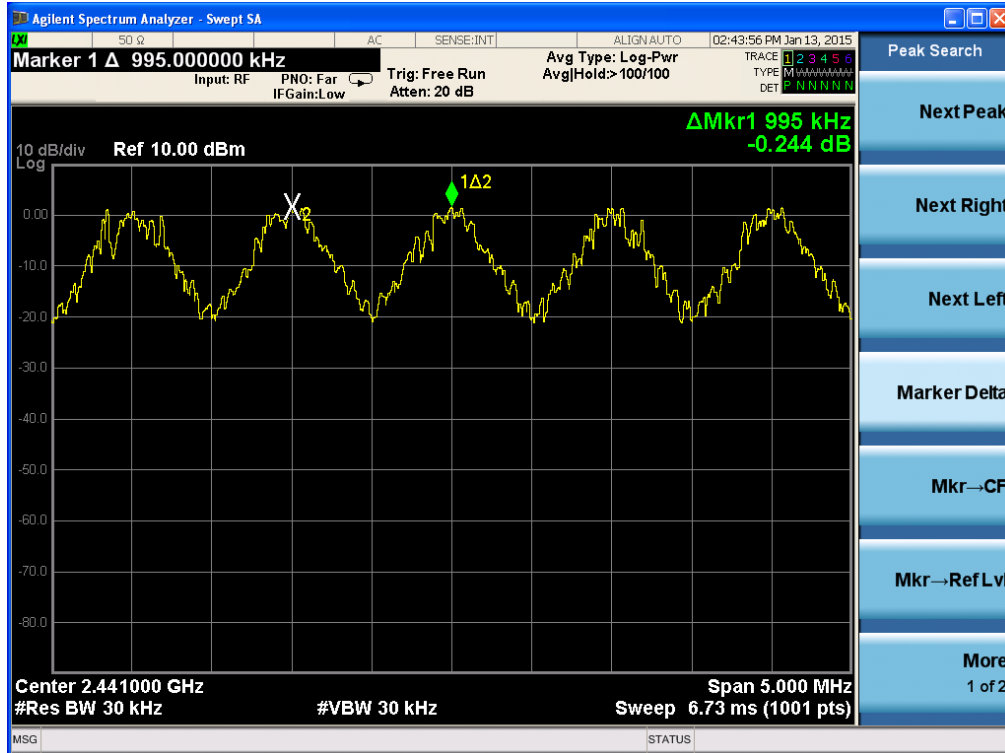

#### Data Rate : 8-DPSK

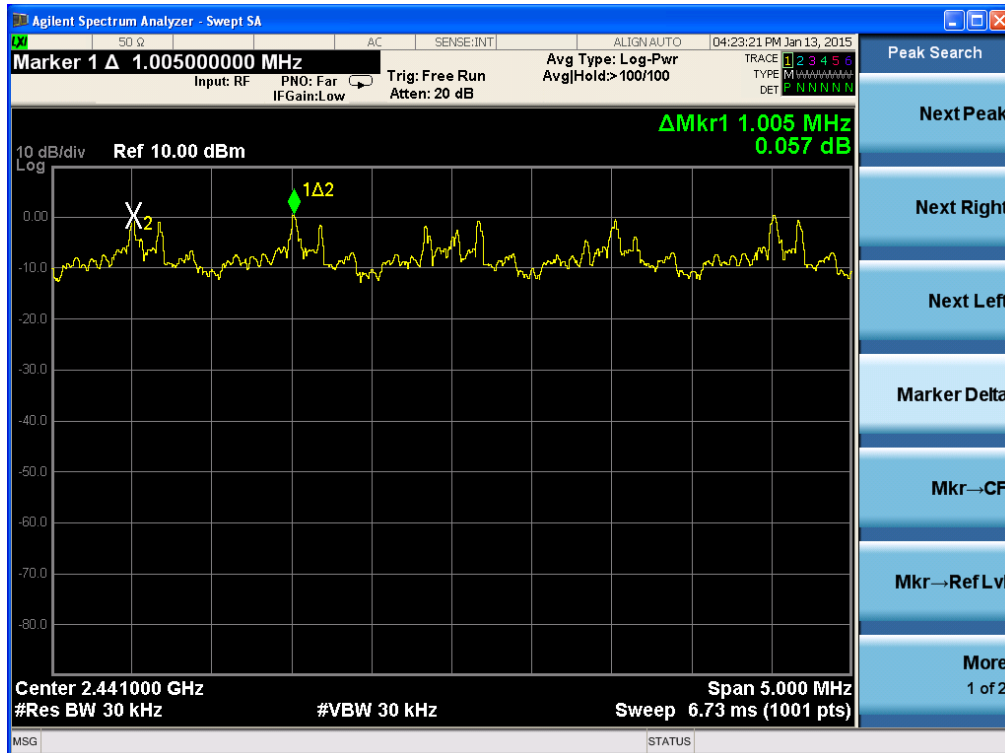

## 2.1.2 Number of Hopping Frequencies

### Test Location

RF Test Room


### Test Procedures

The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to:

Frequency range      1: Start = 2389.5 MHz, Stop = 2439.5 MHz  
                                 2: Start = 2439.5 MHz, Stop = 2489.5 MHz

Span = 50 MHz  
RBW = 300 kHz ( $\geq 1\%$  of the span)  
VBW = 300 kHz ( $\geq$  RBW)  
Trace = max hold  
Sweep = auto  
Detector function = peak



### Limit

§15.247(a)(1)(iii) For frequency hopping system operating in the 2400-2483.5 MHz band shall use at least 15 hopping frequencies.

### Test Results

**Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)**

| Total number of Hopping Channels | Result   |
|----------------------------------|----------|
| 79                               | Complies |

**Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)**

| Total number of Hopping Channels | Result   |
|----------------------------------|----------|
| 79                               | Complies |

See next pages for actual measured spectrum plots.



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

## CTK Co., Ltd.



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970

Fax: +82-31-624-9501

www.e-ctk.com

### Number of Hopping Frequencies(GFSK)

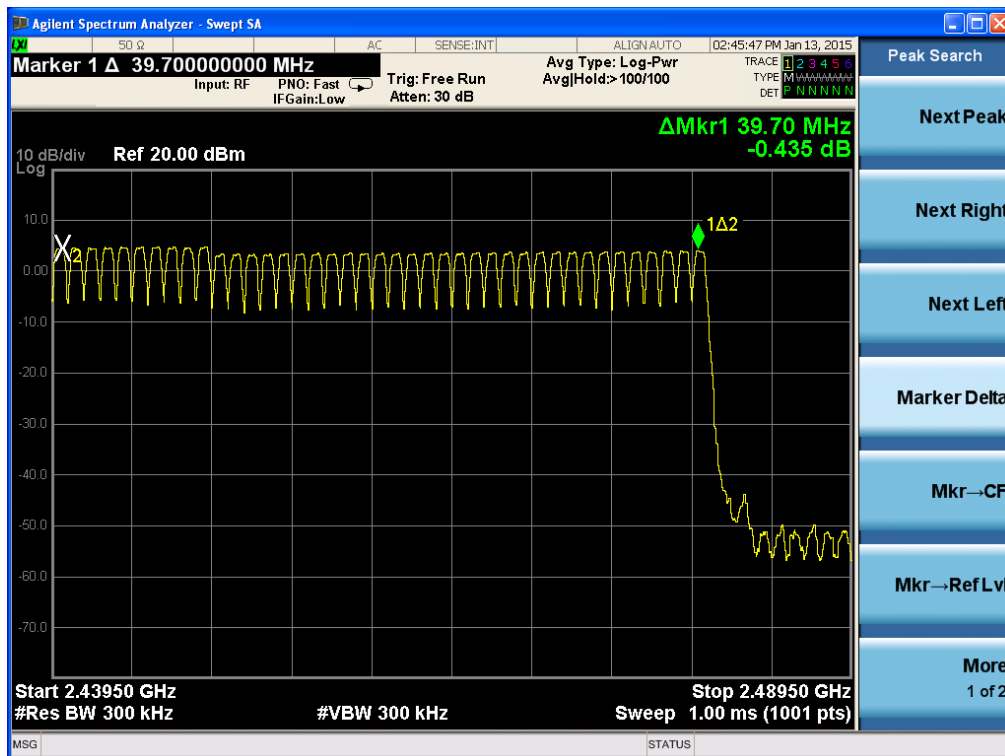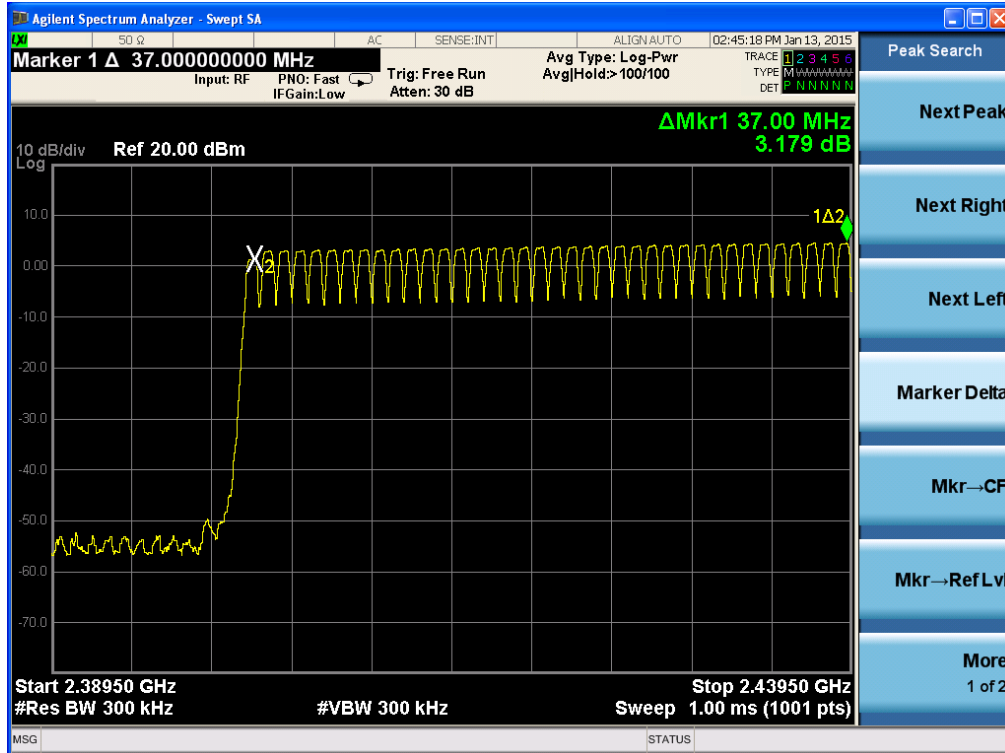



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

## CTK Co., Ltd.



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970

Fax: +82-31-624-9501

www.e-ctk.com

### Number of Hopping Frequencies(8-DPSK)

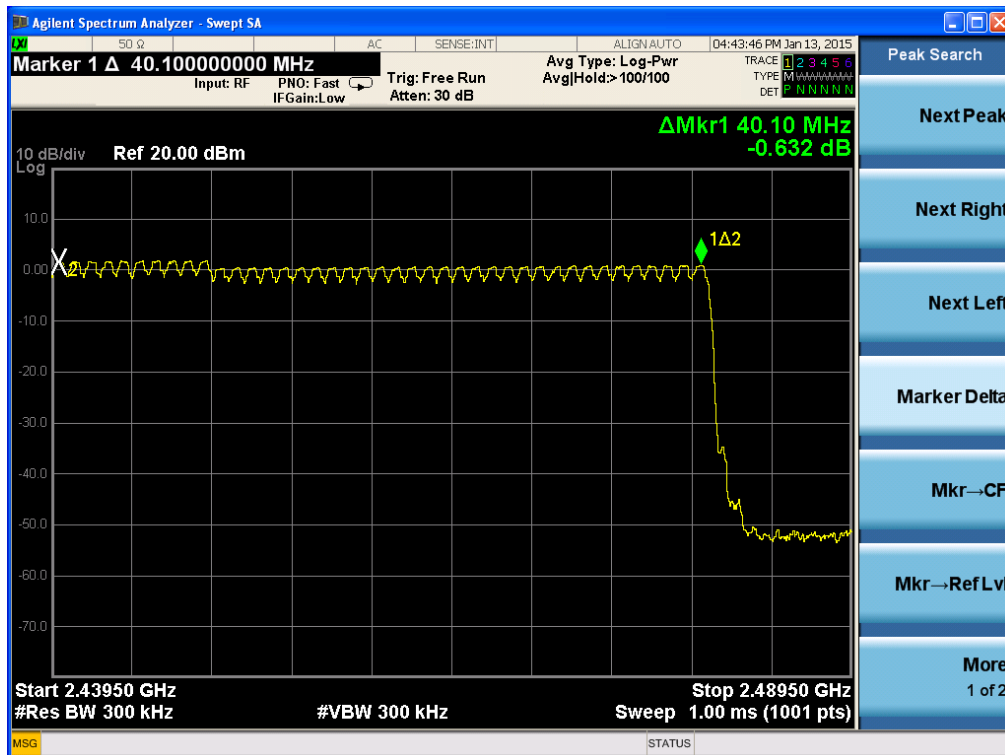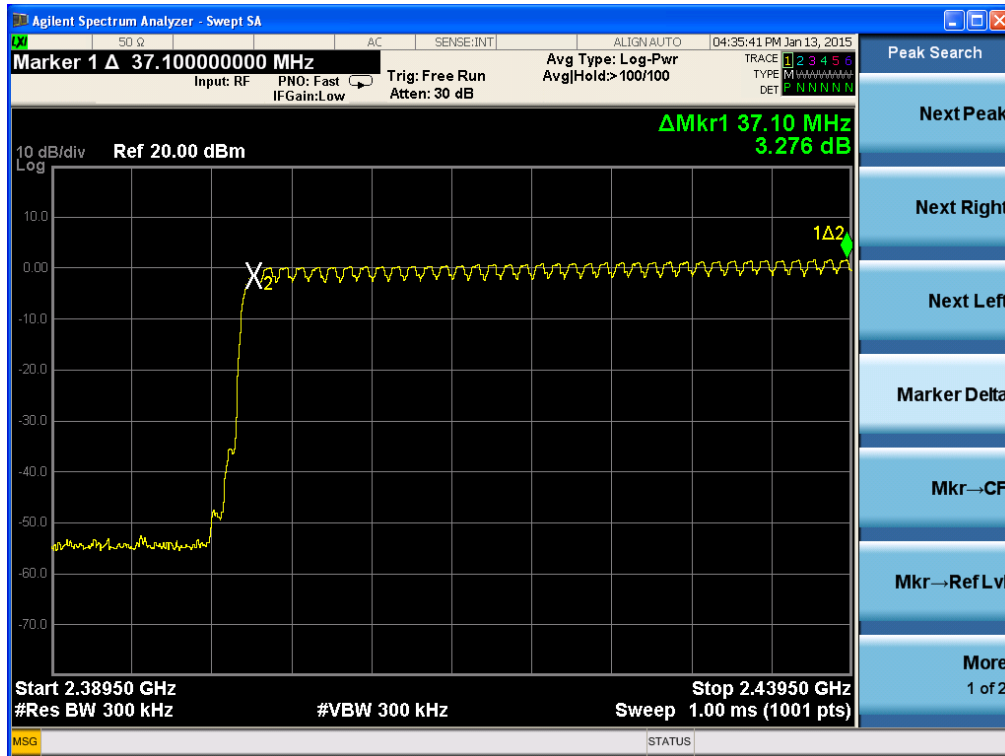

### 2.1.3 20 dB bandwidth

#### Test Location

RF Test Room

#### Test Procedures

The bandwidth at 20 dB below the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels. After the trace being stable, Use the marker-to peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 3 MHz (approximately 2 or 3 times of the 20 dB bandwidth)


RBW = 30 kHz ( $\geq 1\%$  of the span)

Sweep = auto

VBW = 30 kHz ( $\geq$  RBW)

Detector function = peak

Trace = max hold



#### Limit

Limit : N/A



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

### Test Results (20 dB bandwidth)

#### Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

| Frequency (MHz) | Channel Number. | Measured Bandwidth (MHz) | Result   |
|-----------------|-----------------|--------------------------|----------|
| 2402            | 0               | 0.951                    | Complies |
| 2441            | 39              | 0.946                    | Complies |
| 2480            | 78              | 0.946                    | Complies |

#### Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

| Frequency (MHz) | Channel Number. | Measured Bandwidth (MHz) | Result   |
|-----------------|-----------------|--------------------------|----------|
| 2402            | 0               | 1.254                    | Complies |
| 2441            | 39              | 1.255                    | Complies |
| 2480            | 78              | 1.254                    | Complies |

### Test Results (Occupied Bandwidth)

#### Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

| Frequency (MHz) | Channel Number. | Measured Bandwidth (MHz) | Result   |
|-----------------|-----------------|--------------------------|----------|
| 2402            | 0               | 0.864                    | Complies |
| 2441            | 39              | 0.858                    | Complies |
| 2480            | 78              | 0.860                    | Complies |

#### Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

| Frequency (MHz) | Channel Number. | Measured Bandwidth (MHz) | Result   |
|-----------------|-----------------|--------------------------|----------|
| 2402            | 0               | 1.151                    | Complies |
| 2441            | 39              | 1.153                    | Complies |
| 2480            | 78              | 1.153                    | Complies |

See next pages for actual measured spectrum plots.





CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

### 20 dB Bandwidth, Occupied Bandwidth - GFSK

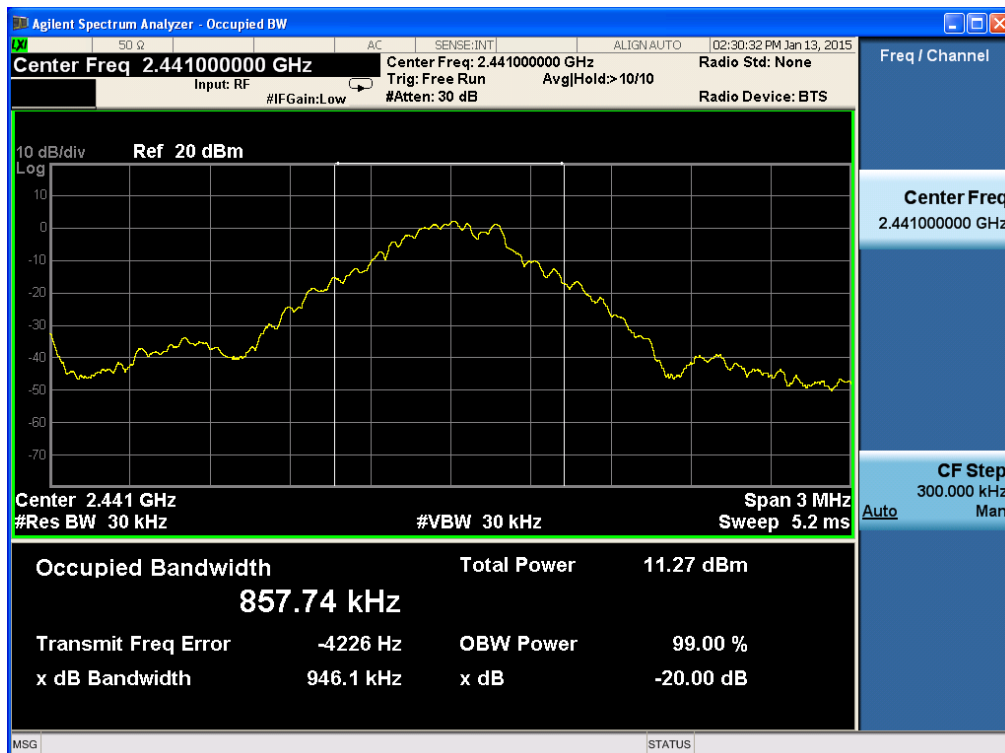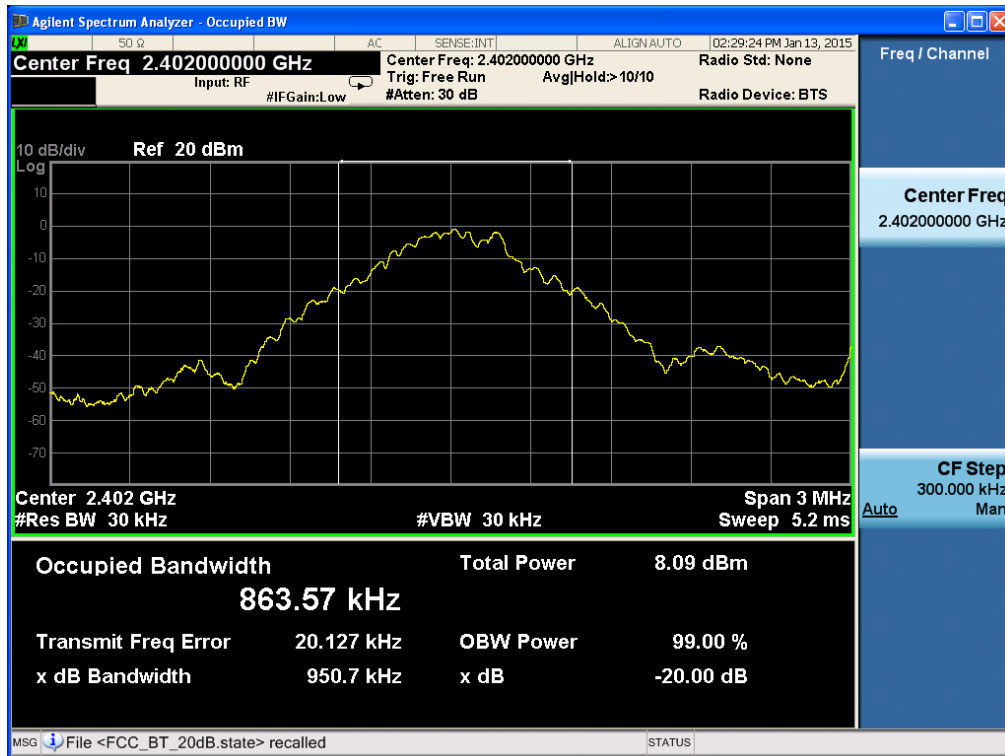




CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

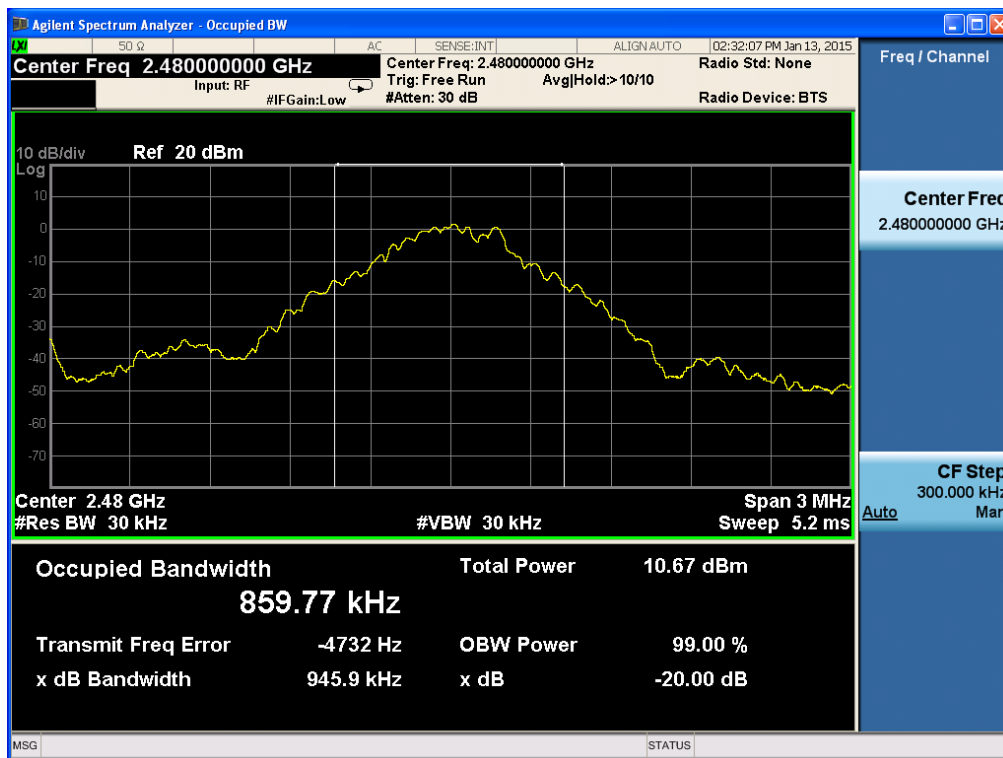





CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

### 20 dB Bandwidth, Occupied Bandwidth - 8-DPSK

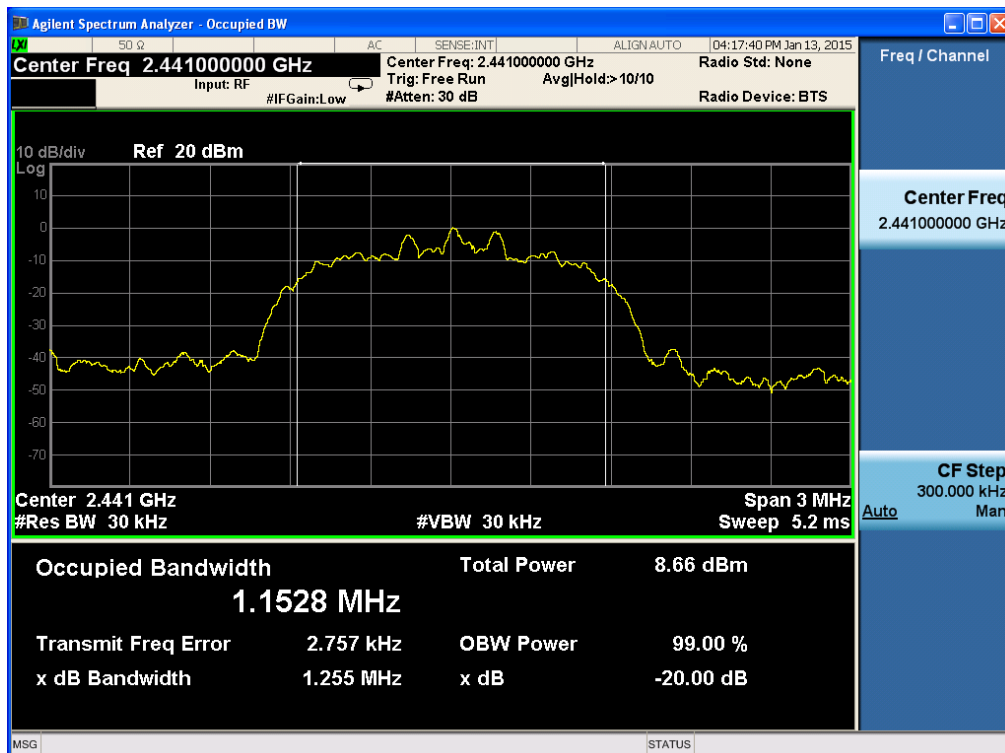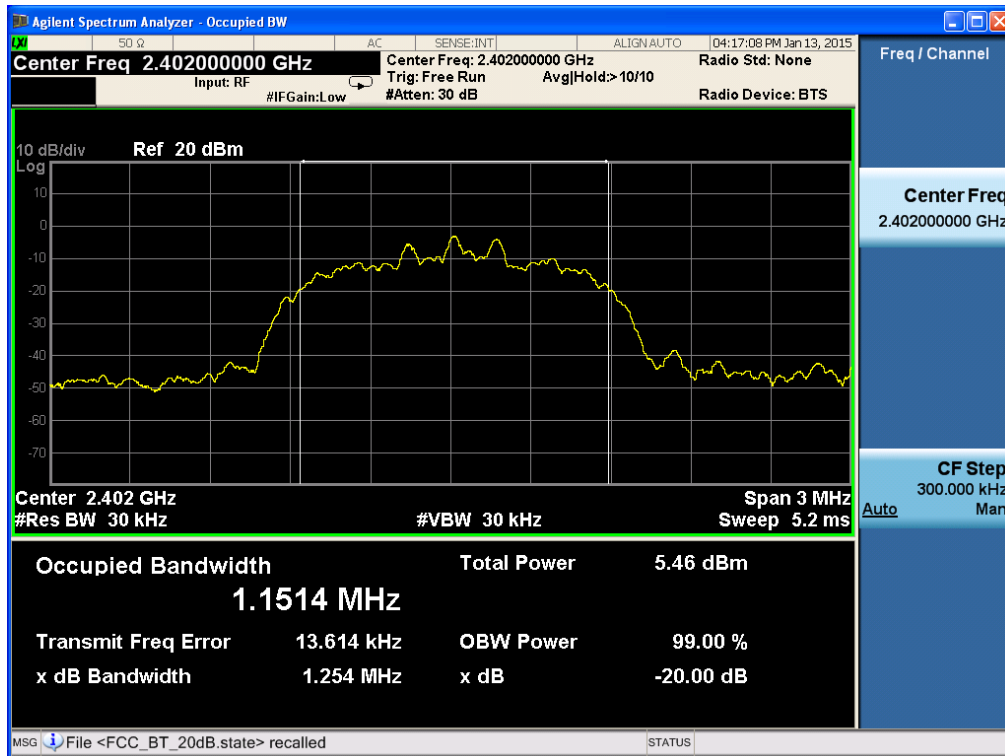




CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

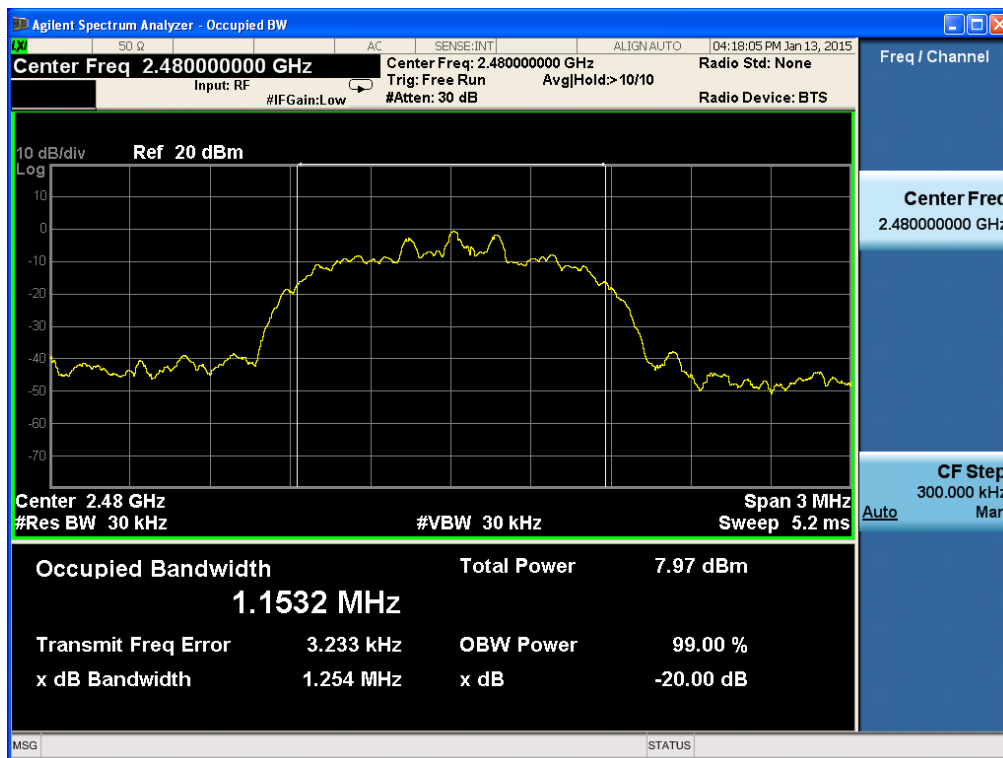

## 2.1.4 Time of Occupancy (Dwell Time)

### Test Location

RF Test Room

### Test Procedures

The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function enabled.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of spectrum analyzer on any frequency be measured and set spectrum analyzer to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.
6. The PSB-100 has 3 type of payload, DH1, DH3, DH5. The hopping rate is 1600 per second.

The spectrum analyzer is set to:

Center frequency = the highest, middle, and the lowest channels

Span = zero


RBW = 1 MHz

Trace = max hold

VBW = 1 MHz ( $\geq$  RBW)

Detector function = peak

Sweep = as necessary to capture the entire dwell time per hopping channel



### Limit

§15.247(a)(1)(iii) For frequency hopping system operating in 2400-2483.5 MHz band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

## Test Results

Time of occupancy on the TX channel in 31.6 sec = time domain slot length × hop rate ÷  
number of hop per channel × 31.6

### Test mode : GFSK

| Channel Frequency (MHz) | Packet Type | Dwell Time (ms) | Test Results                                        |          |
|-------------------------|-------------|-----------------|-----------------------------------------------------|----------|
|                         |             |                 | Time of occupancy on the TX channel in 31.6sec (ms) | Result   |
| 2441                    | DH 1        | 0.410           | 131.2                                               | Complies |
|                         | DH 3        | 1.670           | 267.2                                               | Complies |
|                         | DH 5        | 2.910           | 310.4                                               | Complies |

DH1 Dwell time =  $0.410 \text{ ms} \times (1600 \div 2) \div 79 \times 31.6 = 131.2 \text{ ms}$

DH3 Dwell time =  $1.670 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 267.2 \text{ ms}$

DH5 Dwell time =  $2.910 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 310.4 \text{ ms}$

### Test mode : 8-DPSK

| Channel Frequency (MHz) | Packet Type | Dwell Time (ms) | Test Results                                        |          |
|-------------------------|-------------|-----------------|-----------------------------------------------------|----------|
|                         |             |                 | Time of occupancy on the TX channel in 31.6sec (ms) | Result   |
| 2441                    | 3DH 1       | 0.400           | 128.0                                               | Complies |
|                         | 3DH 3       | 1.655           | 264.8                                               | Complies |
|                         | 3DH 5       | 2.920           | 311.5                                               | Complies |

3DH1 Dwell time =  $0.400 \text{ ms} \times (1600 \div 2) \div 79 \times 31.6 = 128.0 \text{ ms}$

3DH3 Dwell time =  $1.655 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 264.8 \text{ ms}$

3DH5 Dwell time =  $2.920 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 311.5 \text{ ms}$

See next pages for actual measured spectrum plots.



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance


## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea


Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

### Time of Occupancy for PACKET Type DH1(GFSK)

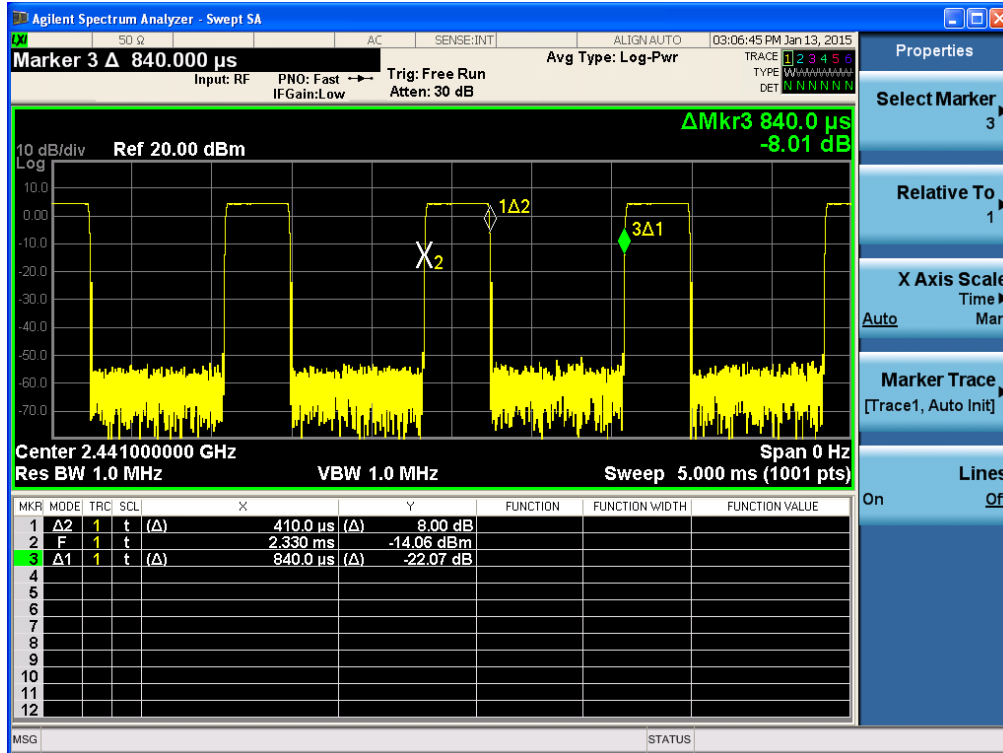

### Time of Occupancy for PACKET Type DH3(GFSK)

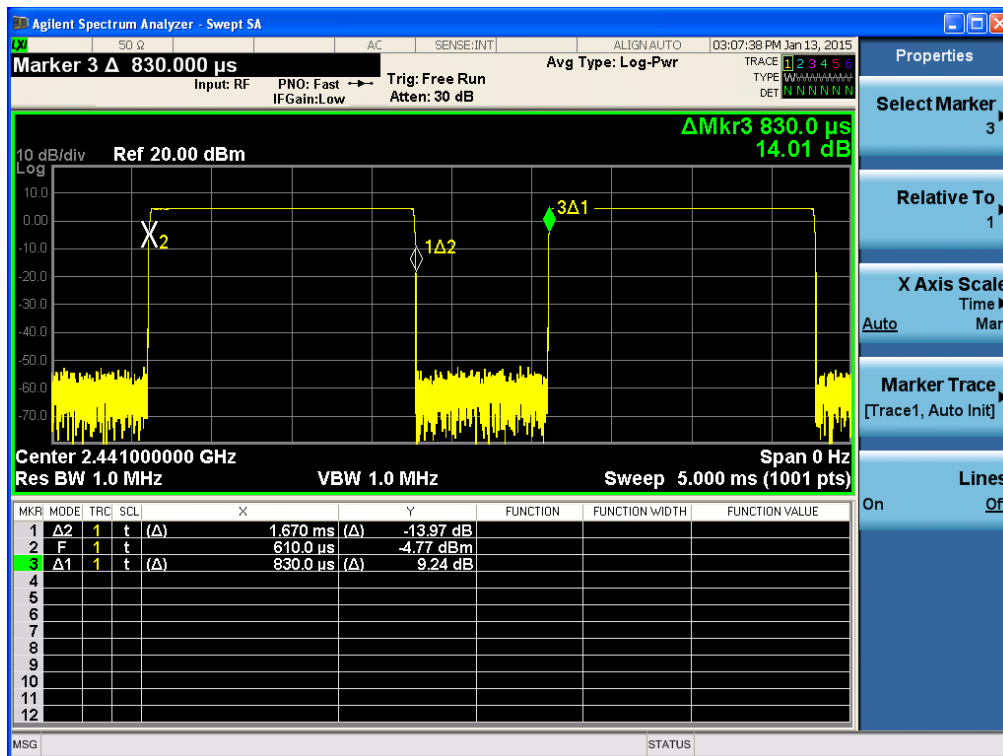



**www.e-ctk.com**



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance


## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea


Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

### Time of Occupancy for PACKET Type 3DH1(8-DPSK)

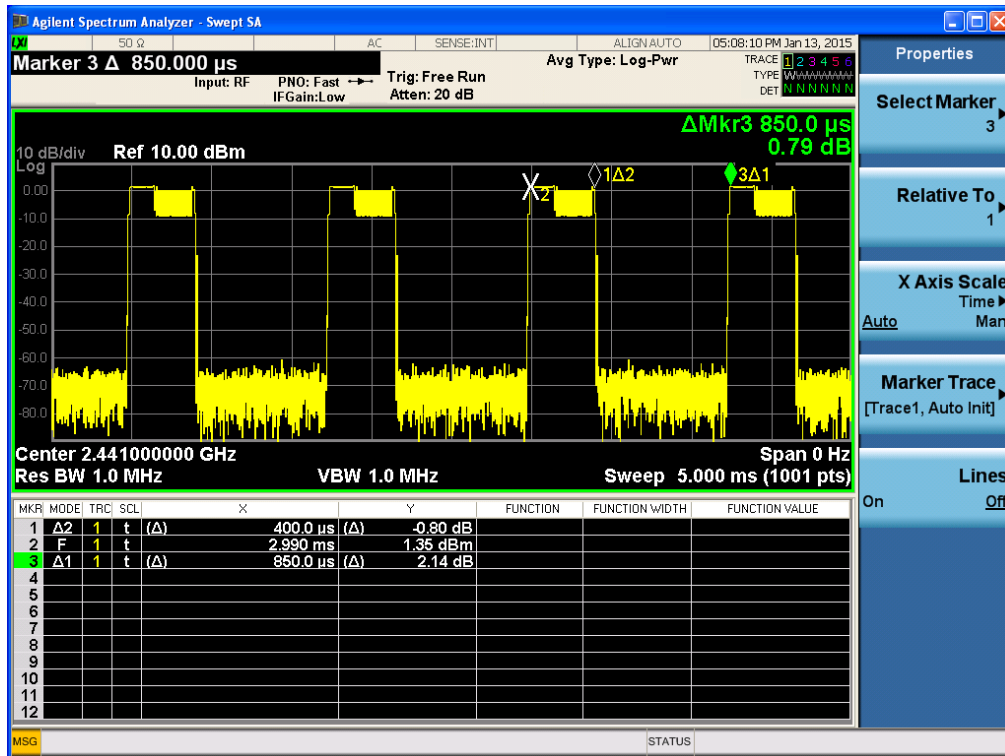

### Time of Occupancy for PACKET Type 3DH3(8-DPSK)

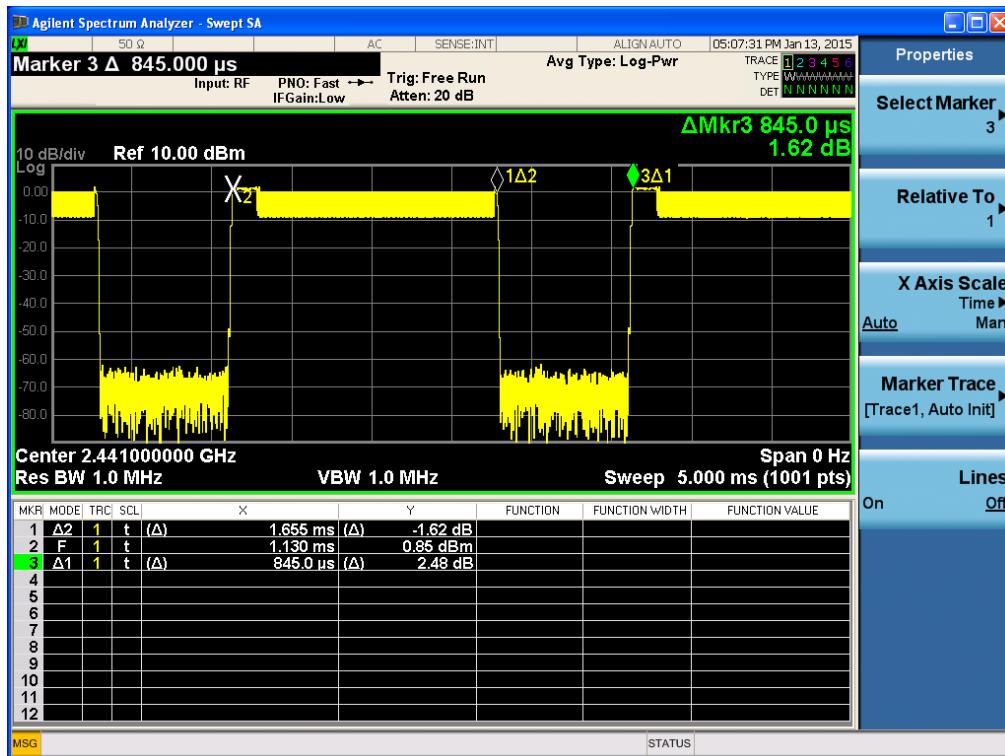



## 2.1.5 Maximum peak Conducted Output Power

### Test Location

RF Test Room

### Test Procedures

The maximum peak conducted output power was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function disabled at the highest, middle and the lowest available channels.

The spectrum analyzer is set to:

Center frequency = the highest, middle, and the lowest channels

Span = 5 MHz (approximately 5 times of the 20 dB bandwidth)


RBW = 1 MHz (greater than the 20 dB bandwidth of the emission being measured)

VBW = 1 MHz ( $\geq$  RBW)

Detector function = peak

Trace = max hold

Sweep = auto



### Limit

§5.247(b)(1) The Maximum Peak Output Power Measurement is 0.125 Watts for frequency hopping system operating in 2400-2483.5 MHz employing at least 15 Hopping channels.

### Test Results

#### Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

| Frequency (MHz) | Channel No. | Peak output power(dBm) | Peak output power(mW) | Result   |
|-----------------|-------------|------------------------|-----------------------|----------|
| 2402            | 0           | 2.113                  | 1.627                 | Complies |
| 2441            | 39          | 5.311                  | 3.397                 | Complies |
| 2480            | 78          | 4.682                  | 2.939                 | Complies |

#### Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

| Frequency (MHz) | Channel No. | Peak output power(dBm) | Peak output power(mW) | Result   |
|-----------------|-------------|------------------------|-----------------------|----------|
| 2402            | 0           | 0.273                  | 1.065                 | Complies |
| 2441            | 39          | 3.447                  | 2.212                 | Complies |
| 2480            | 78          | 2.811                  | 1.910                 | Complies |

See next pages for actual measured spectrum plots.



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance



## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

### Maximum peak Conducted Output Power - GFSK

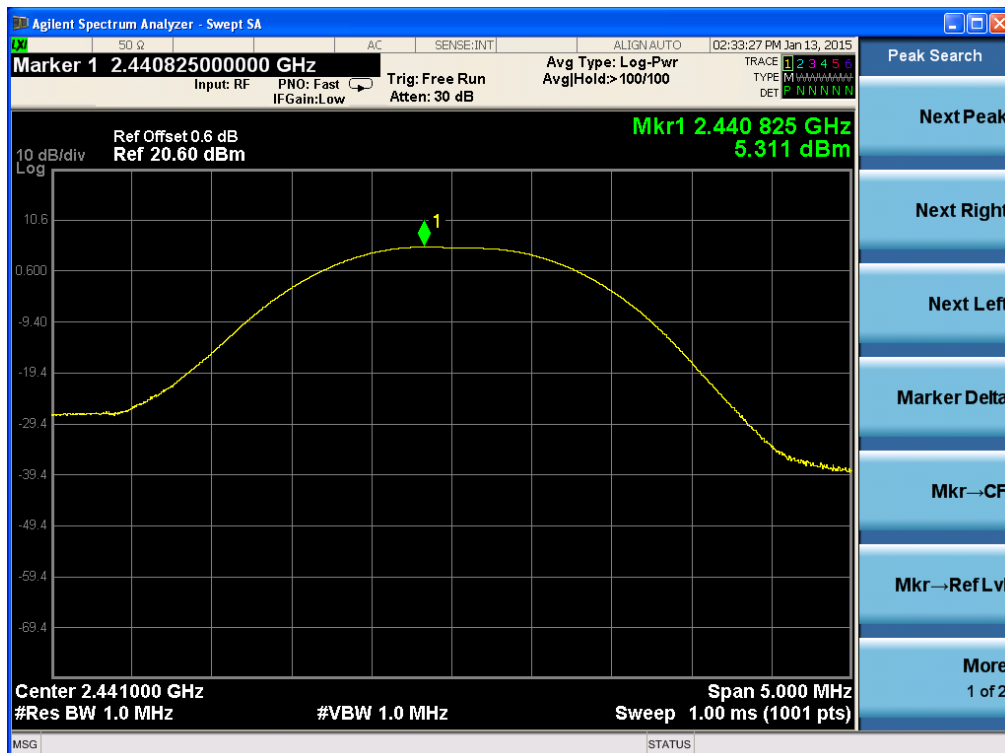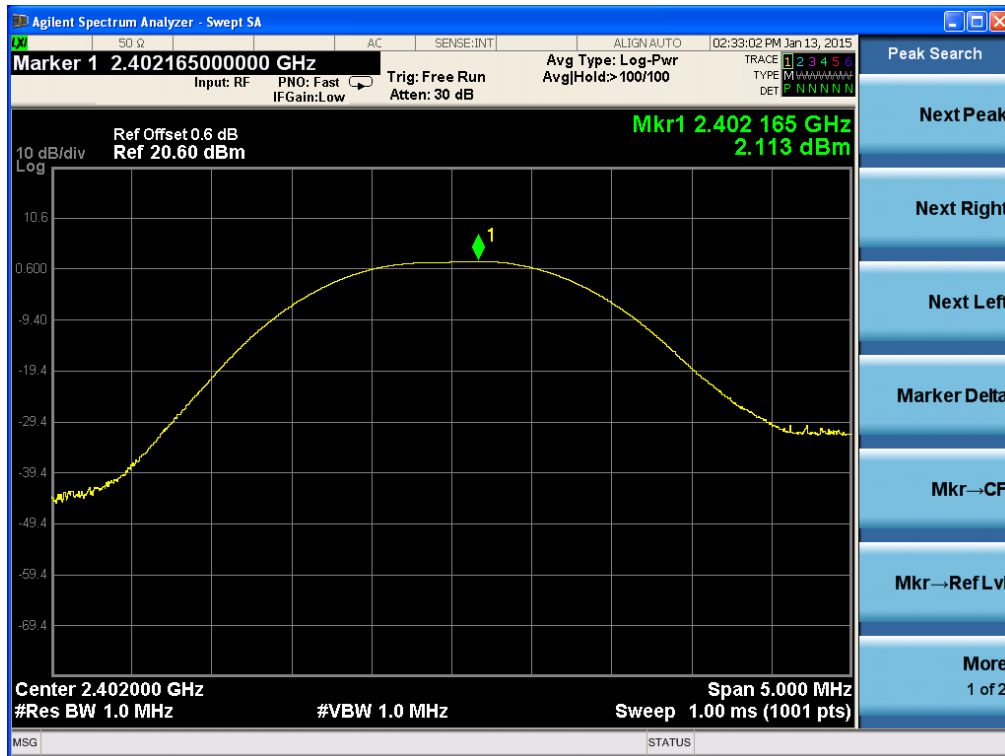




CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

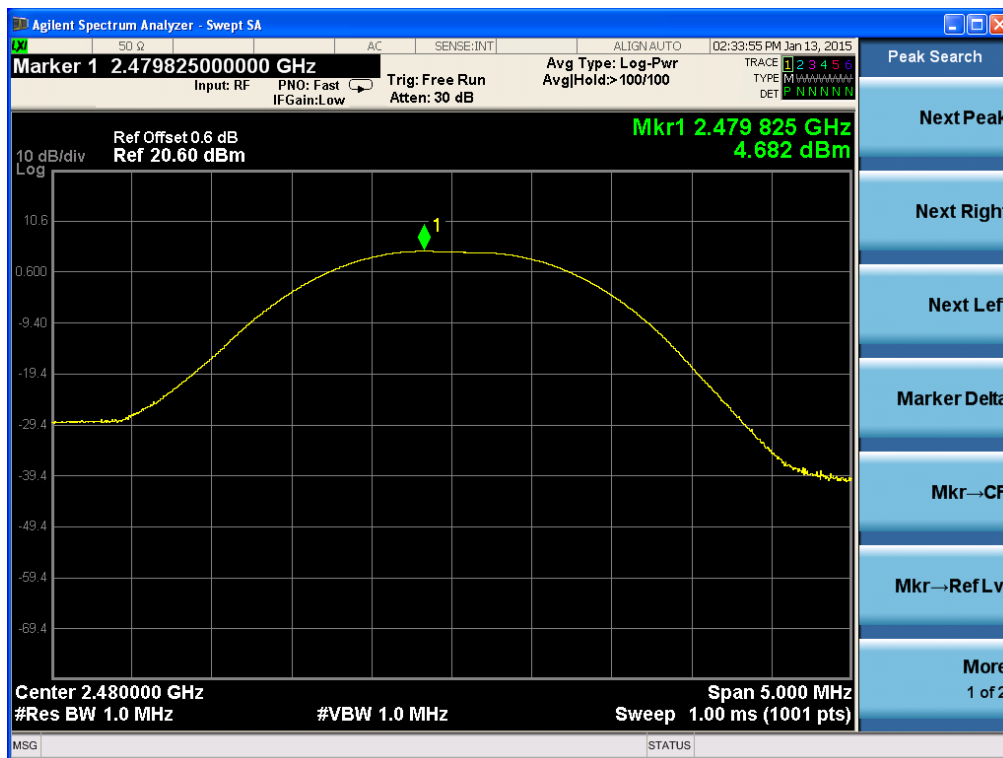



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance



## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

### Maximum peak Conducted Output Power - 8-DPSK

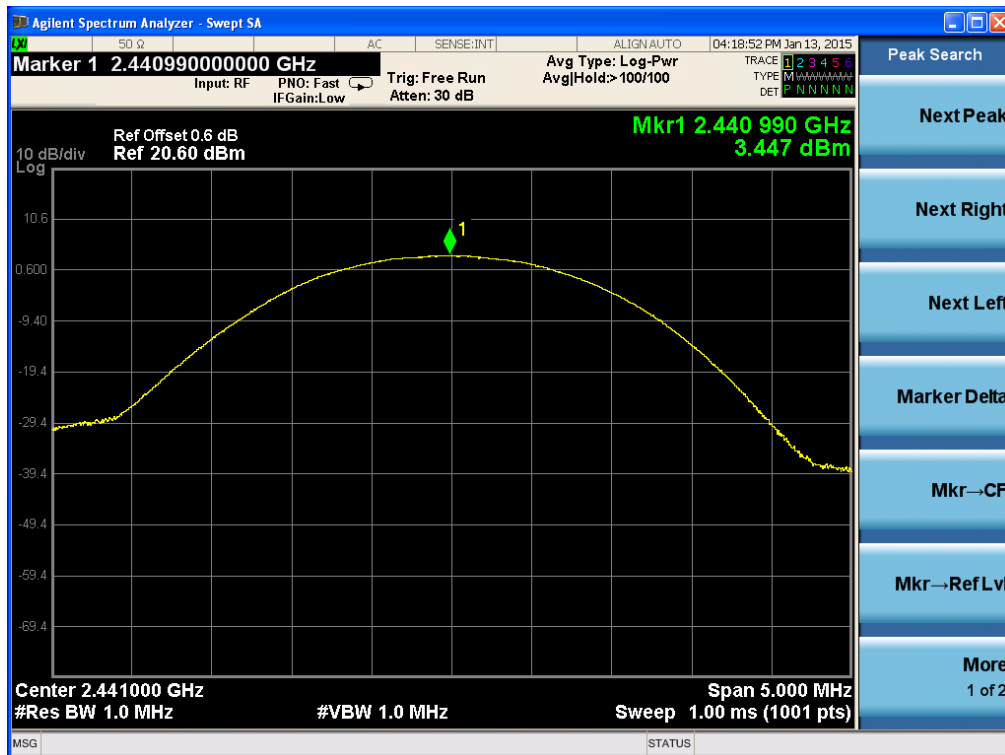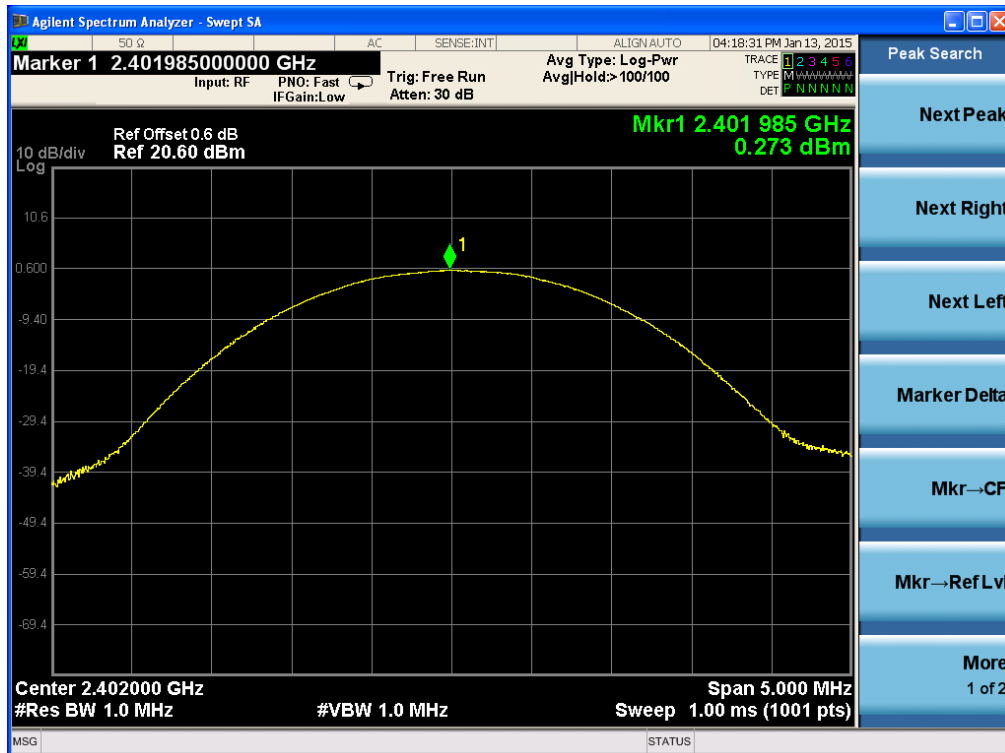




CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

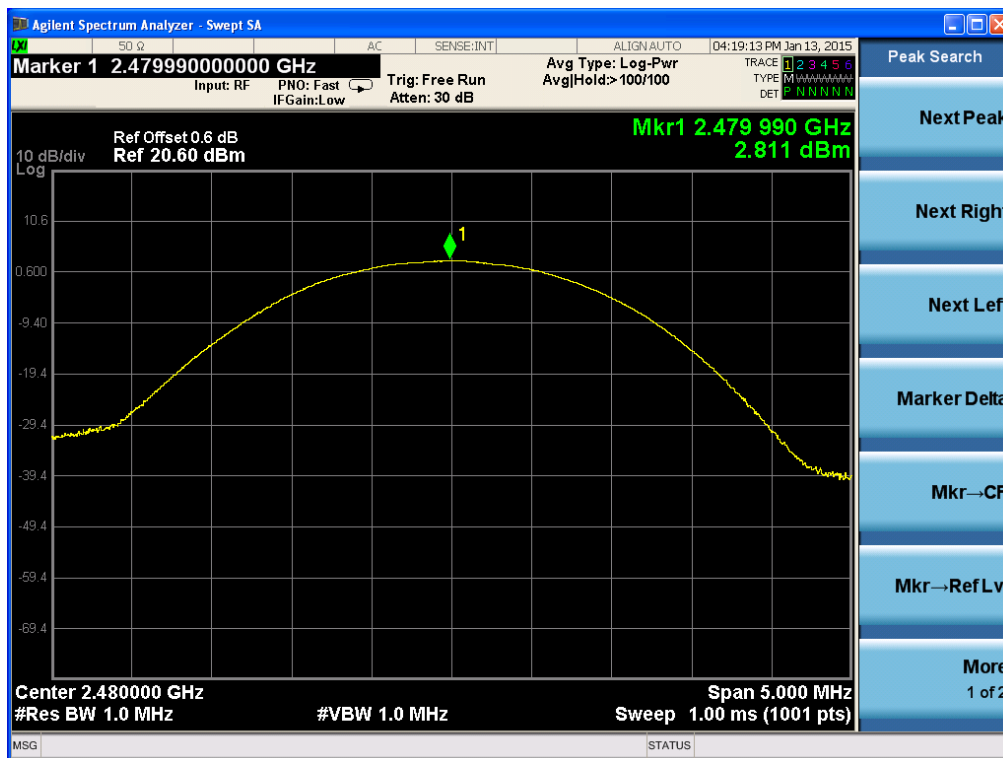

## 2.1.6 Band-edge

### Test Location

RF Test Room

### Test Procedures

The bandwidth at 20 dB down from the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function disabled at the highest, middle and the lowest available channels.

The spectrum analyzer is set to:

Center frequency = the highest, middle, and the lowest channels

RBW = 100 kHz


VBW = 100 kHz ( $\geq$  RBW)

Span = 10 MHz

Trace = max hold

Detector function = peak

Sweep = auto



### Limit

> 20 dBc

### Test Results

All conducted emission in any 100 kHz bandwidth outside of the spectrum band was at least 20 dB lower than the highest level of the inband spectral density. Therefore the applying equipment meets the requirement.

See next pages for actual measured spectrum plots.



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

## CTK Co., Ltd.



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970

Fax: +82-31-624-9501

www.e-ctk.com

### Band – edge (with Hopping) - GFSK

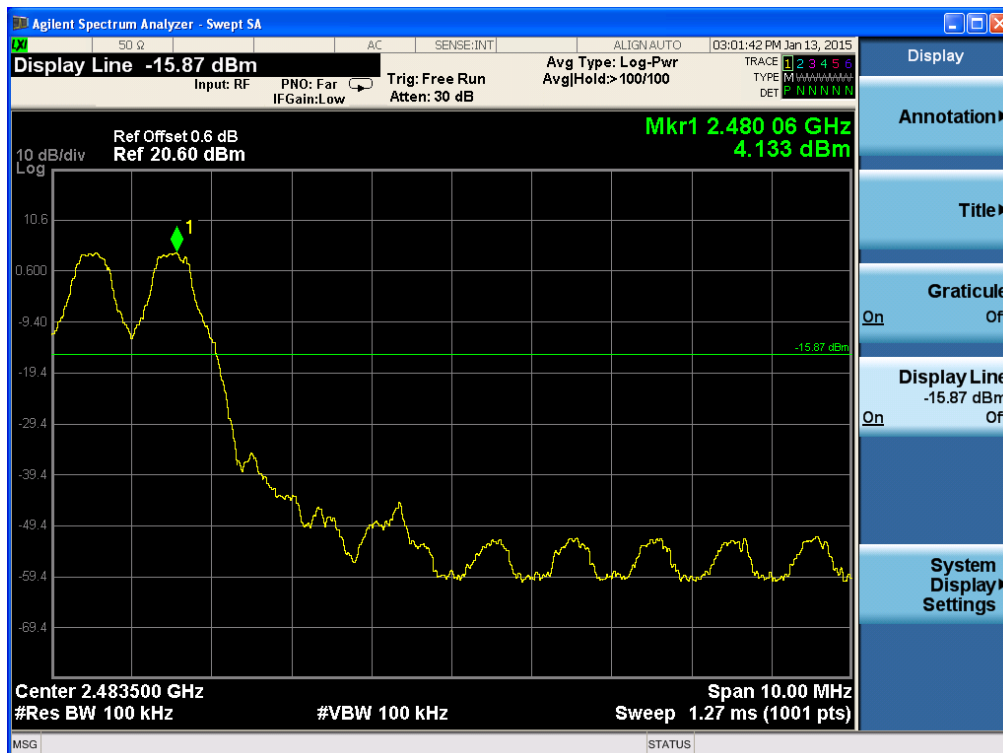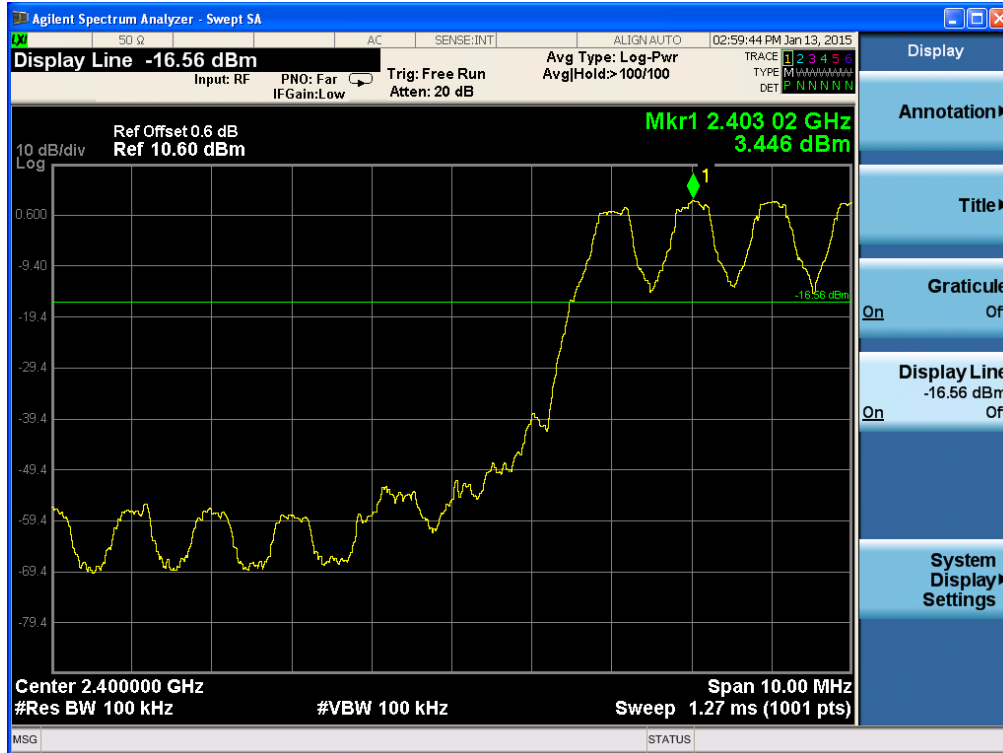



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

## CTK Co., Ltd.


(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970

Fax: +82-31-624-9501

www.e-ctk.com

### Band – edge (without Hopping) - GFSK

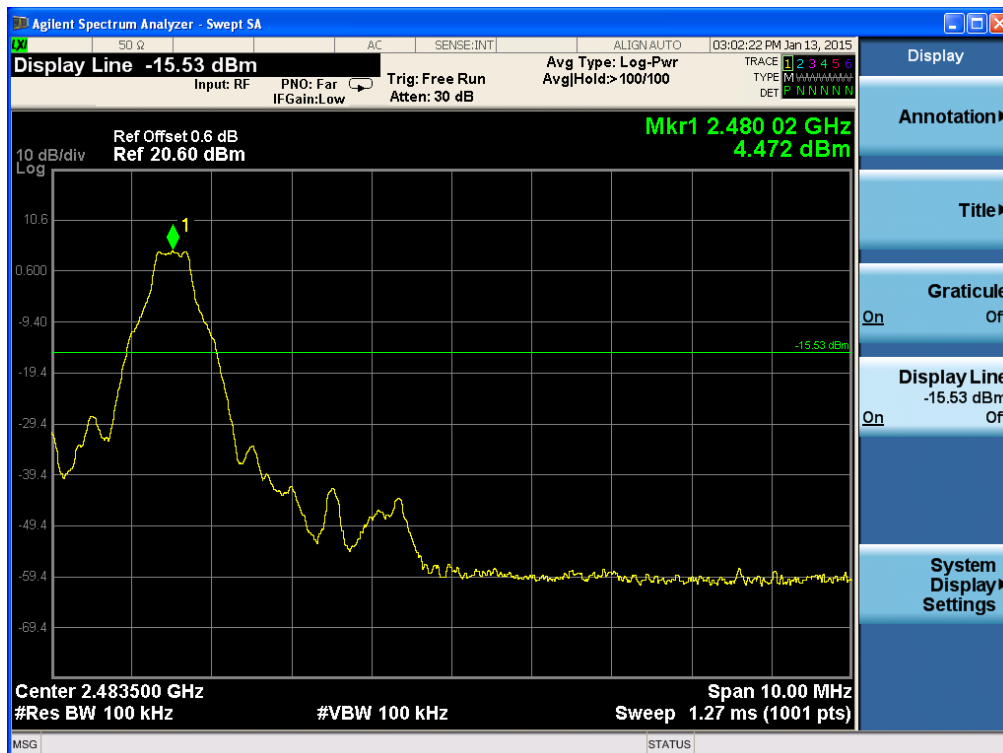



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970

Fax: +82-31-624-9501

www.e-ctk.com

### Band - edge (with Hopping) - 8-DPSK





CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

## CTK Co., Ltd.


(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970

Fax: +82-31-624-9501

www.e-ctk.com

### Band – edge (without Hopping) - 8-DPSK

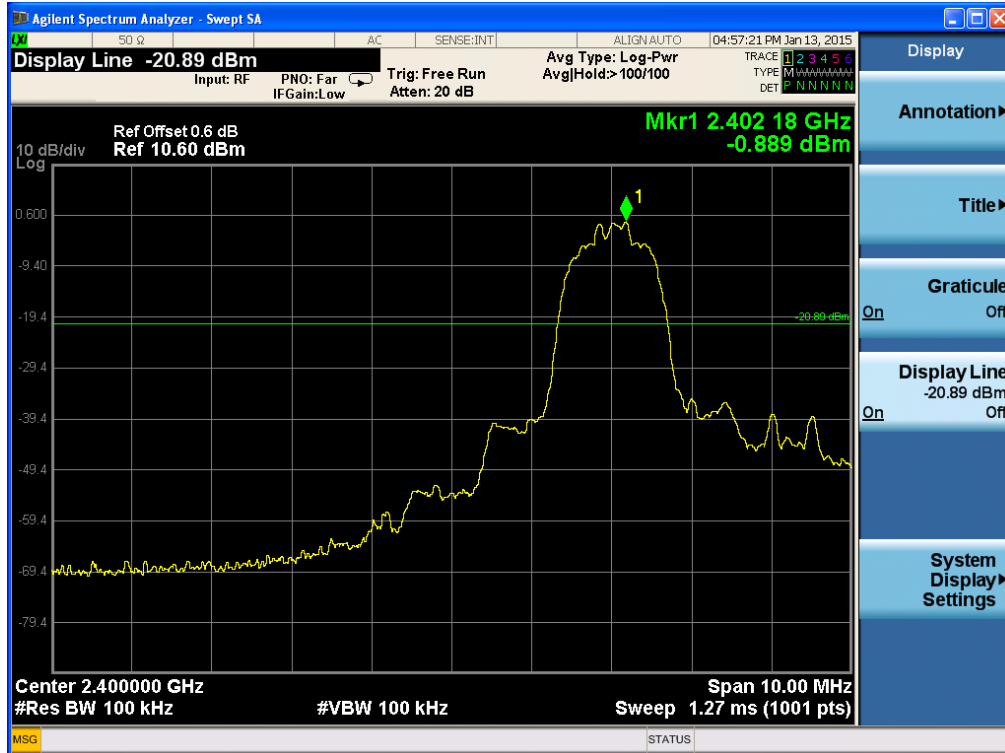





CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

Band – edge (at 20 dB blow) – Low channel  
Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic  
(GFSK : Worst-Case)

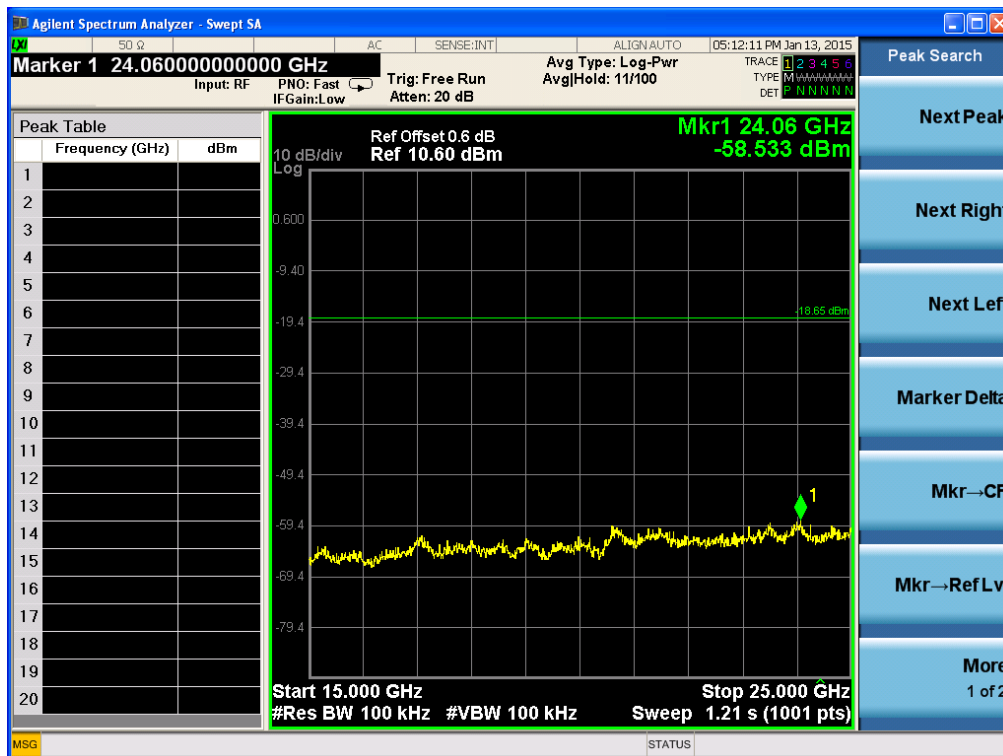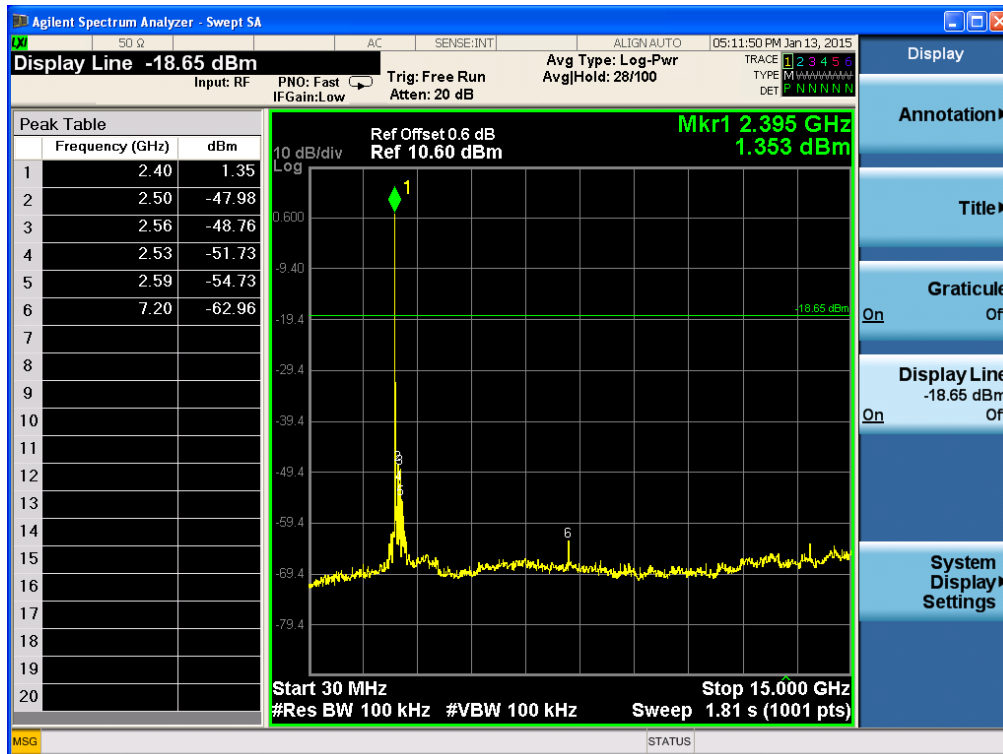





CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

Band – edge (at 20 dB blow) – Mid channel  
Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic  
(GFSK : Worst-Case)

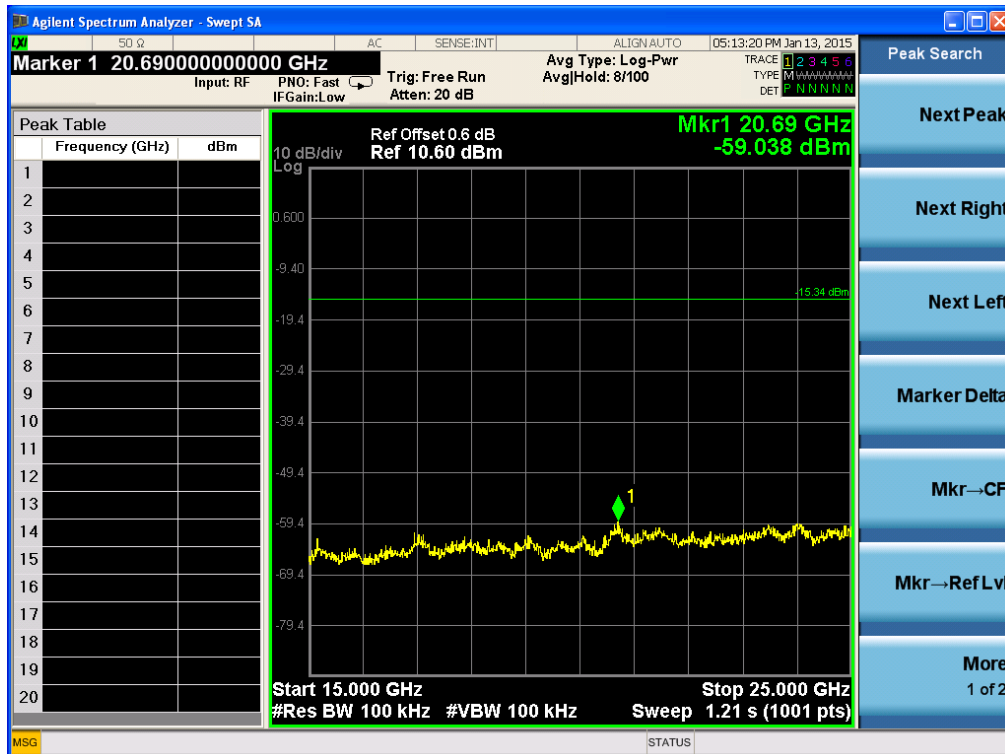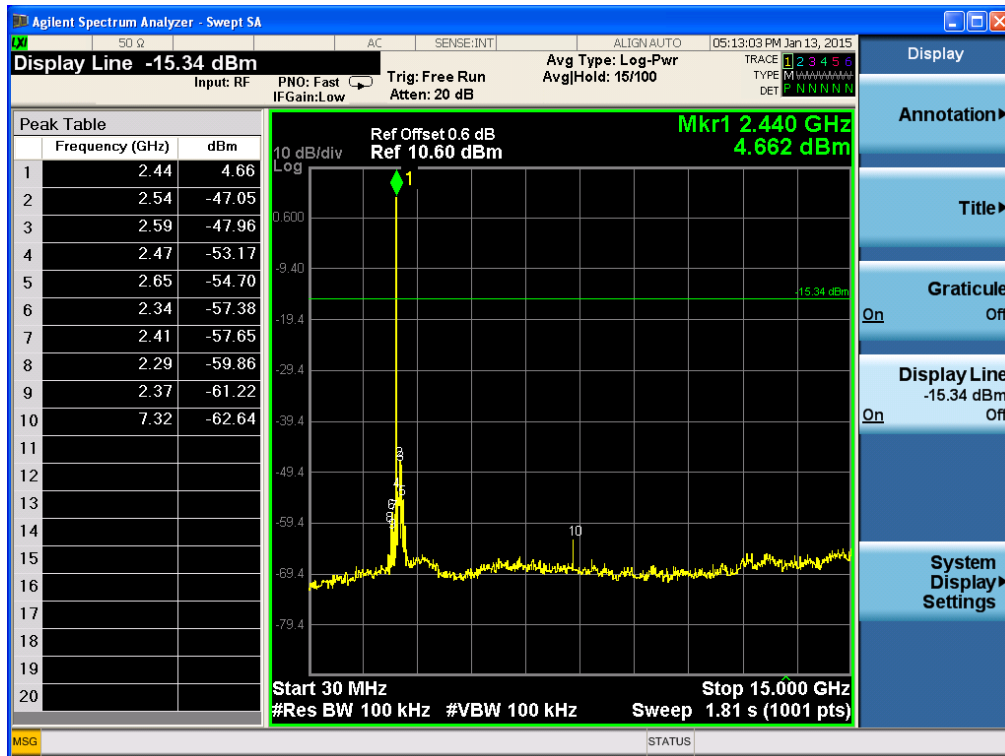



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance



## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

Band – edge (at 20 dB blow) – High channel  
Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic  
(GFSK : Worst-Case)

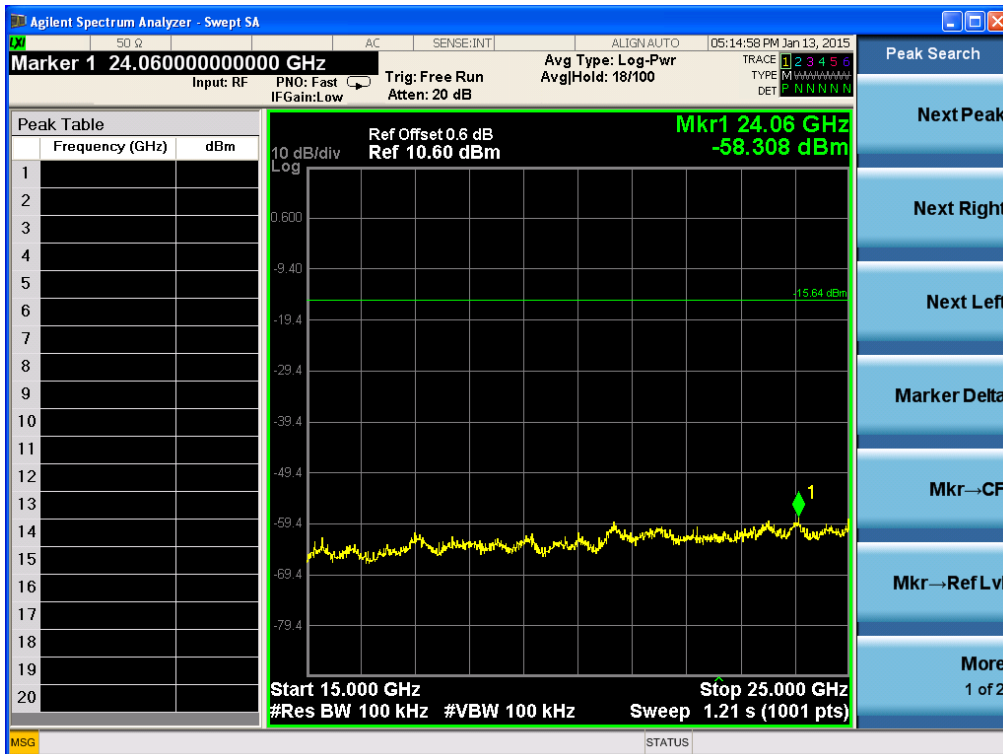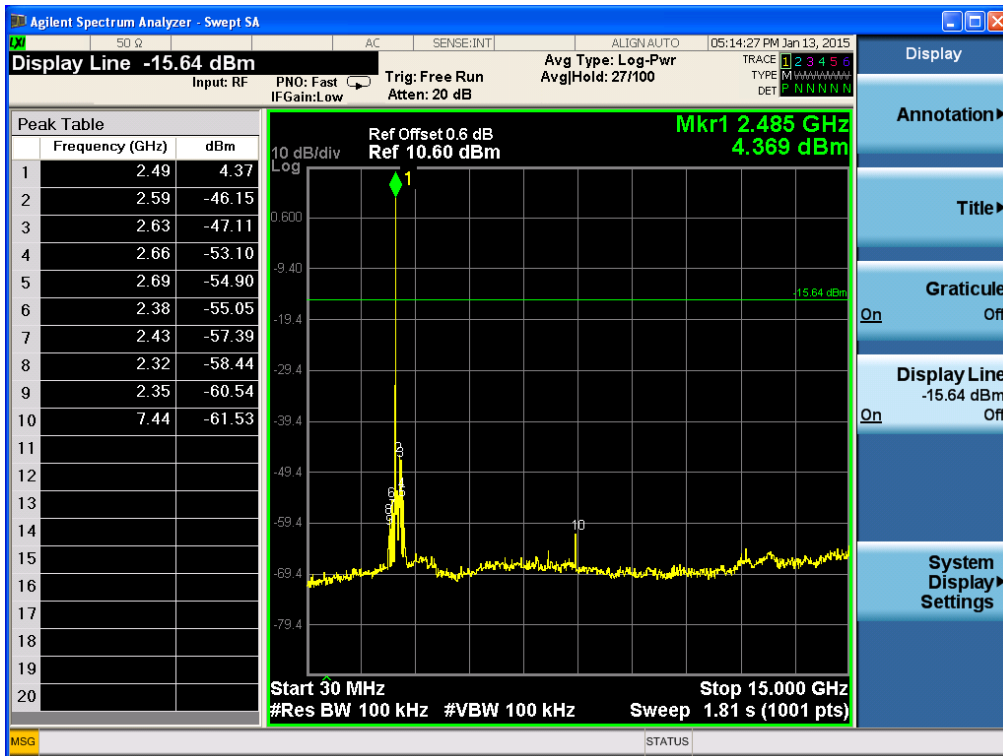





CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

Band – edge (at 20 dB blow) – Low channel  
Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic  
(8-DPSK : Worst-Case)

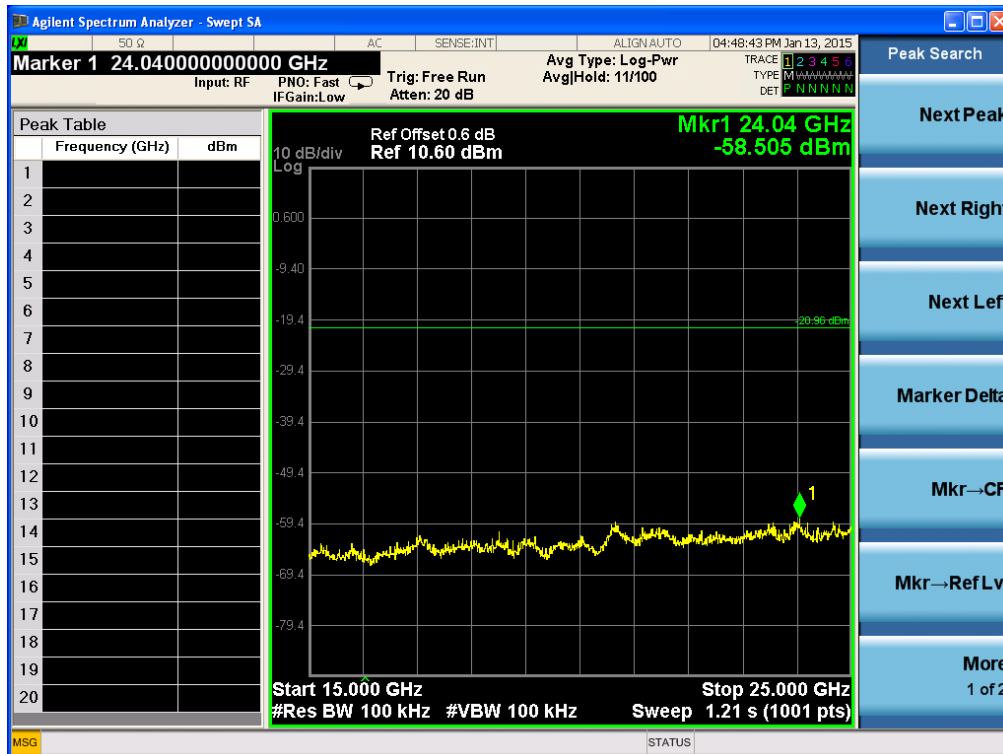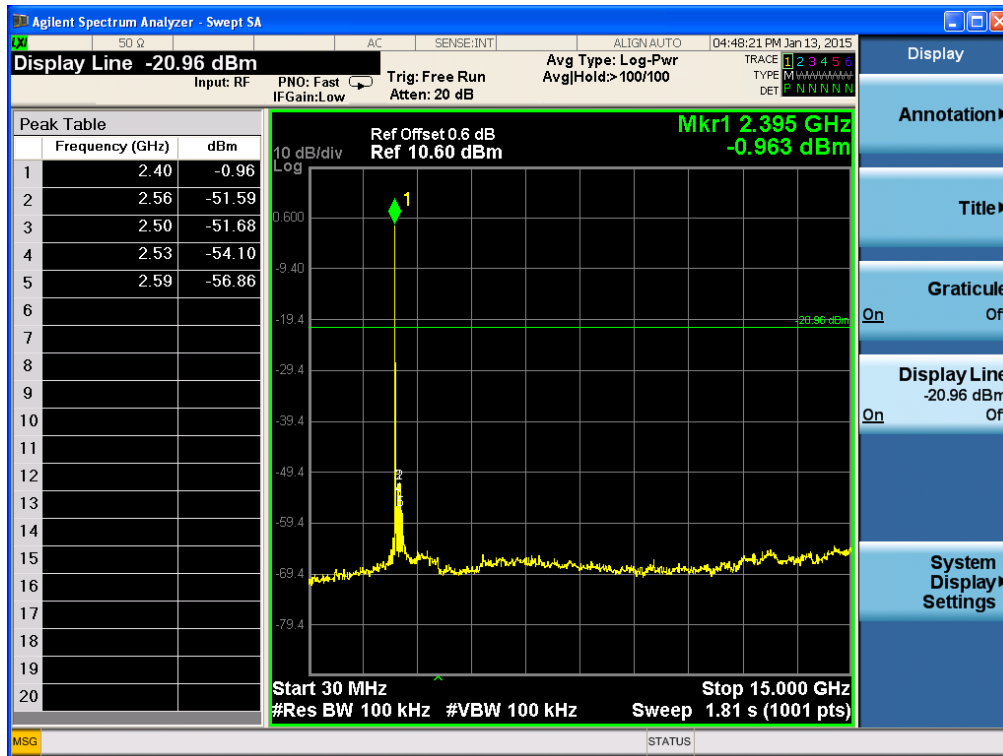



[www.e-ctk.com](http://www.e-ctk.com)



## 2.1.7 Field Strength of Emissions

### Test Location

- ☒ 10 m SAC (test distance : ☐ 10 m, ☒ 3 m)  
☒ 3 m SAC (test distance : 3 m)

### Test Procedures

- 1) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency range above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) and Horn Test Antenna(above 1 GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.

The spectrum analyzer is set to:

Frequency Range = 9 kHz ~ 25 GHz (2.4 GHz 10<sup>th</sup> harmonic)

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz, 9 kHz for  $f < 30$  MHz

VBW  $\geq$  RBW

Sweep = auto

### Limit

#### - 15.209(a)

| Frequency(MHz) | Field Strength<br>uV/m@3m | Field Strength<br>dBuV/m@3m | Measurement<br>Distance (meters) |
|----------------|---------------------------|-----------------------------|----------------------------------|
| 0.009-0.490    | 2400/F(kHz)               | -                           | 300                              |
| 0.490-1.705    | 24000/F(kHz)              | -                           | 30                               |
| 1.705-30       | 30                        | -                           | 30                               |
| 30-88          | 100**                     | 40                          | 3                                |
| 88-216         | 150**                     | 43.5                        | 3                                |
| 216-960        | 200**                     | 46                          | 3                                |
| Above 960      | 500                       | 54                          | 3                                |


\*\* Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

Note :


- 1) For above 1 GHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
- 2) For above 1 GHz, limit field strength of harmonics : 54 dBuV/m@3m (AV) and 74 dBuV/m@3m (PK)

### Test Setup:


- 1) For field strength of emissions from 9 kHz to 30 MHz

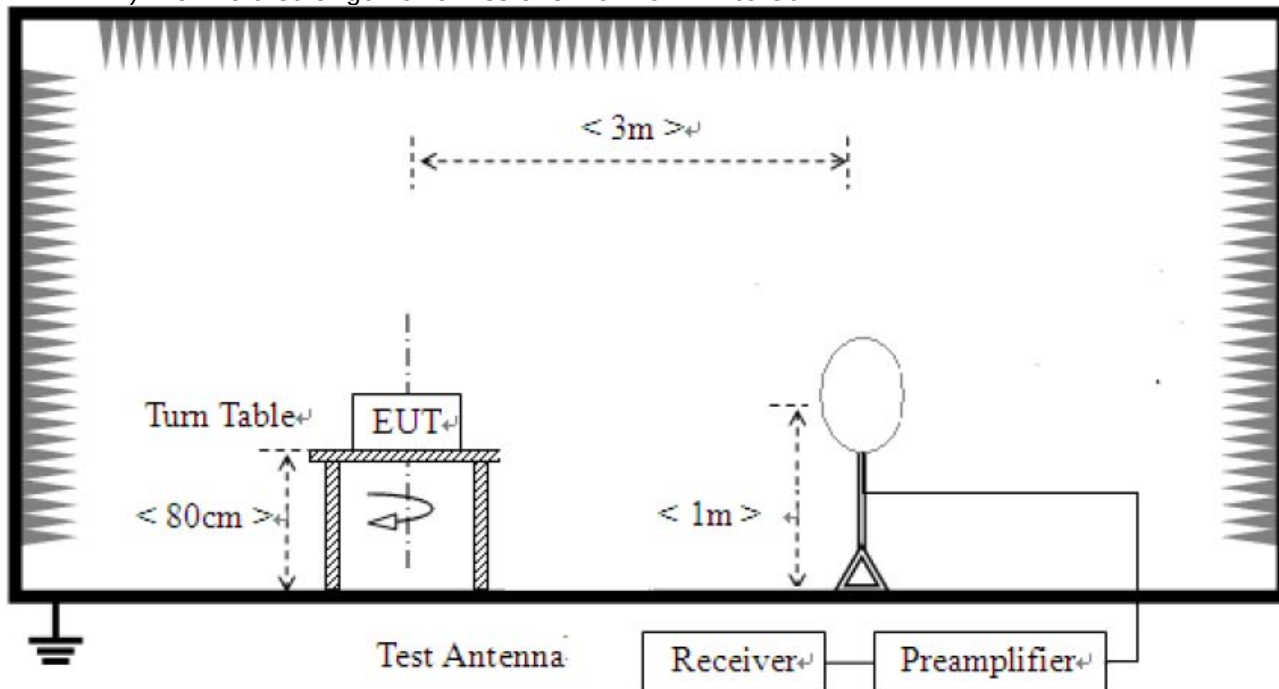

- 2) For field strength of emissions from 30 MHz to 1 GHz

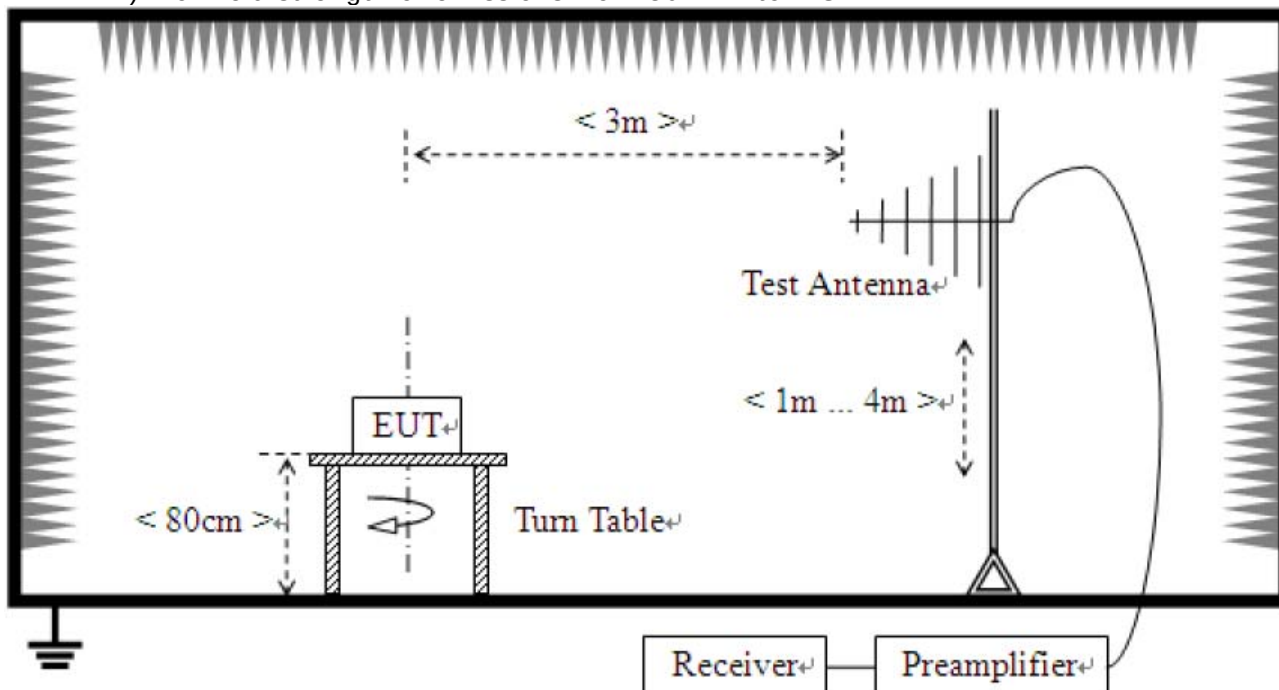

### 3) For field strength of emissions above 1 GHz

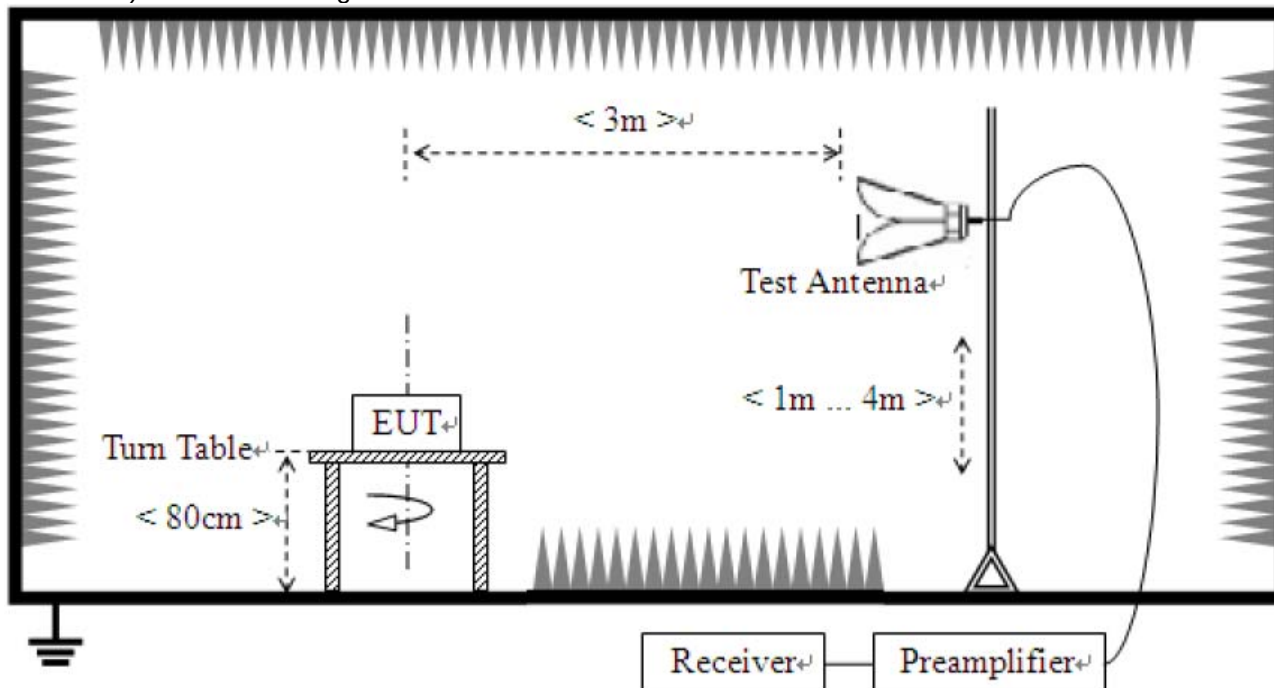

### Test Results

#### 1) 9 kHz to 30 MHz

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

|           |                   |                    |                |
|-----------|-------------------|--------------------|----------------|
| EUT       | Bluetooth Headset | Measurement Detail |                |
| Model     | PSB-100           | Frequency Range    | 9 kHz – 30 MHz |
| Test mode | GFSK, 8-DPSK      | Detector function  | Quasi-Peak     |

The requirements are:

☒ Complies

| Frequency (MHz) | Measured Data (dBuV/m) | Margin (dB) | Remark   |
|-----------------|------------------------|-------------|----------|
| -               | -                      | -           | See note |

#### Note :

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB)



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

### 2) 30 MHz to 1 GHz

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)


|           |                   |                    |                   |
|-----------|-------------------|--------------------|-------------------|
| EUT       | Bluetooth Headset | Measurement Detail |                   |
| Model     | PSB-100           | Frequency Range    | Below 1000MHz     |
| Test mode | GFSK              | Detector function  | Quasi-Peak / Peak |

The requirements are:

☒ Complies

| Frequency<br>(MHz)                                                   | Measured Data<br>(dBuV/m) | Margin<br>(dB) | Remark |
|----------------------------------------------------------------------|---------------------------|----------------|--------|
| No emissions were detected at a level greater than 20dB below limit. |                           |                |        |

### Test Data

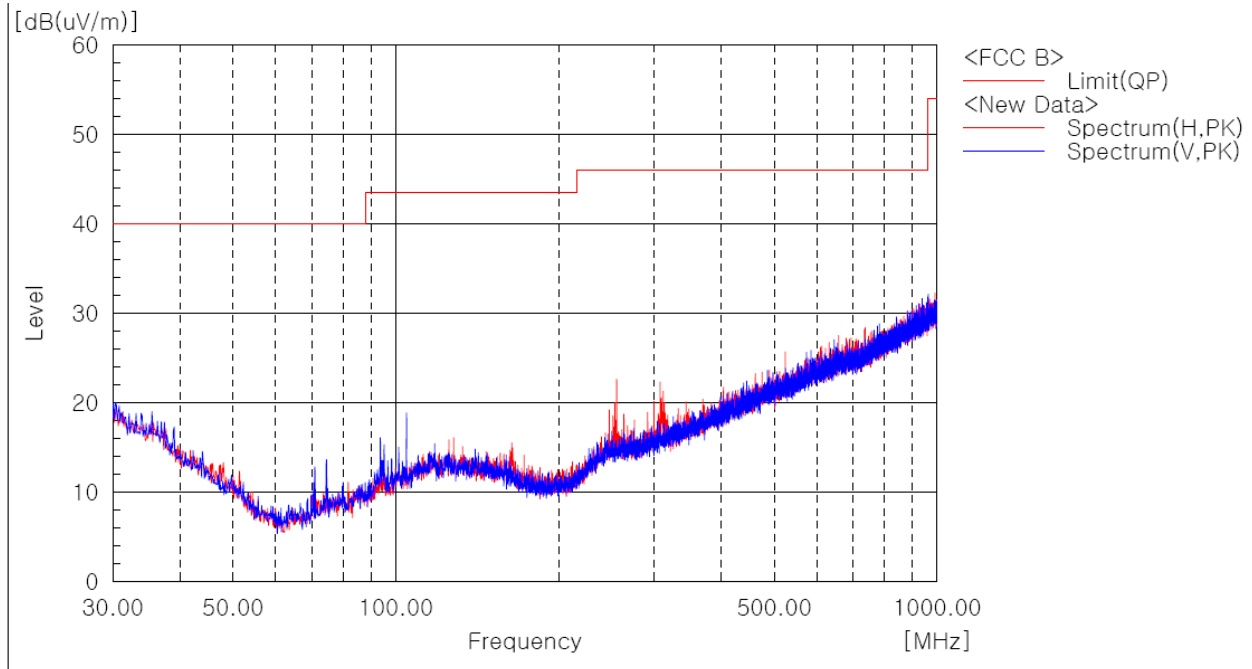

Final Result

| No. | Frequency (P) | c.f       | Height | Angle |
|-----|---------------|-----------|--------|-------|
|     | [MHz]         | [dB(1/m)] | [cm]   | [deg] |
|     |               |           |        |       |

### Remark :

1. The field strength of spurious emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

**Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)**


|           |                   |                    |                   |
|-----------|-------------------|--------------------|-------------------|
| EUT       | Bluetooth Headset | Measurement Detail |                   |
| Model     | PSB-100           | Frequency Range    | Below 1000MHz     |
| Test mode | 8-DPSK            | Detector function  | Quasi-Peak / Peak |

The requirements are:

☒ Complies

| Frequency<br>(MHz)                                                   | Measured Data<br>(dBuV/m) | Margin<br>(dB) | Remark |
|----------------------------------------------------------------------|---------------------------|----------------|--------|
| No emissions were detected at a level greater than 20dB below limit. |                           |                |        |

### Test Data

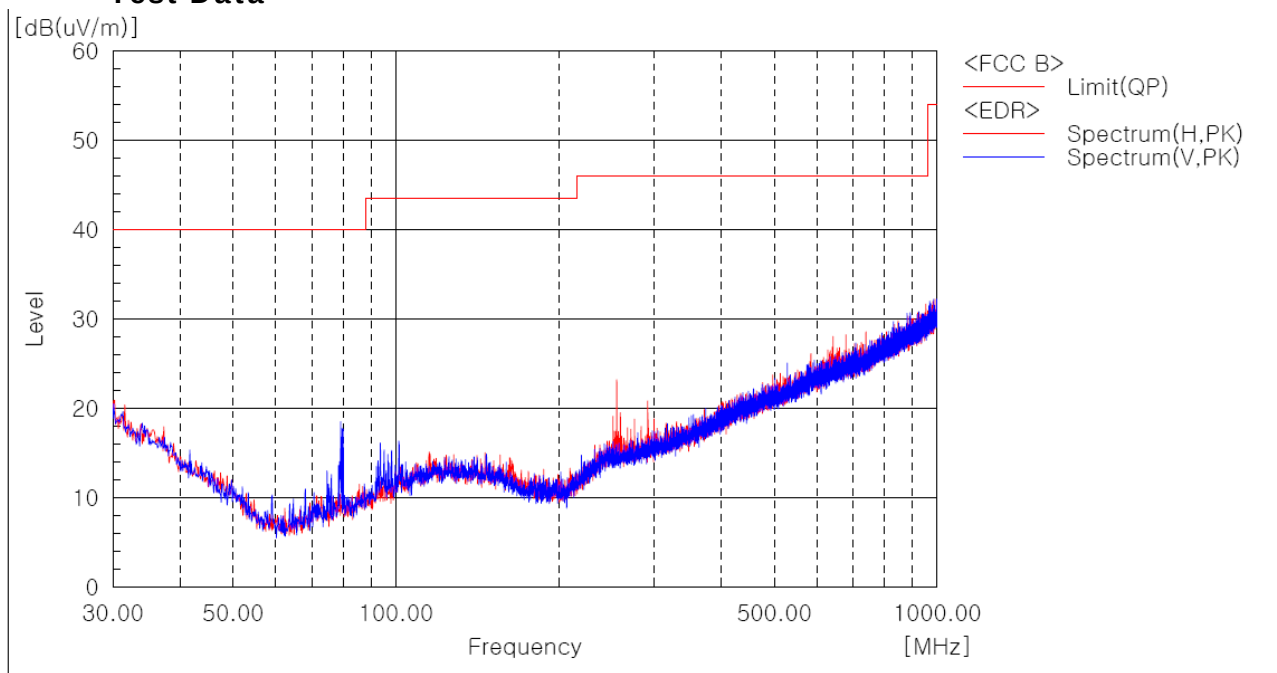

Final Result

| No. | Frequency (P) | c.f       | Height | Angle |
|-----|---------------|-----------|--------|-------|
|     | [MHz]         | [dB(1/m)] | [cm]   | [deg] |

### Remark :

1. The field strength of spurious emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

### 3) above 1 GHz

**Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)**

|       |                   |                    |                |
|-------|-------------------|--------------------|----------------|
| EUT   | Bluetooth Headset | Measurement Detail |                |
| Model | PSB-100           | Frequency Range    | 1-25GHz        |
|       |                   | Detector function  | Average / Peak |

#### Remarks

We have tested three mode (X, Y, Z). The worst mode (Z axis) for final test.

The requirements are:

☒ Complies

| Frequency<br>(MHz) | Measured Data<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|--------------------|---------------------------|----------------|---------|
| 2483.5             | 50.6                      | 3.4            | Average |

### Test Data

#### Ch.0(Low Channel)

| Frequency<br>[MHz] | (P) | Reading AV<br>[dB(uV)] | Reading PK<br>[dB(uV)] | Factor<br>[dB(1/m)] | Level<br>AV<br>[dB(uV/m)] | Level<br>PK<br>[dB(uV/m)] | Limit<br>AV<br>[dB(uV/m)] | Limit<br>PK<br>[dB(uV/m)] | Margin<br>AV<br>[dB] | Margin<br>PK<br>[dB] |
|--------------------|-----|------------------------|------------------------|---------------------|---------------------------|---------------------------|---------------------------|---------------------------|----------------------|----------------------|
|--------------------|-----|------------------------|------------------------|---------------------|---------------------------|---------------------------|---------------------------|---------------------------|----------------------|----------------------|

No emissions were detected at a level greater than 20dB below limit.

#### Ch.39(Mid Channel)

| Frequency<br>[MHz] | (P) | Reading AV<br>[dB(uV)] | Reading PK<br>[dB(uV)] | Factor<br>[dB(1/m)] | Level<br>AV<br>[dB(uV/m)] | Level<br>PK<br>[dB(uV/m)] | Limit<br>AV<br>[dB(uV/m)] | Limit<br>PK<br>[dB(uV/m)] | Margin<br>AV<br>[dB] | Margin<br>PK<br>[dB] |
|--------------------|-----|------------------------|------------------------|---------------------|---------------------------|---------------------------|---------------------------|---------------------------|----------------------|----------------------|
|--------------------|-----|------------------------|------------------------|---------------------|---------------------------|---------------------------|---------------------------|---------------------------|----------------------|----------------------|

No emissions were detected at a level greater than 20dB below limit.

#### Ch.78(High Channel)

| Frequency<br>[MHz] | (P) | Reading AV<br>[dB(uV)] | Reading PK<br>[dB(uV)] | Factor<br>[dB(1/m)] | Level<br>AV<br>[dB(uV/m)] | Level<br>PK<br>[dB(uV/m)] | Limit<br>AV<br>[dB(uV/m)] | Limit<br>PK<br>[dB(uV/m)] | Margin<br>AV<br>[dB] | Margin<br>PK<br>[dB] |
|--------------------|-----|------------------------|------------------------|---------------------|---------------------------|---------------------------|---------------------------|---------------------------|----------------------|----------------------|
|--------------------|-----|------------------------|------------------------|---------------------|---------------------------|---------------------------|---------------------------|---------------------------|----------------------|----------------------|

No emissions were detected at a level greater than 20dB below limit.

### Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

| Frequency<br>[MHz] | (P) | Reading AV<br>[dB(uV)] | Reading PK<br>[dB(uV)] | Factor<br>[dB(1/m)] | Level<br>AV<br>[dB(uV/m)] | Level<br>PK<br>[dB(uV/m)] | Limit<br>AV<br>[dB(uV/m)] | Limit<br>PK<br>[dB(uV/m)] | Margin<br>AV<br>[dB] | Margin<br>PK<br>[dB] |
|--------------------|-----|------------------------|------------------------|---------------------|---------------------------|---------------------------|---------------------------|---------------------------|----------------------|----------------------|
| 2483.5             | H   | 42.3                   | 51.9                   | 8.3                 | 50.6                      | 60.2                      | 54.0                      | 74.0                      | 3.4                  | 13.8                 |
| 2483.5             | V   | 38.0                   | 49.5                   | 8.3                 | 46.3                      | 57.8                      | 54.0                      | 74.0                      | 7.7                  | 16.2                 |



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

### Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

|       |                   |                    |                |
|-------|-------------------|--------------------|----------------|
| EUT   | Bluetooth Headset | Measurement Detail |                |
| Model | PSB-100           | Frequency Range    | 1-25GHz        |
|       |                   | Detector function  | Average / Peak |

### Remarks

We have tested three mode (X, Y, Z). The worst mode (Z axis) for final test.

The requirements are:

☒ Complies

| Frequency<br>(MHz) | Measured Data<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|--------------------|---------------------------|----------------|---------|
| 2483.5             | 45.9                      | 8.1            | Average |

### Test Data

#### Ch.0(Low Channel)

| Frequency<br>[MHz] | (P) | Reading AV<br>[dB(uV)] | Reading PK<br>[dB(uV)] | Factor<br>[dB(1/m)] | Level<br>AV<br>[dB(uV/m)] | Level<br>PK<br>[dB(uV/m)] | Limit<br>AV<br>[dB(uV/m)] | Limit<br>PK<br>[dB(uV/m)] | Margin<br>AV<br>[dB] | Margin<br>PK<br>[dB] |
|--------------------|-----|------------------------|------------------------|---------------------|---------------------------|---------------------------|---------------------------|---------------------------|----------------------|----------------------|
|--------------------|-----|------------------------|------------------------|---------------------|---------------------------|---------------------------|---------------------------|---------------------------|----------------------|----------------------|

No emissions were detected at a level greater than 20dB below limit.

#### Ch.39(Mid Channel)

| Frequency<br>[MHz] | (P) | Reading AV<br>[dB(uV)] | Reading PK<br>[dB(uV)] | Factor<br>[dB(1/m)] | Level<br>AV<br>[dB(uV/m)] | Level<br>PK<br>[dB(uV/m)] | Limit<br>AV<br>[dB(uV/m)] | Limit<br>PK<br>[dB(uV/m)] | Margin<br>AV<br>[dB] | Margin<br>PK<br>[dB] |
|--------------------|-----|------------------------|------------------------|---------------------|---------------------------|---------------------------|---------------------------|---------------------------|----------------------|----------------------|
|--------------------|-----|------------------------|------------------------|---------------------|---------------------------|---------------------------|---------------------------|---------------------------|----------------------|----------------------|

No emissions were detected at a level greater than 20dB below limit.

#### Ch.78(High Channel)

| Frequency<br>[MHz] | (P) | Reading AV<br>[dB(uV)] | Reading PK<br>[dB(uV)] | Factor<br>[dB(1/m)] | Level<br>AV<br>[dB(uV/m)] | Level<br>PK<br>[dB(uV/m)] | Limit<br>AV<br>[dB(uV/m)] | Limit<br>PK<br>[dB(uV/m)] | Margin<br>AV<br>[dB] | Margin<br>PK<br>[dB] |
|--------------------|-----|------------------------|------------------------|---------------------|---------------------------|---------------------------|---------------------------|---------------------------|----------------------|----------------------|
|--------------------|-----|------------------------|------------------------|---------------------|---------------------------|---------------------------|---------------------------|---------------------------|----------------------|----------------------|

No emissions were detected at a level greater than 20dB below limit.

### Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

| Frequency<br>[MHz] | (P) | Reading AV<br>[dB(uV)] | Reading PK<br>[dB(uV)] | Factor<br>[dB(1/m)] | Level<br>AV<br>[dB(uV/m)] | Level<br>PK<br>[dB(uV/m)] | Limit<br>AV<br>[dB(uV/m)] | Limit<br>PK<br>[dB(uV/m)] | Margin<br>AV<br>[dB] | Margin<br>PK<br>[dB] |
|--------------------|-----|------------------------|------------------------|---------------------|---------------------------|---------------------------|---------------------------|---------------------------|----------------------|----------------------|
| 2483.5             | H   | 36.3                   | 49.0                   | 8.3                 | 44.6                      | 57.3                      | 54.0                      | 74.0                      | 9.4                  | 16.7                 |
| 2483.5             | V   | 37.6                   | 47.4                   | 8.3                 | 45.9                      | 55.7                      | 54.0                      | 74.0                      | 8.1                  | 18.3                 |



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

### 2.1.8 AC Conducted Emissions

#### Test Location

Shielded Room

#### Frequency Range of Measurement

150 kHz to 30 MHz

#### Instrument Settings

IF Band Width: 9 kHz

#### Test Procedures

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

#### Limit

##### - 15.207(a)

| Frequency (MHz) | Conducted Limit (dBuV) |           |
|-----------------|------------------------|-----------|
|                 | Quasi-peak             | Average   |
| 0.15 ~ 0.5      | 66 to 56*              | 56 to 46* |
| 0.5 ~ 5         | 56                     | 46        |
| 5 ~ 30          | 60                     | 50        |

\* Decreases with the logarithm of the frequency.

#### Test Results

The requirements are:

☒ Complies


#### Test mode : USB Charge, AC Adaptor Charge

| Frequency (MHz) | Measured Data (dBuV/m) | Margin (dB) | Remark  |
|-----------------|------------------------|-------------|---------|
| 1.302           | 36.4                   | 9.6         | Average |

## Test Data

[HOT]

CISPR 22 Class B\_L1

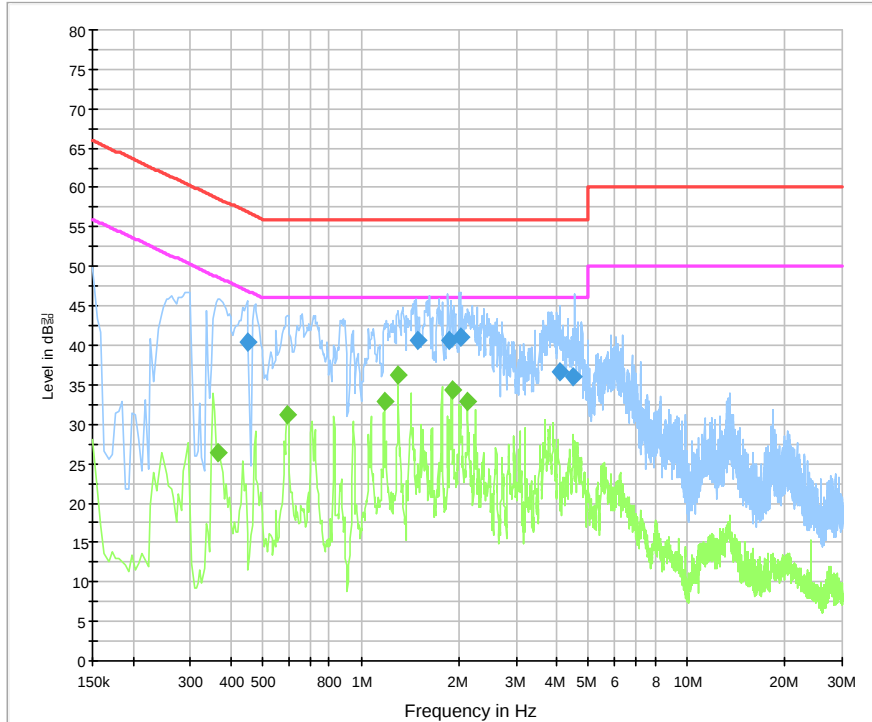

## Final Result 1


| Frequency (MHz) | QuasiPeak (dBuV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBuV) |
|-----------------|------------------|-----------------|-----------------|--------|------|------------|-------------|--------------|
| 0.451500        | 40.4             | 1000.0          | 9.000           | On     | L1   | 10.2       | 16.5        | 56.8         |
| 1.486500        | 40.7             | 1000.0          | 9.000           | On     | L1   | 9.9        | 15.3        | 56.0         |
| 1.869000        | 40.5             | 1000.0          | 9.000           | On     | L1   | 9.9        | 15.5        | 56.0         |
| 2.035500        | 41.0             | 1000.0          | 9.000           | On     | L1   | 9.9        | 15.0        | 56.0         |
| 4.087500        | 36.7             | 1000.0          | 9.000           | On     | L1   | 9.8        | 19.3        | 56.0         |
| 4.492500        | 36.0             | 1000.0          | 9.000           | On     | L1   | 9.8        | 20.0        | 56.0         |

## Final Result 2

| Frequency (MHz) | CAverage (dBuV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBuV) |
|-----------------|-----------------|-----------------|-----------------|--------|------|------------|-------------|--------------|
| 0.366000        | 26.4            | 1000.0          | 9.000           | On     | L1   | 10.1       | 22.2        | 48.6         |
| 0.595500        | 31.2            | 1000.0          | 9.000           | On     | L1   | 10.1       | 14.8        | 46.0         |
| 1.180500        | 33.0            | 1000.0          | 9.000           | On     | L1   | 9.9        | 13.0        | 46.0         |
| 1.302000        | 36.3            | 1000.0          | 9.000           | On     | L1   | 9.9        | 9.7         | 46.0         |
| 1.900500        | 34.3            | 1000.0          | 9.000           | On     | L1   | 9.9        | 11.7        | 46.0         |
| 2.130000        | 33.0            | 1000.0          | 9.000           | On     | L1   | 9.9        | 13.0        | 46.0         |

**[NEUTRAL]**

CISPR 22 Class B\_N

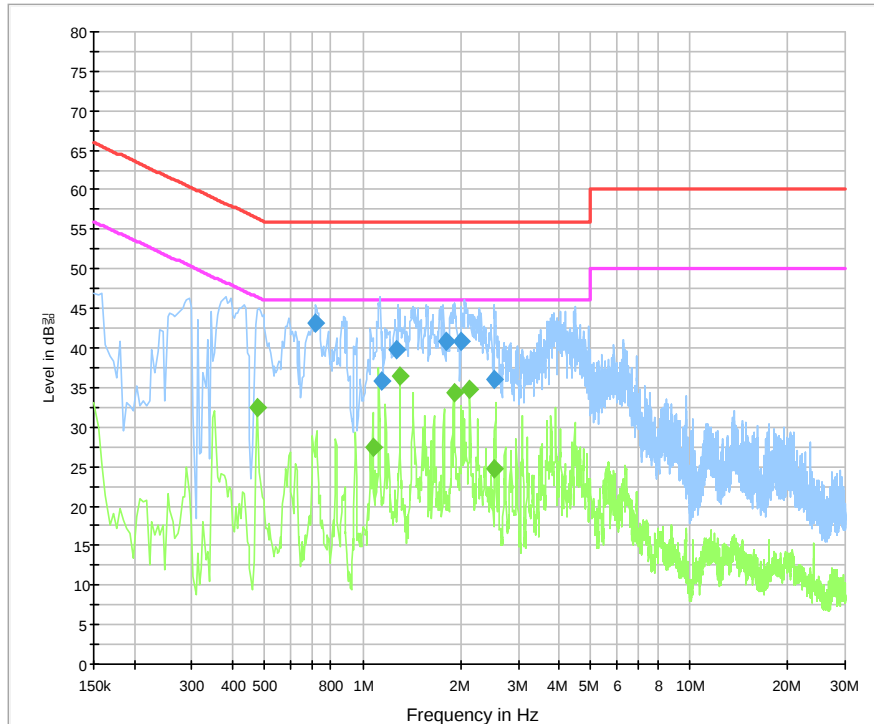

**Final Result 1**

| Frequency (MHz) | QuasiPeak (dBuV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBuV) |
|-----------------|------------------|-----------------|-----------------|--------|------|------------|-------------|--------------|
| 0.717000        | 43.1             | 1000.0          | 9.000           | On     | N    | 10.0       | 12.9        | 56.0         |
| 1.140000        | 35.7             | 1000.0          | 9.000           | On     | N    | 9.9        | 20.3        | 56.0         |
| 1.266000        | 39.8             | 1000.0          | 9.000           | On     | N    | 9.9        | 16.2        | 56.0         |
| 1.797000        | 40.8             | 1000.0          | 9.000           | On     | N    | 9.9        | 15.2        | 56.0         |
| 2.008500        | 40.8             | 1000.0          | 9.000           | On     | N    | 9.9        | 15.2        | 56.0         |
| 2.517000        | 36.1             | 1000.0          | 9.000           | On     | N    | 9.9        | 19.9        | 56.0         |

**Final Result 2**

| Frequency (MHz) | CAverage (dBuV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBuV) |
|-----------------|-----------------|-----------------|-----------------|--------|------|------------|-------------|--------------|
| 0.474000        | 32.4            | 1000.0          | 9.000           | On     | N    | 10.2       | 14.0        | 46.4         |
| 1.077000        | 27.5            | 1000.0          | 9.000           | On     | N    | 9.9        | 18.5        | 46.0         |
| 1.302000        | 36.4            | 1000.0          | 9.000           | On     | N    | 9.9        | 9.6         | 46.0         |
| 1.900500        | 34.4            | 1000.0          | 9.000           | On     | N    | 9.9        | 11.6        | 46.0         |
| 2.130000        | 34.7            | 1000.0          | 9.000           | On     | N    | 9.9        | 11.3        | 46.0         |
| 2.535000        | 24.7            | 1000.0          | 9.000           | On     | N    | 9.9        | 21.3        | 46.0         |



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

### APPENDIX A – Test Equipment Used For Tests

|    | Name of Equipment             | Manufacturer          | Model No.   | Serial No.  | Cal Date   | Due Date   |
|----|-------------------------------|-----------------------|-------------|-------------|------------|------------|
| 1  | Signal Analyzer               | Agilent               | N9020A      | MY48011598  | 2014-11-07 | 2015-11-07 |
| 2  | Spectrum Analyzer             | Rohde & Schwarz       | FSP-30      | 100994      | 2014-11-07 | 2015-11-07 |
| 3  | EMI Test Receiver             | Rohde & Schwarz       | ESCI7       | 100814      | 2014-12-05 | 2015-12-05 |
| 4  | EMI Test Receiver             | Rohde & Schwarz       | ESCI7       | 100816      | 2014-12-05 | 2015-12-05 |
| 5  | Active Loop Antenna           | SCHWARZBECK           | FMZB 1513   | 1513-126    | 2014-05-19 | 2016-05-19 |
| 6  | Attenuator                    | HP                    | 8498A       | 1801A06913  | 2014-11-11 | 2015-11-11 |
| 7  | EPM Series Power Meter        | HP                    | E4418A      | GB38272734  | 2014-11-17 | 2015-11-17 |
| 8  | Power Sensor                  | HP                    | 8487A       | 3318A03524  | 2014-05-15 | 2015-05-15 |
| 9  | Audio Analyzer                | HP                    | 8903B       | 2747A03432  | 2014-11-10 | 2015-11-10 |
| 10 | ESG-D Series Signal Generator | Agilent               | E4432B      | US40054094  | 2014-11-12 | 2015-11-12 |
| 11 | SYNTHESIZED SWEEPER           | HP                    | 8341B       | 2819A01563  | 2014-11-14 | 2015-11-14 |
| 12 | Attenuator                    | HP                    | 8494A       | 3308A33351  | 2014-11-07 | 2015-11-07 |
| 13 | Temp&Humi Chamber             | Kunpoong              | JT-TH-556-1 | 9QE5-002    | 2014-01-16 | 2016-01-16 |
| 14 | Temp&Humi Chamber             | Kunpoong              | JT-TH-556-2 | 9QE5-003    | 2014-01-16 | 2016-01-16 |
| 15 | Temp&Humi Chamber             | ESPEC CORP.           | SH-241      | 92000872    | 2014-08-18 | 2015-08-18 |
| 16 | DC POWER SUPPLY               | Agilent               | E3632A      | MY40011638  | 2014-11-07 | 2015-11-07 |
| 17 | Horn Antenna                  | ETS-Lindgren          | 3115        | 00078895    | 2013-02-28 | 2015-02-28 |
| 18 | Horn Antenna                  | ETS-Lindgren          | 3115        | 00078894    | 2013-05-13 | 2015-05-13 |
| 19 | Horn Antenna                  | ETS-Lindgren          | 3116        | 00062916    | 2013-03-20 | 2015-03-20 |
| 20 | Horn Antenna                  | ETS-Lindgren          | 3116        | 00062504    | 2013-05-27 | 2015-05-27 |
| 21 | Horn Antenna                  | ETS-Lindgren          | 3117        | 00154525    | 2013-07-03 | 2015-07-03 |
| 22 | OPT H64 AMPLIFIER             | HP                    | 8447F       | 3113A06814  | 2014-03-20 | 2015-03-20 |
| 23 | PREAMPLIFIER                  | Agilent               | 8449B       | 3008A02307  | 2014-10-24 | 2015-10-24 |
| 24 | Radio Communication Tester    | Rohde & Schwarz       | CMU200      | 106765      | 2014-02-06 | 2015-02-06 |
| 25 | LISN                          | Rohde & Schwarz       | ENV216      | 101235      | 2014-07-30 | 2015-07-30 |
| 26 | LISN                          | Rohde & Schwarz       | ENV216      | 101236      | 2014-07-30 | 2015-07-30 |
| 27 | LISN                          | Rohde & Schwarz       | ENV216      | 101151      | 2014-11-07 | 2015-11-07 |
| 28 | DC POWER SUPPLY               | Agilent               | E3632A      | MY40011638  | 2014-11-07 | 2015-11-07 |
| 29 | EMI Test Receiver             | Rohde & Schwarz       | ESCI3       | 100032      | 2014-02-04 | 2015-02-04 |
| 30 | 6dB Attenuator                | R&S                   | DNF         | 272.4110.50 | 2014-11-07 | 2015-11-07 |
| 31 | AMPLIFIER                     | Sonoma Instrument Co. | 310         | 291721      | 2014-02-06 | 2015-02-26 |
| 32 | EMI Test Receiver             | Rohde & Schwarz       | ESU40       | 100336      | 2014-05-15 | 2015-05-15 |
| 33 | Signal Generator              | Rohde & Schwarz       | SMBV100A    | 258008      | 2014-08-21 | 2015-08-21 |
| 34 | Bilog Antenna                 | Schaffner             | CBL6111C    | 2551        | 2014-05-08 | 2016-05-08 |