




HUAKE TESTING

For 18GHz to 26GHz

ANT 1:

Antenna polarity: Horizontal

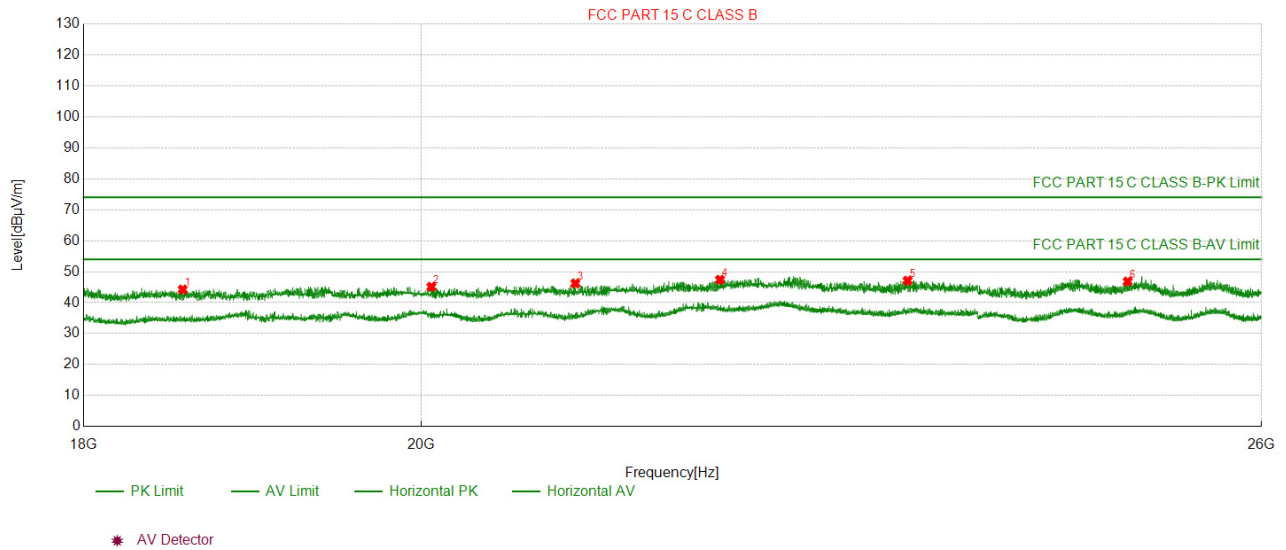


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	PK Level [dBμV/m]	Factor [dB]	PK Limit [dBμV/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18566.457	38.89	44.26	5.37	74.00	29.74	150	190	Horizontal
2	20065.007	38.96	45.13	6.17	74.00	28.87	150	220	Horizontal
3	20987.499	40.86	46.23	5.37	74.00	27.77	150	340	Horizontal
4	21956.396	41.71	47.41	5.70	74.00	26.59	150	240	Horizontal
5	23280.528	41.44	47.11	5.67	74.00	26.89	150	60	Horizontal
6	24935.894	40.52	46.85	6.33	74.00	27.15	150	100	Horizontal

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level




Antenna polarity: Vertical

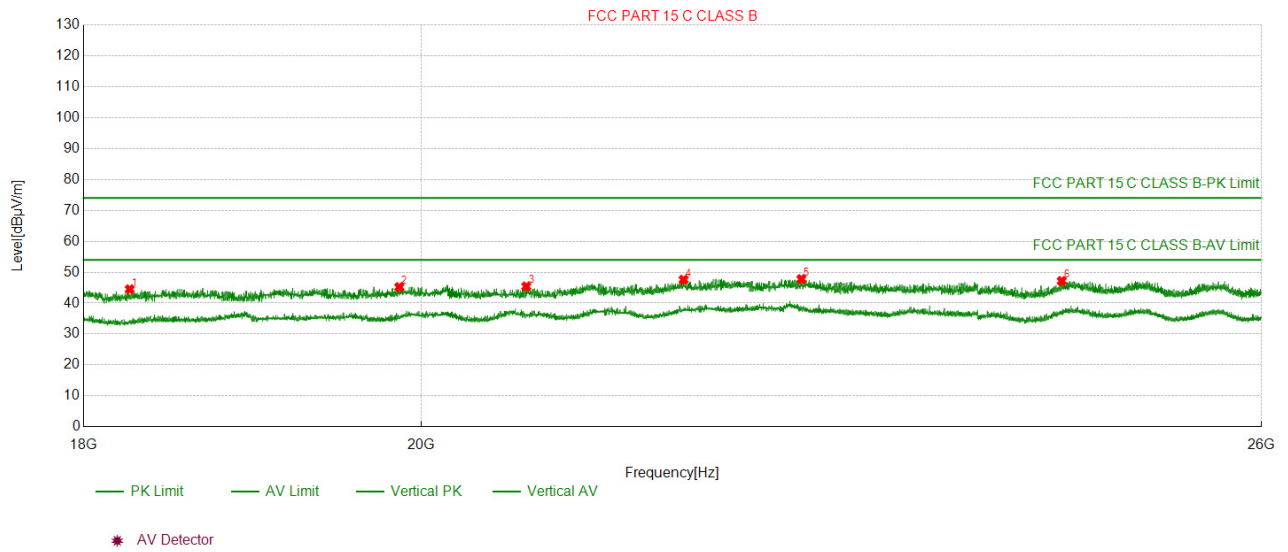

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	PK Level [dBμV/m]	Factor [dB]	PK Limit [dBμV/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18261.626	38.76	44.49	5.73	74.00	29.51	150	270	Vertical
2	19864.986	39.05	45.20	6.15	74.00	28.80	150	210	Vertical
3	20668.267	39.61	45.41	5.80	74.00	28.59	150	100	Vertical
4	21708.371	42.10	47.58	5.48	74.00	26.42	150	0	Vertical
5	22521.252	42.15	47.78	5.63	74.00	26.22	150	200	Vertical
6	24427.843	41.53	47.18	5.65	74.00	26.82	150	210	Vertical

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level

Antenna polarity: Horizontal

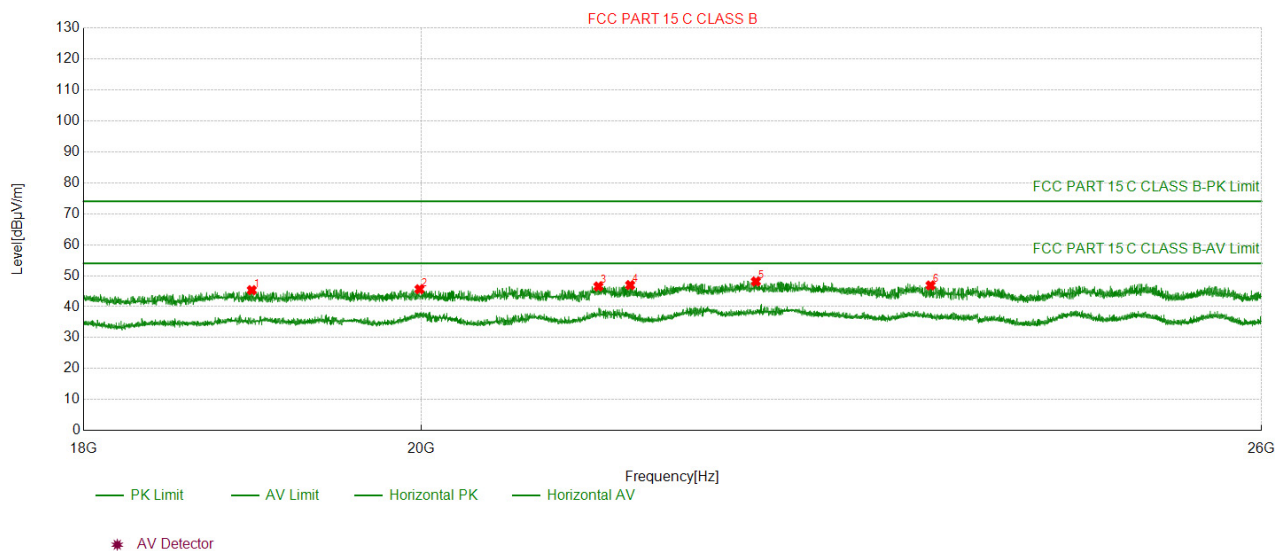

Suspected Data List


NO.	Freq. [MHz]	Reading [dBμV/m]	PK Level [dBμV/m]	Factor [dB]	PK Limit [dBμV/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18971.297	39.68	45.34	5.66	74.00	28.66	150	280	Horizontal
2	19990.599	39.43	45.64	6.21	74.00	28.36	150	20	Horizontal
3	21138.714	41.23	46.54	5.31	74.00	27.46	150	60	Horizontal
4	21349.135	41.69	46.97	5.28	74.00	27.03	150	270	Horizontal
5	22203.620	42.40	48.14	5.74	74.00	25.86	150	220	Horizontal
6	23447.745	41.18	46.86	5.68	74.00	27.14	150	310	Horizontal

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



HUAKE TESTING

Antenna polarity: Vertical

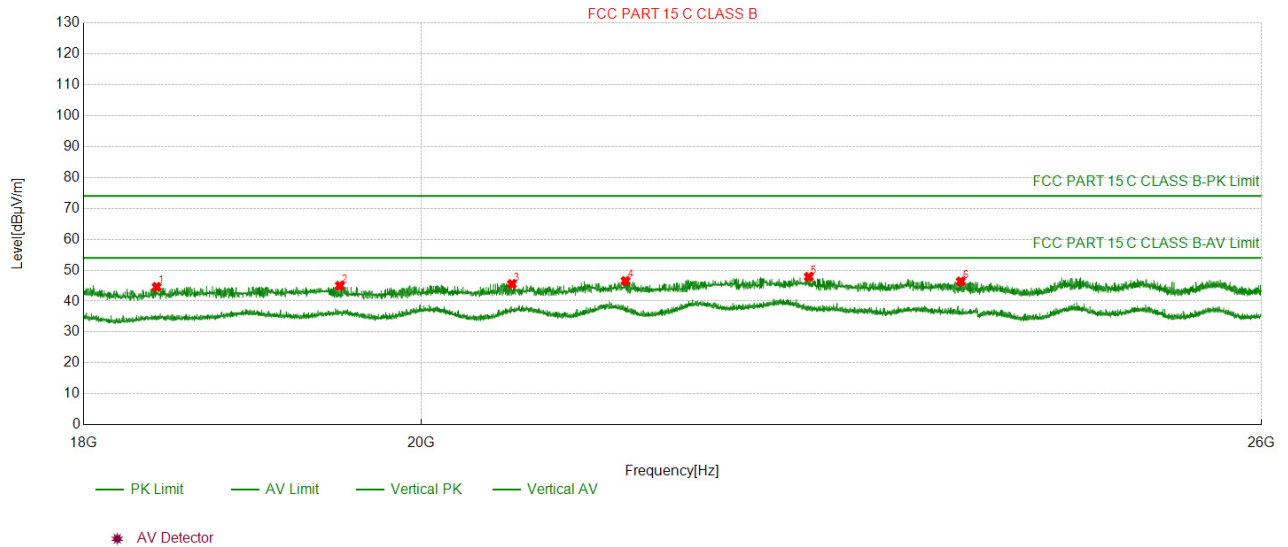

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	PK Level [dBμV/m]	Factor [dB]	PK Limit [dBμV/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18416.042	39.15	44.62	5.47	74.00	29.38	150	310	Vertical
2	19499.350	38.92	45.01	6.09	74.00	28.99	150	240	Vertical
3	20575.458	39.63	45.53	5.90	74.00	28.47	150	140	Vertical
4	21318.732	41.27	46.55	5.28	74.00	27.45	150	80	Vertical
5	22573.257	42.26	47.87	5.61	74.00	26.13	150	220	Vertical
6	23670.167	40.83	46.39	5.56	74.00	27.61	150	310	Vertical

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



4.4 Maximum Peak Output Power Measurement

4.4.1 Limit

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 Test Procedure

The maximum peak conducted output power may be measured using a broadband peak RF automatic control unit. The RF automatic control unit shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

The maximum Average conducted output power may be measured using a wideband RF automatic control unit with a thermocouple detector or equivalent. The RF automatic control unit shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

4.4.3 Deviation from Standard

No deviation.

4.4.4 Test Setup



4.4.5 Test Results

Channel	Channel Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)	Limit (dBm)	Result
CH01	2404	17.36	30.00	Pass
CH02	2442	15.68		Pass
CH03	2480	15.46		Pass

Note: The test results including the cable loss.



4.5 Power Spectral Density

4.5.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

4.5.2 Test Procedure

Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.

Set the RBW = 3 kHz.

Set the VBW = 10 KHz.

Set the span to 1.5 times the DTS channel bandwidth.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum power level.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

The resulting peak PSD level must be 8dBm.

4.5.3 Deviation from Standard

No deviation.

4.5.4 Test Setup







4.5.5 Test Results

Channel	Channel Frequency (MHz)	Test Result (dBm/3kHz)
CH01	2404	2.40
CH02	2442	0.48
CH03	2480	0.53
Limit : 8dBm/3KHz		
Test Result	PASS	


CH01

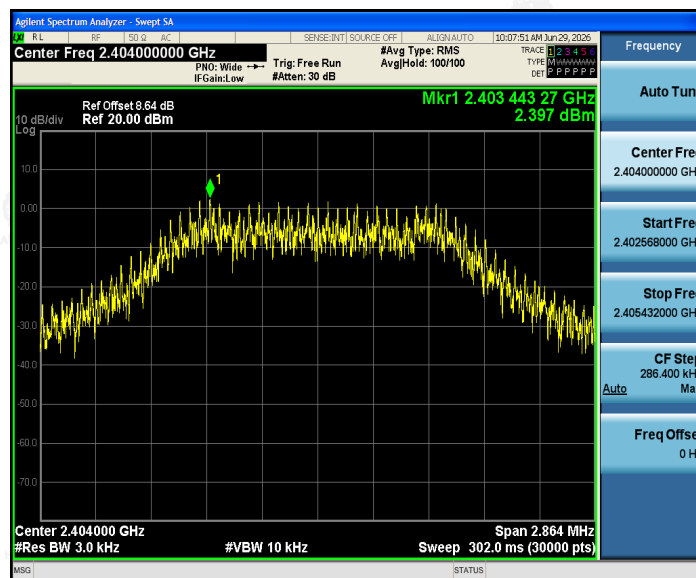

CH02

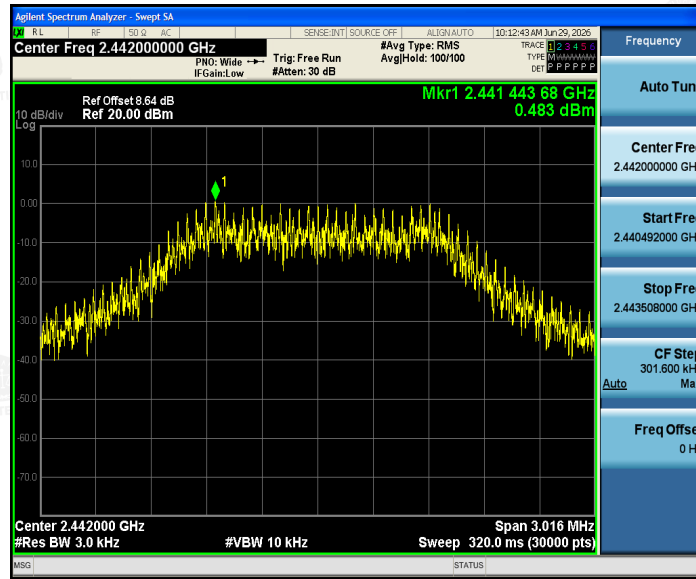

CH03

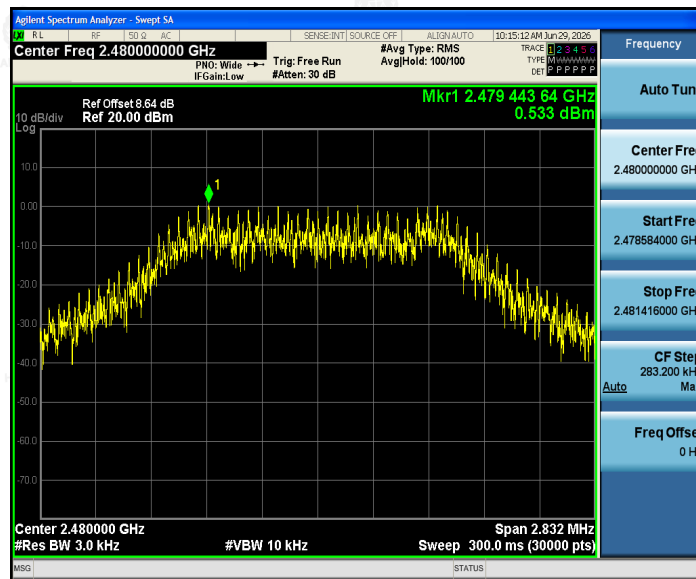



4.6 6dB Bandwidth

4.6.1 Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

4.6.2 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=100 KHz and VBW=300 KHz.

The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.6.3 Deviation from Standard

No deviation.

4.6.4 Test Setup



4.6.5 Test Result

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Limit (KHz)	Result
CH01	2404	1.432	≥500	Pass
CH02	2442	1.508		Pass
CH03	2480	1.416		Pass

CH01



CH02



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

CH03





4.7 Occupied Bandwidth

4.7.1 Test Procedure

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

RBW=1% to 5% of the OBW

VBW=approximately 3 X RBW

Detector=Peak


Trace Mode: Max Hold

Use the 99% power bandwidth function of the instrument to measure the Occupied Bandwidth and recorded.

4.7.2 Deviation from Standard

No deviation.

4.7.3 Test Setup



4.7.4 Test Result

N/A



4.8 Band Edge

4.8.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under FCC rules in section 5.8.1, the attenuation required shall be 30 dB instead of 20 dB.

4.8.2 Test Procedure

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation, RBW $\geq$ 1% of the span, VBW $\geq$ RBW, Sweep = auto, Detector function = peak, Trace = max hold.

4.8.3 Deviation from Standard

No deviation.

4.8.4 Test Setup






HUAKE TESTING

4.8.5 Test Results

PASS

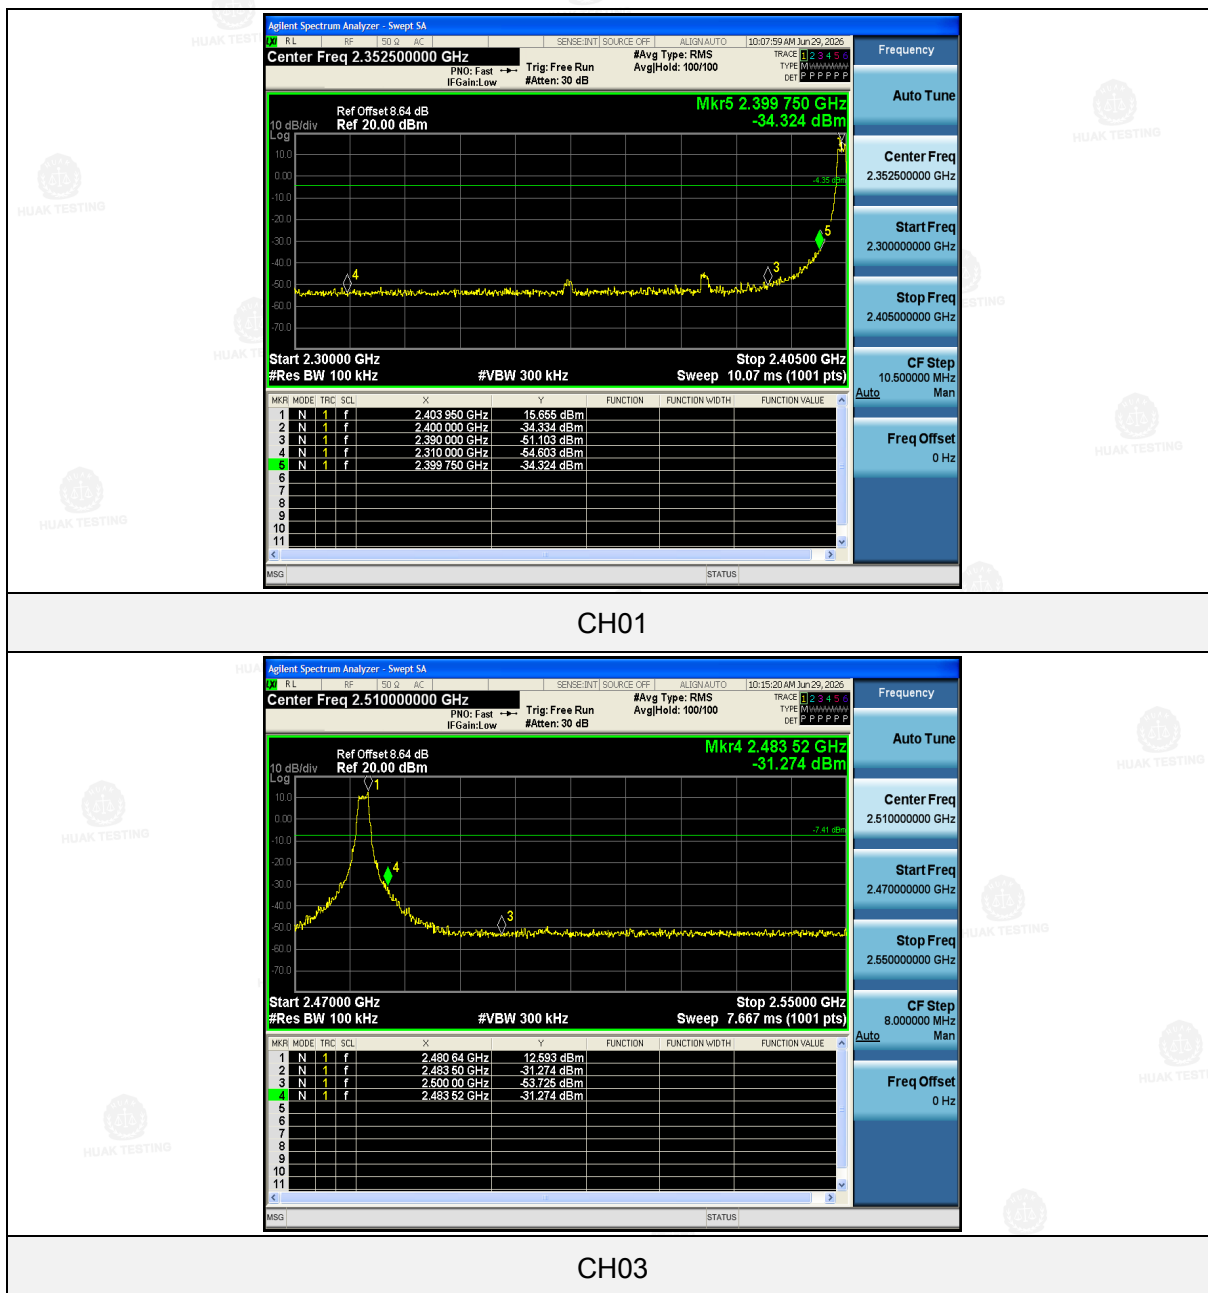

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.



4.9 Conducted Spurious Emissions

4.9.1 Applied Procedures / Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

For below 30MHz, For 9KHz-150kHz, 150K-10MHz, We use the RBW 1KHz, 10KHz, So the limit need to calculated by " $10\lg(BW1/BW2)$ ". For example For 9KHz-150kHz, RBW 1KHz, The Limit = the highest emission level-20-10log(100/1) = the highest emission level-40.


4.9.2 Test Procedure

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation, $RBW \geq 1\%$ of the span, $VBW \geq RBW$, Sweep = auto, Detector function = peak, Trace = max hold.

4.9.3 Deviation from Standard

No deviation.

4.9.4 Test Setup






HUAKE TESTING


4.9.5 Test Results

CH01

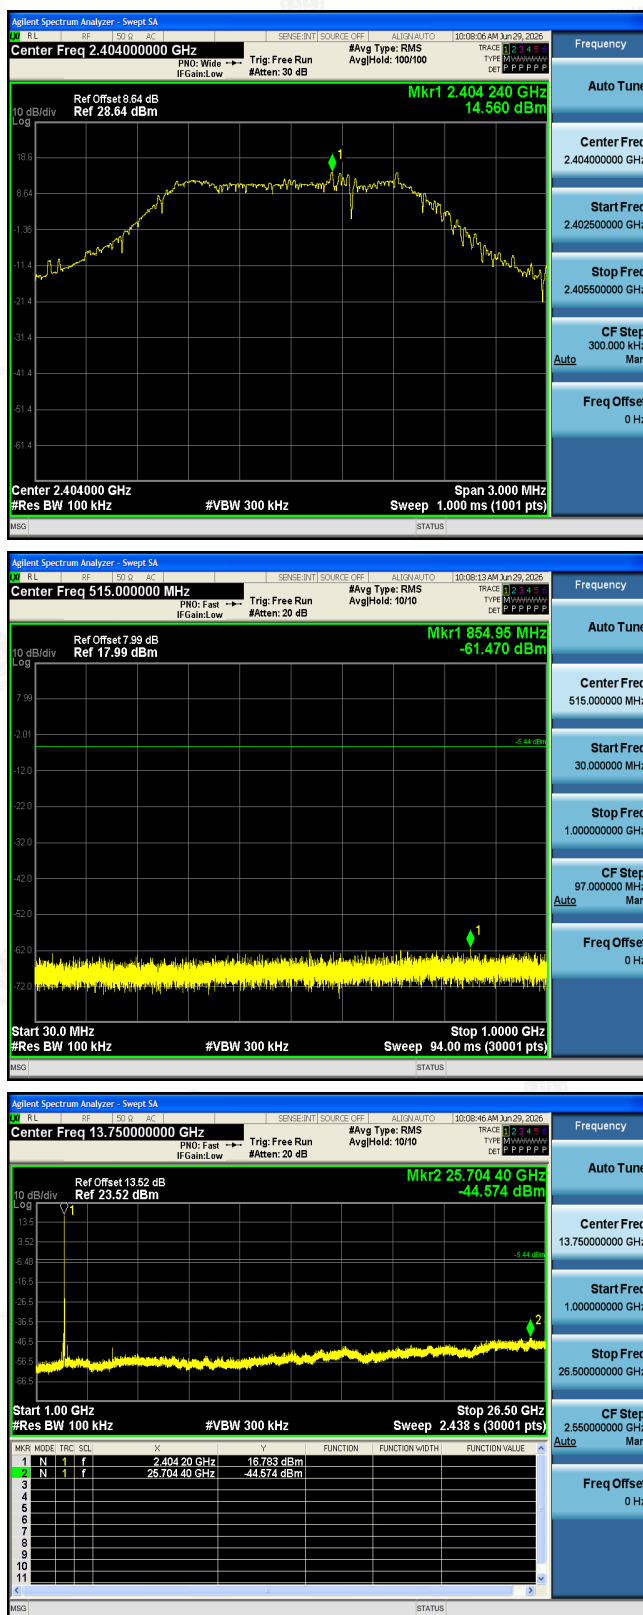


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

CH02

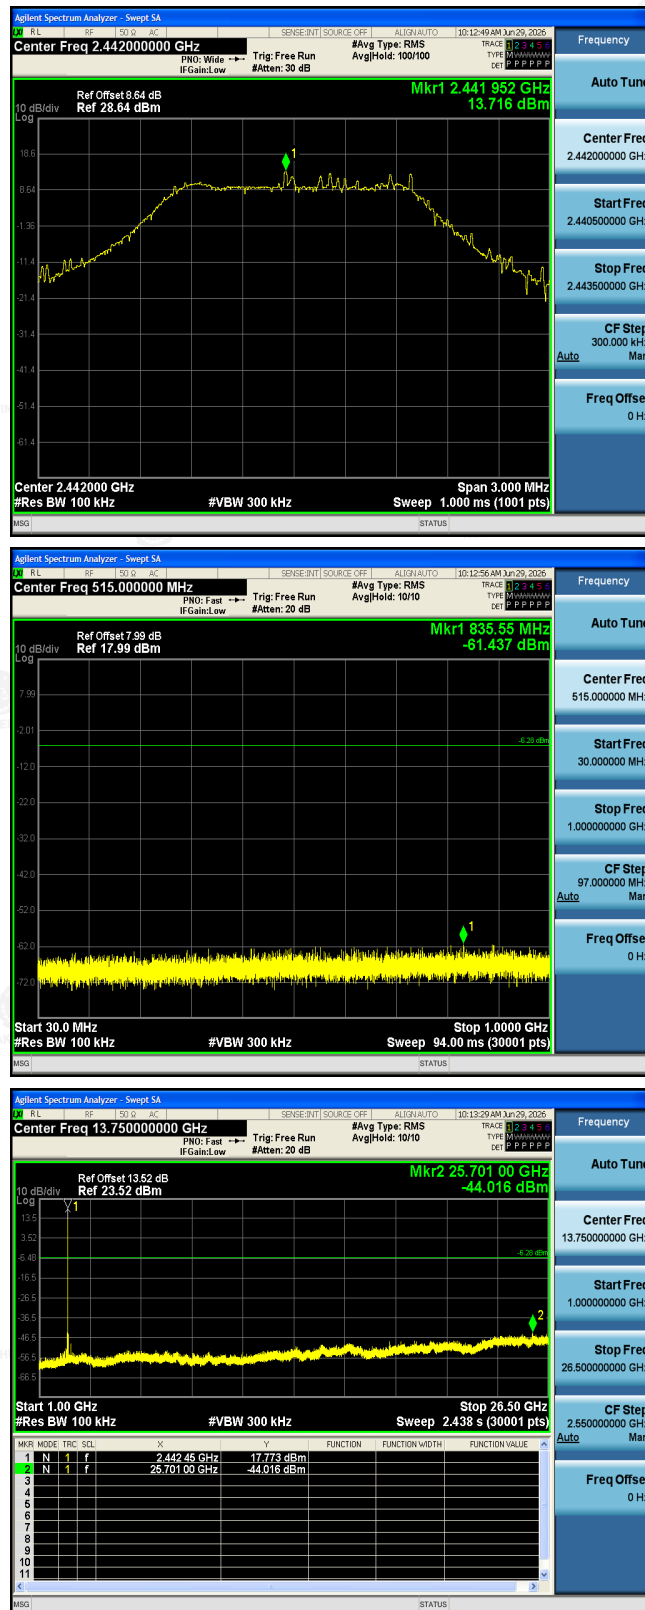

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

CH03

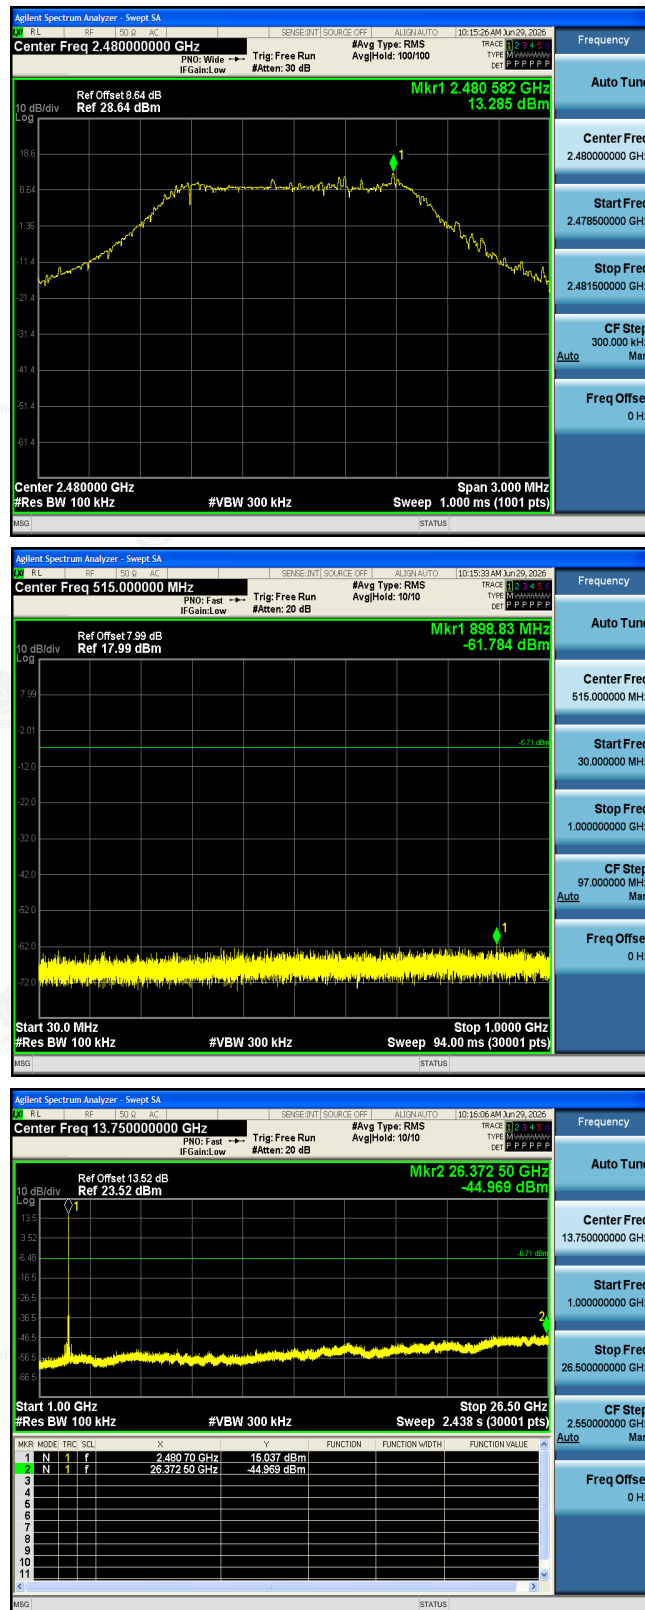


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

5 Test Setup Photos of the EUT

ANT1:


Radiated Emission

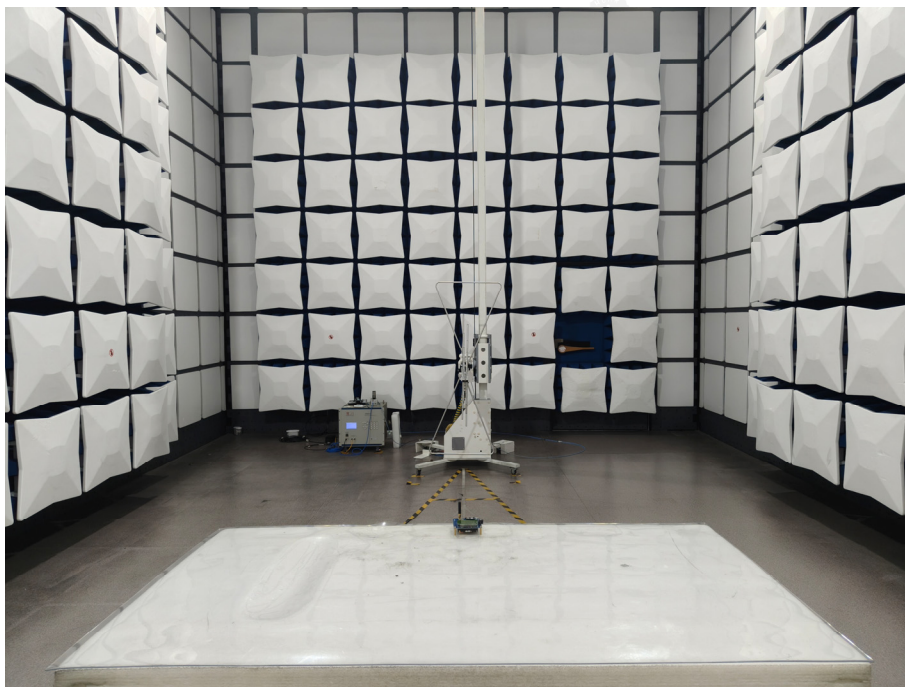

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Radiated Emission

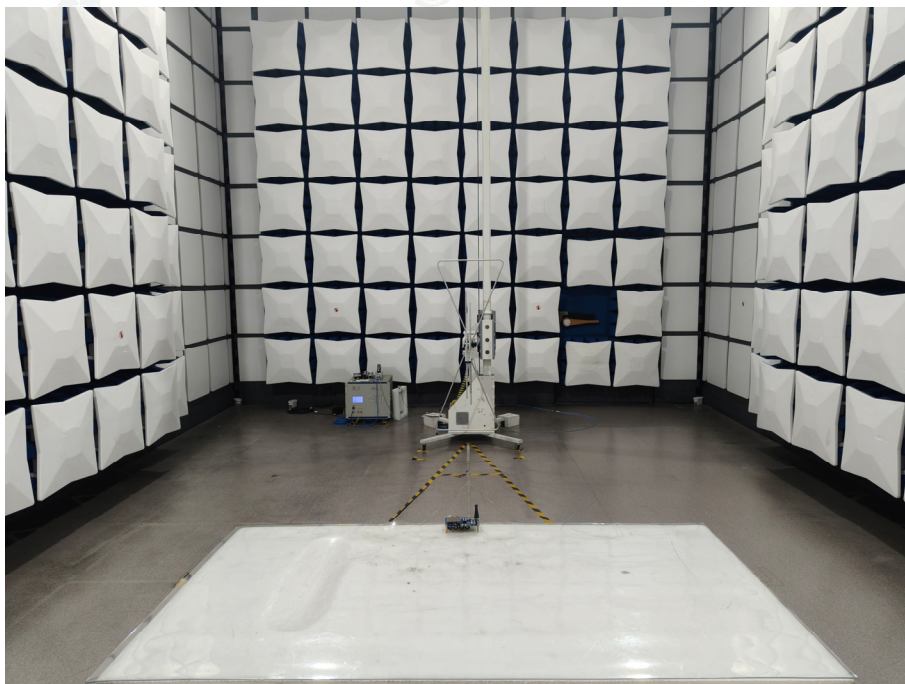

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

AC Conducted Emission


ANT 1:



ANT 2:



RF Conducted Emission

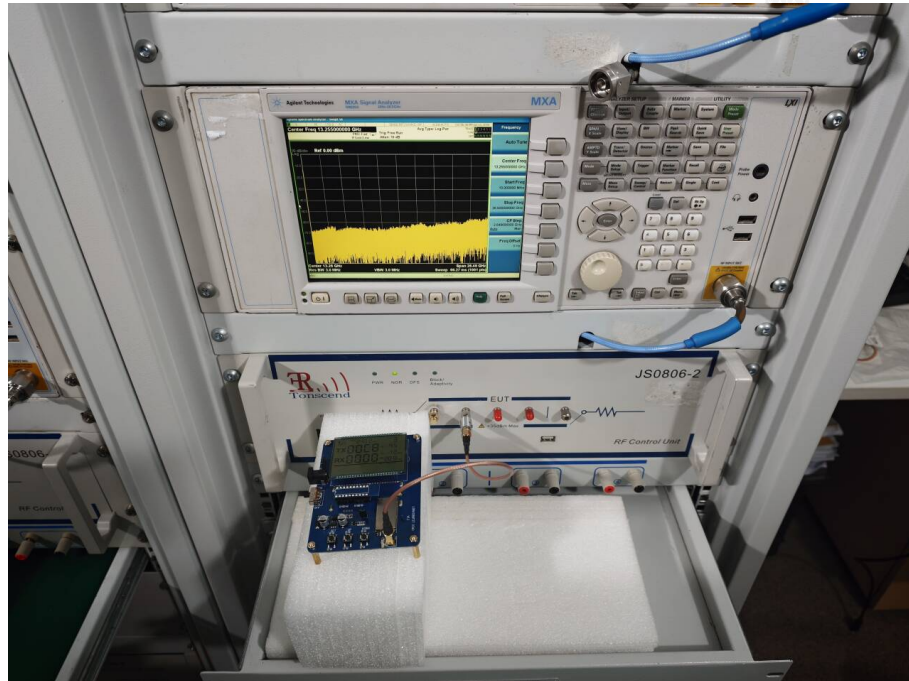

6 Photos of the EUT

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos.

-----End of test report-----