

FCC PART 15.247

TEST REPORT

For

CHINAOWL Co., Ltd.

7/F KIN ON COMM BLDG 49-51, JERVOIS ST SHEUNG WAN, HONGKONG

FCC ID: 2AD7KCHINAOWL-Y018

Report Type: Original Report	Product Type: Bluetooth Speaker
Test Engineer:	Allen Qiao 
Report Number:	RDG150202003-00A
Report Date:	2015-02-04
Reviewed By:	Sula Huang RF Engineer 
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EUT EXERCISE SOFTWARE	5
EQUIPMENT MODIFICATIONS	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE	8
APPLICABLE STANDARD	8
FCC §15.203 - ANTENNA REQUIREMENT.....	9
APPLICABLE STANDARD	9
ANTENNA CONNECTOR CONSTRUCTION	9
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	10
APPLICABLE STANDARD	10
MEASUREMENT UNCERTAINTY.....	10
EUT SETUP	10
EMI TEST RECEIVER SETUP.....	11
TEST PROCEDURE	11
CORRECTED AMPLITUDE & MARGIN CALCULATION	11
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST RESULTS SUMMARY	12
TEST DATA	12
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	15
APPLICABLE STANDARD	15
MEASUREMENT UNCERTAINTY	15
EUT SETUP	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	16
TEST PROCEDURE	16
TEST EQUIPMENT LIST AND DETAILS.....	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST RESULTS SUMMARY	17
TEST DATA	17
FCC §15.247(a) (1) - CHANNEL SEPARATION TEST	26
APPLICABLE STANDARD	26
TEST EQUIPMENT LIST AND DETAILS.....	26
TEST PROCEDURE	26
TEST DATA	26
FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING	32

APPLICABLE STANDARD	32
TEST PROCEDURE	32
TEST EQUIPMENT LIST AND DETAILS.....	32
TEST DATA	32
FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST EQUIPMENT LIST AND DETAILS.....	38
TEST DATA	38
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	42
APPLICABLE STANDARD	42
TEST PROCEDURE	42
TEST EQUIPMENT LIST AND DETAILS.....	42
TEST DATA	42
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	58
APPLICABLE STANDARD	58
TEST PROCEDURE	58
TEST EQUIPMENT LIST AND DETAILS.....	58
TEST DATA	58
FCC §15.247(d) - BAND EDGES TESTING	64
APPLICABLE STANDARD	64
TEST PROCEDURE	64
TEST EQUIPMENT LIST AND DETAILS.....	64
TEST DATA	64
DECLARATION LETTER.....	68

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The CHINAOWL Co., Ltd.'s product, model number: Y018 (FCC ID: 2AD7KCHINAOWL-Y018) (the "EUT") in this report was a *Bluetooth Speaker*, which was measured approximately: 4.0 cm (L) x 3.6 cm (W) x 9.7 cm (H), rated input voltage: DC 3.7V rechargeable Li-ion battery or DC5V charging from USB port.

Note: The series product, model Y018, Y048, Y079, Y069, Y071, Y089 and Y062+ are electrically identical, the differences between them is model name and appearance color, we selected Y018 for testing, the details was explained in the attached declaration letter.

All measurement and test data in this report was gathered from production sample serial number: 150202003 (Assigned by BACL, Dongguan). The EUT was received on 2015-02-03.

Objective

This report is prepared on behalf of CHINAOWL Co., Ltd. in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communications Commission's rules

The tests were performed in order to determine the Bluetooth BDR and EDR mode of EUT compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

EUT Exercise Software

The software “Engineer Mode (adb)” was used for testing, which was provided by manufacturer. The worst condition (maximum power) was setting by the software as following table:

Test Software Version		Engineer Mode (adb)		
Test Frequency		2402MHz	2441MHz	2480MHz
Power Level Setting	GFSK	N/A	N/A	N/A
	π /4-DQPSK	N/A	N/A	N/A
	8DPSK	N/A	N/A	N/A

Equipment Modifications

No modification was made to the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	QDS-BRCM1017
HP	Printer	C3941A	JPTVOB2337
DELL	Keyboard	L100	CNORH656658907BL05DC
SAST	Modem	AEM-2100	0293

External Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Serial Cable	yes	no	1.2	Serial Port of Laptop	Modem
Parallel Cable	yes	no	1.2	Parallel Port of Laptop	Printer
Keyboard Cable	yes	no	1.8	USB Port of Laptop	Keyboard
Charging Cable	no	no	1.43	USB Port of Laptop	EUT

Block Diagram of Test Setup

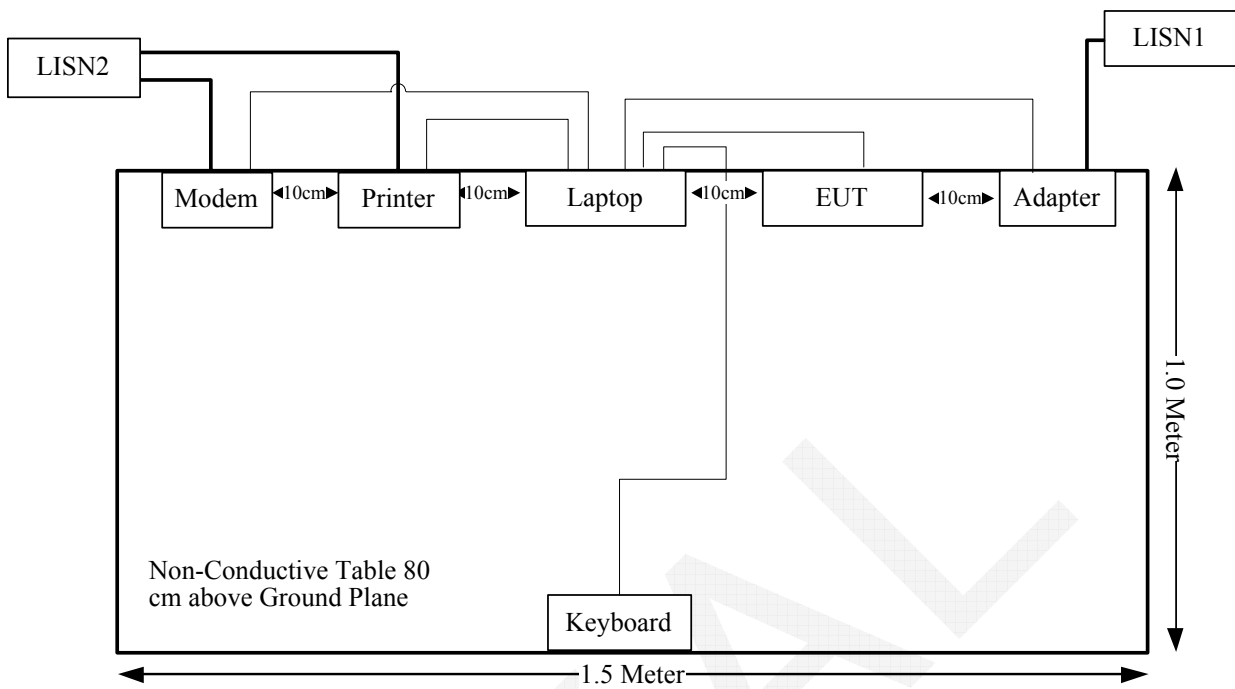

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v05r02:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Measurement Result

The maximum conducted output power = 0.97 dBm (1.25 mW) at 2480 MHz
 $[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})] [\sqrt{f(\text{GHz})}]$
 $= 1.25/5 \cdot (\sqrt{2.48}) = 0.394 < 3.0$

So the stand-alone SAR evaluation is not necessary.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one integral antenna arrangement, which was permanently attached and the antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cisp} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cisp} of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cisp}

Measurement	U_{cisp}
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

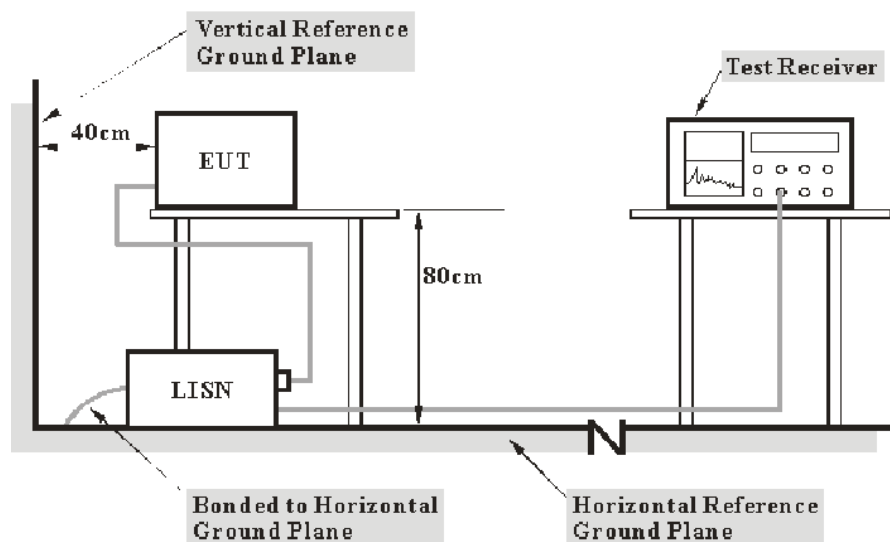

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter of laptop was connected to a 120 VAC/60 Hz power source

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter of laptop was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2014-10-16	2015-10-16
R&S	L.I.S.N	ESH3-Z5	843331/015	N/A	N/A
R&S	Two-line V-network	ENV 216	3560.6550.12	2014-12-11	2015-12-11
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

18.0 dB at 1.310256 MHz in the **Neutral** conducted mode


Test Data**Environmental Conditions**

Temperature:	23.7 °C
Relative Humidity:	42 %
ATM Pressure:	102 kPa

The testing was performed by Allen Qiao on 2015-02-03.


Test Mode: Charging&Transmitting

AC120 V, 60 Hz, Line:

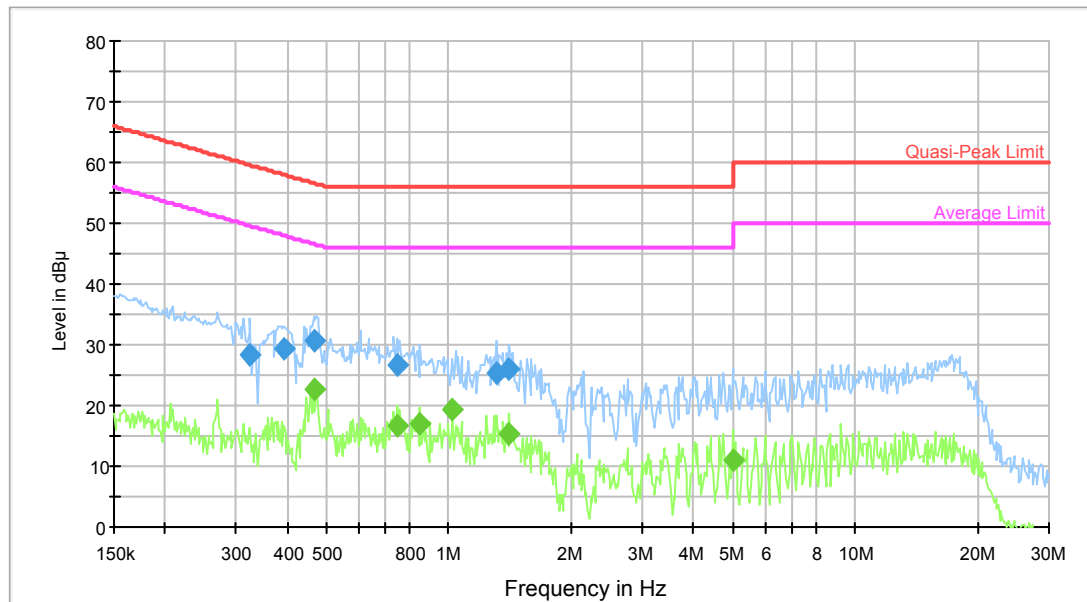

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.324910	28.3	9.000	L1	10.7	31.3	59.6	Compliance
0.393383	29.3	9.000	L1	10.6	28.7	58.0	Compliance
0.465037	30.8	9.000	L1	10.4	25.8	56.6	Compliance
0.744147	26.7	9.000	L1	10.5	29.3	56.0	Compliance
1.310256	25.5	9.000	L1	10.4	30.5	56.0	Compliance
1.407671	25.9	9.000	L1	10.4	30.1	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.465037	22.8	9.000	L1	10.4	23.8	46.6	Compliance
0.744147	16.5	9.000	L1	10.5	29.5	46.0	Compliance
0.852094	17.0	9.000	L1	10.5	29.0	46.0	Compliance
1.023481	19.2	9.000	L1	10.4	26.8	46.0	Compliance
1.407671	15.2	9.000	L1	10.4	30.8	46.0	Compliance
4.997188	11.1	9.000	L1	10.7	34.9	46.0	Compliance

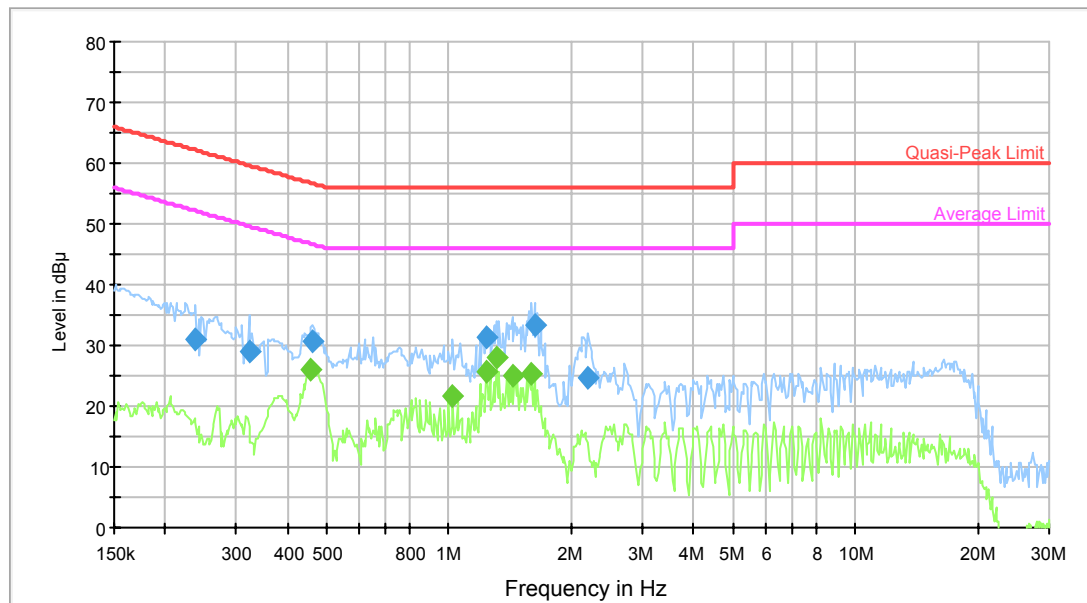AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.238124	31.1	9.000	N	11.3	31.1	62.2	Compliance
0.322331	29.1	9.000	N	11.1	30.5	59.6	Compliance
0.461346	30.7	9.000	N	10.5	26.0	56.7	Compliance
1.239175	31.3	9.000	N	10.5	24.7	56.0	Compliance
1.624765	33.4	9.000	N	10.5	22.6	56.0	Compliance
2.199332	24.7	9.000	N	10.5	31.3	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.457684	26.0	9.000	N	10.5	20.7	46.7	Compliance
1.023481	21.7	9.000	N	10.5	24.3	46.0	Compliance
1.239175	25.8	9.000	N	10.5	20.2	46.0	Compliance
1.310256	28.0	9.000	N	10.5	18.0	46.0	Compliance
1.430284	25.0	9.000	N	10.5	21.0	46.0	Compliance
1.599078	25.4	9.000	N	10.5	20.6	46.0	Compliance

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cisp} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cisp} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:

30M~200MHz: 5.0 dB

200M~1GHz: 6.2 dB

1G~6GHz: 4.45 dB


6G~18GHz: 5.23 dB


Table 1 – Values of U_{cisp}

Measurement	U_{cisp}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1GHz:

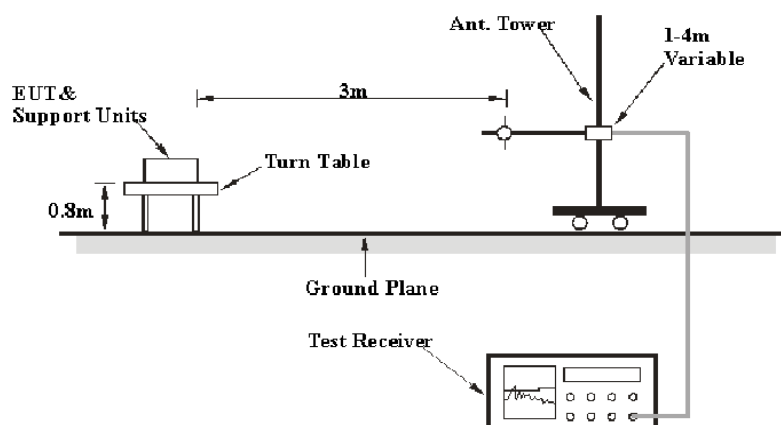

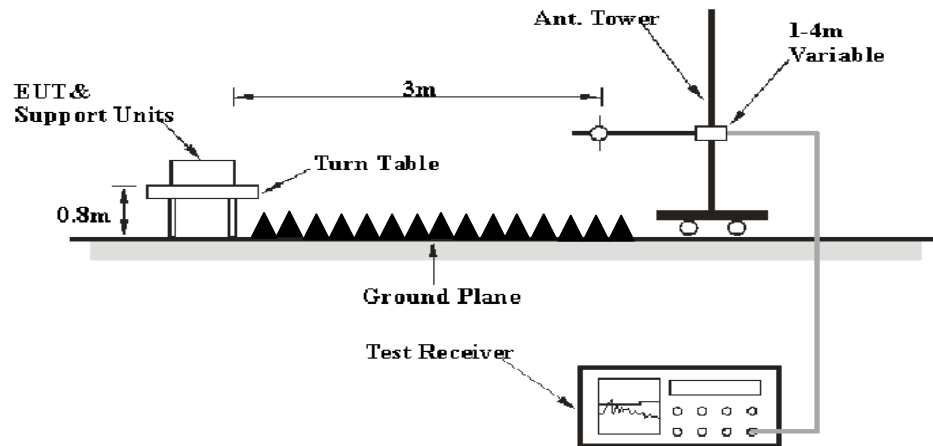Above 1GHz:

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2014-05-09	2015-05-09
Sunol Sciences	Antenna	JB3	A060611-3	2014-07-28	2017-07-27
HP	Amplifier	8447E	2434A02181	2014-09-01	2015-09-01
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09
ETS LINDGREN	Horn Antenna	3115	000 527 35	2012-09-06	2015-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2014-02-19	2015-02-19
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2014-06-16	2017-06-15
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2014-09-06	2015-09-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, and section 15.205, 15.209 and 15.247, with the worst margin reading of:

6.24 dB at 2390 MHz in the Horizontal polarization of EDR Mode ($\pi/4$ -DQPSK)

Test Data**Environmental Conditions**

Temperature:	21.9 °C
Relative Humidity:	49 %
ATM Pressure:	101.8 kPa

The testing was performed by Allen Qiao on 2015-01-30.

Mode: Transmitting

BDR Mode (GFSK):

Frequency	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	FCC 15.247	
(MHz)	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dBμV/m)	Margin (dB)
Low Channel: 2402 MHz									
2402	57.51	PK	H	25.65	4.42	0.00	87.58	N/A	N/A
2402	47.22	AV	H	25.65	4.42	0.00	77.29	N/A	N/A
2402	63.02	PK	V	25.65	4.42	0.00	93.09	N/A	N/A
2402	53.25	AV	V	25.65	4.42	0.00	83.32	N/A	N/A
2390	26.73	PK	H	25.61	4.39	0.00	56.73	74.00	17.27
2390	15.88	AV	H	25.61	4.39	0.00	45.88	54.00	8.12
4804	44.03	PK	H	30.59	5.98	27.41	53.19	74.00	20.81
4804	35.19	AV	H	30.59	5.98	27.41	44.35	54.00	9.65
7206	38.36	PK	H	34.09	7.45	25.91	53.99	74.00	20.01
7206	26.15	AV	H	34.09	7.45	25.91	41.78	54.00	12.22
9608	30.04	PK	H	35.96	8.80	27.55	47.25	74.00	26.75
9608	18.09	AV	H	35.96	8.80	27.55	35.30	54.00	18.70
1894	33.16	PK	H	24.39	3.62	27.51	33.66	74.00	40.34
1894	21.47	AV	H	24.39	3.62	27.51	21.97	54.00	32.03
162.7	33.41	QP	H	12.59	1.56	21.44	26.12	43.50	17.38
Middle Channel: 2441 MHz									
2441	58.43	PK	H	25.75	4.40	0.00	88.58	N/A	N/A
2441	48.67	AV	H	25.75	4.40	0.00	78.82	N/A	N/A
2441	64.46	PK	V	25.75	4.40	0.00	94.61	N/A	N/A
2441	54.79	AV	V	25.75	4.40	0.00	84.94	N/A	N/A
4882	43.97	PK	H	30.79	6.08	27.42	53.42	74.00	20.58
4882	35.71	AV	H	30.79	6.08	27.42	45.16	54.00	8.84
7323	38.84	PK	H	34.38	7.51	25.88	54.85	74.00	19.15
7323	26.36	AV	H	34.38	7.51	25.88	42.37	54.00	11.63
9764	30.55	PK	H	36.33	8.83	27.20	48.51	74.00	25.49
9764	18.42	AV	H	36.33	8.83	27.20	36.38	54.00	17.62
1554	33.01	PK	H	23.71	3.23	27.62	32.33	74.00	41.67
1554	21.16	AV	H	23.71	3.23	27.62	20.48	54.00	33.52
162.7	33.12	QP	H	12.59	1.56	21.44	25.83	43.50	17.67
High Channel: 2480 MHz									
2480	59.44	PK	H	25.85	4.48	0.00	89.77	N/A	N/A
2480	49.29	AV	H	25.85	4.48	0.00	79.62	N/A	N/A
2480	65.57	PK	V	25.85	4.48	0.00	95.90	N/A	N/A
2480	55.38	AV	V	25.85	4.48	0.00	85.71	N/A	N/A
2483.5	31.97	PK	H	25.86	4.49	0.00	62.32	74.00	11.68
2483.5	16.93	AV	H	25.86	4.49	0.00	47.28	54.00	6.72
4960	44.83	PK	H	31.00	5.90	27.43	54.30	74.00	19.70
4960	35.07	AV	H	31.00	5.90	27.43	44.54	54.00	9.46
7440	38.16	PK	H	34.66	7.58	25.97	54.43	74.00	19.57
7440	26.09	AV	H	34.66	7.58	25.97	42.36	54.00	11.64
9920	30.41	PK	H	36.71	8.87	26.66	49.33	74.00	24.67
9920	18.03	AV	H	36.71	8.87	26.66	36.95	54.00	17.05
1891	33.27	PK	H	24.38	3.63	27.51	33.77	74.00	40.23
1891	21.59	AV	H	24.38	3.63	27.51	22.09	54.00	31.91
162.7	33.19	QP	H	12.59	1.56	21.44	25.90	43.50	17.60



EDR Mode ($\pi/4$ -DQPSK):

Frequency	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	FCC 15.247	
(MHz)	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dBμV/m)	Margin (dB)
Low Channel: 2402 MHz									
2402	56.88	PK	H	25.65	4.42	0.00	86.95	N/A	N/A
2402	44.23	AV	H	25.65	4.42	0.00	74.30	N/A	N/A
2402	62.03	PK	V	25.65	4.42	0.00	92.10	N/A	N/A
2402	50.15	AV	V	25.65	4.42	0.00	80.22	N/A	N/A
2390	27.14	PK	H	25.61	4.39	0.00	57.14	74.00	16.86
2390	17.76	AV	H	25.61	4.39	0.00	47.76	54.00	6.24
4804	37.39	PK	H	30.59	5.98	27.41	46.55	74.00	27.45
4804	25.91	AV	H	30.59	5.98	27.41	35.07	54.00	18.93
7206	32.46	PK	H	34.09	7.45	25.91	48.09	74.00	25.91
7206	20.37	AV	H	34.09	7.45	25.91	36.00	54.00	18.00
9608	30.93	PK	H	35.96	8.80	27.55	48.14	74.00	25.86
9608	18.72	AV	H	35.96	8.80	27.55	35.93	54.00	18.07
1815	33.56	PK	H	24.23	3.57	27.53	33.83	74.00	40.17
1815	21.4	AV	H	24.23	3.57	27.53	21.67	54.00	32.33
162.7	33.27	QP	H	12.59	1.56	21.44	25.98	43.50	17.52
Middle Channel: 2441 MHz									
2441	58.46	PK	H	25.75	4.40	0.00	88.61	N/A	N/A
2441	46.3	AV	H	25.75	4.40	0.00	76.45	N/A	N/A
2441	64.13	PK	V	25.75	4.40	0.00	94.28	N/A	N/A
2441	52.25	AV	V	25.75	4.40	0.00	82.40	N/A	N/A
4882	37.53	PK	H	30.79	6.08	27.42	46.98	74.00	27.02
4882	25.61	AV	H	30.79	6.08	27.42	35.06	54.00	18.94
7323	32.51	PK	H	34.38	7.51	25.88	48.52	74.00	25.48
7323	30.73	AV	H	34.38	7.51	25.88	46.74	54.00	7.26
9764	30.16	PK	H	36.33	8.83	27.20	48.12	74.00	25.88
9764	18.58	AV	H	36.33	8.83	27.20	36.54	54.00	17.46
1933	33.35	PK	H	24.47	3.73	27.50	34.05	74.00	39.95
1933	23.16	AV	H	24.47	3.73	27.50	23.86	54.00	30.14
162.7	33.2	QP	H	12.59	1.56	21.44	25.91	43.50	17.59
High Channel: 2480 MHz									
2480	59.62	PK	H	25.85	4.48	0.00	89.95	N/A	N/A
2480	47.58	AV	H	25.85	4.48	0.00	77.91	N/A	N/A
2480	65.08	PK	V	25.85	4.48	0.00	95.41	N/A	N/A
2480	53.29	AV	V	25.85	4.48	0.00	83.62	N/A	N/A
2483.5	32.79	PK	H	25.86	4.49	0.00	63.14	74.00	10.86
2483.5	16.51	AV	H	25.86	4.49	0.00	46.86	54.00	7.14
4960	37.67	PK	H	31.00	5.90	27.43	47.14	74.00	26.86
4960	25.26	AV	H	31.00	5.90	27.43	34.73	54.00	19.27
7440	32.43	PK	H	34.66	7.58	25.97	48.70	74.00	25.30
7440	20.56	AV	H	34.66	7.58	25.97	36.83	54.00	17.17
9920	30.64	PK	H	36.71	8.87	26.66	49.56	74.00	24.44
9920	18.21	AV	H	36.71	8.87	26.66	37.13	54.00	16.87
1649	33.91	PK	H	23.90	3.41	27.74	33.48	74.00	40.52
1649	21.67	AV	H	23.90	3.41	27.74	21.24	54.00	32.76
162.7	33.59	QP	H	12.59	1.56	21.44	26.30	43.50	17.20


EDR Mode (8-DPSK):

Frequency	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	FCC 15.247	
(MHz)	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dBμV/m)	Margin (dB)
Low Channel: 2402 MHz									
2402	56.13	PK	H	25.65	4.42	0.00	86.20	N/A	N/A
2402	44.06	AV	H	25.65	4.42	0.00	74.13	N/A	N/A
2402	62.02	PK	V	25.65	4.42	0.00	92.09	N/A	N/A
2402	50.22	AV	V	25.65	4.42	0.00	80.29	N/A	N/A
2390	27.39	PK	H	25.61	4.39	0.00	57.39	74.00	16.61
2390	17.03	AV	H	25.61	4.39	0.00	47.03	54.00	6.97
4804	37.03	PK	H	30.59	5.98	27.41	46.19	74.00	27.81
4804	25.15	AV	H	30.59	5.98	27.41	34.31	54.00	19.69
7206	32.92	PK	H	34.09	7.45	25.91	48.55	74.00	25.45
7206	20.05	AV	H	34.09	7.45	25.91	35.68	54.00	18.32
9608	30.37	PK	H	35.96	8.80	27.55	47.58	74.00	26.42
9608	18.21	AV	H	35.96	8.80	27.55	35.42	54.00	18.58
2916	33.73	PK	H	26.98	6.62	27.54	39.79	74.00	34.21
2916	21.19	AV	H	26.98	6.62	27.54	27.25	54.00	26.75
162.7	33.85	QP	H	12.59	1.56	21.44	26.56	43.50	16.94
Middle Channel: 2441 MHz									
2441	58.18	PK	H	25.75	4.40	0.00	88.33	N/A	N/A
2441	46.37	AV	H	25.75	4.40	0.00	76.52	N/A	N/A
2441	64.13	PK	V	25.75	4.40	0.00	94.28	N/A	N/A
2441	52.02	AV	V	25.75	4.40	0.00	82.17	N/A	N/A
4882	37.03	PK	H	30.79	6.08	27.42	46.48	74.00	27.52
4882	25.39	AV	H	30.79	6.08	27.42	34.84	54.00	19.16
7323	32.53	PK	H	34.38	7.51	25.88	48.54	74.00	25.46
7323	20.27	AV	H	34.38	7.51	25.88	36.28	54.00	17.72
9764	30.16	PK	H	36.33	8.83	27.20	48.12	74.00	25.88
9764	18.59	AV	H	36.33	8.83	27.20	36.55	54.00	17.45
2676	33.33	PK	H	26.36	4.81	27.47	37.03	74.00	36.97
2676	21.28	AV	H	26.36	4.81	27.47	24.98	54.00	29.02
162.7	33.94	QP	H	12.59	1.56	21.44	26.65	43.50	16.85
High Channel: 2480 MHz									
2480	59.16	PK	H	25.85	4.48	0.00	89.49	N/A	N/A
2480	47.14	AV	H	25.85	4.48	0.00	77.47	N/A	N/A
2480	65.16	PK	V	25.85	4.48	0.00	95.49	N/A	N/A
2480	53.08	AV	V	25.85	4.48	0.00	83.41	N/A	N/A
2483.5	32.64	PK	H	25.86	4.49	0.00	62.99	74.00	11.01
2483.5	16.34	AV	H	25.86	4.49	0.00	46.69	54.00	7.31
4960	37.53	PK	H	31.00	5.90	27.43	47.00	74.00	27.00
4960	25.41	AV	H	31.00	5.90	27.43	34.88	54.00	19.12
7440	32.68	PK	H	34.66	7.58	25.97	48.95	74.00	25.05
7440	20.13	AV	H	34.66	7.58	25.97	36.40	54.00	17.60
9920	30.29	PK	H	36.71	8.87	26.66	49.21	74.00	24.79
9920	18.43	AV	H	36.71	8.87	26.66	37.35	54.00	16.65
2793	33.16	PK	H	26.66	5.28	27.56	37.54	74.00	36.46
2793	21.07	AV	H	26.66	5.28	27.56	25.45	54.00	28.55
162.7	33.83	QP	H	12.59	1.56	21.44	26.54	43.50	16.96

BDR Mode (GFSK):

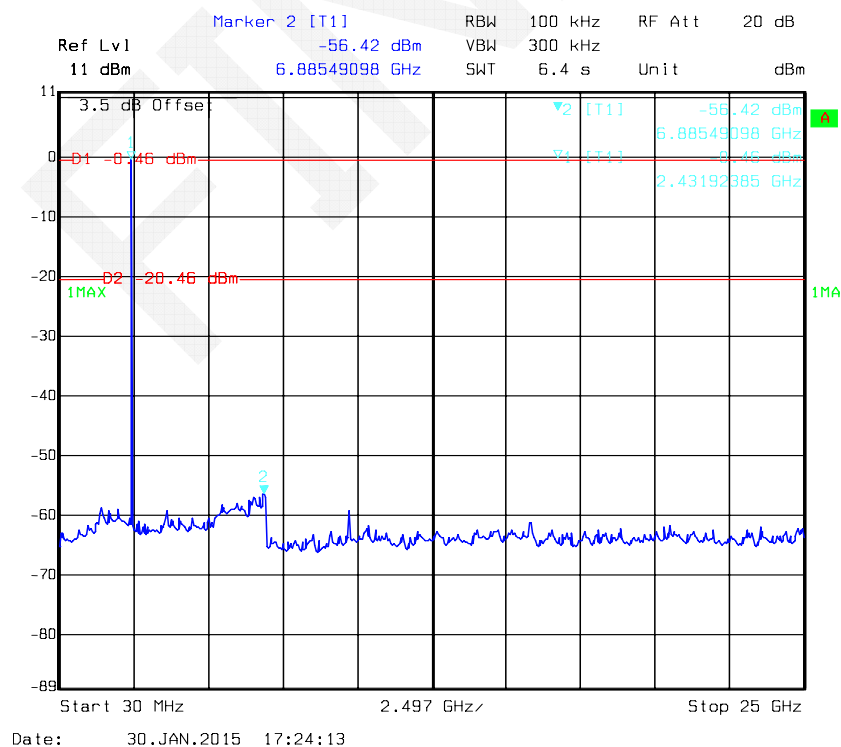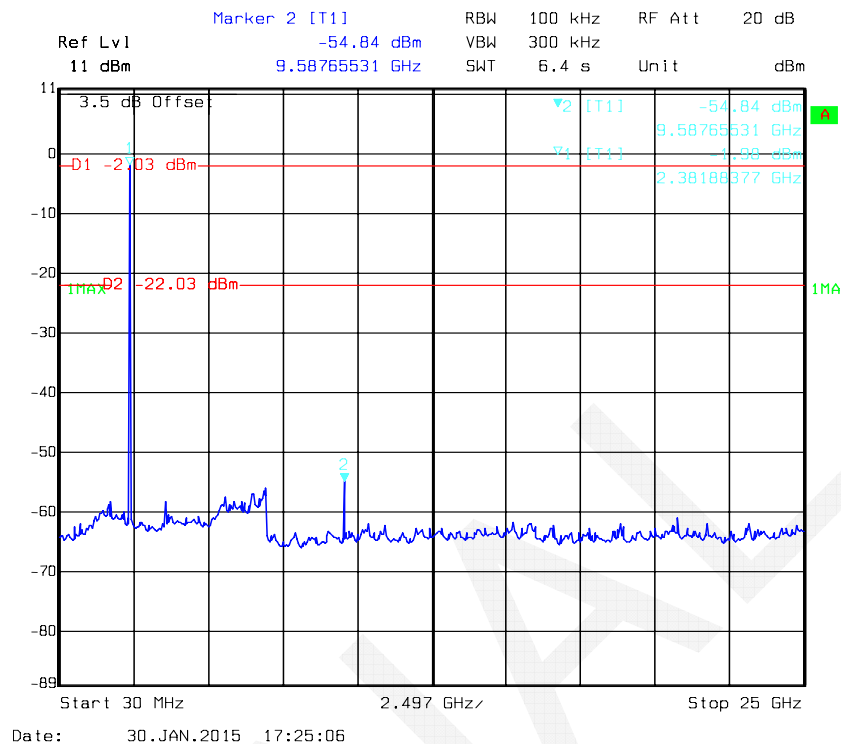


High Channel

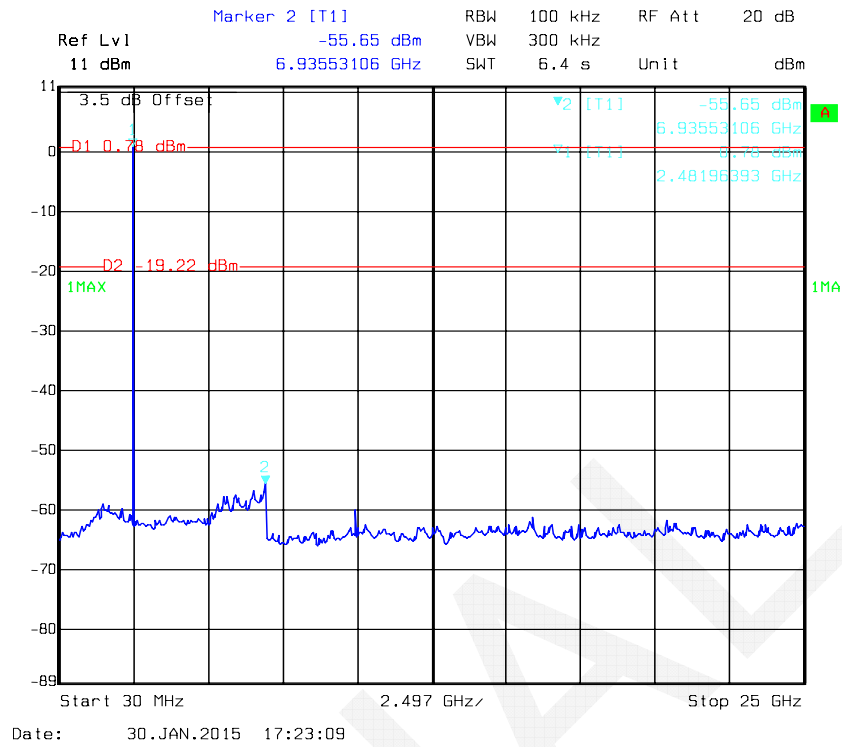


EDR Mode ($\pi/4$ -DQPSK):


Low Channel

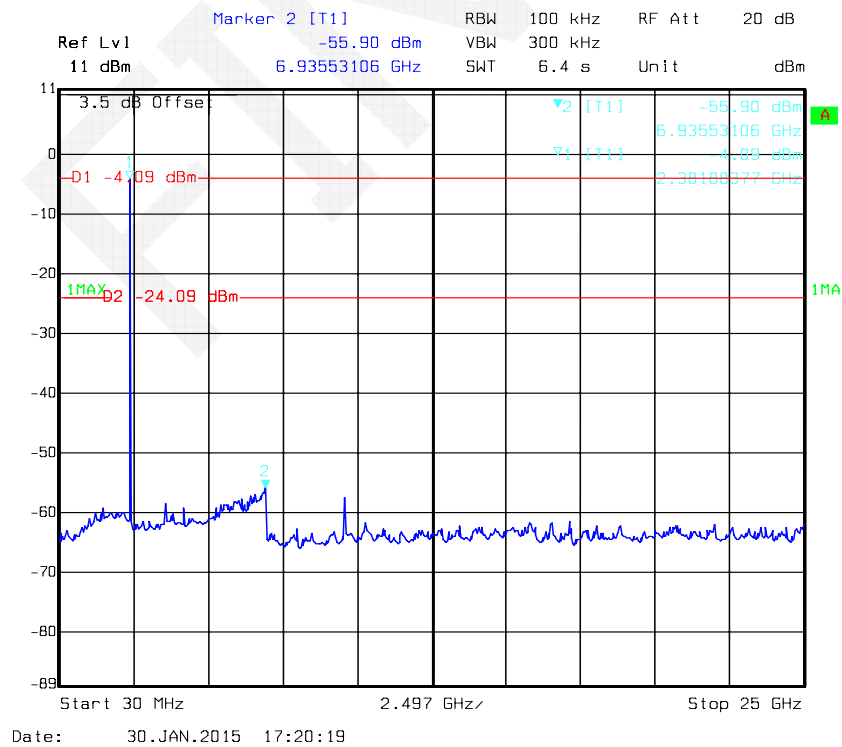


Middle Channel

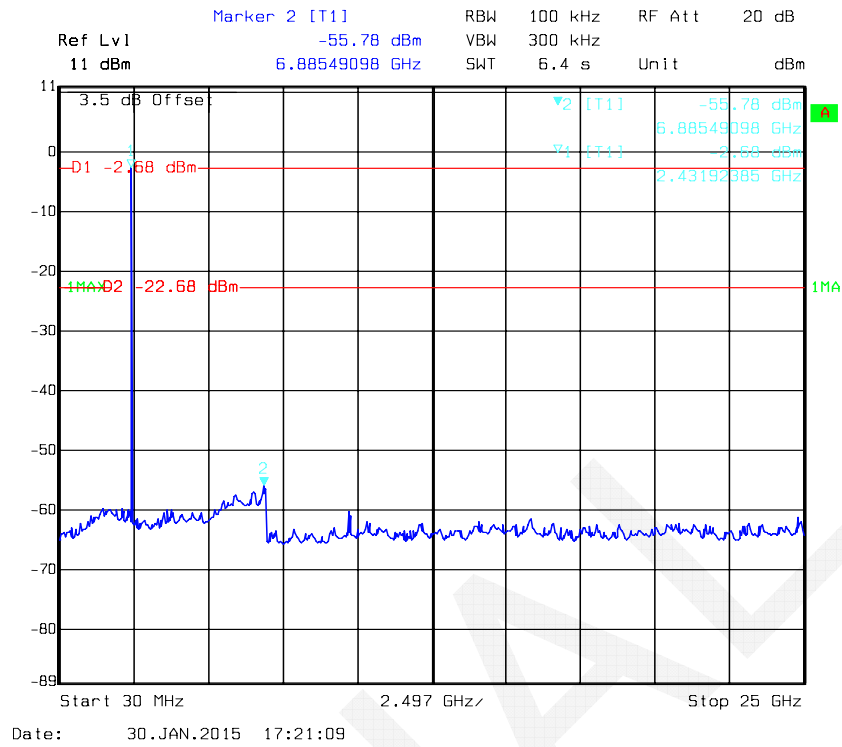


High Channel

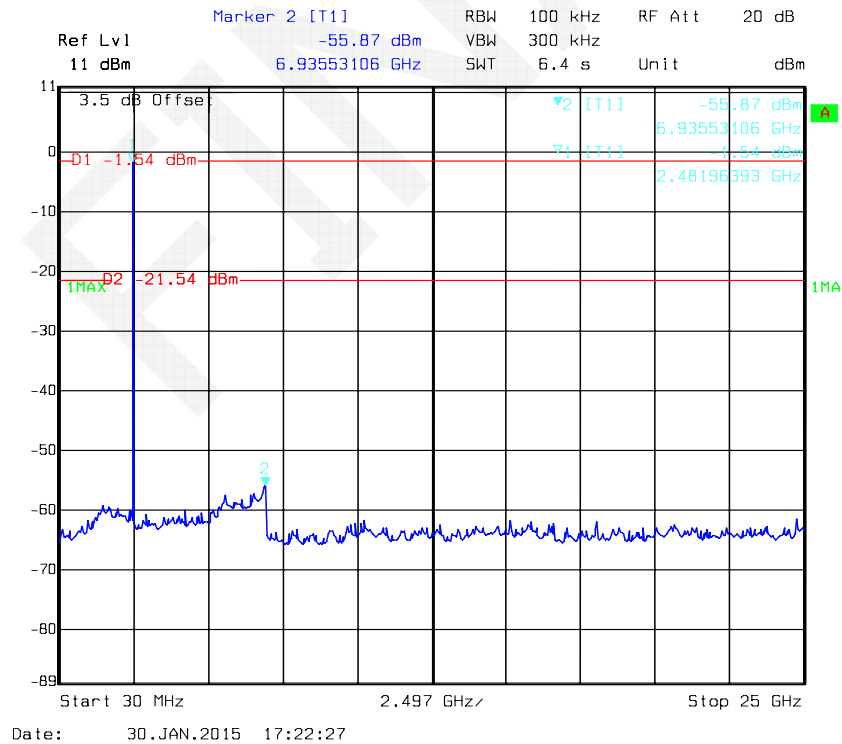

Low Channel

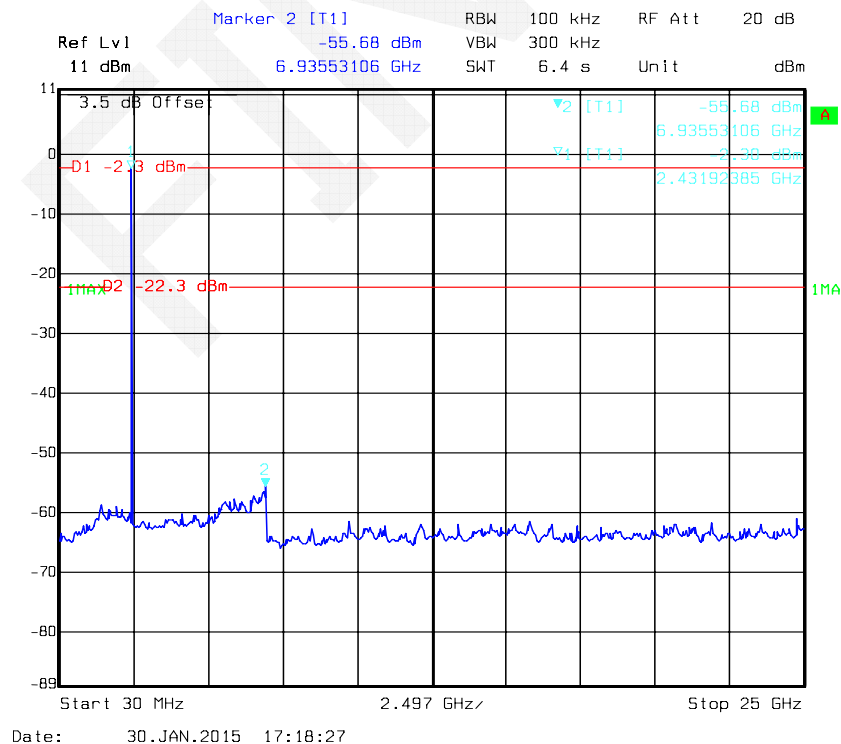

High Channel

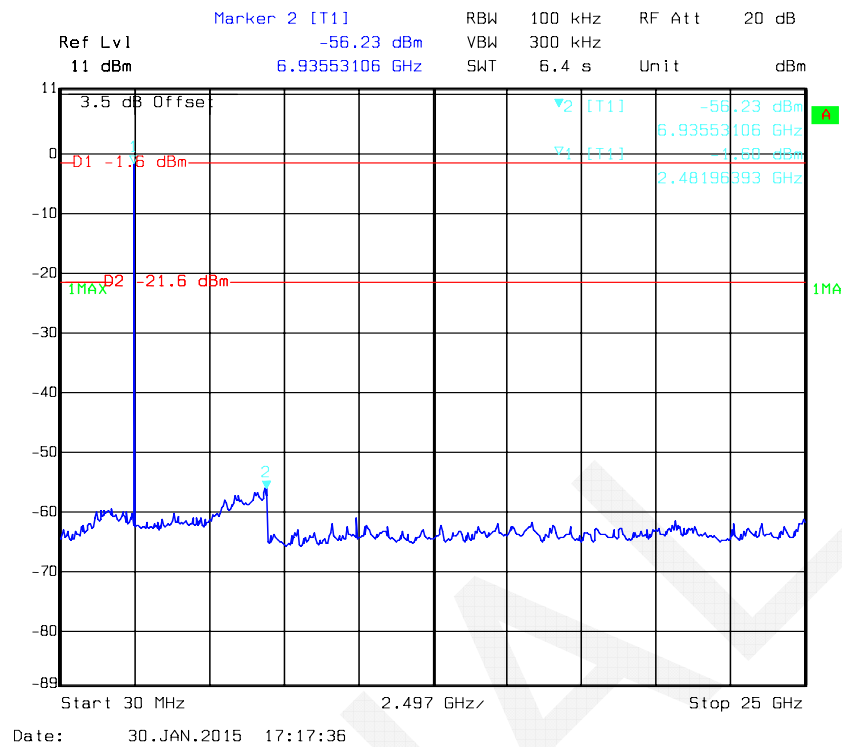

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST**Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace
3. Measure the channel separation.

Test Data**Environmental Conditions**

Temperature:	21.9 °C
Relative Humidity:	49 %
ATM Pressure:	101.8 kPa

* The testing was performed by Allen Qiao on 2015-01-30.


Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting


Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
BDR Mode (GFSK)	Low	2402	1.002	0.561	Pass
	Adjacent	2403			
	Middle	2441	1.002	0.561	Pass
	Adjacent	2442			
	High	2480	1.002	0.561	Pass
	Adjacent	2479			
EDR Mode ($\pi/4$ -DQPSK):	Low	2402	1.002	0.756	Pass
	Adjacent	2403			
	Middle	2441	1.002	0.756	Pass
	Adjacent	2442			
	High	2480	1.002	0.756	Pass
	Adjacent	2479			
EDR Mode (8-DPSK):	Low	2402	1.002	0.780	Pass
	Adjacent	2403			
	Middle	2441	1.002	0.780	Pass
	Adjacent	2442			
	High	2480	1.002	0.780	Pass
	Adjacent	2479			

Note: Limit = $(2/3) \times 20\text{dB}$ bandwidth

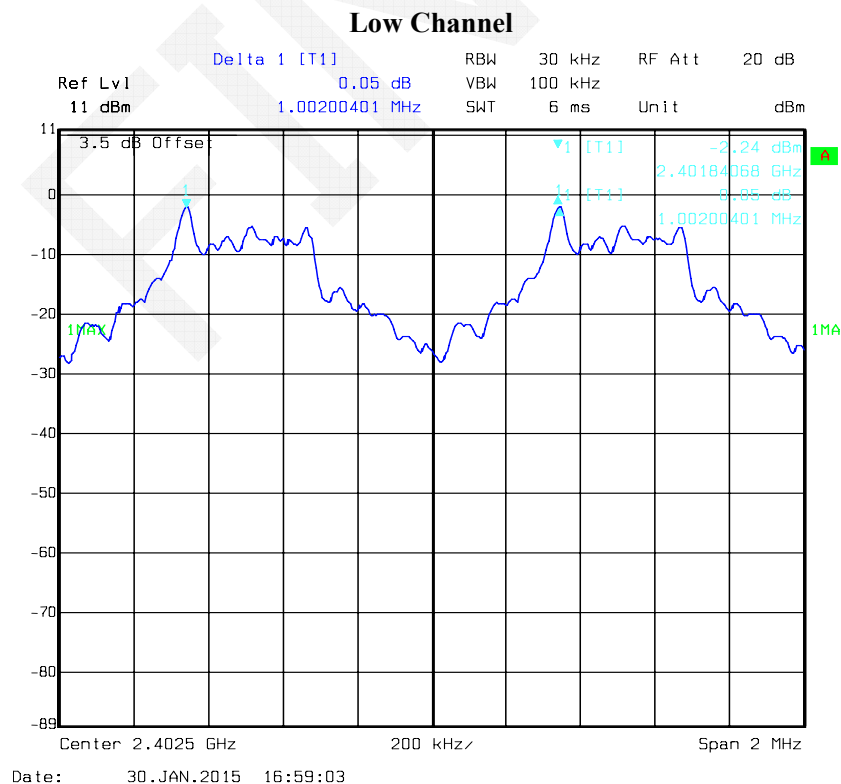
BDR Mode (GFSK):



EDR Mode ($\pi/4$ -DQPSK):

Low Channel

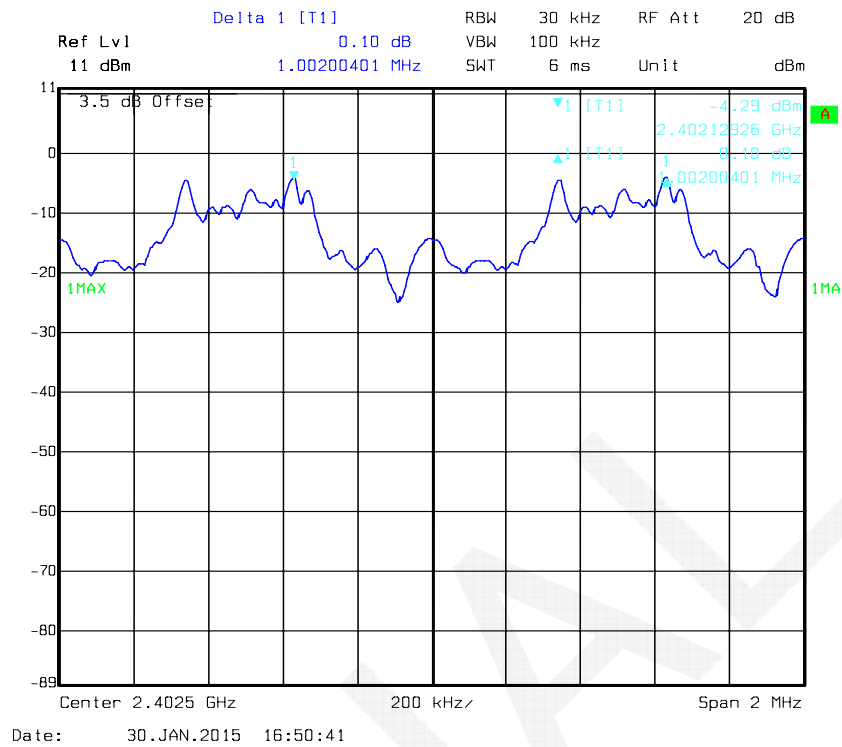


Middle Channel

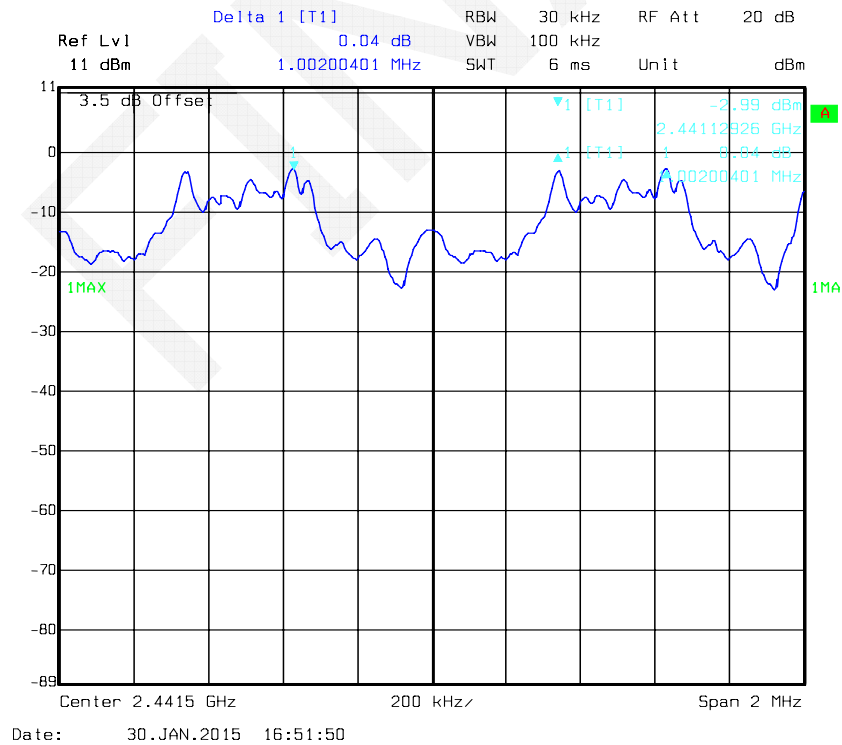


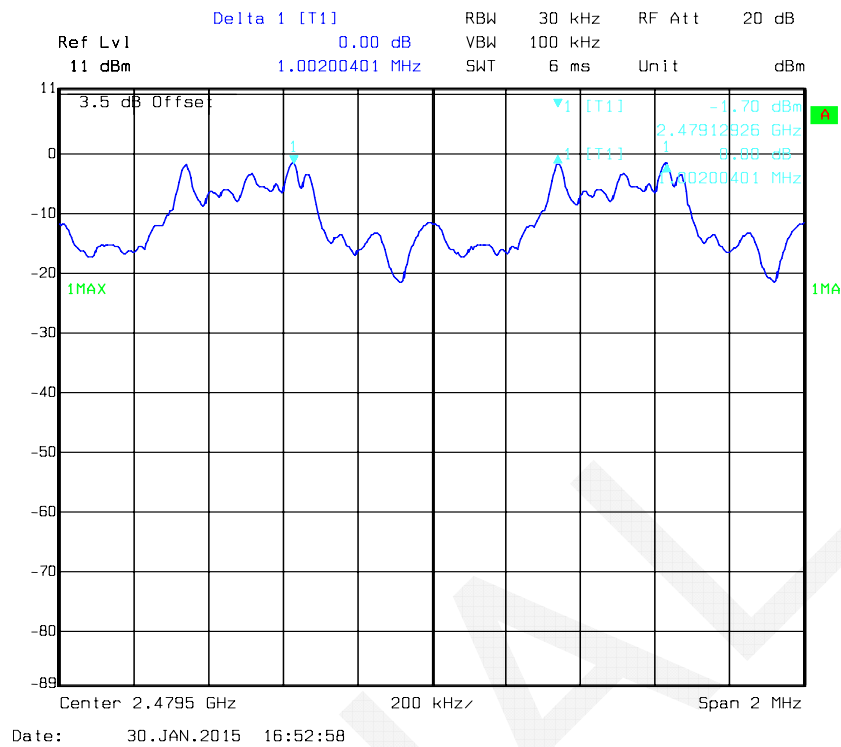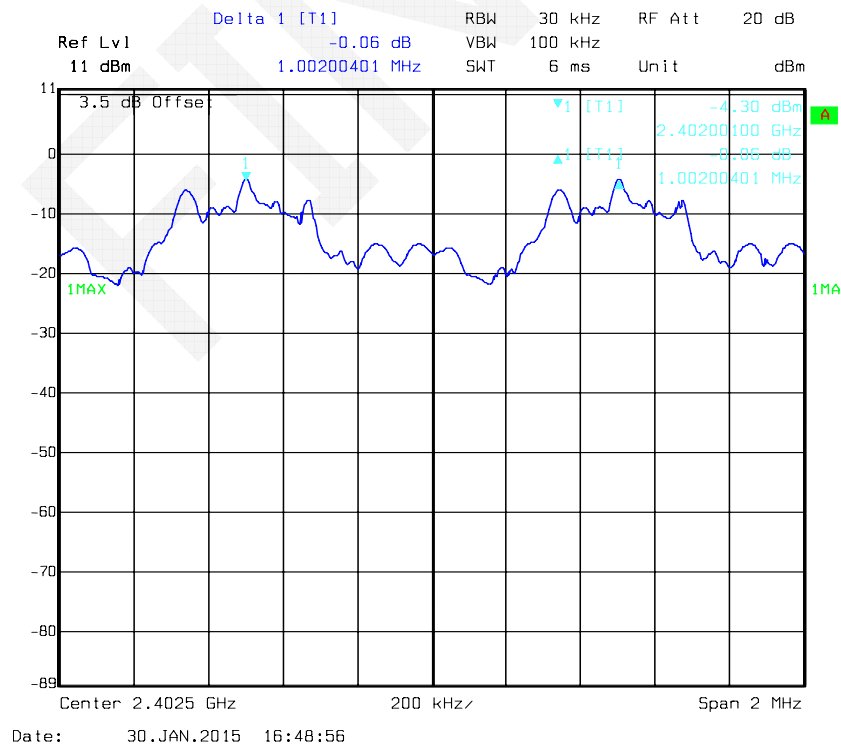High Channel*EDR Mode (8-DPSK):***Low Channel**

Middle Channel

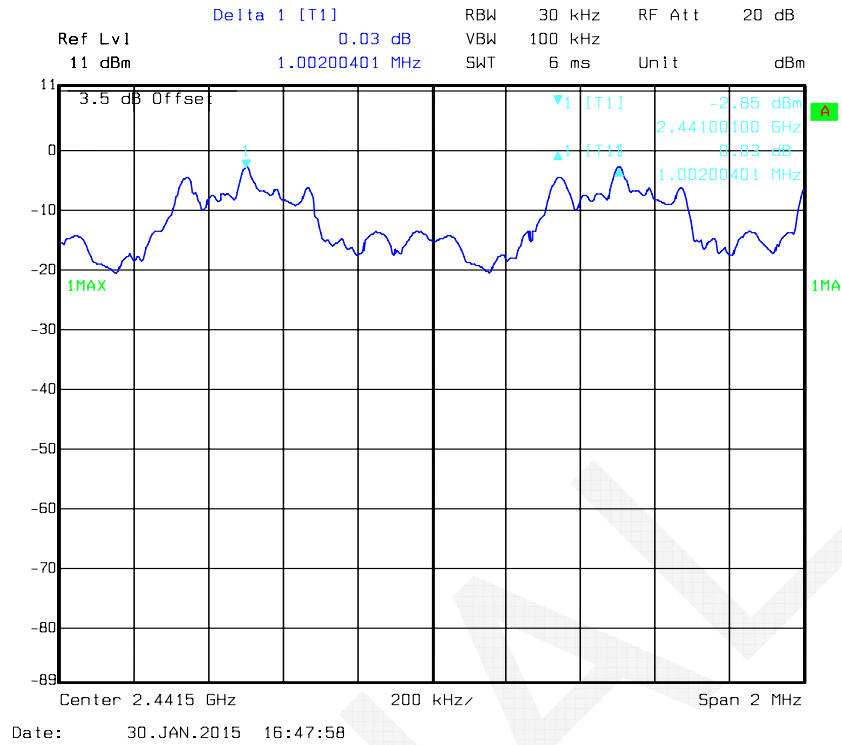

High Channel

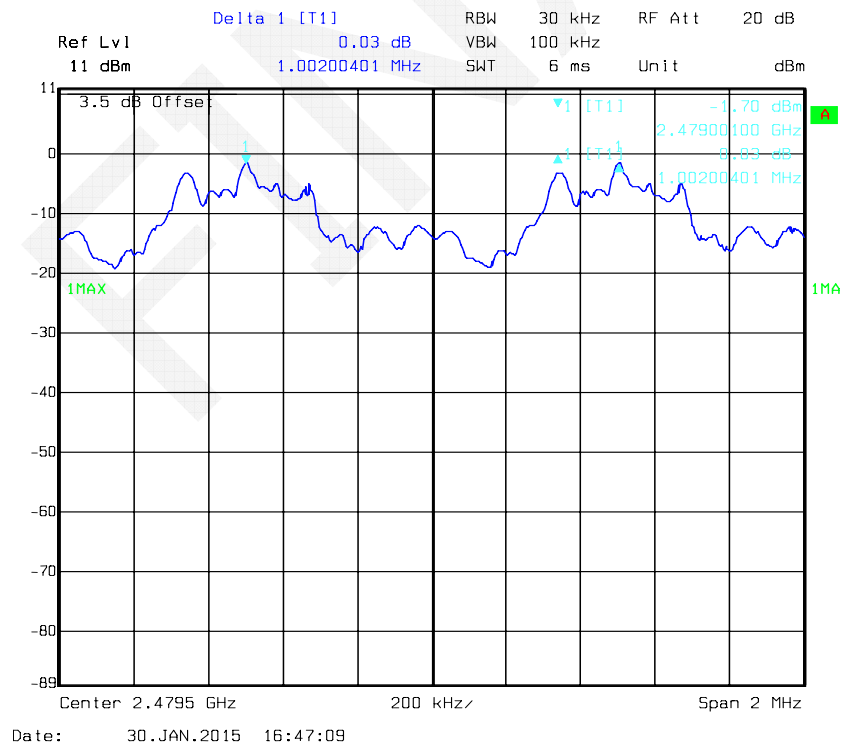

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	21.9 °C
Relative Humidity:	49 %
ATM Pressure:	101.8 kPa


* The testing was performed by Allen Qiao on 2015-01-30.

Test Result: Compliance.


Please refer to following tables and plots

Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR Mode (GFSK)	Low	2402	0.842
	Middle	2441	0.842
	High	2480	0.842
EDR Mode ($\pi/4$ -DQPSK):	Low	2402	1.134
	Middle	2441	1.134
	High	2480	1.134
EDR Mode (8-DPSK):	Low	2402	1.170
	Middle	2441	1.170
	High	2480	1.170


BDR Mode (GFSK):



Middle Channel

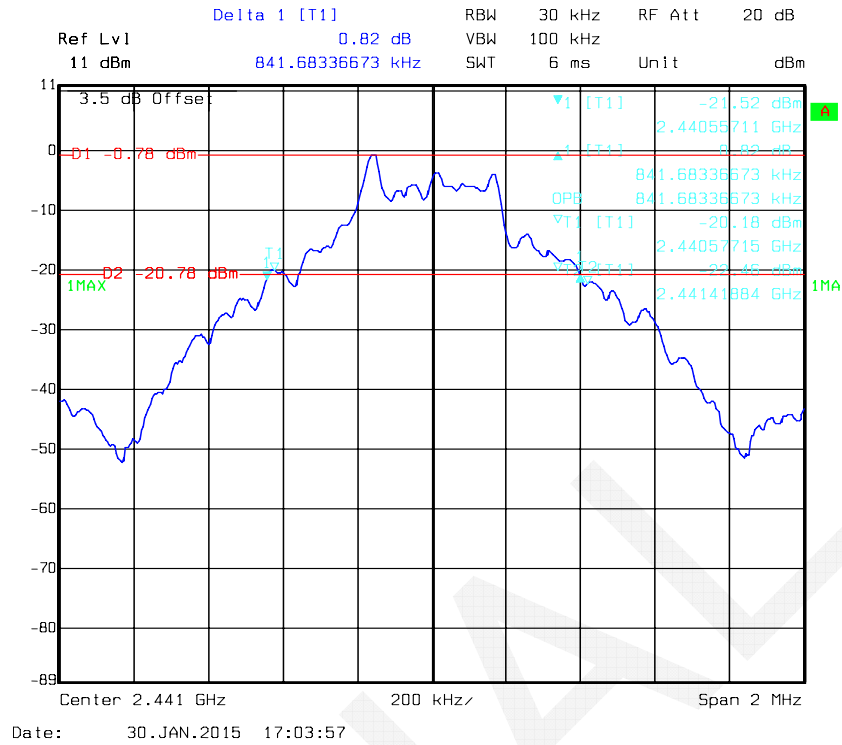


High Channel

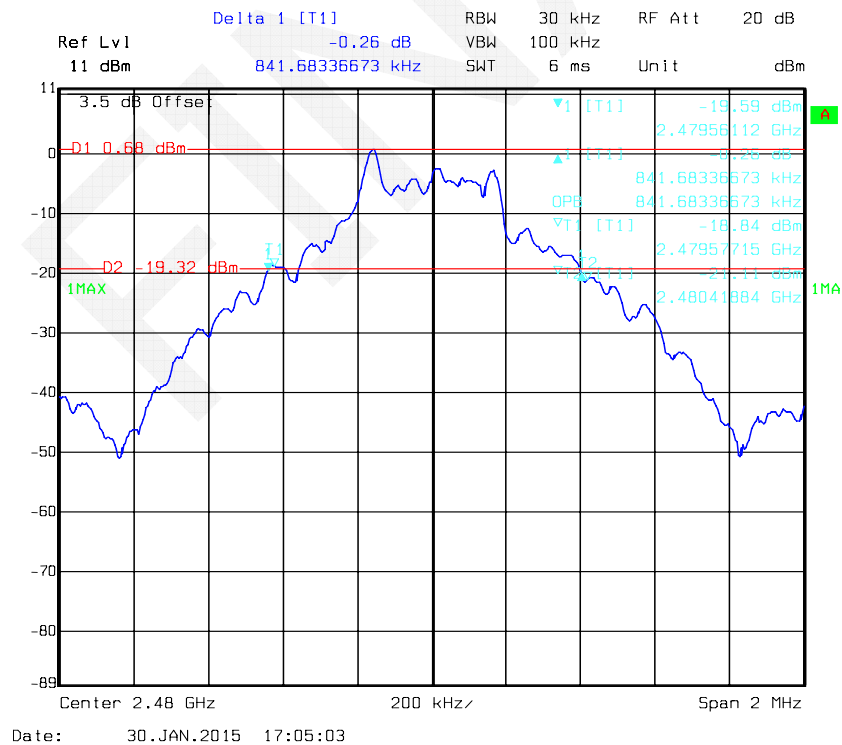


EDR Mode ($\pi/4$ -DQPSK):

Low Channel

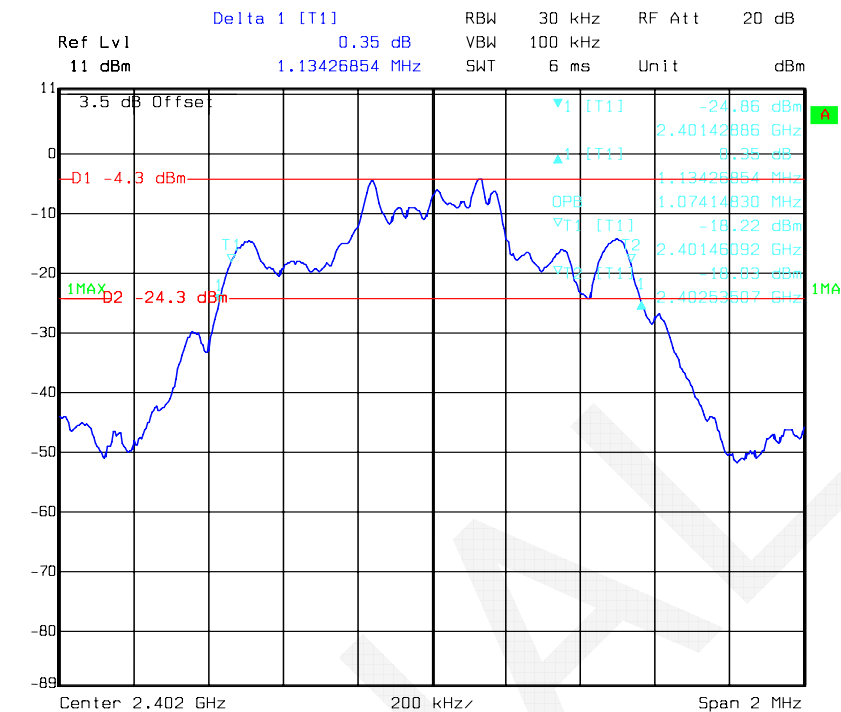

Date: 30.JAN.2015 17:10:38

Middle Channel

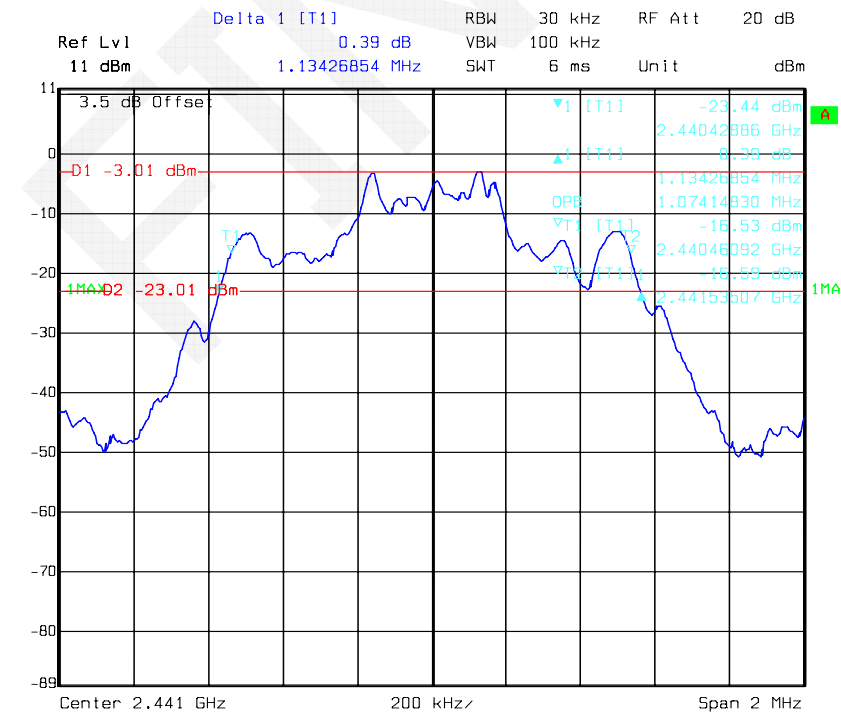


Date: 30.JAN.2015 17:09:05


Delta 1 [T1] RBW 30 kHz RF Att 20 dB
 Ref Lvl -0.05 dB VBW 100 kHz
 11 dBm 1.13426854 MHz SWT 6 ms Unit dBm

3.5 dB Offset
 D1 -1.7 dBm
 D2 -21.7 dBm
 T1
 T2
 T3
 T4
 T5
 T6
 T7
 T8
 T9
 T10
 T11
 T12
 T13
 T14
 T15
 T16
 T17
 T18
 T19
 T20
 T21
 T22
 T23
 T24
 T25
 T26
 T27
 T28
 T29
 T30
 T31
 T32
 T33
 T34
 T35
 T36
 T37
 T38
 T39
 T40
 T41
 T42
 T43
 T44
 T45
 T46
 T47
 T48
 T49
 T50
 T51
 T52
 T53
 T54
 T55
 T56
 T57
 T58
 T59
 T60
 T61
 T62
 T63
 T64
 T65
 T66
 T67
 T68
 T69
 T70
 T71
 T72
 T73
 T74
 T75
 T76
 T77
 T78
 T79
 T80
 T81
 T82
 T83
 T84
 T85
 T86
 T87
 T88
 T89
 T90
 T91
 T92
 T93
 T94
 T95
 T96
 T97
 T98
 T99
 T100
 T101
 T102
 T103
 T104
 T105
 T106
 T107
 T108
 T109
 T110
 T111
 T112
 T113
 T114
 T115
 T116
 T117
 T118
 T119
 T120
 T121
 T122
 T123
 T124
 T125
 T126
 T127
 T128
 T129
 T130
 T131
 T132
 T133
 T134
 T135
 T136
 T137
 T138
 T139
 T140
 T141
 T142
 T143
 T144
 T145
 T146
 T147
 T148
 T149
 T150
 T151
 T152
 T153
 T154
 T155
 T156
 T157
 T158
 T159
 T160
 T161
 T162
 T163
 T164
 T165
 T166
 T167
 T168
 T169
 T170
 T171
 T172
 T173
 T174
 T175
 T176
 T177
 T178
 T179
 T180
 T181
 T182
 T183
 T184
 T185
 T186
 T187
 T188
 T189
 T190
 T191
 T192
 T193
 T194
 T195
 T196
 T197
 T198
 T199
 T200
 T201
 T202
 T203
 T204
 T205
 T206
 T207
 T208
 T209
 T210
 T211
 T212
 T213
 T214
 T215
 T216
 T217
 T218
 T219
 T220
 T221
 T222
 T223
 T224
 T225
 T226
 T227
 T228
 T229
 T230
 T231
 T232
 T233
 T234
 T235
 T236
 T237
 T238
 T239
 T240
 T241
 T242
 T243
 T244
 T245
 T246
 T247
 T248
 T249
 T250
 T251
 T252
 T253
 T254
 T255
 T256
 T257
 T258
 T259
 T260
 T261
 T262
 T263
 T264
 T265
 T266
 T267
 T268
 T269
 T270
 T271
 T272
 T273
 T274
 T275
 T276
 T277
 T278
 T279
 T280
 T281
 T282
 T283
 T284
 T285
 T286
 T287
 T288
 T289
 T290
 T291
 T292
 T293
 T294
 T295
 T296
 T297
 T298
 T299
 T300
 T301
 T302
 T303
 T304
 T305
 T306
 T307
 T308
 T309
 T310
 T311
 T312
 T313
 T314
 T315
 T316
 T317
 T318
 T319
 T320
 T321
 T322
 T323
 T324
 T325
 T326
 T327
 T328
 T329
 T330
 T331
 T332
 T333
 T334
 T335
 T336
 T337
 T338
 T339
 T340
 T341
 T342
 T343
 T344
 T345
 T346
 T347
 T348
 T349
 T350
 T351
 T352
 T353
 T354
 T355
 T356
 T357
 T358
 T359
 T360
 T361
 T362
 T363
 T364
 T365
 T366
 T367
 T368
 T369
 T370
 T371
 T372
 T373
 T374
 T375
 T376
 T377
 T378
 T379
 T380
 T381
 T382
 T383
 T384
 T385
 T386
 T387
 T388
 T389
 T390
 T391
 T392
 T393
 T394
 T395
 T396
 T397
 T398
 T399
 T400
 T401
 T402
 T403
 T404
 T405
 T406
 T407
 T408
 T409
 T410
 T411
 T412
 T413
 T414
 T415
 T416
 T417
 T418
 T419
 T420
 T421
 T422
 T423
 T424
 T425
 T426
 T427
 T428
 T429
 T430
 T431
 T432
 T433
 T434
 T435
 T436
 T437
 T438
 T439
 T440
 T441
 T442
 T443
 T444
 T445
 T446
 T447
 T448
 T449
 T450
 T451
 T452
 T453
 T454
 T455
 T456
 T457
 T458
 T459
 T460
 T461
 T462
 T463
 T464
 T465
 T466
 T467
 T468
 T469
 T470
 T471
 T472
 T473
 T474
 T475
 T476
 T477
 T478
 T479
 T480
 T481
 T482
 T483
 T484
 T485
 T486
 T487
 T488
 T489
 T490
 T491
 T492
 T493
 T494
 T495
 T496
 T497
 T498
 T499
 T500
 T501
 T502
 T503
 T504
 T505
 T506
 T507


Low Channel

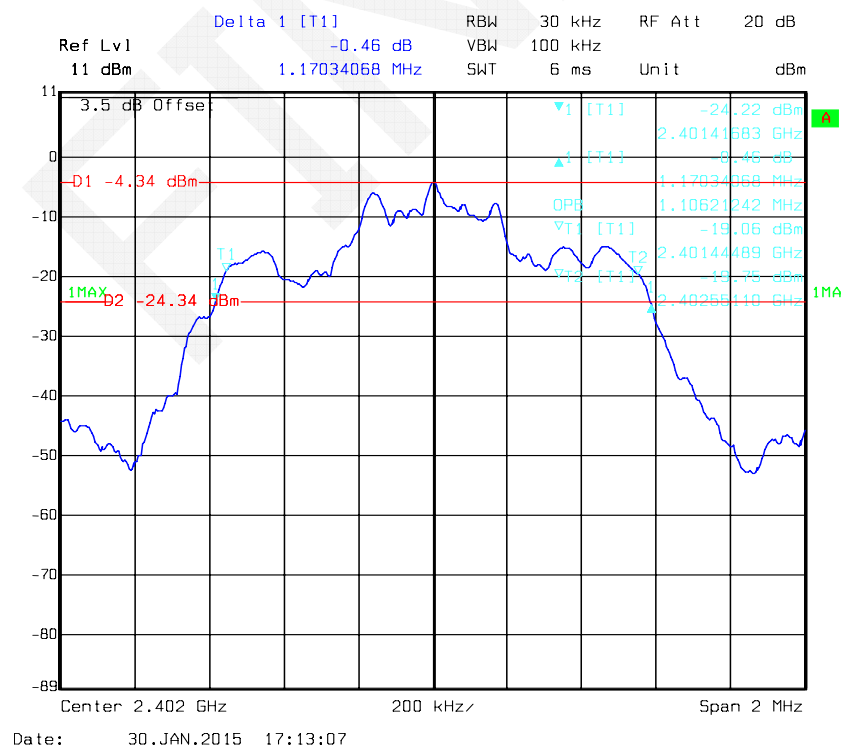

Middle Channel

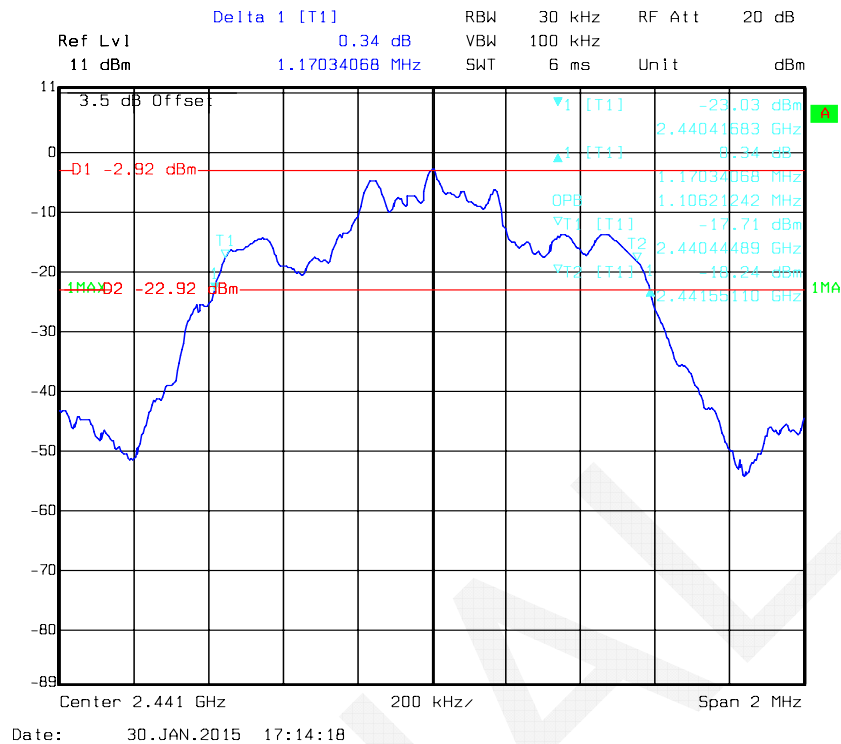

High Channel

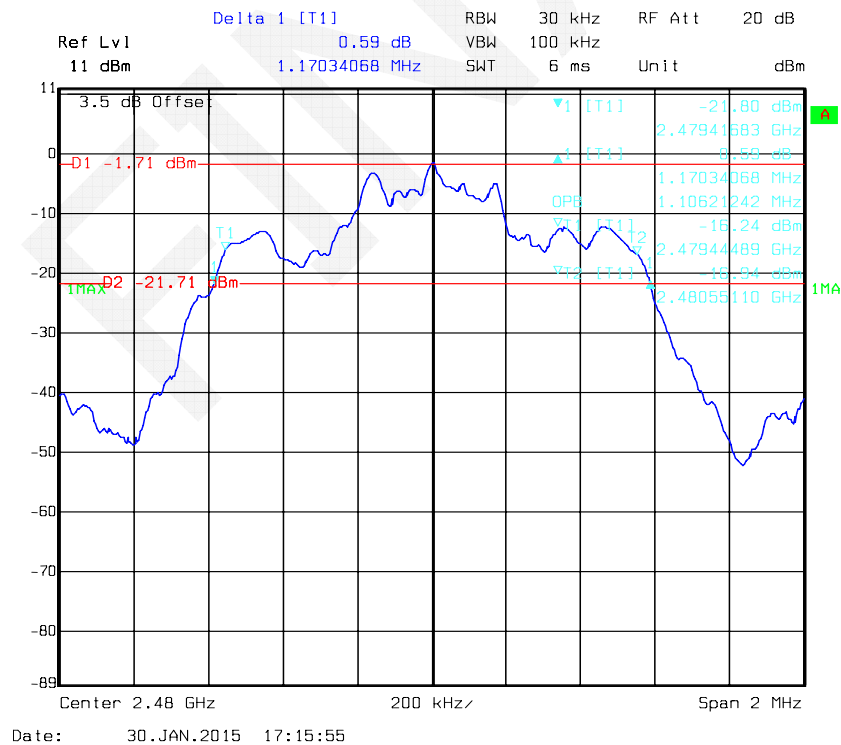

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	21.9 °C
Relative Humidity:	49 %
ATM Pressure:	101.8 kPa

* The testing was performed by Allen Qiao on 2015-01-30.


Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting


BDR Mode (GFSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15

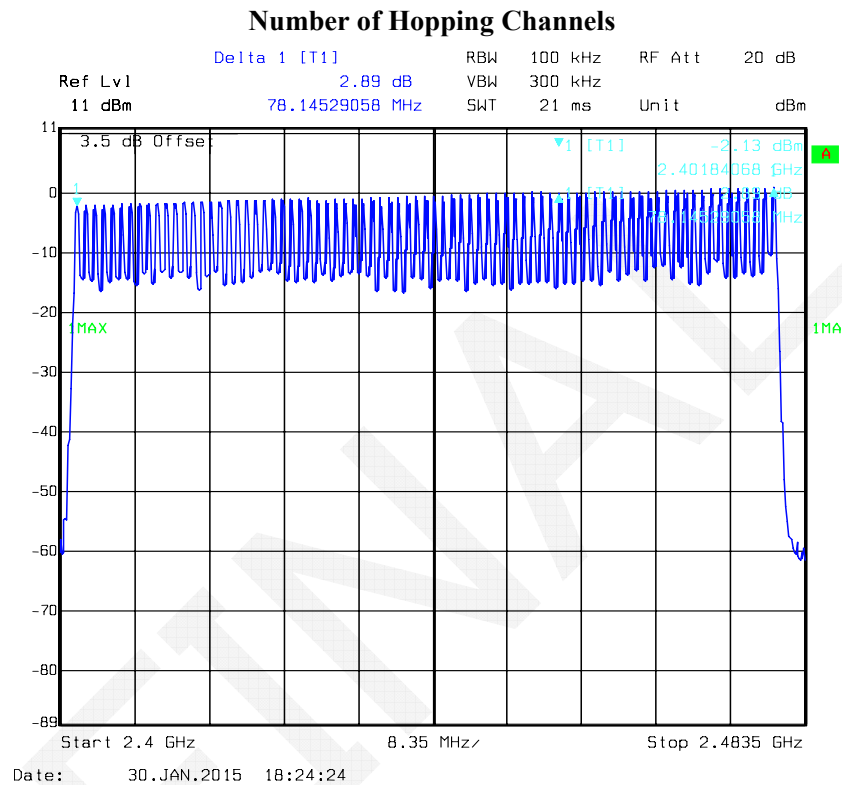


EDR Mode ($\pi/4$ -DQPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥ 15

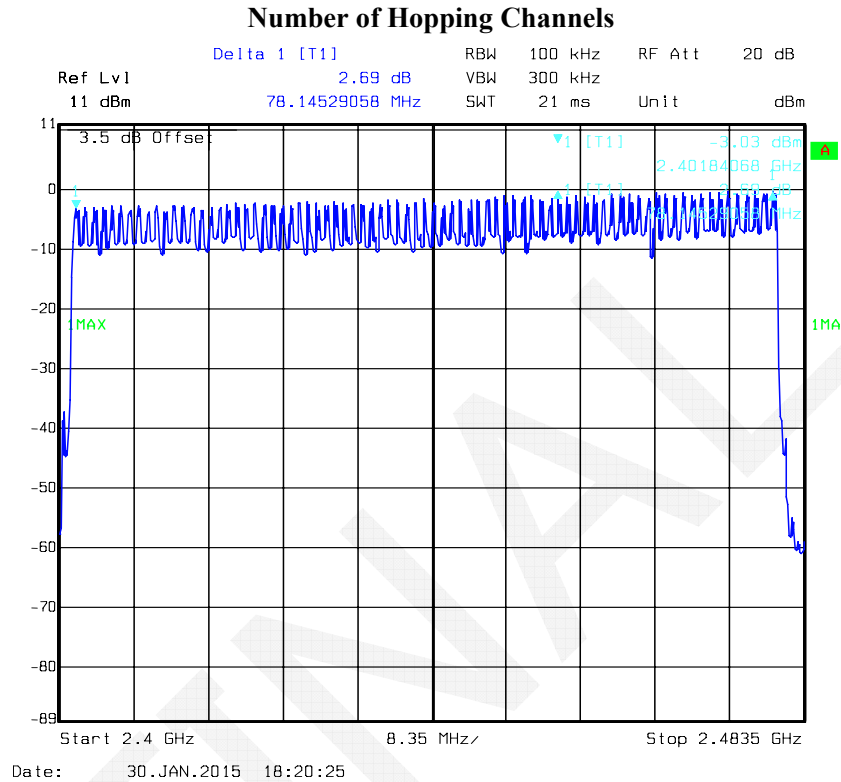

EDR Mode (8-DPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥ 15

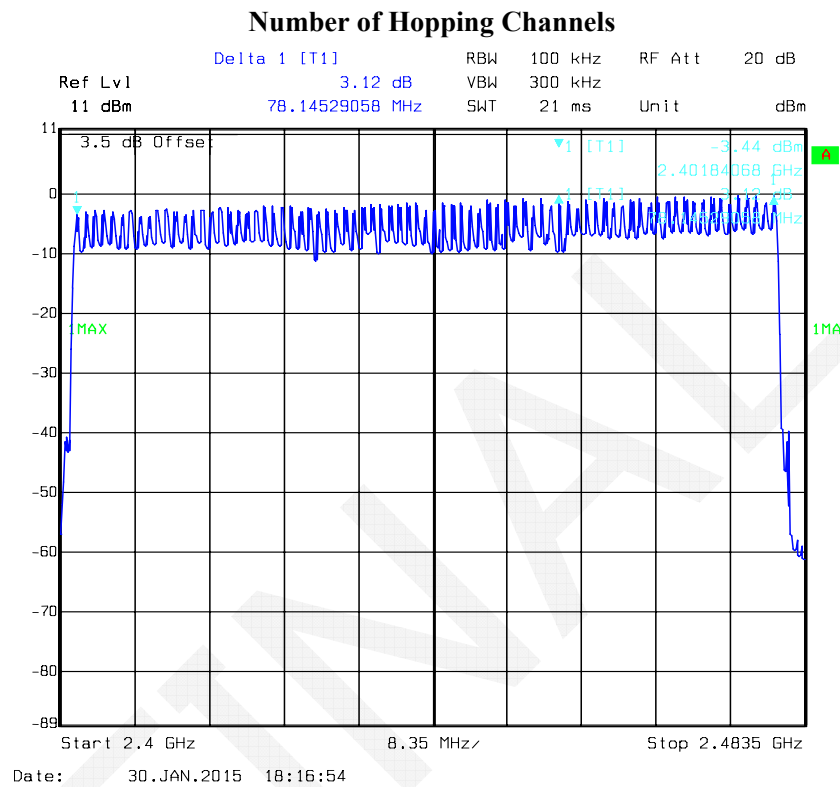

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as $0.4 \times \text{channel no. (s)}$, the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= time slot length * hope rate/ number of hopping channels * 31.6s
Hop rate=1600/s

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	21.9 °C
Relative Humidity:	49 %
ATM Pressure:	101.8 kPa

* The testing was performed by Allen Qiao on 2015-01-30.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting


BDR Mode (GFSK):

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH1	Low	0.391	0.125	0.4	Pass
	Middle	0.391	0.125	0.4	Pass
	High	0.391	0.125	0.4	Pass
	Note: Dwell time=Pulse time (ms) $\times$ (1600/2/79) $\times$ 31.6 s				
DH3	Low	1.657	0.265	0.4	Pass
	Middle	1.657	0.265	0.4	Pass
	High	1.657	0.265	0.4	Pass
	Note: Dwell time=Pulse time (ms) $\times$ (1600/4/79) $\times$ 31.6 s				
DH5	Low	2.900	0.309	0.4	Pass
	Middle	2.900	0.309	0.4	Pass
	High	2.900	0.309	0.4	Pass
	Note: Dwell time=Pulse time (ms) $\times$ (1600/6/79) $\times$ 31.6 s				


DH1: Low Channel


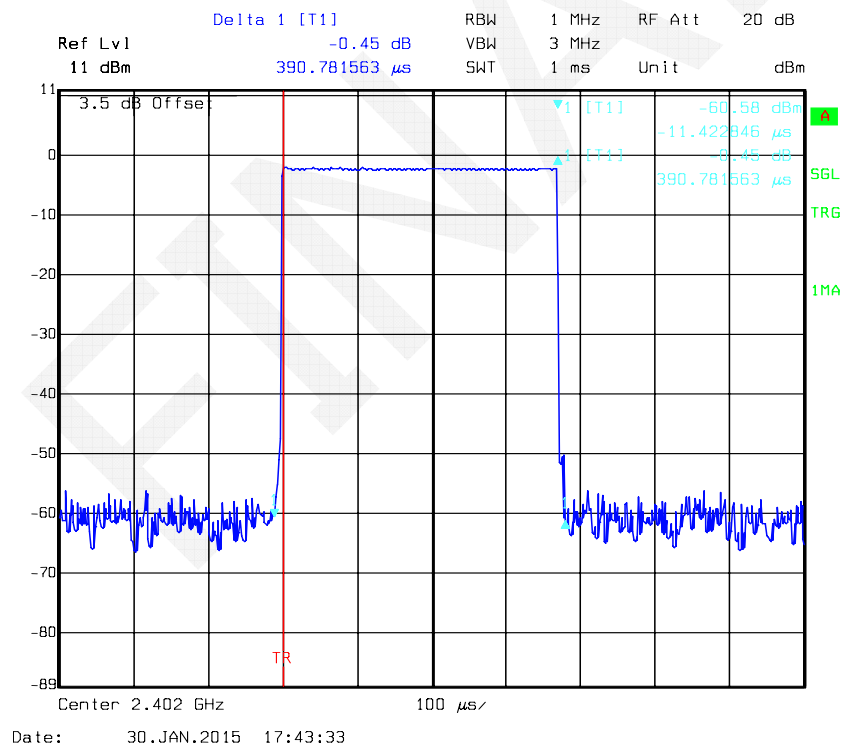


DH1: Middle Channel

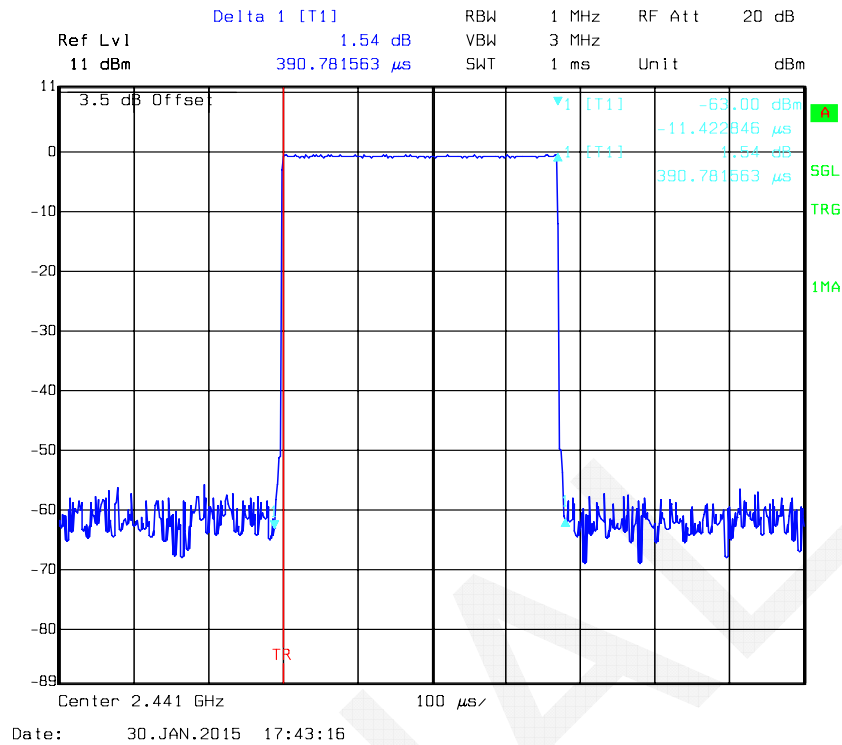

DH1: High Channel

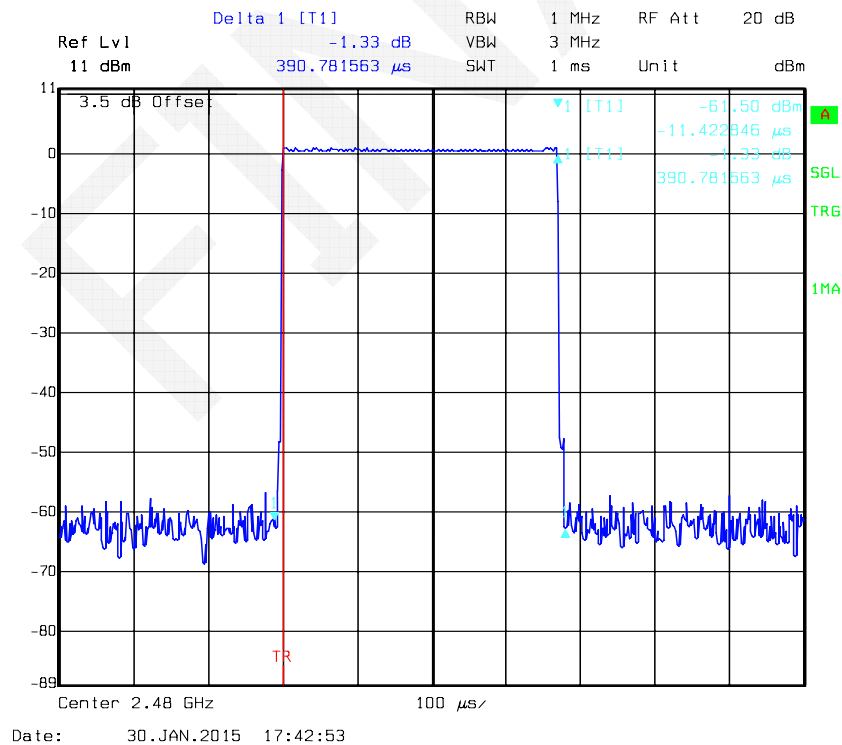

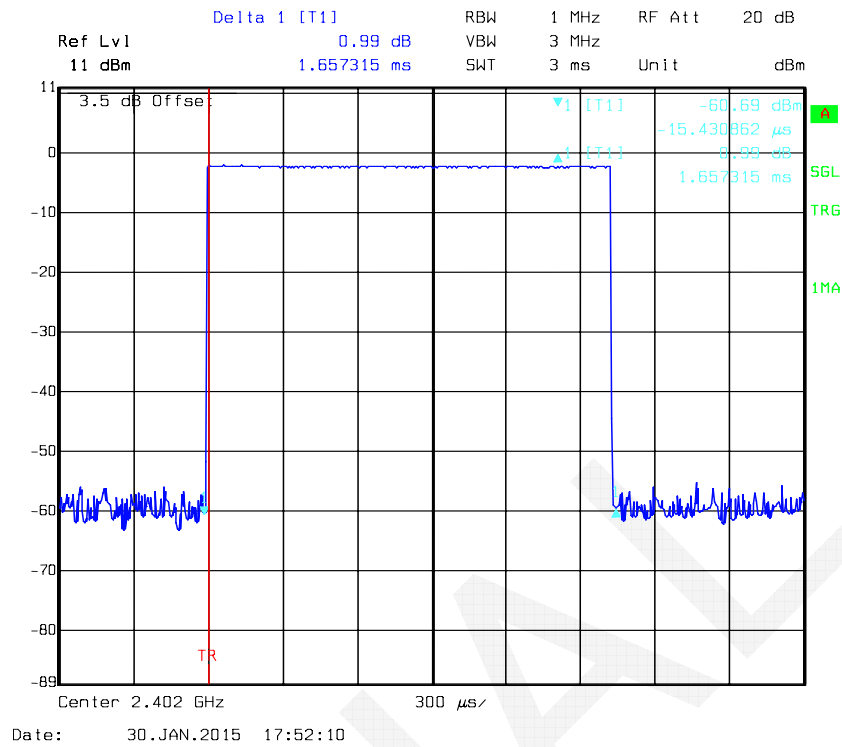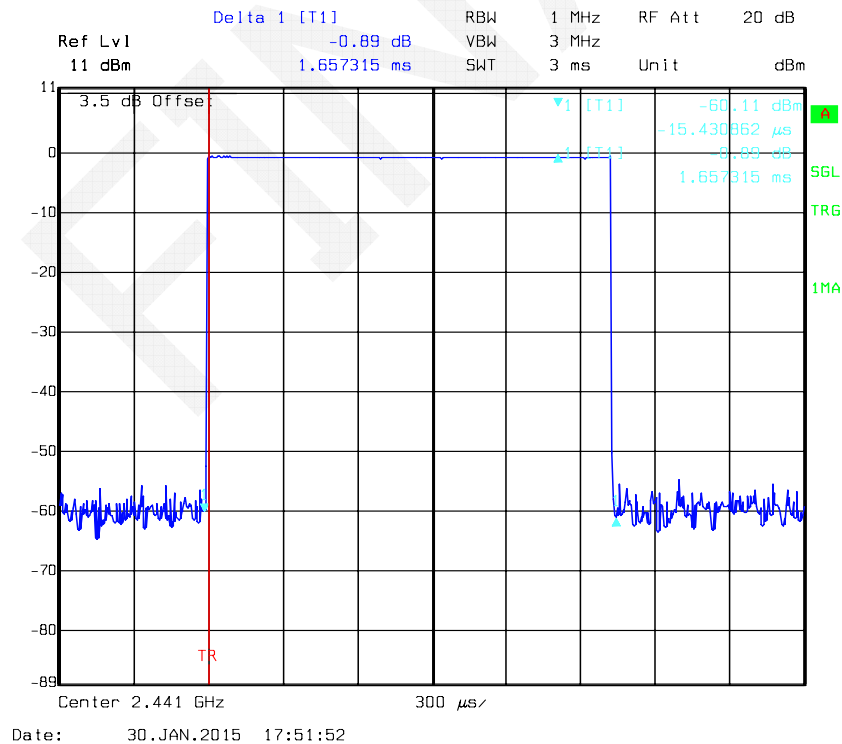DH3: Low Channel**DH3: Middle Channel**

Ref Lvl 11 dBm Delta 1 [T1] -3.18 dB RBW 1 MHz RF Att 20 dB
 3.5 dB Offset 1.657315 ms VBW 3 MHz Unit dBm
 3.18 dB
 -59.32 dBm
 -15.430862 μs
 3.18 dB
 1.657315 ms
 TR
 SGL
 TRG
 1MA
 Center 2.48 GHz 300 μs

Ref Lvl 11 dBm

Delta 1 [T1] -2.29 dB

RBW 1 MHz

VBW 3 MHz

SWT 5 ms

RF Att 20 dB

Unit dBm

3.5 dB Offset

11

0

-10

-20

-30

-40

-50

-60

-70

-80

-89

TR

Center 2.402 GHz

500 μ s

[T1] -57.63 dBm

[T1] -25.450302 μ s

[T1] 2.29 dB

[T1] 2.899800 ms


SGL

TRG


1MA

Date: 30.JAN.2015 17:54:17

DH5: Middle Channel

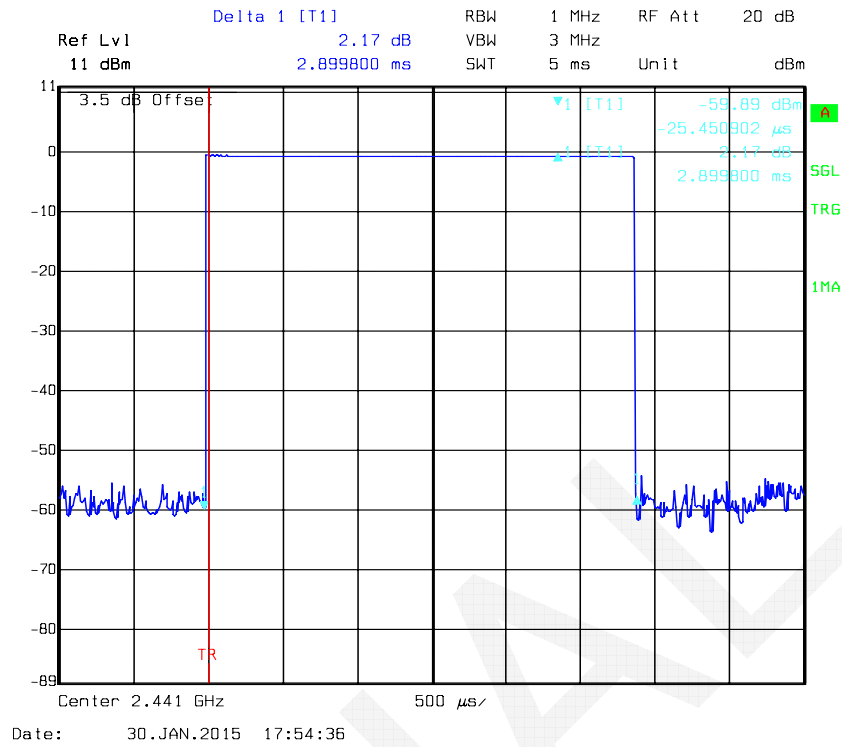


DH5: High Channel

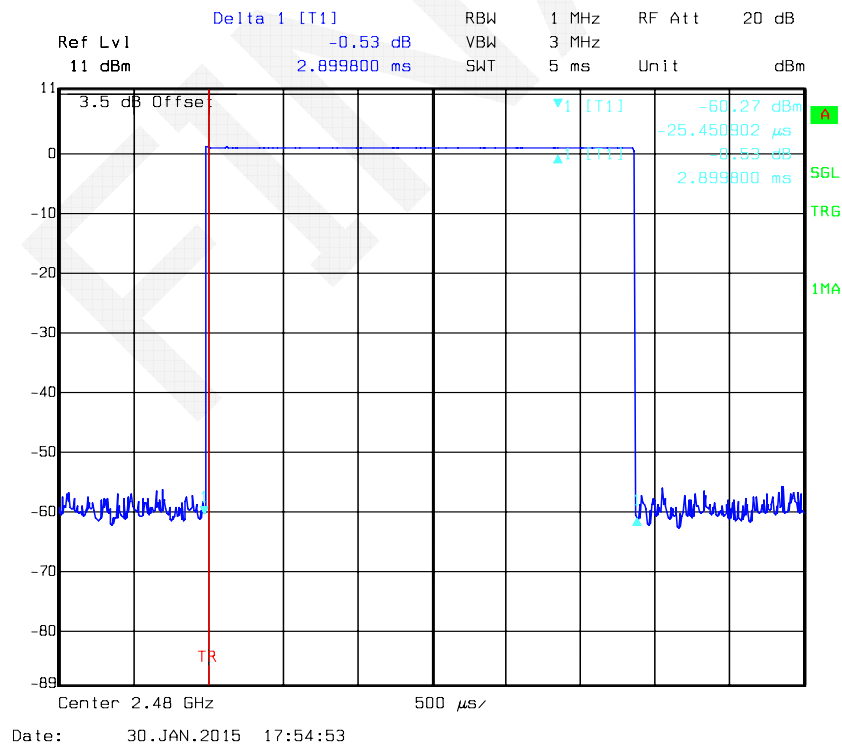


EDR Mode ($\pi/4$ -DQPSK):

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH1	Low	0.395	0.126	0.4	Pass
	Middle	0.395	0.126	0.4	Pass
	High	0.395	0.126	0.4	Pass
	Note: Dwell time=Pulse time (ms) $\times$ (1600/2/79) $\times$ 31.6 s				
DH3	Low	1.657	0.265	0.4	Pass
	Middle	1.657	0.265	0.4	Pass
	High	1.657	0.265	0.4	Pass
	Note: Dwell time=Pulse time (ms) $\times$ (1600/4/79) $\times$ 31.6 s				
DH5	Low	2.900	0.309	0.4	Pass
	Middle	2.900	0.309	0.4	Pass
	High	2.900	0.309	0.4	Pass
	Note: Dwell time=Pulse time (ms) $\times$ (1600/6/79) $\times$ 31.6 s				


DH1: Low Channel

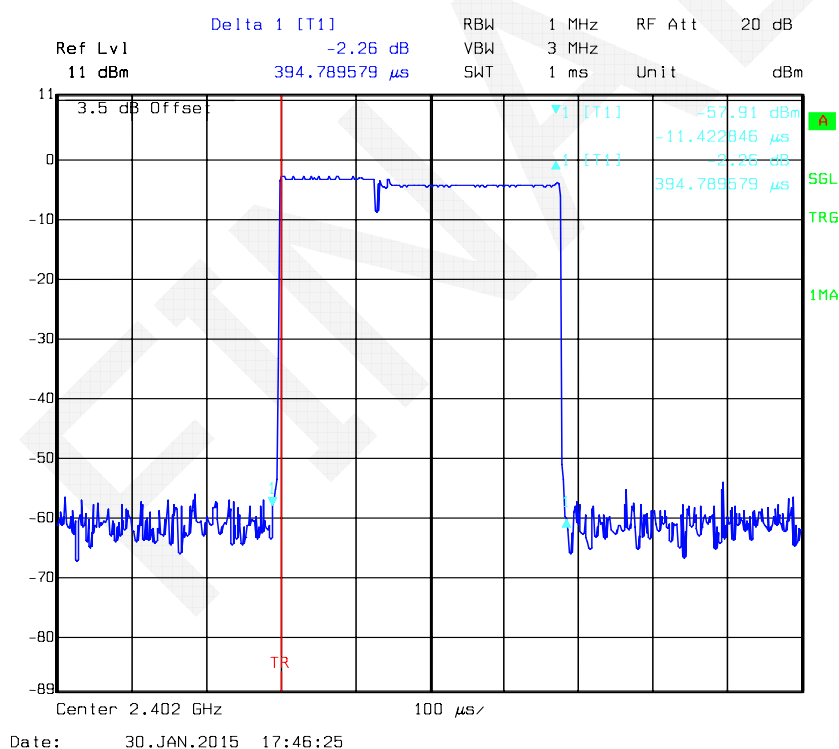


DH1: Middle Channel

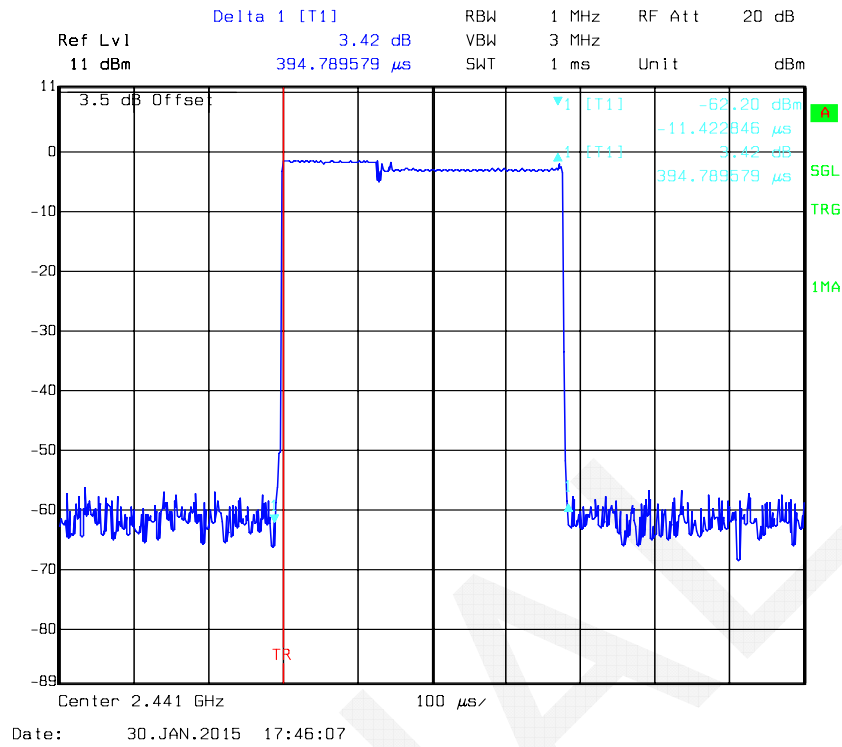


DH1: High Channel

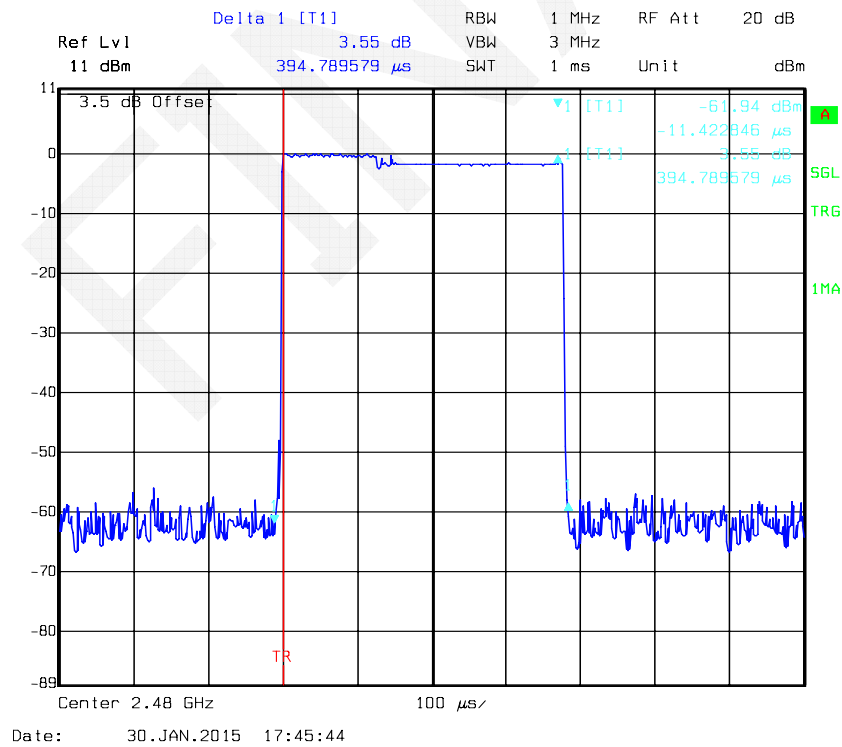


DH3: Low Channel

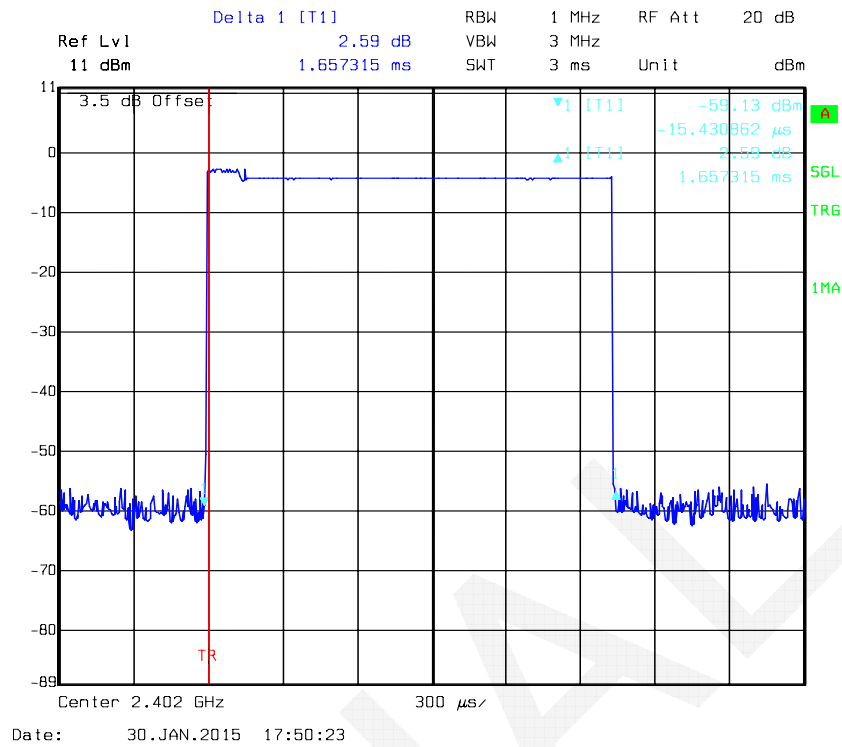


DH3: Middle Channel

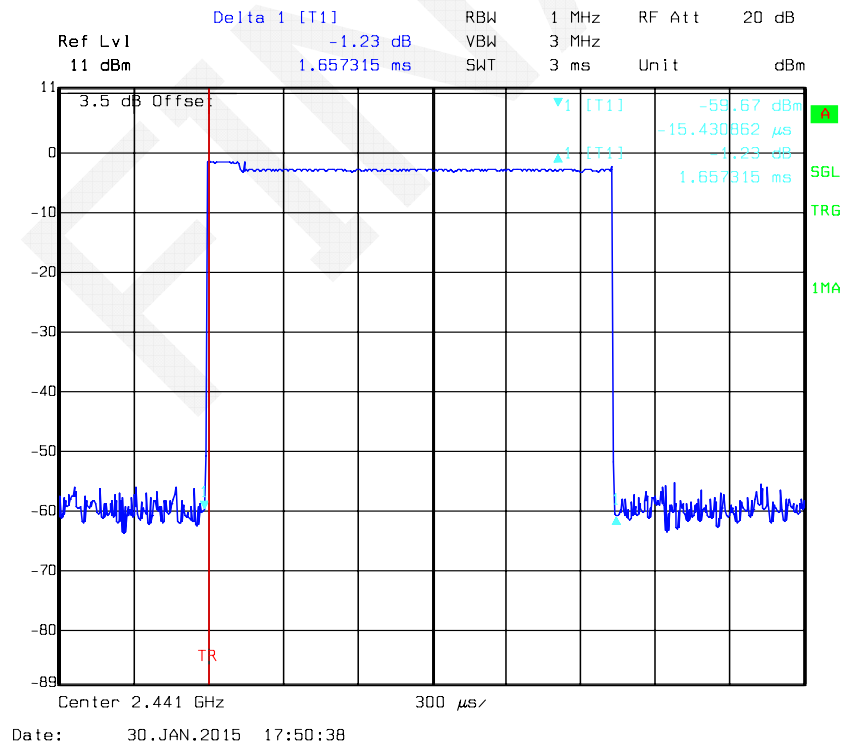


DH3: High Channel

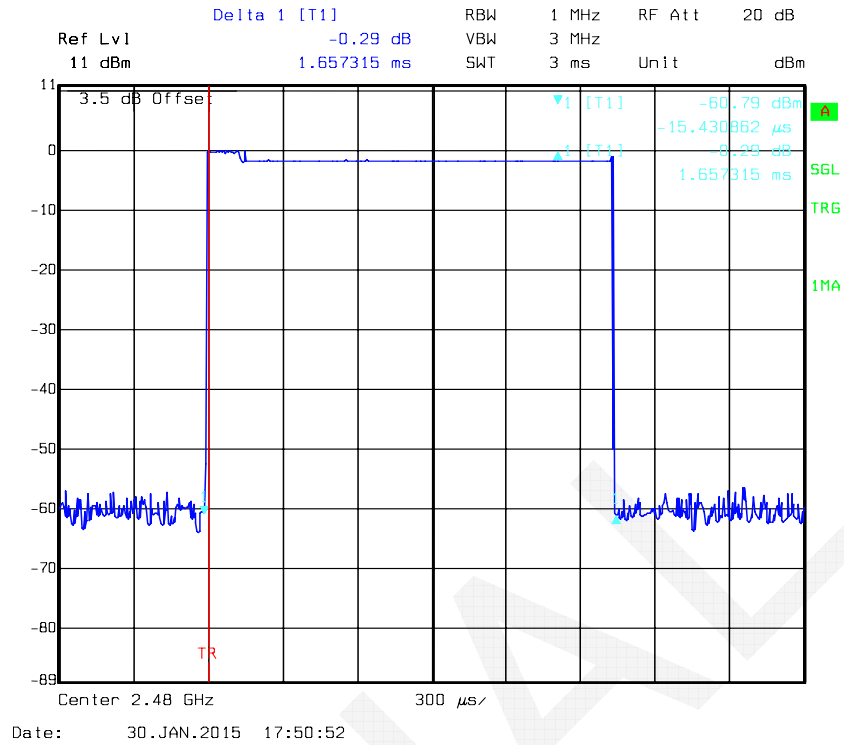


DH5: Low Channel

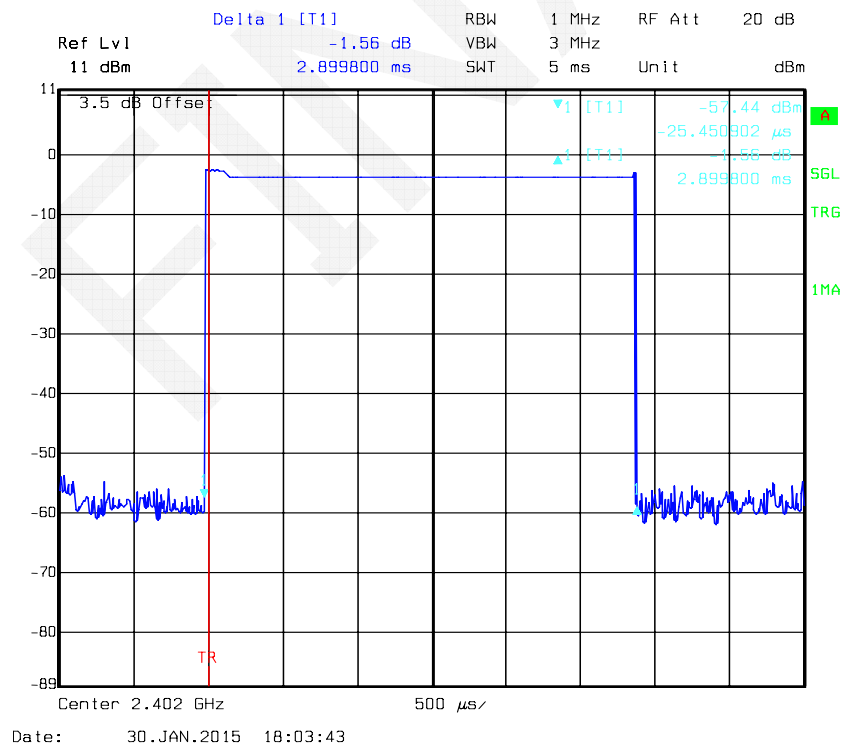

DH5: Middle Channel

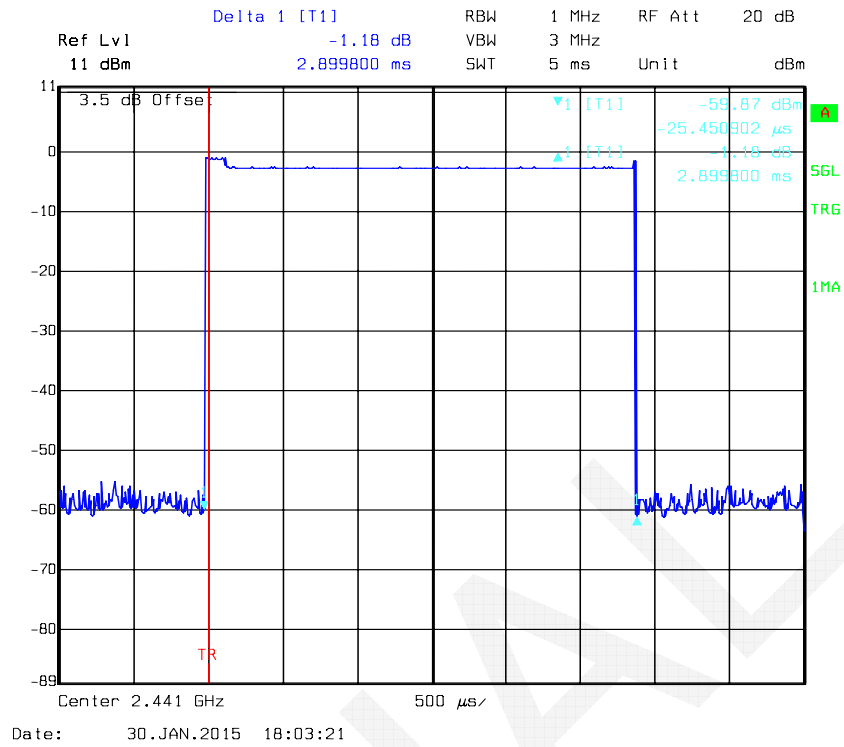


DH5: High Channel

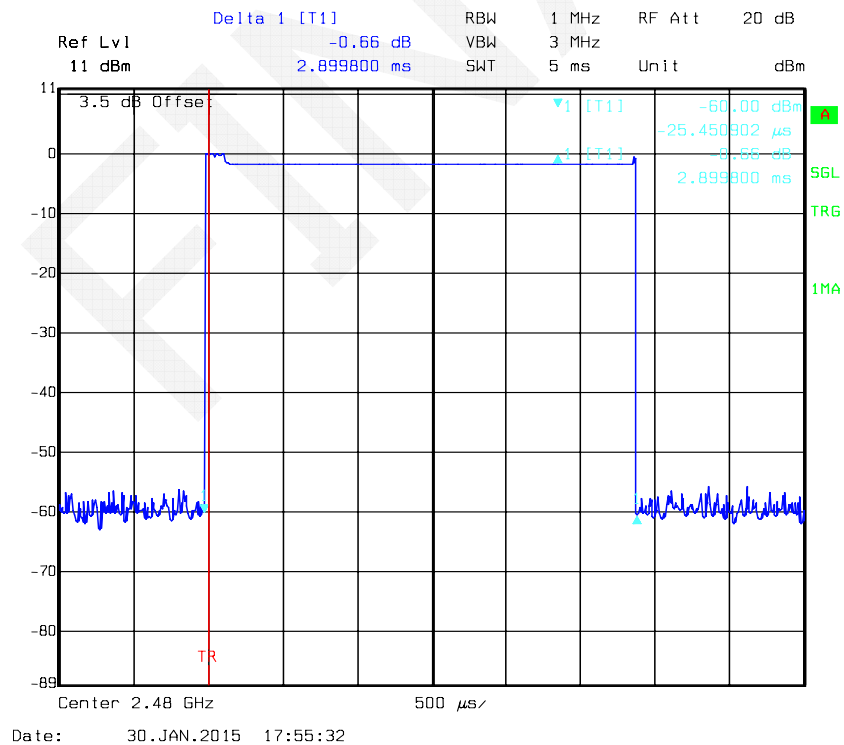


EDR Mode (8-DPSK):


Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH1	Low	0.395	0.126	0.4	Pass
	Middle	0.395	0.126	0.4	Pass
	High	0.395	0.126	0.4	Pass
	Note: Dwell time=Pulse time (ms) × (1600/2/79) ×31.6 s				
DH3	Low	1.657	0.265	0.4	Pass
	Middle	1.657	0.265	0.4	Pass
	High	1.657	0.265	0.4	Pass
	Note: Dwell time=Pulse time (ms) × (1600/4/79) ×31.6 s				
DH5	Low	2.900	0.309	0.4	Pass
	Middle	2.900	0.309	0.4	Pass
	High	2.900	0.309	0.4	Pass
	Note: Dwell time=Pulse time (ms) × (1600/6/79) ×31.6 s				

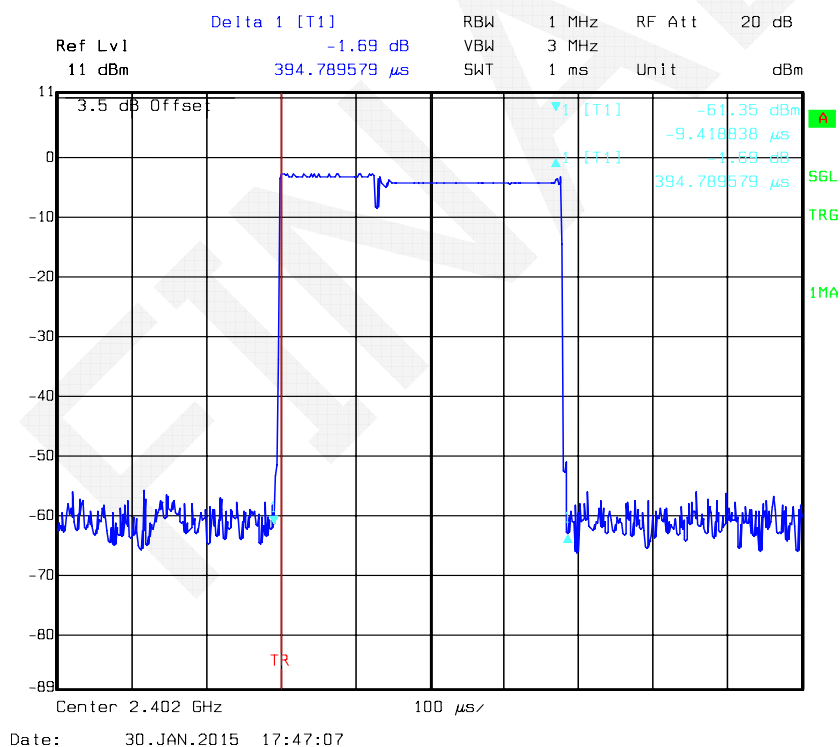DH1: Low Channel


DH1: Middle Channel

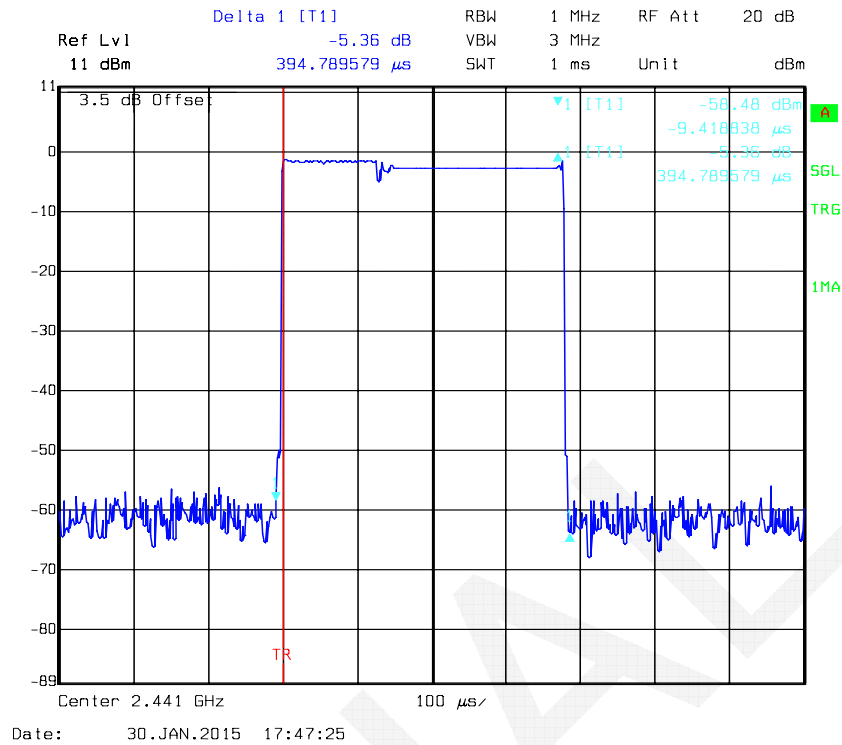


DH1: High Channel

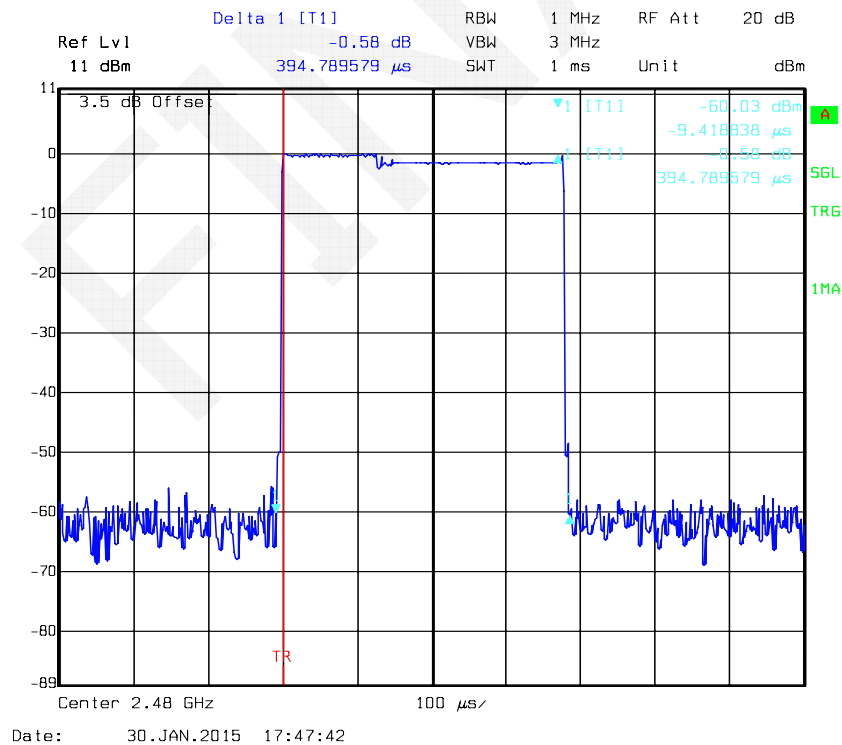


DH3: Low Channel

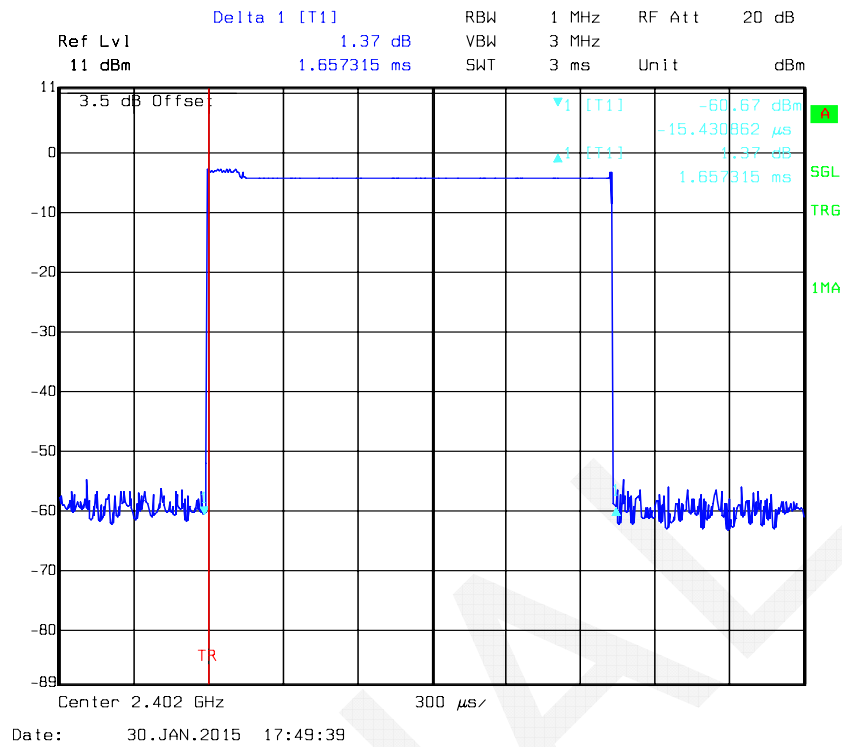


DH3: Middle Channel

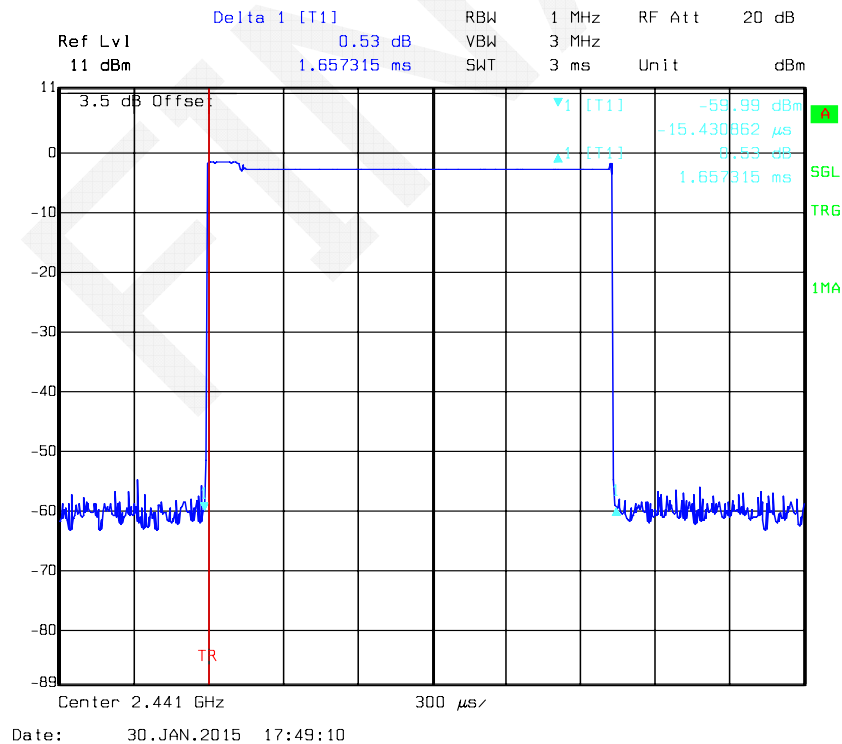


DH3: High Channel

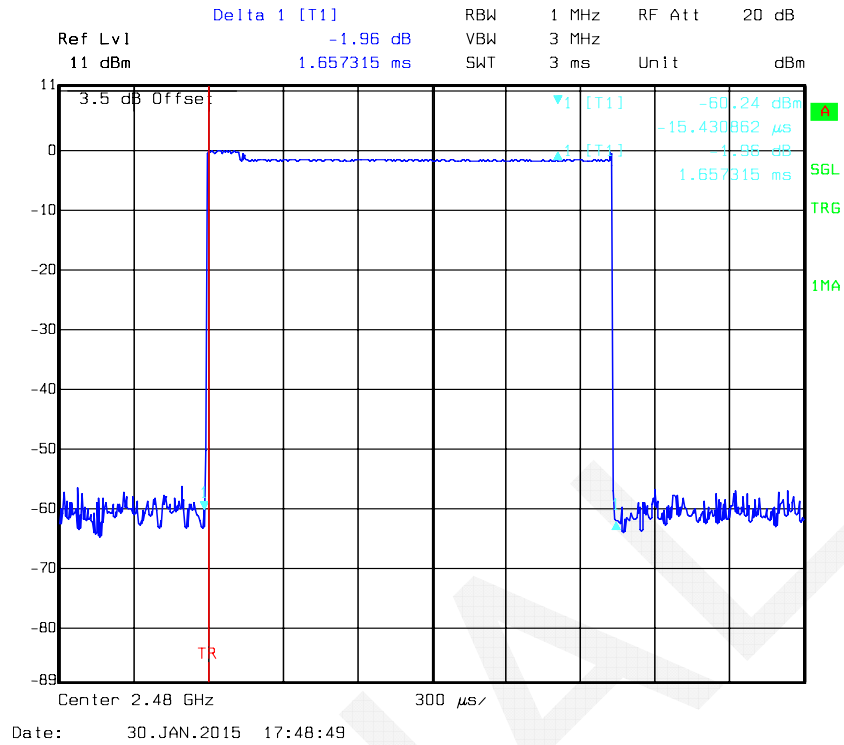


DH5: Low Channel

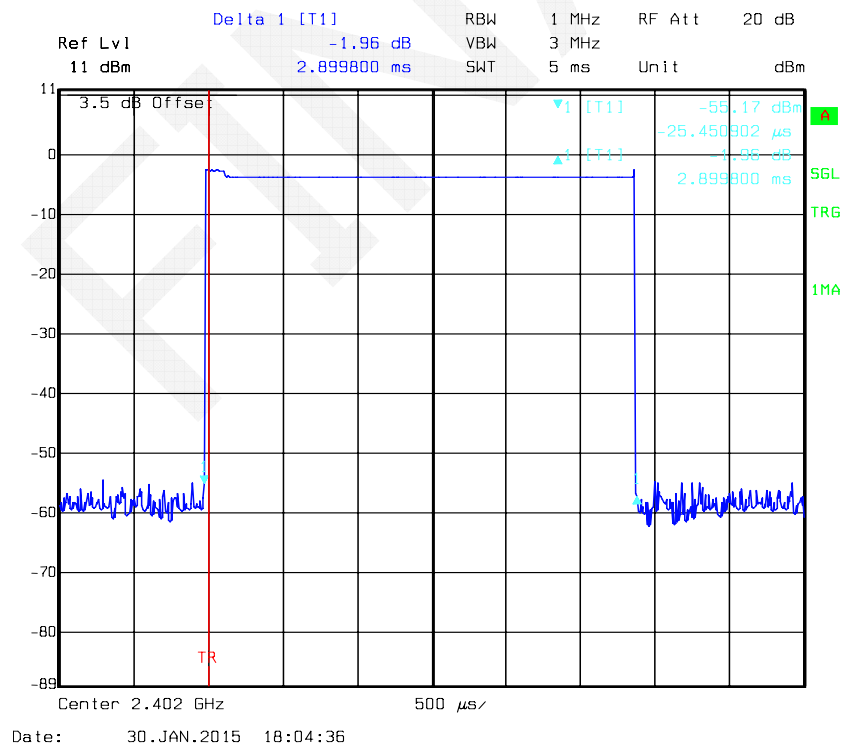

DH5: Middle Channel

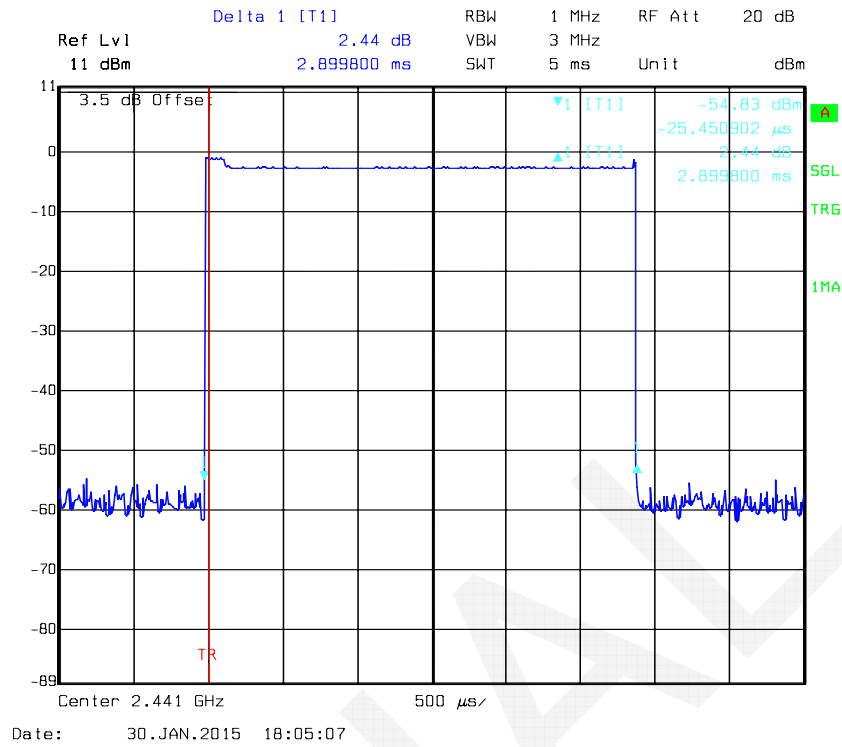

DH5: High Channel

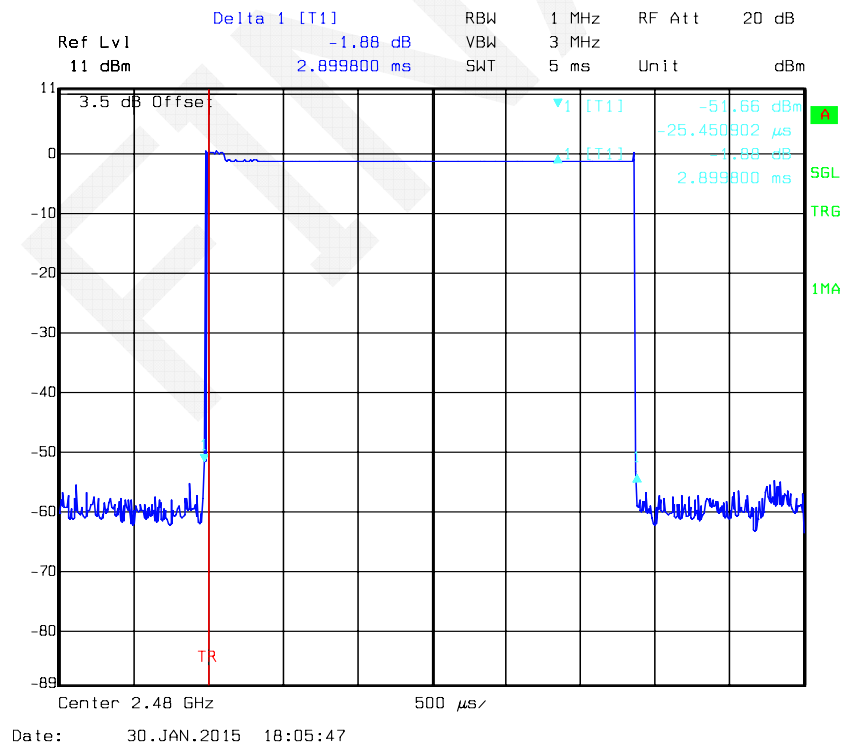

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT**Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	21.9 °C
Relative Humidity:	49 %
ATM Pressure:	101.8 kPa

* The testing was performed by Allen Qiao on 2015-01-30.


Test Result: Compliance.

Test Mode: Transmitting


Mode	Channel	Frequency (MHz)	Output power (dBm)	Limit (dBm)
BDR Mode (GFSK)	Low	2402	-1.91	30
	Middle	2441	-0.45	30
	High	2480	0.97	30
EDR Mode ($\pi/4$ -DQPSK)	Low	2402	-2.47	30
	Middle	2441	-0.96	30
	High	2480	0.41	30
EDR Mode (8-DPSK)	Low	2402	-2.35	30
	Middle	2441	-0.84	30
	High	2480	0.49	30

Note: The data above was tested in conducted mode.


BDR Mode (GFSK):

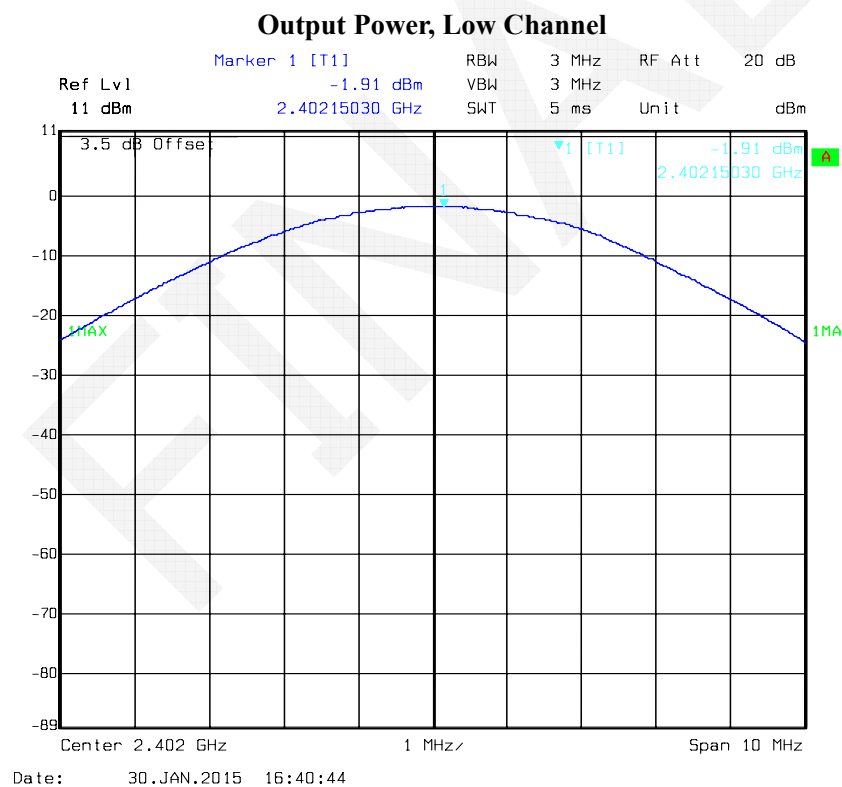

Output Power, Middle Channel

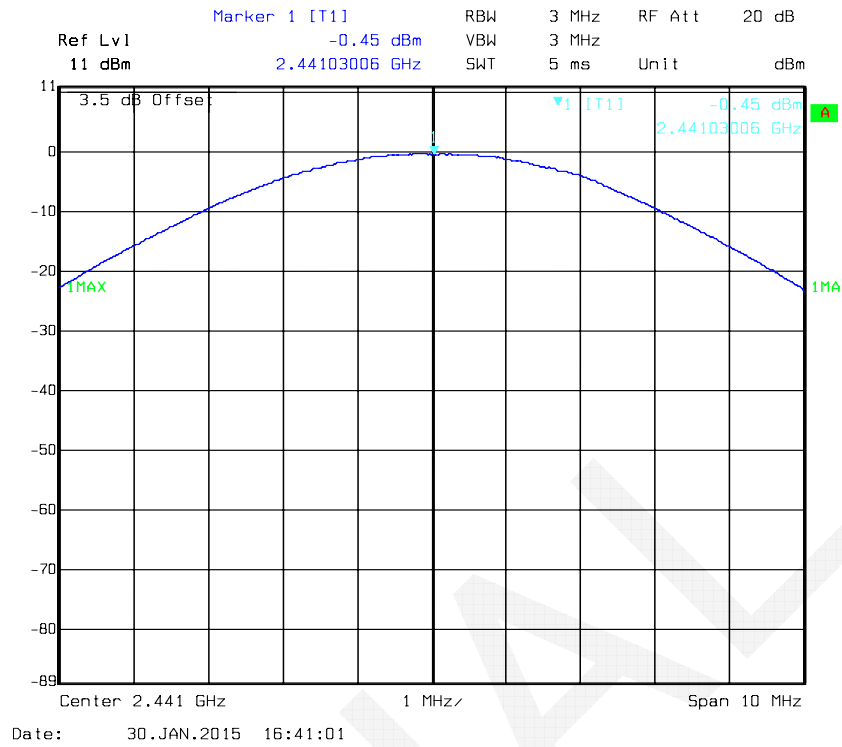


Output Power, High Channel

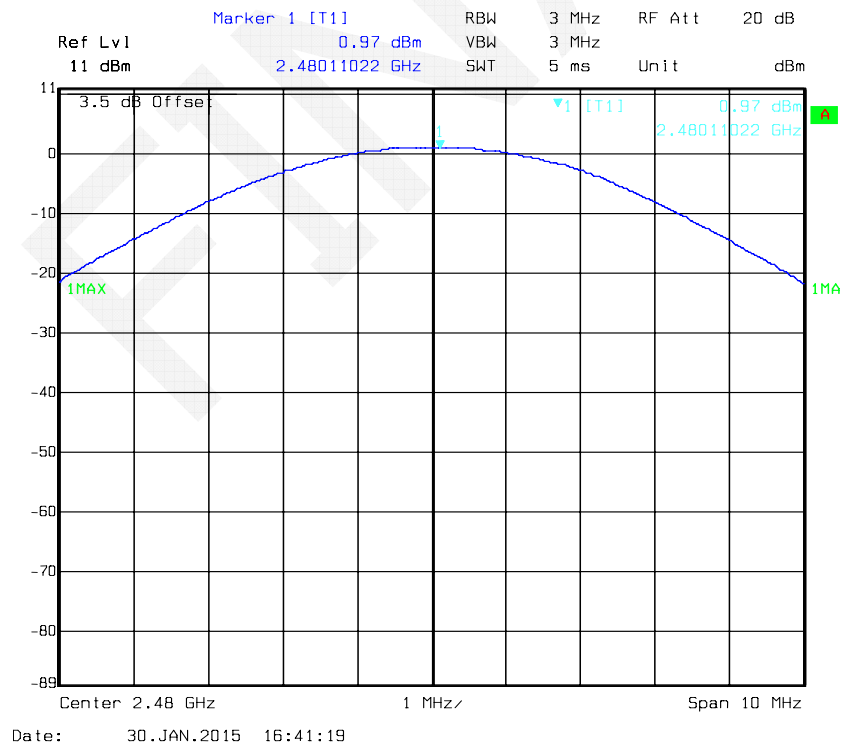


EDR Mode ($\pi/4$ -DQPSK):

Output Power, Low Channel

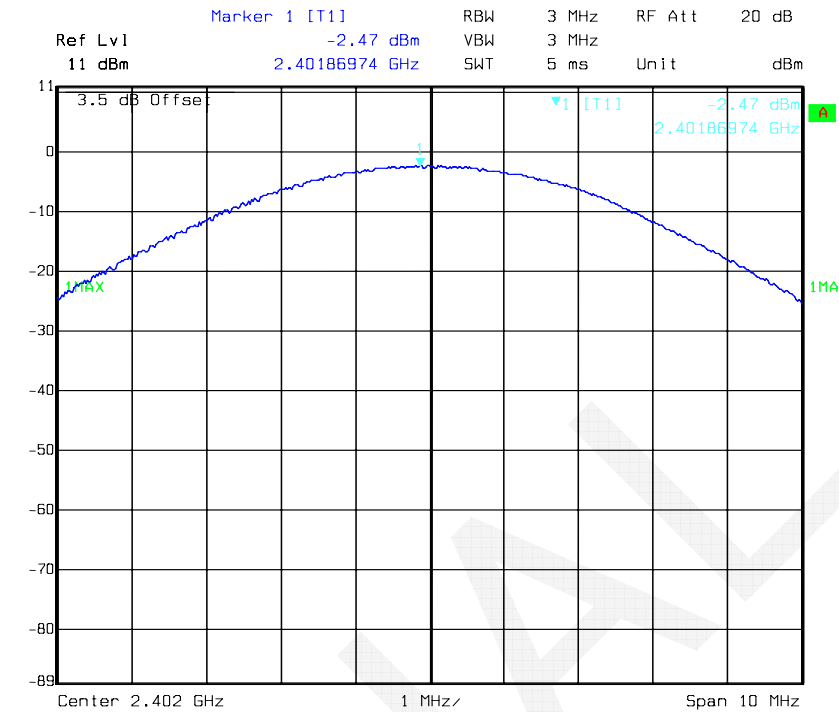

Date: 30.JAN.2015 16:43:43

Output Power, Middle Channel

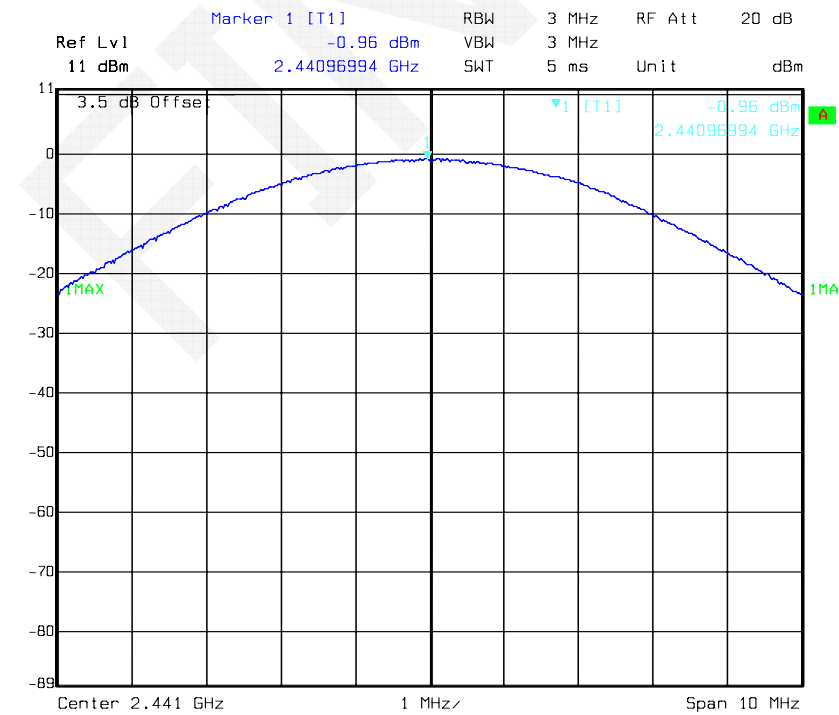

Date: 30.JAN.2015 16:43:16

Ref Lvl 11 dBm

Marker 1 [T1] 0.41 dBm

RBW 3 MHz RF Att 20 dB

VBW 3 MHz

SWT 5 ms Unit dBm

3.5 dB Offset

1MAX


1 [T1] 0.41 dBm 2.47994990 GHz

Center 2.48 GHz 1 MHz


Span 10 MHz

Date: 30.JAN.2015 16:42:48


Output Power, Low Channel

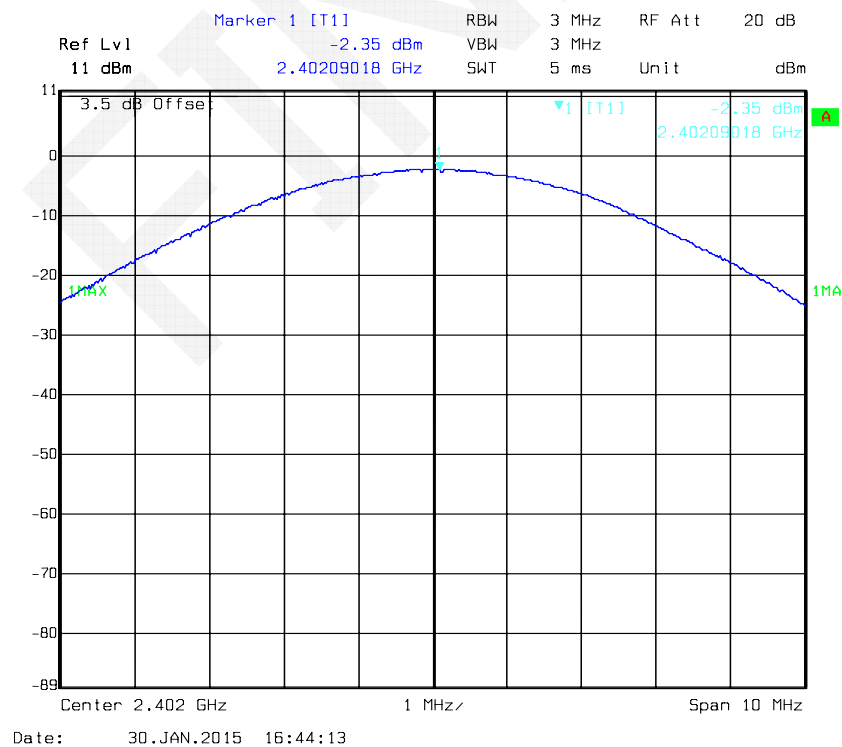

Output Power, Middle Channel

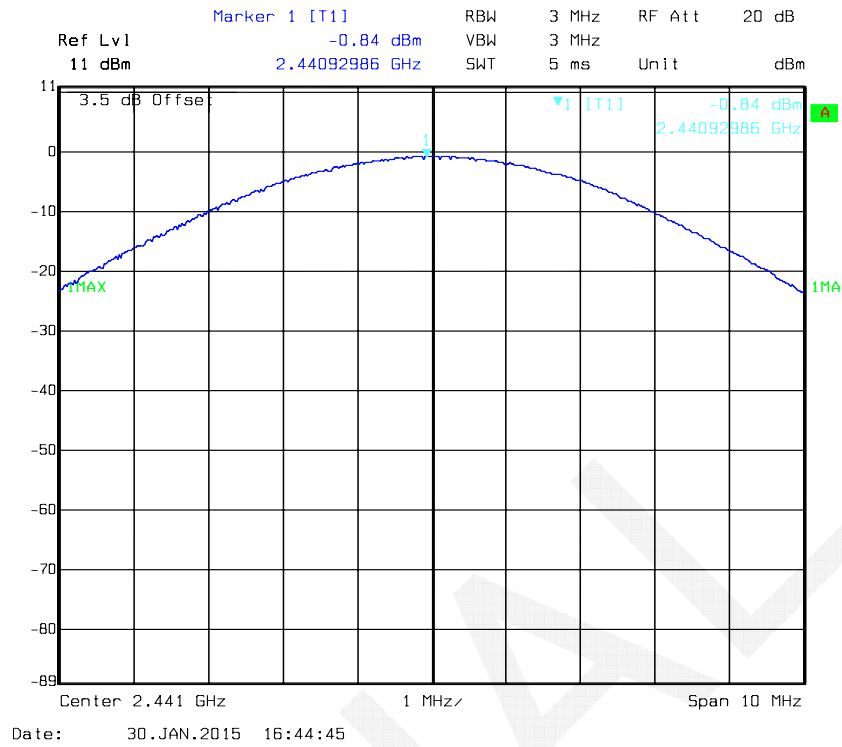

Output Power, High Channel

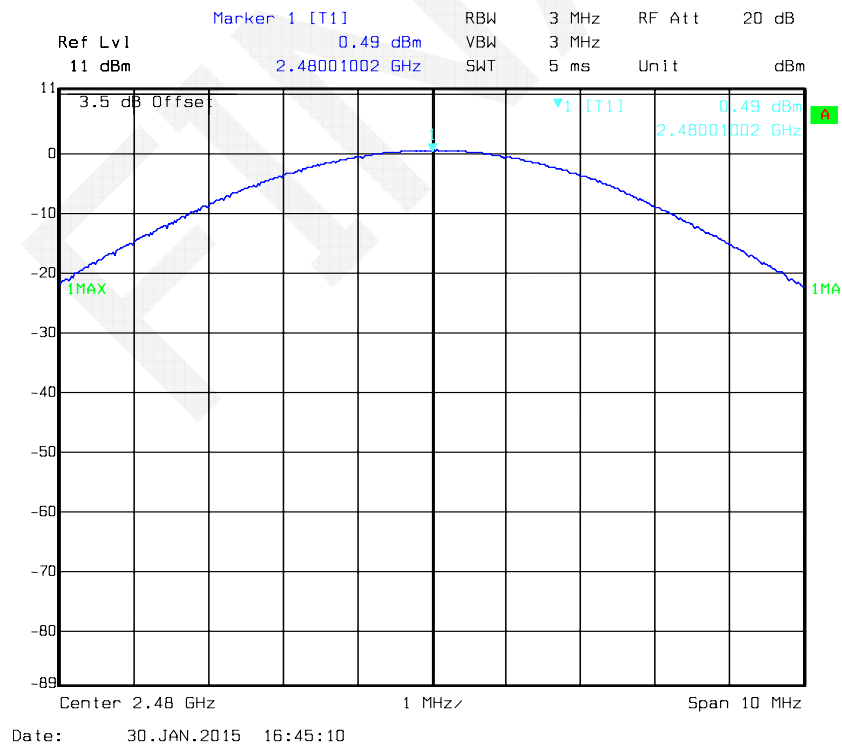

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	21.9 °C
Relative Humidity:	49 %
ATM Pressure:	101.8 kPa

* The testing was performed by Allen Qiao on 2015-01-30.


Test Result: Compliance



BDR Mode (GFSK):

Band Edge, Left Side

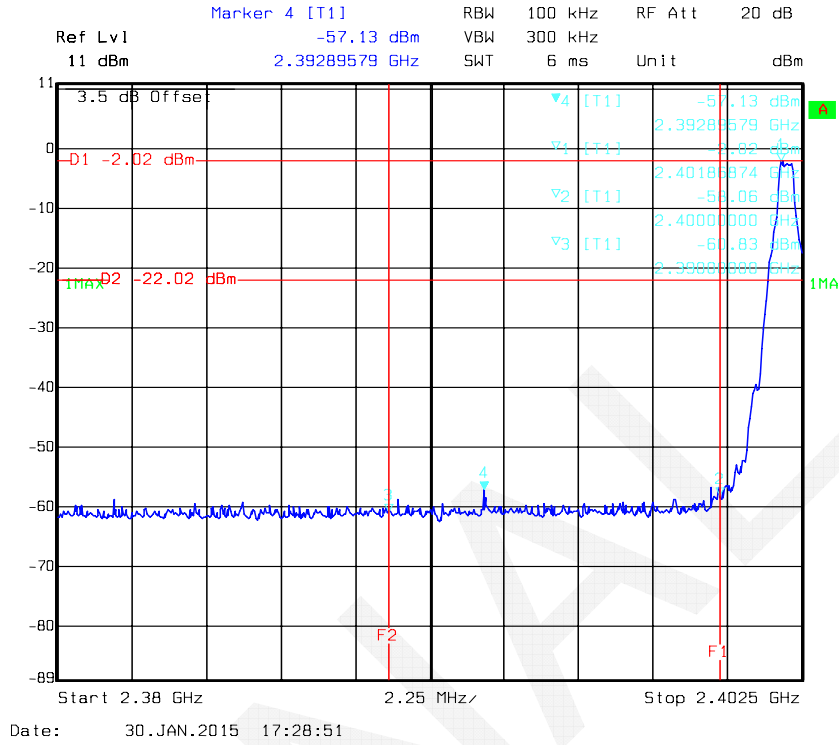


Band Edge, Right Side

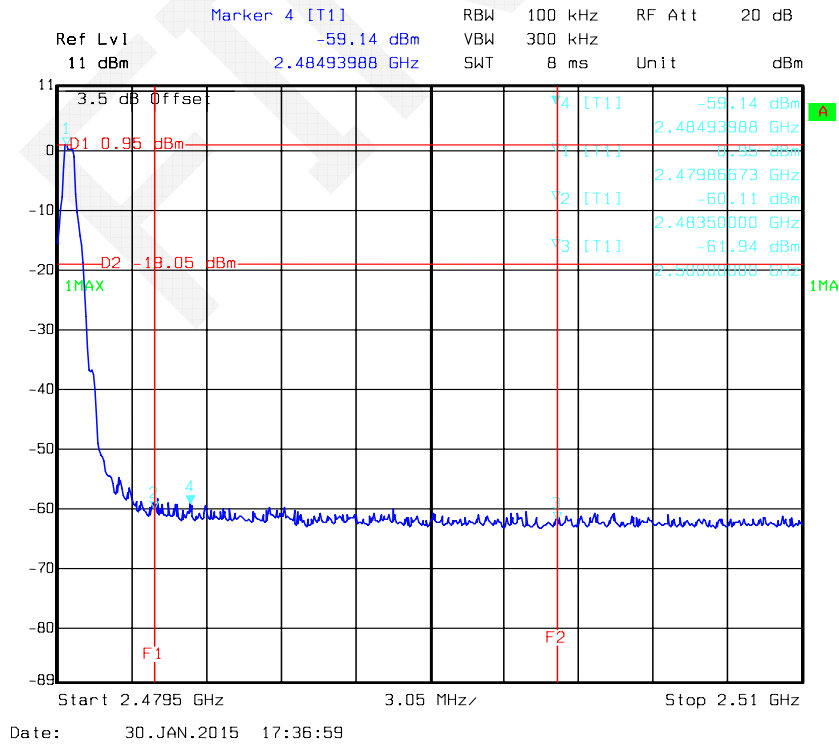

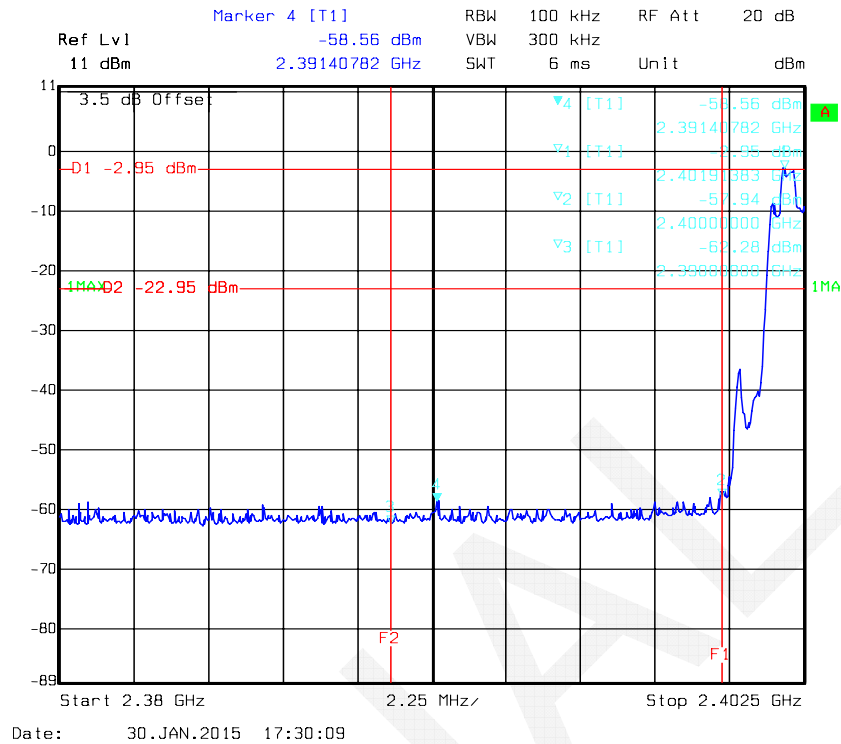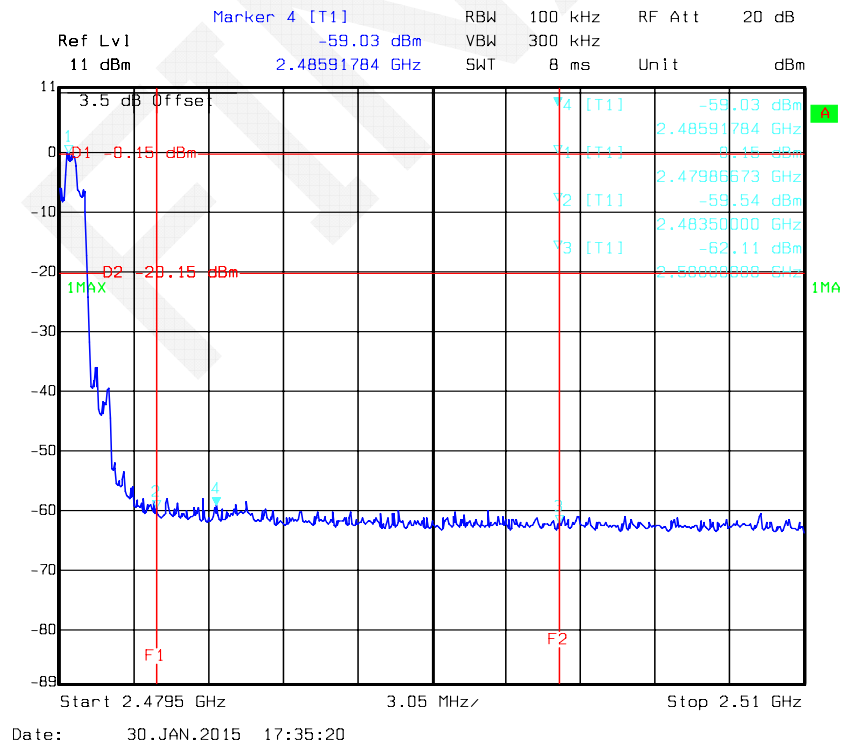*EDR Mode ($\pi/4$ -DQPSK):***Band Edge, Left Side****Band Edge, Right Side**


EDR Mode (8-DPSK):

Band Edge, Left Side

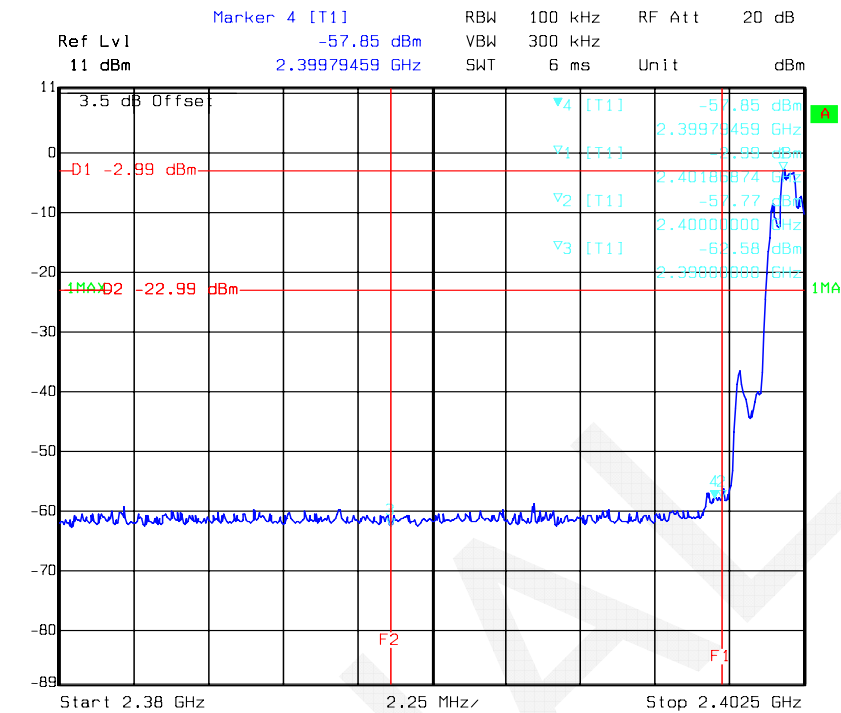

Date: 30.JAN.2015 17:31:27

Band Edge, Right Side

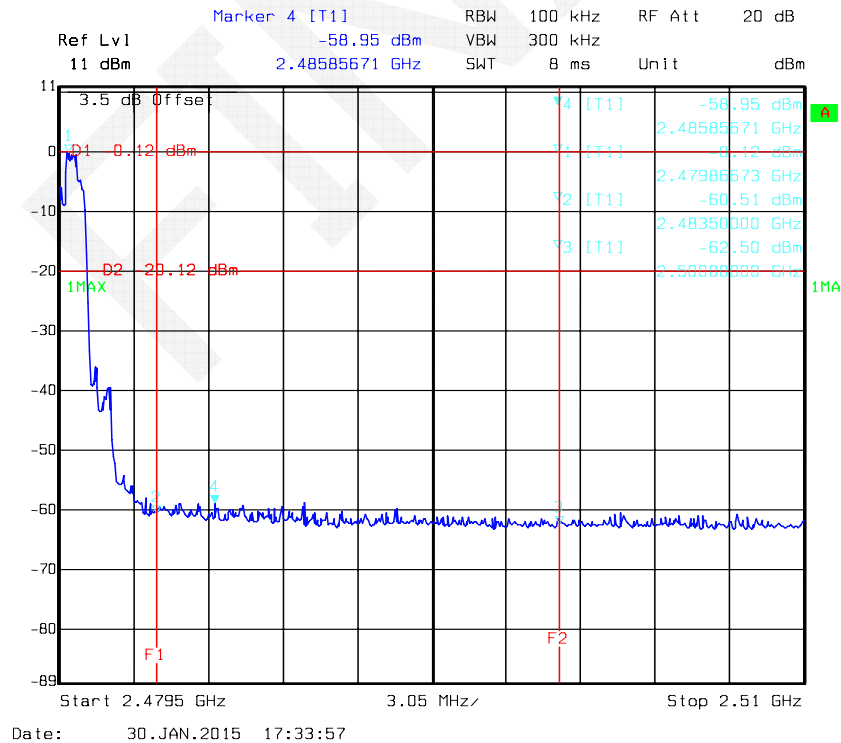

Date: 30.JAN.2015 17:33:57

DECLARATION LETTER

**CHINAOWL**Serve you with zero time difference
CHINAOWL Co., Ltd.

Declaration of Alteration

To Whom It May Concern,

We, CHINAOWL Co., Ltd. hereby declare that there are some differences between our Multiple Models and testing model. Details as below:

Products Description	Name	Bluetooth Speaker		
	Brand	CHINAOWL		
	Project No.	RDG150202003		
Differences Description				
Testing model	Multiple Models	Differences Items		Details
Y018	Y048, Y079, Y069, Y071, Y089, Y062+	Model name and color of appearance		Multiple models just have different color from the testing model

Notes: Testing model-the product's model tested by BACL

Multiple Model- have the same or similar appearance, structure, PCB, Material and function to the testing product's model, and only are different for model name and color of appearance.

Besides the differences in the table above, we declare the products are identical

We guarantee all the information provided above is true, and notice that we'll bear all the consequences caused by any false information or concealing

Best Regards,

Signature

Salina Hu

Salina Hu

Sales Manager

Add: 7/F KIN ON COMM BLDG 49-51, JERVOIS ST SHEUNG WAN, HONGKONG
Tel: +86-755-23993827 Fax: +86-755-86655476

QPDG004R32 Version1.0 (20140717)

******* END OF REPORT *******