

LABELS FOR LOCATION TRANSMITTER INF-B246-X AND INF-B216

Version v1.0
Date July 7, 2015
Author Hanna Luukkonen

© 2015 Sonitor Technologies AS

The contents of this document is the property of Sonitor Technologies AS. Copying and distribution is not permitted without written permission from Sonitor Technologies AS.

LIST OF REVISIONS

Version	Status / Change description	Date	Sign.
V0.1	Initial draft	2015-07-07	HL

TABLE OF CONTENTS

1 GENERAL 4
2 INF-B246-X PRODUCT VARIANT LABELS 5
2.1 INF-B246-B 5
2.1.1 Product label 5
2.1.2 Top product label 5
2.1.3 Base product label 6
2.2 INF-B246-C 6
2.2.1 Product label 6
2.2.2 Top product label 7
2.2.3 Base product label 7
2.3 INF-B246-U 7
2.3.1 Product label 7
2.3.2 Top product label 8
2.3.3 Base product label 8
3 INF-B216 LABELS 9
3.1 PRODUCT LABEL 9
3.2 TOP PRODUCT LABEL 9
3.3 BASE PRODUCT LABEL 9
4 TWO PART FCC STATEMENT 10
5 LABEL MATERIALS AND DURABILITY OF LABELS 11
6 PLACEMENT OF LABELS 12

1 GENERAL

This document illustrates the labels for product variants INF-B246-X and INF-B216. Label placement as well as label materials are described in the document.

2 INF-B246-X PRODUCT VARIANT LABELS

2.1 INF-B246-B

2.1.1 Product label



Figure 1INF-B246-B product label

2.1.2 Top product label

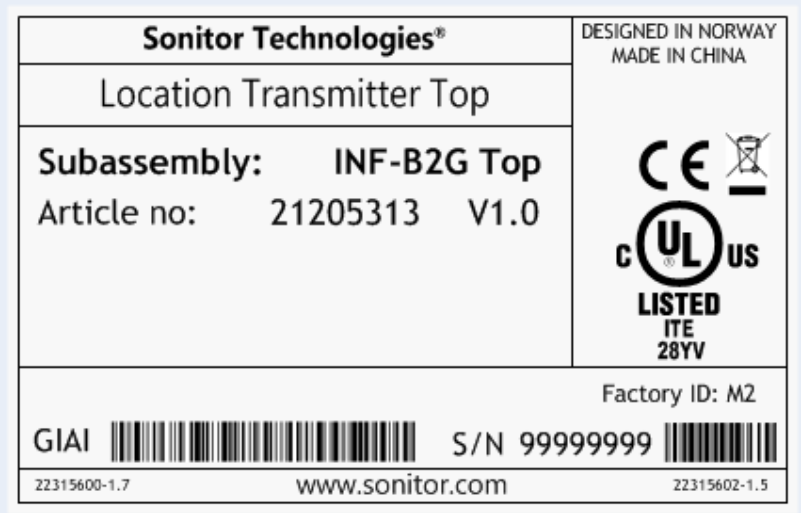


Figure 2 INF-B246-B top product label

2.1.3 Base product label

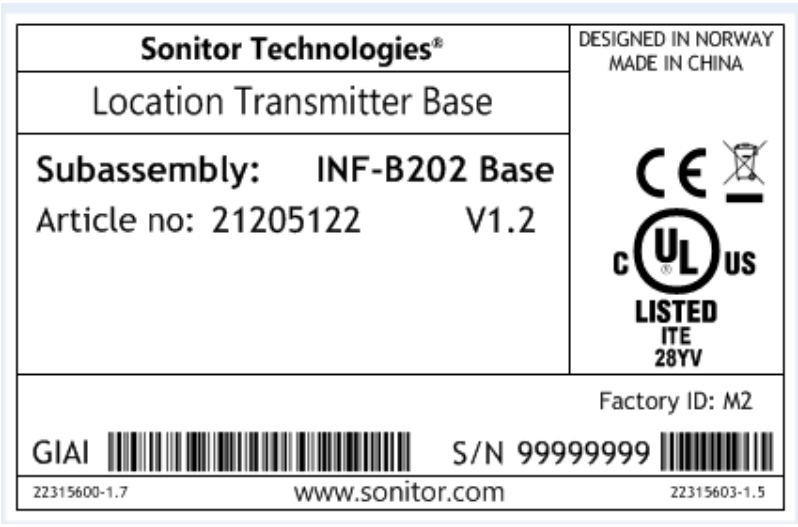


Figure 3 INF-B246-B base product label

2.2 INF-B246-C

2.2.1 Product label



Figure 4 INF-B246-C product label

2.2.2 Top product label

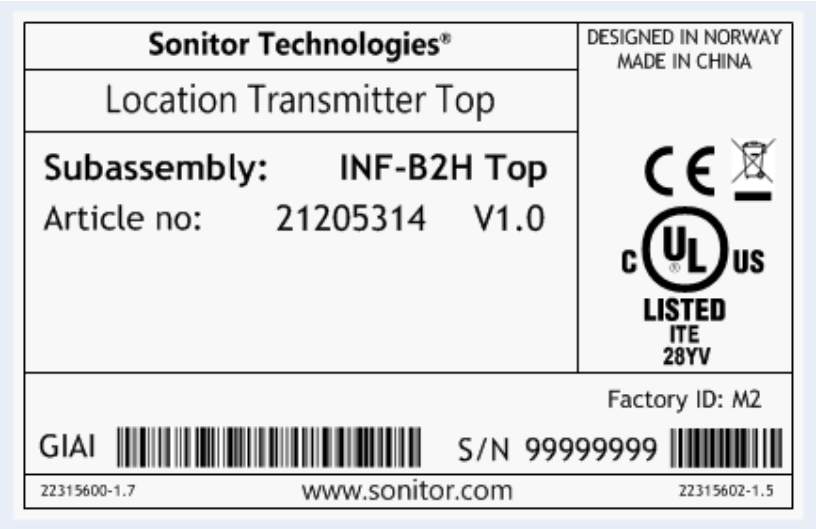


Figure 5 INF-B246-C top product label

2.2.3 Base product label

All variant B246-X and B216 share the same base. See Figure 3 INF-B246-B base product label for illustration.

2.3 INF-B246-U

2.3.1 Product label



Figure 6 INF-B246-U product label

2.3.2 Top product label

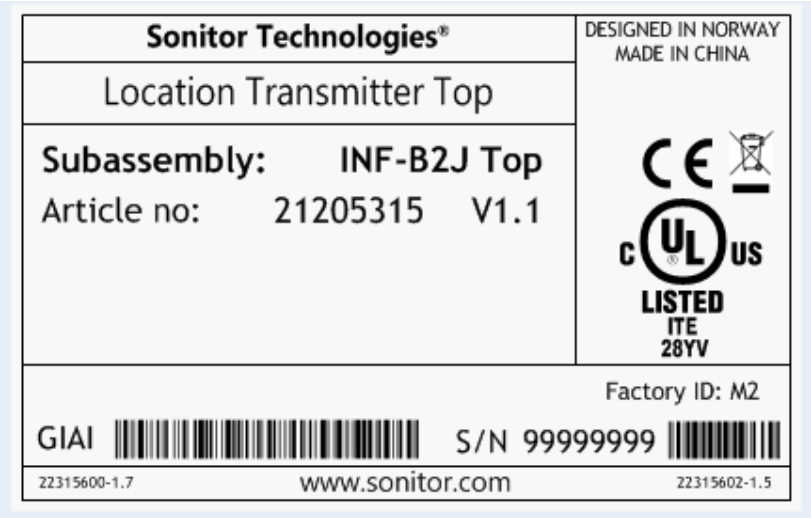


Figure 7 INF-B246-U top product label

2.3.3 Base product label

All variant B246-X and B216 share the same base. See Figure 3 INF-B246-B base product label for illustration.

3 INF-B216 LABELS

3.1 Product label



Figure 8 INF-B216 product label

3.2 Top product label

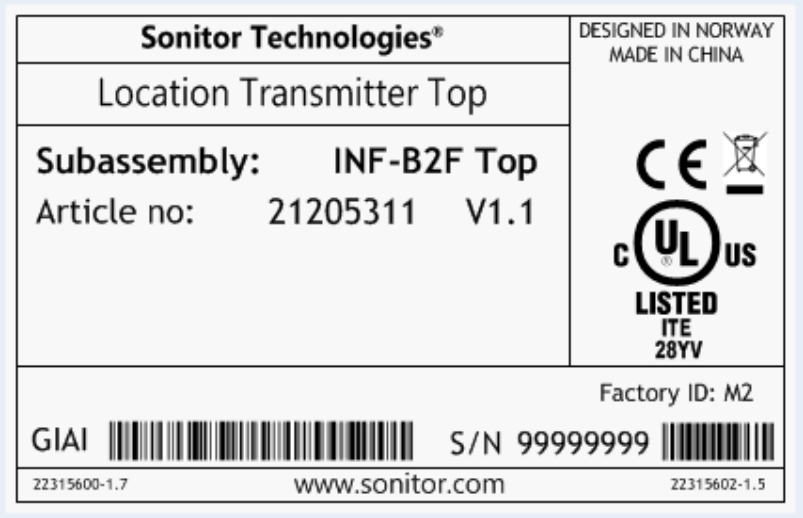


Figure 9 INF-B216 top product label

3.3 Base product label

All variant B246-X and B216 share the same base. See Figure 3 INF-B246-B base product label for illustration.

4 TWO PART FCC STATEMENT

The two part FCC statement is printed as separate label because there is no place for it on the product label.

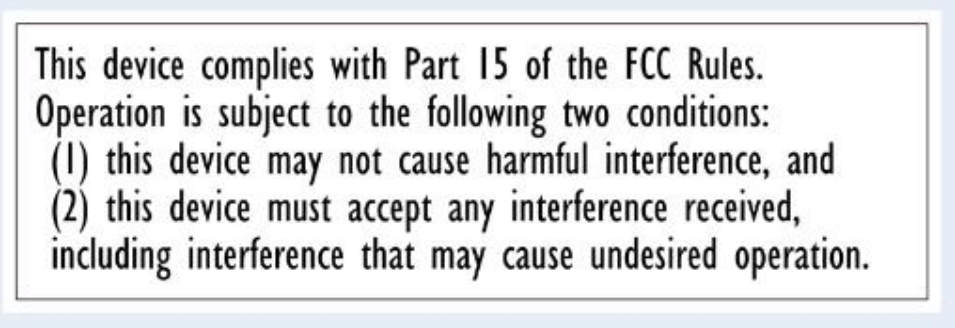


Figure 10 Two part FCC statement

5 LABEL MATERIALS AND DURABILITY OF LABELS

The alternative product label materials are listed in the table below. Only UL approved labels and inks are used.

Description	Part no.	Manuf.
One of the alternatives listed below (matte preferred)		
Label facestock, PET, with ink #1, UL file PGJI2.MH10014	PET	CANNING PRINTING CO LTD (Guangdong, China)
Label facestock, 1M MAT CH PET, UL file PGDQ2.MH26636	1M MAT CH PET	CANNING PRINTING CO LTD (Guangdong, China)
Label facestock, CLEAR PET, WHITE PET, 2M MAT CH PET, UL file PGDQ2.MH26636	CLEAR PET, WHITE PET, 2M MAT CH PET	CANNING PRINTING CO LTD (Guangdong, China)
Label facestock, Matte White polyester, High strength adhesive #310 Acrylic, with ink #1, UL file PGJI2.MH16411	3M 7815	3M
Label facestock, Matte White polyester, Adhesive HP-395, with ink #1, UL file PGJI2.MH16411	3M 7814	3M
Label facestock, Glossy White, High strength adhesive #310 Acrylic, with ink #2, UL file PGJI2.MH16411	3M 7816	3M
Label facestock, White, with ink #6, UL file PGJI2.MH16431	S-514	Strålfors
Label facestock, White, with ink #7, UL file PGJI2.MH16431	S-514	Strålfors
Label facestock, White, with ink #8, UL file PGJI2.MH16431	S-514	Strålfors
Label facestock, Glossy White, with ink #2, UL file PGJI2.MH18322	Z-Ultimate 5A [GL]	Zebra Technologies Europe Ltd

Table 1 List of label materials approved for location transmitter production

6 PLACEMENT OF LABELS

The labels associated to the product variant in question are always placed identically on the product.

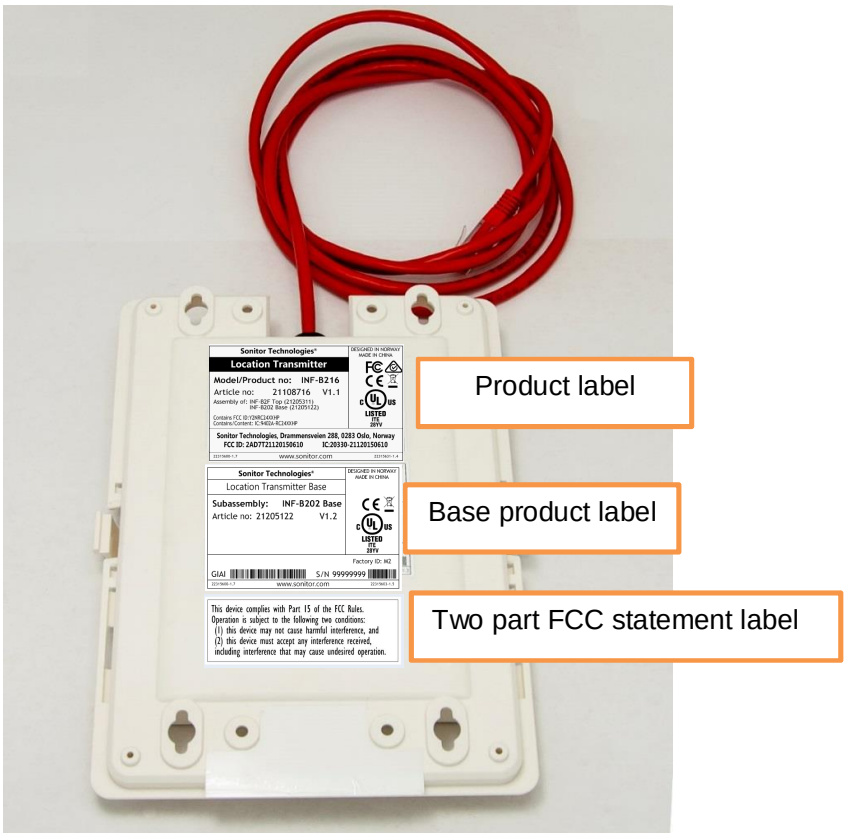


Figure 11 Placement of labels located on the back side of the product

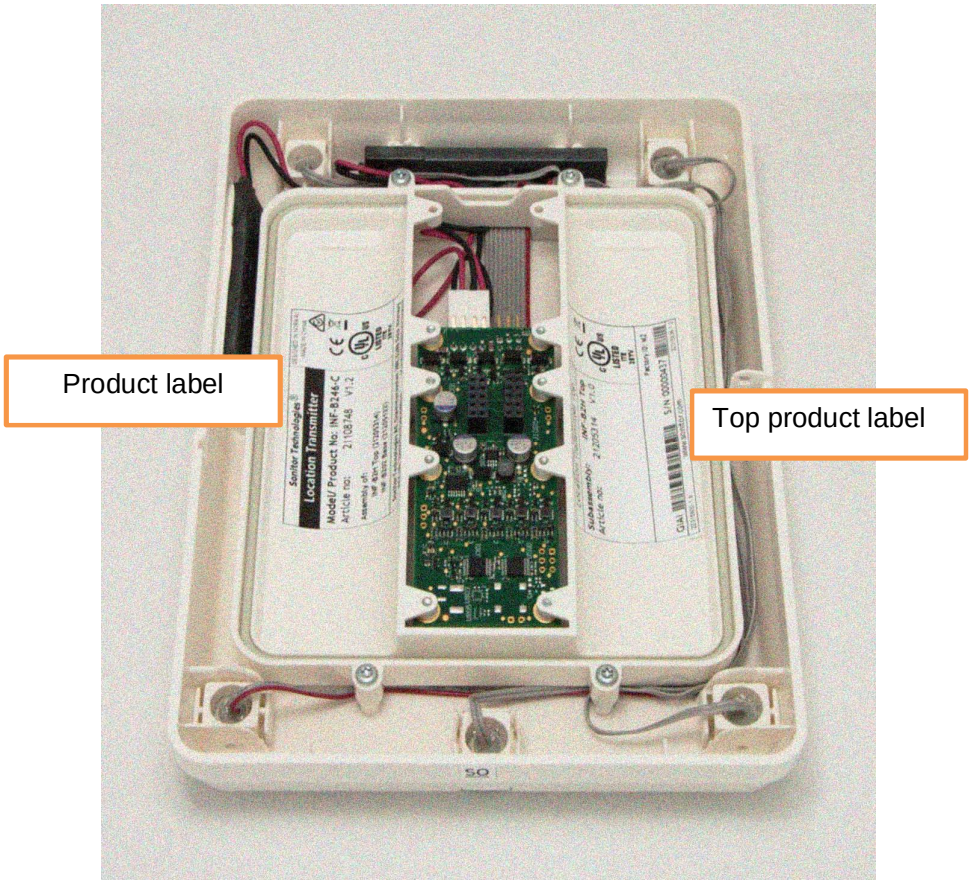


Figure 12 Placement of labels located in the top subassembly