

Global Product Compliance Laboratory
600-700 Mountain Avenue
Room 5B-108
Murray Hill, New Jersey 07974-0636 USA



TESTING
NVLAP LAB CODE: 100275-0

FCC Certification Part 30 Test Report

Product Evaluated

**FA3WA 5G n260 39GHz 8CC
FA3WA 39 GHz Extension Module with AWEWA / AWEWB
FCC ID: 2AD8UFA3WA01**

Customer

Nokia Solutions and Networks, OY
2000 Lucent Lane
Naperville, Illinois 60563

Test Laboratory

Nokia Bell Labs
Nokia, Global Product Compliance Laboratory
600-700 Mountain Avenue, Rm 5B-108
Murray Hill, New Jersey 07974-0636 USA

Date

September 2, 2021

This report shall not be reproduced, in whole or in part without the approval of Nokia Global Product Compliance Laboratory. This report must not be used by the recipient to claim product endorsement by NVLAP or any other agency of the U.S. Government.

Revisions

Date	Revision	Section	Change
8/10/2021	0		Initial Release
9/2/2021	1	4.9	Date correction

Nokia Global Product Compliance Laboratory represents to the client that testing was done in accordance with standard procedures as applicable, and that reported test results are accurate within generally accepted commercial ranges of accuracy in accordance with the scope of our NVLAP Accreditation. Nokia Global Product Compliance reports only apply to the specific samples tested. This report is the property of the client. This report shall not be reproduced except in full without the written approval of the Nokia Global Product Compliance Laboratory.

Nokia Global Product Compliance Laboratory is accredited with the US Department of Commerce National Institute of Standards and Technology's National Voluntary Laboratory Accreditation Program (NVLAP) for satisfactory compliance with criteria established in Title 15, Part 7 Code of Federal Regulations for offering test services for selected test methods in Electromagnetic Compatibility; Voluntary Control Council for Interference (VCCI), Japan; Australian Communications and Media Authority (ACMA). The laboratory is ISO 9001:2008 Certified.

Nokia Global Product Compliance Laboratory represents to the client that the laboratory's accreditation or any of its calibration or test reports in no way constitutes or implies product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Prepared & Reviewed By: W. Steve Majkowski NCE



9/2/2021

Product Certification Filing Lead
Nokia Bell Labs
Nokia, Global Product Compliance Laboratory

Approved By: Ray Johnson



9/2/2021

Technical Manager
Nokia Bell Labs
Nokia, Global Product Compliance Laboratory

Prepared By: Mark Nguyen



9/2/2021

Compliance Engineer
Nokia Bell Labs
Nokia, Global Product Compliance Laboratory

Table of Contents

1. ATTESTATION OF TEST RESULTS	5
2. SUMMARY OF THE TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY.....	6
3. GENERAL INFORMATION	7
3.1 PRODUCT DESCRIPTIONS	7
3.2 EIRP/ PSD COMPLIANCE AND ANTENNA INFORMATION.	7
3.3 ANTENNA FAR FIELD DETERMINATION DISTANCE	8
4. REQUIRED MEASUREMENTS AND RESULTS.....	9
4.1 SECTION 2.1046 MEASUREMENT REQUIRED: RF POWER OUTPUT	10
4.1.1 <i>RF Power Output Measurement</i>	10
4.1.1.1 RF Power Output Results.....	11
4.2 SECTION 2.1047 MEASUREMENT REQUIRED: MODULATION CHARACTERISTICS	20
4.2.1 <i>Modulation Characteristics Measurement</i>	20
4.2.2 <i>Modulation Measurements Results:</i>	20
4.3 SECTION 2.1049 MEASUREMENT REQUIRED: OCCUPIED BANDWIDTH AND EDGE OF BAND EMISSIONS.	22
4.3.1 <i>Results Occupied Bandwidth (Signal Bandwidth)</i>	23
4.3.1.1 Results - Occupied Bandwidth Carrier Aggregation.....	26
4.3.1.2 99% Signal Bandwidth Plots	28
4.3.2 <i>Occupied Bandwidth-Edge of Block Emissions</i>	45
4.3.3 <i>Requirements 39 GHz Emissions Limits</i>	45
4.3.4 <i>Measurement Offset and MIMO</i>	46
4.3.5 <i>Mask Parameters</i>	46
4.3.6 <i>Measurement Path Adjustments</i>	46
4.3.7 <i>Edge of Band Measurements</i>	47
4.3.7.1 Initial Results - Edge of Band Measurements.....	47
4.3.8 <i>Total Radiated Power Evaluation of Out Of Band Emissions</i>	48
4.3.8.1 Total Radiated Power Results	48
4.3.8.2 Out Of Band Emissions Results.....	50
4.4 SECTION 2.1051 MEASUREMENT REQUIRED: SPURIOUS EMISSIONS AT THE ANTENNA TERMINALS	57
4.4.1 <i>Section 2.1051 Spurious Emissions at Antenna Terminals</i>	57
4.4.2 <i>Required Limit</i>	57
4.4.3 <i>Results</i>	57
4.5 SECTION 2.1053 MEASUREMENT REQUIRED: FIELD STRENGTH OF SPURIOUS RADIATION	58
4.5.1 <i>Spurious Radiation and Radiated Emissions Requirements</i>	59
4.5.2 <i>Radiated Spurious Emissions Measurements: 40 GHz - 100 GHz</i>	60
4.5.2.1 Bandwidth Limits and Corrections: Radiated Measurements 40 GHz - 100 GHz	61
4.5.2.2 Resolution Bandwidth and # of Points:.....	61
4.5.2.3 Part 30 Limit:	61
4.5.2.4 Emissions Corrections	61
4.5.3 <i>Field Strength of Spurious Radiation Results:</i>	63
4.5.4 <i>Transmitter Measurements of Radiated Spurious Emissions</i>	65
4.6 SECTION 2.1055 MEASUREMENT OF FREQUENCY STABILITY.....	85
4.6.1 <i>Frequency Stability Results AC Model:</i>	85

4.6.2	<i>Frequency Stability Results DC Model:</i>	85
4.7	LIST OF TEST EQUIPMENT	103
4.7.1	<i>List of Radio Measurements Test Equipment</i>	103
4.7.2	<i>List of Radiated Emissions Test Equipment</i>	103
4.7.3	<i>List of Frequency Stability Test Equipment</i>	105
4.8	PHOTOGRAPHS OF THE TEST SETUPS	106
4.9	FACILITIES AND ACCREDITATION	112
5.	APPENDIX A - CALIBRATION CERTIFICATES	114

1. ATTESTATION OF TEST RESULTS

Equipment Under Test (EUT)	FA3WA 5G n260 39GHz 8CC FA3WA Extension Module with AWEWA / AWEWB
Serial Number(s)	Radiated Emission, FA3WA YK2118000017 & YK2118000027 with AWEWB (DC) YK2118000031 Radio Tests: FA3WA YK2118000028 & YK2118000029, with AWEWB (DC) YK2118000001, Frequency Stability Tests: FA3WA YK2118000033 & YK2118000034 with AWEWA (AC) YK2118000002, AWEWB (DC) YK2118000015,
FCC ID	2AD8UFA3WA01
Model Name	ASMR Family – FA3WA, with AWEWA (AC), AWEWB (DC)
Hardware Version	FA3WA - 475002A.X31, AWEWA - 475170A AWEWA / 475171A AWEWB /
GPCL Project Number	2021-0072
Manufacturer	NOKIA SOLUTIONS AND NETWORKS OY KARAKAARI 7, FI-02610 ESPOO FINLAND
Test Requirement	• 47 CFR FCC Part 2 and Part 30 (Part 2.1047, 2.1055)
Test Standard(s)	• 47 CFR FCC Parts 2 and Part 30 • KDB 971168 D01 Power Meas License Digital Systems v03r01 April 9, 2018 • KDB 662911 D01 Multiple Transmitter Output v02r01 Oct 2013 • KDB 842590 D01 Upper Microwave Flexible Use Service v01r01–April 2020 • Procedures on TRP Compliance for Out of Band and Spurious Emissions C63.26 mmWave JTG - Version # 1 July 14th, 2018
Reference(s)	• ANSI C63.26 (2015) • ANSI C63.4 (2014) • TR 14-1001, MMW Measurements with Harmonic Mixers (April-4-2014)
Test Date	June 4, 2021 – July 20, 2021
Test Performed By	Nokia Global Product Compliance Laboratory 600-700 Mountain Avenue P.O. Box 636 Murray Hill, NJ 07974-0636
FCC Registered Test Site Number	Designation Number: US5302 , Test Firm Registration Number: 395774
Product Engineer(s)	Ron Remy, Obi Okorie
Lead Engineer	W. Steve Majkowski
Test Engineer (s)	W. Steve Majkowski, Mike Soli, Chris Polanco, Jaideep Yadav, Joe Bordonaro
Test Results: The EUT, <i>as tested</i> met the above listed Test Requirements. The decision rule employed is binary (Pass/Fail) based on the measured values without accounting for Measurement Uncertainty or any Guard Band. The measured values obtained during testing were compared to a value given in the referenced regulation or normative standard. Report copies and other information not contained in this report are held by either the product engineer or in an identified file at the Global Product Compliance Laboratory in New Providence, NJ.	

2. SUMMARY OF THE TEST RESULTS

47 CFR FCC Sections	Description of Tests	Compliance Results
2.1046, 30.202 (a)	RF Power Output	Pass
2.1047,	Modulation Characteristics	Pass
2.1049, 30.203	(a) Occupied Bandwidth (b) Edge-of-Band Emissions	Pass
2.1051, 30.203	Spurious Emissions at Antenna Terminals - Radiated	Pass
2.1053, 30.203	Field Strength of Spurious Radiation	Pass
2.1055,	Measurement of Frequency Stability	Pass

2.1 Measurement Uncertainty

The results of the calculations to estimate uncertainties for the several test methods and standards are shown in the Tables below. These are the worst-case values.

Worst-Case Estimated Measurement Uncertainties

Standard, Method or Procedure	Condition	Frequency MHz	Expanded Uncertainty (k=2)
a. Classical Emissions, (e.g., ANSI C63.4, CISPR 11, 14, 22, etc., using ESHS 30,	Conducted Emissions	0.009 - 30	±3.5 dB
	Radiated Emissions (AR-8 Semi-Anechoic Chamber)	30 MHz – 200MHz H	±5.4 dB
		30 MHz – 200 MHz V	±5.4 dB
		200 MHz – 1000 MHz H	±4.7 dB
		200 MHz – 1000 MHz V	±4.7 dB
		1 GHz- 18 GHz	±3.3 dB

Antenna Port Test	Signal Bandwidth	Frequency Range	Expanded Uncertainty (k=2), Amplitude
Occupied Bandwidth, Edge of Band,	10 Hz 100 Hz 10 kHz to 1 MHz 1MHz to 100 MHz	9 kHz to 20 MHz 20 MHz to 1 GHz 1 GHz to 10 GHz 10 GHz to 40 GHz:	±2.2 dB
Conducted Spurious Emissions	30 kHz to 100 MHz	10 MHz to 40 GHz:	±2.8 dB
RF Power, Channel Power	10 Hz to 100 MHz	10 MHz to 40 GHz	±1.4 dB

3. GENERAL INFORMATION

3.1 Product Descriptions

The equipment under test (EUT) has the following specifications.

Table 3.1.1 Product Specifications

Specification Items	Description
Product Type	FA3WA 5G n260 39GHz 8CC; FA3WA 5G AirScale 39 GHz mmWave Radio Extension Module
Radio Type	Intentional Transceiver
Power Type	DC
Modulation	QPSK, 16QAM, 64QAM, 256QAM
Operating Frequency Range	TDD Tx/Rx = 37 – 40.0 GHz, NR Band n260
Channel Bandwidth	1400 MHz
Max Radiated Power (EIRP)	52 dBm EIRP per polarizations; 55 dBm EIRP Total for the two polarizations.
Antenna Gain	23 dBi
Operating Mode	2x2 MIMO (2 duplex Tx/Rx Ports)
Software Version	5G19B
Hardware Version	475002A.X31 - FA3WA
Antenna(s)	Refer to Section 3.2

3.2 EIRP/ PSD Compliance and Antenna Information.

The product incorporates integrated antennas. Externally mounted antennas cannot be attached to the unit or mounted remotely. The units integrated antennas are electronically steerable with a maximum gain of 23 dBi. There is a single antenna board assembly inside the product. This antenna assembly has two individually polarized antenna Tx/Rx modules. Each antenna Tx/Rx modules is an 8x12 matrix (96 elements each). One antenna Tx/Rx modules is vertically polarized, and the second antenna Tx/Rx modules is horizontally polarized. The antennas nominal RF drive level is 29 dBm. The 29 dBm RF power and 23 dBi gain results in a 52 dBm EIRP per assembly. The sum of the two 52 dBm EIRP beams results in a maximum EIRP of 55 dBm. Antenna Gain vs frequency is detailed in Exhibit 6 of the filing package. The FA3WA and AWEWA/B use the same antenna board assembly.

3.3 Antenna Far Field Determination Distance

The Moongilan Test (1) was performed to determine the far field boundary location using calculations and low power measurements. For the antenna array we can calculate the Fraunhofer distance from

$$d_{ff} \geq 2D^2/\lambda$$

where d_{ff} = Far Field distance in meters,

D is the maximum size of the radiating array λ = wavelength of the operating signal in meters

The individual polarization antenna array height is 135 mm and is 77 mm wide with a 155mm diagonal. The diagonal for both arrays is 301 mm.

At 40 GHz the individual array dimensions results in a minimum Fraunhofer far field distance, d_{ff} , of 6.4 meters.


At 40 GHz the overall array dimensions results in a minimum Fraunhofer far field distance, d_{ff} , of 24 meters.

While the Fraunhofer far field distance is the minimum distance where the far field can occur, it does not predict the actual distance where the far field occurs. The Moongilan Test determines the actual distance where the far field occurs for the specific configuration under test.

Measurements for the Moongilan Test were performed at low power using a standard gain horn antenna. In the horizontal polarization the determined boundary was 6.0 m.

To eliminate any inconsistency all Power, OBW and OOB measurements were made at 6.5 m.

(1) The Moongilan Test is named in honor of the late Dheena Moongilan who discovered it and formulated its use into C63.26.

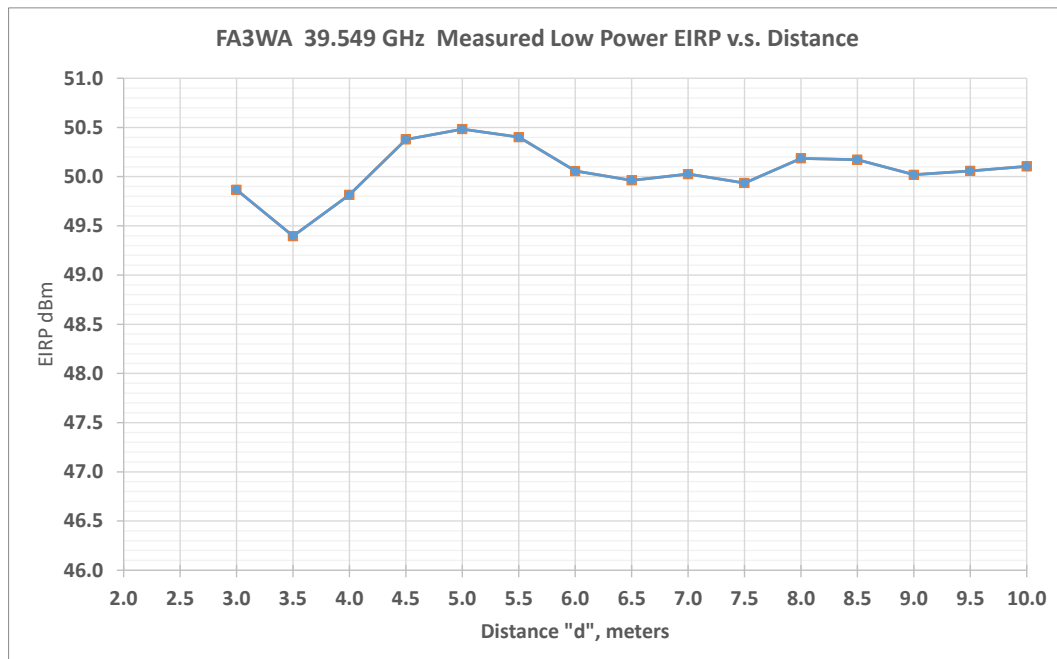

4. REQUIRED MEASUREMENTS AND RESULTS

Per 47CFR FCC Section 2.1033(c)(14), the following certification tests are required by Section 2.1046 through Section 2.1057. These tests are identified in Table 4.0a below.

Table 4.0a Required Certification Measurements

47 CFR FCC Sections	Description of Tests	Test Required for Class II Authorization
2.1046, 30.202 (a)	RF Power Output (a) Power Limits, EIRP, PSD	Yes
2.1047,	Modulation Characteristics	Yes
2.1049, 30.203	(a) Occupied Bandwidth (b) Out-of-Band Emissions	Yes
2.1051, 30.203	Spurious Emissions at Antenna Terminals	Yes
2.1053, 30.203, 30.204, 15.109(a) Class B	Field Strength of Spurious Radiation	Yes
2.1055,	Measurement of Frequency Stability	Yes

The measurements were conducted in accordance with the procedures set out in Section 2.1041 and as appropriate per the test Standards listed in Table 4.0b below. The comprehensive list of tests performed included measurements at Left, Center and Right side of the Part 30 Band. These tests are presented to demonstrate compliance with FCC requirements.

The procedures defined in ANSI C63.26-2015 and KDB 971168 D01 were developed for conducted measurements. The mmWave Joint Technical Group with FCC oversight has been working diligently on revisions to add mmWave measurements for Upper Microwave Flexible Use Service (UMFUS). The new KDB, 842590, is closely aligned with those efforts.

All of the measurements performed herein were performed as radiated measurements. In order to perform these measurements, the equipment settings required to enable the FSW internal noise reduction capability were used. This typically required the use of average detector, and multiple sweep averages. The individual test sections identify any changes in measurement process.

Table 4.0b Test Standards Used for Radiated Measurements of Radio Performance

Test Standard(s)	• 47 CFR FCC Parts 2 and Part 30 • KDB 971168 D01 Power Meas License Digital Systems v03r01 April 9, 2018 • KDB 662911 D01 Multiple Transmitter Output v02r01 Oct 2013 • KDB 842590 D01 Upper Microwave Flexible Use Service v01r01–April 2020 • Procedures on TRP Compliance for Out of Band and Spurious Emissions C63.26 mmWave JTG - Version # 1 July 14th 2018
Reference(s)	• 47 CFR FCC Part 2 and Part 30 • ANSI C63.26 (2015) • ANSI C63.4 (2014) • TR 14-1001, MMW Measurements with Harmonic Mixers (April-4-2014)

4.1 Section 2.1046 MEASUREMENT REQUIRED: RF POWER OUTPUT

The product incorporates internal antennas that are part of the signal source. There is no antenna terminal connection on the product. Therefore, this test as implemented is not a measurement of the total conducted power at the antenna terminal but rather the total radiated power in terms of the maximum EIRP radiated by the product.

The FCC recognized that these products would use integrated antennas and likewise structured the requirements under Part 30. Under Part 30 the average power of the sum of all antenna elements is limited to an equivalent isotopically radiated power (EIRP) density of +75dBm/100 MHz.

The **Nokia AirScale 39 GHz Radio Unit (FA3WA), FCC ID: 2AD8UFA3WA01**, is a LTE TDD Remote radio head can be configured for one to eight carrier operation. It is specified to provide a maximum power output of 52 dBm /158.5 W EIRP per transmit polarization for a sum total of 55 dBm /317W EIRP per unit. The product is designed for the 5G global market including operation per 47 CFR Part 30 rules for use in the USA authorized portions of 5G New Radio Band, n260, from 37 - 40 GHz.

4.1.1 RF Power Output Measurement

The product was configured for test as shown in Figure 4.1.1 below and allowed to warm up and stabilize per KDB 971168 D01 and ANSI C63.26.

Radiated Power measurements of the 5G New Radio transmit signal were conducted with an FSW Spectrum Analyzer per KDB 971168 D01 and KDB 842590 D01. Measurements were performed at a 6.5 m distance using a nominal 68 dB offset. An additional FSW transducer correction factor is used to ascertain the actual measured EIRP power. The calculation of path loss, cable loss and measurement antenna gain are listed in Table 4.1.1. below. The unit was configured to transmit at its maximum power.

The Channel Power function of the FSW spectrum analyzer was used to measure the maximum average Horizontal and Vertical EIRP at the 6.5m boundary distance. The measurements were performed for one through eight carriers at the left, center and right side of the 37 -40 GHz Band. For all measurements a nominal 100 MHz bandwidth carrier with 5G-NR modulations was used. Channel power plots identify the individual carrier power, modulation and the total power.



Calibration Certificate

Kalibrierschein

Certificate Number 24-0060-100977-01

Zertifikatsnummer

Unit Data

Item
Gegenstand **Harmonic Mixer, 40 GHz to 60 GHz**

Manufacturer
Hersteller **RPG**

Type
Typ **RPG FS-Z60**

Material Number
Materialnummer **1048.0171.02** Serial Number
Seriennummer **100977**

Asset Number
Inventarnummer

This calibration certificate documents, that the named item is tested and measured against defined specifications. Measurement results are located usually in the corresponding interval with a probability of approx. 95% (coverage factor $k = 2$). Calibration is performed with test equipment and standards directly or indirectly traceable by means of approved calibration techniques to the PTB/DKD or other national/international standards, which realize the physical units of measurement according to the International System of Units (SI). In all cases where no standards are available, measurements are referenced to standards of the R&S laboratories. Principles and methods of calibration correspond with EN ISO/IEC 17025. This calibration certificate may not be reproduced other than in full. Calibration certificates without signatures are not valid. The user is obliged to have the object recalibrated at appropriate intervals.

Order Data

Customer
Auftraggeber

Order Number
Bestellnummer

Date of Receipt
Eingangsdatum

Dieser Kalibrierschein dokumentiert, dass der genannte Gegenstand nach festgelegten Vorgaben geprüft und gemessen wurde. Die Messwerte lagen im Regelfall mit einer Wahrscheinlichkeit von annähernd 95% im zugeordneten Werteintervall (Erweiterte Messunsicherheit mit $k = 2$). Die Kalibrierung erfolgte mit Messmitteln und Normalen, die direkt oder indirekt durch Ableitung mittels anerkannter Kalibriertechniken rückgeführt sind auf Normale der PTB/DKD oder anderer nationaler/internationaler Standards zur Darstellung der physikalischen Einheiten in Übereinstimmung mit dem Internationalen Einheitensystem (SI). Wenn keine Normale existieren, erfolgt die Rückführung auf Bezugsnormale der R&S-Laboratorien. Grundsätze und Verfahren der Kalibrierung beziehen sich auf EN ISO/IEC 17025. Dieser Kalibrierschein darf nur vollständig und unverändert weiterverbreitet werden. Kalibrierscheine ohne Unterschriften sind ungültig. Für die Einhaltung einer angemessenen Frist zur Wiederholung der Kalibrierung ist der Benutzer verantwortlich.

Performance

Place and Date of Calibration
Ort und Datum der Kalibrierung

Meckenheim, 2017-12-21

Scope of Calibration
Umfang der Kalibrierung

Standard Calibration

Statement of Compliance
(Incoming)
Konformitätsaussage
(Anlieferung)

New device

Statement of Compliance
(Outgoing)
Konformitätsaussage
(Auslieferung)

All measured values are within the data sheet specifications.

Extend of Calibration Documents
Umfang des Kalibrierdokuments

**2 pages Calibration Certificate
5 pages Outgoing Results**

Radiometer Physics GmbH; Meckenheim

Date of Issue
Ausstellungsdatum

2017-12-21

Head of Laboratory
Laborleitung

Schulze

Person Responsible
Bearbeiter

Wildfang

Calibration Method
Kalibrieranweisung

RPG-PAQA-TN-2014-002

Relative Humidity **20 % - 80 %**
Relative Luftfeuchte

Ambient Temperature
Umgebungstemperatur

(23 ⁺⁷₋₃) °C

Working standards used (having a significant effect on the accuracy)
Verwendete Gebrauchsnormale (mit signifikantem Einfluss auf die Genauigkeit)

Item Gegenstand	Type Typ	Serial Number Seriennummer	Calibration Certificate Number Kalibrierscheinnummer	Cal. Due Kalibr. bis
Vector Network Analyzer	R&S® ZVA67	101097	20-300432406	2020-07-21
Powersensor	R&S® NRP-Z55	140093	20-300426315	2018-05-17
Powersensor	R&S® NRP-Z57	101423	20-541799	2019-04-27

UGB1 A compliance statement may be possible where a confidence level of less than 95 % is acceptable.
Die Bestätigung der Konformität ist möglich, sofern ein Grad des Vertrauens von weniger als 95 % akzeptabel ist.

UGB2 A non-compliance statement may be possible where a confidence level of less than 95 % is acceptable.
Die Bestätigung der Nicht-Konformität ist möglich, sofern ein Grad des Vertrauens von weniger als 95 % akzeptabel ist.

Ref.: ILAC-G8:03/2009 'Guidelines on the Reporting of Compliance with Specification'.

Notes
Anmerkungen


If the new product is stored under the climate conditions as specified in the data sheet upon delivery, the product's accuracy is not significantly affected within 12 month after its calibration in our factory. In this case, the recommended calibration interval starts on the date when the product is actually put into operation.

Outgoing Results

The following abbreviations may be used in this document

{a}	No measurement uncertainty stated because the errors always add together. So it is sure that a measurement result evaluated as "PASS" is pass.
{b}	The measurement uncertainty depends on the measurement result. The stated measurement uncertainty is valid for the close area around the specification. Measurement results outside the close area have a higher measurement uncertainty but are within the specification.
{c}	Functional test, therefore no measurement uncertainty is stated.
{d}	Typical value, refer to performance test.
{e}	The measurement uncertainty is taken into account when setting the measuring system.
DL or DT	Data Limit for symmetrical tolerance limits
DLL	Datasheet Lower Limit
DUL	Datasheet Upper Limit
MU	Measurement Uncertainty
MLL or MLV	Measurement Uncertainty Lower Value
MUL or MUV	Measurement Uncertainty Upper Value
Nom.	Nominal Value
Dev.	Deviation
MErr.	Measurement Error
Act.	Actual Value
UGB	Uncertainty Guard Band: Measuring uncertainty violates the data (spec.) limit.
UGB1	Measurement results marked as UGB1 show conformity with a probability of >50 % and <95 %.
UGB2	Measurement results marked as UGB2 show non-conformity with a probability of >50 % and <95 %.
DU	Datasheet Uncertainty

Explanation of charts

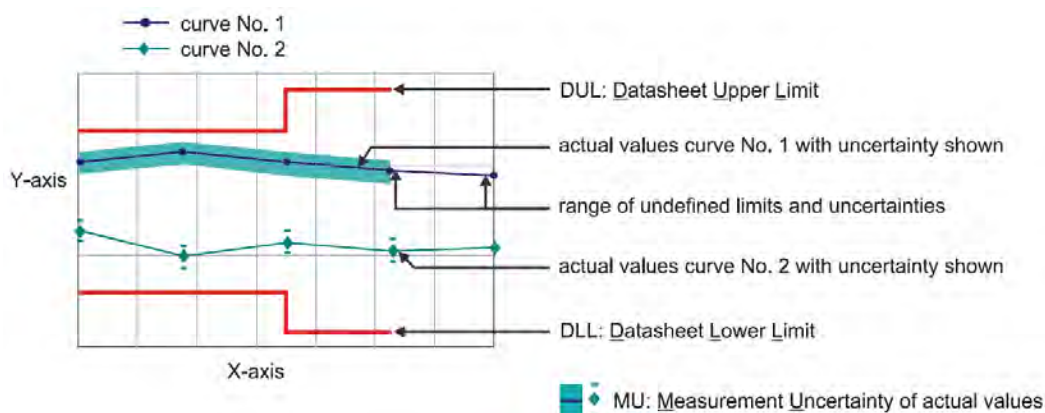

Software used for measurement**Item Type**

Measurement Studio Professional Edition
MixerCertification


Version

2013
7_07

Remark

1.1 RF Input – VSWR


Measurement uncertainty: 0.05 (VSWR)

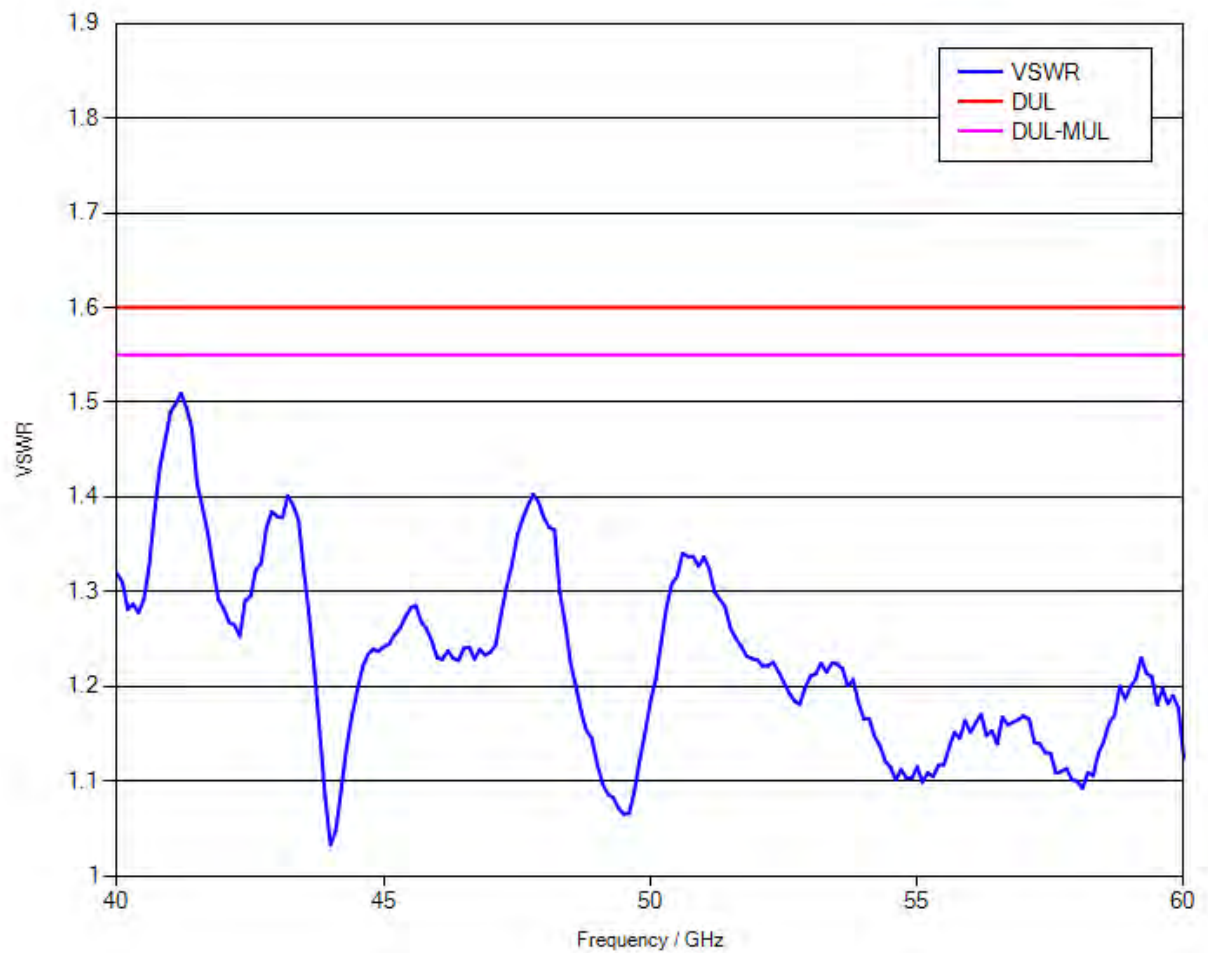

1.2 Conversion loss

LO level +13 dBm nominal
Bias 0 A

Measurement uncertainty: 1.5 dB

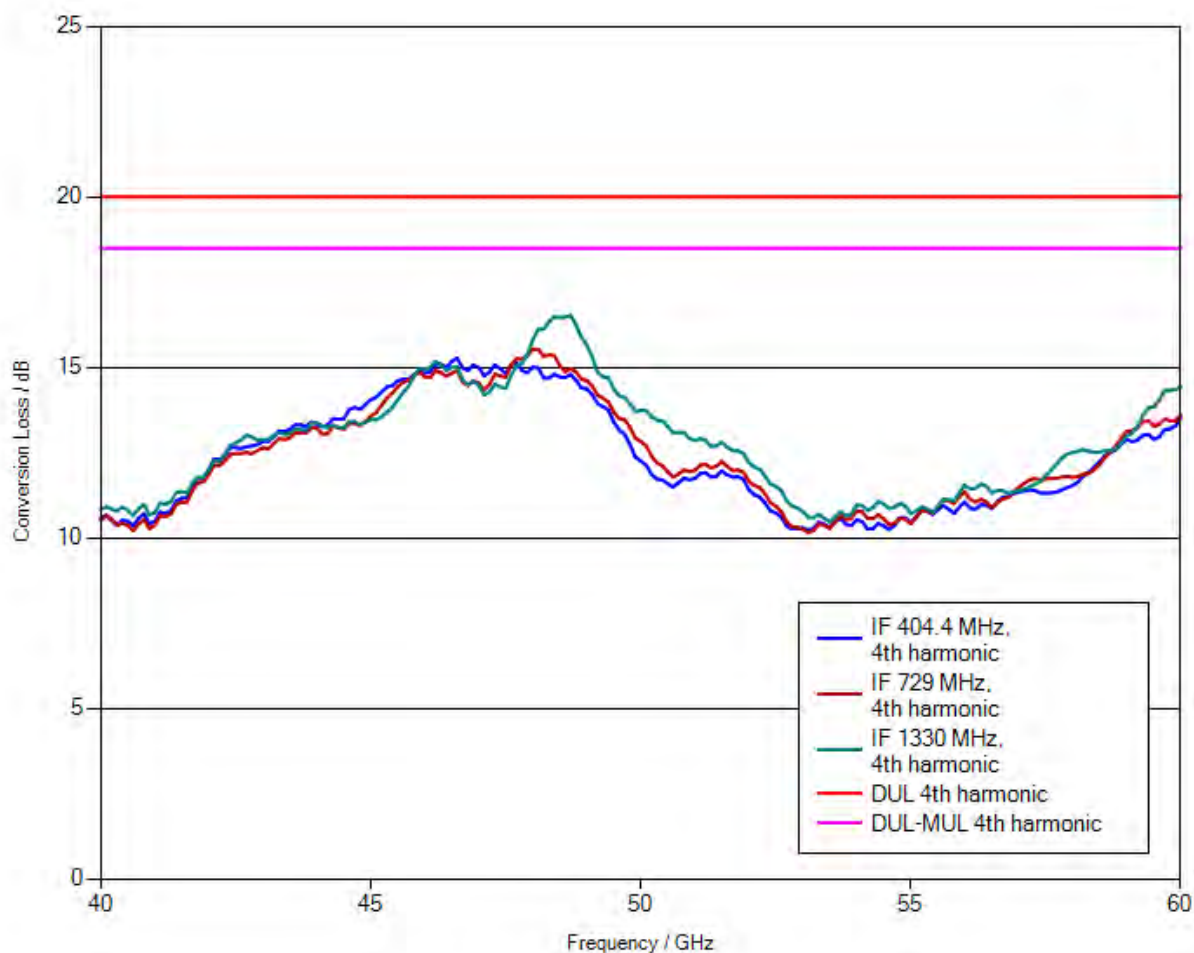

Note: Numeric calibration data can be found attached to the PDF file of the calibration certificate. Click the “paper clip” symbol to display the file.

The file has been renamed for safety reasons.

When downloading the file onto your PC, please delete the “.file” extension and unzip the data.

1.3 Frequency response within 1 GHz

	DUL	Actual (worst case)	Evaluation
IF = 404.4 MHz, 4th harmonic	4 dB	2.02 dB	PASS
IF = 729 MHz, 4th harmonic	4 dB	1.78 dB	PASS
IF = 1330 MHz, 4th harmonic	4 dB	2.35 dB	PASS

Calibration Certificate

Kalibrierschein

Certificate Number **24-0090-101719-01**

Zertifikatsnummer

Unit Data

Item
Gegenstand **Harmonic Mixer, 60 GHz to 90 GHz**

Manufacturer
Hersteller **ROHDE & SCHWARZ**

Type
Typ **R&S® FS-Z90**

Material Number
Materialnummer **1048.0371.02** **Serial Number**
Seriennummer **101719**

Asset Number
Inventarnummer

This calibration certificate documents, that the named item is tested and measured against defined specifications. Measurement results are located usually in the corresponding interval with a probability of approx. 95% (coverage factor $k = 2$). Calibration is performed with test equipment and standards directly or indirectly traceable by means of approved calibration techniques to the PTB/DKD or other national/international standards, which realize the physical units of measurement according to the International System of Units (SI). In all cases where no standards are available, measurements are referenced to standards of the R&S laboratories. Principles and methods of calibration correspond with EN ISO/IEC 17025. This calibration certificate may not be reproduced other than in full. Calibration certificates without signatures are not valid. The user is obliged to have the object recalibrated at appropriate intervals.

Order Data

Customer
Auftraggeber

Order Number
Bestellnummer

Date of Receipt
Eingangsdatum

Dieser Kalibrierschein dokumentiert, dass der genannte Gegenstand nach festgelegten Vorgaben geprüft und gemessen wurde. Die Messwerte lagen im Regelfall mit einer Wahrscheinlichkeit von annähernd 95% im zugeordneten Werteintervall (Erweiterte Messunsicherheit mit $k = 2$). Die Kalibrierung erfolgte mit Messmitteln und Normalen, die direkt oder indirekt durch Ableitung mittels anerkannter Kalibriertechniken rückgeführt sind auf Normale der PTB/DKD oder anderer nationaler/internationaler Standards zur Darstellung der physikalischen Einheiten in Übereinstimmung mit dem Internationalen Einheitensystem (SI). Wenn keine Normale existieren, erfolgt die Rückführung auf Bezugsnormale der R&S-Laboratorien. Grundsätze und Verfahren der Kalibrierung beziehen sich auf EN ISO/IEC 17025. Dieser Kalibrierschein darf nur vollständig und unverändert weiterverbreitet werden. Kalibrierscheine ohne Unterschriften sind ungültig. Für die Einhaltung einer angemessenen Frist zur Wiederholung der Kalibrierung ist der Benutzer verantwortlich.

Performance

Place and Date of Calibration
Ort und Datum der Kalibrierung

Meckenheim, 2017-08-09

Scope of Calibration
Umfang der Kalibrierung

Standard Calibration

Statement of Compliance (Incoming)
Konformitätsaussage (Anlieferung)

New device

Statement of Compliance (Outgoing)
Konformitätsaussage (Auslieferung)

All measured values are within the data sheet specifications.

Extend of Calibration Documents
Umfang des Kalibrierdokuments

**2 pages Calibration Certificate
5 pages Outgoing Results**

Radiometer Physics GmbH; Meckenheim

Date of Issue
Ausstellungsdatum

2017-08-11

Head of Laboratory
Laborleitung


Ceru

Person Responsible
Bearbeiter


Heinze

Page (Seite) 1/2
Vers2010-05-05/
RPG2014-02-28

Calibration Method
Kalibrieranweisung

RPG-PAQA-TN-2014-002

Relative Humidity **20 % - 80 %**
Relative Luftfeuchte

Ambient Temperature
Umgebungstemperatur

(23 ⁺⁷₋₃) °C

Working standards used (having a significant effect on the accuracy)
Verwendete Gebrauchsnormale (mit signifikantem Einfluss auf die Genauigkeit)

Item Gegenstand	Type Typ	Serial Number Seriennummer	Calibration Certificate Number Kalibrierscheinnummer	Cal. Due Kalibr. bis
Vector Network Analyzer	R&S® ZVA67	101097	20-300432406	2020-07-21
Powersensor	R&S® NRP-Z55	140093	20-300426315	2018-05-17
Powersensor	R&S® NRP-Z58	101063	20-611482	2018-07-21
Calibration kit	WR12	E10001	RPG-PAQA-TN-2014-005	2019-02-01

UGB1 A compliance statement may be possible where a confidence level of less than 95 % is acceptable.
Die Bestätigung der Konformität ist möglich, sofern ein Grad des Vertrauens von weniger als 95 % akzeptabel ist.

UGB2 A non-compliance statement may be possible where a confidence level of less than 95 % is acceptable.
Die Bestätigung der Nicht-Konformität ist möglich, sofern ein Grad des Vertrauens von weniger als 95 % akzeptabel ist.

Ref.: ILAC-G8:03/2009 'Guidelines on the Reporting of Compliance with Specification'.

Notes

Anmerkungen


If the new product is stored under the climate conditions as specified in the data sheet upon delivery, the product's accuracy is not significantly affected within 12 month after its calibration in our factory. In this case, the recommended calibration interval starts on the date when the product is actually put into operation.

Outgoing Results

The following abbreviations may be used in this document

{a}	No measurement uncertainty stated because the errors always add together. So it is sure that a measurement result evaluated as "PASS" is pass.
{b}	The measurement uncertainty depends on the measurement result. The stated measurement uncertainty is valid for the close area around the specification. Measurement results outside the close area have a higher measurement uncertainty but are within the specification.
{c}	Functional test, therefore no measurement uncertainty is stated.
{d}	Typical value, refer to performance test.
{e}	The measurement uncertainty is taken into account when setting the measuring system.
DL or DT	Data Limit for symmetrical tolerance limits
DLL	Datasheet Lower Limit
DUL	Datasheet Upper Limit
MU	Measurement Uncertainty
MLL or MLV	Measurement Uncertainty Lower Value
MUL or MUV	Measurement Uncertainty Upper Value
Nom.	Nominal Value
Dev.	Deviation
MErr.	Measurement Error
Act.	Actual Value
UGB	Uncertainty Guard Band: Measuring uncertainty violates the data (spec.) limit.
UGB1	Measurement results marked as UGB1 show conformity with a probability of >50 % and <95 %.
UGB2	Measurement results marked as UGB2 show non-conformity with a probability of >50 % and <95 %.
DU	Datasheet Uncertainty

Explanation of charts

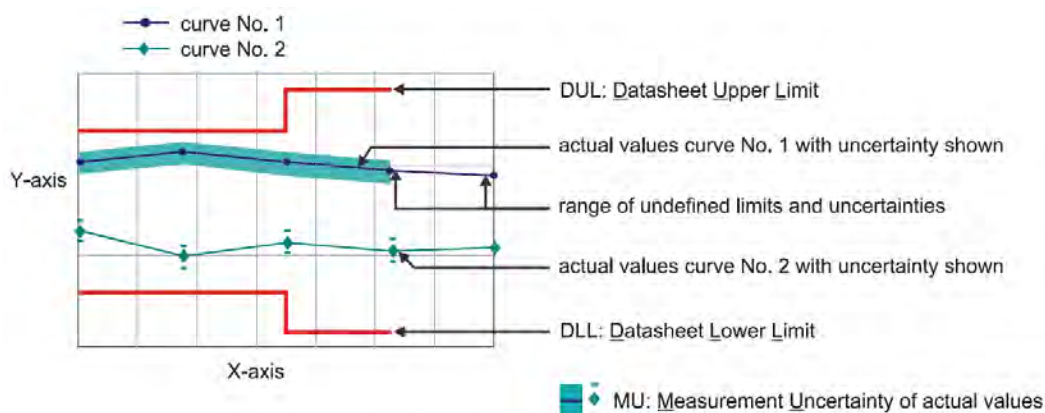

Software used for measurement**Item Type**

Measurement Studio Professional Edition
MixerCertification


Version

2013
only

Remark

1.1 RF Input – VSWR


Measurement uncertainty: 0.05 (VSWR)

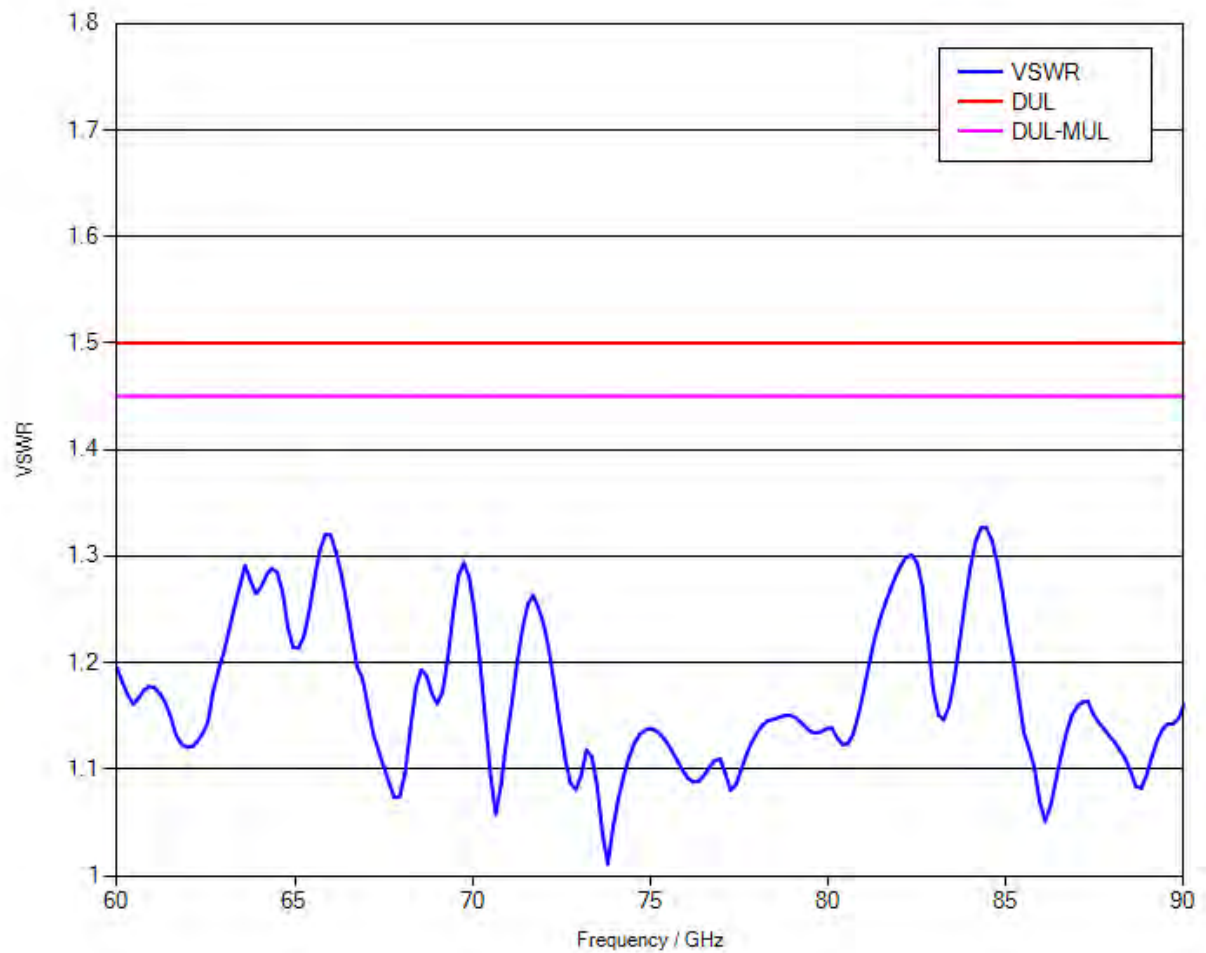

1.2 Conversion loss

LO level +14 dBm nominal
Bias 0 A

Measurement uncertainty: 1.5 dB

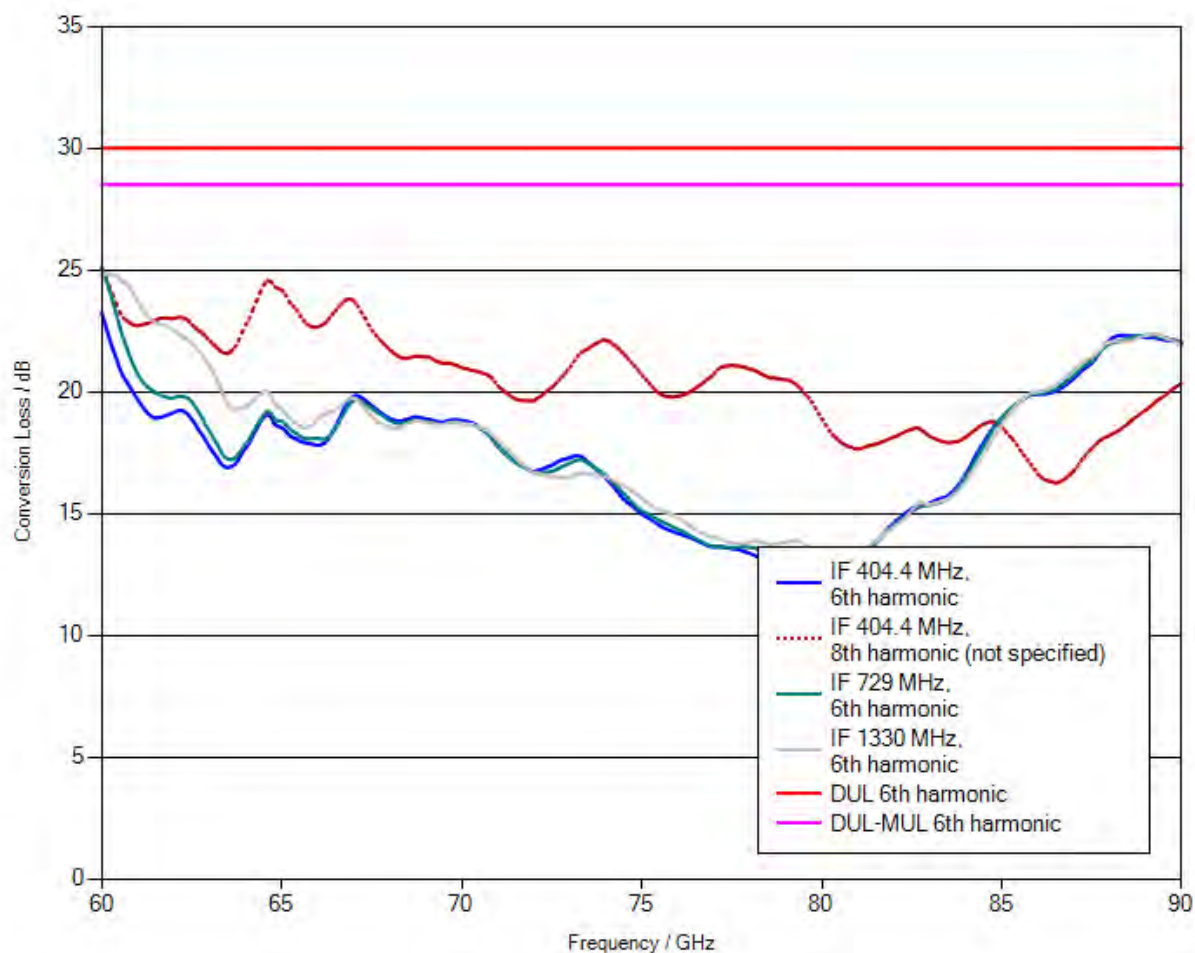

Note: Numeric calibration data can be found attached to the PDF file of the calibration certificate. Click the “paper clip” symbol to display the file.

The file has been renamed for safety reasons.

When downloading the file onto your PC, please delete the “.file” extension and unzip the data.

1.3 Frequency response within 1 GHz

	DUL	Actual (worst case)	Evaluation
IF = 404.4 MHz, 6th harmonic	6 dB	3.33 dB	PASS
IF = 404.4 MHz, 8th harmonic	not specified	2.73 dB	not specified
IF = 729 MHz, 6th harmonic	6 dB	4.12 dB	PASS
IF = 1330 MHz, 6th harmonic	6 dB	2.32 dB	PASS



Calibration Certificate

Kalibrierschein

Certificate Number 24-0140-101008-01

Zertifikatsnummer

Unit Data

Item
Gegenstand Harmonic Mixer, 90 GHz to 140 GHz

Manufacturer
Hersteller RPG

Type
Typ RPG FS-Z140

Material Number
Materialnummer 3622.0708.02

Serial Number
Seriennummer 101008

Asset Number
Inventarnummer

This calibration certificate documents, that the named item is tested and measured against defined specifications. Measurement results are located usually in the corresponding interval with a probability of approx. 95% (coverage factor $k = 2$). Calibration is performed with test equipment and standards directly or indirectly traceable by means of approved calibration techniques to the PTB/DKD or other national/international standards, which realize the physical units of measurement according to the International System of Units (SI). In all cases where no standards are available, measurements are referenced to standards of the R&S laboratories. Principles and methods of calibration correspond with EN ISO/IEC 17025. This calibration certificate may not be reproduced other than in full. Calibration certificates without signatures are not valid. The user is obliged to have the object recalibrated at appropriate intervals.

Order Data

Customer
Auftraggeber

Order Number
Bestellnummer

Date of Receipt
Eingangsdatum

Dieser Kalibrierschein dokumentiert, dass der genannte Gegenstand nach festgelegten Vorgaben geprüft und gemessen wurde. Die Messwerte lagen im Regelfall mit einer Wahrscheinlichkeit von annähernd 95% im zugeordneten Werteintervall (Erweiterte Messunsicherheit mit $k = 2$). Die Kalibrierung erfolgte mit Messmitteln und Normalen, die direkt oder indirekt durch Ableitung mittels anerkannter Kalibriertechniken rückgeführt sind auf Normale der PTB/DKD oder anderer nationaler/internationaler Standards zur Darstellung der physikalischen Einheiten in Übereinstimmung mit dem Internationalen Einheitensystem (SI). Wenn keine Normale existieren, erfolgt die Rückführung auf Bezugsnormale der R&S-Laboratorien. Grundsätze und Verfahren der Kalibrierung beziehen sich auf EN ISO/IEC 17025. Dieser Kalibrierschein darf nur vollständig und unverändert weiterverbreitet werden. Kalibrierscheine ohne Unterschriften sind ungültig. Für die Einhaltung einer angemessenen Frist zur Wiederholung der Kalibrierung ist der Benutzer verantwortlich.

Performance

Place and Date of Calibration
Ort und Datum der Kalibrierung

Meckenheim, 2017-04-06

Scope of Calibration
Umfang der Kalibrierung

Standard Calibration

Statement of Compliance
(Incoming)
Konformitätsaussage
(Anlieferung)

New device

Statement of Compliance
(Outgoing)
Konformitätsaussage
(Auslieferung)

All measured values are within the data sheet specifications.

Extend of Calibration Documents
Umfang des Kalibrierdokuments

2 pages Calibration Certificate
5 pages Outgoing Results

Radiometer Physics GmbH; Meckenheim

Date of Issue
Ausstellungsdatum

2017-04-07

Head of Laboratory
Laborleitung


Ceru

Person Responsible
Bearbeiter


Heinze

Calibration Method
Kalibrieranweisung

RPG-PAQA-TN-2014-002

Relative Humidity **20 % - 80 %**
Relative Luftfeuchte

Ambient Temperature
Umgebungstemperatur

(23 ⁺⁷₋₃) °C

Working standards used (having a significant effect on the accuracy)
Verwendete Gebrauchsnormale (mit signifikantem Einfluss auf die Genauigkeit)

Item Gegenstand	Type Typ	Serial Number Seriennummer	Calibration Certificate Number Kalibrierscheinnummer	Cal. Due Kalibr. bis
Vector Network Analyzer	R&S® ZVA67	101097	10-300319061	2017-08-06
Powersensor	R&S® NRP-Z55	140093	20-541556	2017-05-12

UGB1 A compliance statement may be possible where a confidence level of less than 95 % is acceptable.
Die Bestätigung der Konformität ist möglich, sofern ein Grad des Vertrauens von weniger als 95 % akzeptabel ist.

UGB2 A non-compliance statement may be possible where a confidence level of less than 95 % is acceptable.
Die Bestätigung der Nicht-Konformität ist möglich, sofern ein Grad des Vertrauens von weniger als 95 % akzeptabel ist.

Ref.: ILAC-G8:03/2009 'Guidelines on the Reporting of Compliance with Specification'.


Notes
Anmerkungen

Outgoing Results

The following abbreviations may be used in this document

{a}	No measurement uncertainty stated because the errors always add together. So it is sure that a measurement result evaluated as "PASS" is pass.
{b}	The measurement uncertainty depends on the measurement result. The stated measurement uncertainty is valid for the close area around the specification. Measurement results outside the close area have a higher measurement uncertainty but are within the specification.
{c}	Functional test, therefore no measurement uncertainty is stated.
{d}	Typical value, refer to performance test.
{e}	The measurement uncertainty is taken into account when setting the measuring system.
DL or DT	Data Limit for symmetrical tolerance limits
DLL	Datasheet Lower Limit
DUL	Datasheet Upper Limit
MU	Measurement Uncertainty
MLL or MLV	Measurement Uncertainty Lower Value
MUL or MUV	Measurement Uncertainty Upper Value
Nom.	Nominal Value
Dev.	Deviation
MErr.	Measurement Error
Act.	Actual Value
UGB	Uncertainty Guard Band: Measuring uncertainty violates the data (spec.) limit.
UGB1	Measurement results marked as UGB1 show conformity with a probability of >50 % and <95 %.
UGB2	Measurement results marked as UGB2 show non-conformity with a probability of >50 % and <95 %.
DU	Datasheet Uncertainty


Explanation of charts

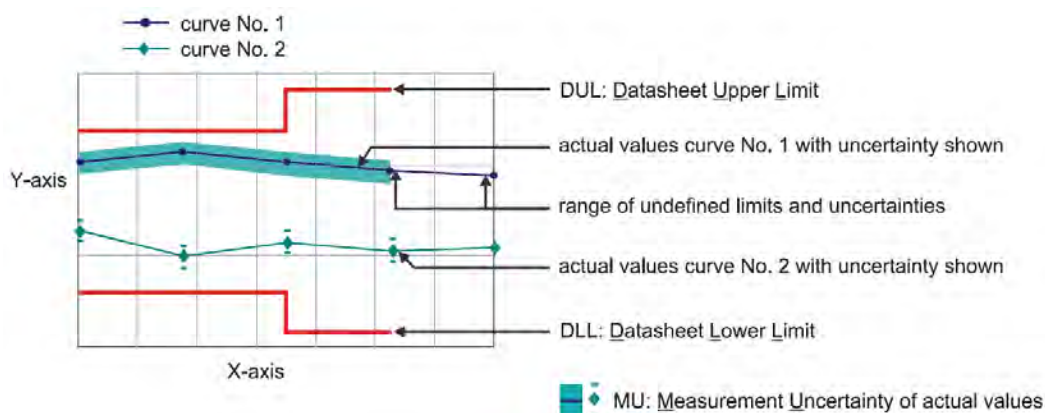

Software used for measurement**Item Type**Measurement Studio Professional Edition
MixerCertification**Version**2013
7_04**Remark**

1.1 RF Input – VSWR

Measurement uncertainty: 0.05 (VSWR)

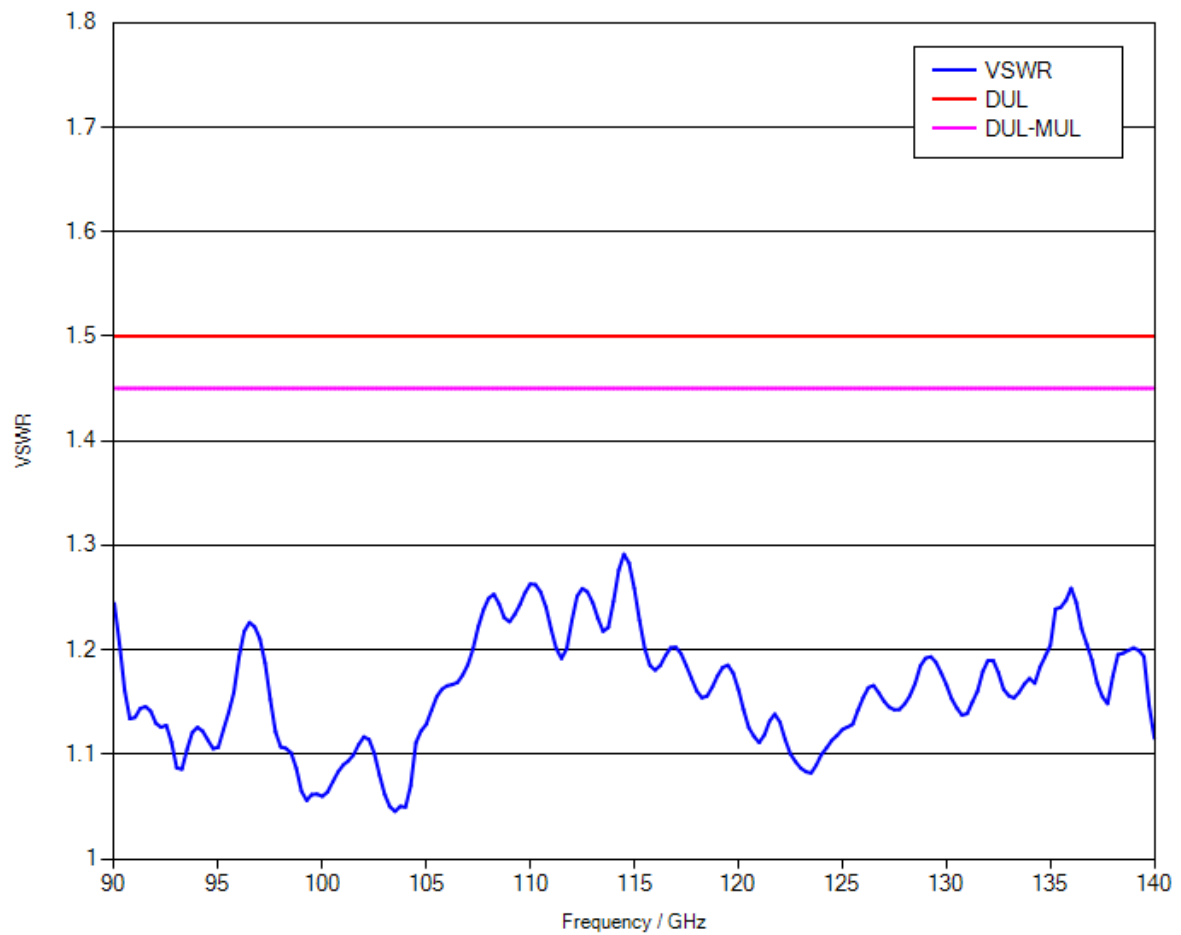

1.2 Conversion loss

LO level +14 dBm nominal
Bias 0 A

Measurement uncertainty: 3.5 dB



Note: Numeric calibration data can be found attached to the PDF file of the calibration certificate. Click the “paper clip” symbol to display the file.

The file has been renamed for safety reasons.

When downloading the file onto your PC, please delete the “.file” extension and unzip the data.

1.3 Frequency response within 1 GHz

	DUL	Actual (worst case)	Evaluation
IF = 404.4 MHz, 10th harmonic	6 dB	3.86 dB	PASS
IF = 729 MHz, 10th harmonic	6 dB	3.48 dB	PASS
IF = 1330 MHz, 10th harmonic	6 dB	3.19 dB	PASS



Calibration Certificate

Kalibrierschein

Certificate Number 24-0220-100960-01

Zertifikatsnummer

Unit Data

Item
Gegenstand Harmonic Mixer, 140 GHz to 220 GHz

Manufacturer
Hersteller RPG

Type
Typ RPG FS-Z220

Material Number
Materialnummer 3593.3250.02

Serial Number
Seriennummer 100960

Asset Number
Inventarnummer

This calibration certificate documents, that the named item is tested and measured against defined specifications. Measurement results are located usually in the corresponding interval with a probability of approx. 95% (coverage factor $k = 2$). Calibration is performed with test equipment and standards directly or indirectly traceable by means of approved calibration techniques to the PTB/DKD or other national/international standards, which realize the physical units of measurement according to the International System of Units (SI). In all cases where no standards are available, measurements are referenced to standards of the R&S laboratories. Principles and methods of calibration correspond with EN ISO/IEC 17025. This calibration certificate may not be reproduced other than in full. Calibration certificates without signatures are not valid. The user is obliged to have the object recalibrated at appropriate intervals.

Order Data

Customer
Auftraggeber

Order Number
Bestellnummer

Date of Receipt
Eingangsdatum

Dieser Kalibrierschein dokumentiert, dass der genannte Gegenstand nach festgelegten Vorgaben geprüft und gemessen wurde. Die Messwerte lagen im Regelfall mit einer Wahrscheinlichkeit von annähernd 95% im zugeordneten Werteintervall (Erweiterte Messunsicherheit mit $k = 2$). Die Kalibrierung erfolgte mit Messmitteln und Normalen, die direkt oder indirekt durch Ableitung mittels anerkannter Kalibriertechniken rückgeführt sind auf Normale der PTB/DKD oder anderer nationaler/internationaler Standards zur Darstellung der physikalischen Einheiten in Übereinstimmung mit dem Internationalen Einheitensystem (SI). Wenn keine Normale existieren, erfolgt die Rückführung auf Bezugsnormale der R&S-Laboratorien. Grundsätze und Verfahren der Kalibrierung beziehen sich auf EN ISO/IEC 17025. Dieser Kalibrierschein darf nur vollständig und unverändert weiterverbreitet werden. Kalibrierscheine ohne Unterschriften sind ungültig. Für die Einhaltung einer angemessenen Frist zur Wiederholung der Kalibrierung ist der Benutzer verantwortlich.

Performance

Place and Date of Calibration
Ort und Datum der Kalibrierung

Meckenheim, 2018-01-17

Scope of Calibration
Umfang der Kalibrierung

Standard Calibration

Statement of Compliance
(Incoming)
Konformitätsaussage
(Anlieferung)

New device

Statement of Compliance
(Outgoing)
Konformitätsaussage
(Auslieferung)

All measured values are within the data sheet specifications.

Extend of Calibration Documents
Umfang des Kalibrierdokuments

2 pages Calibration Certificate
5 pages Outgoing Results

Radiometer Physics GmbH; Meckenheim

Date of Issue
Ausstellungsdatum

2018-01-19

Head of Laboratory
Laborleitung


Ceru

Person Responsible
Bearbeiter



Dick

Outgoing Results

The following abbreviations may be used in this document

{a}	No measurement uncertainty stated because the errors always add together. So it is sure that a measurement result evaluated as "PASS" is pass.
{b}	The measurement uncertainty depends on the measurement result. The stated measurement uncertainty is valid for the close area around the specification. Measurement results outside the close area have a higher measurement uncertainty but are within the specification.
{c}	Functional test, therefore no measurement uncertainty is stated.
{d}	Typical value, refer to performance test.
{e}	The measurement uncertainty is taken into account when setting the measuring system.
DL or DT	Data Limit for symmetrical tolerance limits
DLL	Datasheet Lower Limit
DUL	Datasheet Upper Limit
MU	Measurement Uncertainty
MLL or MLV	Measurement Uncertainty Lower Value
MUL or MUV	Measurement Uncertainty Upper Value
Nom.	Nominal Value
Dev.	Deviation
MErr.	Measurement Error
Act.	Actual Value
UGB	Uncertainty Guard Band: Measuring uncertainty violates the data (spec.) limit.
UGB1	Measurement results marked as UGB1 show conformity with a probability of >50 % and <95 %.
UGB2	Measurement results marked as UGB2 show non-conformity with a probability of >50 % and <95 %.
DU	Datasheet Uncertainty


Explanation of charts

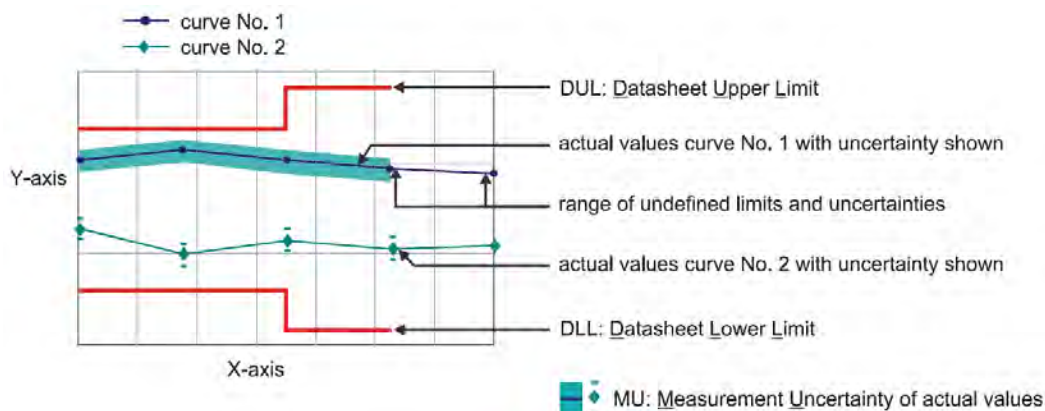

Software used for measurement**Item Type**Measurement Studio Professional Edition
MixerCertification**Version**2013
7_08**Remark**

1.1 RF Input – VSWR


Measurement uncertainty: 0.05 (VSWR)

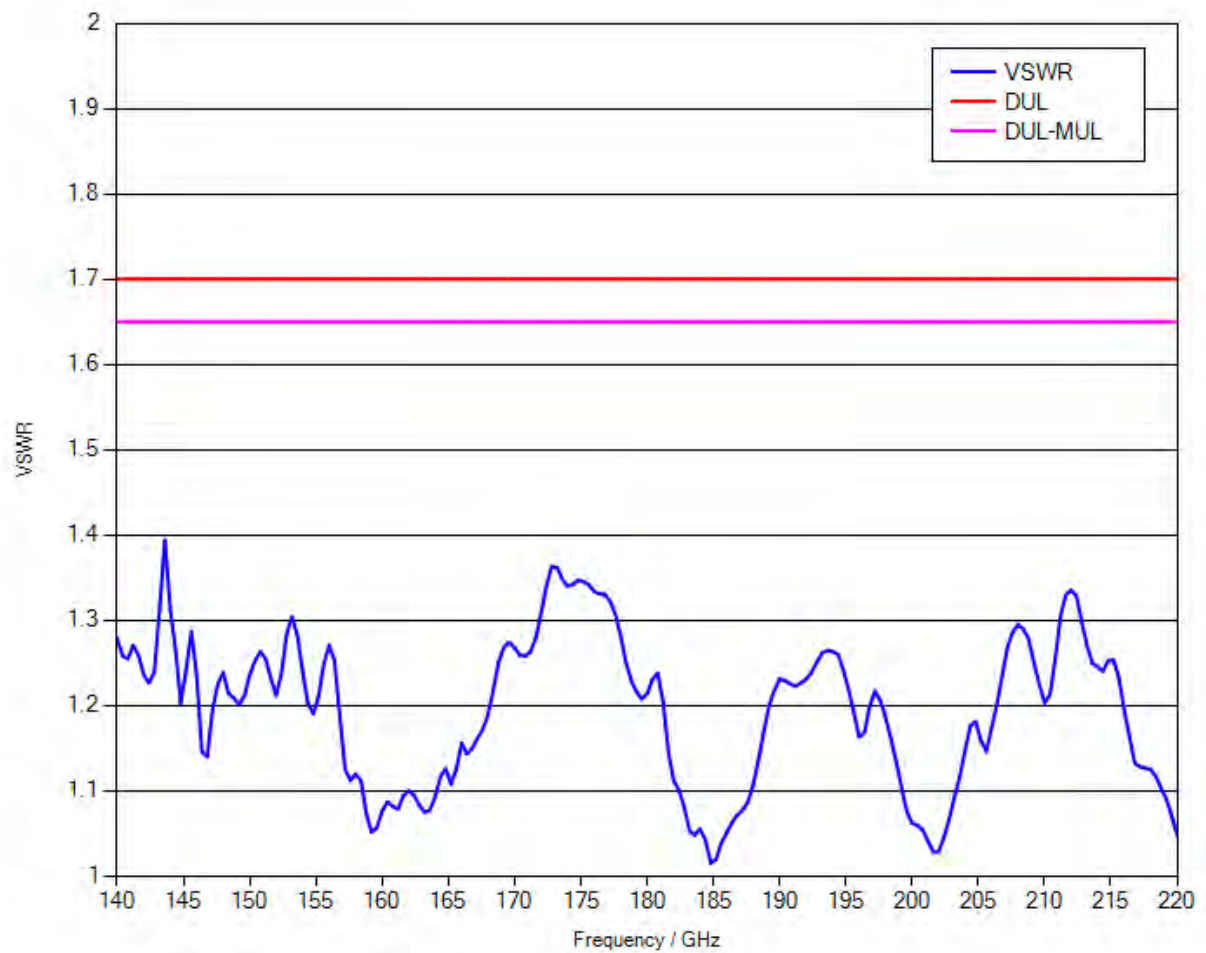

1.2 Conversion loss

LO level +13 dBm nominal
Bias 0 A

Measurement uncertainty: 4 dB

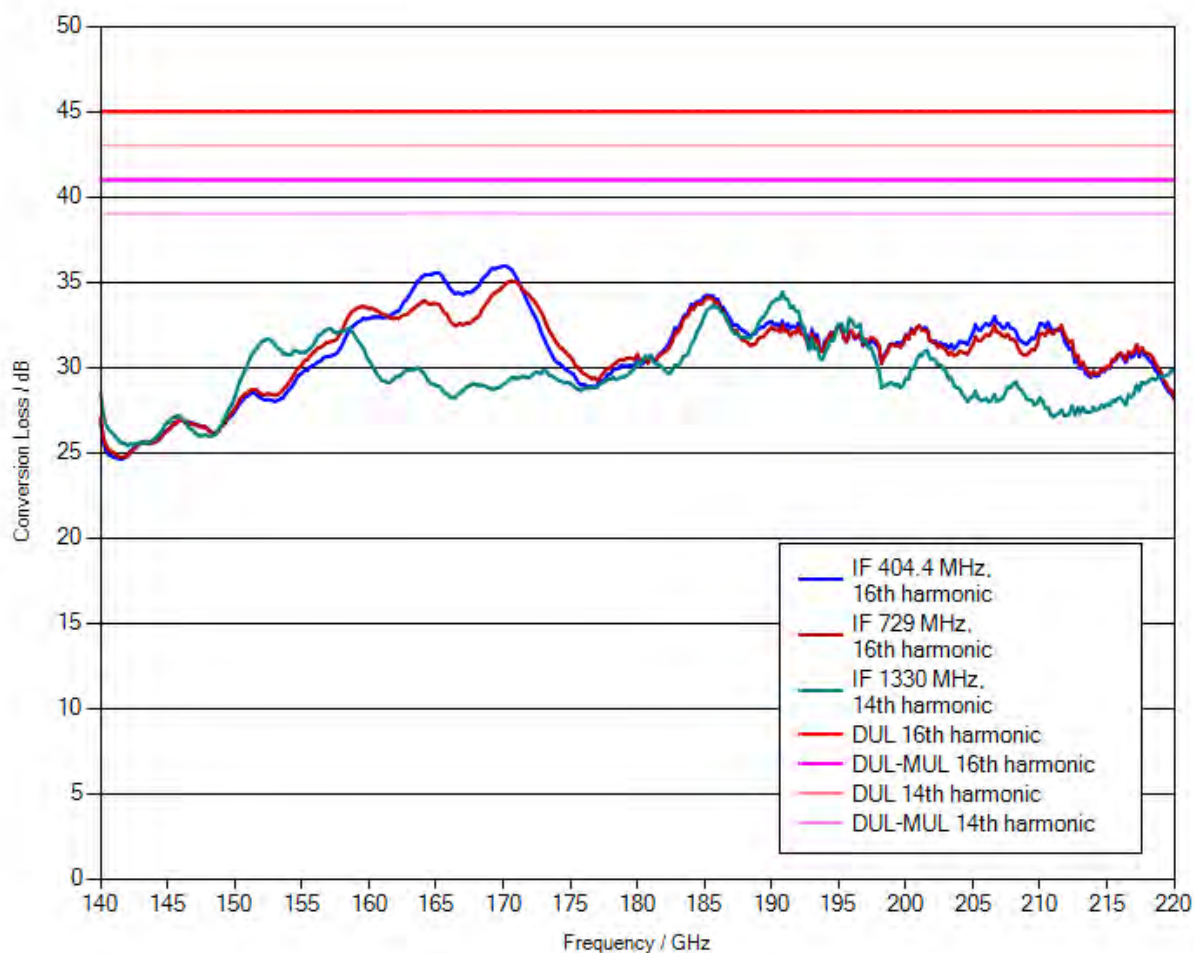

Note: Numeric calibration data can be found attached to the PDF file of the calibration certificate. Click the “paper clip” symbol to display the file.

The file has been renamed for safety reasons.
When downloading the file onto your PC, please delete the “.file” extension and unzip the data.

1.3 Frequency response within 1 GHz

	DUL	Actual (worst case)	Evaluation
IF = 404.4 MHz, 16th harmonic	6 dB	2.1 dB	PASS
IF = 729 MHz, 16th harmonic	6 dB	2.05 dB	PASS
IF = 1330 MHz, 14th harmonic	6 dB	2.48 dB	PASS

Table 4.1.1 Corrections For Transmitter Power Measurements

Frequency	Free Space Path Loss, "PL"	Measurement Antenna Gain, "G1"	Measurement Cable Loss, "L1"	Total Offset Required PL -G1 + L1	FSW Measurement Offset	Required Final Correction
GHz	dB	dBi	dB	dB	dB	dB
35.00	79.58	23.96	12.84	68.46	68	0.460
35.50	79.70	23.52	13.03	69.21	68	1.214
36.00	79.83	24.27	13.20	68.75	68	0.754
36.50	79.95	23.28	13.35	70.01	68	2.015
37.00	80.06	24.42	13.39	69.04	68	1.040
37.50	80.18	23.27	13.39	70.29	68	2.293
38.00	80.30	24.29	13.45	69.45	68	1.455
38.50	80.41	23.18	13.54	70.76	68	2.762
39.00	80.52	23.65	13.73	70.60	68	2.604
39.50	80.63	23.03	13.76	71.36	68	3.358
40.00	80.74	23.00	13.79	71.53	68	3.530
40.50	80.85	23.35	13.84	71.34	68	3.343
41.00	80.96	23.22	13.98	71.72	68	3.717
41.50	81.06	23.28	14.14	71.93	68	3.927
42.00	81.17	23.39	14.23	72.01	68	4.014
42.50	81.27	23.81	14.36	71.81	68	3.815
43.00	81.37	23.55	15.30	73.11	68	5.114
43.50	81.47	23.60	16.14	74.01	68	6.008

4.1.1.1 RF Power Output Results

Power output measurements verified the expected performance of 52 dBm EIRP per polarization for a Total Power of 55 dBm. The maximum measured level was 53.33 dBm for a single polarization and 56.02 dBm total. This level is well within the maximum Part 30.202a limit of 75 dBm EIRP. Measurements were performed for each modulation.


The measured performance was in full compliance with the Rules of the Commission. The data plots are detailed below.

Table 4.1.1.1 – Channel Power Measurements (adjacent)

Location in Band	Channel Center Frequencies, GHz	# of carriers	Modulation	Horizontal Polarization Total Channel Power, EIRP	Vertical Polarization Total Channel Power, EIRP	Sum Total Channel Power EIRP
				dBm	dBm	dBm
Left	37.05	1	QPSK	52.71	52.27	55.51
Middle	38.44776	1	16QAM	52.19	52.37	55.29
Right	39.94536	1	64QAM	52.88	52.13	55.53
Left	37.05000 37.14984	2	QPSK	52.73	52.75	55.75
Left	37.05000 37.14984	2	16QAM	52.73	52.75	55.75
Left	37.05000 37.14984 37.24968	3	QPSK	53.34	52.63	56.01
Left	37.05000 37.14984 37.24968 37.34952	4	QPSK	52.87	52.37	55.64
Left	37.05000 37.14984 37.24968 37.34952 37.44936	5	QPSK	52.86	52.42	55.66
Left	37.05000 37.14984 37.24968 37.34952 37.44936 37.5492	6	QPSK	52.69	52.31	55.51
Left	37.05000 37.14984 37.24968 37.34952 37.44936 37.54920 37.64904	7	QPSK	52.67	52.28	55.49
Left	37.05000 37.14984 37.24968 37.34952 37.44936 37.54920 37.64904 37.74888	8	QPSK	52.78	52.91	55.86
Middle	38.14824 38.24808 38.34792 38.44776 38.54760 38.64744 38.74728 38.84712	8	16QAM	52.01	52.08	55.05
Right	39.24648 39.34632 39.44616 39.54600 39.64584 39.74568 39.84552 39.94536	8	64QAM	52.79	52.09	55.46



99.96 MHz Carrier Spacing						
Middle	38.14956 38.24952 38.34948 38.44944 38.54940 38.64936 38.74932 38.84928	8	16QAM	53.42	52.00	55.78

Figure 4.1.1 Test Set-Up for Measurement of Radio Transmitter Performance


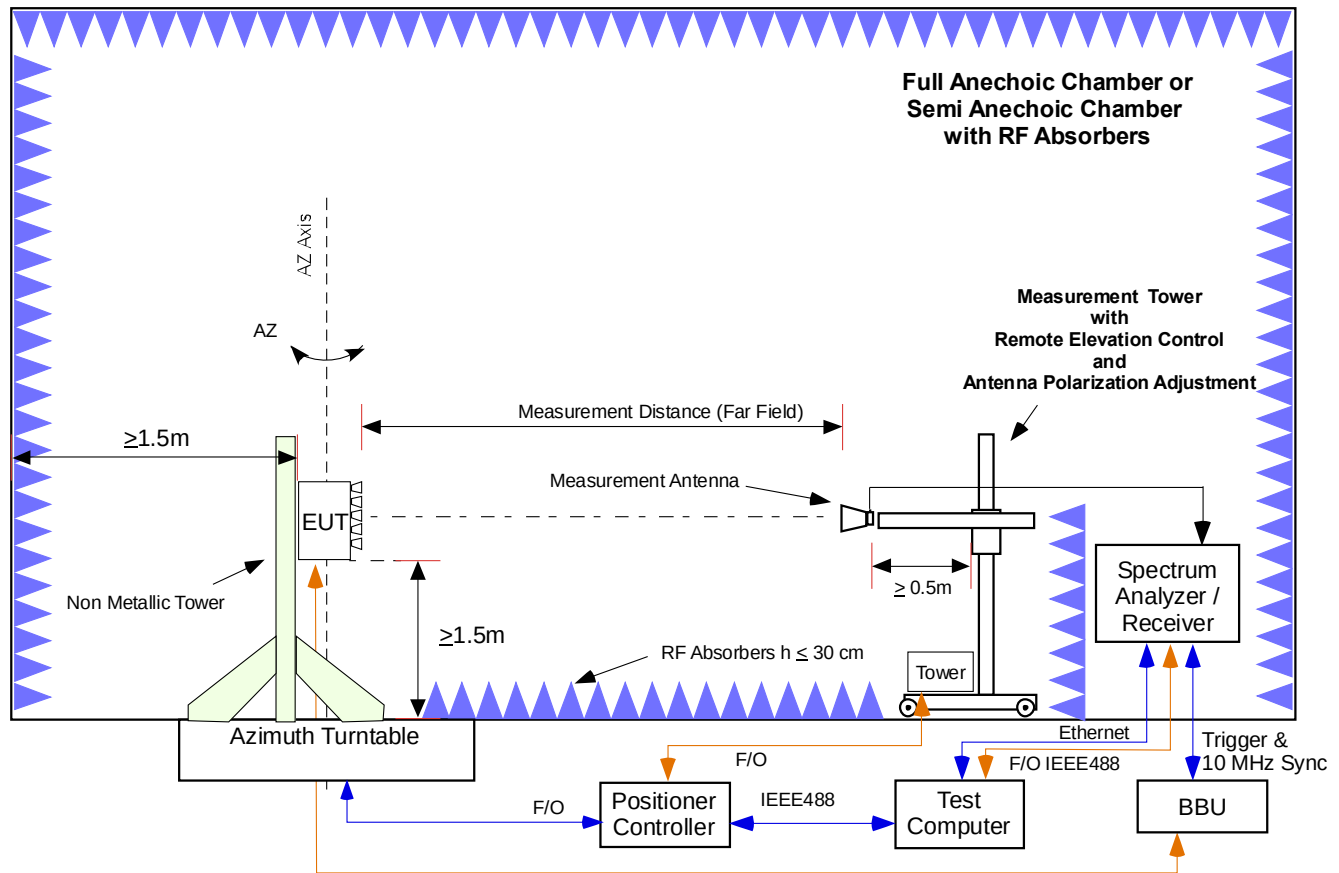


4.1.1.1.1 Channel Power Measurement Plots



Channel Power Measurements, 1 Carrier – QPSK - Left Side of Band

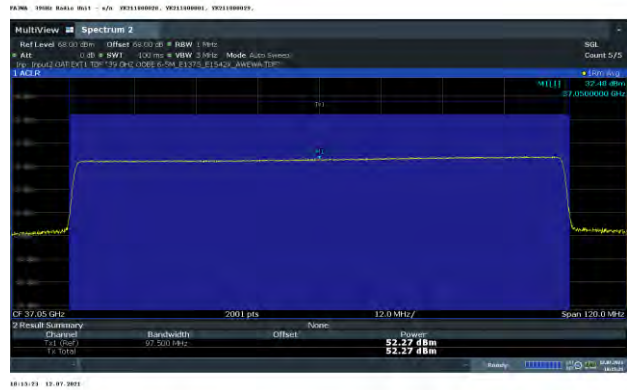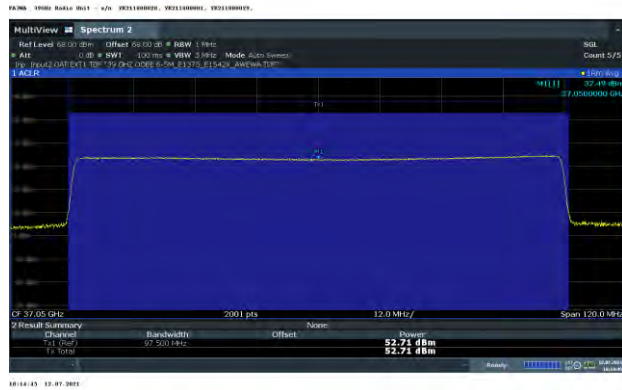

Channel Power Measurements, 1 Carrier – 16QAM – Middle of Band

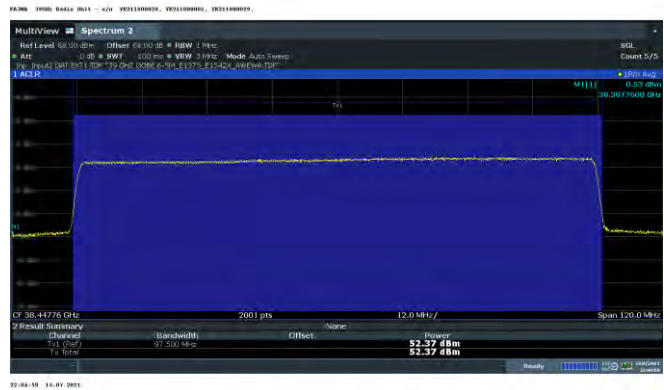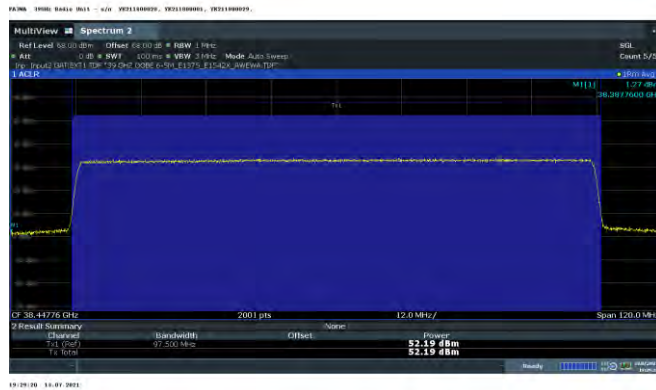


Channel Power Measurements, 1 Carrier – 64QAM – Right Side of Band

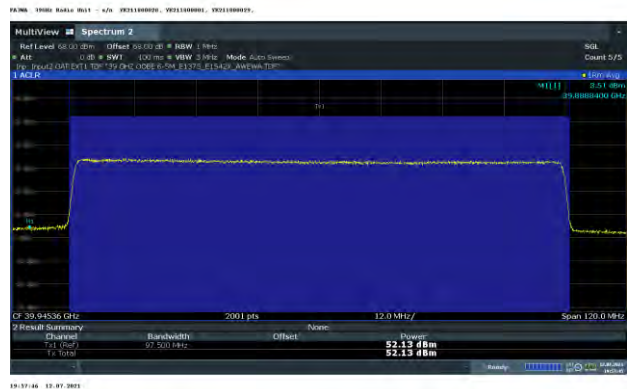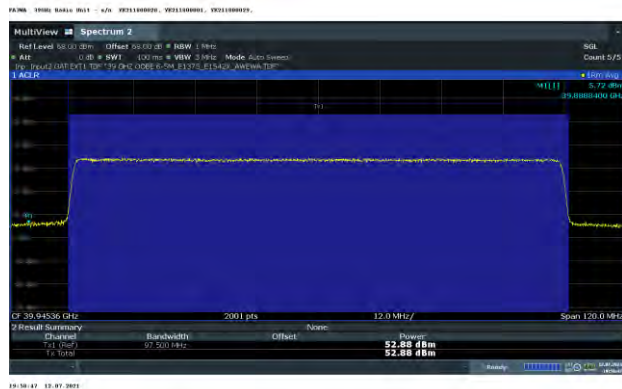


Channel Power Measurements, 2 Carrier –QPSK – Left Side of Band

Horizontal

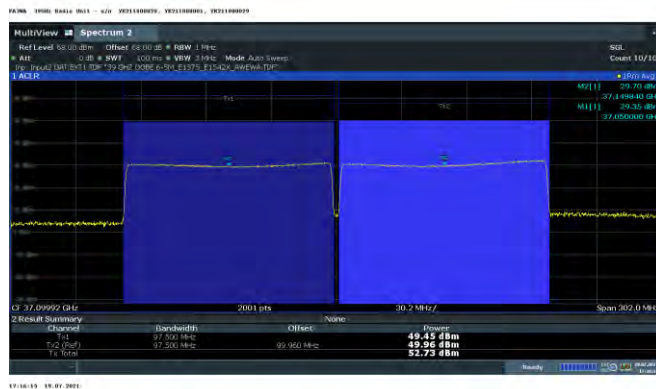



Channel Power Measurements, 2 Carrier –16QAM – Left Side of Band

Horizontal

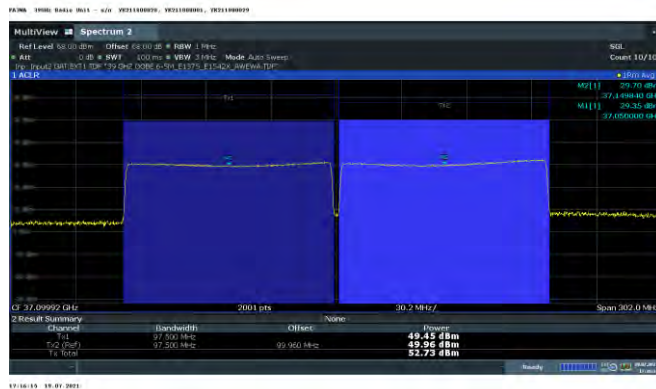

Channel Power Measurements, 3 Carrier – QPSK – Left Side of Band

Horizontal

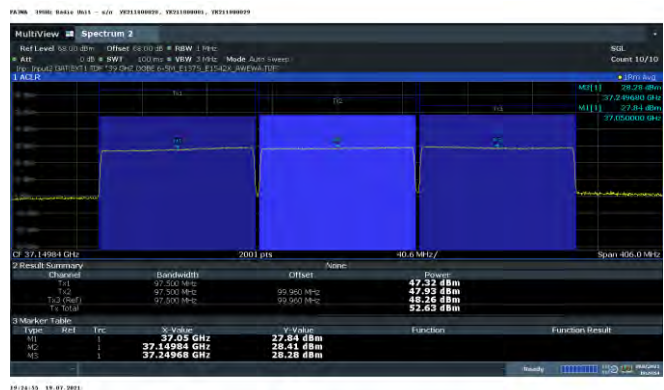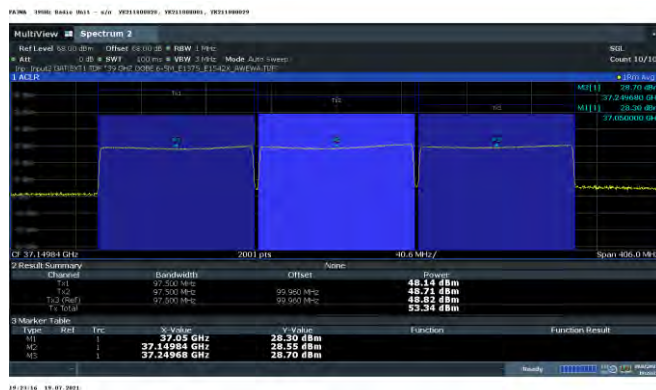



Channel Power Measurements, 4 Carrier – QPSK – Left Side of Band

Horizontal





Channel Power Measurements, 5 Carrier – QPSK – Left Side of Band

Horizontal

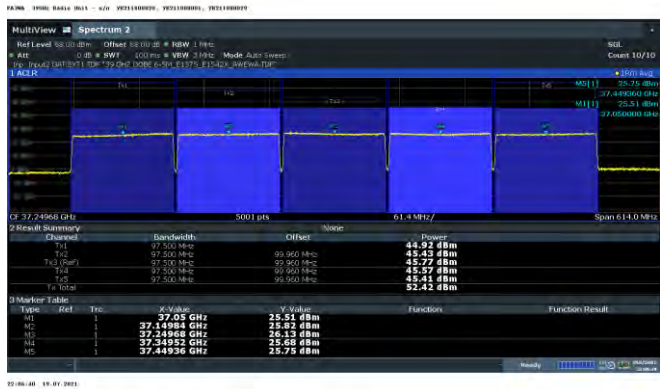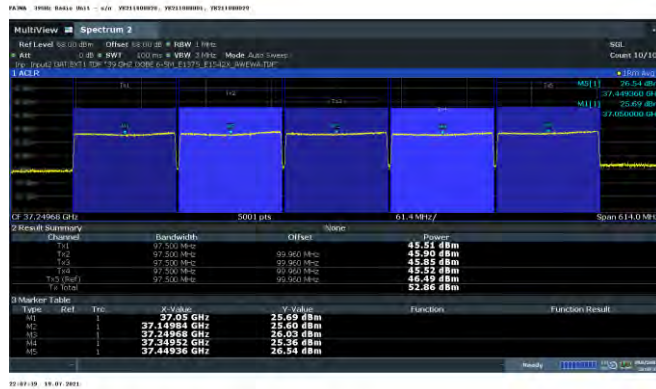



Channel Power Measurements, 6 Carrier – QPSK – Left Side of Band

Horizontal

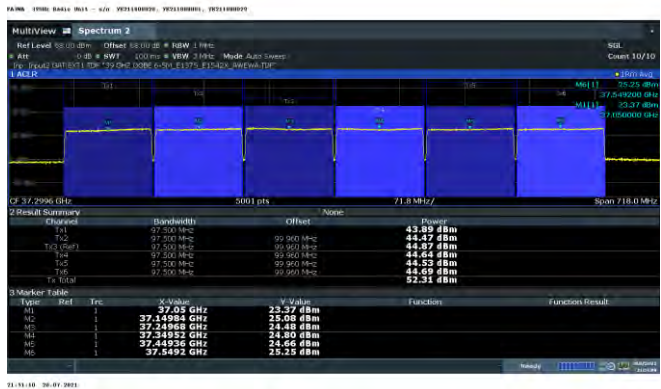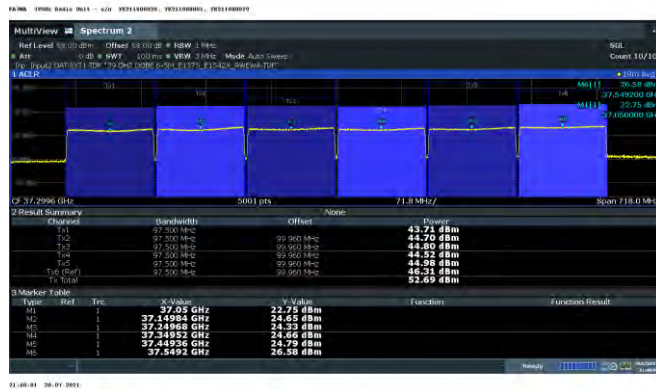



Channel Power Measurements, 7 Carrier – QPSK – Left Side of Band

Horizontal

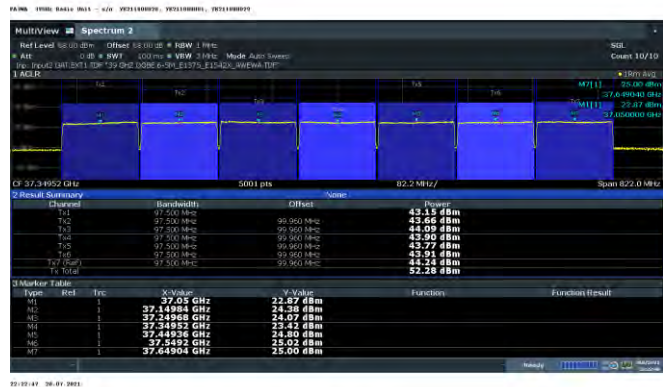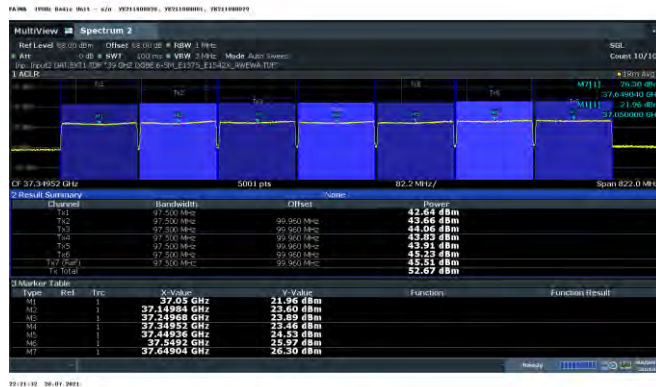



Channel Power Measurements, 8 Carrier – QPSK – Left Side of Band





Horizontal

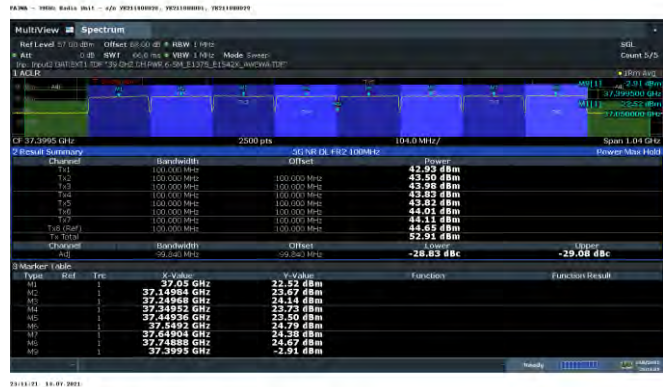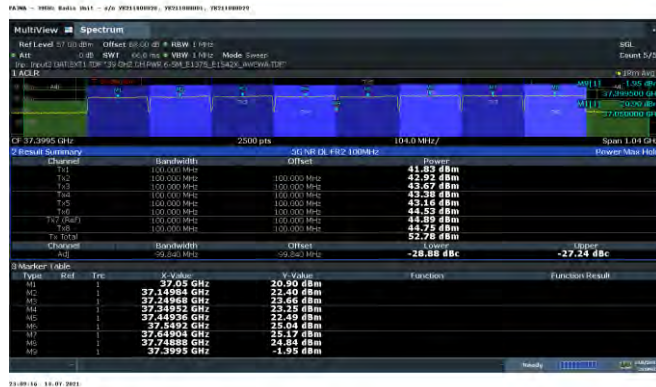

Channel Power Measurements, 8 Carrier – 16QAM – Center of Band

Horizontal

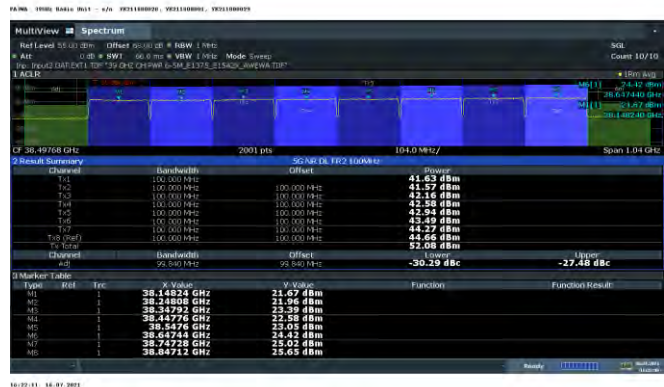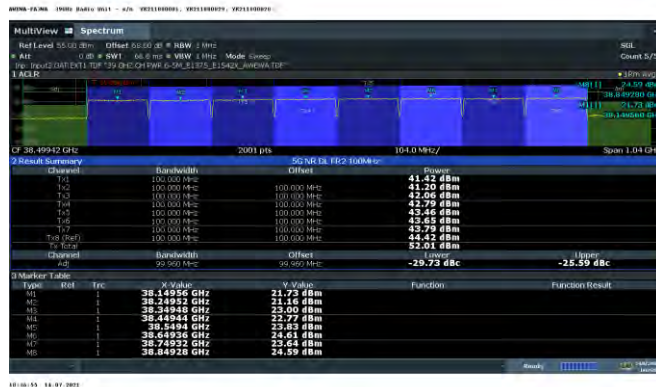

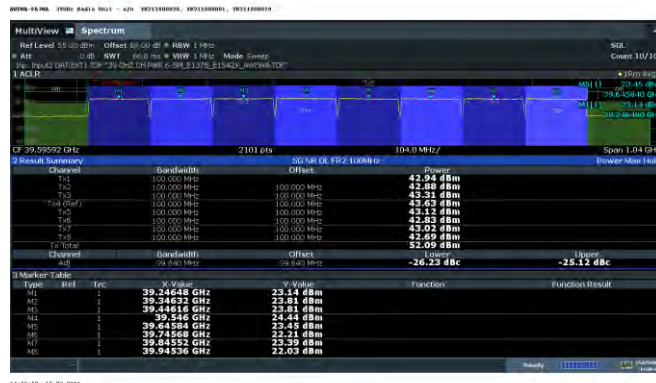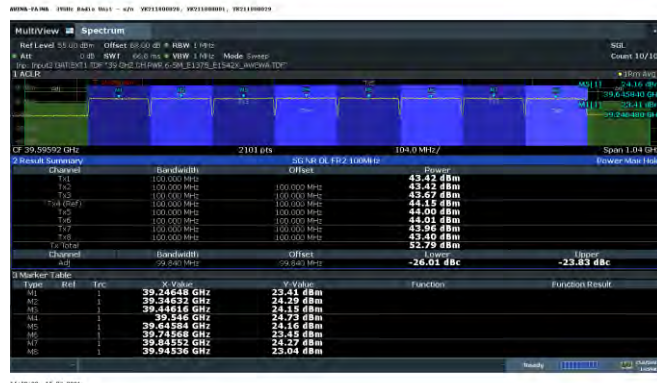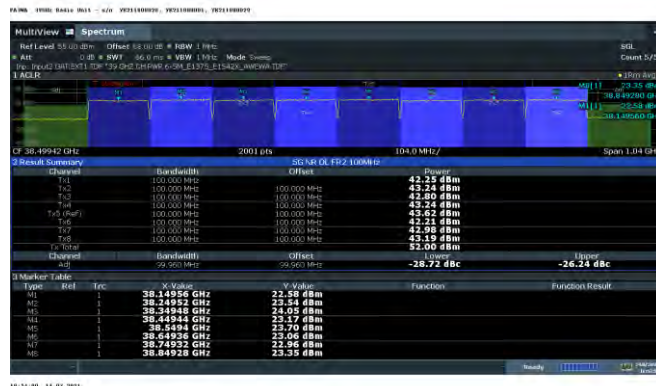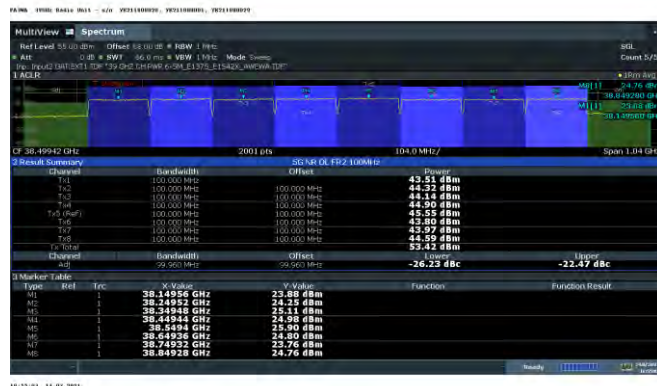[illegible][illegible]

4.2 Section 2.1047 MEASUREMENT REQUIRED: MODULATION CHARACTERISTICS

The **2AD8UFA3WA01** supports the 5G New Radio Modulation Format based upon LTE TDD technologies. LTE utilizes Orthogonal Frequency Division Multiplexing (OFDM) which splits the carrier frequency bandwidth into many small subcarriers. Each individual subcarrier can be modulated with QPSK, 16QAM and 64QAM digital modulation formats.

In QPSK, there are 4 possible symbol states and each symbol carries 2 bits of information. In 16QAM, there are 16 possible symbol states and each 16-QAM symbol carries 4 bits of information. In 64QAM, there are 64 possible symbol states and each 64-QAM symbol carries 6 bits of information. The higher-order modulations, those where the constellations are more dense, are more sensitive to poor channel conditions than the lower-order modulation.

The modulation characteristics measurement of LTE carriers measures the difference between the ideal symbols and the measured symbols after the equalization. The 5G-New Radio format is still in revision in 3GPP and new Releases are expected. The constellations were recorded to assess that the subcarrier configurations were achieved.

There are no FCC Limits for Modulation and all of the formats presented look spectrally the same from a channel edge and regrowth standpoint and we are pleased with the fidelity that available with test equipment as configured.

4.2.1 Modulation Characteristics Measurement


The measurements were performed at a distance of 6.5 m from the unit utilizing the test configuration in Figure 4.4.1 utilizing a Rohde & Schwarz FSW85 Signal analyzer with the 3GPP 5G-NR DL Measurement software option. Representative screen plots of the modulation measurement are attached below for all three of the subcarrier configurations and sample polarizations.

4.2.2 Modulation Measurements Results:


The typical measured modulation characteristics of the EUT are shown below:

Figure 4.2 Sample Modulation Results


QPSK - Left - Vertical Polarization

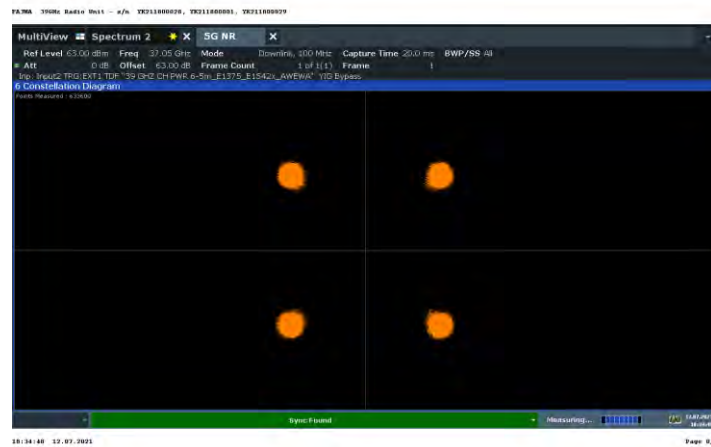

16QAM - Middle - Vertical Polarization

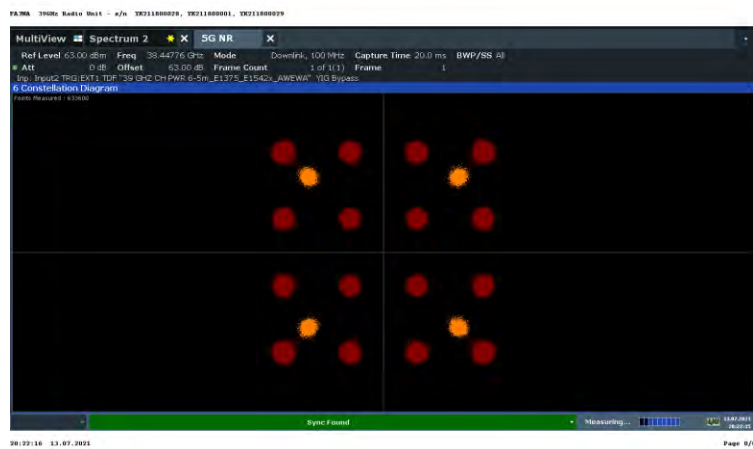

64QAM - Right – Horizontal Polarization

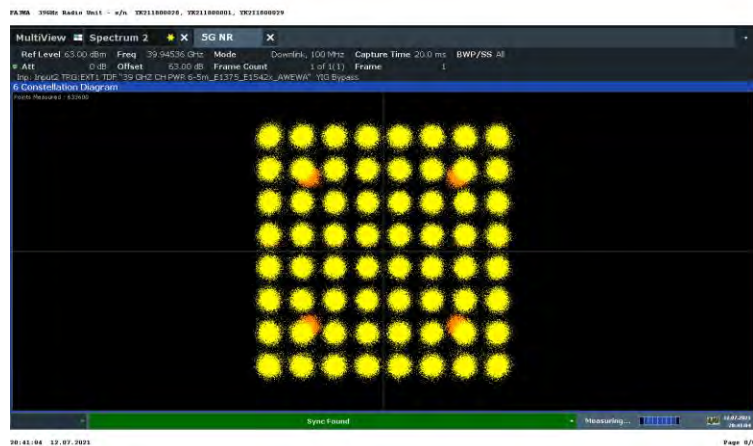

4.3 Section 2.1049 MEASUREMENT REQUIRED: OCCUPIED BANDWIDTH and EDGE of BAND EMISSIONS

This test measures the Occupied Bandwidth of the transmitting carrier and the Edge of-Block Emissions in the frequency spectrum immediately outside and adjacent to the transmitting carrier(s).

The occupied bandwidth (OBW) is usually defined either as the 99% power OBW or a relative OBW. The 99% OBW is the signal bandwidth such that, below its lower and above its upper frequency limits, the mean power radiated or conducted are each equal to 0.5 percent of the total mean power radiated or conducted by a given emission. The relative OBW is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated by at least X dB below the transmitter power, where the value of X is typically specified as 26.

Per KDB 971168 D01 v02, the relative OBW must be measured and reported when it is specified in the applicable rule part; otherwise, the 99% OBW shall be measured and reported. The OBW shall be measured when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment is operated.

4.3.1 Results Occupied Bandwidth (Signal Bandwidth)

The measurements of 99% occupied bandwidth were performed with a Rohde & Schwartz FSW85 GHz spectrum analyzer. The measurements of the intended 100 MHz 5G-NR carrier indicated compliance with the 97M0G7D emission designator. Sample results are presented below and shows that the measured signals are within the parameters of the 97M0G7D emissions designator. Most of the multicarrier measurements were made with a carrier spacing of 99.84 MHz. Center of band data for the 99.96MHz carrier spacing is also separately reported for the 8 carrier configuration.

Tabular Data – Occupied Bandwidth **1MHz** RBW

Location in Band	Carrier Frequencies (GHz)	Number of Carriers	Modulation	Horizontal Polarization Occupied Signal Bandwidth (MHz)	Vertical Polarization Occupied Signal Bandwidth (MHz)
Left	37.05	1	QPSK	94.338	94.179
Middle	38.38776	1	16QAM	94.172	94.137
Right	39.88536	1	64QAM	94.247	94.281
Left	37.05 37.14984	2	QPSK	193.642	193.037
Left	37.05000 37.14984 37.24968	3	QPSK	292.386	291.710
Left	37.05 To 37.34952	4	QPSK	391.384	390.396
Left	37.05 To 37.44936	5	QPSK	490.602	489.518
Left	37.05 To 37.5492	6	QPSK	589.184	589.183
Left	37.05 To 37.64904	7	QPSK	687.669	686.709
Left	37.05 To 37.74888	8	QPSK	785.901	785.698
Middle	38.14824 To 38.84712	8	16QAM	786.983	787.271
Right	39.24648 To 39.94536	8	64QAM	787.011	786.674
99.96 MHz Carrier Spacing					
Middle	38.14956 To 38.84928	8	16QAM	788.072	787.800

Tabular Data – Occupied Bandwidth 3MHz RBW

Location in Band	Carrier Frequencies (GHz)	Number of Carriers	Modulation	Horizontal Polarization Occupied Signal Bandwidth (MHz)	Vertical Polarization Occupied Signal Bandwidth (MHz)
Left	37.05	1	QPSK	95.468	95.200
Middle	38.38776	1	16QAM	95.166	95.111
Right	39.88536	1	64QAM	95.300	95.366
Left	37.05 37.14984	2	QPSK	194.538	193.540
Left	37.05000 37.14984 37.24968	3	QPSK	292.778	291.878
Left	37.05 To 37.34952	4	QPSK	391.514	390.470
Left	37.05 To 37.44936	5	QPSK	490.766	489.242
Left	37.05 To 37.5492	6	QPSK	589.237	588.020
Left	37.05 To 37.64904	7	QPSK	687.575	686.924
Left	37.05 To 37.74888	8	QPSK	785.857	785.637
Middle	38.14824 To 38.84712	8	16QAM	786.916	787.315
Right	39.24648 To 39.94536	8	64QAM	786.836	786.520
99.96 MHz Carrier Spacing					
Middle	38.14956 To 38.84928	8	16QAM	787.800	787.780

Tabular Data – Occupied Bandwidth 5MHz RBW

Location in Band	Carrier Frequencies (GHz)	Number of Carriers	Modulation	Horizontal Polarization Occupied Signal Bandwidth (MHz)	Vertical Polarization Occupied Signal Bandwidth (MHz)
Left	37.05	1	QPSK	97.237	96.845
Middle	38.38776	1	16QAM	96.783	96.697
Right	39.88536	1	64QAM	96.968	97.060
Left	37.05 37.14984	2	QPSK	195.963	194.625
Left	37.05000 37.14984 37.24968	3	QPSK	292.571	292.571
Left	37.05 To 37.34952	4	QPSK	392.115	390.877
Left	37.05 To 37.44936	5	QPSK	491.291	489.741
Left	37.05 To 37.5492	6	QPSK	589.574	588.292
Left	37.05 To 37.64904	7	QPSK	687.753	686.808
Left	37.05 To 37.74888	8	QPSK	785.945	785.694
Middle	38.14824 To 38.84712	8	16QAM	786.922	787.318
Right	39.24648 To 39.94536	8	64QAM	786.977	786.571
99.96 MHz Carrier Spacing					
Middle	38.14956 To 38.84928	8	16QAM	788.205	787.856

Tabular Data – Occupied Bandwidth **10MHz** RBW

Location in Band	Carrier Frequencies (GHz)	Number of Carriers	Modulation	Horizontal Polarization Occupied Signal Bandwidth (MHz)	Vertical Polarization Occupied Signal Bandwidth (MHz)
Left	37.05 To 37.74888	8	QPSK	786.937	786.602
Middle	38.14824 To 38.84712	8	16QAM	788.178	788.567
Right	39.24648 To 39.94536	8	64QAM	788.049	787.522
99.96 MHz Carrier Spacing					
Middle	38.14956 To 38.84928	8	16QAM	789.446	788.985

4.3.1.1 Results - Occupied Bandwidth Carrier Aggregation

The April 12, 2016 TCBC viewgraph package identified that Carrier Aggregation data should be supplied during filing. This requirement is not yet formalized in a KDB for LTE, 5G-NR or UMFUS but we used the same rules as used for Part 15. The multi-carrier bandwidth of the **AWEWA/B** is thus defined as follows.

The N260 39 GHz Band can be assigned a total of 30 side by side carriers over the 37-40 GHz frequency range. The AWEWA/B can be operated anywhere within this 3 GHz wide band.

The AWEWA/B product can support up to eight carriers operating within its maximum instantaneous 1.4 GHz bandwidth. Additionally, we have evaluated carrier spacing configuration of 99.96 MHz and 99.84 MHz respectively. There is a 1% difference in the occupied signal bandwidth for eight aggregated carriers which was expected. There was no difference identified for Power, radiated spurious or OOB measurements with either spacing.

An example of the signal bandwidth for 4 adjacent carriers is depicted in Figure 4.3.1.1. The emissions designator for 2 thru seven is identical for either spacing. The eight carrier spacing using 99.84 MHz is 99.9% of the 99.96 spacing so a single emissions designator is appropriate.

The maximum calculated assessment for two through eight carriers using 99.96 and 99.84 channel spacings are identified below.


Two Carrier Aggregation Bandwidth	= 1(99.96) + 97 MHz = 196.96 MHz = 197MG7W
Three Carrier Aggregation Bandwidth	= 2(99.96) + 97 MHz = 296.92 MHz = 297MG7W
Four Carrier Aggregation Bandwidth	= 3(99.96) + 97 MHz = 396.88 MHz = 397MG7W
Five Carrier Aggregation Bandwidth	= 4(99.96) + 97 MHz = 496.84 MHz = 497MG7W
Six Carrier Aggregation Bandwidth	= 5(99.96) + 97 MHz = 596.80 MHz = 597MG7W
Seven Carrier Aggregation Bandwidth	= 6(99.96) + 97 MHz = 696.76 MHz = 697MG7W
Eight Carrier Aggregation Bandwidth	= 7(99.96) + 97 MHz = 796.72 MHz = 797MG7W

The maximum calculated assessment for two through eight carriers using 99.84 channel spacing are identified below.

Two Carrier Aggregation Bandwidth	= 1(99.84) + 97 MHz = 196.84 MHz = 197MG7W
Three Carrier Aggregation Bandwidth	= 2(99.84) + 97 MHz = 296.68 MHz = 297MG7W
Four Carrier Aggregation Bandwidth	= 3(99.84) + 97 MHz = 396.52 MHz = 397MG7W
Five Carrier Aggregation Bandwidth	= 4(99.84) + 97 MHz = 496.36 MHz = 497MG7W
Six Carrier Aggregation Bandwidth	= 5(99.84) + 97 MHz = 596.20 MHz = 597MG7W
Seven Carrier Aggregation Bandwidth	= 6(99.84) + 97 MHz = 696.04 MHz = 697MG7W
Eight Carrier Aggregation Bandwidth	= 7(99.84) + 97 MHz = 795.88 MHz ≤ 797MG7W

Since the values are identical for two through seven and nearly so for eight carriers the 99.96 set will be used.

Figure 4.3.1.1 Carrier Aggregation

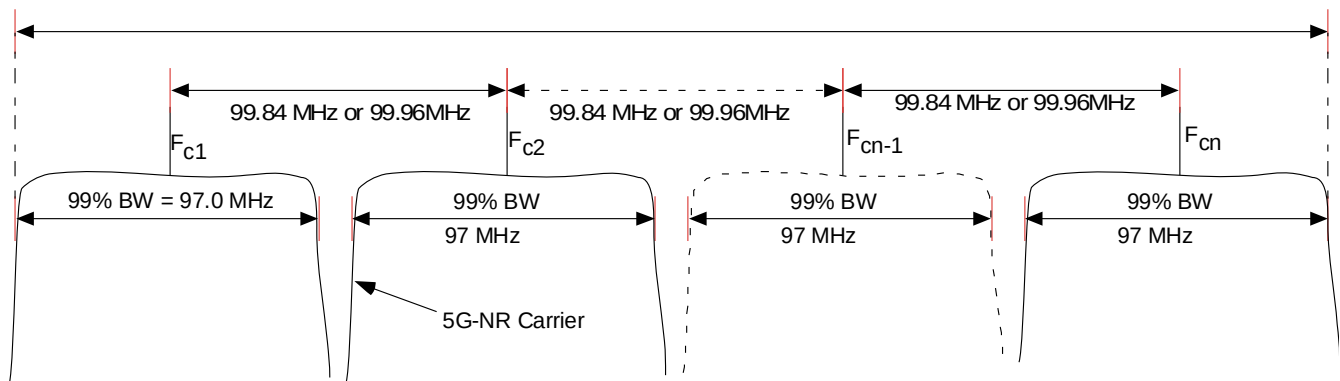


Carrier Aggregation nx(97M0)
WSM 7-12-21

4.3.1.2 99% Signal Bandwidth Plots

1MHz RBW

1 Carrier, Left, QPSK Horizontal

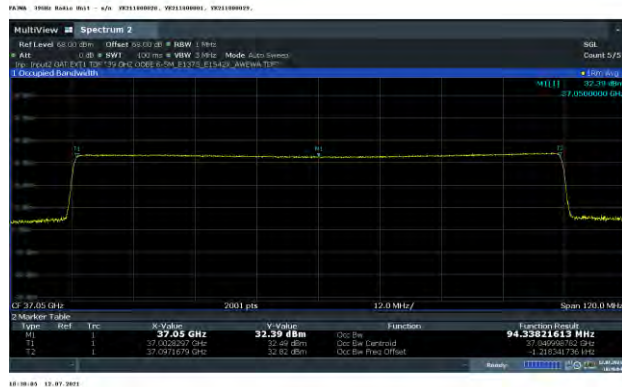

Vertical



1 Carrier, Middle, 16QAM Horizontal




Vertical




1 Carrier, Right, 64QAM Horizontal




Vertical

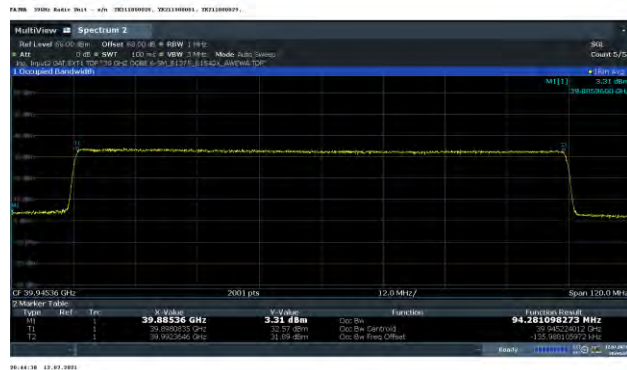

2 Carrier, Left, QPSK Horizontal

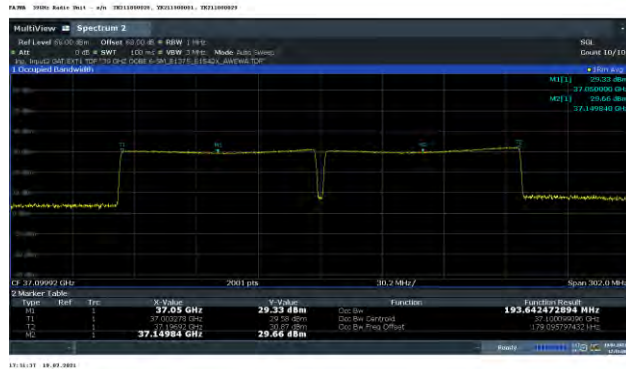

Vertical

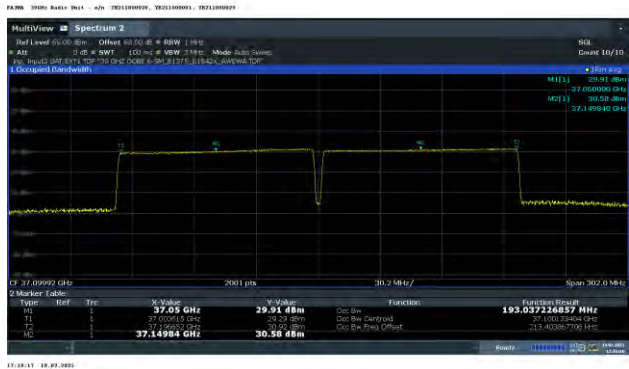

3 Carrier, Left, QPSK Horizontal



Vertical




4 Carrier, Left, QPSK Horizontal



Vertical




5 Carrier, Left, QPSK Horizontal

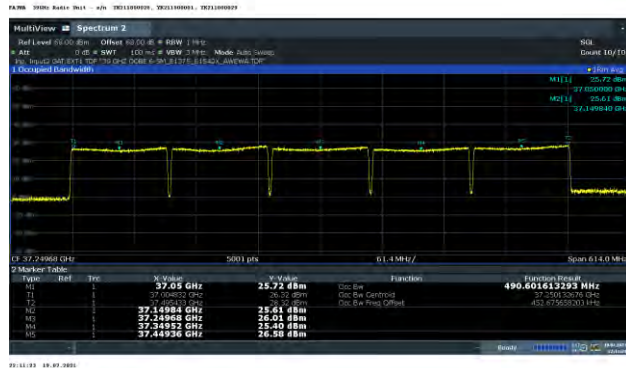

Vertical




6 Carrier, Left, QPSK Horizontal

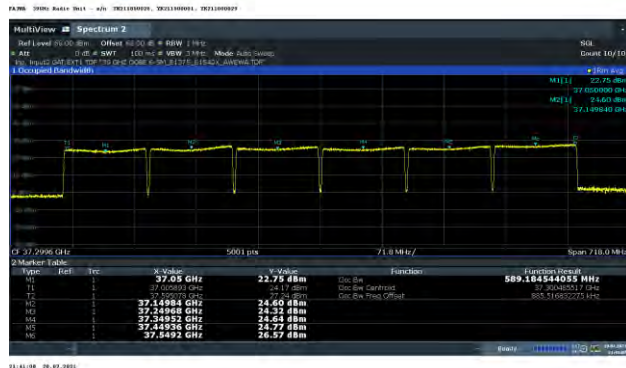


Vertical




7 Carrier, Left, QPSK Horizontal

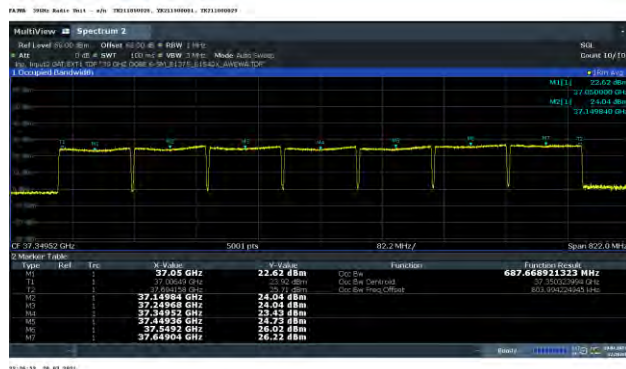


Vertical

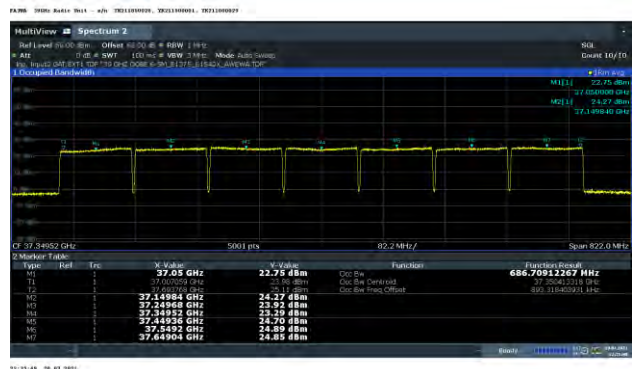


Vertical

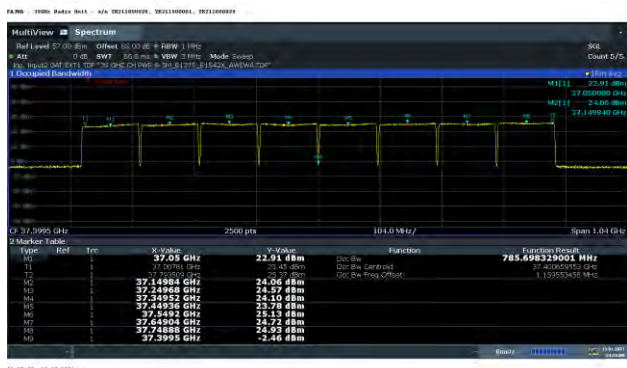

Vertical

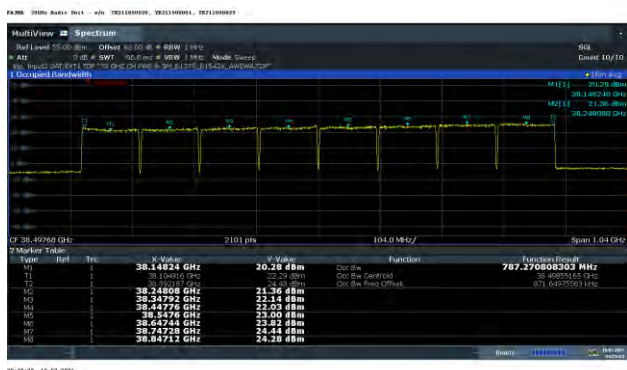

Vertical

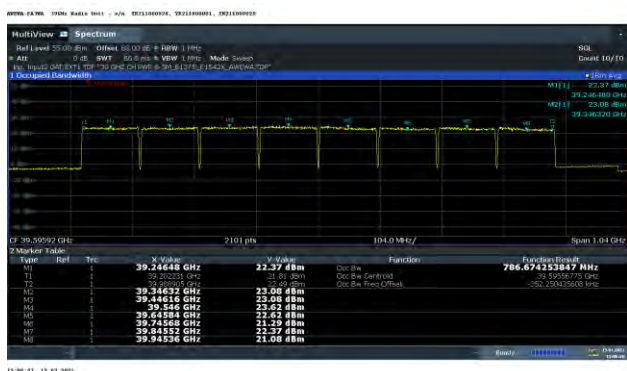

8 Carrier, Middle, 16QAM with 99.96 MHz channel spacing
Horizontal




Vertical




3MHz RBW

1 Carrier, Left, QPSK Horizontal

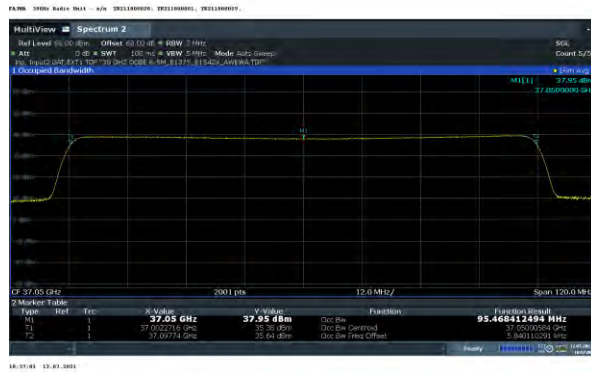


Vertical

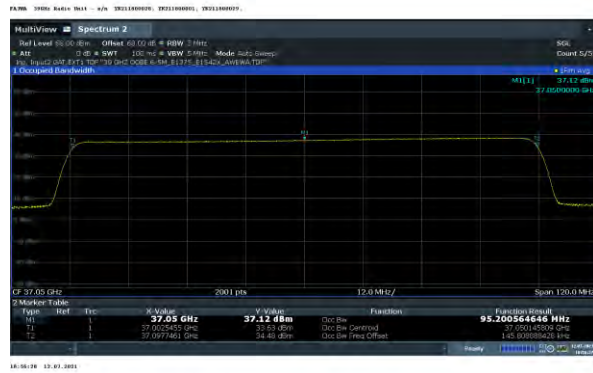


1 Carrier, Middle, 16QAM Horizontal



Vertical

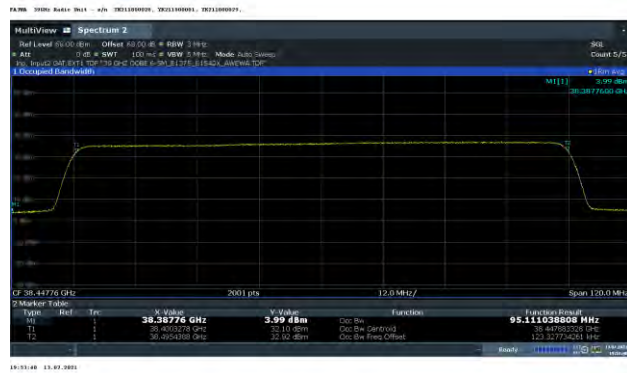


1 Carrier, Right, 64QAM Horizontal

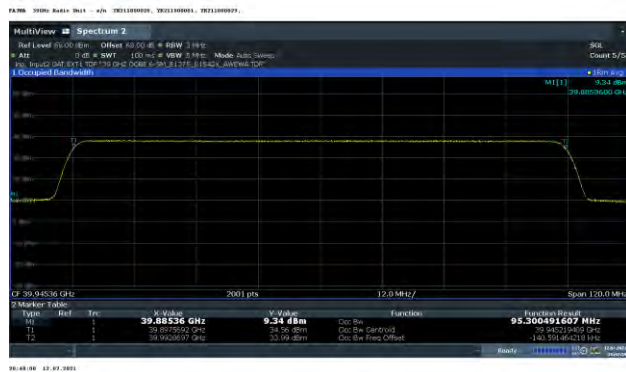


Vertical



2 Carrier, Left, QPSK Horizontal

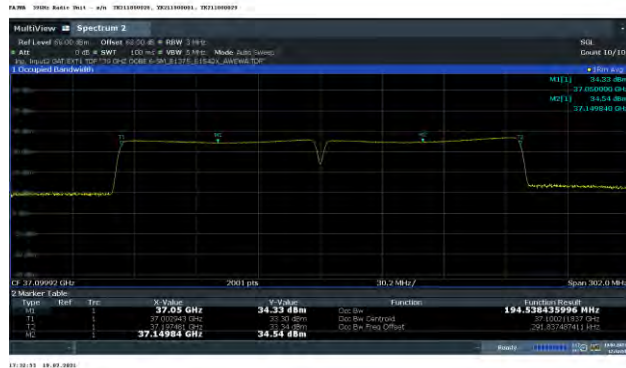

Vertical

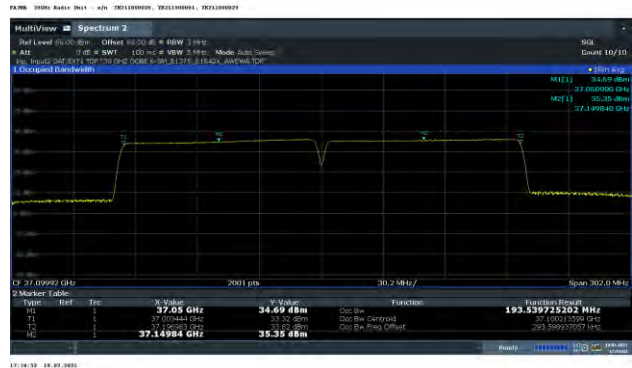

3 Carrier, Left, QPSK Horizontal



Vertical




4 Carrier, Left, QPSK Horizontal




Vertical




5 Carrier, Left, QPSK Horizontal

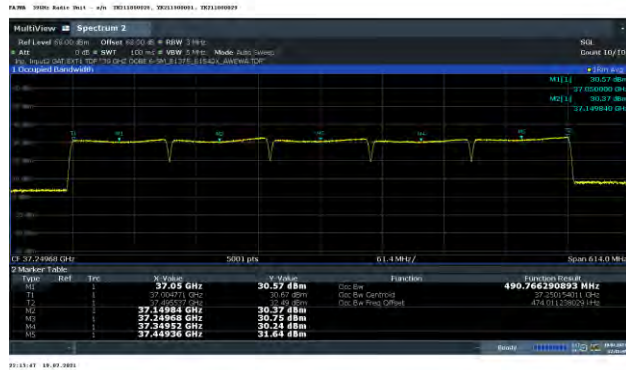

Vertical

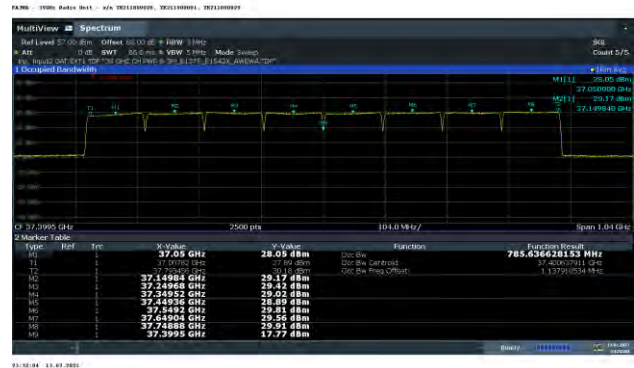


Vertical

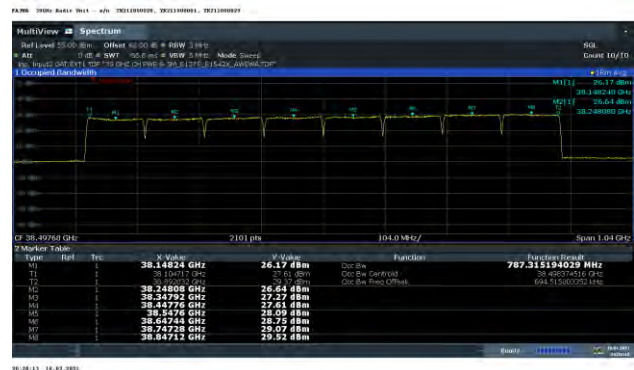


Vertical



8 Carrier, Middle, 16QAM with 99.96 MHz channel spacing Horizontal

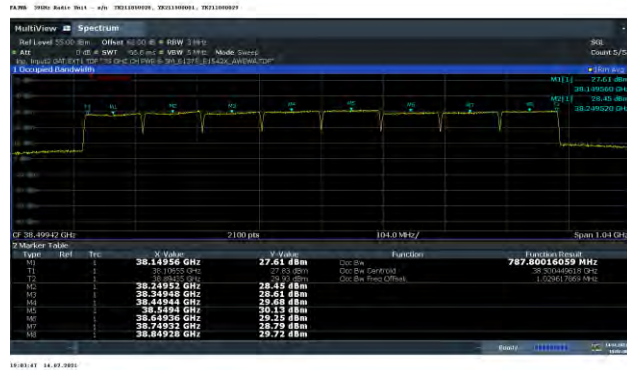


Vertical

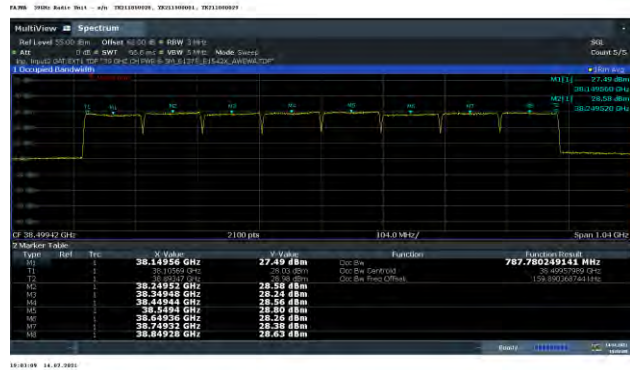

5MHz RBW

1 Carrier, Left, QPSK Horizontal

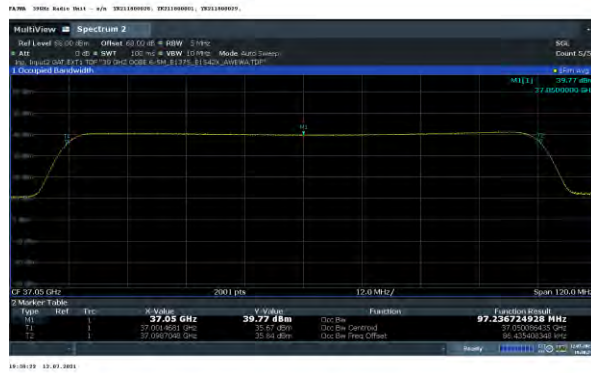


Vertical




1 Carrier, Middle, 16QAM Horizontal



Vertical

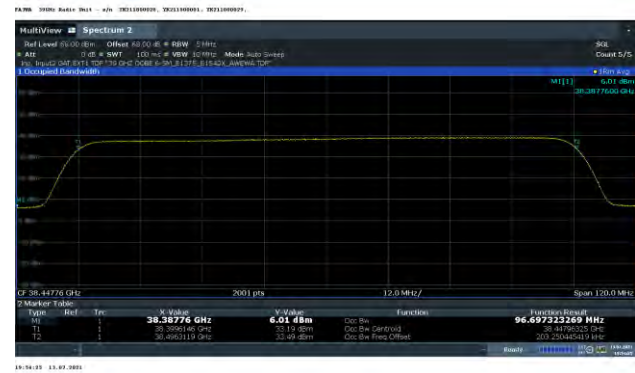


1 Carrier, Right, 64QAM Horizontal

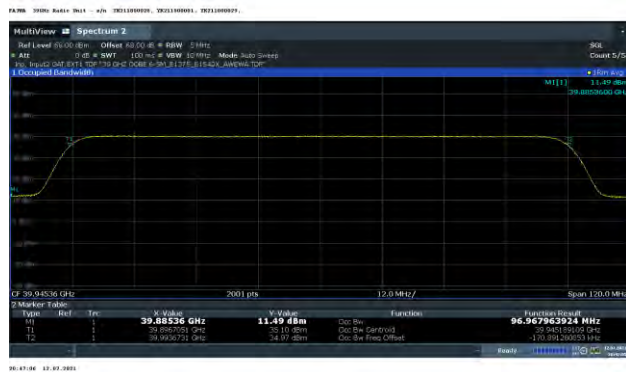


Vertical



2 Carrier, Left, QPSK Horizontal

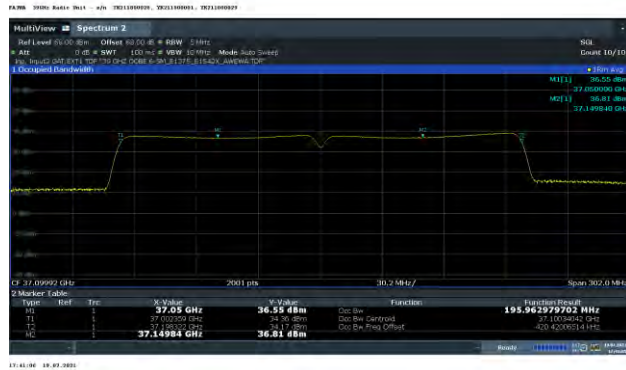

Vertical

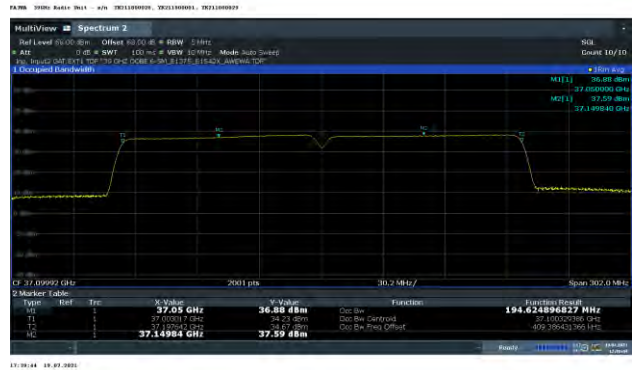

3 Carrier, Left, QPSK Horizontal



Vertical



4 Carrier, Left, QPSK Horizontal



Vertical




5 Carrier, Left, QPSK Horizontal




Vertical




6 Carrier, Left, QPSK Horizontal

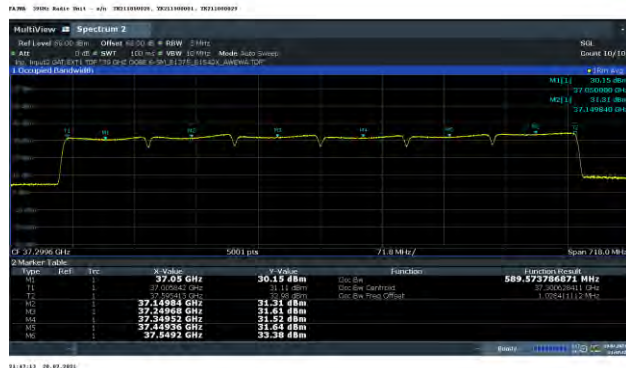


Vertical

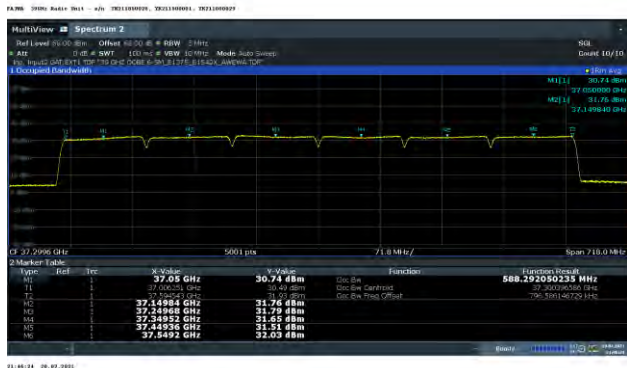


7 Carrier, Left, QPSK Horizontal

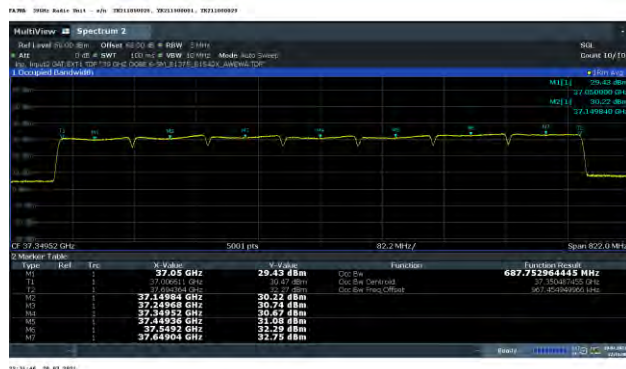

Vertical

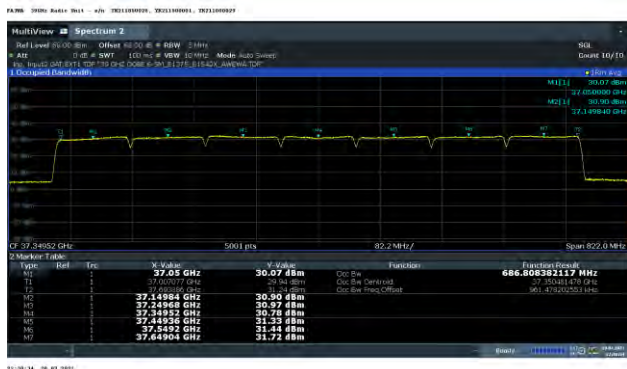


8 Carrier, Left, QPSK Horizontal

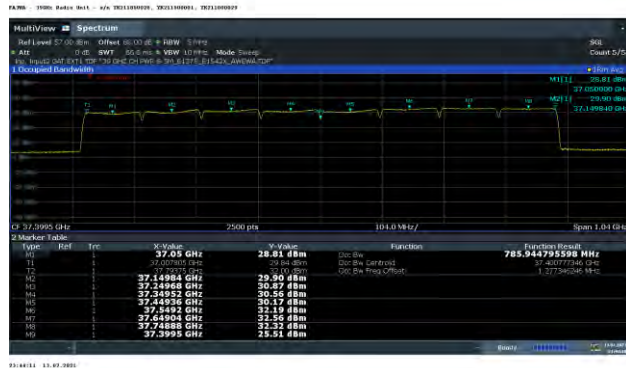


Vertical




8 Carrier, Middle, 16QAM Horizontal

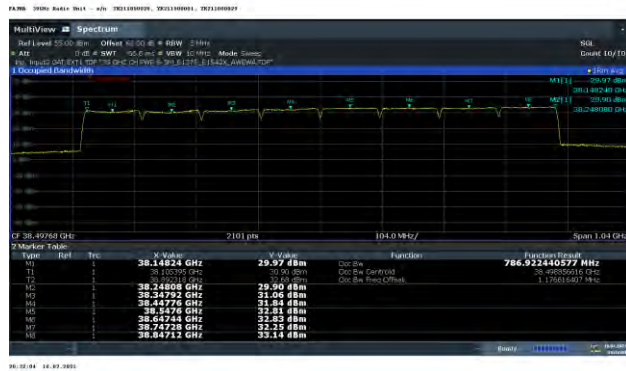


Vertical

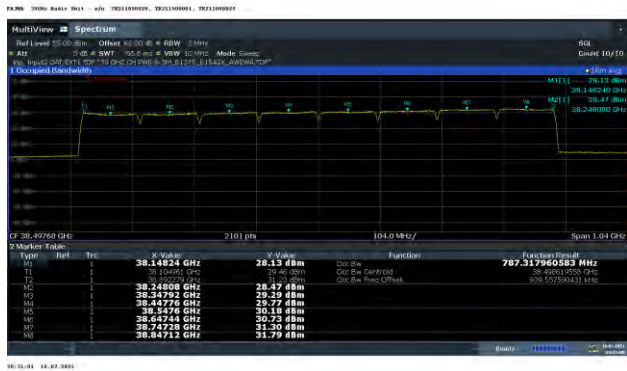


8 Carrier, Right, 64QAM Horizontal

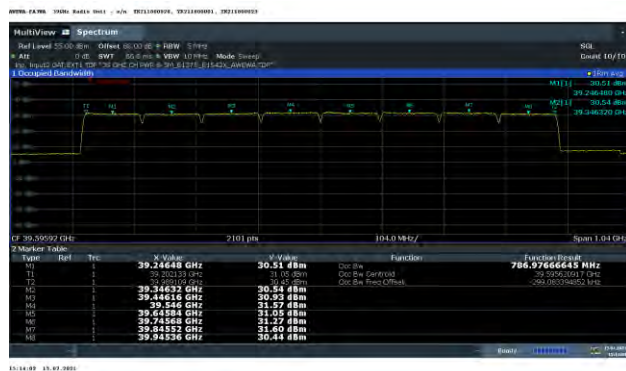


Vertical

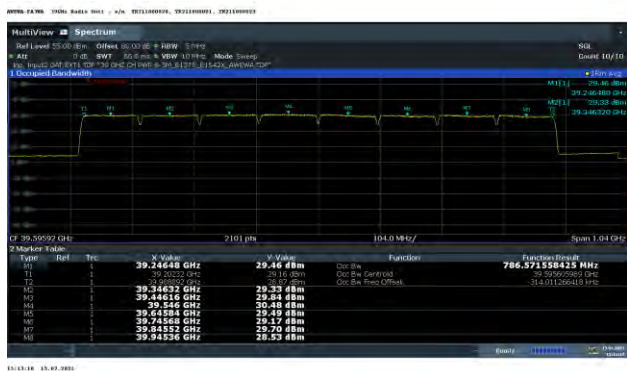

8 Carrier, Middle, 16QAM with 99.96 MHz channel spacing Horizontal

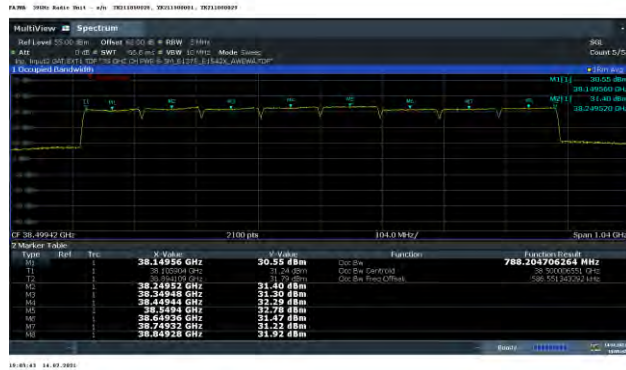


Vertical

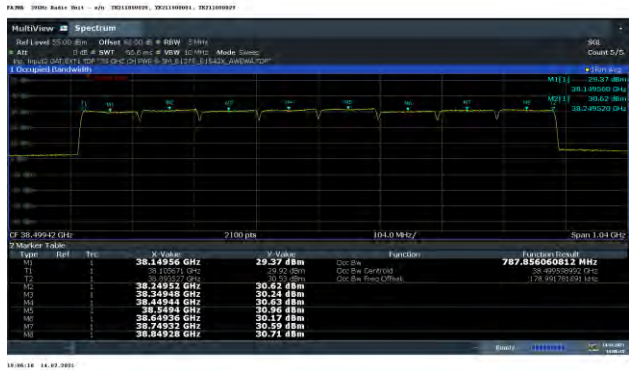


10MHz RBW


8 Carrier, Left, QPSK Horizontal

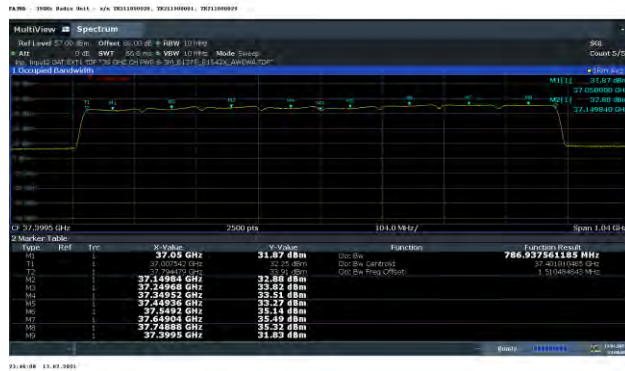

Vertical

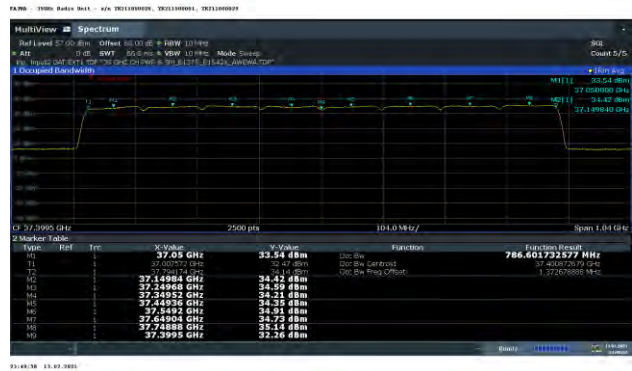


8 Carrier, Middle, 16QAM Horizontal

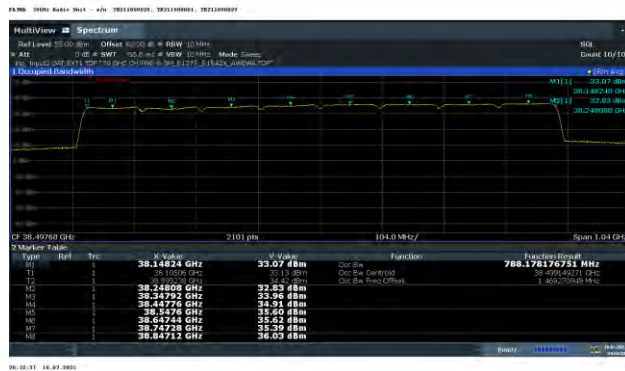


Vertical




8 Carrier, Right, 64QAM Horizontal

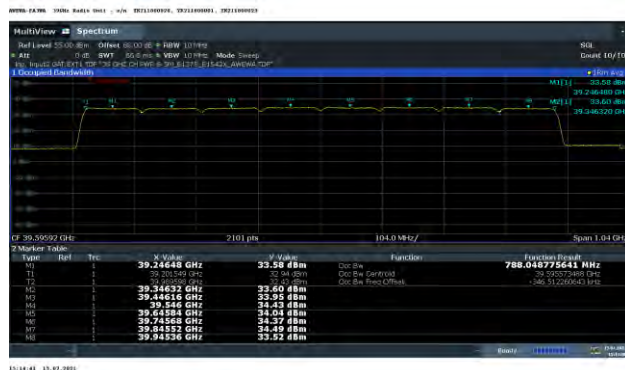


Vertical

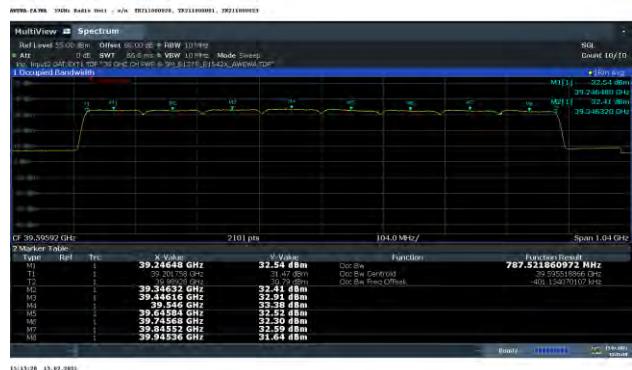

8 Carrier, Middle, 16QAM with 99.96 MHz channel spacing Horizontal

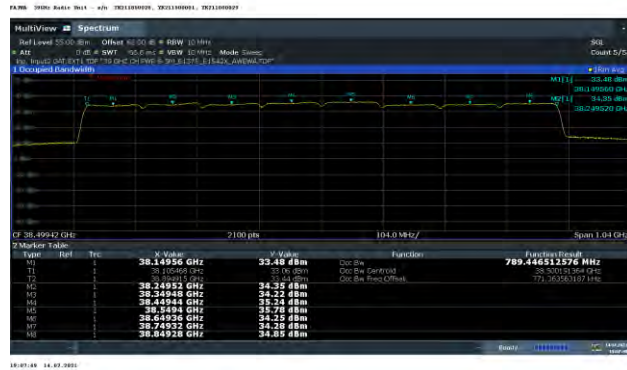

Vertical

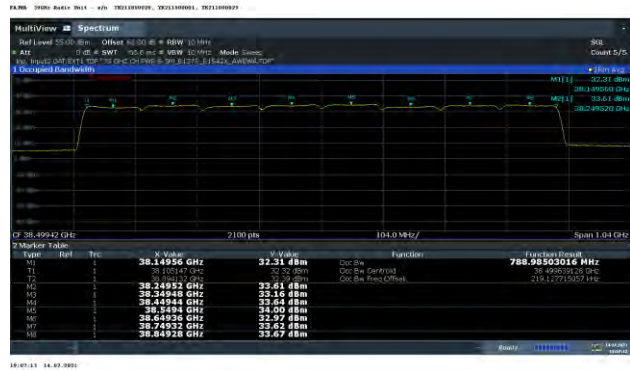

4.3.2 Occupied Bandwidth-Edge of Block Emissions

The classical Occupied Bandwidth measurement of Edge of Block Emissions or conveniently Out Of Band Emissions (OOBE) is an evaluation of the transmit carrier compliance with edge of block/edge of band requirements. This measurement documents the product's ability to maintain compliance with FCC Parts 2 and Part 30.203 limitations on emissions outside the block/ band of operation.

The **2AD8UFA3WA01 AWEWA/B 5G AirScale 39 GHz mmWave Radio** Unit presently supports nominal 100 MHz bandwidth 5G-New Radio LTE TDD technologies. The Out Of Band evaluation addresses operation with one through eight carriers.

The OOBE evaluation is used to measure the maximum average spurious levels outside the transmit band as measured at the 6.5m boundary distance. The measurements were performed for one carrier which is the maximum spectral density carrier at the left, center and right side of band, two thru eight carriers at the left side of band and eight carriers at the left, center and right side of band. Additionally, the eight carrier non-adjacent configurations when spaced across the maximum instantaneous bandwidth of 1.4 GHz were evaluated at left side and right side of the band.

For each configuration channel power and modulation were verified prior to other measurements. The measurement process meets the requirements of ANSI C63.26 and ISO17025. The test setup was as shown in Figure 4.1.1. Measurements were performed in the far field at 6.5m for both vertical and horizontal polarizations.

The Out Of Band Emissions of each of the signals identified in Table 4.3.6 was measured using a Rohde & Schwarz FSW85 Spectrum analyzer, a remote PC based instrumentation controller and the same calibrated RF attenuation path used for channel power. The correction included the products antenna gain to correct the emissions to the relative "antenna connection" port. All spurious emissions > 10% Signal BW outside the band was evaluated for compliance without the product gain as is required.

Plots are provided using the triggered functionality of the test analyzer and demonstrate compliance with edge of band limits.

These sheets contain data for multiple mixed carrier configurations for Left Edge, Center and Right Edge of the 39 GHz Part 30 Upper Microwave Flexible Use Service spectrum.

4.3.3 Requirements 39 GHz Emissions Limits

The Limit in 47 CFR 30.203 for Emissions Limits is as follows:

- (a) The conductive power or the total radiated power of any emission outside a licensee's frequency block shall be -13 dBm/MHz or lower. However, in the bands immediately outside and adjacent to the licensee's frequency block, having a bandwidth equal to 10 percent of the channel bandwidth, the conductive power or the total radiated power of any emission shall be -5 dBm/MHz or lower.
- (b)(1) Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater.
- (2) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges as the design permits.
- (3) The measurements of emission power can be expressed in peak or average values.

In order to address the limit as imposed for the requirement in 47CFR 96.41 we evaluated emissions per the requirements in ANSI C63.26 and per KDB 940660 D01 Part 30 CBRS Equipment.

The average detector function was used for all MXA measurements and the Peak detector function were used for EMC receiver measurements.

4.3.4 Measurement Offset and MIMO

As this was a radiated EIRP measurement no MIMO adjustment was used.

4.3.5 Mask Parameters

The mask parameters are in units as stated in Part 30 and are listed in Table 4.3.5. Mask parameters are as stated in Table 4.3.5. The Guard band was adjusted for 10% of the maximum signal bandwidth (80 MHz).

Mask Edge Offsets = $\frac{1}{2}$ the measurement Resolution Bandwidth were not used.

Table 4.3.5 - Mask Parameters Out Of Band / Edge of Band Emissions

Frequency	Part 30 Limit
GHz	dBm
35.00	-13
36.00	-13
36.92	-13
36.92	-5
37.00	-5
37.00	57
40.00	57
40.00	-5
40.08	-5
40.08	-13
43.00	-13

4.3.6 Measurement Path Adjustments

The measured power at the spectrum analyzer input was adjusted for calculated free space loss, cable loss, measurement antenna gain and the product antenna gain over its applicable frequency range as documented in Exhibit 6 of the filing and in the table below. This is appropriate for Out Of Band Emissions / Edge of Band emissions only for the frequency range that the transmit antenna has documentable and consistent gain. Since different products have different gain responses vs frequency, the products documentable antenna gain only applies for the operational frequency range for which the product is designed.

Sample calculation: The sample calculation below is the formula and the correction for 35 GHz;
Adjustment = Free Space Path Loss - Measurement Antenna Gain + Cable Loss - Product Antenna Gain.
Total Required Adjustment (@35 GHz) = **50.32 dB** = 79.58 dB -23.96dBi + 12.84dB – 18.14 dBi

This adjustment was only used for the OOBE/EoB frequency range. Table 4.3.6 below lists the offset correction factors used for the measurement distance of 6.5m including the FA3WA product gain. The measurements were made using a flat offset of 44 dB with a transducer correction identified below.

Table 4.3.6 Measurement Correction for Edge of Band / Out of Band Emissions

Frequency	Free Space Path Loss, PL	Measurement Antenna Gain, "G"	Measurement Cable Loss, "L"	PL-G1+L1	AEWF Antenna Gain, IEEE	Total Required Adjustment	FSW Offset	Transducer Correction Factor
GHz	dB	dBi	dB	dB	dBi	dB	dB	dB
35.00	79.58	23.96	12.84	68.46	18.14	50.32	44	6.324
35.50	79.70	23.52	13.03	69.21	20.05	49.16	44	5.162
36.00	79.83	24.27	13.20	68.75	21.97	46.78	44	2.784
36.50	79.95	23.28	13.35	70.01	22.81	47.20	44	3.203
37.00	80.06	24.42	13.39	69.04	23.65	45.39	44	1.387
37.50	80.18	23.27	13.39	70.29	23.82	46.47	44	2.469
38.00	80.30	24.29	13.45	69.45	23.99	45.46	44	1.461
38.50	80.41	23.18	13.54	70.76	24.11	46.65	44	2.653
39.00	80.52	23.65	13.73	70.60	24.22	46.38	44	2.382
39.50	80.63	23.03	13.76	71.36	24.10	47.26	44	3.256
40.00	80.74	23.00	13.79	71.53	23.98	47.55	44	3.547
40.50	80.85	23.35	13.84	71.34	23.91	47.43	44	3.433
41.00	80.96	23.22	13.98	71.72	23.84	47.88	44	3.880
41.50	81.06	23.28	14.14	71.93	23.20	48.73	44	4.731
42.00	81.17	23.39	14.23	72.01	22.56	49.46	44	5.459
42.50	81.27	23.81	14.36	71.81	21.52	50.29	44	6.290
43.00	81.37	23.55	15.30	73.11	20.49	52.62	44	8.620
43.50	81.47	23.60	16.14	74.01	18.55	55.46	44	11.462

4.3.7 Edge of Band Measurements

The Occupied Bandwidth and Edge-of-Band emissions measurements were made as a radiated measurement at a distance of 6.5m. The measurements were performed with an FSW spectrum analyzer in compliance with the procedure and requirements of ANSI C63.26. The test set-up diagram in Figure 4.1.1 was used. Testing was performed for the 100 MHz carrier configurations at the left side, and right side of the Part 30 Band. All of the Edge of Band measurements were performed at the specified 1 MHz resolution bandwidths. Adjustment factors were as described in Section 4.3.6 above.

4.3.7.1 Initial Results - Edge of Band Measurements

The initial Occupied Bandwidth and Edge-of-Band emissions measurements identified a single significant Out Of Band Emissions (OOBE). This emission was identified as a single LO narrowband spurious signal at 40.6489 GHz. Multiple transmit configurations were evaluated to determine the worst case operating configuration for generating the maximum spurious signal at 40.6489 GHz. Multiple scans confirmed that the maximum signal was generated by a single full power QPSK carrier at the Left side of the band.

The OOBE measurements determined that the 40.6489 GHz signal maximum value was 8.39 dBm when not adjusted for the AWEUA's Transmit Antenna gain. Per KDB 842590 D01 guidance these emissions needed to be evaluated using the Total Radiated Power methodology.

4.3.8 Total Radiated Power Evaluation of Out Of Band Emissions

Per KDB 842590 D01 the use of product array gain to reference the radiated spurious to the conducted transmit signal is not valid at greater than 10% of signal bandwidth outside the band. For reference, if the gain was allowable for the 40.6489 GHz spur it would result in a final value of -15.52 dBm which is 2.52 dB of margin to the limit. Without the consideration for transmit antenna gain the OOB measurements determined that the 40.6489 GHz signals maximum value was 8.39 dBm and needed to be evaluated for Total Radiated Power.

Following the requirements and guidance of KDB 842590 D01 a Two and Three Cut Total Radiated Power (TRP) evaluation was performed on the spurious signals.

Two Cut and Three cut TRP evaluations were performed at a measurement distance of 4m per KDB 842590 D01. We used our ISO 17025 accredited Radiated Emissions measurement process software with updated software drivers for control of the FSW85 analyzer and modifications for data export. Measurements were performed every 4 degrees. For cuts one and two the maximum beam height was 180 cm. For Cut 3 the height was 170 cm. The first cut was performed with the receive antenna Vertically polarized and the second cut was performed with the receive antenna Horizontally polarized. The product under test has two arrays (H&V) which are at the same height and their peak beam is also at the same height but about 1 degrees apart in azimuth. There was no attempt to duplicate the data cuts as it would not result in any change in average value. The sweeps were performed with the following settings as follows:


	<u>Spur #1</u>
Frequency range:	40.5 GHz to 40.8 GHz
Resolution Bandwidth:	1 MHz
Video bandwidth:	3 MHz
Detector:	RMS
Trace averaging Factor	120
Number of points	3001
Turntable step size	4 degrees
Three cut correction factor	1.5 dB

4.3.8.1 Total Radiated Power Results

The net result for the Spur was a maximum corrected TRP value of -17.654 dBm at 40.6492 GHz. Which demonstrates 4.654 dB margin to the -13 dBm limit. This emission is reportable.

The plot of the Three Cut Average TRP measurements over frequency are plotted below.

TRP Data Plot for 40.5-40.8 GHz

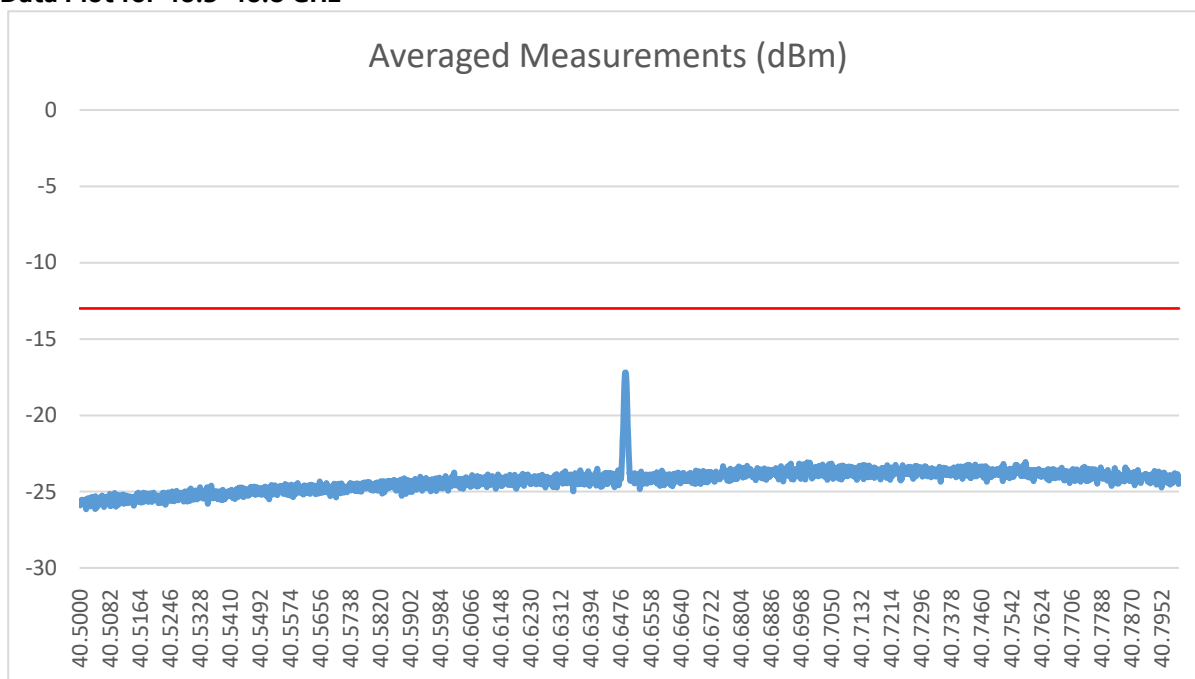

4.3.8.2 Out Of Band Emissions Results

The Out Of Band Emissions plots for the tested configurations of one through eight carriers operation are below. These Occupied Bandwidth and Edge-of-Band emissions measurements were made as a radiated measurement at the verified far field measurement distance of 6.5m. The plots show compliance to the Part 30 FCC limit for the n260 Band for all signals except the single narrowband local oscillator spurious at 40.6489 GHz. This spur was evaluated for compliance using the three cut TRP method and found to be compliant.

The out-of-band emissions plots attached below document that all the emissions are compliant.


The measurement results of the occupied bandwidth and the out-of-band emissions as documented in the plots and Table 4.3.6.1 demonstrate the full compliance with the Rules of the Commission for the operating band.

Table 4.3.7.1 Results - Occupied Bandwidth-Edge of Block Emissions/ OOB


Center Frequencies of Edge Channels, GHz	Location	Number of Carriers	Modulation	Polarization	Occupied Bandwidth Edge of Block / OOB Compliance
37.05	Left Side of Lower Band	1	QPSK	Horizontal	Compliant
				Vertical	Compliant
38.447760	Middle of Overall Band	1	16QAM	Horizontal	Compliant
				Vertical	Compliant
39.945360	Right Side of Upper Band	1	64QAM	Horizontal	Compliant
				Vertical	Compliant
37.05 37.14984	Left Side of Band	2 adjacent	QPSK	Horizontal	Compliant
				Vertical	Compliant
37.05 37.24968	Left Side of Band	3 adjacent	QPSK	Horizontal	Compliant
				Vertical	Compliant
37.05 37.34952	Left Side of Band	4 adjacent	QPSK	Horizontal	Compliant
				Vertical	Compliant
37.05 37.44936	Left Side of Band	5 adjacent	QPSK	Horizontal	Compliant
				Vertical	Compliant
37.05 37.5492	Left Side of Band	6 adjacent	QPSK	Horizontal	Compliant
				Vertical	Compliant
37.05 37.64904	Left Side of Band	7 adjacent	QPSK	Horizontal	Compliant
				Vertical	Compliant
37.05 37.74888	Left Side of Band	8 adjacent	QPSK	Horizontal	Compliant
				Vertical	Compliant
38.14824 38.84712	Middle of Overall Band	8 adjacent	16QAM	Horizontal	Compliant
				Vertical	Compliant
39.24648 39.94536	Right Side of Upper Band	8 adjacent	64QAM	Horizontal	Compliant
				Vertical	Compliant
38.14956 38.84928	Middle w/ 99.96 MHz channel spacing	8 adjacent	16QAM	Horizontal	Compliant
				Vertical	Compliant

4.3.8.2.1 Occupied Bandwidth Edge of Band Plots


1 Carrier – QPSK / Left OOBE/EoB – Horizontal Polarization

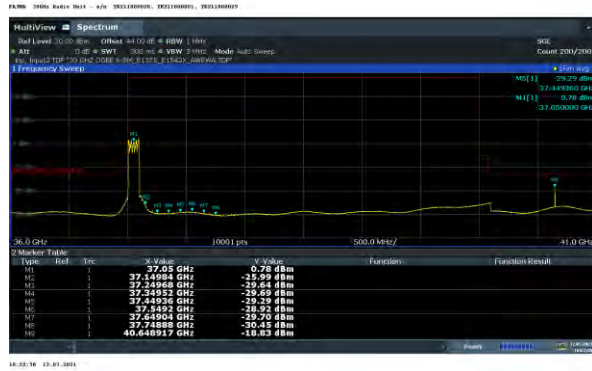


OOBE/EoB – Vertical Polarization

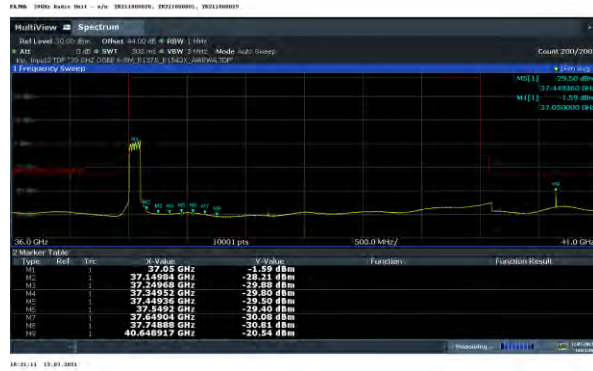


1 Carrier – 16QAM / Middle OOBE/EoB – Horizontal Polarization

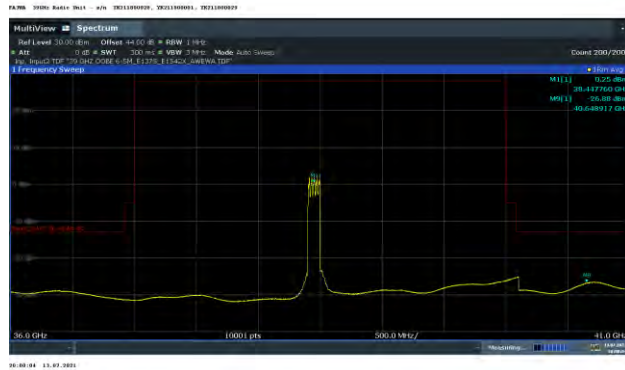


OOBE/EoB – Vertical Polarization

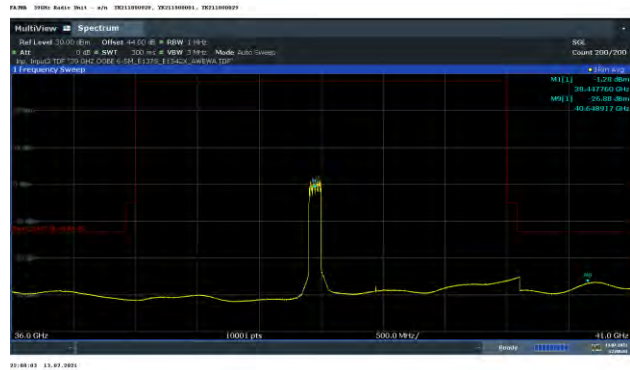


1 Carrier – 64QAM / Right OOBE/EoB – Horizontal Polarization

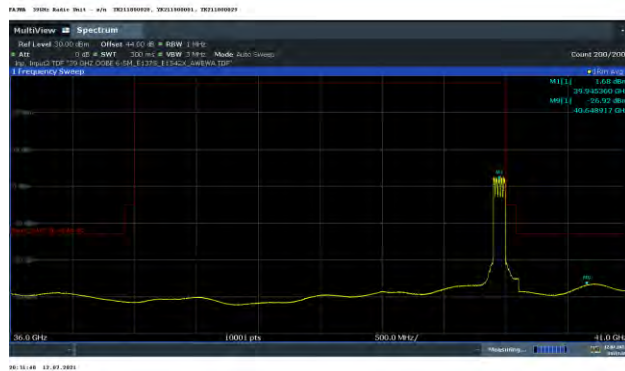

OOBE/EoB – Vertical Polarization

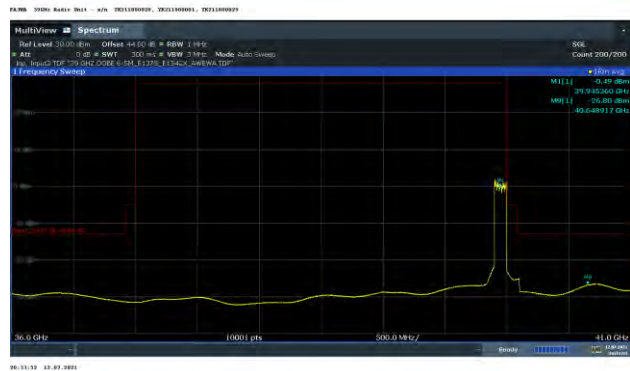

2 Carrier – QPSK / Left OOBE/EoB – Horizontal Polarization

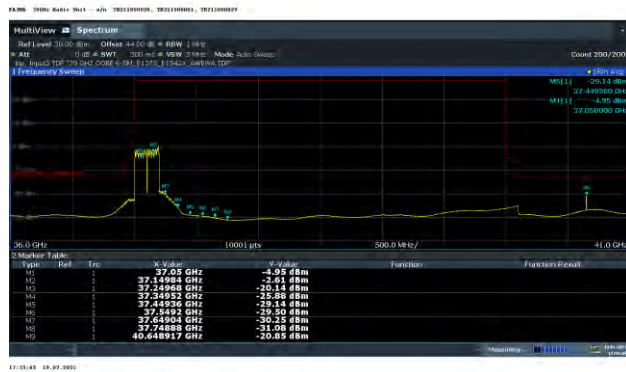


OOBE/EoB – Vertical Polarization




3 Carrier – QPSK / Left OOBE/EoB – Horizontal Polarization



OOBE/EoB – Vertical Polarization

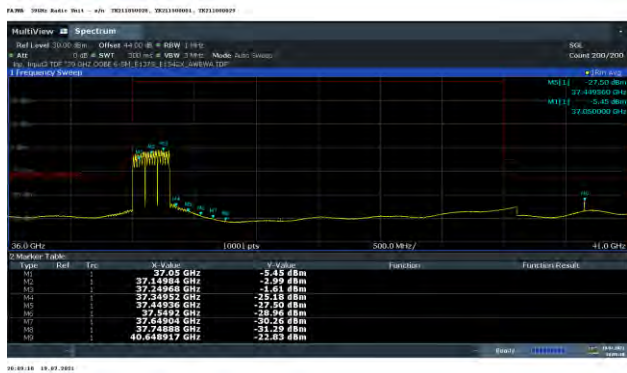


4 Carrier – QPSK / Left OOBE/EoB – Horizontal Polarization

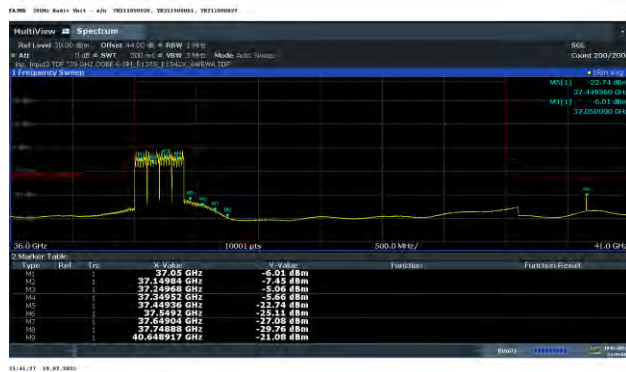

OOBE/EoB – Vertical Polarization




5 Carrier – QPSK / Left OOBE/EoB – Horizontal Polarization

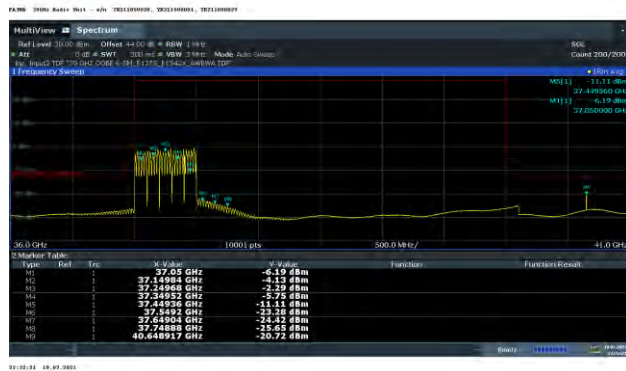


OOBE/EoB – Vertical Polarization




6 Carrier – QPSK / Left OOBE/EoB – Horizontal Polarization

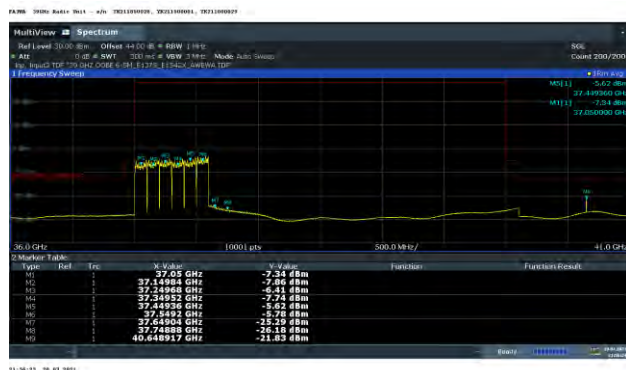


OOBE/EoB – Vertical Polarization

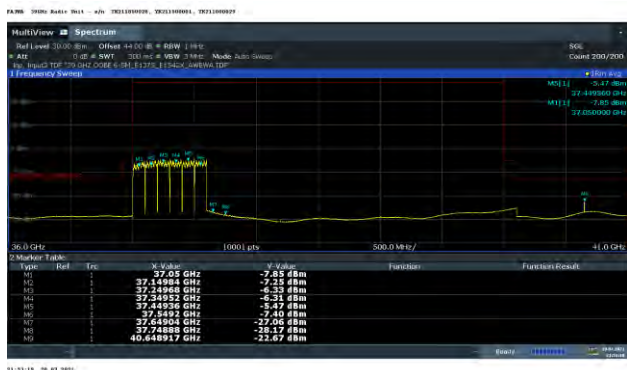


7 Carrier – QPSK / Left OOBE/EoB – Horizontal Polarization

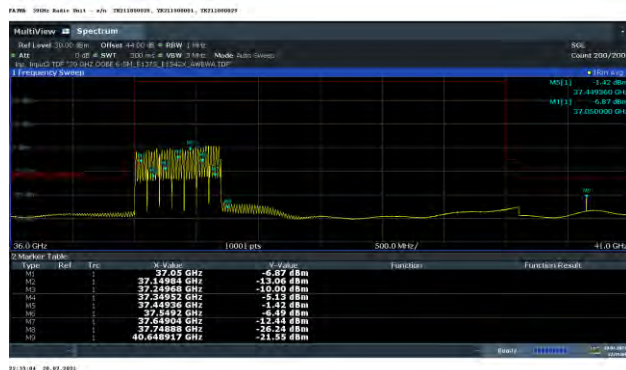


OOBE/EoB – Vertical Polarization

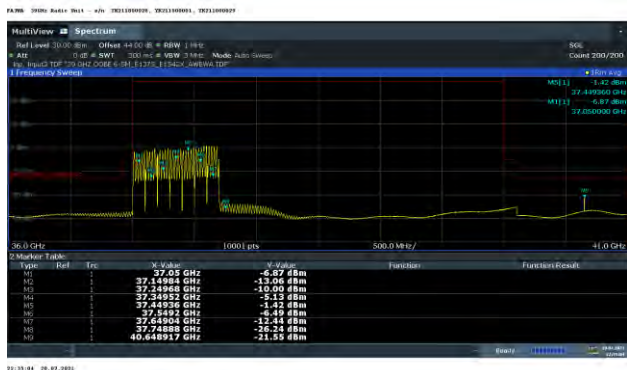

8 Carrier – QPSK / Left OOBE/EoB – Horizontal Polarization

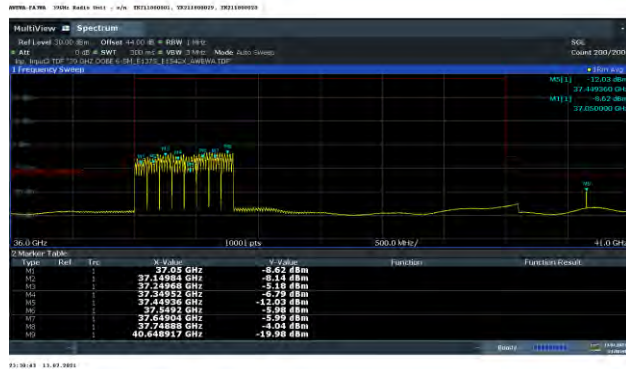

OOBE/EoB – Vertical Polarization

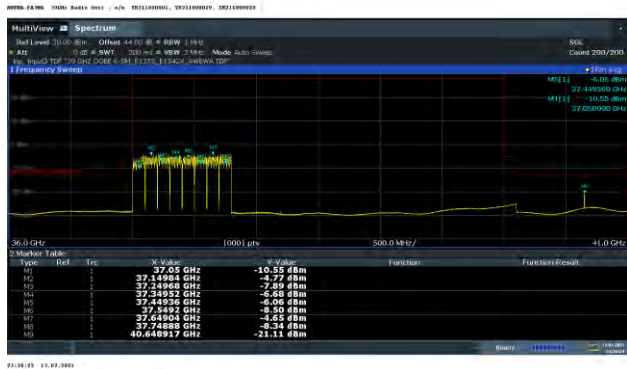


8 Carrier – 16QAM / Middle OOBE/EoB – Horizontal Polarization



OOBE/EoB – Vertical Polarization




8 Carrier – 64QAM / Right OOBE/EoB – Horizontal Polarization

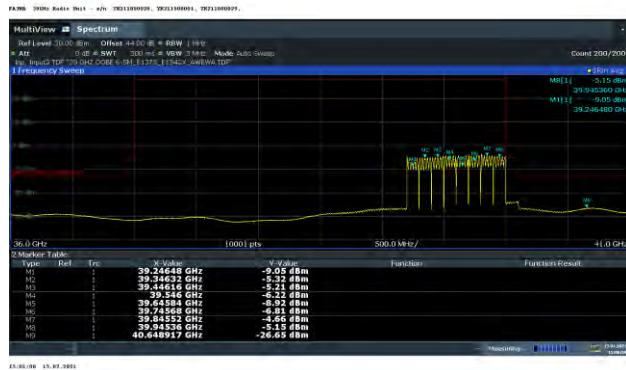


OOBE/EoB – Vertical Polarization



8 Carrier – 16QAM with 99.96 MHz channel spacing / Middle OOBE/EoB – Horizontal Polarization

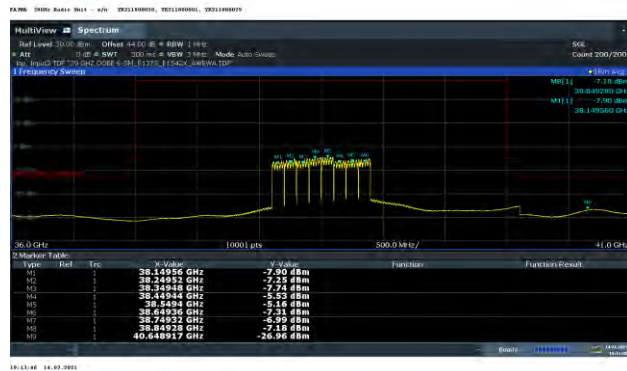

OOBE/EoB – Vertical Polarization

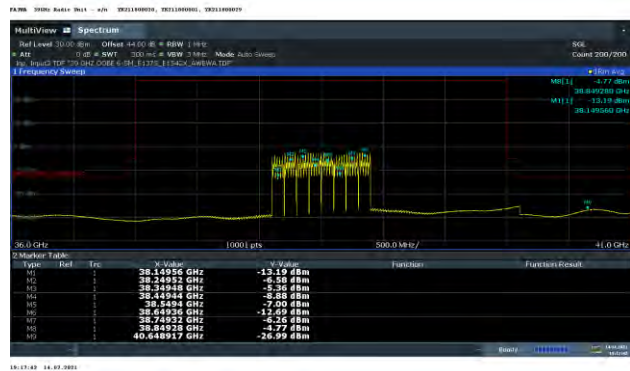

4.4 Section 2.1051 MEASUREMENT REQUIRED: SPURIOUS EMISSIONS AT THE ANTENNA TERMINALS

This test measures the emissions of spurious signals which may come from harmonic, parasitic, intermodulation and frequency conversion products and are outside the necessary bandwidth but excludes Edge-of-Band emissions.

4.4.1 Section 2.1051 Spurious Emissions at Antenna Terminals

Spurious Emissions were investigated per 47CFR Section 2.1057(a)(1) over the frequency range of 30 MHz to 200 GHz as specified in 2.1057(a)(2).

2.1057(a) In all of the measurements set forth in §§2.1051 and 2.1053, the spectrum shall be investigated from the lowest radio frequency signal generated in the equipment, without going below 9 kHz, up to at least the frequency shown below:

(3) If the equipment operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower.

(c) The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

(d) Unless otherwise specified, measurements above 40 GHz shall be performed using a minimum resolution bandwidth of 1 MHz.

4.4.2 Required Limit

The required emission limitation specified in 47CFR 30.203 (a) was applied to these tests. Based upon the criterion given in Section 30 of the Code and as developed in 4.3.3, the required emission limit for emissions outside a licensee's frequency block is:

47CFR 30.203 (a) (a) The conductive power or the total radiated power of any emission outside a licensee's frequency block shall be -13 dBm/MHz or lower. However, in the bands immediately outside and adjacent to the licensee's frequency block, having a bandwidth equal to 10 percent of the channel bandwidth, the conductive power or the total radiated power of any emission shall be -5 dBm/MHz or lower.

4.4.3 Results

Since there is no antenna terminal, all measurements were performed as radiated measurements and standard radiated emissions. The Edge of Band emissions, presented in Section 4.3.7 and the Total Radiated Power (TRP) evaluation in 4.3.8 document the OOB compliance for the 36-41 GHz frequency range which is around the Transmit ranges of 37 - 40 GHz. Those measurements are appropriate as the products antenna gain is documented over the same ranges. There was one significant emission detected and was shown to be compliant in Section 4.3.8.1. There were no other emissions detected in these ranges within 20 dB of the limit.

The standard radiated emissions are documented in Section 4.5 "*Section 2.1053 Measurement Required: Field Strength of Spurious Radiation*". The test configuration is shown in Figure 4.4.1 documents the test set up used for the measurements. Measurements in Section 4.5

The measurements were performed in compliance with ANSI C63.26, KDB 842590 D01, C63.26 mmWave JTG, and our ISO17025 process. The measurement meets the ANSI C63.26 requirements in paragraphs 5.2.4.4.1 and 5.7 which requires that the number of points in the sweep be $> 2 \times \text{Span/RBW}$. The ESW-44 spectrum analyzer measurements examine the 30 MHz to 40 GHz range. The FSW based mmWave transmitter test system were used to provide measurement capability from 40 GHz to 220 GHz range.

4.5 Section 2.1053 MEASUREMENT REQUIRED: FIELD STRENGTH OF SPURIOUS RADIATION

The field strength measurements of radiated spurious emissions were made in FCC registered five and ten meter semi-anechoic chambers AR-4 and AR-8 , (FCC Registration Number: 395774) **NVLAP** Lab Code: 100275-0 and IC (Filing Number: 6933F-4 & 8) which are maintained by Nokia Bell Labs in Murray Hill, New Jersey.

The **2AD8UFA3WA01** (EUT) was configured in semi-anechoic chambers AR-4 & AR-8 in a manner simulating a normal field installation. The product's field installation hardware was used to mount the Base Unit and Two Extension Modules to a wooden pole with the bottom of the product 1.5m above the turntable ground plane. The recommendations of ANSI C63.4–2014, C63.26-2015, KDB 842590 D01 and C63.26 mmWave JTG were followed for EUT testing setup and cabling. The EUT was configured to operate in a 5G-NR test model per the constraints identified in section 4.2. A photograph of this setup is in Exhibit 12 of the filing package.

The Main Radio Unit was configured into the full power forward beam transmit configuration as defined in Table 4.5.1. The unit was configured with the maximum transmit bandwidth of eight carriers for each polarization. The Vertical and Horizontal polarizations each transmitted 52 dBm EIRP, with the total transmit power of 55 dBm EIRP. The product in the below configurations was evaluated over the 30 MHz to 100 GHz frequency range as required.

Table 4.5.1 EUT Transmit Configuration

# of Carriers	Test Configuration NR-ARFCN	FA3WA Tx Frequencies GHz	Active Transmit Polarizations	Signal Bandwidth, MHz	Modulation	Total EIRP Power, dBm	Radiated Emissions Pass / Fail
1	2229999	37.05000	H & V	100	QPSK	55	Pass
8	2266607 2268271 2269935 2271599 2273263 2274927 2276591 2278255	39.24648 39.34632 39.44616 39.54600 39.64584 39.74568 39.84552 39.94536	H & V	100	64QAM	55	Pass

4.5.1 Spurious Radiation and Radiated Emissions Requirements.

This product meets Part 15B, and Part 30.203 requirements. FCC Part 15 Class B require emissions to be below 54.5 dBuV/m at 3m. Part 30.203 requires emissions to be below the value generated by a conducted emission of -13 dBm. This is a standard value for wireless products typically defined as

$$-43+10\log P=-13 \text{ dBm.}$$

The evaluation of emissions at the Edge of Band was detailed in Sections 4.3.7 and 4.3.8. Emissions removed from the transmit band were evaluated identically to other wireless products.

Measurements were performed in compliance with Section 2.1053, FCC publication 442401, the requirements detailed above and clause 5.5 of ANSI C63.26. For this case the evaluation of acceptable radiated field strength is as follows.

The calculated emission levels were found by:

$$P_{\text{meas}} (\text{dBm}) + \text{Cable Loss}(\text{dB}) + \text{Antenna Factor}(\text{dB}) + 107 (\text{dB}\mu\text{V}/\text{dBm}) - \text{Amplifier Gain} (\text{dB}) \\ = \text{Field Strength} (\text{dB}\mu\text{V}/\text{m})$$

Title 47CFR section 30.203 and 2.1053 contains the requirements for the levels of spurious radiation as a function of the EIRP of the modulated carrier with 100 MHz of bandwidth. The reference level for the modulated carrier is calculated as the field produced by an isotropic radiator excited by the transmitter output power according to the following relation taken from Reference Data for Radio Engineers, page 27-7, 6th edition, IT&T Corp.

$$E = (120\pi P)^{1/2} = [(30 \cdot P)^{1/2}] / R \\ 20 \log (E \cdot 10^6) - (43 + 10 \log P) = 82.23 \text{ dB } \mu\text{V}/\text{meter}$$

Where: E = Field Intensity in Volts/ meter R = Distance in meters = 3 m
P = Transmitted Power, Watts = 316.23 W

The field strength of radiated spurious emissions measured was determined by

$$E (\text{dB}\mu\text{V}/\text{m}) = V_{\text{meas}} (\text{dB}\mu\text{V}) + \text{Cable Loss} (\text{dB}) + \text{Antenna Factor} (\text{dBi}/\text{m}).$$

Field strength measurements of radiated spurious emissions were made in the 5m semi-anechoic chamber, AR-4 as detailed above. The recommendations of ANSI C63.4 and ANSI C63.26 were followed for EUT testing setup, cabling, and measurement approach and procedures. All the measurement equipment used, including antennas, was calibrated in accordance with ISO 9001 process. The EUT setup diagram is given in the Figure 4.5. The minimum margins to the Part 30.203 limit is as measured in accordance with 2.1053. The test data follows.

4.5.2 Radiated Spurious Emissions Measurements: 40 GHz - 100 GHz

The radiated spurious emissions spectrum was investigated per 47CFR Section 2.1057(a)(1) for spurious emissions over the frequency range of 40 GHz to 200 GHz. The procedure and methodology followed the recommendations of ANSI C63.4-2014, C63.26-2015 and C63.26 mmWave JTG.

A Rohde & Schwarz FSW 67 was employed with external three port Harmonic Down Converters (HDC). The waveguide RF input converters provided coverage for 40-60 GHz (U), 60-90 GHz (E), 90-140 GHz (F) and 140-220 GHz (G) bands. The HDC's were paired with 25 dB Standard Gain Horns. A 40 GHz waveguide high pass filter was utilized to limit the transmit carrier emissions from overloading the 40-60 GHz HDC.

Operation of the harmonic down converters utilizes a swept LO with a fixed IF frequency of 1.325 GHz. The IF cable loss for the 4m of cable was 1.03 dB and was corrected internally to the FSW along with the Conversion loss for the harmonic down converters. Additional external shielding of the HDC's was necessary to limit carrier energy from creating immunity issues with the measurements.

Cable loss compensation for the LO cable loss was necessary to enable scan heights from 1-3 meters. The experience of this test indicated that a 3m maximum test height with this product is adequate (0.5 m above the top of product). This allowed for a reduction of the test cables length and reduce IF images which occurred at multiples of the 1.325 GHz IF frequency.

Measurements were performed at the following distances:

mmWave Band	Frequency Range, GHz	Measurement distance meters
U	40-60	4
E	60-90	4
F	90-140	3
G	140-220	3

Operation was verified prior to testing by bore-sighting a mmWave signal generator or mmWave source module with an antenna identical to the measurement antenna at the test distance. The location of the maximum beams had previously been ascertained for both vertical and horizontal polarizations. The beam is narrow and radiated power is down 23 dB at just ± 12 degrees off center. All of the emissions and harmonics were found to be centered on the beam as well.

Based upon previous experience a continuous max hold (average detector) sweep of the product in elevation and azimuth was employed for full coverage scanning of the product. For these measurements in each band the scan was started at the beam peak location of 21 degrees azimuth, and a nominal elevations 172 cm for Vertical and Horizontal. The peak was first located for the most prominent emissions in the span. The elevation was then swept down to 1m and back up back to 3m and returned to the beam peak. The product was then rotated continuously to 360 degrees back to 0 degrees and back to 21 degrees. This method locates any emission and provides the maximum emissions but required operation without the analyzer internal noise reduction function. Peaks were noted using the marker function which were later formally measured with the required 1 MHz resolution bandwidth. Measurements for 40-200 GHz were performed this way for the 1 carrier and the 8 carrier transmit configurations.

4.5.2.1 Bandwidth Limits and Corrections: Radiated Measurements 40 GHz - 100 GHz

All corrections were made to the signal level as detailed below.

4.5.2.2 Resolution Bandwidth and # of Points:

For measurements above 40 GHz we performed final measurement scans with the required 1 MHz resolution bandwidth and preliminary scans with either a 10 MHz or 3 MHz resolution bandwidth.

Final measurements were performed so that the resolution bandwidth and span limitations of ANSI C63.26 were followed so that the number of measurement points $> 2(\text{Span}/\text{RBW})$.

Our FSW was upgraded from the original filing and now processes 100,000 data points across the screen which allows for 50 GHz spans with a 1 MHz RBW. Multiple spans were therefore used when necessary to evaluate the peak spurious emissions detected.

4.5.2.3 Part 30 Limit:

The -13 dBm emissions limit was not adjusted in any way.

4.5.2.4 Emissions Corrections

The measured signal was corrected by the FSW for the harmonic downconverter (HDC) conversion loss. In addition, a correction consisting of the radiated path loss, the gain of the measurement antenna and a 1 dB IF cable loss (at 1.3 GHz) was applied. There was no correction applied for the product antenna gain as these measurements are outside the transmit frequency range.

$$\text{Emissions Correction} = \text{Path Loss} - \text{Antenna Gain} + \text{IF Cable loss (1 dB)}$$

$$\text{Where Free Space Path Loss} = ((4\pi d)/\lambda))^2$$

Table 4.5.2.4 details the correction for the three bands.

Table 4.5.2.4a Radiated Emissions Corrections for 40-60 GHz at 4m

Frequency	λ	Measurement Distance, d	Path Loss	Measurement Antenna Gain	IF Cable Loss	Emissions Correction Total
GHz	m	m	dB	dB	dB	dB
40.0	0.0075	4	76.52	21.80	1.03	55.75
42.5	0.0071	4	77.05	22.20	1.03	55.87
45.0	0.0067	4	77.55	22.50	1.03	56.07
47.5	0.0063	4	78.02	22.70	1.03	56.34
50.0	0.0060	4	78.46	23.00	1.03	56.49
52.5	0.0057	4	78.89	23.30	1.03	56.61
55.0	0.0055	4	79.29	23.40	1.03	56.91
57.5	0.0052	4	79.68	23.60	1.03	57.10
60.0	0.0050	4	80.05	23.70	1.03	57.37

Table 4.5.2.4b Radiated Emissions Corrections for 60-90 GHz at 4m

Frequency	λ	Measurement Distance, d	Path Loss	Measurement Antenna Gain	IF Cable Loss	Emissions Correction Total
GHz	m	m	dB	dB	dB	dB
60.0	0.0050	4	80.05	21.80	1.03	59.276
65.0	0.0046	4	80.74	22.30	1.03	59.471
70.0	0.0043	4	81.38	22.70	1.03	59.715
75.0	0.0040	4	81.98	23.00	1.03	60.014
80.0	0.0038	4	82.54	23.40	1.03	60.175
85.0	0.0035	4	83.07	23.60	1.03	60.501
90.0	0.0033	4	83.57	23.80	1.03	60.798

Table 4.5.2.4c Radiated Emissions Corrections for 90-100GHz at 3m

Frequency	λ	Measurement Distance, d	Path Loss	Measurement Antenna Gain	IF Cable Loss	Emissions Correction Total
GHz	m	m	dB	dB	dB	dB
90.0	0.0033	3	81.07	21.90	1.03	60.199
95.0	0.0032	3	81.54	22.30	1.03	60.269
100.0	0.0030	3	81.98	22.60	1.03	60.414
105.0	0.0029	3	82.41	22.95	1.03	60.488
110.0	0.0027	3	82.81	23.30	1.03	60.542
115.0	0.0026	3	83.20	23.60	1.03	60.628
120.0	0.0025	3	83.57	23.85	1.03	60.748
125.0	0.0024	3	83.92	24.05	1.03	60.902
130.0	0.0023	3	84.26	24.18	1.03	61.113
135.0	0.0022	3	84.59	24.35	1.03	61.271
140.0	0.0021	3	84.91	24.50	1.03	61.437

Table 4.5.2.4d Radiated Emissions Corrections for 140-200GHz at 3m.

Frequency	λ	Measurement Distance, d	Path Loss	Rx Antenna Gain	Total	Offset	Transducer Factor
GHz	m	m	dB	dB	dB	dB	dB
140.0	0.002143	3	84.91	23.40	61.51	62.07	-0.56
145.0	0.002069	3	85.21	23.65	61.56	62.07	-0.51
150.0	0.002000	3	85.51	23.90	61.61	62.07	-0.46
155.0	0.001935	3	85.79	24.15	61.64	62.07	-0.43
160.0	0.001875	3	86.07	24.30	61.77	62.07	-0.30
165.0	0.001818	3	86.33	24.55	61.78	62.07	-0.29
170.0	0.001765	3	86.59	24.70	61.89	62.07	-0.18
175.0	0.001714	3	86.84	24.95	61.89	62.07	-0.18
180.0	0.001667	3	87.09	25.10	61.99	62.07	-0.08
185.0	0.001622	3	87.33	25.25	62.08	62.07	0.01
190.0	0.001579	3	87.56	25.40	62.16	62.07	0.09
195.0	0.001538	3	87.78	25.55	62.23	62.07	0.16
200.0	0.001500	3	88.00	25.70	62.30	62.07	0.23

4.5.3 Field Strength of Spurious Radiation Results:

This product meets Part 15B limits below 10 GHz and Part 30 Requirements. For the Title 47CFR section 30.203 and 2.1053 test, the field strength of any spurious radiation, measured at 3m, is required to be less than 82.23 dBμV/meter. Emissions equal to or less than 62.23 dBμV/meter are not reportable.

There was a single reportable emission at 40.6489 GHz. This signal was addressed in section 4.3.7 and 4.3.8. This signal also was compliant during normal radiated emissions testing. The TRP measured spurious signal level of -17.654 dBm at 40.6492 GHz demonstrates a 4.654 dB margin to the -13 dBm limit.

All other emissions below 40 GHz were below the Part 15 Class B limit.

Presented results include the standard measurements from 30 MHz to 40 GHz followed by the four mmWave bands. The worst-case emissions are presented. The scans are performed with the required 1 MHz resolution bandwidth and sufficient number of points per ANSI C63.26 with markers at the frequencies of interest. The limit in the measurement is the conducted -13 dBm limit as specified in Part 30.203.


Corrections to the emissions levels consisted of only the HDC conversion loss, the Free Space Path Loss and the gain of the measurement antenna as detailed in Table 4.5.2.4.

Over the out of band spectrum investigated from 30 MHz to 200 GHz, reportable spurious emissions were detected and determined to be compliant with the Part 30 limit. The minimum margin, measured in the horizontal polarization, was **3.07 dB at 128.98436 GHz**. Additionally, from 30 MHz to 40 GHz all non-transmitter emissions were a minimum of 1.61 dB below the Part 15 Class B limit.

This demonstrates that the **AWEWA/B 5G AirScale 39 GHz mmWave Radio FCC ID: 2AD8UFA3WA01**, the subject of this application, complies with FCC Part 15 Class B, and FCC Sections 2.1053, 30.203 and 2.1057 of the Rules.


Photographs of the measurement setup are in the filing exhibits.

Figure 4.5 Radiated Emissions Product Setup

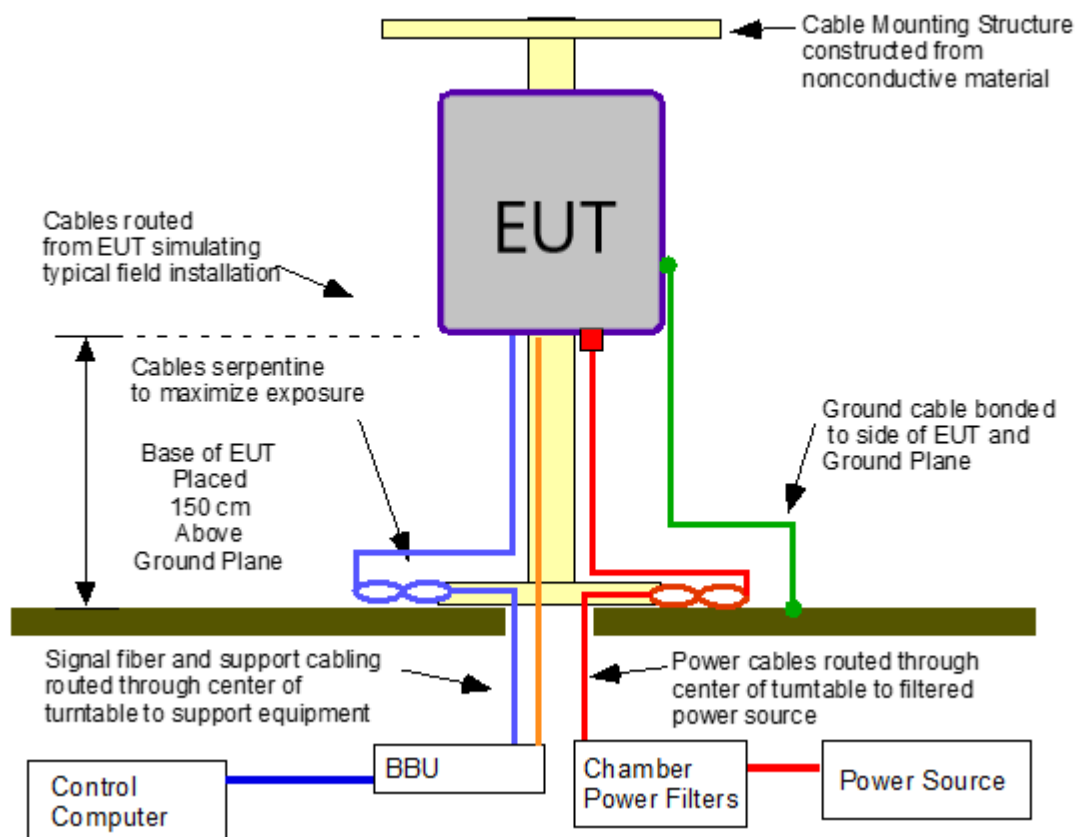

4.5.4 Transmitter Measurements of Radiated Spurious Emissions

T23 Radiated Emissions 3m 30MHz-1GHz 8CC TX-On Part 15B

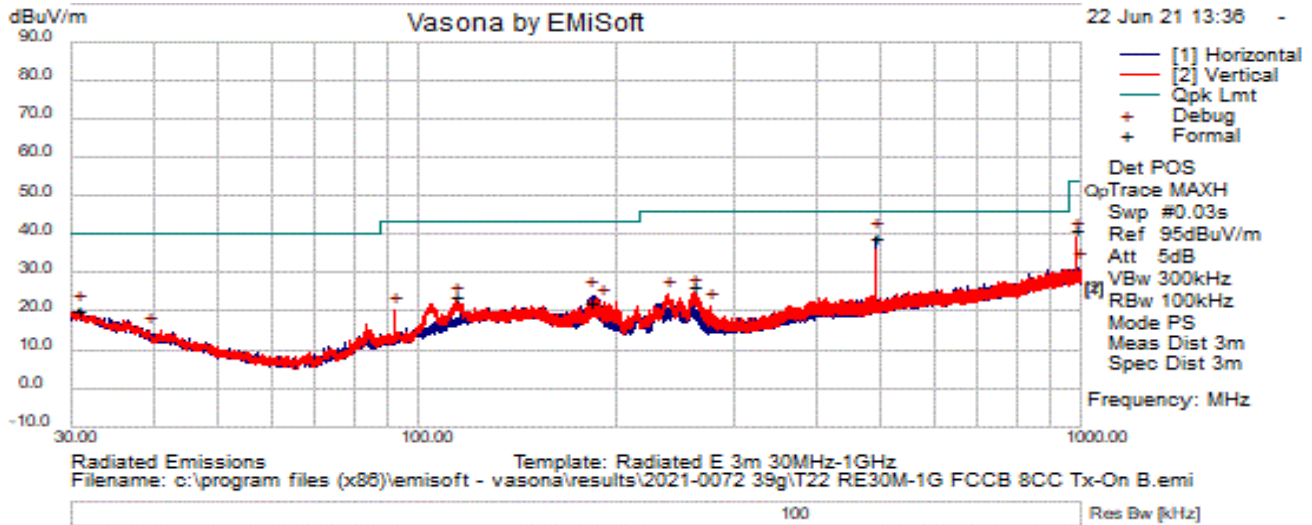

Test Information

Results Title	Radiated Emissions 3m 30MHz-1GHz
File Name	T23 RE30M-1G FCCB 8CC Tx-On M.emi
Test Laboratory	MH-AR4, 52.4%RH, 20.6C, 997hPa
Test Engineer	MJS/CP
Test Software	Vasona by EMISoft, version 6.061
Equipment	Nokia Wireless Group
EUT Details	AR4-2021-0072, 39GHz ASMR - SN-AM1-YK211800007, AM2-YK211800027, AM3-YK211800031, FA3WA Extension Unit - 8CC Middle Tx-On.
Configuration	Powered by 120V/60Hz AC. Tested to FCC Part 15b, RE 30MHz-15GHz, @ 3-Meters, Bilog Antenna E601, LPF-E980, Preamp-E813, FSW67-E1260, Cables AR4 set. Internal attenuation 5dB, Previews RBW Default; Formals RBW Default.
Date	2021-06-22 14:53:20

Formal Data


Freq. (MHz)	Raw (dBuV)	Cable (dB)	Factor (dB)	Level (dBuV/m)	Emission Type	Pol (H/V)	Ht (cm)	Az (deg)	Limit (dBuV/m)	Margin (dB)	Pass/Fail	Comments
491.493667	45.67	3.02	-9.69	39.00	QuasiMax	H	105	338	46.00	-7.00	Pass	
983.025	38.90	5.03	-2.80	41.13	QuasiMax	V	138	29	54.00	-12.87	Pass	
261.603667	36.96	2.14	-12.53	26.57	QuasiMax	V	171	59	46.00	-19.43	Pass	
30.711333	29.09	0.80	-9.35	20.54	QuasiMax	H	294	286	40.00	-19.46	Pass	
114.099	34.03	1.44	-11.58	23.89	QuasiMax	V	107	219	43.50	-19.61	Pass	
182.775	34.64	1.81	-14.17	22.28	QuasiMax	H	168	180	43.50	-21.22	Pass	

Preview Data

Freq. (MHz)	Raw (dBuV)	Cable (dB)	Factor (dB)	Level (dBuV/m)	Emission Type	Pol (H/V)	Ht (cm)	Az (deg)	Limit (dBuV/m)	Margin (dB)	Pass/Fail	Comments
491.493667	45.91	3.02	-9.69	39.24	Debug	H	100	352	46.00	-6.76	Pass	
983.025	37.06	5.03	-2.80	39.29	Debug	V	100	352	54.00	-14.71	Pass	
182.775	36.42	1.81	-14.17	24.07	Debug	H	100	180	43.50	-19.43	Pass	
30.711333	28.92	0.80	-9.35	20.37	Debug	H	175	352	40.00	-19.63	Pass	
114.099	32.95	1.44	-11.58	22.81	Debug	V	100	225	43.50	-20.69	Pass	
261.603667	35.30	2.14	-12.53	24.91	Debug	V	175	45	46.00	-21.09	Pass	
190.535	35.33	1.84	-14.94	22.23	Debug	V	175	0	43.50	-21.27	Pass	
239.326	35.22	2.06	-13.00	24.28	Debug	V	175	45	46.00	-21.72	Pass	
989.297667	29.07	5.07	-2.71	31.43	Debug	H	250	0	54.00	-22.57	Pass	
92.144667	34.75	1.30	-15.87	20.17	Debug	V	100	315	43.50	-23.33	Pass	
276.444667	33.11	2.20	-14.15	21.17	Debug	V	175	45	46.00	-24.83	Pass	
39.247333	28.04	0.90	-13.95	14.98	Debug	V	175	315	40.00	-25.02	Pass	

Note: Preview data was measured using a peak detector to identify frequencies of interest for formal measurement. Formal data consist of all frequencies in the preview list within 6 dB of specification limit or the top six frequencies. Failure in preview data does not necessarily constitute failure in formal data.

T8 Radiated Emissions 3m 1GHz – 18GHz 8CC TX-On Top

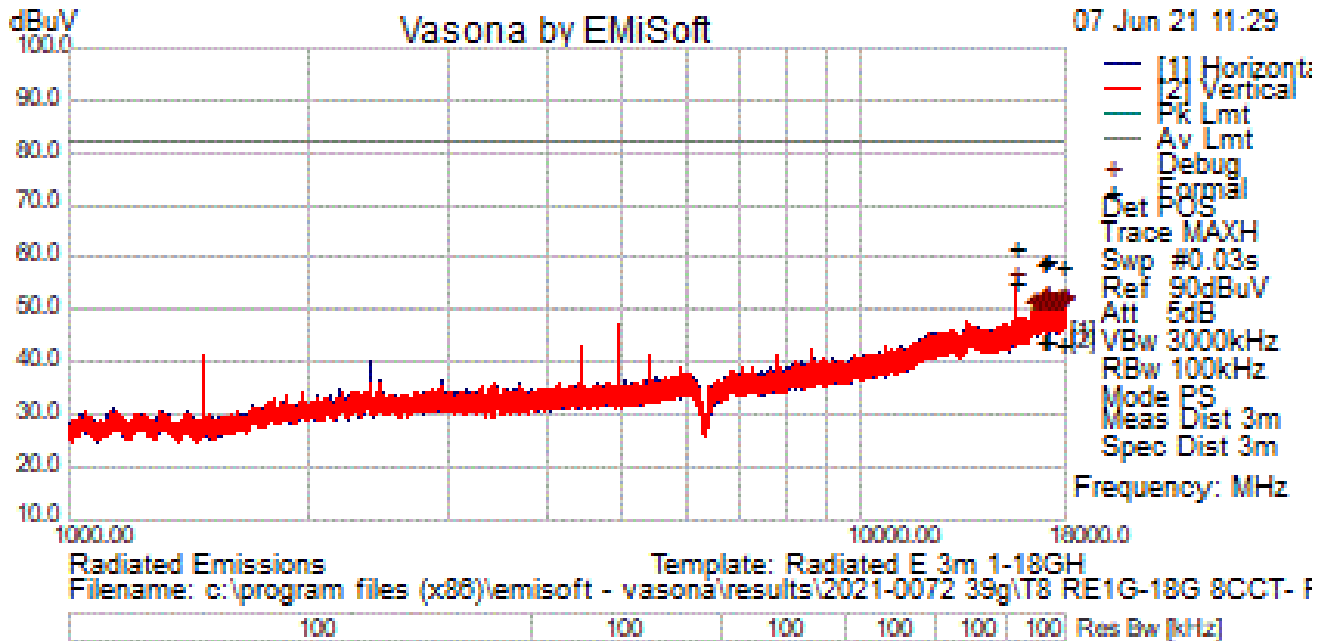

Test Information

Results Title	Radiated Emissions 3m 1-18GHz
File Name	T8 RE1G-18G 8CCT- FCC-P30-ExtP.emi
Test Laboratory	MH-AR4, 49.2%RH, 20.6C, 997hPa
Test Engineer	CP
Test Software	Vasona by EMISoft, version 6.061
Equipment	Nokia Wireless Group
EUT Details	AR4-2021-0072, 39GHz ASMR - SN-AM1-YK211800017, AM2-YK211800027, AM3-YK211800031, 8CC Top-TX-On, FA3WA Extension ON.
Configuration	Powered by -48Vdc Tested to FCC Part 30, RE 1GHz-18GHz, @ 3-Meters, Horn Antenna E1074, LPF-E1476, Preamp-E447, FSW67-E1260, Cables E1503 and E1504. Internal attenuation 0dB, Previews RBW 100K; Formals RBW 1M / 3M.
Date	2021-06-07 11:33:20

Formal Data


Freq. (MHz)	Raw (dBuV)	Cable (dB)	Factor (dB)	Level (dBuV/m)	Emission Type	Pol (H/V)	Ht (cm)	Az (deg)	Limit (dBuV/m)	Margin (dB)	Pass/Fail	Comments
15603.756	41.31	12.18	2.05	55.54	AvgMax	V	146	162	82.23	-26.69	Pass	
17005.595	26.83	12.39	4.88	44.11	AvgMax	H	322	92	82.23	-38.12	Pass	
16924.656	27.01	12.37	4.70	44.08	AvgMax	V	146	33	82.23	-38.15	Pass	
16996.528	26.80	12.39	4.88	44.07	AvgMax	H	186	175	82.23	-38.16	Pass	
16929.850	26.96	12.37	4.72	44.04	AvgMax	H	175	148	82.23	-38.19	Pass	
17858.144	26.69	12.85	4.14	43.69	AvgMax	H	282	252	82.23	-38.54	Pass	

Preview Data

Freq. (MHz)	Raw (dBuV)	Cable (dB)	Factor (dB)	Level (dBuV/m)	Emission Type	Pol (H/V)	Ht (cm)	Az (deg)	Limit (dBuV/m)	Margin (dB)	Pass/Fail	Comments
15603.756	40.15	12.18	2.05	54.38	Debug	V	175	150	82.23	-27.85	Pass	
17005.595	33.85	12.39	4.88	51.13	Debug	H	325	330	82.23	-31.10	Pass	
16996.528	33.57	12.39	4.88	50.84	Debug	H	325	60	82.23	-31.39	Pass	
16924.656	33.56	12.37	4.70	50.63	Debug	V	325	120	82.23	-31.60	Pass	
17858.144	33.55	12.85	4.14	50.55	Debug	H	175	90	82.23	-31.68	Pass	
16929.850	33.23	12.37	4.72	50.31	Debug	H	250	30	82.23	-31.92	Pass	
17999.244	33.13	12.99	4.15	50.27	Debug	H	100	270	82.23	-31.96	Pass	
17965.622	33.15	12.96	4.15	50.26	Debug	V	325	120	82.23	-31.97	Pass	
16957.239	33.07	12.38	4.78	50.23	Debug	H	325	210	82.23	-32.00	Pass	
17676.906	33.38	12.66	4.14	50.18	Debug	V	325	60	82.23	-32.05	Pass	
17942.389	32.91	12.93	4.15	49.99	Debug	H	325	60	82.23	-32.24	Pass	
17896.300	32.96	12.89	4.15	49.99	Debug	H	325	90	82.23	-32.24	Pass	
16943.450	32.83	12.37	4.75	49.95	Debug	H	250	270	82.23	-32.28	Pass	
17348.995	33.12	12.45	4.36	49.93	Debug	H	325	120	82.23	-32.30	Pass	
17046.300	32.71	12.40	4.82	49.93	Debug	V	325	120	82.23	-32.30	Pass	
17243.783	32.95	12.44	4.52	49.90	Debug	H	325	60	82.23	-32.33	Pass	
17825.372	32.87	12.82	4.14	49.82	Debug	V	250	150	82.23	-32.41	Pass	
17076.995	32.58	12.41	4.77	49.76	Debug	H	100	150	82.23	-32.47	Pass	
17488.867	33.10	12.48	4.15	49.73	Debug	V	325	210	82.23	-32.50	Pass	
17633.367	32.94	12.62	4.14	49.70	Debug	H	175	90	82.23	-32.53	Pass	
16820.767	32.92	12.33	4.44	49.69	Debug	H	325	60	82.23	-32.54	Pass	
17627.133	32.92	12.61	4.14	49.66	Debug	V	325	330	82.23	-32.57	Pass	
16859.583	32.75	12.34	4.54	49.63	Debug	V	325	120	82.23	-32.60	Pass	
17251.906	32.69	12.44	4.50	49.63	Debug	V	175	240	82.23	-32.60	Pass	
17830.378	32.65	12.82	4.14	49.62	Debug	V	250	210	82.23	-32.61	Pass	
16457.439	33.87	12.23	3.51	49.61	Debug	V	175	210	82.23	-32.62	Pass	
17641.017	32.78	12.63	4.14	49.54	Debug	H	100	90	82.23	-32.69	Pass	
17529.383	32.89	12.51	4.13	49.54	Debug	V	100	120	82.23	-32.69	Pass	
17211.106	32.53	12.43	4.57	49.52	Debug	H	250	180	82.23	-32.71	Pass	
16512.028	33.61	12.22	3.66	49.49	Debug	V	325	330	82.23	-32.74	Pass	
17219.511	32.49	12.43	4.55	49.48	Debug	V	325	30	82.23	-32.75	Pass	
17113.639	32.35	12.41	4.72	49.47	Debug	V	325	240	82.23	-32.76	Pass	
16842.583	32.63	12.34	4.50	49.46	Debug	H	250	180	82.23	-32.77	Pass	
17504.922	32.83	12.49	4.13	49.45	Debug	V	325	300	82.23	-32.78	Pass	
17342.572	32.59	12.45	4.37	49.41	Debug	V	250	330	82.23	-32.82	Pass	
16365.828	33.88	12.26	3.26	49.40	Debug	V	175	0	82.23	-32.83	Pass	
17299.128	32.50	12.45	4.43	49.38	Debug	H	250	240	82.23	-32.85	Pass	
17232.545	32.41	12.43	4.53	49.38	Debug	H	325	90	82.23	-32.85	Pass	
17150.567	32.30	12.42	4.66	49.37	Debug	H	325	0	82.23	-32.86	Pass	
17190.989	32.34	12.43	4.60	49.36	Debug	H	100	0	82.23	-32.87	Pass	
17097.489	32.21	12.41	4.74	49.36	Debug	V	175	210	82.23	-32.87	Pass	
17333.222	32.51	12.45	4.38	49.35	Debug	V	100	60	82.23	-32.88	Pass	
17165.206	32.28	12.42	4.64	49.34	Debug	H	100	90	82.23	-32.89	Pass	

Note: Preview data was measured using a peak detector to identify frequencies of interest for formal measurement. Formal data consist of all frequencies in the preview list within 6 dB of specification limit or the top six frequencies. Failure in preview data does not necessarily constitute failure in formal data.

T14a Radiated Emissions 3m 1GHz – 18GHz 1CC TX-Off Top

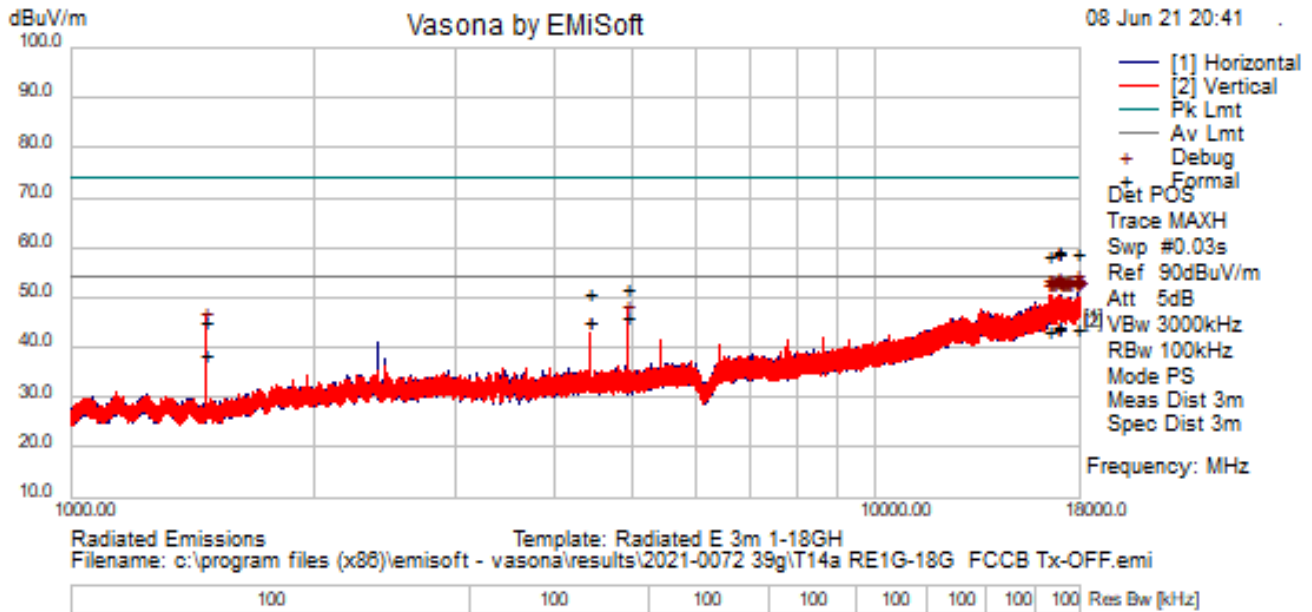

Test Information

Results Title	Radiated Emissions 3m 1-18GHz
File Name	T14a RE1G-18G FCCB Tx-Off_Pass.emi
Test Laboratory	MH-AR4, 49.2%RH, 20.6C, 997hPa
Test Engineer	JY
Test Software	Vasona by EMISoft, version 6.061
Equipment	Nokia Wireless Group
EUT Details	AR4-2021-0072, 39GHz ASMR - SN-AM1-YK211800017, AM2-YK211800027, AM3-YK211800031, FA3WA & Main Unit - 1CC Top-Tx-OFF.
Configuration	Powered by -48Vdc Tested to FCC Part 15b, RE 1GHz-18GHz, @ 3-Meters, Horn Antenna E1074, LPF-E1476, Preamp-E447, FSW67-E1260, Cables E1503 and E1504. Internal attenuation 5dB, Previews RBW 100K; Formals RBW 1M / 3M.
Date	2021-06-08 20:41:31

Formal Data

Freq. (MHz)	Raw (dBuV)	Cable (dB)	Factor (dB)	Level (dBuV/m)	Emission Type	Pol (H/V)	Ht (cm)	Az (deg)	Limit (dBuV/m)	Margin (dB)	Pass/Fail	Comments
4915.269	43.87	6.45	-3.88	46.44	AvgMax	V	159	5	54.00	-7.56	Pass	
4423.690	43.39	5.89	-4.16	45.12	AvgMax	V	164	51	54.00	-8.88	Pass	
16999.692	27.02	12.39	4.89	44.31	AvgMax	H	128	335	54.00	-9.69	Pass	
16941.608	27.08	12.37	4.74	44.20	AvgMax	H	227	321	54.00	-9.80	Pass	
16993.742	26.78	12.39	4.87	44.04	AvgMax	V	243	14	54.00	-9.96	Pass	
17882.063	26.98	12.87	4.15	43.99	AvgMax	H	323	179	54.00	-10.01	Pass	
16984.321	26.71	12.39	4.85	43.95	AvgMax	V	102	102	54.00	-10.05	Pass	
16475.738	27.56	12.22	3.56	43.35	AvgMax	V	302	316	54.00	-10.65	Pass	
16999.692	42.34	12.39	4.89	59.62	PeakMax	H	128	335	74.00	-14.38	Pass	
16984.321	41.97	12.39	4.85	59.21	PeakMax	V	102	102	74.00	-14.79	Pass	
17882.063	42.07	12.87	4.15	59.08	PeakMax	H	323	179	74.00	-14.92	Pass	

Freq. (MHz)	Raw (dBuV)	Cable (dB)	Factor (dB)	Level (dBuV/m)	Emission Type	Pol (H/V)	Ht (cm)	Az (deg)	Limit (dBuV/m)	Margin (dB)	Pass/Fail	Comments
16941.608	41.94	12.37	4.74	59.06	PeakMax	H	227	321	74.00	-14.94	Pass	
16993.742	41.77	12.39	4.87	59.04	PeakMax	V	243	14	74.00	-14.96	Pass	
1474.583	46.72	3.19	-11.38	38.53	AvgMax	V	117	54	54.00	-15.47	Pass	
16475.738	42.59	12.22	3.56	58.38	PeakMax	V	302	316	74.00	-15.62	Pass	
4915.269	49.31	6.45	-3.88	51.88	PeakMax	V	159	5	74.00	-22.12	Pass	
4423.690	49.26	5.89	-4.16	51.00	PeakMax	V	164	51	74.00	-23.00	Pass	
1474.583	53.65	3.19	-11.38	45.47	PeakMax	V	117	54	74.00	-28.53	Pass	


Preview Data

Freq. (MHz)	Raw (dBuV)	Cable (dB)	Factor (dB)	Level (dBuV/m)	Emission Type	Pol (H/V)	Ht (cm)	Az (deg)	Limit (dBuV/m)	Margin (dB)	Pass/Fail	Comments
17882.063	34.08	12.87	4.15	51.10	Debug	H	325	90	54.00	-2.90	Pass	
16999.692	33.38	12.39	4.89	50.66	Debug	H	175	330	54.00	-3.34	Pass	
16941.608	33.38	12.37	4.74	50.49	Debug	H	250	90	54.00	-3.51	Pass	
16475.738	34.62	12.22	3.56	50.40	Debug	V	250	60	54.00	-3.60	Pass	
16984.321	33.05	12.39	4.85	50.29	Debug	V	175	330	54.00	-3.71	Pass	
16993.742	33.00	12.39	4.87	50.27	Debug	V	325	330	54.00	-3.73	Pass	
16574.267	34.21	12.24	3.82	50.27	Debug	V	325	330	54.00	-3.73	Pass	
17945.954	33.12	12.94	4.15	50.20	Debug	V	325	300	54.00	-3.80	Pass	
17923.358	33.12	12.92	4.15	50.18	Debug	V	325	120	54.00	-3.82	Pass	
17422.496	33.44	12.47	4.25	50.16	Debug	H	100	60	54.00	-3.84	Pass	
16952.588	32.97	12.38	4.77	50.12	Debug	V	175	300	54.00	-3.88	Pass	
17896.442	33.06	12.89	4.15	50.09	Debug	V	100	150	54.00	-3.91	Pass	
17541.921	33.42	12.52	4.13	50.08	Debug	H	175	0	54.00	-3.92	Pass	
16484.946	34.27	12.22	3.59	50.07	Debug	V	175	60	54.00	-3.93	Pass	
17982.292	32.89	12.98	4.15	50.02	Debug	V	325	270	54.00	-3.98	Pass	
17956.367	32.92	12.95	4.15	50.01	Debug	V	100	30	54.00	-3.99	Pass	
17358.321	33.17	12.46	4.34	49.97	Debug	V	175	180	54.00	-4.03	Pass	
17056.925	32.77	12.40	4.80	49.97	Debug	H	175	0	54.00	-4.03	Pass	
16913.488	32.93	12.36	4.67	49.97	Debug	H	250	300	54.00	-4.03	Pass	
17882.346	32.92	12.87	4.15	49.94	Debug	V	100	150	54.00	-4.06	Pass	
17024.696	32.68	12.40	4.85	49.93	Debug	V	325	150	54.00	-4.07	Pass	
17088.588	32.76	12.41	4.75	49.92	Debug	V	325	30	54.00	-4.08	Pass	
17087.313	32.65	12.41	4.76	49.82	Debug	H	100	240	54.00	-4.18	Pass	
17938.233	32.69	12.93	4.15	49.77	Debug	V	250	30	54.00	-4.23	Pass	
16844.708	32.92	12.34	4.50	49.76	Debug	V	175	60	54.00	-4.24	Pass	
17994.263	32.62	12.99	4.15	49.76	Debug	H	100	150	54.00	-4.24	Pass	
17065.992	32.53	12.40	4.79	49.72	Debug	H	250	150	54.00	-4.28	Pass	
17034.683	32.48	12.40	4.84	49.71	Debug	V	250	90	54.00	-4.29	Pass	
16912.142	32.65	12.36	4.67	49.68	Debug	H	325	300	54.00	-4.32	Pass	
16562.933	33.65	12.23	3.79	49.68	Debug	V	100	0	54.00	-4.32	Pass	
17886.100	32.63	12.88	4.15	49.66	Debug	V	250	90	54.00	-4.34	Pass	
17415.979	32.92	12.47	4.26	49.65	Debug	H	250	60	54.00	-4.35	Pass	
17351.167	32.78	12.45	4.35	49.59	Debug	V	325	60	54.00	-4.41	Pass	
17803.296	32.65	12.79	4.14	49.59	Debug	H	325	60	54.00	-4.41	Pass	
17111.608	32.43	12.41	4.72	49.56	Debug	V	175	0	54.00	-4.44	Pass	
17463.933	32.88	12.47	4.18	49.54	Debug	V	175	240	54.00	-4.46	Pass	
16709.558	33.08	12.29	4.16	49.54	Debug	V	325	300	54.00	-4.46	Pass	

Freq. (MHz)	Raw (dBuV)	Cable (dB)	Factor (dB)	Level (dBuV/m)	Emission Type	Pol (H/V)	Ht (cm)	Az (deg)	Limit (dBuV/m)	Margin (dB)	Pass/Fail	Comments
17928.033	32.46	12.92	4.15	49.53	Debug	V	100	300	54.00	-4.47	Pass	
17848.275	32.54	12.84	4.14	49.52	Debug	V	100	30	54.00	-4.48	Pass	
16634.404	33.28	12.26	3.97	49.51	Debug	V	100	0	54.00	-4.49	Pass	
16459.375	33.76	12.23	3.52	49.50	Debug	H	175	330	54.00	-4.50	Pass	
16473.967	33.70	12.22	3.56	49.48	Debug	V	325	210	54.00	-4.52	Pass	
16733.642	32.95	12.30	4.22	49.47	Debug	H	250	270	54.00	-4.53	Pass	
17116.071	32.33	12.41	4.71	49.46	Debug	V	175	150	54.00	-4.54	Pass	
17151.346	32.38	12.42	4.66	49.45	Debug	V	175	0	54.00	-4.55	Pass	
17223.383	32.45	12.43	4.55	49.43	Debug	V	325	330	54.00	-4.57	Pass	
17314.971	32.57	12.45	4.41	49.43	Debug	H	325	270	54.00	-4.57	Pass	
17507.425	32.80	12.49	4.13	49.42	Debug	H	100	330	54.00	-4.58	Pass	
17387.363	32.65	12.46	4.30	49.41	Debug	V	250	120	54.00	-4.59	Pass	
16557.408	33.40	12.23	3.78	49.41	Debug	V	250	180	54.00	-4.59	Pass	
4915.269	42.57	6.45	-3.88	45.14	Debug	V	0	330	54.00	-8.86	Pass	
1474.583	52.02	3.19	-11.38	43.84	Debug	V	0	330	54.00	-10.16	Pass	
4423.690	40.25	5.89	-4.16	41.98	Debug	V	0	330	54.00	-12.02	Pass	

Note: Preview data was measured using a peak detector to identify frequencies of interest for formal measurement. Formal data consist of all frequencies in the preview list within 6 dB of specification limit or the top six frequencies. Failure in preview data does not necessarily constitute failure in formal data.

T17a Radiated Emissions 3m 18GHz – 26.5GHz 8CC TX-On Top

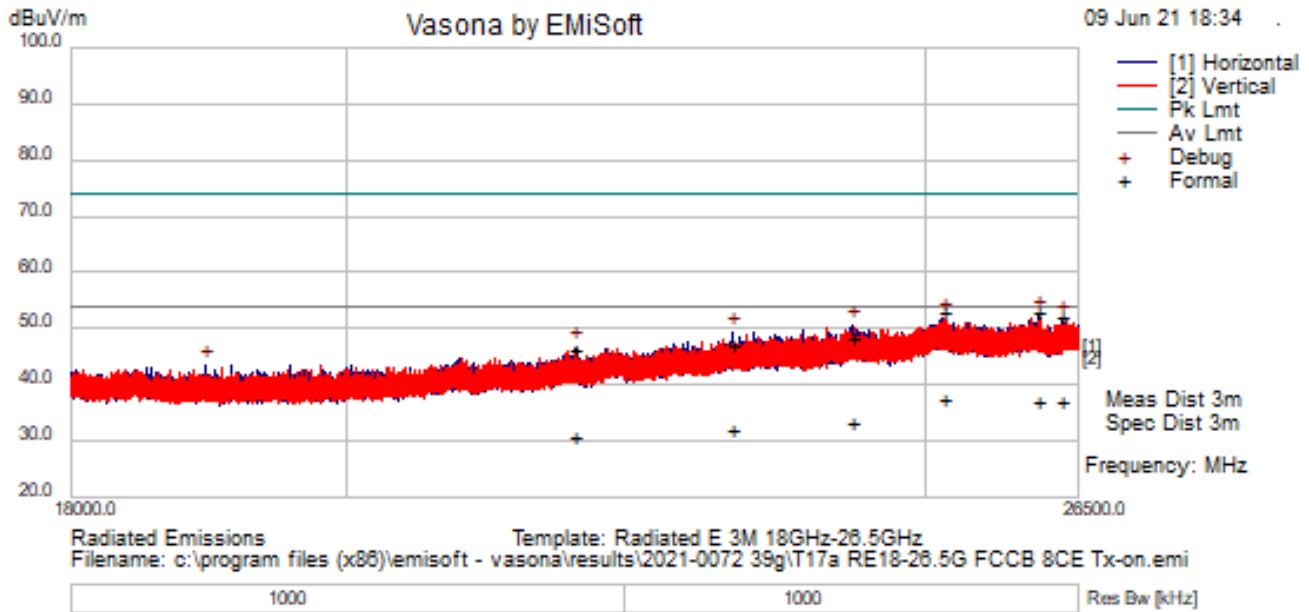

Test Information

Results Title	Radiated Emissions 3M 18GHz-26.5GHz
File Name	T17a RE18g-26.5G FCCB 8C-Ext Tx-on.emi
Test Laboratory	MH-AR4, 49.2%RH, 20.6C, 997hPa
Test Engineer	MJS
Test Software	Vasona by EMISoft, version 6.061
Equipment	Nokia Wireless Group
EUT Details	AR4-2021-0072, 39GHz ASMR - SN-AM1-YK211800017, AM2-YK211800027, AM3-YK211800031, FA3WA Extension Unit - 8CC Top-Tx-On.
Configuration	Powered by -48Vdc Tested to FCC Part 15b, RE 18GHz-26.5GHz, @ 3-Meters, Horn Antenna E1452, LPF-E1516, Preamp-E447, FSW67-E1260, Cables E1501 and E1502. Internal attenuation 0dB, Previews RBW 100K; Formals RBW 1M / 3M.
Date	2021-06-09 18:34:52

Formal Data


Freq. (MHz)	Raw (dBuV)	Cable (dB)	Factor (dB)	Level (dBuV/m)	Emission Type	Pol (H/V)	Ht (cm)	Az (deg)	Limit (dBuV/m)	Margin (dB)	Pass/Fail	Comments
25162.241	26.61	14.25	-3.20	37.66	AvgMax	V	179	256	54.00	-16.34	Pass	
26340.057	26.08	14.48	-3.23	37.32	AvgMax	H	167	192	54.00	-16.68	Pass	
26089.307	25.94	14.42	-3.17	37.19	AvgMax	H	298	77	54.00	-16.81	Pass	
24299.491	23.34	13.78	-3.69	33.43	AvgMax	H	322	197	54.00	-20.57	Pass	
25162.241	42.24	14.25	-3.20	53.29	PeakMax	V	179	256	74.00	-20.71	Pass	
26089.307	41.73	14.42	-3.17	52.99	PeakMax	H	298	77	74.00	-21.01	Pass	
23202.425	23.56	13.71	-5.03	32.24	AvgMax	H	153	343	54.00	-21.76	Pass	
26340.057	40.88	14.48	-3.23	52.13	PeakMax	H	167	192	74.00	-21.87	Pass	
21839.308	25.42	13.01	-7.45	30.97	AvgMax	H	318	355	54.00	-23.03	Pass	
24299.491	38.22	13.78	-3.69	48.31	PeakMax	H	322	197	74.00	-25.69	Pass	
23202.425	38.54	13.71	-5.03	47.21	PeakMax	H	153	343	74.00	-26.79	Pass	
21839.308	40.70	13.01	-7.45	46.25	PeakMax	H	318	355	74.00	-27.75	Pass	

Preview Data

Freq. (MHz)	Raw (dBuV)	Cable (dB)	Factor (dB)	Level (dBuV/m)	Emission Type	Pol (H/V)	Ht (cm)	Az (deg)	Limit (dBuV/m)	Margin (dB)	Pass/Fail	Comments
26089.307	40.82	14.42	-3.17	52.07	Debug	H	325	132	54.00	-1.93	Pass	
25162.241	40.76	14.25	-3.20	51.82	Debug	V	100	242	54.00	-2.18	Pass	
26340.057	40.00	14.48	-3.23	51.25	Debug	H	175	286	54.00	-2.75	Pass	
24299.491	40.42	13.78	-3.69	50.51	Debug	H	175	220	54.00	-3.49	Pass	
23202.425	40.39	13.71	-5.03	49.06	Debug	H	100	330	54.00	-4.94	Pass	
21839.308	40.82	13.01	-7.45	46.37	Debug	H	325	154	54.00	-7.63	Pass	
18952.425	40.39	11.91	-8.91	43.39	Debug	H	100	330	54.00	-10.61	Pass	

Note: Preview data was measured using a peak detector to identify frequencies of interest for formal measurement. Formal data consist of all frequencies in the preview list within 6 dB of specification limit or the top six frequencies. Failure in preview data does not necessarily constitute failure in formal data.

T18a Radiated Emissions 3m 18GHz – 26.5GHz 1CC TX-On Top

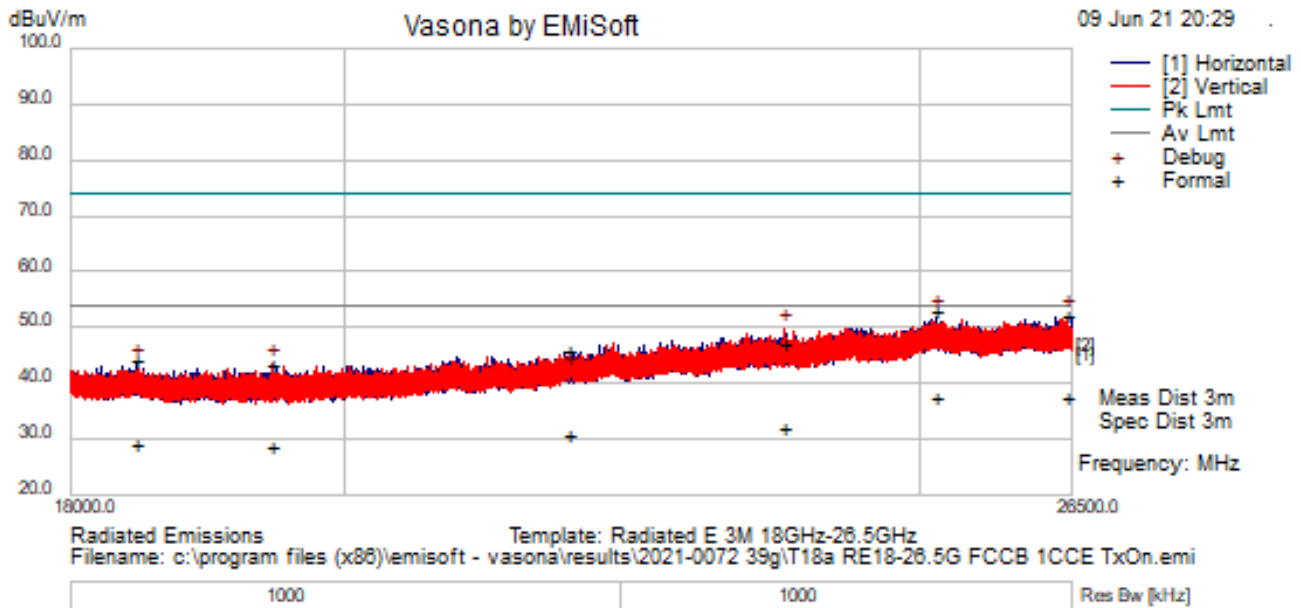

Test Information

Results Title	Radiated Emissions 3M 18GHz-26.5GHz
File Name	T18a RE18-26.5G FCCB 1CC Ext Unit Tx-On.emi
Test Laboratory	MH-AR4, 49.2%RH, 20.6C, 997hPa
Test Engineer	MJS
Test Software	Vasona by EMIsoft, version 6.061
Equipment	Nokia Wireless Group
EUT Details	AR4-2021-0072, 39GHz ASMR - SN-AM1-YK211800017, AM2-YK211800027, AM3-YK211800031, FA3WA Extension Unit - 1CC Top-Tx-On.
Configuration	Powered by -48Vdc Tested to FCC Part 15b, RE 18GHz-26.5GHz, @ 3-Meters, Horn Antenna E1452, LPF-E1516, Preamp-E447, FSW67-E1260, Cables E1501 and E1502. Internal attenuation 0dB, Previews RBW 100K; Formals RBW 1M / 3M.
Date	2021-06-09 20:29:06

Formal Data


Freq. (MHz)	Raw (dBuV)	Cable (dB)	Factor (dB)	Level (dBuV/m)	Emission Type	Pol (H/V)	Ht (cm)	Az (deg)	Limit (dBuV/m)	Margin (dB)	Pass/Fail	Comments
25154.308	26.62	14.25	-3.21	37.66	AvgMax	H	108	248	54.00	-16.34	Pass	
26447.724	26.17	14.50	-3.22	37.46	AvgMax	V	248	93	54.00	-16.54	Pass	
25154.308	42.26	14.25	-3.21	53.30	PeakMax	H	108	248	74.00	-20.70	Pass	
26447.724	41.10	14.50	-3.22	52.38	PeakMax	V	248	93	74.00	-21.62	Pass	
23706.191	23.12	13.71	-4.70	32.13	AvgMax	V	282	322	54.00	-21.87	Pass	
21823.441	25.45	13.00	-7.49	30.96	AvgMax	V	284	249	54.00	-23.04	Pass	
18463.533	25.96	11.88	-8.57	29.28	AvgMax	H	110	27	54.00	-24.72	Pass	
19456.192	25.96	12.03	-9.24	28.76	AvgMax	V	172	17	54.00	-25.24	Pass	
23706.191	38.28	13.71	-4.70	47.29	PeakMax	V	282	322	74.00	-26.71	Pass	
21823.441	40.62	13.00	-7.49	46.13	PeakMax	V	284	249	74.00	-27.87	Pass	
18463.533	41.05	11.88	-8.57	44.36	PeakMax	H	110	27	74.00	-29.64	Pass	
19456.192	40.70	12.03	-9.24	43.50	PeakMax	V	172	17	74.00	-30.50	Pass	

Preview Data

Freq. (MHz)	Raw (dBuV)	Cable (dB)	Factor (dB)	Level (dBuV/m)	Emission Type	Pol (H/V)	Ht (cm)	Az (deg)	Limit (dBuV/m)	Margin (dB)	Pass/Fail	Comments
26447.724	40.66	14.50	-3.22	51.94	Debug	V	175	198	54.00	-2.06	Pass	
25154.308	40.79	14.25	-3.21	51.84	Debug	H	250	330	54.00	-2.16	Pass	
23706.191	40.60	13.71	-4.70	49.62	Debug	V	175	0	54.00	-4.38	Pass	
19456.192	40.60	12.03	-9.24	43.40	Debug	V	175	0	54.00	-10.60	Pass	
18463.533	39.88	11.88	-8.57	43.19	Debug	H	175	330	54.00	-10.81	Pass	
21823.441	35.85	13.00	-7.49	41.36	Debug	V	99	352	54.00	-12.64	Pass	

Note: Preview data was measured using a peak detector to identify frequencies of interest for formal measurement. Formal data consist of all frequencies in the preview list within 6 dB of specification limit or the top six frequencies. Failure in preview data does not necessarily constitute failure in formal data.

T2a Radiated Emissions 3m 26.5GHz – 37GHz 8CC TX-On Top

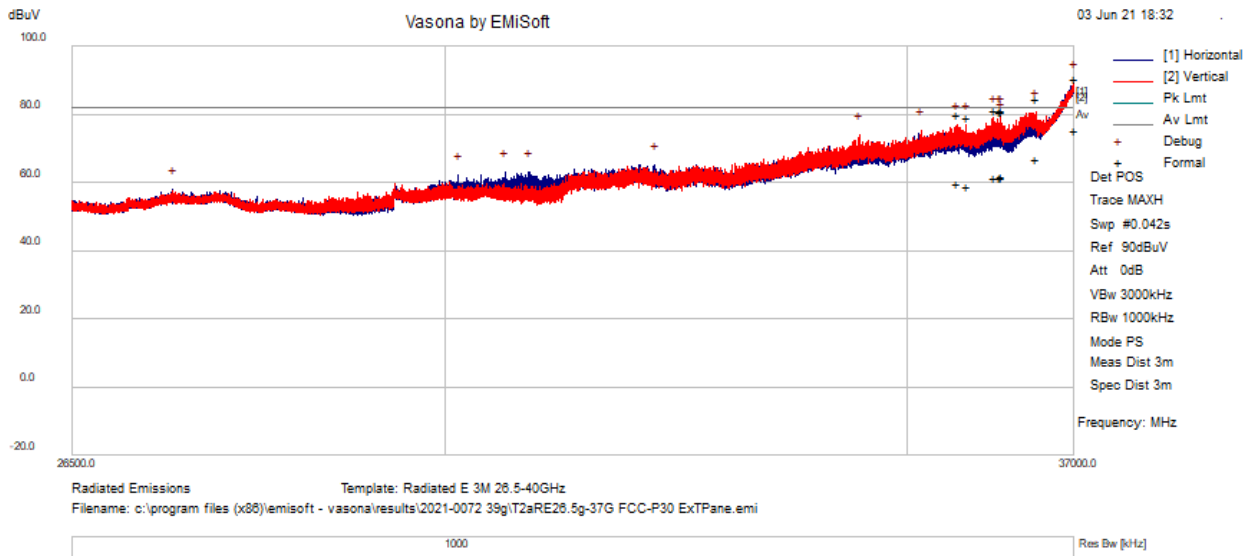

Test Information

Results Title	Radiated Emissions 3M 26.5-40GHz
File Name	T2a RE26.5g-37G 8cc FCC-P30 ExT Panel.emi
Test Laboratory	MH-AR4, 49.2%RH, 20.6C, 997hPa
Test Engineer	MJS / WSM
Test Software	Vasona by EMISoft, version 6.061
Equipment	Nokia Wireless Group
EUT Details	AR4-2021-0072, 39GHz ASMR - SN-AM1-YK211800017, AM2-YK211800027, AM3-YK211800031, Tx-On 8CC. FA3WA Extension Module
Configuration	Powered by -48Vdc, Tested to FCCB, RE 26.5G-37GHz, @ 3-Meters, Horn Antenna E1373, Preamp-E1525, FSW67-E1260, and HPF-Filter E1516, Cables E1501 and E1502. Internal attenuation 0dB, Previews RBW 1M; Formals RBW 1M / 3M.
Date	2021-06-03 18:32:02

Formal Data


Freq. (MHz)	Raw (dBuV)	Cable (dB)	Factor (dB)	Level (dBuV/m)	Emission Type	Pol (H/V)	Ht (cm)	Az (deg)	Limit (dBuV/m)	Margin (dB)	Pass/Fail	Comments
36995.100	29.13	49.41	-2.98	75.57	AvgMax	V	168	207	82.23	-6.66	Pass	
36533.450	35.62	33.66	-2.15	67.13	AvgMax	V	169	277	82.23	-15.10	Pass	
36112.050	41.79	22.68	-2.34	62.12	AvgMax	V	174	269	82.23	-20.11	Pass	
36096.300	41.83	22.37	-2.36	61.84	AvgMax	V	180	268	82.23	-20.39	Pass	
36019.300	42.84	21.24	-2.34	61.74	AvgMax	V	163	269	82.23	-20.49	Pass	
36101.550	41.59	22.46	-2.36	61.69	AvgMax	V	170	266	82.23	-20.54	Pass	
35581.450	42.62	18.93	-1.40	60.15	AvgMax	V	173	270	82.23	-22.08	Pass	
35691.000	41.73	19.13	-1.61	59.25	AvgMax	V	167	281	82.23	-22.98	Pass	

Preview Data

Freq. (MHz)	Raw (dBuV)	Cable (dB)	Factor (dB)	Level (dBuV/m)	Emission Type	Pol (H/V)	Ht (cm)	Az (deg)	Limit (dBuV/m)	Margin (dB)	Pass/Fail	Comments
36995.100	42.81	49.41	-2.98	89.25	Debug	V	250	330	82.23	7.02	Fail	
36533.450	49.14	33.66	-2.15	80.66	Debug	V	175	264	82.23	-1.57	Pass	
36101.550	59.24	22.46	-2.36	79.35	Debug	V	175	264	82.23	-2.88	Pass	
36096.300	59.21	22.37	-2.36	79.23	Debug	V	175	264	82.23	-3.00	Pass	
36019.300	60.31	21.24	-2.34	79.21	Debug	V	175	264	82.23	-3.02	Pass	
36112.050	57.00	22.68	-2.34	77.34	Debug	V	175	264	82.23	-4.89	Pass	
35581.450	59.43	18.93	-1.40	76.96	Debug	V	175	264	82.23	-5.27	Pass	
35691.000	59.38	19.13	-1.61	76.90	Debug	V	175	264	82.23	-5.33	Pass	
35158.300	59.50	17.57	-1.63	75.44	Debug	V	175	264	82.23	-6.79	Pass	
34447.450	58.12	16.96	-1.06	74.02	Debug	V	175	264	82.23	-8.21	Pass	
32178.750	49.74	16.16	-0.50	65.41	Debug	H	175	286	82.23	-16.82	Pass	
30860.650	48.26	15.33	-0.50	63.09	Debug	H	175	286	82.23	-19.14	Pass	
30612.500	48.17	15.29	-0.40	63.06	Debug	H	175	286	82.23	-19.17	Pass	
30134.050	47.02	15.15	0.14	62.31	Debug	H	175	286	82.23	-19.92	Pass	
27403.700	43.56	14.52	-0.03	58.04	Debug	H	175	22	82.23	-24.19	Pass	

Note: Preview data was measured using a peak detector to identify frequencies of interest for formal measurement. Formal data consist of all frequencies in the preview list within 6 dB of specification limit or the top six frequencies. Failure in preview data does not necessarily constitute failure in formal data.

T5 Radiated Emissions 3m 26.5GHz – 37GHz 1CC TX-On Top

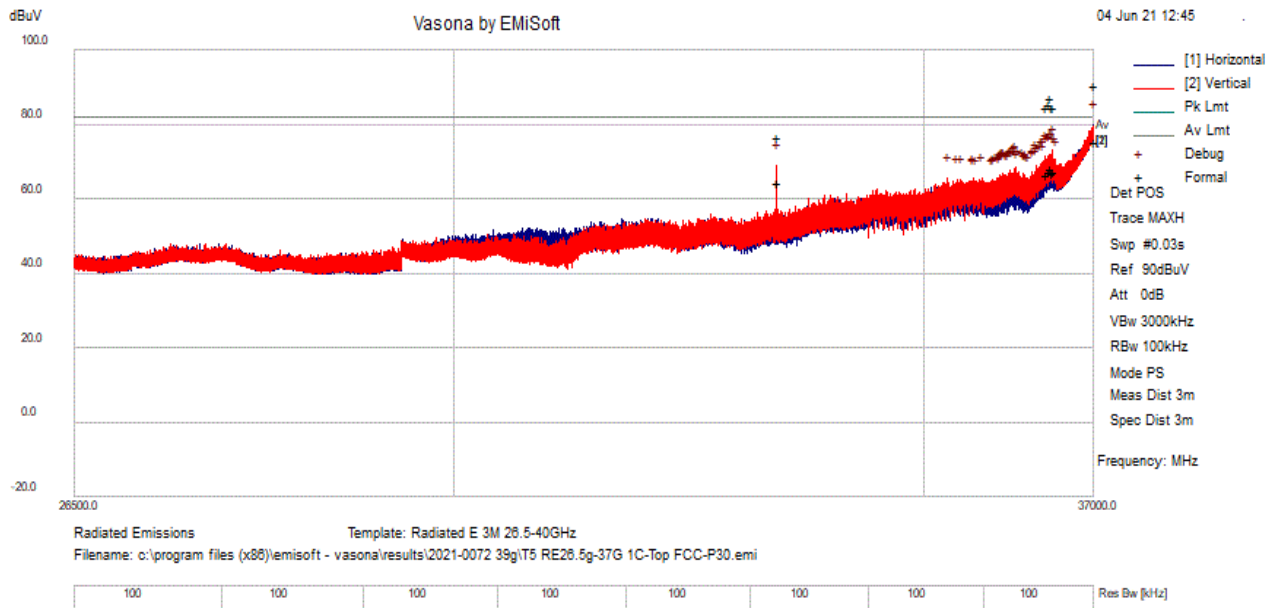

Test Information

Results Title	Radiated Emissions 3M 26.5-40GHz
File Name	T5 RE26.5g-37G 1C-Top FCC-P30.emi
Test Laboratory	MH-AR4, 49.2%RH, 20.6C, 997hPa
Test Engineer	MJS / WSM
Test Software	Vasona by EMISoft, version 6.061
Equipment	Nokia Wireless Group
EUT Details	AR4-2021-0072, 39GHz ASMR - SN-AM1-YK211800017, AM2-YK211800027, AM3-YK211800031, Tx-On 1CC, FA3WA Extension Unit TX-On.
Configuration	Powered by -48Vdc Tested to FCCB, RE 26.5G-37Hz, @ 3-Meters, Horn Antenna E1373, Preamp-E1525, FSW67-E1260, and HPF-Filter E1516, Cables E1501 and E1502. Internal attenuation 5dB, Previews RBW 100K; Formals RBW 1M / 3M.
Date	2021-06-04 13:00:10

Formal Data

Freq. (MHz)	Raw (dBuV)	Cable (dB)	Factor (dB)	Level (dBuV/m)	Emission Type	Pol (H/V)	Ht (cm)	Az (deg)	Limit (dBuV/m)	Margin (dB)	Pass/Fail	Comments
36996.500	29.19	49.47	-2.98	75.68	AvgMax	H	157	30	82.23	-6.55	Pass	
36473.600	38.62	31.92	-2.06	68.47	AvgMax	V	169	276	82.23	-13.76	Pass	
36501.863	36.82	32.73	-2.09	67.47	AvgMax	V	164	266	82.23	-14.76	Pass	
36454.656	38.11	31.38	-2.05	67.44	AvgMax	V	180	274	82.23	-14.79	Pass	
36489.963	37.03	32.39	-2.08	67.34	AvgMax	V	182	275	82.23	-14.89	Pass	
36415.806	38.59	30.26	-2.02	66.84	AvgMax	V	176	270	82.23	-15.39	Pass	
33351.669	49.16	16.12	-0.83	64.45	AvgMax	V	162	272	82.23	-17.78	Pass	

Preview Data

Freq. (MHz)	Raw (dBuV)	Cable (dB)	Factor (dB)	Level (dBuV/m)	Emission Type	Pol (H/V)	Ht (cm)	Az (deg)	Limit (dBuV/m)	Margin (dB)	Pass/Fail	Comments
36996.500	33.40	49.47	-2.98	79.89	Debug	H	325	44	82.23	-2.34	Pass	
36501.863	42.51	32.73	-2.09	73.15	Debug	V	175	264	82.23	-9.08	Pass	
36489.963	41.76	32.39	-2.08	72.08	Debug	V	175	264	82.23	-10.15	Pass	
36473.600	42.07	31.92	-2.06	71.93	Debug	V	175	264	82.23	-10.30	Pass	
36415.806	43.16	30.26	-2.02	71.41	Debug	V	175	264	82.23	-10.82	Pass	
36454.656	42.03	31.38	-2.05	71.35	Debug	V	175	264	82.23	-10.88	Pass	
36465.288	41.64	31.68	-2.06	71.26	Debug	V	175	264	82.23	-10.97	Pass	
36416.419	42.61	30.28	-2.02	70.88	Debug	V	175	264	82.23	-11.35	Pass	
36535.244	39.14	33.71	-2.15	70.70	Debug	V	175	264	82.23	-11.53	Pass	
36505.625	39.95	32.84	-2.09	70.70	Debug	V	175	264	82.23	-11.53	Pass	
36379.144	42.70	29.24	-2.02	69.91	Debug	V	175	264	82.23	-12.32	Pass	
36537.606	38.15	33.78	-2.15	69.77	Debug	V	175	264	82.23	-12.46	Pass	
36370.394	42.76	29.00	-2.02	69.74	Debug	V	175	264	82.23	-12.49	Pass	
36390.869	42.13	29.56	-2.01	69.68	Debug	V	175	264	82.23	-12.55	Pass	
33351.644	53.73	16.12	-0.83	69.02	Debug	V	175	264	82.23	-13.21	Pass	
36303.719	43.82	27.16	-2.07	68.91	Debug	V	175	264	82.23	-13.32	Pass	
36348.869	42.41	28.40	-2.04	68.78	Debug	V	175	264	82.23	-13.45	Pass	
36381.331	41.43	29.30	-2.01	68.71	Debug	V	175	286	82.23	-13.52	Pass	
36061.650	49.11	21.86	-2.35	68.63	Debug	V	175	264	82.23	-13.60	Pass	
36048.306	48.90	21.67	-2.35	68.22	Debug	V	175	264	82.23	-14.01	Pass	
36323.406	42.42	27.70	-2.05	68.06	Debug	V	175	264	82.23	-14.17	Pass	
36000.006	48.93	20.96	-2.34	67.55	Debug	V	175	264	82.23	-14.68	Pass	
36293.263	42.69	26.89	-2.08	67.49	Debug	V	175	264	82.23	-14.74	Pass	
36053.338	48.05	21.74	-2.35	67.45	Debug	V	175	264	82.23	-14.78	Pass	
36257.519	43.48	25.98	-2.15	67.31	Debug	V	175	264	82.23	-14.92	Pass	
36095.731	47.29	22.36	-2.36	67.30	Debug	V	175	264	82.23	-14.93	Pass	
36005.869	48.40	21.04	-2.34	67.11	Debug	V	175	264	82.23	-15.12	Pass	
36263.600	43.01	26.14	-2.14	67.01	Debug	V	175	264	82.23	-15.22	Pass	
36017.638	48.09	21.22	-2.34	66.97	Debug	V	175	264	82.23	-15.26	Pass	
35906.075	48.99	20.05	-2.14	66.91	Debug	V	175	264	82.23	-15.32	Pass	
35919.638	48.81	20.18	-2.17	66.83	Debug	V	175	264	82.23	-15.40	Pass	
35916.794	48.83	20.16	-2.16	66.82	Debug	V	175	264	82.23	-15.41	Pass	
36149.981	45.64	23.47	-2.31	66.81	Debug	V	175	264	82.23	-15.42	Pass	
35985.219	48.23	20.81	-2.30	66.74	Debug	V	175	264	82.23	-15.49	Pass	
36070.663	47.08	21.99	-2.35	66.72	Debug	V	175	264	82.23	-15.51	Pass	
36171.113	45.02	23.92	-2.29	66.65	Debug	V	175	264	82.23	-15.58	Pass	
35881.138	48.77	19.88	-2.08	66.57	Debug	V	175	264	82.23	-15.66	Pass	
35921.256	48.52	20.20	-2.17	66.55	Debug	V	175	264	82.23	-15.68	Pass	
35949.169	48.25	20.47	-2.23	66.49	Debug	V	175	264	82.23	-15.74	Pass	
35909.269	48.37	20.08	-2.14	66.32	Debug	V	175	264	82.23	-15.91	Pass	
35969.950	47.76	20.67	-2.27	66.16	Debug	V	175	264	82.23	-16.07	Pass	
36160.569	44.71	23.70	-2.30	66.11	Debug	V	175	264	82.23	-16.12	Pass	


Note: Preview data was measured using a peak detector to identify frequencies of interest for formal measurement. Formal data consist of all frequencies in the preview list within 6 dB of specification limit or the top six frequencies. Failure in preview data does not necessarily constitute failure in formal data.

Maximum Measured Radiated Emissions -U Band 40GHz-60GHz


FCC B Part 30

1CC

Vertical Polarization - 1 MHz RBW

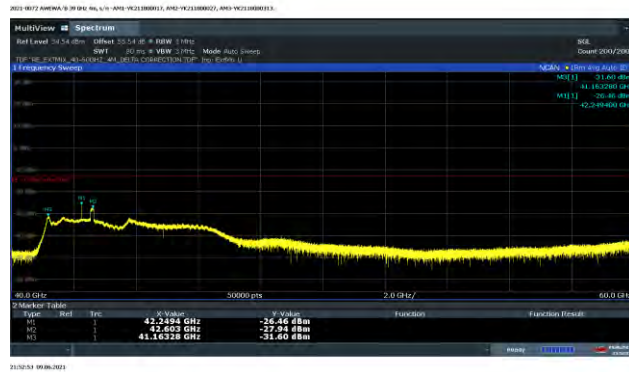


Horizontal Polarization - 1 MHz RBW

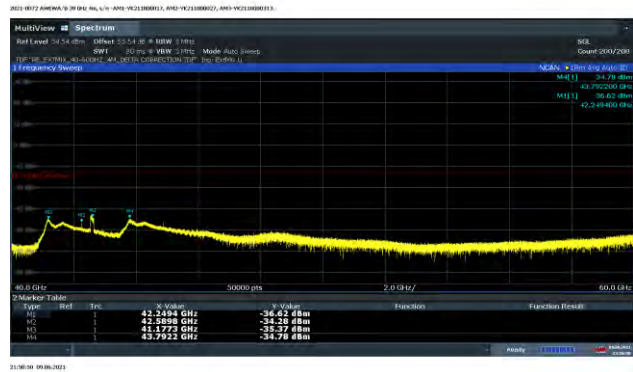


8CC

Vertical Polarization - 1 MHz RBW

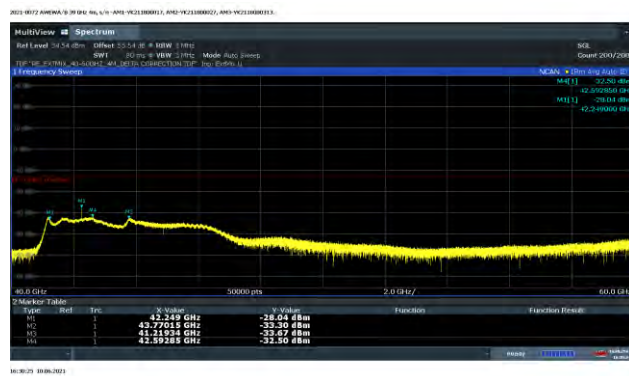


Horizontal Polarization - 1 MHz RBW

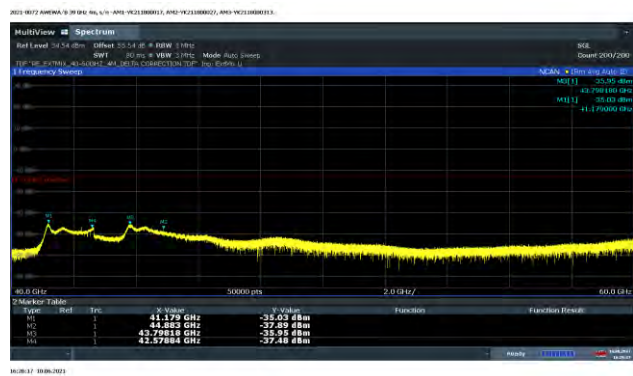


Maximum Measured Radiated Emissions -U Band 60GHz-90GHz 1CC

FCC B Part 30

Vertical Polarization - 1 MHz RBW

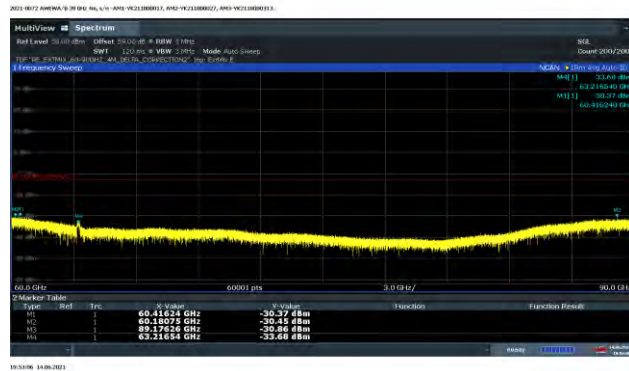


Horizontal Polarization - 1 MHz RBW

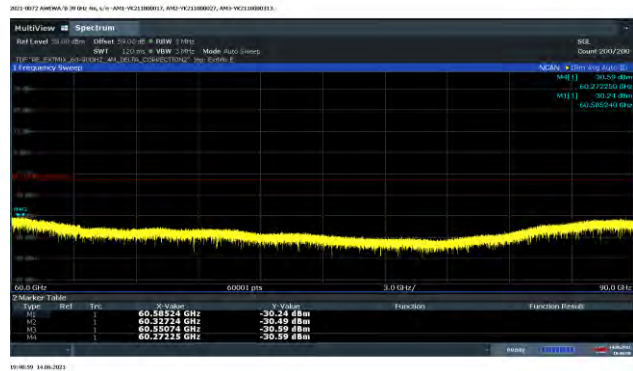


8CC

Vertical Polarization - 1 MHz RBW

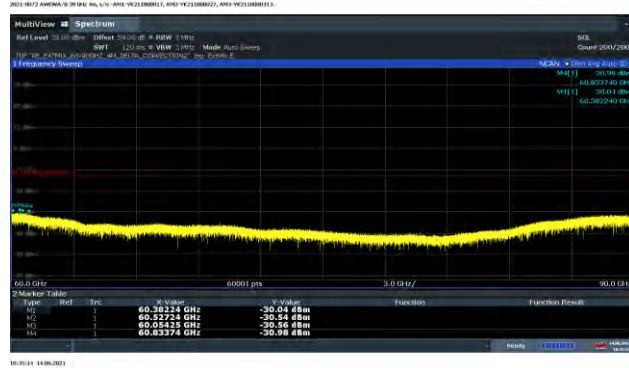


Horizontal Polarization - 1 MHz RBW

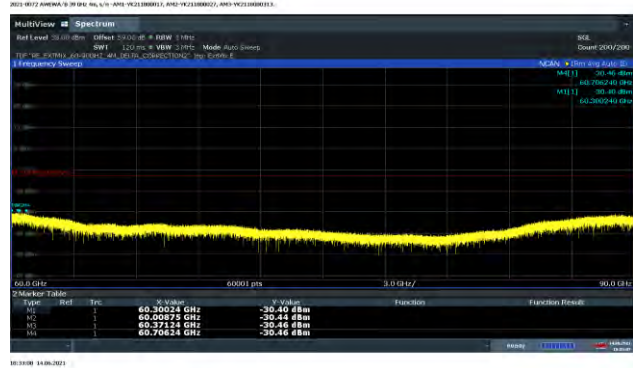


Maximum Measured Radiated Emissions -U Band 90GHz-140GHz
1CC

FCC B Part 30

Vertical Polarization - 1 MHz RBW

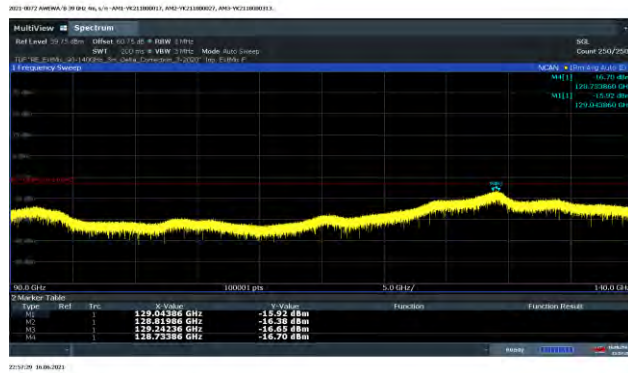


Horizontal Polarization - 1 MHz RBW

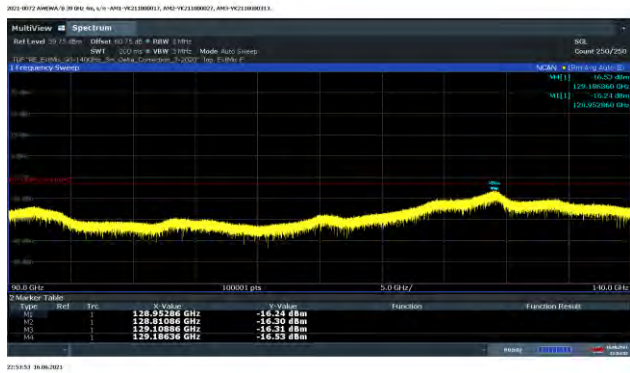


8CC

Vertical Polarization - 1 MHz RBW

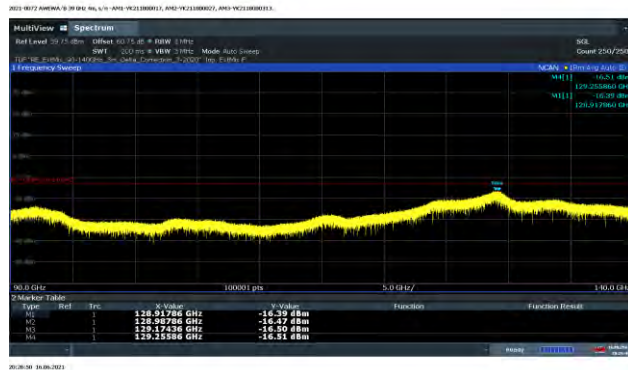


Horizontal Polarization - 1 MHz RBW

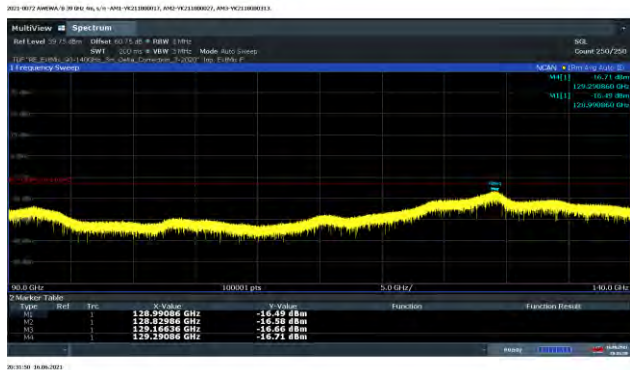


Maximum Measured Radiated Emissions -U Band 140GHz-170GHz FCC B Part 30

1CC

Vertical Polarization - 1 MHz RBW

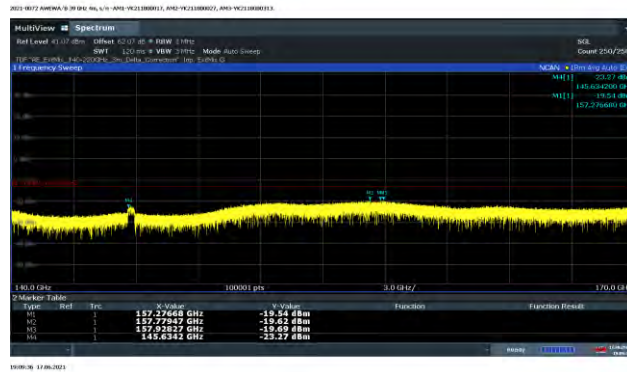


Horizontal Polarization - 1 MHz RBW

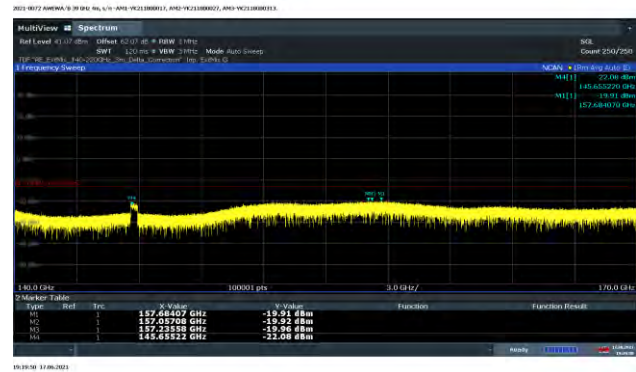


8CC

Vertical Polarization - 1 MHz RBW

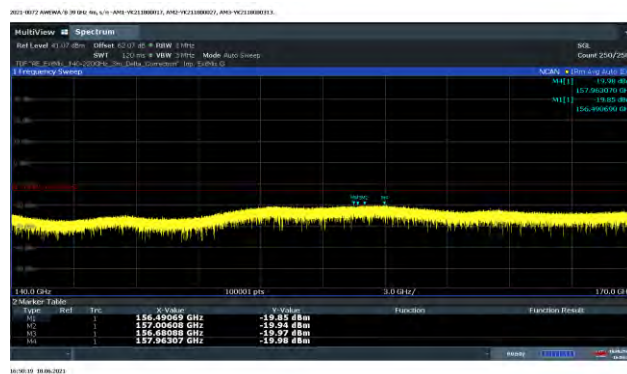


Horizontal Polarization - 1 MHz RBW

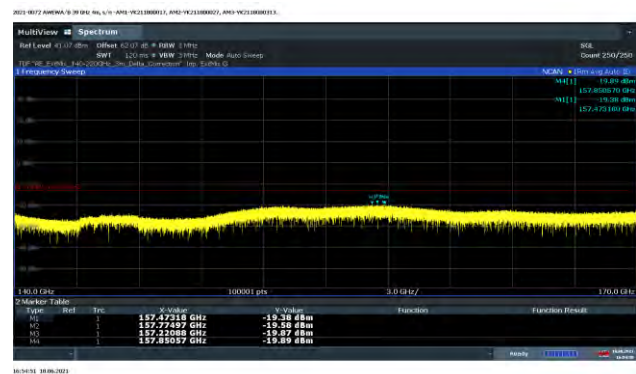


Maximum Measured Radiated Emissions -U Band 170GHz-200GHz FCC B Part 30

1CC

Vertical Polarization - 1 MHz RBW

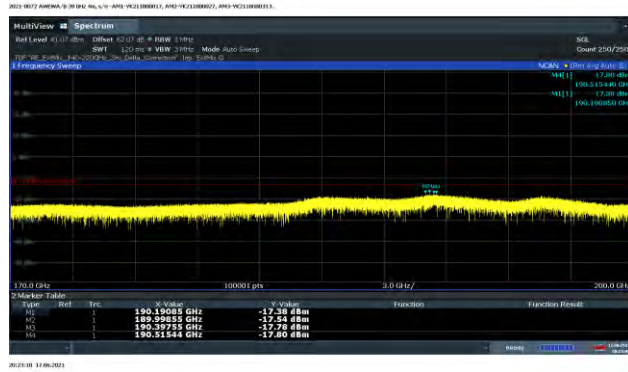


Horizontal Polarization - 1 MHz RBW

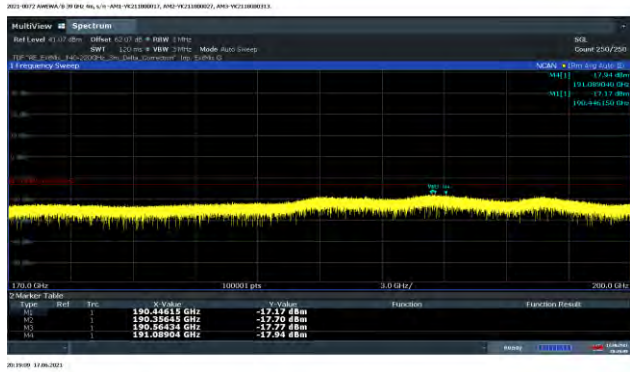


8CC

Vertical Polarization - 1 MHz RBW

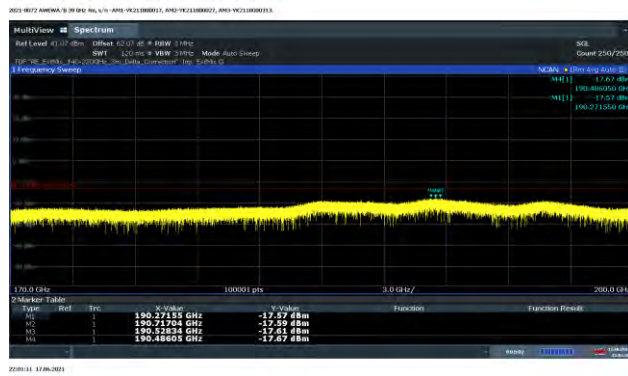

Horizontal Polarization - 1 MHz RBW

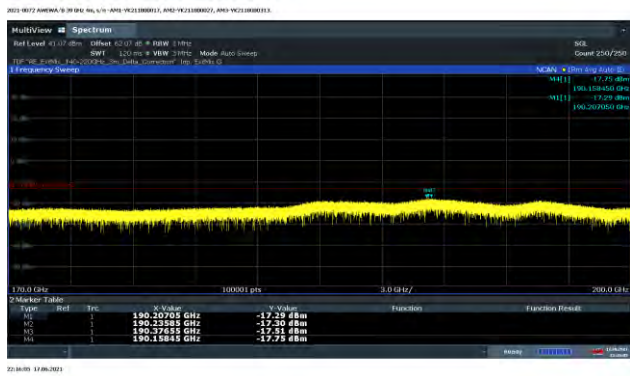

4.6 Section 2.1055 MEASUREMENT OF FREQUENCY STABILITY

This measurement evaluates the frequency difference between the actual transmit carrier frequency and the specified transmit frequency assignment. Only the portion of the transmitter system containing the frequency determining and stabilizing circuitry need be put in an environmental chamber and subjected to the temperature variation test per FCC Section 2.1055 and RSS-133. The unit which provides baseband signals, such as BBU (baseband unit), can be located outside the chamber if it is a separated unit.

4.6.1 Frequency Stability Results AC Model:

Frequency Stability testing was completed on a FA3WA Extension Modules powered and supported by an AC version 39 GHz ASMR main unit (CF = 38,447.76MHz). Testing was performed from 06/21/2021 through 06/22/2021 on the radio, which was located in the T-16 Thermal chamber of the Global Product Compliance Laboratory (GPCL) test facility located in Building 4, Room 4-280, Murray Hill, NJ, by Joe Bordonaro from GPCL.

Table A: AC Unit Under Test

Series	Vendor	Serial Number	Model
FA3WA	Nokia	YK211800033	475002A.X31
FA3WA	Nokia	YK211800034	475002A.X31
AWEWA	Nokia	YK211800002	475170A.X31

Note: A fan was not installed on the radio during testing.

The temperatures to which the UUT were subjected ranged from a high temperature of +50°C system ambient to a low temperature of -30°C system ambient with measurements recorded at 10C increments.

Transmit frequency error measures the deviation between the actual transmit frequency and the assigned frequency. The transmit frequency error in this case was measured by capturing the transmitted signal using a receiving antenna and then cabling it to an MXA signal analyzer. A maximum deviation of 33.868 Hz was recorded which demonstrates compliance with the established design criteria of +/-1922.4 Hz (± 0.05 ppm).

4.6.2 Frequency Stability Results DC Model:

Frequency Stability testing was completed on FA3WA with AWEWA DC powered 39GHz ASMR (CF = 38,447.76MHz). Testing was performed from 06/23/2021 through 06/24/2021 on the radio, which was located in the T-16 Thermal chamber of the Global Product Compliance Laboratory (GPCL) test facility located in Building 4, Room 4-280, Murray Hill, NJ, by Joe Bordonaro from GPCL.

Table B: DC Unit Under Test


Series	Vendor	Serial Number	Com Code #
FA3WA	Nokia	YK211800033	475002A.X31
FA3WA	Nokia	YK211800034	475002A.X31
AWEWB	Nokia	YK211800015	475171A.X31

Note: A fan was not installed on the radio during testing.


The temperatures to which the UUT were subjected ranged from a high temperature of +50°C system ambient to a low temperature of -30°C system ambient with measurements recorded at 10C increments.

Transmit frequency error measures the deviation between the actual transmit frequency and the assigned frequency. The transmit frequency error in this case was measured by capturing the transmitted signal using a receiving antenna and then cabling it to an MXA signal analyzer. A maximum deviation of 34.980 Hz was recorded which demonstrates compliance with the established design criteria of +/-1922.4 Hz (± 0.05 ppm).

FIGURE 1: TEST BLOCK DIAGRAM

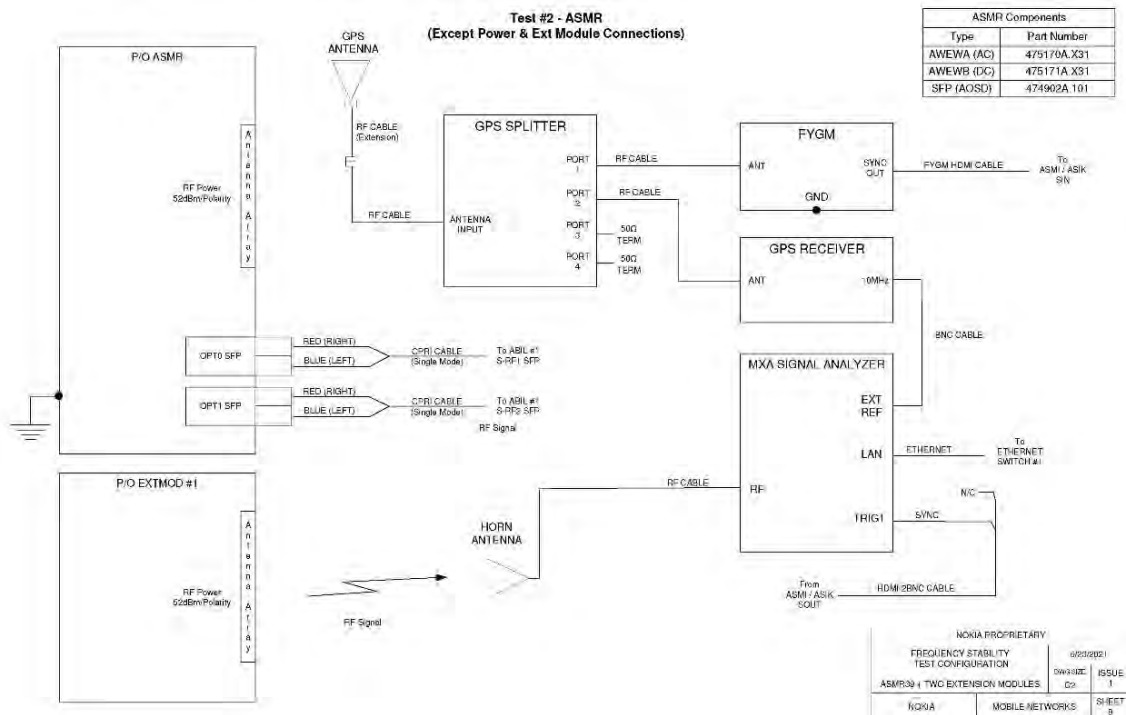


**Test #1 - ASMR (AWEWA)
AC Power**

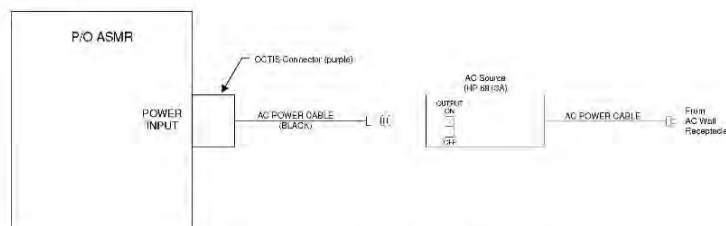

AC POWER DATA	
Voltage	Current @ 120VAC
100 to 250 VAC	<2.5 A

Notes:
1. Data recorded with chamber set to +50C
2. This was the maximum current observed

**Test #2 - ASMR (AWEWB)
DC Power**

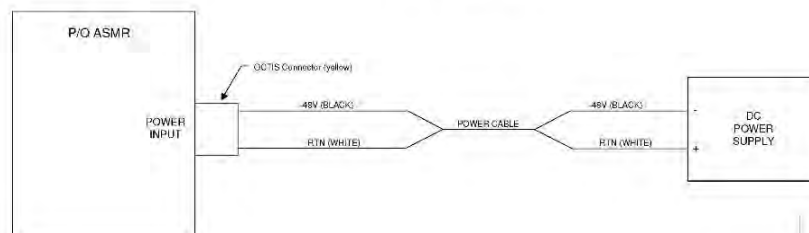


DC POWER DATA	
Voltage	Current
-48Vdc	< 5.0A

Notes:
1. Data recorded at room temperature

NOKIA PROPRIETARY			
FREQUENCY STABILITY TEST CONFIGURATION		DATE	ISSUE
ASMR39 + TWO EXTENSION MODULES		6/23/2021	1
NOKIA	MOBILE NETWORKS		SHEET 10

Test #1 & #2 - ASMR Connected to Extension Modules

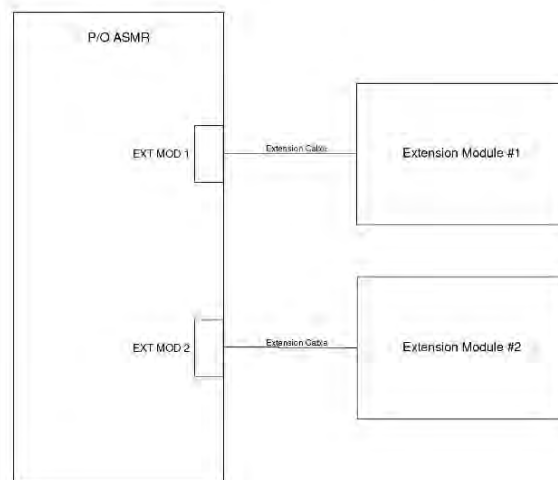

Extension Module	
Name	Part Number
FA3WA	475002A.X31

NOKIA PROPRIETARY			
FREQUENCY STABILITY TEST CONFIGURATION		DATE	ISSUE
ASMR39 + TWO EXTENSION MODULES		6/23/2021	1
NOKIA	MOBILE NETWORKS		SHEET 11

FA3UA + AWEWA - AC Version

Frequency Block Tested: 39 GHz RADIO (CF = 38,447.76MHz)

Baseline Measurement at +25°C

Transmit Frequency Deviation at +25°C at 100% of Nominal Voltage, 120VAC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	13.111
0.5	0.78801
1.0	10.795
1.5	12.861
2.0	14.655
2.5	6.6406
3.0	12.787
FCC SPECIFICATION	+/-1922.4Hz (±0.05ppm) ±0.05ppm = ±Hz
FCC RESULT	Pass

Transmit Frequency Deviation at +50°C at 100% of Nominal Voltage, 120VAC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	-3.2418
0.5	13.115
1.0	-8.0514
1.5	10.144
2.0	-0.4928
2.5	14.392
3.0	5.8396
FCC SPECIFICATION	+/-1922.4Hz (±0.05ppm) ±0.05ppm = ±Hz
FCC RESULT	Pass

Transmit Frequency Deviation at +40°C at 100% of Nominal Voltage, 120VAC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	15.695
0.5	3.3412
1.0	10.168
1.5	-3.8514
2.0	-9.1557
2.5	5.6470
3.0	20.858
FCC SPECIFICATION	+/-1922.4Hz (±0.05ppm) ±0.05ppm = ±Hz
FCC RESULT	Pass

Transmit Frequency Deviation at +30°C at 100% of Nominal Voltage, 120VAC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	4.7404
0.5	12.430
1.0	4.3301
1.5	-11.230
2.0	-7.7532
2.5	12.445
3.0	5.9113
FCC SPECIFICATION	+/-1922.4Hz (±0.05ppm) ±0.05ppm = ±Hz
FCC RESULT	Pass

Transmit Frequency Deviation at +20°C at 100% of Nominal Voltage, 120VAC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	8.3116
0.5	4.5011
1.0	17.955
1.5	1.5506
2.0	-6.1657
2.5	14.027
3.0	-1.2359
FCC SPECIFICATION	+/-1922.4Hz (±0.05ppm) ±0.05ppm = ±Hz
FCC RESULT	Pass

Transmit Frequency Deviation at +10°C at 100% of Nominal Voltage, 120VAC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	5.8857
0.5	12.715
1.0	1.8021
1.5	-6.3238
2.0	19.839
2.5	10.521
3.0	-0.83318
FCC SPECIFICATION	+/-1922.4Hz (±0.05ppm) ±0.05ppm = ±Hz
FCC RESULT	Pass

Transmit Frequency Deviation at 0°C at 100% of Nominal Voltage, 120VAC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	16.681
0.5	4.5097
1.0	-0.7665
1.5	5.2510
2.0	18.751
2.5	4.6458
3.0	-4.2273
FCC SPECIFICATION	+/-1922.4Hz (±0.05ppm) ±0.05ppm = ±Hz
FCC RESULT	Pass

Transmit Frequency Deviation at -10°C at 100% of Nominal Voltage, 120VAC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	13.002
0.5	-2.2340
1.0	8.7299
1.5	-7.2664
2.0	9.4134
2.5	19.129
3.0	6.2202
FCC SPECIFICATION	+/-1922.4Hz (±0.05ppm) ±0.05ppm = ±Hz
FCC RESULT	Pass

Transmit Frequency Deviation at -20°C at 100% of Nominal Voltage, 120VAC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	5.1157
0.5	13.770
1.0	1.8577
1.5	6.8028
2.0	5.6239
2.5	9.0679
3.0	14.552
FCC SPECIFICATION	+/-1922.4Hz (±0.05ppm) ±0.05ppm = ±Hz
FCC RESULT	Pass

Transmit Frequency Deviation at -30°C at 100% of Nominal Voltage, 120VAC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	11.200
0.5	2.6812
1.0	-5.3370
1.5	3.8333
2.0	-2.3281
2.5	10.248
3.0	7.2584
FCC SPECIFICATION	+/-1922.4Hz (±0.05ppm) ±0.05ppm = ±Hz
FCC RESULT	Pass

Upon return to +25°C

Transmit Frequency Deviation at +25°C at 100% of Nominal Voltage, 120VAC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	14.080
0.5	13.318
1.0	25.566
1.5	8.1983
2.0	10.559
2.5	-4.8542
3.0	11.513
FCC SPECIFICATION	+/-1922.4Hz (±0.05ppm) ±0.05ppm = ±Hz
FCC RESULT	Pass

Transmit Frequency Deviation at +25°C at +15% of Nominal Voltage, 138.0VAC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	13.018
0.5	-4.5630
1.0	5.6430
1.5	20.375
2.0	8.4732
2.5	15.843
3.0	33.868
FCC SPECIFICATION	+/-1922.4Hz (±0.05ppm) ±0.05ppm = ±Hz
FCC RESULT	Pass

Transmit Frequency Deviation at +25°C at +12% of Nominal Voltage, 134.40VAC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	8.1775
0.5	-0.5158
1.0	18.759
1.5	9.9124
2.0	2.6433
2.5	5.0576
3.0	-2.0275
FCC SPECIFICATION	+/-1922.4Hz (±0.05ppm) ±0.05ppm = ±Hz
FCC RESULT	Pass

Transmit Frequency Deviation at +25°C at +9% of Nominal Voltage, 130.80VAC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	7.5559
0.5	12.249
1.0	8.2609
1.5	-0.9278
2.0	11.600
2.5	1.0150
3.0	4.9411
FCC SPECIFICATION	+/-1922.4Hz (±0.05ppm) ±0.05ppm = ±Hz
FCC RESULT	Pass

Transmit Frequency Deviation at +25°C at +6% of Nominal Voltage, 127.20VAC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	6.4640
0.5	-0.8967
1.0	5.1581
1.5	12.431
2.0	-9.4260
2.5	3.2700
3.0	-6.0713
FCC SPECIFICATION	+/-1922.4Hz (±0.05ppm) ±0.05ppm = ±Hz
FCC RESULT	Pass

Transmit Frequency Deviation at +25°C at +3% of Nominal Voltage, 123.60VAC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	7.0284
0.5	12.990
1.0	-3.7400
1.5	6.4070
2.0	1.0252
2.5	9.4424
3.0	11.359
FCC SPECIFICATION	+/-1922.4Hz (±0.05ppm) ±0.05ppm = ±Hz
FCC RESULT	Pass

Transmit Frequency Deviation at +25°C at -3% of Nominal Voltage, 116.40VAC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	6.2074
0.5	1.4952
1.0	17.105
1.5	10.991
2.0	25.165
2.5	6.6824
3.0	3.8268
FCC SPECIFICATION	+/-1922.4Hz (±0.05ppm) ±0.05ppm = ±Hz
FCC RESULT	Pass

Transmit Frequency Deviation at +25°C at -6% of Nominal Voltage, 112.80VAC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	9.8699
0.5	3.7053
1.0	1.3225
1.5	11.222
2.0	0.6512
2.5	17.392
3.0	2.3274
FCC SPECIFICATION	+/-1922.4Hz (±0.05ppm) ±0.05ppm = ±Hz
FCC RESULT	Pass

Transmit Frequency Deviation at +25°C at -9% of Nominal Voltage, 109.20VAC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	14.030
0.5	5.1072
1.0	1.3910
1.5	12.270
2.0	3.0453
2.5	5.3259
3.0	-0.6639
FCC SPECIFICATION	+/-1922.4Hz (±0.05ppm) ±0.05ppm = ±Hz
FCC RESULT	Pass

Transmit Frequency Deviation at +25°C at -12% of Nominal Voltage, 105.60VAC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	-3.9776
0.5	13.600
1.0	19.753
1.5	6.3323
2.0	4.3180
2.5	-2.3764
3.0	9.8002
FCC SPECIFICATION	+/-1922.4Hz (±0.05ppm) ±0.05ppm = ±Hz
FCC RESULT	Pass

Transmit Frequency Deviation at +25°C at -15% of Nominal Voltage, 102.0VAC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	-0.0482
0.5	19.662
1.0	2.2966
1.5	8.1748
2.0	-2.0069
2.5	15.993
3.0	-1.5567
FCC SPECIFICATION	+/-1922.4Hz (±0.05ppm) ±0.05ppm = ±Hz
FCC RESULT	Pass

FA3WA + AWEWB + - DC Version

Baseline Measurement at +25°C

Transmit Frequency Deviation at +25°C at 100% of Nominal Voltage, -48VDC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	5.3717
0.5	9.1716
1.0	-6.2743
1.5	7.7106
2.0	-0.1346
2.5	5.7867
3.0	-3.7020
FCC SPECIFICATION	38,447.76MHz (±0.05ppm) ±0.05ppm = ±1922.45Hz
FCC RESULT	PASS

Transmit Frequency Deviation at +50°C at 100% of Nominal Voltage, -48VDC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	2.7994
0.5	13.860
1.0	-3.7563
1.5	-10.063
2.0	5.3310
2.5	-7.8576
3.0	11.628
FCC SPECIFICATION	38,447.76MHz (±0.05ppm) ±0.05ppm = ±1922.45Hz
FCC RESULT	PASS

Transmit Frequency Deviation at +40°C at 100% of Nominal Voltage, -48VDC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	4.9815
0.5	11.152
1.0	-0.18084
1.5	5.7859
2.0	18.643
2.5	22.894
3.0	-3.0847
FCC SPECIFICATION	38,447.76MHz (±0.05ppm) ±0.05ppm = ±1922.45Hz
FCC RESULT	PASS

Transmit Frequency Deviation at +30°C at 100% of Nominal Voltage, -48VDC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	2.9555
0.5	-3.7904
1.0	14.497
1.5	5.1026
2.0	16.990
2.5	11.386
3.0	3.9316
FCC SPECIFICATION	38,447.76MHz (±0.05ppm) ±0.05ppm = ±1922.45Hz
FCC RESULT	PASS

Transmit Frequency Deviation at +20°C at 100% of Nominal Voltage, -48VDC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	7.9572
0.5	2.0672
1.0	-3.2580
1.5	19.936
2.0	5.8211
2.5	7.1661
3.0	3.9313
FCC SPECIFICATION	38,447.76MHz (±0.05ppm) ±0.05ppm = ±1922.45Hz
FCC RESULT	PASS

Transmit Frequency Deviation at +10°C at 100% of Nominal Voltage, -48VDC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	6.5647
0.5	10.176
1.0	0.1091
1.5	9.6805
2.0	6.8924
2.5	-1.5072
3.0	12.604
FCC SPECIFICATION	38,447.76MHz (±0.05ppm) ±0.05ppm = ±1922.45Hz
FCC RESULT	PASS

Transmit Frequency Deviation at 0°C at 100% of Nominal Voltage, -48VDC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	19.993
0.5	9.3070
1.0	1.3352
1.5	-2.2986
2.0	9.0385
2.5	-4.7677
3.0	-3.0167
FCC SPECIFICATION	38,447.76MHz (± 0.05 ppm) ± 0.05 ppm = ± 1922.45 Hz
FCC RESULT	PASS

Transmit Frequency Deviation at -10°C at 100% of Nominal Voltage, -48VDC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	5.1961
0.5	0.61847
1.0	15.476
1.5	8.1087
2.0	14.949
2.5	12.804
3.0	-8.8906
FCC SPECIFICATION	38,447.76MHz (± 0.05 ppm) ± 0.05 ppm = ± 1922.45 Hz
FCC RESULT	PASS

Transmit Frequency Deviation at -20°C at 100% of Nominal Voltage, -48VDC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	-1.9848
0.5	14.175
1.0	6.2946
1.5	15.101
2.0	-4.8754
2.5	6.0201
3.0	-2.8523
FCC SPECIFICATION	38,447.76MHz (± 0.05 ppm) ± 0.05 ppm = ± 1922.45 Hz
FCC RESULT	PASS

Transmit Frequency Deviation at -30°C at 100% of Nominal Voltage, -48VDC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	19.852
0.5	34.980
1.0	8.2369
1.5	2.8516
2.0	-7.1159
2.5	12.406
3.0	3.3541
FCC SPECIFICATION	38,447.76MHz (±0.05ppm) ±0.05ppm = ±1922.45Hz
FCC RESULT	PASS

Upon return to +25°C.

Transmit Frequency Deviation at +25°C at 100% of Nominal Voltage, -48VDC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	-7.1416
0.5	5.6805
1.0	1.6613
1.5	-7.2289
2.0	0.55693
2.5	12.828
3.0	2.2910
FCC SPECIFICATION	38,447.76MHz (±0.05ppm) ±0.05ppm = ±1922.45Hz
FCC RESULT	PASS

Transmit Frequency Deviation at +25°C at 103% of Nominal Voltage, -49.44VDC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	-3.2775
0.5	8.3858
1.0	-0.5131
1.5	4.0309
2.0	12.369
2.5	11.200
3.0	2.8653
FCC SPECIFICATION	38,447.76MHz (±0.05ppm) ±0.05ppm = ±1922.45Hz
FCC RESULT	PASS

Transmit Frequency Deviation at +25°C at 106% of Nominal Voltage, -50.88VDC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	22.487
0.5	10.983
1.0	2.4532
1.5	9.8378
2.0	3.5910
2.5	10.508
3.0	4.6842
FCC SPECIFICATION	38,447.76MHz (±0.05ppm) ±0.05ppm = ±1922.45Hz
FCC RESULT	PASS

Transmit Frequency Deviation at +25°C at 109% of Nominal Voltage, -52.32VDC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	4.6812
0.5	6.7634
1.0	1.9768
1.5	-5.6610
2.0	18.270
2.5	4.8324
3.0	-2.4254
FCC SPECIFICATION	38,447.76MHz (±0.05ppm) ±0.05ppm = ±1922.45Hz
FCC RESULT	PASS

Transmit Frequency Deviation at +25°C at 112% of Nominal Voltage, -53.76VDC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	4.4481
0.5	9.0950
1.0	-7.1927
1.5	14.007
2.0	-2.0294
2.5	14.618
3.0	5.0757
FCC SPECIFICATION	38,447.76MHz (±0.05ppm) ±0.05ppm = ±1922.45Hz
FCC RESULT	PASS

Transmit Frequency Deviation at +25°C at 115% of Nominal Voltage, -55.20VDC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	8.3026
0.5	14.010
1.0	2.2780
1.5	14.137
2.0	23.107
2.5	5.8085
3.0	-4.0131
FCC SPECIFICATION	38,447.76MHz (±0.05ppm) ±0.05ppm = ±1922.45Hz
FCC RESULT	PASS

Transmit Frequency Deviation at +25°C at 100% of Nominal Voltage, -48.0VDC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	-9.9890
0.5	10.407
1.0	-4.7079
1.5	2.2624
2.0	10.187
2.5	1.3859
3.0	4.1272
FCC SPECIFICATION	38,447.76MHz (±0.05ppm) ±0.05ppm = ±1922.45Hz
FCC RESULT	PASS

Transmit Frequency Deviation at +25°C at -3% of Nominal Voltage, -46.56VDC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	10.171
0.5	0.56579
1.0	13.813
1.5	-1.7037
2.0	-6.7878
2.5	-13.105
3.0	8.0425
FCC SPECIFICATION	38,447.76MHz (±0.05ppm) ±0.05ppm = ±1922.45Hz
FCC RESULT	PASS

Transmit Frequency Deviation at +25°C at -6% of Nominal Voltage, -45.12VDC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	-3.4635
0.5	16.086
1.0	-1.8561
1.5	2.6651
2.0	8.6077
2.5	-4.2673
3.0	12.419
FCC SPECIFICATION	38,447.76MHz (±0.05ppm) ±0.05ppm = ±1922.45Hz
FCC RESULT	PASS

Transmit Frequency Deviation at +25°C at -9% of Nominal Voltage, -43.68VDC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	10.350
0.5	-4.3117
1.0	16.768
1.5	7.2068
2.0	-0.6209
2.5	7.5892
3.0	17.007
FCC SPECIFICATION	38,447.76MHz (±0.05ppm) ±0.05ppm = ±1922.45Hz
FCC RESULT	PASS

Transmit Frequency Deviation at +25°C at -12% of Nominal Voltage, -42.24VDC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	-3.5629
0.5	1.4070
1.0	-3.5125
1.5	2.2096
2.0	-14.592
2.5	7.0721
3.0	15.479
FCC SPECIFICATION	38,447.76MHz (±0.05ppm) ±0.05ppm = ±1922.45Hz
FCC RESULT	PASS

Transmit Frequency Deviation at +25°C at -15% of Nominal Voltage, -40.80VDC	
Time (minutes)	Transmit Carrier Deviation (Hz)
0	10.906
0.5	15.003
1.0	-0.7521
1.5	7.2081
2.0	15.326
2.5	2.5654
3.0	-1.9956
FCC SPECIFICATION	38,447.76MHz (±0.05ppm) ±0.05ppm = ±1922.45Hz
FCC RESULT	PASS

4.7 List of Test Equipment

4.7.1 List of Radio Measurements Test Equipment

The following equipmnet was used for the measurement of Radio parameters and Radiated Emissions.

Asset ID	Manufacturer	Type	Description	Model	Serial	Calibration Date	Calibration Due
E1373	A-Info	Horn Antenna	26.5-40GHz WR28 25 dB	LB-28-25-C2-KF	J202062735	2018-12-05	2021-12-05
E1375	A-Info	Horn Antenna	26.5-40GHz WR28 25 dB	LB-28-25-C2-KF	J202023249	2020-7-27	2022-7-27
E1384	Rohde & Schwarz	Spectrum Analyzer	2 Hz to 85 GHz	FSW85	101537	2020-08-25	2022-08-25
E483	Kikusui	Power Supply	DC 55 Volts 120 Amps	PAD 55-120L	DM000112	CNR	CNR
E772	Sunol Sciences Corp	Modular Controller	Tower / Turntable Controller	SC104V	060107-1	CNR	CNR
E1255	ETS Lindgren	Controller	Multi-Device Controller	2090	00078509	CNR	CNR
E1150	Extech	Data Logger	Pressure Humidity Temp Data Logger	SD700	Q752767	2021-01-11	2023-01-11

CNR: Calibration Not Required

CNR-V: Calibration Not Required, Must Be Verified

SPV: System Performance Verified

4.7.2 List of Radiated Emissions Test Equipment

Asset ID	Manufacturer	Type	Description	Model	Serial	Calibration Date	Calibration Due
E601	A.H. Systems Inc.	Biological Antenna	25 - 2000 MHz	SAS-521-2	408	2019-12-03	2021-12-03
E1074	ETS Lindgren	Horn Antenna	Double-Ridged Waveguide Horn 1-18 GHz	3117	00135194	2019-05-01	2021-08-01
E1373	A-Info	Horn Antenna	26.5-40GHz WR28 25 dB	LB-28-25-C2-KF	J202062735	2018-12-05	2021-12-05
E1452	A-Info	Horn Antenna	18 to 26.5 GHz WR42 25 dB	LB-42-25-C2-KF	J202066361	2020-08-11	2022-08-11
E1260	Rohde & Schwarz	Spectrum Analyzer	2 Hz-67 GHz	FSW67	104007	2020-08-21	2022-08-21
E447	Hewlett Packard	Pre-Amplifier	Preamplifier 1-26.5 GHz	8449B	3008A01384	2020-08-31	2022-08-31
E813	Sonoma Instrument Co.	Amplifier	9kHz-1GHz	310N	186750	2020-10-20	2022-10-20
E1525	A.H. Systems Inc.	Pre-Amplifier	18 GHz-40 GHz, 37 dB	PAM-1840VH	186	2020-11-30	2022-11-30
E980	Trilithic	Filter, Low Pass	PCS	10LC1790-3-AA	PCS-LPF-12	CNR-V	CNR-V

Asset ID	Manufacturer	Type	Description	Model	Serial	Calibration Date	Calibration Due
E1516	Reactel, Inc.	Filter, Low Pass	1 - 34 GHz, 2.0 dB	11LS-X34GK11	SN20-01	2021-03-15	2022-03-15
E1476	Reactel, Inc.	Filter, Low Pass	DC - 20 GHz	11LS-X20GS11	SN20-01	2020-09-15	2021-09-15
E1119	Extech	Data Logger	Pressure Humidity Temp data logger	SD700	Q668960	2021-01-11	2023-01-11
E483	Kikusui	Power Supply	DC 55 Volts 120 Amps	PAD 55-120L	DM000112	CNR	CNR
E588	Sunol Sciences Corp	System Controller	Tower / Turntable Controller	SC99V	32802-1	CNR	CNR
E1308	Rohde & Schwarz	Harmonic Mixer	Down Converter 90-140GHz	FS-Z140	101008	2017-04-06, - in Service 2018-07-01	SPV
E1311	Rohde & Schwarz	Harmonic Mixer	Down Converter 40-60GHz	FS-Z60	100977	2017-12-21, - in Service 2018-07-01	SPV
E1312	Rohde & Schwarz	Harmonic Mixer	Down Converter 60-90GHz	FS-Z90	101719	2017-08-09 -in Service 2018-07-01	SPV
E1313	Rohde & Schwarz	Harmonic Mixer	Down Converter, 140-220GHz	FS-Z220	100960	2017-12-21, - in Service 2018-07-01	SPV
E1315	RS Microwave Company, Inc.	Microwave Filter	40 GHz High Pass Filter	P/N 60733A	007	CNR-V	CNR-V
E1323	Mi-Wave Millimeter Wave Products, Inc.	Horn Antenna	G-band pyramidal horn antenna 25dB 140 - 220 GHz	261G-25/387		2017-12-21, - in Service 2018-07-01	SPV
E1330	Sage Millimeter, Inc.	Horn Antenna	U-band pyramidal horn antenna - 40 to 60 GHz	SAR-2309-19-S2	14853-01	Factory, - in Service 2018-07-01	SPV
E1332	Sage Millimeter, Inc.	Horn Antenna	E-band pyramidal horn antenna - 60 to 90 GHz.	SAR-2309-12-S2	14853-01	Factory, - in Service 2018-07-01	SPV
E1335	Sage Millimeter, Inc.	Horn Antenna	F-band pyramidal horn antenna - 90 to 140 GHz	SAR-2309-08-S2	14853-02	Factory, - in Service 2018-07-01	SPV

CNR: Calibration Not Required

CNR-V: Calibration Not Required, Must Be Verified

SPV: System Performance Verified

Note* - This is a brand-new factory calibrated equipment. Keysight Liberty Labs who does the 17025-calibration was closed due to Covid-19. Prior to testing, a verification test of this equipment was performed in house with a17025 calibrated network analyzer and the factory calibration was verified.


4.7.3 List of Frequency Stability Test Equipment

Asset ID	Manufacturer	Type	Description	Model	Serial	Calibration Date	Calibration Due
TH514-T16	Envirotronics	Controller		Envirotronics SPPCM	SP000637	2021-06-08	2023-06-08
TH-T16	Envirotronics	Thermal Chamber		N/A	3015243	N/A	N/A
TH149	Fluke	Multimeter	Digital Multimeter	87III	7519030337	2019-07-22	2021-07-22
EIH74	KeySight Technologies	EMI Receiver	MXA Signal Analyzer	N9020B	MY57120303	2020-12-21	2022-12-21
TH288	Yokogawa	Data Acquisition Unit	Recorder	MV2048-2-4-2-1-1D	S5JC04071	2021-02-25	2023-02-25
N/A	HP	Power Supply	AC Source	6813A	3524A-00321	N/A	N/A
N/A	Agilent	Power Supply	DC Source	N5767At	US13N5074M	N/A	N/A


4.8 PHOTOGRAPHS OF THE TEST SETUPS

Radio Measurements and Radiated Emissions Test


30 MHz–1 GHz

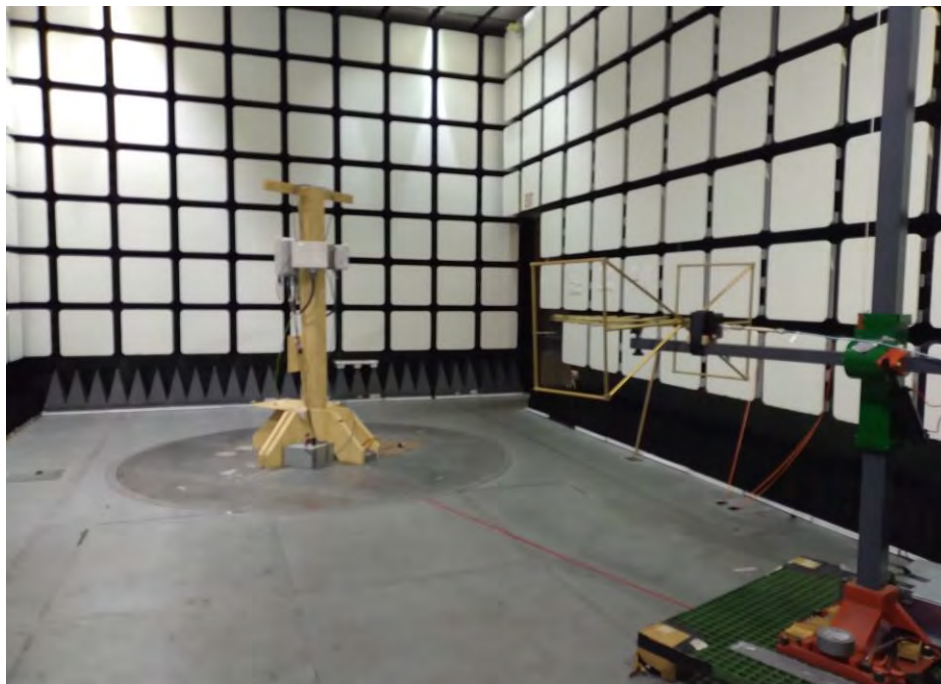


1 GHz – 18 GHz

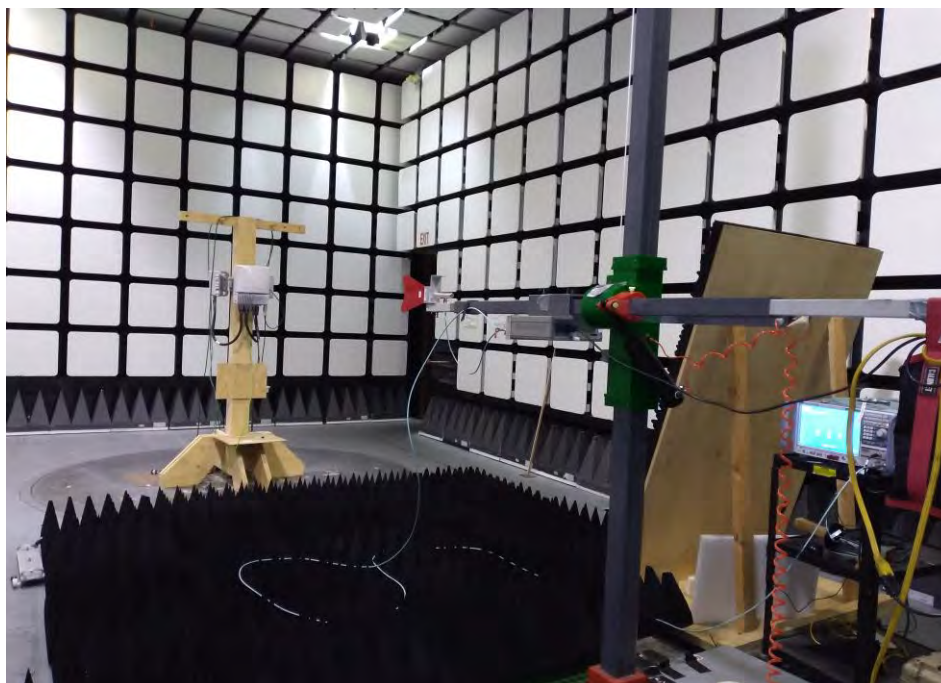


18GHz-26.5GHz

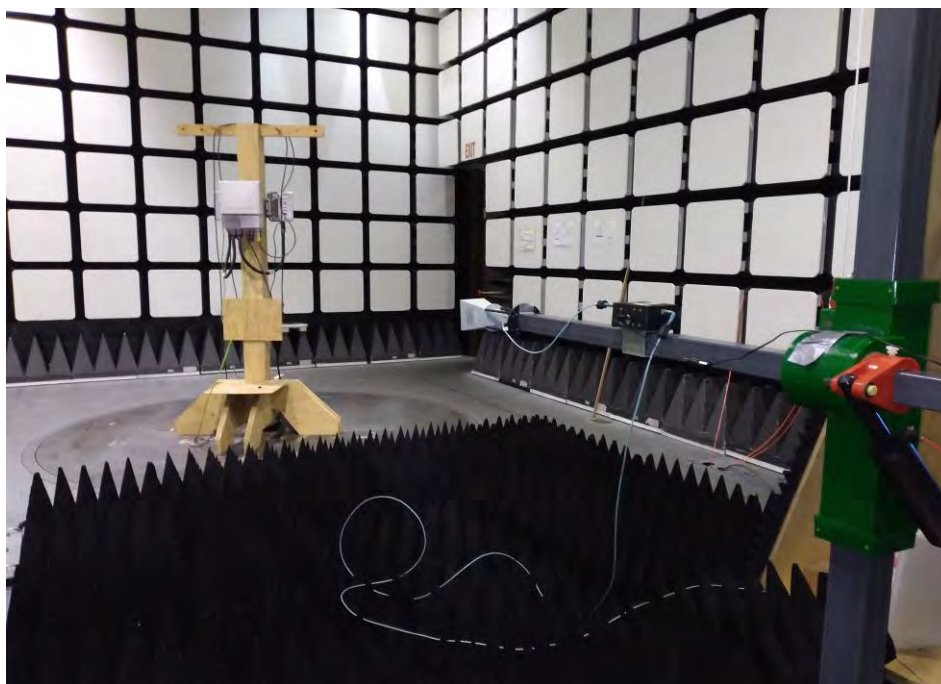


26.5GHz-40 GHz

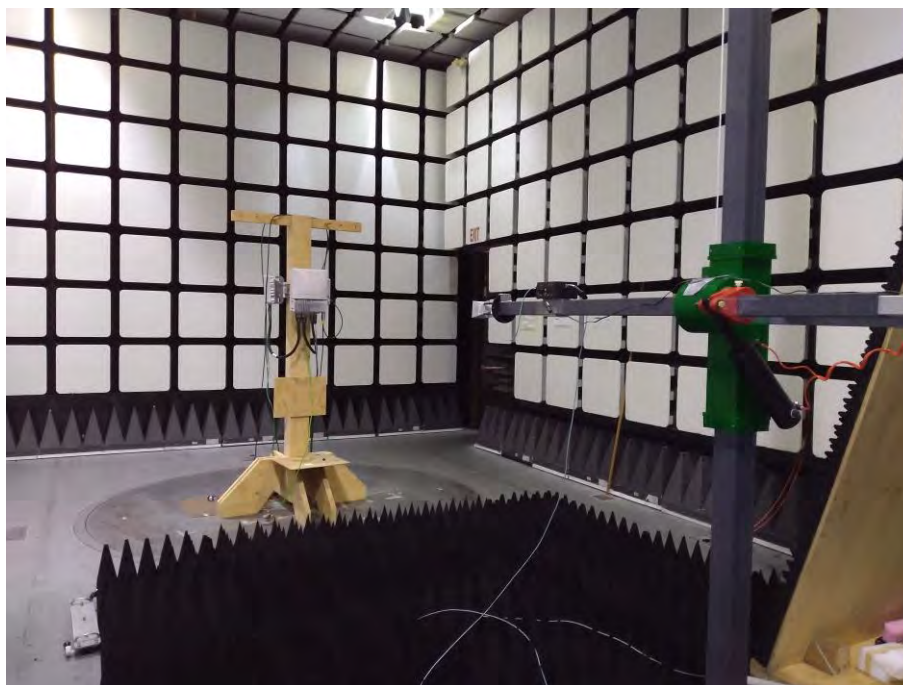


40GHz-60 GHz

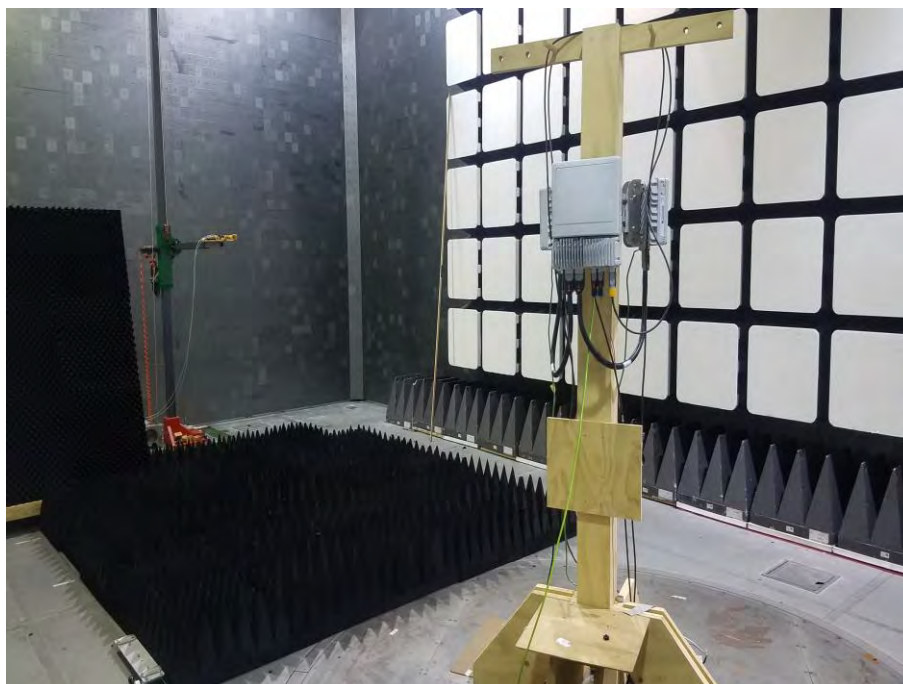

60GHz-90 GHz

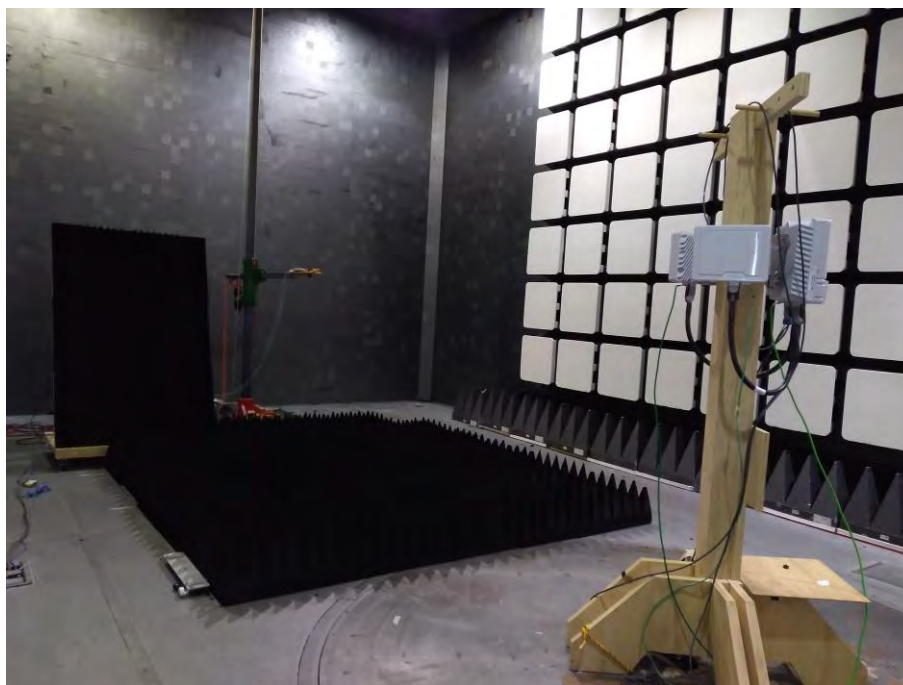

Radio Testing

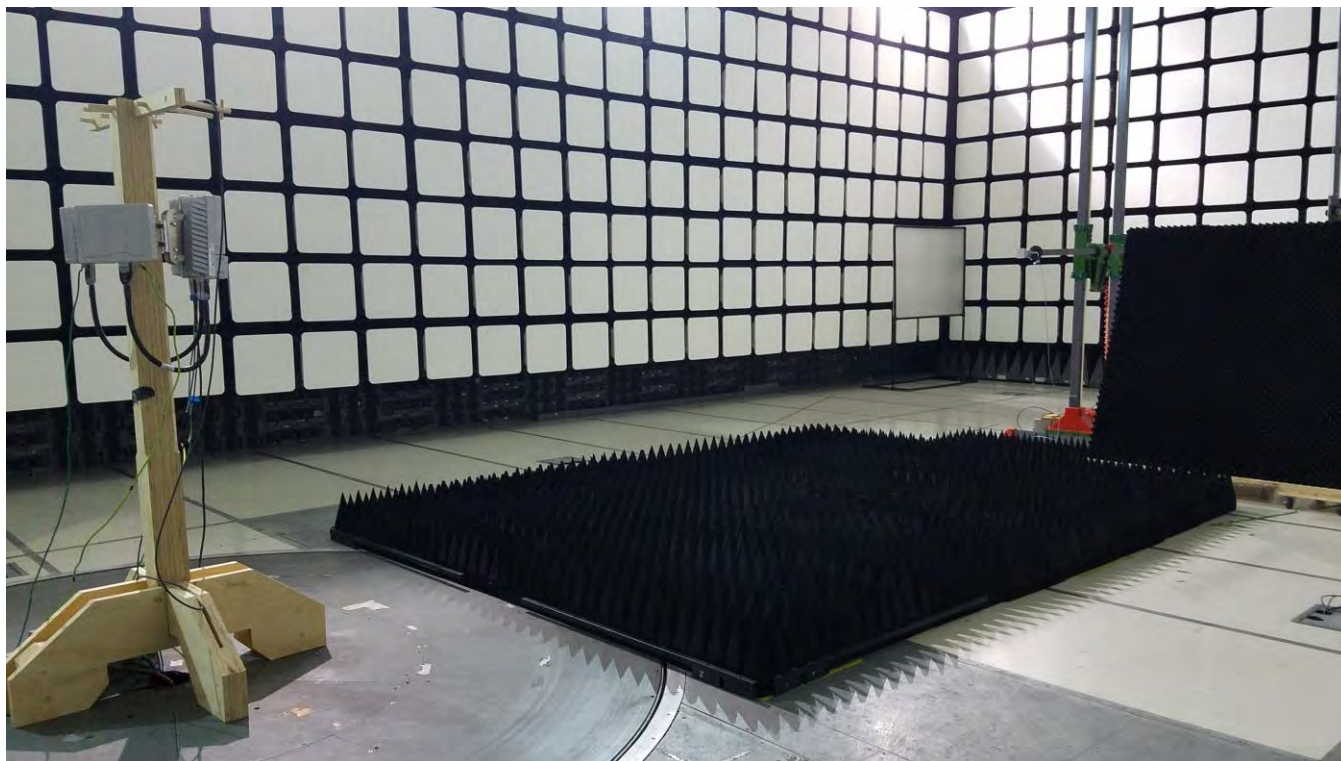


Frequency Stability Test - in thermal chamber



Frequency Stability Test – Measurement Antenna in thermal chamber



Frequency Stability - Support Equipment Setup

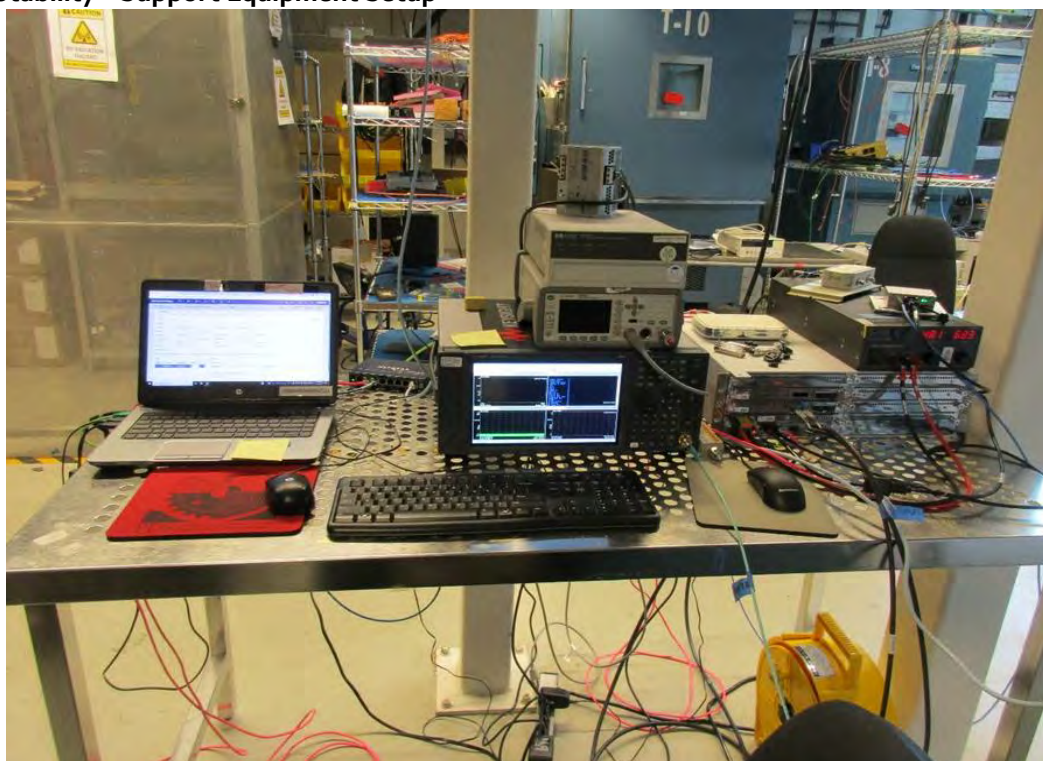

4.9 FACILITIES AND ACCREDITATION

Measurement facilities at Nokia, Global Product Compliance Laboratory (GPCL) a member of the Nokia family of companies, was used to collect the measurement data in the test report. The laboratory, which is part of Nokia Bell Labs, is located at 600-700 Mountain Avenue, Murray Hill, New Jersey 07974-0636 USA.

The field strength measurements of radiated spurious emissions were made in a FCC registered five meter semi-anechoic chamber AR-5, (FCC Registration Number: 395774) **NVLAP** Lab Code: 100275-0 and IC (Filing Number: 6933F-5) which is maintained by Nokia Bell Labs in Murray Hill, New Jersey. The sites were constructed and are continuously in conformance with the requirements of ANSI C63.4 and CISPR Publication 22.

Nokia Global Product Compliance Laboratory FCC OET Accredited Test Firm Scope List is accessible at:

https://apps.fcc.gov/oetcf/eas/reports/ViewTestFirmAccredScopes.cfm?calledFromFrame=N&RequestTimeout=500®num_specified=N&test_firm_id=7007

and is as listed in the Table below.

OET Accredited Test Firm Scope List
Test Firm: Nokia, Global Product Compliance Lab

Scope	FCC Rule Parts	Maximum Assessed Frequency, MHz	Status	Expiration Date	Recognition Date
Unintentional Radiators	FCC Part15, Subpart B	40000	Approved	9/30/2021	7/6/2017
Intentional Radiators	FCC Part 15 Subpart C	40000	Approved	9/30/2021	6/5/2018
U-NII without DFS Intentional Radiators	FCC Part 15, Subpart E	40000	Approved	9/30/2021	6/5/2018
U-NII with DFS Intentional Radiators	FCC Part 15, Subpart E	40000	Approved	9/30/2021	6/5/2018
Commercial Mobile Services	Part 22 (cellular), Part 24, Part 25 (below 3 GHz), Part 27	40000	Approved	9/30/2021	6/5/2018
General Mobile Radio Services	Part 22 (non-cellular), Part 90 (below 3 GHz), Part 95 (below 3 GHz), Part 97 (below 3 GHz), Part 101 (below 3 GHz)	40000	Approved	9/30/2021	6/5/2018
Citizens Broadband Radio Services	Part 30	40000	Approved	9/30/2021	7/6/2017
Microwave and Millimeter Bands Radio Services	Part 25, Part30, Part 74, Part 90 (90M DSRC, Y, Z), Part 95 (M & L), Part 101	200000	Approved	9/30/2021	7/6/2017

Nokia Global Product Compliance Laboratory is accredited with the US Department of Commerce National Institute of Standards and Technology's National Voluntary Laboratory Accreditation Program (NVLAP) for satisfactory compliance with criteria established in Title 15, Part 7 Code of Federal Regulations for offering test services for selected test methods in Electromagnetic Compatibility; Voluntary Control Council for Interference (VCCI), Japan; Australian Communications and Media Authority (ACMA). The laboratory is ISO 9001:2008 Certified.



5. APPENDIX A - CALIBRATION CERTIFICATES.

The attached Calibration certificates represent the Harmonic Downconverters used in this testing.



Calibration Certificate

Kalibrierschein

Certificate Number 24-0060-100977-01

Zertifikatsnummer

Unit Data

Item Harmonic Mixer, 40 GHz to 60 GHz
Gegenstand

Manufacturer RPG
Hersteller

Type RPG FS-Z60
Typ

Material Number 1048.0171.02 **Serial Number** 100977
Materialnummer Seriennummer

Asset Number
Inventarnummer

This calibration certificate documents, that the named item is tested and measured against defined specifications. Measurement results are located usually in the corresponding interval with a probability of approx. 95% (coverage factor $k = 2$). Calibration is performed with test equipment and standards directly or indirectly traceable by means of approved calibration techniques to the PTB/DKD or other national/international standards, which realize the physical units of measurement according to the International System of Units (SI). In all cases where no standards are available, measurements are referenced to standards of the R&S laboratories. Principles and methods of calibration correspond with EN ISO/IEC 17025. This calibration certificate may not be reproduced other than in full. Calibration certificates without signatures are not valid. The user is obliged to have the object recalibrated at appropriate intervals.

Order Data

Customer
Auftraggeber

Order Number
Bestellnummer

Date of Receipt
Eingangsdatum

Dieser Kalibrierschein dokumentiert, dass der genannte Gegenstand nach festgelegten Vorgaben geprüft und gemessen wurde. Die Messwerte lagen im Regelfall mit einer Wahrscheinlichkeit von annähernd 95% im zugeordneten Werteintervall (Erweiterte Messunsicherheit mit $k = 2$). Die Kalibrierung erfolgte mit Messmitteln und Normalen, die direkt oder indirekt durch Ableitung mittels anerkannter Kalibriertechniken rückgeführt sind auf Normale der PTB/DKD oder anderer nationaler/internationaler Standards zur Darstellung der physikalischen Einheiten in Übereinstimmung mit dem Internationalen Einheitensystem (SI). Wenn keine Normale existieren, erfolgt die Rückführung auf Bezugsnormale der R&S-Laboratorien. Grundsätze und Verfahren der Kalibrierung beziehen sich auf EN ISO/IEC 17025. Dieser Kalibrierschein darf nur vollständig und unverändert weiterverbreitet werden. Kalibrierscheine ohne Unterschriften sind ungültig. Für die Einhaltung einer angemessenen Frist zur Wiederholung der Kalibrierung ist der Benutzer verantwortlich.

Performance

Place and Date of Calibration
Ort und Datum der Kalibrierung

Meckenheim, 2017-12-21

Scope of Calibration
Umfang der Kalibrierung

Standard Calibration

Statement of Compliance (Incoming)
Konformitätsaussage (Anlieferung)

New device

Statement of Compliance (Outgoing)
Konformitätsaussage (Auslieferung)

All measured values are within the data sheet specifications.

Extend of Calibration Documents
Umfang des Kalibrierdokuments

**2 pages Calibration Certificate
5 pages Outgoing Results**

Radiometer Physics GmbH; Meckenheim

Date of Issue
Ausstellungsdatum

2017-12-21

Head of Laboratory
Laborleitung

Schulze

Person Responsible
Bearbeiter

Wildfang

Page (Seite) 1/2
Vers2010-05-05/
RPG2014-02-28

Calibration Method
Kalibrieranweisung

RPG-PAQA-TN-2014-002

Relative Humidity **20 % - 80 %**
Relative Luftfeuchte

Ambient Temperature
Umgebungstemperatur

(23 ⁺⁷₋₃) °C

Working standards used (having a significant effect on the accuracy)
Verwendete Gebrauchsnormale (mit signifikantem Einfluss auf die Genauigkeit)

Item Gegenstand	Type Typ	Serial Number Seriennummer	Calibration Certificate Number Kalibrierscheinnummer	Cal. Due Kalibr. bis
Vector Network Analyzer	R&S® ZVA67	101097	20-300432406	2020-07-21
Powersensor	R&S® NRP-Z55	140093	20-300426315	2018-05-17
Powersensor	R&S® NRP-Z57	101423	20-541799	2019-04-27

UGB1 A compliance statement may be possible where a confidence level of less than 95 % is acceptable.
Die Bestätigung der Konformität ist möglich, sofern ein Grad des Vertrauens von weniger als 95 % akzeptabel ist.

UGB2 A non-compliance statement may be possible where a confidence level of less than 95 % is acceptable.
Die Bestätigung der Nicht-Konformität ist möglich, sofern ein Grad des Vertrauens von weniger als 95 % akzeptabel ist.

Ref.: ILAC-G8:03/2009 'Guidelines on the Reporting of Compliance with Specification'.

Notes

Anmerkungen


If the new product is stored under the climate conditions as specified in the data sheet upon delivery, the product's accuracy is not significantly affected within 12 month after its calibration in our factory. In this case, the recommended calibration interval starts on the date when the product is actually put into operation.

Outgoing Results

The following abbreviations may be used in this document

{a}	No measurement uncertainty stated because the errors always add together. So it is sure that a measurement result evaluated as "PASS" is pass.
{b}	The measurement uncertainty depends on the measurement result. The stated measurement uncertainty is valid for the close area around the specification. Measurement results outside the close area have a higher measurement uncertainty but are within the specification.
{c}	Functional test, therefore no measurement uncertainty is stated.
{d}	Typical value, refer to performance test.
{e}	The measurement uncertainty is taken into account when setting the measuring system.
DL or DT	Data Limit for symmetrical tolerance limits
DLL	Datasheet Lower Limit
DUL	Datasheet Upper Limit
MU	Measurement Uncertainty
MLL or MLV	Measurement Uncertainty Lower Value
MUL or MUV	Measurement Uncertainty Upper Value
Nom.	Nominal Value
Dev.	Deviation
MErr.	Measurement Error
Act.	Actual Value
UGB	Uncertainty Guard Band: Measuring uncertainty violates the data (spec.) limit.
UGB1	Measurement results marked as UGB1 show conformity with a probability of >50 % and <95 %.
UGB2	Measurement results marked as UGB2 show non-conformity with a probability of >50 % and <95 %.
DU	Datasheet Uncertainty

Explanation of charts

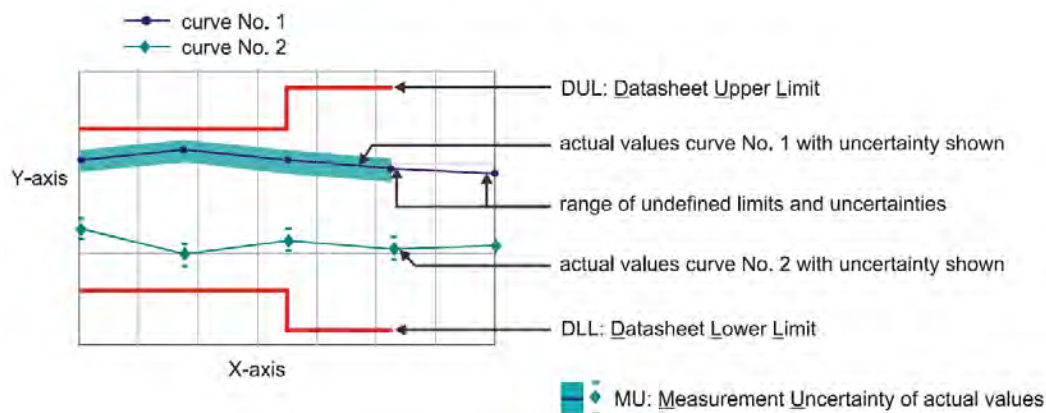

Software used for measurement**Item Type**

Measurement Studio Professional Edition
MixerCertification


Version

2013
7_07

Remark

1.1 RF Input – VSWR


Measurement uncertainty: 0.05 (VSWR)

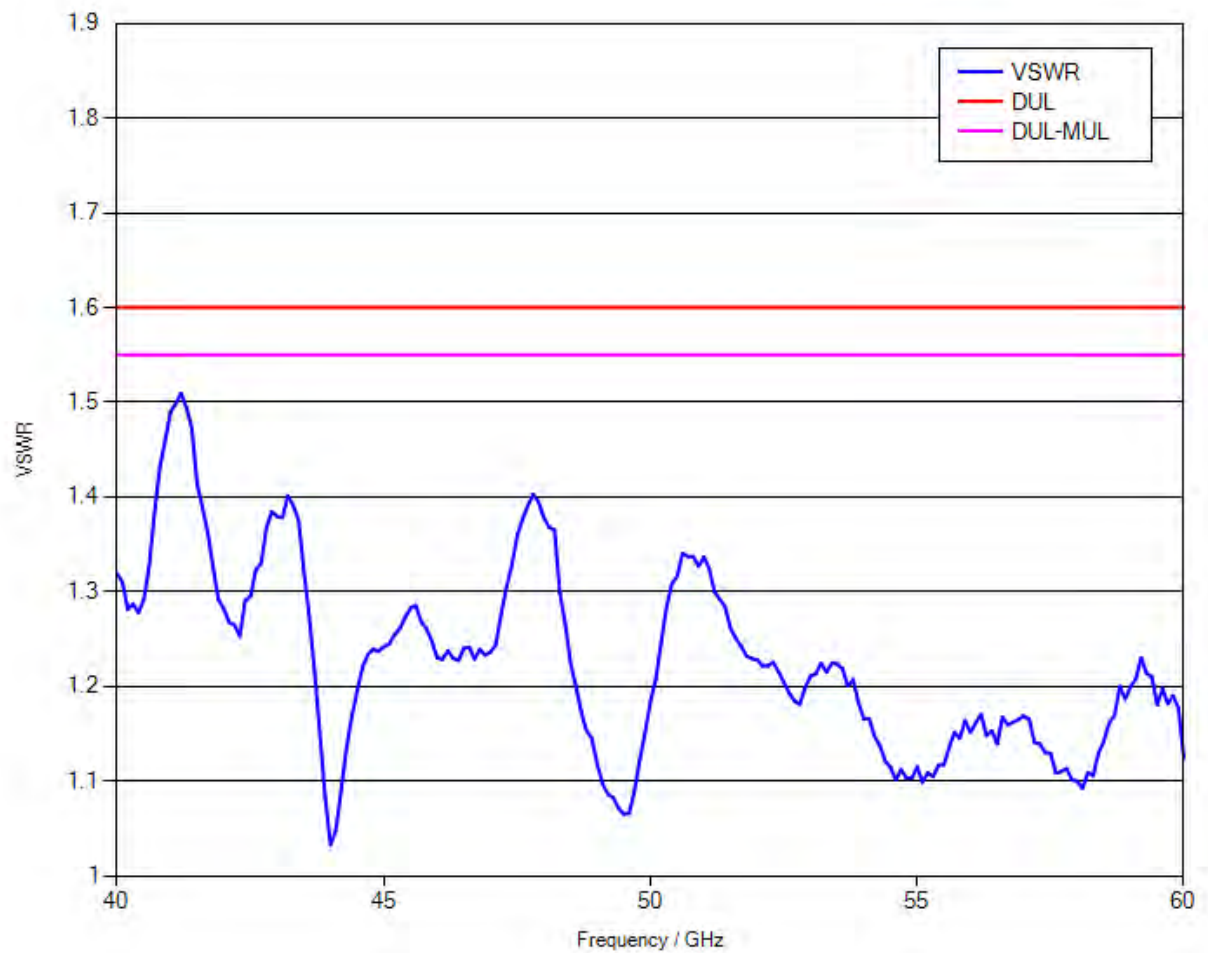

1.2 Conversion loss

LO level +13 dBm nominal
Bias 0 A

Measurement uncertainty: 1.5 dB

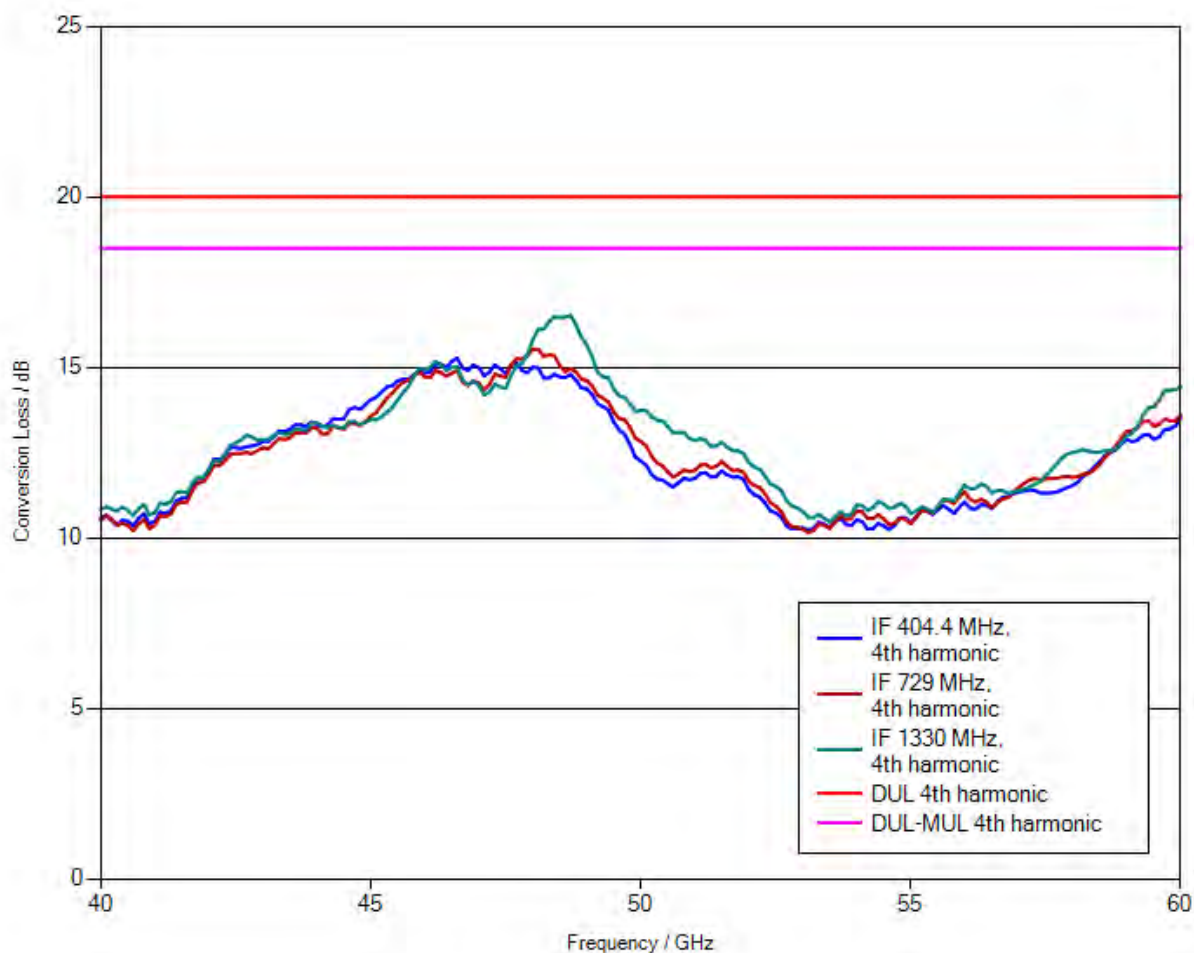

Note: Numeric calibration data can be found attached to the PDF file of the calibration certificate. Click the “paper clip” symbol to display the file.

The file has been renamed for safety reasons.

When downloading the file onto your PC, please delete the “.file” extension and unzip the data.

1.3 Frequency response within 1 GHz

	DUL	Actual (worst case)	Evaluation
IF = 404.4 MHz, 4th harmonic	4 dB	2.02 dB	PASS
IF = 729 MHz, 4th harmonic	4 dB	1.78 dB	PASS
IF = 1330 MHz, 4th harmonic	4 dB	2.35 dB	PASS

Calibration Certificate

Kalibrierschein

Certificate Number **24-0090-101719-01**

Zertifikatsnummer

Unit Data

Item Harmonic Mixer, 60 GHz to 90 GHz
Gegenstand

Manufacturer ROHDE & SCHWARZ
Hersteller

Type R&S® FS-Z90
Typ

Material Number 1048.0371.02 **Serial Number** 101719
Materialnummer Seriennummer

Asset Number
Inventarnummer

This calibration certificate documents, that the named item is tested and measured against defined specifications. Measurement results are located usually in the corresponding interval with a probability of approx. 95% (coverage factor $k = 2$). Calibration is performed with test equipment and standards directly or indirectly traceable by means of approved calibration techniques to the PTB/DKD or other national/international standards, which realize the physical units of measurement according to the International System of Units (SI). In all cases where no standards are available, measurements are referenced to standards of the R&S laboratories. Principles and methods of calibration correspond with EN ISO/IEC 17025. This calibration certificate may not be reproduced other than in full. Calibration certificates without signatures are not valid. The user is obliged to have the object recalibrated at appropriate intervals.

Order Data

Customer
Auftraggeber

Order Number
Bestellnummer

Date of Receipt
Eingangsdatum

Dieser Kalibrierschein dokumentiert, dass der genannte Gegenstand nach festgelegten Vorgaben geprüft und gemessen wurde. Die Messwerte lagen im Regelfall mit einer Wahrscheinlichkeit von annähernd 95% im zugeordneten Werteintervall (Erweiterte Messunsicherheit mit $k = 2$). Die Kalibrierung erfolgte mit Messmitteln und Normalen, die direkt oder indirekt durch Ableitung mittels anerkannter Kalibriertechniken rückgeführt sind auf Normale der PTB/DKD oder anderer nationaler/internationaler Standards zur Darstellung der physikalischen Einheiten in Übereinstimmung mit dem Internationalen Einheitensystem (SI). Wenn keine Normale existieren, erfolgt die Rückführung auf Bezugsnormale der R&S-Laboratorien. Grundsätze und Verfahren der Kalibrierung beziehen sich auf EN ISO/IEC 17025. Dieser Kalibrierschein darf nur vollständig und unverändert weiterverbreitet werden. Kalibrierscheine ohne Unterschriften sind ungültig. Für die Einhaltung einer angemessenen Frist zur Wiederholung der Kalibrierung ist der Benutzer verantwortlich.

Performance

Place and Date of Calibration
Ort und Datum der Kalibrierung

Meckenheim, 2017-08-09

Scope of Calibration
Umfang der Kalibrierung

Standard Calibration

Statement of Compliance (Incoming)
Konformitätsaussage (Anlieferung)

New device

Statement of Compliance (Outgoing)
Konformitätsaussage (Auslieferung)

All measured values are within the data sheet specifications.

Extend of Calibration Documents
Umfang des Kalibrierdokuments

**2 pages Calibration Certificate
5 pages Outgoing Results**

Radiometer Physics GmbH; Meckenheim

Date of Issue
Ausstellungsdatum

2017-08-11

Head of Laboratory
Laborleitung


Ceru

Person Responsible
Bearbeiter


Heinze

Page (Seite) 1/2
Vers2010-05-05/
RPG2014-02-28

Calibration Method
Kalibrieranweisung

RPG-PAQA-TN-2014-002

Relative Humidity **20 % - 80 %**
Relative Luftfeuchte

Ambient Temperature
Umgebungstemperatur

(23 ⁺⁷₋₃) °C

Working standards used (having a significant effect on the accuracy)
Verwendete Gebrauchsnormale (mit signifikantem Einfluss auf die Genauigkeit)

Item Gegenstand	Type Typ	Serial Number Seriennummer	Calibration Certificate Number Kalibrierscheinnummer	Cal. Due Kalibr. bis
Vector Network Analyzer	R&S® ZVA67	101097	20-300432406	2020-07-21
Powersensor	R&S® NRP-Z55	140093	20-300426315	2018-05-17
Powersensor	R&S® NRP-Z58	101063	20-611482	2018-07-21
Calibration kit	WR12	E10001	RPG-PAQA-TN-2014-005	2019-02-01

UGB1 A compliance statement may be possible where a confidence level of less than 95 % is acceptable.
Die Bestätigung der Konformität ist möglich, sofern ein Grad des Vertrauens von weniger als 95 % akzeptabel ist.

UGB2 A non-compliance statement may be possible where a confidence level of less than 95 % is acceptable.
Die Bestätigung der Nicht-Konformität ist möglich, sofern ein Grad des Vertrauens von weniger als 95 % akzeptabel ist.

Ref.: ILAC-G8:03/2009 'Guidelines on the Reporting of Compliance with Specification'.

Notes

Anmerkungen


If the new product is stored under the climate conditions as specified in the data sheet upon delivery, the product's accuracy is not significantly affected within 12 month after its calibration in our factory. In this case, the recommended calibration interval starts on the date when the product is actually put into operation.

Outgoing Results

The following abbreviations may be used in this document

{a}	No measurement uncertainty stated because the errors always add together. So it is sure that a measurement result evaluated as "PASS" is pass.
{b}	The measurement uncertainty depends on the measurement result. The stated measurement uncertainty is valid for the close area around the specification. Measurement results outside the close area have a higher measurement uncertainty but are within the specification.
{c}	Functional test, therefore no measurement uncertainty is stated.
{d}	Typical value, refer to performance test.
{e}	The measurement uncertainty is taken into account when setting the measuring system.
DL or DT	Data Limit for symmetrical tolerance limits
DLL	Datasheet Lower Limit
DUL	Datasheet Upper Limit
MU	Measurement Uncertainty
MLL or MLV	Measurement Uncertainty Lower Value
MUL or MUV	Measurement Uncertainty Upper Value
Nom.	Nominal Value
Dev.	Deviation
MErr.	Measurement Error
Act.	Actual Value
UGB	Uncertainty Guard Band: Measuring uncertainty violates the data (spec.) limit.
UGB1	Measurement results marked as UGB1 show conformity with a probability of >50 % and <95 %.
UGB2	Measurement results marked as UGB2 show non-conformity with a probability of >50 % and <95 %.
DU	Datasheet Uncertainty


Explanation of charts

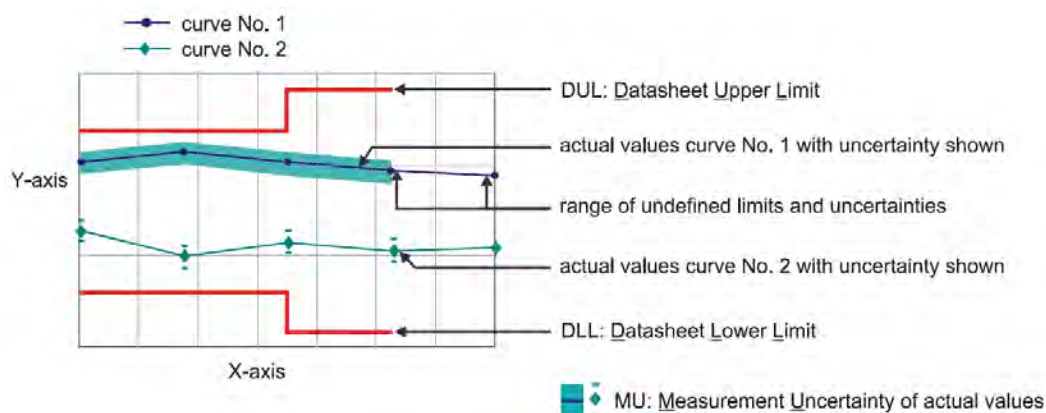

Software used for measurement**Item Type**Measurement Studio Professional Edition
MixerCertification**Version**2013
only**Remark**

1.1 RF Input – VSWR


Measurement uncertainty: 0.05 (VSWR)

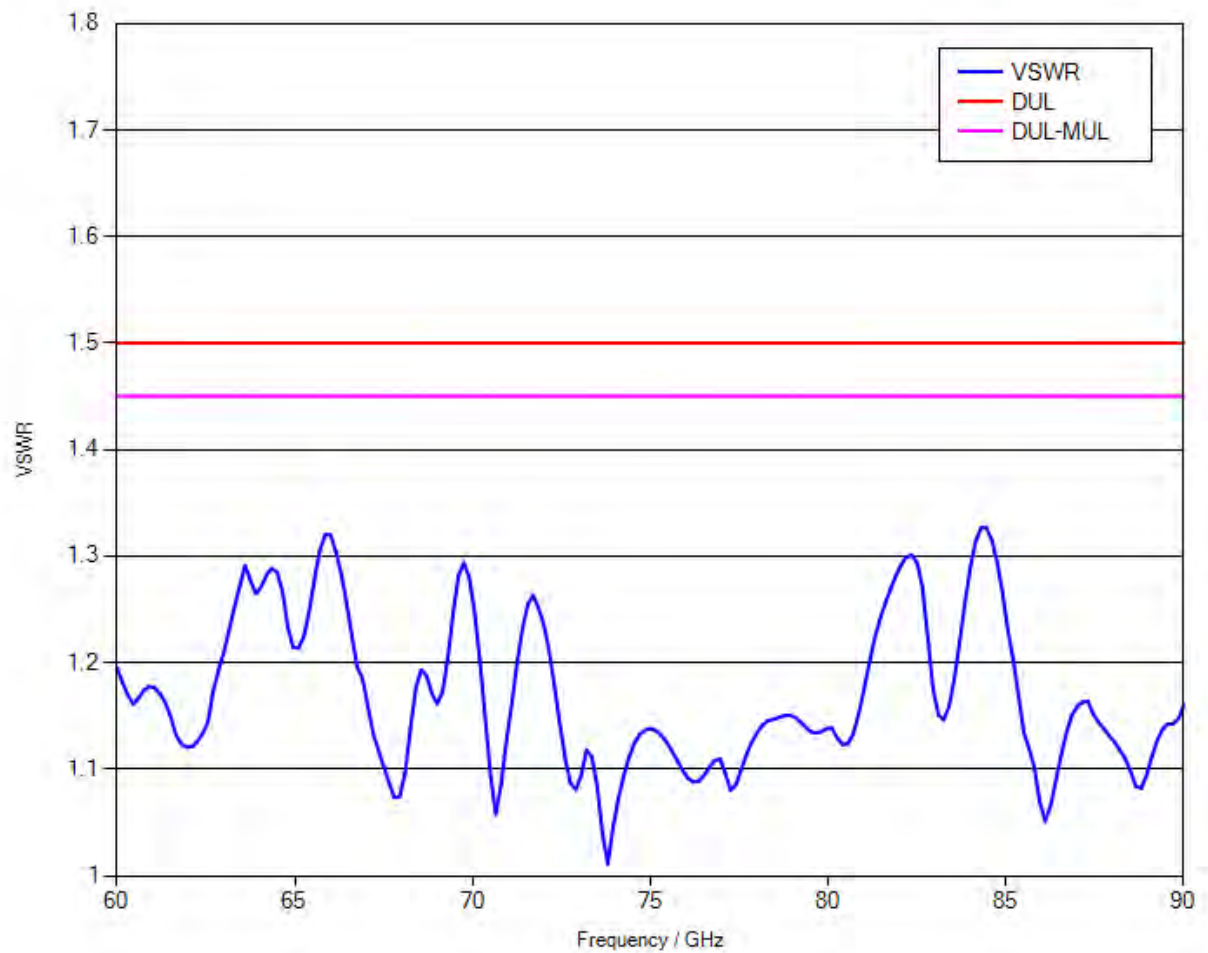

1.2 Conversion loss

LO level +14 dBm nominal
Bias 0 A

Measurement uncertainty: 1.5 dB

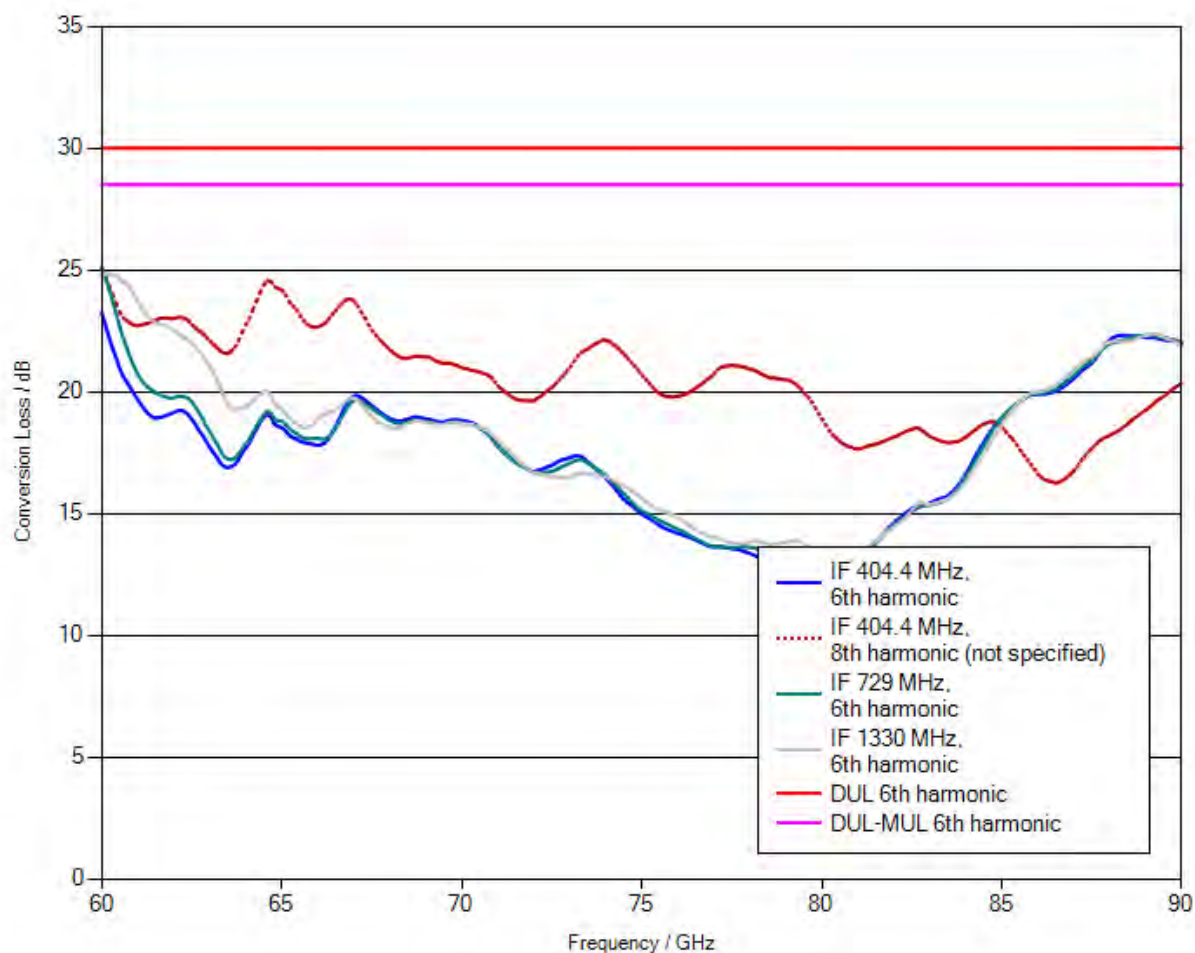

Note: Numeric calibration data can be found attached to the PDF file of the calibration certificate. Click the “paper clip” symbol to display the file.

The file has been renamed for safety reasons.

When downloading the file onto your PC, please delete the “.file” extension and unzip the data.

1.3 Frequency response within 1 GHz

	DUL	Actual (worst case)	Evaluation
IF = 404.4 MHz, 6th harmonic	6 dB	3.33 dB	PASS
IF = 404.4 MHz, 8th harmonic	not specified	2.73 dB	not specified
IF = 729 MHz, 6th harmonic	6 dB	4.12 dB	PASS
IF = 1330 MHz, 6th harmonic	6 dB	2.32 dB	PASS



Calibration Certificate

Kalibrierschein

Certificate Number 24-0140-101008-01

Zertifikatsnummer

Unit Data

Item
Gegenstand Harmonic Mixer, 90 GHz to 140 GHz

Manufacturer
Hersteller RPG

Type
Typ RPG FS-Z140

Material Number
Materialnummer 3622.0708.02

Serial Number
Seriennummer 101008

Asset Number
Inventarnummer

This calibration certificate documents, that the named item is tested and measured against defined specifications. Measurement results are located usually in the corresponding interval with a probability of approx. 95% (coverage factor $k = 2$). Calibration is performed with test equipment and standards directly or indirectly traceable by means of approved calibration techniques to the PTB/DKD or other national/international standards, which realize the physical units of measurement according to the International System of Units (SI). In all cases where no standards are available, measurements are referenced to standards of the R&S laboratories. Principles and methods of calibration correspond with EN ISO/IEC 17025. This calibration certificate may not be reproduced other than in full. Calibration certificates without signatures are not valid. The user is obliged to have the object recalibrated at appropriate intervals.

Order Data

Customer
Auftraggeber

Order Number
Bestellnummer

Date of Receipt
Eingangsdatum

Dieser Kalibrierschein dokumentiert, dass der genannte Gegenstand nach festgelegten Vorgaben geprüft und gemessen wurde. Die Messwerte lagen im Regelfall mit einer Wahrscheinlichkeit von annähernd 95% im zugeordneten Werteintervall (Erweiterte Messunsicherheit mit $k = 2$). Die Kalibrierung erfolgte mit Messmitteln und Normalen, die direkt oder indirekt durch Ableitung mittels anerkannter Kalibriertechniken rückgeführt sind auf Normale der PTB/DKD oder anderer nationaler/internationaler Standards zur Darstellung der physikalischen Einheiten in Übereinstimmung mit dem Internationalen Einheitensystem (SI). Wenn keine Normale existieren, erfolgt die Rückführung auf Bezugsnormale der R&S-Laboratorien. Grundsätze und Verfahren der Kalibrierung beziehen sich auf EN ISO/IEC 17025. Dieser Kalibrierschein darf nur vollständig und unverändert weiterverbreitet werden. Kalibrierscheine ohne Unterschriften sind ungültig. Für die Einhaltung einer angemessenen Frist zur Wiederholung der Kalibrierung ist der Benutzer verantwortlich.

Performance

Place and Date of Calibration
Ort und Datum der Kalibrierung

Meckenheim, 2017-04-06

Scope of Calibration
Umfang der Kalibrierung

Standard Calibration

Statement of Compliance
(Incoming)
Konformitätsaussage
(Anlieferung)

New device

Statement of Compliance
(Outgoing)
Konformitätsaussage
(Auslieferung)

All measured values are within the data sheet specifications.

Extend of Calibration Documents
Umfang des Kalibrierdokuments

2 pages Calibration Certificate
5 pages Outgoing Results

Radiometer Physics GmbH; Meckenheim

Date of Issue
Ausstellungsdatum

2017-04-07

Head of Laboratory
Laborleitung


Ceru

Person Responsible
Bearbeiter


Heinze

Calibration Method
Kalibrieranweisung

RPG-PAQA-TN-2014-002

Relative Humidity **20 % - 80 %**
Relative Luftfeuchte

Ambient Temperature
Umgebungstemperatur

(23 ⁺⁷₋₃) °C

Working standards used (having a significant effect on the accuracy)
Verwendete Gebrauchsnormale (mit signifikantem Einfluss auf die Genauigkeit)

Item Gegenstand	Type Typ	Serial Number Seriennummer	Calibration Certificate Number Kalibrierscheinnummer	Cal. Due Kalibr. bis
Vector Network Analyzer	R&S® ZVA67	101097	10-300319061	2017-08-06
Powersensor	R&S® NRP-Z55	140093	20-541556	2017-05-12

UGB1 A compliance statement may be possible where a confidence level of less than 95 % is acceptable.
Die Bestätigung der Konformität ist möglich, sofern ein Grad des Vertrauens von weniger als 95 % akzeptabel ist.

UGB2 A non-compliance statement may be possible where a confidence level of less than 95 % is acceptable.
Die Bestätigung der Nicht-Konformität ist möglich, sofern ein Grad des Vertrauens von weniger als 95 % akzeptabel ist.

Ref.: ILAC-G8:03/2009 'Guidelines on the Reporting of Compliance with Specification'.


Notes
Anmerkungen

Outgoing Results

The following abbreviations may be used in this document

{a}	No measurement uncertainty stated because the errors always add together. So it is sure that a measurement result evaluated as "PASS" is pass.
{b}	The measurement uncertainty depends on the measurement result. The stated measurement uncertainty is valid for the close area around the specification. Measurement results outside the close area have a higher measurement uncertainty but are within the specification.
{c}	Functional test, therefore no measurement uncertainty is stated.
{d}	Typical value, refer to performance test.
{e}	The measurement uncertainty is taken into account when setting the measuring system.
DL or DT	Data Limit for symmetrical tolerance limits
DLL	Datasheet Lower Limit
DUL	Datasheet Upper Limit
MU	Measurement Uncertainty
MLL or MLV	Measurement Uncertainty Lower Value
MUL or MUV	Measurement Uncertainty Upper Value
Nom.	Nominal Value
Dev.	Deviation
MErr.	Measurement Error
Act.	Actual Value
UGB	Uncertainty Guard Band: Measuring uncertainty violates the data (spec.) limit.
UGB1	Measurement results marked as UGB1 show conformity with a probability of >50 % and <95 %.
UGB2	Measurement results marked as UGB2 show non-conformity with a probability of >50 % and <95 %.
DU	Datasheet Uncertainty


Explanation of charts

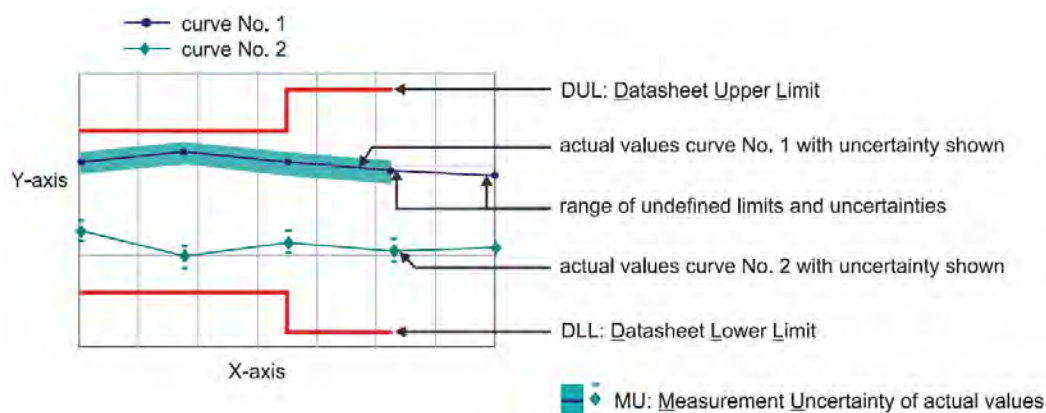

Software used for measurement**Item Type**Measurement Studio Professional Edition
MixerCertification**Version**2013
7_04**Remark**

1.1 RF Input – VSWR

Measurement uncertainty: 0.05 (VSWR)

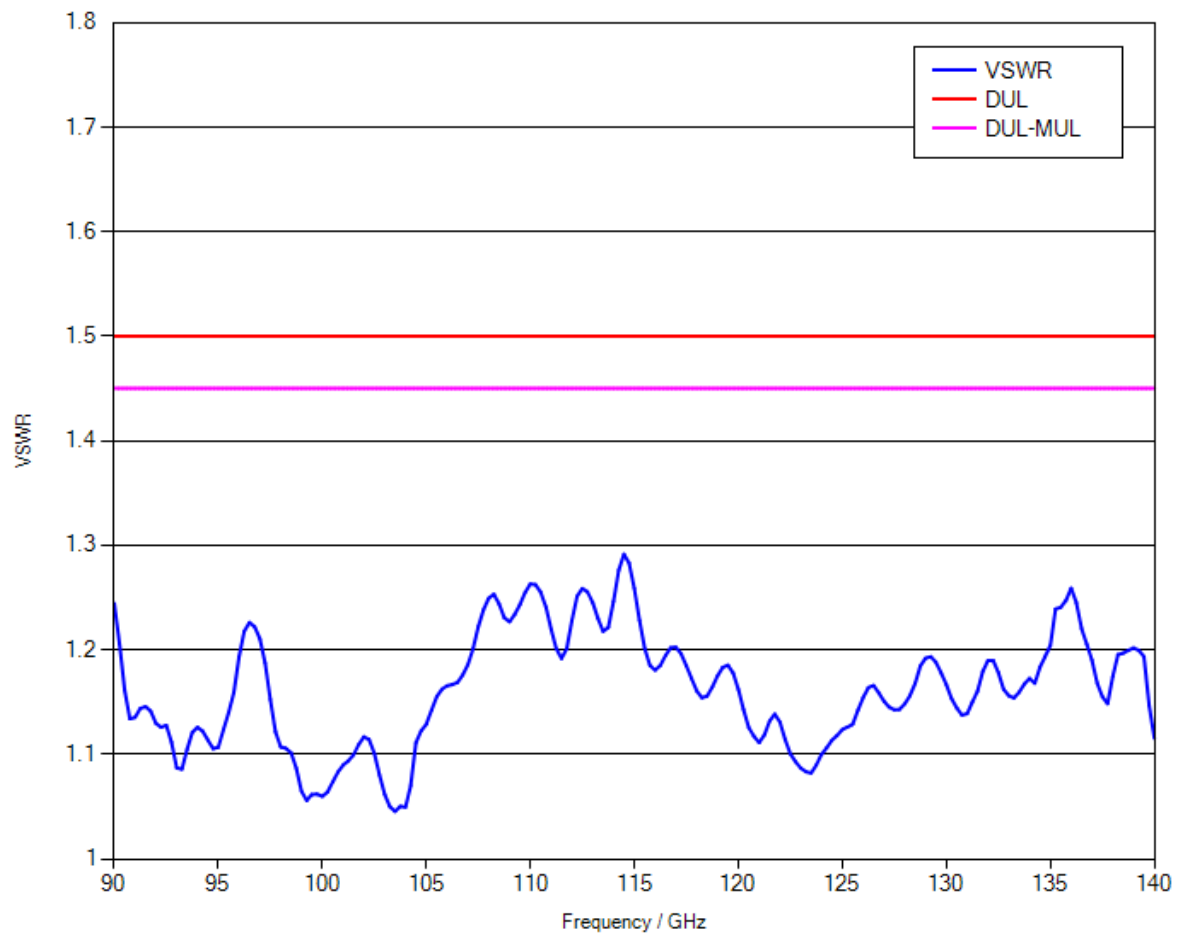

1.2 Conversion loss

LO level +14 dBm nominal
Bias 0 A

Measurement uncertainty: 3.5 dB



Note: Numeric calibration data can be found attached to the PDF file of the calibration certificate. Click the “paper clip” symbol to display the file.

The file has been renamed for safety reasons.

When downloading the file onto your PC, please delete the “.file” extension and unzip the data.

1.3 Frequency response within 1 GHz

	DUL	Actual (worst case)	Evaluation
IF = 404.4 MHz, 10th harmonic	6 dB	3.86 dB	PASS
IF = 729 MHz, 10th harmonic	6 dB	3.48 dB	PASS
IF = 1330 MHz, 10th harmonic	6 dB	3.19 dB	PASS



Calibration Certificate

Kalibrierschein

Certificate Number 24-0220-100960-01

Zertifikatsnummer

Unit Data

Item
Gegenstand Harmonic Mixer, 140 GHz to 220 GHz

Manufacturer
Hersteller RPG

Type
Typ RPG FS-Z220

Material Number
Materialnummer 3593.3250.02

Serial Number
Seriennummer 100960

Asset Number
Inventarnummer

This calibration certificate documents, that the named item is tested and measured against defined specifications. Measurement results are located usually in the corresponding interval with a probability of approx. 95% (coverage factor $k = 2$). Calibration is performed with test equipment and standards directly or indirectly traceable by means of approved calibration techniques to the PTB/DKD or other national/international standards, which realize the physical units of measurement according to the International System of Units (SI). In all cases where no standards are available, measurements are referenced to standards of the R&S laboratories. Principles and methods of calibration correspond with EN ISO/IEC 17025. This calibration certificate may not be reproduced other than in full. Calibration certificates without signatures are not valid. The user is obliged to have the object recalibrated at appropriate intervals.

Order Data

Customer
Auftraggeber

Order Number
Bestellnummer

Date of Receipt
Eingangsdatum

Dieser Kalibrierschein dokumentiert, dass der genannte Gegenstand nach festgelegten Vorgaben geprüft und gemessen wurde. Die Messwerte lagen im Regelfall mit einer Wahrscheinlichkeit von annähernd 95% im zugeordneten Werteintervall (Erweiterte Messunsicherheit mit $k = 2$). Die Kalibrierung erfolgte mit Messmitteln und Normalen, die direkt oder indirekt durch Ableitung mittels anerkannter Kalibriertechniken rückgeführt sind auf Normale der PTB/DKD oder anderer nationaler/internationaler Standards zur Darstellung der physikalischen Einheiten in Übereinstimmung mit dem Internationalen Einheitensystem (SI). Wenn keine Normale existieren, erfolgt die Rückführung auf Bezugsnormale der R&S-Laboratorien. Grundsätze und Verfahren der Kalibrierung beziehen sich auf EN ISO/IEC 17025. Dieser Kalibrierschein darf nur vollständig und unverändert weiterverbreitet werden. Kalibrierscheine ohne Unterschriften sind ungültig. Für die Einhaltung einer angemessenen Frist zur Wiederholung der Kalibrierung ist der Benutzer verantwortlich.

Performance

Place and Date of Calibration
Ort und Datum der Kalibrierung

Meckenheim, 2018-01-17

Scope of Calibration
Umfang der Kalibrierung

Standard Calibration

Statement of Compliance
(Incoming)
Konformitätsaussage
(Anlieferung)

New device

Statement of Compliance
(Outgoing)
Konformitätsaussage
(Auslieferung)

All measured values are within the data sheet specifications.

Extend of Calibration Documents
Umfang des Kalibrierdokuments

2 pages Calibration Certificate
5 pages Outgoing Results

Radiometer Physics GmbH; Meckenheim

Date of Issue
Ausstellungsdatum

2018-01-19

Head of Laboratory
Laborleitung


Ceru

Person Responsible
Bearbeiter


Dick

Calibration Method
Kalibrieranweisung

RPG-PAQA-TN-2014-002

Relative Humidity **20 % - 80 %**
Relative Luftfeuchte

Ambient Temperature
Umgebungstemperatur

(23 ⁺⁷₋₃) °C

Working standards used (having a significant effect on the accuracy)
Verwendete Gebrauchsnormale (mit signifikantem Einfluss auf die Genauigkeit)

Item Gegenstand	Type Typ	Serial Number Seriennummer	Calibration Certificate Number Kalibrierscheinnummer	Cal. Due Kalibr. bis
Vector Network Analyzer	R&S® ZVA67	101097	20-300432406	2020-07-21
Powersensor	R&S® NRP-Z55	140093	20-300426315	2018-05-17

UGB1 A compliance statement may be possible where a confidence level of less than 95 % is acceptable.
Die Bestätigung der Konformität ist möglich, sofern ein Grad des Vertrauens von weniger als 95 % akzeptabel ist.

UGB2 A non-compliance statement may be possible where a confidence level of less than 95 % is acceptable.
Die Bestätigung der Nicht-Konformität ist möglich, sofern ein Grad des Vertrauens von weniger als 95 % akzeptabel ist.

Ref.: ILAC-G8:03/2009 'Guidelines on the Reporting of Compliance with Specification'.

Notes
Anmerkungen


If the new product is stored under the climate conditions as specified in the data sheet upon delivery, the product's accuracy is not significantly affected within 12 month after its calibration in our factory. In this case, the recommended calibration interval starts on the date when the product is actually put into operation.

Outgoing Results

The following abbreviations may be used in this document

{a}	No measurement uncertainty stated because the errors always add together. So it is sure that a measurement result evaluated as "PASS" is pass.
{b}	The measurement uncertainty depends on the measurement result. The stated measurement uncertainty is valid for the close area around the specification. Measurement results outside the close area have a higher measurement uncertainty but are within the specification.
{c}	Functional test, therefore no measurement uncertainty is stated.
{d}	Typical value, refer to performance test.
{e}	The measurement uncertainty is taken into account when setting the measuring system.
DL or DT	Data Limit for symmetrical tolerance limits
DLL	Datasheet Lower Limit
DUL	Datasheet Upper Limit
MU	Measurement Uncertainty
MLL or MLV	Measurement Uncertainty Lower Value
MUL or MUV	Measurement Uncertainty Upper Value
Nom.	Nominal Value
Dev.	Deviation
MErr.	Measurement Error
Act.	Actual Value
UGB	Uncertainty Guard Band: Measuring uncertainty violates the data (spec.) limit.
UGB1	Measurement results marked as UGB1 show conformity with a probability of >50 % and <95 %.
UGB2	Measurement results marked as UGB2 show non-conformity with a probability of >50 % and <95 %.
DU	Datasheet Uncertainty

Explanation of charts

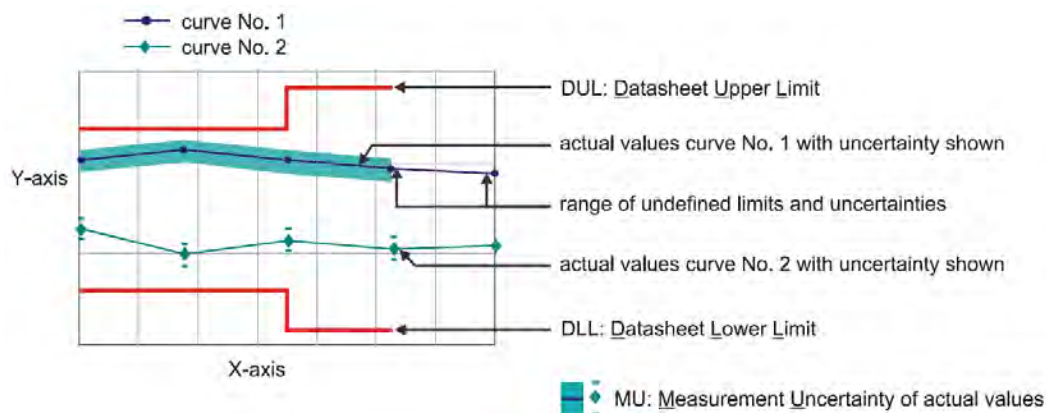

Software used for measurement**Item Type**

Measurement Studio Professional Edition
MixerCertification


Version

2013
7_08

Remark

1.1 RF Input – VSWR


Measurement uncertainty: 0.05 (VSWR)

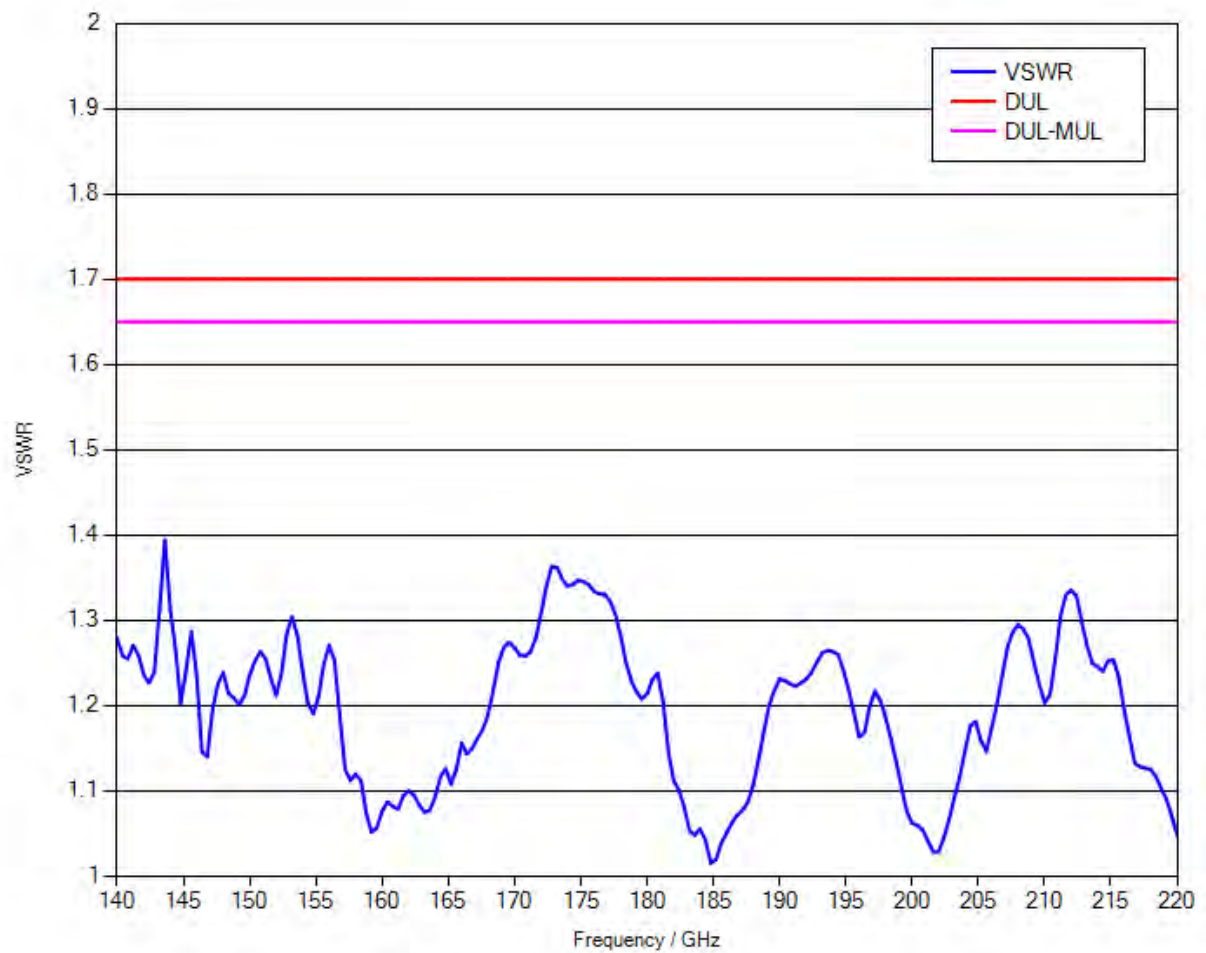

1.2 Conversion loss

LO level +13 dBm nominal
Bias 0 A

Measurement uncertainty: 4 dB

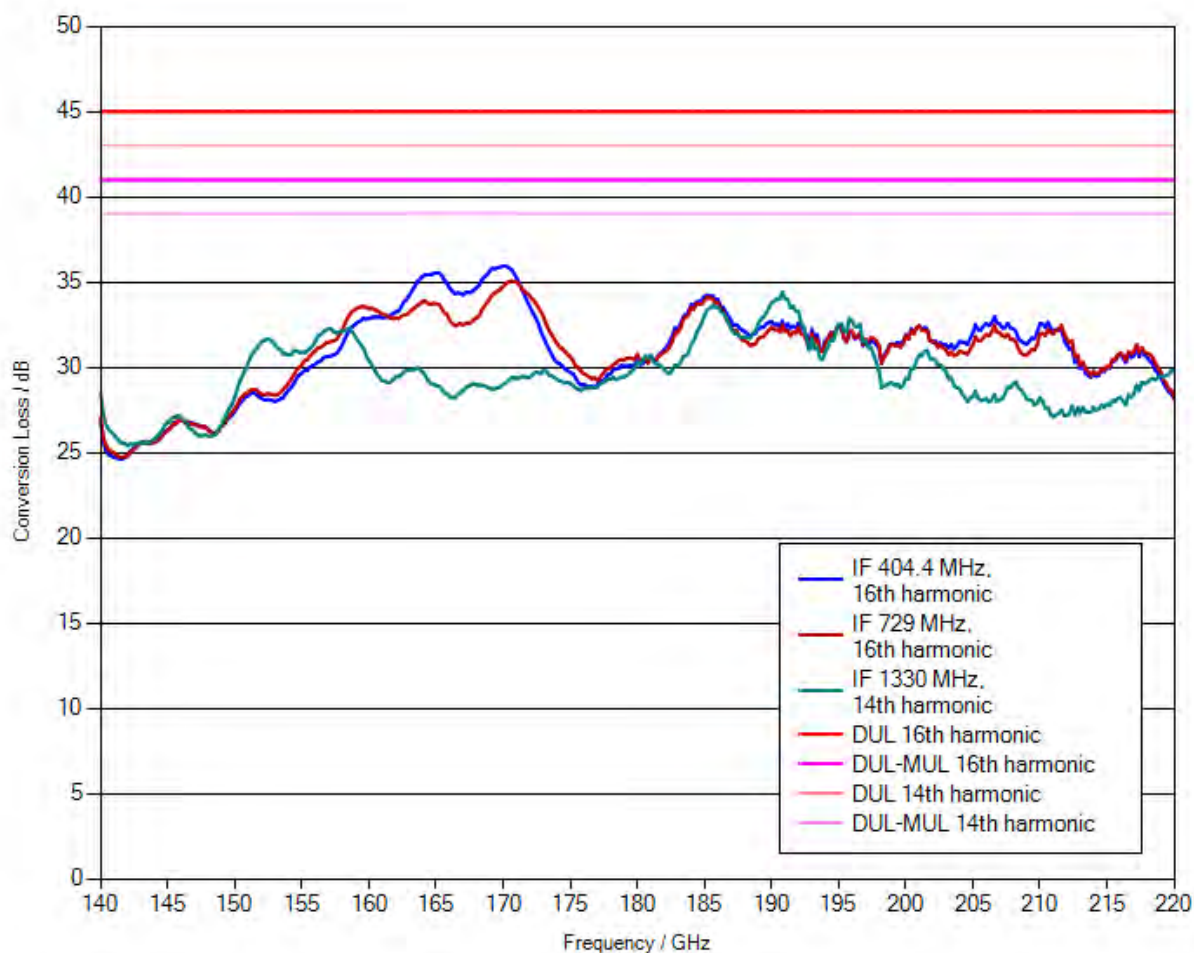

Note: Numeric calibration data can be found attached to the PDF file of the calibration certificate. Click the “paper clip” symbol to display the file.

The file has been renamed for safety reasons.

When downloading the file onto your PC, please delete the “.file” extension and unzip the data.

1.3 Frequency response within 1 GHz

	DUL	Actual (worst case)	Evaluation
IF = 404.4 MHz, 16th harmonic	6 dB	2.1 dB	PASS
IF = 729 MHz, 16th harmonic	6 dB	2.05 dB	PASS
IF = 1330 MHz, 14th harmonic	6 dB	2.48 dB	PASS