


Test_Mode	802.11 g Transmitting	Test_Frequency	2412MHz
Remark:	\	Test_Date	2026/6/30


Test Graph

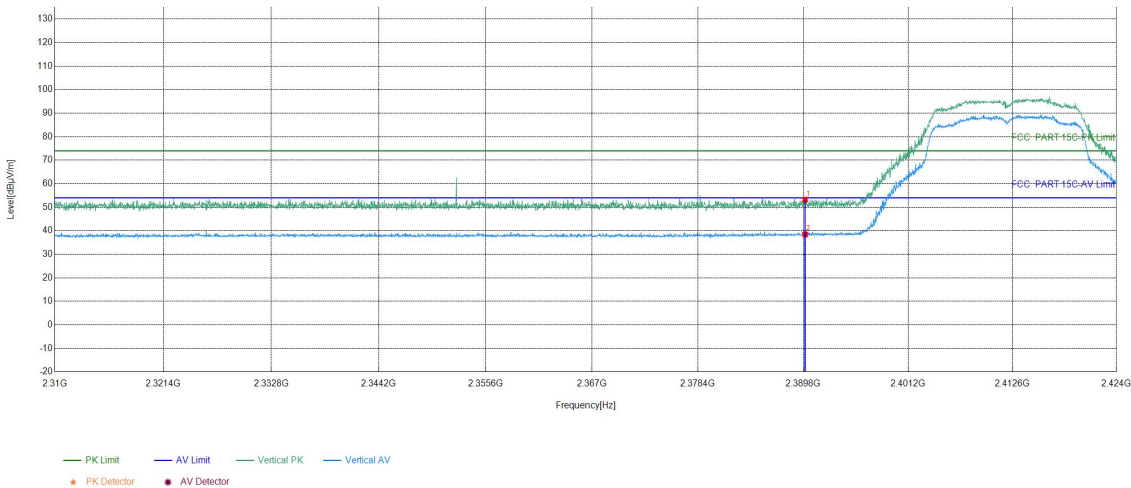

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	37.21	53.17	74.00	20.83	PASS	Vertical	PK
2	2390	15.96	22.51	38.47	54.00	15.53	PASS	Vertical	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2462MHz
Remark:	\	Test_Date	2026/6/30


Test Graph

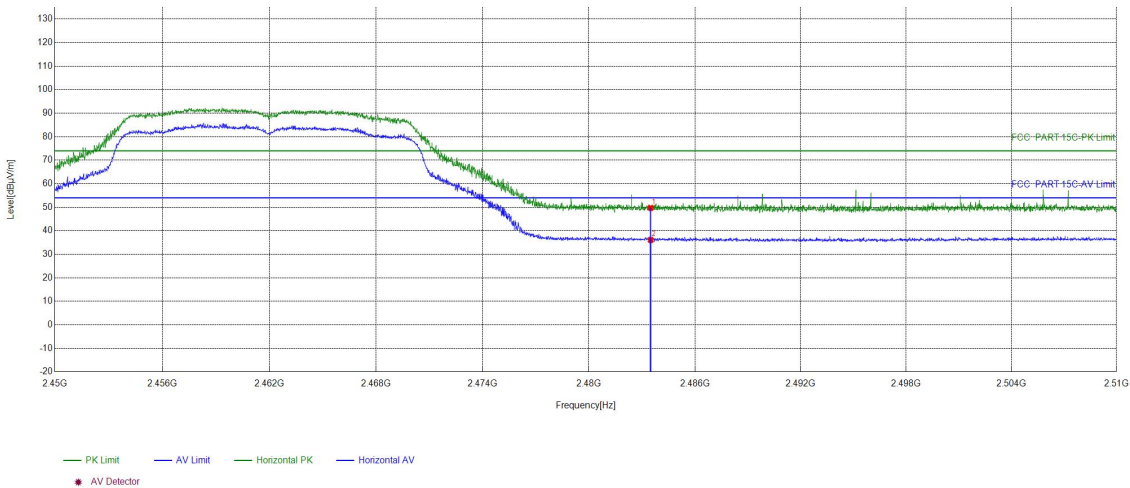

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	33.41	49.70	74.00	24.30	PASS	Horizont	PK
2	2483.5	16.29	19.80	36.09	54.00	17.91	PASS	Horizont	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2462MHz
Remark:	\	Test_Date	2026/6/30


Test Graph

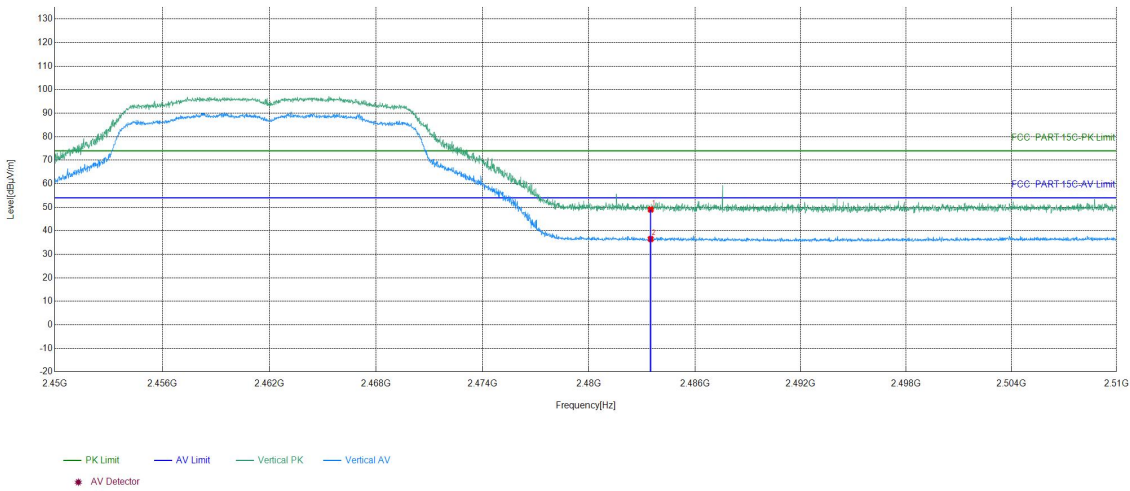

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	32.75	49.04	74.00	24.96	PASS	Vertical	PK
2	2483.5	16.29	20.20	36.49	54.00	17.51	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Remark:	\	Test_Date	2026/6/30


Test Graph

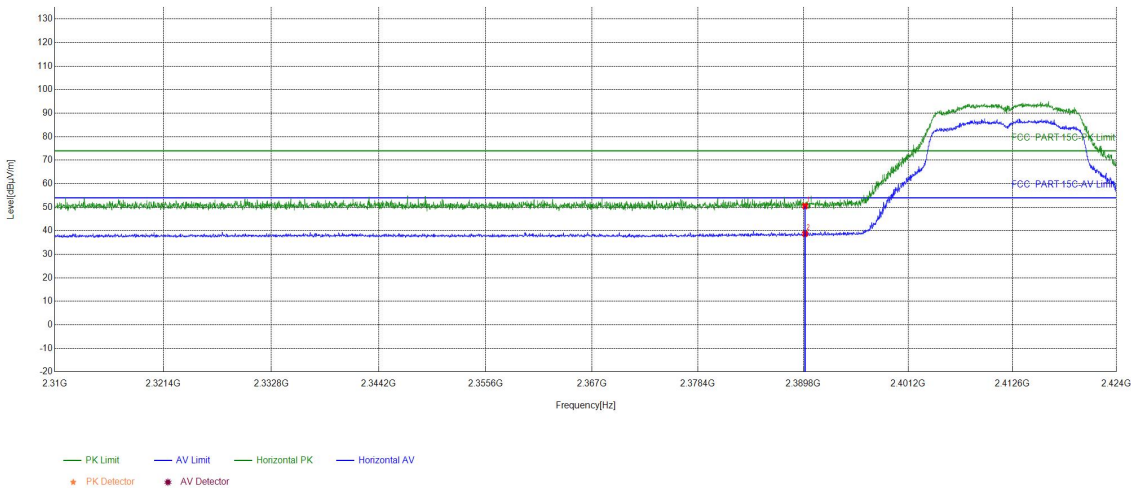

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	34.55	50.51	74.00	23.49	PASS	Horizont	PK
2	2390	15.96	22.75	38.71	54.00	15.29	PASS	Horizont	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Remark:	\	Test_Date	2026/6/30


Test Graph

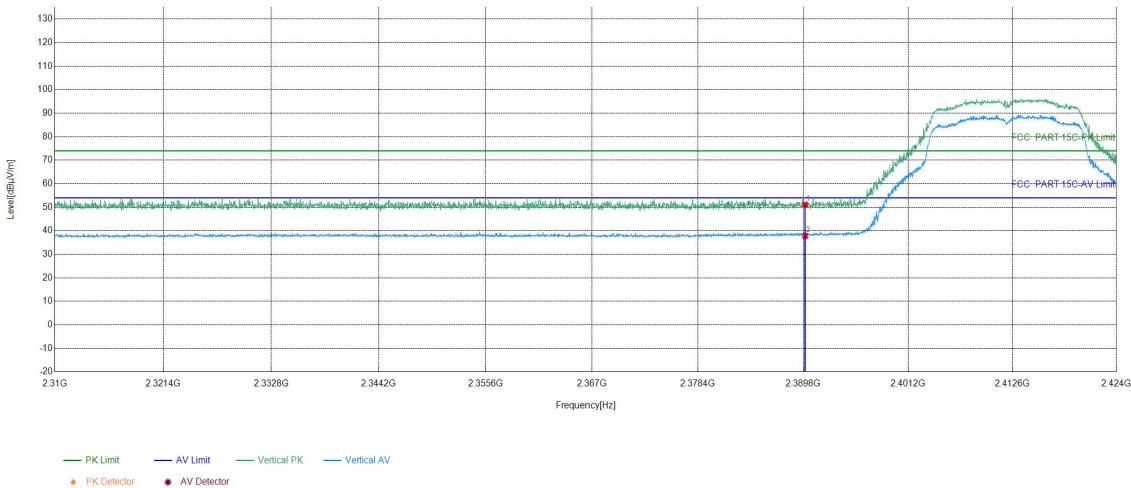

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.13	51.09	74.00	22.91	PASS	Vertical	PK
2	2390	15.96	21.83	37.79	54.00	16.21	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Remark:	\	Test_Date	2026/6/30


Test Graph

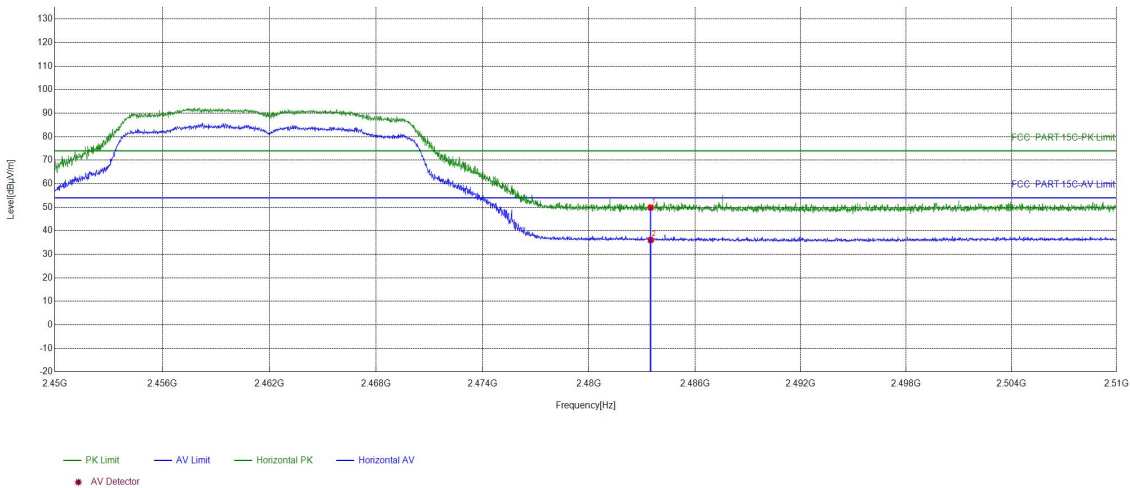

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	33.56	49.85	74.00	24.15	PASS	Horizont	PK
2	2483.5	16.29	19.78	36.07	54.00	17.93	PASS	Horizont	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Remark:	\	Test_Date	2026/6/30


Test Graph

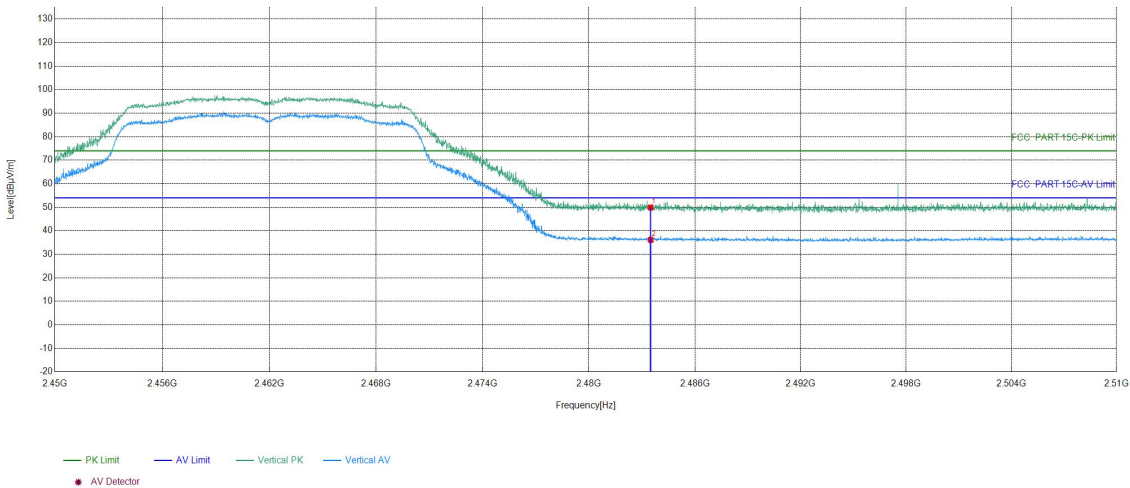

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	33.57	49.86	74.00	24.14	PASS	Vertical	PK
2	2483.5	16.29	19.84	36.13	54.00	17.87	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422MHz
Remark:	\	Test_Date	2026/6/30


Test Graph

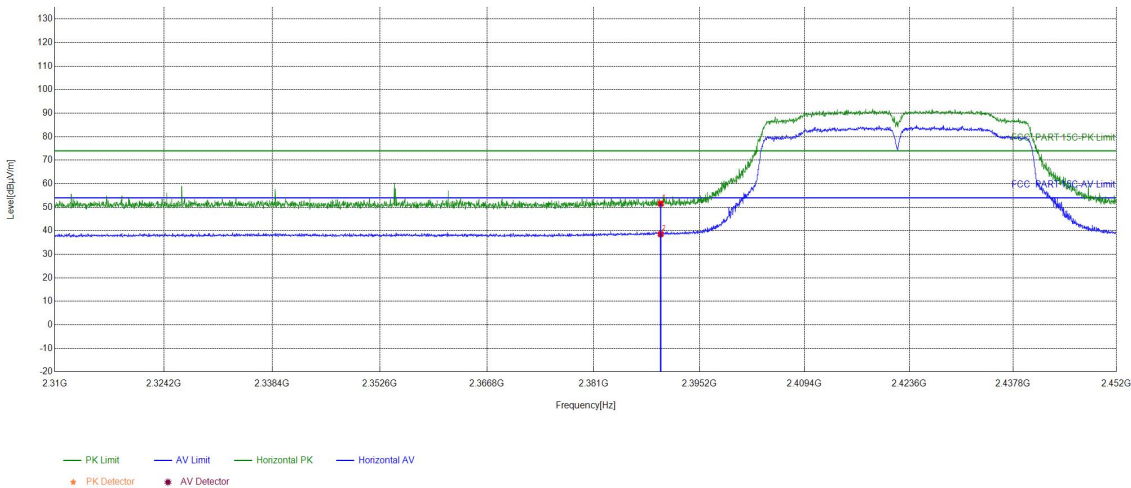

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.58	51.54	74.00	22.46	PASS	Horizont	PK
2	2390	15.96	22.62	38.58	54.00	15.42	PASS	Horizont	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422MHz
Remark:	\	Test_Date	2026/6/30


Test Graph

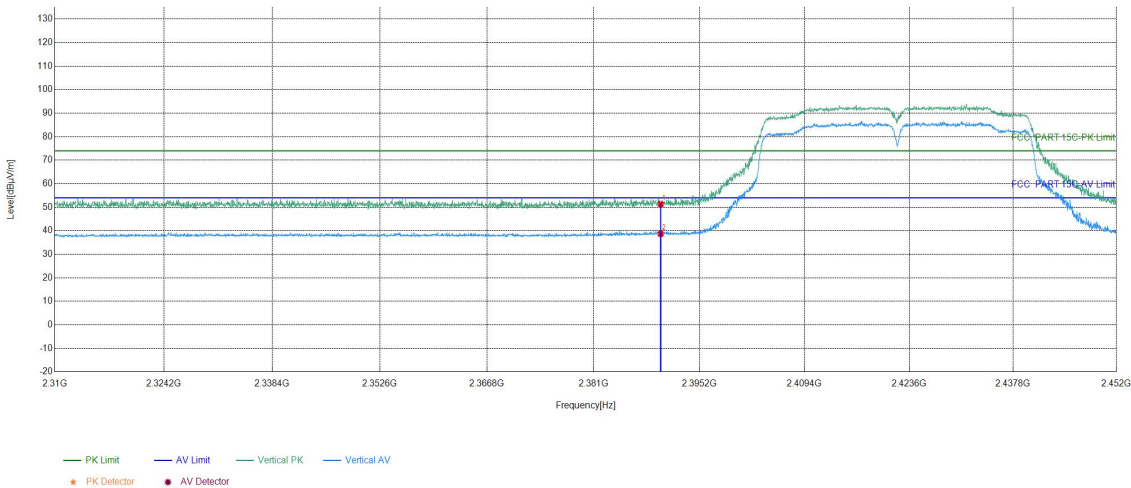

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.33	51.29	74.00	22.71	PASS	Vertical	PK
2	2390	15.96	22.76	38.72	54.00	15.28	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452MHz
Remark:	\	Test_Date	2026/6/30


Test Graph

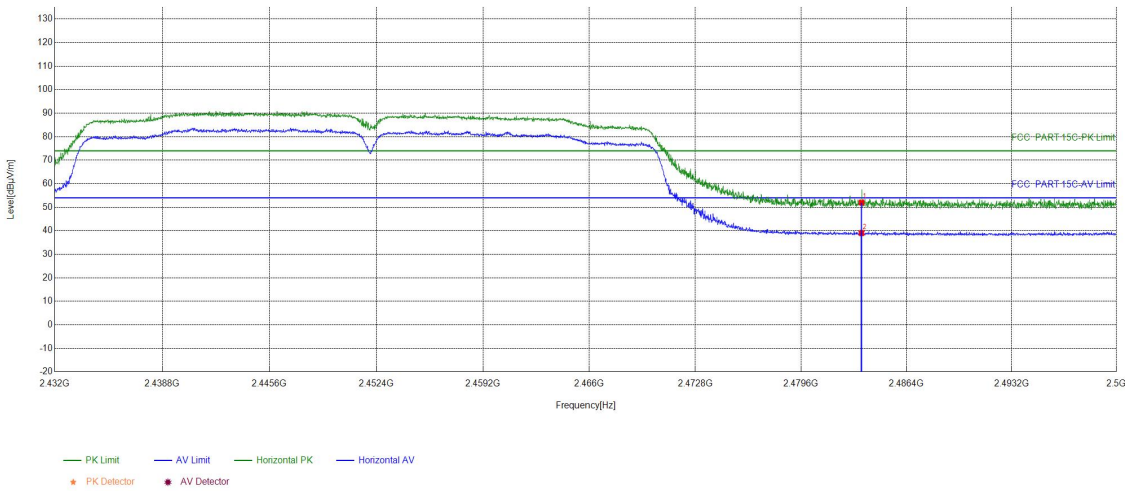

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.70	51.99	74.00	22.01	PASS	Horizontal	PK
2	2483.5	16.29	22.74	39.03	54.00	14.97	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452MHz
Remark:	\	Test_Date	2026/6/30

Test Graph

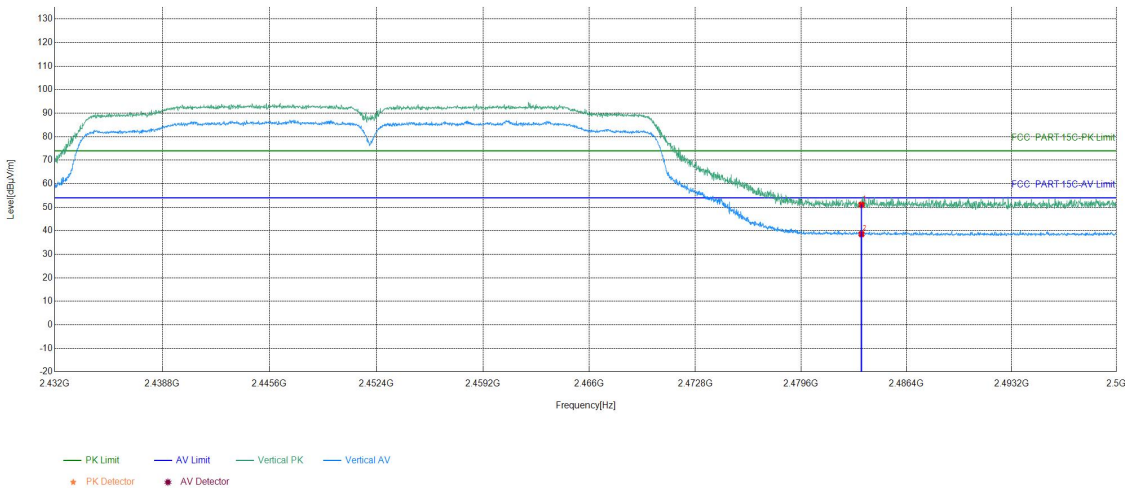

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	34.76	51.05	74.00	22.95	PASS	Vertical	PK
2	2483.5	16.29	22.30	38.59	54.00	15.41	PASS	Vertical	AV

Note:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading - Correct Factor
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

6 Appendix A

Refer to Appendix: 2.4G Wi-Fi of EED32S813647

7 PHOTOGRAPHS

Refer to Appendix Photographs of Report No. EED32S813646.

Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

*** End of Report ***