

Test Report

Customer:

Hottinger Baldwin Messtechnik GmbH

Im Tiefen See 45

64293 Darmstadt

Tel.: +49 6151-803-8030

Fax: +49 6151-803-9100

RF test report

150253-AU01+W02



Industry
Canada

Industrie
Canada

Hottinger Baldwin Messtechnik GmbH

Torque meter

T40FH

S10, S11



The test result refers exclusively
to the tested model.
This test report may not be copied or
published in a part without the written
authorization
of the accreditation agency and/or
EMV **TESTHAUS** GmbH
Revision: 1.0



EMV **TESTHAUS** GmbH

Gustav-Hertz-Straße 35
94315 Straubing
Tel.: +49 9421 56868-0
Fax: +49 9421 56868-100
Email: info@emv-testhaus.com

Accreditation:



FCC facility registration number: 221458
Test Firm Type "2.948 listed": Valid until 2017-04-22
Test Firm Type "accredited": Valid until 2017-06-09
MRA US-EU, FCC designation number: DE0010
BnetzA-CAB-02/21-02/04 Valid until 2018-11-27

Industry Canada test site number: 3472A-1
Registration expiry date: 2015-10-02

Test Laboratory:

EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

The technical accuracy is guaranteed through the quality management of the
EMV **TESTHAUS** GmbH



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11

150253-AU01+W02

Page 2 of 72

Table of contents

1	Test regulations	7
1.1	Summary of test results.....	8
2	Equipment under Test (EUT)	9
2.1	Photo documentation	10
2.2	Short description of the EUT	10
2.3	Operation mode	10
2.4	Configuration.....	11
2.5	Used cables	11
3	AC power line conducted emissions	12
3.1	Test location.....	12
3.2	Test instruments.....	12
3.3	Limits	12
3.4	Test procedure	13
3.5	Test setup	13
3.6	Test results - T40FH S10	14
3.7	Test results - T40FH S11 - full alu stator	16
3.8	Test results - T40FH S11 - alu-plastic stator	18
4	Radiated emission measurement (<1 GHz)	20
4.1	Test Location.....	20
4.2	Test instruments.....	20
4.3	Limits	21
4.4	Test procedure	22
4.5	Test setup	23
4.6	Test deviation.....	23
4.7	Test results - T40FH S10	24
4.8	Test results - T40FH S11 - full alu stator	34
4.9	Test results - T40FH S11 - alu-plastic stator	44
5	Radiated emission measurement (>1 GHz)	54
6	Bandwidths.....	55
6.1	Test Location.....	55
6.2	Test instruments.....	55
6.3	Limits	55
6.4	Test setup	55
6.5	Test deviation.....	55



6.6	Test results - T40FH S10	56
6.7	Test results - T40FH S11 - full alu stator	60
6.8	Test results - T40FH S11 - alu plastic stator.....	64
6.9	Necessary bandwidth - data transfer carrier (1.22 MHz).....	68
7	Equipment calibration status.....	69
8	Measurement uncertainty	70
9	Summary.....	71
10	Revision History.....	72



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany
 Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
 Torque meter
 T40FH
 S10, S11

150253-AU01+W02

Page 4 of 72

List of pictures

Picture 1: Outline of conducted emission test setup	13
Picture 2: T40FH S10 - Graphic - Conducted emission on mains, phase 1 (without termination)	14
Picture 3: T40FH S10 - Table - Conducted emission on mains, phase 1 (without termination) .	14
Picture 4: T40FH S10 - Graphic - Conducted emission on mains, neutral (without termination)	15
Picture 5: T40FH S10 - Table - Conducted emission on mains, neutral (without termination) ...	15
Picture 6: T40FH S11 - Graphic - Conducted emission on mains, phase 1 (without termination)	16
Picture 7: T40FH S11 - Table - Conducted emission on mains, phase 1 (without termination) .	16
Picture 8: T40FH S11 - Graphic - Conducted emission on mains, neutral (without termination)	17
Picture 9: T40FH S11 - Table - Conducted emission on mains, neutral (without termination) ...	17
Picture 10: T40FH S11 - Graphic - Conducted emission on mains, phase 1 (without termination)	18
Picture 11: T40FH S11 - Table - Conducted emission on mains, phase 1 (without termination)	18
Picture 12: T40FH S11 - Graphic - Conducted emission on mains, neutral (without termination)	19
Picture 13: T40FH S11 - Table - Conducted emission on mains, neutral (without termination) .	19
Picture 14: Test setup for radiated emission measurement (< 30 MHz).....	23
Picture 15: Test setup for radiated emission measurement (< 1 GHz).....	23
Picture 16: T40FH S10 - Radiated emission 9 kHz – 30 MHz @ 3m distance, QP	25
Picture 17: T40FH S10 - Radiated emission 9 kHz – 30 MHz @ 3m distance, AV.....	26
Picture 18: T40FH S10 - Restricted Band - PK @ 3m distance	28
Picture 19: T40FH S10 - Restricted Band - QP @ 3m distance	28
Picture 20: T40FH S10 - carrier (1.22 MHz) and restricted band	30
Picture 21: T40FH S10 - zoomed to carrier (1.22 MHz)	31
Picture 22: T40FH S10 - zoomed to restricted band	32
Picture 23: T40FH S10 - Radiated emission 30 MHz - 1000MHz @ 3m distance	33
Picture 24: T40FH S11 - Radiated emission 9 kHz – 30 MHz @ 3m distance, QP	35
Picture 25: T40FH S11 - Radiated emission 9 kHz – 30 MHz @ 3m distance, AV.....	36
Picture 26: T40FH S11 - Restricted Band - PK @ 3m distance	38
Picture 27: T40FH S11 - Restricted Band - QP @ 3m distance	38



Picture 28: T40FH S11 - carrier (1.22 MHz) and restricted band	40
Picture 29: T40FH S11 - zoomed to carrier (1.22 MHz)	41
Picture 30: T40FH S11 - zoomed to restricted band	42
Picture 31: T40FH S11 - Radiated emission 30 MHz - 1000MHz @ 3m distance	43
Picture 32: T40FH S11 - Radiated emission 9 kHz – 30 MHz @ 3m distance	45
Picture 33: T40FH S11 - Restricted Band - PK @ 3m distance	47
Picture 34: T40FH S11 - Restricted Band - QP @ 3m distance	48
Picture 35: T40FH S11 - carrier (1.22 MHz) and restricted band	50
Picture 36: T40FH S11 - zoomed to carrier (1.22 MHz)	51
Picture 37: T40FH S11 - zoomed to restricted band	52
Picture 38: T40FH S11 - Radiated emission 30 MHz - 1000MHz @ 3m distance	53
Picture 39: T40FH S10 - Occupied bandwidth (99 %) - 472.200 kHz.....	57
Picture 40: T40FH S10 - -6 dB emission bandwidth - 472.200 kHz	58
Picture 41: T40FH S10 - -20 dB emission bandwidth - 472.200 kHz.....	59
Picture 42: T40FH S11 - Occupied bandwidth (99 %) - 472.200 kHz.....	61
Picture 43: T40FH S11 - -6 dB emission bandwidth - 472.200 kHz	62
Picture 44: T40FH S11 - -20 dB emission bandwidth - 472.200 kHz.....	63
Picture 45: T40FH S11 - Occupied bandwidth (99 %) - 472.200 kHz.....	65
Picture 46: T40FH S11 - -6 dB emission bandwidth - 472.200 kHz	66
Picture 47: T40FH S11 - -20 dB emission bandwidth - 472.200 kHz.....	67

List of tables

Table 1: Equipment calibration status.....	69
Table 2: Measurement uncertainty	70



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11

150253-AU01+W02

Page 6 of 72

1 Test regulations

47 CFR Part 2: 10-2014	Code of Federal Regulations Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)
47 CFR Part 15: 10-2014	Code of Federal Regulations Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)
ANSI C63.4: September 2009	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ICES-003 Issue 5, August 2012, updated November 2014	Spectrum Management and Telecommunications Interference-Causing Equipment Standard Information Technology Equipment (ITE) – Limits and methods of measurement
RSS-Gen Issue 4, November 2014	Spectrum Management and Telecommunications Radio Standards Specification General Requirements for Compliance of Radio Apparatus
RSS-102 Issue 5, March 2015	Spectrum Management and Telecommunications Radio Standards Specification Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)
RSS-210 Issue 8, December 2010 with Amendment 1, February 2015, updated May 2015	Spectrum Management and Telecommunications Radio Standards Specification Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11

150253-AU01+W02

Page 7 of 72

1.1 Summary of test results

Standard	Test result
47 CFR Part 15, sections 15.207 and 15.209	Passed
RSS-210 Issue 8 clause 2 (with appropriate references to RSS-Gen Issue 4)	Passed



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11

150253-AU01+W02

Page 8 of 72

2 Equipment under Test (EUT)

Product type: Torque meter

Model Name: T40FH S10
T40FH S11 (with full aluminium stator)
T40FH S11 (with alu-plastic stator)

Manufacturer: Hottinger Baldwin Messtechnik GmbH

Serial number: T40FH S10: test sample
T40FH S11: test sample

FCC ID: 2ADAT-T40S10TOS11

IC certification number: 12438A-T40S10TOS11

Application frequency band: Not applicable (general requirements apply)

Frequency range: 472.20 kHz -> wireless power supply
1.22 MHz -> wireless data transfer

Operating frequency: 472.20 kHz -> wireless power supply
1.22 MHz -> wireless data transfer

Number of RF-channels: 2

Modulation: ASK -> wireless power supply
PSK -> wireless data transfer

Antenna types: loop antenna
☐ detachable ☒ not detachable

Power supply: External power source
nominal: 24.0 VDC

Temperature range: -20°C to +85°C

Remark:

The tests were performed with 120V AC / 60Hz at mains input of DC power supply.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11

150253-AU01+W02

Page 9 of 72

2.1 Photo documentation

For photos of the EUT, see annex B.
For photos taken during testing, see annex A.

2.2 Short description of the EUT

The EUT is a torque meter with wireless measurement data transfer and wireless power supply. The measurement data transfer goes from rotor to stator. The wireless power supply goes the other way round. In the field EUT is part of an engine test bench.

2.3 Operation mode

The EUT is configured to start wireless power supply, measurement and data transfer as soon as supplied by external power.

The position in which the EUT was tested is documented in annex A.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11

150253-AU01+W02

Page 10 of 72

2.4 Configuration

The following peripheral devices and interface cables were connected during the tests:

Device	Model:	Serial or inventory number
Torque meter	T40FH S10	test sample
Torque meter	T40FH S11 (with full aluminium stator)	test sample
Torque meter	T40FH S11 (with alu-plastic stator)	test sample
DC power supply	TRIO-PS/1AC/24DC/5 120 VAC / 60 Hz -> 24 VDC	2866310
Data cable termination box	hbm test device (for radiated measurements)	n/a
AC power source	CHROMA 61602	616020002099

2.5 Used cables

Numbers:	Description: (type / lengths / remarks)	Serial No
1	7-pin shielded cable with 2 screw connectors, 3 m (for radiated measurements)	n/a
1	7-pin shielded cable with 1 screw connector and DC plug, 3 m (for AC power line conducted emissions)	n/a



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11

150253-AU01+W02

Page 11 of 72

3 AC power line conducted emissions

according to 47 CFR Part 15, section 15.207, and
RSS-210, section 2.1 with RSS-Gen, section 8.8

3.1 Test location

Description	Manufacturer	Inventory No.
Shielded room	Siemens - Matsushita	E00107

3.2 Test instruments

	Description	Manufacturer	Inventory No.
☒	ESCS 30	Rohde & Schwarz	E00003
☐	ESU 26	Rohde & Schwarz	W00002
☐	ESCI	Rohde & Schwarz	E00001
☐	ESH3-Z2	Rohde & Schwarz	E00028
☒	ESH2-Z5	Rohde & Schwarz	E00004
☐	ESH2-Z5	Rohde & Schwarz	E00005

3.3 Limits

Frequency [MHz]	Quasi-peak [dB μ V]	Avarage [dB μ V]
0.15 – 0.5	66 – 56	56 – 46
0.5 – 5.0	56	46
5 – 30	60	50



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11

150253-AU01+W02


Page 12 of 72

3.4 Test procedure

1. The tests of conducted emission were carried out in a shielded room using a line impedance stabilization network (LISN) 50 μ H/50 Ohms and an EMI test receiver.
2. The EMI test receiver was connected to the LISN and set to a measurement bandwidth of 9 kHz in the frequency range from 0.15 MHz to 30 MHz.
3. The EUT was placed on a wooden table and connected to the LISN.
4. To accelerate the measurement the detector of the EMI test receiver was set to peak and the whole frequency range from 0.15 MHz to 30 MHz was scanned.
5. After that all peaks values with less margin than 10 dB to quasi-peak limit or exceeding the limit were marked and re-measured with quasi-peak detector.
6. If after that all values are under the average limit no addition measurement is necessary. In case there are still values between quasi-peak and average limit then these values were re-measured with average detector.
7. These measurements were done on all power lines.

According to ANSI C63.4, section 13.3.1 testing of intentional radiators with detachable antennas shall be done with a dummy load otherwise the tests should be done with connected antenna and if adjustable fully extended.

3.5 Test setup

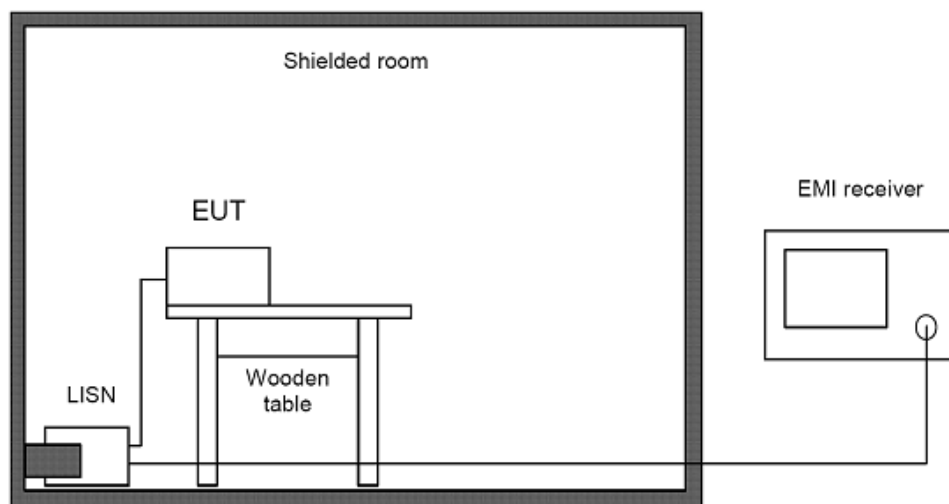


Picture 1: Outline of conducted emission test setup

Comments: All peripheral devices were additionally decoupled by means of a line stabilization network.

3.6 Test results - T40FH S10


Temperature:	21°C	Humidity:	44%
Tested by:	Martin Müller	Test date:	2015-04-28

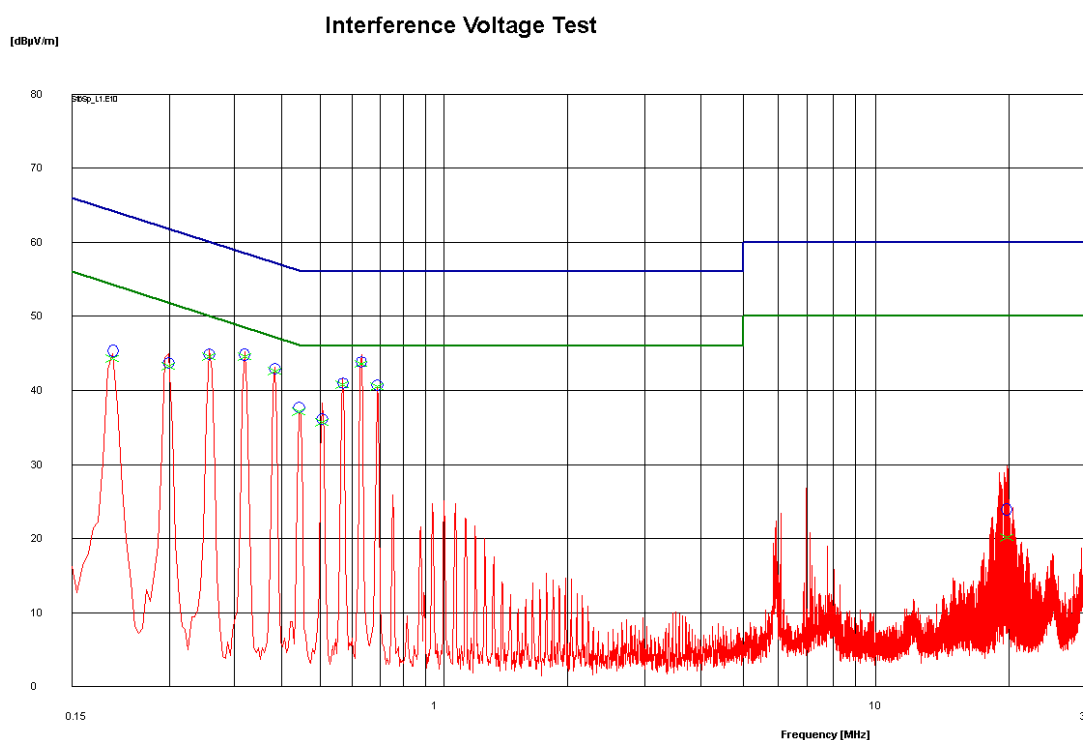

Picture 2: T40FH S10 - Graphic - Conducted emission on mains, phase 1 (without termination)

E..	Freq. [MHz]	U_CISPR ...	Limit CISPR	delta CISPR	U_AV ...	Limit AV	delta AV	Date	P..	Remarks	U_Scan ...	Cor.
✓	0.186	45.4	64.2	18.9	44.3	54.2	9.9	2015-04-28 09:52...	L		45.0	0.0
✓	0.249	43.7	61.8	18.1	43.3	51.8	8.5	2015-04-28 09:53...	L		45.0	0.0
✓	0.3075	44.9	60.0	15.1	44.6	50.0	5.5	2015-04-28 09:53...	L		45.4	0.0
✓	0.3705	44.8	58.5	13.7	44.5	48.5	3.9	2015-04-28 09:53...	L		45.2	0.0
✓	0.4335	42.9	57.2	14.2	42.6	47.2	4.6	2015-04-28 09:53...	L		43.1	0.0
✓	0.492	37.8	56.1	18.4	37.2	46.1	9.0	2015-04-28 09:54...	L		37.1	0.0
✓	0.555	36.2	56.0	19.8	35.7	46.0	10.3	2015-04-28 09:54...	L		38.3	0.0
✓	0.618	41.0	56.0	15.0	40.7	46.0	5.3	2015-04-28 09:54...	L		41.7	0.0
✓	0.681	43.9	56.0	12.2	43.6	46.0	2.4	2015-04-28 09:54...	L		44.8	0.0
✓	0.7395	40.7	56.0	15.3	40.6	46.0	5.5	2015-04-28 09:54...	L		40.4	0.0
✓	19.8235	23.9	60.0	36.1	20.1	50.0	29.9	2015-04-28 09:55...	L		29.9	0.0

Picture 3: T40FH S10 - Table - Conducted emission on mains, phase 1 (without termination)

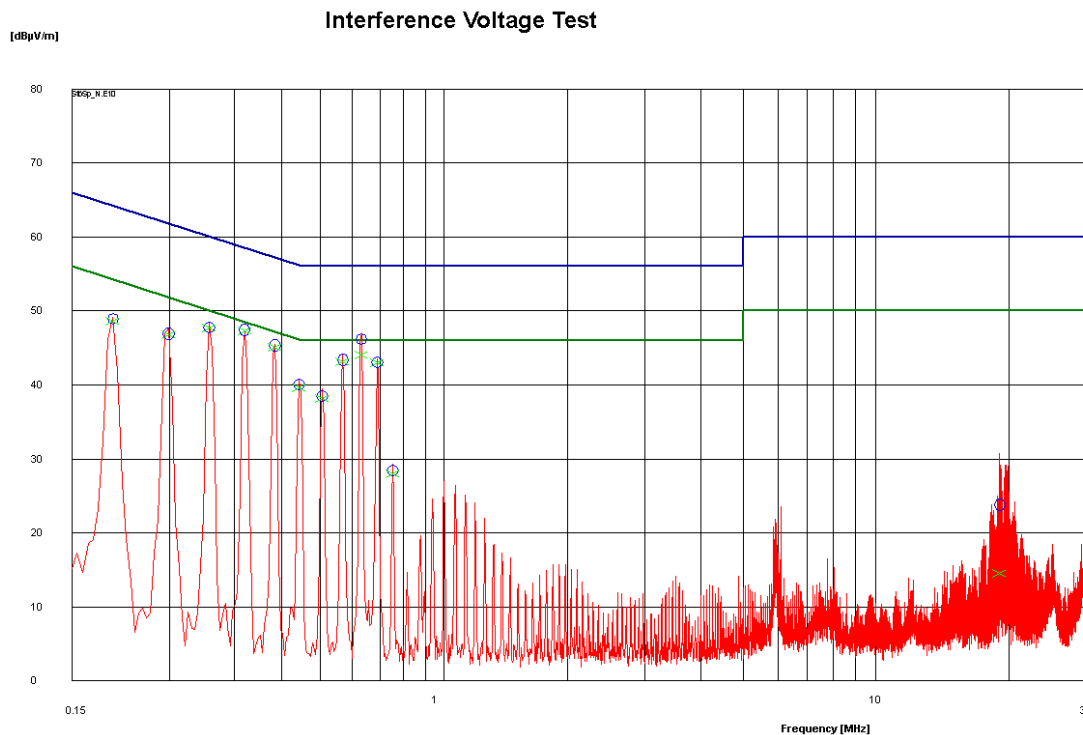


Picture 4: T40FH S10 - Graphic - Conducted emission on mains, neutral (without termination)

E.	Freq. [MHz]	U_CISPR ...	Limit CISPR	delta CISPR	U_AV ...	Limit AV	delta AV	Date	P.	Remarks	U_Scan ...	Cor.
✓	0.186	48.9	64.2	15.3	48.6	54.2	5.6	2015-04-28 09:56...	N		49.2	0.0
✓	0.249	46.9	61.8	14.9	46.8	51.8	5.0	2015-04-28 09:56...	N		47.7	0.0
✓	0.3075	47.8	60.0	12.3	47.7	50.0	2.4	2015-04-28 09:56...	N		48.4	0.0
✓	0.3705	47.5	58.5	11.0	47.3	48.5	1.1	2015-04-28 09:56...	N		47.4	0.0
✓	0.4335	45.4	57.2	11.8	45.2	47.2	2.0	2015-04-28 09:57...	N		45.5	0.0
✓	0.492	40.0	56.1	16.1	39.7	46.1	6.5	2015-04-28 09:57...	N		40.7	0.0
✓	0.555	38.5	56.0	17.5	38.2	46.0	7.8	2015-04-28 09:57...	N		39.5	0.0
✓	0.618	43.4	56.0	12.6	43.2	46.0	2.8	2015-04-28 09:57...	N		44.1	0.0
✓	0.681	46.2	56.0	9.8	44.0	46.0	2.0	2015-04-28 09:57...	N		46.9	0.0
✓	0.7395	43.1	56.0	12.9	43.0	46.0	3.1	2015-04-28 09:58...	N		43.5	0.0
✓	0.8025	28.4	56.0	27.6	28.0	46.0	18.0	2015-04-28 09:58...	N		29.2	0.0
✓	19.0815	23.8	60.0	36.2	14.6	50.0	35.4	2015-04-28 09:58...	N		30.7	0.0

Picture 5: T40FH S10 - Table - Conducted emission on mains, neutral (without termination)

3.7 Test results - T40FH S11 - full alu stator

Temperature:	21°C	Humidity:	44%
Tested by:	Martin Müller	Test date:	2015-04-28

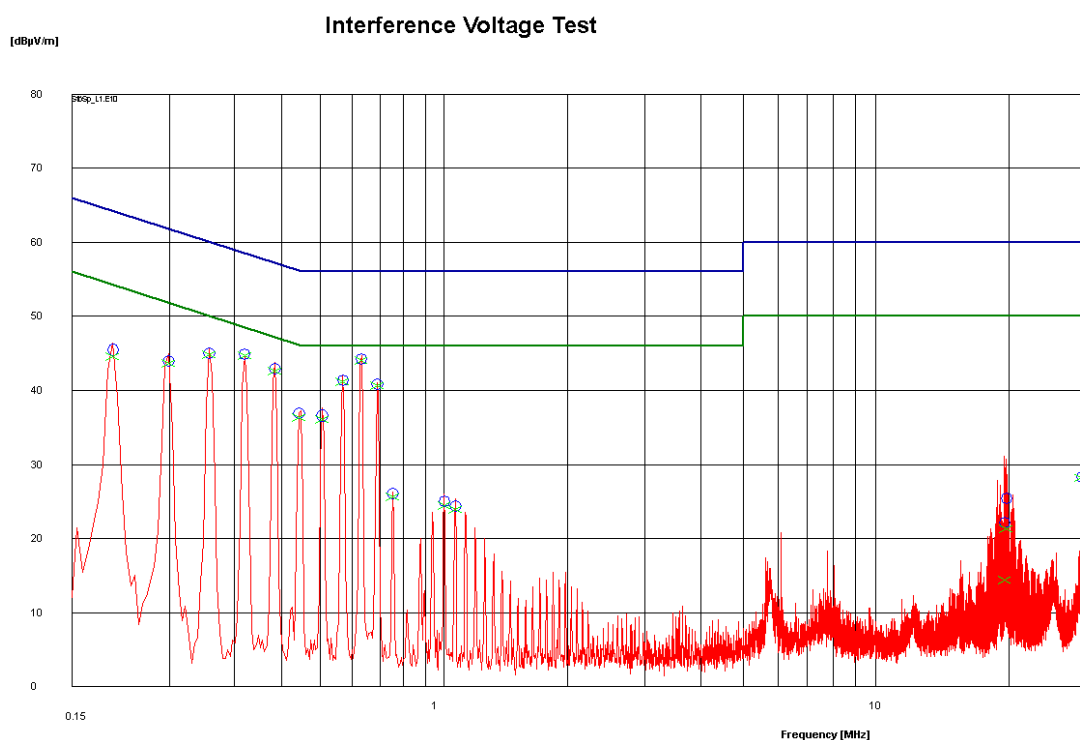

Picture 6: T40FH S11 - Graphic - Conducted emission on mains, phase 1 (without termination)

E..	Freq. [MHz]	U_CISPR ...	Limit CISPR	delta CISPR	U_AV ...	Limit AV	delta AV	Date	P..	Remarks	U_Scan ...	Cor.
✓	0.186	45.5	64.2	18.7	44.6	54.2	9.6	2015-04-28 10:16...	L		46.4	0.0
✓	0.249	44.0	61.8	17.8	43.6	51.8	8.2	2015-04-28 10:16...	L		44.9	0.0
✓	0.3075	45.1	60.0	15.0	44.8	50.0	5.2	2015-04-28 10:16...	L		45.7	0.0
✓	0.3705	44.9	58.5	13.6	44.7	48.5	3.8	2015-04-28 10:17...	L		44.7	0.0
✓	0.4335	43.0	57.2	14.2	42.6	47.2	4.6	2015-04-28 10:17...	L		43.7	0.0
✓	0.4915	36.9	56.1	19.2	36.3	46.1	9.8	2015-04-28 10:17...	L		37.3	0.0
✓	0.555	36.6	56.0	19.4	36.1	46.0	9.9	2015-04-28 10:17...	L		37.6	0.0
✓	0.618	41.4	56.0	14.6	41.2	46.0	4.9	2015-04-28 10:17...	L		42.0	0.0
✓	0.681	44.3	56.0	11.7	44.1	46.0	1.9	2015-04-28 10:18...	L		44.7	0.0
✓	0.7395	40.9	56.0	15.1	40.6	46.0	5.4	2015-04-28 10:18...	L		41.1	0.0
✓	0.8025	26.1	56.0	29.9	25.6	46.0	20.4	2015-04-28 10:18...	L		26.3	0.0
✓	1.05	25.1	56.0	31.0	24.4	46.0	21.6	2015-04-28 10:18...	L		26.1	0.0
✓	1.113	24.4	56.0	31.6	23.9	46.0	22.1	2015-04-28 10:19...	L		25.4	0.0
✓	19.576	22.2	60.0	37.8	14.4	50.0	35.6	2015-04-28 10:19...	L		31.1	0.0
✓	19.7655	25.4	60.0	34.6	21.3	50.0	28.7	2015-04-28 10:19...	L		30.8	0.0
✓	29.283	28.3	60.0	31.7	28.2	50.0	21.8	2015-04-28 10:19...	L		29.2	0.0

Picture 7: T40FH S11 - Table - Conducted emission on mains, phase 1 (without termination)




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11

150253-AU01+W02

Page 16 of 72

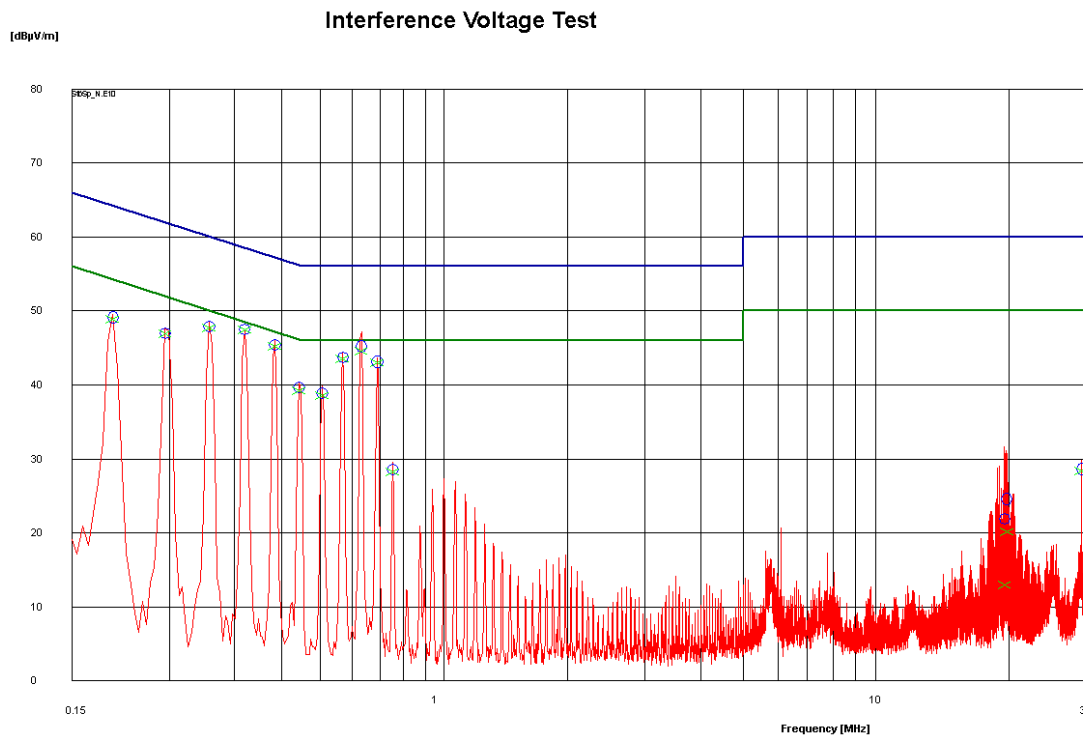


Picture 8: T40FH S11 - Graphic - Conducted emission on mains, neutral (without termination)

E.	Freq. [MHz]	U_CISPR ...	Limit CISPR	delta CISPR	U_AV ...	Limit AV	delta AV	Date	P.	Remarks	U_Scan ...	Cor.
✓	0.186	49.1	64.2	15.1	48.8	54.2	5.4	2015-04-28 10:24...	N		49.6	0.0
✓	0.2445	47.0	61.9	14.9	46.9	51.9	5.0	2015-04-28 10:24...	N		47.6	0.0
✓	0.3075	47.9	60.0	12.2	47.8	50.0	2.3	2015-04-28 10:24...	N		48.5	0.0
✓	0.3705	47.5	58.5	11.0	47.4	48.5	1.1	2015-04-28 10:25...	N		47.5	0.0
✓	0.4335	45.4	57.2	11.8	45.2	47.2	2.0	2015-04-28 10:25...	N		46.1	0.0
✓	0.492	39.7	56.1	16.5	39.3	46.1	6.9	2015-04-28 10:25...	N		40.4	0.0
✓	0.555	38.9	56.0	17.1	38.6	46.0	7.4	2015-04-28 10:25...	N		39.8	0.0
✓	0.618	43.8	56.0	12.3	43.5	46.0	2.5	2015-04-28 10:25...	N		44.4	0.0
✓	0.681	45.2	56.0	10.8	44.5	46.0	1.5	2015-04-28 10:26...	N		47.2	0.0
✓	0.7395	43.1	56.0	12.9	43.0	46.0	3.1	2015-04-28 10:26...	N		43.6	0.0
✓	0.8025	28.6	56.0	27.4	28.2	46.0	17.8	2015-04-28 10:26...	N		29.5	0.0
✓	19.5765	21.9	60.0	38.1	13.0	50.0	37.0	2015-04-28 10:26...	N		31.6	0.0
✓	19.824	24.6	60.0	35.4	20.1	50.0	29.9	2015-04-28 10:27...	N		30.7	0.0
✓	29.283	28.6	60.0	31.4	28.4	50.0	21.6	2015-04-28 10:27...	N		29.8	0.0

Picture 9: T40FH S11 - Table - Conducted emission on mains, neutral (without termination)

3.8 Test results - T40FH S11 - alu-plastic stator


Temperature:	21°C	Humidity:	44%
Tested by:	Martin Müller	Test date:	2015-04-28

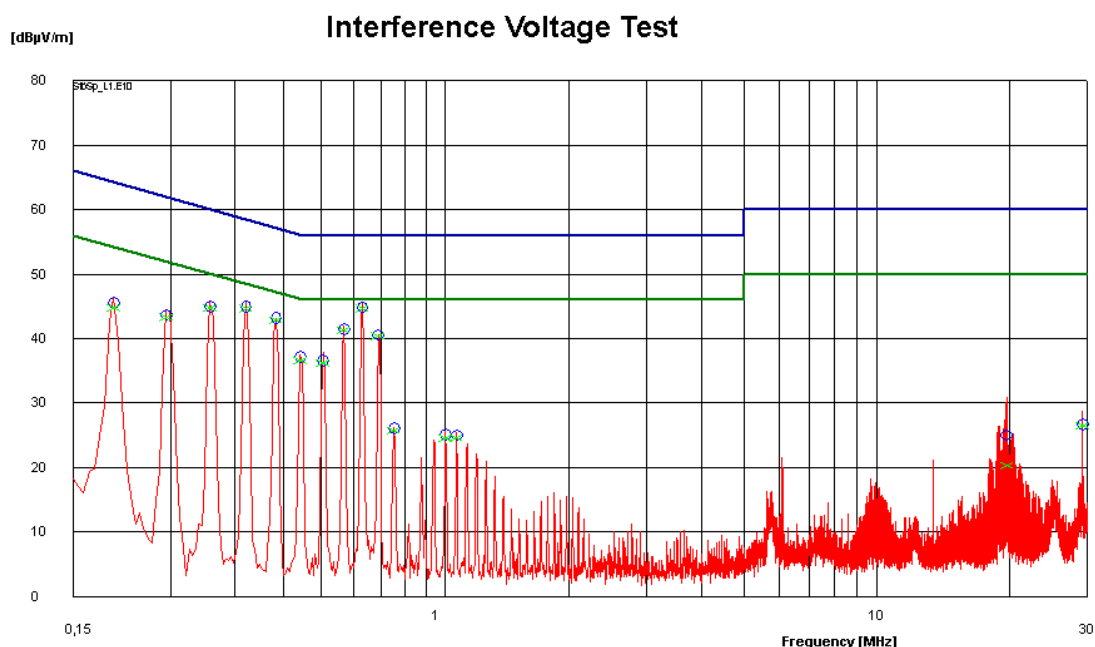

Picture 10: T40FH S11 - Graphic - Conducted emission on mains, phase 1 (without termination)

E.	Freq. [MHz]	U_CISPR ...	Limit CISPR	delta CISPR	U_AV ...	Limit AV	delta AV	Date	P.	Remarks	U_Scan ...	Cor.
✓	0,186	45,5	64,2	18,7	44,7	54,2	9,5	2015-04-28 10:51...	L		46,5	0,0
✓	0,2445	43,7	61,9	18,2	43,3	51,9	8,6	2015-04-28 10:51...	L		44,4	0,0
✓	0,3075	45,0	60,0	15,0	44,7	50,0	5,3	2015-04-28 10:52...	L		45,7	0,0
✓	0,3705	44,9	58,5	13,5	44,7	48,5	3,8	2015-04-28 10:52...	L		45,6	0,0
✓	0,4335	43,2	57,2	14,0	42,8	47,2	4,3	2015-04-28 10:52...	L		43,1	0,0
✓	0,492	37,2	56,1	18,9	36,7	46,1	9,5	2015-04-28 10:52...	L		37,6	0,0
✓	0,555	36,6	56,0	19,4	36,2	46,0	9,8	2015-04-28 10:52...	L		37,9	0,0
✓	0,618	41,5	56,0	14,5	41,2	46,0	4,8	2015-04-28 10:53...	L		41,9	0,0
✓	0,681	44,9	56,0	11,1	44,7	46,0	1,3	2015-04-28 10:53...	L		45,6	0,0
✓	0,7395	40,6	56,0	15,4	40,4	46,0	5,6	2015-04-28 10:53...	L		40,7	0,0
✓	0,8025	26,1	56,0	29,9	25,7	46,0	20,3	2015-04-28 10:53...	L		26,3	0,0
✓	1,05	25,2	56,0	30,8	24,6	46,0	21,4	2015-04-28 10:53...	L		25,6	0,0
✓	1,113	25,0	56,0	31,0	24,5	46,0	21,5	2015-04-28 10:54...	L		25,4	0,0
✓	19,711	25,0	60,0	35,0	20,3	50,0	29,7	2015-04-28 10:54...	L		31,0	0,0
✓	29,283	26,7	60,0	33,3	26,6	50,0	23,5	2015-04-28 10:54...	L		28,8	0,0

Picture 11: T40FH S11 - Table - Conducted emission on mains, phase 1 (without termination)

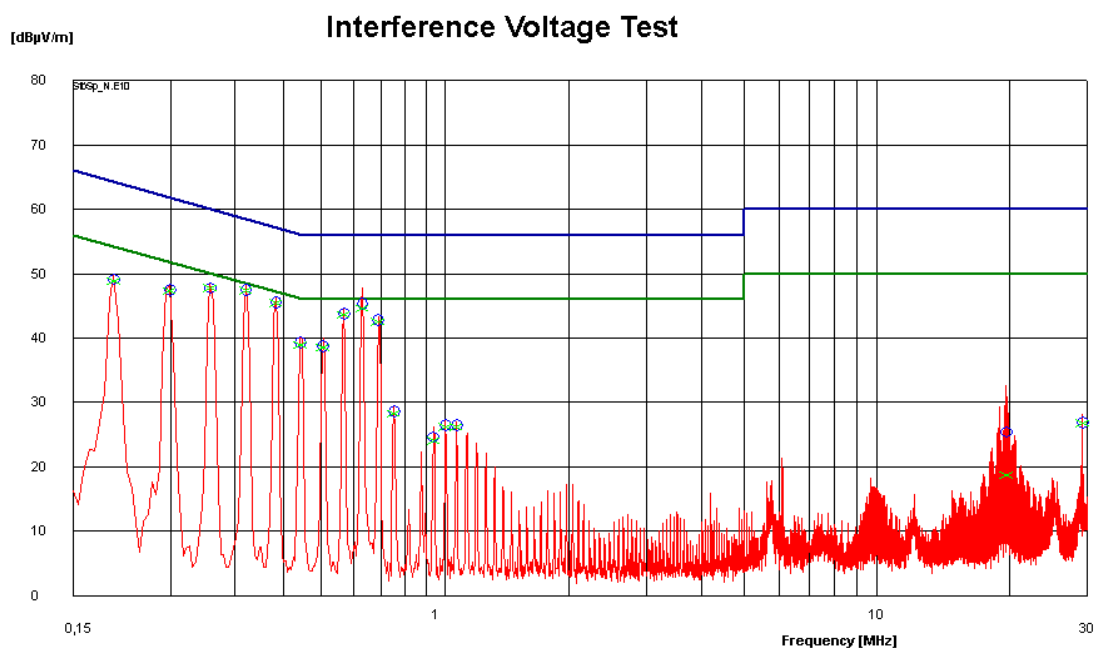

Picture 12: T40FH S11 - Graphic - Conducted emission on mains, neutral (without termination)

E.	Freq. [MHz]	U_CISPR ...	Limit CISPR	delta CISPR	U_AV ...	Limit AV	delta AV	Date	P.	Remarks	U_Scan ...	Cor.
✓	0,186	49,1	64,2	15,1	48,9	54,2	5,3	2015-04-28 11:00...	N		49,7	0,0
✓	0,249	47,5	61,8	14,3	47,3	51,8	4,5	2015-04-28 11:01...	N		48,1	0,0
✓	0,3075	47,8	60,0	12,3	47,8	50,0	2,3	2015-04-28 11:01...	N		48,5	0,0
✓	0,3705	47,5	58,5	11,0	47,4	48,5	1,1	2015-04-28 11:01...	N		48,2	0,0
✓	0,4335	45,6	57,2	11,6	45,4	47,2	1,8	2015-04-28 11:01...	N		46,2	0,0
✓	0,492	39,4	56,1	16,8	39,0	46,1	7,2	2015-04-28 11:01...	N		40,1	0,0
✓	0,555	38,8	56,0	17,2	38,5	46,0	7,5	2015-04-28 11:02...	N		39,9	0,0
✓	0,618	43,8	56,0	12,2	43,7	46,0	2,3	2015-04-28 11:02...	N		44,6	0,0
✓	0,681	45,3	56,0	10,7	44,5	46,0	1,5	2015-04-28 11:02...	N		47,8	0,0
✓	0,7395	42,8	56,0	13,2	42,5	46,0	3,5	2015-04-28 11:02...	N		43,3	0,0
✓	0,8025	28,6	56,0	27,4	28,2	46,0	17,8	2015-04-28 11:02...	N		29,4	0,0
✓	0,987	24,7	56,0	31,4	24,1	46,0	21,9	2015-04-28 11:03...	N		26,1	0,0
✓	1,05	26,5	56,0	29,5	26,2	46,0	19,8	2015-04-28 11:03...	N		27,1	0,0
✓	1,113	26,5	56,0	29,5	26,2	46,0	19,8	2015-04-28 11:03...	N		26,9	0,0
✓	19,653	25,4	60,0	34,6	18,7	50,0	31,3	2015-04-28 11:03...	N		32,5	0,0
✓	29,283	26,9	60,0	33,1	26,8	50,0	23,3	2015-04-28 11:04...	N		28,1	0,0

Picture 13: T40FH S11 - Table - Conducted emission on mains, neutral (without termination)

4 Radiated emission measurement (<1 GHz)

according to 47 CFR Part 15, section 15.205(a), 15.209(a),
RSS-210, section 2.5 with RSS-Gen, sections 8.10 and 8.9

4.1 Test Location

- ☒ Scan with peak detector in 3 m CDC.
- ☒ Final CISPR measurement with quasi peak detector on 3 m open area test site.

Description	Manufacturer	Inventory No.
CDC	Albatross Projects	E00026
Open area test site (OATS)	EMV TESTHAUS GmbH	E00354

4.2 Test instruments

	Description	Manufacturer	Inventory No.
☒	ESCS 30 (FF)	Rohde & Schwarz	E00551
☐	ESU 26	Rohde & Schwarz	W00002
☒	ESCI (CDC)	Rohde & Schwarz	E00001
☒	VULB 9163 (FF)	Schwarzbeck	E00013
☒	VULB 9160 (CDC)	Schwarzbeck	E00011
☒	HFH2-Z2	Rohde & Schwarz	E00060
☒	RF-R 400-1	Langer EMV-Technik	E00270
☒	Feedline OATS	Huber & Suhner	200024



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11

150253-AU01+W02

Page 20 of 72

4.3 Limits

The field strength of any emissions including spurious emissions falling into restricted bands as specified in 15.205(a) shall not exceed the general radiated emission limits as specified in 15.209.

Frequency [MHz]	Field strength Fs [μ V/m]	Field strength [dB μ V/m]	Measurement distance d [m]
0.009 – 0.490	266.6 – 4.9	48.5 – 13.8	300
0.490 – 1.705	48.98 – 14.08	33.8 – 22.97	30
1.705 – 30.0	30	29.54	30
30 – 88	100	40	3
88 – 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11

150253-AU01+W02

Page 21 of 72

4.4 Test procedure

1. EUT was configured according to ANSI C63.4. It was placed on the top of the turntable 0.8 meter above ground. The receiving antenna was placed 3 meters from the turntable. The test setup was placed inside a compact diagnostic chamber.
2. EUT and all peripherals were powered on.
3. The broadband antenna was set to vertical polarization.
4. The EMI receiver performed a scan from 30 MHz to 1000 MHz with peak detector peak and measurement bandwidth set to 120 kHz.
5. The turn table was rotated to 6 different positions ($360^\circ / 6$) and the antenna polarization was changed to horizontal.
6. Test procedure at step 4 and 5 was repeated.
7. The test setup was then placed in an OATS at 3 m distance and all peak values over or with less margin to the limit than 6dB were marked and re-measured with a quasi-peak detector.
8. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
9. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization. The highest value was recorded.
10. For emissions below 30 MHz measurements were done using a loop antenna. Prescans were performed with peak detector and final measurements with quasi-peak except for the frequency bands 9 to 90 kHz and 110 to 490 kHz where average detector applies. Antenna height was not changed during this test. Appropriate CISPR bandwidths of 200 Hz for frequencies up to 150 kHz and 9 or 10 kHz for frequencies above were used.




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11


150253-AU01+W02

Page 22 of 72

4.5 Test setup

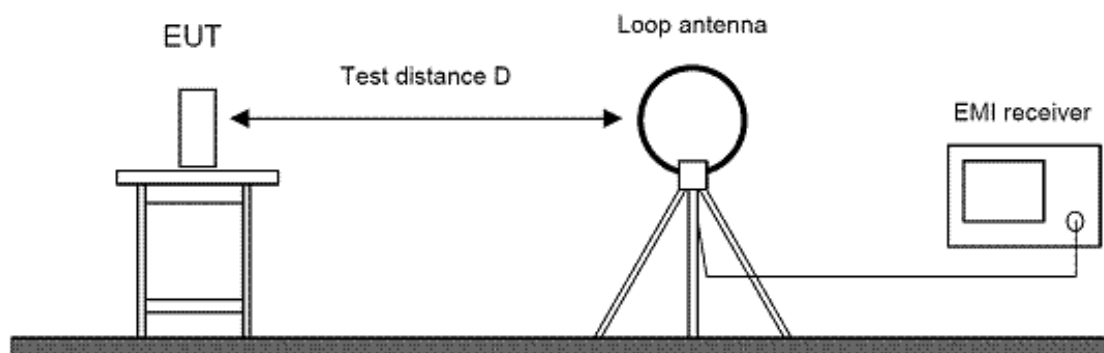

Picture 14: Test setup for radiated emission measurement (< 30 MHz)

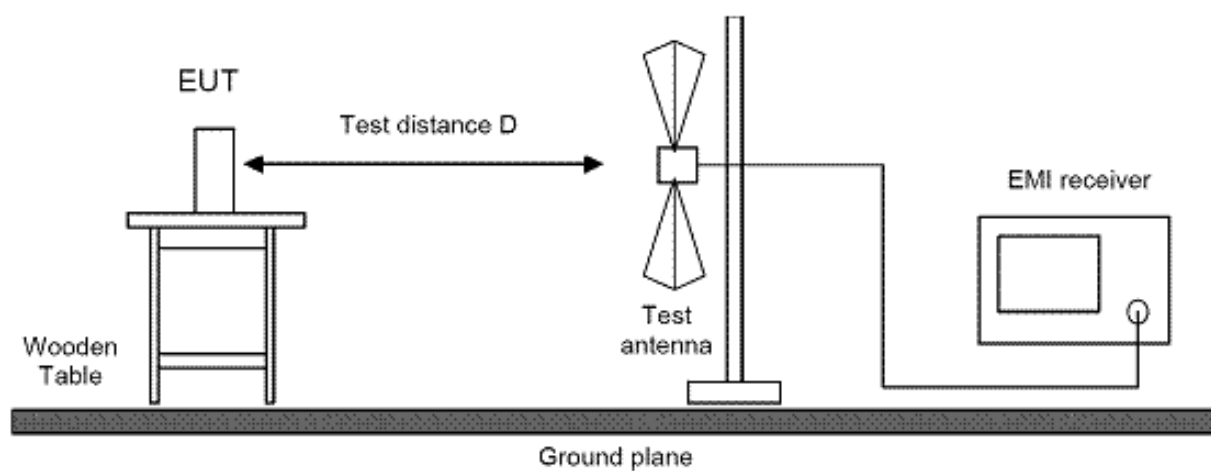

Picture 15: Test setup for radiated emission measurement (< 1 GHz)

4.6 Test deviation

There is no deviation from the standards referred to.

4.7 Test results - T40FH S10

Temperature:	18°C	Humidity:	47%
Tested by:	Martin Müller	Test date:	2015-04-28

Radiated Emission Measurement 9 kHz - 30 MHz

Test procedure

The EUT was placed in a full anechoic chamber and the spurious emission testing was performed in accordance with ANSI C63.4, and 47 CFR Part 15, Subpart C. The measurement distance was 3 m.




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11


150253-AU01+W02

Page 24 of 72

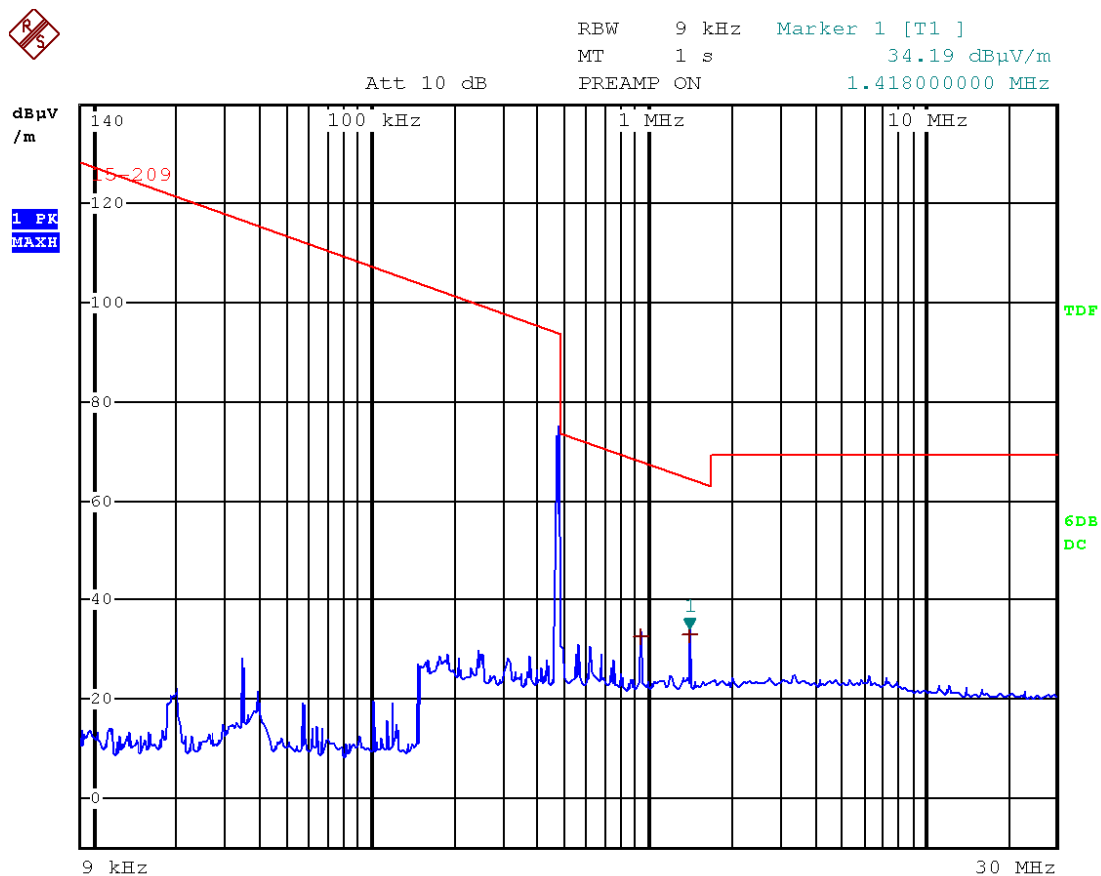

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	15-209			
Trace2:	---			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBµV/m	DELTA	LIMIT dB
1 Quasi Peak	946 kHz	32.69	-35.41	
1 Quasi Peak	1.418 MHz	33.28	-31.31	

Picture 16: T40FH S10 - Radiated emission 9 kHz – 30 MHz @ 3m distance, QP

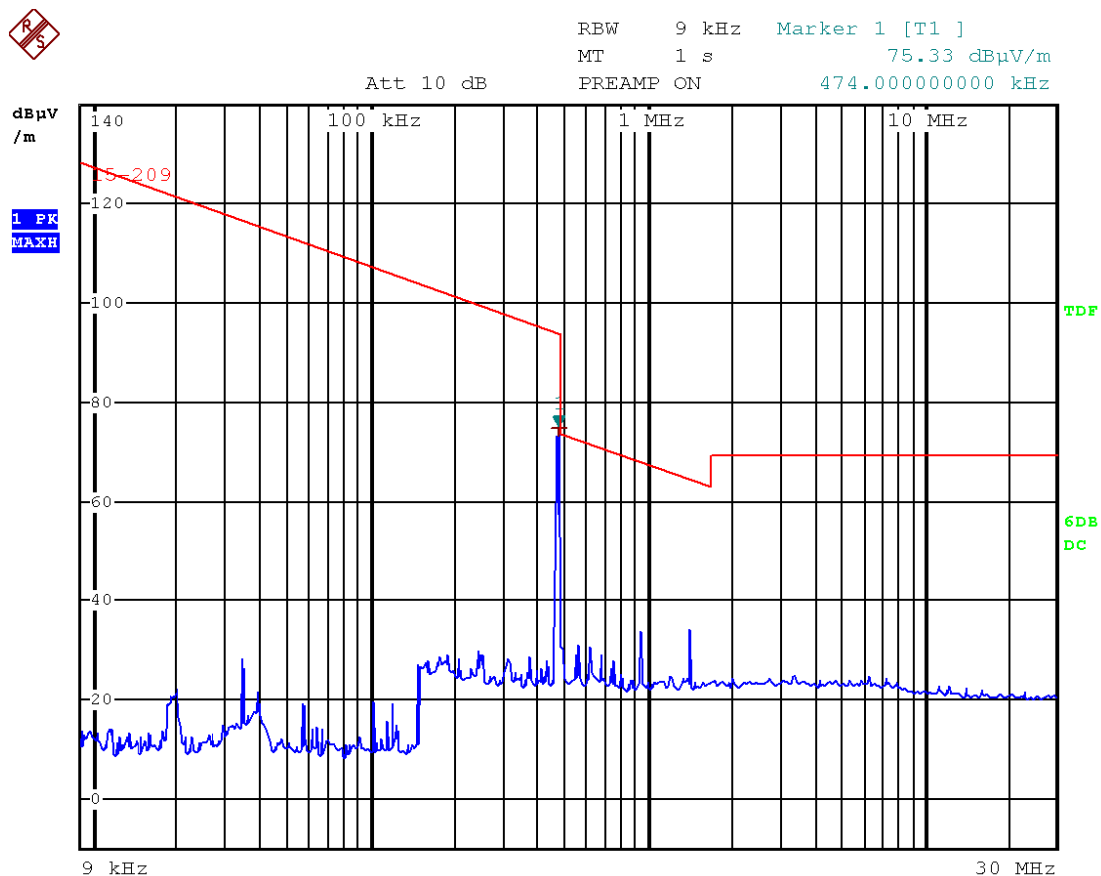

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	15-209			
Trace2:	---			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB	
1 Average	474 kHz	74.72	-19.36	

Picture 17: T40FH S10 - Radiated emission 9 kHz – 30 MHz @ 3m distance, AV

Frequency (kHz)	Measured value (dBµV/m)	Detector	Recalculation factor (dB/decade)	Field strength (dBµV/m)	Limit (dBµV/m)	Margin	Result
¹⁾ 474	74.72	AV	80	-5.28	14.09	11.24	PASS
946	32.69	QP	40	-7.31	28.09	35.40	PASS
1418	33.28	QP	40	-6.72	24.57	31.29	PASS

¹⁾ Note:

Measured value = 74.72 dBµV/m @ 3 m

Recalculation factor = 40 dB / decade

Recalculated value = 74.72 dBµV/m @ 3 m - 40 dB = **34.72 dBµV/m @ 30 m**

Recalculation factor = 40 dB / decade

Recalculated value = 34.72 dBµV/m @ 3 m - 40 dB = **-5.28 dBµV/m @ 300 m**




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11


150253-AU01+W02

Page 27 of 72

Restricted Band (495 kHz - 505 kHz)

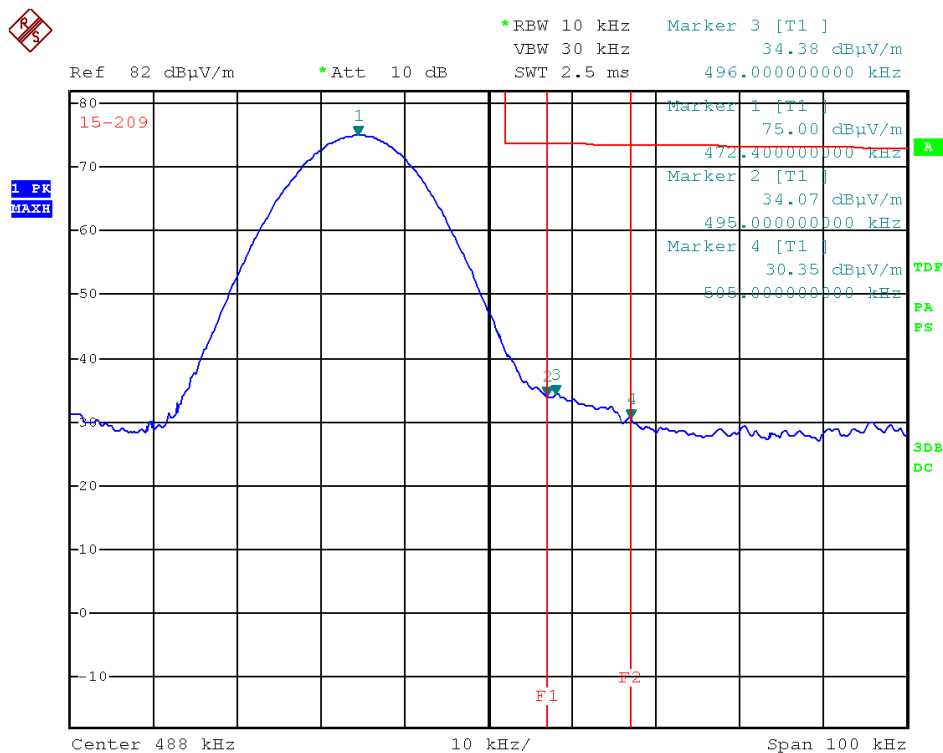

Picture 18: T40FH S10 - Restricted Band - PK @ 3m distance

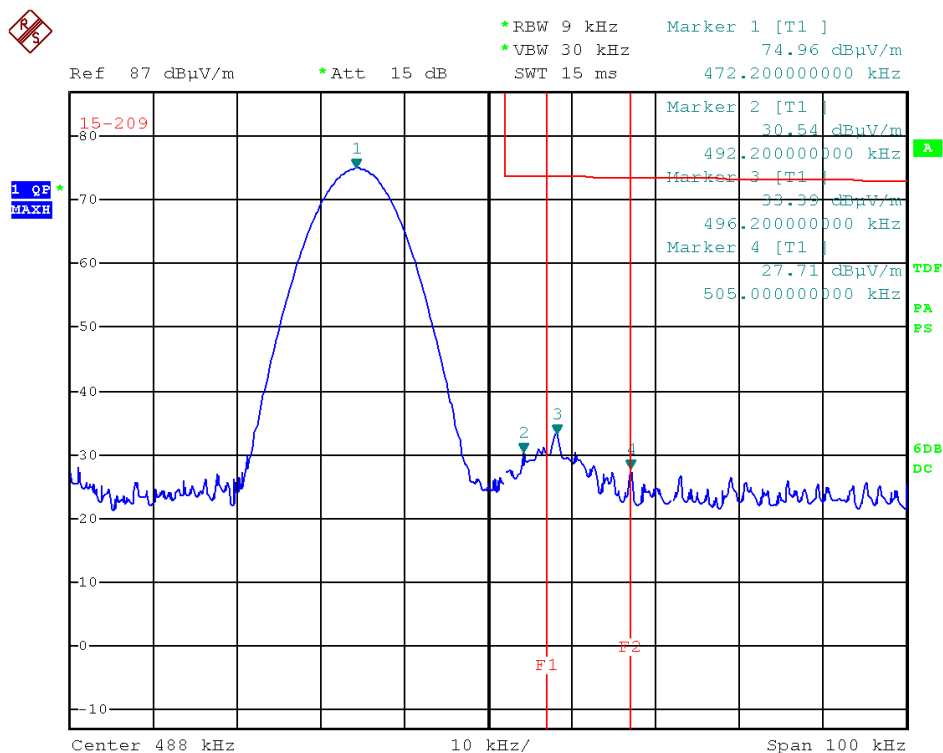

Picture 19: T40FH S10 - Restricted Band - QP @ 3m distance

Frequency (kHz)	Measured value (dBµV/m)	Detector	Recalculation factor (dB/decade)	Field strength (dBµV/m)	Limit (dBµV/m)	Margin	Result
472.40	75.00	PK	80	-5.00	14.12(AV)	19.12	PASS
¹⁾ 472.2	74.96	QP	80	-5.04	14.12(AV)	19.16	PASS
492.2	30.54	QP	40	-9.46	33.76	43.22	PASS
495.00	34.07	PK	40	-5.93	33.71(QP)	39.64	PASS
496.00	34.38	PK	40	-5.62	33.69(QP)	39.31	PASS
496.20	33.39	QP	40	-6.61	33.69	40.30	PASS
505.00	30.35	PK	40	-9.65	33.54(QP)	43.19	PASS
505.00	27.71	QP	40	-12.29	33.54	45.83	PASS

¹⁾ Note:

Measured value = 74.96 dBµV/m @ 3 m

Recalculation factor = 40 dB / decade

Recalculated value = 74.96 dBµV/m @ 3 m - 40 dB = **34.96 dBµV/m @ 30 m**

Recalculation factor = 40 dB / decade

Recalculated value = 34.96 dBµV/m @ 3 m - 40 dB = **-5.04 dBµV/m @ 300 m**

Additional note:

Emissions in restricted band are spurious emissions not caused by carrier or modulation.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0


Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11

150253-AU01+W02

Page 29 of 72

Restricted Band (2.1735 MHz - 2.1905 MHz)

Remark: This measurement was performed using magnetic field probe RF-R 400-1 to show that there are no emissions caused by carrier or modulation. During the "radiated emission 9kHz - 30MHz"-measurement no carrier at 1.22 MHz was detected because of its low amplitude. The setup is documented in Annex A.

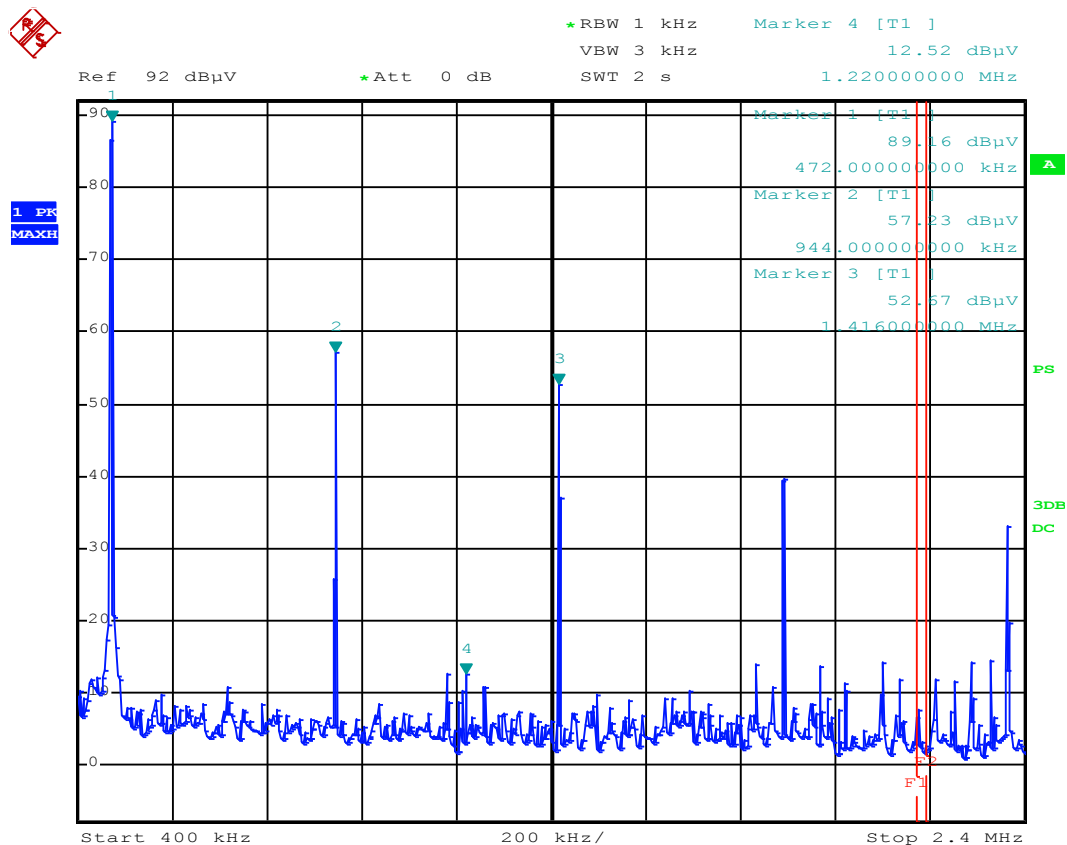


f [MHz]	E _{meas} [dBμV]	Detector	Remark
0.4720	89.16	PK	carrier power supply
0.944	57.23	PK	2 nd harmonic power supply
1.2200	12.52	PK	carrier data transfer
1.416	52.67	PK	3 rd harmonic power supply

Picture 20: T40FH S10 - carrier (1.22 MHz) and restricted band



*RBW 1 kHz Delta 3 [T1]
VBW 3 kHz -1.49 dB
*Att 0 dB 37.600000000 kHz
SWT 600 ms

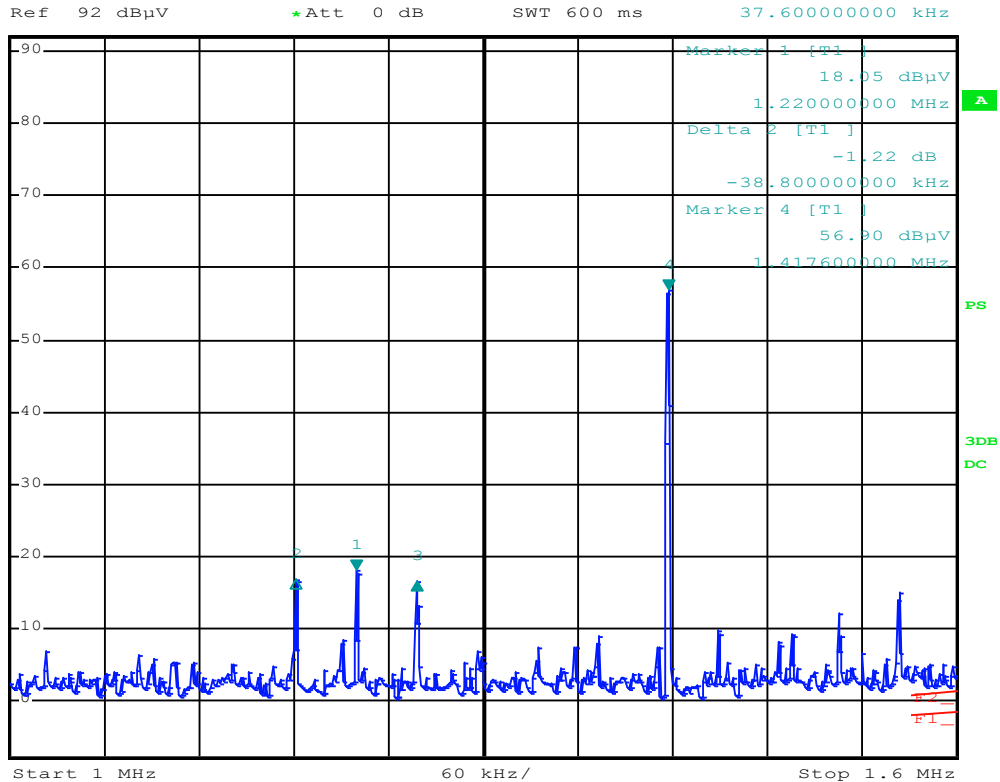

f [MHz]	E _{meas} [dBμV]	Detector	Remark
1.1812	16.83	PK	lower sideband data transfer
1.2200	18.05	PK	carrier data transfer
1.2576	16.56	PK	upper sideband data transfer
1.4176	56.90	PK	3 rd harmonic power supply

Picture 21: T40FH S10 - zoomed to carrier (1.22 MHz)



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0


Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11

150253-AU01+W02

Page 31 of 72




*RBW 1 kHz Marker 3 [T1]
VBW 3 kHz 6.44 dBμV
Ref 92 dBμV *Att 0 dB SWT 700 ms 2.190500000 MHz

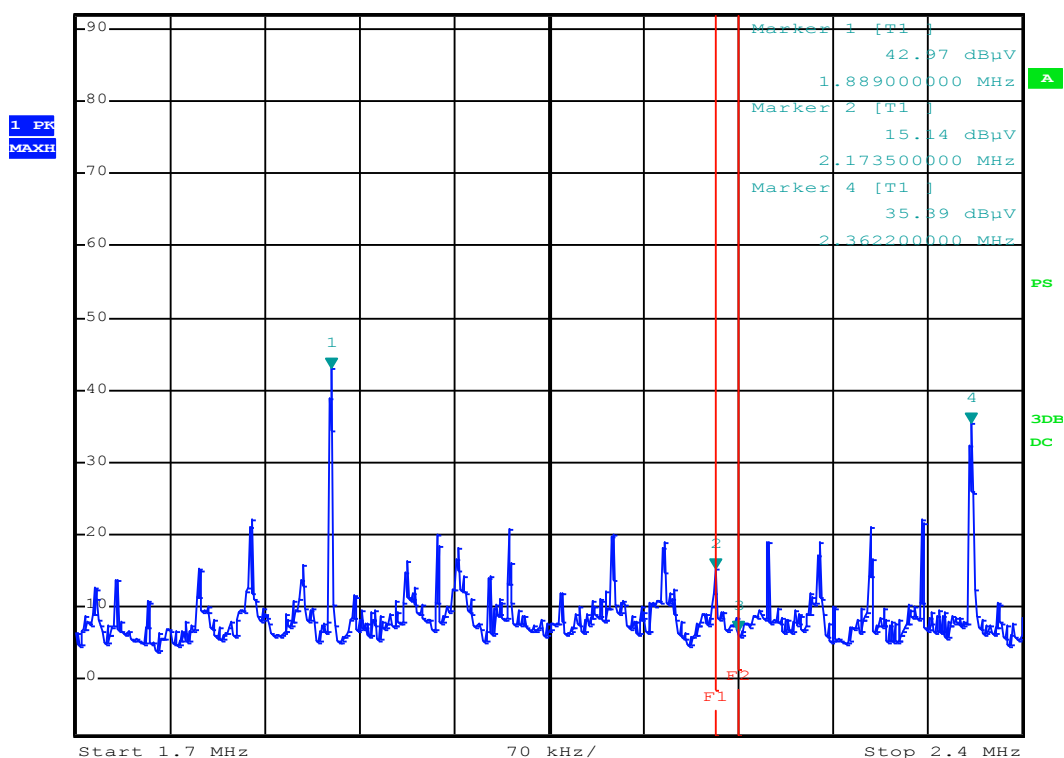

f [MHz]	E _{meas} [dBμV]	Detector	Remark
1.8890	42.97	PK	4 th harmonic power supply
2.1735	15.14	PK	lower edge restricted band
2.1905	6.44	PK	upper edge restricted band
2.3622	35.39	PK	5 th harmonic power supply

Picture 22: T40FH S10 - zoomed to restricted band

Radiated Emission Measurement 30 MHz - 1000 MHz

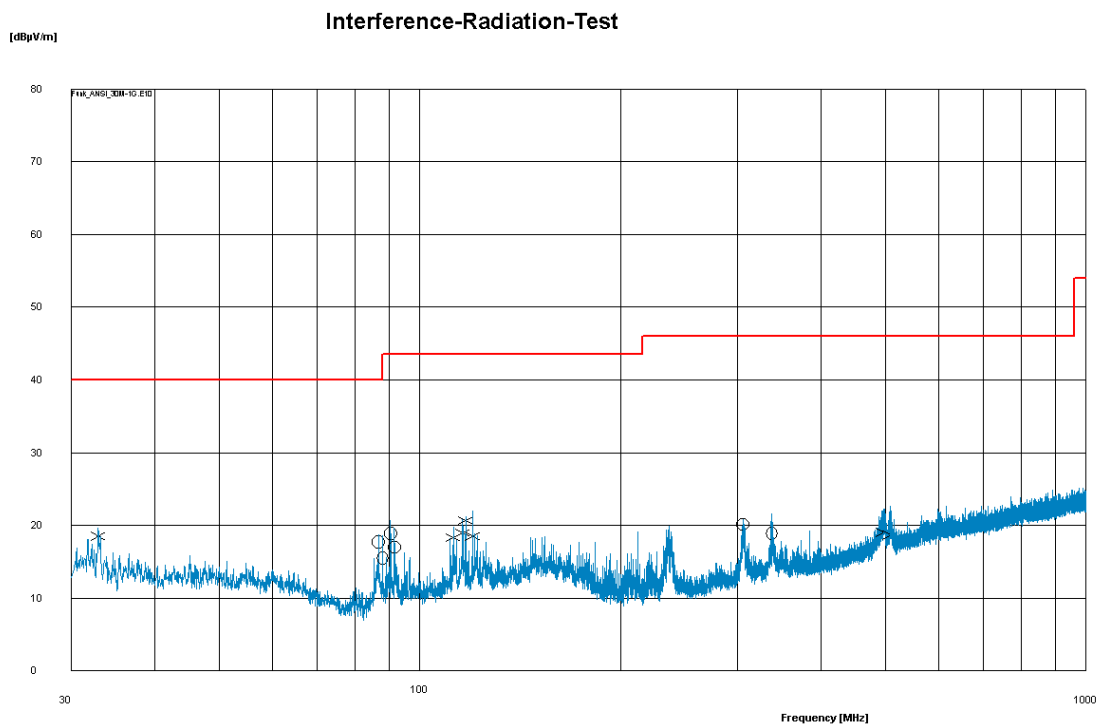

M.	Freq [M...]	VMaxC...	Corr...	Limit	dLimit	Pol	Ant	TT	Date	Remarks	VScal...	Corr ...
✓	32.88	18.5	12.1	40.0	- 21.5	V	100	74	2015-04-23 15:16...		19.7	0.0
✓	86.64	17.8	9.5	40.0	- 22.2	H	100	154	2015-04-23 15:22...		18.7	0.0
✓	87.84	15.5	9.6	40.0	- 24.5	H	100	166	2015-04-23 15:23...		18.6	0.0
✓	90.3	18.9	9.8	43.5	- 24.6	H	100	182	2015-04-23 15:24...		20.6	0.0
✓	91.5	17.0	9.9	43.5	- 26.5	H	100	178	2015-04-23 15:25...		19.7	0.0
✓	112.26	18.3	11.7	43.5	- 25.2	V	100	236	2015-04-23 15:17...		19.7	0.0
✓	115.92	19.0	12.1	43.5	- 24.5	V	100	232	2015-04-23 15:18...		21.0	0.0
✓	117.12	20.7	12.2	43.5	- 22.8	V	100	236	2015-04-23 15:18...		21.2	0.0
✓	120	18.5	12.5	43.5	- 25.0	V	100	220	2015-04-23 15:19...		22.0	0.0
✓	305.46	20.2	12.9	46.0	- 25.9	H	100	140	2015-04-23 15:26...		20.8	0.0
✓	337.2	19.0	13.5	46.0	- 27.1	H	100	57	2015-04-23 15:27...		21.6	0.0
✓	496.68	19.1	16.4	46.0	- 26.9	V	100	73	2015-04-23 15:20...		22.3	0.0
✓	507.9	18.7	16.6	46.0	- 27.3	V	100	70	2015-04-23 15:21...		22.6	0.0

Picture 23: T40FH S10 - Radiated emission 30 MHz - 1000MHz @ 3m distance



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11

150253-AU01+W02

Page 33 of 72

4.8 Test results - T40FH S11 - full alu stator

Temperature:	18°C	Humidity:	47%
Tested by:	Martin Müller	Test date:	2015-04-28

Radiated Emission Measurement 9 kHz - 30 MHz

Test procedure

The EUT was placed in a full anechoic chamber and the spurious emission testing was performed in accordance with ANSI C63.4, and 47 CFR Part 15, Subpart C. The measurement distance was 3 m.




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11


150253-AU01+W02

Page 34 of 72

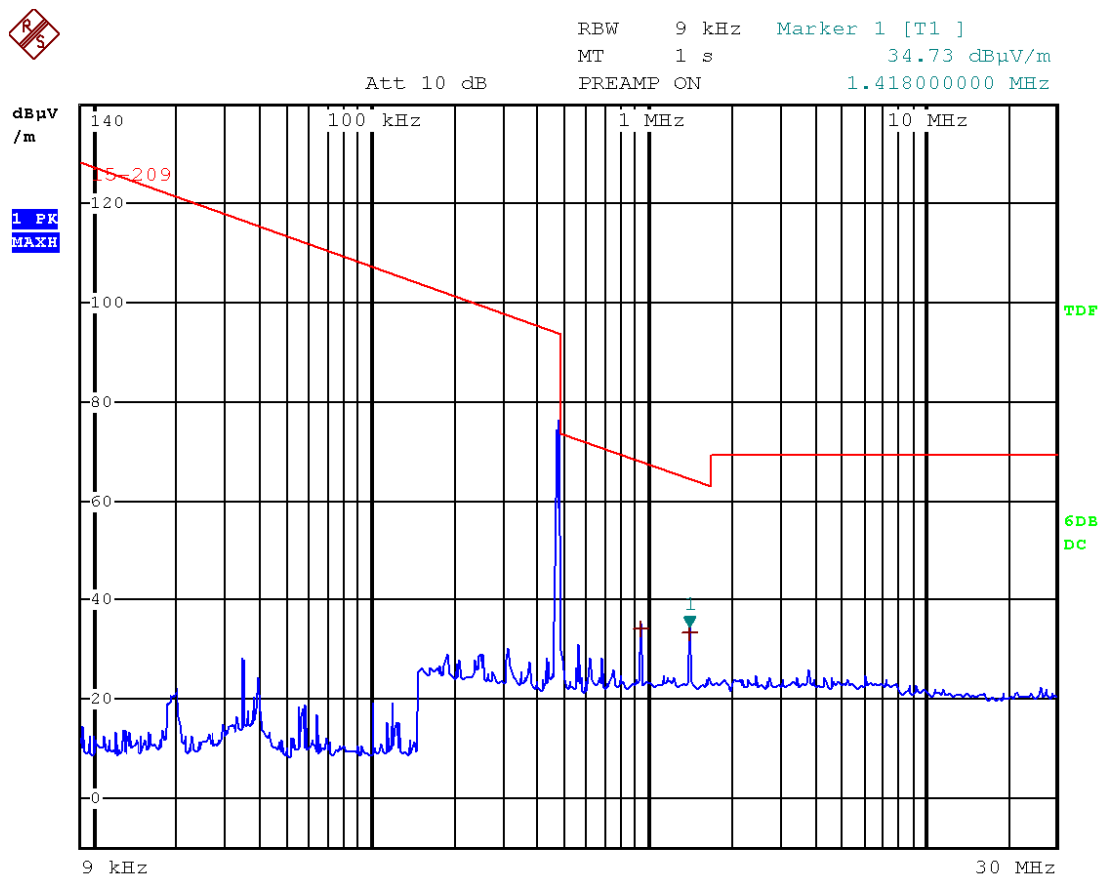

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	15-209			
Trace2:	---			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBµV/m	DELTA	LIMIT dB
1 Quasi Peak	946 kHz	34.48	-33.62	
1 Quasi Peak	1.418 MHz	33.31	-31.28	

Picture 24: T40FH S11 - Radiated emission 9 kHz – 30 MHz @ 3m distance, QP

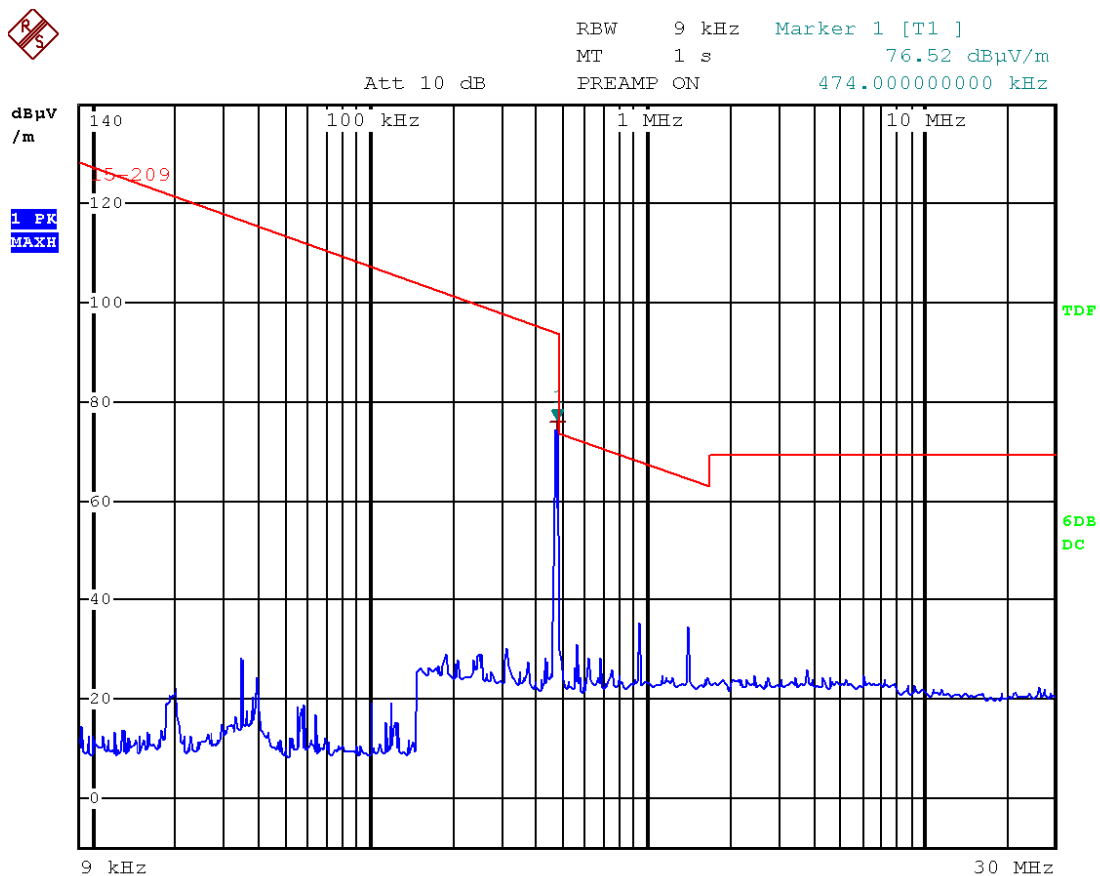

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	15-209			
Trace2:	---			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA	LIMIT dB
1 Average	474 kHz	75.97	-18.11	

Picture 25: T40FH S11 - Radiated emission 9 kHz – 30 MHz @ 3m distance, AV

Frequency (kHz)	Measured value (dBµV/m)	Detector	Recalculation factor (dB/decade)	Field strength (dBµV/m)	Limit (dBµV/m)	Margin	Result
¹⁾ 474	75.97	AV	80	-4.03	14.09	18.12	PASS
946	34.48	QP	40	-5.52	28.09	33.61	PASS
1418	33.31	QP	40	-6.69	24.57	31.26	PASS

¹⁾ Note:

Measured value = 75.97 dBµV/m @ 3 m

Recalculation factor = 40 dB / decade

Recalculated value = 75.97 dBµV/m @ 3 m - 40 dB = **35.97 dBµV/m @ 30 m**

Recalculation factor = 40 dB / decade

Recalculated value = 35.97 dBµV/m @ 3 m - 40 dB = **-4.03 dBµV/m @ 300 m**




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11


150253-AU01+W02

Page 37 of 72

Restricted Band (495 kHz - 505 kHz)

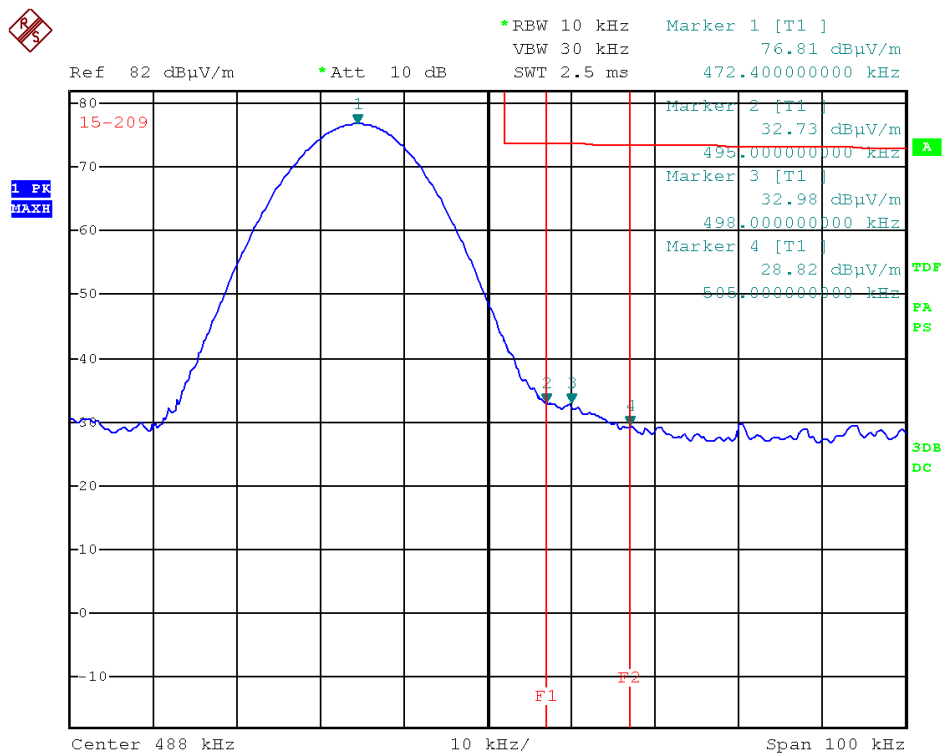

Picture 26: T40FH S11 - Restricted Band - PK @ 3m distance

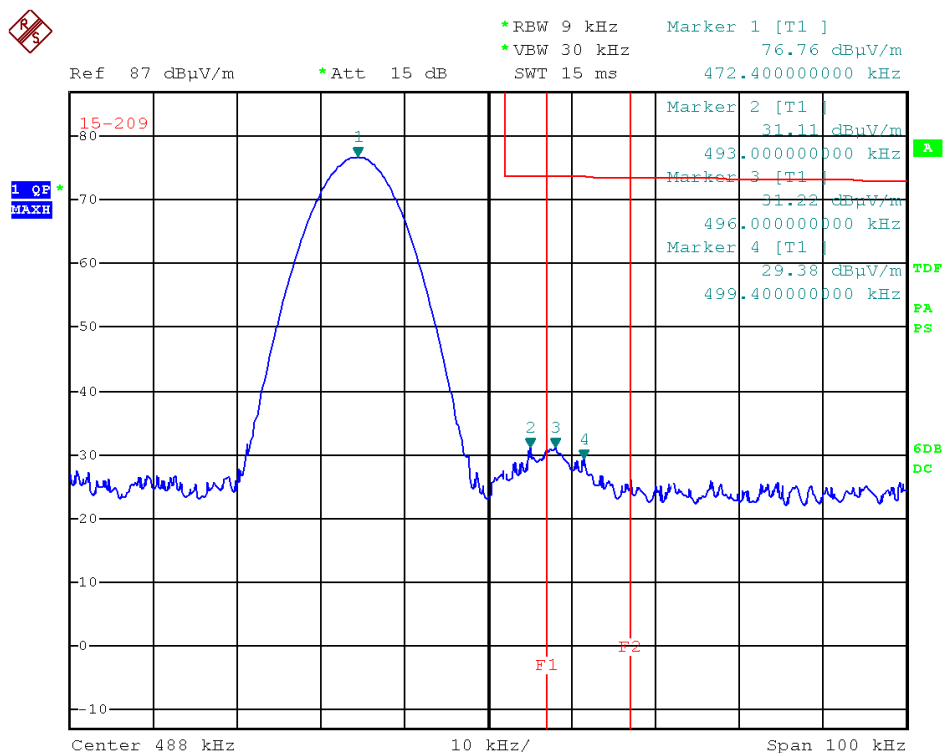

Picture 27: T40FH S11 - Restricted Band - QP @ 3m distance

Frequency (kHz)	Measured value (dBµV/m)	Detector	Recalculation factor (dB/decade)	Field strength (dBµV/m)	Limit (dBµV/m)	Margin	Result
472.40	76.81	PK	80	-3.19	14.12(AV)	17.31	PASS
¹⁾ 472.40	76.76	QP	80	-3.24	14.12(AV)	17.36	PASS
493.00	31.11	QP	40	-8.89	33.75	42.64	PASS
495.00	32.73	PK	40	-7.27	33.71(QP)	40.98	PASS
496.00	31.22	QP	40	-8.78	33.69	42.47	PASS
498.00	32.98	PK	40	-7.02	33.66(QP)	40.68	PASS
499.40	29.38	QP	40	-10.62	33.64	44.26	PASS
505.00	28.82	PK	40	-11.18	33.54(QP)	44.72	PASS

¹⁾ Note:

Measured value = 75.97 dBµV/m @ 3 m

Recalculation factor = 40 dB / decade

Recalculated value = 75.97 dBµV/m @ 3 m - 40 dB = **35.97 dBµV/m @ 30 m**

Recalculation factor = 40 dB / decade

Recalculated value = 35.97 dBµV/m @ 3 m - 40 dB = **-4.03 dBµV/m @ 300 m**

Additional note:

Emissions in restricted band are spurious emissions not caused by carrier or modulation.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0


Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11

150253-AU01+W02

Page 39 of 72

Restricted Band (2.1735 MHz - 2.1905 MHz)

Remark: This measurement was performed using magnetic field probe RF-R 400-1 to show that there are no emissions caused by carrier or modulation. During the “radiated emission 9kHz - 30MHz”-measurement no carrier at 1.22 MHz was detected because of its low amplitude. The setup is documented in Annex A.

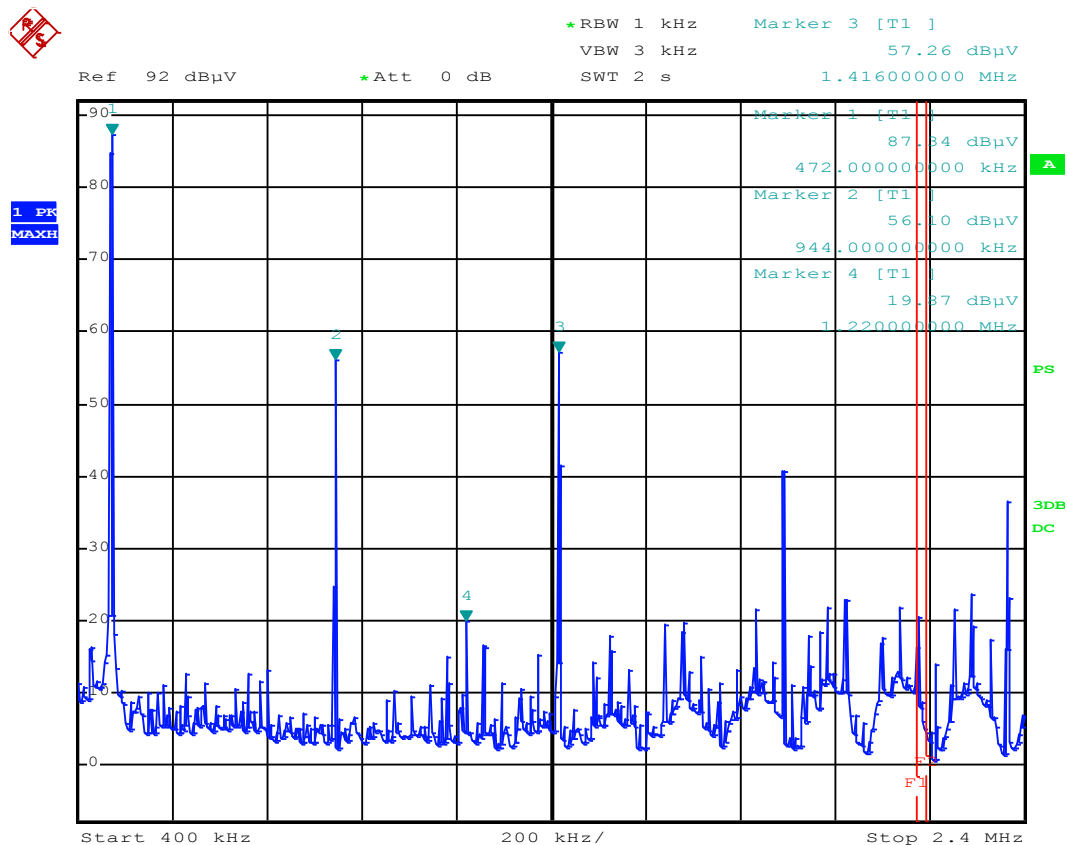

f [MHz]	E _{meas} [dBμV]	Detector	Remark
0.4720	87.34	PK	carrier power supply
0.9440	56.10	PK	2 nd harmonic power supply
1.2200	19.87	PK	carrier data transfer
1.4160	57.26	PK	3 rd harmonic power supply

Picture 28: T40FH S11 - carrier (1.22 MHz) and restricted band




*RBW 1 kHz Marker 1 [T1] 19.72 dBμV
VBW 3 kHz
SWT 600 ms 1.219600000 MHz

Ref 92 dBμV

*Att 0 dB

1 PK
MAXH

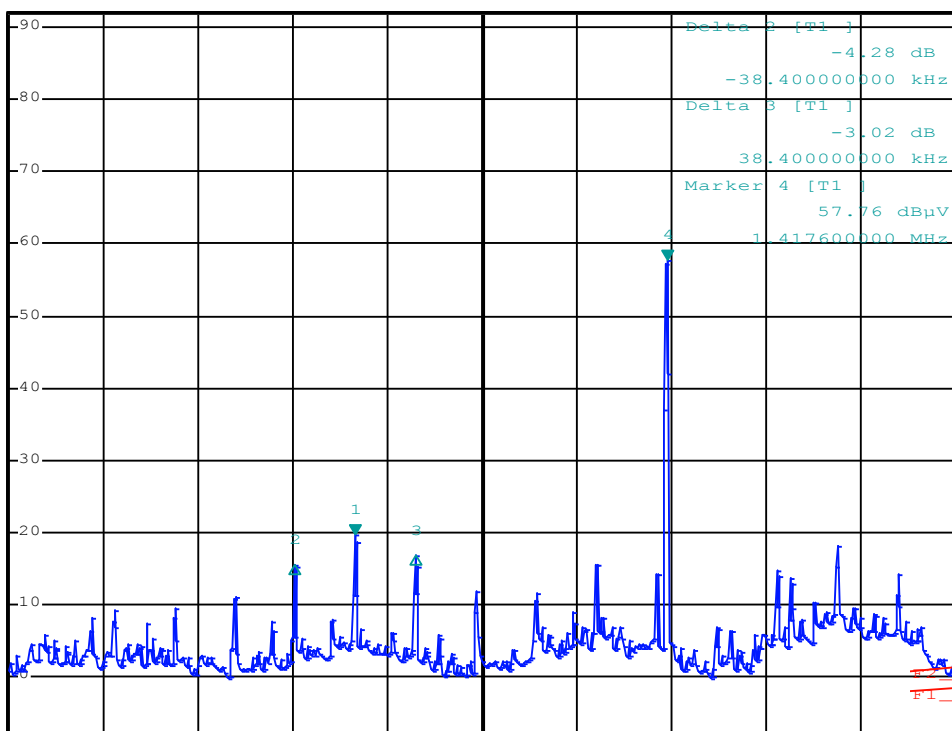

Start 1 MHz 60 kHz/ Stop 1.6 MHz

f [MHz]	E _{meas} [dBμV]	Detector	Remark
1.1812	15.44	PK	lower sideband data transfer
1.2196	19.72	PK	carrier data transfer
1.2580	16.70	PK	upper sideband data transfer
1.4176	57.76	PK	3 rd harmonic power supply

Picture 29: T40FH S11 - zoomed to carrier (1.22 MHz)



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0


Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11

150253-AU01+W02

Page 41 of 72



*RBW 1 kHz Marker 2 [T1]
VBW 3 kHz 20.63 dBμV
*Att 0 dB 2.173500000 MHz
SWT 800 ms

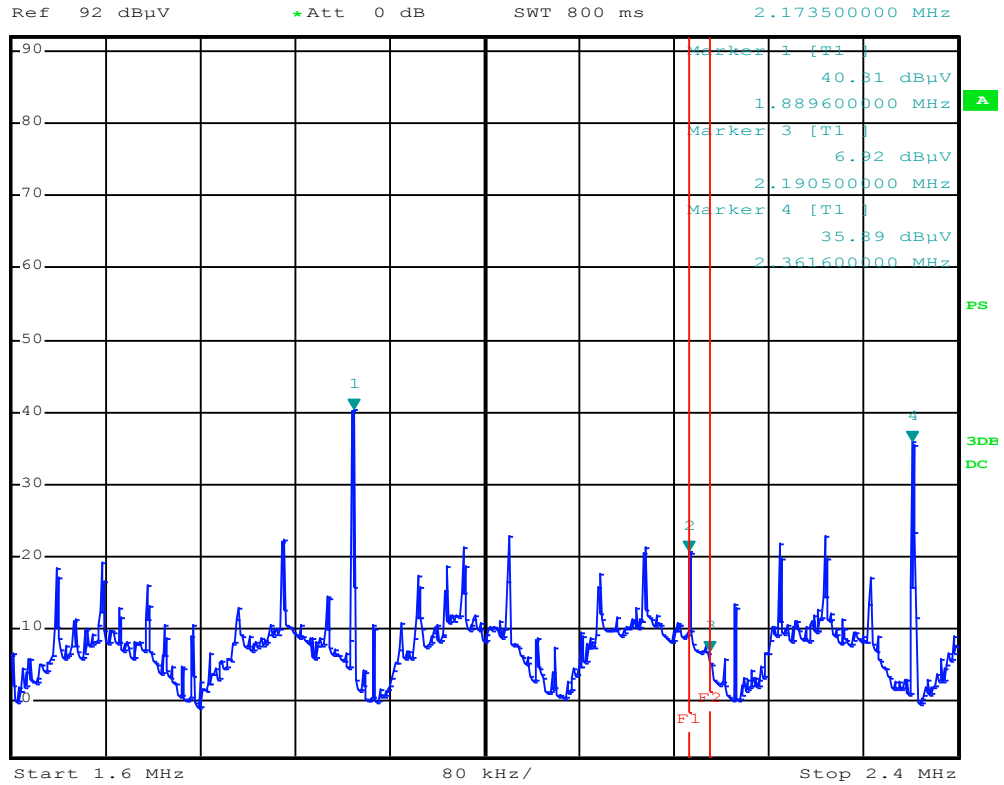

f [MHz]	E _{meas} [dBμV]	Detector	Remark
1.8896	40.31	PK	4 th harmonic power supply
2.1735	20.63	PK	lower edge restricted band
2.1905	6.92	PK	upper edge restricted band
2.3616	35.89	PK	5 th harmonic power supply

Picture 30: T40FH S11 - zoomed to restricted band




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11

150253-AU01+W02

Page 42 of 72

Radiated Emission Measurement 30 MHz - 1000 MHz

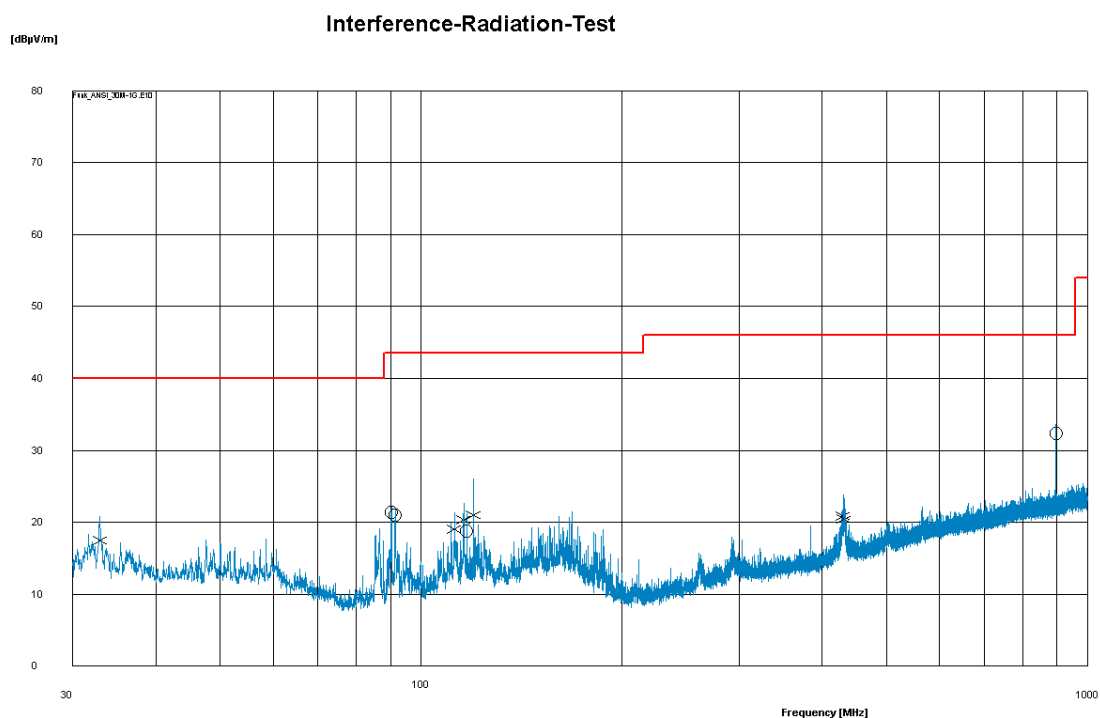

M	Freq [M...	VMaxC...	Corr...	Limit	dLimit	Pol	Ant	TT	Date	Remarks	VScal...	Corr ...
✓	33	17.5	12.1	40.0	- 22.5	V	100	46	2015-04-23 14:42...		20.8	0.0
✓	90.3	21.4	9.8	43.5	- 22.1	H	100	169	2015-04-23 14:44...		22.1	0.0
✓	91.5	21.0	9.9	43.5	- 22.5	H	100	166	2015-04-23 14:45...		21.9	0.0
✓	112.26	19.1	11.7	43.5	- 24.5	V	100	245	2015-04-23 14:39...		21.3	0.0
✓	115.92	20.3	12.1	43.5	- 23.2	V	100	236	2015-04-23 14:40...		22.6	0.0
✓	117.12	18.8	12.2	43.5	- 24.7	H	100	182	2015-04-23 14:45...		21.2	0.0
✓	120	21.0	12.5	43.5	- 22.5	V	100	274	2015-04-23 14:41...		26.0	0.0
✓	430.26	20.9	15.4	46.0	- 25.1	V	100	277	2015-04-23 14:37...		23.8	0.0
✓	431.58	20.4	15.4	46.0	- 25.6	V	100	277	2015-04-23 14:38...		23.2	0.0
✓	896.94	32.3	21.8	46.0	- 13.7	H	100	273	2015-04-23 14:43...		33.6	0.0

Picture 31: T40FH S11 - Radiated emission 30 MHz - 1000MHz @ 3m distance



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11

150253-AU01+W02

Page 43 of 72

4.9 Test results - T40FH S11 - alu-plastic stator

Temperature:	18°C	Humidity:	47%
Tested by:	Martin Müller	Test date:	2015-04-28

Radiated Emission Measurement 9 kHz - 30 MHz

Test procedure

The EUT was placed in a full anechoic chamber and the spurious emission testing was performed in accordance with ANSI C63.4, and 47 CFR Part 15, Subpart C. The measurement distance was 3 m.




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11

150253-AU01+W02

Page 44 of 72

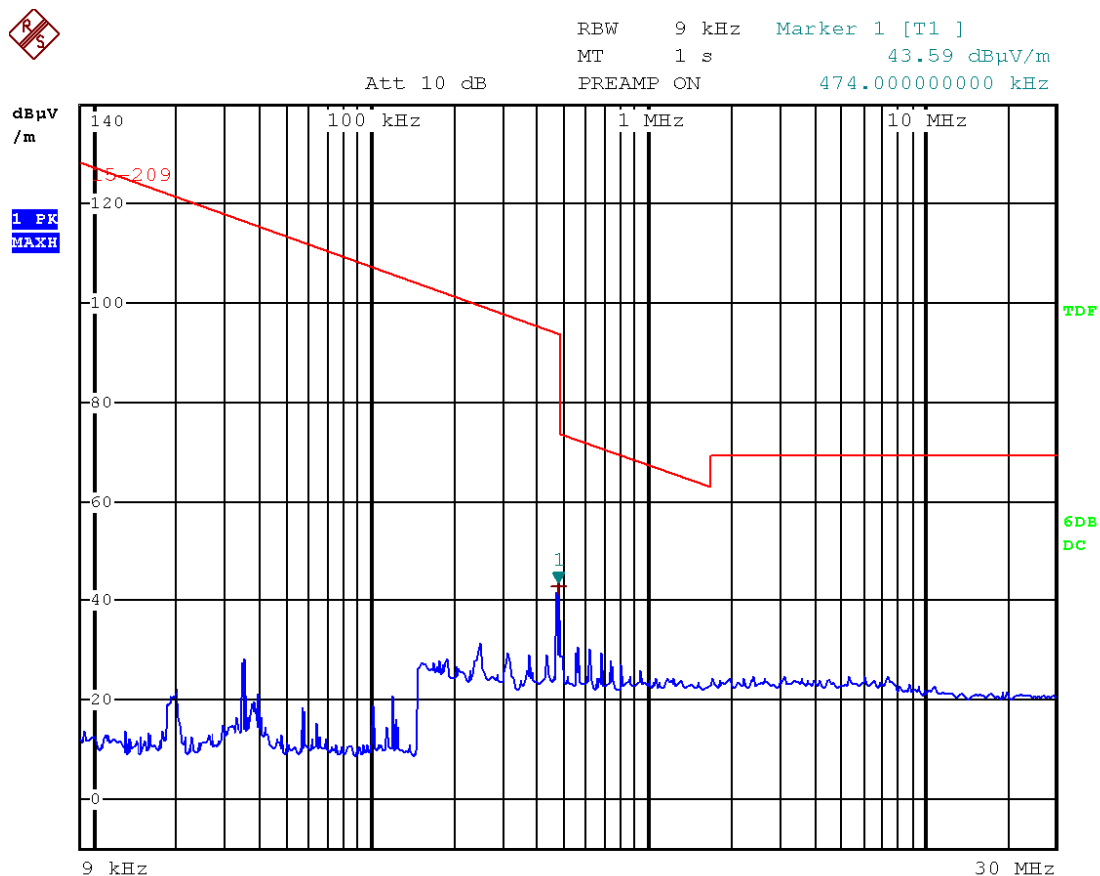

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	15-209			
Trace2:	---			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBµV/m	DELTA LIMIT dB	
1 Average	474 kHz	42.77	-51.31	

Picture 32: T40FH S11 - Radiated emission 9 kHz – 30 MHz @ 3m distance

Frequency (kHz)	Measured value (dBµV/m)	Detector	Recalculation factor (dB/decade)	Field strength (dBµV/m)	Limit (dBµV/m)	Margin	Result
¹⁾ 474	42.77	AV	80	-37.23	14.09	51.32	PASS

¹⁾ Note:

Measured value = 42.77 dBµV/m @ 3 m

Recalculation factor = 40 dB / decade

Recalculated value = 42.77 dBµV/m @ 3 m - 40 dB = **2.77 dBµV/m @ 30 m**

Recalculation factor = 40 dB / decade

Recalculated value = 2.77 dBµV/m @ 3 m - 40 dB = **-37.23 dBµV/m @ 300 m**




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11


150253-AU01+W02

Page 46 of 72

Restricted Band (495 kHz - 505 kHz)

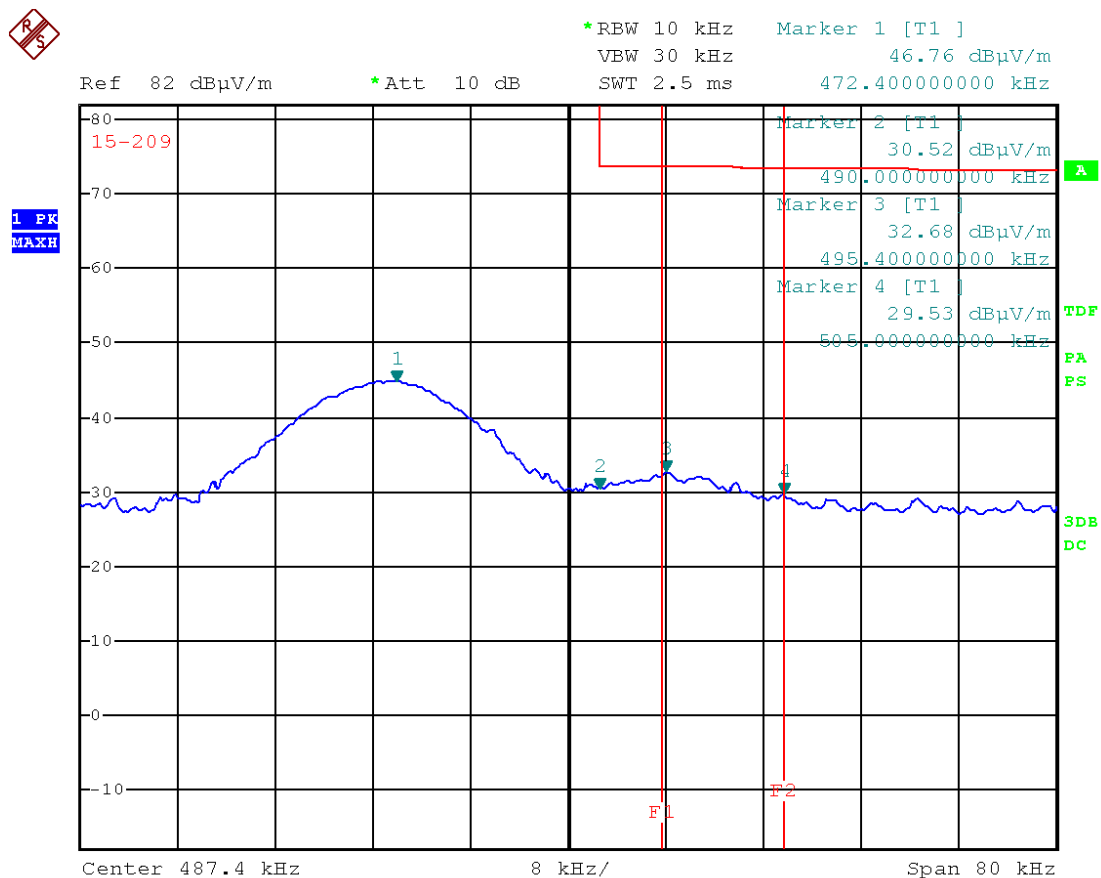

Picture 33: T40FH S11 - Restricted Band - PK @ 3m distance

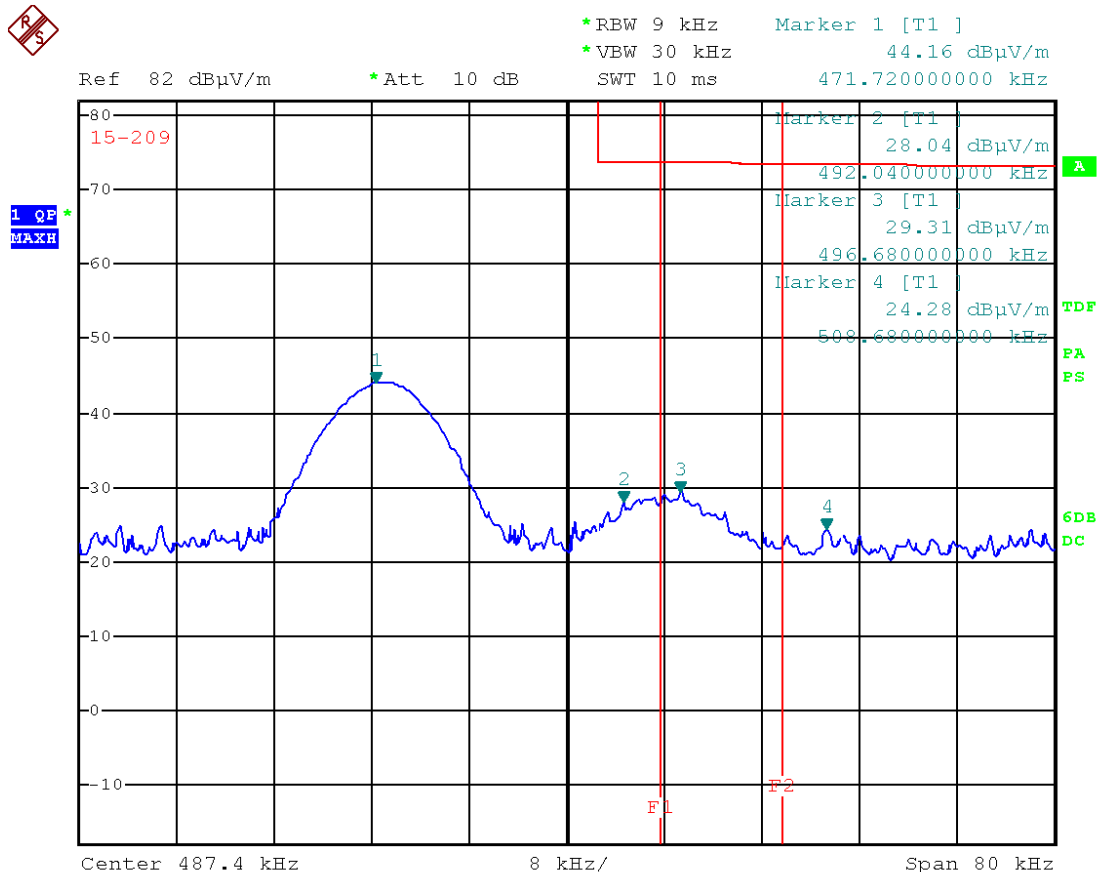

Picture 34: T40FH S11 - Restricted Band - QP @ 3m distance

Frequency (kHz)	Measured value (dBµV/m)	Detector	Recalculation factor (dB/decade)	Field strength (dBµV/m)	Limit (dBµV/m)	Margin	Result
¹⁾ 471.72	44.16	QP	80	-35.84	14.13	49.97	PASS
472.40	46.76	PK	80	-33.24	14.12(AV)	47.36	PASS
492.04	28.04	QP	40	-11.96	33.76	45.72	PASS
493.00	30.52	PK	40	-9.48	33.75(QP)	43.23	PASS
495.40	32.68	PK	40	-7.32	33.71(QP)	41.03	PASS
496.68	29.31	QP	40	-10.69	33.68	44.37	PASS
505.00	29.53	PK	40	-10.47	33.54(QP)	44.01	PASS
508.68	24.28	QP	40	-15.72	33.48	49.20	PASS

¹⁾ Note:

Measured value = 44.16 dBµV/m @ 3 m

Recalculation factor = 40 dB / decade

Recalculated value = 44.16 dBµV/m @ 3 m - 40 dB = **4.16 dBµV/m @ 30 m**

Recalculation factor = 40 dB / decade

Recalculated value = 4.16 dBµV/m @ 3 m - 40 dB = **-35.84 dBµV/m @ 300 m**

Additional note:

Emissions in restricted band are spurious emissions not caused by carrier or modulation.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0


Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11

150253-AU01+W02

Page 49 of 72

Restricted Band (2.1735 MHz - 2.1905 MHz)

Remark: This measurement was performed using magnetic field probe RF-R 400-1 to show that there are no emissions caused by carrier or modulation. During the “radiated emission 9kHz - 30MHz”-measurement no carrier at 1.22 MHz was detected because of its low amplitude. The setup is documented in Annex A.

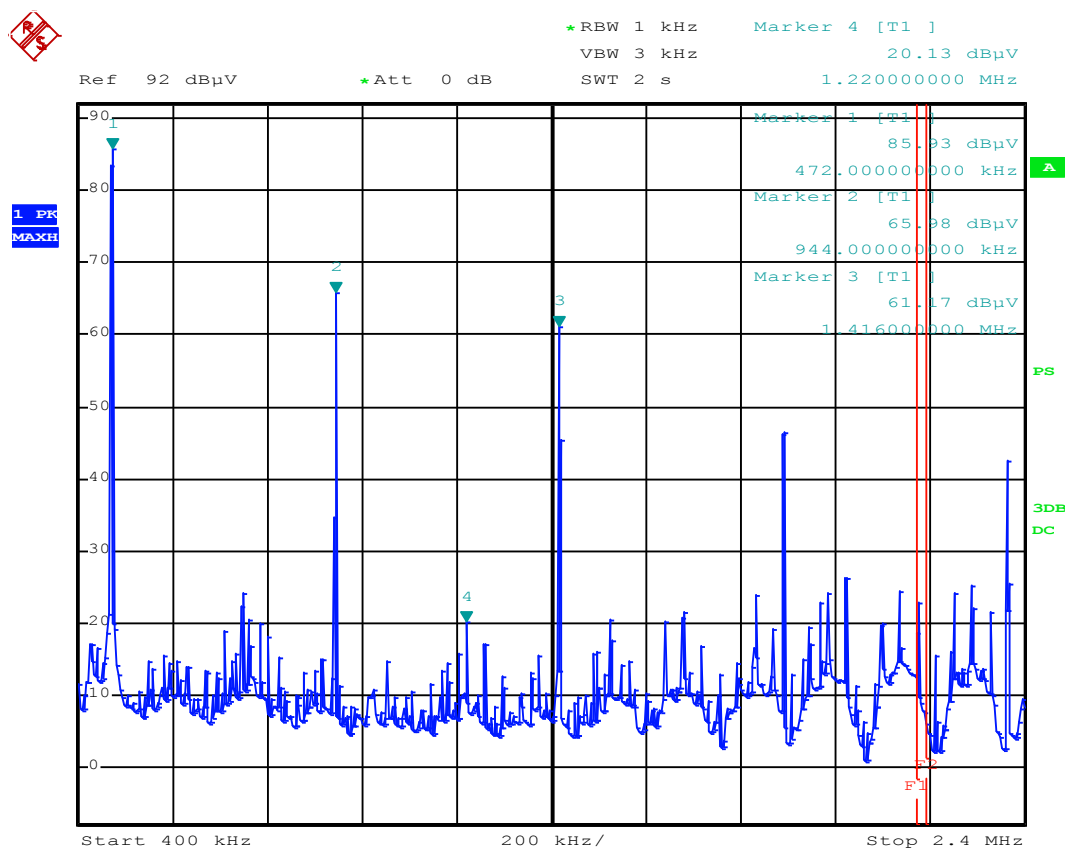

f [MHz]	E _{meas} [dBμV]	Detector	Remark
0.4720	85.93	PK	carrier power supply
0.9440	65.98	PK	2 nd harmonic power supply
1.2200	20.13	PK	carrier data transfer
1.4160	61.17	PK	3 rd harmonic power supply

Picture 35: T40FH S11 - carrier (1.22 MHz) and restricted band




*RBW 1 kHz Delta 3 [T1]
VBW 3 kHz -3.21 dB
SWT 600 ms 37.60000000 kHz

Ref 92 dBμV

*Att 0 dB

1 PK
MAXH

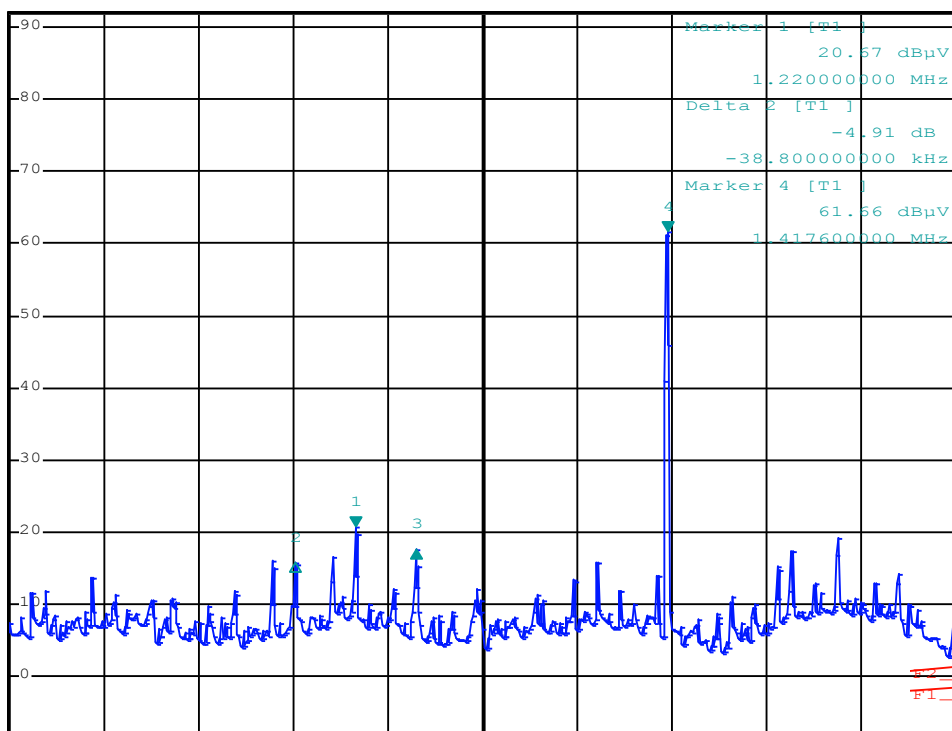

Start 1 MHz 60 kHz/ Stop 1.6 MHz

f [MHz]	E _{meas} [dBμV]	Detector	Remark
1.1812	15.76	PK	lower sideband data transfer
1.2200	20.67	PK	carrier data transfer
1.2576	17.46	PK	upper sideband data transfer
1.4176	61.66	PK	3 rd harmonic power supply

Picture 36: T40FH S11 - zoomed to carrier (1.22 MHz)



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0


Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11

150253-AU01+W02

Page 51 of 72



*RBW 1 kHz Marker 3 [T1]
VBW 3 kHz 6.34 dBµV
*Att 0 dB
SWT 800 ms 2.190500000 MHz

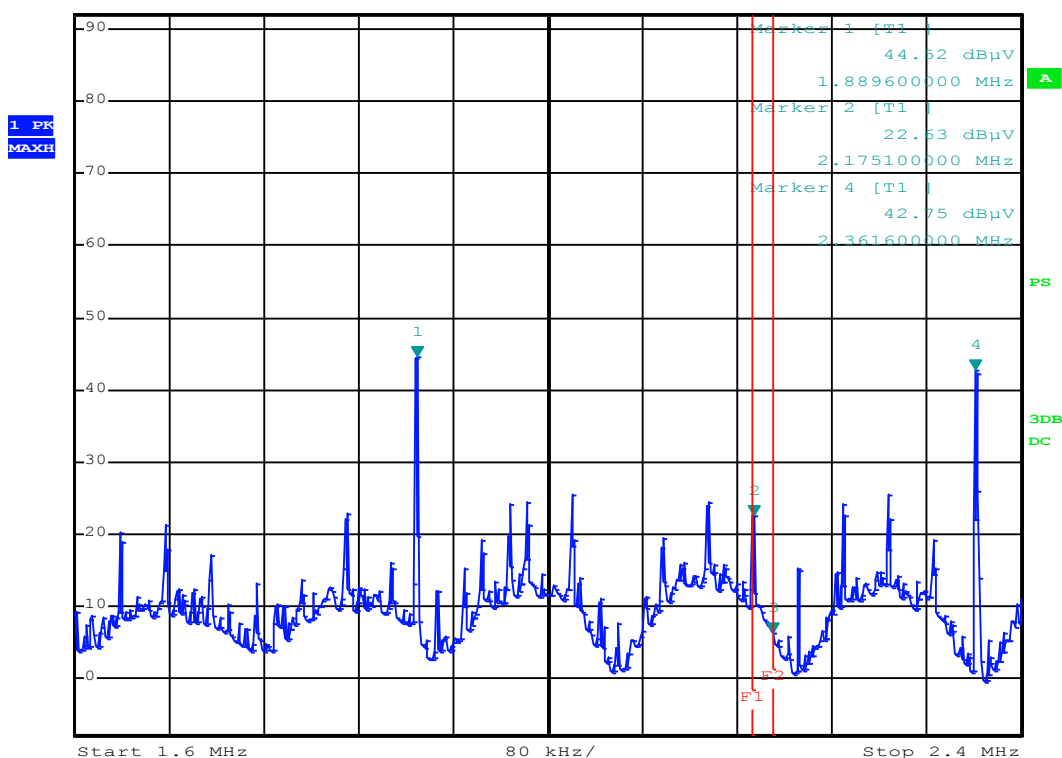

f [MHz]	E _{meas} [dBµV]	Detector	Remark
1.8896	44.52	PK	4 th harmonic power supply
2.1751	22.63	PK	lower edge restricted band
2.1905	6.34	PK	upper edge restricted band
2.3616	42.75	PK	5 th harmonic power supply

Picture 37: T40FH S11 - zoomed to restricted band




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11

150253-AU01+W02

Page 52 of 72

Radiated Emission Measurement 30 MHz - 1000 MHz

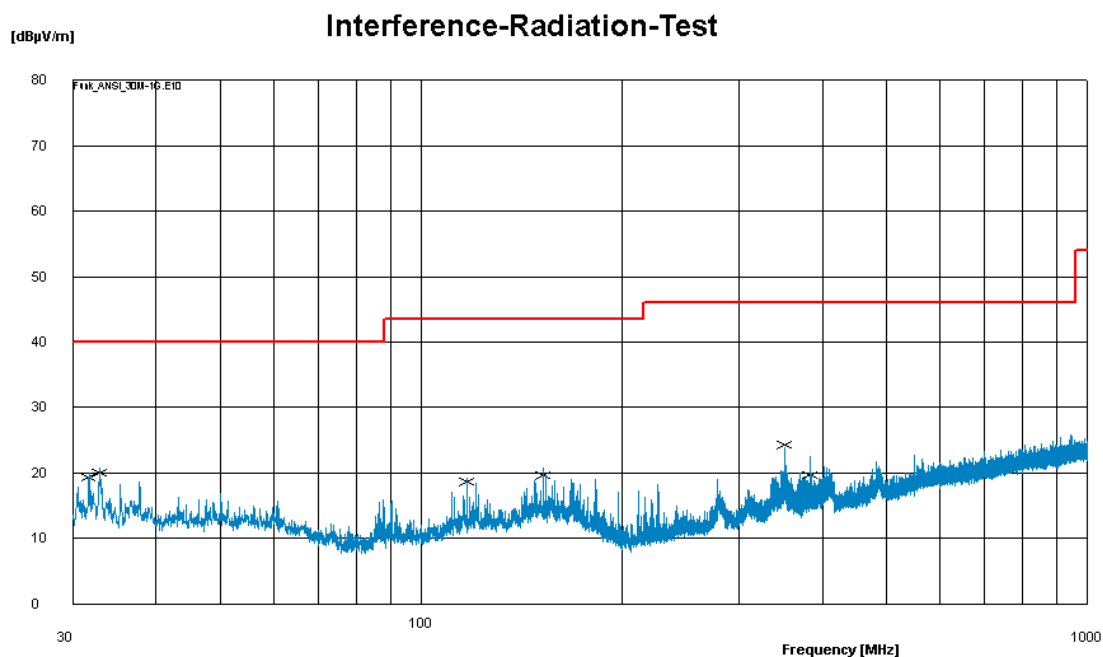

M.	Freq [M...	VMaxC...	Corr...	Limit	dLimit	Pol	Ant	TT	Date	Remarks	VScal...	Corr ...
✓	31,74	19,3	12,1	40,0	- 20,7	V	100	74	2015-04-23 09:53...		20,0	0,0
✓	32,94	19,9	12,1	40,0	- 20,1	V	100	61	2015-04-23 09:54...		20,7	0,0
✓	117,12	18,6	12,2	43,5	- 25,0	V	100	99	2015-04-23 09:55...		19,2	0,0
✓	152,52	19,7	14,0	43,5	- 23,9	V	100	74	2015-04-23 09:56...		20,8	0,0
✓	351,36	24,2	13,7	46,0	- 21,8	V	100	83	2015-04-23 09:57...		23,9	0,0
✓	384	19,7	14,4	46,0	- 26,3	V	100	61	2015-04-23 09:58...		22,5	0,0

Picture 38: T40FH S11 - Radiated emission 30 MHz - 1000MHz @ 3m distance

5 Radiated emission measurement (>1 GHz)

according to 47 CFR Part 15, section 15.209(a),
RSS-210, section 2.5 with RSS-Gen, section 8.9

Remark:

This measurement needs not to be applied because

- the intentional radiator operates below 10 GHz and tenth harmonic of the highest fundamental frequency is lower than 1 GHz (see 47 CFR Part 15, section 15.33(a)(1), and RSS-Gen, section 6.13), and
- the digital part of the device does not generate or use internal frequencies higher than 108 MHz (see 47 CFR Part 15 section 15.33(b)(1), and RSS-Gen, section 2.3.3 with ICES-003, section 6.2).



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11

150253-AU01+W02

Page 54 of 72

6 Bandwidths

according to CFR 47 Part 2, section 2.202(a), and RSS-Gen, section 6.6

6.1 Test Location

See clause 4.1 on page 20.

6.2 Test instruments

See clause 4.2 on page 20.

6.3 Limits

The bandwidths are recorded only. There are no limits specified in CFR 47 Part 15, section 15.209, and RSS-210, Annex 2.6

6.4 Test setup

See clause 4.5 on page 23.

6.5 Test deviation

There is no deviation from the standards referred to.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11

150253-AU01+W02

Page 55 of 72

6.6 Test results - T40FH S10

Temperature:	18°C	Humidity:	47%
Tested by:	Martin Müller	Test date:	2015-04-28

Occupied bandwidth (99 %)

Test procedure

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured. The transmitter shall be operated at its maximum carrier power measured under normal test conditions.

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual.

The trace data points are recovered and directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth. For this purpose the appropriate measurement function of the spectrum analyzer is used.




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11

150253-AU01+W02

Page 56 of 72

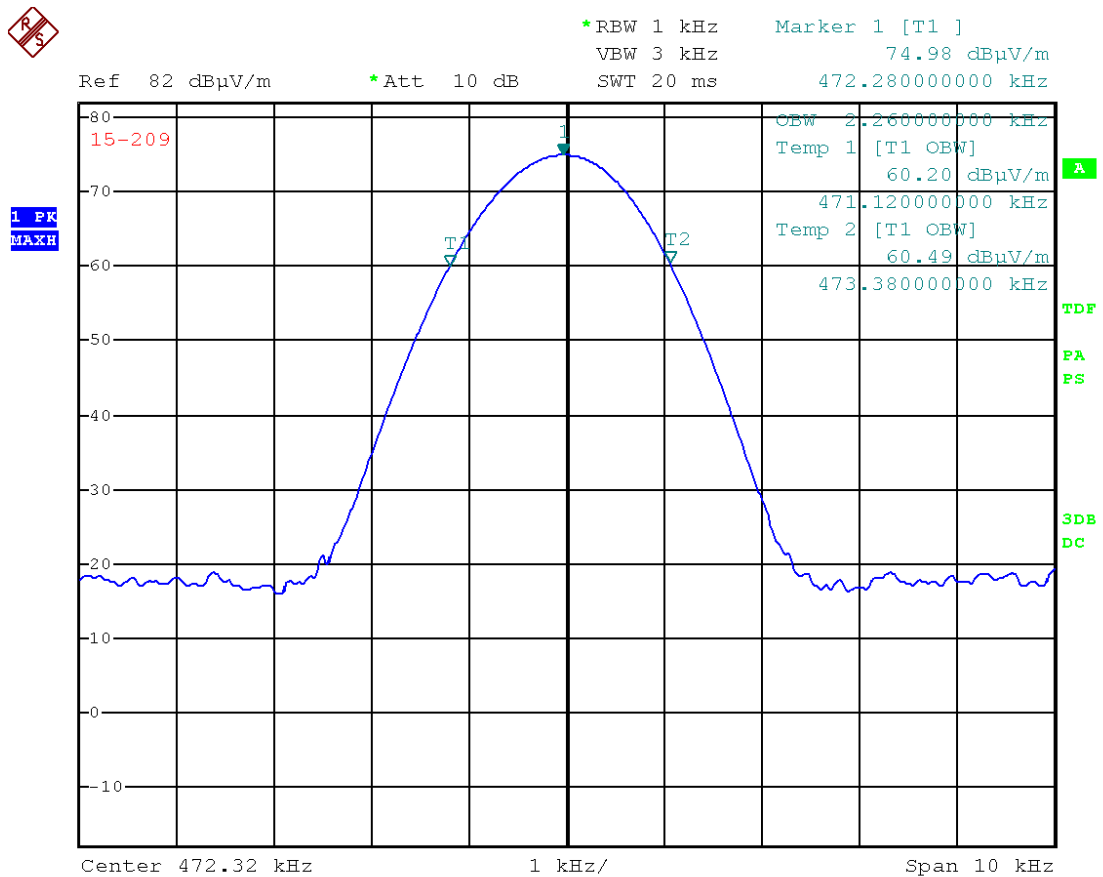


Picture 39: T40FH S10 - Occupied bandwidth (99 %) - 472.200 kHz

Measured occupied bandwidth (99 %) - 472.200 kHz: 2.2600 kHz

-6 dB emission bandwidth

Test procedure

Where indicated, the -6 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 6 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth

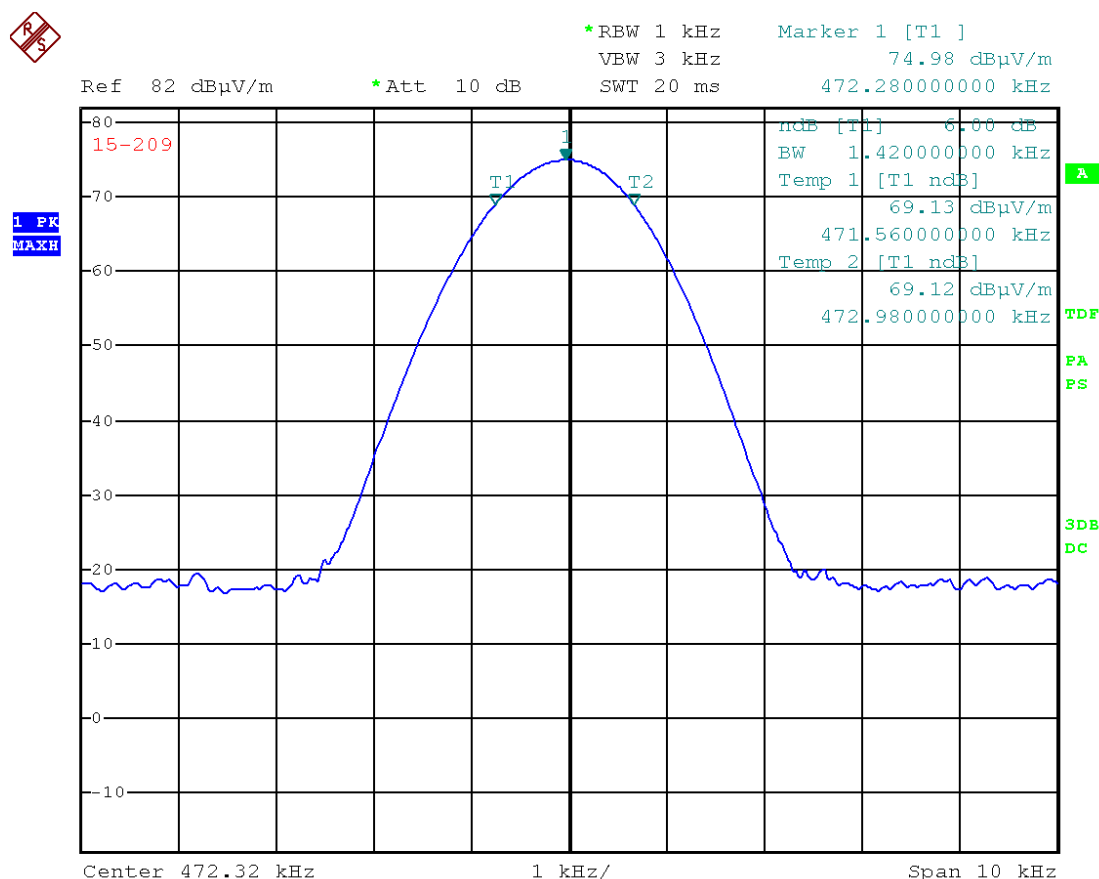


Picture 40: T40FH S10 - -6 dB emission bandwidth - 472.200 kHz

Measured -6 dB emission bandwidth - 472.200 kHz: 1.4200 kHz

-20 dB emission bandwidth

Test procedure

Where indicated, the -20 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 20 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

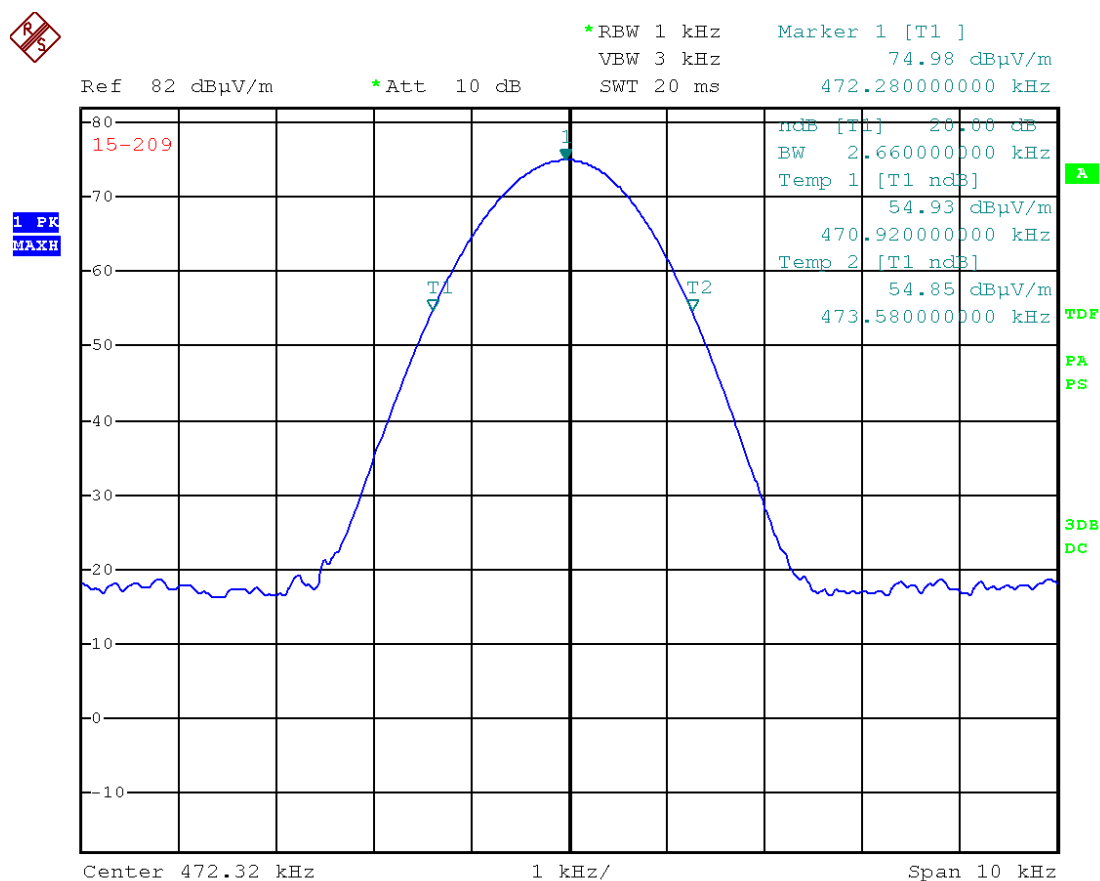

Picture 41: T40FH S10 - -20 dB emission bandwidth - 472.200 kHz

Measured -20 dB emission bandwidth - 472.200 kHz: 2.6600 kHz



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11

150253-AU01+W02

Page 59 of 72

6.7 Test results - T40FH S11 - full alu stator

Temperature:	18°C	Humidity:	47%
Tested by:	Martin Müller	Test date:	2015-04-28

Occupied bandwidth (99 %)

Test procedure

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured. The transmitter shall be operated at its maximum carrier power measured under normal test conditions.

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual.

The trace data points are recovered and directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth. For this purpose the appropriate measurement function of the spectrum analyzer is used.




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11

150253-AU01+W02

Page 60 of 72

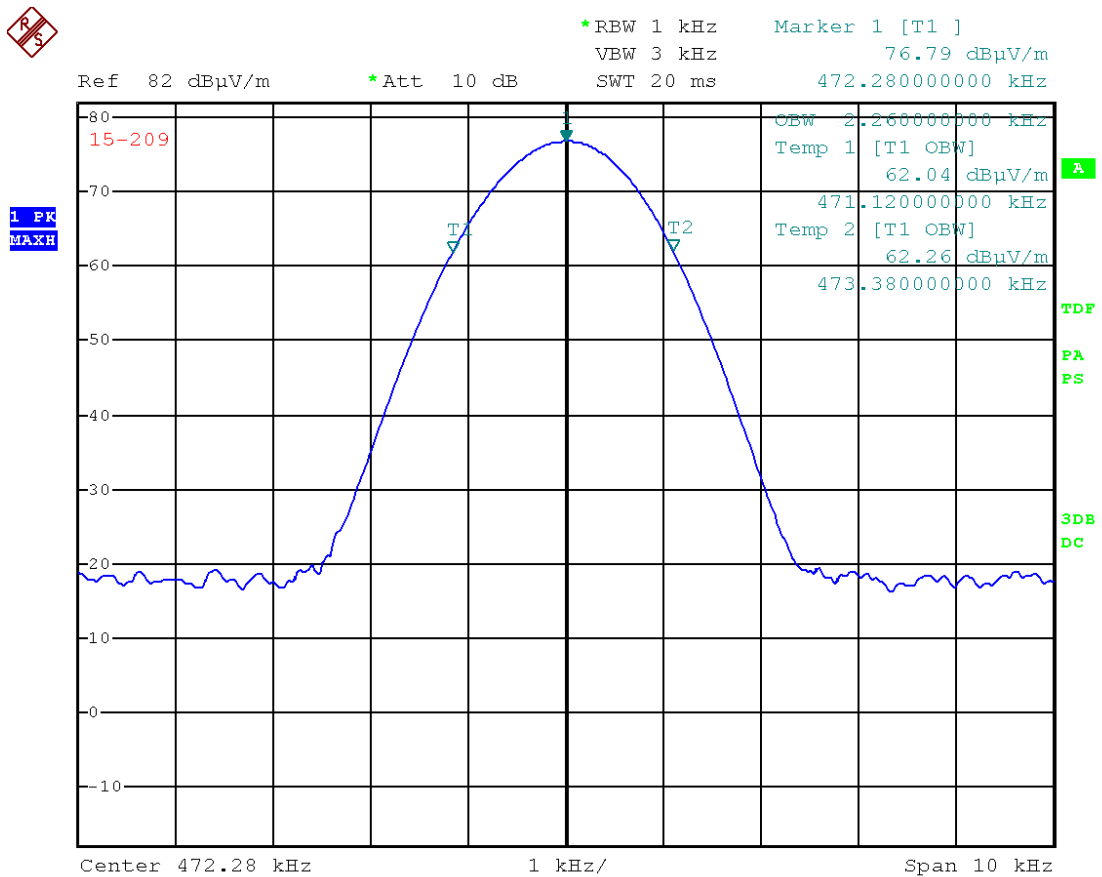


Picture 42: T40FH S11 - Occupied bandwidth (99 %) - 472.200 kHz

Measured occupied bandwidth (99 %) - 472.200 kHz: 2.2600 kHz

-6 dB emission bandwidth

Test procedure

Where indicated, the -6 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 6 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth

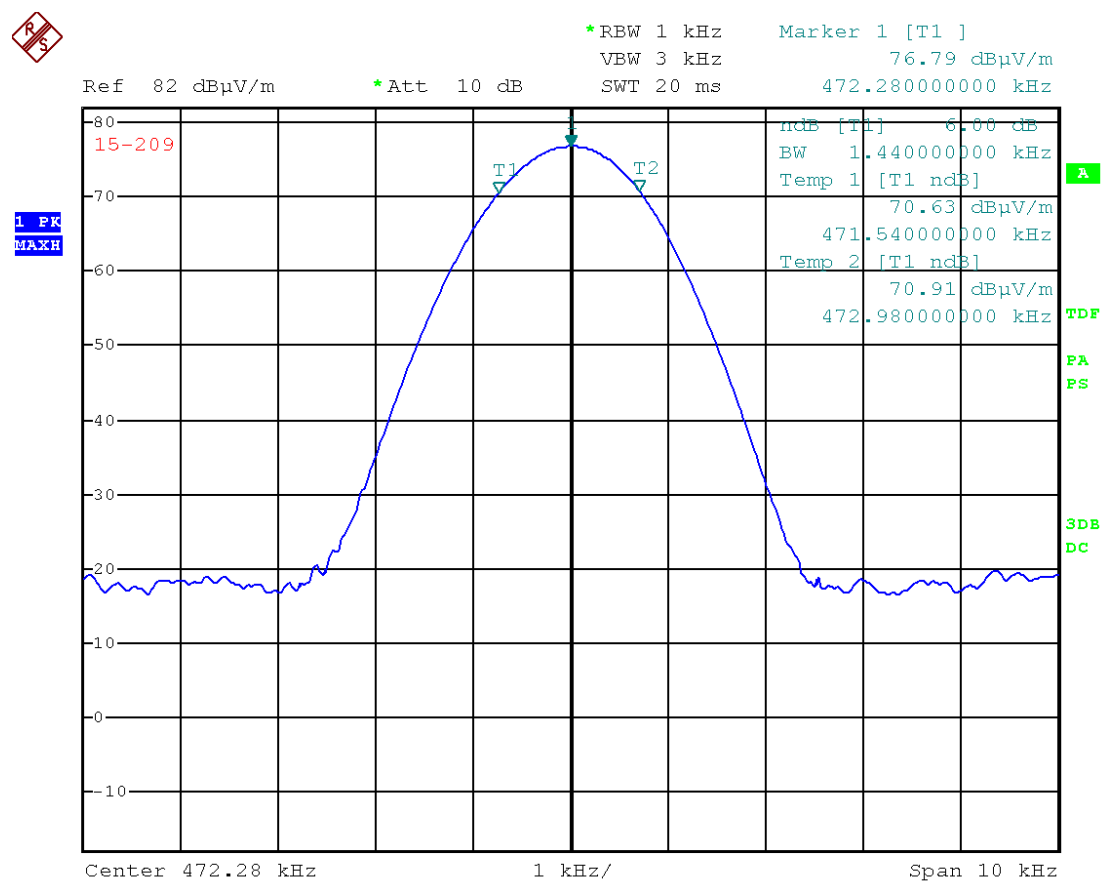


Picture 43: T40FH S11 - -6 dB emission bandwidth - 472.200 kHz

Measured -6 dB emission bandwidth - 472.200 kHz: 1.4400 kHz

-20 dB emission bandwidth

Test procedure

Where indicated, the -20 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 20 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

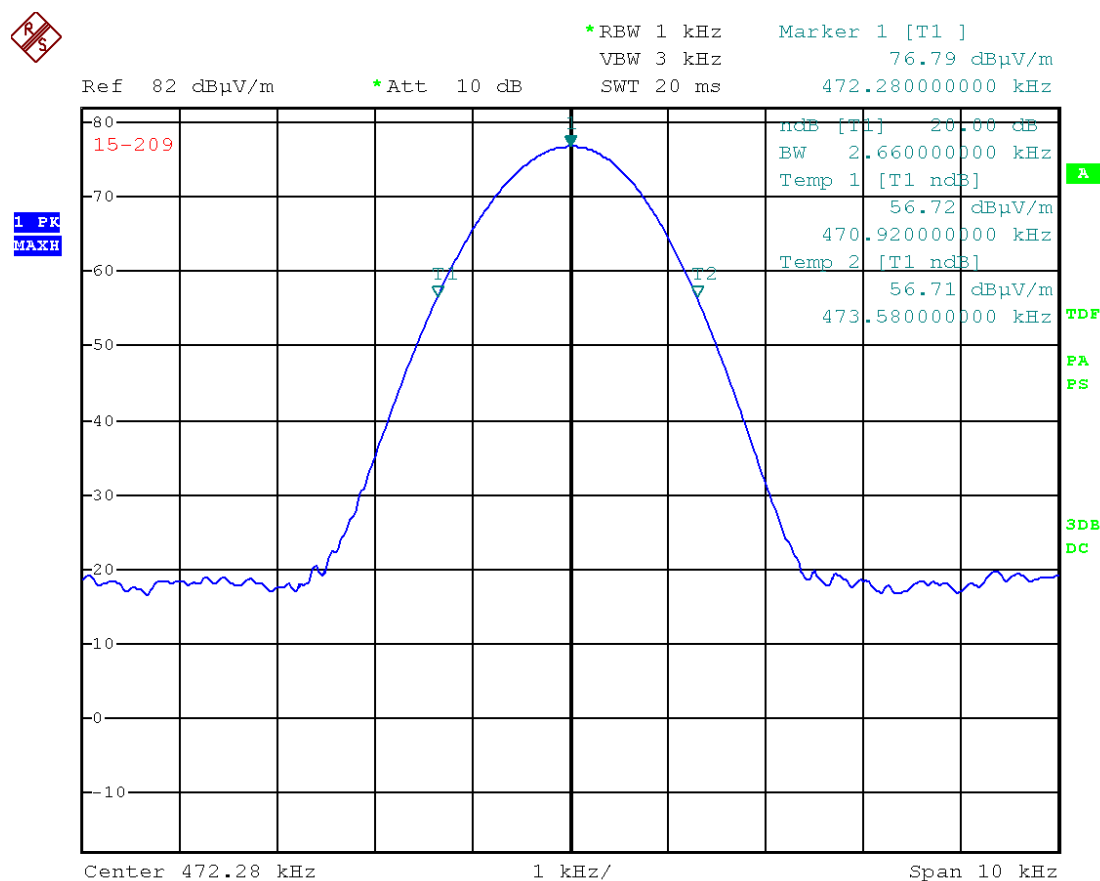

Picture 44: T40FH S11 - -20 dB emission bandwidth - 472.200 kHz

Measured -20 dB emission bandwidth - 472.200 kHz: 2.6600 kHz

6.8 Test results - T40FH S11 - alu plastic stator

Temperature:	18°C	Humidity:	47%
Tested by:	Martin Müller	Test date:	2015-04-28

Occupied bandwidth (99 %)

Test procedure

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured. The transmitter shall be operated at its maximum carrier power measured under normal test conditions.

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual.

The trace data points are recovered and directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth. For this purpose the appropriate measurement function of the spectrum analyzer is used.




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11

150253-AU01+W02

Page 64 of 72

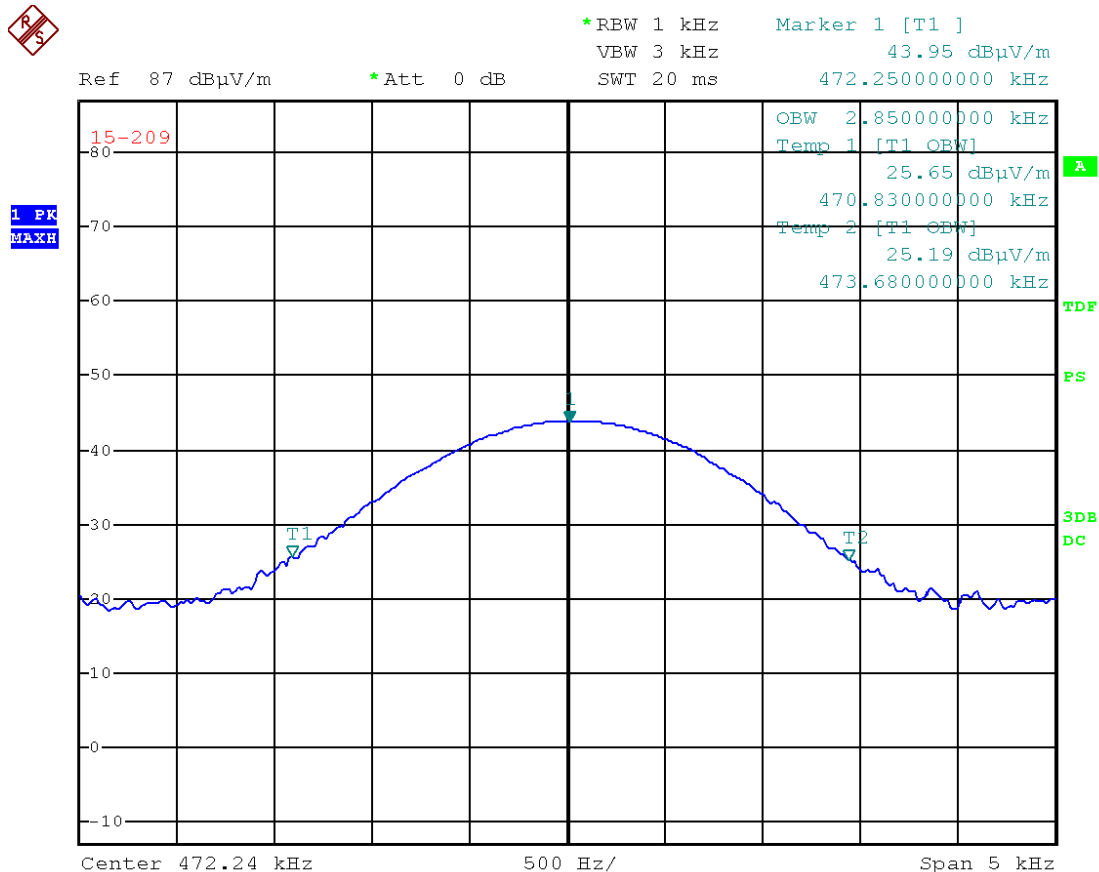

Picture 45: T40FH S11 - Occupied bandwidth (99 %) - 472.200 kHz

Measured occupied bandwidth (99 %) - 472.200 kHz: 2.8500 kHz



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11


150253-AU01+W02

Page 65 of 72

-6 dB emission bandwidth

Test procedure

Where indicated, the -6 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 6 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth

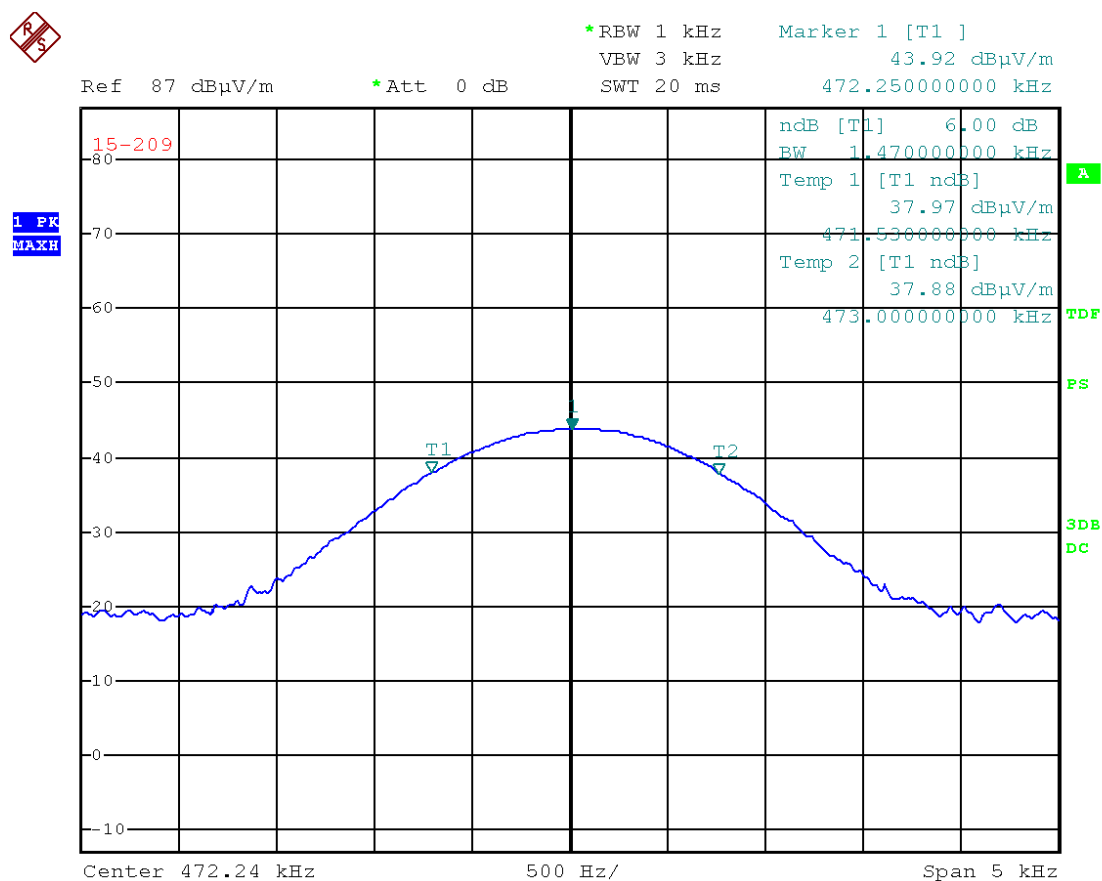

Picture 46: T40FH S11 - -6 dB emission bandwidth - 472.200 kHz

Measured -6 dB emission bandwidth - 472.200 kHz: 1.4700 kHz

6.9 Necessary bandwidth - data transfer carrier (1.22 MHz)

Test procedure

Calculated according to TRC-43, Issue 3, November 2012

Formula for PSK: $B_n = \frac{2 \times R \times K}{\log_2 S}$

$R = 1.2 \text{ Mbps}$ ¹⁾

$K = 1$

$S = 3$ ¹⁾

$$\underline{\underline{B_n = 1.5142 \text{ MHz}}}$$

Note¹⁾ : customer information

Remark: The calculation of the data transfer carrier is valid for all the models because the parameters are the same. Due to extremely low levels the bandwidth cannot be verified by measurements of e. g. occupied bandwidth.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11

150253-AU01+W02

Page 68 of 72

7 Equipment calibration status

Description	Modell number	Serial number	Inventory number	Last calibration	Next calibration
Test receiver	ESU 26	100026	W00002	2014-02	2016-02
Test receiver	ESCI 3	100013	E00001	2013-12	2015-12
Test receiver	ESCI 3	100328	E00552	2014-07	2016-07
Test receiver	ESCS 30	825442/0002	E00003	2014-02	2016-02
Test receiver	ESCS 30	845552/0008	E00551	2014-01	2016-01
LISN	ESH2-Z5	893406/009	E00005	2014-01	2016-01
Broadband antenna	VULB 9163	9163-114	E00013	2013-09	2015-09
Loop antenna	HFH2-Z2	871398/0050	E00004	2014-07	2016-07
Magnetic field probe	RF-R 400-1	02-1165	E00270	N/A (see note 1)	
Shielded room	P92007	B83117C1109T211	E00107	N/A	
Compact Diagnostic Chamber (CDC)	VK041.0174	D62128-A502-A69-2-0006	E00026	N/A	
Open area test site (OATS)	---	---	E00354	2014-10	2015-10
Climatic chamber 340 I	VC ³ 4034	58566123250010	C00015	2014-09	2016-09

Table 1: Equipment calibration status

Note 1: Used for relative measurements only.

Note 2: Expiration date of measurement facility registration (OATS) by
 - FCC (registration number 221458): 2017-04
 - Industry Canada (test site number 3472A-1): 2015-10



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany
 Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
 Torque meter
 T40FH
 S10, S11

150253-AU01+W02

Page 69 of 72

8 Measurement uncertainty

Description	Max. deviation	k=
Conducted emission AMN (9kHz to 30 MHz)	± 3.8 dB	2
Radiated emission open field (3 m) (30 MHz to 300 MHz) (300MHz to 1 GHz)	± 5.4 dB ± 5.9 dB	2
Radiated emission absorber chamber (> 1000 MHz)	± 4.5 dB	2

Table 2: Measurement uncertainty

The uncertainty stated is the expanded uncertainty obtained by multiplying the standard uncertainty by the coverage factor k. For a confidence level of 95 % the coverage factor k is 2.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11

150253-AU01+W02

Page 70 of 72

9 Summary

The EMC Regulations according to the marked specifications are

☒ **KEPT**

The EUT does fulfill the general approval requirements mentioned.

☐ **NOT KEPT**

The EUT does not fulfill the general approval requirements mentioned.


Place, Date: Straubing, June 8th, 2015



Martin Müller

Test engineer

EMV **TESTHAUS** GmbH

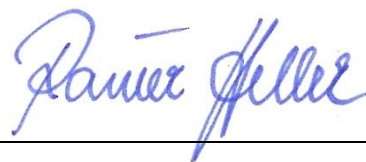

Rainer Heller

Head of EMC / radio department

EMV **TESTHAUS** GmbH



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11

150253-AU01+W02

Page 71 of 72

10 Revision History

Date	Description	Person	Revision
2015-06-08	First edition	M. Müller	- - -

Template used: A_1.0_FCC 15.225_EN_PB.dotx



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

Hottinger Baldwin Messtechnik GmbH
Torque meter
T40FH
S10, S11

150253-AU01+W02

Page 72 of 72