



FCC Test Report

Equipment : Pro-tracker The Ultimate Tracking Device
Brand Name : Pro-tracker
Model No. : Tracker 1
FCC ID : 2ADB5-TRACKER1
Standard : 47 CFR FCC Part 15.249
Operating Band : 902 MHz – 928 MHz
FCC Classification : DXX
Applicant : Pro-Tracker LLC
6010 South 400 West, Rexburg ID 83440 U.S.A
Manufacturer : Meritronics, Inc.
500 Yosemite drive suite 108, milpitas ca95035 U.S.A

The product sample received on May 06, 2014 and completely tested on Aug. 14, 2014. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

Vic Hsiao / Supervisor



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Accessories	6
1.3	Testing Applied Standards	6
1.4	Testing Location Information.....	6
1.5	Measurement Uncertainty	7
2	TEST CONFIGURATION OF EUT	8
2.1	The Worst Case Modulation Configuration	8
2.2	Test Channel Frequencies Configuration.....	8
2.3	The Worst Case Measurement Configuration.....	8
2.4	Test Setup Diagram	9
3	TRANSMITTER TEST RESULT	10
3.1	AC Power-line Conducted Emissions	10
3.2	Emission Bandwidth	11
3.3	Fundamental Emissions	13
3.4	Transmitter Radiated Unwanted Emissions	15
4	TEST EQUIPMENT AND CALIBRATION DATA	26
APPENDIX A. TEST PHOTOS		
APPENDIX B. PHOTOGRAPHS OF EUT		

Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	-	FCC 15.207	NA
3.2	15.215(c)	Emission Bandwidth	0.2779 MHz; fall in band	Information only	Complied
3.3	15.249(a)	Fundamental Emissions	[dBuV/m at 3m]: 915MHz 67.93 (Margin 26.07dB) Peak	[dBuV/m at 3m]: Peak: 94	Complied
3.4	15.249(a)/(d)	Transmitter Radiated Unwanted Emissions	[dBuV/m at 3m]:32.91MHz 28.92 (Margin 11.08dB) - PK	Harmonics: 54 dBuV/m@3m Other band: 50 dB or FCC 15.209, whichever is the lesser attenuation.	Complied



SPORTON INTERNATIONAL INC.
TEL : 886-3-327-3456
FAX : 886-3-327-0973

1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information					
Frequency Range (MHz)	Modulation	Ch. Frequency (MHz)	Bandwith (KHz)	Channel Number	Fundamental Field Strength (dBuV/m)
902-928	FSK	905-927.25	250	89	67.93
Note 1: Field strength performed Peak level at 3m.					

1.1.2 Antenna Information

Antenna Category	
☒	Integral antenna (antenna permanently attached)
☐	External antenna (dedicated antennas) ; Unique antenna connector

1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	☐ Production ; ☐ Pre-Production ; ☒ Prototype
Type of EUT	
☒	Stand-alone
☐	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
☐	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...
☐	Other:

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
☐	Operated normally mode for worst duty cycle
☒	Operated test mode for worst duty cycle
Test Signal Duty Cycle (x)	Duty Cycle Correction Factor [dB] – (10 log x)
☒ 100%	0
If worst duty < 100%, average emission = peak emission + 10 log x	

1.1.5 EUT Operational Condition

Supply Voltage	☐ AC mains	☒ DC	
Type of DC Source	☐ Internal DC supply	☐ External DC adapter	☒ Battery

1.2 Accessories

Accessories				
Battery	Brand Name	KONNOC	Model Name	JS70300PP
	Type	80mAh		

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2009

1.4 Testing Location Information

Testing Location				
☒	HWA YA	ADD : No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.		
		TEL : 886-3-327-3456 FAX : 886-3-327-0973		
Test Condition		Test Site No.	Test Engineer	Test Environment
RF Conducted		TH06-HY	Cain	28.8°C / 65%
Radiated Emission		03CH02-HY	Daniel	24.5°C / 64%

1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty		
Test Item		Uncertainty
AC power-line conducted emissions		±2.2 dB
Emission bandwidth, 20dB bandwidth		±1.4 %
RF output power, conducted		±0.6 dB
All emissions, radiated	9 – 150 kHz	±2.4 dB
	0.15 – 30 MHz	±2.2 dB
	30 – 1000 MHz	±2.5 dB
	1 – 18 GHz	±3.5 dB
	18 – 40 GHz	±3.8 dB
	40 – 200 GHz	N/A
Temperature		±0.8 °C
Humidity		±3 %
DC and low frequency voltages		±3 %
Time		±1.4 %
Duty Cycle		±1.4 %

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Modulation Used for Conformance Testing	
Test Mode	Field Strength (dBuV/m at 3 m)
FSK	67.93

2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration	
Test Mode	Test Channel Frequencies (MHz)
FSK	905.00-(F1), 915.00-(F2), 927.25-(F3)


2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral (120Vac / 60Hz)
Operating Mode	Operating Mode Description
1	Battery mode and Radio Transmit
Note: The Battery mode is not applicable for ac power-line conducted emissions.	


The Worst Case Mode for Following Conformance Tests			
Tests Item	Emission Bandwidth, Fundamental Emissions, Radiated Unwanted Emissions		
Test Condition	Radiated measurement		
User Position	☐ EUT will be placed in fixed position.		
	☒ EUT will be placed in mobile position and operating multiple positions. EUT shall be performed three orthogonal planes. The worst planes is Y.		
	☐ EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes. The worst planes is X.		
Operating Mode	☒ 1. Battery mode and Radio Transmit		
Test Mode	FSK		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			

2.4 Test Setup Diagram

Test Setup Diagram – Radiated Emission (Below 1GHz)

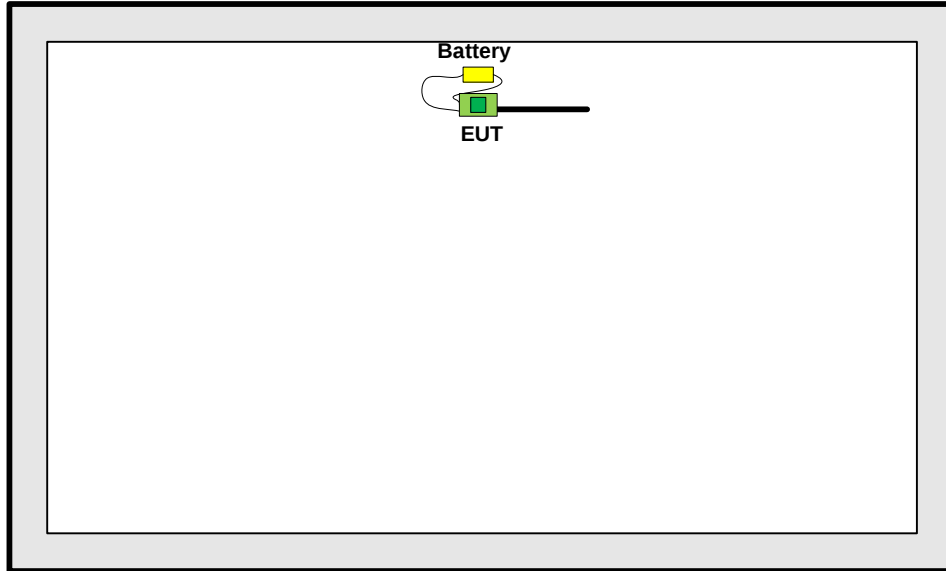

Test Setup Diagram – Radiated Emission (Above 1GHz)

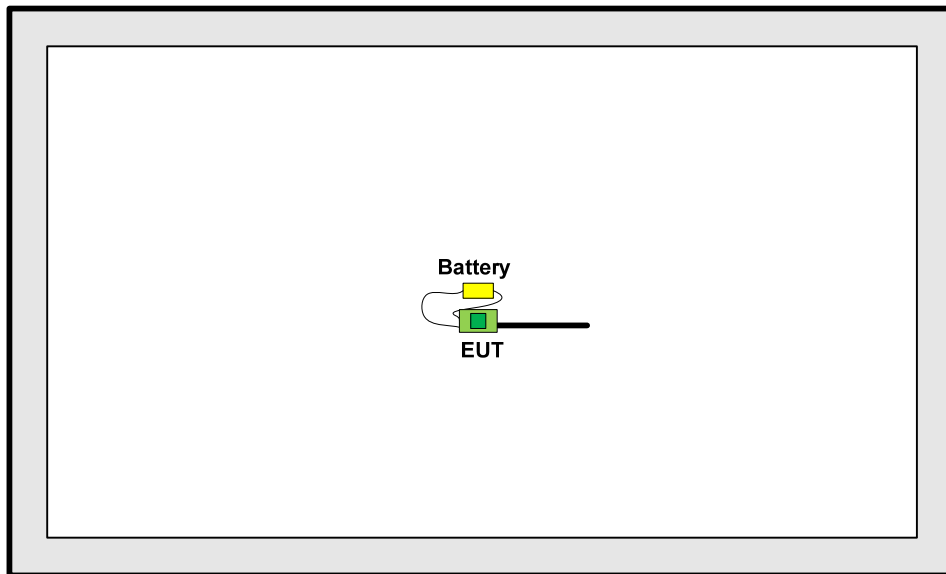

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

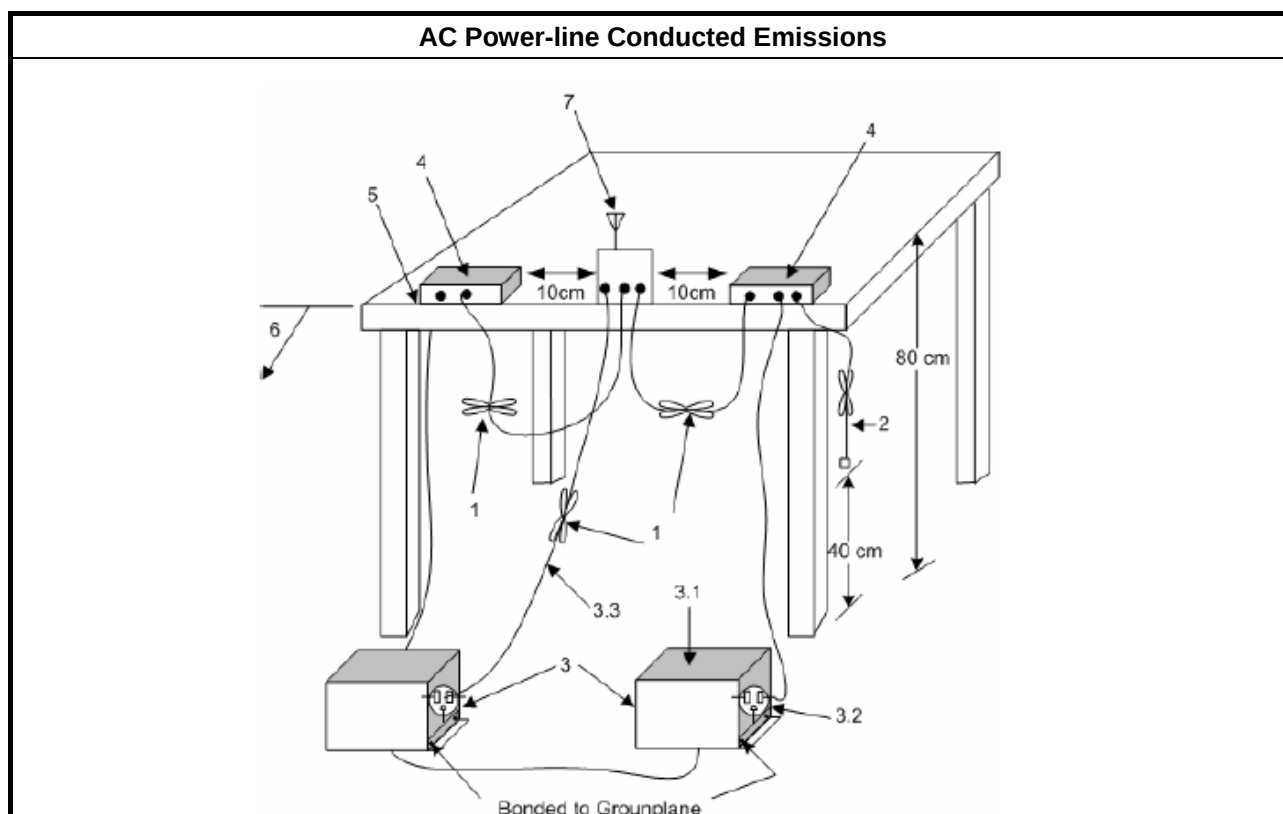

3.1.5 Test Result of AC Power-line Conducted Emissions

The test is not applicable for this EUT.

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
☒	Emission bandwidth falls completely within authorized band.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures


Test Method	
☒	Refer as ANSI C63.10, clause 6.9.1 for 20 dB emission bandwidth and 99% occupied bandwidth measurement.

3.2.4 Test Setup

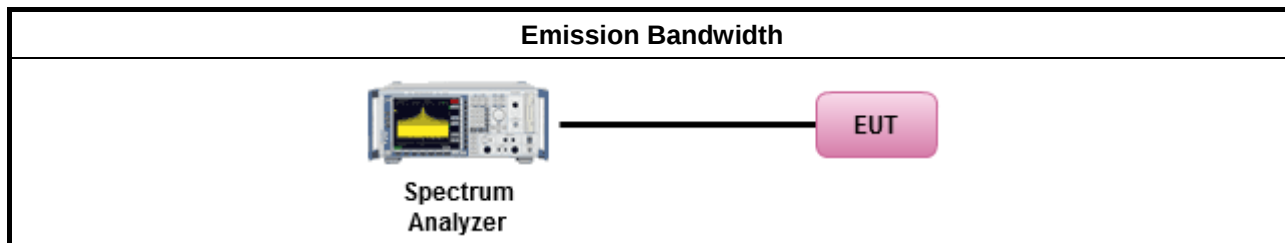

3.2.5 Test Result of Emission Bandwidth

Emission Bandwidth Result					
Modulation Mode	Frequency (MHz)	99% Bandwidth (MHz)	F _L at 20dB BW (MHz)	F _H at 20dB BW (MHz)	20dB BW (MHz)
FSK	905.00	0.2431	904.8553	-	0.2764
FSK	915.00	0.2445	-	-	0.2764
FSK	927.25	0.2489	-	927.3831	0.2779
Limit		N/A	902	928	N/A
Result		Complied			

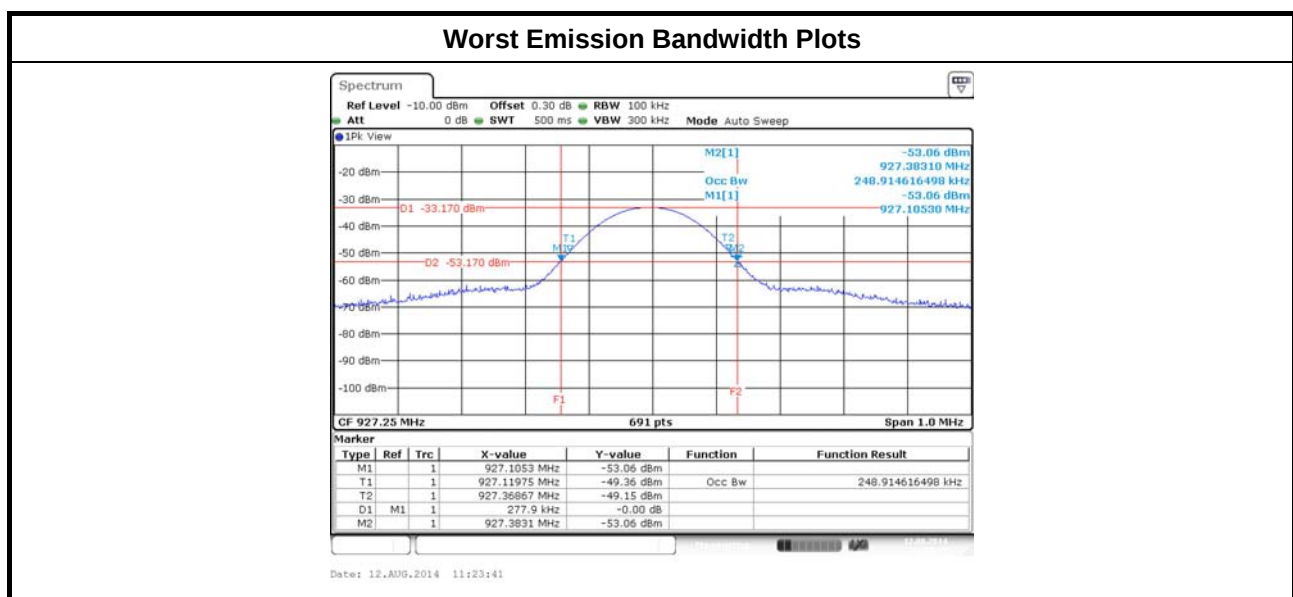

3.3 Fundamental Emissions

3.3.1 Fundamental Emissions Limit

Fundamental Emissions E-Field Strength Limit (3m)	
☒	902-928 MHz Band: 94 dBuV/m (quasi peak)
☐	2400-2483.5 MHz Band: 94 dBuV/m (average)
☐	5725-5785 MHz Band: 94 dBuV/m (average)


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

☒	The average emission levels shall be measured in [duty cycle ≥ 100 or by duty cycle correction factor].
☒	For the transmitter emissions shall be measured using following options below:
☐	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW) – Duty cycle $\geq 100\%$.
☒	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions. Adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$. Average emission = peak emission + 20 log (duty cycle).
☒	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
☒	Refer as ANSI C63.10, clause 6.5 for radiated emissions and test distance is 3m.

3.3.4 Test Setup

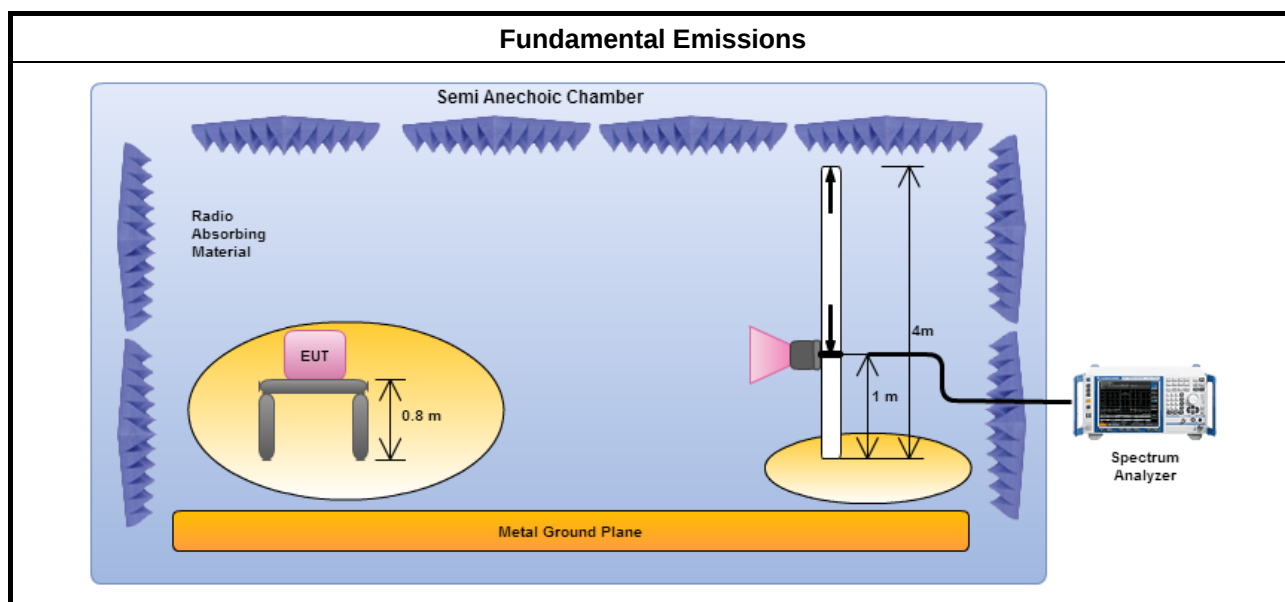

3.3.5 Test Result of Fundamental Emissions

Field Strength of Fundamental Emissions Result					
Modulation Mode	Frequency (MHz)	Fundamental (dBuV/m)@3m	Margin (dB)	Limit (dBuV/m)@3m	Type
FSK	905.00	64.45	29.55	94	peak
FSK	915.00	67.93	26.07	94	peak
FSK	927.25	52.46	41.54	94	peak
Result		Complied			
Note 1: Measurement worst emissions of receive antenna polarization: Horizontal.					

3.4 Transmitter Radiated Unwanted Emissions

3.4.1 Transmitter Radiated Unwanted Emissions Limit

Transmitter Radiated Unwanted Emissions Limit	
Harmonics:	
☒	54 dBuV/m (average)
Other Unwanted Emissions:	
☒	50 dB below the level of the fundamental or FCC 15.209, whichever is the lesser attenuation.



3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method – General Information	
☒	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
☒	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
☒	Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
☒	For the transmitter unwanted emissions shall be measured using following options below:
☐	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW) – Duty cycle $\geq$ 100%.
☒	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions. Adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$. Average emission = peak emission + 20 log (duty cycle).
☒	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
☒	For the transmitter bandedge emissions shall be measured using following options below:
☒	Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.
☐	Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.
☒	For radiated measurement.
☒	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
☒	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
☒	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1 GHz and test distance is 3m.
☒	The any unwanted emissions level shall not exceed the fundamental emission level.
☒	All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


3.4.4 Test Setup

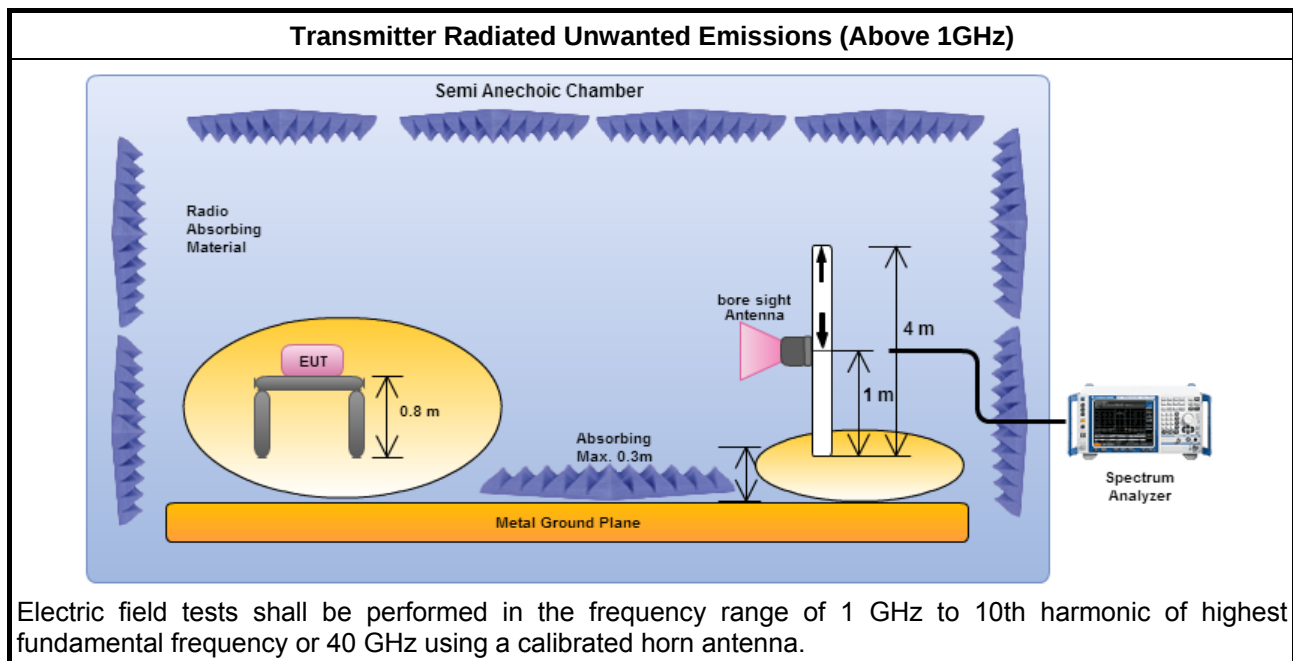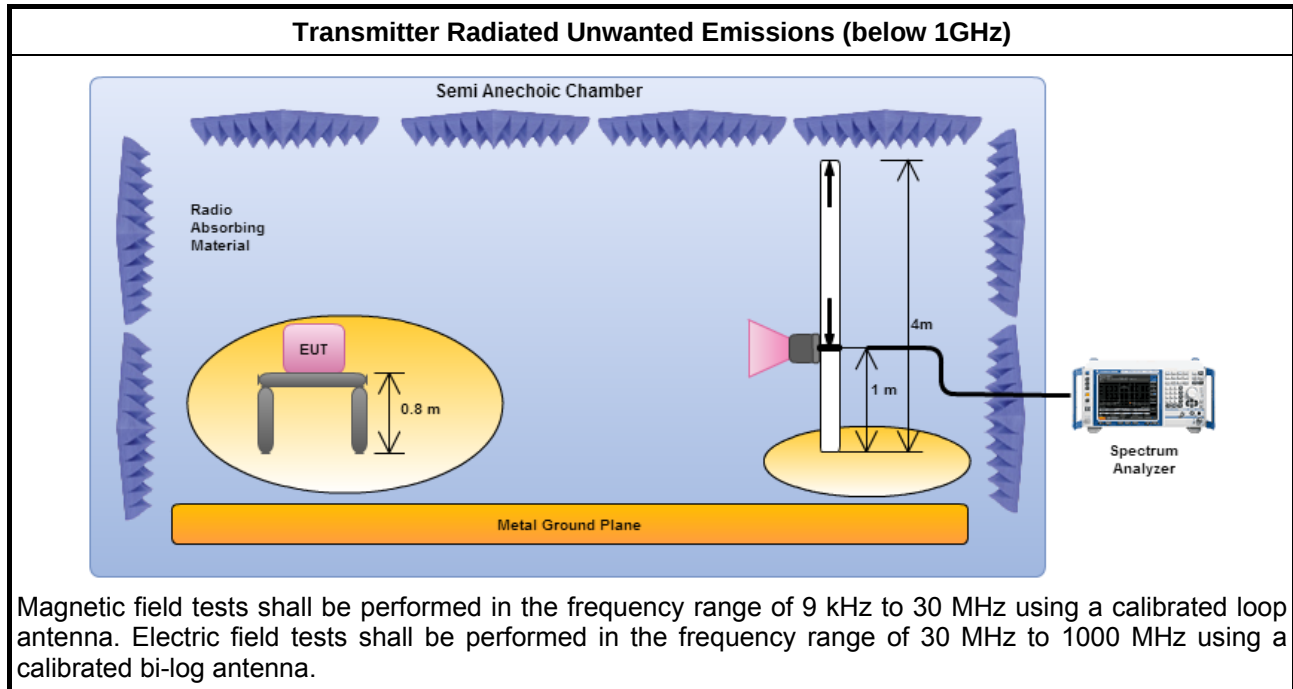

3.4.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)


All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

3.4.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

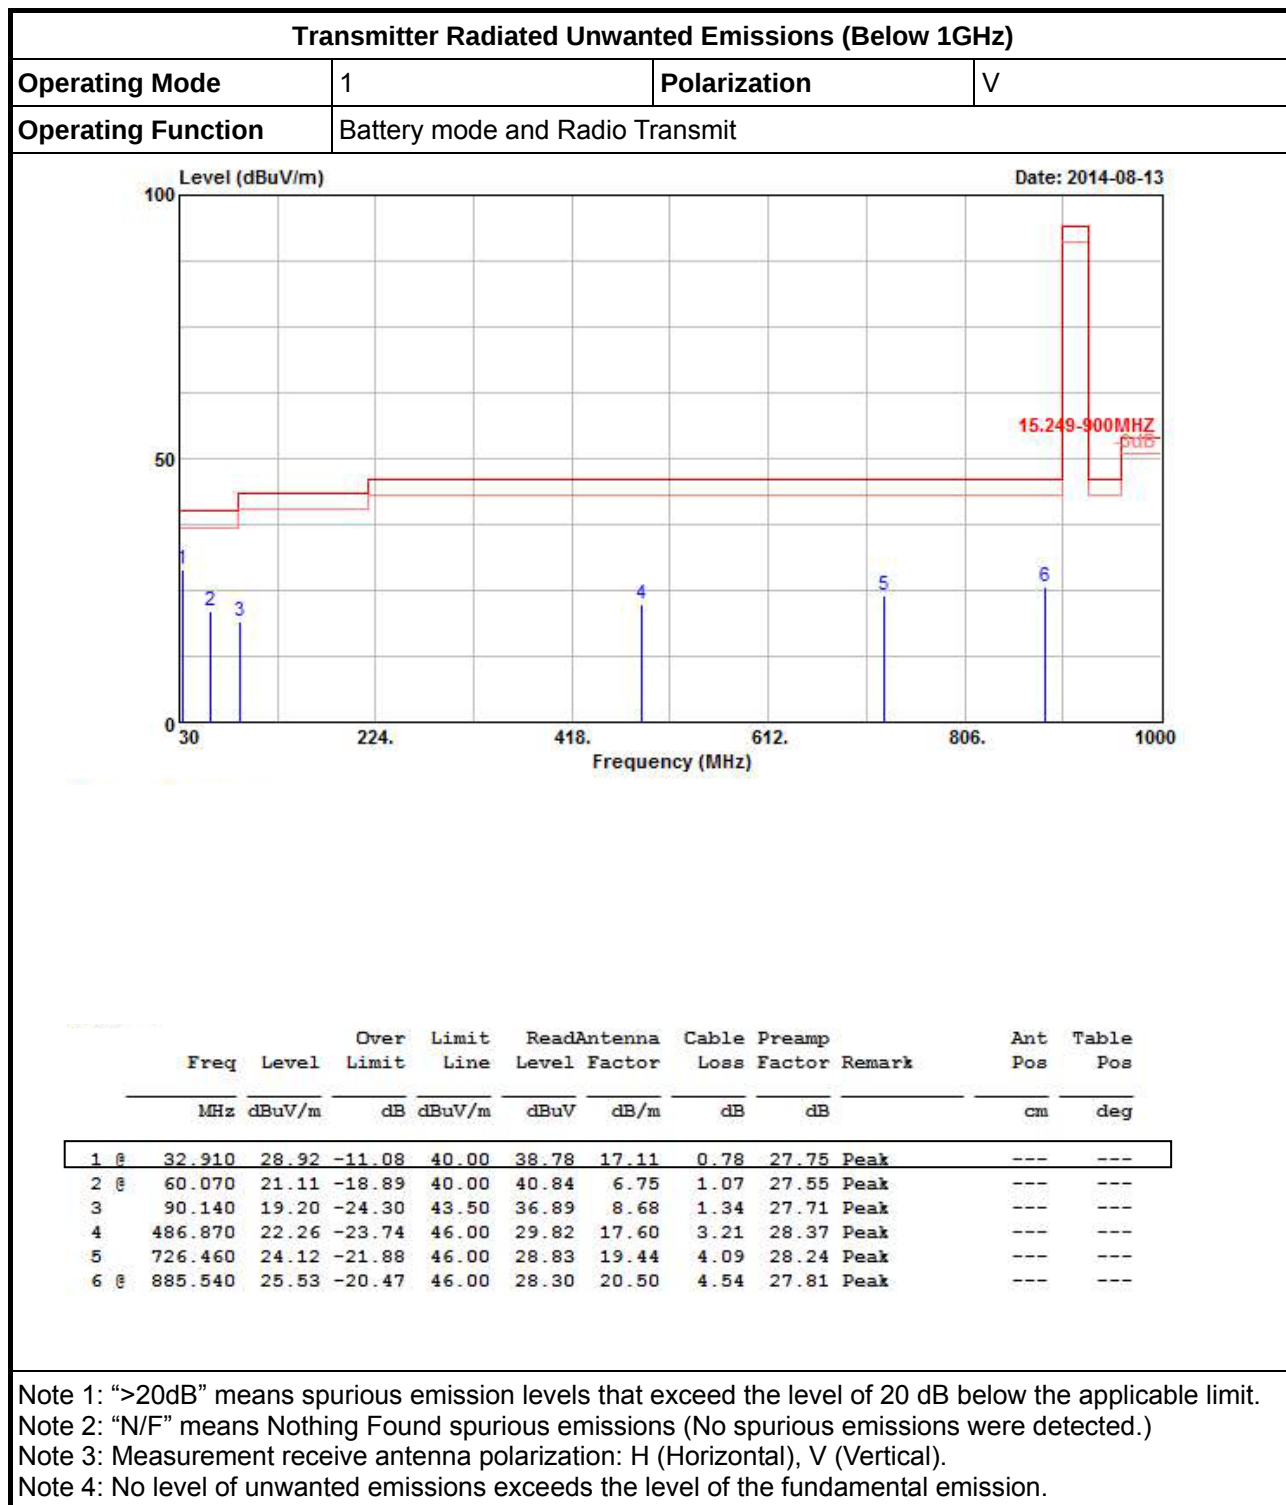

Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	1	Polarization	H
Operating Function	Battery mode and Radio Transmit		

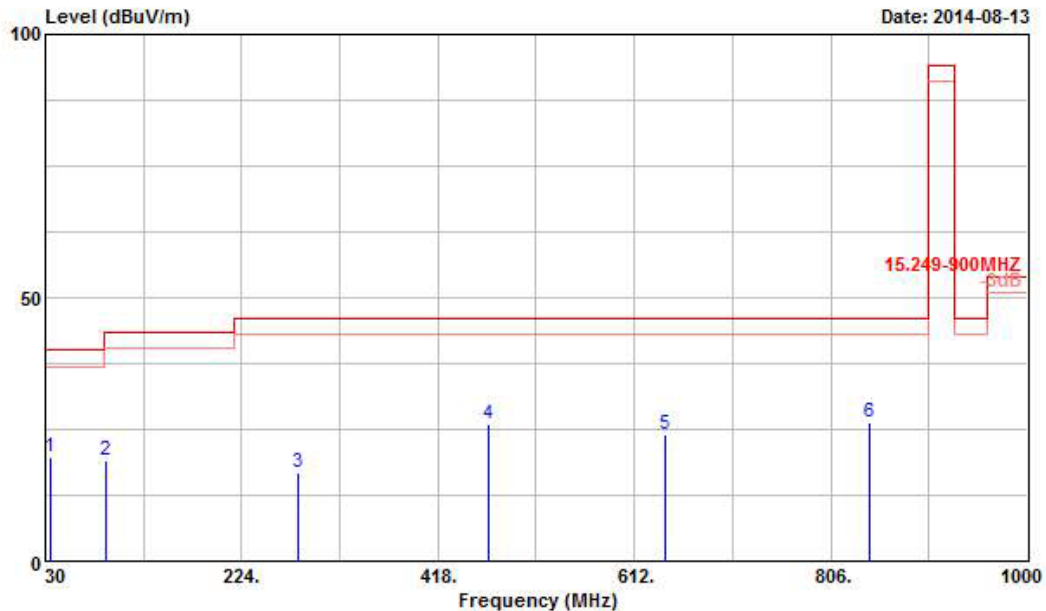

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	35.820	19.85	-20.15	40.00	31.16	15.59	0.82	27.72	Peak	---	---
2	90.140	19.02	-24.48	43.50	36.71	8.68	1.34	27.71	Peak	---	---
3	280.260	16.85	-29.15	46.00	28.68	12.93	2.44	27.20	Peak	---	---
4 @	467.470	26.00	-20.00	46.00	33.73	17.36	3.17	28.26	Peak	---	---
5	642.070	24.01	-21.99	46.00	29.54	19.06	3.82	28.41	Peak	---	---
6 @	843.830	26.20	-19.80	46.00	29.34	20.30	4.50	27.94	Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).


Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

3.4.7 Transmitter Radiated Unwanted Emissions (Above 1GHz)

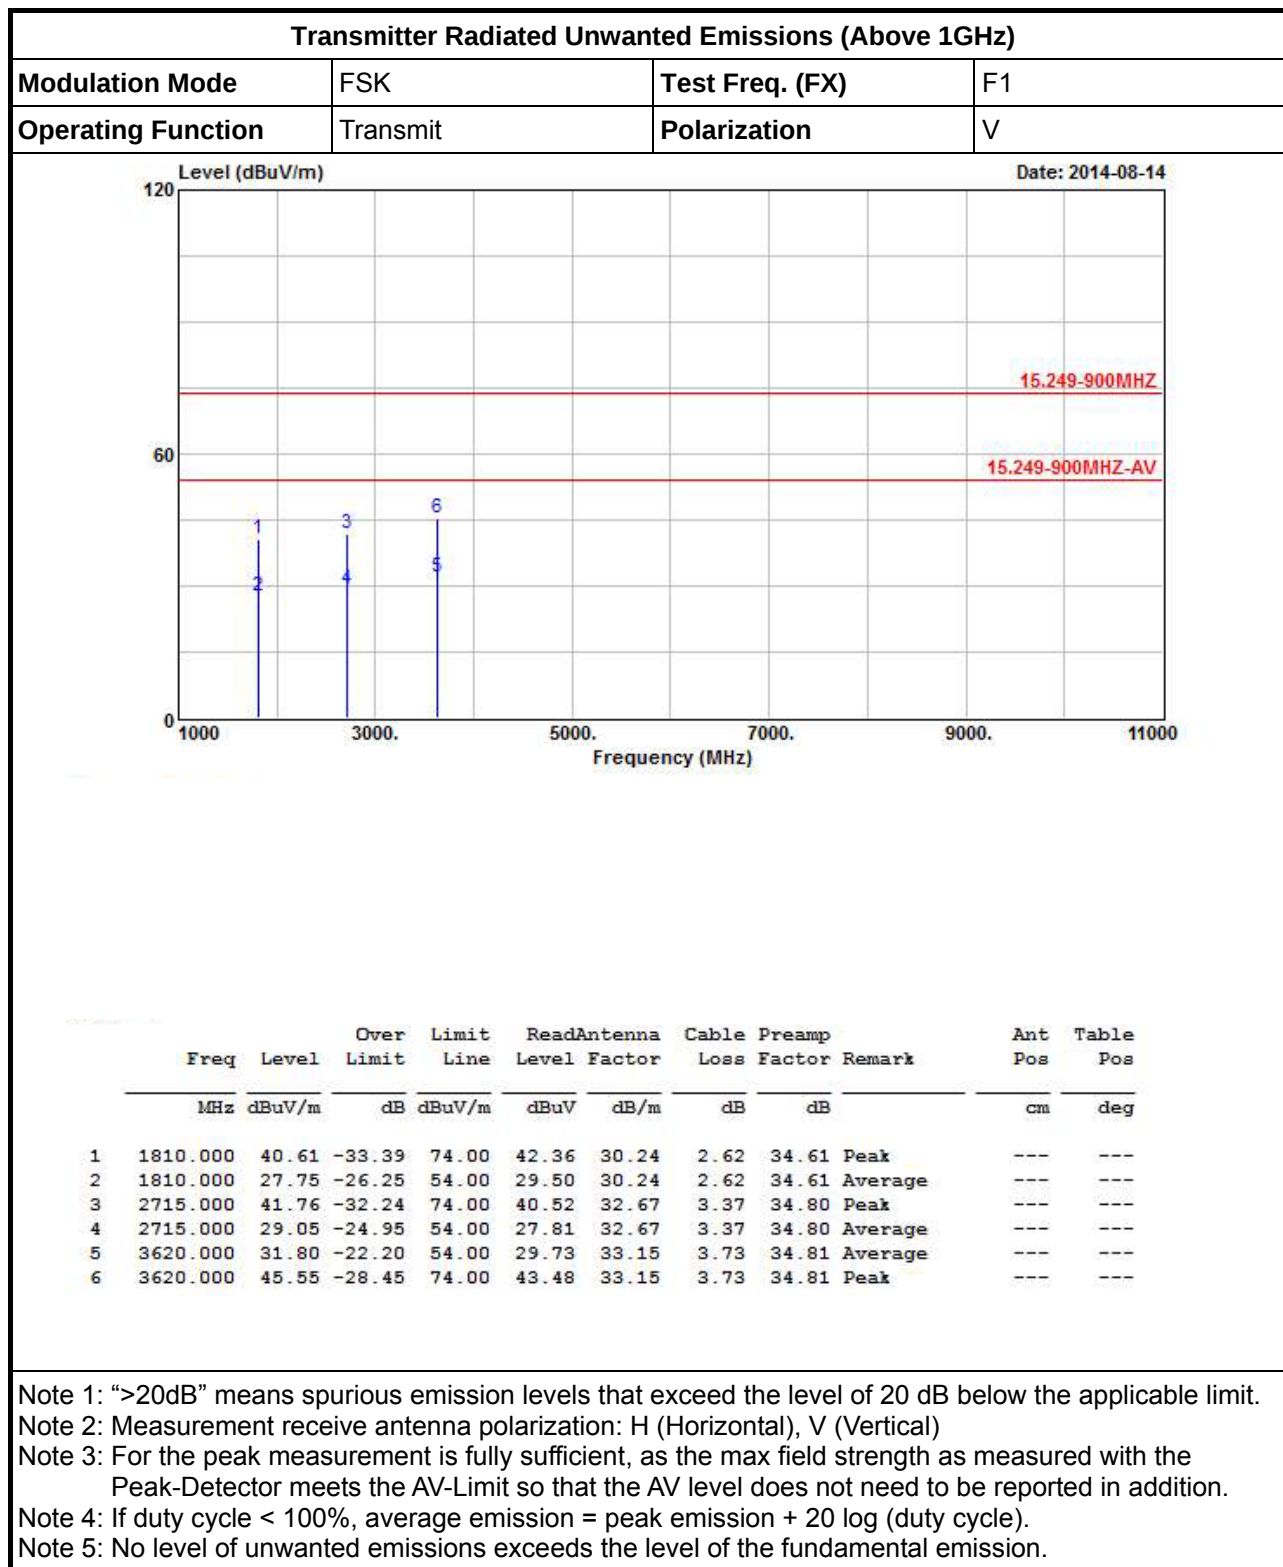

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	FSK	Test Freq. (FX)	F1
Operating Function	Transmit	Polarization	H

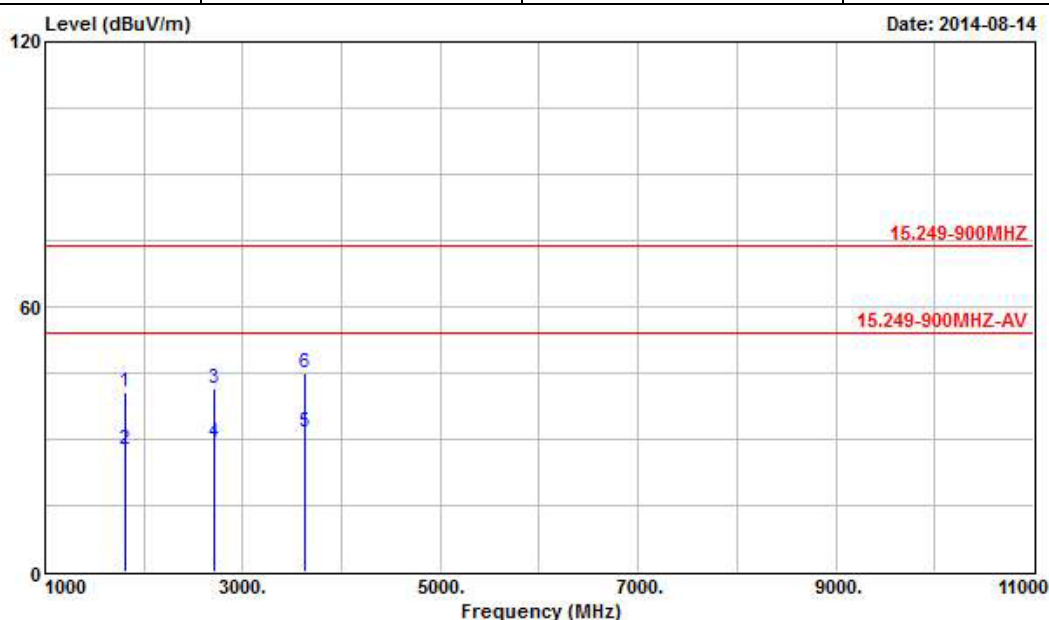

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	1810.000	40.56	-33.44	74.00	42.31	30.24	2.62	34.61	Peak	---
2	1810.000	27.60	-26.40	54.00	29.35	30.24	2.62	34.61	Average	---
3	2715.000	41.60	-32.40	74.00	40.36	32.67	3.37	34.80	Peak	---
4	2715.000	29.25	-24.75	54.00	28.01	32.67	3.37	34.80	Average	---
5	3620.000	31.48	-22.52	54.00	29.41	33.15	3.73	34.81	Average	---
6	3620.000	44.82	-29.18	74.00	42.75	33.15	3.73	34.81	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).

Note 5: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	FSK	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	V

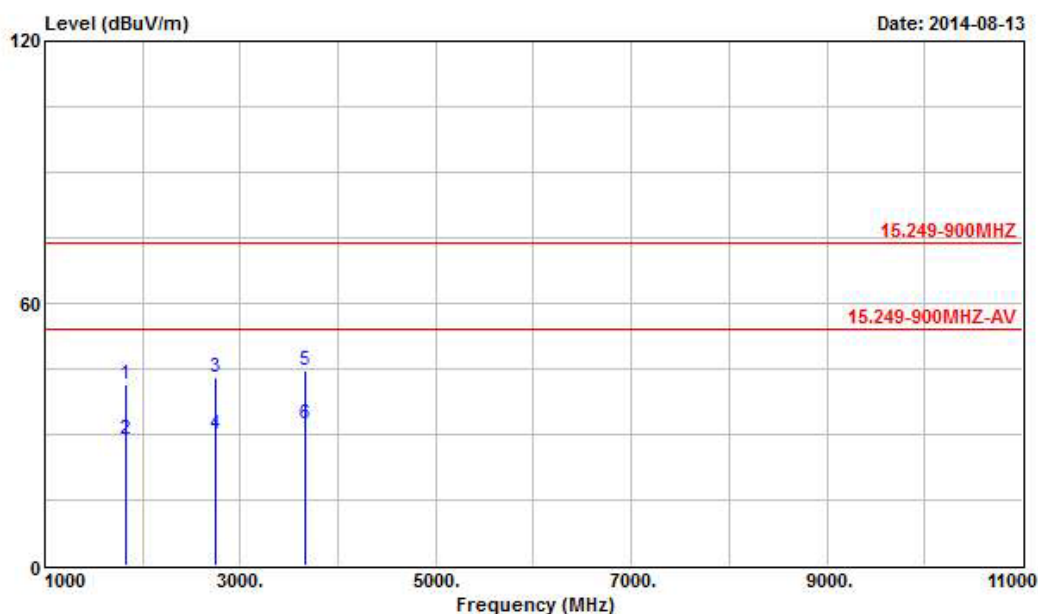

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	1830.000	41.27	-32.73	74.00	42.88	30.37	2.62	34.60	Peak	---
2	1830.000	28.92	-25.08	54.00	30.53	30.37	2.62	34.60	Average	---
3	2745.000	42.98	-31.02	74.00	41.70	32.70	3.39	34.81	Peak	---
4	2745.000	30.04	-23.96	54.00	28.76	32.70	3.39	34.81	Average	---
5	3660.000	44.77	-29.23	74.00	42.68	33.16	3.73	34.80	Peak	---
6	3660.000	32.19	-21.81	54.00	30.10	33.16	3.73	34.80	Average	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).

Note 5: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	FSK	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	H

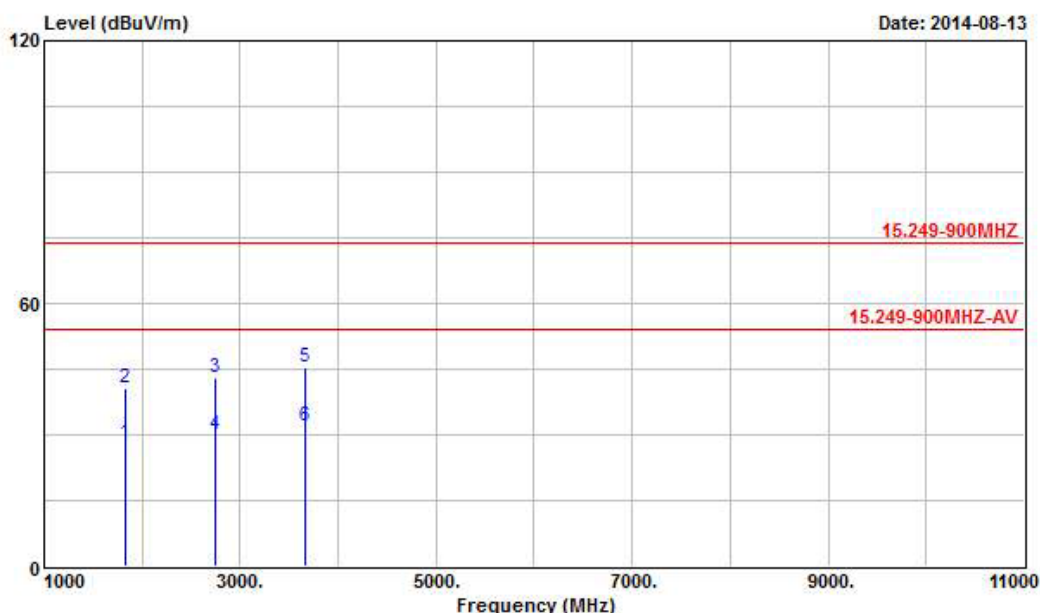

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	1830.000	27.87	-26.13	54.00	29.48	30.37	2.62	34.60	Average	---	---
2	1830.000	40.56	-33.44	74.00	42.17	30.37	2.62	34.60	Peak	---	---
3	2745.000	42.94	-31.06	74.00	41.66	32.70	3.39	34.81	Peak	---	---
4	2745.000	29.92	-24.08	54.00	28.64	32.70	3.39	34.81	Average	---	---
5	3660.000	45.46	-28.54	74.00	43.37	33.16	3.73	34.80	Peak	---	---
6	3660.000	32.01	-21.99	54.00	29.92	33.16	3.73	34.80	Average	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).

Note 5: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	FSK	Test Freq. (FX)	F3
Operating Function	Transmit	Polarization	V

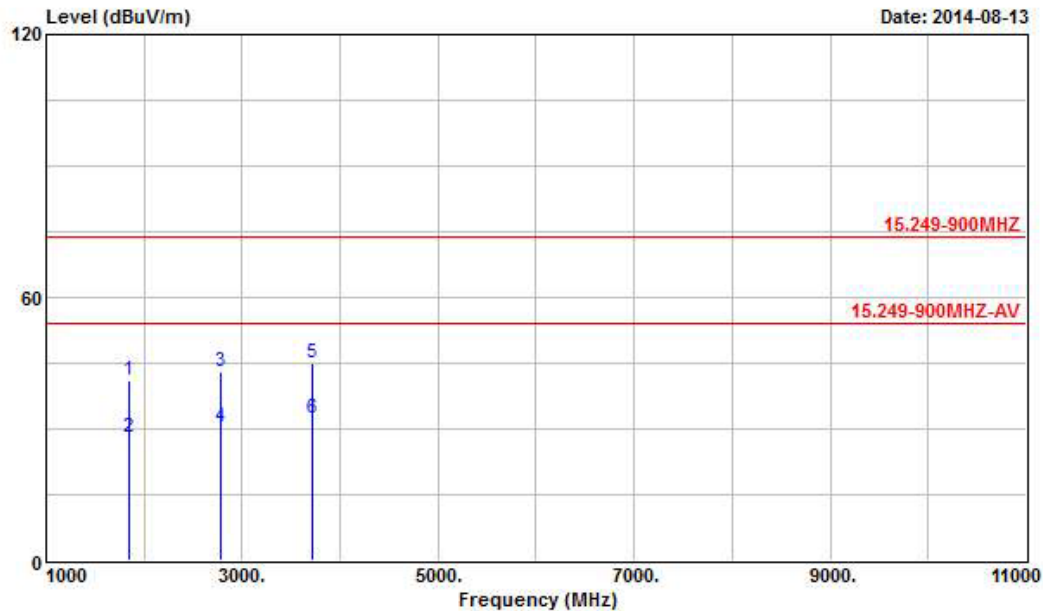

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	1854.500	41.17	-32.83	74.00	42.62	30.49	2.65	34.59	Peak	---	---
2	1854.500	28.15	-25.85	54.00	29.60	30.49	2.65	34.59	Average	---	---
3	2781.750	43.02	-30.98	74.00	41.70	32.73	3.42	34.83	Peak	---	---
4	2781.750	30.25	-23.75	54.00	28.93	32.73	3.42	34.83	Average	---	---
5	3709.000	45.12	-28.88	74.00	43.01	33.18	3.73	34.80	Peak	---	---
6	3709.000	32.37	-21.63	54.00	30.26	33.18	3.73	34.80	Average	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).

Note 5: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	FSK	Test Freq. (FX)	F3
Operating Function	Transmit	Polarization	H

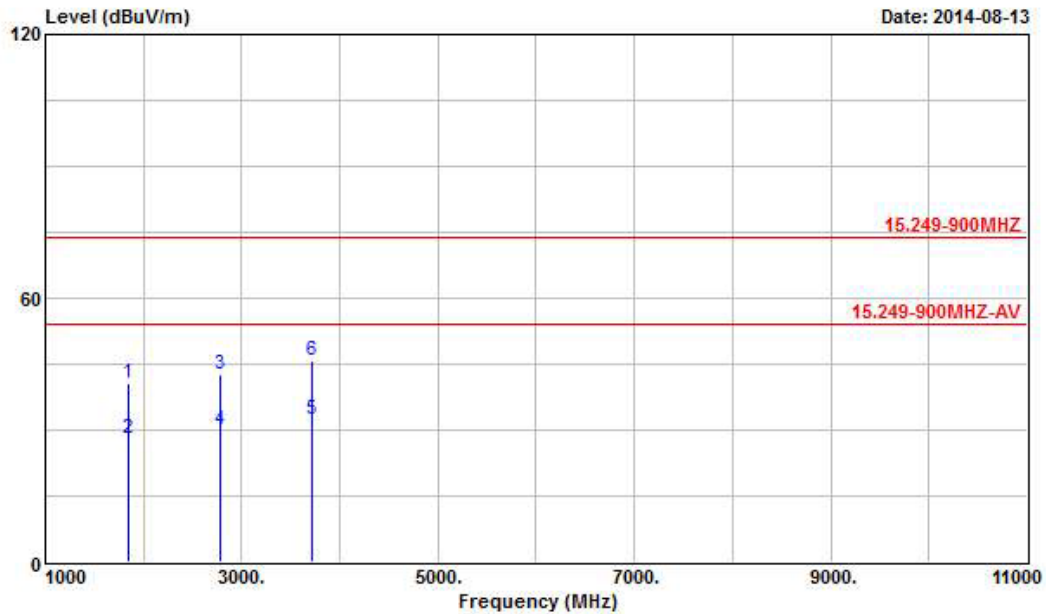

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	1854.500	40.75	-33.25	74.00	42.20	30.49	2.65	34.59	Peak	---	---
2	1854.500	27.86	-26.14	54.00	29.31	30.49	2.65	34.59	Average	---	---
3	2781.750	42.82	-31.18	74.00	41.50	32.73	3.42	34.83	Peak	---	---
4	2781.750	29.97	-24.03	54.00	28.65	32.73	3.42	34.83	Average	---	---
5	3709.000	32.39	-21.61	54.00	30.28	33.18	3.73	34.80	Average	---	---
6	3709.000	45.80	-28.20	74.00	43.69	33.18	3.73	34.80	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).

Note 5: No level of unwanted emissions exceeds the level of the fundamental emission.

3.4.8 Transmitter Radiated Bandedge Emissions

902-928 MHz Transmitter Radiated Bandedge Emissions						
Modulation Mode	Test Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) QPK	Pol.
FSK	905.00	3	888.34	26.24	46.00	H
FSK	915.00	3	934.12	27.27	46.00	H
FSK	927.75	3	932.98	26.44	46.00	H
Note 1: Measurement worst emissions of receive antenna polarization.						

4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV 40	101013	9kHz ~ 40GHz	Jan. 25, 2014	RF Conducted
RF Cable-0.2m	HUBER+SUHNER	SUCOFLEX_103	10709/4	30MHz ~ 26.5GHz	Dec. 02, 2013	RF Conducted
Signal Generator	R&S	SMB 100A	175727	100kHz ~ 40GHz	Jan. 07, 2014	RF Conducted

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP40	100593	9kHz ~ 40GHz	Oct. 03, 2013	Radiation
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz ~ 1GHz 3m	May 11, 2014	Radiation
Amplifier	Agilent	8447D	2944A11149	100kHz ~ 1.3GHz	Jul. 22, 2014	Radiation
Amplifier	Agilent	8449B	3008A02373	1GHz ~ 26.5GHz	Aug. 28, 2013	Radiation
Horn Antenna	ETS-LINDGREN	3117	00091920	1GHz ~ 18GHz	Nov. 25, 2013	Radiation
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Nov. 09, 2013	Radiation
RF Cable-high	SUHNER	SUCOFLEX106	03CH02-HY	1GHz ~ 40GHz	Mar. 05, 2014	Radiation
Bilog Antenna	SCHAFFNER	CBL61128	2723	30MHz ~ 2GHz	Oct. 10, 2013	Radiation
Turn Table	Chaintek Instruments	3000	MF7802058	0 ~ 360 degree	N/A	Radiation
Antenna Mast	MF	MF7802	MF780208205	1 ~ 4 m	N/A	Radiation

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	TESEQ	HLA 6120	31244	9 kHz - 30 MHz	Dec. 02, 2012	Radiation

Note: Calibration Interval of instruments listed above is two year.