

AMODIT

2126

INPUT: 120VAC 50/60Hz

MAXLOAD:16A Electronic Ballast

20A Tungsten, General Purpose

1/2 HP Motor

0-10V DIM:100mA SINK

HVIN:AMODIT

Suitable for Plenum Mounting

FCC ID: 2ADCB-AMODIT, IC: 6715C-AMODIT

THE ENCLOSED DEVICE COMPLIES WITH PART 15

OF THE FCC RULES, OPERATION IS SUBJECT TO

THE FOLLOWING TWO CONDITIONS:(1) THIS DEVICE

MAY NOT CAUSE HARMFUL INTERFERENCE AND (2)

THIS DEVICE MUST ACCEPT ANY INTERFERENCE

RECEIVED, INCLUDING INTERFERENCE THAT MAY

CAUSE UNDESIRABLE OPERATION

BLK -HOT

WHT -NEUTRAL

BLU0SEITCHED OUT

VIO - 0-10V DIM +

PNK -0-10V DIM -

GRN - GROUND

CAUTION

Do not overload. Risk of Electric

Shock - More than one disconnect

Switch may be required to

De-energize the equipment before

Servicing. For supply connections,

Use 14 AWG or larger wires rated

For at least 75°C. CU ONLY

E167435



LISTED

3D62


ENERGY MGMT
EQPT

Factory ID:74

Assembled In MEX

1.800.535.2465

AcuityControls.com

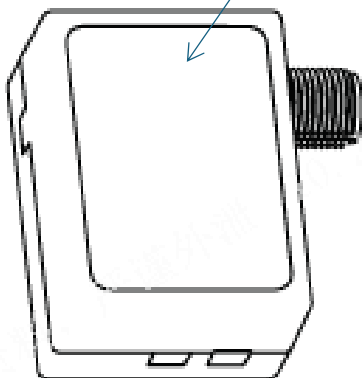

AMODITX

2126

INPUT: 120VAC 50/60Hz

MAXLOAD:16A Electronic Ballast

20A Tungsten, General Purpose

1/2 HP Motor

0-10V DIM:100mA SINK

HVIN:AMODITX

Suitable for Plenum Mounting

FCC ID: 2ADCB-AMODIT, IC: 6715C-AMODIT

THE ENCLOSED DEVICE COMPLIES WITH PART 15

OF THE FCC RULES, OPERATION IS SUBJECT TO

THE FOLLOWING TWO CONDITIONS:(1) THIS DEVICE

MAY NOT CAUSE HARMFUL INTERFERENCE AND (2)

THIS DEVICE MUST ACCEPT ANY INTERFERENCE

RECEIVED, INCLUDING INTERFERENCE THAT MAY

CAUSE UNDESIRE OPERATION

BLK -HOT
WHT -NEUTRAL
BLU0SEITCHED OUT
VIO - 0-10V DIM +
PNK -0-10V DIM -
GRN - GROUND

CAUTION

Do not overload. Risk of Electric

Shock - More than one disconnect

Switch may be required to

De-energize the equipment before

Servicing. For supply connections,

Use 14 AWG or larger wires rated

For at least 75°C. CU ONLY

E167435



3D62

ENERGY MGMT
EQPT

Factory ID:74

Assembled In MEX

1.800.535.2465

AcuityControls.com

