

FCC PART 15 SUBPART C TEST REPORT

for

RFID Reader

Model No.: CIM150E

FCC ID: 2ADCGCIMRF01

of

Applicant: CIMFORCE INTERNATIONAL LIMITED

Address: 4F., No.105, Zhongcheng Rd., Tucheng Dist.,
New Taipei City 236, Taiwan

Tested and Prepared

by

Worldwide Testing Services (Taiwan) Co., Ltd.

FCC Registration No.: 930600

Industry Canada filed test laboratory Reg. No. IC 5679A-1, IC 5107A

A2LA Accredited No.: 2732.01



Report No.: W6M21409-14476-C-1

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: wts@wts-lab.com



TABLE OF CONTENTS

1	GENERAL INFORMATION.....	2
1.1	NOTES	2
1.2	TESTING LABORATORY	3
1.2.1	Location	3
1.2.2	Details of accreditation status	3
1.3	DETAILS OF APPROVAL HOLDER	3
1.4	APPLICATION DETAILS.....	4
1.5	GENERAL INFORMATION OF TEST ITEM.....	4
1.6	TEST STANDARDS	4
2	TECHNICAL TEST.....	5
2.1	SUMMARY OF TEST RESULTS.....	5
2.2	TEST ENVIRONMENT	5
2.3	TEST EQUIPMENT LIST.....	6
2.4	GENERAL TEST PROCEDURE	8
3	TEST RESULTS (ENCLOSURE)	9
3.1	PEAK OUTPUT POWER	10
3.2	SPURIOUS EMISSIONS RADIATED – TRANSMITTER OPERATING	12
3.3	OCCUPIED BANDWIDTH.....	16
3.4	ANTENNA REQUIREMENT.....	17
3.5	RADIATED EMISSIONS FROM RECEIVER SECTION OF RECEIVER PART	18
3.6	POWER LINE CONDUCTED EMISSION	21

APPENDIX



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21409-14476-C-1

FCC ID: 2ADCGCIMRF01

1 General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems. The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.

Tester:

October 13, 2014

Rick Chen

Rick Chen.

Date

WTS-Lab.

Name

Signature

Technical responsibility for area of testing:

October 13, 2014

Kevin Wang

Kevin Wang

Date

WTS

Name

Signature



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21409-14476-C-1

FCC ID: 2ADCGCIMRF01

1.2 Testing laboratory

1.2.1 Location

OATS

No.5-1, Shuang Sing Village,

LiShuei Rd., Wanli Dist.,

New Taipei City 207, Taiwan (R.O.C.)

Company

Worldwide Testing Services(Taiwan) Co., Ltd.

6F, NO. 58, LANE 188, RUEY-KUANG RD.

NEIHU, TAIPEI 114, TAIWAN R.O.C.

Tel: 886-2-66068877

Fax: 886-2-66068879

1.2.2 Details of accreditation status

Accredited testing laboratory

A2LA accredited number: 2732.01

FCC filed test laboratory Reg. No. 930600

Industry Canada filed test laboratory Reg. No. IC 5679A-1, IC 5107A



Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :

Name:	./.
Accredited number:	./.
Street:	./.
Town:	./.
Country:	./.
Telephone:	./.
Fax:	./.

1.3 Details of approval holder

Name:	CIMFORCE INTERNATIONAL LIMITED
Street:	4F., No.105, Zhongcheng Rd., Tucheng Dist.,
Town:	New Taipei City 236,
Country:	Taiwan
Telephone:	+886 (2) 2268-7772
Fax:	+886 (2) 2268-7770



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21409-14476-C-1

FCC ID: 2ADCGCIMRF01

1.4 Application details

Date of receipt of test item: September 16, 2014

Date of test: from September 17, 2014 to October 09, 2014

1.5 General information of Test item

Type of test item: RFID Reader

Model Number: CIM150E

Multi-listing model number: CIM130E

Brand name: CIMFORCE

Photos: see Appendix

Technical data

Transmitting Frequency: 125 kHz

Operation modes: Half-duplex

Modulation Type: ASK

Antenna Type: Ferrite core bar type antenna

Power supply: Adaptor(I/P:100-240 VAC, 50/60 Hz, 0.5-0.25 A ;
O/P:12 V, 1.5 A, 18 W MAX)
USB 5 VDC (power from PC)

Manufacturer: (if different from Approval Holder)

Name: Sunion Electronics Corp.
Street: 11F, No.123-7, Shing De Rd.,
Town: San Chung City, Taipei 241
Country: Taiwan

Additional information: ./.

1.6 Test standards

Technical standard :

FCC RULES 15 SUBPART C § 2.1049, § 15.203, § 15.209 (2013-10)



FCC ID: 2ADCGCIMRF01

2 Technical test

2.1 Summary of test results

☒

or

9

2.2 Test environment

Temperature: 23 °C

Relative humidity content: 20 ... 75 %

Air pressure: 86 ... 103 kPa

Details of power supply	Adaptor(I/P:100-240 VAC, 50/60 Hz, 0.5-0.25 A ; O/P:12 V, 1.5 A, 18 W MAX) USB 5 VDC (power from PC)
-------------------------	--

Extreme conditions parameters:

	test voltage : -- extreme
	min : -- V
	max : -- V



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21409-14476-C-1

FCC ID: 2ADCGCIMRF01

2.3 Test Equipment List

No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2014/9/2	2015/9/1
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function Test	
ETSTW-CE 008	HF-EICHLITUNG RF STEP ATTENUATOR 139dB DPSP	334.6010.02	844581/024	R&S	Function Test	
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2014/7/8	2015/7/7
ETSTW-CE 016	TWO-LINE V-NETWORK	ENV216	100050	R&S	2013/10/28	2014/10/27
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2014/9/2	2015/9/1
ETSTW-RE 005	EMI TEST RECEIVER	ESVS10	843207/020	R&S	2014/9/2	2015/9/1
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	Function Test	
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0336	397	K&L	Function Test	
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2014/9/26	2015/9/25
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	ETS-Lindgren	2014/7/01	2015/6/30
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	EMCO	2014/2/25	2015/2/24
ETSTW-RE 045	ESA-E SERIES SPECTRUM ANALYZER	E4404B	MY45111242	Agilent	Pre-test Use	
ETSTW-RE 049	TRILOG Super Broadband test Antenna	VULB 9160	9160-3185	Schwarzbeck	2014/2/18	2015/2/17
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2014/3/3	2015/3/2
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2014/3/3	2015/3/2
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2014/3/3	2015/3/2
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2014/6/05	2015/6/04
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2014/3/3	2015/3/2
ETSTW-RE 062	Amplifier Module	CHC 2	None	KMIC	2013/11/27	2014/11/26
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Function Test	
ETSTW-RE 069	Double-Ridged Guide Horn Antenna	3117	00069377	EMCO	Function Test	
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	HP	2014/9/26	2015/9/25
ETSTW-RE 088	SOLID STATE AMPLIFIER	KMA180265A01	99057	KMIC	2014/9/26	2015/9/25
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2014/3/3	2015/3/2
ETSTW-RE 106	Humidity Temperature Meter	TES-1366	091011113	TES	2013/12/04	2014/12/03
ETSTW-RE 111	TRILOG Super Broadband test Antenna	VULB 9160	9160-3309	Schwarz beck	2013/12/27	2014/12/26
ETSTW-RE 112	AC POWER SOURCE	TFC-1005	None	T-Power	Function test	
ETSTW-RE 115	2.4GHz Notch Filter	N0124411	473874	MICROWAVE CIRCUITS	2014/1/10	2015/1/09
ETSTW-RE 120	RF Player	MP9200	MP9210-111022	ADIVIC	Function test	
ETSTW-RE 122	SIGNAL GENERATOR	SMF100A	102149	R&S	2014/6/11	2015/6/10
ETSTW-RE 125	5GHz Notch filter	5NSL11-5200/E221.3-O/O	1	K&L Microwave	2014/8/12	2015/8/11



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21409-14476-C-1

FCC ID: 2ADCGCIMRF01

ETSTW-RE 126	5GHz Notch filter	5NSL11-5800/E221.3-O/O	1	K&L Microwave	2014/8/12	2015/8/11
ETSTW-RE 127	RF Switch Box	RFS-01	None	WTS	2014/3/3	2015/3/2
ETSTW-RE 128	5.3GHz Notch filter	N0153001	SN487233	Microwave Circits	2014/8/12	2015/8/11
ETSTW-RE 129	5.5GHz Notch filter	N0555984	SN487234	Microwave Circits	2014/8/12	2015/8/11
ETSTW-RE 130	Handheld RF Spectrum Analyzer	N9340A	CN0147000204	Agilent	Pre-test Use	
ETSTW-GSM 002	Universal Radio Communication Tester	CMU 200	109439	R&S	2014/9/26	2015/9/25
ETSTW-GSM 019	Band Reject Filter	WRCTF824/849-822/851-40 /12+9SS	3	WI	2014/1/10	2015/1/09
ETSTW-GSM 020	Band Reject Filter	WRCD1747/1748-1743/1752-32/5SS	1	WI	2014/1/10	2015/1/09
ETSTW-GSM 021	Band Reject Filter	WRCD1879.5/1880.5-1875.5/1884.5-32/5SS	3	WI	2014/1/10	2015/1/09
ETSTW-GSM 022	Band Reject Filter	WRCT901.9/903.1-904.25-50/8SS	1	WI	2014/1/10	2015/1/09
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2014/9/17	2015/9/16
ETSTW-Cable 010	BNC Cable	5 M BNC Cable	None	JYE BAO CO.,LTD.	2014/2/27	2015/2/26
ETSTW-Cable 011	BNC Cable	BNC Cable 1	None	JYE BAO CO.,LTD.	Pre-test Use NCR	
ETSTW-Cable 012	N TYPE To SMA Cable	Cable 012	None	JYE BAO CO.,LTD.	2014/2/27	2015/2/26
ETSTW-Cable 016	BNC Cable	Switch Box	B Cable 1	Schwarz beck	2014/2/27	2015/2/26
ETSTW-Cable 017	BNC Cable	X Cable	B Cable 2	Schwarz beck	2014/2/27	2015/2/26
ETSTW-Cable 018	BNC Cable	Y Cable	B Cable 3	Schwarz beck	2014/2/27	2015/2/26
ETSTW-Cable 019	BNC Cable	Z Cable	B Cable 4	Schwarz beck	2014/2/27	2015/2/26
ETSTW-Cable 022	N TYPE Cable	5006	0002	JYE BAO CO.,LTD.	2014/2/19	2015/2/18
ETSTW-Cable 026	Microwave Cable	SUCOFLEX 104	279075	HUBER+SUHNER	2014/3/3	2015/3/2
ETSTW-Cable 027	Microwave Cable	SUCOFLEX 104	279083	HUBER+SUHNER	2014/3/3	2015/3/2
ETSTW-Cable 028	Microwave Cable	FA147A0015M2020	30064-2	UTIFLEX	2014/9/26	2015/9/25
ETSTW-Cable 029	Microwave Cable	FA147A0015M2020	30064-3	UTIFLEX	2014/9/26	2015/9/25
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S_Cable 9)	279067	HUBER+SUHNER	2014/3/3	2015/3/2
ETSTW-Cable 031	Microwave Cable	SUCOFLEX 104 (S_Cable 10)	238092	HUBER+SUHNER	2013/11/27	2014/11/26
ETSTW-Cable 043	Microwave Cable	SUCOFLEX 104	317576	HUBER+SUHNER	2013/11/27	2014/11/26
ETSTW-Cable 047	Microwave Cable	SUCOFLEX 104	325518	HUBER+SUHNER	2013/11/27	2014/11/26
ETSTW-Cable 053	N TYPE To SMA Cable	RG142	None	JYE BAO CO.,LTD.	2014/2/19	2015/2/18
ETSTW-Cable 058	Microwave Cable	SUCOFLEX 104	none	HUBER+SUHNER	2014/2/19	2015/2/18
WTSTW-SW 002	EMI TEST SOFTWARE	EZ EMC	None	Farad	Version ETS-03A1	



Registration number: W6M21409-14476-C-1

FCC ID: 2ADCGCIMRF01

2.4 General Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.4-2014 5.2 using a 50 μ H LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

RADIATION INTERFERENCE: The test procedure used was according to ANSI STANDARD C63.4-2014 6.4 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB μ V) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:

Freq (MHz)	METER READING + ACF + CABLE LOSS (to the receiver) = FS
33	20 dB μ V + 10.36 dB + 6 dB = 36.36 dB μ V/m @3m

ANSI STANDARD C63.4-2014 6.3.1 MEASUREMENT PROCEDURES: The EUT was placed on a table 80 cm height and with dimensions of 1m by 1.5m (non metallic table). The EUT was placed in the centre of the table. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to 10th harmonic of the fundamental.

Peak readings were taken in three (3) orthogonal planes and the highest readings.

Measurements were made by Worldwide Testing Services(Taiwan) Co., Ltd. at the registered open field test site located at No.5-1, Lishui, Shuang Sing Village, Wanli Dist., New Taipei City 207, Taiwan (R.O.C.). The Registration Number: 930600.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

ANSI STANDARD C63.4-2014 10.2.7: Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21409-14476-C-1

FCC ID: 2ADCGCIMRF01

3 Test results (enclosure)

Test case	Para. Number	Required	Test passed	Test failed
Peak Output Power	15.209	☒	☒	☐
Spurious Emissions radiated – Transmitter operating	15.209	☒	☒	☐
Spurious Emissions radiated – Receiver operating	15.109	☒	☒	☐
Occupied bandwidth	2.1049	☒	☒	☐
Antenna Requirement	FCC 15.203	☒	☒	☐
Power Line Conducted Emission	FCC 15.207	☒	☒	☐

The following is intentionally left blank.




Registration number: W6M21409-14476-C-1

FCC ID: 2ADCGCIMRF01

3.1 Peak Output Power

FCC Rules: 15.209

The power was measured with modulation (declared by the applicant).

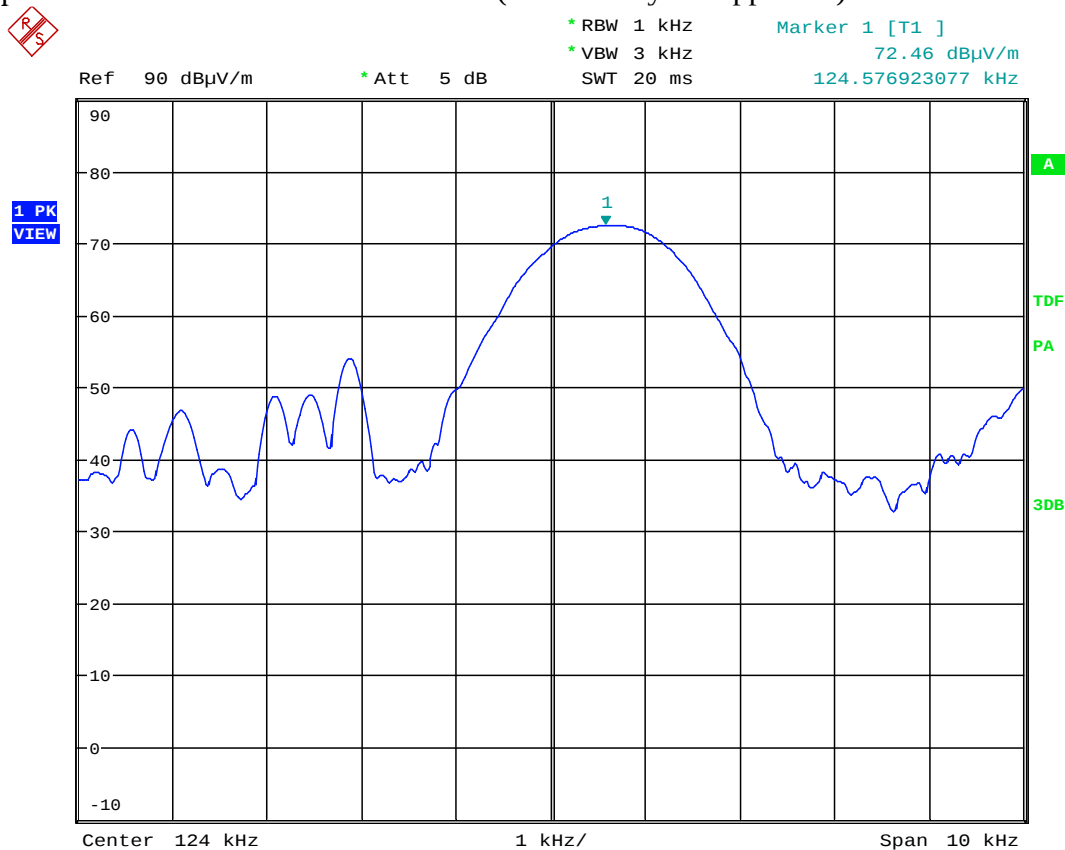

Date: 1.OCT.2014 10:38:12

Limits: 15.209

Frequency of Emission (MHz)	Field Strength of Fundamental Limit uV/m	Measurement distance
0.009 – 0.490	2400 / f (KHz)	300
0.49 – 1.705	24000 / f (KHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3



Registration number: W6M21409-14476-C-1

FCC ID: 2ADCGCIMRF01

The test was performed in the anechoic OATS at 3 meter test distance, i.e. the distance between measuring antenna and EUT boundary. The results were extrapolated by using the square of an inverse linear distance factor DF:

DF (distance factor) = $40 \log (D_1/D_2) = 80 \text{ dB}$, where


D_1 is the 300 meter specified measurement distance,

D_2 is the 3 meter test measurement distance.

For 40 kHz frequency the calculated limit is:

$\text{Limit}_{3\text{m}} = \text{Limit}_{300\text{m}} + \text{DF} = 35.5\text{dBuV/m} + 80 \text{ dB} = 115.5 \text{ dBuV/m}$

Test equipment used: ETSTW-RE 004, ETSTW-RE 027, ETSTW-RE 055.



Registration number: W6M21409-14476-C-1


FCC ID: 2ADCGCIMRF01

3.2 Spurious Emissions radiated – Transmitter operating

FCC Rules: 15.209

The field strength of any emission appearing outside of the specific band shall not exceed the general radiated emission limits in 15.209.


For the frequency from 9 kHz to 30 MHz:

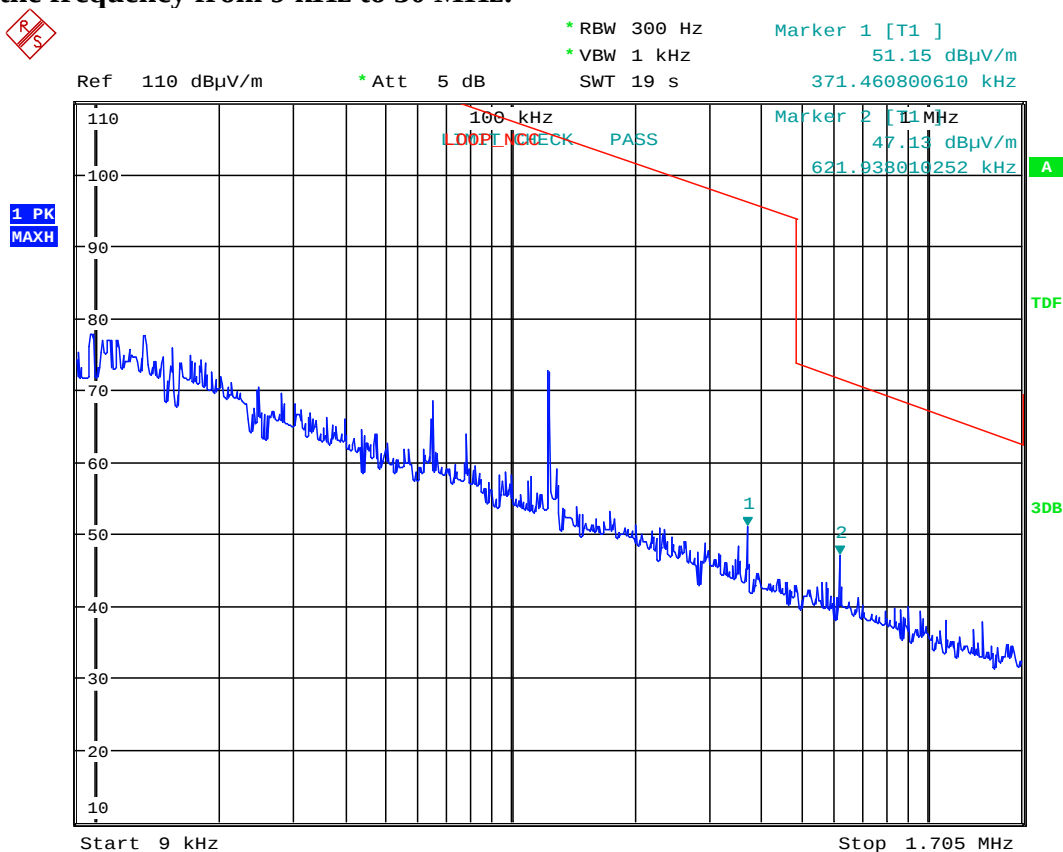

Date: 1.OCT.2014 10:44:03



Registration number: W6M21409-14476-C-1
FCC ID: 2ADCGCIMRF01

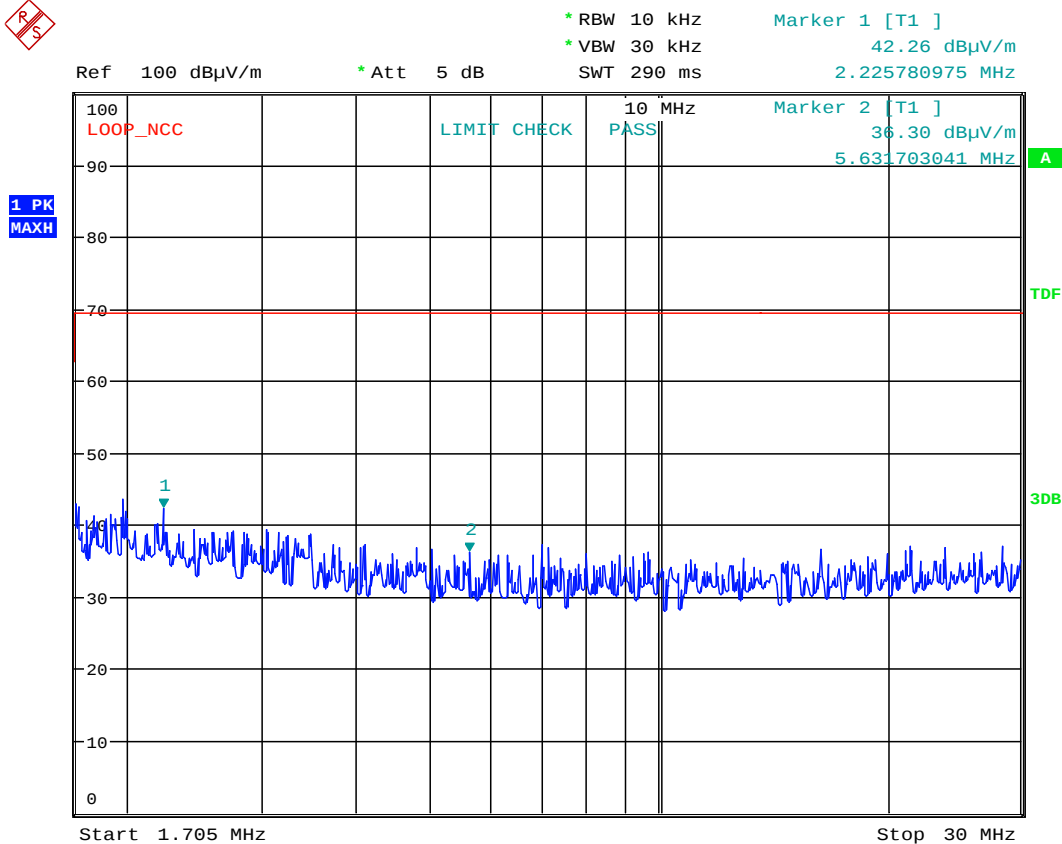

Date: 1.OCT.2014 10:45:24

Note: The above field strength limits are specified at a distance of 3 meters.



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21409-14476-C-1

FCC ID: 2ADCGCIMRF01

Above 30 MHz

Model: CIM150E Date: 2014/10/2
Mode: TX Temperature: 24 °C Engineer: Leon
Polarization: Horizontal Humidity: 60 %

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
76.6533	14.72	peak	10.37	25.09	40.00	-14.91	135	100
123.3066	16.33	peak	13.51	29.84	43.50	-13.66	90	100
234.1082	17.74	peak	14.02	31.76	46.00	-14.24	110	100
302.1442	18.27	peak	16.04	34.31	46.00	-11.69	45	100
409.0581	14.65	peak	18.94	33.59	46.00	-12.41	230	100
735.6312	9.16	peak	25.11	34.27	46.00	-11.73	170	100

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
31.9437	25.49	QP	13.26	38.75	40.00	-1.25	115	100
80.5411	25.98	peak	9.79	35.77	40.00	-4.23	190	100
119.4188	24.25	peak	13.15	37.40	43.50	-6.10	60	100
150.5210	19.53	peak	15.31	34.84	43.50	-8.66	140	100
232.1641	15.52	peak	13.98	29.50	46.00	-16.50	235	100
304.0880	14.69	peak	16.09	30.78	46.00	-15.22	50	100

Note

1. **Correction Factor = Antenna factor + Cable loss - Preamplifier**
2. **The formula of measured value as: Test Result = Reading + Correction Factor**
3. **Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average**
4. **All not in the table noted test results are more than 20 dB below the relevant limits.**
5. **Measurement uncertainty for 3m measurement : 0.009-30 MHz : ± 6.03 dB, 30-1000 MHz = ± 3.68 dB, 1-18 GHz = ± 5.37 dB, 18-40 GHz = ± 3.43 dB ;Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.**
6. **See attached diagrams in the Appendix.**



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21409-14476-C-1

FCC ID: 2ADCGCIMRF01

All other not noted test plots do not contain significant test results in relation to the limits.

TEST RESULT (Transmitter): The unit DOES meet the FCC requirements.

Limits: 15.209

Frequency of Emission (MHz)	Field Strength of Fundamental Limit uV/m	Measurement distance
0.009 – 0.490	2400 / f (KHz)	300
0.49 – 1.705	24000 / f (KHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

* In the emission table above, the tighter limit applies at the band edges.

The test was performed in the anechoic chamber at 3 meter test distance, i.e. the distance between measuring antenna and EUT boundary. The results were extrapolated by using the square of an inverse linear distance factor DF:

$DF = 40 \log (D_1/D_2) = 80 \text{ dB}$, where

For D_1 is the 300 meter specified measurement distance.

D_2 is the 3 meter test measurement distance.

The $DF = 80 \text{ dB}$ was applied for limit calculation at 3 meter test distance measurements.

For D_1 is the 30 meter specified measurement distance.

D_2 is the 3 meter test measurement distance.

The $DF = 40 \text{ dB}$ was applied for limit calculation at 3 meter test distance measurements.

If the frequency between 9 – 490 kHz,

Limit = $20\log(2400/f(\text{kHz})) + 80$

If the frequency between 490 – 1705 kHz,

Limit = $20\log(2400/f(\text{kHz})) + 40$

If the frequency between 1705 – 30000 kHz,

Limit = $20\log 30 + 40$

For 40 kHz frequency the calculated limit is:

Limit_{3m} = Limit_{300m} + DF = $35.5\text{dBuV/m} + 80 \text{ dB} = 115.5 \text{ dBuV/m}$

Test equipment used: ETSTW-RE 004, ETSTW-RE 027,
ETSTW-RE 055, ETSTW-RE 049.



Registration number: W6M21409-14476-C-1
FCC ID: 2ADCGCIMRF01

3.3 Occupied Bandwidth


FCC Rules: 2.1049

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated are each equal to 0.5% of the total mean power radiated by a given emission.

The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth specifications are given, the following guidelines are used:

Fundamental frequency	Minimum resolution bandwidth
9 kHz to 30 MHz	1 kHz
30 MHz to 1000 MHz	10 kHz
1000 MHz to 40 GHz	100 kHz

Test result:

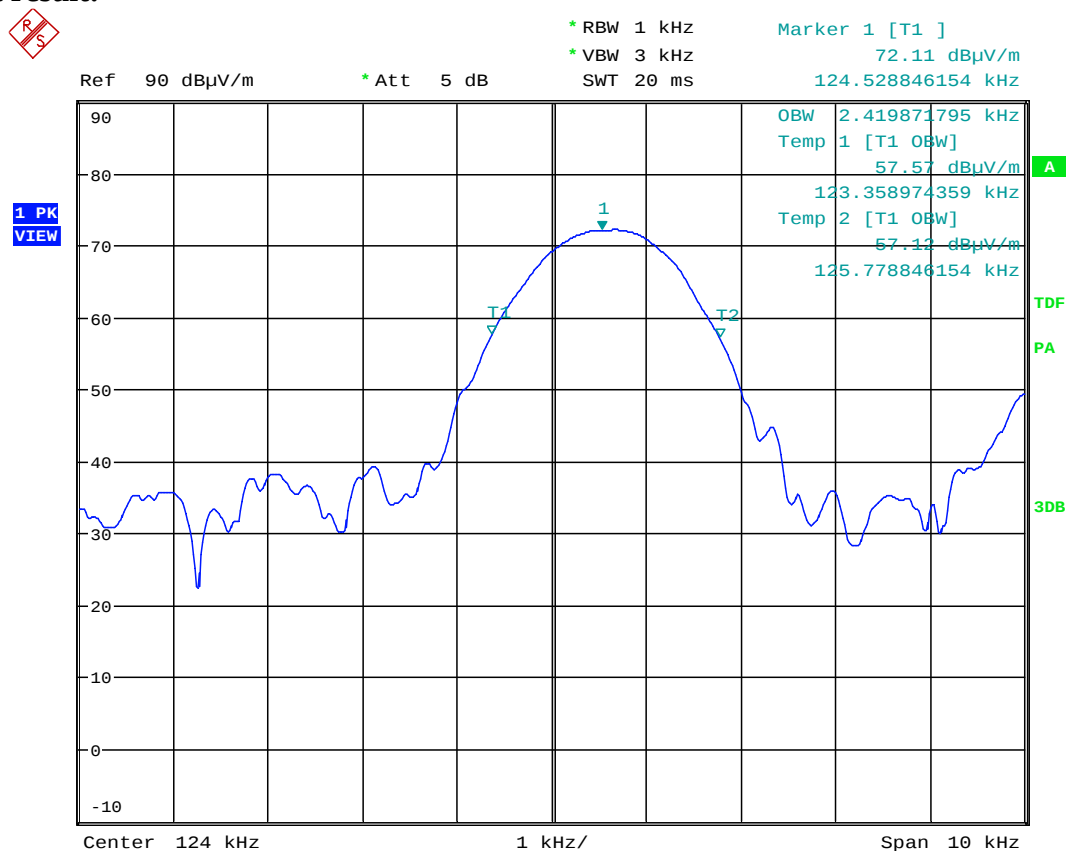

Date: 1.OCT.2014 10:37:04

Test equipment: ETSTW-RE 055



Registration number: W6M21409-14476-C-1


FCC ID: 2ADCGCIMRF01

3.4 Antenna requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

Explanation: This antenna is Ferrite core bar type antenna which passes antenna requirement.

The equipment meets the requirements	yes ☒	no ☐
--------------------------------------	--	--------------------------------



Registration number: W6M21409-14476-C-1
FCC ID: 2ADCGCIMRF01

3.5 Radiated Emissions from Receiver Section of Receiver Part

For the frequency from 9 kHz to 30 MHz:


FCC Rule: 15.209

The field strength of any emission appearing outside of the specific band shall not exceed the general radiated emission limits in 15.209.

Frequency of Emission (MHz)	Field Strength of Fundamental Limit uV/m	Measurement distance
0.009 – 0.490	2400 / f (KHz)	300
0.49 – 1.705	24000 / f (KHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

* In the emission table above, the tighter limit applies at the band edges.


For the frequency from 9 kHz to 30 MHz:

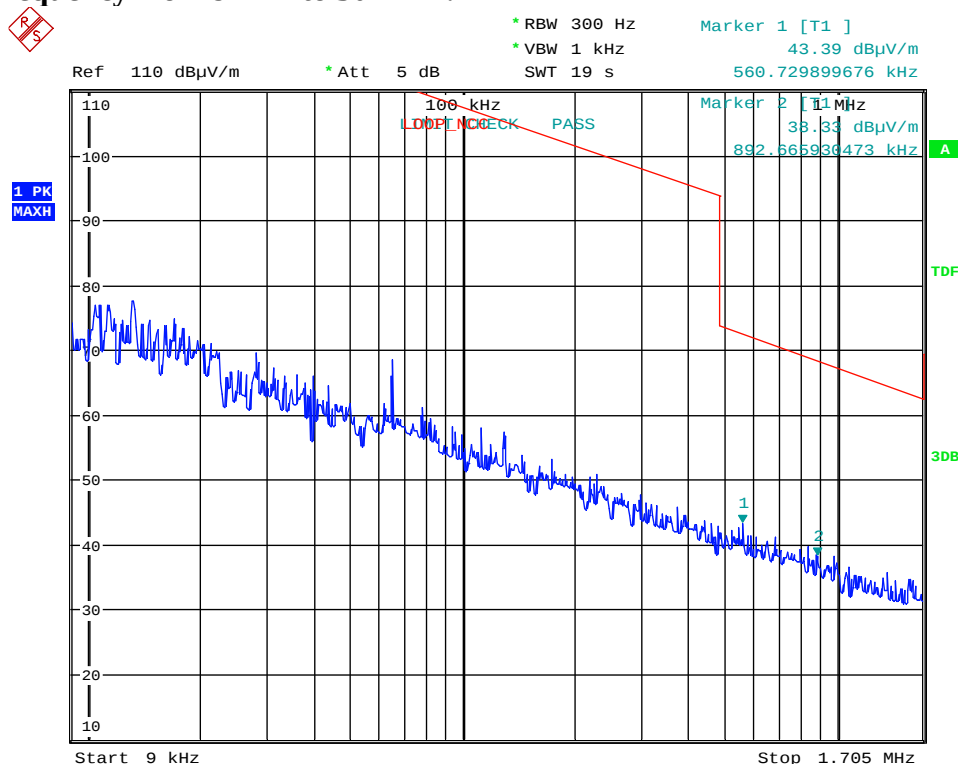

Date: 1.OCT.2014 10:43:25



Registration number: W6M21409-14476-C-1
FCC ID: 2ADCGCIMRF01

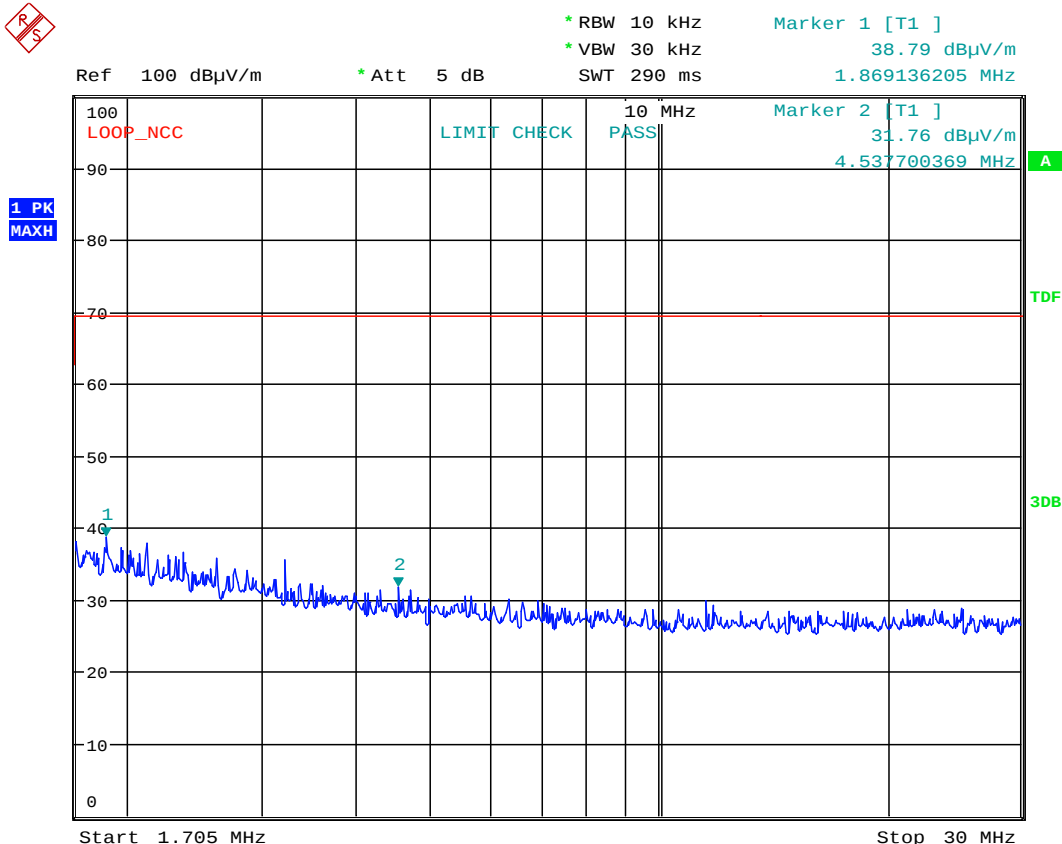

Date: 1.OCT.2014 10:46:17

Note: The above field strength limits are specified at a distance of 3 meters.

The test was performed in the anechoic chamber at 3 meter test distance, i.e. the distance between measuring antenna and EUT boundary. The results were extrapolated by using the square of an inverse linear distance factor DF:

$DF = 40 \log (D_1/D_2) = 80 \text{ dB}$, where

For D_1 is the 300 meter specified measurement distance.

D_2 is the 3 meter test measurement distance.

The DF = 80 dB was applied for limit calculation at 3 meter test distance measurements.

For D_1 is the 30 meter specified measurement distance.

D_2 is the 3 meter test measurement distance.

The DF = 40 dB was applied for limit calculation at 3 meter test distance measurements.

If the frequency between 9 – 490 kHz, limit = $20 \log(2400/f(\text{kHz})) + 80$

If the frequency between 490 – 1705 kHz, limit = $20 \log(2400/f(\text{kHz})) + 40$

If the frequency between 1705 – 30000 kHz, limit = $20 \log 30 + 40$

For 125 kHz frequency the calculated limit is:

$\text{Limit}_{3m} = \text{Limit}_{300m} + DF = 35.5 \text{ dBuV/m} + 80 \text{ dB} = 115.5 \text{ dBuV/m}$

Test equipment used: ETSTW-RE 004, ETSTW-RE 027,
ETSTW-RE 055, ETSTW-RE 049.



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21409-14476-C-1

FCC ID: 2ADCGCIMRF01

For the frequency from 30 MHz to 1000 MHz.:

FCC Rule: 15.109

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission (MHz)	Field Strength (microvolts/meter)	Field Strength (dBmicrovolts/meter)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

Above 30 MHz

Model: CIM150E

Date: 2014/10/2

Mode: RX

Temperature: 24 °C

Engineer: Leon

Polarization: Horizontal

Humidity: 60 %

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
166.0721	12.70	peak	15.03	27.73	43.50	-15.77	120	100
232.1642	19.09	peak	13.98	33.07	46.00	-12.93	50	100
302.1442	19.39	peak	16.04	35.43	46.00	-10.57	135	100
409.0581	13.48	peak	18.94	32.42	46.00	-13.58	170	100
634.5490	8.19	peak	23.47	31.66	46.00	-14.34	80	100
702.5851	7.85	peak	24.49	32.34	46.00	-13.66	90	100

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
33.8877	25.62	QP	13.32	38.94	40.00	-1.06	225	100
78.5972	24.25	peak	10.06	34.31	40.00	-5.69	150	100
113.5871	25.98	peak	12.71	38.69	43.50	-4.81	70	100
152.4650	19.32	peak	15.33	34.65	43.50	-8.85	135	100
409.0581	11.44	peak	18.94	30.38	46.00	-15.62	190	100
617.0540	8.87	peak	23.33	32.20	46.00	-13.80	210	100

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 030,
ETSTW-RE 044, ETSTW-RE 064

Note

- Correction Factor = Antenna factor + Cable loss - Preamplifier**
- The formula of measured value as: Test Result = Reading + Correction Factor**
- Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average**
- All not in the table noted test results are more than 20 dB below the relevant limits.**
- Measurement uncertainty for 3m measurement : 0.009-30 MHz : ±6.03 dB, 30-1000 MHz = ± 3.68 dB, 1-18 GHz = ± 5.37 dB, 18-40 GHz= ± 3.43 dB ; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.**
- See attached diagrams in appendix.**



Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M21409-14476-C-1

FCC ID: 2ADCGCIMRF01

3.6 Power Line Conducted Emission

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

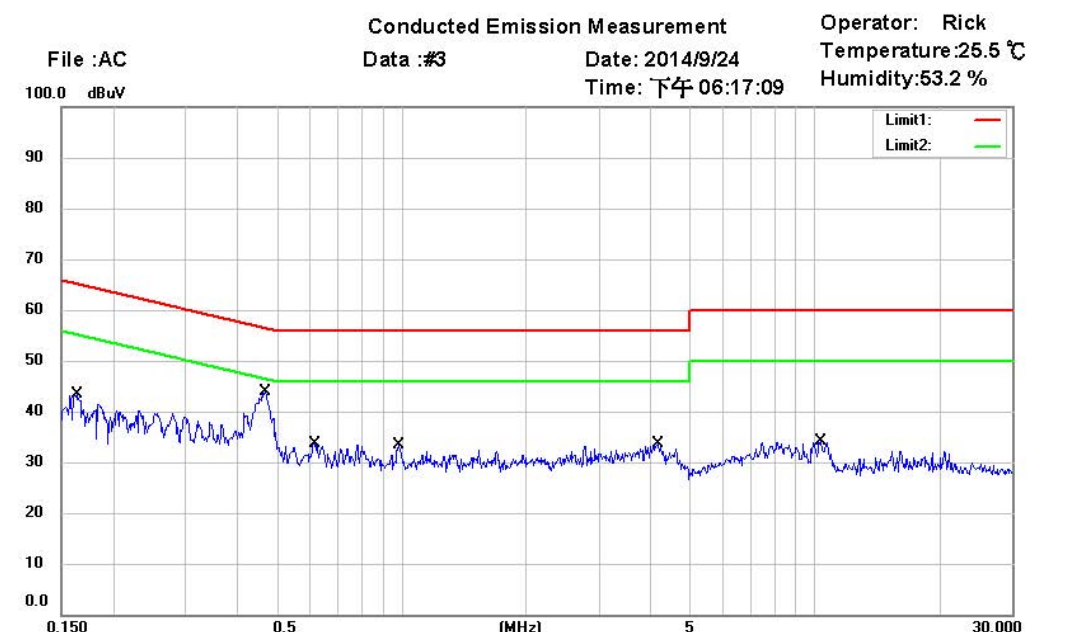

Site : Chamber_03

Condition : FCC Part 15 Class B Conduction (QP)

EUT : W6M21409-14476

M/N: CIM150E

Test Mode : RS232

Note :

Phase: N

Power : 120Vac

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Comment
	0.1630	-2.69	QP	9.67	6.98	65.31	-58.33	
	0.1630	-7.66	AVG	9.67	2.01	55.31	-53.30	
	0.4676	-2.96	QP	9.68	6.72	56.56	-49.84	
	0.4676	-7.58	AVG	9.68	2.10	46.56	-44.46	
	0.6147	-2.78	QP	9.68	6.90	56.00	-49.10	
	0.6147	-7.51	AVG	9.68	2.17	46.00	-43.83	
	0.9815	-2.80	QP	9.70	6.90	56.00	-49.10	
	0.9815	-7.53	AVG	9.70	2.17	46.00	-43.83	
	4.1810	-2.48	QP	9.83	7.35	56.00	-48.65	
*	4.1810	-7.38	AVG	9.83	2.45	46.00	-43.55	
	10.3250	-2.50	QP	10.04	7.54	60.00	-52.46	
	10.3250	-7.38	AVG	10.04	2.66	50.00	-47.34	



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21409-14476-C-1
FCC ID: 2ADCGCIMRF01

Conducted Emission Measurement

Operator: Rick
Temperature: 25.5 °C
Humidity: 53.2 %


File : AC

Data : #2

Date: 2014/9/24

Time: 下午 06:15:00

100.0 dBuV

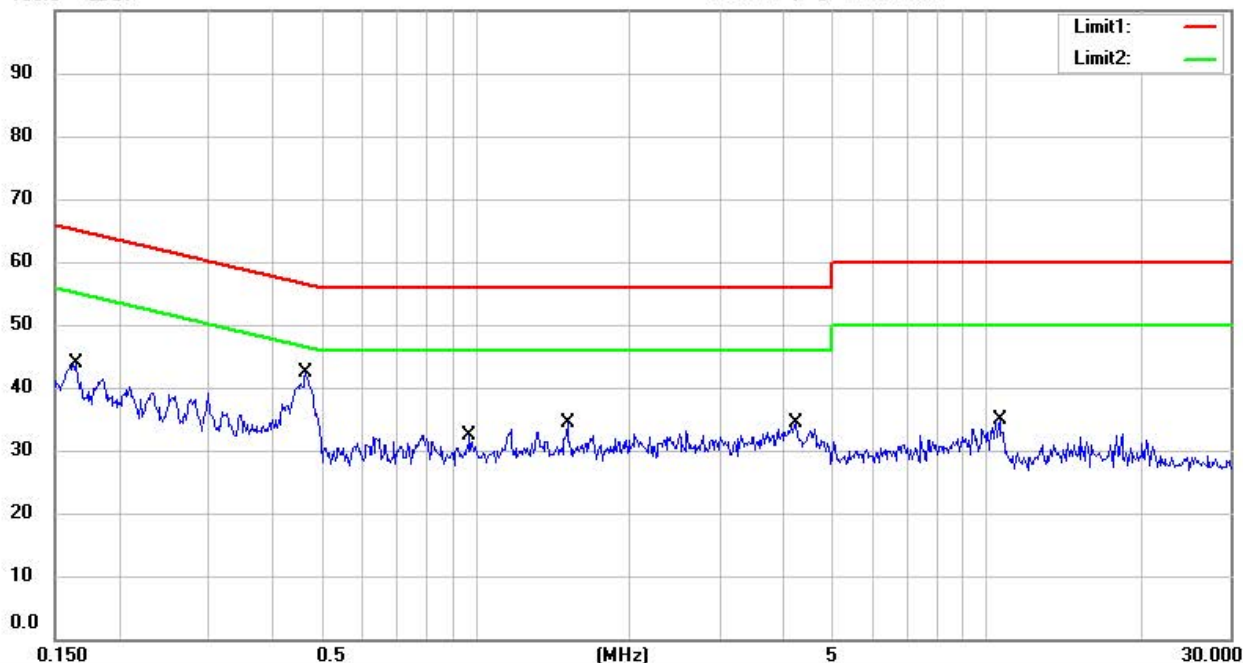

Site : Chamber_03

Condition : FCC Part 15 Class B Conduction (QP)

Phase: L1

EUT : W6M21409-14476

Power : 120Vac

M/N: CIM150E

Test Mode : RS232

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Comment
	0.1645	26.32	QP	9.66	35.98	65.23	-29.25	
	0.1645	7.82	AVG	9.66	17.48	55.23	-37.75	
	0.4655	26.89	QP	9.67	36.56	56.59	-20.03	
*	0.4655	21.49	AVG	9.67	31.16	46.59	-15.43	
	0.9725	13.41	QP	9.70	23.11	56.00	-32.89	
	0.9725	6.46	AVG	9.70	16.16	46.00	-29.84	
	1.5058	14.71	QP	9.73	24.44	56.00	-31.56	
	1.5058	7.75	AVG	9.73	17.48	46.00	-28.52	
	4.2283	16.56	QP	9.82	26.38	56.00	-29.62	
	4.2283	10.15	AVG	9.82	19.97	46.00	-26.03	
	10.5875	14.07	QP	9.99	24.06	60.00	-35.94	
	10.5875	7.63	AVG	9.99	17.62	50.00	-32.38	



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21409-14476-C-1
FCC ID: 2ADCGCIMRF01

Conducted Emission Measurement


Operator: Rick
Temperature: 25.5 °C
Humidity: 53.2 %

File : AC
100.0 dBuV

Data : #3

Date: 2014/9/24

Time: 下午 05:45:08

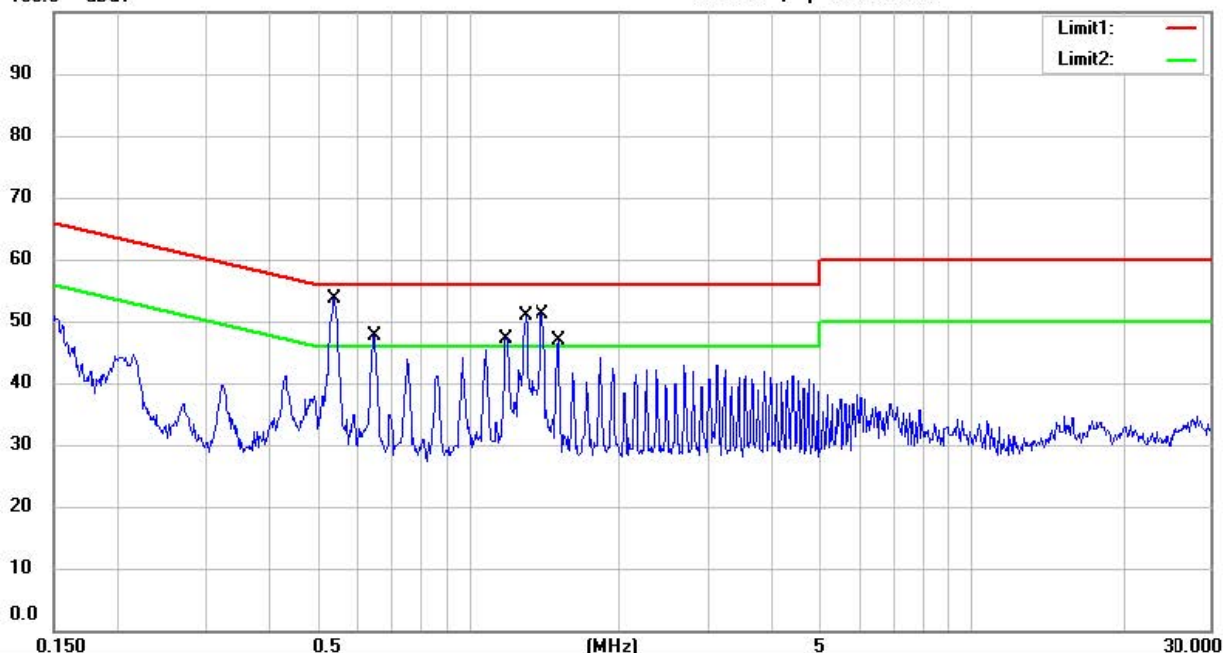

Site : Chamber_03

Condition : FCC Part 15 Class B Conduction (QP)

Phase: N

EUT : W6M21409-14476

Power : 120Vac

M/N: CIM150E

Test Mode : USB

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Comment
*	0.5382	41.22	QP	9.68	50.90	56.00	-5.10	
	0.5382	23.17	AVG	9.68	32.85	46.00	-13.15	
	0.6462	34.22	QP	9.69	43.91	56.00	-12.09	
	0.6462	19.44	AVG	9.69	29.13	46.00	-16.87	
	1.1795	30.26	QP	9.71	39.97	56.00	-16.03	
	1.1795	16.19	AVG	9.71	25.90	46.00	-20.10	
	1.2920	35.12	QP	9.71	44.83	56.00	-11.17	
	1.2920	16.43	AVG	9.71	26.14	46.00	-19.86	
	1.3977	37.60	QP	9.72	47.32	56.00	-8.68	
	1.3977	22.42	AVG	9.72	32.14	46.00	-13.86	
	1.5080	33.21	QP	9.73	42.94	56.00	-13.06	
	1.5080	18.65	AVG	9.73	28.38	46.00	-17.62	




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21409-14476-C-1
FCC ID: 2ADCGCIMRF01

Conducted Emission Measurement

Operator: Rick
Temperature: 25.5 °C
Humidity: 53.2 %

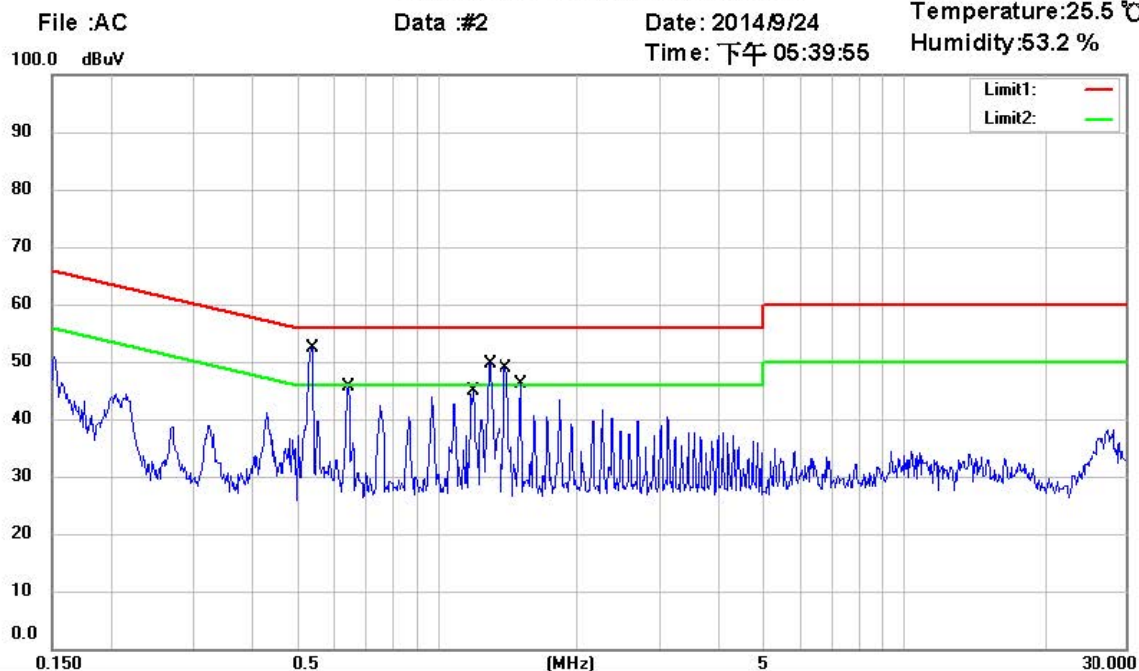

Site : Chamber_03

Condition : FCC Part 15 Class B Conduction (QP)

Phase: L1

EUT : W6M21409-14476

Power : 120Vac

M/N: CIM150E

Test Mode : USB

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Comment
*	0.5382	41.26	QP	9.67	50.93	56.00	-5.07	
	0.5382	22.80	AVG	9.67	32.47	46.00	-13.53	
	0.6440	33.30	QP	9.68	42.98	56.00	-13.02	
	0.6440	15.91	AVG	9.68	25.59	46.00	-20.41	
	1.1885	25.16	QP	9.71	34.87	56.00	-21.13	
	1.1885	8.19	AVG	9.71	17.90	46.00	-28.10	
	1.2897	35.40	QP	9.71	45.11	56.00	-10.89	
	1.2897	16.60	AVG	9.71	26.31	46.00	-19.69	
	1.3977	37.29	QP	9.72	47.01	56.00	-8.99	
	1.3977	20.57	AVG	9.72	30.29	46.00	-15.71	
	1.5080	33.23	QP	9.73	42.96	56.00	-13.04	
	1.5080	16.83	AVG	9.73	26.56	46.00	-19.44	

Note

1. The formula of measured value as: Test Result = Reading + Correction Factor
2. The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss
3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
4. All not in the table noted test results are more than 20 dB below the relevant limits.
5. Measurement uncertainty = ± 1.41 dB; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.
6. Up Line: QP Limit Line, Down Line: Ave Limit Line.



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21409-14476-C-1

FCC ID: 2ADCGCIMRF01

Limits:

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi Peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Test equipment used: ETSTW-CE 001, ETSTW-CE 016, ETSTW-CE 006, ETSTW-RE 045.



Registration number: W6M21409-14476-C-1
FCC ID: 2ADCGCIMRF01

Appendix

Measurement diagrams

Spurious Emissions Radiated




Registration number: W6M21409-14476-C-1

FCC ID: 2ADCGCIMRF01


Spurious Emissions radiated_TX

Above 30 MHz

Antenna Polarization H

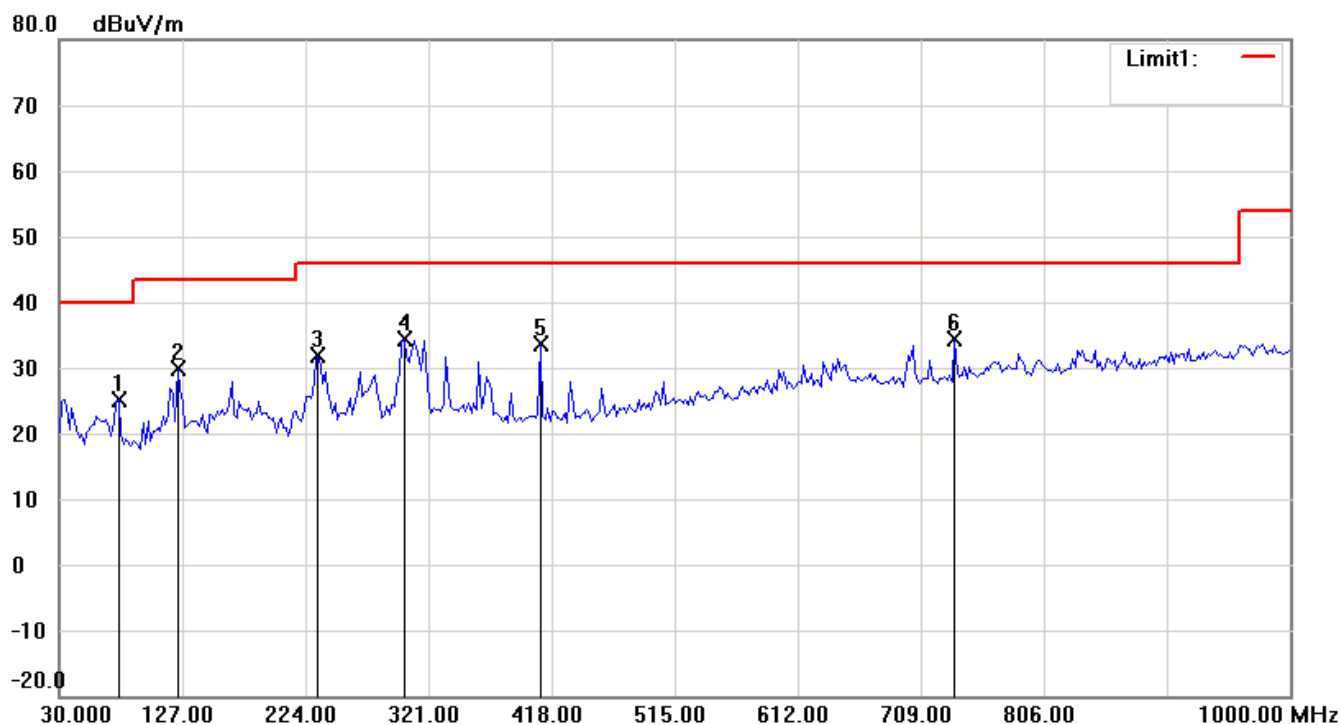

Antenna Polarization V

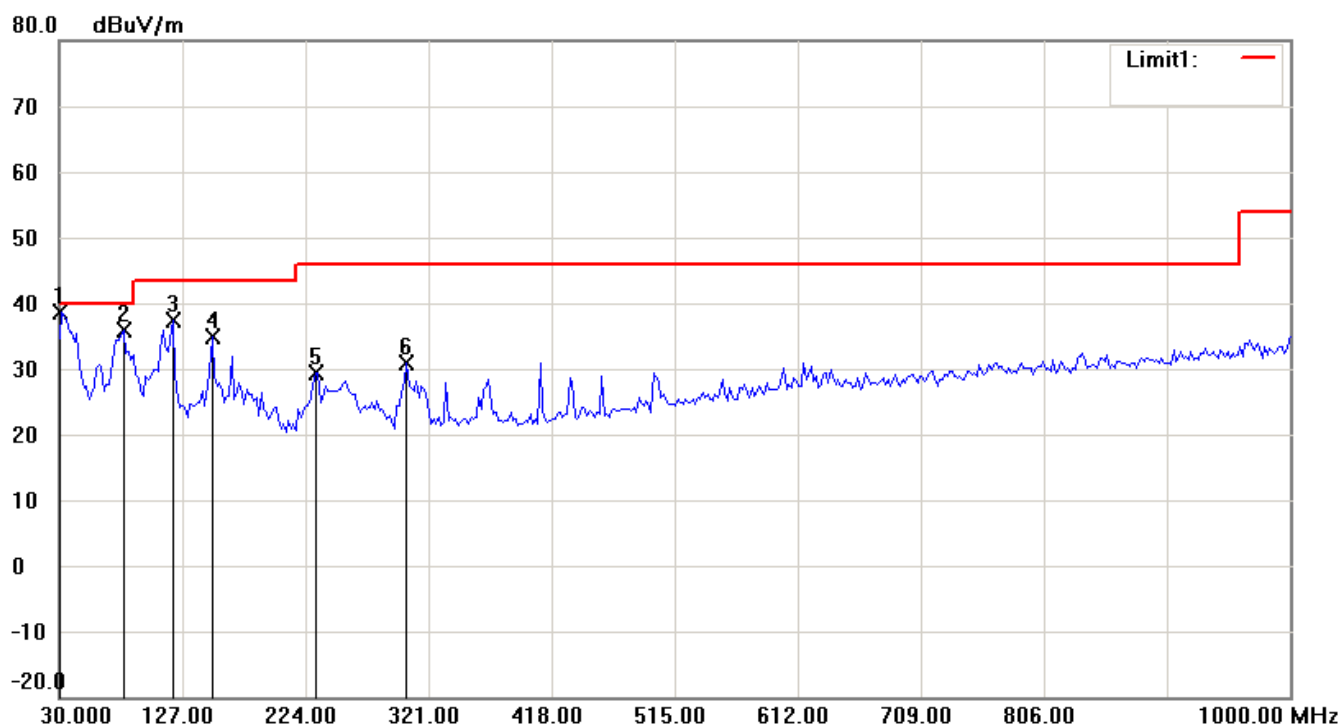

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.



Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M21409-14476-C-1

FCC ID: 2ADCGCIMRF01


Spurious Emissions radiated_RX

Above 30 MHz

Antenna Polarization H

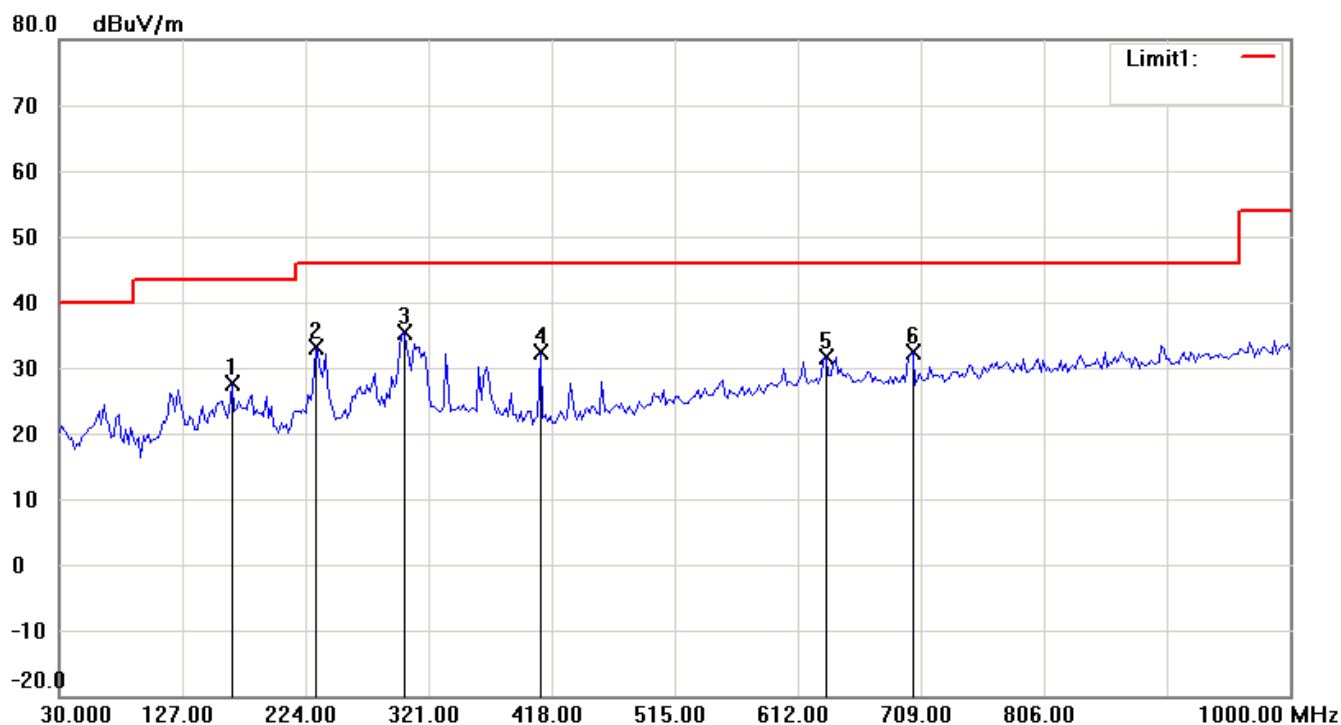

Antenna Polarization V

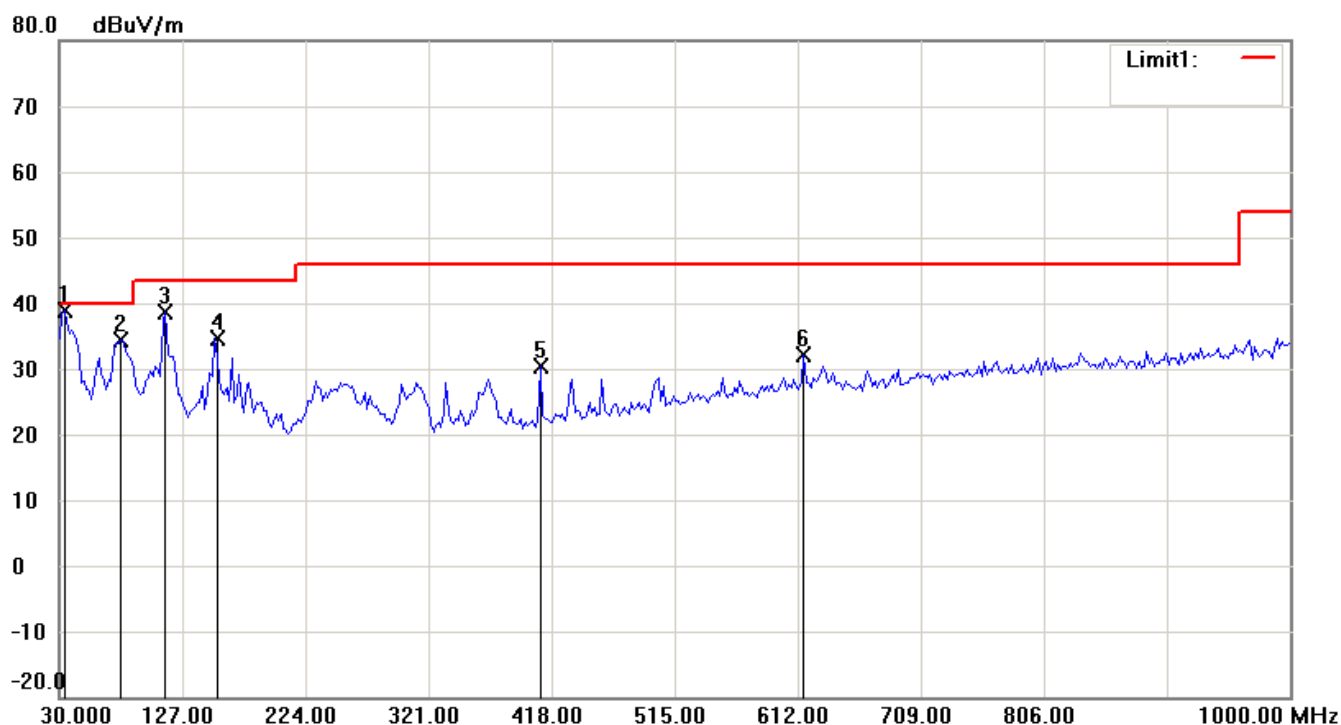

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.