



THE ENERGY OF THINGS

IPPAN (Peter)

Installation Manual

Version 5.0
July 2015

CONTENTS

- 1.0 OVERVIEW**
- 2.0 IPPAN MODULE**
 - 2.1 SPECIFICATIONS**
 - 2.2 PIN SIGNALS**
 - 2.3 ANTENNAS**
 - 2.4 OPERATING CHANNELS**
- 3.0 MODES OF OPERATION**
- 4.0 INSTALLATION**
- 5.0 AGENCY CERTIFICATIONS**
- 6.0 END USER LICENSE AGREEMENT**



CUSTOMER SUPPORT
970-300-1344
info@amatiscontrols.com

1.0 OVERVIEW

Thank you for choosing the IPPAN (or Peter) module by Amatis Controls. This Installation Manual will guide you through the process of installing the module.

IPPAN embeds wireless IPv6-based communication into each Amatis or host device, and uses wireless mesh networking technology to connect to the internet. Each IPPAN module has a unique IPv6 address and “smart” functionality which enables wireless data gathering, communication, and control of the host device.


The IPPAN module is designed to be a self contained IEEE® 802.15.4 compliant wireless interface to be employed in conjunction with a variety of daughter boards that must provide a stable 3.0-3.3Vdc supply, and provides a diverse set of I/O options which include serial interface or general purpose I/O. IPPAN is comprised of a microcontroller, transceiver, amplifier, and two antennas.

2.0 IPPAN MODULE

2.1 SPECIFICATIONS

Specification	IPPAN
Performance	
Tuning Range	internally calibrated for the selected IEEE channel
Data Rate	250kb/s
Max Radio Output Power	5.0 dbm
Receiver Sensitivity	-101dBm
Power Requirements	
VCC	3.0 - 3.3Vdc, 0.3A
General	
Dimensions	8.7 x 25.0 x 32.6 mm (H x W x D)
Operating Temperature	-30° C to +60°
Humidity	90% RH (max), non-condensing
Agency Approval	
United States (15.247)	2ADDY-P1
Industry Canada (IC)	20256-P1

2.2 PIN SIGNALS

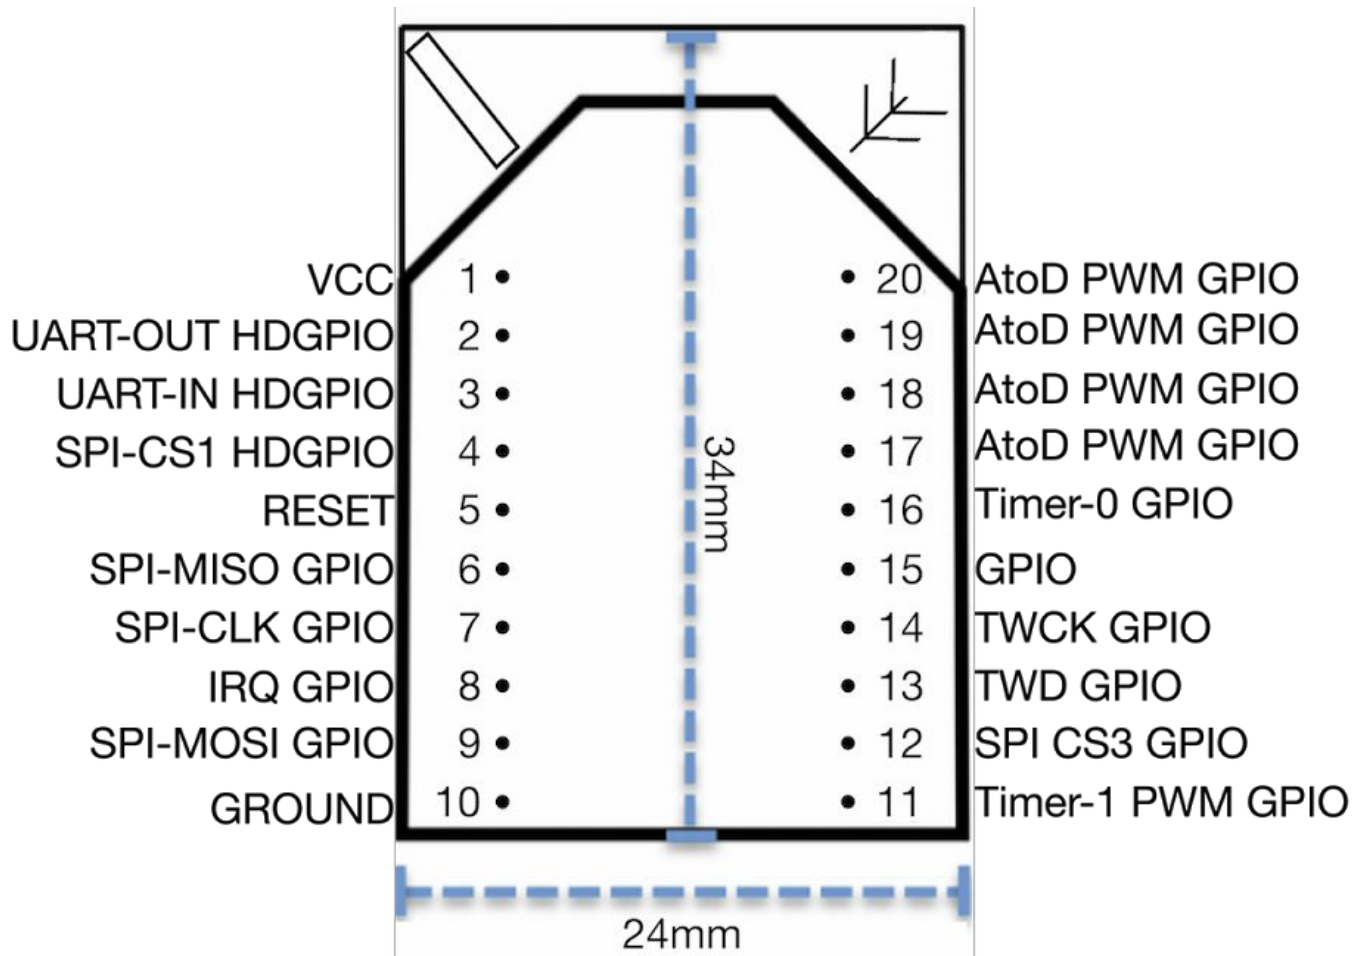

PIN NUMBER	NAME	DESCRIPTION
1	VCC	Voltage Supply
2	UART-OUT HDGPIO	Serial Uart Out or High Drive General Purpose Input/Output
3	UART-IN HDGPIO	Serial Uart In or High Drive General Purpose Input/Output
4	SPI-CS1 HDGPIO	SPI Chip Select 1 or High Drive General Purpose Input/Output
5	RESET	Module Inverted Reset
6	SPI-MISO GPIO	SPI Master Input → Slave Output or General Purpose Input/Output
7	SPI-CLK GPIO	SPI Clock or General Purpose Input/Output
8	IRQ GPIO	External Interrupt or General Purpose Input/Output
9	SPI-MOSI GPIO	SPI Master Output → Slave Input or General Purpose Input/Output
10	GROUND	Ground
11	Timer-1 PWM GPIO	Timer Counter or Pulse Width Modulation or General Purpose Input/Output
12	SPI CS3 GPIO	SPI Chip Select 1 or General Purpose Input/Output
13	TWD GPIO	Two Wire Data or General Purpose Input/Output
14	TWCK GPIO	Two Wire Clock or General Purpose Input/Output
15	GPIO	General Purpose Input/Output
16	Timer-0 GPIO	Timer Counter or General Purpose Input/Output
17	AtoD PWM GPIO	Analog to Digital Converter or Pulse Width Modulation or General Purpose Input/Output
18	AtoD PWM GPIO	Analog to Digital Converter or Pulse Width Modulation or General Purpose Input/Output
19	AtoD PWM GPIO	Analog to Digital Converter or Pulse Width Modulation or General Purpose Input/Output
20	AtoD PWM GPIO	Analog to Digital Converter or Pulse Width Modulation or General Purpose Input/Output

2.3 Antennas

IPPAN's antennas are integrated into the pcb and to meet fcc regulations cannot be modified. The ceramic antenna has a gain less than 2.2 dBi, and the monopole (whip) antenna has a gain of less than 5.19 dBi. IPPAN uses spatial diversity and a proprietary algorithm to select the antenna with the best performance characteristics.

2.4 Operating Channels

IPPAN provides a wide range of channels listed below

IEEE 802.15.4 Operating Channels	Operating Frequency [GHz]
13	2.415
14	2.420
15	2.425
16	2.430
17	2.435
18	2.440
19	2.445
20	2.450
21	2.455
22	2.460
23	2.465
24	2.470

3.0 Modes of Operation

The final use and application of IPPAN is dependent on the firmware pre-installed at the factory. However, all applications have common modes of operations that can be summarized as follows:

Idle Mode

IPPAN enters into idle mode of operation whenever the device is not in transmit, or receive mode, or when there is no data to process.

Data Processing Mode

When an interrupt, timer, frame reception, or frame transmission event occurs IPPAN moves out of idle mode and into data processing mode. In this mode IPPAN can process information and act on data accordingly.

Receive Mode

When a 802.15.4 compliant message is received by the transceiver and it's either addressed for IPPAN or broadcast the device can be said to be in receive mode. In receive mode IPPAN validates data and address before accepting the message for processing.

Transmit Mode

In this mode IPPAN generates an 802.15.4 compliant message that can be sent directly to another IPPAN or broadcast to all other IPPAN modules within radio range. Transmission mode is preceded by user interaction, a data logging event, a network maintenance message or as a response to a message acknowledgement request.

4.0 INSTALLATION

Design Guidelines

IPPAN will come pre programed from the manufacture, and in many cases pre-installed in a device. If you have elected to install IPPAN in house, it is important to understand the it's proper installation.

- The IPPAN Module is designed to mount into a 20 pin socket.
 - Samtec P/N: MMS-110-01-L-SV.
 - Samtec P/N: SMM-110-02-SM-S.
- No soldering is required when installing the Module.
- Standard electrostatic discharge precautions should be taken when handling the module.
- The socket should be designed in a manner where the radiating structures (antenna) are away from other sensitive electronics
- The monopole antenna should stand perpendicular to the module (see FIG 4.0).
- No antenna modifications can be made (see section 5.0)
- FCC labeling guidelines must be maintained (see section 5.0)
- All stated electrical maximum and minimum values must be met (see section 2.1)

End User Guidelines

The module is designed to be used in fixed locations and to generally be used in such a way that a separation distance of at least 20 centimeters is maintained between the transmitter's radiating structures and the body of the user or nearby persons.

If the end user experiences communication problems it is recommended to move the transceivers closer to one another or purchase a repeater.

Objects including, but not limited to, steel reinforced walls, metal electrical boxes, water, and snow may degrade the working distance between transceivers, and if possible should be avoided. IPPAN is designed to operate in a mesh network, and in most cases adding nodes can help overcome any communication issues.

FCC requires specific text to be placed within user's manual or operator instruction guide for the final commercial product. Specific details on this text can be found in the IPPAN Module Integration Instructions.(see section 5.0)

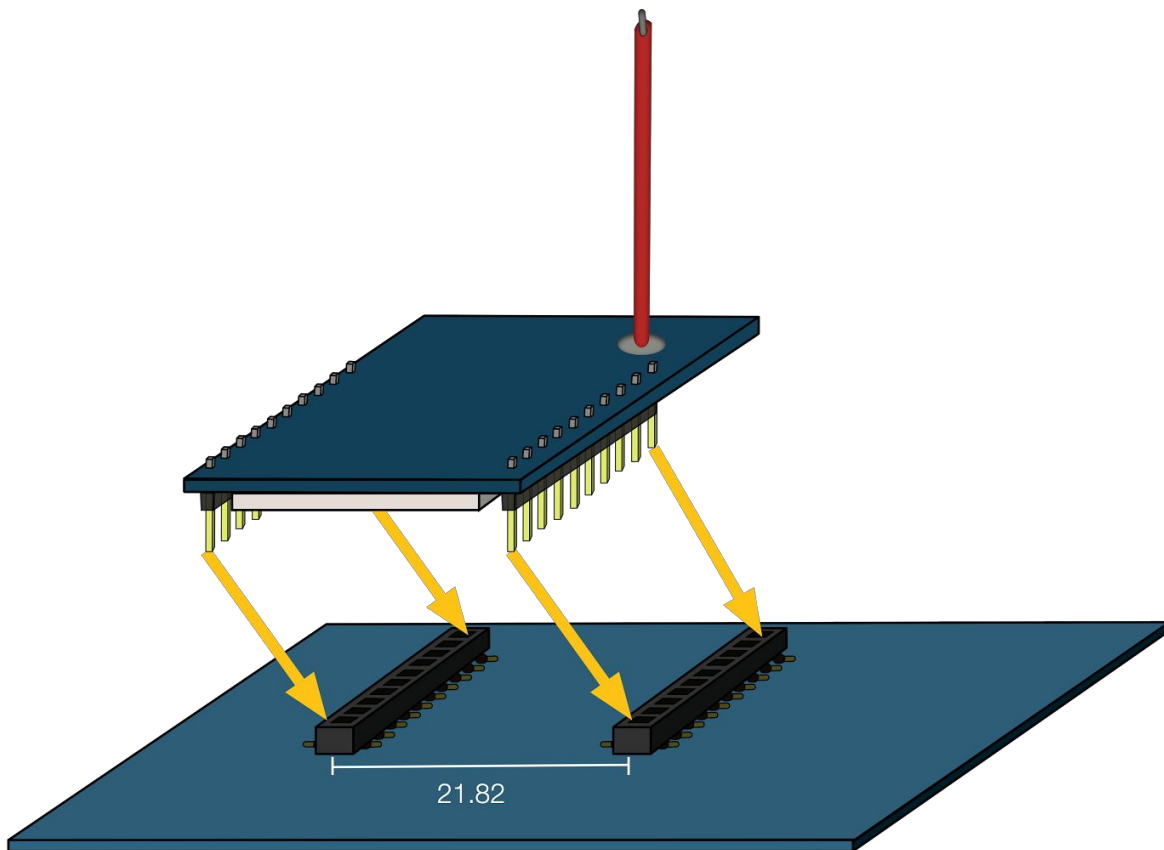


FIG 4.0

5.0 AGENCY CERTIFICATIONS

Operating Requirements and Conditions

The design of *IPPAN* complies with Part 15 of the U.S. Federal Communications Commission guidelines respecting safety levels of radio frequency (RF) exposure for Mobile devices.

Mobile Device RF Exposure Statement

RF Exposure - This device is only authorized for use in a mobile application. At least 20cm of separation distance between the *IPPAN* device and the user's body must be maintained at all times.

Caution Statement for Modifications

CAUTION: Any changes or modifications not expressly approved by *Amatis Controls, LLC* could void the user's authority to operate the equipment.

FCC Notices

IPPAN has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in an installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning IPPAN off and on the user is encouraged to try to correct the interference by one or more of the following measures:

- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer for help.

OEM Labeling Requirements

WARNING! The Original Equipment Manufacturer (OEM) must ensure that FCC labeling requirements are met. This includes a clearly visible label on the outside of the final product enclosure that displays the contents shown below.

FCC:

Contains FCC ID: 2ADDY-P1

The enclosed device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. this device may not cause harmful interference, and
2. this device must accept any interference received, including interference that may cause undesired operation

CANADA (IC):

Contains Model IPPAN P1, IC:20256-P1

6.0 END USER LICENSE AGREEMENT

1. USER NOTICE

Please read this End User Software License Agreement (“License Agreement”) carefully before using your Amatis product. By installing and registering an Amatis device you hereby agree with the terms of this License Agreement. If you do not agree with the terms of this License Agreement, do not use the Amatis Product and Amatis Software.

2. TERMS

The terms of this License Agreement are applicable to anyone who uses Amatis Controls Software and Firmware included in a product purchased from Amatis and/or Amatis partners. This license does not permit the use of the Amatis Software in any other product. Amatis Controls reserves the right to take legal action against anyone else using, selling or distributing the software. By using the Amatis Product and Amatis Software, you agree to the terms of this License Agreement.

3. LICENSE

Amatis Controls grants a single, non-sublicensable, non-exclusive, non-transferable license to use the Amatis Software solely as part of products obtained from Amatis and/or any Amatis partner for which applicable fees have been paid. Except for the limited license rights expressly granted in this License Agreement, Amatis Controls reserves all rights in and to the Amatis Software and any modifications or copies thereto.

4. GENERAL RESTRICTIONS

In exchange for the license, you agree not to: decompile, disassemble, or reverse engineer the Amatis Software; alter, modify or create any derivative works based on the Amatis Software; use, copy, sell, sublicense, lease, rent, loan, assign, convey or otherwise transfer the Amatis Software except as expressly authorized in writing by Amatis Controls; distribute, disclose, or allow use of the Amatis Software, in any format, through any timesharing service, service bureau, network or by any other means; allow any service provider or other third party, with the exception of Amatis Controls authorized resellers, distributors, and their designated employees who are acting solely on behalf of and for the benefit of the end user, to use or execute any software commands that cause the Amatis Software to perform functions that facilitate the maintenance or repair of any product.

5. DISCLAIMER OF WARRANTIES

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, AMATIS CONTROLS PROVIDES THE AMATIS SOFTWARE “AS IS” AND “AS AVAILABLE” WITH ALL FAULTS AND WITHOUT WARRANTY OF ANY KIND. AMATIS CONTROLS HEREBY DISCLAIMS WITH RESPECT TO THE AMATIS SOFTWARE ALL WARRANTIES AND CONDITIONS, WHETHER EXPRESS, IMPLIED OR STATUTORY, INCLUDING BUT NOT LIMITED TO ANY (IF ANY) WARRANTIES OR CONDITIONS OF OR RELATED TO: NON-INFRINGEMENT, MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, LACK OF VIRUS, ACCURACY, OR COMPLETENESS OF RESPONSE.

6. TERMINATION

If you breach the license limitations or restrictions in this License Agreement, Amatis Controls may, with immediate effect, terminate the software licenses granted in this License Agreement without prejudice to any available rights and remedies. Upon termination or expiration of the license for any reason, you shall immediately return the Amatis Software and any copies to Amatis Controls, or, at Amatis Controls’ discretion, you shall permanently destroy all copies of the Amatis Software and any related materials in your possession or control. Inadvertent copies of the Amatis Software and any related materials remaining in the possession of the End User subsequent to termination or expiration shall not be implied or construed as Amatis Controls consenting to transfer ownership of the software and any related materials to the End User.

7. LIMITATION OF LIABILITY

TO THE EXTENT NOT PROHIBITED BY APPLICABLE LAW, IN NO EVENT SHALL AMATIS CONTROLS BE LIABLE FOR ANY CONSEQUENTIAL, INDIRECT, SPECIAL, EXEMPLARY, OR PUNITIVE DAMAGES WHATSOEVER (INCLUDING BUT NOT LIMITED TO DAMAGES FOR: LOSS OF PROFITS, LOSS OF CONFIDENTIAL OR OTHER INFORMATION, BUSINESS INTERRUPTION) ARISING OUT OF OR IN ANY WAY RELATED TO THE USE OF OR INABILITY TO USE THE AMATIS SOFTWARE, EVEN IF AMATIS CONTROLS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

8. COMPLIANCE

Amatis Controls will have the right to inspect your compliance with these License Agreement terms.

9. GOVERNMENT END USERS

The Amatis Software is classified as “commercial computer software” and the Documentation is classified as “commercial software documentation” or “commercial items.” Any use, modification, reproduction, release, performance, display or disclosure of the Amatis Software or Documentation shall be governed solely by the terms of this License Agreement and shall be prohibited except to the extent expressly permitted.

10. APPLICABLE LAWS

This License Agreement will be governed by and construed in accordance with the laws of the United States. Severability in the event that any part or parts of this agreement shall be held illegal or null and void by any court or administrative body of competent jurisdiction, such determination shall not affect the remaining parts of this agreement, and they shall remain in full force and effect as if such part or parts determined illegal or void had not been included.