

FCC RADIO TEST REPORT

FCC ID: 2ADE2TAB700

Product : MID

Trade Name : North tech /SLIDE

Model Name: TAB700

Serial Model : TAB705,NT-TPC7,WA7016,WA7022,WA706

Report No. : BZT- 20170603218R

Prepared for

Jiangxi Wei Heng Digital Company Limited
XinYu National High-tech Industrial Development Zone,
Xinyu City,China

Prepared by

BZT Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street,
Bao'an District, Shenzhen P.R. China

TEST RESULT CERTIFICATION

Applicant's name : Jiangxi Wei Heng Digital Company Limited
Address : XinYu National High-tech Industrial Development Zone,
Xinyu City,China
Manufacture's Name..... : Jiangxi Wei Heng Digital Company Limited
Address : XinYu National High-tech Industrial Development Zone,
Xinyu City,China

Product description

Product name : MID

Model and/or type reference : TAB700

Serial Model : TAB705,NT-TPC7,WA7016,WA7022,WA706

Standards : FCC Part15.247, KDB558074 D01 DTS Meas Guidance v03r03

Test procedure ANSI C63.10-2013

This device described above has been tested by BZT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BZT, this document may be altered or revised by BZT, personal only, and shall be noted in the revision of the document.


Date of Test :

Date (s) of performance of tests : 01 Jun. 2017 ~10 Jun. 2017

Date of Issue..... : 10 Jun. 2017

Test Result..... : **Pass**

Testing Engineer : _____




(Lynn Chen)

Technical Manager : _____



(Carlen Liu)

Authorized Signatory : _____



(Tommy Zhang)

Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3 . EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
3.1.2 TEST PROCEDURE	14
3.1.3 DEVIATION FROM TEST STANDARD	14
3.1.4 TEST SETUP	14
3.1.5 EUT OPERATING CONDITIONS	14
3.1.6 TEST RESULTS	15
3.2 RADIATED EMISSION MEASUREMENT	17
3.2.1 RADIATED EMISSION LIMITS	17
3.2.2 TEST PROCEDURE	18
3.2.3 DEVIATION FROM TEST STANDARD	18
3.2.4 TEST SETUP	19
3.2.5 EUT OPERATING CONDITIONS	20
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	21
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	22
3.3 BAND EDGE EMISSION (RADIATED):	25
4 . POWER SPECTRAL DENSITY TEST	26
4.1 APPLIED PROCEDURES / LIMIT	26
4.1.1 TEST PROCEDURE	26
4.1.2 DEVIATION FROM STANDARD	26
4.1.3 TEST SETUP	26
4.1.4 EUT OPERATION CONDITIONS	26
4.1.5 TEST RESULTS	27
5 . BANDWIDTH TEST	35
5.1 APPLIED PROCEDURES / LIMIT	35
5.1.1 TEST PROCEDURE	35
5.1.2 DEVIATION FROM STANDARD	35
5.1.3 TEST SETUP	35
5.1.4 EUT OPERATION CONDITIONS	35

Table of Contents	Page
5.1.5 TEST RESULTS	36
6 . PEAK OUTPUT POWER TEST	44
6.1 APPLIED PROCEDURES / LIMIT	44
6.1.1 TEST PROCEDURE	44
6.1.2 DEVIATION FROM STANDARD	44
6.1.3 TEST SETUP	44
6.1.4 EUT OPERATION CONDITIONS	44
6.1.5 TEST RESULTS	45
7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	46
7.1 DEVIATION FROM STANDARD	46
7.2 TEST SETUP	46
7.3 EUT OPERATION CONDITIONS	46
7.4 TEST RESULTS	47
8 . ANTENNA REQUIREMENT	52
8.1 STANDARD REQUIREMENT	52
8.2 EUT ANTENNA	52
9 . EUT TEST PHOTO	53
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C KDB558074 D01 DTS Meas Guidance v03r02			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

1.1 TEST FACILITY

BZT Testing Technology Co., Ltd.

Add.: Buliding 17,Xinghua Road Xingwei industrial Park Fuyong,Baoan
District, Shenzhen,Guangdong,China

FCC Registration No.: 701733


1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %** °

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

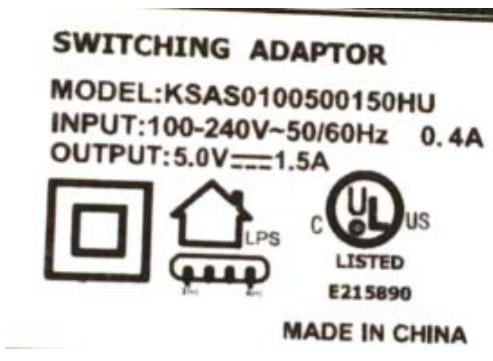Equipment	MID														
Trade Name	North tech /SLIDE														
Model Name	TAB700														
Serial Model	TAB705,NT-TPC7,WA7016,WA7022,WA706														
Model Difference	All the same,only model name is different.														
Product Description	The EUT is a MID <table> <tr> <td>Operation Frequency:</td><td>802.11b/g/n(20MHz):2412~2462 MHz 802.11n(40MHz):2422~2452</td></tr> <tr> <td>Modulation Type:</td><td>CCK/OFDM/DBPSK/DAPSK</td></tr> <tr> <td>Bit Rate of Transmitter</td><td>802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n(20/40MHz):150/144.44/130/117/115.56/104/86.67/78/52/6.5Mbps</td></tr> <tr> <td>Number Of Channel</td><td>802.11b/g/n20MHz:11CH 802.11n40MHz:7CH</td></tr> <tr> <td>Antenna Designation:</td><td>Please see Note 3.</td></tr> <tr> <td>Output Power(Conducted, PK):</td><td>802.11b: 8.64 dBm (Max.)</td></tr> <tr> <td>Antenna Gain (dBi)</td><td>0.5dbi</td></tr> </table>	Operation Frequency:	802.11b/g/n(20MHz):2412~2462 MHz 802.11n(40MHz):2422~2452	Modulation Type:	CCK/OFDM/DBPSK/DAPSK	Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n(20/40MHz):150/144.44/130/117/115.56/104/86.67/78/52/6.5Mbps	Number Of Channel	802.11b/g/n20MHz:11CH 802.11n40MHz:7CH	Antenna Designation:	Please see Note 3.	Output Power(Conducted, PK):	802.11b: 8.64 dBm (Max.)	Antenna Gain (dBi)	0.5dbi
Operation Frequency:	802.11b/g/n(20MHz):2412~2462 MHz 802.11n(40MHz):2422~2452														
Modulation Type:	CCK/OFDM/DBPSK/DAPSK														
Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n(20/40MHz):150/144.44/130/117/115.56/104/86.67/78/52/6.5Mbps														
Number Of Channel	802.11b/g/n20MHz:11CH 802.11n40MHz:7CH														
Antenna Designation:	Please see Note 3.														
Output Power(Conducted, PK):	802.11b: 8.64 dBm (Max.)														
Antenna Gain (dBi)	0.5dbi														
Channel List	Please refer to the Note 2.														
Ratings	AC 120V														
Adapter	 SWITCHING ADAPTOR MODEL:KSAS0100500150HU INPUT:100-240V~50/60Hz 0.4A OUTPUT:5.0V=1.5A UL LISTED E215890 MADE IN CHINA														
Battery	DC 3.7V,2500mAh														
Connecting I/O Port(s)	Please refer to the User's Manual														

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List for 802.11b/g/n(20)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

Channel List for 802.11n(40MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	06	2437	09	2452		
04	2427	07	2442				
05	2432	08	2447				

3.

Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Gain (dBi)	NOTE
A	N/A	N/A	FPCB Antenna	0.5	

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n(20) CH1/ CH6/ CH11
Mode 4	802.11n(40) CH3/ CH6/ CH9
Mode 5	WIFI Link Mode

For Conducted Emission	
Final Test Mode	Description
Mode 5	WIFI Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n(20) CH1/ CH6/ CH11
Mode 4	802.11n(40) CH3/ CH6/ CH9

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2)The measurements are performed at all Bit Rate of Transmitter, the worst data was reported
- (3) The EUT configured to transmit signals continuously. (duty cycle>98%)

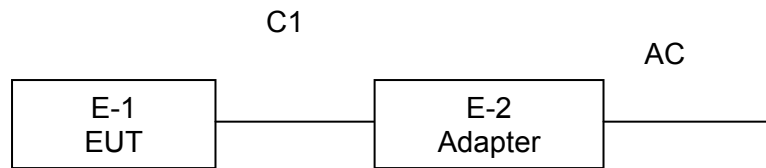2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	MID	North tech /SLIDE	TAB700	N/A	EUT
E-2	Adapter	--	KSAS0100500150HU		

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1.0m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2016.07.06	2017.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2017.06.07	2018.06.06	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2016.07.06	2017.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2017.06.07	2018.06.06	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2017.06.07	2018.06.06	1 year
6	Horn Antenna	EM	EM-AH-10180	2011071402	2016.07.06	2017.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2016.07.06	2017.07.05	1 year
8	Amplifier	EM	EM-30180	060538	2016.12.22	2017.12.21	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2017.06.08	2018.06.07	1 year
10	Power Meter	R&S	NRVS	100696	2016.07.06	2017.07.05	1 year
11	Power Sensor	R&S	URV5-Z4	0395.1619.05	2016.07.06	2017.07.05	1 year

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2017.06.06	2018.06.05	1 year
2	LISN	R&S	ENV216	101313	2016.08.24	2017.08.23	1 year
3	LISN	EMCO	3816/2	00042990	2016.08.24	2017.08.23	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2017.06.07	2018.06.06	1 year
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	2017.06.07	2018.06.06	1 year
6	Absorbing clamp	R&S	MOS-21	100423	2017.06.08	2018.06.07	1 year

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

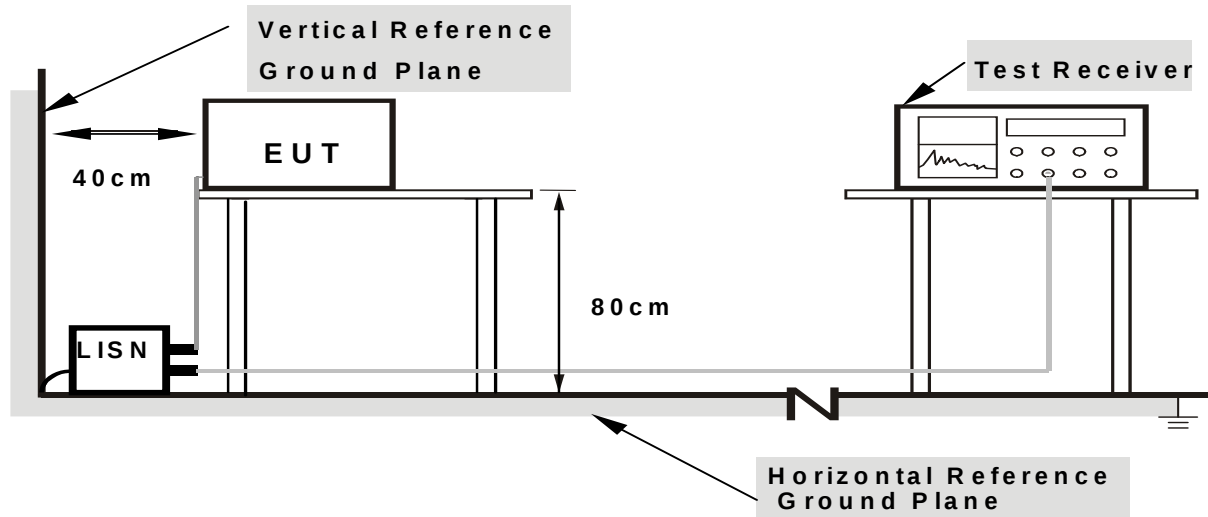

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


3.1.6 TEST RESULTS

EUT :	MID	Model Name. :	MID
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	AC 120V	Test Mode :	Mode 5

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1860	44.95	9.56	54.51	64.21	-9.70	QP
0.2779	37.34	9.88	47.22	60.88	-13.66	QP
0.3899	30.78	9.94	40.72	58.06	-17.34	QP
0.4860	27.83	10.02	37.85	56.24	-18.39	QP
0.1860	32.60	9.56	42.16	54.21	-12.05	AVG
0.2779	23.34	9.88	33.22	50.88	-17.66	AVG
0.3899	17.13	9.94	27.07	48.06	-20.99	AVG
0.4860	12.54	10.02	22.56	46.24	-23.68	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

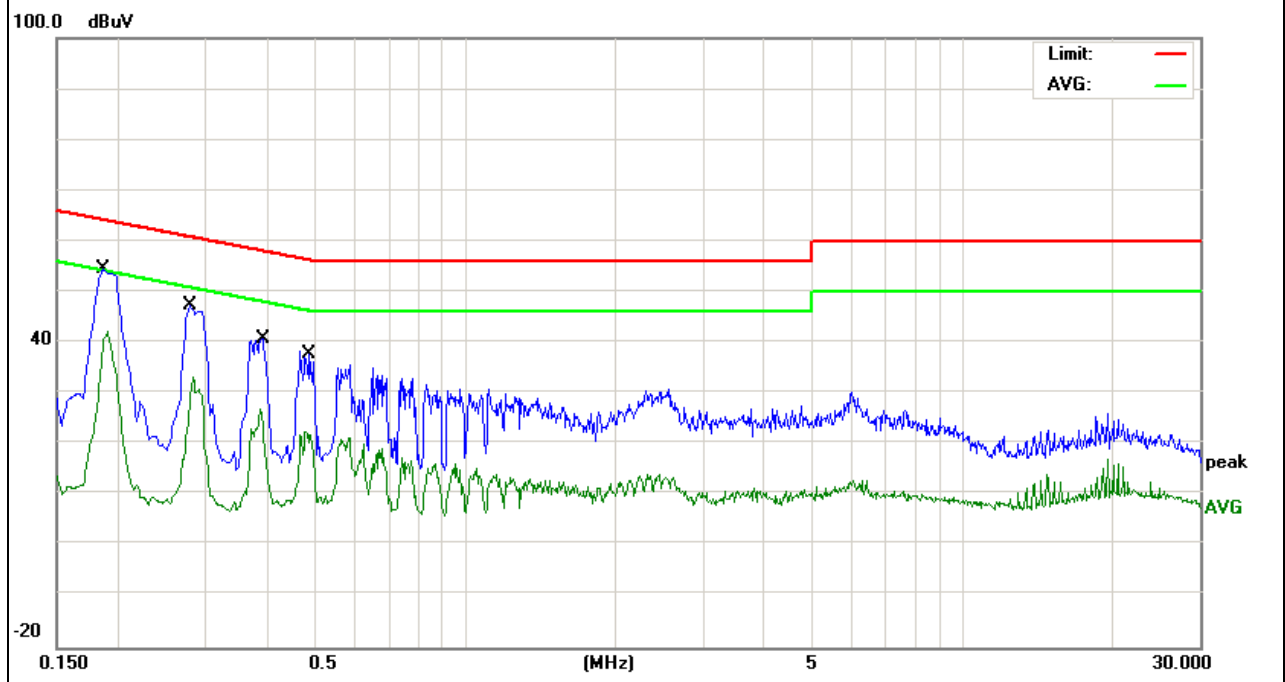


EUT :	MID	Model Name. :	MID
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	AC 120V	Test Mode :	Mode 5

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1860	45.60	9.56	55.16	64.21	-9.05	QP
0.2779	38.33	9.88	48.21	60.88	-12.67	QP
0.3780	32.46	9.92	42.38	58.32	-15.94	QP
0.4820	31.03	10.01	41.04	56.30	-15.26	QP
0.1860	31.27	9.56	40.83	54.21	-13.38	AVG
0.2779	20.93	9.88	30.81	50.88	-20.07	AVG
0.3780	14.74	9.92	24.66	48.32	-23.66	AVG
0.4820	12.63	10.01	22.64	46.30	-23.66	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

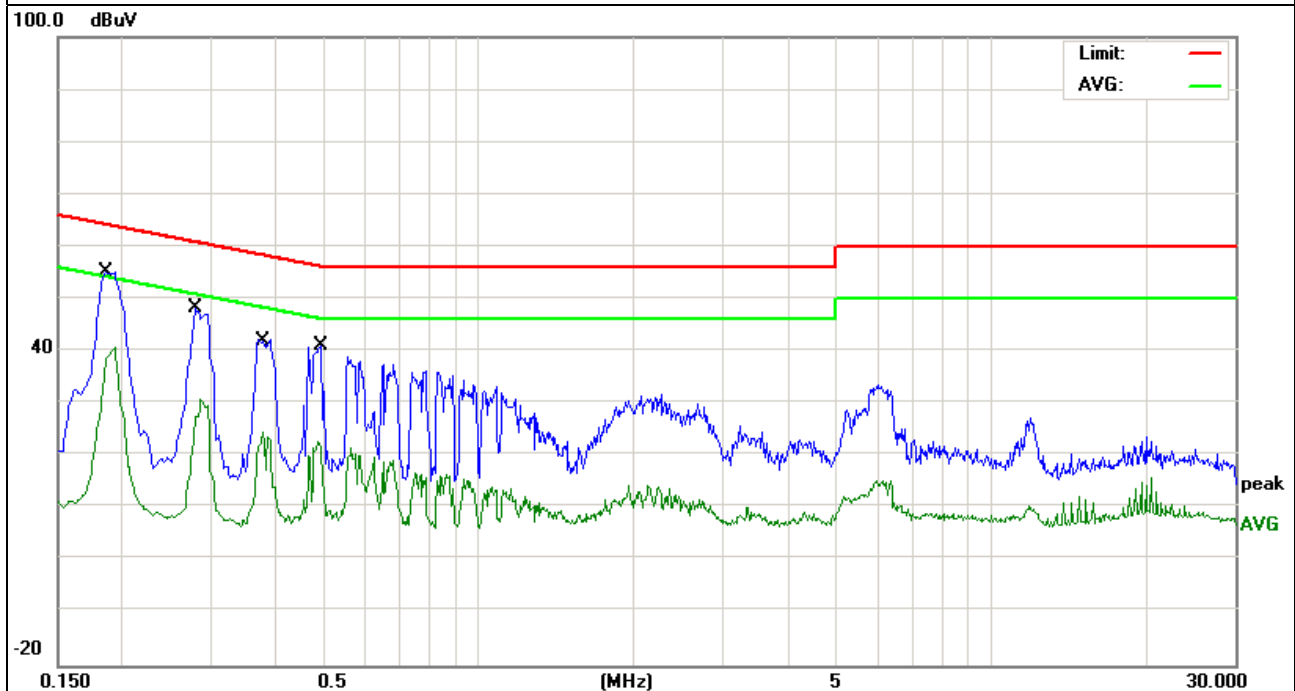

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters(above 1GHz is 1.5 m) above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m(above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

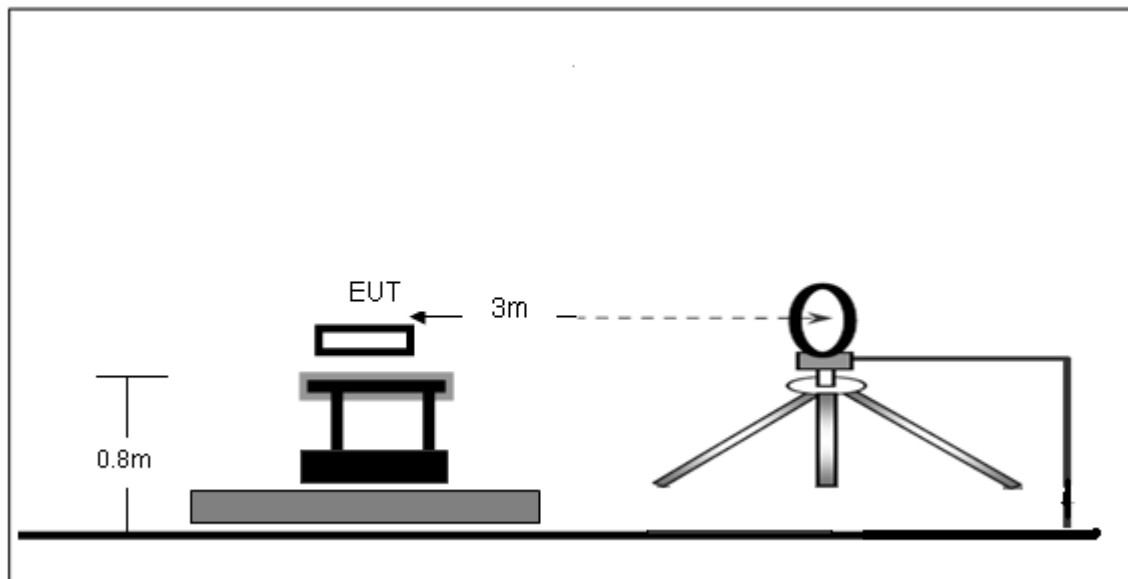

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

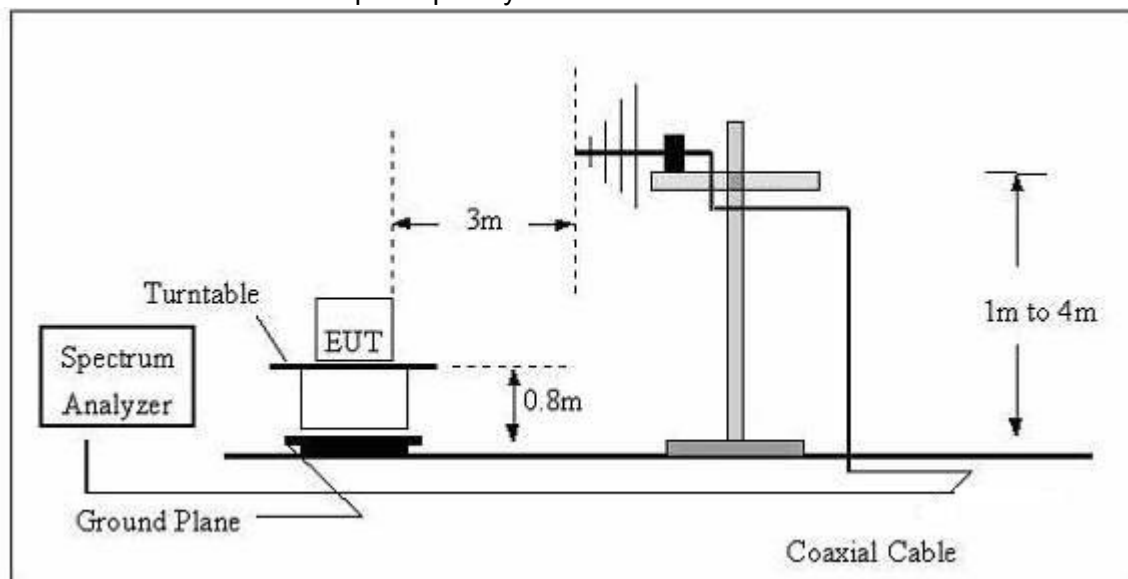

(C) Radiated Emission Test-Up Frequency Above 1GHz

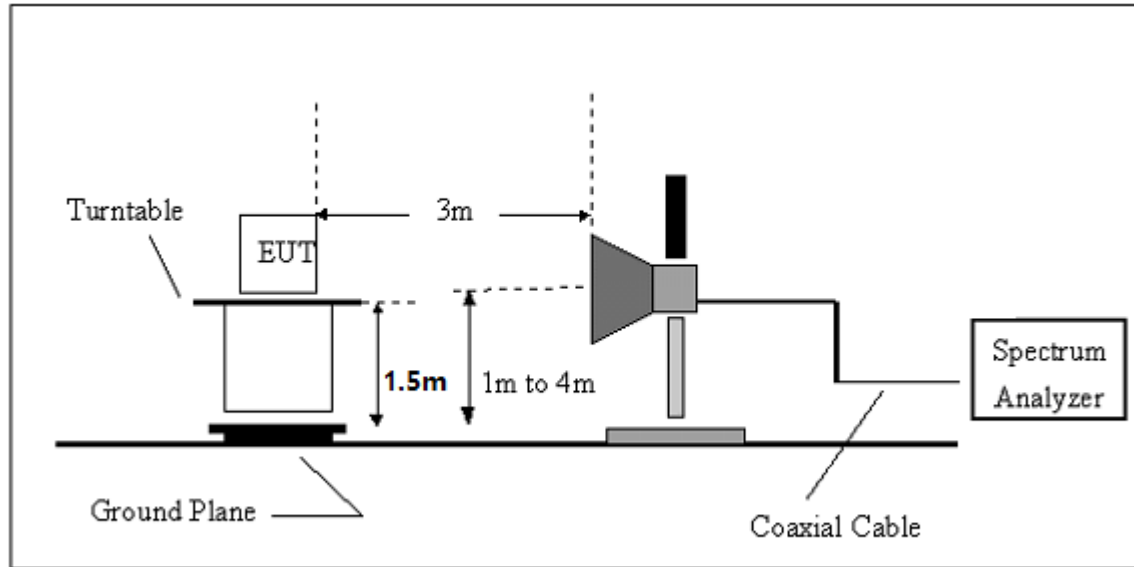

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)

EUT:	MID	Model Name. :	MID
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC 120V
Test Mode :	TX/Mode 5	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.


3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

EUT :	MID	Model Name :	MID
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz		
Test Mode :	TX		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
230.0985	48.37	-15.05	33.32	46.00	-12.68	QP
238.3102	49.85	-14.58	35.27	46.00	-10.73	QP
258.3263	47.55	-13.98	33.57	46.00	-12.43	QP
311.0867	42.31	-12.29	30.02	46.00	-15.98	QP
392.0951	39.47	-10.38	29.09	46.00	-16.91	QP
896.9964	39.02	-1.48	37.54	46.00	-8.46	QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

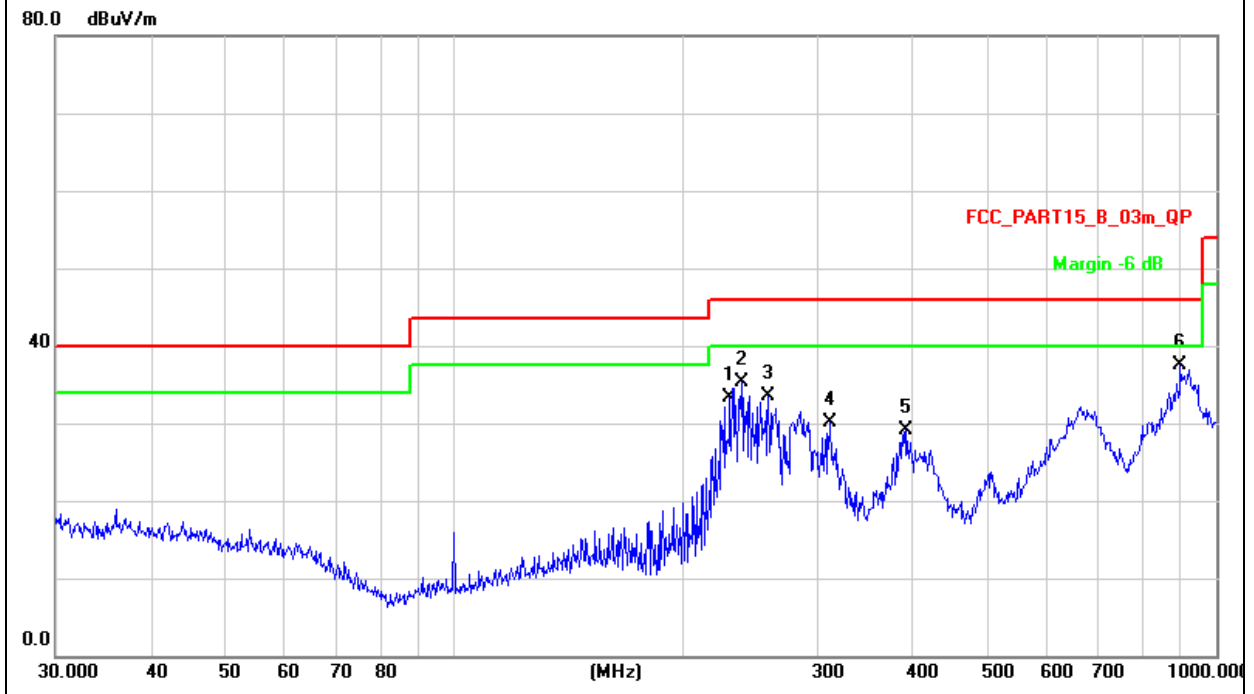

EUT :	MID	Model Name :	MID
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz		
Test Mode :	TX		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
31.7313	43.62	-8.25	35.37	40.00	-4.63	QP
42.4508	34.27	-9.16	25.11	40.00	-14.89	QP
68.8721	42.94	-14.08	28.86	40.00	-11.14	QP
97.4560	39.28	-16.76	22.52	43.50	-20.98	QP
176.2684	42.36	-14.01	28.35	43.50	-15.15	QP
188.4123	36.78	-15.37	21.41	43.50	-22.09	QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



3.2.8 TEST RESULTS (1000 MHz-10thharmonics)

802.11b

Normal Voltage

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412							
V	4824.243	47.76	10.44	58.2	74	-15.8	peak
V	4824.243	29.68	10.44	40.12	54	-13.88	AVG
H	4824.243	46.95	10.44	57.35	74	-16.65	peak
H	4824.243	28.82	10.44	39.22	54	-14.78	AVG
operation frequency:2437							
V	4874.142	46.17	10.4	56.57	74	-17.43	peak
V	4874.142	30.56	10.4	40.96	54	-13.04	AVG
H	4874.142	48.24	10.4	58.63	74	-15.37	peak
H	4874.142	30.08	10.4	40.52	54	-13.48	AVG
operation frequency:2462							
V	4924.216	49.02	10.39	59.41	74	-14.59	peak
V	4924.216	32.9	10.39	43.29	54	-10.71	AVG
H	4924.216	48.96	10.39	59.35	74	-14.65	peak
H	4924.216	31.08	10.39	41.47	54	-12.53	AVG

Remark:

Absolute Level= Reading Level+ Factor, Margin= Absolute Level – Limit

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Factor added by measurement software automatically

Emission Level is less(PK) than AV Limits, No need AV level

"802.11b" mode is the worst mode, and is recorded in the test report

3.3 BAND EDGE EMISSION (RADIATED):

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
802.11b							
2400	82.19	-12.99	69.2	74	-4.8	peak	Vertical
2400	84.39	-12.99	71.4	74	-2.6	peak	Horizontal
2400	59.82	-12.99	46.83	54	-7.17	AVG	Vertical
2400	59.62	-12.99	46.63	54	-7.37	AVG	Horizontal
2483.5	59.20	-12.78	46.42	74	-27.58	peak	Vertical
2483.5	52.74	-12.78	39.96	74	-34.04	peak	Horizontal
802.11g							
2400	79.32	-12.99	66.33	74	-7.67	peak	Horizontal
2400	57.27	-12.99	44.28	54	-9.72	AVG	Horizontal
2400	83.59	-12.99	70.6	74	-3.4	peak	Vertical
2400	60.37	-12.99	47.38	54	-6.62	AVG	Vertical
2483.5	60.51	-12.78	47.73	74	-26.27	peak	Vertical
2483.5	61.19	-12.78	48.41	74	-25.59	peak	Horizontal
802.11n(20)							
2400	84.29	-12.99	71.3	74	-2.7	peak	Horizontal
2400	60.84	-12.99	47.85	54	-6.15	AVG	Horizontal
2400	83.79	-12.99	70.8	74	-3.2	peak	Vertical
2400	60.33	-12.99	47.34	54	-6.66	AVG	Vertical
2483.5	58.21	-12.78	45.46	74	-28.54	peak	Vertical
2483.5	55.51	-12.78	42.73	74	-31.27	peak	Horizontal
802.11n(40)							
2400.000	76.22	-12.99	63.23	74.00	-10.77	peak	Horizontal
2400.000	59.49	-12.99	46.50	54.00	-7.50	AVG	Horizontal
2483.500	64.58	-12.78	51.80	74.00	-22.20	peak	Horizontal
2400.000	65.73	-12.99	52.74	74.00	-21.26	peak	Vertical
2483.500	62.67	-12.78	49.89	74.00	-24.11	peak	Vertical

Note: Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Factor added by measurement software automatically.
Emission Level is less(PK) than AV Limits, No need AV level

4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

4.1.1 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW ≥ 3 kHz.
4. Set the VBW $\geq 3 \times$ RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP




4.1.4 EUT OPERATION CONDITIONS



The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

4.1.5 TEST RESULTS

EUT :	MID	Model Name :	MID
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	AC120V
Test Mode :	TX b Mode /CH01, CH06, CH11		


Frequency	Power Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
2412 MHz	-17.42	8	PASS
2437 MHz	-17.98	8	PASS
2462 MHz	-17.72	8	PASS


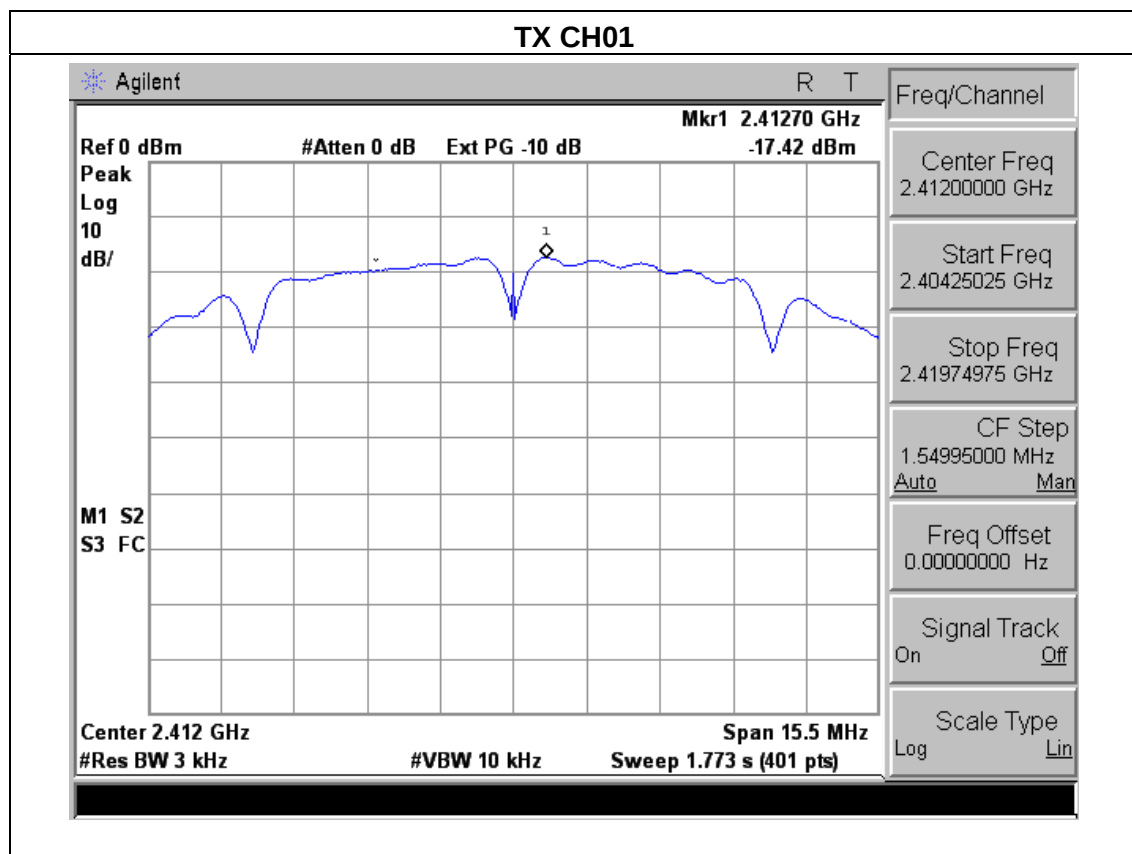


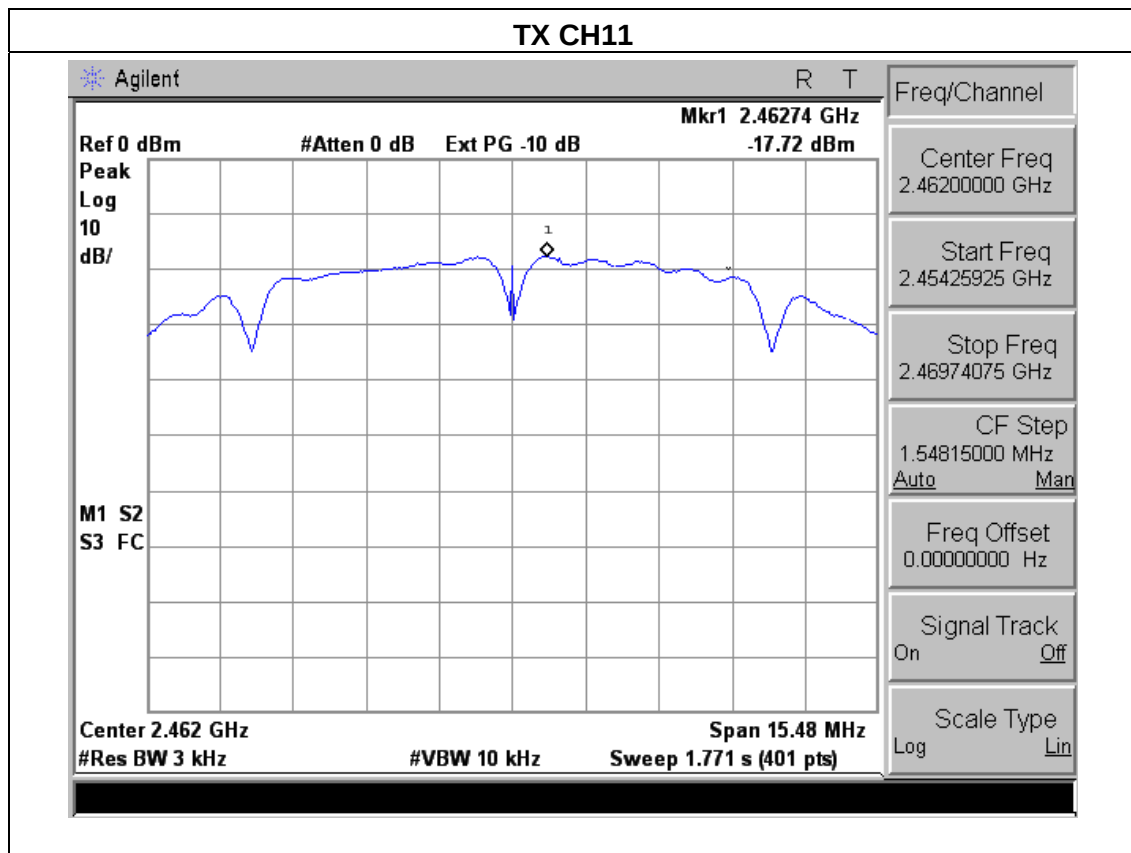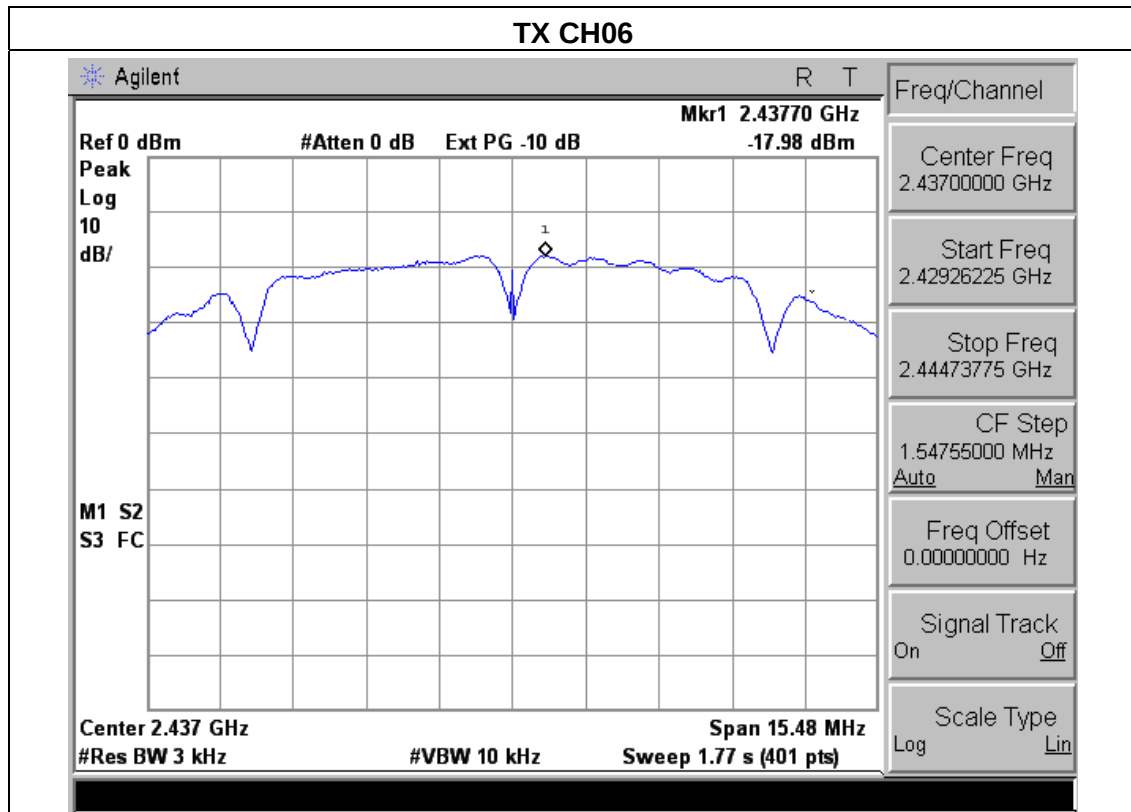

EUT :	MID	Model Name :	MID
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	AC120V
Test Mode :	TX g Mode /CH01, CH06, CH11		


Frequency	Power Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
2412 MHz	-18.64	8	PASS
2437 MHz	-19.17	8	PASS
2462 MHz	-18.43	8	PASS

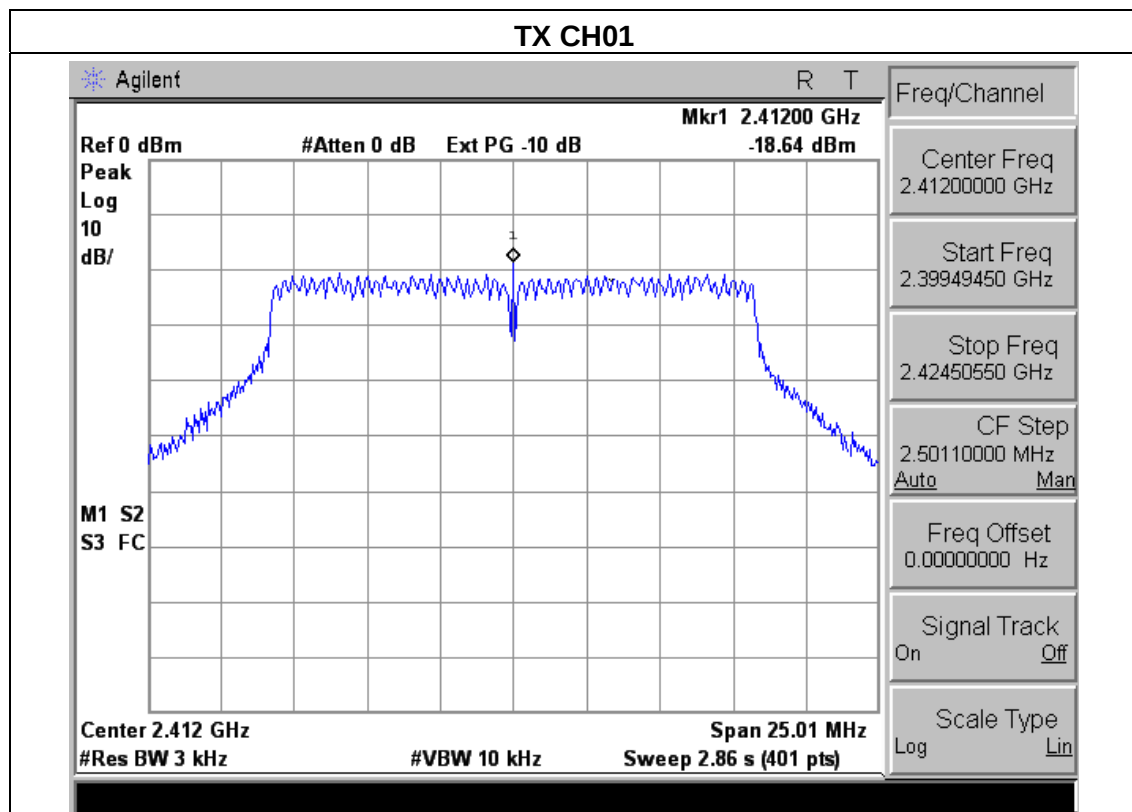

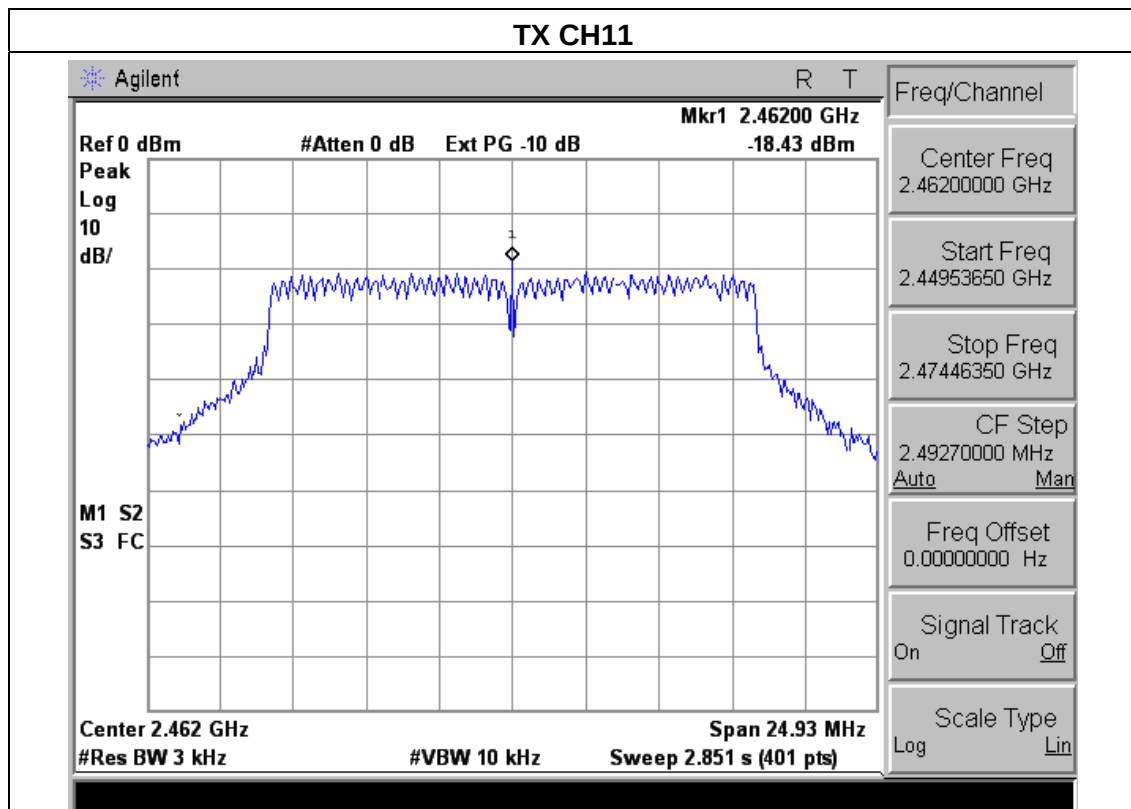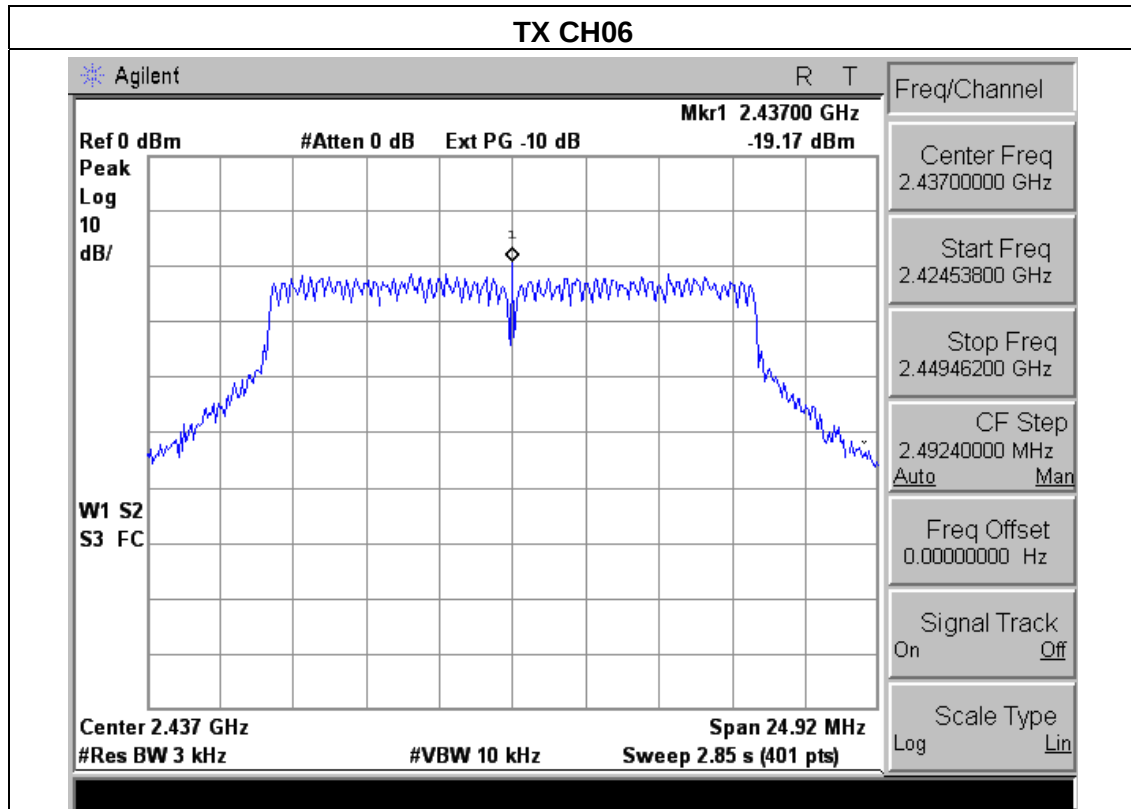


EUT :	MID	Model Name :	MID
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	AC120V
Test Mode :	TX n Mode(20M) /CH01, CH06, CH11		


Frequency	Power Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
2412 MHz	-18.70	8	PASS
2437 MHz	-18.52	8	PASS
2462 MHz	-18.83	8	PASS

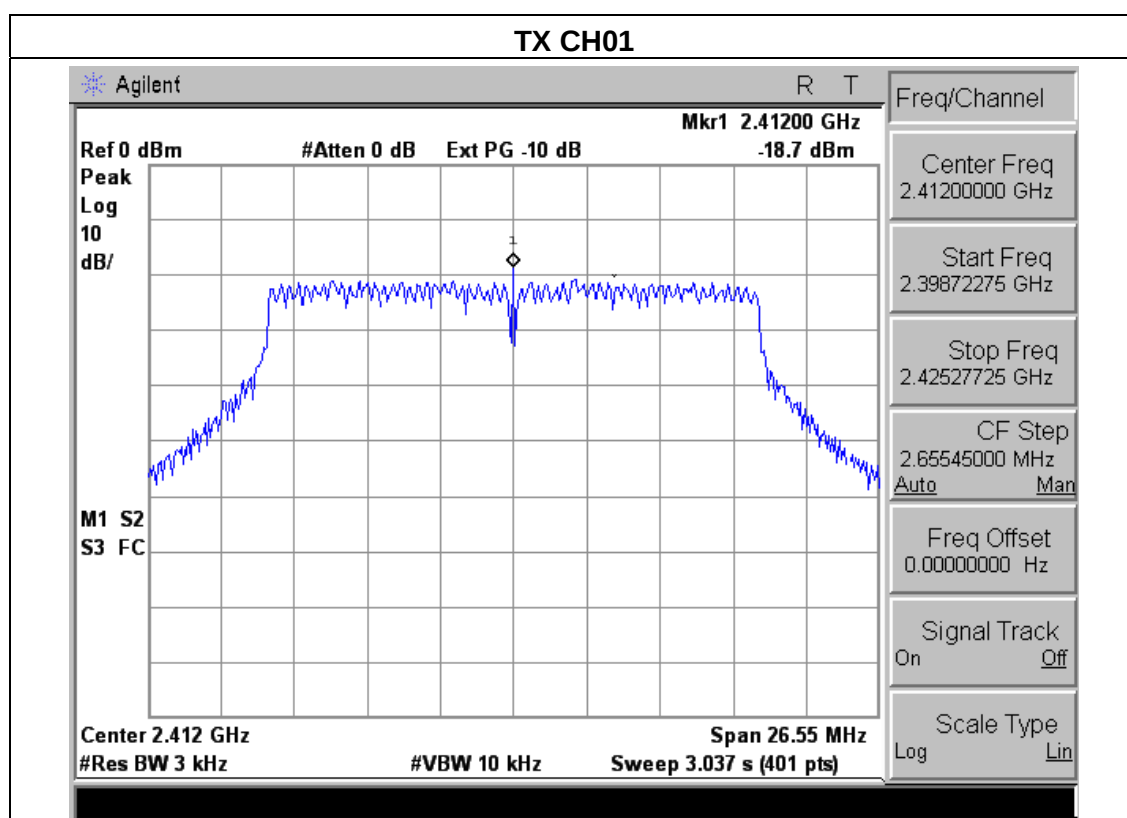

TX CH06

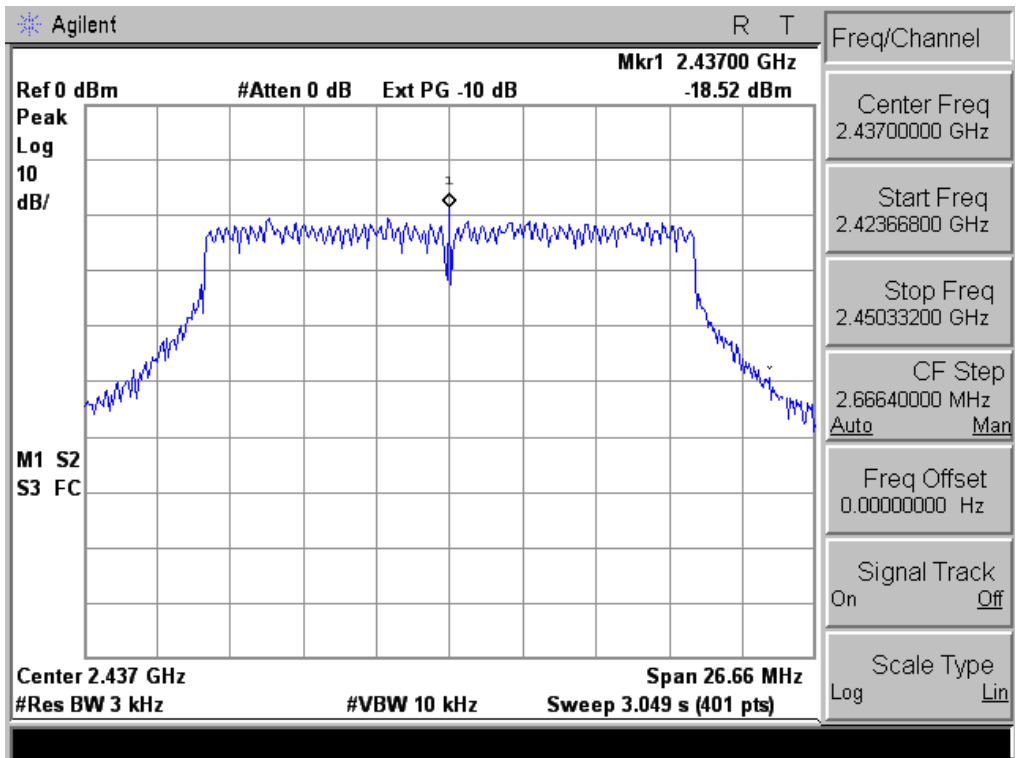


TX CH11

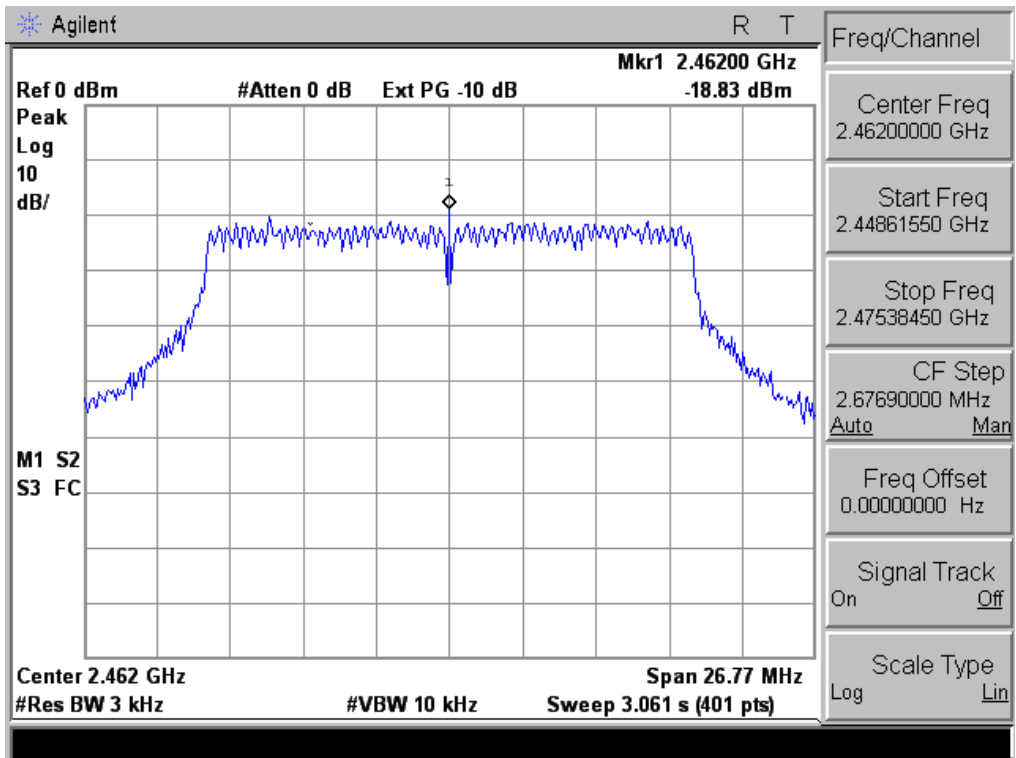


EUT :	MID	Model Name :	MID
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	AC120V
Test Mode :	TX n Mode(40M) /CH03, CH06, CH09		


Frequency	Power Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
2422 MHz	-23.78	8	PASS
2437 MHz	-24.16	8	PASS
2452 MHz	-24.46	8	PASS

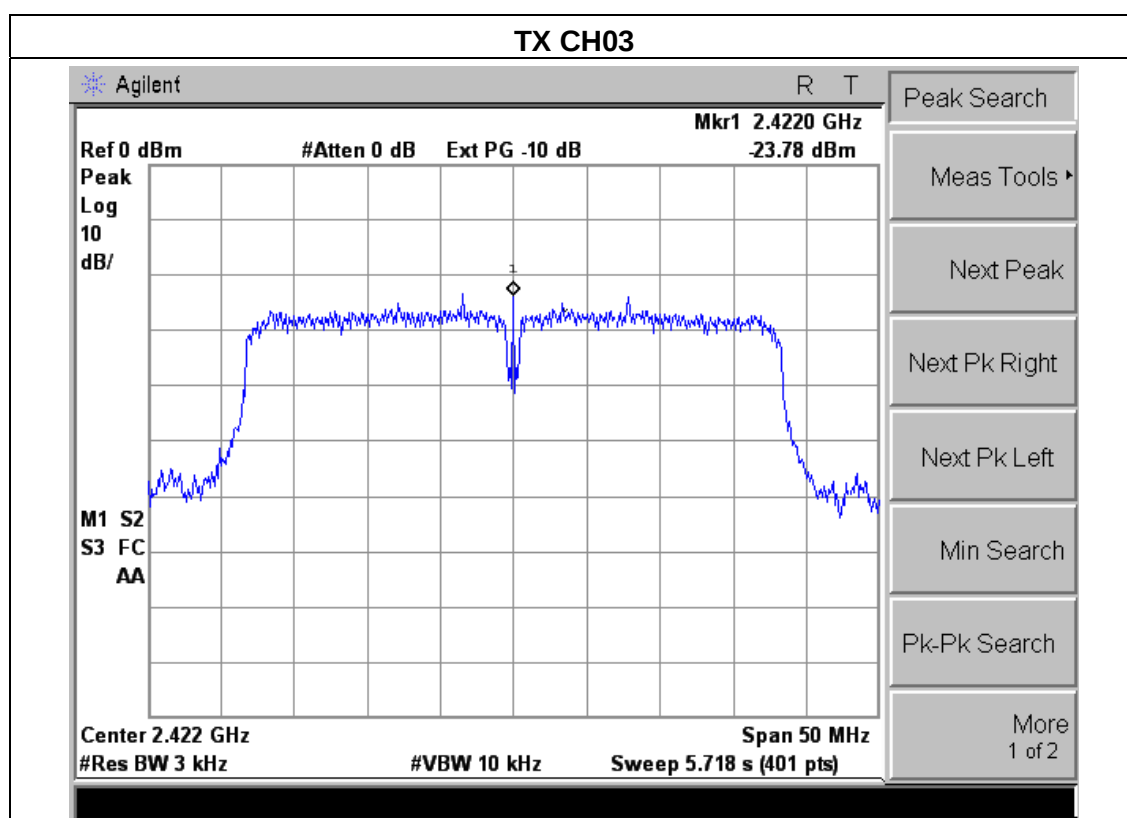

TX CH06

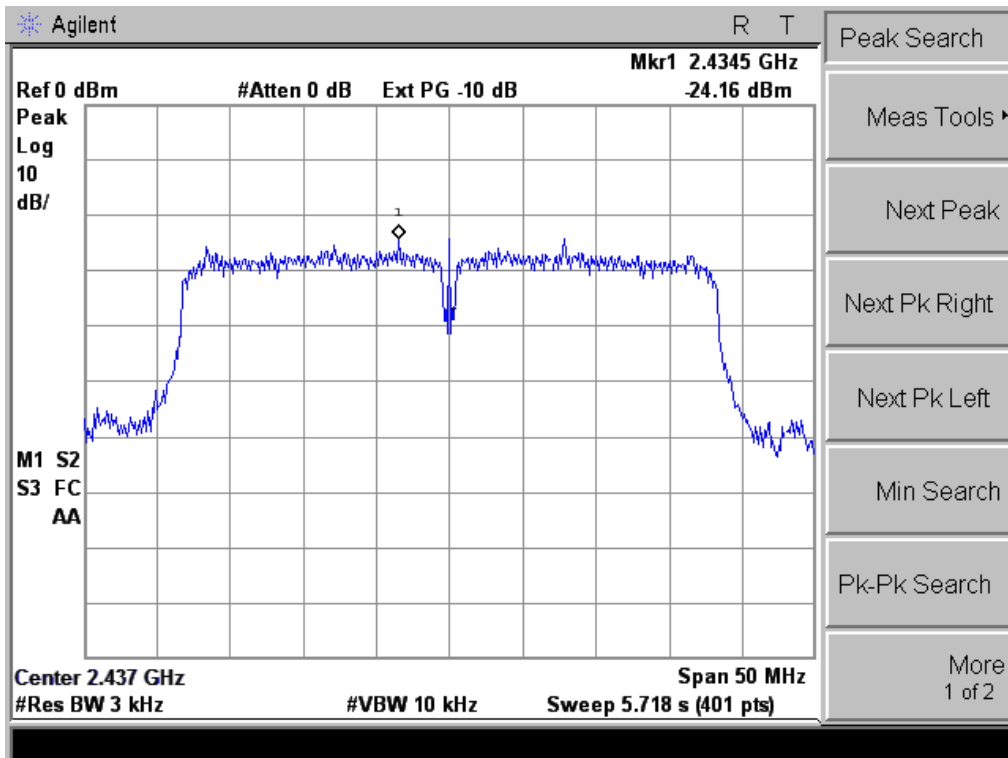

TX CH09

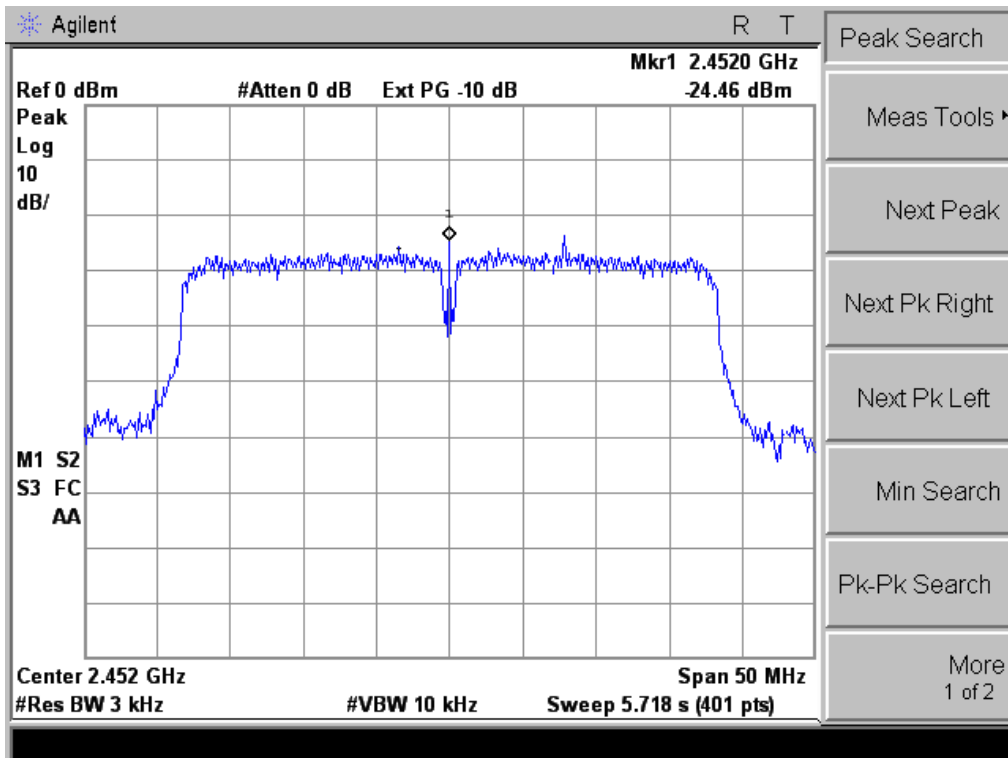

5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS


5.1.1 TEST PROCEDURE

1. Set RBW= 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP

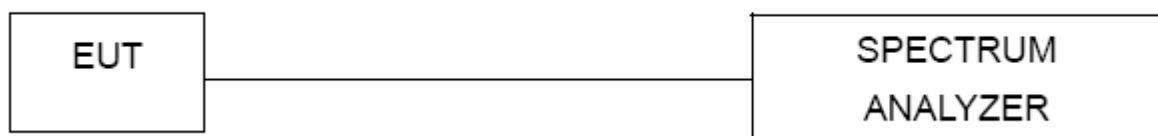


5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


5.1.5 TEST RESULTS

EUT :	MID	Model Name :	MID
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	AC120V
Test Mode :	TX b Mode /CH01, CH06, CH11		


Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	10.33	500	Pass
Middle	2437	10.31	500	Pass
High	2462	10.32	500	Pass

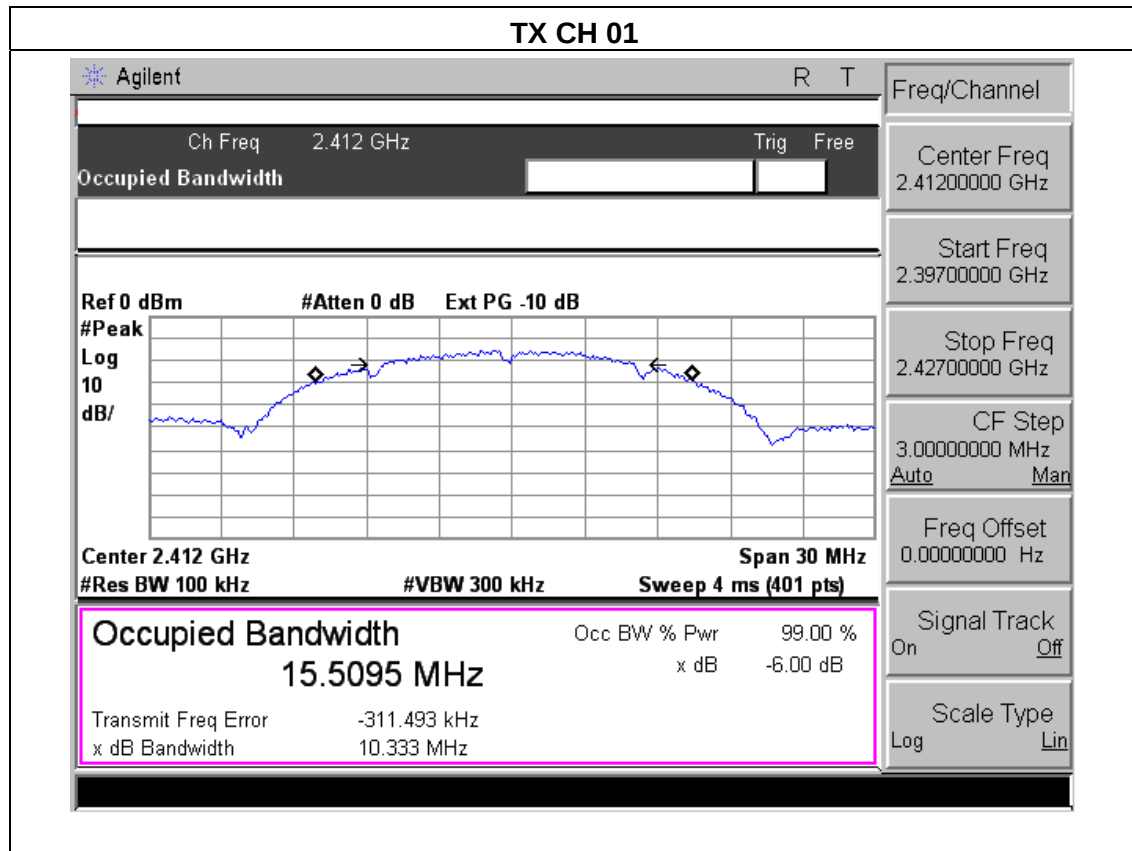

TX CH 06

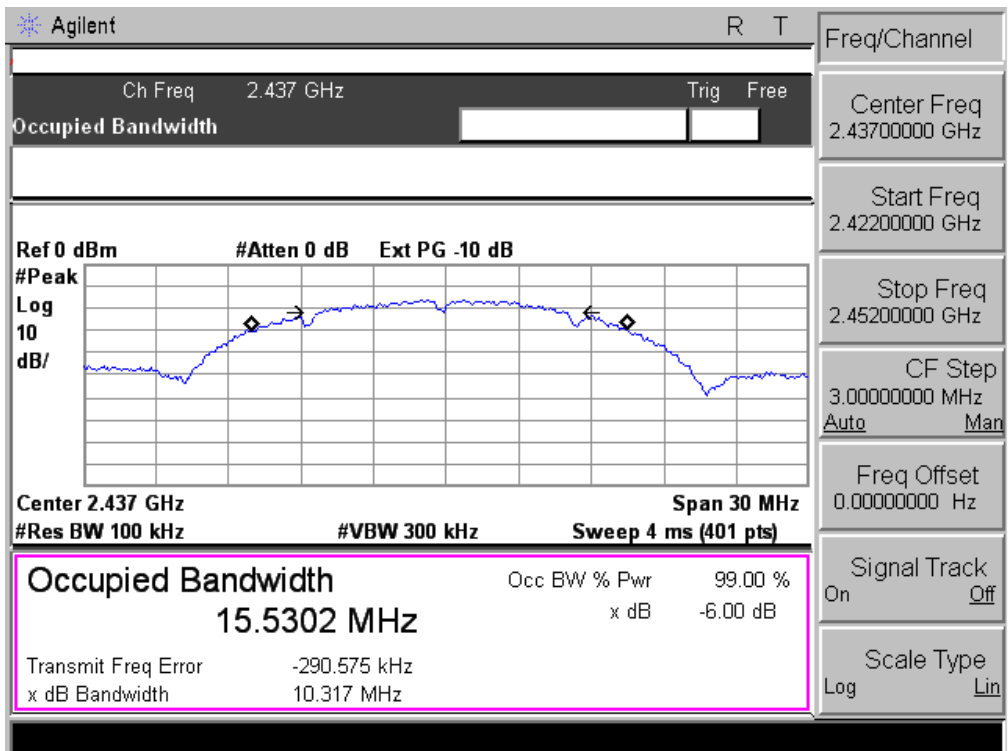


TX CH 11

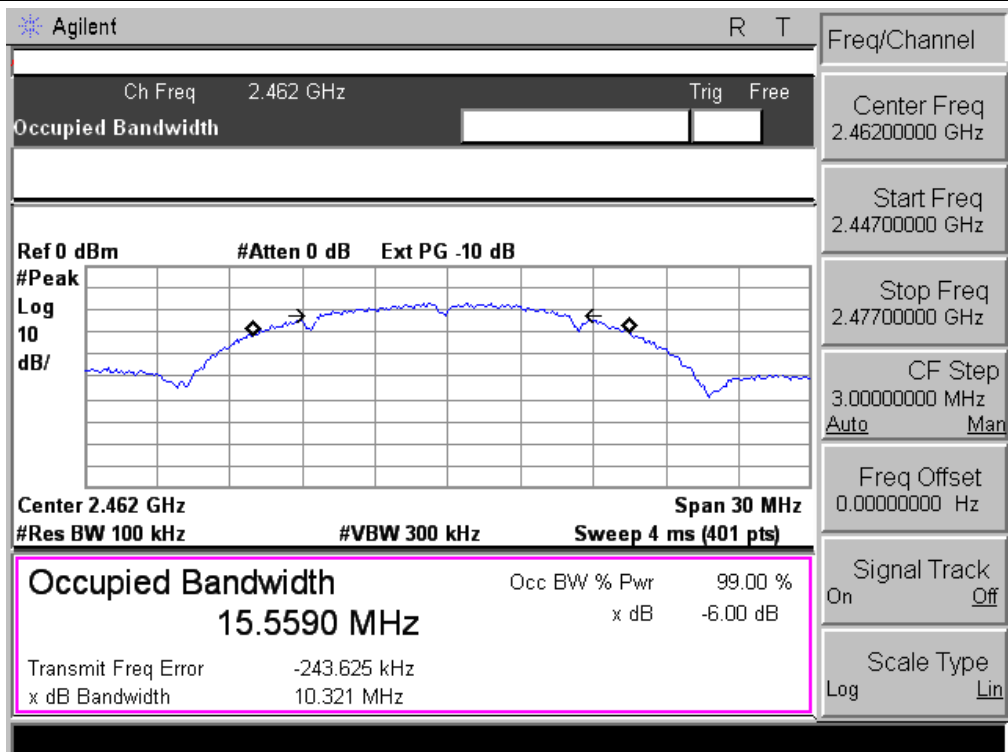


EUT :	MID	Model Name :	MID
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	AC120V
Test Mode :	TX g Mode /CH01, CH06, CH11		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.67	500	Pass
Middle	2437	16.62	500	Pass
High	2462	16.62	500	Pass


TX CH 01

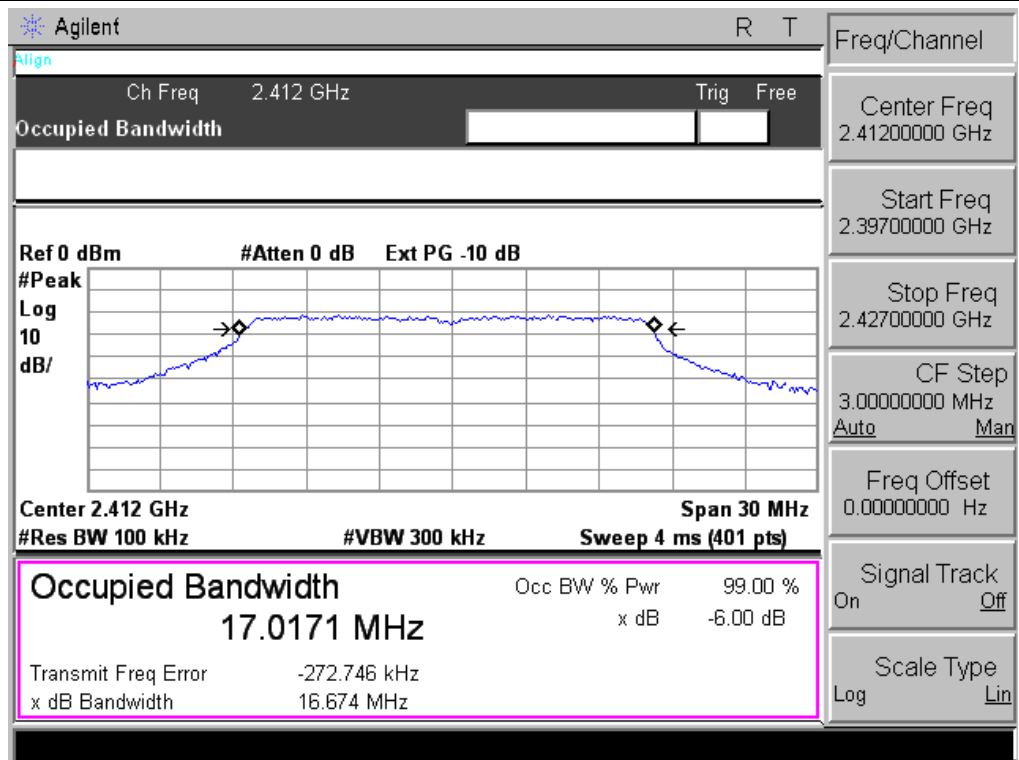

TX CH 06

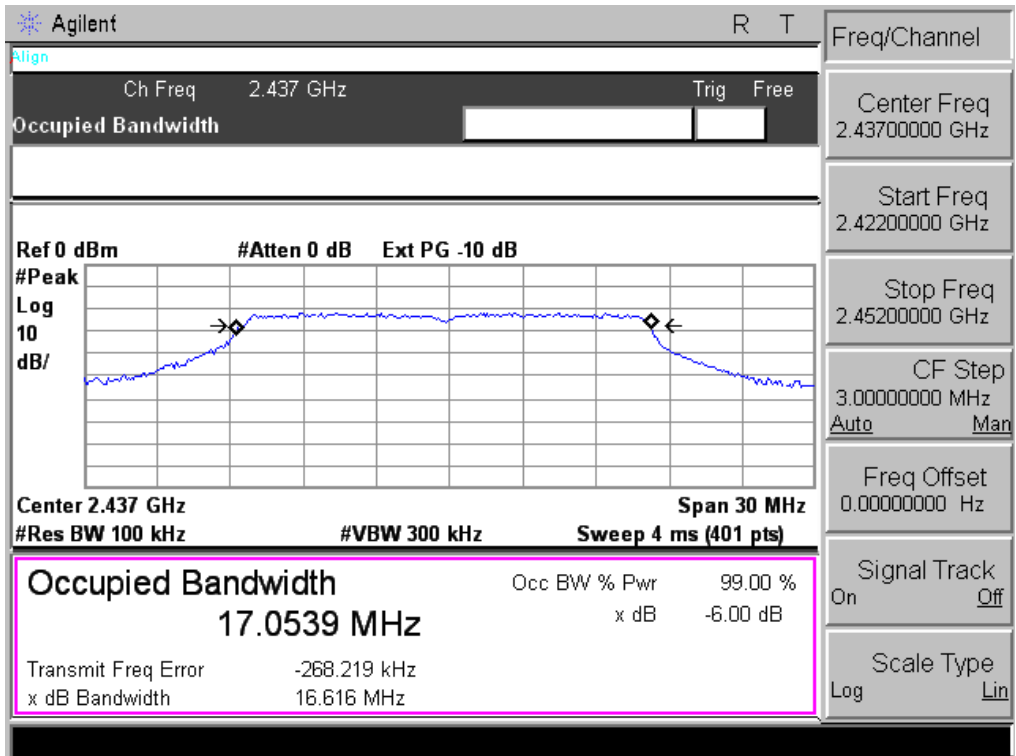




TX CH 11

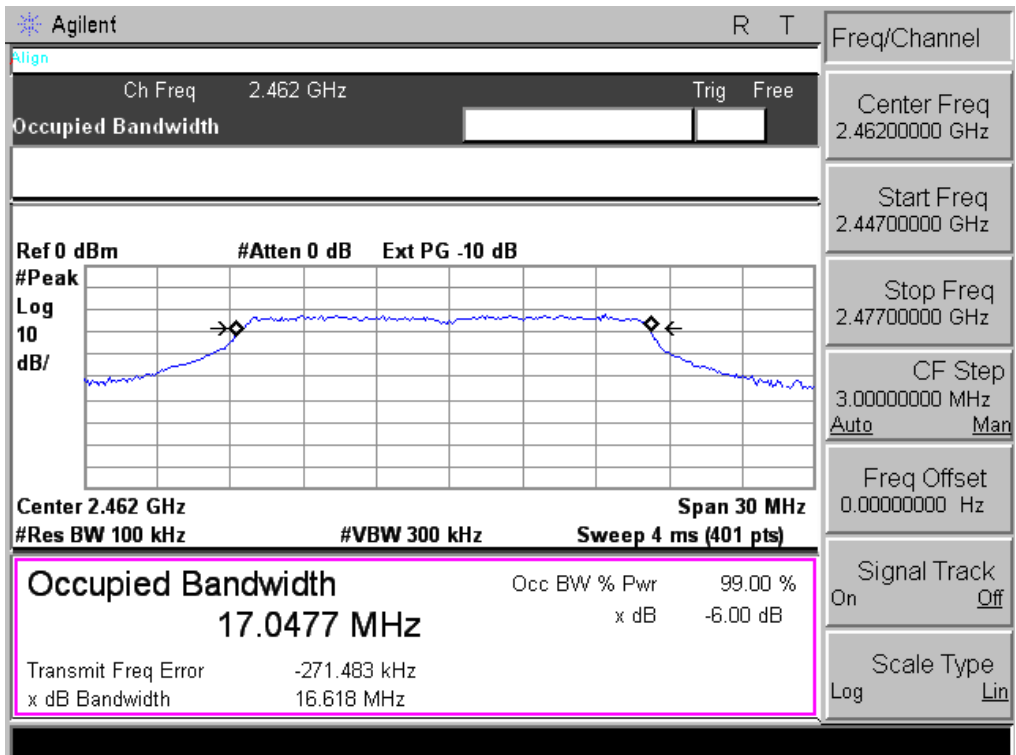

EUT :	MID	Model Name :	MID
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	AC120V
Test Mode :	TX n Mode(20M) /CH01, CH06, CH11		


Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.70	500	Pass
Middle	2437	17.78	500	Pass
High	2462	17.85	500	Pass

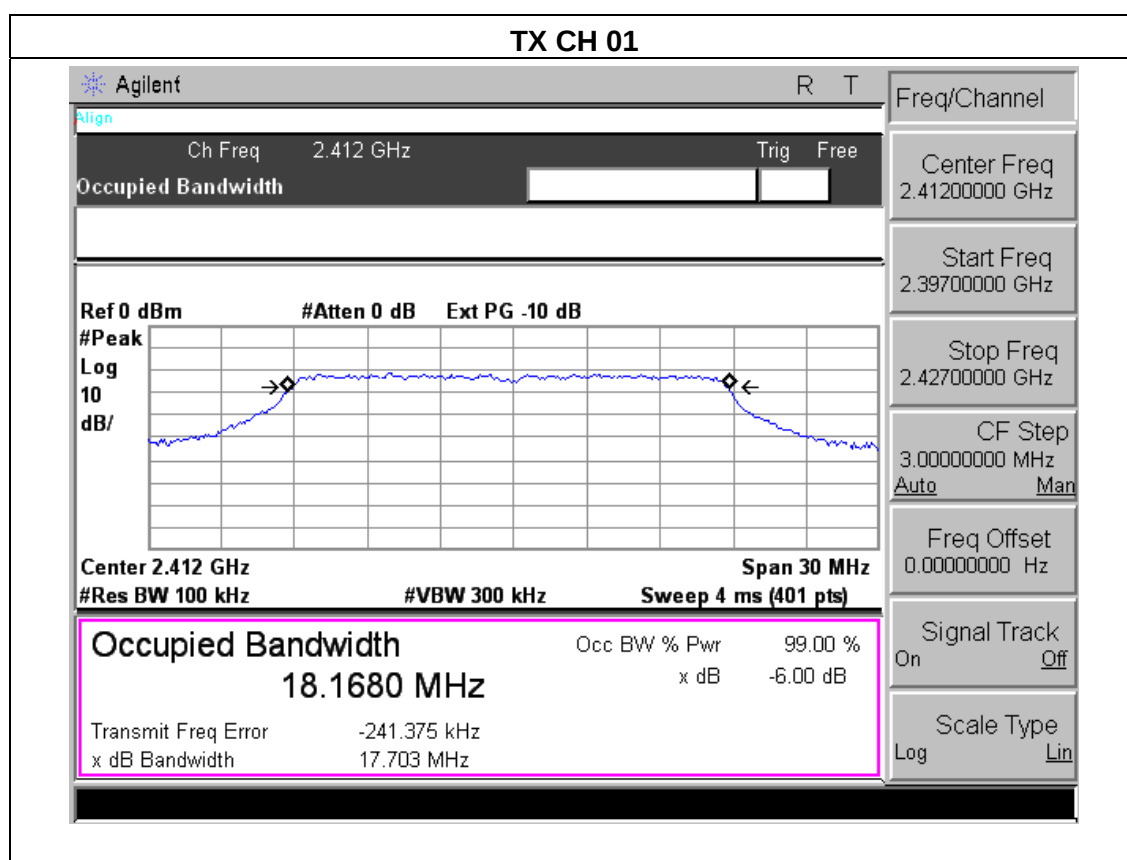

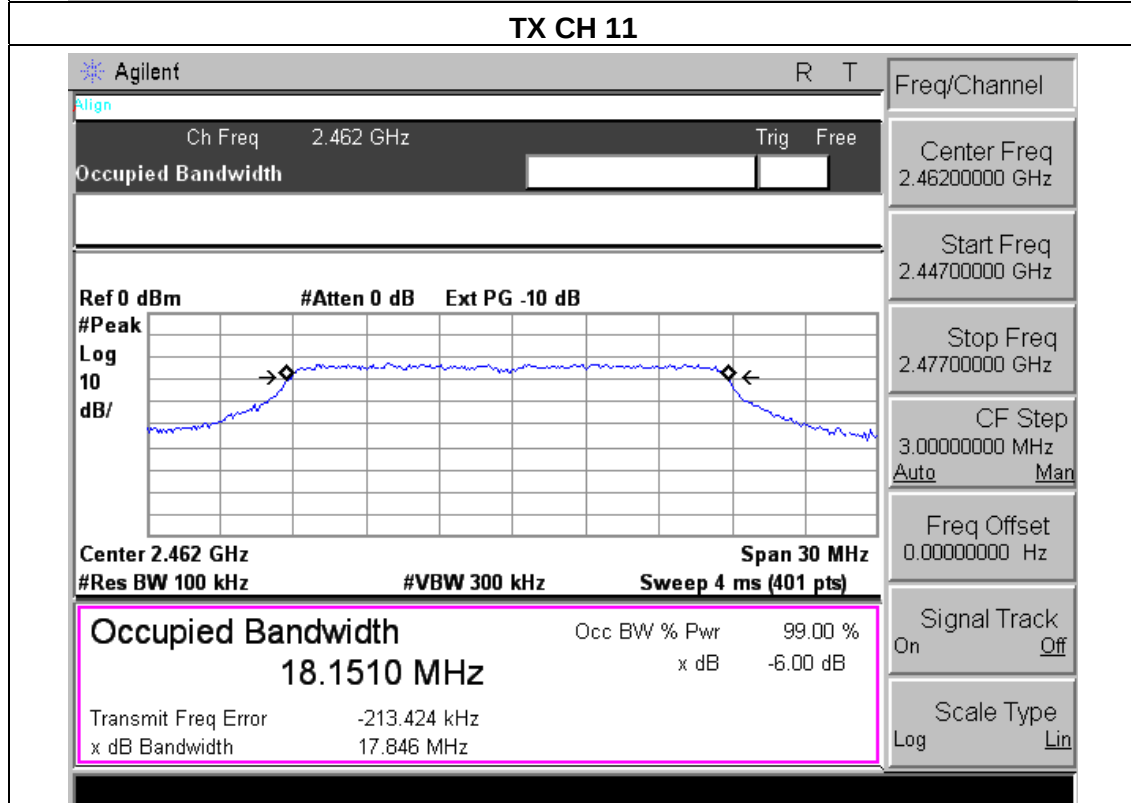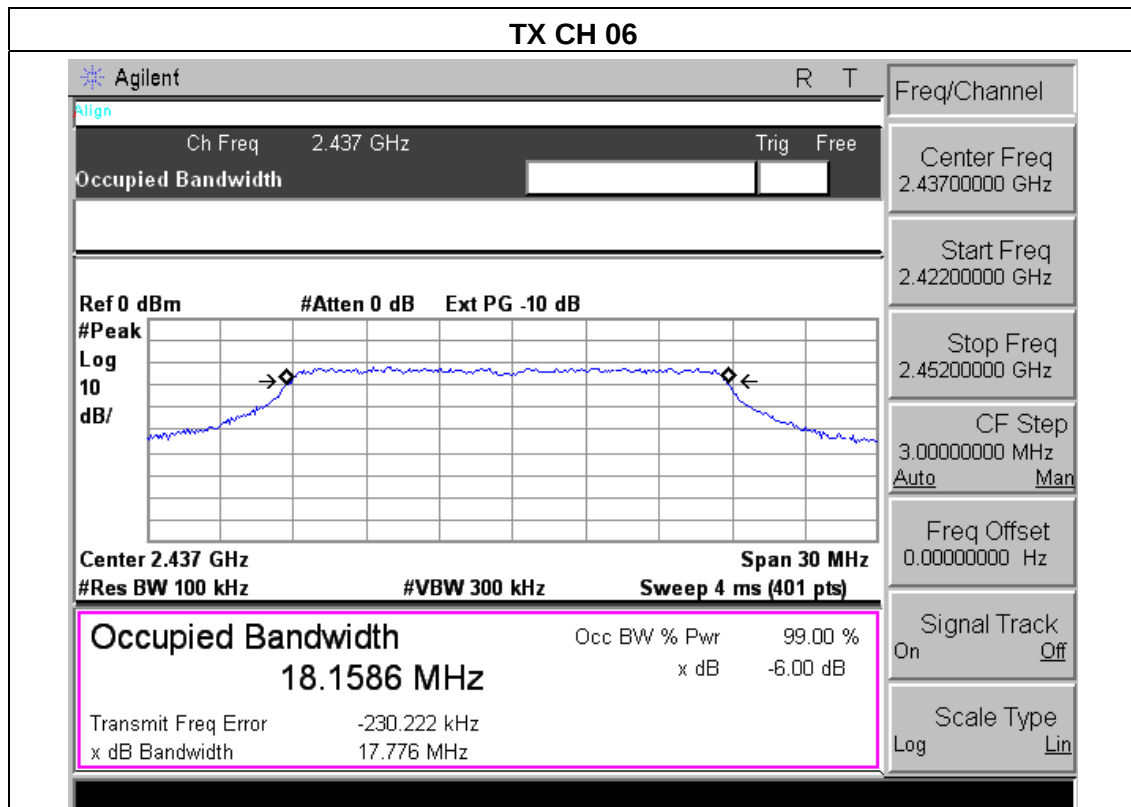


EUT :	MID	Model Name :	MID
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	AC120V
Test Mode :	TX n Mode(40M) /CH03, CH06, CH09		


Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2422	36.16	500	Pass
Middle	2437	35.95	500	Pass
High	2452	36.11	500	Pass

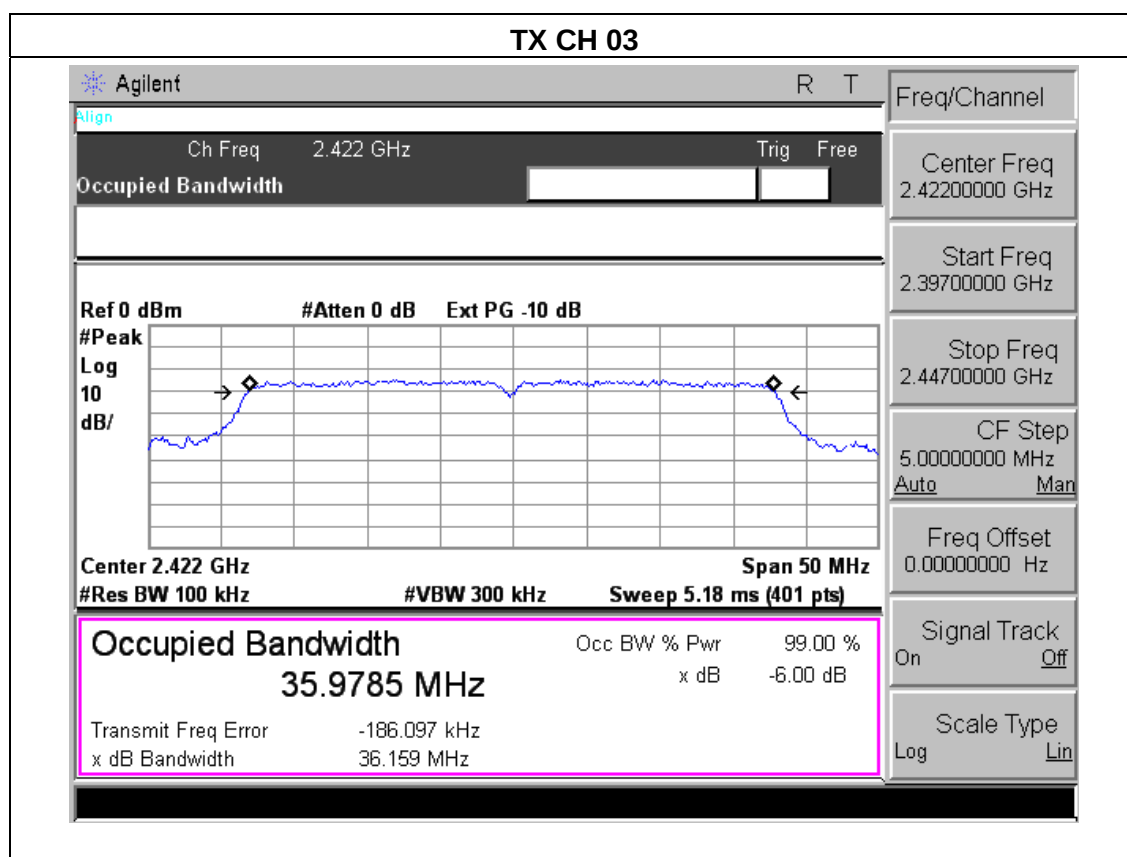

TX CH 06

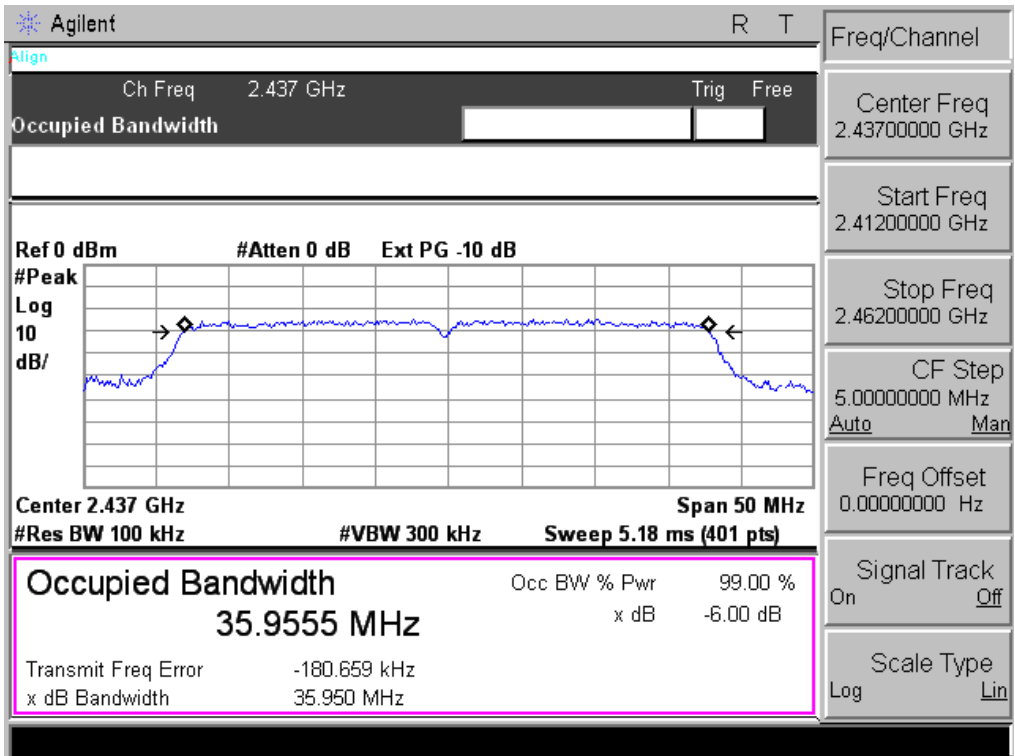

TX CH 09

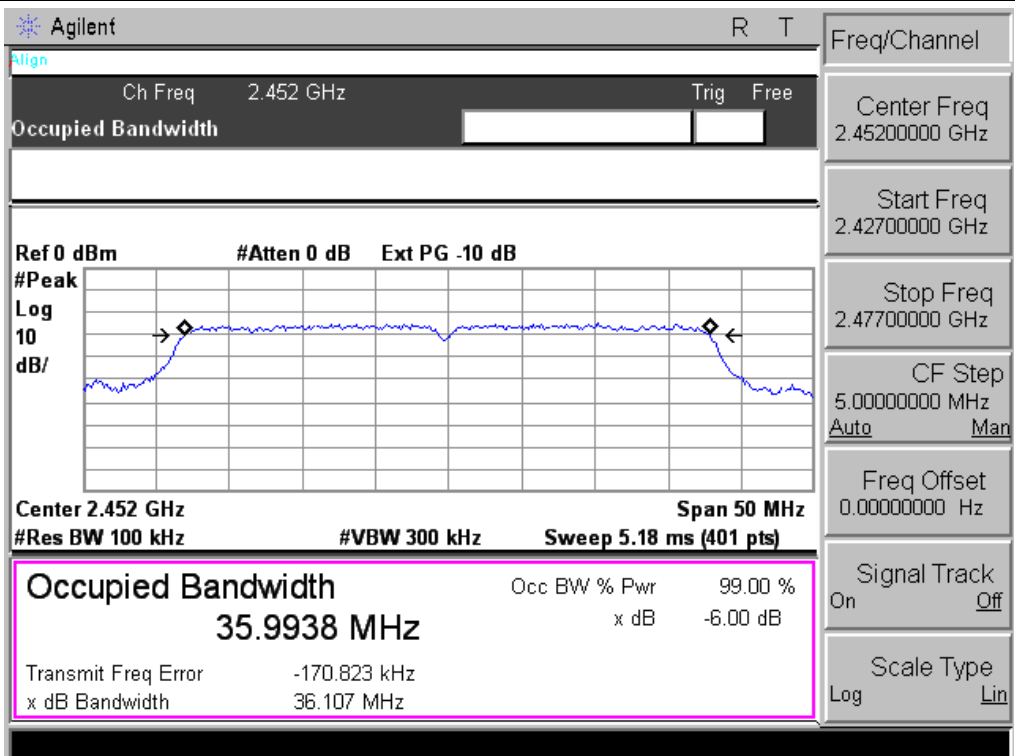

6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 TEST RESULTS

EUT :	MID	Model Name :	MID
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	AC120V
Test Mode :	TX b/g/n(20M, 40M) Mode		

TX 802.11b Mode			
Test Channe	Frequency	Maximum Conducted Output Power(PK)	LIMIT
	(MHz)	(dBm)	dBm
CH01	2412	8.64	30
CH06	2437	8.45	30
CH11	2462	8.34	30
TX 802.11g Mode			
CH01	2412	6.04	30
CH06	2437	6.77	30
CH11	2462	6.11	30
TX 802.11n-HT20 Mode			
CH01	2412	5.44	30
CH06	2437	5.89	30
CH11	2462	5.42	30
TX 802.11n-HT40 Mode			
CH03	2422	5.08	30
CH06	2437	5.79	30
CH09	2452	5.61	30

7. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- Repeat above procedures until all measured frequencies were complete.

7.1 DEVIATION FROM STANDARD

No deviation.

7.2 TEST SETUP



7.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


7.4 TEST RESULTS

EUT :	MID	Model Name :	MID
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	AC120V


Frequency Band	Delta Peak to band emission (dBc)	> Limit (dBc)	Result
802.11b mode			
Left-band	32.55	20	Pass
Right-band	52.15	20	Pass
802.11g mode			
Left-band	29.45	20	Pass
Right-band	42.88	20	Pass
802.11n-HT20 mode			
Left-band	30.89	20	Pass
Right-band	41.97	20	Pass
802.11n-HT40 mode			
Left-band	28.30	20	Pass
Right-band	37.20	20	Pass

BAND EDGE EMISSION (CONDUCTED):


802.11b: Band Edge, Left Side

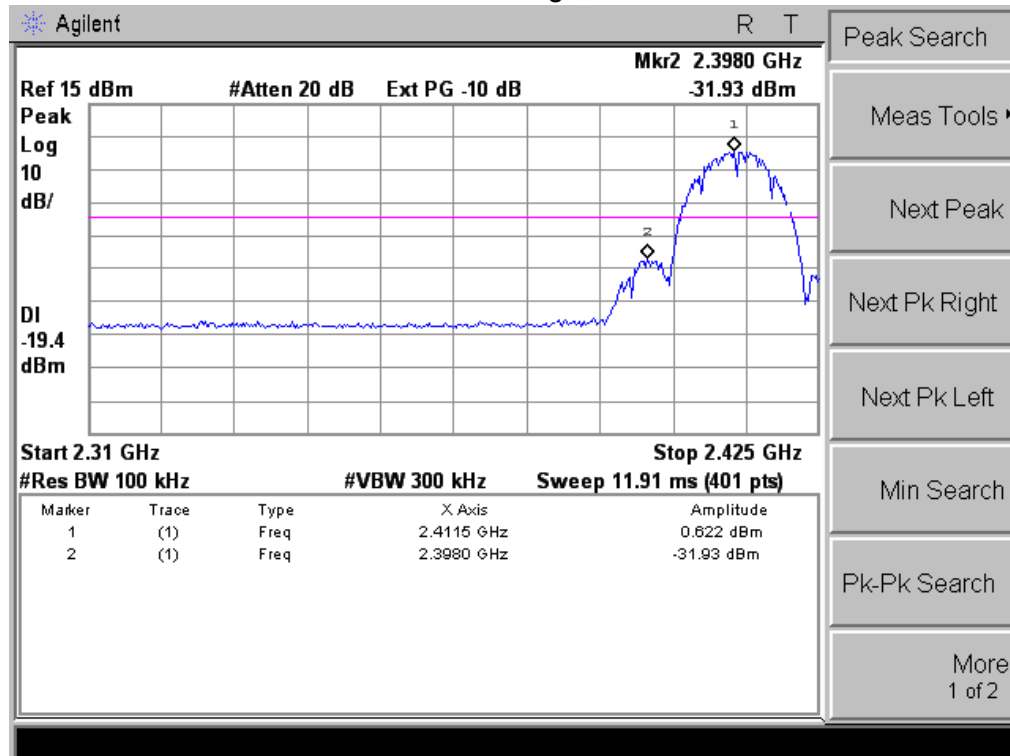


802.11b: Band Edge, Right Side

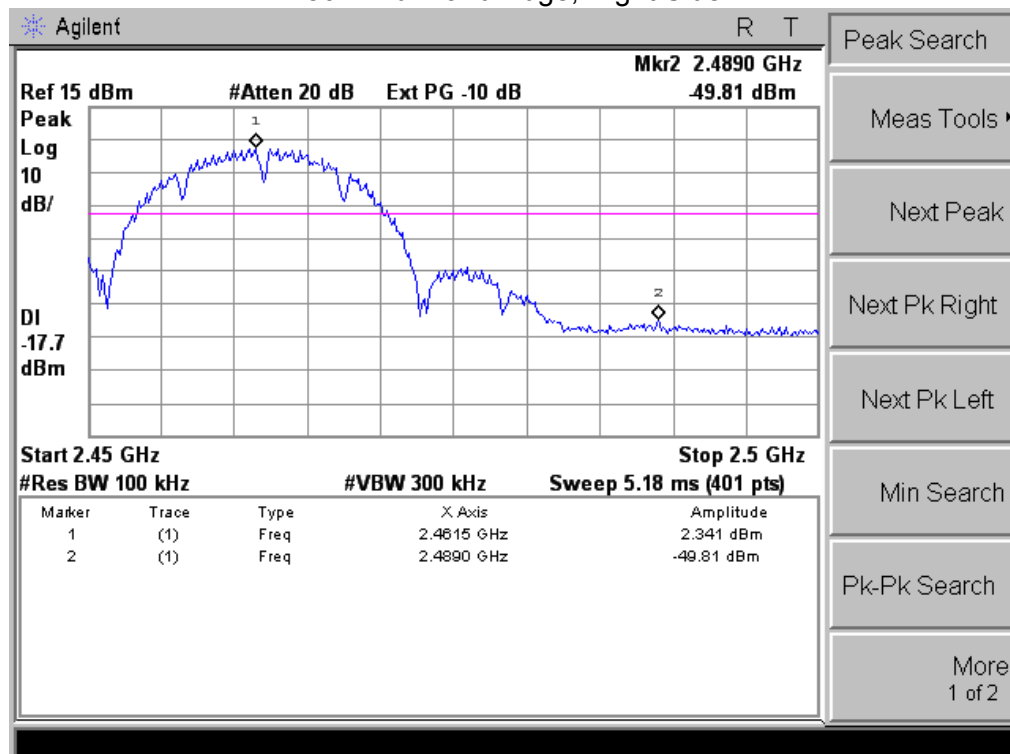


802.11g: Band Edge, Left Side

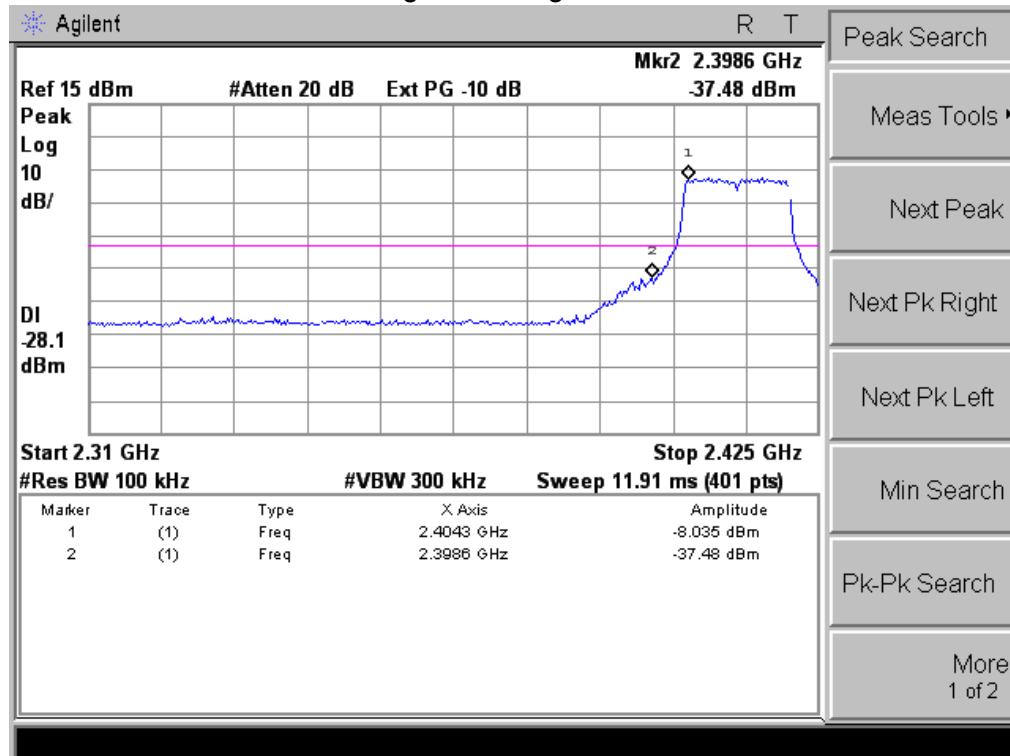


802.11g: Band Edge, Right Side

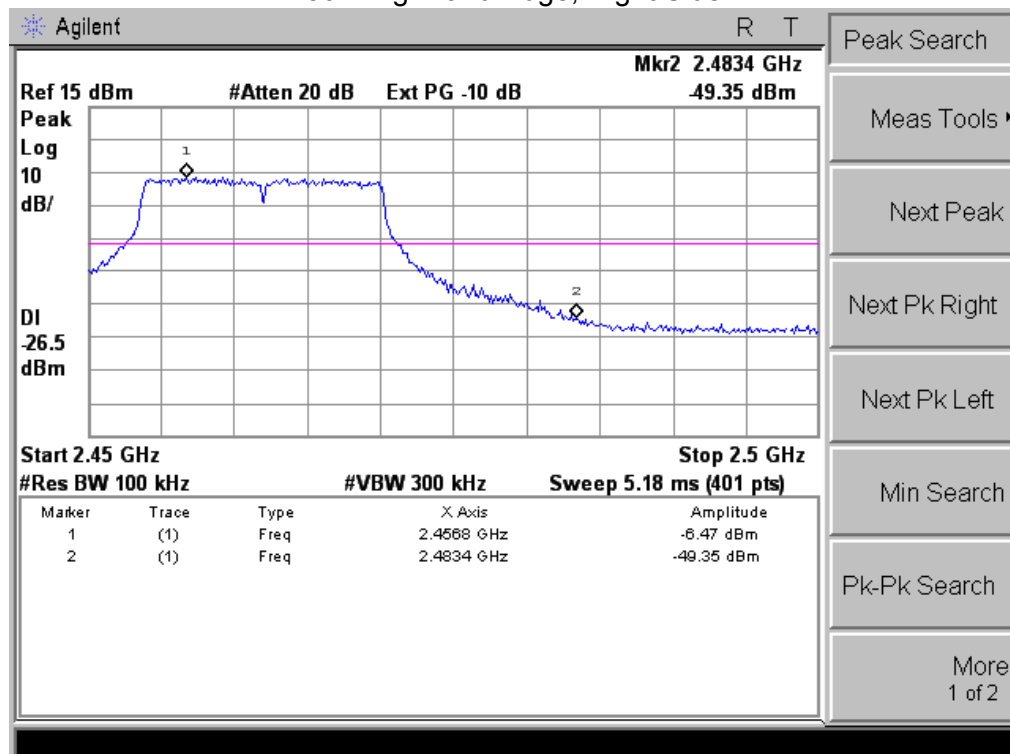


802.11n-HT20: Band Edge, Left Side

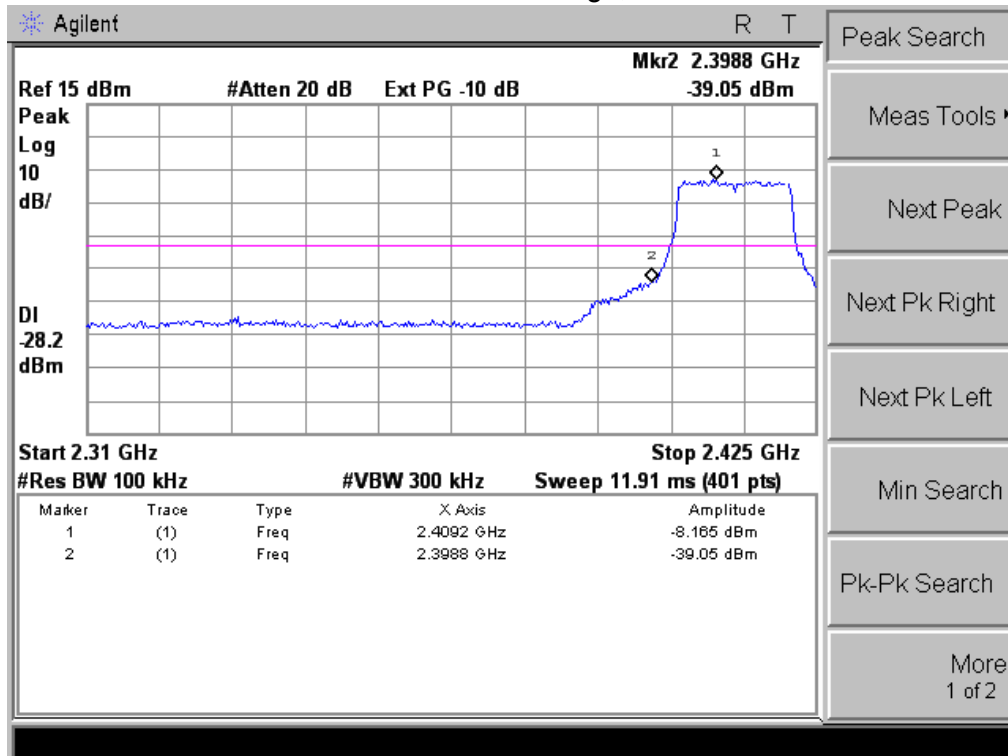


802.11n-HT20: Band Edge, Right Side

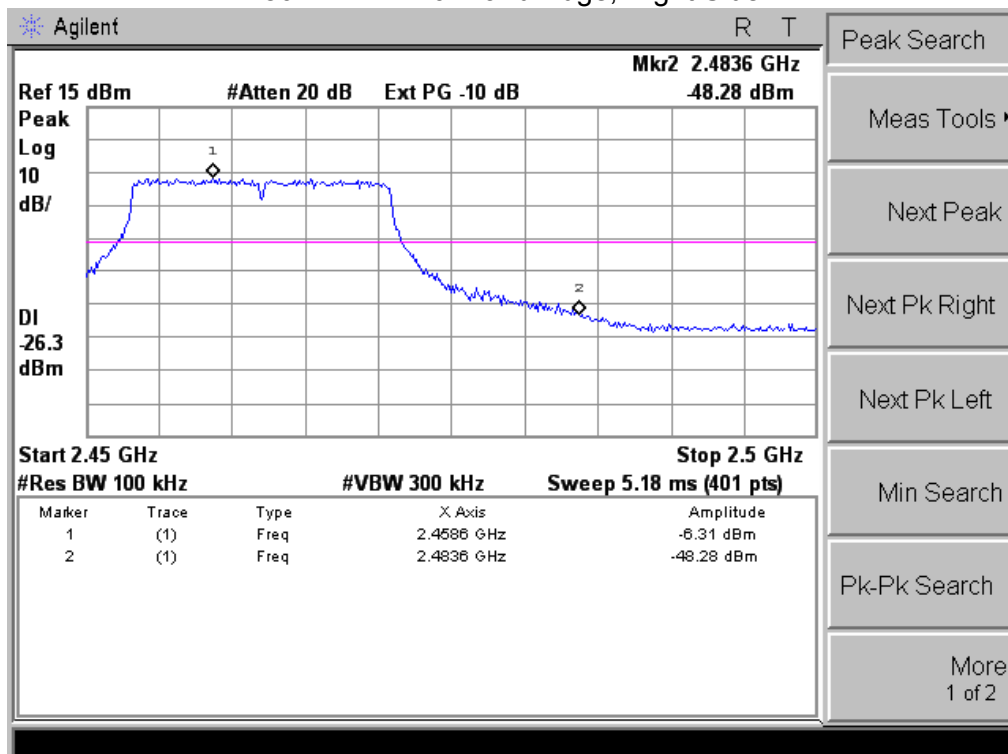

802.11n-HT40: Band Edge, Left Side

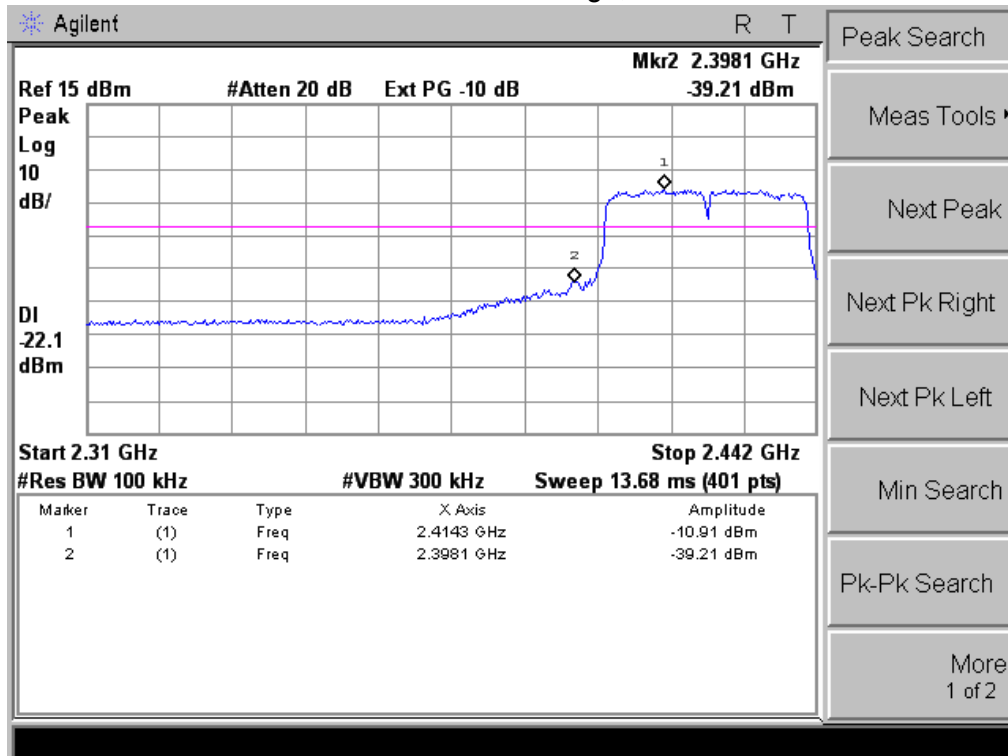

802.11n-HT40: Band Edge, Right Side

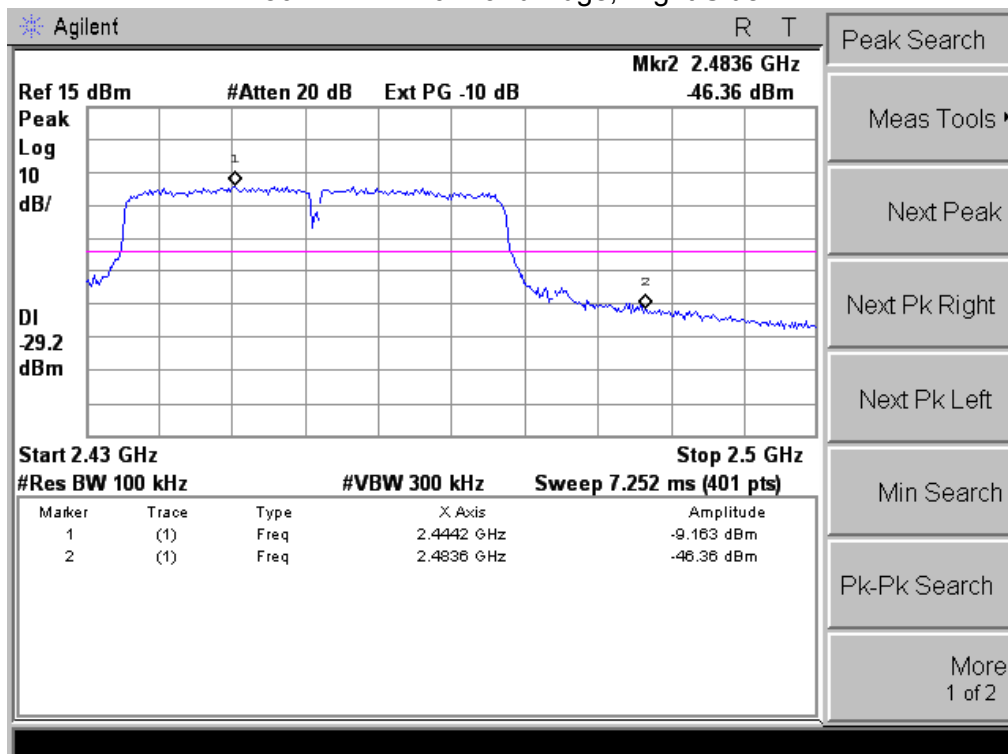

8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT


15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA


The EUT antenna is a FPCB antenna. It comply with the standard requirement.

9. EUT TEST PHOTO

Radiated Measurement Photos

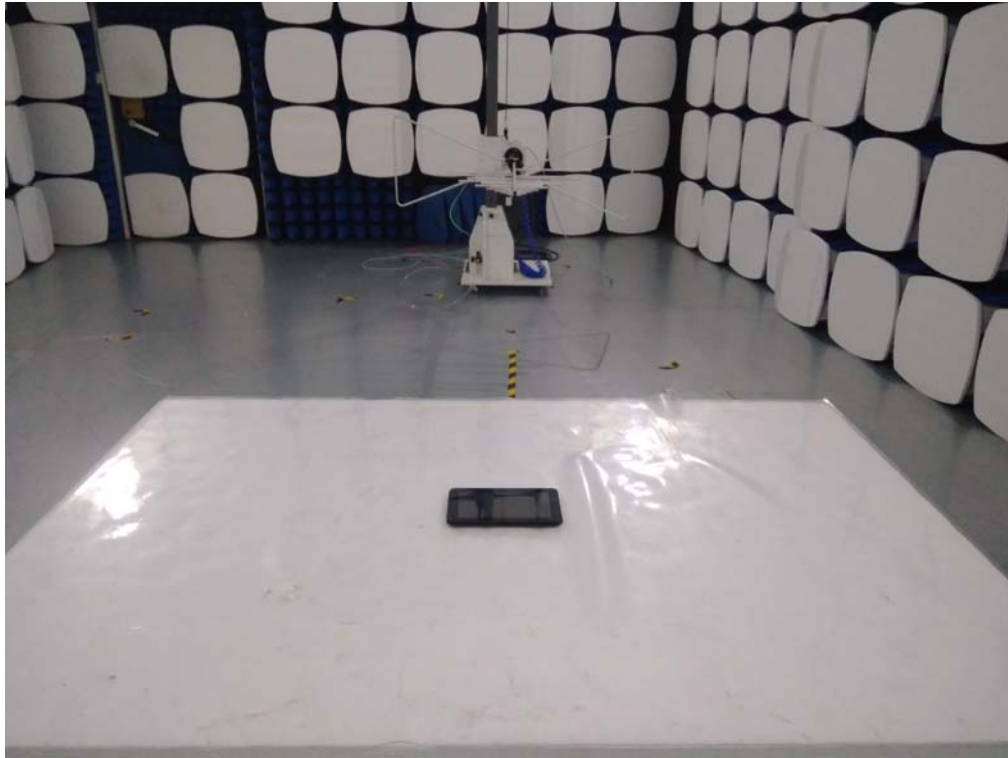

Radiated Measurement Photos

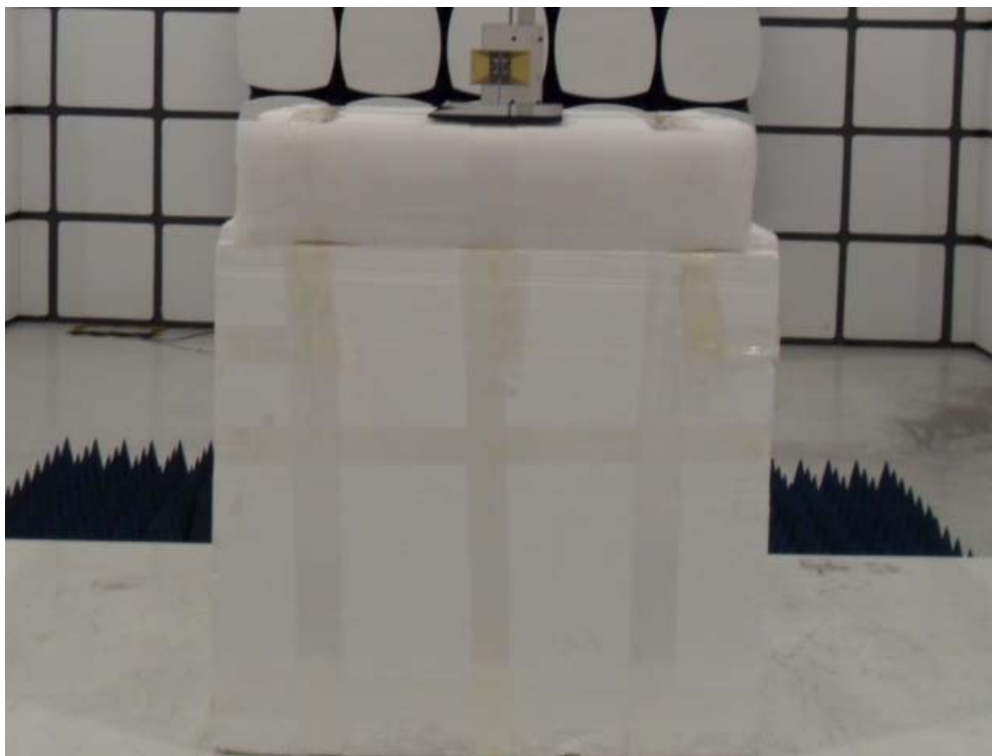

Conducted Measurement Photos

