



REPORT No.: SZ25120367S01

TEST REPORT

APPLICANT : Wuxi iData Technology Co., Ltd.

PRODUCT NAME : New Mobile Computer

MODEL NAME : iDataW7, iDataW7S, iDataW7Pro, iDataW7Turbo, iDataW7A, iDataW7G, iDataW7L, iDataW7COLD, iDataW7SCOLD, iDataW7ProCOLD, iDataW7TurboCOLD, iDataW7ACOLD, iDataW7GCOLD, iDataW7LCOLD, iDataW7HC, iDataW7SHC, iDataW7ProHC, iDataW7TurboHC, iDataW7AHC, iDataW7GHC, iDataW7LHC, iDataW7XHC, iDataW7XSHC, iDataW7XProHC, iDataW7XTurboHC, iDataW7XAHc, iDataW7XGHC, iDataW7XLHC

BRAND NAME : iData

FCC ID : 2ADE3IDATAW7

STANDARD(S) : FCC 47 CFR Part 2 (2.1093)
IEC TR 63170:2018
IEC/IEEE 62209-1528:2020

RECEIPT DATE : 2026-01-26

TEST DATE : 2026-03-15 to 2026-03-30

ISSUE DATE : 2026-05-18



Edited by:

Pang Siyu

Pang Siyu (Rapporteur)

Approved by:

Shen Junsheng

Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

1. Statement of Compliance.....	5
2. Technical Information.....	6
2.1. Applicant and Manufacturer Information.....	6
2.2. Equipment under Test (EUT) Description	6
2.3. Environment of Test Site/Conditions	7
3. Specific Absorption Rate (SAR).....	8
3.1. Introduction.....	8
3.2. SAR Definition	8
4. RF Exposure Limits	9
4.1. Uncontrolled Environment.....	9
4.2. Controlled Environment.....	10
5. Applied Reference Documents	11
6. SAR Measurement System	12
6.1. E-Field Probe	13
6.2. Data Acquisition Electronics (DAE).....	14
6.3. Robot	14
6.4. Measurement Server.....	15
6.5. Light Beam Unit.....	15
6.6. Phantom	16
6.7. Device Holder	16
6.8. Data Storage and Evaluation	17
6.9. Test Equipment List	20
7. Tissue Simulating Liquids	22
8. SAR System Verification	24
8.1. Purpose of System Performance check	24
8.2. System Setup.....	24



8.3. Validation Results	25
8.4. PD System Verification Source	27
9. EUT Testing Position	29
9.1. Body-worn Configurations	29
9.2. Hotspot Mode Exposure Position Conditions	29
10. Measurement Procedures.....	31
10.1. Spatial Peak SAR Evaluation.....	32
10.2. Power Reference Measurement	32
10.3. SAR Averaged Methods	32
10.4. Power Drift Monitoring	33
11. Power Density Measurement Procedure	33
12. SAR Measurement Procedure	35
12.1. Test Procedure	35
12.2. Scanning Requirements.....	36
12.3. Description of Interpolation/Extrapolation Scheme.....	38
12.4. Wireless Router	39
13. Conducted Power List.....	40
14. Hotspot Mode Evaluation Procedure	40
15. Block Diagram of the Tests to be Performed	41
15.1. Body.....	41
16. Test Results List.....	42
16.1. Test Guidance.....	42
16.2. Body SAR Data	43
16.3. PD Test Results	50
17. Simultaneous Transmission Evaluation	54
17.1. Simultaneous Transmission Consideration	54
17.2. Total Exposure Radio Analysis	54
17.3. Simultaneous Transmission Analysis.....	56



18. Uncertainty Assessment	57
Annex A General Information	63
Annex B Test Setup Photos	64
Annex C Plots of System Performance Check	64
Annex D Plots of Maximum SAR & PD Test Results	64
Annex E Conducted Power	64
Annex F DASY Calibration Certificate	64
Notes	65

Changed History		
Version	Date	Reason for Change
1.0	2026-05-18	First edition

Note: The latest revision of the report supersedes all previous version.



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during test as bellows:

<Highest RF Exposure Summary>

Frequency Band		Highest SAR Summary	
		Body (Gap 0 mm)	
		1g SAR (W/kg)	
WLAN	2.4GHz WLAN	1.301	
	5GHz WLAN	1.389	
	6GHz WLAN	1.179	
2.4GHz Band	Bluetooth	0.193	

Frequency Band		APD	Scaled PD
		4cm ² (mW/cm ²)	4cm ² psPD (mW/cm ²)
WLAN	6GHz WLAN	0.573	0.148

Highest Simultaneous Transmission SAR _{1g} (W/kg):	1.582	Limit: 1.6 W/kg
--	-------	-----------------

Highest Simultaneous Transmission with Multiple transmitters	Total Exposure Radio	Limit
SAR & Power Density	0.928	1.0

Note:

1. This device is compliance with Specific Absorption Rate (SAR) for general population or uncontrolled exposure limits (1.6 W/kg for 1g SAR, 1.0 mW/cm² for PD and APD in 4cm²) specified in FCC 47 CFR Part 1 (1.1310) and IEEE C95.1-1991), and had been tested in accordance with the measurement methods and procedures specified in IEC/IEEE 62209-1528, TCBC workshop notes, IEC TR 63170 and FCC KDB publications.
2. The declarations of EUT presented in the report are provided by applicant and/or manufacturer, and the test laboratory is not responsible for the accuracy of the information.



2. Technical Information

Note: Provide by applicant.

2.1. Applicant and Manufacturer Information

Applicant:	Wuxi iData Technology Co., Ltd.
Applicant Address:	Floor 11, Building B1, No.999 Gaolang East Road Wuxi City, P.R.C.
Manufacturer:	Wuxi iData Technology Co., Ltd.
Manufacturer Address:	Floor 11, Building B1, No.999 Gaolang East Road Wuxi City, P.R.C.

2.2. Equipment under Test (EUT) Description

Product Name:	New Mobile Computer
EUT No.:	1#, 14#
Hardware Version:	B1-1
Software Version:	15.00
Frequency Bands:	WLAN 2.4GHz: 2412 MHz ~ 2472 MHz WLAN 5.2GHz: 5180 MHz ~ 5240 MHz WLAN 5.3GHz: 5260 MHz ~ 5320 MHz WLAN 5.5GHz: 5500 MHz ~ 5700 MHz WLAN 5.8GHz: 5745 MHz ~ 5825 MHz WLAN 6.2GHz (U-NII-5): 5925 MHz ~ 6425 MHz WLAN 6.5GHz (U-NII-6): 6425 MHz ~ 6525 MHz WLAN 6.7GHz (U-NII-7): 6525 MHz ~ 6875 MHz WLAN 7.0GHz (U-NII-8): 6875 MHz ~ 7125 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC: 13.56 MHz
Modulation Mode:	802.11b: DSSS 802.11a/g: OFDM 802.11n-HT20/40: OFDM 802.11ac-VHT20/40/80: OFDM 802.11ax-HEW20/40/80: OFDMA BR+EDR: GFSK (1Mbps), $\pi/4$ -DQPSK (2Mbps), 8-DPSK (3Mbps) Bluetooth LE: GFSK (1Mbps, 2Mbps) NFC: ASK
Antenna Type:	WLAN: PIFA Antenna Bluetooth: PIFA Antenna



	NFC: Loop Antenna
--	-------------------

Note:

1. According to the certificate holder, they declare that this product below model (s) / item(s): iDataW7, iDataW7S, iDataW7Pro, iDataW7Turbo, iDataW7A, iDataW7G, iDataW7L, iDataW7COLD, iDataW7SCOLD, iDataW7ProCOLD, iDataW7TurboCOLD, iDataW7ACOLD, iDataW7GCOLD, iDataW7LCOLD, iDataW7HC, iDataW7SHC, iDataW7ProHC, iDataW7TurboHC, iDataW7AHC, iDataW7GHC, iDataW7LHC, iDataW7XHC, iDataW7XSHC, iDataW7XProHC, iDataW7XTurboHC, iDataW7XAHc, iDataW7XGHC, iDataW7XLHC. Their electrical circuit design, PCB layout, electrical components used and internal wiring are identical. The main measuring model is iDataW7, only the results for iDataW7 were recorded in this report.
2. For more detailed description, please refer to specification or user manual supplied by the applicant and/or manufacturer.

2.3. Environment of Test Site/Conditions

Normal Temperature (NT):	18-25 °C
Relative Humidity:	30-75 %

During SAR test, EUT is in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, and a call is established.

The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the Factory. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link is used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset.

The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the handset by at least 35 dB.

3. Specific Absorption Rate (SAR)

3.1. Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational or controlled and general population or uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational or controlled exposure limits are Middle than the limits for general population or uncontrolled.

3.2. SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density. (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg).

SAR measurement can be either related to the temperature elevation in tissue by,

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where C is the specific head capacity, δT is the temperature rise and δt the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where σ is the conductivity of the tissue, ρ is the mass density of the tissue and $|E|$ is the rmselectrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4. RF Exposure Limits

4.1. Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Limits for General Population/Uncontrolled Exposure (W/kg)

Type Exposure	Uncontrolled Environment Limit
Spatial Peak SAR (1g cube tissue for head and trunk)	1.6 W/kg
Spatial Peak SAR (10g cube tissue for limbs)	4.0 W/kg
Spatial Peak SAR (1g cube tissue for whole body)	0.08 W/kg

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500			f/300	6
1500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500			f/1500	30
1500-100,000			1.0	30

Note:

- Occupational/Uncontrolled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).
- Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.



4.2. Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.



5. Applied Reference Documents

Leading reference documents for testing:

Identity	Document Title	Remark
FCC 47 CFR Part 2 (2.1093)	Radio Frequency Radiation Exposure Evaluation: Portable Devices	/
IEC/IEEE 62209-1528:2020	Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices –Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)	/
IEC TR 63170:2018	Measurement procedure for the evaluation of power density related to human exposure to radio frequency fields from wireless communication devices operating between 6 GHz and 100 GHz	/
KDB 447498 D04v01	General RF Exposure Guidance	/
KDB 248227 D01v02r02	SAR Measurement Procedures for 802.11 Transmitters	/
KDB 865664 D01v01r04	SAR Measurement 100 MHz to 6 GHz	/
KDB 865664 D02v01r02	RF Exposure Reporting	/
KDB 648474 D04v01r03	Handset SAR	/
KDB 941225 D06v02r01	SAR Evaluation Procedures for Portable Devices With Wireless Router Capabilities	/
Note: Any additions, deviation, or exclusions from the method shall be noted in the “Remark”.		

6. SAR Measurement System

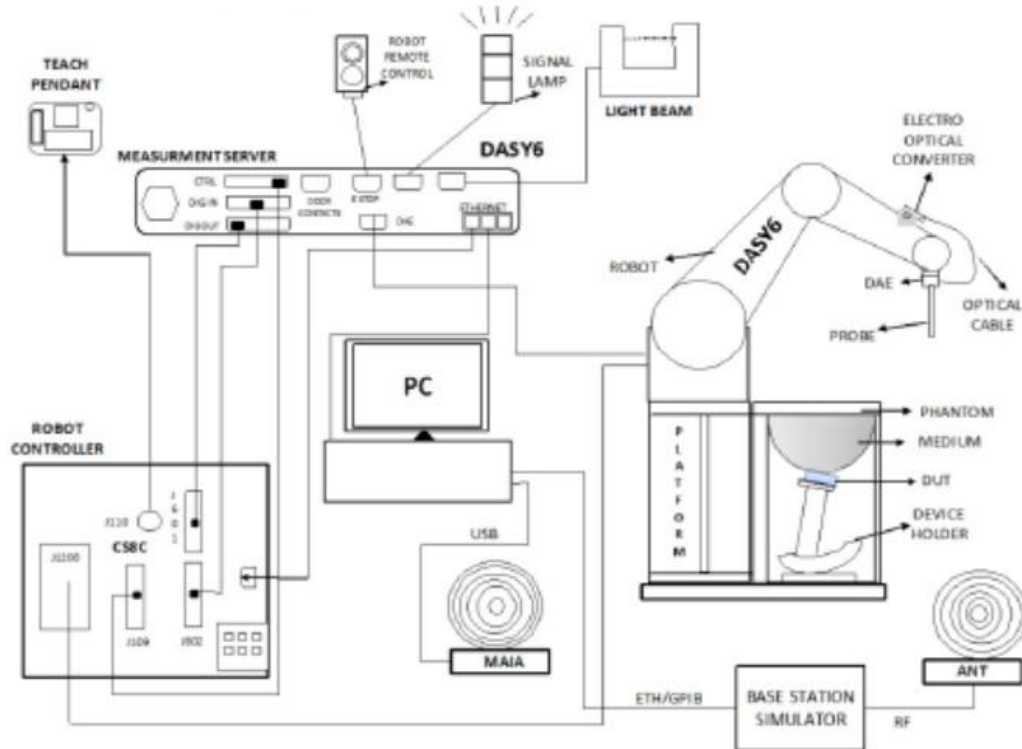


Fig 6.1 SPEAG DASY System Configurations

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software.
- A data acquisition electronic (DAE) attached to the robot arm extension.
- A dosimetric probe equipped with an optical surface detector system.
- The electro-optical converter (ECO) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning.
- A computer operating Windows XP.
- DASY software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom.
- A device holder.
- Tissue simulating liquid.

- Dipole for evaluating the proper functioning of the system.
- Some of the components are described in details in the following sub-sections.

6.1. E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

➤ E-Field Probe Specification

<ES3DV3 Probe>

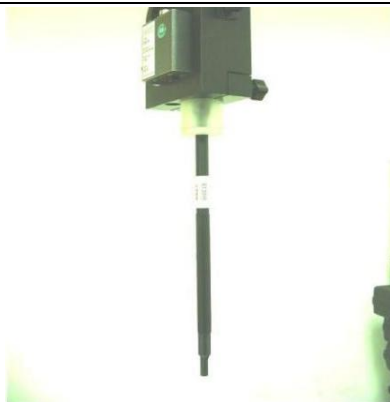
Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz to 3 GHz; Linearity: ± 0.2 dB	
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.4 dB in HSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g to 100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 330 mm (Tip: 16 mm) Tip diameter: 6.8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.7 mm	

Fig 6.2 Photo of ES3DV3

<EX3DV4 Probe>

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz to 10 GHz; Linearity: ± 0.2 dB	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

Fig 6.3 Photo of EX3DV4

➤ E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to annex C of this report.

6.2. Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 6.4 Photo of DAE

6.3. Robot

The SPEAG DASY system uses the high precision robots (DASY4: RX90BL; DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY4: CS7MB; DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

High precision (repeatability ± 0.035 mm)

High reliability (industrial design)

Jerk-free straight movements

Low ELF interference (the closed metallic construction shields against motor control fields)



Fig 6.5 Photo of DASY5

6.4. Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY4: 166 MHz, Intel Pentium; DASY5: 400 MHz, Intel Celeron), chip disk (DASY4: 32 MB; DASY5: 128 MB), RAM (DASY4: 64 MB, DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bits AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board. The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Fig 6.6 Photo of Server for DASY5

6.5. Light Beam Unit

The light beam switch allows automatic "tooling" of the probe. During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip.

The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.



Fig. 6.7 Photo of Light Beam

6.6. Phantom

<SAM Twin Phantom>

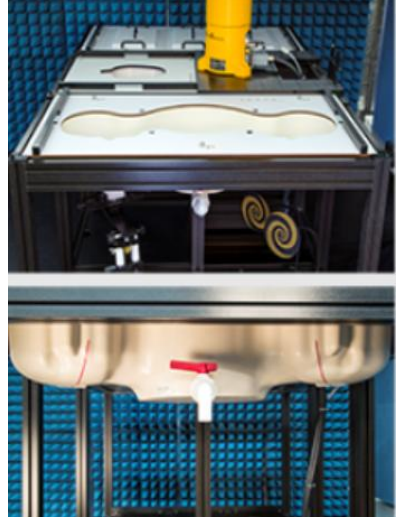
Shell Thickness	2 ± 0.2 mm (sagging: <1%) Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Head, Right Head, Flat Phantom	

Fig. 6.8 Photo of SAM Phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

6.7. Device Holder

<Device Holder for SAM Twin Phantom>

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

<Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Fig 6.9 Device Holder



Fig 6.10 Laptop Extension Kit

6.8. Data Storage and Evaluation

➤ Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

➤ Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software.

Probe parameters:	- Sensitivity	$\text{Norm}_i, a_{i0}, a_{i1}, a_{i2}$
	- Conversion factor	ConvF_i



	- Diode compression point	dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \times \frac{cf}{dcpi}$$

With V_i = compensated signal of channel i, (i = x, y, z)
 U_i = input signal of channel i, (i = x, y, z)
 cf = crest factor of exciting field (DASY parameter)
 dcpi = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated:

$$\text{E-field Probes: } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \times \text{ConvF}}}$$

$$\text{H-field Probes: } H_i = \sqrt{V_i} \times \frac{a_{i0} + a_{i1} + a_{i2}f^2}{f}$$

With V_i = compensated signal of channel i, (i = x, y, z)
 Norm_i = sensor sensitivity of channel i, (i = x, y, z), $\mu\text{V}/(\text{V/m})^2$ for E-field
 Probes ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m



The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \times \frac{\sigma}{\rho \times 1000}$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm³

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.



6.9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial No./ SW Version	Calibration	
				Last Cal.	Due Date
SPEAG	2450MHz System Validation Kit	D2450V2	805	2024.10.22	2027.10.21
SPEAG	5000MHz System Validation Kit	D5GHzV2	1176	2024.10.22	2027.10.21
SPEAG	D6.5GHz System Validation Kit	D6.5GHzV2	1054	2025.11.01	2028.10.31
SPEAG	5G Verification Source	10GHz	1019	2024.12.03	2027.12.02
SPEAG	DOSIMETRIC ASSESSMENT SYSTEM Software	cDASY6 SAR	16.0.0.116	NCR	NCR
SPEAG	DOSIMETRIC ASSESSMENT SYSTEM Software	cDASY6 mmWave	V2.4.2.62	NCR	NCR
SPEAG	Dosimetric E-Field Probe	EX3DV4	3823	2026.01.07	2027.01.06
SPEAG	Dosimetric E-Field Probe	EX3DV4	3826	2025.07.03	2026.07.03
SPEAG	EUmmWave Probe	EUmmMV4	9602	2026.03.19	2027.03.18
SPEAG	Data Acquisition Electronics	DAE4	480	2026.01.07	2027.01.06
SPEAG	Twin-SAM	QD 000 P41 Ax	2020	NCR	NCR
SPEAG	mmWave	N/A	N/A	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
SPEAG	Dielectric Assessment KIT	DAK-3.5	1279	2026.03.17	2027.03.16
mini-circuits	Amplifier	ZHL-42W+	608501717	NCR	NCR
mini-circuits	Amplifier	ZVE-8G+	754401735	NCR	NCR
Agilent	Signal Generator	N5182B	MY53050509	2025.09.02	2026.09.01
R&S	Power Sensor	NRP8S	103215	2025.12.24	2026.12.23
Agilent	Power Meter	E4416A	MY45102093	2025.09.02	2026.09.01
R&S	Power Sensor	NRP8S	103240	2025.12.24	2026.12.23
Anritsu	Power Meter	E4418B	GB43318055	2025.05.15	2026.05.14
Agilent	Dual Directional Coupler	778D	50422	NA	NA
MCL	Attenuation	351-218-010	N/A	NA	NA
R&S	Spectrum Analyzer	N9030A	MY54170556	2025.09.02	2026.09.01
KTJ	Thermo meter	TA298	N/A	2025.11.13	2026.11.12
SPEAG	Tissue Simulating Liquids	HBBL600-10000V6	24H		

Note:

1. The calibration certificate of DASY can be referred to annex F of this report.
2. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.



3. The dielectric probe kit was calibrated via the network analyzer, with the specified procedure (calibrated in pure water) and calibration kit (standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by SPEAG.
4. In system check we need to monitor the level on the power meter, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1 W input power according to the ratio of 1 W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the power meter is critical and we do have calibration for it.
5. Attenuator insertion loss is calibrated by the network Analyzer, which the calibration is valid, before system check.
6. N.C.R means No Calibration Requirement.

7. Tissue Simulating Liquids

➤ Description of Tissue Simulation Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 7.1, for body SAR testing, the liquid height from the centre of the flat phantom to liquid top surface is larger than 15 cm, which is shown in Fig. 7.2.

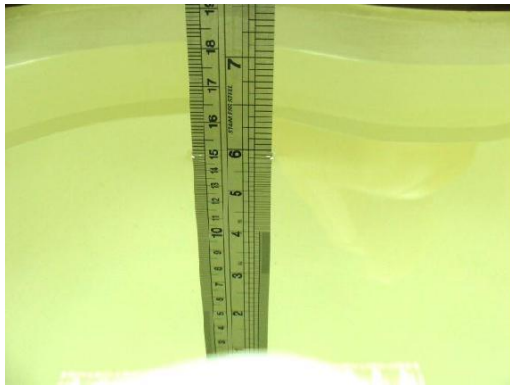


Fig 7.1 Photo of Liquid Height for Head SAR



Fig 7.2 Photo of Liquid Height for Body SAR

➤ Target Dielectric Properties of the Tissue-equivalent Liquid Material

The relative permittivity and conductivity of the tissue material should be within $\pm 5\%$ of the values given in the table below recommended by the FCC OET 65 supplement C.

Frequency	Head Tissue Simulating Media	
(MHz)	ϵ_r (F/m)	σ (S/m)
6000	35.07	5.48
6500	34.46	6.07
7000	33.88	6.65

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)

The dielectric parameters of liquids were verified prior to the SAR evaluation using a Speag Dielectric Probe Kit and an Agilent Network Analyzer.

The following table shows the measuring results for simulating liquid.



Table 1: Dielectric Performance of Tissue Simulating Liquid

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Conductivity Target (σ)	Delta (σ) (%)	Limit (%)	Date
2450	HSL	22.1	1.863	1.80	3.50	±5	2026.3.17
5250	HSL	22.2	4.896	4.71	3.95	±5	2026.3.17
5600	HSL	22.1	5.231	5.07	3.18	±5	2026.3.17
5750	HSL	22.3	5.087	5.22	-2.55	±5	2026.3.17
6500	HSL	22.1	6.240	6.07	2.80	±5	2026.3.15
6500	HSL	22.1	6.230	6.07	2.64	±5	2026.3.16
Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Permittivity (ϵ_r)	Permittivity Target (ϵ_r)	Delta (ϵ_r) (%)	Limit (%)	Date
2450	HSL	22.1	38.786	39.20	-1.06	±5	2026.3.17
5250	HSL	22.2	35.872	35.95	-0.22	±5	2026.3.17
5600	HSL	22.1	34.500	35.50	-2.82	±5	2026.3.17
5750	HSL	22.3	34.345	35.35	-2.84	±5	2026.3.17
6500	HSL	22.1	35.330	34.46	2.52	±5	2026.3.15
6500	HSL	22.1	35.325	34.46	2.51	±5	2026.3.16

Note: According to April 2019 TCB Workshop that FCC has permitted the use of single head-tissue simulating liquid specified in IEC 62209-1 for all SAR tests.

8. SAR System Verification

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

8.1. Purpose of System Performance Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

8.2. System Setup

The output power on dipole port must be calibrated to 250 mW or 100 mW before dipole is connected. In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.



Fig 8.1 Photo of Dipole Setup

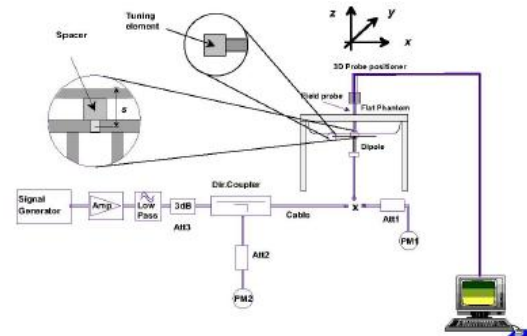


Fig 8.2 System Setup for System Evaluation

8.3. Validation Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10%. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table as below indicates the system performance check can meet the variation criterion and the plots can be referred to annex C of this report.

<Validation Setup>

Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N
2450	100	D2450V2-805	3823	480
5250	100	D5GHzV2-1176-5250	3823	480
5600	100	D5GHzV2-1176-5600	3823	480
5750	100	D5GHzV2-1176-5750	3823	480
6500	100	D6.5GHzV2-1176-6500	3826	480

<System Validation>

Frequency (MHz)	Tissue Type	Conductivity (σ)	Permittivity (ϵ_r)	CW Signal Validation		
				Sensitivity	Probe Linearity	Probe Isotropy
2450	HSL	1.863	38.85	PASS	PASS	PASS
5250	HSL	4.528	35.32	PASS	PASS	PASS
5600	HSL	4.905	34.89	PASS	PASS	PASS
5750	HSL	5.077	34.28	PASS	PASS	PASS
6500	HSL	6.07	34.46	PASS	PASS	PASS

Frequency (MHz)	Tissue Type	Conductivity (σ)	Permittivity (ϵ_r)	Modulation Signal Validation		
				Mod. Type	Duty Factor	PAR
2450	HSL	1.863	38.85	OFDM	PASS	PASS
5250	HSL	4.528	35.32	OFDM	N/A	PASS
5600	HSL	4.905	34.89	OFDM	N/A	PASS
5750	HSL	5.077	34.28	OFDM	N/A	PASS
6500	HSL	6.07	34.46	OFDM	N/A	PASS



<Validation Results>

Date	Frequency (MHz)	Tissue Type	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2026.3.17	2450	HSL	5.60	52.80	56	6.06
2026.3.17	5250	HSL	7.80	77.30	78	0.91
2026.3.17	5600	HSL	8.20	82.40	82	-0.49
2026.3.17	5750	HSL	7.61	77.20	76.1	-1.42
2026.3.15	6500	HSL	25.40	248.00	254	2.42
2026.3.16	6500	HSL	25.91	248.00	259.1	4.48

Date	Frequency (MHz)	Tissue Type	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2026.3.17	2450	HSL	2.30	24.50	23	-6.12
2026.3.17	5250	HSL	1.94	21.50	19.4	-9.77
2026.3.17	5600	HSL	2.31	22.80	23.1	1.32
2026.3.17	5750	HSL	1.98	21.20	19.8	-6.60
2026.3.15	6500	HSL	5.62	54.90	56.2	2.37
2026.3.16	6500	HSL	5.71	54.90	57.1	4.01

Date	Frequency (MHz)	Tissue Type	Measured 4cm ² APD (W/m ²)	Targeted 4cm ² APD (W/m ²)	Normalized 4cm ² APD (W/m ²)	Deviation (%)
2026.3.15	6500	HSL	137.00	1310.00	1370	4.58
2026.3.16	6500	HSL	141.00	1310.00	1410	7.63

Note: System checks the specific test data please see annex C.

8.4. PD System Verification Source

➤ General description

The EUT is replaced by a calibrated source, the same spatial resolution, measurement region and test separation used in the calibration was applied to system check. Through visual inspection into the measured power density distribution, both the spatially (shape) and numerically (level) have no noticeable difference. The measurement results should be within $\pm 10\%$ of the calibrated targets.

Frequency [GHz]	Grid step	Grid extent X/Y [mm]	Measurement points
10	$0.25 \left(\frac{\lambda}{4}\right)$	120/120	16×16
30	$0.25 \left(\frac{\lambda}{4}\right)$	60/60	24×24
60	$0.25 \left(\frac{\lambda}{4}\right)$	32.5/32.5	26×26
90	$0.25 \left(\frac{\lambda}{4}\right)$	30/30	36×36

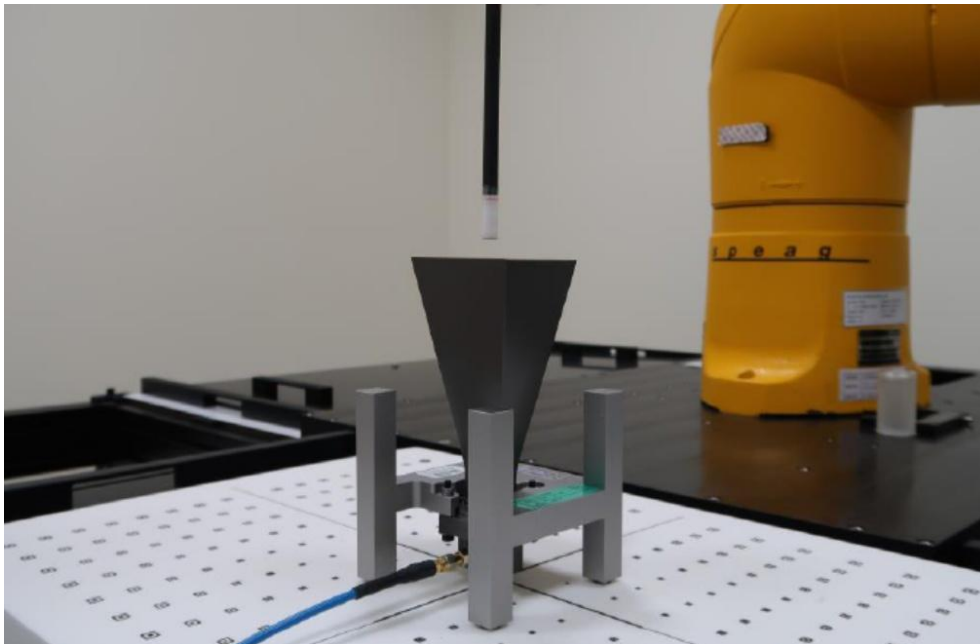


Fig 8.3 Photos of Verification Setup

➤ Validation Results

After system check testing, the results of power density will be compared with the reference value derived from the certificate report. The deviation of system check should be within $\pm 10\%$.

<Validation Setup>

Frequency (GHz)	6.5G Verification Source	Probe S/N	DAE S/N
10	10GHz-SN 1019	9602	480



<Validation Results>

Date	Frequency (GHz)	Test Distance (mm)	Measured 4cm ² pStotavg (W/m ²)	Targeted 4cm ² pStotavg (W/m ²)	Deviation (%)
2026.3.28	10	10	44.6	44.8	-0.4
2026.3.29	10	10	44.2	44.8	-1.3
2026.3.30	10	10	43.7	44.8	-2.5

Note: System checks the specific test data please see annex C.

9. EUT Testing Position

This EUT was tested in five different positions. They are front Side/bottom face/edge 1/edge 2/edge 4 of the EUT with phantom 0 mm gap, as illustrated below, please refer to annex B for the test setup photos.

9.1. Body-worn Configurations

The body-worn configurations shall be tested with the supplied accessories (belt-clips, holsters, etc.) attached to the device in normal use configuration.

For body-worn and other configurations a flat phantom shall be used which is comprised of material with electrical properties similar to the corresponding tissues.

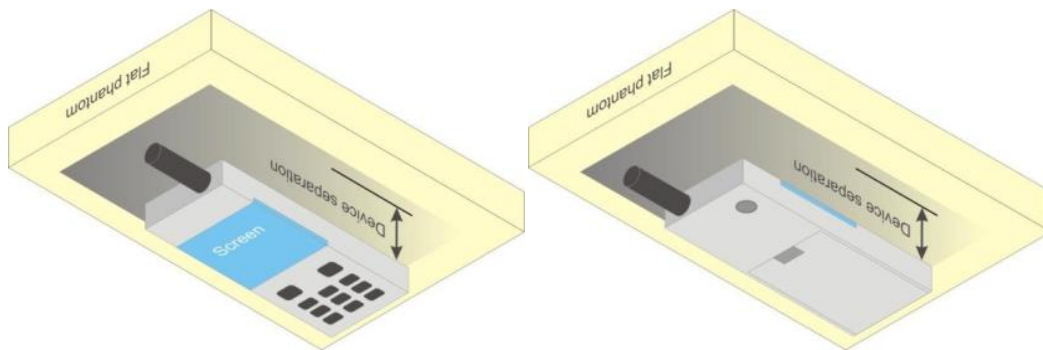


Fig 9.1 Illustration for Body Worn Position

9.2. Hotspot Mode Exposure Position Conditions

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing functions, the relevant hand and body exposure conditions are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge. When the form factor of a handset is smaller than 9 cm x 5 cm, a test separation distance of 5 mm (instead of 10 mm) is required for testing hotspot mode. When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

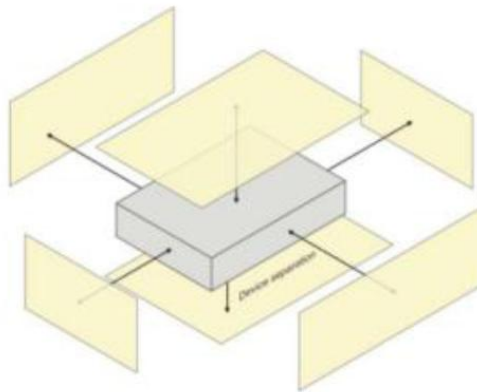


Fig 9.2 Illustration for Hotspot Position

10. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power.

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Annex D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band.
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement.
- (b) Area scan.
- (c) Zoom scan.
- (d) Power drift measurement.



10.1. Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan.
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters).
- (c) Generation of a high-resolution mesh within the measured volume.
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid.
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface.
- (f) Calculation of the averaged SAR within masses of 1g and 10g.

10.2. Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

10.3. SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Sheppard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

10.4. Power Drift Monitoring

All SAR testing is under the DUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of DUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

11. Power Density Measurement Procedure

➤ Computation of the Electric Field Polarization Ellipse

For the numerical description of an arbitrarily oriented ellipse in three-dimensional space, five parameters are needed: the semi-major axis (a), the semi-minor axis (b), two angles describing the orientation of the normal vector of the ellipse (ϕ, θ), and one angle describing the tilt of the semi-major axis (ψ). For the two extreme cases, i.e. circular and linear polarizations, three parameters only (a , ϕ and θ) are sufficient for the description of the incident field.

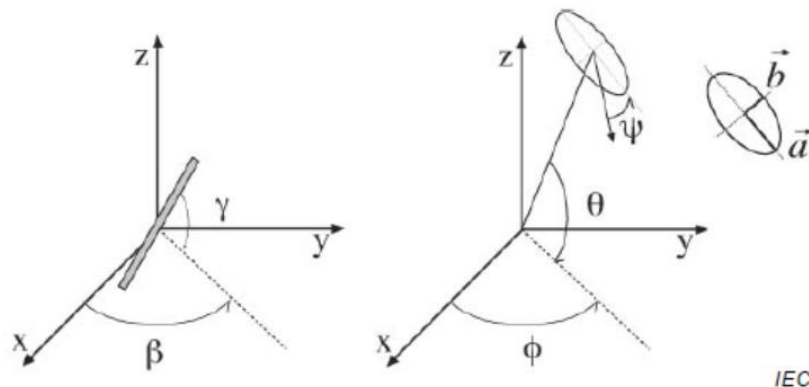


Fig 11.1 Illustration of the angles used for the numerical description of the sensor and the orientation of an ellipse in 3-D space

For the construction of the ellipse parameters from measured data, the problem can be reformulated as a nonlinear search problem. The semi-major and semi-minor axes of an elliptical field can be express as functions of the three angles (ϕ , θ and ψ). The parameters can be uniquely determined towards minimizing the error based on least-squares for the given set of angles and the measured data. In this way, the numbers of three parameters is reduced from five to three, which means that least three sensors readings are necessary to gain sufficient information for the reconstruction of ellipse parameters. However, to suppress the noise and increase the reconstruction accuracy, it is desirable to have an over determined system of equations. The solution to use a probe consisting of two sensors angled by γ_1 and γ_2 toward the probe axis and to perform measurements at three angular positions of the probe, i.e. at β_1 , β_2 and β_3 , results in over determination of two. If there is a need for more information or



increased accuracy, more rotation angles can be added.

The reconstruction of ellipse parameters can be separated into linear and non-linear parts that are best solved by the given algorithm combined with a downhill simplex algorithm. To minimize the mutual coupling, sensor angles are set with a 90° shift ($\gamma_1 = \gamma_2 + 90^\circ$), and, to simplify, the first rotation angle of the probe (β_1) can be set to 0° .

➤ **Total Field and Power Flux Density Reconstruction**

Computation of the power density in general requires knowledge of the electric and magnetic field amplitudes and phases in the plane of incidence. Reconstruction of these quantities from pseudo-vector E-field measurements is feasible, as they are constrained by Maxwell's equations. The SPEAG has developed a reconstruction approach based on the Gerchberg-Saxton algorithm, which benefits from the availability of the E-Field polarization ellipse information obtained with the EUmmWV2 probe. This reconstruction algorithm, together with the ability of the probe to measure extremely close to the source without perturbing the field, permits reconstruction of the E-field and H-field, as well as of the power density, on measurement planes located as near as $\lambda/5$ away.

➤ **Power Flux Density Averaging**

The average of the reconstructed power density is evaluated over a circular area in each measurement plane. The area of the circle is defined by the user; the default is 1cm^2 . The computed peak average value is displayed in the box at the top right. Note that the average is evaluated only for grid points where the averaging circle is completely filled with values; for points at the edge where the averaging circle is only partly filled with values, the average power density is set to zero. Two average power density values are computed.

12. SAR Measurement Procedure

12.1. Test Procedure

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEC/IEEE 62209-1528:2020.

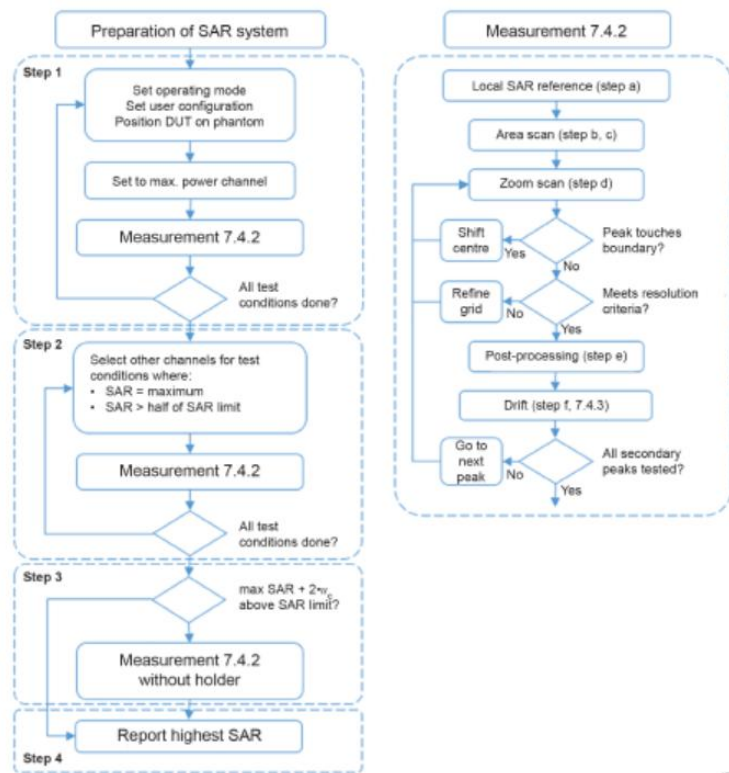


Fig 12.1 Block diagram of the tests to be performed

The SAR test procedure shall be performed for each test configuration should follows the requirements specified in IEC/IEEE 62209-1528. The Following steps are used for each test position shown in fig 12.1:

1. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface.
2. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.

12.2. Scanning Requirements

➤ Area Scan Parameters

Measure the two-dimensional SAR distribution within the phantom (i.e. the area scan). Table 1 provides the measurement parameters required for the area scan.

Table 1 Area scan parameters

Parameter	DUT transmit frequency being tested	
	$f \leq 3 \text{ GHz}$	$3 \text{ GHz} < f \leq 10 \text{ GHz}$
Maximum distance between the measured points (geometric centre of the sensors) and the inner phantom surface (z_{M1} in Figure 20 in mm)	5 ± 1	$\delta \ln(2)/2 \pm 0,5^a$
Maximum spacing between adjacent measured points in mm (see O.8.3.1) ^b	20, or half of the corresponding zoom scan length, whichever is smaller	$60/f$, or half of the corresponding zoom scan length, whichever is smaller
Maximum angle between the probe axis and the phantom surface normal (α in Figure 20) ^c	5° (flat phantom only) 30° (other phantoms)	5° (flat phantom only) 20° (other phantoms)
Tolerance in the probe angle	1°	1°
^a δ is the penetration depth for a plane-wave incident normally on a planar half-space. ^b See Clause O.8 on how Δx and Δy may be selected for individual area scan requirements. ^c The probe angle relative to the phantom surface normal is restricted due to the degradation in the measurement accuracy in fields with steep spatial gradients. The measurement accuracy decreases with increasing probe angle and increasing frequency. This is the reason for the tighter probe angle restriction at frequencies above 3 GHz.		

1. The area over which the SAR measurement is performed shall cover at least an area larger than the projection of the DUT, including its antenna. For some DUTs, the area projected onto the phantom can be relatively large, such that the probe might not reach all points. In this case, rotated phantoms may be used, and the area may be assessed by multiple overlapping area scans. The measurement resolution and spatial resolution for interpolation shall be selected to allow identification of the local peak locations to within one-half of the linear dimension of the corresponding side of the zoom-scan volume.
2. For the flat phantom, the boundary of the measurement area shall not be closer than 20 mm from the phantom side walls.

➤ Zoom Scan Parameters

Measure the three-dimensional SAR distribution at each of the local maxima locations identified in step c) (i.e. the zoom scan).

Table 2 Zoom scan parameters

Parameter	DUT transmit frequency being tested	
	$f \leq 3 \text{ GHz}$	$3 \text{ GHz} < f \leq 10 \text{ GHz}$
Maximum distance between the closest measured points and the phantom surface (z_{M1} in Figure 20 and Table 3, in mm)	5	$\delta \ln(2)/2^a$
Maximum angle between the probe axis and the phantom surface normal (α in Figure 20)	5° (flat phantom only) 30° (other phantoms)	5° (flat phantom only) 20° (other phantoms)
Maximum spacing between measured points in the x- and y-directions (Δx and Δy , in mm)	8	$24/f^b$
For uniform grids: Maximum spacing between measured points in the direction normal to the phantom shell (Δz_1 in Figure 20, in mm)	5	$10/(f - 1)$
For graded grids: Maximum spacing between the two closest measured points in the direction normal to the phantom shell (Δz_1 in Figure 20, in mm)	4	$12/f$
For graded grids: Maximum incremental increase in the spacing between measured points in the direction normal to the phantom shell ($R_z = \Delta z_2/\Delta z_1$ in Figure 20)	1,5	1,5
Minimum edge length of the zoom scan volume in the x- and y-directions (L_z in O.8.3.2, in mm)	30	22
Minimum edge length of the zoom scan volume in the direction normal to the phantom shell (L_n in O.8.3.2 in mm)	30	22
Tolerance in the probe angle	1°	1°
^a δ is the penetration depth for a plane-wave incident normally on a planar half-space.		
^b This is the maximum spacing allowed, which might not work for all circumstances.		

- For frequencies at or below 3 GHz, the following procedure shall be applied (see Table 2).
 - The minimum size of the zoom scan volume shall be 30 mm by 30 mm by 30 mm.
 - The horizontal grid step shall be 8 mm or less.
 - The grid step in the vertical direction shall be 5 mm, or less if uniform spacing is used.
 - If variable spacing is used in the vertical direction, the maximum spacing between the two closest measured points to the phantom shell (M1 and M2, see Figure 20 of IEC/IEEE 62209-1528 section 7.4.2) shall be 4 mm or less, and the spacing between the farther points shall increase by a factor of 1.5 or less.
 - For other parameters, see Table 4.
- For frequencies above 3 GHz, the following procedure shall be applied.

- 1) The minimum size of the zoom scan volume may be reduced to 22 mm by 22 mm by 22 mm.
 - 2) The horizontal grid step shall be $(24 / f \text{ [GHz]})$ mm or less.
 - 3) If uniform spacing in the vertical direction is used, the grid step in the vertical direction shall be $(10 / (f \text{ [GHz]} - 1))$ mm or less.
 - 4) If variable spacing is used in the vertical direction, the maximum spacing between the two measured points closest to the phantom shell shall be $(12 / f \text{ [GHz]})$ mm or less, and the spacing between farther points shall increase by a factor of 1.5 or less.
3. If the highest SAR 1 g or 10 g cube is touching the boundary of a zoom-scan volume, the entire zoom scan shall be repeated with the new centre located at the maximum psSAR location indicated by the preceding zoom scan measurement. It is also acceptable to expand the zoom scan during measurement until the 1 g or 10 g cube is no longer touching the boundary of the zoom-scan volume.
4. If the zoom scan measured as specified in the preceding paragraphs complies with both i) and ii), or if the psSAR is below 0.1 W/kg, no additional measurements are needed.
- 1) The smallest horizontal distance from the local SAR peaks to all points 3 dB below the SAR peak shall be larger than the horizontal grid steps in both x- and y-directions (Δx , Δy). This shall be checked for the measured zoom scan plane conformal to the phantom at the distance zM1. The minimum distance shall be recorded in the SAR test report.
 - 2) ii) The ratio of the SAR at the second measured point (M2) to the SAR at the closest measured point (M1) at the x-y location of the measured maximum SAR value shall be at least 30 % (Figure 20). This ratio (in %) shall be recorded in the SAR test report.

12.3. Description of Interpolation/Extrapolation Scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.



12.4. Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

13. Conducted Power List

Remark: The output power of WLAN/Bluetooth was recorded in annex E of this report.

14. Hotspot Mode Evaluation Procedure

➤ EUT Antenna Location

The location of antenna was recorded in annex B
WLAN Main ANT: TX/RX: WLAN 2.4GHz/5GHz/6GHz
BT ANT: Bluetooth
WLAN Aux ANT: TX/RX: WLAN 2.4GHz/5GHz/6GHz

➤ Test Positions Consideration

1. The test position consideration was recorded in annex F.
2. Per KDB 616217 D04v01r02, when the overall diagonal dimension of display is > 20 cm, the test distance is 0mm; the SAR Test Exclusion Threshold in KDB 447498 section 4.3.1 can be applied to determine SAR test exclusion for adjacent edge configurations.
3. Per KDB 616217 D04v01r02, SAR evaluation for the front surface of tablet display screens is generally not necessary.
4. Per KDB 616217 D04v01r02, additional testing for hotspot SAR is not required.

15. Block Diagram of the Tests to be Performed

15.1. Body

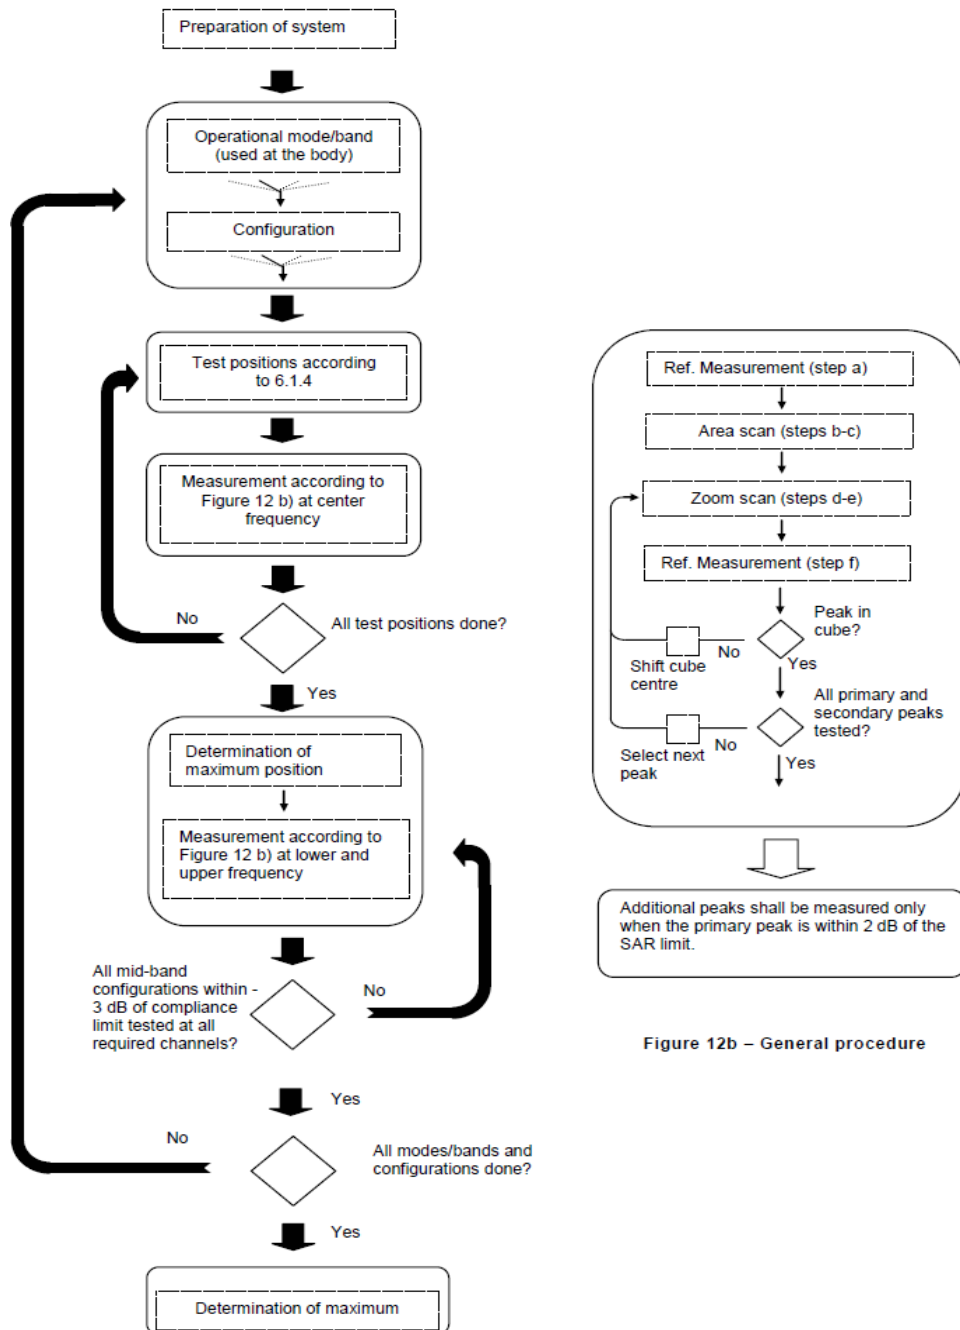


Figure 12b – General procedure

16. Test Results List

16.1. Test Guidance

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1 / (duty cycle)".
 - c. For WLAN/Bluetooth: Reported SAR(W/kg) = Measured SAR (W/kg) * Duty Cycle scaling factor * Tune-up scaling factor.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - a. ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - b. ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - c. ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
5. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for tablet modes to compare with the 1.2 W/kg SAR test reduction threshold.
6. Per KDB248227 D01v02r02, a Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement. The test frequencies established using test mode must correspond to the actual channel frequencies required for operations in the U.S. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. In addition, a periodic transmission duty factor is required for current generation SAR systems to measure SAR

correctly. Unless it is permitted by specific KDB procedures or continuous transmission is specifically restricted by the device, the reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. When a device is not capable of sustaining continuous transmission or the output can become nonlinear, and it is limited by hardware design and unable to transmit at higher than 85% duty factor, a periodic duty factor within 15% of the maximum duty factor the device is capable of transmitting should be used. The reported SAR must be scaled to the maximum transmission duty factor to determine compliance. Descriptions of the procedures applied to establish the specific duty factor used for SAR testing are required in SAR reports to support the test results.

7. According to the manual, the maximum power of NFC is less than 1 mW. Per KDB 447498 D04v01, NFC is exempt from RF exposure evaluation.
8. Evaluate SAR / APD with DASY6 Module SAR V16.0 or higher. The configurations to be tested are defined in the relevant Knowledge Database (KDB). The 4cm² psSAR and absorbed psPD are reported.

16.2. Body SAR Data

➤ WLAN/BT Body SAR

Plot No.	Band/ Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)	Meas. 4cm ² APD (W/m ²)
ANT 1									
	WLAN2.4GHz/802.11b	Edge1	13	15.64	16.50	1.219	1.050	1.280	/
	WLAN2.4GHz/802.11b	Edge2	13	15.64	16.50	1.219	0.000	0.000	/
	WLAN2.4GHz/802.11b	Edge4	13	15.64	16.50	1.219	0.127	0.154	/
	WLAN2.4GHz/802.11b	Front Side	13	15.64	16.50	1.219	0.145	0.176	/
	WLAN2.4GHz/802.11b	Bottom Face	13	15.64	16.50	1.219	0.219	0.268	/
	WLAN2.4GHz/802.11b	Edge1	1	14.86	15.50	1.159	0.693	0.803	/
	WLAN2.4GHz/802.11b	Edge1	7	15.08	16.00	1.236	0.834	1.030	/
ANT 2									
	WLAN2.4GHz/802.11b	Edge1	1	13.89	14.50	1.151	0.895	1.030	/
	WLAN2.4GHz/802.11b	Edge2	1	13.89	14.50	1.151	0.032	0.037	/
	WLAN2.4GHz/802.11b	Edge4	1	13.89	14.50	1.151	0.055	0.063	/
	WLAN2.4GHz/802.11b	Front Side	1	13.89	14.50	1.151	0.074	0.085	/
	WLAN2.4GHz/802.11b	Bottom Face	1	13.89	14.50	1.151	0.229	0.264	/



	WLAN2.4GHz/802.11b	Edge1	7	13.32	14.00	1.169	0.927	1.084	/
1#	WLAN2.4GHz/802.11b	Edge1	13	13.61	14.50	1.227	1.060	1.301	/
ANT 1									
	WLAN2.4GHz/802.11ax20	Edge1	13	18.21	19.00	1.199	0.925	1.110	/
	WLAN2.4GHz/802.11ax20	Edge2	13	18.21	19.00	1.199	0.122	0.146	/
	WLAN2.4GHz/802.11ax20	Edge4	13	18.21	19.00	1.199	0.037	0.044	/
	WLAN2.4GHz/802.11ax20	Front Side	13	18.21	19.00	1.199	0.111	0.133	/
	WLAN2.4GHz/802.11ax20	Bottom Face	13	18.21	19.00	1.199	0.171	0.205	/
	WLAN2.4GHz/802.11ax20	Edge1	1	17.77	18.50	1.183	0.863	1.021	/
	WLAN2.4GHz/802.11ax20	Edge1	7	17.03	18.00	1.250	0.442	0.553	/
ANT 2									
	WLAN2.4GHz/802.11ax40	Edge1	3	17.30	18.00	1.175	0.708	0.831	/
	WLAN2.4GHz/802.11ax40	Edge2	3	17.30	18.00	1.175	0.020	0.024	/
	WLAN2.4GHz/802.11ax40	Edge4	3	17.30	18.00	1.175	0.043	0.050	/
	WLAN2.4GHz/802.11ax40	Front Side	3	17.30	18.00	1.175	0.051	0.060	/
	WLAN2.4GHz/802.11ax40	Bottom Face	3	17.30	18.00	1.175	0.333	0.391	/
	WLAN2.4GHz/802.11ax40	Edge1	7	16.45	17.00	1.135	0.980	1.112	/
	WLAN2.4GHz/802.11ax40	Edge1	11	17.23	18.00	1.194	0.708	0.845	/
ANT 1+2									
	WLAN2.4GHz/802.11ax20	Edge1	1	19.00	20.00	1.259	0.867	1.091	/
	WLAN2.4GHz/802.11ax20	Edge2	1	19.00	20.00	1.259	0.093	0.117	/
	WLAN2.4GHz/802.11ax20	Edge4	1	19.00	20.00	1.259	0.077	0.097	/
	WLAN2.4GHz/802.11ax20	Front Side	1	19.00	20.00	1.259	0.090	0.113	/
	WLAN2.4GHz/802.11ax20	Bottom Face	1	19.00	20.00	1.259	0.370	0.465	/
	WLAN2.4GHz/802.11ax20	Edge1	7	17.04	18.00	1.247	0.884	1.103	/
	WLAN2.4GHz/802.11ax20	Edge1	13	17.49	18.00	1.125	0.751	0.844	/
ANT 1									
	WLAN5.2GHz/802.11ax20 (RU26)	Edge1	36	18.49	19.00	1.125	0.178	0.225	/
	WLAN5.2GHz/802.11ax20 (RU26)	Edge2	36	18.49	19.00	1.125	0.084	0.106	/
	WLAN5.2GHz/802.11ax20 (RU26)	Edge4	36	18.49	19.00	1.125	0.097	0.123	/
	WLAN5.2GHz/802.11ax20(RU26)	Front Side	36	18.49	19.00	1.125	0.051	0.064	/
	WLAN5.2GHz/802.11ax20 (RU26)	Bottom Face	36	18.49	19.00	1.125	0.081	0.102	/
ANT 2									
	WLAN5.2GHz/802.11ax40 (RU242)	Edge1	38	12.09	13.00	1.233	0.804	1.180	/
	WLAN5.2GHz/802.11ax40 (RU242)	Edge2	38	12.09	13.00	1.233	0.023	0.033	/



REPORT No.: SZ25120367S01

	WLAN5.2GHz/802.11ax40 (RU242)	Edge4	38	12.09	13.00	1.233	0.038	0.056	/
	WLAN5.2GHz/802.11ax40 (RU242)	Front Side	38	12.09	13.00	1.233	0.039	0.058	/
	WLAN5.2GHz/802.11ax40 (RU242)	Bottom Face	38	12.09	13.00	1.233	0.126	0.185	/
ANT 1+2									
2#	WLAN5.2GHz/802.11ax40	Edge1	38	12.99	13.50	1.125	1.090	1.226	/
	WLAN5.2GHz/802.11ax40	Edge2	38	12.99	13.50	1.125	0.040	0.045	/
	WLAN5.2GHz/802.11ax40	Edge4	38	12.99	13.50	1.125	0.081	0.091	/
	WLAN5.2GHz/802.11ax40	Front Side	38	12.99	13.50	1.125	0.055	0.062	/
	WLAN5.2GHz/802.11ax40	Bottom Face	38	12.99	13.50	1.125	0.194	0.218	/
	WLAN5.2GHz/802.11ax40	Edge1	46	12.76	13.50	1.186	0.947	1.123	/
ANT 1									
	WLAN5.3GHz/802.11ac20	Edge1	52	11.98	12.50	1.127	0.904	1.019	/
	WLAN5.3GHz/802.11ac20	Edge2	52	11.98	12.50	1.127	0.034	0.039	/
	WLAN5.3GHz/802.11ac20	Edge4	52	11.98	12.50	1.127	0.052	0.058	/
	WLAN5.3GHz/802.11ac20	Front Side	52	11.98	12.50	1.127	0.080	0.090	/
	WLAN5.3GHz/802.11ac20	Bottom Face	52	11.98	12.50	1.127	0.123	0.139	/
3#	WLAN5.3GHz/802.11ac20	Edge1	60	11.33	12.00	1.167	1.190	1.389	/
	WLAN5.3GHz/802.11ac20	Edge1	64	10.86	11.50	1.159	0.897	1.039	/
ANT 2									
	WLAN5.3GHz/802.11ax40	Edge1	54	10.02	11.00	1.253	0.810	1.015	/
	WLAN5.3GHz/802.11ax40	Edge2	54	10.02	11.00	1.253	0.037	0.046	/
	WLAN5.3GHz/802.11ax40	Edge4	54	10.02	11.00	1.253	0.086	0.108	/
	WLAN5.3GHz/802.11ax40	Front Side	54	10.02	11.00	1.253	0.068	0.085	/
	WLAN5.3GHz/802.11ax40	Bottom Face	54	10.02	11.00	1.253	0.293	0.367	/
	WLAN5.3GHz/802.11ax40	Edge1	62	9.77	10.50	1.183	0.920	1.088	/
ANT 1+2									
	WLAN5.3GHz/802.11ac20	Edge1	52	12.73	13.50	1.194	0.841	1.004	/
	WLAN5.3GHz/802.11ac20	Edge2	52	12.73	13.50	1.194	0.022	0.027	/
	WLAN5.3GHz/802.11ac20	Edge4	52	12.73	13.50	1.194	0.048	0.058	/
	WLAN5.3GHz/802.11ac20	Front Side	52	12.73	13.50	1.194	0.033	0.040	/
	WLAN5.3GHz/802.11ac20	Bottom Face	52	12.73	13.50	1.194	0.123	0.147	/
	WLAN5.3GHz/802.11ac20	Edge1	60	11.67	12.50	1.211	0.881	1.067	/
	WLAN5.3GHz/802.11ac20	Edge1	64	11.43	12.00	1.140	0.926	1.056	/
ANT 1									
4#	WLAN5.5GHz/802.11ac40	Edge1	110	9.64	10.50	1.219	1.100	1.341	/
	WLAN5.5GHz/802.11ac40	Edge2	110	9.64	10.50	1.219	0.026	0.032	/
	WLAN5.5GHz/802.11ac40	Edge4	110	9.64	10.50	1.219	0.033	0.040	/



	WLAN5.5GHz/802.11ac40	Front Side	110	9.64	10.50	1.219	0.020	0.025	/
	WLAN5.5GHz/802.11ac40	Bottom Face	110	9.64	10.50	1.219	0.098	0.120	/
	WLAN5.5GHz/802.11ac40	Edge1	102	9.01	10.00	1.256	0.902	1.133	/
	WLAN5.5GHz/802.11ac40	Edge1	142	9.39	10.00	1.151	0.937	1.078	/
ANT 2									
	WLAN5.5GHz/802.11ac20	Edge1	100	11.19	12.00	1.205	1.090	1.313	/
	WLAN5.5GHz/802.11ac20	Edge2	100	11.19	12.00	1.205	0.019	0.023	/
	WLAN5.5GHz/802.11ac20	Edge4	100	11.19	12.00	1.205	0.062	0.074	/
	WLAN5.5GHz/802.11ac20	Front Side	100	11.19	12.00	1.205	0.053	0.064	/
	WLAN5.5GHz/802.11ac20	Bottom Face	100	11.19	12.00	1.205	0.212	0.255	/
	WLAN5.5GHz/802.11ac20	Edge1	116	10.40	11.00	1.148	0.899	1.032	/
	WLAN5.5GHz/802.11ac20	Edge1	144	10.53	11.50	1.250	0.928	1.160	/
ANT 1+2									
	WLAN5.5GHz/802.11ax40	Edge1	102	10.49	11.00	1.125	0.758	0.852	/
	WLAN5.5GHz/802.11ax40	Edge2	102	10.49	11.00	1.125	0.018	0.020	/
	WLAN5.5GHz/802.11ax40	Edge4	102	10.49	11.00	1.125	0.049	0.055	/
	WLAN5.5GHz/802.11ax40	Front Side	102	10.49	11.00	1.125	0.046	0.051	/
	WLAN5.5GHz/802.11ax40	Bottom Face	102	10.49	11.00	1.125	0.230	0.258	/
	WLAN5.5GHz/802.11ax40	Edge1	110	10.32	11.00	1.169	0.894	1.046	/
	WLAN5.5GHz/802.11ax40	Edge1	142	10.24	11.00	1.191	0.776	0.924	/
ANT 1									
	WLAN5.8GHz/802.11ax40	Edge1	151	10.96	11.50	1.132	0.447	0.506	/
	WLAN5.8GHz/802.11ax40	Edge2	151	10.96	11.50	1.132	0.034	0.039	/
	WLAN5.8GHz/802.11ax40	Edge4	151	10.96	11.50	1.132	0.017	0.019	/
	WLAN5.8GHz/802.11ax40	Front Side	151	10.96	11.50	1.132	0.036	0.041	/
	WLAN5.8GHz/802.11ax40	Bottom Face	151	10.96	11.50	1.132	0.099	0.112	/
	WLAN5.8GHz/802.11ax40	Edge1	159	10.80	11.50	1.175	0.456	0.535	/
ANT 2									
	WLAN5.8GHz/802.11ax20	Edge1	165	10.06	11.00	1.242	0.901	1.119	/
	WLAN5.8GHz/802.11ax20	Edge2	165	10.06	11.00	1.242	0.024	0.029	/
	WLAN5.8GHz/802.11ax20	Edge4	165	10.06	11.00	1.242	0.138	0.171	/
	WLAN5.8GHz/802.11ax20	Front Side	165	10.06	11.00	1.242	0.073	0.091	/
	WLAN5.8GHz/802.11ax20	Bottom Face	165	10.06	11.00	1.242	0.844	1.048	/
5#	WLAN5.8GHz/802.11ax20	Edge1	149	9.73	10.50	1.194	1.077	1.286	/
	WLAN5.8GHz/802.11ax20	Edge1	157	9.47	10.00	1.130	0.811	0.916	/
ANT 1+2									
	WLAN5.8GHz/802.11ax40	Edge1	151	13.08	14.00	1.236	0.722	0.893	/
	WLAN5.8GHz/802.11ax40	Edge2	151	13.08	14.00	1.236	0.026	0.032	/
	WLAN5.8GHz/802.11ax40	Edge4	151	13.08	14.00	1.236	0.068	0.084	/



	WLAN5.8GHz/802.11ax40	Front Side	151	13.08	14.00	1.236	0.066	0.082	/
	WLAN5.8GHz/802.11ax40	Bottom Face	151	13.08	14.00	1.236	0.403	0.498	/
	WLAN5.8GHz/802.11ax40	Edge1	159	13.06	14.00	1.242	0.912	1.132	/
ANT 1									
	WLAN6.2GHz/802.11ax40	Bottom Face	3	9.56	10.50	1.242	0.473	0.587	2.129
	WLAN6.2GHz/802.11ax40	Front Side	3	9.56	10.50	1.242	0.103	0.128	2.129
	WLAN6.2GHz/802.11ax40	Edge 1	3	9.56	10.50	1.242	0.727	0.903	3.680
	WLAN6.2GHz/802.11ax40	Edge 2	3	9.56	10.50	1.242	0.247	0.307	1.112
	WLAN6.2GHz/802.11ax40	Edge 4	3	9.56	10.50	1.242	0.232	0.288	1.044
	WLAN6.2GHz/802.11ax40	Edge 1	51	6.67	7.50	1.211	0.710	0.860	3.550
	WLAN6.2GHz/802.11ax40	Edge 1	91	6.98	7.50	1.127	0.700	0.789	3.415
ANT 2									
	WLAN6.2GHz/802.11ax80	Bottom Face	87	10.14	11.00	1.219	0.639	0.779	2.876
	WLAN6.2GHz/802.11ax80	Front Side	87	10.14	11.00	1.219	0.112	0.137	2.876
6#	WLAN6.2GHz/802.11ax80	Edge 1	87	10.14	11.00	1.219	0.924	1.126	5.570
	WLAN6.2GHz/802.11ax80	Edge 2	87	10.14	11.00	1.219	0.295	0.360	1.328
	WLAN6.2GHz/802.11ax80	Edge 4	87	10.14	11.00	1.219	0.217	0.265	0.977
	WLAN6.2GHz/802.11ax80	Edge 1	7	9.61	10.50	1.227	0.901	1.106	5.170
	WLAN6.2GHz/802.11ax80	Edge 1	55	9.91	10.50	1.146	0.887	1.016	5.099
ANT 1+2									
	WLAN6.2GHz/802.11ax80	Bottom Face	87	12.56	13.50	1.242	0.570	0.708	2.565
	WLAN6.2GHz/802.11ax80	Front Side	87	12.56	13.50	1.242	0.107	0.133	2.565
	WLAN6.2GHz/802.11ax80	Edge 1	87	12.56	13.50	1.242	0.707	0.878	3.630
	WLAN6.2GHz/802.11ax80	Edge 2	87	12.56	13.50	1.242	0.484	0.601	2.178
	WLAN6.2GHz/802.11ax80	Edge 4	87	12.56	13.50	1.242	0.212	0.263	0.954
	WLAN6.2GHz/802.11ax80	Edge 1	7	12.06	13.00	1.242	0.691	0.858	3.510
	WLAN6.2GHz/802.11ax80	Edge 1	55	11.98	12.50	1.127	0.683	0.770	3.474
ANT 1									
	WLAN6.5GHz/802.11ax80	Bottom Face	103	7.67	8.50	1.211	0.449	0.544	1.430
	WLAN6.5GHz/802.11ax80	Front Side	103	7.67	8.50	1.211	0.104	0.126	1.430
7#	WLAN6.5GHz/802.11ax80	Edge 1	103	7.67	8.50	1.211	0.974	1.179	5.130
	WLAN6.5GHz/802.11ax80	Edge 2	103	7.67	8.50	1.211	0.280	0.339	0.569
	WLAN6.5GHz/802.11ax80	Edge 4	103	7.67	8.50	1.211	0.308	0.373	0.547
	WLAN6.5GHz/802.11ax80	Edge 1	103	7.67	8.50	1.211	0.951	1.151	4.980
ANT 2									
	WLAN6.5GHz/802.11ax80	Bottom Face	103	9.67	10.50	1.211	0.606	0.734	3.770
	WLAN6.5GHz/802.11ax80	Front Side	103	9.67	10.50	1.211	0.096	0.116	3.770
	WLAN6.5GHz/802.11ax80	Edge 1	103	9.67	10.50	1.211	0.906	1.097	5.410
	WLAN6.5GHz/802.11ax80	Edge 2	103	9.67	10.50	1.211	0.259	0.314	0.655



	WLAN6.5GHz/802.11ax80	Edge 4	103	9.67	10.50	1.211	0.229	0.277	0.712
	WLAN6.5GHz/802.11ax80	Bottom Face	103	9.67	10.50	1.211	0.860	1.041	4.810
ANT 1+2									
	WLAN6.5GHz/802.11ax80	Bottom Face	103	12.48	13.00	1.127	0.342	0.386	2.800
	WLAN6.5GHz/802.11ax80	Front Side	103	12.48	13.00	1.127	0.084	0.095	2.800
	WLAN6.5GHz/802.11ax80	Edge 1	103	12.48	13.00	1.127	0.603	0.680	3.560
	WLAN6.5GHz/802.11ax80	Edge 2	103	12.48	13.00	1.127	0.161	0.181	0.735
	WLAN6.5GHz/802.11ax80	Edge 4	103	12.48	13.00	1.127	0.180	0.203	1.030
	WLAN6.5GHz/802.11ax80	Edge 1	103	12.48	13.00	1.127	0.591	0.666	3.160
ANT 1									
	WLAN6.7GHz/802.11ax80	Bottom Face	151	8.70	9.50	1.202	0.591	0.711	0.563
	WLAN6.7GHz/802.11ax80	Front Side	151	8.70	9.50	1.202	0.081	0.097	0.563
	WLAN6.7GHz/802.11ax80	Edge 1	151	8.70	9.50	1.202	0.932	1.121	5.010
	WLAN6.7GHz/802.11ax80	Edge 2	151	8.70	9.50	1.202	0.506	0.608	0.535
	WLAN6.7GHz/802.11ax80	Edge 4	151	8.70	9.50	1.202	0.233	0.280	0.484
	WLAN6.7GHz/802.11ax80	Edge 1	135	6.98	7.50	1.127	0.877	0.989	4.560
	WLAN6.7GHz/802.11ax80	Edge 1	167	7.87	8.50	1.156	0.869	1.005	4.461
ANT 2									
	WLAN6.7GHz/802.11ax80	Bottom Face	135	9.39	10.00	1.151	0.548	0.631	0.579
	WLAN6.7GHz/802.11ax80	Front Side	135	9.39	10.00	1.151	0.089	0.102	0.579
	WLAN6.7GHz/802.11ax80	Edge 1	135	9.39	10.00	1.151	0.979	1.127	5.730
	WLAN6.7GHz/802.11ax80	Edge 2	135	9.39	10.00	1.151	0.883	1.016	0.661
	WLAN6.7GHz/802.11ax80	Edge 4	135	9.39	10.00	1.151	0.237	0.273	0.560
8#	WLAN6.7GHz/802.11ax80	Edge 1	151	8.68	9.50	1.208	0.961	1.161	4.725
	WLAN6.7GHz/802.11ax80	Edge 1	167	8.24	9.00	1.191	0.955	1.138	4.698
ANT 1+2									
	WLAN6.7GHz/802.11ax80	Bottom Face	135	12.31	13.00	1.172	0.365	0.428	1.170
	WLAN6.7GHz/802.11ax80	Front Side	135	12.31	13.00	1.172	0.066	0.077	1.170
	WLAN6.7GHz/802.11ax80	Edge 1	135	12.31	13.00	1.172	0.706	0.828	4.120
	WLAN6.7GHz/802.11ax80	Edge 2	135	12.31	13.00	1.172	0.454	0.532	0.826
	WLAN6.7GHz/802.11ax80	Edge 4	135	12.31	13.00	1.172	0.248	0.291	0.672
	WLAN6.7GHz/802.11ax80	Edge 1	151	11.24	12.00	1.191	0.686	0.817	3.887
	WLAN6.7GHz/802.11ax80	Edge 1	167	11.48	12.00	1.127	0.693	0.781	3.791
ANT 1									
	WLAN7.0GHz/802.11ax80	Bottom Face	199	7.37	8.00	1.156	0.491	0.568	0.746
	WLAN7.0GHz/802.11ax80	Front Side	199	7.37	8.00	1.156	0.081	0.094	0.746
	WLAN7.0GHz/802.11ax80	Edge 1	199	7.37	8.00	1.156	0.828	0.957	4.580
	WLAN7.0GHz/802.11ax80	Edge 2	199	7.37	8.00	1.156	0.446	0.516	0.690
	WLAN7.0GHz/802.11ax80	Edge 4	199	7.37	8.00	1.156	0.320	0.370	0.755



	WLAN7.0GHz/802.11ax80	Edge 1	199	7.37	8.00	1.156	0.808	0.934	3.936
	WLAN7.0GHz/802.11ax80	Edge 1	215	7.36	8.00	1.159	0.811	0.940	3.850
ANT 2									
	WLAN7.0GHz/802.11ax40	Bottom Face	187	6.98	7.50	1.127	0.581	0.655	0.759
	WLAN7.0GHz/802.11ax40	Front Side	187	6.98	7.50	1.127	0.086	0.097	0.759
	WLAN7.0GHz/802.11ax40	Edge 1	187	6.98	7.50	1.127	0.966	1.089	5.450
	WLAN7.0GHz/802.11ax40	Edge 2	187	6.98	7.50	1.127	0.501	0.565	0.701
	WLAN7.0GHz/802.11ax40	Edge 4	187	6.98	7.50	1.127	0.471	0.531	0.596
	WLAN7.0GHz/802.11ax40	Edge 1	203	6.60	7.50	1.230	0.941	1.158	4.735
9#	WLAN7.0GHz/802.11ax40	Edge 1	227	4.05	5.00	1.245	0.937	1.166	4.662
ANT 1+2									
	WLAN7.0GHz/802.11ax80	Bottom Face	199	11.13	12.00	1.222	0.189	0.231	0.851
	WLAN7.0GHz/802.11ax80	Front Side	199	11.13	12.00	1.222	0.063	0.077	0.851
	WLAN7.0GHz/802.11ax80	Edge 1	199	11.13	12.00	1.222	0.666	0.814	3.700
	WLAN7.0GHz/802.11ax80	Edge 2	199	11.13	12.00	1.222	0.111	0.136	0.500
	WLAN7.0GHz/802.11ax80	Edge 4	199	11.13	12.00	1.222	0.289	0.353	1.301
	WLAN7.0GHz/802.11ax80	Edge 1	199	11.13	12.00	1.222	0.657	0.803	3.335
	WLAN7.0GHz/802.11ax80	Edge 1	215	10.35	11.00	1.161	0.649	0.754	3.215
ANT 1									
	Bluetooth/DH5	Edge1	39	6.91	7.50	1.146	0.147	0.183	/
	Bluetooth/DH5	Edge2	39	6.91	7.50	1.146	0.021	0.026	/
	Bluetooth/DH5	Edge4	39	6.91	7.50	1.146	0.007	0.009	/
	Bluetooth/DH5	Front Side	39	6.91	7.50	1.146	0.016	0.020	/
	Bluetooth/DH5	Bottom Face	39	6.91	7.50	1.146	0.037	0.045	/
10#	Bluetooth/DH5	Edge1	0	5.82	6.50	1.169	0.152	0.193	/
	Bluetooth/DH5	Edge1	78	6.44	7.00	1.138	0.114	0.141	/

Note:

1. The WLAN 5.2GHz 802.11ax-HEW20(RU26) reported 1g SAR (W/kg) should be scaled with the duty cycle scaling factor 1.124, and WLAN 5.2GHz 802.11ax-HEW40(RU242) with 1.19.
2. According to 2016 Oct. TCB workshop for Bluetooth SAR consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to the theoretical value of Bluetooth reported SAR calculation. The duty cycle of Bluetooth is 76.85 %, Therefore the duty cycle scaling factor 1.084 should be used to calculating the reported SAR.

16.3. PD Test Results

➤ **General Note**

1. The reported PD is the measured Total PD value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For PD testing of WLAN signal with non-100% duty cycle, the measured PD is scaled-up by the duty cycle scaling factor which is equal to "1 / (duty cycle)".
 - c. For WLAN: Reported PD (W/m^2) = Measured Total PD (W/m^2) * Duty Cycle scaling factor * Tune-up scaling factor.
2. According to the equipment user manual that the most conservative test distance of 2mm was applied to PD measurement and the REC (field reconstruction) component of the uncertainty budget for a given E-field is valid only for $d \geq \lambda/5$ mm.
3. According to TCBC workshop in April 2021 that in addition to tune-up tolerance scaling, adjust measured results per amount that measurement uncertainty exceeds 30% (e.g. per methods of IEC 62479:2010). Total expanded uncertainty of 1.51 dB which was converted to 41.6% was used to determining the psPD measurement scaling factor.
4. The duty cycle scaling factor of 1.000 should be calculated the final power density.
5. According to TCBC workshop in October 2018 that $4cm^2$ averaging area may now be considered.
6. RF exposure compliance with PD is demonstrated for various radio configurations using below equation:

$$Final\ PD = Mea.\ psPD_{tot+} * tune-up\ factor * duty\ cycle\ factor * Uncertainty\ Factor$$

$$\text{Where Uncertainty factor} = 1 + (| 1 - 10^{1.51/10} * 100\% | - 30\%)$$

7. The final psPD should be scaled to the uncertainty factor of 1.12.
8. The measurement procedure consists of measuring the PDinc at two different distances: $d=2mm$ (compliance distance) and $d = \lambda/5$. The same grid extents and grid steps should be used for both measurements. The grid extents should be large enough to fully capture the transmitted energy. The grid step should be fine enough to demonstrate that the integrated Power Density iPDn varies by less than 1 dB between the $d = 2\ mm$ and $d = \lambda/5$ measurements. We recommend using as first approximation a grid step Lgrid that is a function of the distance to the transmitting structure and not larger than:

$$l_{grid} = \begin{cases} 1.25d & \text{for } d < \lambda/5 \\ \lambda/4 & \text{for } d \geq \lambda/5 \end{cases}$$

9. According to the TCB WS publication in Oct. 2024, identify the boundary area where the protrusion begins with an added 5 mm margin, therefore 5 mm distance between the antenna and probe tip should be used to scan the power density.



➤ PD Test Results

Band/Mode	Exposure Position	Gap (mm)	Ant.	Ch.	Grip Step (λ)	iPDn (W/m ²)	iPDn Ratio (<1dB)	Total psPDtot+ (W/m ²)
WLAN 6.5GHz/802.11ax80	Edge 1	2	ANT 1	151	0.0625	0.07	0.479	1.481
WLAN 6.5GHz/802.11ax80	Edge 1	8.95	ANT 1	151	0.0625	0.06		1.464

Plot No.	Band/Mode	Exposure Position	Ch.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	psPDtot+ over 4cm² (W/m²)	
							Mea.	Scaled
ANT 1								
	WLAN 6.2GHz/802.11ax40	Front Face	3	9.56	10.50	1.242	0.181	0.252
	WLAN 6.2GHz/802.11ax40	Bottom Face	3	9.56	10.50	1.242	0.149	0.207
	WLAN 6.2GHz/802.11ax40	Edge 1	3	9.56	10.50	1.242	0.521	0.725
	WLAN 6.2GHz/802.11ax40	Edge 2	3	9.56	10.50	1.242	0.114	0.159
	WLAN 6.2GHz/802.11ax40	Edge 3	3	9.56	10.50	1.242	0.024	0.033
	WLAN 6.2GHz/802.11ax40	Edge 4	3	9.56	10.50	1.242	0.065	0.090
	WLAN 6.2GHz/802.11ax40	Edge 1	51	6.67	7.50	1.211	0.475	0.644
	WLAN 6.2GHz/802.11ax40	Edge 1	91	6.98	7.50	1.127	0.471	0.595
ANT 2								
	WLAN 6.2GHz/802.11ax80	Front Face	87	10.14	11.00	1.219	0.189	0.258
	WLAN 6.2GHz/802.11ax80	Bottom Face	87	10.14	11.00	1.219	0.553	0.755
	WLAN 6.2GHz/802.11ax80	Edge 1	87	10.14	11.00	1.219	0.616	0.841
	WLAN 6.2GHz/802.11ax80	Edge 2	87	10.14	11.00	1.219	0.022	0.030
	WLAN 6.2GHz/802.11ax80	Edge 3	87	10.14	11.00	1.219	0.077	0.105
	WLAN 6.2GHz/802.11ax80	Edge 4	87	10.14	11.00	1.219	0.135	0.184
	WLAN 6.2GHz/802.11ax80	Edge 1	7	9.61	10.50	1.227	0.585	0.804
	WLAN 6.2GHz/802.11ax80	Edge 1	55	9.91	10.50	1.146	0.601	0.771
ANT 1+2								
	WLAN 6.2GHz/802.11ax80	Front Face	87	12.56	13.50	1.242	0.108	0.150
	WLAN 6.2GHz/802.11ax80	Bottom Face	87	12.56	13.50	1.242	0.212	0.295
	WLAN 6.2GHz/802.11ax80	Edge 1	87	12.56	13.50	1.242	0.719	1.000
	WLAN 6.2GHz/802.11ax80	Edge 2	87	12.56	13.50	1.242	0.035	0.049
	WLAN 6.2GHz/802.11ax80	Edge 3	87	12.56	13.50	1.242	0.025	0.035
	WLAN 6.2GHz/802.11ax80	Edge 4	87	12.56	13.50	1.242	0.208	0.289
	WLAN 6.2GHz/802.11ax80	Edge 1	7	12.06	13.00	1.242	0.688	0.957
	WLAN 6.2GHz/802.11ax80	Edge 1	55	11.98	12.50	1.127	0.691	0.872
ANT 1								
	WLAN 6.5GHz/802.11ax80	Front Face	103	7.67	8.50	1.211	0.082	0.111



	WLAN 6.5GHz/802.11ax80	Bottom Face	103	7.67	8.50	1.211	0.171	0.232
	WLAN 6.5GHz/802.11ax80	Edge 1	103	7.67	8.50	1.211	1.010	1.369
	WLAN 6.5GHz/802.11ax80	Edge 2	103	7.67	8.50	1.211	0.261	0.354
	WLAN 6.5GHz/802.11ax80	Edge 3	103	7.67	8.50	1.211	0.090	0.122
	WLAN 6.5GHz/802.11ax80	Edge 4	103	7.67	8.50	1.211	0.163	0.221
ANT 2								
	WLAN 6.5GHz/802.11ax80	Front Face	103	9.67	10.50	1.211	0.059	0.080
	WLAN 6.5GHz/802.11ax80	Bottom Face	103	9.67	10.50	1.211	0.475	0.644
	WLAN 6.5GHz/802.11ax80	Edge 1	103	9.67	10.50	1.211	0.479	0.649
	WLAN 6.5GHz/802.11ax80	Edge 2	103	9.67	10.50	1.211	0.032	0.043
	WLAN 6.5GHz/802.11ax80	Edge 3	103	9.67	10.50	1.211	0.020	0.027
	WLAN 6.5GHz/802.11ax80	Edge 4	103	9.67	10.50	1.211	0.083	0.113
ANT 1+2								
	WLAN 6.5GHz/802.11ax80	Front Face	103	12.48	13.00	1.127	0.200	0.252
	WLAN 6.5GHz/802.11ax80	Bottom Face	103	12.48	13.00	1.127	0.067	0.085
	WLAN 6.5GHz/802.11ax80	Edge 1	103	12.48	13.00	1.127	0.534	0.674
	WLAN 6.5GHz/802.11ax80	Edge 2	103	12.48	13.00	1.127	0.066	0.083
	WLAN 6.5GHz/802.11ax80	Edge 3	103	12.48	13.00	1.127	0.121	0.153
	WLAN 6.5GHz/802.11ax80	Edge 4	103	12.48	13.00	1.127	0.212	0.268
ANT 1								
	WLAN 6.7GHz/802.11ax80	Front Face	151	8.70	9.50	1.202	0.341	0.459
	WLAN 6.7GHz/802.11ax80	Bottom Face	151	8.70	9.50	1.202	0.182	0.245
11#	WLAN 6.7GHz/802.11ax80	Edge 1	151	8.70	9.50	1.202	1.100	1.481
	WLAN 6.7GHz/802.11ax80	Edge 2	151	8.70	9.50	1.202	0.215	0.290
	WLAN 6.7GHz/802.11ax80	Edge 3	151	8.70	9.50	1.202	0.119	0.160
	WLAN 6.7GHz/802.11ax80	Edge 4	151	8.70	9.50	1.202	0.127	0.171
	WLAN 6.7GHz/802.11ax80	Bottom Face	135	6.98	7.50	1.127	0.996	1.257
	WLAN 6.7GHz/802.11ax80	Bottom Face	167	7.87	8.50	1.156	0.912	1.181
ANT 2								
	WLAN 6.7GHz/802.11ax80	Front Face	135	9.39	10.00	1.151	0.277	0.357
	WLAN 6.7GHz/802.11ax80	Bottom Face	135	9.39	10.00	1.151	0.520	0.670
	WLAN 6.7GHz/802.11ax80	Edge 1	135	9.39	10.00	1.151	0.954	1.230
	WLAN 6.7GHz/802.11ax80	Edge 2	135	9.39	10.00	1.151	0.011	0.014
	WLAN 6.7GHz/802.11ax80	Edge 3	135	9.39	10.00	1.151	0.094	0.121
	WLAN 6.7GHz/802.11ax80	Edge 4	135	9.39	10.00	1.151	0.259	0.334
	WLAN 6.7GHz/802.11ax80	Bottom Face	151	8.68	9.50	1.208	0.885	1.197
	WLAN 6.7GHz/802.11ax80	Bottom Face	167	8.24	9.00	1.191	0.817	1.090
ANT 1+2								



	WLAN 6.7GHz/802.11ax80	Front Face	135	12.31	13.00	1.172	0.198	0.260
	WLAN 6.7GHz/802.11ax80	Bottom Face	135	12.31	13.00	1.172	0.167	0.219
	WLAN 6.7GHz/802.11ax80	Edge 1	135	12.31	13.00	1.172	0.253	0.332
	WLAN 6.7GHz/802.11ax80	Edge 2	135	12.31	13.00	1.172	0.020	0.026
	WLAN 6.7GHz/802.11ax80	Edge 3	135	12.31	13.00	1.172	0.094	0.123
	WLAN 6.7GHz/802.11ax80	Edge 4	135	12.31	13.00	1.172	0.231	0.303
	WLAN 6.7GHz/802.11ax80	Bottom Face	151	11.24	12.00	1.191	0.241	0.322
	WLAN 6.7GHz/802.11ax80	Bottom Face	167	11.48	12.00	1.127	0.246	0.311
ANT 1								
	WLAN 7.0GHz/802.11ax80	Front Face	199	7.37	8.00	1.156	0.111	0.144
	WLAN 7.0GHz/802.11ax80	Bottom Face	199	7.37	8.00	1.156	0.200	0.259
	WLAN 7.0GHz/802.11ax80	Edge 1	199	7.37	8.00	1.156	0.251	0.325
	WLAN 7.0GHz/802.11ax80	Edge 2	199	7.37	8.00	1.156	0.092	0.119
	WLAN 7.0GHz/802.11ax80	Edge 3	199	7.37	8.00	1.156	0.170	0.220
	WLAN 7.0GHz/802.11ax80	Edge 4	199	7.37	8.00	1.156	0.239	0.309
	WLAN 7.0GHz/802.11ax80	Bottom Face	215	7.36	8.00	1.159	0.241	0.313
ANT 2								
	WLAN 7.0GHz/802.11ax40	Front Face	187	6.98	7.50	1.127	0.331	0.418
	WLAN 7.0GHz/802.11ax40	Bottom Face	187	6.98	7.50	1.127	0.127	0.160
	WLAN 7.0GHz/802.11ax40	Edge 1	187	6.98	7.50	1.127	1.020	1.288
	WLAN 7.0GHz/802.11ax40	Edge 2	187	6.98	7.50	1.127	0.298	0.376
	WLAN 7.0GHz/802.11ax40	Edge 3	187	6.98	7.50	1.127	0.129	0.163
	WLAN 7.0GHz/802.11ax40	Edge 4	187	6.98	7.50	1.127	0.175	0.221
	WLAN 7.0GHz/802.11ax40	Bottom Face	203	6.60	7.50	1.230	0.925	1.275
	WLAN 7.0GHz/802.11ax40	Bottom Face	227	4.05	5.00	1.245	0.918	1.280
ANT 1+2								
	WLAN 7.0GHz/802.11ax80	Front Face	199	11.13	12.00	1.222	0.217	0.297
	WLAN 7.0GHz/802.11ax80	Bottom Face	199	11.13	12.00	1.222	0.112	0.153
	WLAN 7.0GHz/802.11ax80	Edge 1	199	11.13	12.00	1.222	0.241	0.330
	WLAN 7.0GHz/802.11ax80	Edge 2	199	11.13	12.00	1.222	0.078	0.107
	WLAN 7.0GHz/802.11ax80	Edge 3	199	11.13	12.00	1.222	0.028	0.038
	WLAN 7.0GHz/802.11ax80	Edge 4	199	11.13	12.00	1.222	0.022	0.030
	WLAN 7.0GHz/802.11ax80	Bottom Face	215	10.35	11.00	1.161	0.152	0.198

17. Simultaneous Transmission Evaluation

17.1. Simultaneous Transmission Consideration

No.	Simultaneous Transmission Consideration	Body
1	WLAN 2.4GHz(SISO/MIMO)+Bluetooth	Yes
2	WLAN 5GHz(SISO/MIMO)+Bluetooth	Yes
3	WLAN 6GHz(SISO/MIMO)+Bluetooth	Yes

Note:

- Per KDB 447498D01v06, simultaneous transmission SAR evaluation procedures is as followed:
Step 1: If sum of 1 g SAR < 1.6 W/kg, Simultaneous SAR measurement is not required.
Step 2: If sum of 1 g SAR > 1.6 W/kg, ratio of SAR to peak separation distance for pair of transmitters calculated.
Step 3: If the ratio of SAR to peak separation distance is ≤ 0.04 , Simultaneous SAR measurement is not required.
Step 4: If the ratio of SAR to peak separation distance is > 0.04 , Simultaneous SAR measurement is required and simultaneous transmission SAR value is calculated.
(The ratio is determined by: $(SAR_1 + SAR_2) \wedge 1.5 / R_i \leq 0.04$,
 R_i is the separation distance between the peak SAR locations for the antenna pair in mm.
- This product's NFC does not support simultaneous transmission, so NFC simultaneous transmission is not required.
- The total exposure rate of Bluetooth and WLAN 6GHz will be evaluated using the formula:

$$\text{Total Exposure Ratio} = \frac{\text{PD}}{\text{PD\_Limit}} + \frac{\text{SAR}}{\text{SAR\_Limit}} \leq 1$$

17.2. Total Exposure Radio Analysis

The fields generated by the antennas can be correlated or uncorrelated. At different frequencies, fields are always uncorrelated, and the aggregate power density contributions can be summed according to spatially averaged values of corresponding sources at any point in space, r , to determine the total exposure ratio (TER). Assuming I sources, the TER at each point in space is equal to

$$\text{TER}^{\text{uncorr}}(r) = \sum_{i=1}^I \text{ER}_i = \sum_{i=1}^I \frac{S_{\text{av},i}(r, f_i)}{S_{\text{lim}}(f_i)}$$

Where $S_{\text{av},i}$ is the power density for the source I operating at a frequency f_i and S_{lim} is the power density limit as specified by the relevant standard.

Exposure from transmitters operating above and below 6GHz, where 6GHz denotes the transmission frequency where the basic restrictions change from being defined in terms of SAR to being defined in terms of power density, therefore uncorrelated and the TER is determined as

$$TER^{uncorr}(r) = \sum_{i=1}^I ER_i = \sum_{i=1}^I \frac{S_{av,i}(r, f_i)}{S_{lim}(f_i)}$$

According to the FCC guidance in TCBC workshop and IEC TR 63170, the total exposure ratio calculated by taking ratio of maximum reported SAR divided by SAR limit and adding it to maximum measured power density by its limit. Numerical sum of the ratios should be less 1. Therefore the simultaneous transmission should be follows:

$$TER = \sum_{n=1}^N \frac{SAR_n}{SAR_{n,limit}} + \sum_{n=1}^N \frac{S_{m,avg}}{S_{m,limit}} < 1$$

For transmitters operating above 6000 MHz, it is necessary to perform an assessment against the PD (basic restriction up to 10 GHz and reference levels beyond). The exposure ratio for the n -th transmitter is given by:

$$\max \left[\frac{SAR_m}{SAR_{limit}}, \frac{APD_m}{APD_{limit}} \right] \quad 5925 \text{ MHz} < f_m \leq 10 \text{ GHz}$$

Where:

- SAR_m is the SAR value for the n -th transmitter/test frequency.
- SAR_{limit} is the basic restriction limit that is applicable to the n -th transmitter/test frequency.
- APD_m is the APD value for the m -th transmitter/test frequency.
- APD_{limit} is the basic restriction limit that is applicable for the m -th transmitter/test frequency.

17.3. Simultaneous Transmission Analysis

➤ Body Simultaneous Transmission for Bluetooth + WLAN 2.4GHz/5GHz

Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)
	Bluetooth	2.4GHz WLAN (MAX of SISO/MIMO)	5GHz WLAN (MAX of SISO/MIMO)		
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
Front Face	0.020	0.176	0.091	0.196	0.111
Bottom Face	0.045	0.465	1.048	0.510	1.093
Edge 1	0.193	1.301	1.389	1.494	1.582
Edge 2	0.026	0.146	0.106	0.172	0.132
Edge 4	0.009	0.154	0.171	0.163	0.180

➤ Body Simultaneous Transmission for Bluetooth + WLAN 6GHz

Exposure Position	1	2	1+2 Summed 1g SAR (W/kg)
	Bluetooth	6GHz WLAN (MAX of SISO/MIMO)	
	1g SAR (W/kg)	1g SAR (W/kg)	
Front Face	0.020	0.708	0.728
Bottom Face	0.045	0.137	0.182
Edge 1	0.193	1.179	1.372
Edge 2	0.026	1.016	1.042
Edge 4	0.009	0.531	0.540

➤ Body Total Exposure Radio for Bluetooth + WLAN 6GHz

Exposure Position	1	2	1+2 TER(SAR/1.6+PD/10)
	Bluetooth	6GHz WLAN (MAX of SISO/MIMO)	
	1g SAR (W/kg)	psPDtot+ over 4cm ² (W/m ²)	
Front Face	0.020	0.732	0.086
Bottom Face	0.045	0.921	0.120
Edge 1	0.193	8.073	0.928
Edge 2	0.026	0.398	0.056
Edge 3	/	0.075	0.008
Edge 4	0.009	0.366	0.042

18. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A Type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in below Table.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor	$1/k(b)$	$1/\sqrt{3}$	$1/\sqrt{6}$	$1/\sqrt{2}$

Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.



DASY6/8 Uncertainty Budget (Frequency Range: 300MHz ~ 3GHz)								
Symbol	Error Description	Uncert. Value (±%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System Errors								
CF	Probe calibration	12.0	N	2	1	1	6.0	6.0
CF _{drift}	Probe calibration Drift	1.7	R	$\sqrt{3}$	1	1	1.0	1.0
LIN	Probe Linearity	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
BBS	Broadband Signal	3.0	R	$\sqrt{3}$	1	1	1.7	1.7
ISO	Probe Isotropy	7.6	R	$\sqrt{3}$	1	1	4.4	4.4
DAE	Other Probe+Electronic	0.7	N	1	1	1	0.7	0.7
AMB	RF Ambient	1.8	N	1	1	1	1.8	1.8
▲ _{sys}	Probe positioning	0.006mm	N	1	0.14	0.14	0.1	0.1
DAT	Data Processing	1.2	N	1	1	1	1.2	1.2
Phantom and Device Errors								
LIQ(σ)	Conductivity (meas.) DAK	2.5	N	1	0.78	0.71	2.0	1.8
LIQ(T _σ)	Conductivity (temp.) ^{BB}	3.3	R	$\sqrt{3}$	0.78	0.71	1.5	1.4
EPS	Phantom Permittivity	14.0	R	$\sqrt{3}$	0	0	0	0
DIS	Distance DUT - TSL	2.0	N	1	2	2	4.0	4.0
D _{xyz}	Device Positioning	1.0	N	1	1	1	1.0	1.0
H	Device Holder	3.6	N	1	1	1	3.6	3.6
MOD	DUT Modulation ^m	2.4	R	$\sqrt{3}$	1	1	1.4	1.4
TAS	Time-average SAR	1.7	R	$\sqrt{3}$	1	1	1.0	1.0
RF _{drift}	DUT Drift	2.5	N	1	1	1	2.5	2.5
VAL	Val Antenna Unc. ^{val}	0.0	N	1	1	1	0.0	0.0
RF _{in}	Unc. Input Power ^{val}	0.0	N	1	1	1	0.0	0.0
Correction to the SAR Results								
C(ε,σ)	Deviation to Target	1.9	N	1	1	0.84	1.9	1.6
C(R)	SAR Scaling ^p	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
u(▲SAR)	Combined Standard Uncertainty						10.9	10.9
U	Expanded Standard Uncertainty						21.9	21.8



DASY6/8 Uncertainty Budget (Frequency Range: 3GHz ~ 6GHz)								
Symbol	Error Description	Uncert. Value (±%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System Errors								
CF	Probe calibration	13.1	N	2	1	1	6.55	6.55
CF _{drift}	Probe calibration Drift	1.7	R	$\sqrt{3}$	1	1	1.0	1.0
LIN	Probe Linearity	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
BBS	Broadband Signal	2.6	R	$\sqrt{3}$	1	1	1.5	1.5
ISO	Probe Isotropy	7.6	R	$\sqrt{3}$	1	1	4.4	4.4
DAE	Other Probe+Electronic	1.2	N	1	1	1	1.2	1.2
AMB	RF Ambient	1.8	N	1	1	1	1.8	1.8
▲ _{sys}	Probe positioning	0.005mm	N	1	0.29	0.29	0.15	0.15
DAT	Data Processing	2.3	N	1	1	1	2.3	2.3
Phantom and Device Errors								
LIQ(σ)	Conductivity (meas.) DAK	2.5	N	1	0.78	0.71	2.0	1.8
LIQ(T _σ)	Conductivity (temp.) ^{BB}	3.4	R	$\sqrt{3}$	0.78	0.71	1.5	1.4
EPS	Phantom Permittivity	14.0	R	$\sqrt{3}$	0.25	0.25	2.0	2.0
DIS	Distance DUT - TSL	2.0	N	1	2	2	4.0	4.0
D _{xyz}	Device Positioning	1.0	N	1	1	1	1.0	1.0
H	Device Holder	3.6	N	1	1	1	3.6	3.6
MOD	DUT Modulation ^m	2.4	R	$\sqrt{3}$	1	1	1.4	1.4
TAS	Time-average SAR	1.7	R	$\sqrt{3}$	1	1	1.0	1.0
RF _{drift}	DUT Drift	2.5	N	1	1	1	2.5	2.5
VAL	Val Antenna Unc. ^{val}	0.0	N	1	1	1	0.0	0.0
RF _{in}	Unc. Input Power ^{val}	0.0	N	1	1	1	0.0	0.0
Correction to the SAR Results								
C(ε,σ)	Deviation to Target	1.9	N	1	1	0.84	1.9	1.6
C(R)	SAR Scaling ^p	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
u(▲SAR)	Combined Standard Uncertainty						11.6	11.5
U	Expanded Standard Uncertainty						23.3	23.0



DASY Uncertainty Budget According to IEC/IEEE 62209-1528:2020 (4 MHz - 10 GHz range)							
Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System errors							
Probe Calibration	18.6	N	2	1	1	9.3	9.3
Probe calibration drift	1.7	R	1.732	1	1	1.0	1.0
Probe linearity and detection limit	4.7	R	1.732	1	1	2.7	2.7
Broadband signal	2.8	R	1.732	1	1	1.6	1.6
Probe isotropy	7.6	R	1.732	1	1	4.4	4.4
Other probe and data acquisition errors	2.4	N	1	1	1	2.4	2.4
RF ambient and noise	1.8	N	1	1	1	1.8	1.8
Probe positioning errors	0.006	N	1	0.5	0.5	0.0	0.0
Data processing errors	4	N	1	1	1	4.0	4.0
Phantom and device errors							
Measurement of phantom conductivity(σ)	2.5	N	1	0.78	0.71	2.0	1.8
Temperature effects (medium)	5.4	R	1.732	0.78	0.71	2.4	2.2
Shell permittivity	14	R	1.732	0.5	0.5	4.0	4.0
Distance between the radiating element of the DUT and the phantom medium	2	N	1	2	2	4.0	4.0
Repeatability of positioning the DUT or source against the phantom	1	N	1	1	1	1.0	1.0
Device holder effects	3.6	N	1	1	1	3.6	3.6
Effect of operating mode on probe sensitivity	2.4	R	1.732	1	1	1.4	1.4
Time-average SAR	1.7	R	1.732	1	1	1.0	1.0
Variation in SAR due to drift in output of DUT	2.5	N	1	1	1	2.5	2.5
Validation antenna uncertainty (validation measurement)	0	N	1	1	1	0.0	0.0
Uncertainty in accepted power (validation measurement only)	0	N	1	1	1	0.0	0.0
Phantom and Setup							



Phantom deviation from target (ϵ', σ)	1.9	N	1	1	0.84	1.9	1.6
SAR scaling	0	R	1.732	1	1	0.0	0.0
Combined Std. Uncertainty						14.5%	14.4%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						29.0%	28.8%

DASY6/8 Uncertainty Budget for psSAR / psAPD Assessment (Frequency Range: 6GHz ~ 10GHz)								
Symbol	Error Description	Uncert. Value ($\pm\%$)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	Standard Uncertainty (1g) ($\pm\%$)	Standard Uncertainty (10g) ($\pm\%$)
psSAR	Module SAR V16.0 (Table 6.3.3)	14.2/13.9	N	1	1	1	14.2	13.9
PDC	Power Density Conversion	13.5	R	$\sqrt{3}$	1	1	7.8	7.8
u(Δ SAR)	Combined Standard Uncertainty						16.2	15.9
U	Expanded Standard Uncertainty in dB						32.4 ± 1.2 dB	31.9 ± 1.2 dB

Error Description	Uncertainty ($\pm$ dB)	Probability Distribution	Divisor	ci	Standard Uncertainty ($\pm$ dB)	ν_i or ν_{eff}
Uncertainty terms dependent on the measurement system						
Probe calibration	0.49	N	1	1	0.49	∞
Probe correction	0	R	1.732	1	0	∞
Frequency response	0.20	R	1.732	1	0.12	∞
Sensor cross coupling	0	R	1.732	1	0	∞
Isotropy	0.50	R	1.732	1	0.29	∞
Linearity	0.20	R	1.732	1	0.12	∞
Probe scattering	0	R	1.732	1	0	∞
Probe positioning offset	0.30	R	1.732	1	0.17	∞
Probe positioning repeatability	0.04	R	1.732	1	0.02	∞
Sensor mechanical offset	0	R	1.732	1	0	∞
Probe spatial resolution	0	R	1.732	1	0	∞
Field impedance dependance	0	R	1.732	1	0	∞
Amplitude and phase drift	0	R	1.732	1	0	∞
Amplitude and phase noise	0.04	R	1.732	1	0.02	∞
Measurement area truncation	0	R	1.732	1	0	∞
Data acquisition	0.03	R	1.732	1	0.03	∞
Sampling	0	R	1.732	1	0	∞
Field reconstruction	2.0	R	1.732	1	1.15	∞
Forward transformation	0	R	1.732	1	0	∞
Power density scaling	-	R	1.732	1	-	∞



Spatial averaging	0.10	R	1.732	1	0.06	∞
System Detection Limits	0.04	R	1.732	1	0.02	∞
Uncertainty terms dependent on the DUT and environmental factors						
Probe coupling with DUT	0	R	1.732	1	0	∞
Modulation response	0.40	R	1.732	1	0.23	∞
Integration time	0	R	1.732	1	0	∞
Response time	0	R	1.732	1	0	∞
Device holder influence	0.10	R	1.732	1	0.06	∞
DUT alignment	0	R	1.732	1	0	∞
RF ambient	0.04	R	1.732	1	0.02	∞
Ambient reflections	0.04	R	1.732	1	0.02	∞
Immunity / secondary reception	0	R	1.732	1	0	∞
Drift of the DUT	-	R	1.732	1	-	∞
Combined standard uncertainty					0.75 dB	∞
Coverage Factor for 95%					K=2	N/A
Expanded standard uncertainty					1.51 dB	

PD Uncertainty Budget for Frequency Range 6 – 10GHz



Annex A General Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address:	FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Address:	FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

The FCC designation number is CN1192, the test firm registration number is 226174.



Annex B Test Setup Photos

The annex B will be submitted separately.

Annex C Plots of System Performance Check

The annex C will be submitted separately.

Annex D Plots of Maximum SAR & PD Test Results

The annex D will be submitted separately.

Annex E Conducted Power

The annex E will be submitted separately.

Annex F DASY Calibration Certificate

The annex F will be submitted separately.



Notes

1. The report shall have report stamp or our company stamp.
2. The report shall be invalid without all the signatures of the editor and approver.
3. The report shall not be changed.
4. Any objections must be raised to Morlab within 15 days since the date when the report is received.
It will not be taken into consideration beyond this limit.
5. Conformity declaration:
 - ☒ Morlab issues a statement of conformity based on the corresponding standards (default)
 - ☐ Morlab issues a statement of conformity based on the applicant requirement
6. Use of uncertainty of measurement for decisions on conformity (decision rule):
No decision rule is specified by the testing standard, when comparing the measurement result with the applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty ("simple acceptance" decision rule).

***** END OF MAIN REPORT *****