

# RF TEST REPORT

Test Equipment : Unity 20 Wireless  
Model Name : HU20-ASF-WB  
FCC ID : 2ADE9HU20ASFWB  
Date of receipt : 2023-01-11  
Test duration : 2023-02-03 ~ 2023-03-07  
Date of issue : 2023-03-10

Applicant : SecuGen Corporation

2065 Martin Avenue Suite 102, Santa Clara, CA 95050 USA.

Test Laboratory : Lab-T, Inc.

2182-42 Baegok-daero, Mohyeon-eup, Cheoin-gu, Yongin-si  
Gyeonggi-do 17036, Korea(Republic of)

Test specification : FCC Part 15 Subpart C 15.247


RF Output Power : 10.12 dBm

Test result : Pass

The test results presented in this test report are limited only to the sample supplied by applicant  
and the use of this test report is inhibited other than its purpose.

This test report shall not be reproduced except in full, without the written approval of Lab-T, Inc.  
This test report is not related to KOLAS.

Tested by:



Engineer  
HyunWoo Lee

Reviewed by:



Technical Manager  
SangHoon Yu

## CONTENTS

|                                                          |           |
|----------------------------------------------------------|-----------|
| <b>1. Revision history</b>                               | <b>3</b>  |
| <b>2. Information</b>                                    | <b>4</b>  |
| 2.1 Applicant Information                                | 4         |
| 2.2 Test Laboratory information                          | 4         |
| 2.3 Test Site                                            | 4         |
| <b>3. Information About Test Equipment</b>               | <b>5</b>  |
| 3.1 Equipment Information                                | 5         |
| 3.2 Antenna Information                                  | 5         |
| 3.3 Test Frequency                                       | 5         |
| 3.4 Operation conditions for the EUT                     | 6         |
| <b>4. Test Report</b>                                    | <b>7</b>  |
| 4.1 Summary                                              | 7         |
| 4.2 Measurement Uncertainty                              | 7         |
| 4.3 Transmitter Requirements                             | 8         |
| 4.3.1 Antenna Requirement                                | 8         |
| 4.3.2 Maximum Peak Output Power                          | 9         |
| 4.3.3 Peak Power Spectral Density                        | 12        |
| 4.3.4 6 dB Bandwidth(DTS Bandwidth)                      | 22        |
| 4.3.5 Spurious Emission, Band Edge, and Restricted bands | 40        |
| 4.3.6 Conducted Emission                                 | 76        |
| <b>APPENDIX I</b>                                        | <b>78</b> |

## 1. Revision history

| Test Report No. | Date       | Description   |
|-----------------|------------|---------------|
| TRRFCC23-0004   | 2023-03-10 | Initial issue |
|                 |            |               |
|                 |            |               |

## 2. Information

### 2.1 Applicant Information

|                  |                                                                                                                  |
|------------------|------------------------------------------------------------------------------------------------------------------|
| Applicant name   | SecuGen Corporation                                                                                              |
| Address          | 2065 Martin Avenue Suite 102, Santa Clara, CA 95050 USA.                                                         |
| Telephone No.    | (31) 495-8167                                                                                                    |
| Person in charge | JongSung Kim / Senior Engineer of R&D                                                                            |
| 1. Manufacturer  | Woo Kyung Optics                                                                                                 |
| Address          | #301 Jungwoo venture town 1cha, 8, Haebong-ro 330beon-gil, Danwon-gu Ansan-city Gyeonggi-do, South Korea, 15425  |
| 2. Manufacturer  | SecuGen Korea                                                                                                    |
| Address          | #506 Jungwoo venture town 1cha, 8, Haebong-ro 330beon-gil, Danwon-gu Ansan-city Gyeonggi-do, South Korea, 15425. |

### 2.2 Test Laboratory information

|                        |                                                                                                |
|------------------------|------------------------------------------------------------------------------------------------|
| Corporate name         | Lab-T, Inc.                                                                                    |
| Representative         | Duke (Jongyoung) Kim                                                                           |
| Address                | 2182-42 Baegok-daero, Mohyeon-eup, Cheoin-gu, Yongin-si, Gyeonggi-do 17036, Korea(Republic of) |
| Telephone              | +82-31-322-6767                                                                                |
| Fax                    | +82-31-322-6768                                                                                |
| E-mail                 | <a href="mailto:info@lab-t.net">info@lab-t.net</a>                                             |
| FCC/IC Designation No. | KR0159                                                                                         |

### 2.3 Test Site

| Test Site  | used                                | Address                                                                                        |
|------------|-------------------------------------|------------------------------------------------------------------------------------------------|
| Building L | <input checked="" type="checkbox"/> | 2182-40 Baegok-daero, Mohyeon-eup, Cheoin-gu, Yongin-si, Gyeonggi-do 17036, Korea(Republic of) |
| Building T | <input checked="" type="checkbox"/> | 2182-42 Baegok-daero, Mohyeon-eup, Cheoin-gu, Yongin-si, Gyeonggi-do 17036, Korea(Republic of) |
| Building A | <input type="checkbox"/>            | 2182-44 Baegok-daero, Mohyeon-eup, Cheoin-gu, Yongin-si, Gyeonggi-do 17036, Korea(Republic of) |

### 3. Information About Test Equipment

#### 3.1 Equipment Information

|                                     |                                                                                                                                                                                                                                                                                                                                                            |
|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Equipment type                      | Unity 20 Wireless                                                                                                                                                                                                                                                                                                                                          |
| Model name                          | HU20-ASF-WB                                                                                                                                                                                                                                                                                                                                                |
| Variant model name <sup>Note2</sup> | HU20-ASF-WB, U20-ASF-WB, HU20-ASF-WBF, U20-ASF-WBF, HU20-ASF-WBL1, U20-ASF-WBL1, HU20-ASF-WBM, U20-ASF-WBM, HU20-ASF-BT2, U20-ASF-BT2, HU20-ASF-BT2F, U20-ASF-BT2F, HU20-ASF-BT2L1, U20-ASF-BT2L1, HU20-ASF-BT2M, U20-ASF-BT2M, HU20-ASF-WIFI, U20-ASF-WIFI, HU20-ASF-WIFIF, U20-ASF-WIFIF, HU20-ASF-WIFIL1, U20-ASF-WIFIL1, HU20-ASF-WIFIM, U20-ASF-WIFIM |
| Frequency range                     | Bluetooth LE : 2 402 MHz ~ 2 480 MHz<br>2.4 GHZ WLAN : 2 412 MHz ~ 2 462 MHz                                                                                                                                                                                                                                                                               |
| Modulation type                     | GFSK, DSSS, CCK, OFDM                                                                                                                                                                                                                                                                                                                                      |
| Modulation technology               | Bluetooth LE, 2.4GHz WLAN 802.11b/g/n(HT20)                                                                                                                                                                                                                                                                                                                |
| Power supply                        | DC 3.7 V                                                                                                                                                                                                                                                                                                                                                   |
| H/W version                         | Rev.A                                                                                                                                                                                                                                                                                                                                                      |
| S/W version                         | 0.722d                                                                                                                                                                                                                                                                                                                                                     |

Note1: The above EUT information was declared by the manufacturer.

Note2: Variant models are based on optional wireless specifications.

Each model uses a different protocol / brand name

#### 3.2 Antenna Information

| Type         | Model No.   | Gain     | Note |
|--------------|-------------|----------|------|
| Chip Antenna | SDBTPTR3015 | 1.99 dBi | -    |

#### 3.3 Test Frequency

| Test mode     | Test frequency (MHz) |                  |                   |
|---------------|----------------------|------------------|-------------------|
|               | Lowest frequency     | Middle frequency | Highest frequency |
| Bluetooth LE  | 2 402                | 2 440            | 2 480             |
| 802.11b       | 2 412                | 2 437            | 2 462             |
| 802.11g       | 2 412                | 2 437            | 2 462             |
| 802.11n(HT20) | 2 412                | 2 437            | 2 462             |

### 3.4 Worst case

|              |        |               |        |
|--------------|--------|---------------|--------|
| Bluetooth LE | 1 Mbps | 802.11b       | 1 Mbps |
| 802.11g      | 6 Mbps | 802.11n(HT20) | MCS0   |

Note1 : The power measurement has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates.

### 3.5 Operation conditions for the EUT

|                               |        |                                            |
|-------------------------------|--------|--------------------------------------------|
| Firmware state                |        | 0.722d                                     |
| Test software name(version)   |        | Teraterm (Version 4.86)                    |
| Test power setting            |        | Default setting value                      |
| Serial number<br>(Setup mode) | EUT #1 | #25 (RF conducted measurement)             |
|                               | EUT #2 | #7 (Radiated Emission, Conducted Emission) |

## 4. Test Report

### 4.1 Summary

| FCC Part 15                                                                |                                                   |        |        |
|----------------------------------------------------------------------------|---------------------------------------------------|--------|--------|
| FCC Rule                                                                   | Parameter                                         | Clause | Status |
| Transmitter Requirements                                                   |                                                   |        |        |
| 15.203<br>15.247(b)(4)                                                     | Antenna Requirement                               | 4.3.1  | C      |
| 15.247(b)(3)                                                               | Maximum Peak Output Power                         | 4.3.2  | C      |
| 15.247(e)                                                                  | Peak Power Spectral Density                       | 4.3.3  | C      |
| 15.247(a)(2)                                                               | 6 dB Channel Bandwidth                            | 4.3.4  | C      |
| -                                                                          | Occupied Bandwidth                                | 4.3.4  | C      |
| 15.247(d)<br>15.205(a)<br>15.209(a)                                        | Spurious Emission, Band Edge and Restricted bands | 4.3.5  | C      |
| 15.207(a)                                                                  | Conducted Emissions                               | 4.3.6  | C      |
| NOTE 1 : C = Comply N/C = Not Comply N/T = Not Tested N/A = Not Applicable |                                                   |        |        |

\* The general test methods used to test this device is ANSI C63.10:2020

\* Standard(s) : KDB 558074 D01 DTS Meas Guidance

### 4.2 Measurement Uncertainty

| Mesurement items                             | Expanded Uncertainty |                                              |
|----------------------------------------------|----------------------|----------------------------------------------|
| RF Output Power                              | 0.77 dB              | (The confidence level is about 95 %, $k=2$ ) |
| Power Spectral Density                       | 0.94 dB              | (The confidence level is about 95 %, $k=2$ ) |
| Occupied Channel Bandwidth                   | 6.46 kHz             | (The confidence level is about 95 %, $k=2$ ) |
| Conducted Spurious Emissions                 | 0.41 dB              | (The confidence level is about 95 %, $k=2$ ) |
| Radiated Spurious Emissions<br>(1 GHz under) | 4.78 dB              | (The confidence level is about 95 %, $k=2$ ) |
| Radiated Spurious Emissions<br>(Above 1 GHz) | 5.98 dB              | (The confidence level is about 95 %, $k=2$ ) |
| Conducted emission                           | 2.36 dB              | (The confidence level is about 95 %, $k=2$ ) |

## 4.3 Transmitter Requirements

### 4.3.1 Antenna Requirement

#### 4.3.1.1 Regulation

According to §15.203 An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

According to §15.247(b)(4) the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 4.3.1.2 Result

**Comply**

(The transmitter has a Chip Antenna. The directional peak gain of the antenna is 1.99 dBi.)

## 4.3.2 Maximum Peak Output Power

### 4.3.2.1 Regulation

According to §15.247(b)(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to §15.247(b)(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 4.3.2.2 Measurement Procedure

ANSI C63.10 § 11.9.1 Maximum peak conducted output power

#### 4.3.2.2.1 PKPM1 Peak power meter method

The maximum peak conducted output power may be measured using a broadband peak RF power meter.

The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

### 4.3.2.3 Result

**Comply** (measurement data : refer to the next page)

#### 4.3.2.4 Measurement data

Test mode : Bluetooth LE

| Maximum Peak Output Power |                 |                |                |
|---------------------------|-----------------|----------------|----------------|
| Freq.<br>(MHz)            | Result<br>(dBm) | Result<br>(mW) | Limit<br>(dBm) |
| 2 402                     | 1.10            | 1.29           | 30.00          |
| 2 440                     | 1.19            | 1.32           | 30.00          |
| 2 480                     | 0.52            | 1.13           | 30.00          |

Test mode : 802.11b

| Maximum Peak Output Power |                 |                |                |
|---------------------------|-----------------|----------------|----------------|
| Freq.<br>(MHz)            | Result<br>(dBm) | Result<br>(mW) | Limit<br>(dBm) |
| 2 412                     | 10.05           | 10.12          | 30.00          |
| 2 437                     | 9.97            | 9.93           | 30.00          |
| 2 462                     | 9.70            | 9.33           | 30.00          |

Test mode : 802.11g

| Maximum Peak Output Power |                 |                |                |
|---------------------------|-----------------|----------------|----------------|
| Freq.<br>(MHz)            | Result<br>(dBm) | Result<br>(mW) | Limit<br>(dBm) |
| 2 412                     | 10.12           | 10.28          | 30.00          |
| 2 437                     | 9.19            | 8.30           | 30.00          |
| 2 462                     | 8.72            | 7.45           | 30.00          |

Test mode : 802.11n(HT20)

| Maximum Peak Output Power |                 |                |                |
|---------------------------|-----------------|----------------|----------------|
| Freq.<br>(MHz)            | Result<br>(dBm) | Result<br>(mW) | Limit<br>(dBm) |
| 2 412                     | 10.10           | 10.23          | 30.00          |
| 2 437                     | 9.15            | 8.22           | 30.00          |
| 2 462                     | 8.90            | 7.76           | 30.00          |

Note 1 : refer to 4.3.1 for information on limit reduction.

Note 2 : We took the insertion loss of the cable loss into consideration within the measuring instrument.

Test mode : Bluetooth LE

| Average Output Power |               |              |                 |                |                |
|----------------------|---------------|--------------|-----------------|----------------|----------------|
| Freq.<br>(MHz)       | ANT1<br>(dBm) | ANT1<br>(mW) | Result<br>(dBm) | Result<br>(mW) | Limit<br>(dBm) |
| 2 402                | -1.23         | 0.75         | 0.82            | 1.21           | 30.00          |
| 2 440                | -1.17         | 0.76         | 0.88            | 1.22           | 30.00          |
| 2 480                | -1.93         | 0.64         | 0.12            | 1.03           | 30.00          |

Test mode : 802.11b

| Average Output Power |               |              |                 |                |                |
|----------------------|---------------|--------------|-----------------|----------------|----------------|
| Freq.<br>(MHz)       | ANT1<br>(dBm) | ANT1<br>(mW) | Result<br>(dBm) | Result<br>(mW) | Limit<br>(dBm) |
| 2 412                | 7.58          | 5.73         | 7.59            | 5.74           | 30.00          |
| 2 437                | 7.28          | 5.35         | 7.29            | 5.36           | 30.00          |
| 2 462                | 7.23          | 5.28         | 7.24            | 5.29           | 30.00          |

Test mode : 802.11g

| Average Output Power |               |              |                 |                |                |
|----------------------|---------------|--------------|-----------------|----------------|----------------|
| Freq.<br>(MHz)       | ANT1<br>(dBm) | ANT1<br>(mW) | Result<br>(dBm) | Result<br>(mW) | Limit<br>(dBm) |
| 2 412                | 0.49          | 1.12         | 0.54            | 1.13           | 30.00          |
| 2 437                | 0.25          | 1.06         | 0.30            | 1.07           | 30.00          |
| 2 462                | -0.58         | 0.87         | -0.53           | 0.88           | 30.00          |

Test mode : 802.11n(HT20)

| Average Output Power |               |              |                 |                |                |
|----------------------|---------------|--------------|-----------------|----------------|----------------|
| Freq.<br>(MHz)       | ANT1<br>(dBm) | ANT1<br>(mW) | Result<br>(dBm) | Result<br>(mW) | Limit<br>(dBm) |
| 2 412                | 0.62          | 1.15         | 0.67            | 1.17           | 30.00          |
| 2 437                | 0.11          | 1.03         | 0.16            | 1.04           | 30.00          |
| 2 462                | -0.28         | 0.94         | -0.23           | 0.95           | 30.00          |

Note 1 : refer to 4.3.1 for information on limit reduction.

Note 2 : We took the insertion loss of the cable loss into consideration within the measuring instrument.

Note 3 : Result : Measured Value + Duty cycle Factor

Note 4 : Duty cycle Factor :  $10 \cdot \log(1/(\text{on-time}/\text{Period}))$  refer to 4.3.5.8

### 4.3.3 Peak Power Spectral Density

#### 4.3.3.1 Regulation

According to §15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

#### 4.3.3.2 Measurement Procedure

ANSI C63.10 § 11.10 Maximum power spectral density level in the fundamental emission

##### 4.3.3.2.1 Method PKPSD (peak PSD)

The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span > 1.5 times the DTS bandwidth.
- c) Set the RBW to  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- e) Detector = peak.
- t) Sweep time = No faster than coupled (auto) time.
- g) Trace mode = max-hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

#### 4.3.3.3 Result

**Comply** (measurement data : refer to the next page)

#### 4.3.3.4 Measurement data

Test mode : Bluetooth LE

| Peak Power Spectral Density |                 |                |
|-----------------------------|-----------------|----------------|
| Freq.<br>(MHz)              | Result<br>(dBm) | Limit<br>(dBm) |
| 2 402                       | -13.38          | 8.00           |
| 2 440                       | -13.12          | 8.00           |
| 2 480                       | -13.96          | 8.00           |

Test mode : 802.11b

| Peak Power Spectral Density |                 |                |
|-----------------------------|-----------------|----------------|
| Freq.<br>(MHz)              | Result<br>(dBm) | Limit<br>(dBm) |
| 2 412                       | -12.61          | 8.00           |
| 2 437                       | -13.39          | 8.00           |
| 2 462                       | -13.89          | 8.00           |

Test mode : 802.11g

| Peak Power Spectral Density |                 |                |
|-----------------------------|-----------------|----------------|
| Freq.<br>(MHz)              | Result<br>(dBm) | Limit<br>(dBm) |
| 2 412                       | -23.56          | 8.00           |
| 2 437                       | -23.64          | 8.00           |
| 2 462                       | -23.57          | 8.00           |

Test mode : 802.11n(HT20)


| Peak Power Spectral Density |                 |                |
|-----------------------------|-----------------|----------------|
| Freq.<br>(MHz)              | Result<br>(dBm) | Limit<br>(dBm) |
| 2 412                       | -23.69          | 8.00           |
| 2 437                       | -23.86          | 8.00           |
| 2 462                       | -23.83          | 8.00           |

Note 1 : refer to 4.3.1 for information on limit reduction.


Note 2 : We took the insertion loss of the cable loss into consideration within the measuring instrument.

#### 4.3.3.5 Test Plot


Test mode : Bluetooth LE 2 402 MHz

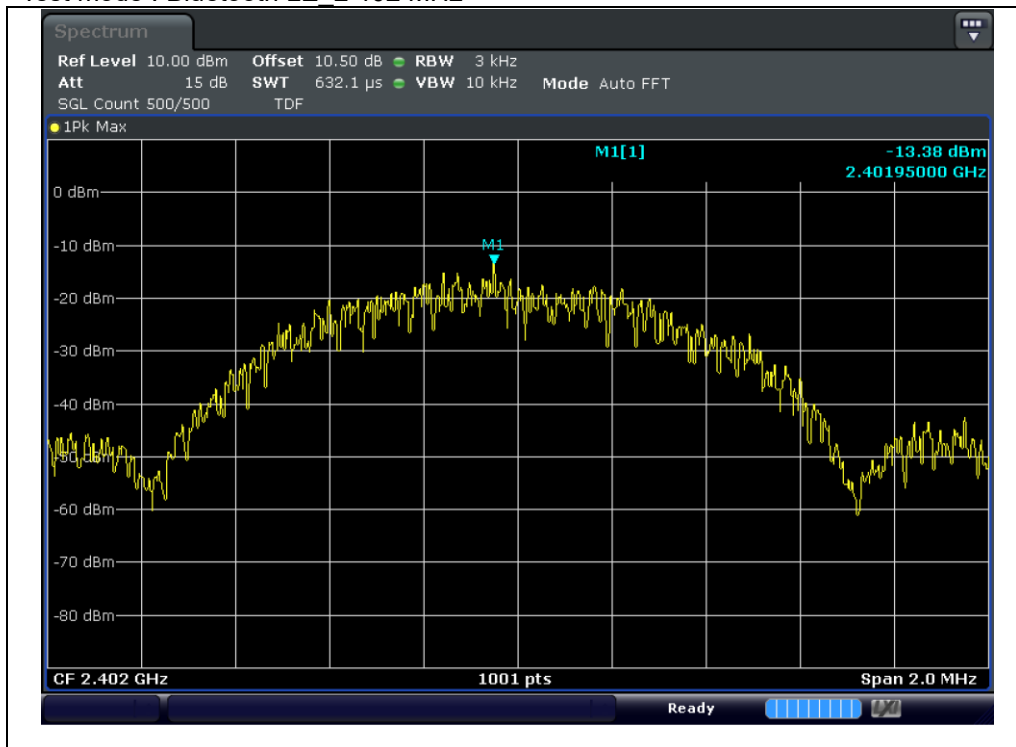


Test mode : Bluetooth LE 2 440 MHz

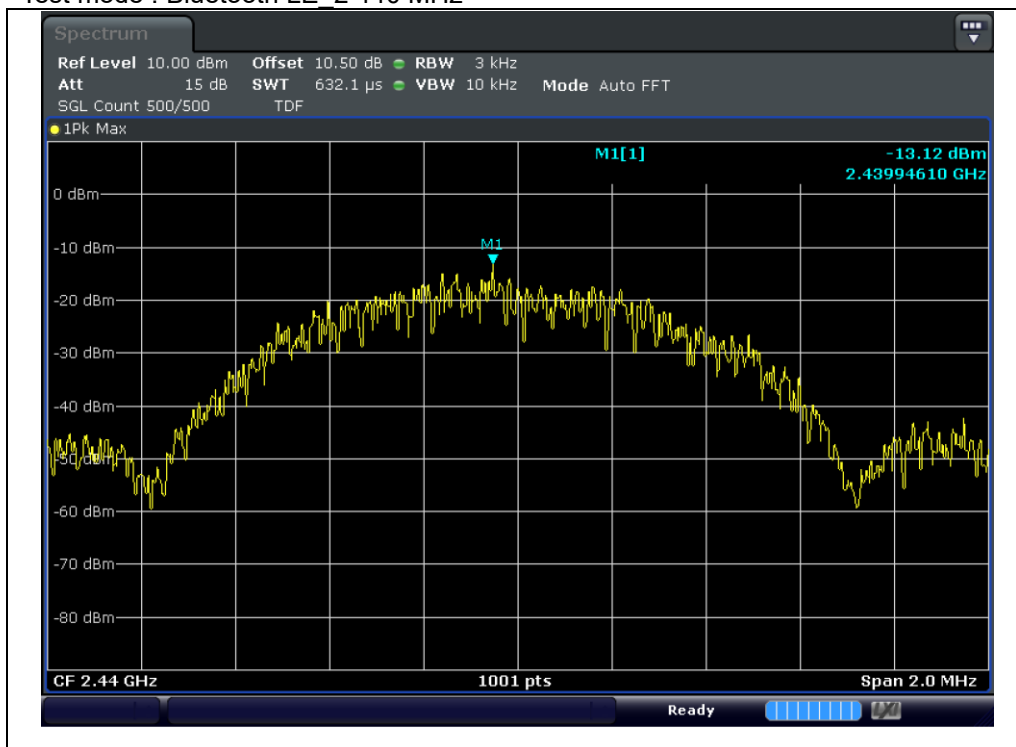


Test mode : Bluetooth LE\_2 480 MHz

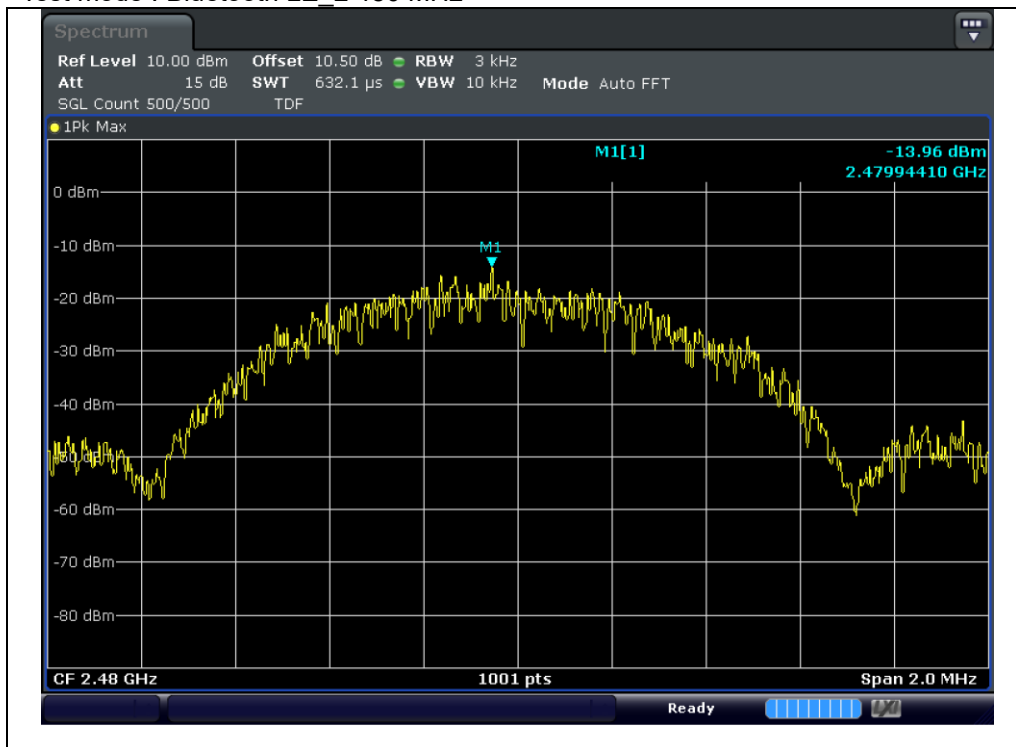


Test mode : 802.11b\_2 412 MHz

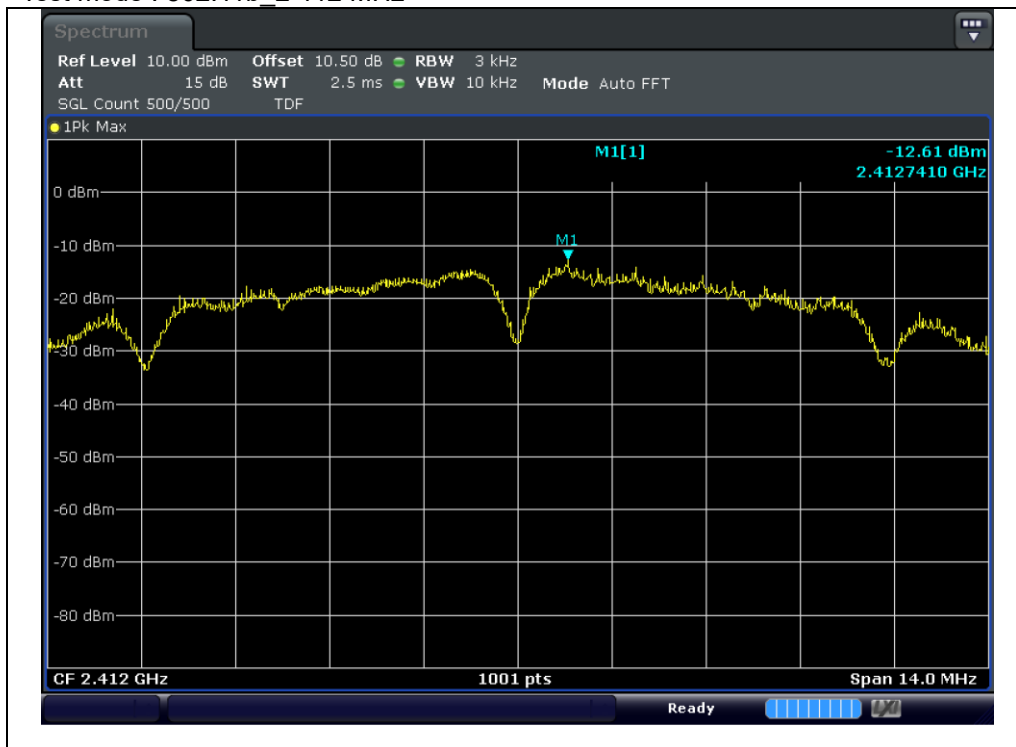


Test mode : 802.11b\_2 437 MHz

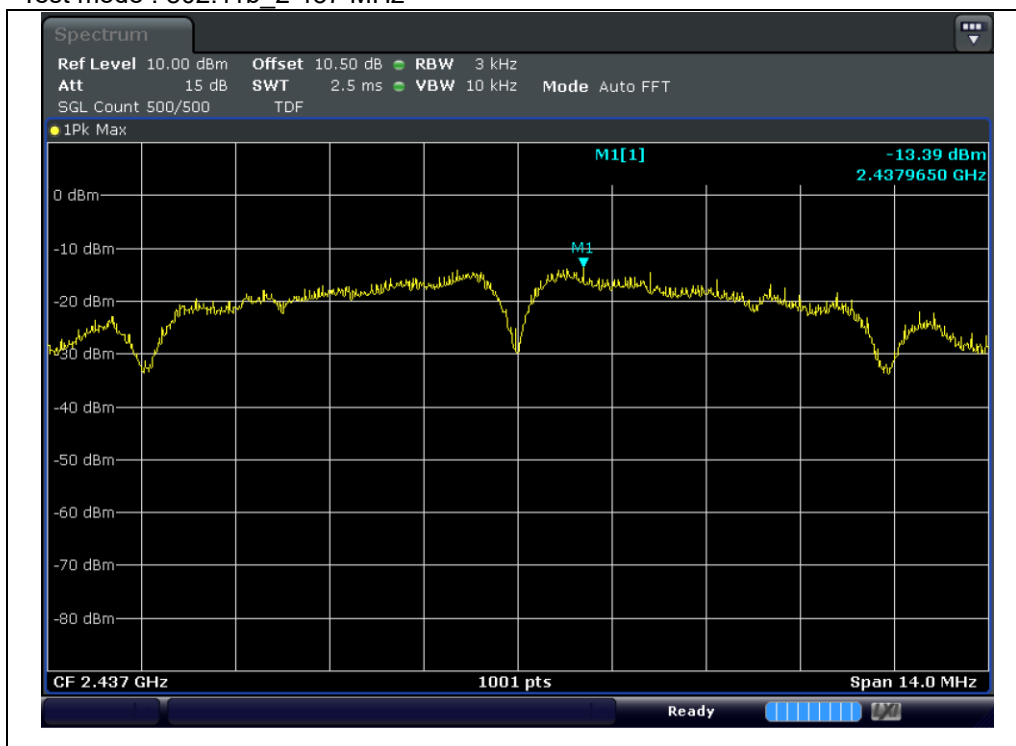


Test mode : 802.11b\_2 462 MHz

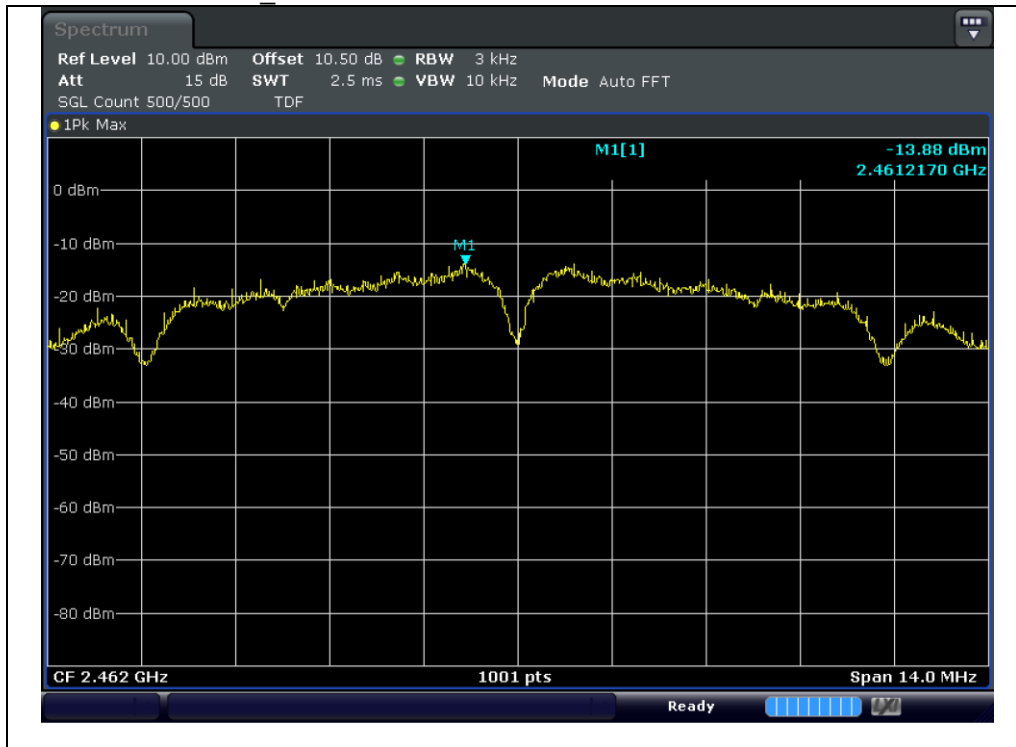


Test mode : 802.11g\_2 412 MHz

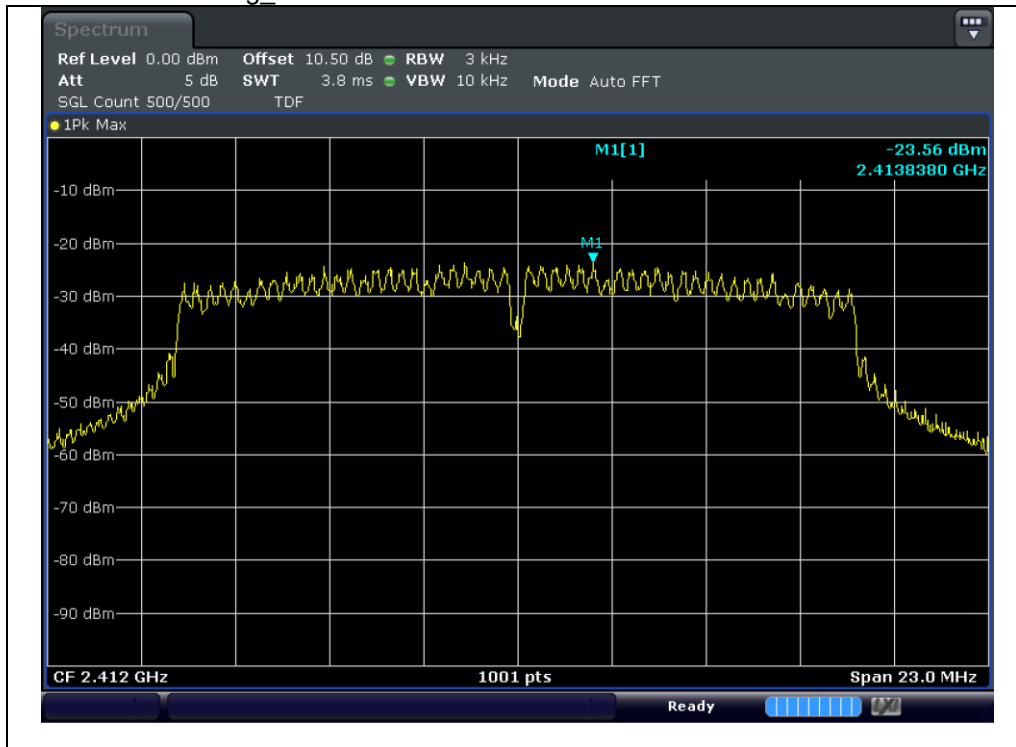


Test mode : 802.11g\_2 437 MHz

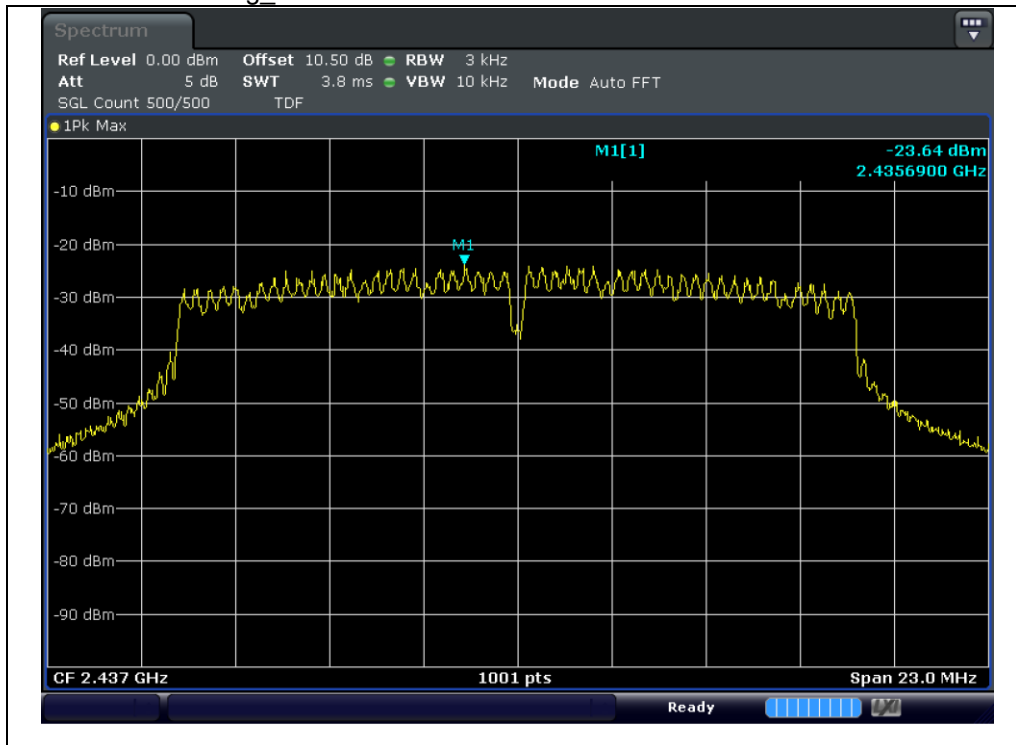


Test mode : 802.11g\_2 462 MHz

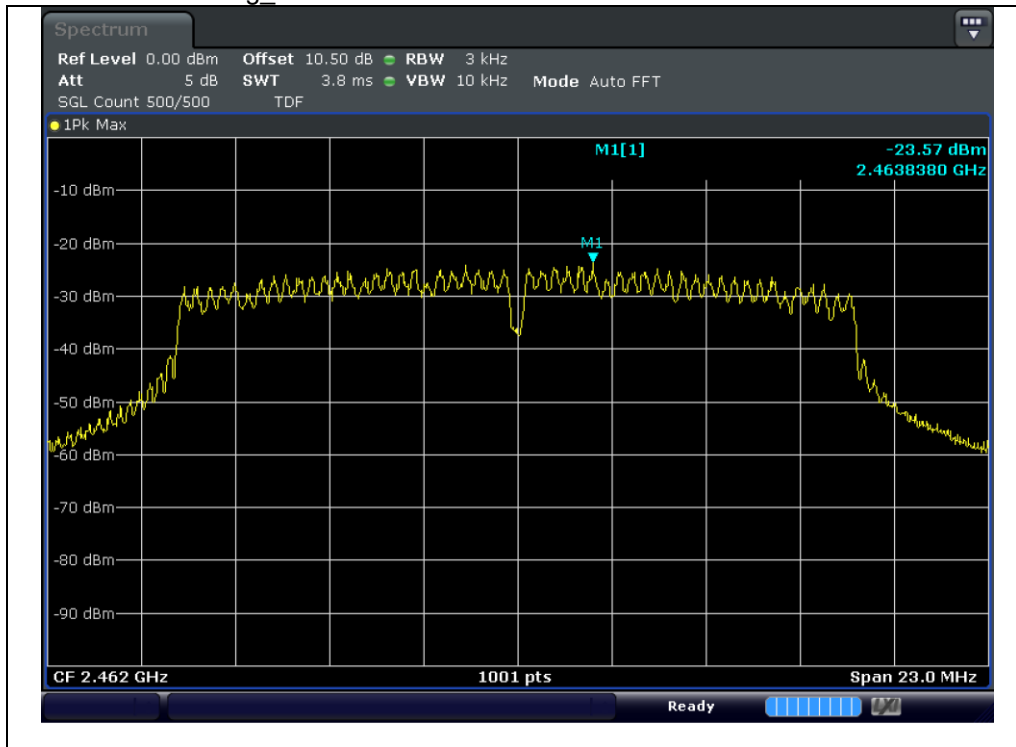


Test mode : 802.11n(HT20) 2 412 MHz

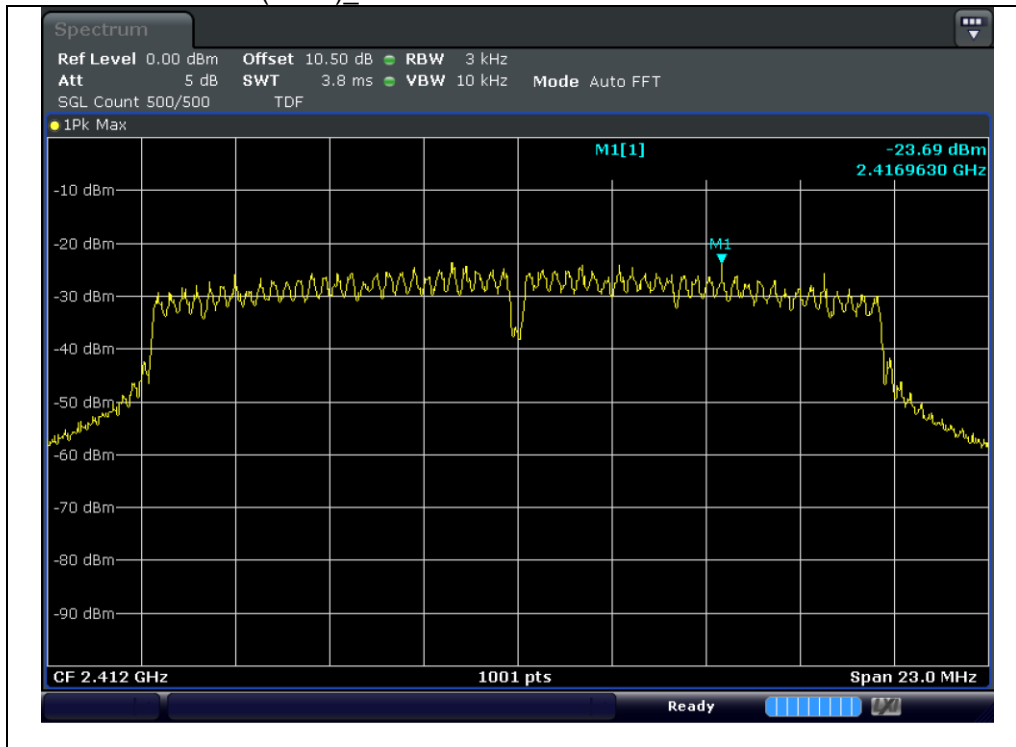

Test mode : 802.11n(HT20) 2 437 MHz

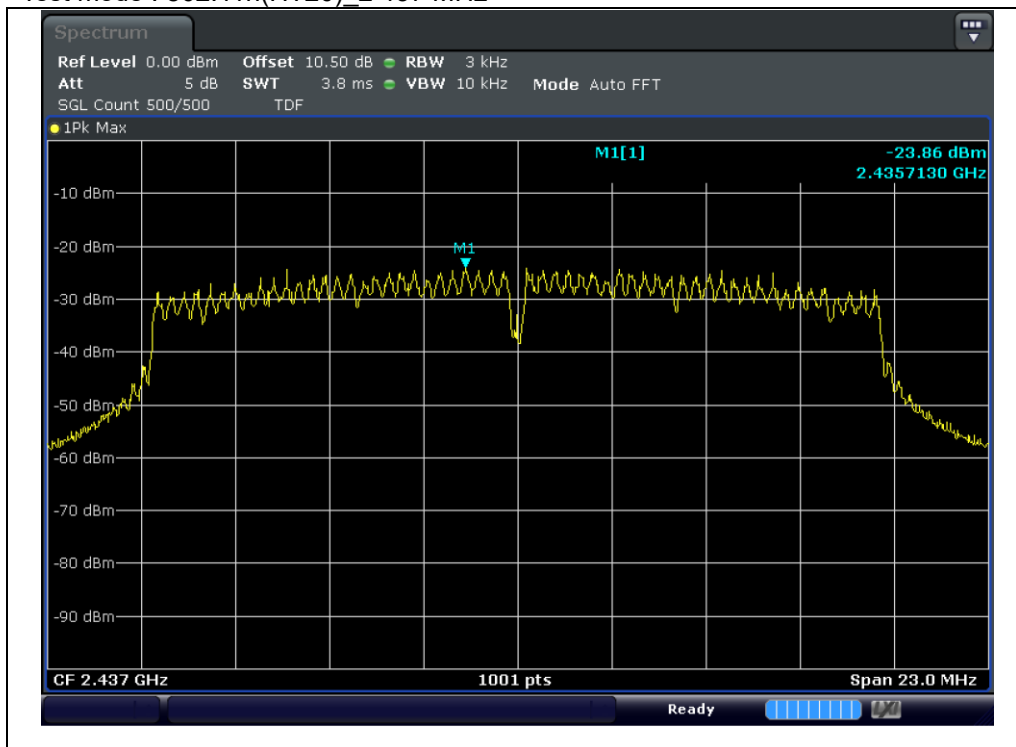

Test mode : 802.11n(HT20) 2 462 MHz

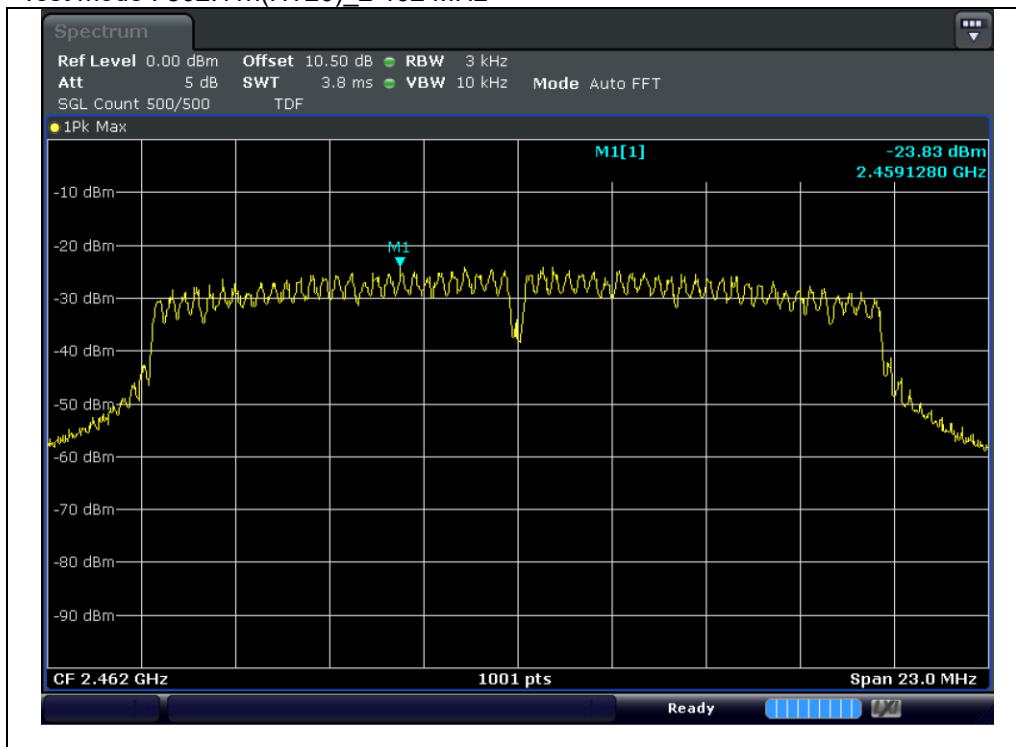

#### 4.3.4 6 dB Bandwidth(DTS Bandwidth)

##### 4.3.4.1 Regulation

According to §15.247(a)(2) Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

##### 4.3.4.2 Measurement Procedure

ANSI C63.10 § 11.8 DTS bandwidth

##### 4.3.4.2.1 Option 1

- a) Set RBW = 100 kHz.
- b) Set the VBW  $\geq$  [3 RBW].
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

##### 4.3.4.2.2 Option 2

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW  $\geq$  3  $\times$  RBW, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq$  6 dB.

##### 4.3.4.3 Result

**Comply** (measurement data : refer to the next page)

#### 4.3.4.4 Measurement data

Test mode : Bluetooth LE

| Frequency (MHz) | 6 dB Bandwidth (MHz) | Min. Limit (MHz) | Occupied Bandwidth (MHz) |
|-----------------|----------------------|------------------|--------------------------|
| 2 402           | 0.72                 | 0.50             | 1.05                     |
| 2 440           | 0.69                 | 0.50             | 1.05                     |
| 2 480           | 0.71                 | 0.50             | 1.05                     |

Test mode : 802.11b

| Frequency (MHz) | 6 dB Bandwidth (MHz) | Min. Limit (MHz) | Occupied Bandwidth (MHz) |
|-----------------|----------------------|------------------|--------------------------|
| 2 412           | 9.05                 | 0.50             | 14.05                    |
| 2 437           | 9.05                 | 0.50             | 14.04                    |
| 2 462           | 9.05                 | 0.50             | 14.04                    |

Test mode : 802.11g


| Frequency (MHz) | 6 dB Bandwidth (MHz) | Min. Limit (MHz) | Occupied Bandwidth (MHz) |
|-----------------|----------------------|------------------|--------------------------|
| 2 412           | 15.11                | 0.50             | 16.31                    |
| 2 437           | 15.12                | 0.50             | 16.28                    |
| 2 462           | 15.09                | 0.50             | 16.32                    |

Test mode : 802.11n(HT20)

| Frequency (MHz) | 6 dB Bandwidth (MHz) | Min. Limit (MHz) | Occupied Bandwidth (MHz) |
|-----------------|----------------------|------------------|--------------------------|
| 2 412           | 15.06                | 0.50             | 17.50                    |
| 2 437           | 15.10                | 0.50             | 17.37                    |
| 2 462           | 15.10                | 0.50             | 17.40                    |

#### 4.3.4.5 Test Plot


Test mode : Bluetooth LE / 2 402 MHz\_ 6 dB Bandwidth

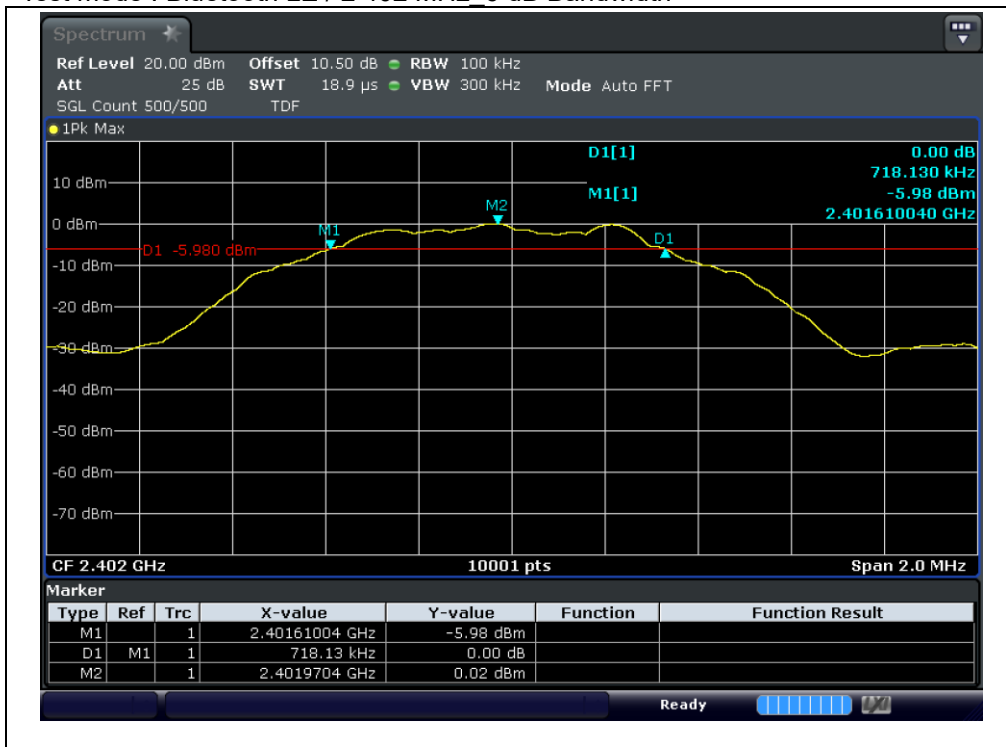

Test mode : Bluetooth LE / 2 440 MHz\_ 6 dB Bandwidth



Test mode : Bluetooth LE / 2 480 MHz\_ 6 dB Bandwidth

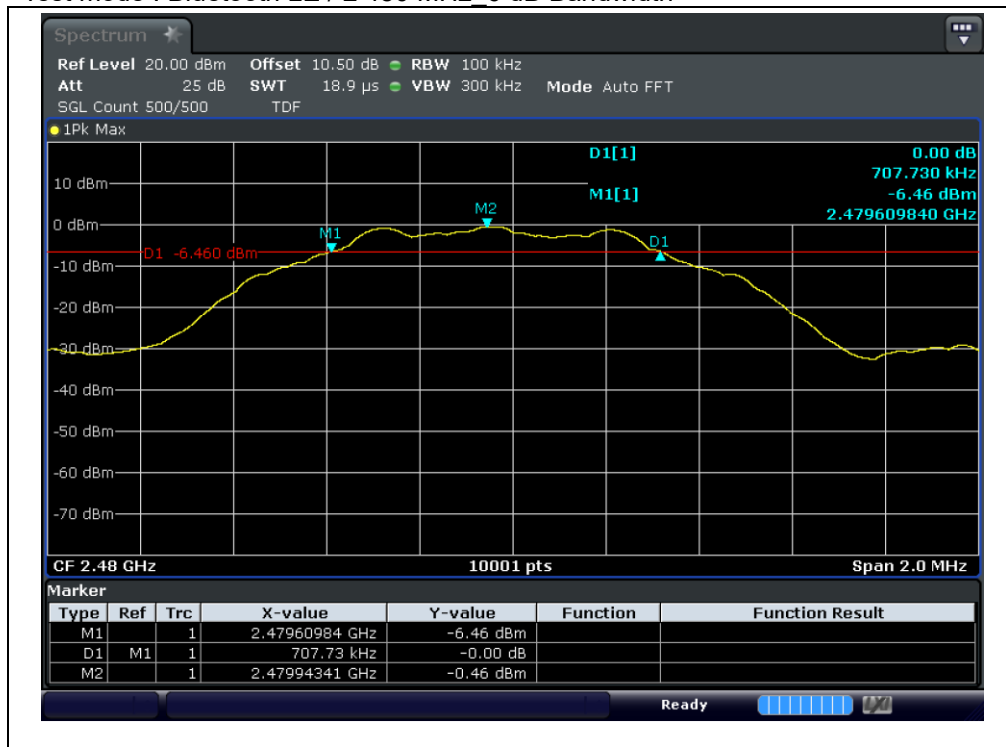

Test mode : 802.11b / 2 412 MHz 6 dB Bandwidth




Test mode : 802.11b / 2 437 MHz 6 dB Bandwidth




Test mode : 802.11b / 2.462 MHz 6 dB Bandwidth




Test mode : 802.11g / 2 412 MHz 6 dB Bandwidth

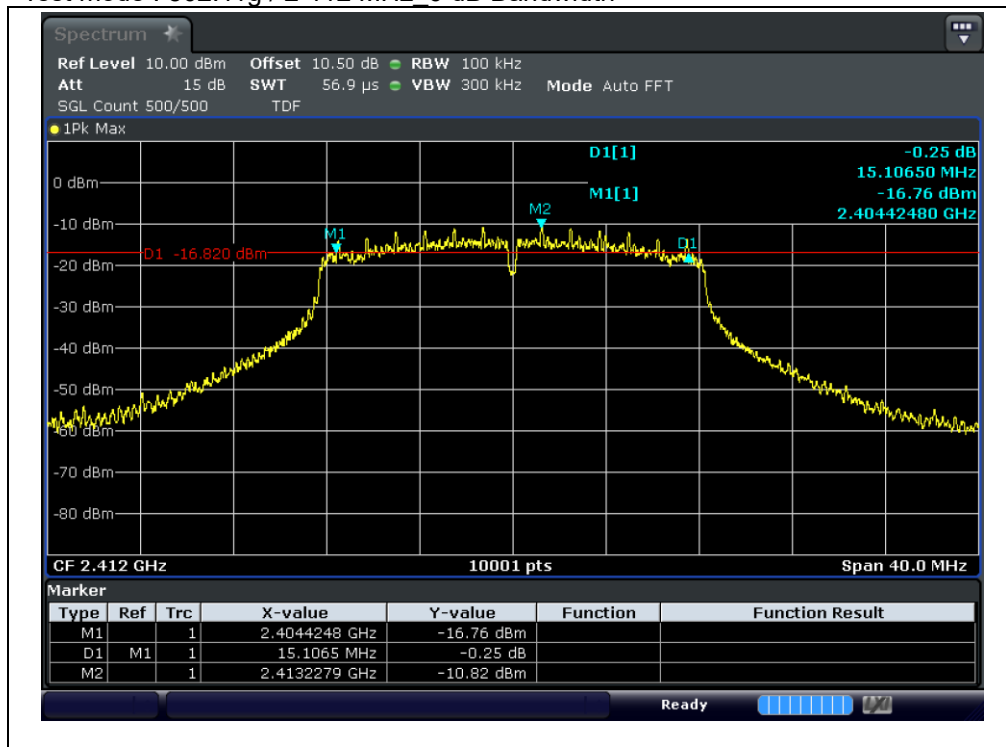


Test mode : 802.11g / 2 437 MHz 6 dB Bandwidth

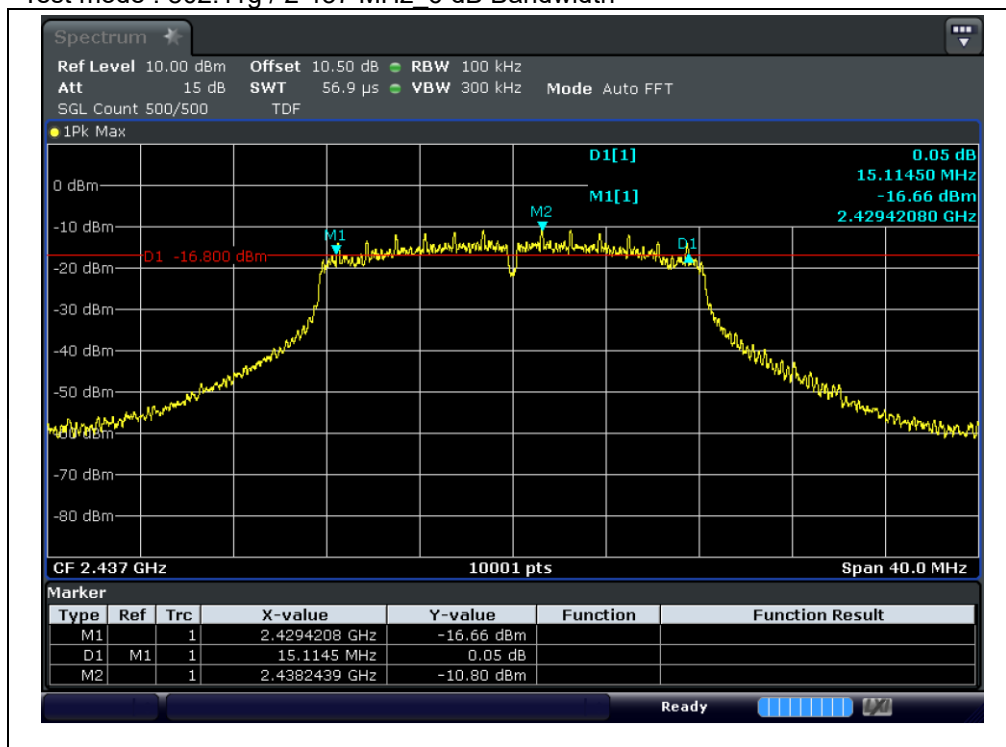


Test mode : 802.11g / 2 462 MHz 6 dB Bandwidth

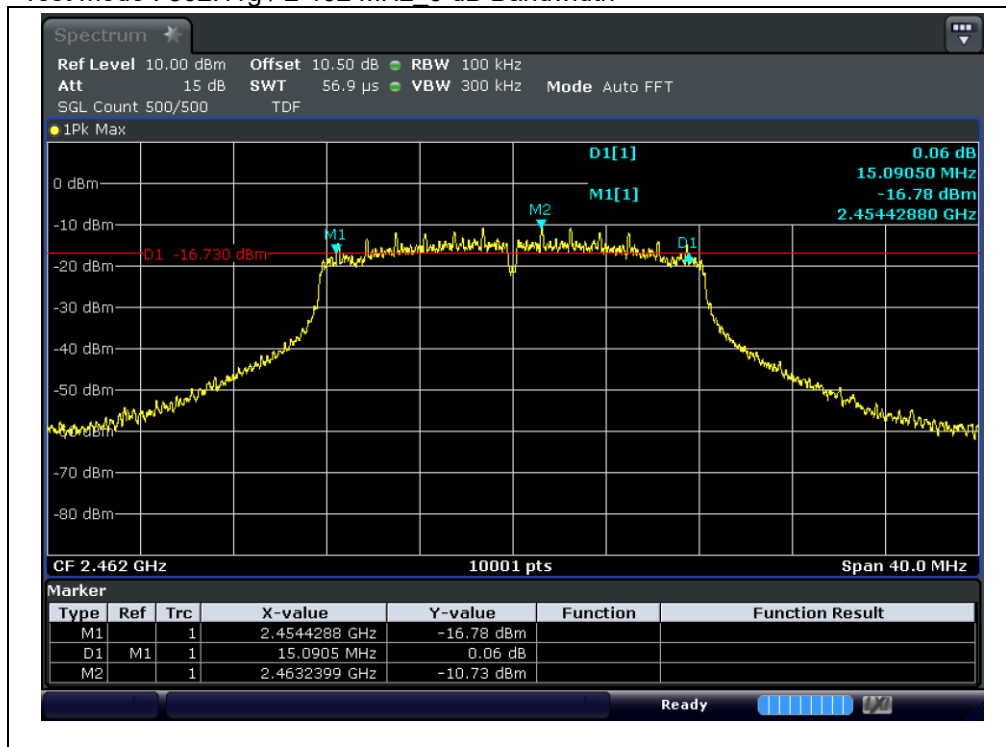


Test mode : 802.11n(HT20) / 2 412 MHz\_6 dB Bandwidth

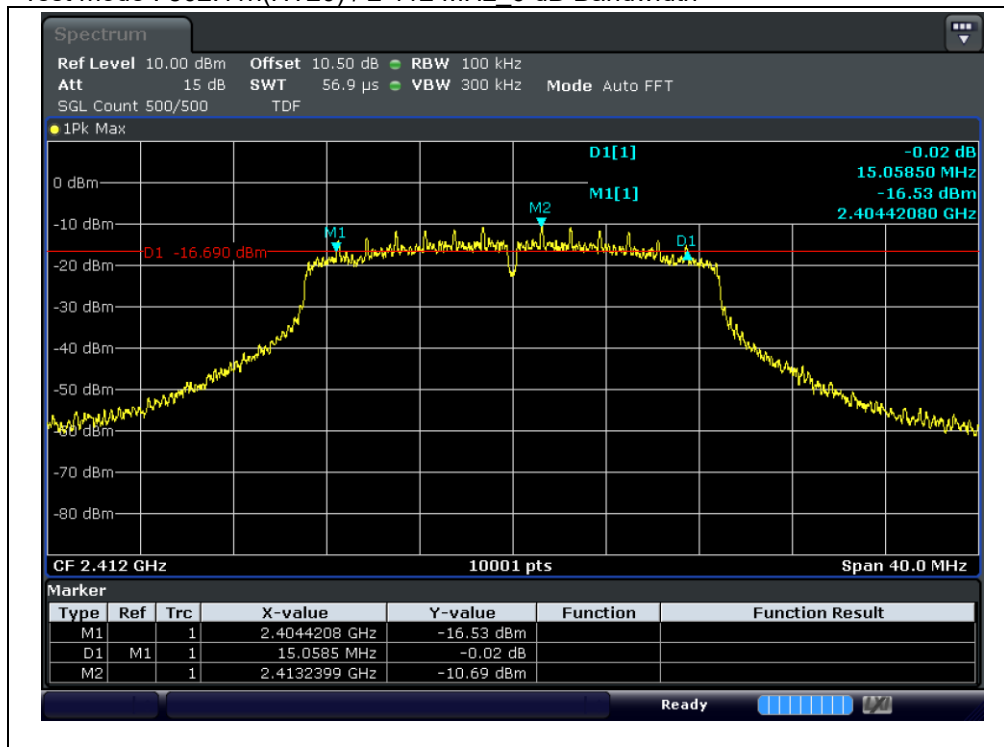


Test mode : 802.11n(HT20) / 2 437 MHz\_6 dB Bandwidth

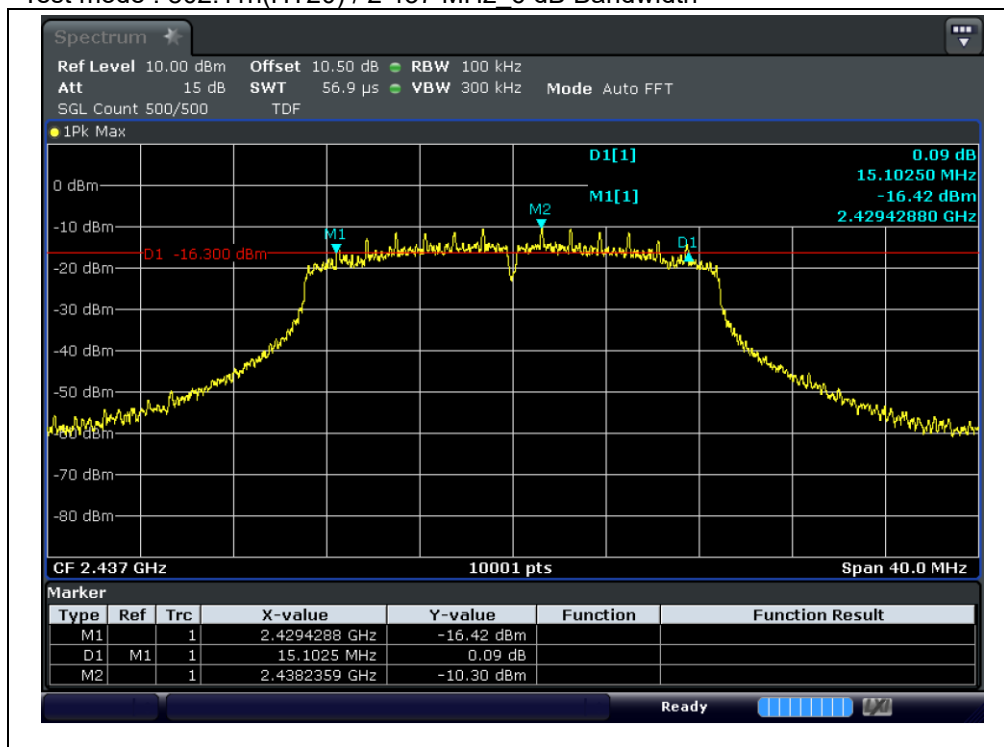


Test mode : 802.11n(HT20) / 2 462 MHz\_6 dB Bandwidth

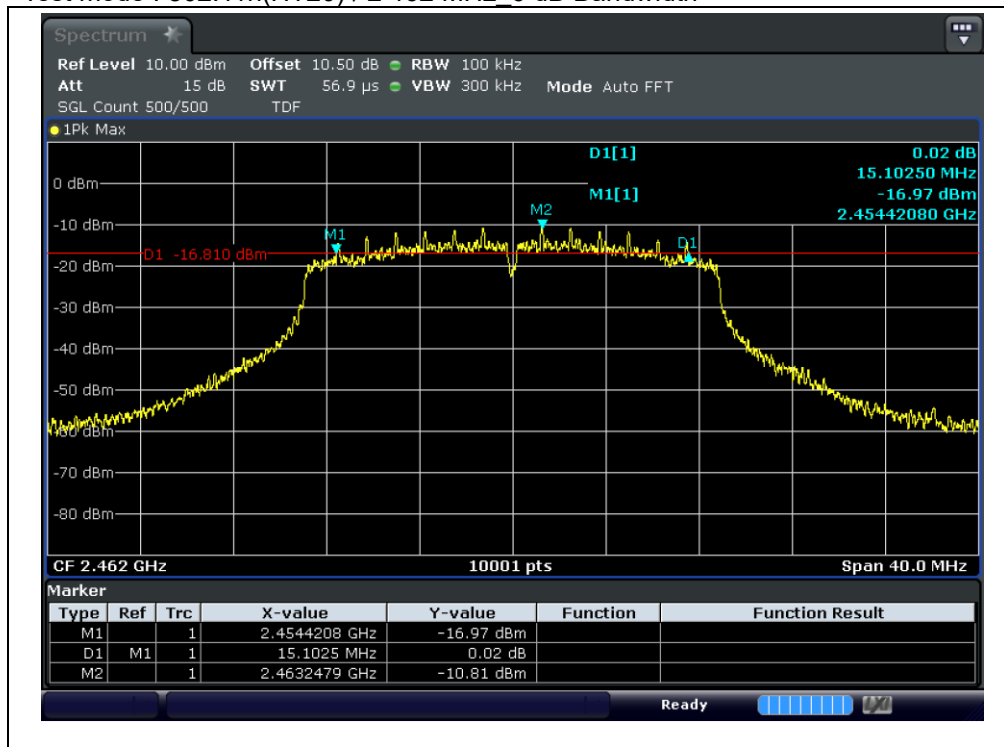


Test mode : Bluetooth LE / 2 402 MHz\_Occupied Bandwidth

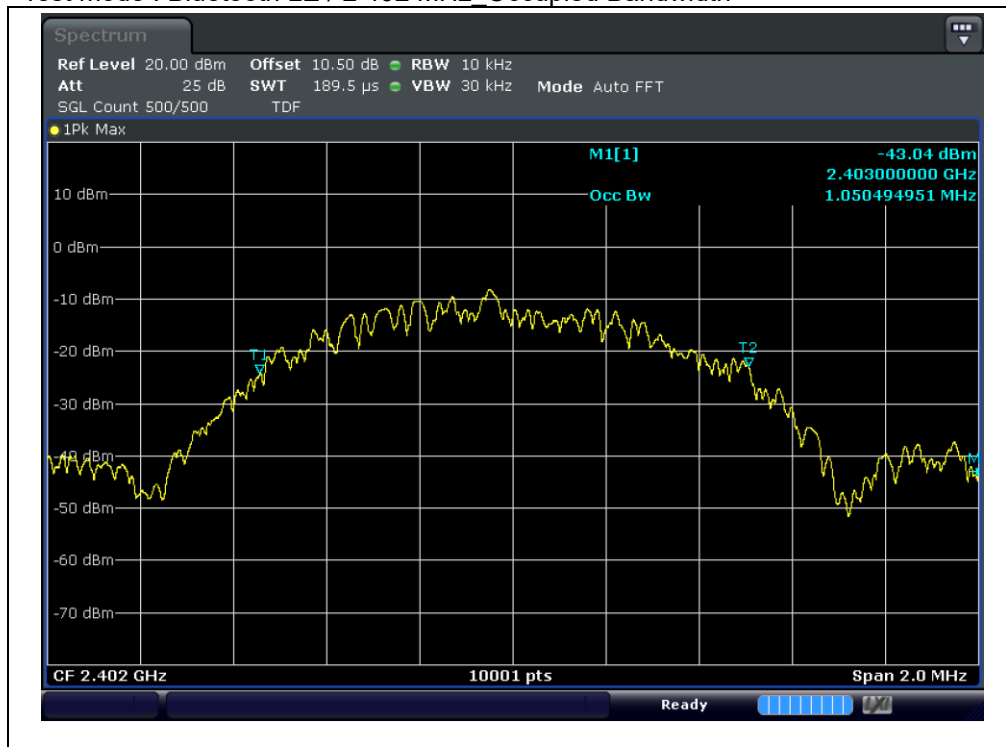


Test mode : Bluetooth LE / 2 440 MHz\_Occupied Bandwidth

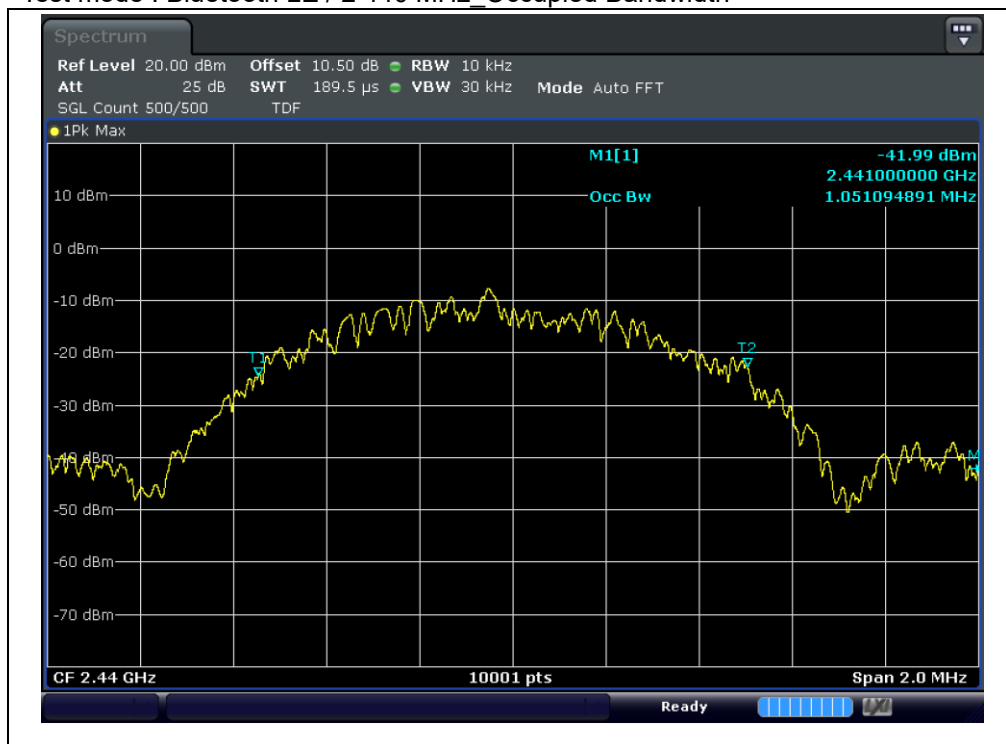


Test mode : Bluetooth LE / 2 480 MHz\_Occupied Bandwidth

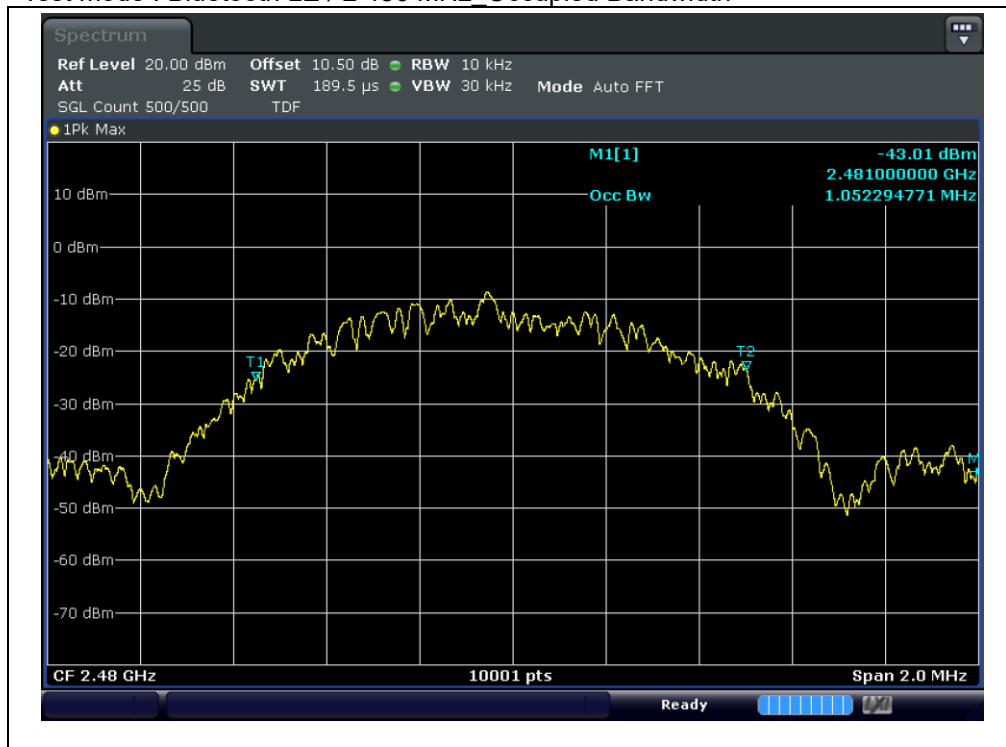


Test mode : 802.11b / 2 412 MHz\_Occupied Bandwidth

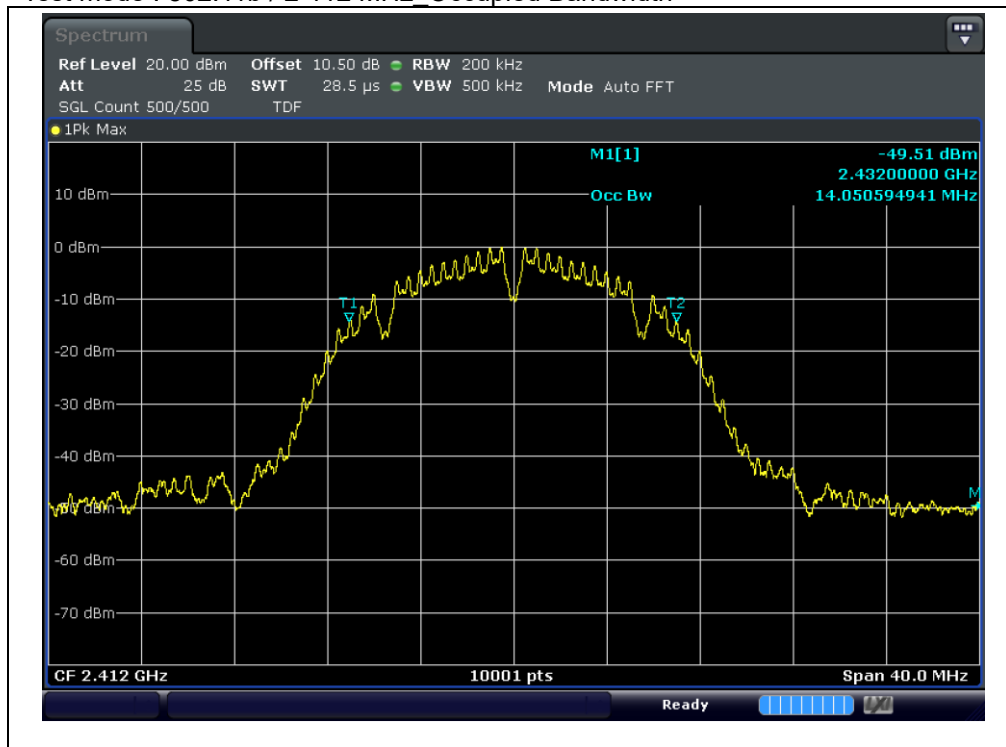


Test mode : 802.11b / 2 437 MHz\_Occupied Bandwidth

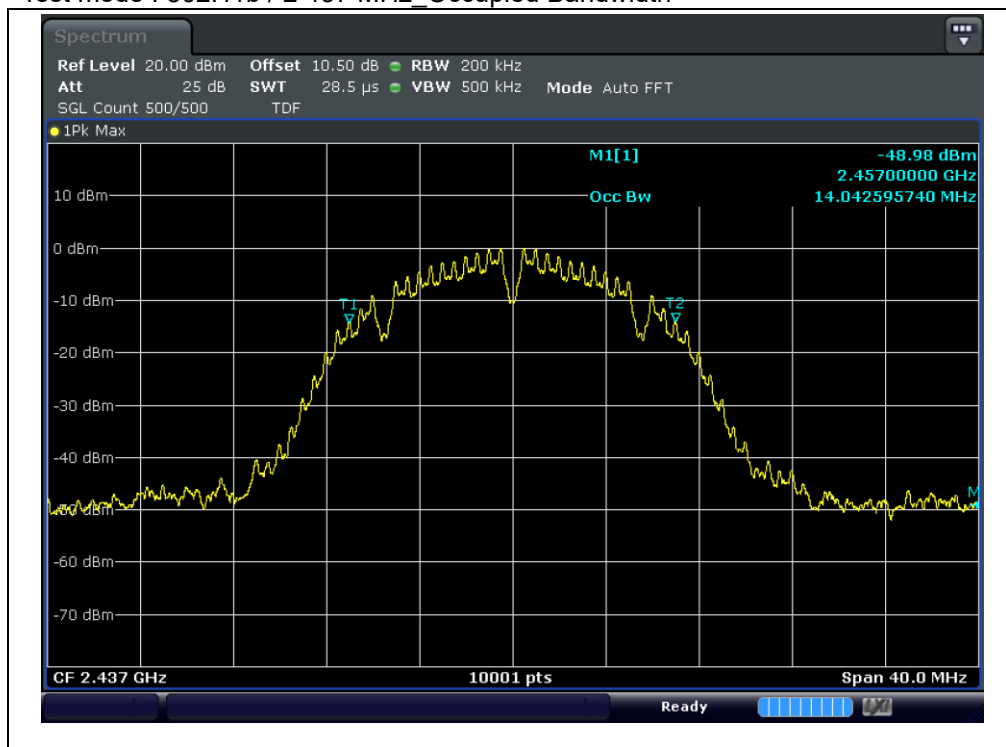


Test mode : 802.11b / 2 462 MHz\_Occupied Bandwidth

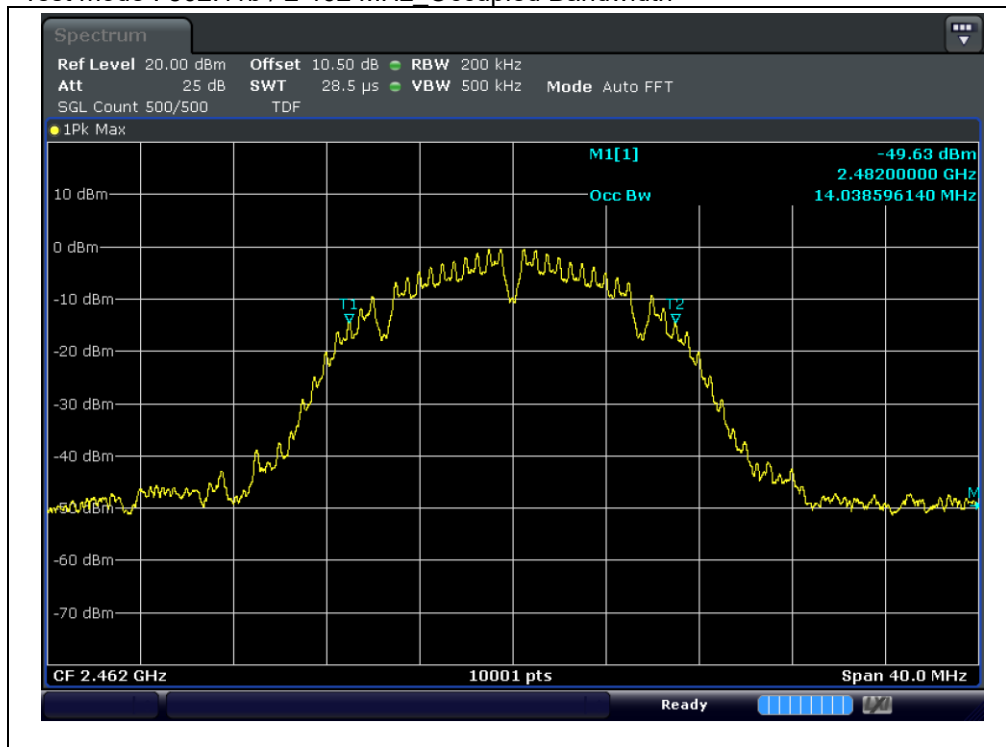


Test mode : 802.11g / 2 412 MHz\_Occupied Bandwidth

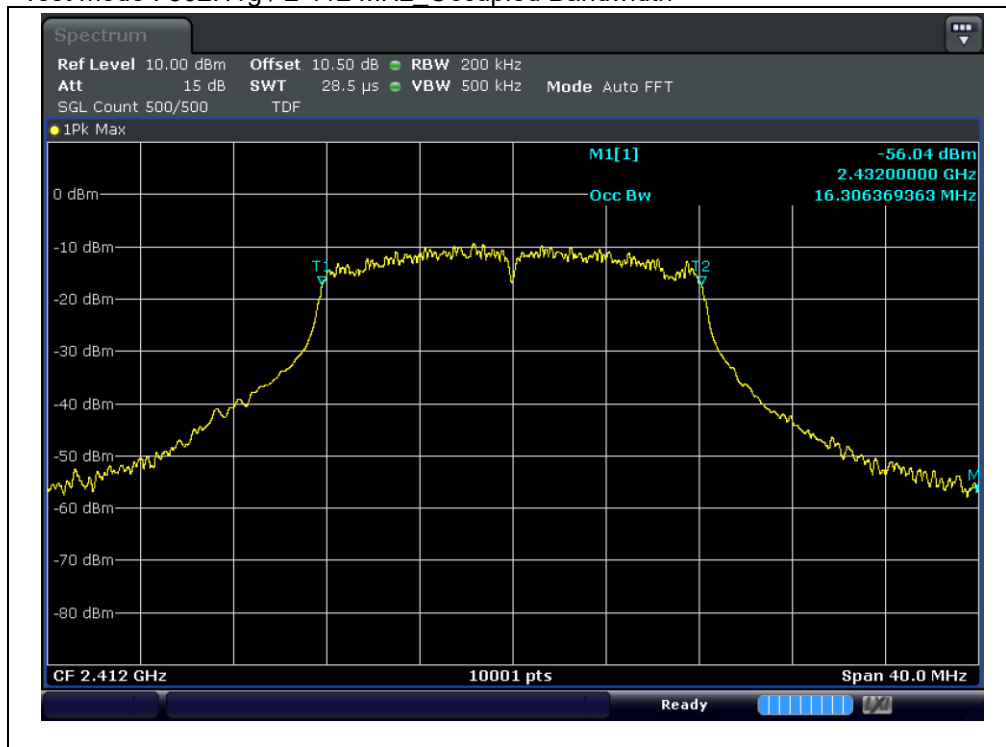


Test mode : 802.11g / 2 437 MHz\_Occupied Bandwidth

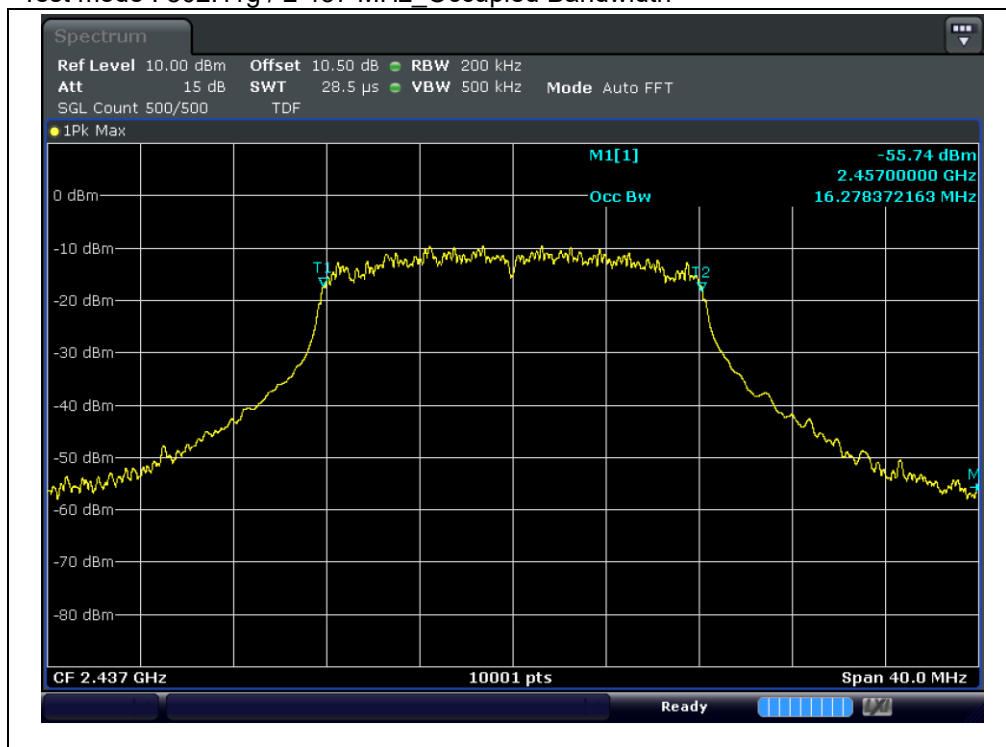


Test mode : 802.11g / 2 462 MHz\_Occupied Bandwidth

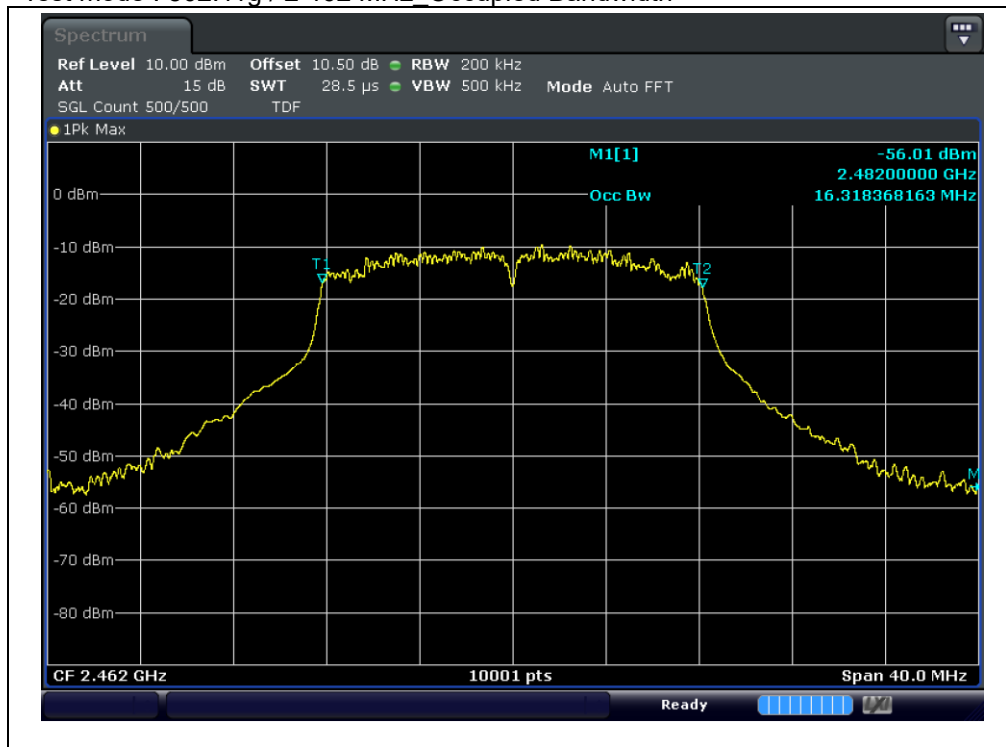


Test mode : 802.11n(HT20) / 2 412 MHz\_Occupied Bandwidth

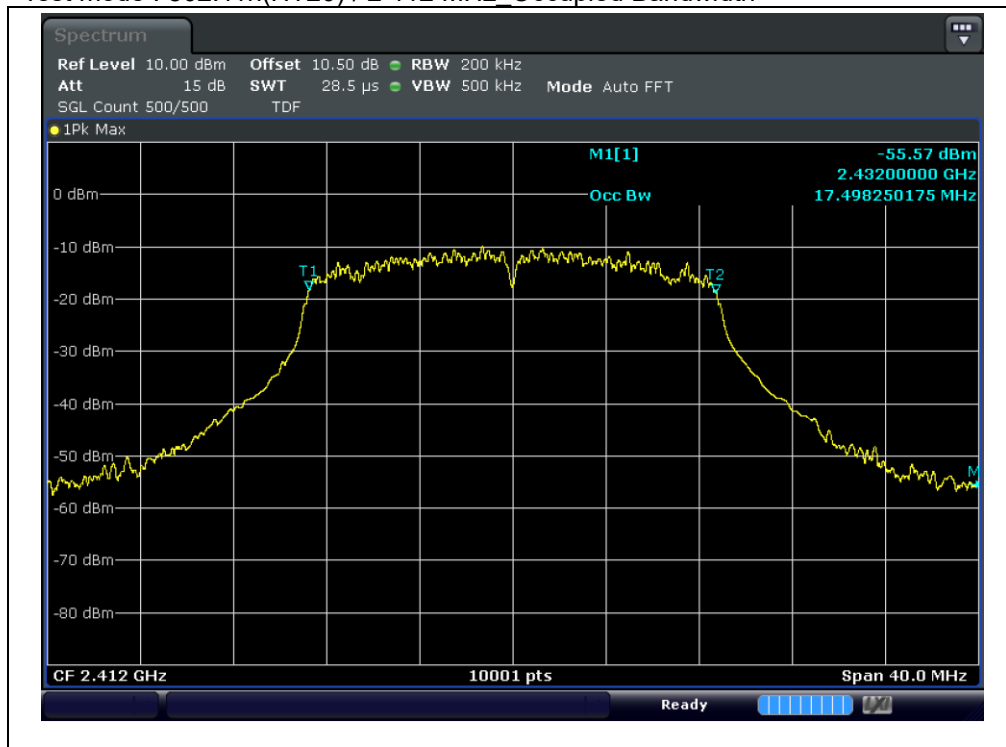

Test mode : 802.11n(HT20) / 2 437 MHz\_Occupied Bandwidth

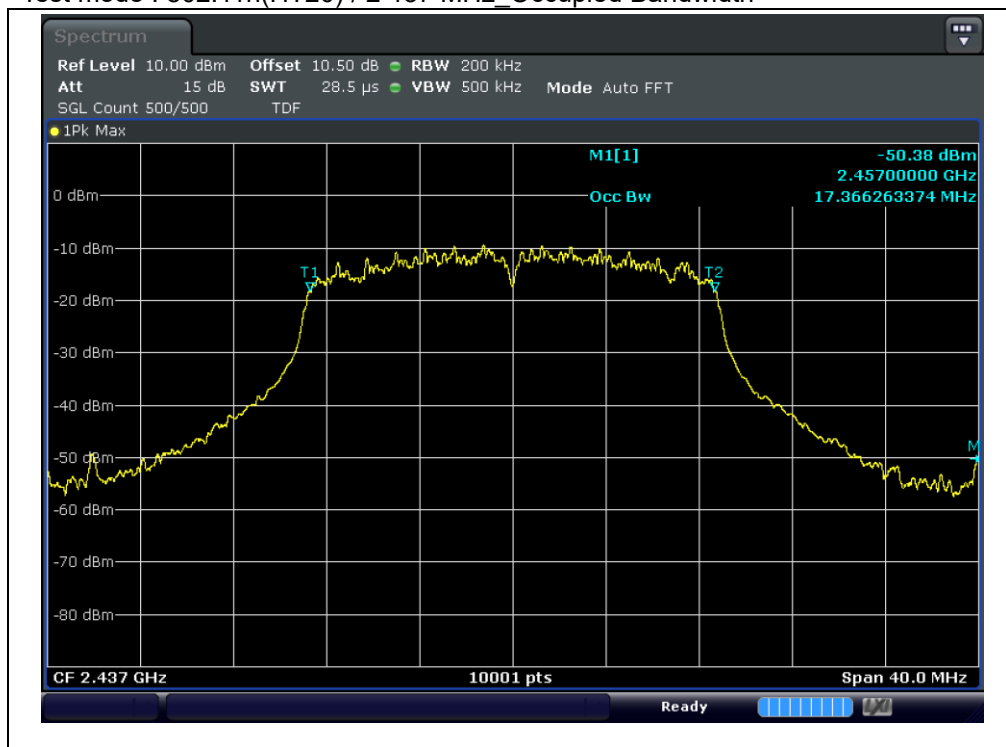

Test mode : 802.11n(HT20) / 2 462 MHz\_Occupied Bandwidth

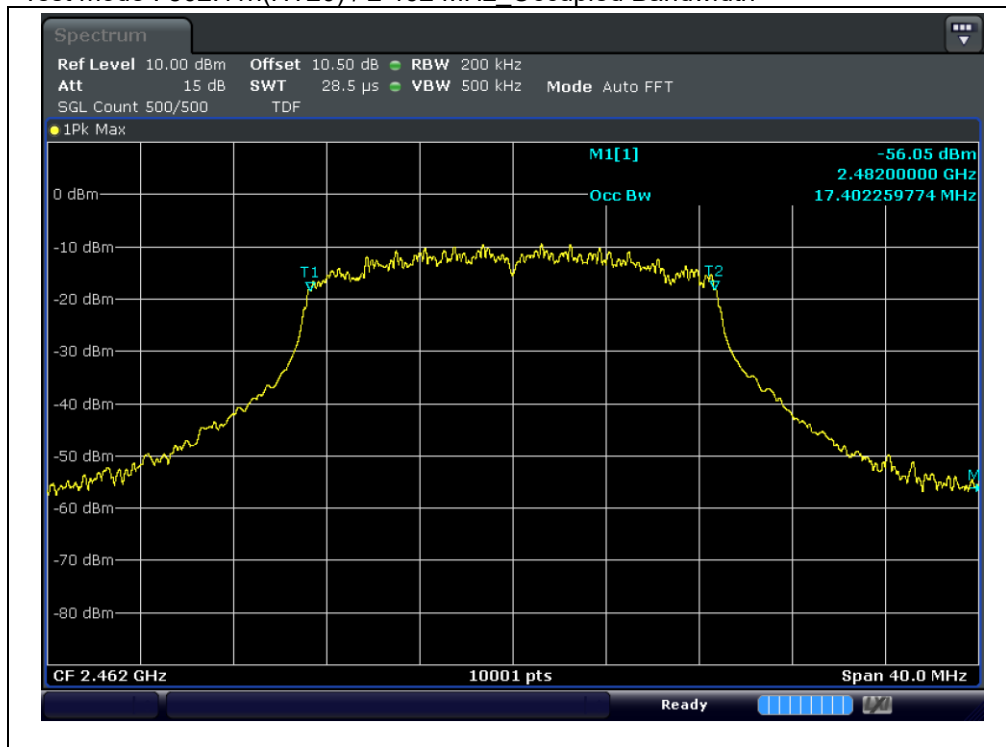

### 4.3.5 Spurious Emission, Band Edge, and Restricted bands

#### 4.3.5.1 Regulation

According to §15.247(d) and RSS-247 §5.5 In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

According to §15.209(a) and RSS-GEN §8.9 Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency(MHz) | Field strength(microvolts/meter) | Measurement distance(meters) |
|----------------|----------------------------------|------------------------------|
| 0.009 - 0.490  | 2 400/F(kHz)                     | 300                          |
| 0.490 - 1.705  | 24 000/F(kHz)                    | 30                           |
| 1.705 - 30.0   | 30                               | 30                           |
| 30 - 88        | 100**                            | 3                            |
| 88 - 216       | 150**                            | 3                            |
| 216 - 960      | 200**                            | 3                            |
| Above 960      | 500                              | 3                            |

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

According to §15.205(a) and (b), and RSS-GEN §8.10 only spurious emissions are permitted in any of the frequency bands listed below:

| MHz                   | MHz                     | MHz               | GHz           |
|-----------------------|-------------------------|-------------------|---------------|
| 0.009 - 0.110         | 16.42 - 16.423          | 399.9 - 410       | 4.5 - 5.15    |
| 0.495 - 0.505         | 16.694 75 - 16.695 25   | 608 - 614         | 5.35 - 5.46   |
| 2.173 5 - 2.190 5     | 16.804 25 - 16.804 75   | 960 – 1 240       | 7.25 - 7.75   |
| 4.125 - 4.128         | 25.5 - 25.67            | 1 300 – 1 427     | 8.025 - 8.5   |
| 4.177 25 - 4.177 75   | 37.5 - 38.25            | 1 435 – 1 626.5   | 9.0 - 9.2     |
| 4.207 25 - 4.207 75   | 73 - 74.6               | 1 645.5 – 1 646.5 | 9.3 - 9.5     |
| 6.215 - 6.218         | 74.8 - 75.2             | 1 660 – 1 710     | 10.6 - 12.7   |
| 6.267 75 - 6.268 25   | 108 - 121.94            | 1 718.8 – 1 722.2 | 13.25 - 13.4  |
| 6.311 75 - 6.312 25   | 123 - 138               | 2 200 – 2 300     | 14.47 - 14.5  |
| 8.291 - 8.294         | 149.9 - 150.05          | 2 310 – 2 390     | 15.35 - 16.2  |
| 8.362 - 8.366         | 156.524 75 - 156.525 25 | 2 483.5 – 2 500   | 17.7 - 21.4   |
| 8.376 25 - 8.386 75   | 156.7 - 156.9           | 2 690 – 2 900     | 22.01 - 23.12 |
| 8.414 25 - 8.414 75   | 162.012 5 - 167.17      | 3 260 – 3 267     | 23.6 - 24.0   |
| 12.29 - 12.293        | 167.72 - 173.2          | 3 332 – 3 339     | 31.2 - 31.8   |
| 12.519 75 - 12.520 25 | 240 - 285               | 3 345.8 – 3 358   | 36.43 - 36.5  |
| 12.576 75 - 12.577 25 | 322 - 335.4             | 3 600 – 4 400     | Above 38.6    |
| 13.36 - 13.41         |                         |                   |               |

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurement

#### 4.3.5.2 Measurement Procedure

##### 4.3.5.2.1 Band-edge Compliance of RF Conducted Emissions

###### 4.3.5.2.1.1 Reference Level Measurement

Establish a reference level by using the following procedure:

- 1) Set instrument center frequency to DTS channel center frequency.
- 2) Set the span to  $\geq 1.5$  times the DTS bandwidth.
- 3) Set the RBW = 100 kHz.
- 4) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- 5) Detector = peak.
- 6) Sweep time = No faster than coupled (auto) time.
- 7) Trace mode = max-hold.
- 8) Allow trace to fully stabilize.
- 9) Use the peak marker function to determine the maximum PSD level.

#### 4.3.5.2.1.2 Emissions Level Measurement

- 1) Set the center frequency and span to encompass frequency range to be measured. Note that the frequency range might need to be divided into multiple frequency ranges to retain frequency resolution.
- 2) Set the RBW = 100 kHz.
- 3) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- 4) Detector = peak.
- 5) Sweep time = No faster than coupled (auto) time.
- 6) Trace mode = max-hold.
- 7) Allow trace to fully stabilize.
- 8) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

#### 4.3.5.2.2 Conducted Spurious Emissions

Set the spectrum analyzer as follows:

- 1) Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
- 2) RBW = 100 kHz
- 3) VBW  $\geq 3 \times \text{RBW}$
- 4) Sweep = auto
- 5) Detector function = peak
- 6) Trace = max hold
- 7) Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
- 8) Each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.

#### 4.3.5.2.3 Radiated Spurious Emissions

- 1) The preliminary and final radiated measurements were performed to determine the frequency producing the maximum emissions in at a 10m anechoic chamber. The EUT was tested at a distance 3 meters.
- 2) The EUT was placed on the top of the 0.8 m height or 1.5 m height non-metallic table. To find the maximum emission levels, the height of a measuring antenna was changed and the turntable was rotated 360°.
- 3) The antenna polarization was also changed from vertical to horizontal. The spectrum was scanned from 9 kHz to 30 MHz using the loop antenna, and from 30 to 1 000 MHz using the TRILOG broadband antenna, and from 1 000 MHz to 26 500 MHz using the horn antenna.
- 4) Each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.

NOTE1 : The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1 GHz.

NOTE2 : The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz.  
The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz(1/T) for Average detection (AV) at frequency above 1 GHz. (where T= pulse width)

NOTE3 : The 0.8 m height is for below 1 GHz testing, and 1.5 m is for above 1 GHz testing Below 1 GHz Measured

#### 4.3.5.3 Note

##### - Below 1GHz

Note 1 : Measured the worst case.  
Note 2 : Loss : Cable loss - Amp gain  
Note 3 : Result : Reading + Ant Factor + Loss  
Note 4 : Measured distance : 3 m

##### - Above 1GHz

Note 1 : Factor : Ant Factor + Cable loss - Amp gain + Distance Factor  
Note 2 : Peak Result : Reading + Factor  
Note 3 : Average Result : Average Reading + Factor + Average Factor  
Note 4 : Average Factor :  $10\log(1/\text{Dutycycle})$  \* Refer to 4.3.5.8  
Note 5 : Measured distance : 1 m, Distance Factor =  $20\log(1 / 3) = -9.54 / 3$  m  
Note 6 : Average measurement did not take place because the peak data did not exceed Average Limit.  
Note 7 : Not Detected means that peak data does not exceed the average limit.

#### 4.3.5.4 Result

**Comply** (measurement data : refer to the next page)

#### 4.3.5.5 Measurement data

Test mode : Below 1 GHz ( Worst case : 802.11g 2 412 MHz)

| Frequency (MHz) | Detector | Pol. (V/H) | Reading (dBμV) | Ant Factor (dB) | Loss (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|----------|------------|----------------|-----------------|-----------|-----------------|----------------|-------------|
| 32.18           | QP       | V          | 46.00          | 18.40           | -29.50    | 34.90           | 40.00          | 5.10        |
| 71.95           | QP       | H          | 43.00          | 17.10           | -28.70    | 31.40           | 40.00          | 8.60        |
| 71.95           | QP       | V          | 49.20          | 17.10           | -28.70    | 37.60           | 40.00          | 2.40        |
| 143.97          | QP       | H          | 46.10          | 19.40           | -27.90    | 37.60           | 43.50          | 5.90        |
| 143.97          | QP       | V          | 40.80          | 19.40           | -27.90    | 32.30           | 43.50          | 11.20       |
| 456.06          | QP       | H          | 39.30          | 23.40           | -26.50    | 36.20           | 46.00          | 9.80        |

Test mode : Above 1 GHz / Bluetooth LE 2 402 MHz

| Frequency (MHz) | Detector | Pol. (V/H) | Reading (dBμV) | Factor (dB) | Dutycycle Factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|----------|------------|----------------|-------------|-----------------------|-----------------|----------------|-------------|
| 2 387.01        | PK       | V          | 42.30          | -3.64       | -                     | 38.66           | 74.00          | 35.34       |
| 2 389.01        | PK       | H          | 43.60          | -3.64       | -                     | 39.96           | 74.00          | 34.04       |

Test mode : Above 1 GHz / Bluetooth LE 2 440 MHz

| Frequency (MHz) | Detector | Pol. (V/H) | Reading (dBμV) | Factor (dB) | Dutycycle Factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|----------|------------|----------------|-------------|-----------------------|-----------------|----------------|-------------|
|                 |          |            | Not Detected   |             |                       |                 |                |             |
|                 |          |            |                |             |                       |                 |                |             |

Test mode : Above 1 GHz / Bluetooth LE 2 480 MHz

| Frequency (MHz) | Detector | Pol. (V/H) | Reading (dBμV) | Factor (dB) | Dutycycle Factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|----------|------------|----------------|-------------|-----------------------|-----------------|----------------|-------------|
| 2 483.59        | PK       | H          | 56.90          | -3.24       | -                     | 53.66           | 74.00          | 20.34       |
|                 | AV       | H          | 42.70          | -3.24       | 2.05                  | 41.51           | 54.00          | 12.49       |
| 2 483.59        | PK       | V          | 60.40          | -3.24       | -                     | 57.16           | 74.00          | 16.84       |
|                 | AV       | V          | 43.40          | -3.24       | 2.05                  | 42.21           | 54.00          | 11.79       |

Test mode : Above 1 GHz / 802.11b 2 412 MHz

| Frequency (MHz) | Detector | Pol. (V/H) | Reading (dBμV) | Factor (dB) | Dutycycle Factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|----------|------------|----------------|-------------|-----------------------|-----------------|----------------|-------------|
| 2 383.75        | PK       | H          | 47.30          | -3.74       | -                     | 43.56           | 74.00          | 30.44       |
| 2 384.75        | PK       | V          | 49.50          | -3.74       | -                     | 45.76           | 74.00          | 28.24       |

Test mode : Above 1 GHz / 802.11b 2 437 MHz

| Frequency (MHz) | Detector | Pol. (V/H) | Reading (dBμV) | Factor (dB) | Dutycycle Factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|----------|------------|----------------|-------------|-----------------------|-----------------|----------------|-------------|
|                 |          |            | Not Detected   |             |                       |                 |                |             |
|                 |          |            |                |             |                       |                 |                |             |

Test mode : Above 1 GHz / 802.11b 2 462 MHz

| Frequency (MHz) | Detector | Pol. (V/H) | Reading (dBμV) | Factor (dB) | Dutycycle Factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|----------|------------|----------------|-------------|-----------------------|-----------------|----------------|-------------|
| 2 488.50        | PK       | H          | 48.40          | -3.24       | -                     | 45.16           | 74.00          | 28.84       |
| 2 489.00        | PK       | V          | 50.80          | -3.24       | -                     | 47.56           | 74.00          | 26.44       |

Test mode : Above 1 GHz / 802.11g 2 412 MHz

| Frequency (MHz) | Detector | Pol. (V/H) | Reading (dBμV) | Factor (dB) | Dutycycle Factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|----------|------------|----------------|-------------|-----------------------|-----------------|----------------|-------------|
| 2 389.00        | PK       | H          | 54.10          | -3.64       | -                     | 50.46           | 74.00          | 23.54       |
| 2 389.50        | PK       | V          | 59.10          | -3.64       | -                     | 55.46           | 74.00          | 18.54       |
|                 | AV       | V          | 42.10          | -3.64       | -                     | 38.46           | 54.00          | 15.54       |

Test mode : Above 1 GHz / 802.11g 2 437 MHz

| Frequency (MHz) | Detector | Pol. (V/H) | Reading (dBμV) | Factor (dB) | Dutycycle Factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|----------|------------|----------------|-------------|-----------------------|-----------------|----------------|-------------|
|                 |          |            | Not Detected   |             |                       |                 |                |             |
|                 |          |            |                |             |                       |                 |                |             |

Test mode : Above 1 GHz / 802.11g 2 462 MHz

| Frequency (MHz) | Detector | Pol. (V/H) | Reading (dBμV) | Factor (dB) | Dutycycle Factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|----------|------------|----------------|-------------|-----------------------|-----------------|----------------|-------------|
| 2 483.50        | PK       | H          | 62.40          | -3.24       | -                     | 59.16           | 74.00          | 14.84       |
| 2 484.25        | PK       | V          | 63.60          | -3.24       | -                     | 60.36           | 74.00          | 13.64       |
|                 | AV       | V          | 45.00          | -3.24       | -                     | 41.76           | 54.00          | 12.24       |

Test mode : Above 1 GHz / 802.11n(HT20) 2 412 MHz

| Frequency (MHz) | Detector | Pol. (V/H) | Reading (dBμV) | Factor (dB) | Dutycycle Factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|----------|------------|----------------|-------------|-----------------------|-----------------|----------------|-------------|
| 2 385.75        | PK       | H          | 58.70          | -3.74       | -                     | 54.96           | 74.00          | 19.04       |
|                 | AV       | H          | 39.20          | -3.74       | -                     | 35.46           | 54.00          | 18.54       |
| 2 390.00        | PK       | V          | 62.90          | -3.64       | -                     | 59.26           | 74.00          | 14.74       |
|                 | AV       | V          | 40.60          | -3.64       | -                     | 36.96           | 54.00          | 17.04       |

Test mode : Above 1 GHz / 802.11n(HT20) 2 437 MHz

| Frequency (MHz) | Detector | Pol. (V/H) | Reading (dBμV) | Factor (dB) | Dutycycle Factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|----------|------------|----------------|-------------|-----------------------|-----------------|----------------|-------------|
|                 |          |            | Not Detected   |             |                       |                 |                |             |
|                 |          |            |                |             |                       |                 |                |             |

Test mode : Above 1 GHz / 802.11n(HT20) 2 462 MHz


| Frequency (MHz) | Detector | Pol. (V/H) | Reading (dBμV) | Factor (dB) | Dutycycle Factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|----------|------------|----------------|-------------|-----------------------|-----------------|----------------|-------------|
| 2 483.75        | PK       | H          | 62.30          | -3.24       | -                     | 59.06           | 74.00          | 14.94       |
|                 | AV       | H          | 43.90          | -3.24       | -                     | 40.66           | 54.00          | 13.34       |
| 2 485.50        | PK       | V          | 65.80          | -3.24       | -                     | 62.56           | 74.00          | 11.44       |
|                 | AV       | V          | 46.20          | -3.24       | -                     | 42.96           | 54.00          | 11.04       |

Test mode : Simultaneous operation (Bluetooth LE + 2.4 GHz WLAN)


| Frequency (MHz) | Detector | Pol. (V/H) | Reading (dBμV) | Factor (dB) | Dutycycle Factor (dB) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|----------|------------|----------------|-------------|-----------------------|-----------------|----------------|-------------|
| 2 374.50        | PK       | V          | 46.70          | -3.84       | -                     | 42.86           | 74.00          | 31.14       |
| 2 389.25        | PK       | H          | 45.50          | -3.64       | -                     | 41.86           | 74.00          | 32.14       |
| 2 483.75        | PK       | V          | 64.60          | -3.24       | -                     | 61.36           | 74.00          | 12.64       |
|                 | AV       | V          | 42.60          | -3.24       | 2.05                  | 41.41           | 54.00          | 12.59       |
| 2 483.75        | PK       | H          | 62.90          | -3.24       | -                     | 59.66           | 74.00          | 14.34       |
|                 | AV       | H          | 41.80          | -3.24       | 2.05                  | 40.61           | 54.00          | 13.39       |

#### 4.3.5.6 Measurement Plot\_Radiated Spurious Emissions


Test mode : 9 kHz ~ 30 MHz (Worst case : 802.11g 2 412 MHz)

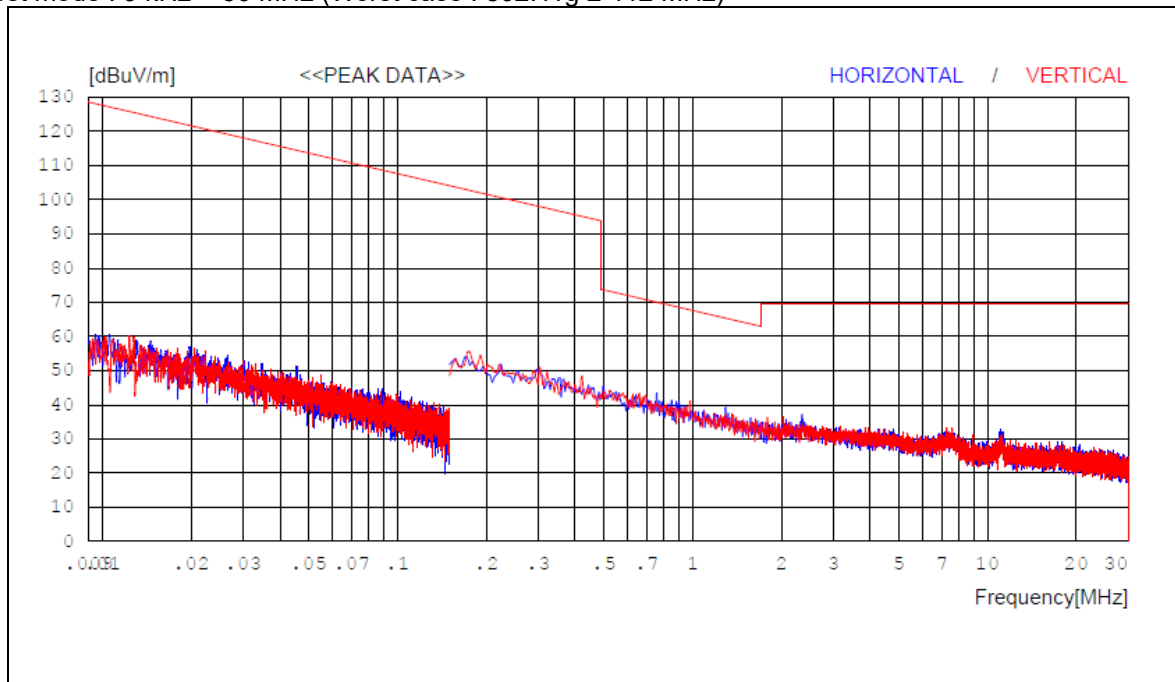


Test mode : 30 MHz ~ 1 GHz (Worst case : 802.11g 2 412 MHz)

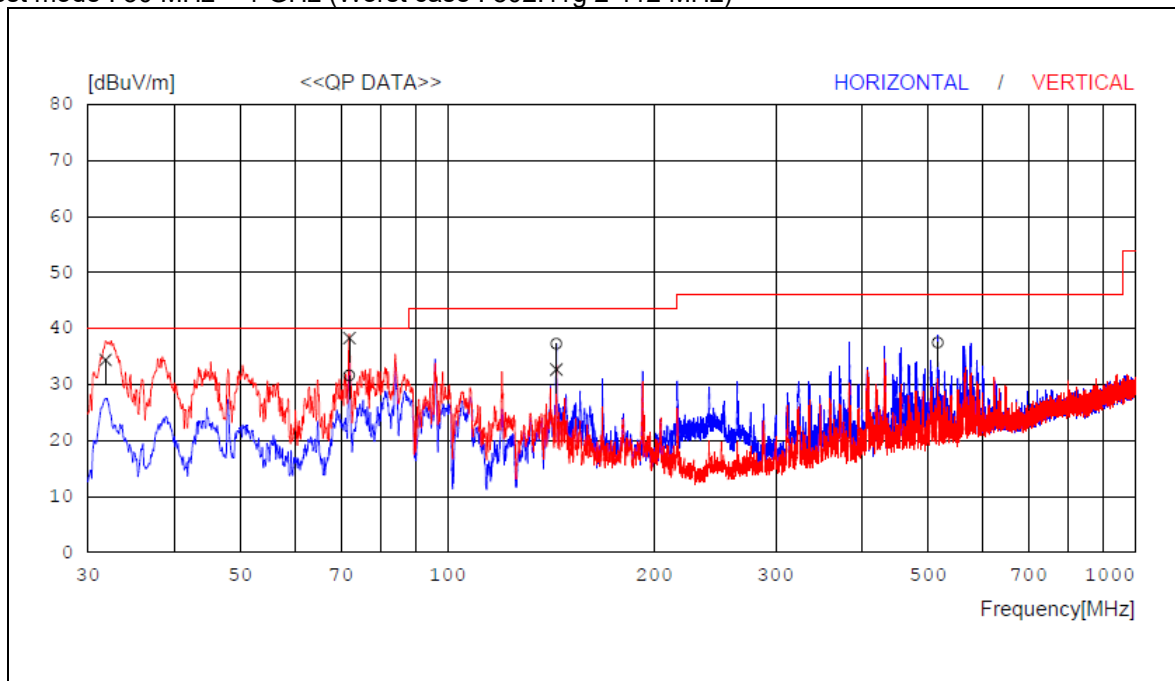


Test mode : 1 GHz ~ 3 GHz (Worst case : 802.11g 2 412 MHz)

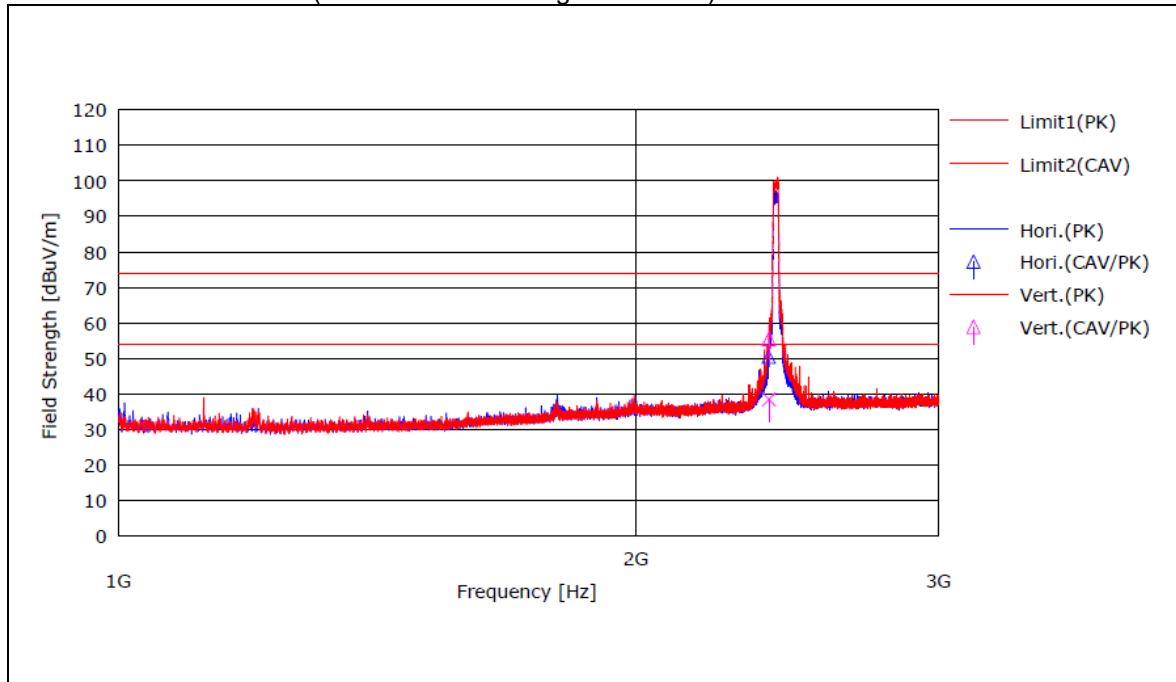

Test mode : 3 GHz ~ 18 GHz (Worst case : 802.11g 2 412 MHz)

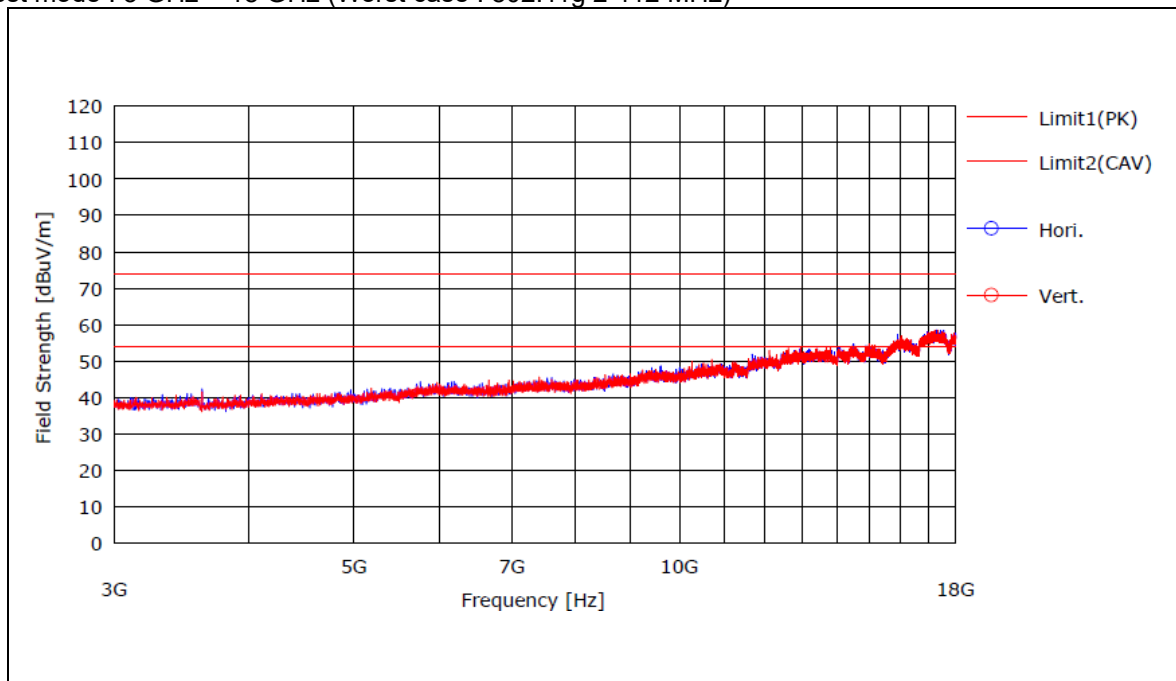


Test mode : 18 GHz ~ 26 GHz (Worst case : 802.11g 2 412 MHz)

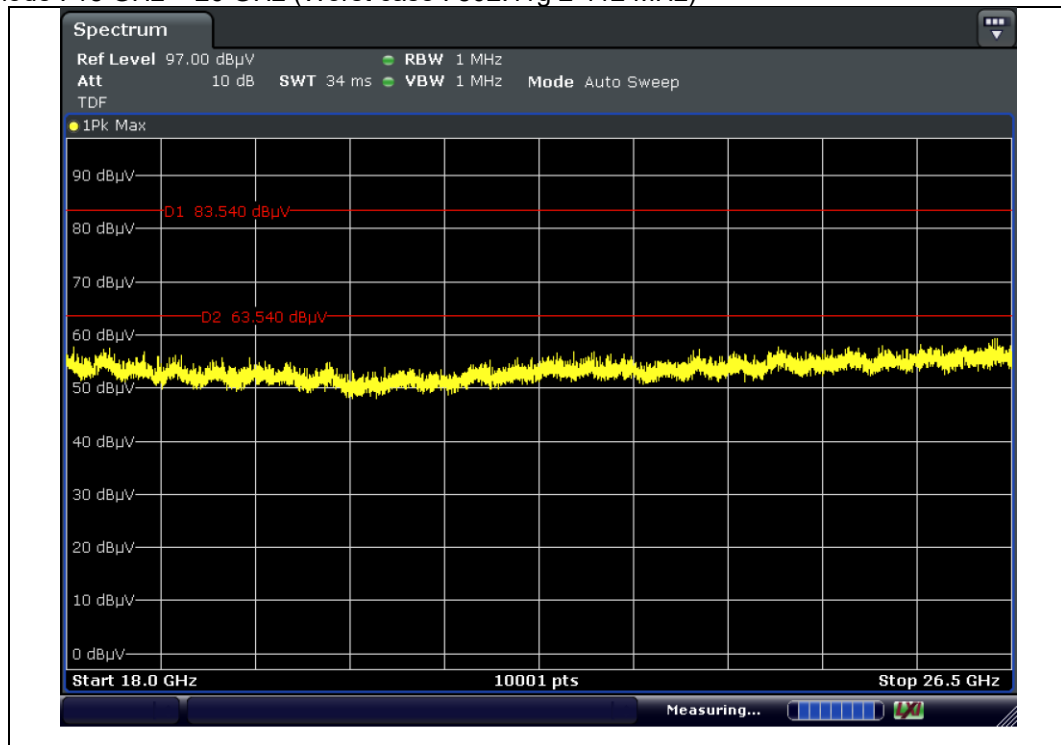


NOTE 1 : Limit : Peak : 83.54 dBμV/m, Average : 63.54 dBμV/m


Test mode : 1 GHz ~ 3 GHz (Bluetooth LE + 2.4 GHz WLAN)

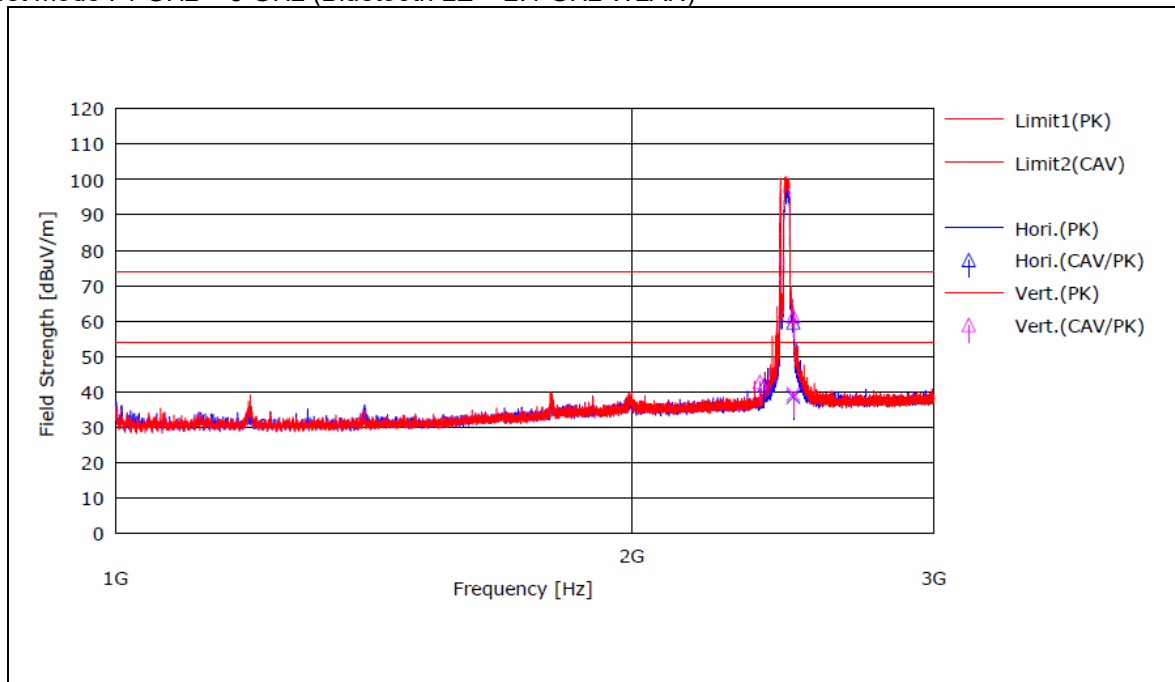


Test mode : 3 GHz ~ 18 GHz (Bluetooth LE + 2.4 GHz WLAN)

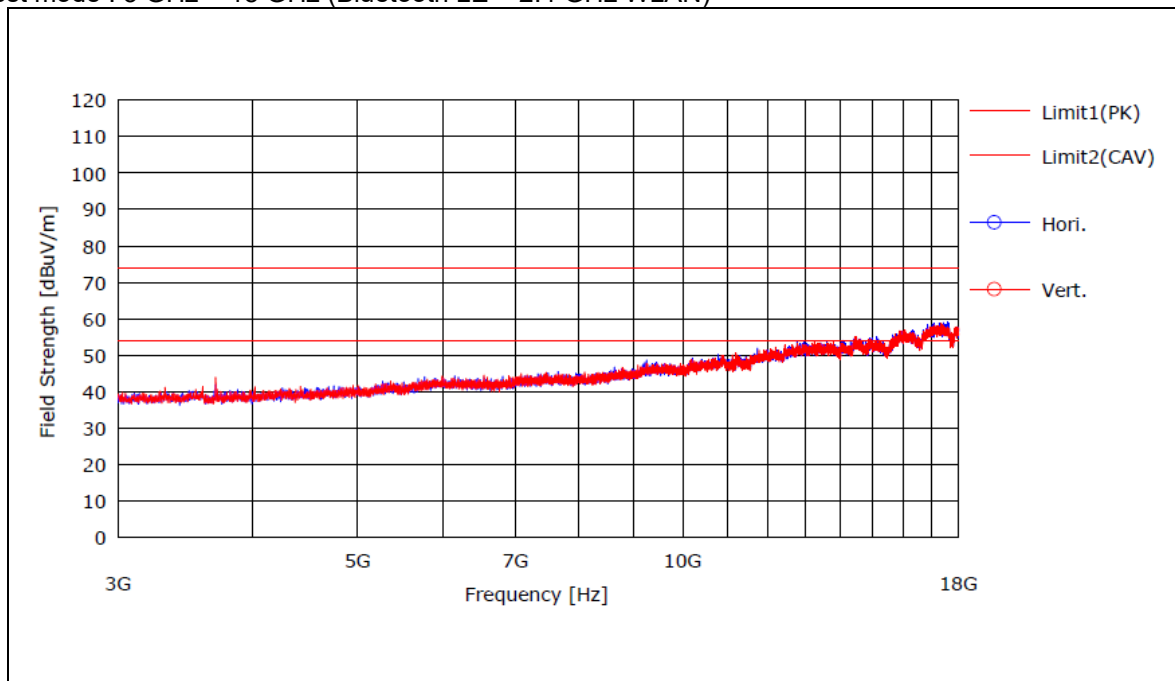


Test mode : Bluetooth LE / Lowest Frequency\_Reference

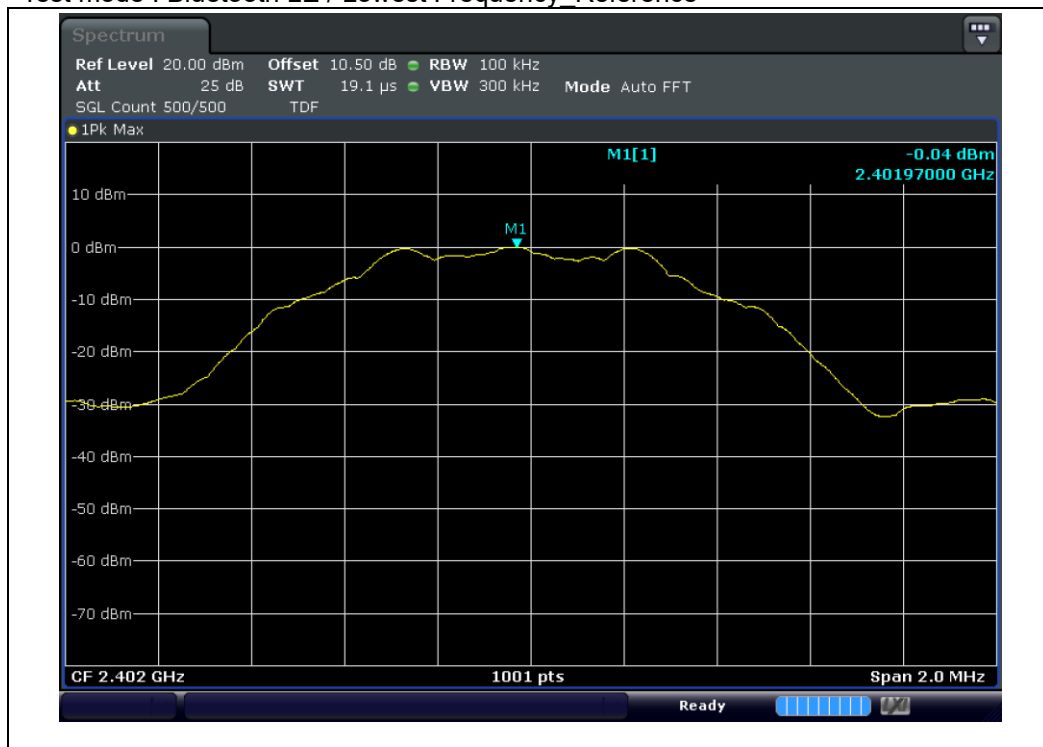


Test mode : Bluetooth LE / Lowest Frequency\_Bandedge

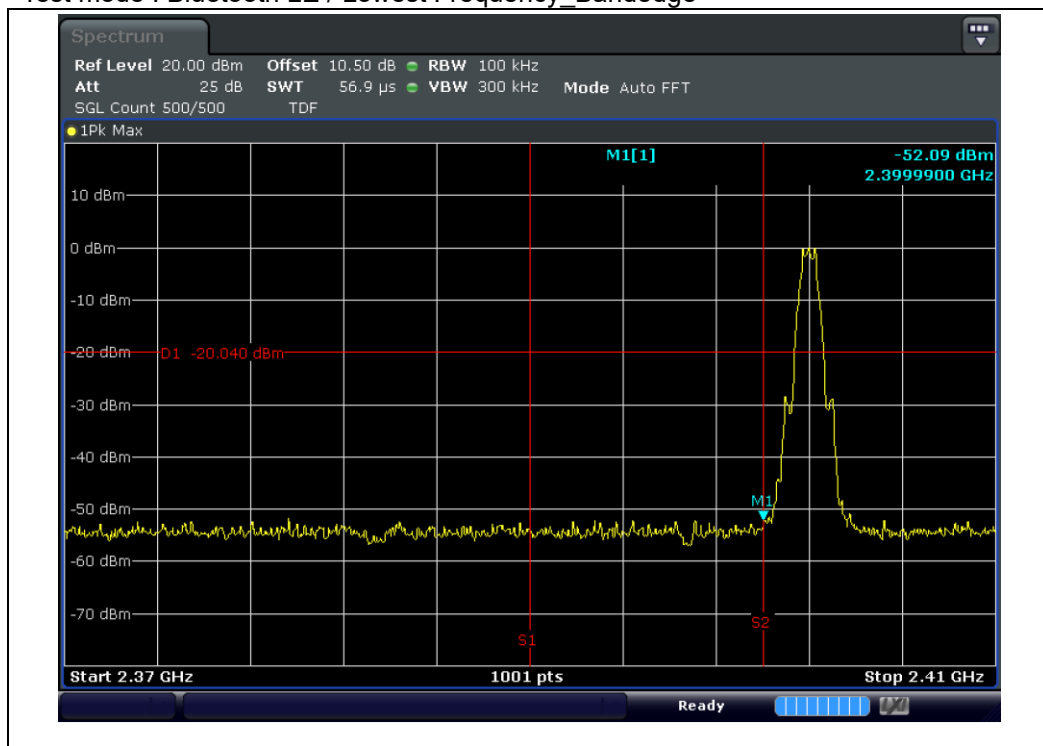


Test mode : Bluetooth LE / Lowest Frequency\_Conducted Spurious Emission

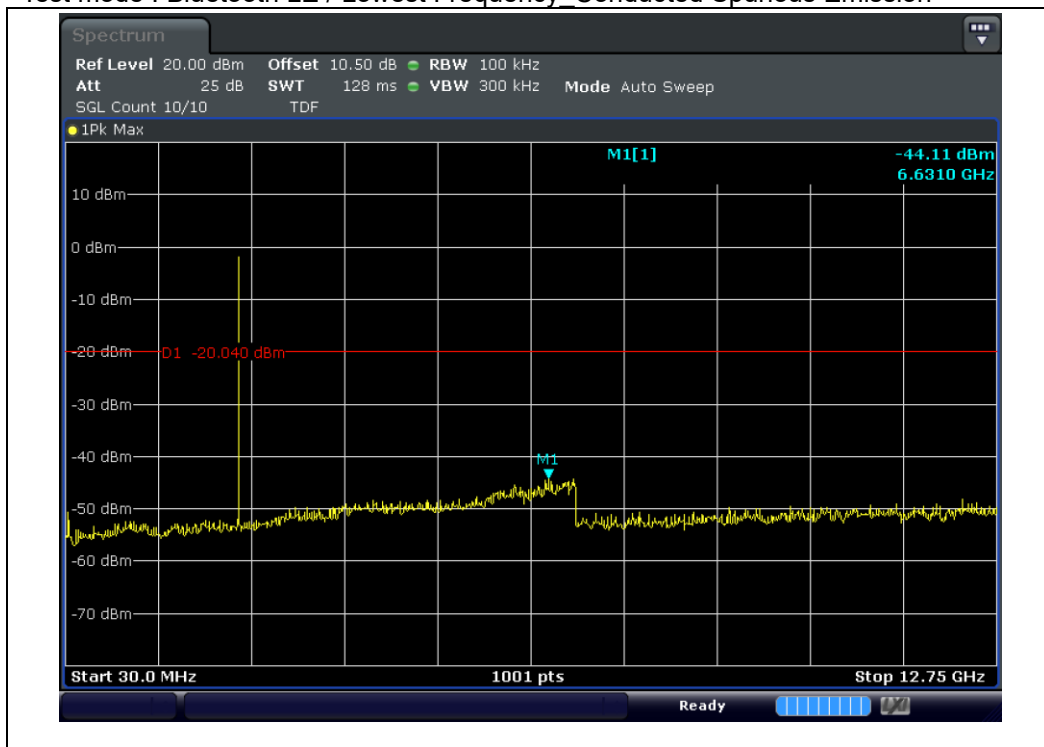


Test mode : Bluetooth LE / Middle Frequency\_Reference

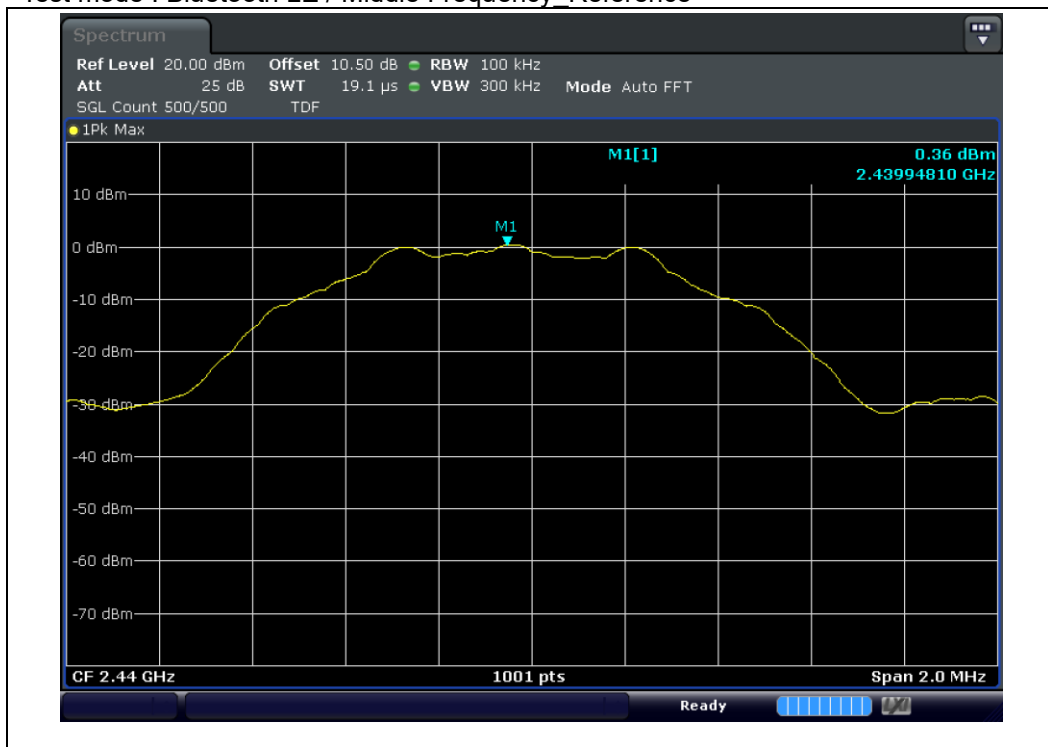


Test mode : Bluetooth LE / Middle Frequency\_Conducted Spurious Emission

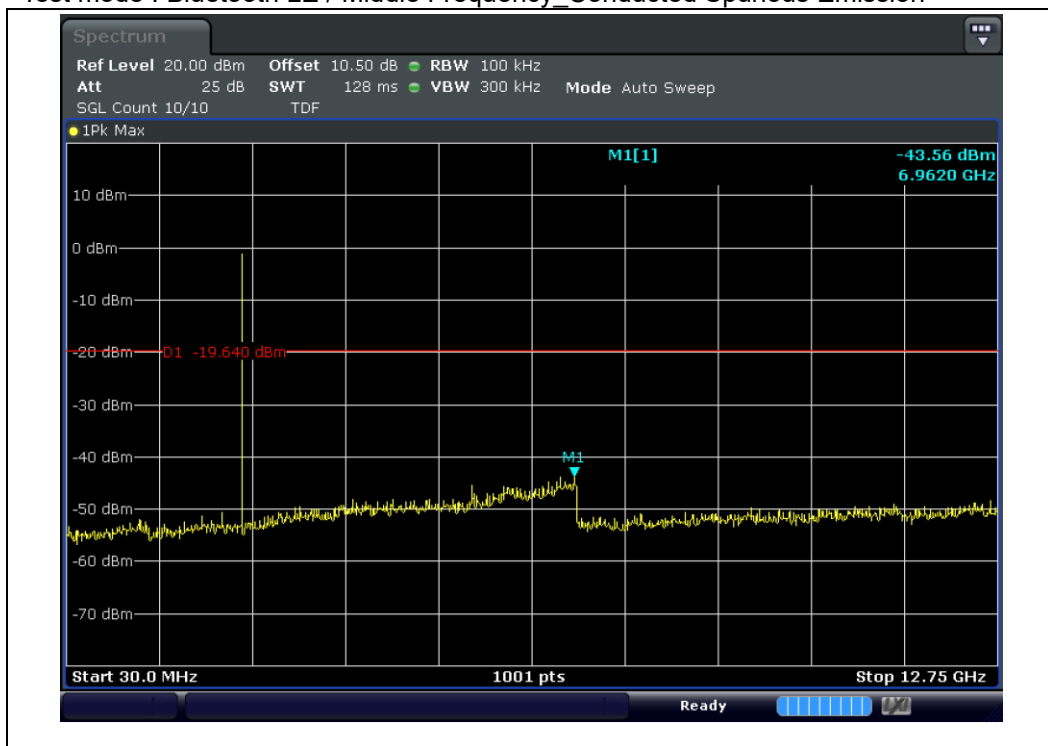


Test mode : Bluetooth LE / Highest Frequency\_Reference

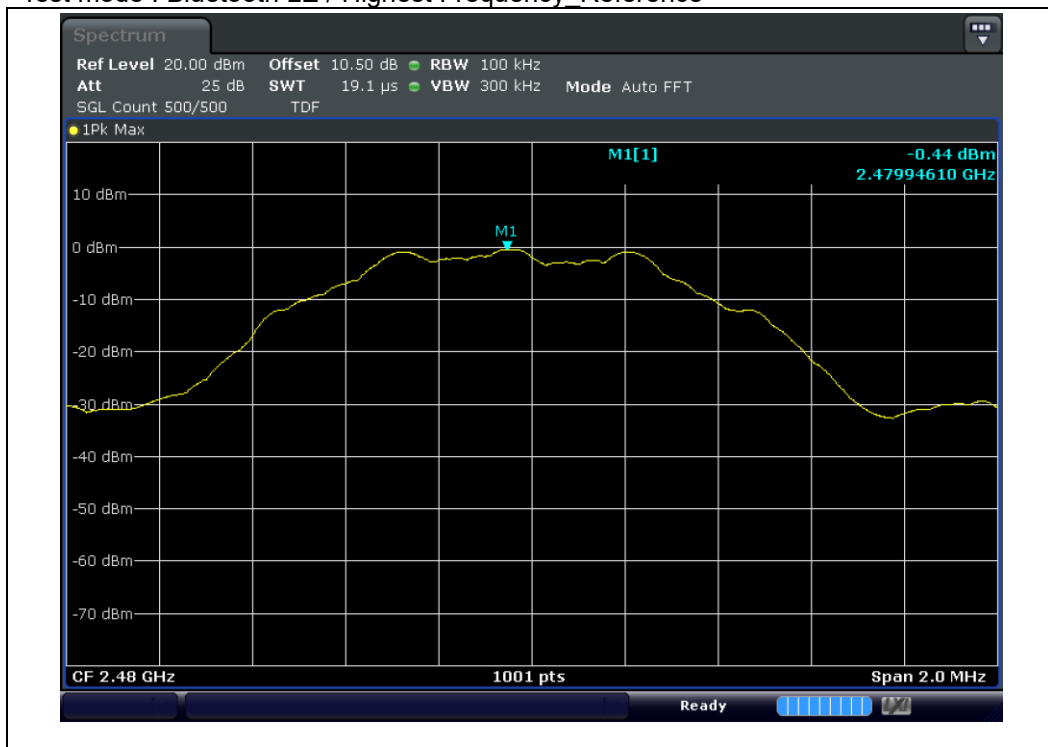


Test mode : Bluetooth LE / Highest Frequency\_Bandedge

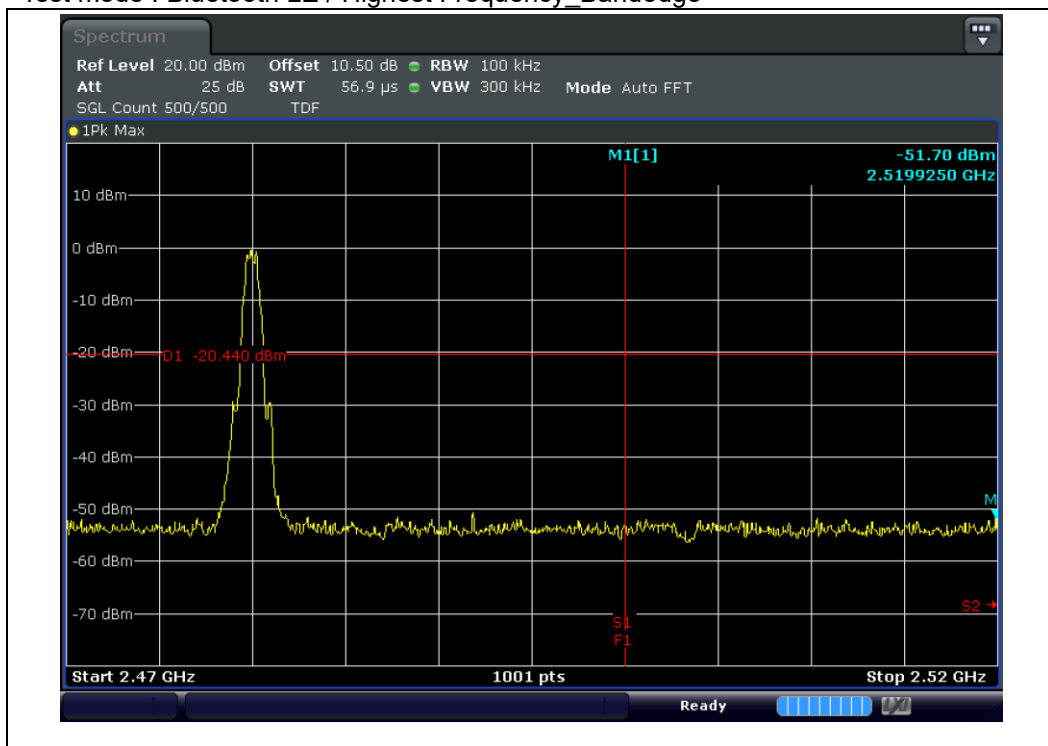


Test mode : Bluetooth LE / Highest Frequency Conducted Spurious Emission

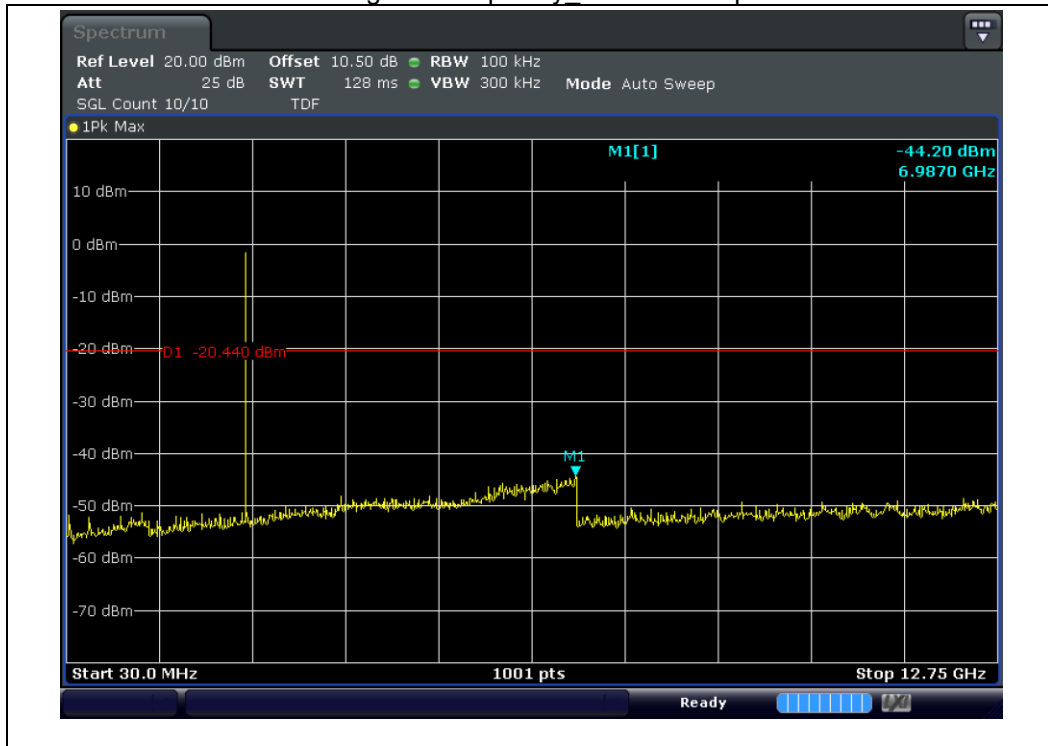


Test mode : 802.11b / Lowest Frequency\_Reference

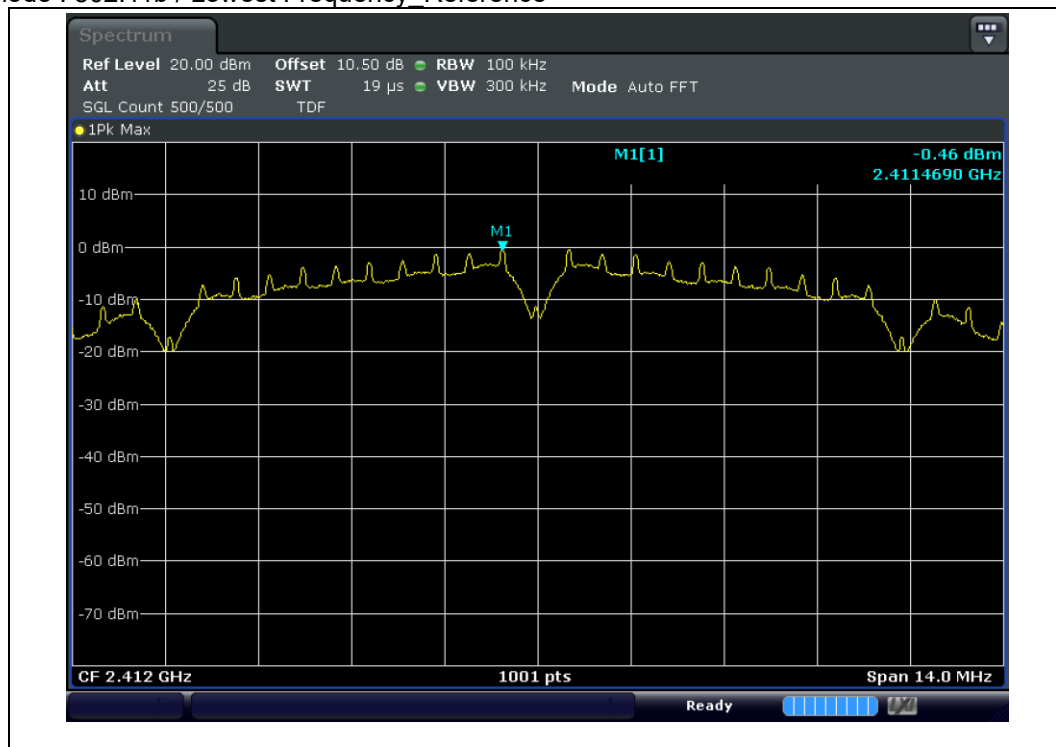


Test mode : 802.11b / Lowest Frequency\_Bandedge

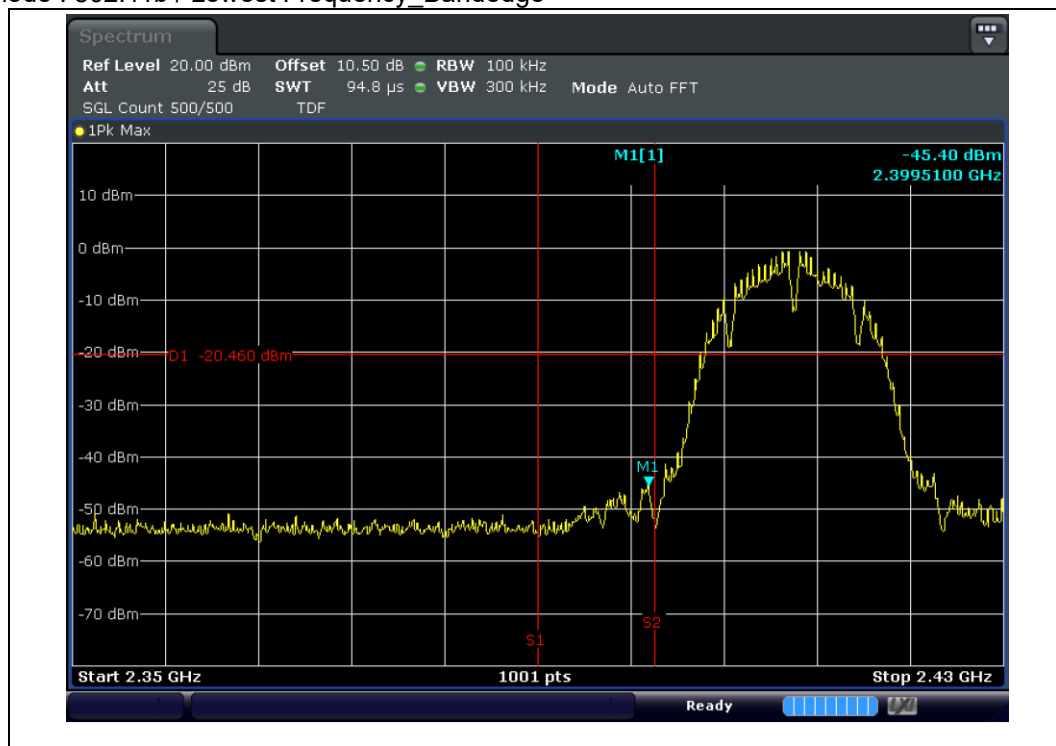


Test mode : 802.11b / Lowest Frequency Conducted Spurious Emission

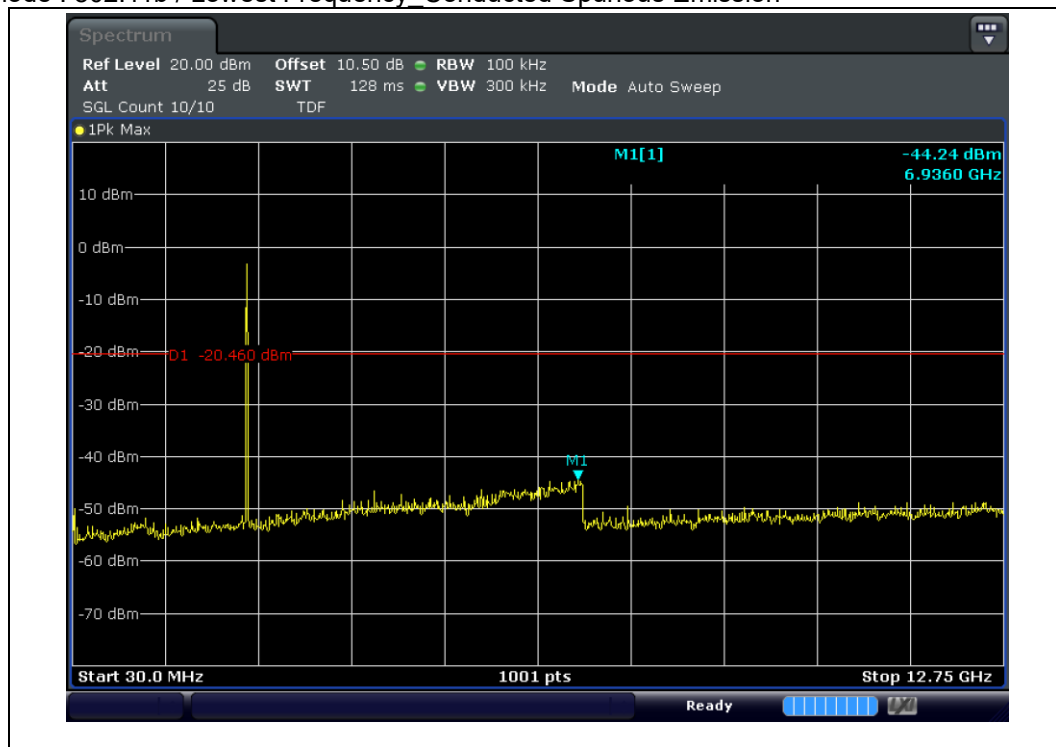


Test mode : 802.11b / Middle Frequency\_Reference

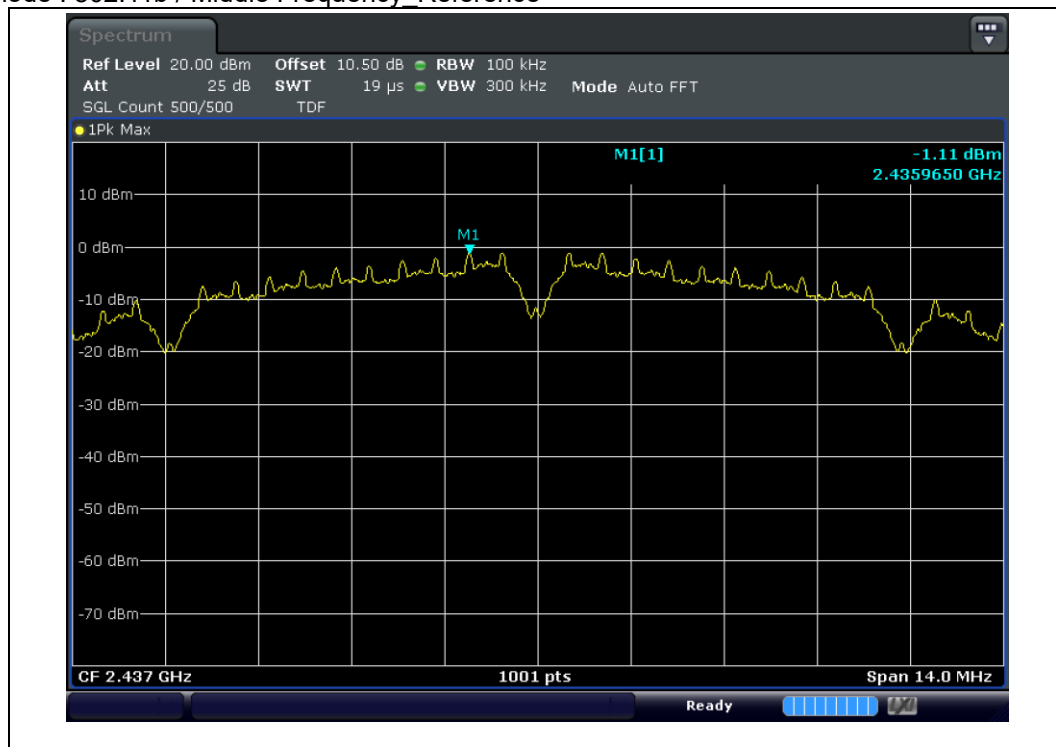


Test mode : 802.11b / Middle Frequency\_Conducted Spurious Emission

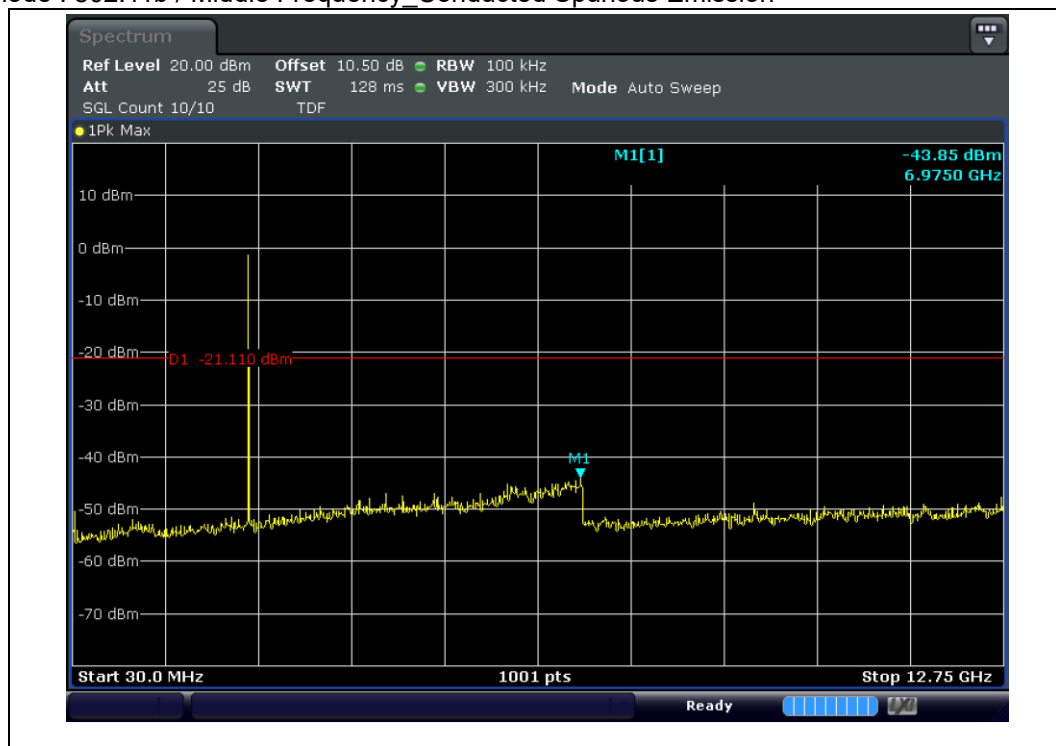


Test mode : 802.11b / Highest Frequency\_Reference

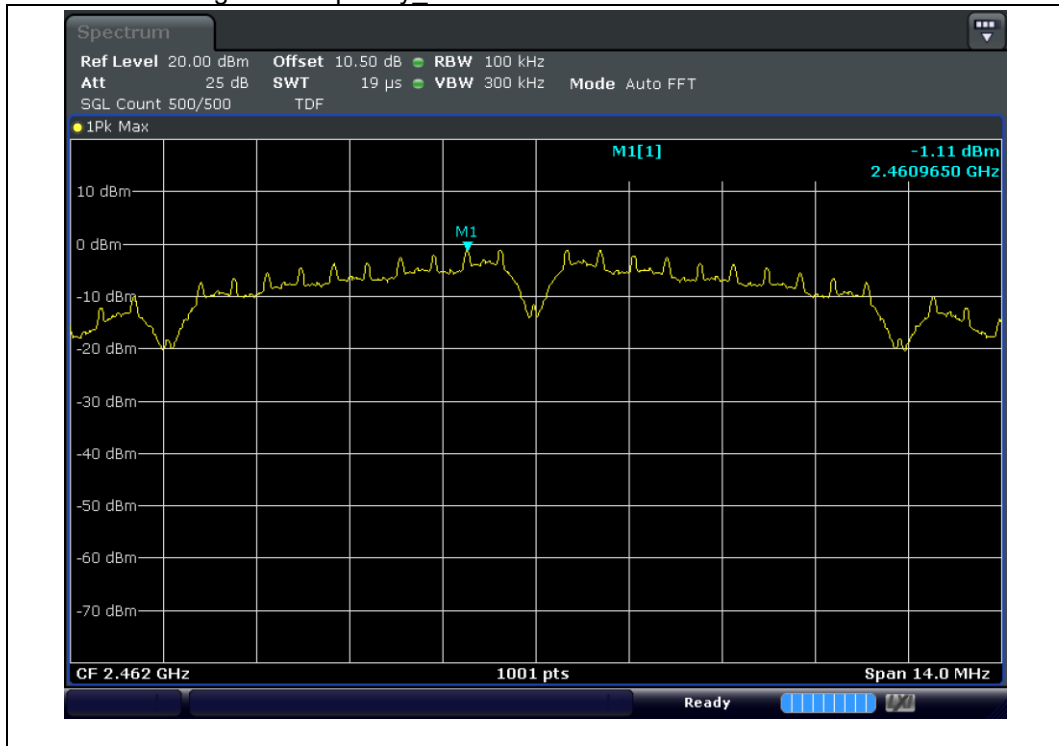


Test mode : 802.11b / Highest Frequency\_Bandedge

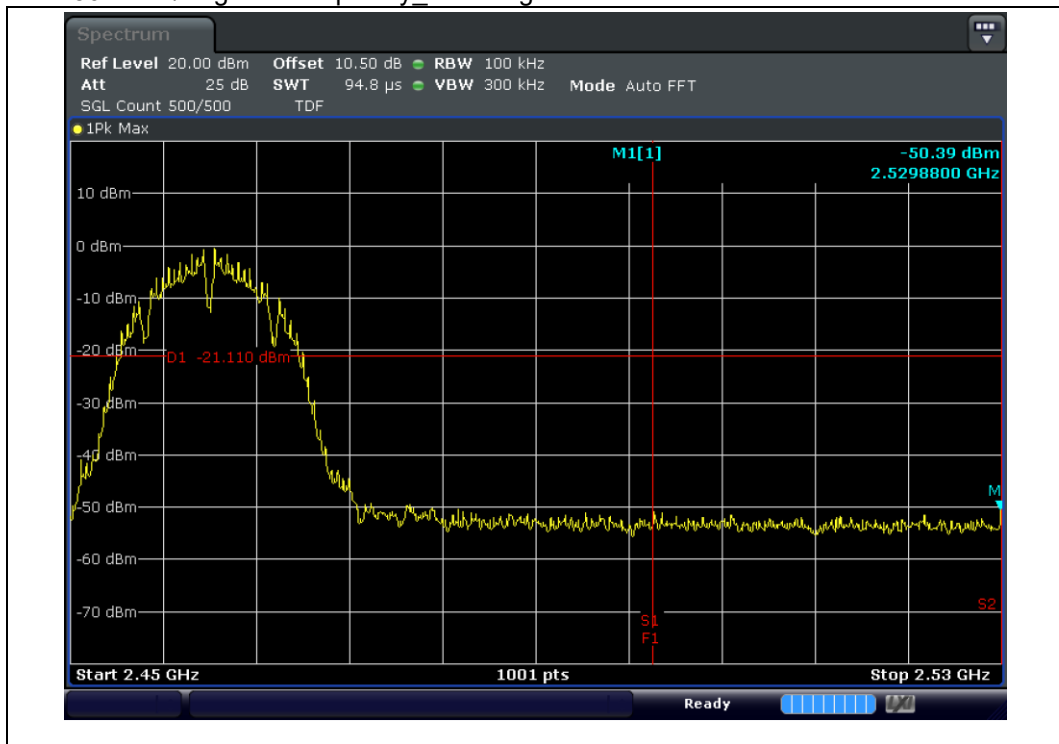


Test mode : 802.11b / Highest Frequency\_Conducted Spurious Emission

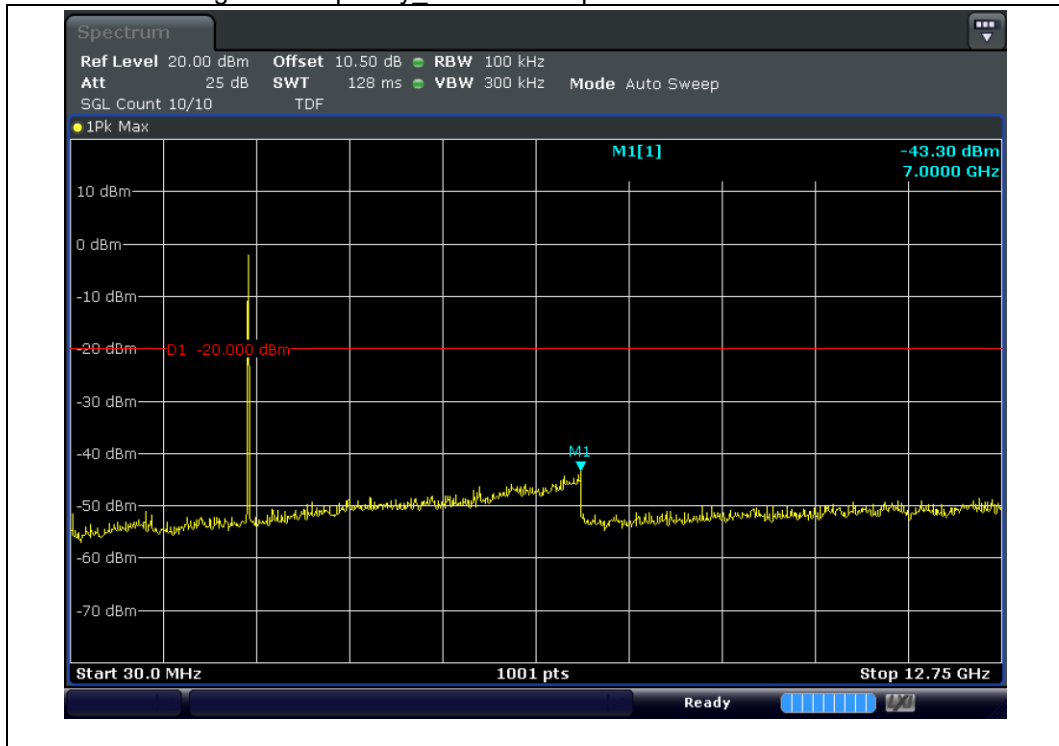


Test mode : 802.11g / Lowest Frequency\_Reference

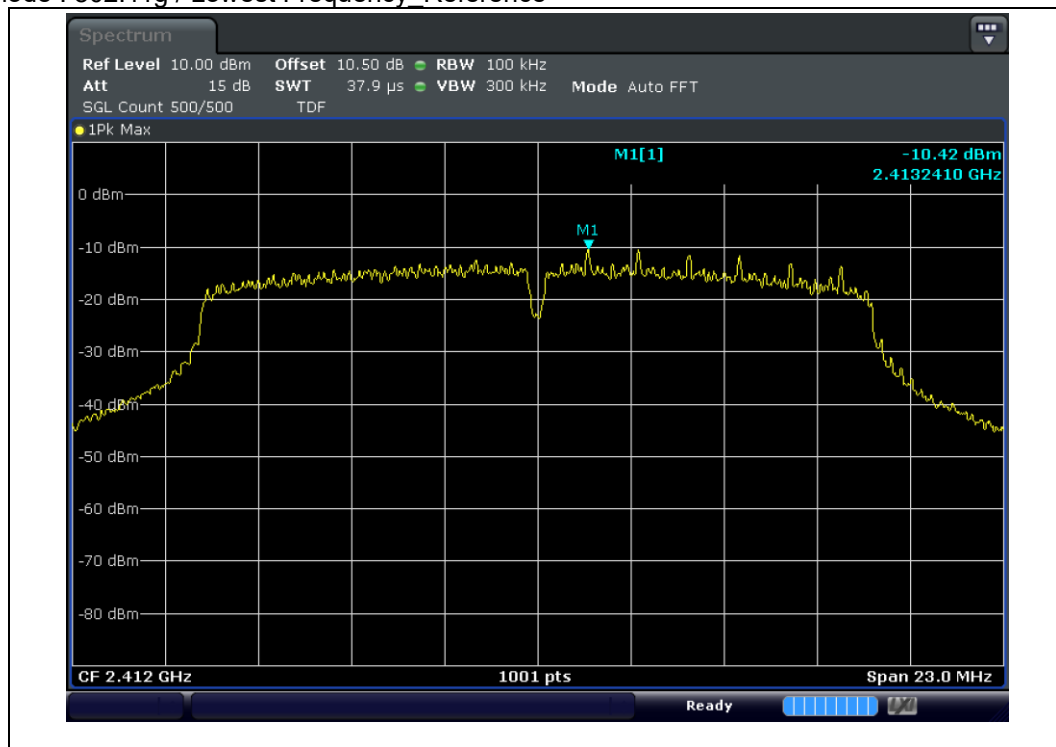


Test mode : 802.11g / Lowest Frequency\_Bandedge

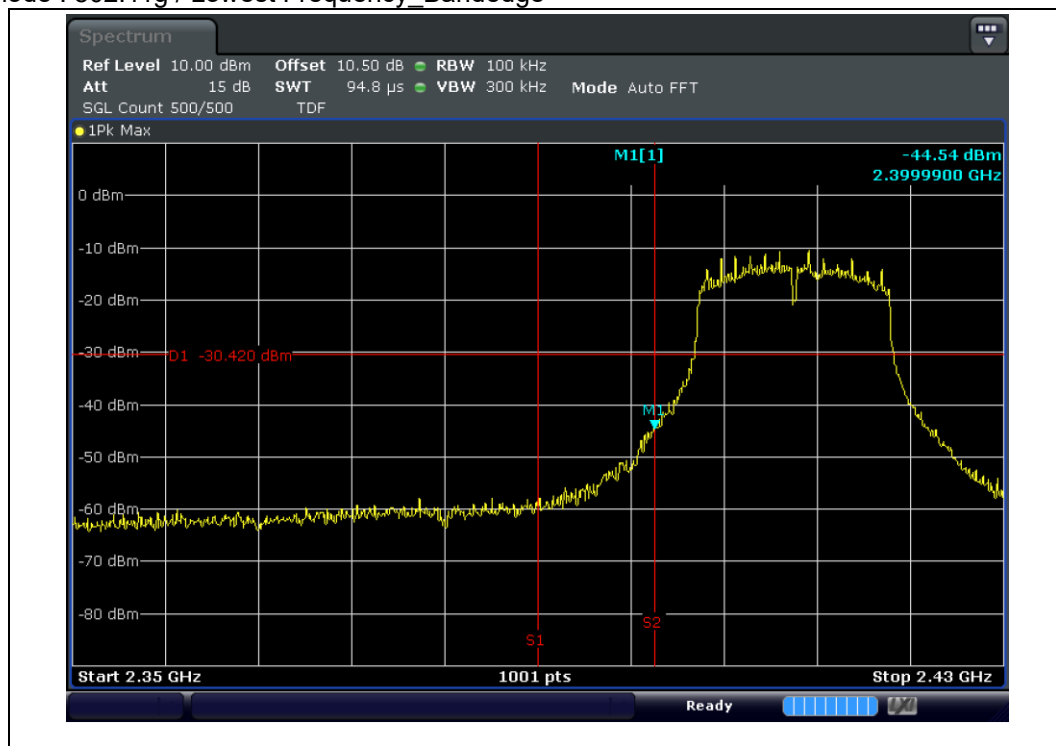


Test mode : 802.11g / Lowest Frequency Conducted Spurious Emission

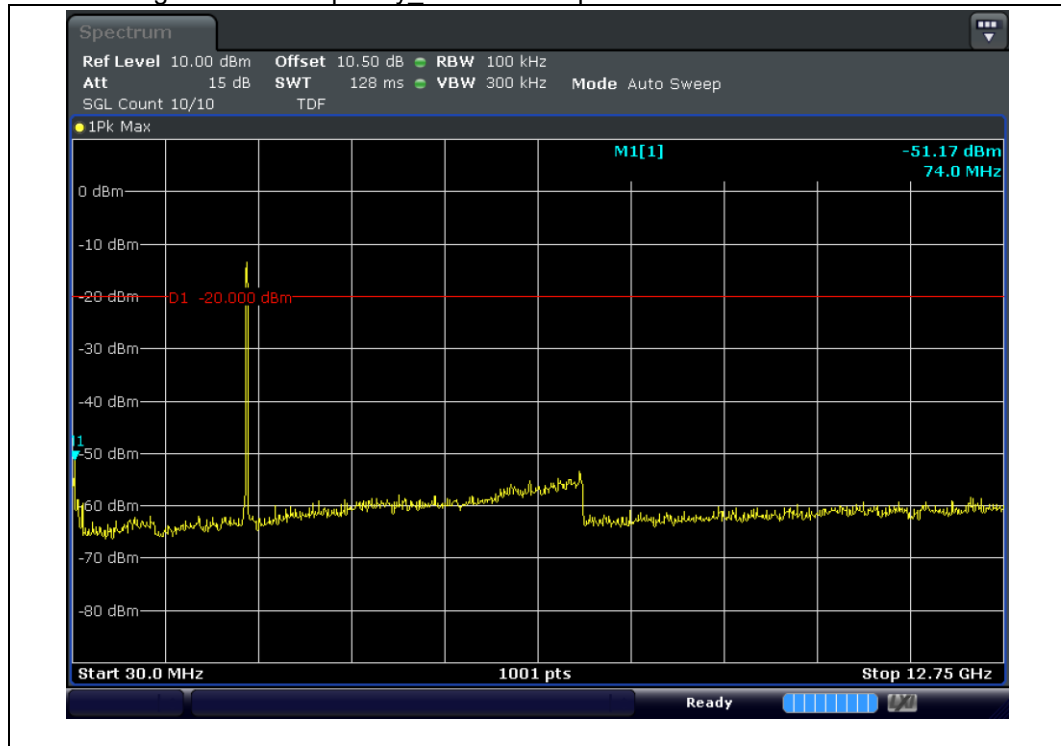


Test mode : 802.11g / Middle Frequency\_Reference

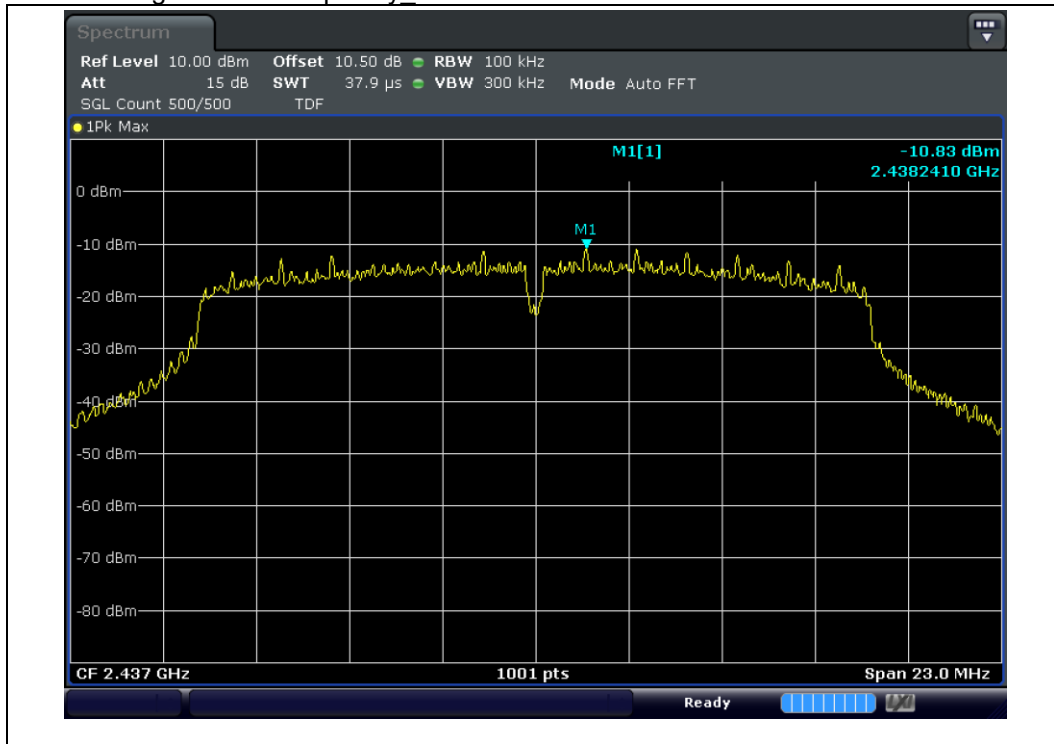


Test mode : 802.11g / Middle Frequency\_Conducted Spurious Emission

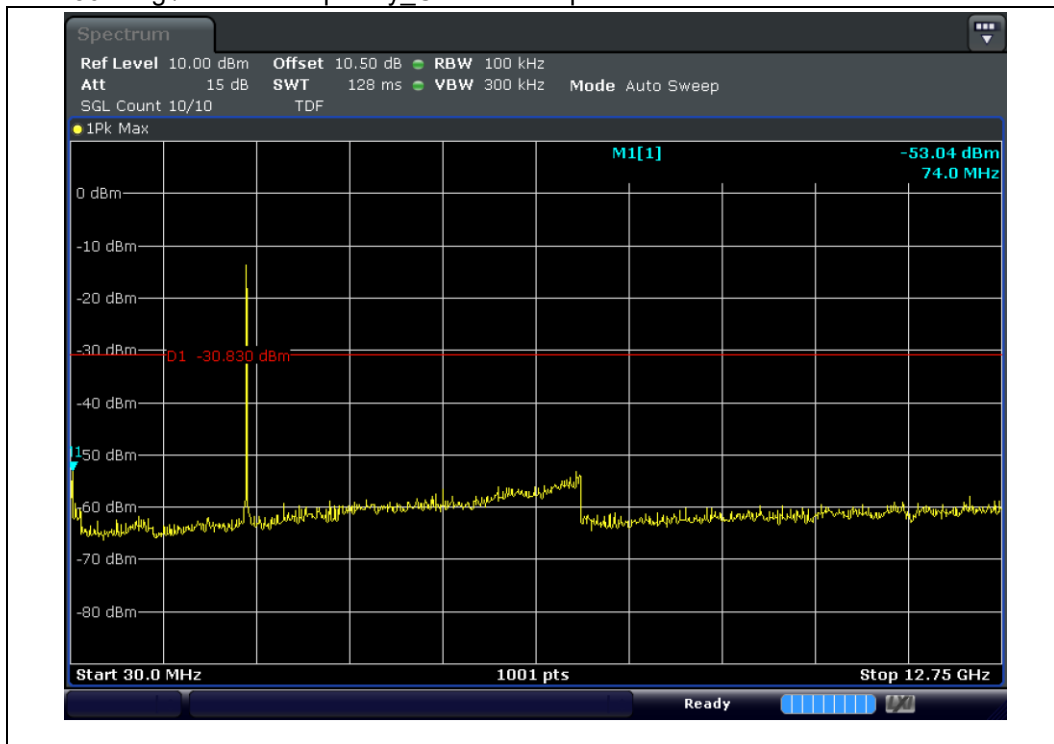


Test mode : 802.11g / Highest Frequency\_Reference

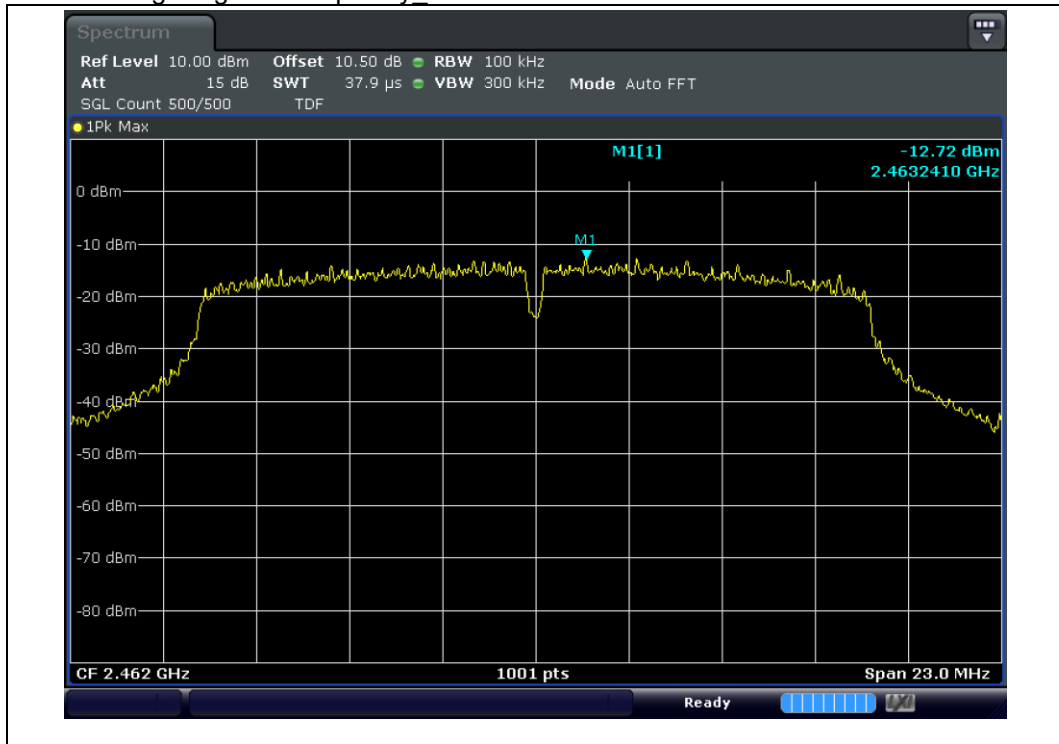


Test mode : 802.11g / Highest Frequency\_Bandedge

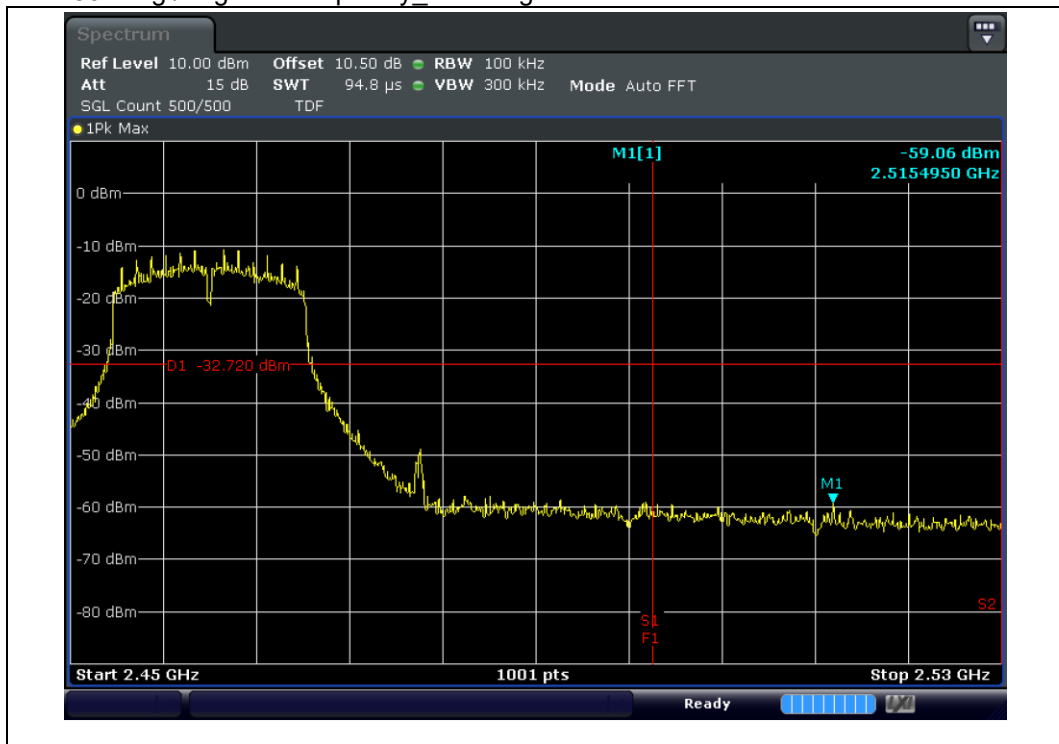


Test mode : 802.11g / Highest Frequency\_Conducted Spurious Emission

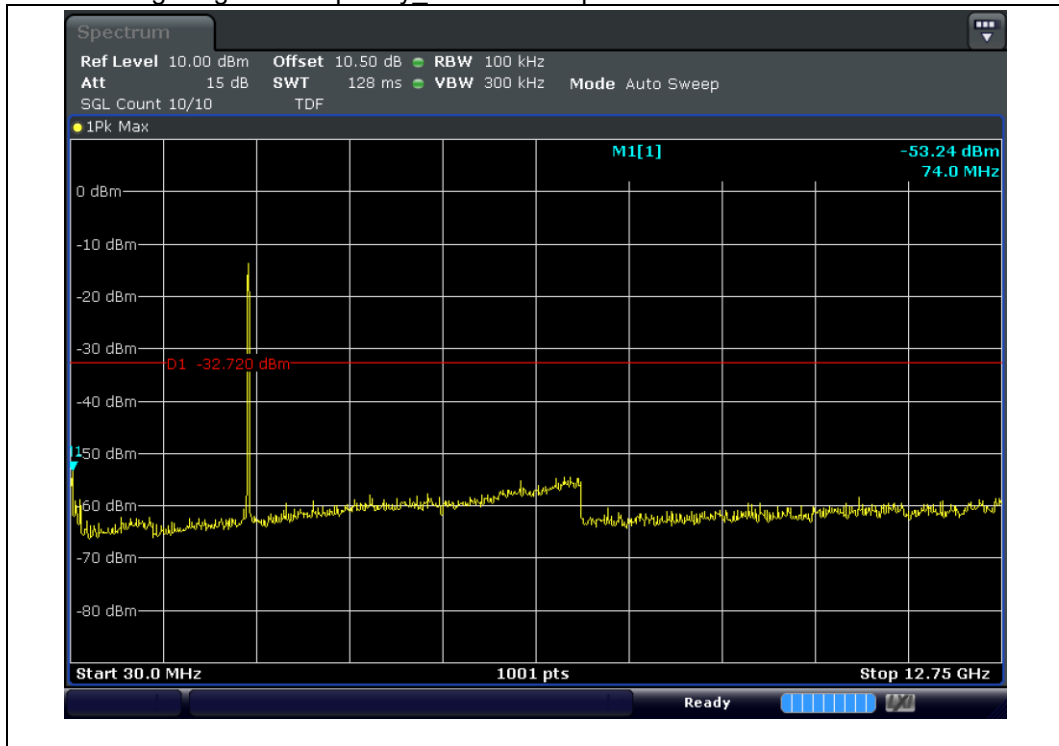


Test mode : 802.11n(HT20) / Lowest Frequency\_Reference

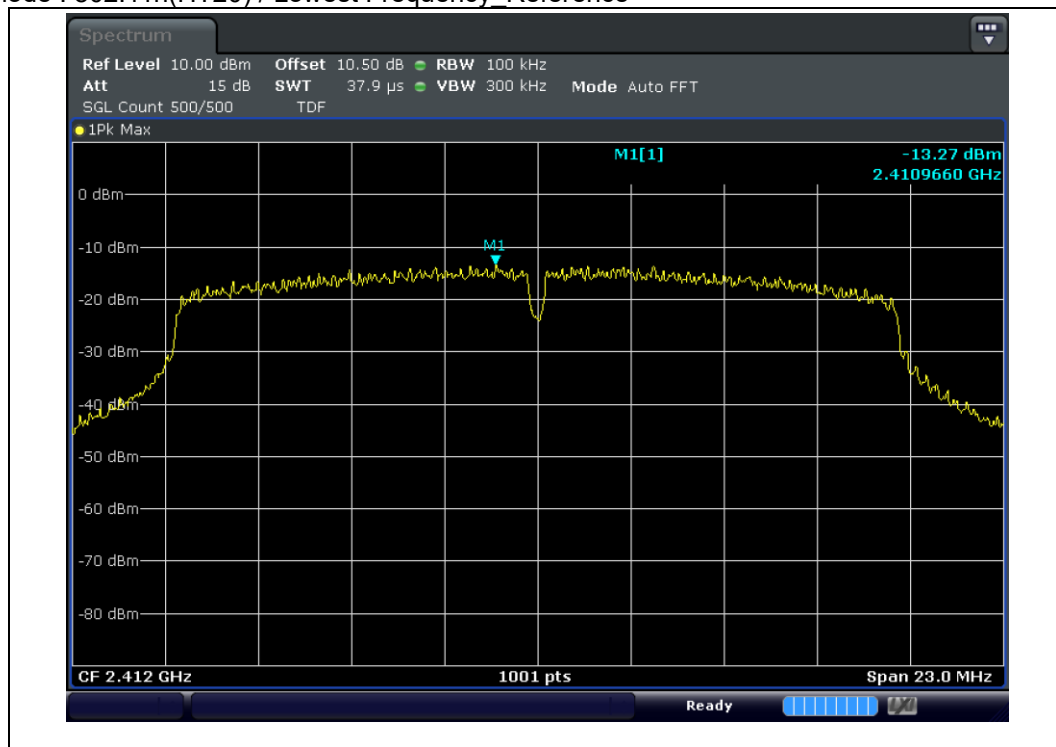


Test mode : 802.11n(HT20) / Lowest Frequency\_Bandedge

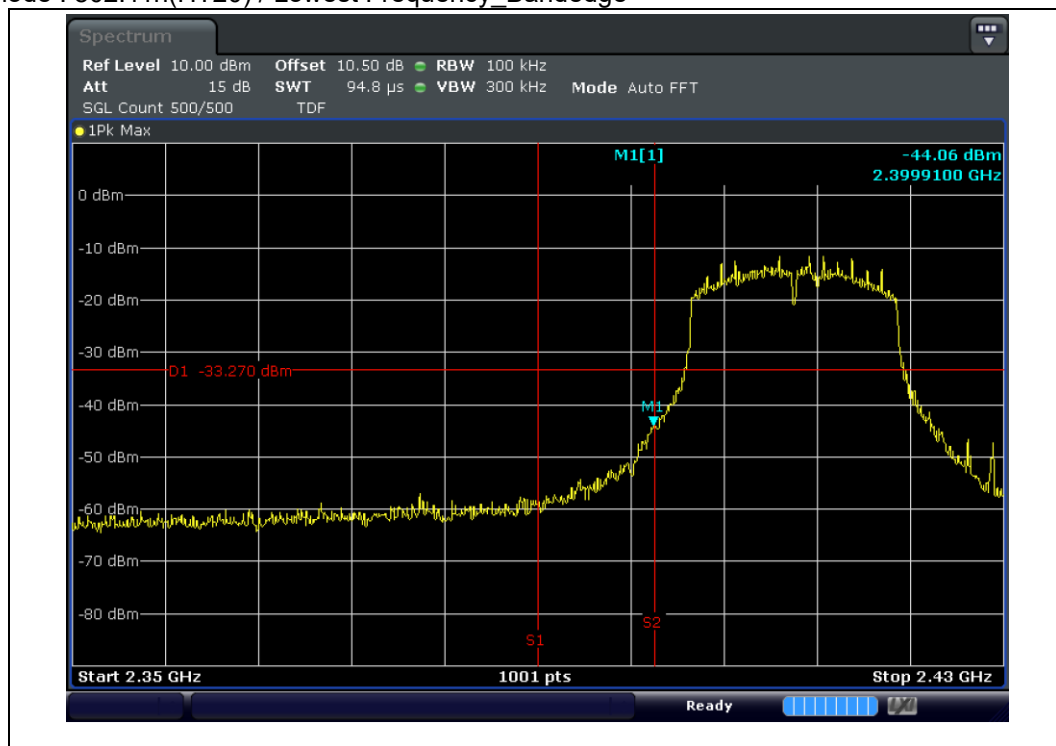


Test mode : 802.11n(HT20) / Lowest Frequency\_Conducted Spurious Emission

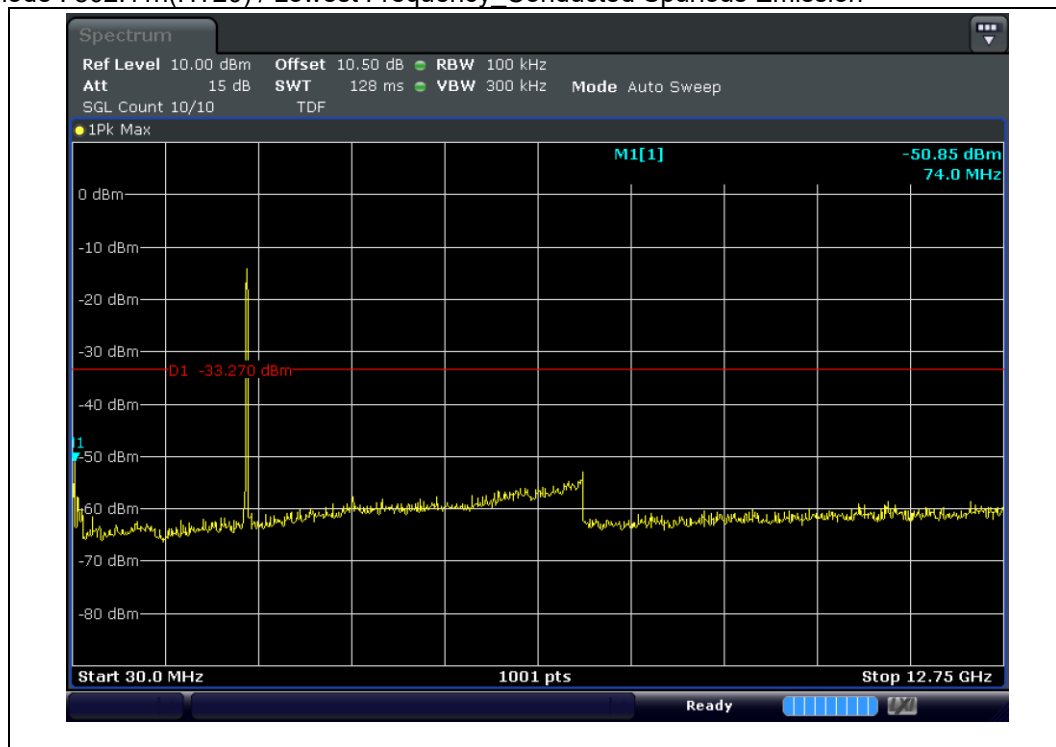


Test mode : 802.11n(HT20) / Middle Frequency\_Reference

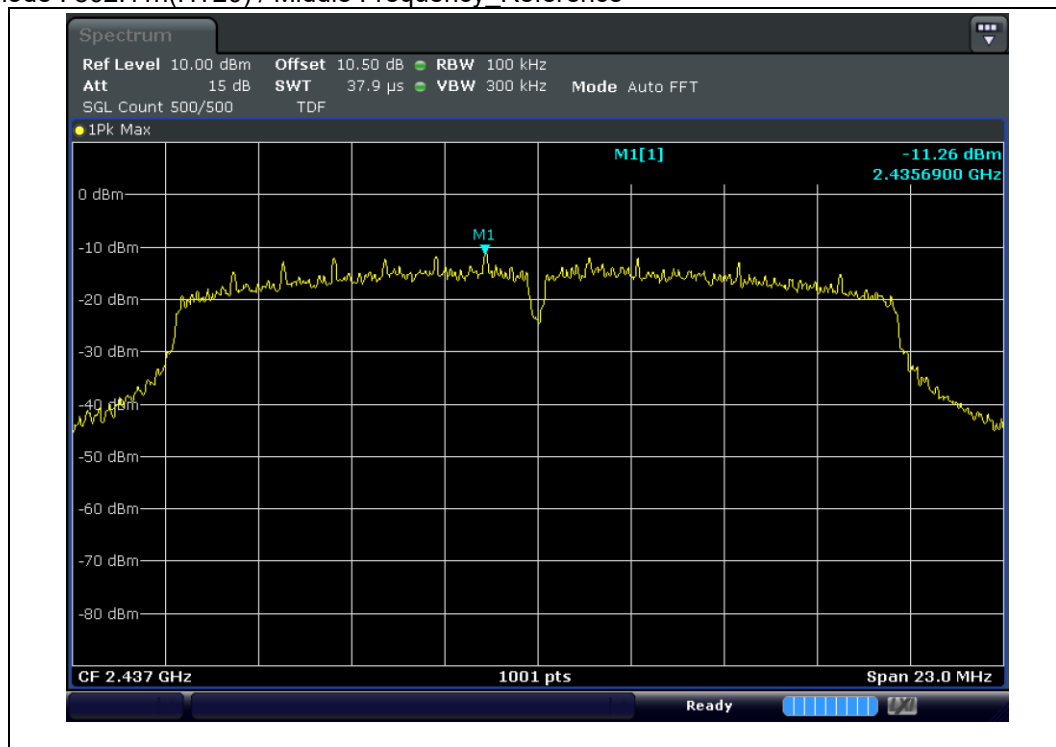


Test mode : 802.11n(HT20) / Middle Frequency\_Conducted Spurious Emission

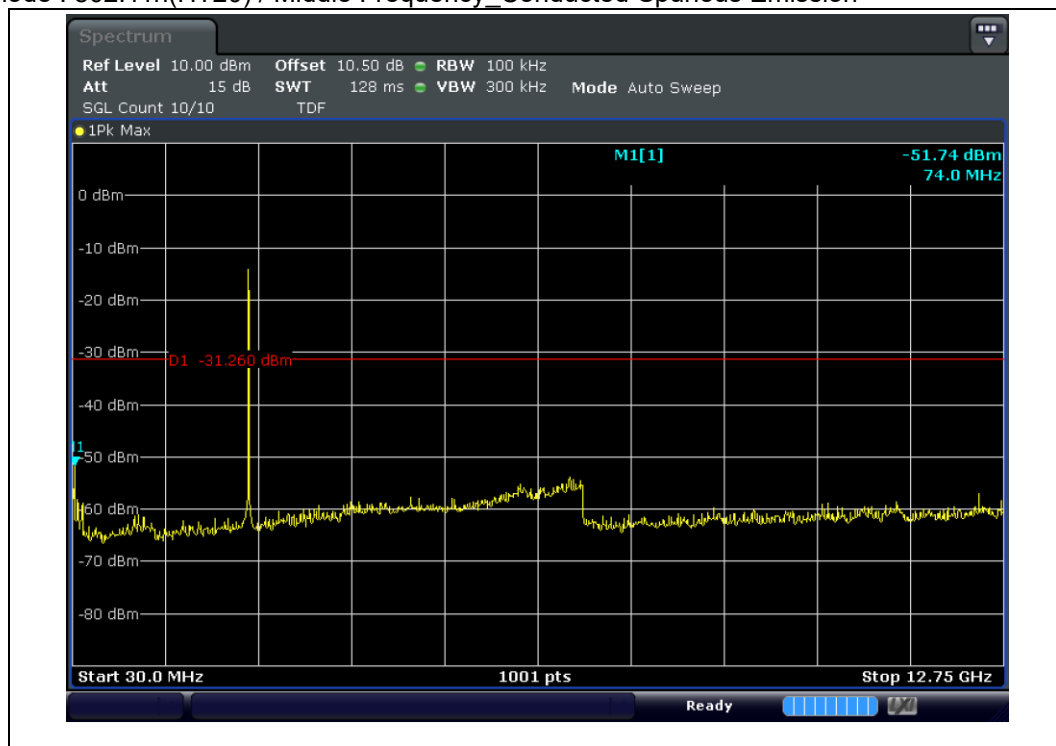


Test mode : 802.11n(HT20) / Highest Frequency\_Reference

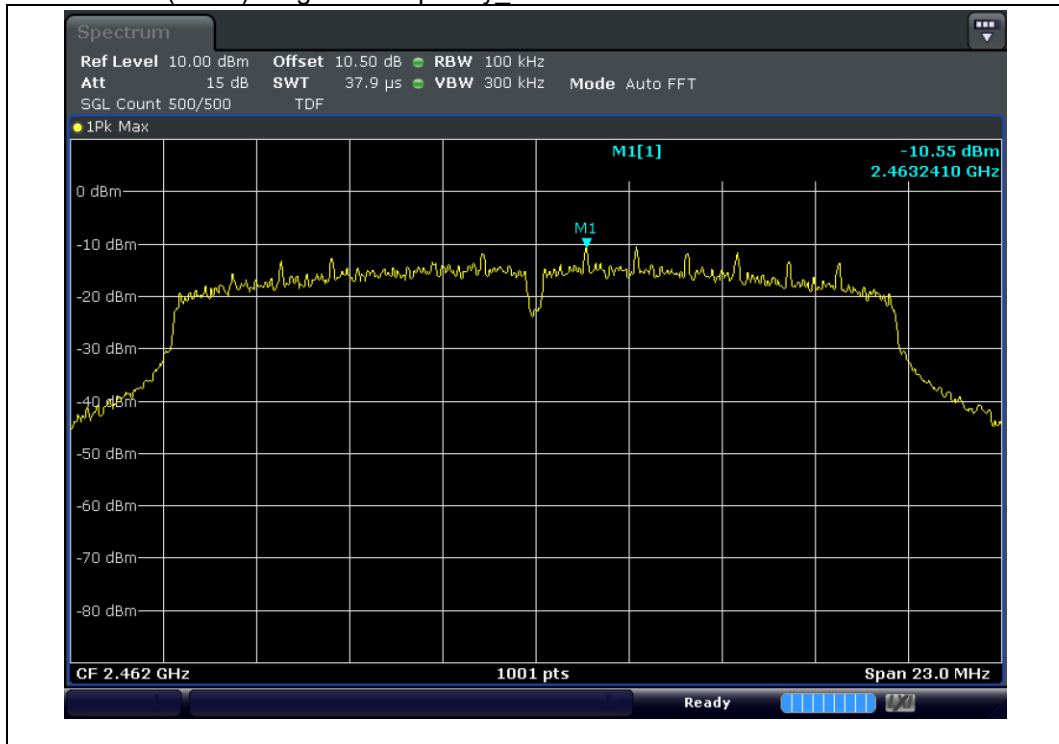

Test mode : 802.11n(HT20) / Highest Frequency\_Bandedge

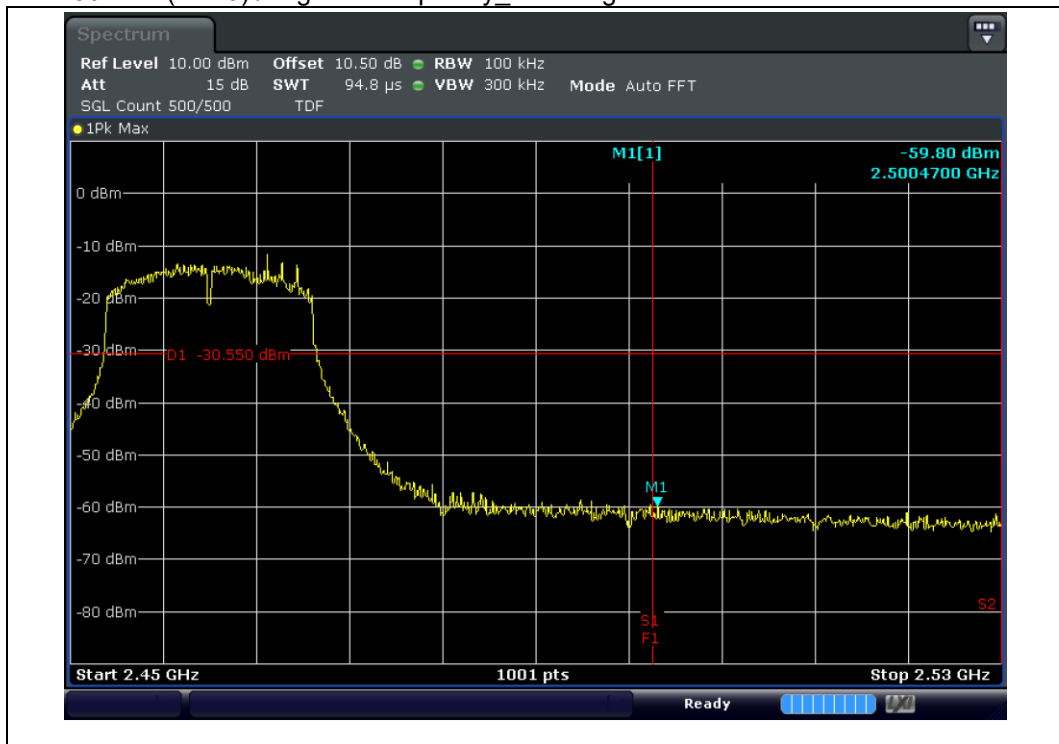


Test mode : 802.11n(HT20) / Highest Frequency\_Conducted Spurious Emission

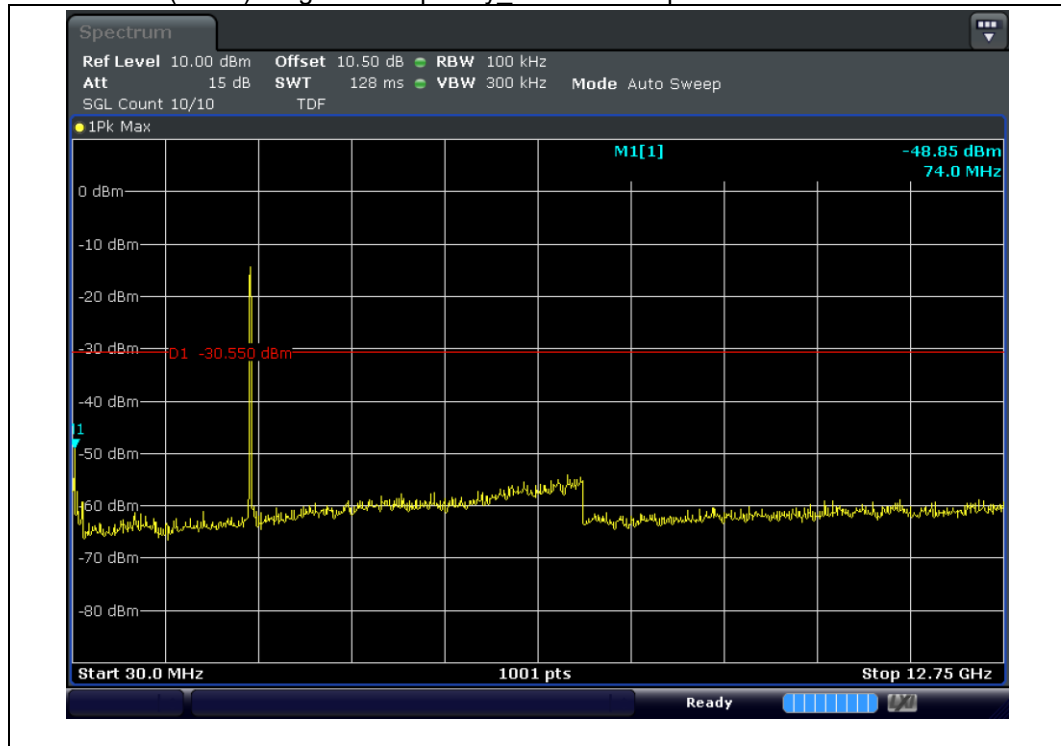


#### 4.3.5.8 Measurement data\_Duty Cycle

Test mode : Bluetooth LE

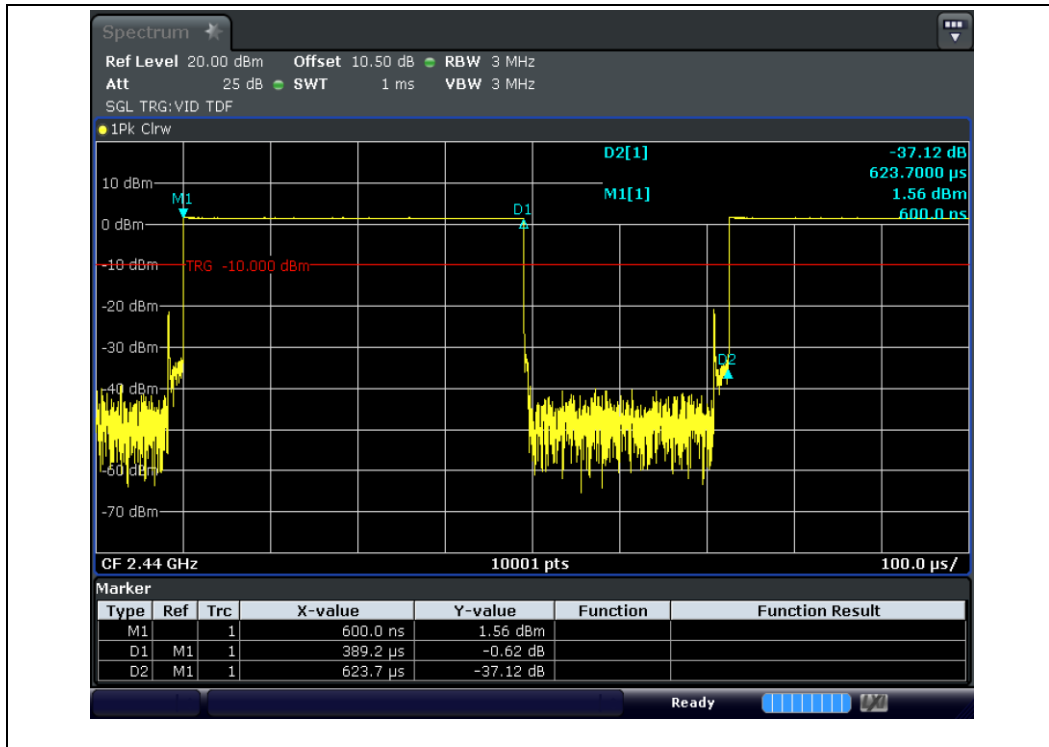


Note Duty cycle : 0.624 / Average Factor :  $10\log(1 / 0.624) = 2.05$

Test mode : 802.11b

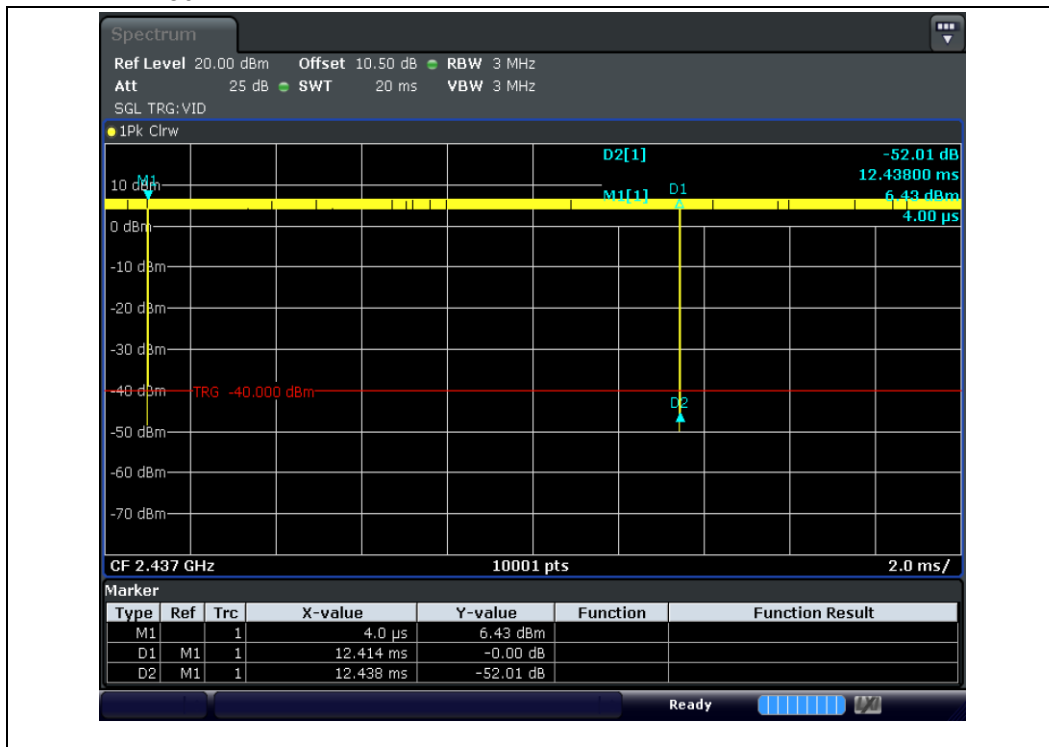


Note Duty cycle : 0.998 / Average Factor :  $10\log(1 / 0.998) = 0.01$

Test mode : 802.11g

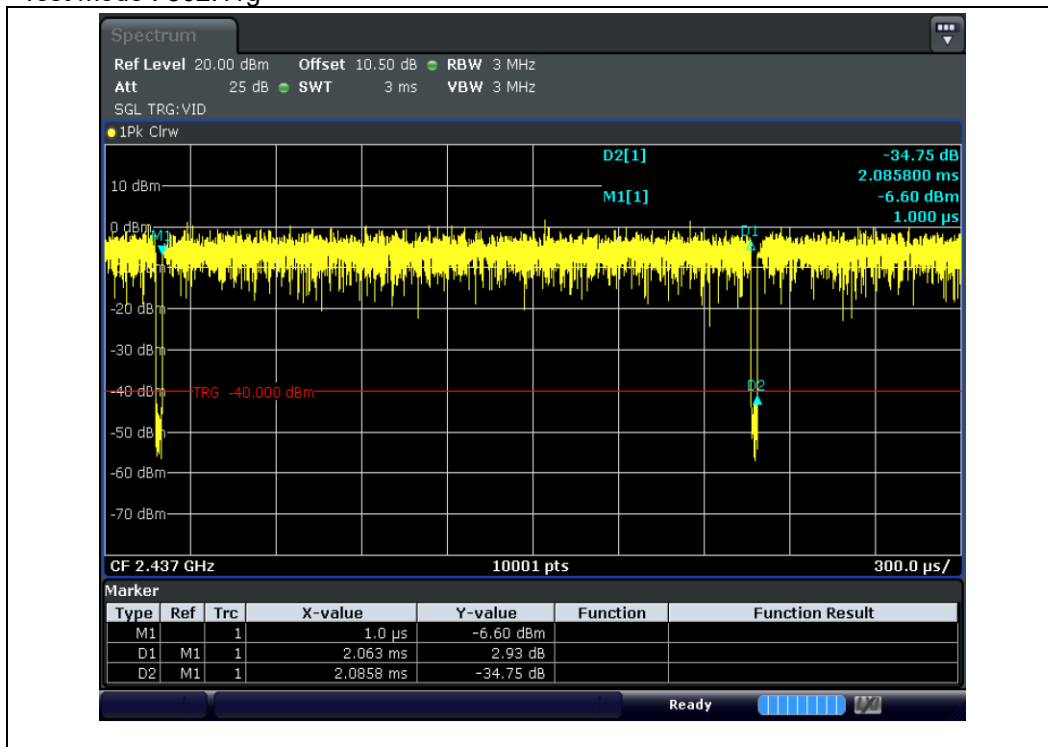

Note Duty cycle : 0.989 / Average Factor :  $10\log(1 / 0.989) = 0.05$

Test mode : 802.11n(HT20)

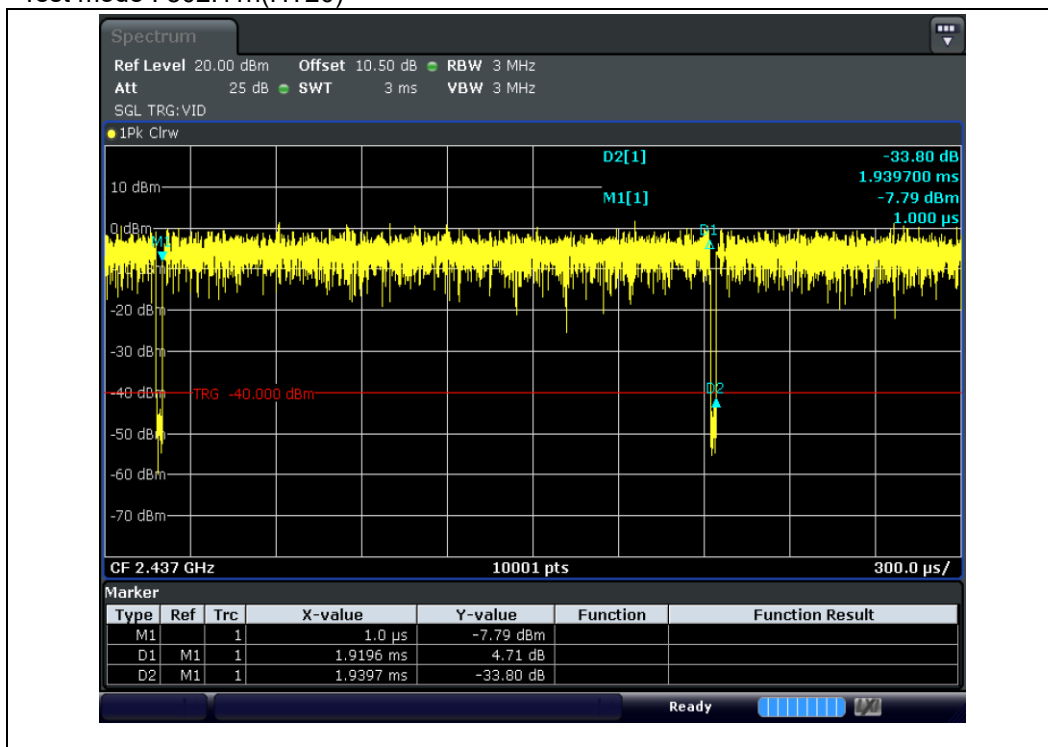

Note Duty cycle : 0.990 / Average Factor :  $10\log(1 / 0.990) = 0.05$

### 4.3.6 Conducted Emission

#### 4.3.6.1 Regulation

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50  $\Omega$  line impedance stabilization network (LISN).

Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

| Frequency of emission (MHz) | Conducted limit (dB $\mu$ V) |            |
|-----------------------------|------------------------------|------------|
|                             | Quasi-peak                   | Average    |
| 0.15 – 0.5                  | 66 to 56 *                   | 56 to 46 * |
| 0.5 – 5                     | 56                           | 46         |
| 5 - 30                      | 60                           | 50         |

\* Decreases with the logarithm of the frequency.

According to §15.107(a), for unintentional device, except for Class A digital devices, line conducted emission limits are the same as the above table.

#### 4.3.6.2 Measurement Procedure

1) The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5 m away from the side wall of the shielded room.

2) Each current-carrying conductor of the EUT power cord was individually connected through a 50  $\Omega$ /50  $\mu$ H LISN, which is an input transducer to a Spectrum Analyzer or an EMI/Field Intensity Meter, to the input power source.

3) Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.

4) The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment is the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.


5) The measurements were made with the detector set to PEAK amplitude within a bandwidth of 10 kHz or to QUASIPeAK and AVERAGE within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.

#### 4.3.6.3 Result

**Comply** (measurement data : refer to the next page)

#### 4.3.6.4 Measurement data

Test mode : 802.11g\_2 412 MHz

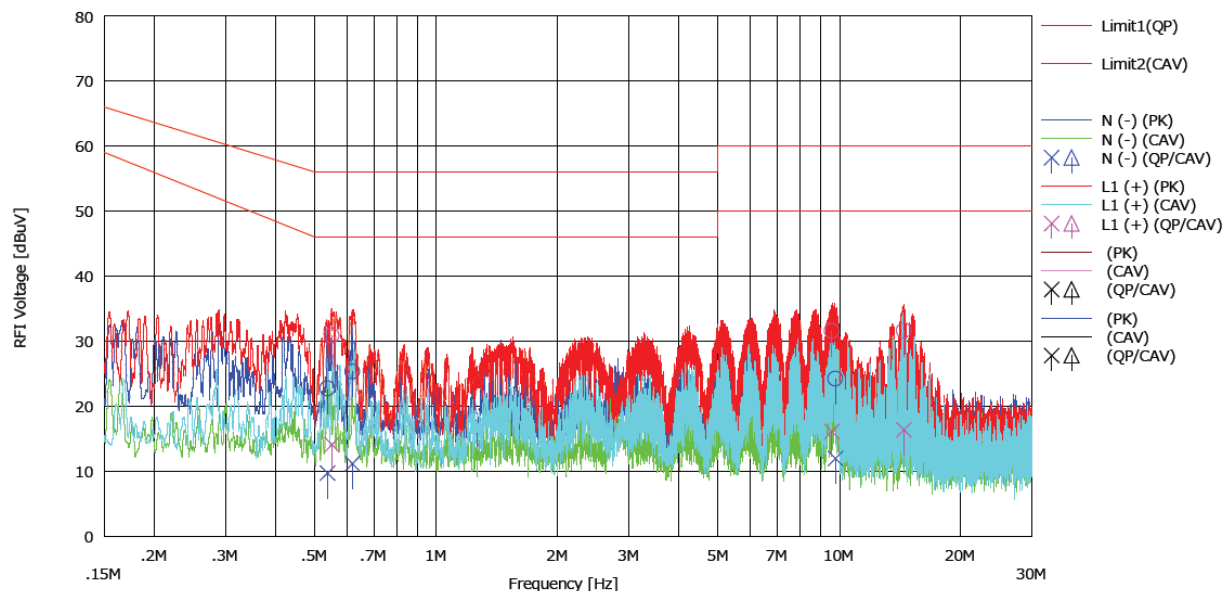

| NO | FREQ<br>[MHz] | READING      |               | C.FACTOR<br>[dB] | RESULT       |               | LIMIT        |               | MARGIN       |               | PHASE  |
|----|---------------|--------------|---------------|------------------|--------------|---------------|--------------|---------------|--------------|---------------|--------|
|    |               | QP<br>[dBuV] | CAV<br>[dBuV] |                  | QP<br>[dBuV] | CAV<br>[dBuV] | QP<br>[dBuV] | CAV<br>[dBuV] | QP<br>[dBuV] | CAV<br>[dBuV] |        |
| 1  | 0.53725       | 2.7          | -10.3         | 19.9             | 22.7         | 9.7           | 56.0         | 46.0          | 33.3         | 36.3          | N (-)  |
| 2  | 0.61913       | 5.4          | -8.8          | 19.9             | 25.3         | 11.1          | 56.0         | 46.0          | 30.7         | 34.9          | N (-)  |
| 3  | 9.76838       | 4.1          | -8.1          | 20.0             | 24.2         | 11.9          | 60.0         | 50.0          | 35.8         | 38.1          | N (-)  |
| 4  | 0.55103       | 10.9         | -5.9          | 19.9             | 30.8         | 14.0          | 56.0         | 46.0          | 25.2         | 32.0          | L1 (+) |
| 5  | 9.58410       | 11.5         | -4.0          | 20.0             | 31.5         | 16.1          | 60.0         | 50.0          | 28.5         | 33.9          | L1 (+) |
| 6  | 14.45159      | 11.5         | -3.8          | 20.1             | 31.6         | 16.3          | 60.0         | 50.0          | 28.4         | 33.7          | L1 (+) |

# APPENDIX I

## TEST EQUIPMENT USED FOR TESTS

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment.

| Equipment                  | Manufacturer                | Model                                | Serial No. | Cal. Date (yy.mm.dd) | Next Cal.Date (yy.mm.dd) |
|----------------------------|-----------------------------|--------------------------------------|------------|----------------------|--------------------------|
| FSV Signal Analyzer        | ROHDE&SCHWARZ               | FSV30                                | 103370     | 2022-10-11           | 2023-10-11               |
| Power Sensor               | KEYSIGHT                    | U2022XA                              | MY55320008 | 2022-08-16           | 2023-08-16               |
| ATTENUATOR                 | WEINSCHEL                   | 54A-10                               | 69672      | 2022-10-11           | 2023-10-11               |
| DC Power Supply            | AGILENT                     | E3632A                               | MY51160055 | 2022-04-14           | 2023-04-14               |
| Digital MultiMeter         | HP                          | 34401A                               | US36025428 | 2023-01-10           | 2024-01-10               |
| Signal Generator           | ROHDE&SCHWARZ               | SMB100A                              | 178384     | 2022-10-11           | 2023-10-11               |
| EMI Test Receiver          | ROHDE&SCHWARZ               | ESU40                                | 100445     | 2022-09-05           | 2023-09-05               |
| BiLog Antenna              | Schwarzbeck                 | VULB9168                             | 00821      | 2021-03-31           | 2023-03-31               |
| ATTENUATOR                 | JFW                         | 50F-006                              | 6 dB-3     | 2022-04-13           | 2023-04-13               |
| Preamplifier               | TSJ                         | MLA-10k01-b01-27                     | 1870367    | 2022-04-13           | 2023-04-13               |
| Antenna Mast(10 m)         | TOKIN                       | 5977                                 | -          | -                    | -                        |
| Antenna Mast(10 m)         | Innco                       | MA4640-XPET-0800                     | 578        | -                    | -                        |
| Controller(10 m)           | TOKIN                       | 5909L                                | 141909L-1  | -                    | -                        |
| Controller(10 m)           | Innco                       | CO3000                               | 40040217   | -                    | -                        |
| Turn Table(10 m)           | TOKIN                       | 5983-1.5                             | -          | -                    | -                        |
| 10 m Semi-Anechoic Chamber | SY CORPORATION              | -                                    | -          | -                    | -                        |
| Active Loop H-Field        | ETS                         | 6502                                 | 00150598   | 2022-06-02           | 2023-06-02               |
| Double Ridge Horn Antenna  | ETS                         | 3117                                 | 00168719   | 2022-08-16           | 2023-08-16               |
| Double Ridge Horn Antenna  | A.H Systems, Inc            | SAS-574                              | 465        | 2021-04-26           | 2023-04-26               |
| PREAMPLIFIER               | Agilent                     | 8449B                                | 3008A02110 | 2023-01-09           | 2024-01-09               |
| PREAMPLIFIER               | A.H Systems, Inc            | PAM-1840VH                           | 166        | 2023-01-09           | 2024-01-09               |
| EMI Test Receiver          | ROHDE&SCHWARZ               | ESR7                                 | 101440     | 2022-09-05           | 2023-09-05               |
| LISN                       | ROHDE&SCHWARZ               | ENV216                               | 101883     | 2022-04-13           | 2023-04-13               |
| Pulse Limiter              | Schwarzbeck                 | VTSD 9561-F                          | 00189      | 2022-04-13           | 2023-04-13               |
| Band Reject Filter         | wainwright instruments gmbh | WRCGV10-2363.5-2400-2483.5-2520-60SS | 7          | 2022-04-14           | 2023-04-14               |