



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5) Date : 16 Jan 2018

Application No. : LV041517

Applicant : Kondor Limited
Radar Way
Christchurch Business Park
Christchurch, BH23, 4FL
United Kingdom

Sample Description	Model No.
Myjack2 bluetooth receiver	KSMYJACK2BK

Date Received : December 16, 2017

Test Period : December 28-29, 2017

Test Requested : FCC Certification for FCC Part 15, subpart C
ISED Certification for License-exempt Device

Test Method : 47 CFR Part 15 (10-1-16 Edition),
ANSI C63.10 – 2013,
ANSI C63.4 – 2014
RSS-247 Issue 2,
RSS-Gen Issue 4,

Test Engineer : Mr. Leung Shu Kan, Ken

Conclusion : The submitted sample was found to comply with technical requirement of FCC
Part 15 Subpart C, section 15.247, and ISED Canada Radio Standards Specification
RSS-247 Issue 2.

For and on behalf of
CMA Industrial Development Foundation Limited

Authorized Signature : _____

Mr. WONG Lap-pong, Andrew
Manager
Electrical Division

Page 1 of 74

FCC ID: 2ADFFKSMYJACK2



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

Table of Contents

Table of Contents	2
1 Product Information	4
1.1 General Information.....	4
1.2 Technical Information.....	4
1.3 Associated Electric Accessories Informatin	4
1.4 Associated Cables	4
2.0 Equipment Units Tested (EUT).....	5
3.0 Location of Test Facility.....	5
4.0 List of test equipment, supporting equipment and cables.....	6
4.1 Test equipment.....	6
4.2 Supporting equipment.....	7
4.3 Cables.....	7
4.4 Software	7
5.0 Measurement Uncertainty.....	7
6.0 Measurement	8
6.1 General Test condition.....	8
6.2 Number of hopping frequency	8
6.2.1 Measurement	8
6.2.2 Final Result	8
6.3 Band-edge measurement	9
6.3.1 Measurement	9
6.3.2 Final Result	10
6.4 Carrier Frequency Separation	11
6.4.1 Measurement	11
6.4.2 Final Result	11
6.5 Time of occupancy (dwell time)	12
6.5.1 Measurement	12
6.5.2 Final Result	12
6.6 Output Power	13
6.6.1 Measurement	13
6.6.2 Final Result	13
6.7 Occupied Bandwidth.....	14
6.7.1 Measurement	14
6.7.2 Final Result	14
6.8 Conducted Spurious emission (Transmitter).....	15
6.8.1 Measurement	15
6.8.2 Final Result	15
6.9 Radiated Spurious emission (Transmitter).....	16
6.9.1 Measurement	16
6.9.2 Final Result	17



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

6.10	Radiated Spurious emission (Receiver)	18
6.10.1	Measurement	18
6.9.2	Final Result	19
6.11	Conducted Emission.....	21
6.10.1	Measurement	21
6.10.2	Final Result	21
7.0	Frequency Hopping System Requirement	22
APPENDIX A	Test Result	24



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

1 Product Information

1.1 General Information

Product Description:	Model:
Myjack2 bluetooth receiver	KSMYJACK2BK
Primary function	: Receive the audio signal from player by bluetooth communication
Power supply	: DC3.7V
RF related function	: Bluetooth communication for audio communication
Electric Accessories sold with	: Nil
Interconnection cable associated sold with	: 1) 80cm mini-USB cable 2) 7cm 3.5mm audio cable
Operating condition	: Not specified
Model difference	: Not applicable

1.2 Technical Information

Operating Frequency	: 2402 – 2480MHz
Digital Modulation	: FHSS
Modulation	: GFSK, $\pi/4$ QPSK, 8DPSK
Number of Channel	: 79
Channel Bandwidth	: 1MHz
Occupied Bandwidth	: 1.293Mhz
Rated transmission Power	: 1.0dBm EIRP
Signal Type	: Data
Number of Antenna	: One
Antenna Type	: Ceramic Chip Antenna
Antenna Gain	: 2.0dBi
Rated Input Voltage	: DC3.7V
RF Technology Used	: Bluetooth 4.1+EDR (non BLE)
Simplex or Duplex	: Half-duplex
Adaptivity	: FHSS adaptivity

1.3 Associated Electric Accessories Information

Not applicable

1.4 Associated Cables

USB cable : Cable Type: mini-USB cable



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

Audio cable : Unshielded
Length: 0.8m
without ferrite
Cable Type: 3.5mm audio cable
Unshielded
Length: 7cm
Without ferrite

2.0 Equipment Units Tested (EUT)

Product Description : Myjack2 bluetooth receiver
Model : KSMYJACK2
Serial No. : Batch code: 56764
Sample Type : Production Sample and engineering sample
Sample No. : RV041777-001-05(T) and RV041777-002-6(T)
Rationale of selection : Only one model number

3.0 Location of Test Facility

CMA Industrial Development Foundation Ltd.
Room 1302, Yan Hing Centre,
9-13 Wong Chuk Yeung,
Fo Tan, Shatin,
New Territories
Hong Kong.

FCC Accredited Lab (Designation Number: HK0004)
ISED Wireless Test Site (ISED Assigned Code: 4093A)



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

4.0 List of test equipment, supporting equipment and cables

4.1 Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Calibration Due Date	Calibration Period
EMI Test Receiver	Rohde & Schwarz	ESCS30	100001	01 Feb 2018	1Year
EMI Test Receiver	Rohde & Schwarz	ESCI	100152	07 Dec 2018	1Year
Spectrum Analyzer	R&S	FSV40	100964	08 Feb 2018	1Year
Spectrum Analyzer	Rohde & Schwarz	FSP30	100628	28 Mar 2018	1Year
Broadband Antenna	Schaffner	CBL6112B	2692	29 Mar 2018	2Years
Loop Antenna	EMCO	6502	00056620	25 Jan 2018	2Years
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-531	21 Dec 2018	2Years
Broadband Pre-Amplifier	Schwarzbeck	BBV 9718	9718-119	21 Dec 2018	2Years
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170442	02 Aug 2018	2Years
Broadband Pre-Amplifier	Schwarzbeck	BBV 9719	9719-010	02 Aug 2018	2Years
Coaxial Cable	Schaffner	RG 213/U	N/A	18 May 2018	1Year
Coaxial Cable	Suhner	RG 214/U	N/A	18 May 2018	1Year
Coaxial Cable	Suhner	Sucoflex_104	N/A	21 Dec 2018	1Year
LISN	Rohde & Schwarz	ENV216	101323	16 Jan 2018	1Year
Coaxial Cable	Tyco Electronics	RG 58C/U	N/A	24 Oct 2018	1Year
Rohde & Schwarz TS8997 Testing System					
Spectrum Analyzer	Rohde & Schwarz	FSV 40	101190	09 Aug 2018	1Year
Vector Generator	Rohde & Schwarz	SMBV100A	262024	09 Aug 2018	1Year
Generator	Rohde & Schwarz	SMB100A	103230	09 Aug 2018	1Year
OSP	Rohde & Schwarz	OSP	OSP120 V02	09 Aug 2018	1Year



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

4.2 Supporting equipment

Equipment Name	Manufacturer	Model	Serial	Provided by
AC/DC adaptor	Apple	A1299	Not specified	CMA
Test control board*	Factory	Not labelled	Not labelled	Applicant
Speaker with 8cm cable	CMA	Nil	Nil	CMA

Remark: *only used for configure engineering mode

4.3 Cables

Cable Type	Length	Shielding	Ferrite used	Provided by
Parallel Cable*	1m	Not shielded	No	CMA

Remark: *only used for configure engineering mode

4.4 Software

Software Name	Version	Function	Provided by
CSR BlueSuite*	2.4.8	Configure Engineering mode	CMA

Remark: *only used for configure engineering mode

5.0 Measurement Uncertainty

The reported uncertainty is based on a standard uncertainty multiplied by a coverage factor $k=2$, providing a level of confidence of approximately 95%.

Radiated emissions

Frequency	Uncertainty (U_{lab})
30MHz ~ 200MHz (Horizontal)	4.59dB
30MHz ~ 200MHz (Vertical)	4.49dB
200MHz ~ 1000MHz (Horizontal)	4.94dB
200MHz ~ 1000MHz (Vertical)	4.97dB
1GHz ~ 6GHz	4.52dB
6GHz ~ 18GHz	4.58dB

Line-conducted emissions

Frequency	Uncertainty (U_{lab})
150kHz~30MHz	2.80dB



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

6.0 Measurement

6.1 General Test condition

Temperature : 22°C
Test Voltage : DC3.7V and AC230V
Humidity : 51%
Atmosphere Pressure : 101.2kPa

6.2 Number of hopping frequency

6.2.1 Measurement

Requirement : FCC Part 15 § 15.247(a)(1)(iii) and RSS-247 §5.1(d)
Measuring procedure : ANSI C63.10:2013, clause 7.8.3
Span : 83.5MHz
RBW : 300kHz
VBW : 300kHz
Frequency range : 2.4000 – 2.4835GHz
Modulation tested : GFSK
Packet Type tested : DH5
Additional measuring procedure :

6.2.2 Final Result

No. of hopping channels measured	Limit	Result	Worst case mode
79	≥ 15	PASS	GFSK and DH5

Remark: Detail test result and equipment setting refer to appendix A, A5



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

6.3 Band-edge measurement

6.3.1 Measurement

- | | | |
|-------------------------------------|---|--|
| Requirement | : | FCC Part 15 §15.247(d) and RSS-247 §5.5 |
| Measuring procedure | : | ANSI C63.10:2013, section 7.8.6 and 6.10 |
| Hopping mode | : | Enabled and Disable |
| RBW | : | 100kHz |
| VBW | : | 300kHz |
| Frequency range | : | 2310 – 2483.5MHz and 2400 – 2500MHz |
| Modulation tested | : | GFSK, $\pi/4$ QDPSK, 8DPSK |
| Packet Type tested | : | DH5 |
| Channel tested for non-hopping mode | : | 2402MHz for lowed band edge and 2480MHz for higher band edge |
| Additional measuring procedure | : | For lower band edge (2400MHz) <ol style="list-style-type: none">1. Using the “Measurement 1” setting shown below the scan plot within the frequency span from 2400 – 2483.5MHz to measure the maximum peak value of fundamental2. Using the “Measurement 2” setting shown below the scan plot within the frequency span from 2310 – 2400MHz to measure the bandedge reading3. Compare that reading in procedure with the limit which equal to the measured maximum peak in procedure 1 minus 20dB For Upper bandedge (2483.5MHz) <ol style="list-style-type: none">1. Using the “Measurement 1” setting shown below the scan plot within the frequency span from 2400 – 2483.5MHz to measure the maximum peak value of fundamental2. Using the “Measurement 2” setting shown below the scan plot within the frequency span from 2483.5 – 2500MHz to measure the bandedge reading3. Compare that reading in procedure with the limit which equal to the measured maximum peak in procedure 1 minus 20dB |



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

6.3.2 Final Result

Bandedge frequency for lower bandedge(Worst Case)	Worst case (dBc) ²	Detector	Limit ¹ (dBc)	Result	Worst case
2394.328151MHz	51.1	Peak	≥ 20.0	PASS	GFSK and DH5
Bandedge frequency for higher bandedge (Worst Case)	Worst case in (dBc) ²	Detector	Limit ¹	Result	Worst case
2499.077795MHz	46.1	Peak	≥ 20.0	PASS	GFSK and DH5

Remark: 1) The limit is based on the transmitter demonstrated compliance with peak conducted power limit on section 6.4.2 of this report.

2) The Worst case dBc is the peak values measured in procedure 1 minus the worst case bandedge emission

3) Detail test result and equipment setting refer to appendix A, A6-11, A22-24, A33-35



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

6.4 Carrier Frequency Separation

6.4.1 Measurement

Requirement	: FCC Part 15 §15.247(a) and RSS-247 §5.1(b)
Measuring procedure	: ANSI C63.10:2013, section 7.8.2
Hopping mode	: Enabled
RBW	: 300kHz
VBW	: 300kHz
Frequency range	: 2440 – 2443MHz ¹
Modulation tested	: GFSK ²
Packet Type tested	: DH5
Additional measuring procedure	: Nil
Remark	: 1) Since the measured value is more than 1.5 times of limit, only middle channel is measured. 2) Since the modulation and packet type does not affect the channel separation, GFSK and DH5 are selected as represented modulation and data type

6.4.2 Final Result

Carrier Frequency Separation	Limit ¹	Result	Worst case mode
0.970588MHz	≥0.862355MHz	PASS	GFSK and DH5

Remark: 1) Limit is 2/3 of the 20dB bandwidth in section 6.7 and conducted peak power is less than 0.125W in section 6.6 of this report.

2) Detail test result and equipment setting refer to appendix A, A12-14



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

6.5 Time of occupancy (dwell time)

6.5.1 Measurement

Requirement	: FCC Part 15 §15.247(a) and RSS-247 §5.1(a)
Measuring procedure	: ANSI C63.10:2013, section 7.8.4
Hopping mode	: Disable
RBW	: 500kHz
VBW	: 1MHz
Modulation tested	: GFSK ¹
Packet Type tested	: DH1, DH3, DH5
Channel tested for non-hopping mode	: 2441MHz
Additional measuring procedure	: 1) Setup engineering sample to channel 2441MHz and DH1 packet size to perform the measurement according to ANSI C63.10, section 7.8.4 2) Find the worst case packet size 3) Repeat procedure1 with the worst case packet size for channel 2402MHz and 2480MHz
Remark	: 1) Since the modulation does not affect the dwell time, GFSK is selected as represented modulation.

6.5.2 Final Result

Dwell time (worst case)	Limit	Result	Worst case mode
311.390ms	≤400ms	PASS	GFSK and DH5

Remark: 1) Detail test result and equipment setting refer to appendix A, A15-17



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

6.6 Output Power

6.6.1 Measurement

Requirement : FCC Part 15 §15.247(b) (1) and RSS-247 §5.4
Measuring procedure : ANSI C63.10:2013, section 7.8.5
Hopping mode : Disable
Modulation tested : GFSK, $\pi/4$ QPSK, 8DPSK
Packet Type tested : DH5¹
Channel tested for non-hopping mode : 2402MHz, 2441MHz, 2480MHz
Additional measuring procedure : Nil
Remark : 1) Since the packet size does not affect the output power, DH5 is selected as represented packet size.

6.6.2 Final Result

(a) Maximum peak conducted output power

Maximum peak conducted output power	Limit(s) ¹	Result	Modulation
-22.3dBm	≤ 21.0 dBm	PASS	GFSK
-22.3dBm	≤ 21.0 dBm	PASS	$\pi/4$ QPSK
-22.3dBm	≤ 21.0 dBm	PASS	8DPSK

Remark: 1) 0.125W (21.0dBm) limit is used for 2/3 20dB bandwidth requirement for channel separation.

2) Detail test result and equipment setting refer to appendix A, A18, A25, A29

(b) Maximum peak e.i.r.p.(for RSS-247)

Maximum peak e.i.r.p. ¹	Limit(s) ²	Result	Modulation
-20.3dBm	≤ 27.0 dBm	PASS	GFSK
-20.3dBm	≤ 27.0 dBm	PASS	$\pi/4$ QPSK
-20.3dBm	≤ 27.0 dBm	PASS	8DPSK

Remark: 1) Maximum peak e.i.r.p. = Maximum peak conducted output power + antenna gain (dBi)

2) Maximum peak e.i.r.p. limit = Maximum peak conducted output power limit + 6dBi

3) Detail test result and equipment setting refer to appendix A, A18, A25, A29



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

6.7 Occupied Bandwidth

6.7.1 Measurement

Requirement : FCC Part 15 §15.247(a) and RSS-247 §5.1(a)
Measuring procedure : ANSI C63.10:2013, section 7.8.7 and 6.9.2
Hopping mode : Disable
Modulation tested : GFSK, $\pi/4$ QPSK, 8DPSK
Packet Type tested : DH5¹
Channel tested for non-hopping mode : 2402MHz, 2441MHz, 2480MHz
Additional measuring procedure : Nil
Remark : 1) Since the packet size does not affect the bandwidth, DH5 is selected as represented packet size.

6.7.2 Final Result

20dB bandwidth	99% OBW	Modulation
0.935324MHz	0.864MHz	GFSK
1.293532MHz	1.170MHz	$\pi/4$ QPSK
1.273632MHz	1.164MHz	8DPSK

Remark: 1) Detail test result and equipment setting refer to appendix A, A19-21, A26-28, A30-32, A45-49



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

6.8 Conducted Spurious emission (Transmitter)

6.8.1 Measurement

Requirement	: FCC Part 15 §15.247(d) and RSS-247 §5.5
Measuring procedure	: ANSI C63.10:2013, section 5.5, 5.6, 7.8.8 and 11.12.2.1
Hopping mode	: Disable
RBW	: Refer to pre-measurement and final measurement setting
Detector	: Refer to pre-measurement and final measurement setting
Modulation tested	: GFSK ¹
Packet Type tested	: DH5 ²
Channel tested for non-hopping mode	: 2402MHz, 2441MHz, 2480MHz
Additional measuring procedure	: 1) Setup engineering sample to channel 2402MHz to perform the measurement according to ANSI C63.10, section 7.8.8 with pre-measurement setting 2) If the pre-measurement is over the limit, the final measurement is performed for the specific frequency according to final measurement setting or restricted band frequency 3) For non-restricted band frequency, peak detector and 100kHz RBW will be used for final measurement. 4) Repeat the procedure 1 to 3 for channel frequency of 2441MHz and 2480MHz
Remark	: 1) Since the GFSK generates a higher SPD with power level, GFSK is selected as represented modulation for testing. 2) Since DH5 generates a higher dwell time, DH5 is selected as representative packet size for testing

6.8.2 Final Result

Worst case spurious emission frequency	Worst case spurious emission power ¹	Limit ²	Margin	Result	Worst case mode
4881.484531MHz	-44.8dBm	-41.2dBm	3.6dB	PASS	GFSK and DH5

Remark: 1) Spurious emission power = measured conducted power + antenna gain(dBi) + ground reflection factor according to ANSI C63.10 section 11.12.2.2 for restricted band emission.

2) For restricted band emission, limit = restricted band field strength limit (dBuV/m) + 4.7dB – 104.8dB according to ANSI C63.10 section 11.12.2.2 For non-restricted band, limit = SPD/100kHz – 20dB.

3) Detail test result and equipment setting refer to appendix A, A36-44



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

6.9 Radiated Spurious emission (Transmitter)

6.9.1 Measurement

The equipment under test (EUT) was placed on a non-conductive turntable with dimensions of 1.5m x 0.4m and 0.8m high above the ground for below 1GHz measurement and 1.5m high above the ground for above 1GHz measurement. 3m from the EUT, a broadband antenna mounting on the mast received the signal strength. The turntable was rotated to maximize the emission level. The antenna was then moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated.

For below 30MHz, a loop antenna with its vertical plane is placed 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1 m above the ground.

For 30MHz to 300MHz, biconical antenna with its vertical and horizontal plane is placed 3m from the EUT and rotated about its vertical and horizontal axis for maximum response at each azimuth about the EUT. And the reference point of antenna shall be 1 m above the ground. Same procedure for frequency 300MHz to 1000MHz but Log-periodic antenna is used for final measurements.

For above 1GHz, horn antenna with its vertical and horizontal plane is placed 3m from the EUT and rotated about its vertical and horizontal axis for maximum response at each azimuth about the EUT. Preamplifier and High Pass filter was used for measurements. The reference point of antenna shall be 1 m above the ground.

The device was rotated through three X, Y, Z orthogonal to determine which attitude and configuration produce the highest emission during measurement for Radiated Emission measurement.

The Frequencies from fundamental up to the tenth harmonics were investigated, and emissions more 20dB below limit were not reported.

Bluetooth hopping mode with GFSK modulation and DH5packet type are selected as worst case mode for spurious radiated emission test from cabinet. Other non-bluetooth operating mode such as charging mode for digital part of EUT may be tested.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

6.9.2 Final Result

a) Test mode: Bluetooth hopping mode

Frequency (MHz)	Polarity (H/V)	Reading at 3m (dBμV)	Transducer Factor (dB/m)	Field Strength at 3m ¹ (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)	Detector (PK/QP/AV)
2390.000	H	42.0	-4.7	37.3	54.0	16.7	PK
2390.000	V	40.5	-4.7	35.8	54.0	18.2	PK
2400.000	H	53.3	-4.7	48.6	54.0	5.4	PK
2400.000	V	51.4	-4.7	46.7	54.0	7.3	PK
2483.500	H	45.2	-4.7	40.5	54.0	13.5	PK
2483.500	V	48.1	-4.7	43.4	54.0	10.6	PK
2532.797	H	55.9	-4.7	51.2	54.0	2.8	PK
2532.797	V	52.6	-4.7	47.9	54.0	6.1	PK

Remark: 1) Field Strength = Reading + transducer factor.

2) Other emission with more than 20dB margin are not reported in this report.

b) Test mode: Charging mode

Frequency (MHz)	Polarity (H/V)	Reading at 3m (dBμV)	Transducer Factor (dB/m)	Field Strength at 3m ¹ (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)	Detector (PK/QP/AV)
60.386	V	9.2	10.0	19.2	40.0	20.8	QP
119.891	H	8.6	12.6	21.2	43.5	22.3	QP
160.036	V	11.2	14.2	25.4	43.5	18.1	QP
204.785	H	4.2	14.5	18.7	43.5	24.8	QP
387.996	H	17.9	20.9	38.8	46.0	7.2	QP
415.984	H	14.8	20.9	35.7	46.0	10.3	QP

Remark: 1) Field Strength = Reading + transducer factor.

2) Other emission with more than 20dB margin are not reported in this report.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

6.10 Radiated Spurious emission (Receiver)

6.10.1 Measurement

The equipment under test (EUT) was placed on a non-conductive turntable with dimensions of 1.5m x 0.4m and 0.8m high above the ground for below 1GHz measurement and 1.5m high above the ground for above 1GHz measurement. 3m from the EUT, a broadband antenna mounting on the mast received the signal strength. The turntable was rotated to maximize the emission level. The antenna was then moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated.

For below 30MHz, a loop antenna with its vertical plane is placed 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1 m above the ground.

For 30MHz to 300MHz, biconical antenna with its vertical and horizontal plane is placed 3m from the EUT and rotated about its vertical and horizontal axis for maximum response at each azimuth about the EUT. And the reference point of antenna shall be 1 m above the ground. Same procedure for frequency 300MHz to 1000MHz but Log-periodic antenna is used for final measurements.

For above 1GHz, horn antenna with its vertical and horizontal plane is placed 3m from the EUT and rotated about its vertical and horizontal axis for maximum response at each azimuth about the EUT. Preamplifier and High Pass filter was used for measurements. The reference point of antenna shall be 1 m above the ground.

The device was rotated through three X, Y, Z orthogonal to determine which attitude and configuration produce the highest emission during measurement for Radiated Emission measurement.

The Frequencies from fundamental up to the tenth harmonics were investigated, and emissions more 20dB below limit were not reported.

Bluetooth receiving mode is selected for spurious radiated emission test from cabinet.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

6.9.2 Final Result

Test mode: Receiving mode (2402MHz)

Frequency (MHz)	Polarity (H/V)	Reading at 3m (dBμV)	Transducer Factor (dB/m)	Field Strength at 3m ¹ (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)	Detector (PK/QP/AV)
395.985	H	14.0	20.9	34.9	46.0	11.1	QP
492.005	H	18.4	21.7	40.1	46.0	5.9	QP
639.999	H	16.5	23.8	40.3	46.0	5.7	QP
1081.784	H	58.3	-9.0	49.3	54.0	4.7	PK
1104.836	V	49.6	-9.0	40.6	54.0	13.4	PK

Remark: 1) Field Strength = Reading + transducer factor.

2) Other emission with more than 20dB margin are not reported in this report.

Test mode: Receiving mode (2441MHz)

Frequency (MHz)	Polarity (H/V)	Reading at 3m (dBμV)	Transducer Factor (dB/m)	Field Strength at 3m ¹ (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)	Detector (PK/QP/AV)
395.944	H	12.4	20.9	33.3	46.0	12.7	QP
492.028	H	16.9	21.7	38.6	46.0	7.4	QP
629.640	H	12.8	23.8	36.6	46.0	9.4	QP
1083.280	H	58.6	-9.0	49.6	54.0	4.4	PK
1103.740	V	49.4	-9.0	40.4	54.0	13.6	PK

Remark: 1) Field Strength = Reading + transducer factor.

2) Other emission with more than 20dB margin are not reported in this report.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

Test mode: Receiving mode (2480MHz)

Frequency (MHz)	Polarity (H/V)	Reading at 3m (dBμV)	Transducer Factor (dB/m)	Field Strength at 3m ¹ (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)	Detector (PK/QP/AV)
395.979	H	15.5	20.9	36.4	46.0	9.6	QP
491.984	H	18.3	21.7	40.0	46.0	6.0	QP
648.024	H	14.6	23.8	38.4	46.0	7.6	QP
1084.160	H	59.1	-9.0	50.1	54.0	3.9	PK
1161.880	V	48.7	-9.0	39.7	54.0	14.3	PK

Remark: 1) Field Strength = Reading + transducer factor.

2) Other emission with more than 20dB margin are not reported in this report.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

6.11 Conducted Emission

6.10.1 Measurement

Requirement : FCC Part 15 §15.207(a) and RSS-Gen, clause 8.8
Measuring procedure : ANSI C63.4:2014, section 7.3
Test mode : Hopping mode
RBW : 9kHz
VBW : 30kHz
Modulation tested : GFSK¹
Packet Type tested : DH5
Additional measuring procedure : Nil
Remark : Nil

6.10.2 Final Result

Worst case conducted emission frequency	Worst case conducted emission	Limit	Margin	Detector	Lines	Worst case mode	Result
0.44687MHz	39.29dBμV	46.93dBμV	7.64dB	AV	N	Hopping mode	PASS

Remark: 1) Detail test result and equipment setting refer to appendix A, A50-51



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

7.0 Frequency Hopping System Requirement

Test Requirement: Section 15.247(a)(1), (g), (h) and RSS-247, section 5.1 requirement

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom order list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmissions bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hop sets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Compliance for section 15.247(a)(1) and RSS-247 section 5.1(a)

According to Bluetooth Core Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stage: 9
- Length of pseudorandom sequence: $2^9-1=511$ bits
- Longest sequence of zero: 8 (non-inverted signal)

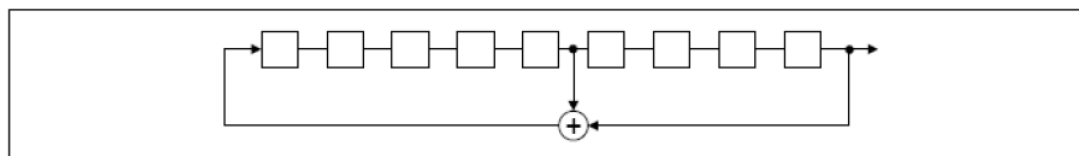

Linear Feedback Shift Register for Generation of the PRBS sequence



TEST REPORT

Date : 16 Jan 2018

Figure 1: Example of pseudorandom frequency hopping sequence as following.

Slot	Frequency Value
1	20
2	62
3	46
4	77
5	7
6	64
7	8
8	73
9	16
10	75
11	1

According to Bluetooth Core Specification, Bluetooth receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any Bluetooth transmitters and shift frequencies in synchronization with the transmitted signals.

According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinate with other FHSS System in effort to avoid the simultaneous occupancy of the individual hopping frequencies by multiple transmitter.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

APPENDIX A Test Result



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

FCC Part 47 §15.247 2400-2483.5 MHz 2015

Frequencies

BT CH 1 (2402 MHz)	BT CH 2 (2403 MHz)	BT CH 3 (2404 MHz)
BT CH 4 (2405 MHz)	BT CH 5 (2406 MHz)	BT CH 6 (2407 MHz)
BT CH 7 (2408 MHz)	BT CH 8 (2409 MHz)	BT CH 9 (2410 MHz)
BT CH 10 (2411 MHz)	BT CH 11 (2412 MHz)	BT CH 12 (2413 MHz)
BT CH 13 (2414 MHz)	BT CH 14 (2415 MHz)	BT CH 15 (2416 MHz)
BT CH 16 (2417 MHz)	BT CH 17 (2418 MHz)	BT CH 18 (2419 MHz)
BT CH 19 (2420 MHz)	BT CH 20 (2421 MHz)	BT CH 21 (2422 MHz)
BT CH 22 (2423 MHz)	BT CH 23 (2424 MHz)	BT CH 24 (2425 MHz)
BT CH 25 (2426 MHz)	BT CH 26 (2427 MHz)	BT CH 27 (2428 MHz)
BT CH 28 (2429 MHz)	BT CH 29 (2430 MHz)	BT CH 30 (2431 MHz)
BT CH 31 (2432 MHz)	BT CH 32 (2433 MHz)	BT CH 33 (2434 MHz)
BT CH 34 (2435 MHz)	BT CH 35 (2436 MHz)	BT CH 36 (2437 MHz)
BT CH 37 (2438 MHz)	BT CH 38 (2439 MHz)	BT CH 39 (2440 MHz)
BT CH 40 (2441 MHz)	BT CH 41 (2442 MHz)	BT CH 42 (2443 MHz)
BT CH 43 (2444 MHz)	BT CH 44 (2445 MHz)	BT CH 45 (2446 MHz)
BT CH 46 (2447 MHz)	BT CH 47 (2448 MHz)	BT CH 48 (2449 MHz)
BT CH 49 (2450 MHz)	BT CH 50 (2451 MHz)	BT CH 51 (2452 MHz)
BT CH 52 (2453 MHz)	BT CH 53 (2454 MHz)	BT CH 54 (2455 MHz)
BT CH 55 (2456 MHz)	BT CH 56 (2457 MHz)	BT CH 57 (2458 MHz)
BT CH 58 (2459 MHz)	BT CH 59 (2460 MHz)	BT CH 60 (2461 MHz)
BT CH 61 (2462 MHz)	BT CH 62 (2463 MHz)	BT CH 63 (2464 MHz)
BT CH 64 (2465 MHz)	BT CH 65 (2466 MHz)	BT CH 66 (2467 MHz)
BT CH 67 (2468 MHz)	BT CH 68 (2469 MHz)	BT CH 69 (2470 MHz)
BT CH 70 (2471 MHz)	BT CH 71 (2472 MHz)	BT CH 72 (2473 MHz)
BT CH 73 (2474 MHz)	BT CH 74 (2475 MHz)	BT CH 75 (2476 MHz)
BT CH 76 (2477 MHz)	BT CH 77 (2478 MHz)	BT CH 78 (2479 MHz)
BT CH 79 (2480 MHz)		

Hardware Setup: WMS Measurements\WMS Hardware Setup

Spectrum Analyzer:	SA FSV 40 (SA FSV 40) @ VISA (ADR TCPIP::192.168.48.148::INST0::INSTR), SN 1321.3008K39/101190, FW 2.30 SP4
Vector Generator:	VG SMBV100A (VG SMBV100A) @ VISA (ADR TCPIP::192.168.48.149::INST0::INSTR), SN 262024, FW 5.1.0
Generator:	SMB100A (SMB100A) @ VISA (ADR TCPIP::192.168.48.152::INST0::INSTR), SN 103230, FW Rev 2.20.1, 08/2012, CVI 2009



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

OSP: TS8997 OSP (OSP) @ VISA (ADR
TCPIP::192.168.48.147::INST0::INSTR), SN OSP120 V02,
101611, FW 2.55.150506

Power Meter: OSP-B157 Power Meter (OSP-B157 Power Meter) @ USB (ADR
20), SN 27873972, FW 3.1



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

Summary

Test	Frequency (MHz)	Nominal Power (dBm)	Nominal Bandwidth (MHz)	Result
Hopping Frequencies	--- (hopping)	-20.0	1.000000	PASS
Band Edge low	--- (hopping)	-20.0	1.000000	PASS
Band Edge high	--- (hopping)	-20.0	1.000000	PASS
Carrier Frequency Separation	2402.000 (hopping)	-20.0	1.000000	PASS
Carrier Frequency Separation	2441.000 (hopping)	-20.0	1.000000	PASS
Carrier Frequency Separation	2479.000 (hopping)	-20.0	1.000000	PASS
Time of Channel Occupancy	2441.000 (hopping)	-20.0	1.000000	PASS
Time of Channel Occupancy(2)	2441.000 (hopping)	-20.0	1.000000	PASS
Time of Channel Occupancy(3)	2441.000 (hopping)	-20.0	1.000000	PASS
RF output power	2402.000 (single)	-20.0	1.000000	PASS
Emission Bandwidth 20 dB	2402.000 (single)	-20.0	1.000000	PASS
Emission Bandwidth 20 dB(2)	2402.000 (single)	-20.0	1.000000	PASS
Emission Bandwidth 20 dB(3)	2402.000 (single)	-20.0	1.000000	PASS
Band Edge low	2402.000 (single)	-20.0	1.000000	PASS
RF output power	2441.000 (single)	-20.0	1.000000	PASS
Emission Bandwidth 20 dB	2441.000 (single)	-20.0	1.000000	PASS
Emission Bandwidth 20 dB(2)	2441.000 (single)	-20.0	1.000000	PASS
Emission Bandwidth 20 dB(3)	2441.000 (single)	-20.0	1.000000	PASS
RF output power	2480.000 (single)	-20.0	1.000000	PASS
Emission Bandwidth 20 dB	2480.000 (single)	-20.0	1.000000	PASS
Emission Bandwidth 20 dB(2)	2480.000 (single)	-20.0	1.000000	PASS
Emission Bandwidth 20 dB(3)	2480.000 (single)	-20.0	1.000000	PASS
Band Edge high	2480.000 (single)	-20.0	1.000000	PASS



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT


Report No. : AW0004237(5)

Date : 16 Jan 2018

Hopping Frequencies (frequency independent; -20.000 dBm; 1 MHz)

Channels

Channels	Limit Min	Limit Max	Result
79	15	---	PASS

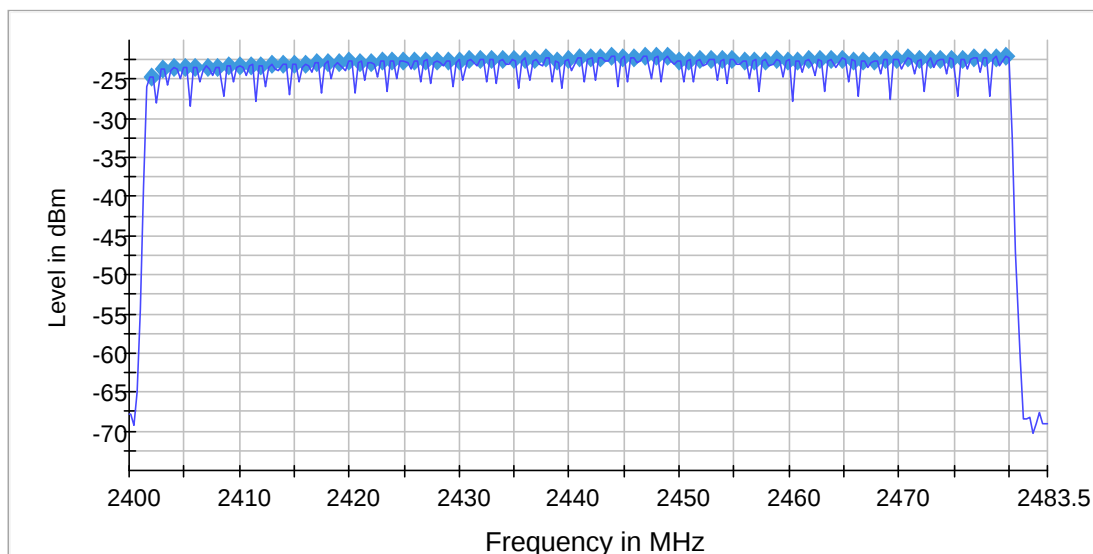

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	300.000 kHz	<= 300.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	278	~ 278
SweepTime	1.000 ms	AUTO
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50	0.50
Run	32 / max. 150	max. 150
Stable	3 / 3	3



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

Band Edge low (frequency independent; -20.000 dBm; 1 MHz)

Result

DUT Frequency (MHz)	Result
hopping	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2476.978905	-35.0

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2394.328151	-86.1	31.1	-55.0	PASS
2397.076624	-86.4	31.4	-55.0	PASS
2397.026652	-86.5	31.5	-55.0	PASS
2396.976680	-86.5	31.5	-55.0	PASS
2394.278179	-86.6	31.6	-55.0	PASS
2398.825652	-86.6	31.6	-55.0	PASS
2394.727929	-86.6	31.6	-55.0	PASS
2394.677957	-86.7	31.7	-55.0	PASS
2398.775680	-86.8	31.7	-55.0	PASS
2383.684064	-86.8	31.7	-55.0	PASS
2390.230428	-86.8	31.8	-55.0	PASS
2383.284287	-86.9	31.9	-55.0	PASS
2389.131038	-87.0	32.0	-55.0	PASS
2394.627984	-87.0	32.0	-55.0	PASS
2383.334259	-87.0	32.0	-55.0	PASS




CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

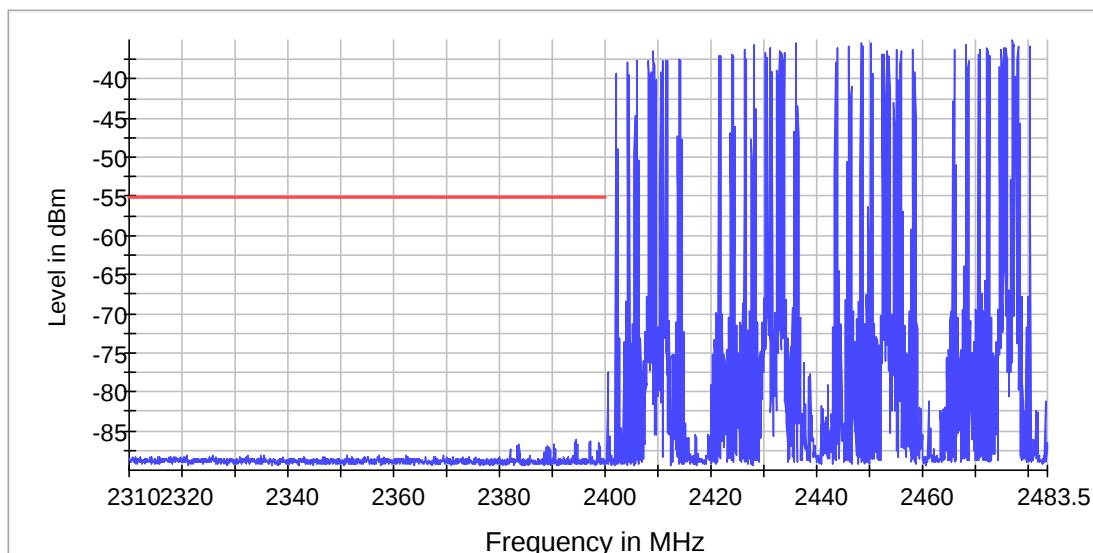

Measurement 1

Setting	Instrument Value	Target Value
RBW	100.000 kHz	≤ 100.000 kHz
VBW	300.000 kHz	≥ 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 s	1.670 s
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

Measurement 2

Setting	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 s	1.800 s
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

Band Edge high (frequency independent; -20.000 dBm; 1 MHz)

Result

DUT Frequency (MHz)	Result
hopping	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2473.031269	-34.5

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2499.077795	-80.7	26.1	-54.5	PASS
2499.127644	-81.5	26.9	-54.5	PASS
2487.114048	-81.6	27.0	-54.5	PASS
2497.682024	-81.7	27.2	-54.5	PASS
2484.920695	-81.8	27.2	-54.5	PASS
2497.632175	-81.8	27.3	-54.5	PASS
2493.793807	-81.8	27.3	-54.5	PASS
2487.163897	-81.9	27.4	-54.5	PASS
2493.843656	-81.9	27.4	-54.5	PASS
2499.526435	-82.3	27.8	-54.5	PASS
2484.970544	-82.4	27.9	-54.5	PASS
2497.333082	-82.5	28.0	-54.5	PASS
2487.064199	-82.6	28.0	-54.5	PASS
2499.177492	-82.6	28.0	-54.5	PASS
2483.674471	-82.8	28.2	-54.5	PASS




CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

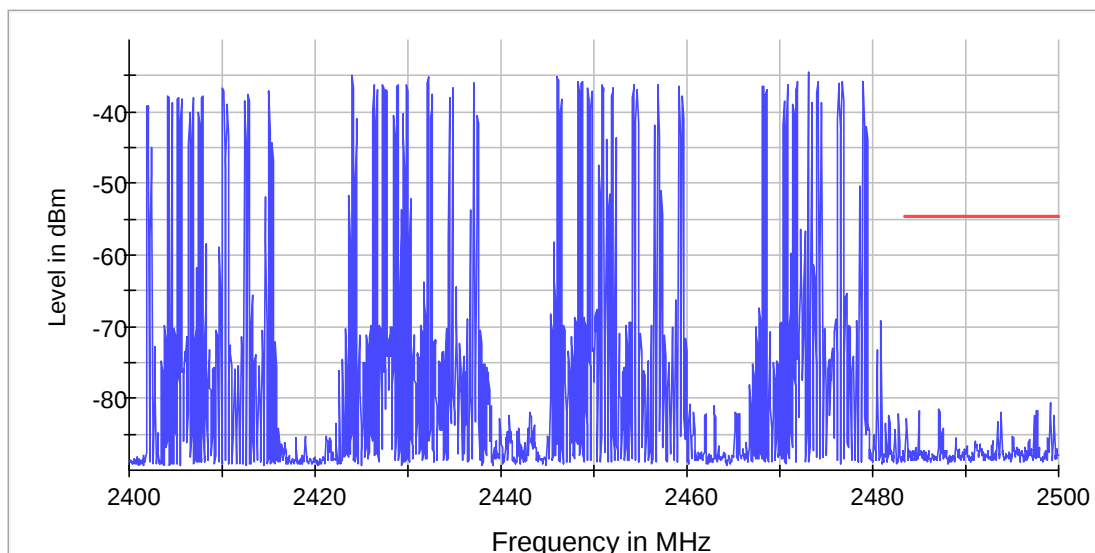

Measurement 1

Setting	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 s	1.670 s
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

Measurement 2

Setting	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	330	~ 330
SweepTime	330.000 ms	330.000 ms
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT


Report No. : AW0004237(5)

Date : 16 Jan 2018

Carrier Frequency Separation (2402 MHz; -20.000 dBm; 1 MHz)

Result

DUT Frequency (MHz)	Frequency Separation (MHz)	Limit Min (MHz)	Limit Max (MHz)	Center Frequency low Channel (MHz)	Center Frequency high Channel (MHz)	Result
2402.000000	1.000000	0.666667	---	2401.985294	2402.985294	PASS

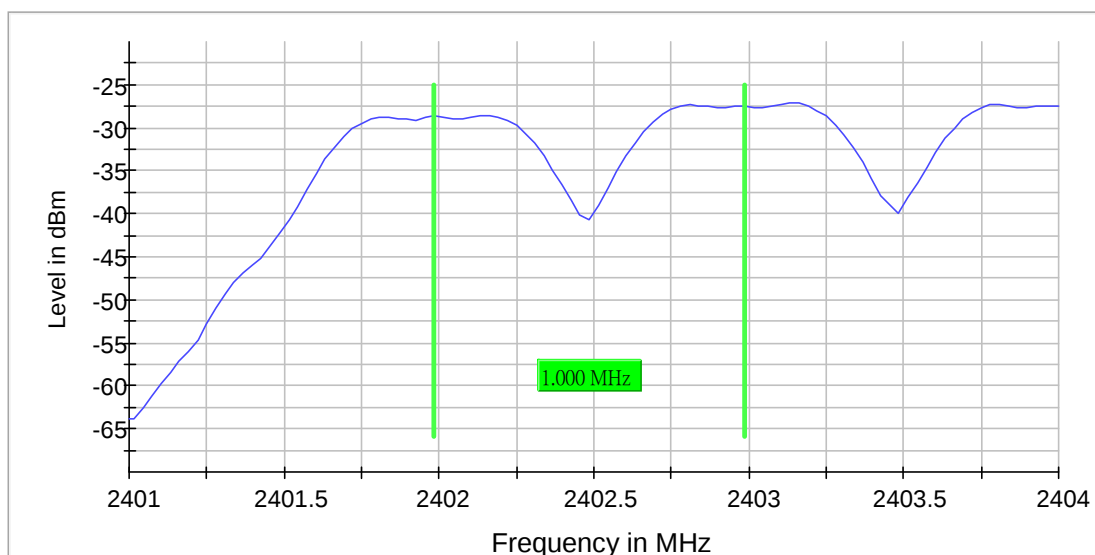

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40400 GHz	2.40400 GHz
Span	3.000 MHz	3.000 MHz
RBW	300.000 kHz	<= 300.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	101	~ 10
SweepTime	6.313 μ s	AUTO
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	33 / max. 150	max. 150
Stable	10 / 10	10



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT


Report No. : AW0004237(5)

Date : 16 Jan 2018

Carrier Frequency Separation (2441 MHz; -20.000 dBm; 1 MHz)

Result

DUT Frequency (MHz)	Frequency Separation (MHz)	Limit Min (MHz)	Limit Max (MHz)	Center Frequency low Channel (MHz)	Center Frequency high Channel (MHz)	Result
2441.000000	0.970588	0.666667	---	2440.985294	2441.955882	PASS

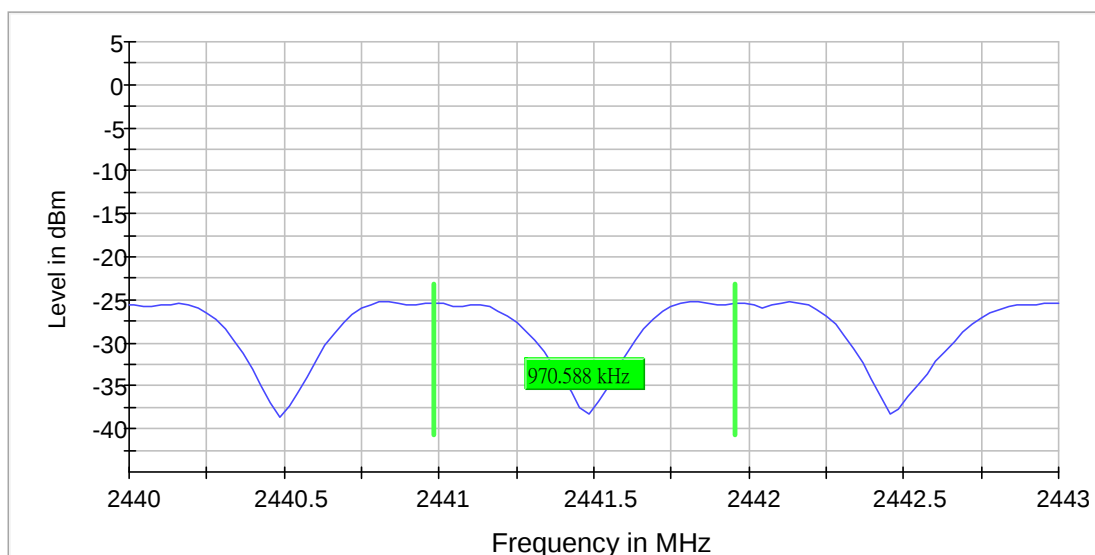

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.44000 GHz	2.44000 GHz
Stop Frequency	2.44300 GHz	2.44300 GHz
Span	3.000 MHz	3.000 MHz
RBW	300.000 kHz	<= 300.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	101	~ 10
SweepTime	6.313 μ s	AUTO
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	10 / max. 150	max. 150
Stable	10 / 10	10



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT


Report No. : AW0004237(5)

Date : 16 Jan 2018

Carrier Frequency Separation (2479 MHz; -20.000 dBm; 1 MHz)

Result

DUT Frequency (MHz)	Frequency Separation (MHz)	Limit Min (MHz)	Limit Max (MHz)	Center Frequency low Channel (MHz)	Center Frequency high Channel (MHz)	Result
2479.000000	0.970588	0.666667	---	2478.985294	2479.955882	PASS

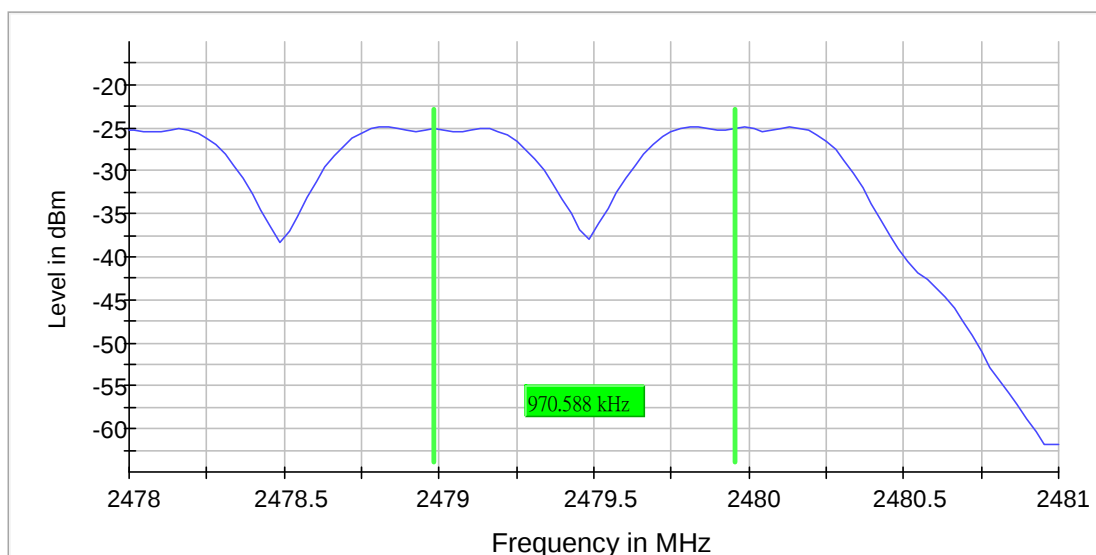

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47800 GHz	2.47800 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	3.000 MHz	3.000 MHz
RBW	300.000 kHz	<= 300.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	101	~ 10
SweepTime	6.313 μ s	AUTO
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	23 / max. 150	max. 150
Stable	10 / 10	10



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT


Report No. : AW0004237(5)

Date : 16 Jan 2018

Time of Channel Occupancy (2441 MHz; -20.000 dBm; 1 MHz)

Result

DUT Frequency (MHz)	Time (ms)	Limit Max (ms)	Limit Min (ms)	Threshold (dBm)	Result
2441.000000	130.020	---	0.000	-40.0	PASS

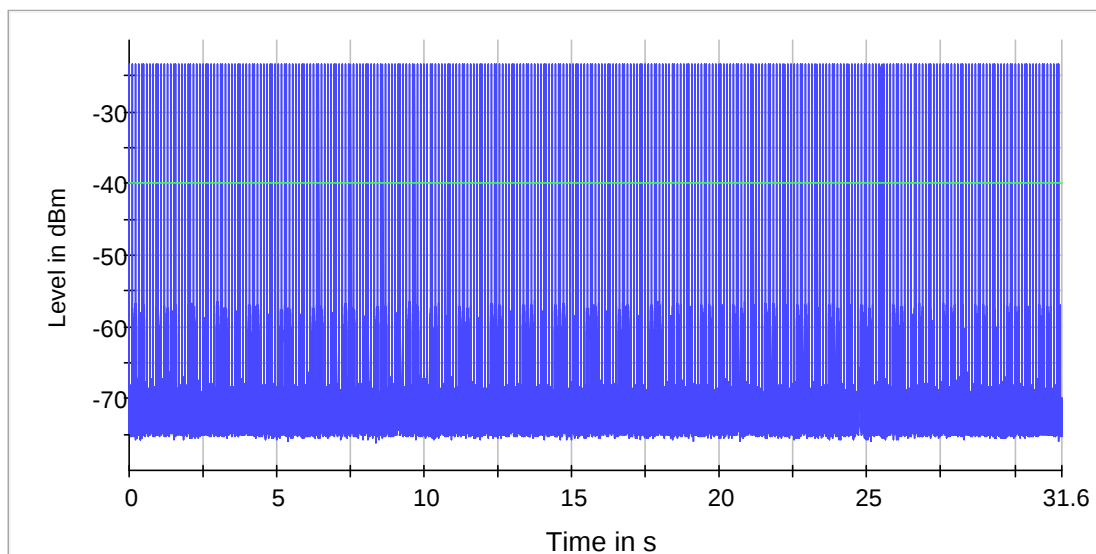

Measurement

Setting	Instrument Value	Target Value
Center Frequency	2.44100 GHz	2.44100 GHz
Span	ZeroSpan	ZeroSpan
RBW	500.000 kHz	~ 500.000 kHz
VBW	1.000 MHz	~ 1.500 MHz
SweepPoints	30001	~ 30001
SweepTime	31.600 s	31.600 s
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	1	1
Filter	Channel	Channel
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off
Trigger	Extern	Extern
Trigger Offset	0.000 ms	0.000 ms



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT


Report No. : AW0004237(5)

Date : 16 Jan 2018

Time of Channel Occupancy(2) (2441 MHz; -20.000 dBm; 1 MHz)

Result

DUT Frequency (MHz)	Time (ms)	Limit Max (ms)	Limit Min (ms)	Threshold (dBm)	Result
2441.000000	265.970	---	0.000	-40.0	PASS

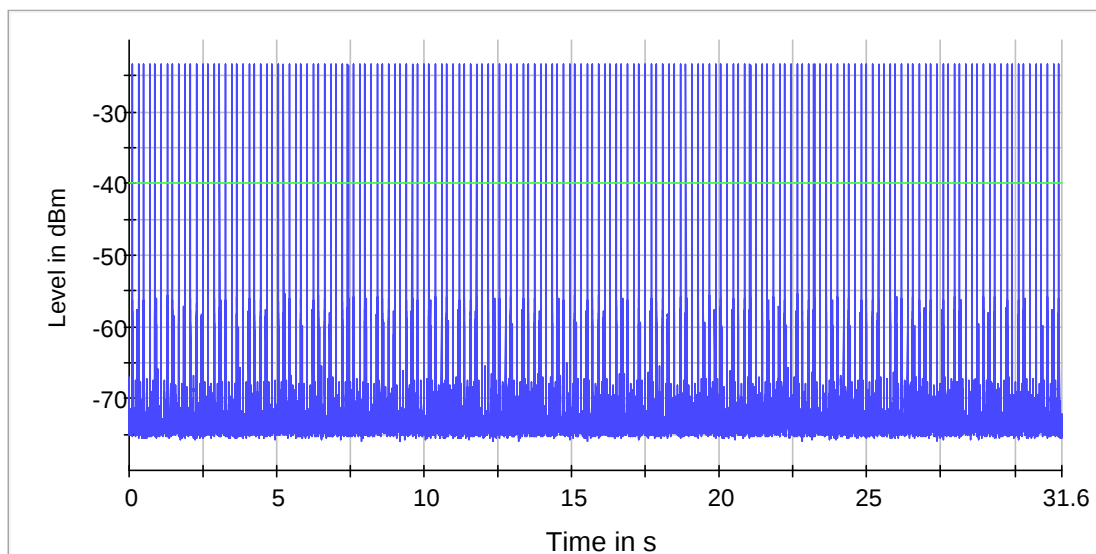

Measurement

Setting	Instrument Value	Target Value
Center Frequency	2.44100 GHz	2.44100 GHz
Span	ZeroSpan	ZeroSpan
RBW	500.000 kHz	~ 500.000 kHz
VBW	1.000 MHz	~ 1.500 MHz
SweepPoints	30001	~ 30001
SweepTime	31.600 s	31.600 s
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	1	1
Filter	Channel	Channel
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off
Trigger	Extern	Extern
Trigger Offset	0.000 ms	0.000 ms



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT


Report No. : AW0004237(5)

Date : 16 Jan 2018

Time of Channel Occupancy(3) (2441 MHz; -20.000 dBm; 1 MHz)

Result

DUT Frequency (MHz)	Time (ms)	Limit Max (ms)	Limit Min (ms)	Threshold (dBm)	Result
2441.000000	311.390	---	0.000	-40.0	PASS

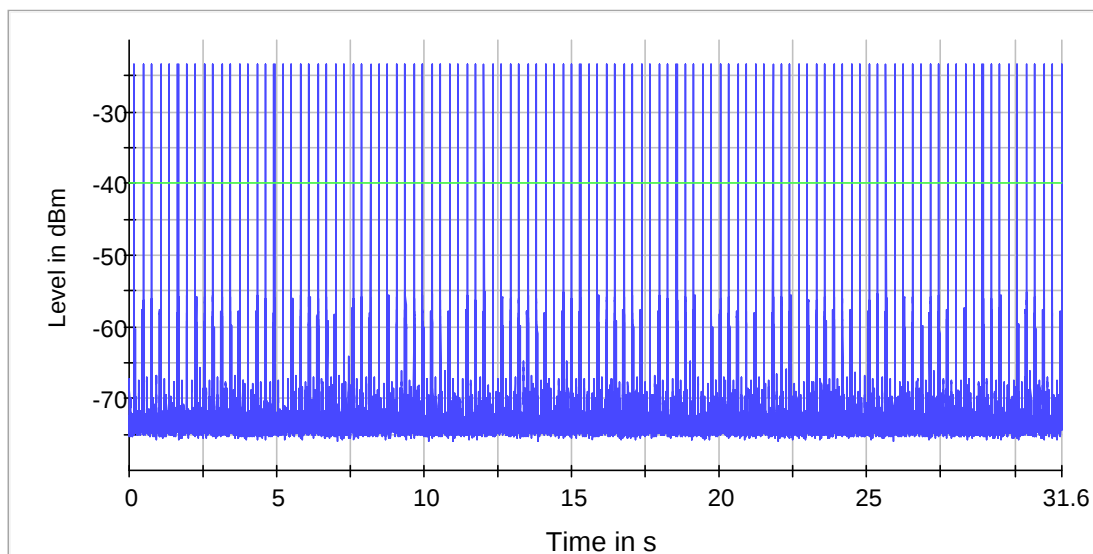

Measurement

Setting	Instrument Value	Target Value
Center Frequency	2.44100 GHz	2.44100 GHz
Span	ZeroSpan	ZeroSpan
RBW	500.000 kHz	~ 500.000 kHz
VBW	1.000 MHz	~ 1.500 MHz
SweepPoints	30001	~ 30001
SweepTime	31.600 s	31.600 s
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	1	1
Filter	Channel	Channel
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off
Trigger	Extern	Extern
Trigger Offset	0.000 ms	0.000 ms



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT


Report No. : AW0004237(5)

Date : 16 Jan 2018

RF output power (2402 MHz; -20.000 dBm; 1 MHz; Test Mode)

Result

DUT Frequency (MHz)	Gated (dBm)	Limit Max (dBm)	DutyCycle (%)	Result
2402.000000	-24.9	21.0	77.537	PASS

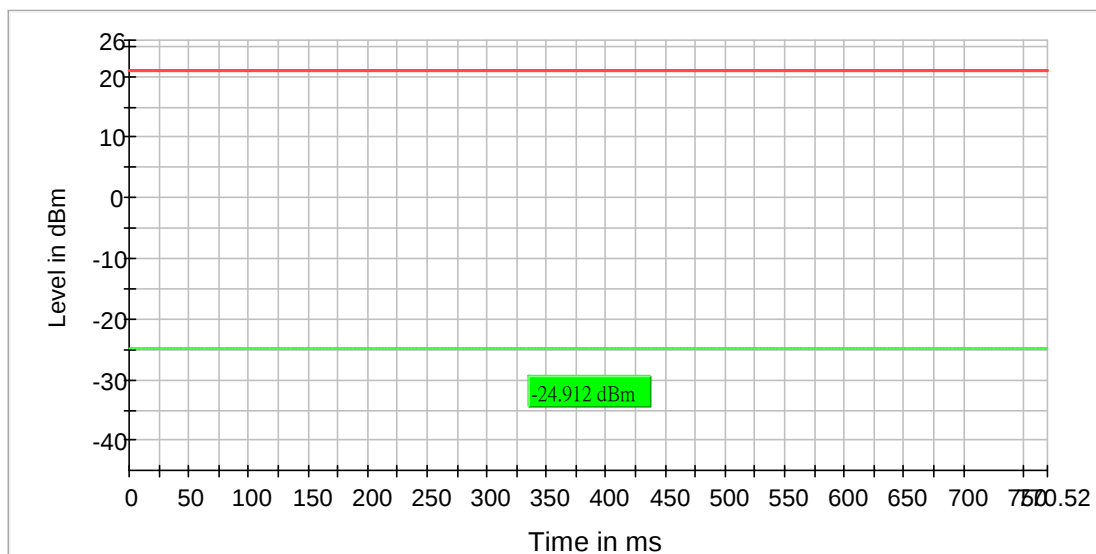



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT


Report No. : AW0004237(5)

Date : 16 Jan 2018

Emission Bandwidth 20 dB (2402 MHz; -20.000 dBm; 1 MHz; Test Mode)

20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
2402.000000	0.935324	---	---	2401.532338	2402.467662	-30.6	PASS

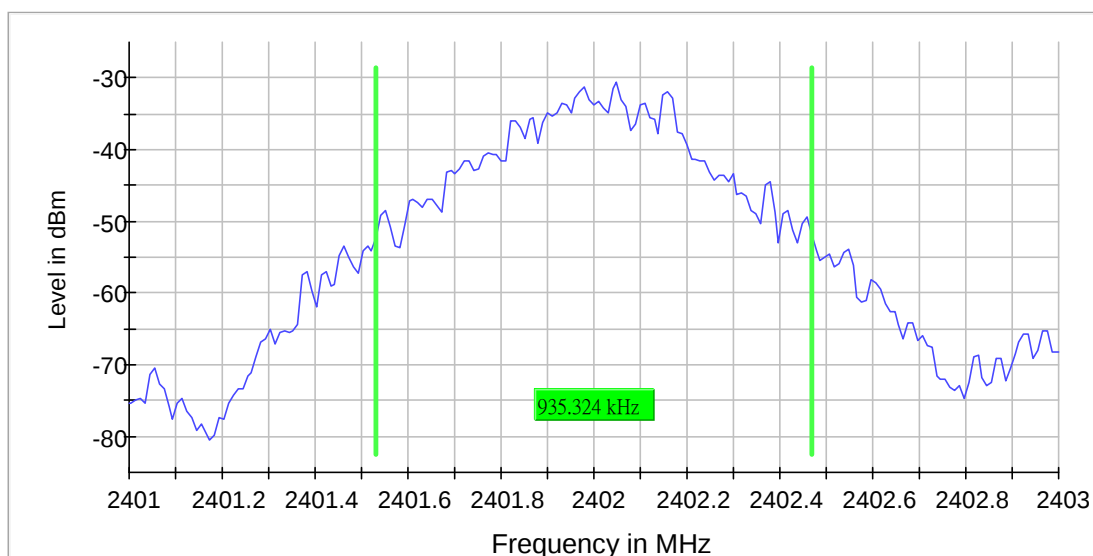

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	~ 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	200	~ 200
SweepTime	189.620 μ s	AUTO
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	7 / max. 150	max. 150
Stable	5 / 5	5



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT


Report No. : AW0004237(5)

Date : 16 Jan 2018

Emission Bandwidth 20 dB(2) (2402 MHz; -20.000 dBm; 1 MHz; Test Mode)

20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
2402.000000	1.273631	---	---	2401.383085	2402.656716	-35.0	PASS

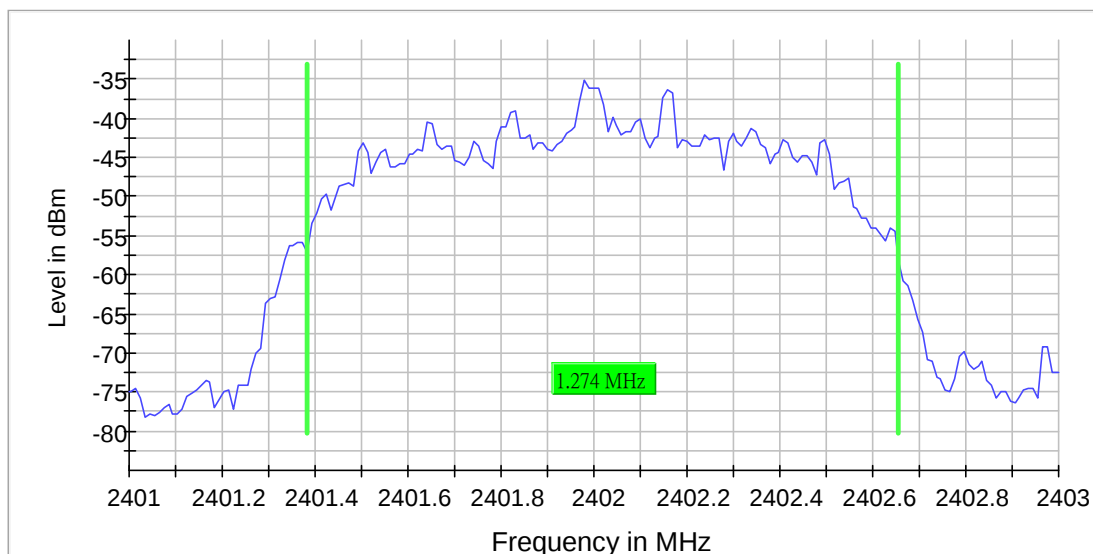

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	~ 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	200	~ 200
SweepTime	189.620 μ s	AUTO
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	9 / max. 150	max. 150
Stable	5 / 5	5



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT


Report No. : AW0004237(5)

Date : 16 Jan 2018

Emission Bandwidth 20 dB(3) (2402 MHz; -20.000 dBm; 1 MHz; Test Mode)

20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
2402.000000	1.273632	---	---	2401.353234	2402.626866	-35.1	PASS

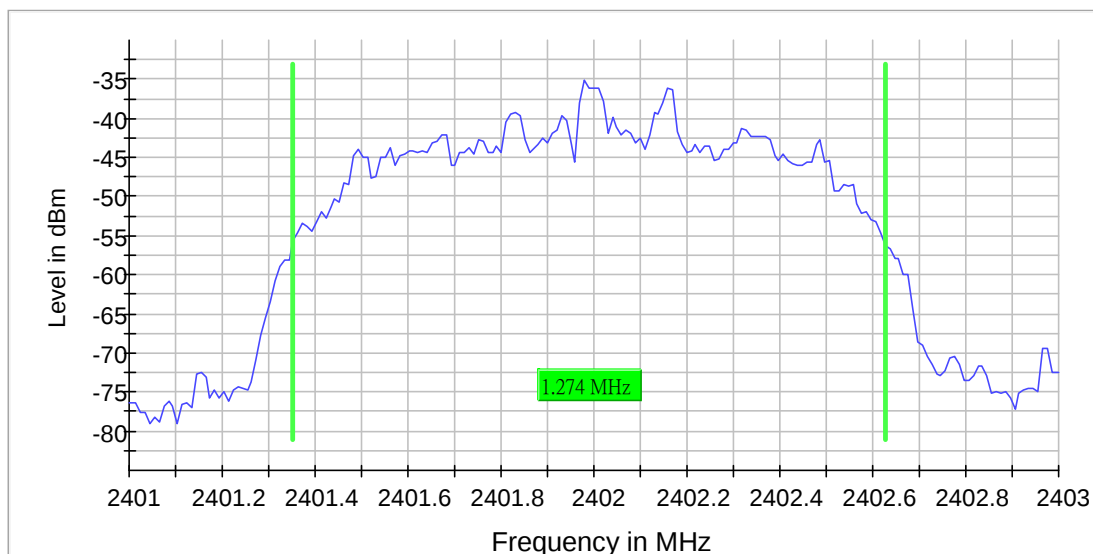

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	~ 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	200	~ 200
SweepTime	189.620 μ s	AUTO
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	8 / max. 150	max. 150
Stable	5 / 5	5



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

Band Edge low (2402 MHz; -20.000 dBm; 1 MHz; Test Mode)

Result

DUT Frequency (MHz)	Result
2402.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2402.123728	-38.8

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2381.985008	-86.3	27.6	-58.8	PASS
2399.925042	-86.4	27.6	-58.8	PASS
2399.725153	-86.4	27.6	-58.8	PASS
2399.775125	-86.4	27.6	-58.8	PASS
2382.084953	-86.7	27.9	-58.8	PASS
2381.885064	-86.8	28.0	-58.8	PASS
2382.034981	-86.8	28.0	-58.8	PASS
2381.785119	-86.8	28.1	-58.8	PASS
2382.234870	-86.9	28.2	-58.8	PASS
2399.575236	-87.0	28.2	-58.8	PASS
2399.675180	-87.0	28.2	-58.8	PASS
2399.625208	-87.0	28.2	-58.8	PASS
2381.685175	-87.1	28.3	-58.8	PASS
2382.334814	-87.1	28.3	-58.8	PASS
2381.585230	-87.1	28.4	-58.8	PASS




CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

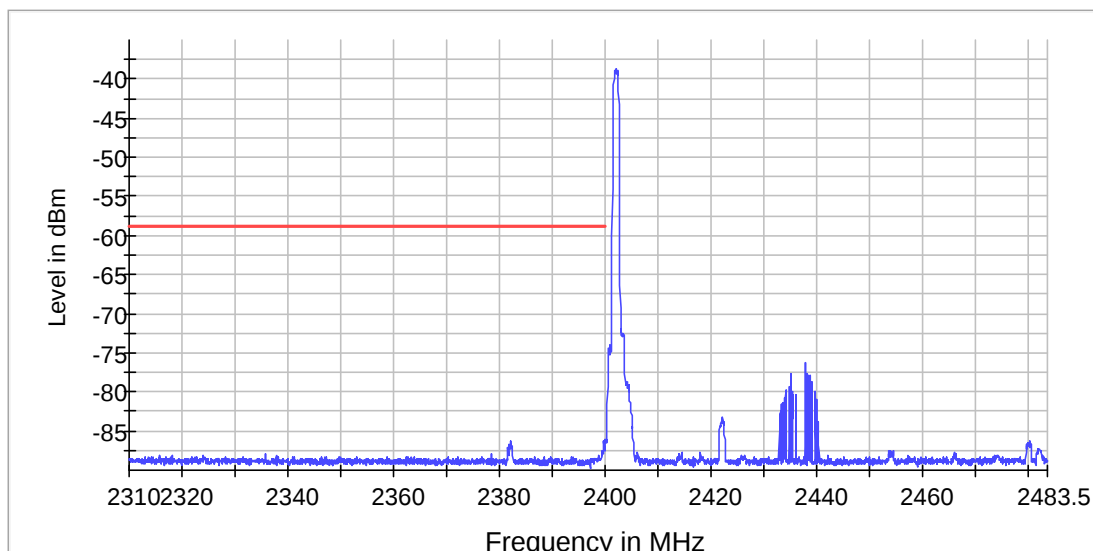

Measurement 1

Setting	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 s	1.670 s
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

Measurement 2

Setting	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 s	1.800 s
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT


Report No. : AW0004237(5)

Date : 16 Jan 2018

RF output power (2441 MHz; -20.000 dBm; 1 MHz; Test Mode)

Result

DUT Frequency (MHz)	Gated (dBm)	Limit Max (dBm)	DutyCycle (%)	Result
2441.000000	-22.5	21.0	77.640	PASS

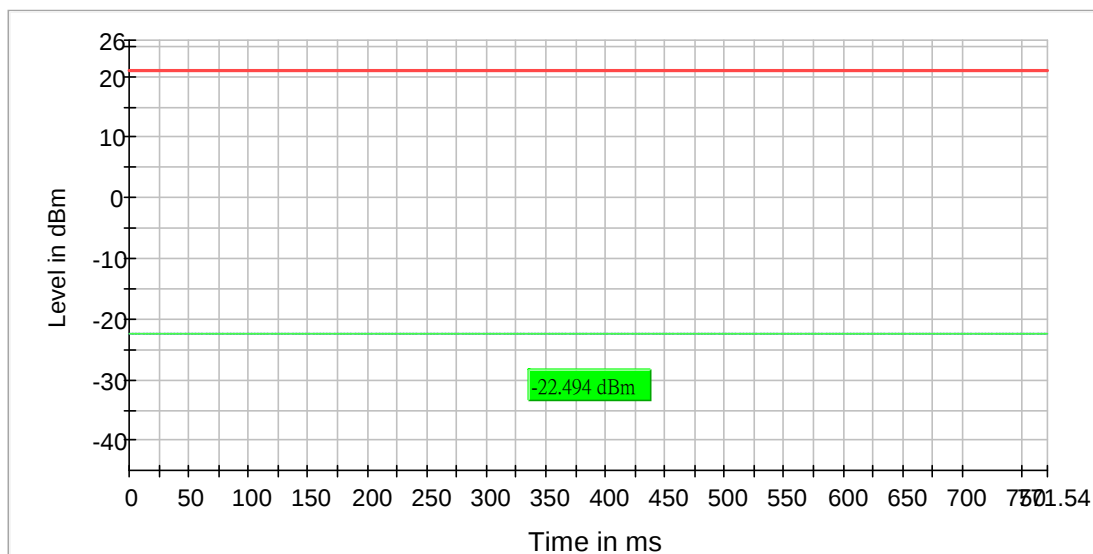



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT


Report No. : AW0004237(5)

Date : 16 Jan 2018

Emission Bandwidth 20 dB (2441 MHz; -20.000 dBm; 1 MHz; Test Mode)

20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
2441.000000	0.935324	---	---	2440.532338	2441.467662	-28.1	PASS

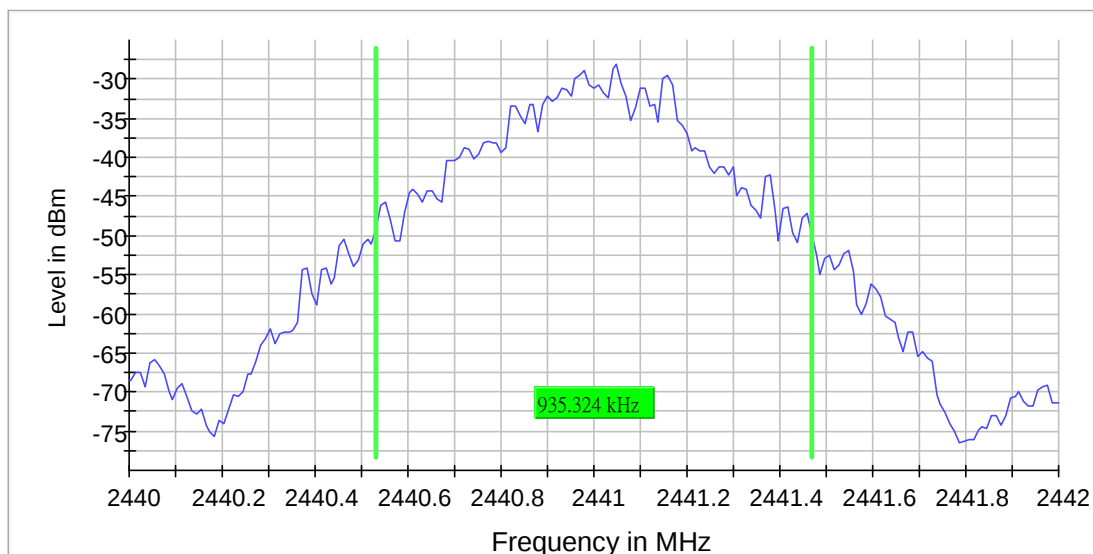

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.44000 GHz	2.44000 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	~ 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	200	~ 200
SweepTime	189.620 μ s	AUTO
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	7 / max. 150	max. 150
Stable	5 / 5	5



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT


Report No. : AW0004237(5)

Date : 16 Jan 2018

Emission Bandwidth 20 dB(2) (2441 MHz; -20.000 dBm; 1 MHz; Test Mode)

20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
2441.000000	1.293532	---	---	2440.353234	2441.646766	-31.8	PASS

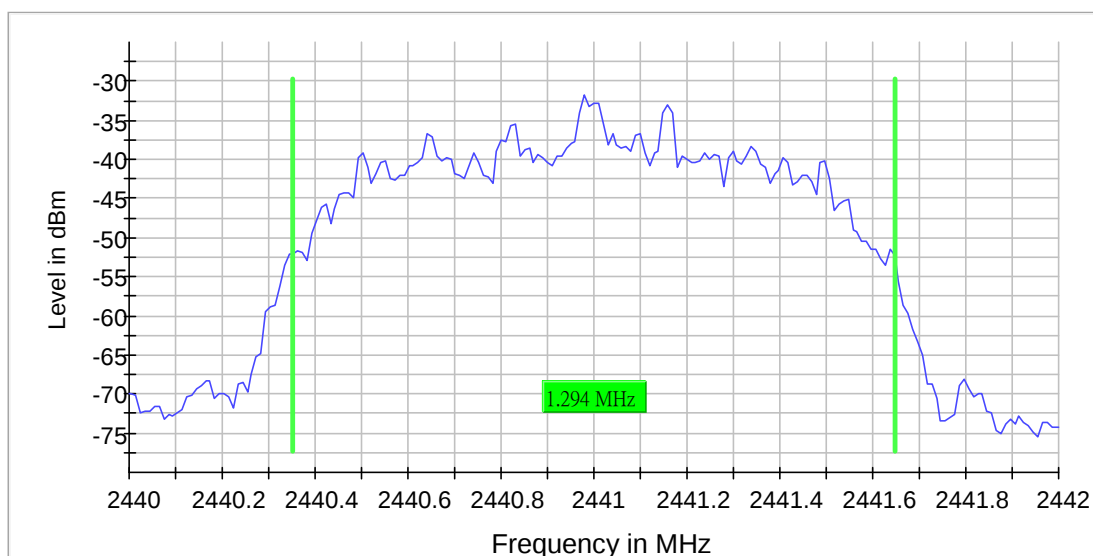

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.44000 GHz	2.44000 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	~ 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	200	~ 200
SweepTime	189.620 μ s	AUTO
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	6 / max. 150	max. 150
Stable	5 / 5	5



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT


Report No. : AW0004237(5)

Date : 16 Jan 2018

Emission Bandwidth 20 dB(3) (2441 MHz; -20.000 dBm; 1 MHz; Test Mode)

20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
2441.000000	1.273631	---	---	2440.343284	2441.616915	-31.8	PASS

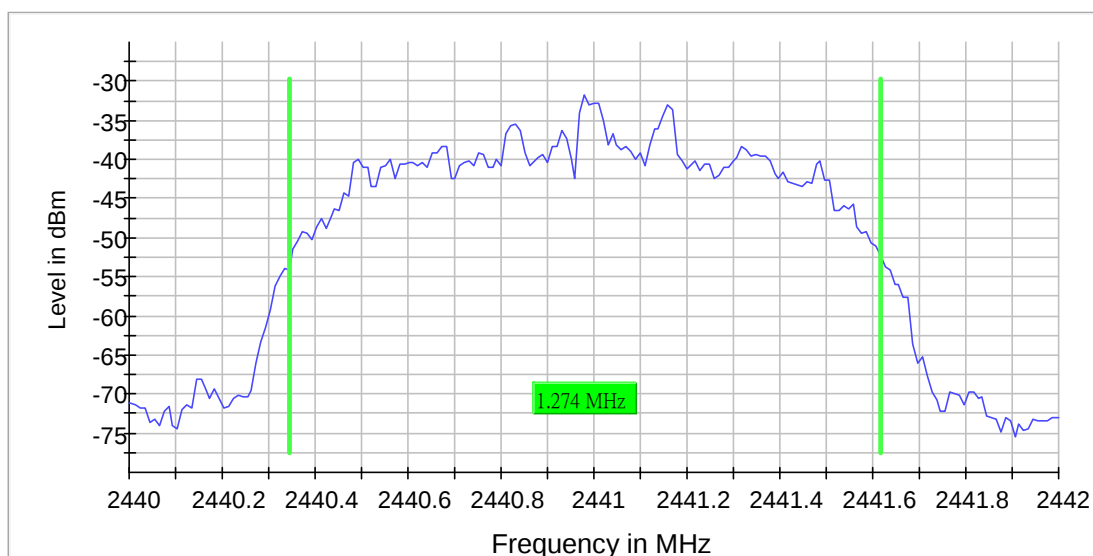

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.44000 GHz	2.44000 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	~ 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	200	~ 200
SweepTime	189.620 μ s	AUTO
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	8 / max. 150	max. 150
Stable	5 / 5	5



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT


Report No. : AW0004237(5)

Date : 16 Jan 2018

RF output power (2480 MHz; -20.000 dBm; 1 MHz; Test Mode)

Result

DUT Frequency (MHz)	Gated (dBm)	Limit Max (dBm)	DutyCycle (%)	Result
2480.000000	-22.3	21.0	77.649	PASS

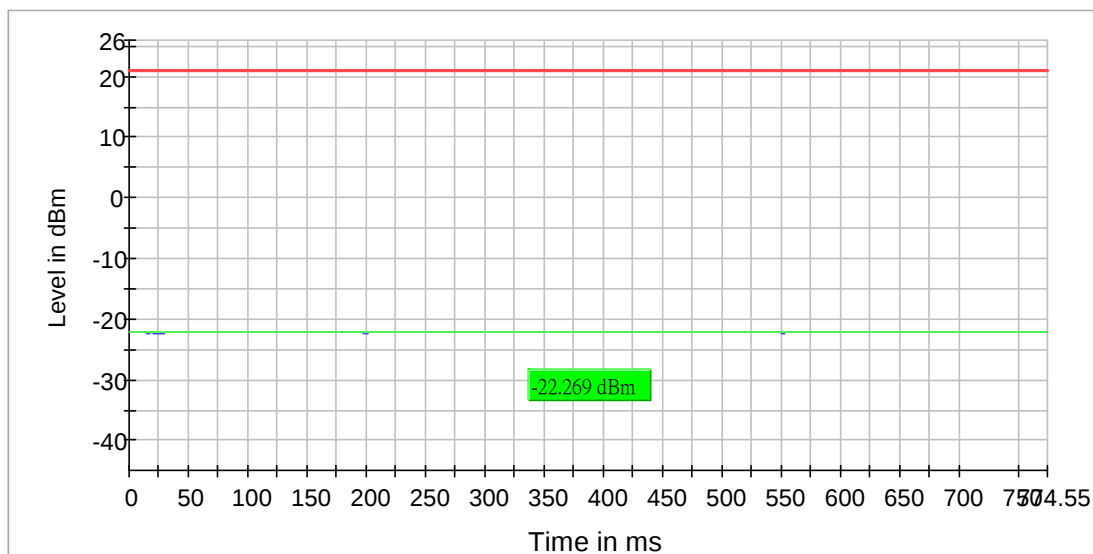



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT


Report No. : AW0004237(5)

Date : 16 Jan 2018

Emission Bandwidth 20 dB (2480 MHz; -20.000 dBm; 1 MHz; Test Mode)

20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
2480.000000	0.935324	---	---	2479.532338	2480.467662	-28.0	PASS

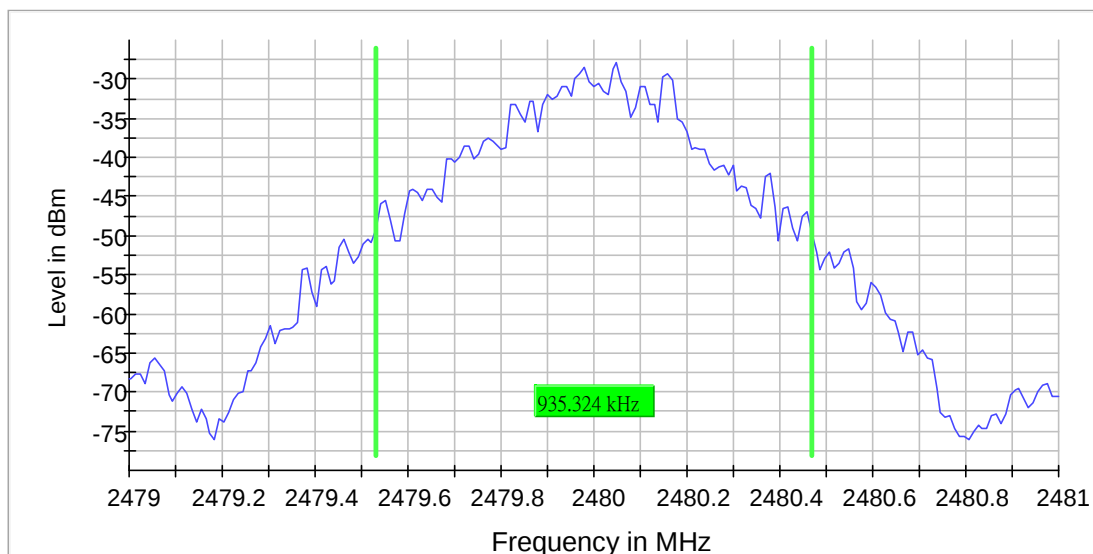

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	~ 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	200	~ 200
SweepTime	189.620 μ s	AUTO
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	7 / max. 150	max. 150
Stable	5 / 5	5



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT


Report No. : AW0004237(5)

Date : 16 Jan 2018

Emission Bandwidth 20 dB(2) (2480 MHz; -20.000 dBm; 1 MHz; Test Mode)

20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
2480.000000	1.263681	---	---	2479.383085	2480.646766	-31.4	PASS

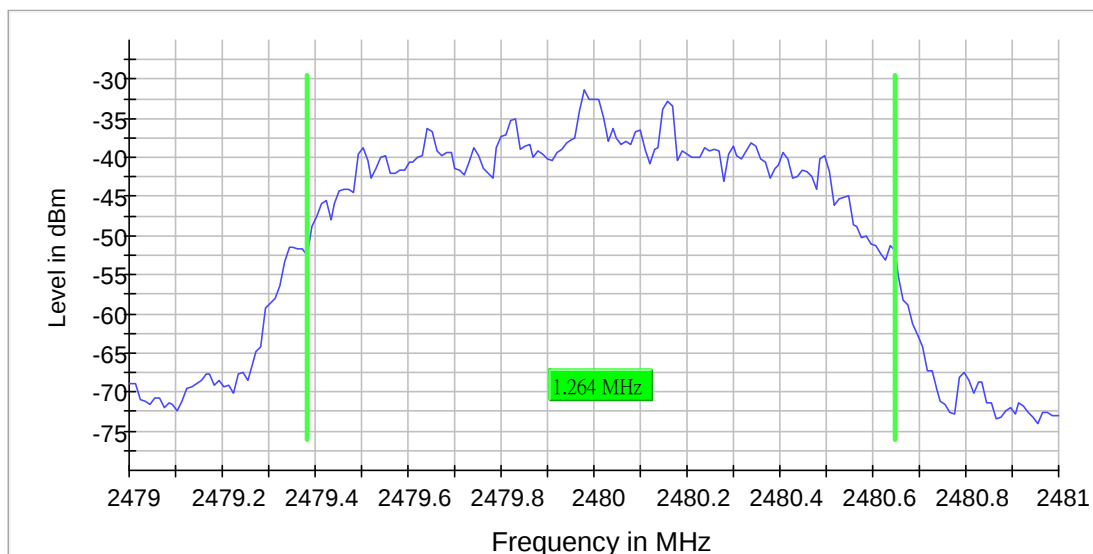

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	~ 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	200	~ 200
SweepTime	189.620 μ s	AUTO
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	7 / max. 150	max. 150
Stable	5 / 5	5



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT


Report No. : AW0004237(5)

Date : 16 Jan 2018

Emission Bandwidth 20 dB(3) (2480 MHz; -20.000 dBm; 1 MHz; Test Mode)

20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
2480.000000	1.273631	---	---	2479.343284	2480.616915	-31.4	PASS

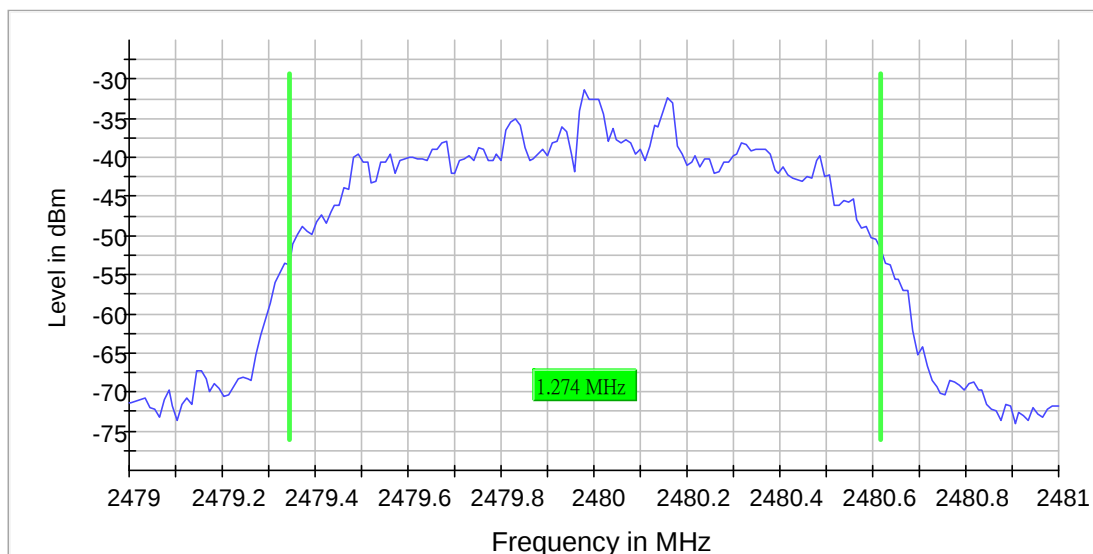

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	~ 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	200	~ 200
SweepTime	189.620 μ s	AUTO
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	9 / max. 150	max. 150
Stable	5 / 5	5



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

Band Edge high (2480 MHz; -20.000 dBm; 1 MHz; Test Mode)

Result

DUT Frequency (MHz)	Result
2480.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
2480.027080	-34.8

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2499.925227	-79.6	24.8	-54.8	PASS
2500.000000	-79.6	24.8	-54.8	PASS
2499.875378	-80.0	25.2	-54.8	PASS
2499.825529	-80.2	25.4	-54.8	PASS
2499.775680	-80.2	25.4	-54.8	PASS
2499.725831	-80.2	25.5	-54.8	PASS
2499.626133	-80.3	25.5	-54.8	PASS
2499.675982	-80.3	25.5	-54.8	PASS
2499.576284	-80.5	25.7	-54.8	PASS
2499.526435	-81.3	26.5	-54.8	PASS
2499.476586	-82.1	27.3	-54.8	PASS
2499.426737	-83.2	28.4	-54.8	PASS
2499.376888	-84.8	30.0	-54.8	PASS
2491.849698	-86.5	31.7	-54.8	PASS
2484.073263	-86.5	31.7	-54.8	PASS




CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

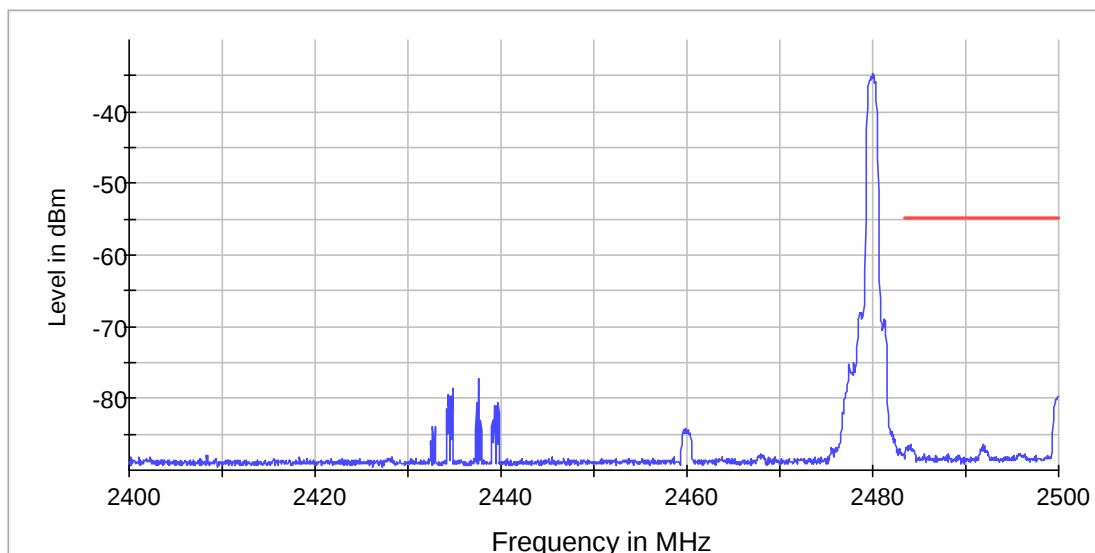

Measurement 1

Setting	Instrument Value	Target Value
RBW	100.000 kHz	≤ 100.000 kHz
VBW	300.000 kHz	≥ 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 s	1.670 s
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

Measurement 2

Setting	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	330	~ 330
SweepTime	330.000 ms	330.000 ms
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

Tx Spurious Emission (2402 MHz; -20.000 dBm; 1 MHz; Test Mode)

Result

DUT Frequency (MHz)	Result
2402.000000	PASS

Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
4804.493054	-45.2	-49.5	-41.2	8.3	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
4804.493054	-45.2	3.9	-41.2
4803.993109	-45.4	4.2	-41.2
4803.493165	-45.5	4.3	-41.2
4804.992999	-47.3	6.0	-41.2
4802.993220	-48.2	7.0	-41.2
4805.492943	-55.0	13.8	-41.2
7208.096369	-61.5	15.6	-45.9
7207.502656	-61.9	16.0	-45.9
4802.493275	-57.4	16.1	-41.2
17677.629523	-62.1	16.2	-45.9
16991.297419	-62.3	16.4	-45.9
7208.690082	-62.5	16.6	-45.9
17698.409474	-62.6	16.7	-45.9
17685.347791	-62.7	16.7	-45.9
16376.804575	-62.8	16.9	-45.9

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	2400.000000	2	2
2400.000000	2483.500000	2	2
2483.500000	7000.000000	2	2
7000.000000	26000.000000	2	2




CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

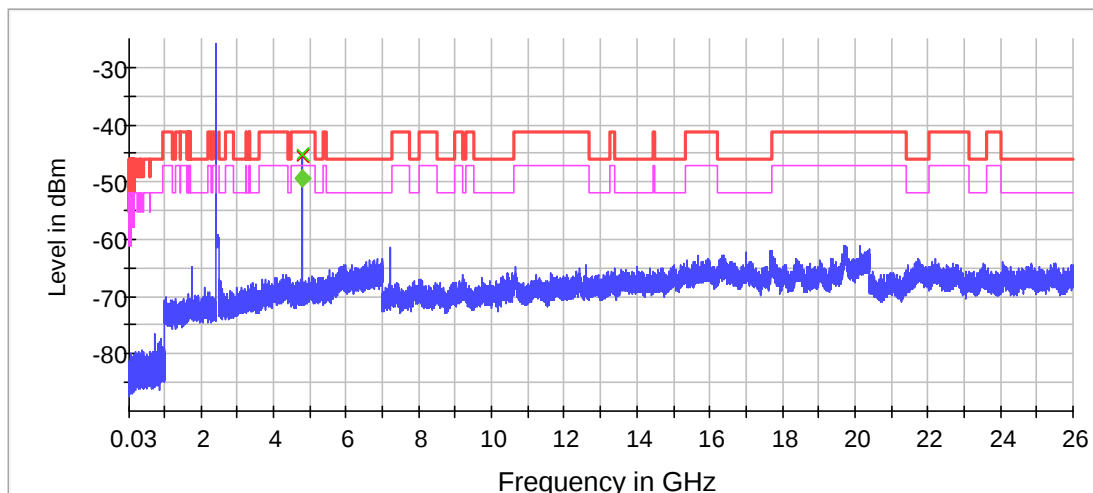

× Limit [limit.Result:1] × Sum Level [trace.Result:1]
◆ Threshold [limit 2.Result:1] ◆ Critical [Over Limit.Result:1]

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	19400	~ 19400
SweepTime	19.400 ms	AUTO
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 150	max. 150
Stable	3 / 3	3

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	2800	~ 2800
SweepTime	2.800 ms	AUTO
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

Trace Mode	Max Hold	Max Hold
Sweep type	Sweep	AUTO
Preamp	off	off
Stable mode	Trace	Trace
Stable value	0.30	0.30
Run	3 / max. 150	max. 150
Stable	3 / 3	3

Final Measurement 2

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
Sweep Points	10001	~ 10001
Sweep time	1.000 s	1.000 s
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
Sweep Count	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
Sweep type	Sweep	AUTO
Preamp	off	off



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

Tx Spurious Emission (2441 MHz; -20.000 dBm; 1 MHz; Test Mode)

Result

DUT Frequency (MHz)	Result
2441.000000	PASS

Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
4881.484531	-44.8	-49.3	-41.2	8.0	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
4881.484531	-44.8	3.6	-41.2
4881.984475	-44.8	3.6	-41.2
4882.484420	-45.0	3.8	-41.2
4880.984586	-46.9	5.7	-41.2
4882.984365	-47.0	5.8	-41.2
4883.484309	-54.4	13.2	-41.2
7322.682957	-54.7	13.5	-41.2
4880.484641	-55.0	13.8	-41.2
7322.089244	-55.1	13.9	-41.2
7323.276670	-55.3	14.0	-41.2
7323.870383	-55.3	14.1	-41.2
7321.495532	-57.0	15.8	-41.2
7320.901819	-57.7	16.5	-41.2
7324.464096	-58.9	17.7	-41.2
7320.308106	-60.2	18.9	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	2400.000000	2	2
2400.000000	2483.500000	2	2
2483.500000	7000.000000	2	2
7000.000000	26000.000000	2	2




CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

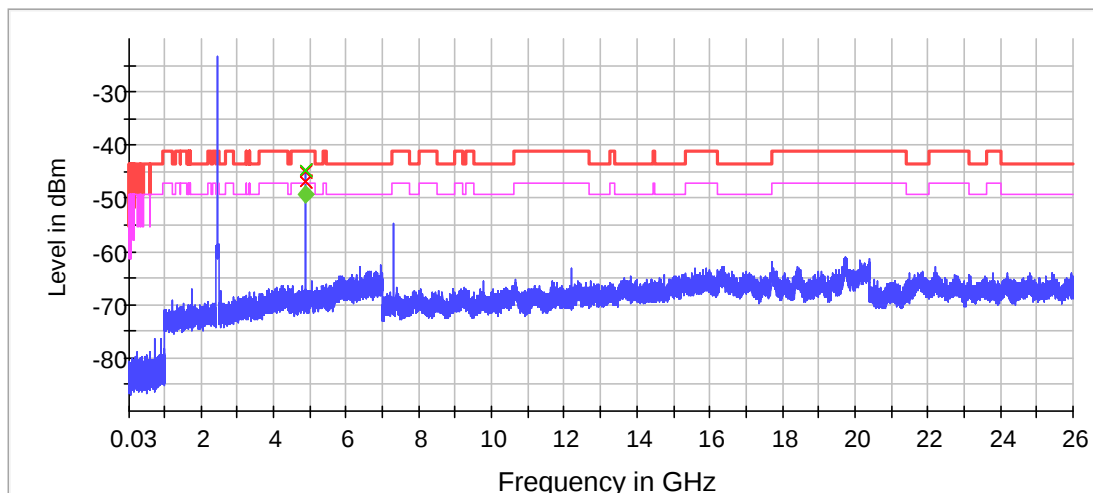

× Limit [limit.Result:1] × Sum Level [trace.Result:1]
◆ Threshold [limit 2.Result:1] ◆ Critical [Over Limit.Result:1]

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	19400	~ 19400
SweepTime	19.400 ms	AUTO
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 150	max. 150
Stable	3 / 3	3

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	2800	~ 2800
SweepTime	2.800 ms	AUTO
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

Trace Mode	Max Hold	Max Hold
Sweep type	Sweep	AUTO
Preamp	off	off
Stable mode	Trace	Trace
Stable value	0.30	0.30
Run	3 / max. 150	max. 150
Stable	3 / 3	3

Final Measurement 2

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
Sweep Points	10001	~ 10001
Sweep time	1.000 s	1.000 s
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
Sweep Count	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
Sweep type	Sweep	AUTO
Preamp	off	off



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

Tx Spurious Emission (2480 MHz; -20.000 dBm; 1 MHz; Test Mode)

Result

DUT Frequency (MHz)	Result
2480.000000	PASS

Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
4960.475786	-47.2	6.0	-41.2
4959.975841	-47.3	6.0	-41.2
4959.475897	-47.3	6.0	-41.2
4960.975731	-48.9	7.7	-41.2
4958.975952	-50.2	9.0	-41.2
7439.050684	-54.1	12.9	-41.2
7439.644397	-54.3	13.1	-41.2
7440.238110	-54.6	13.4	-41.2
7440.831823	-54.9	13.7	-41.2
7438.456971	-55.8	14.6	-41.2
7437.863259	-56.8	15.6	-41.2
4958.476007	-56.9	15.6	-41.2
4961.475675	-57.4	16.2	-41.2
7437.269546	-59.7	18.5	-41.2
16332.869821	-61.9	19.3	-42.6

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	2400.000000	2	2
2400.000000	2483.500000	2	2
2483.500000	7000.000000	2	2
7000.000000	26000.000000	2	2




CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

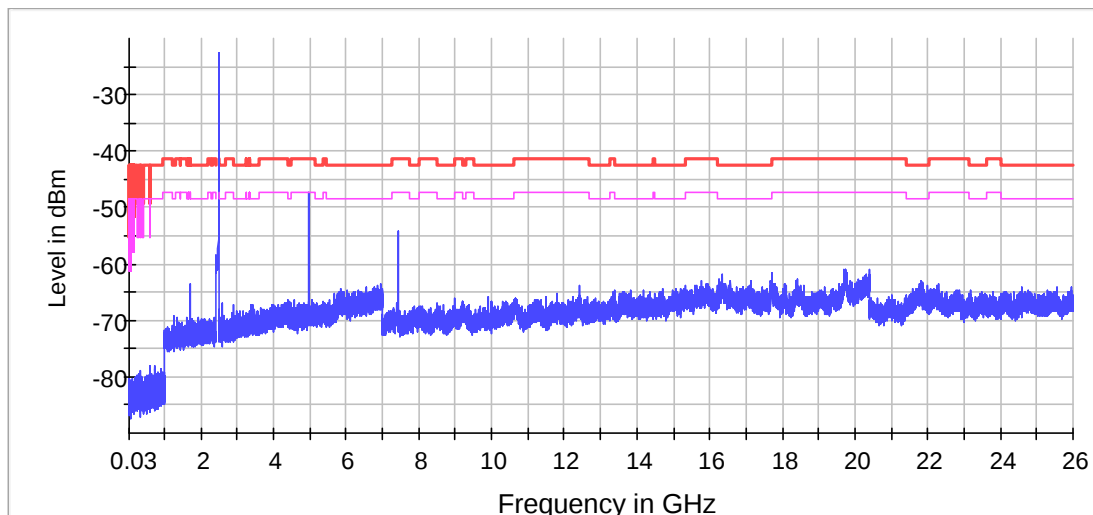

× Limit [limit.Result:1] × Sum Level [trace.Result:1]

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	19400	~ 19400
SweepTime	19.400 ms	AUTO
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 150	max. 150
Stable	3 / 3	3

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	2800	~ 2800
SweepTime	2.800 ms	AUTO
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

Trace Mode	Max Hold	Max Hold
Sweep type	Sweep	AUTO
Preamp	off	off
Stable mode	Trace	Trace
Stable value	0.30	0.30
Run	3 / max. 150	max. 150
Stable	3 / 3	3



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AW0004237(5)

Date : 16 Jan 2018

99% Occupied bandwidth

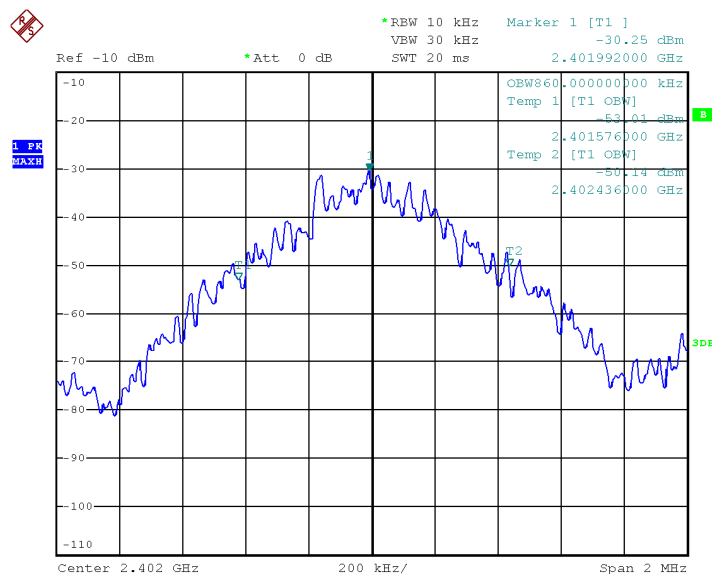

2402MHz, GFSK

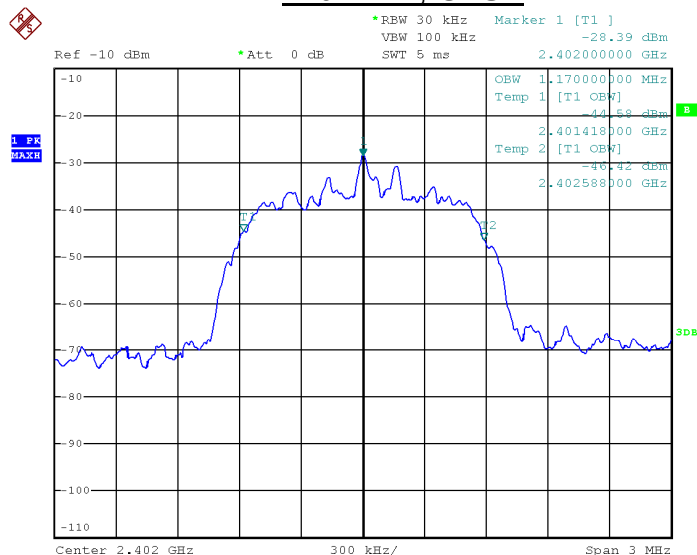

2402MHz, $\pi/4$ QDPSK




CMA Testing and Certification Laboratories

廠商會檢定中心


TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

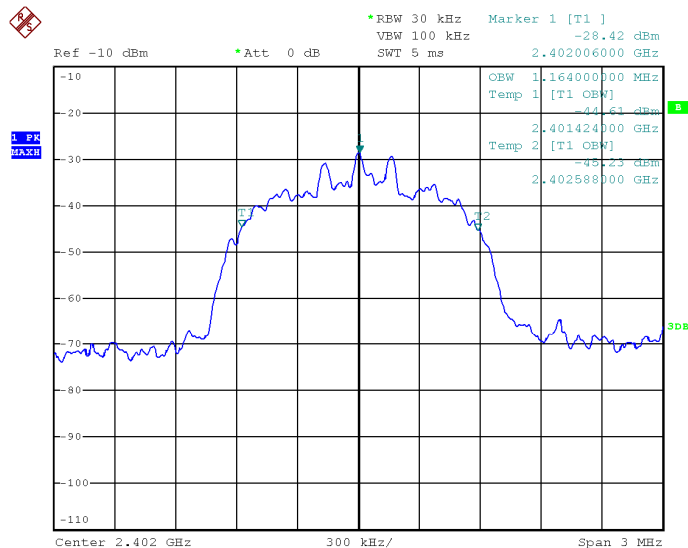

2402MHz, 8DPSK

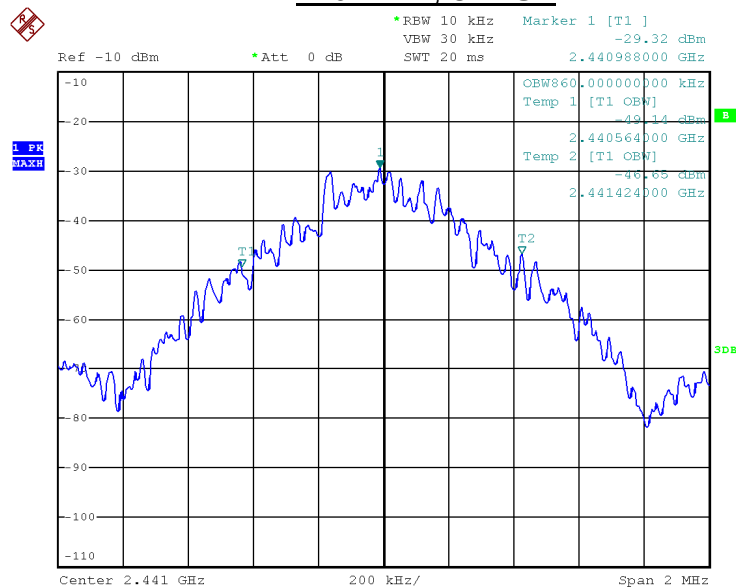

2441MHz, GFSK




CMA Testing and Certification Laboratories

廠商會檢定中心


TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

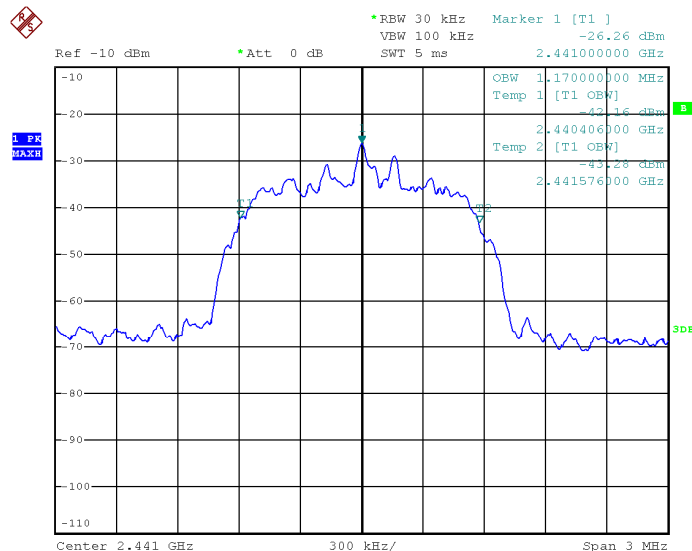

2441MHz, $\pi/4$ QDPSK

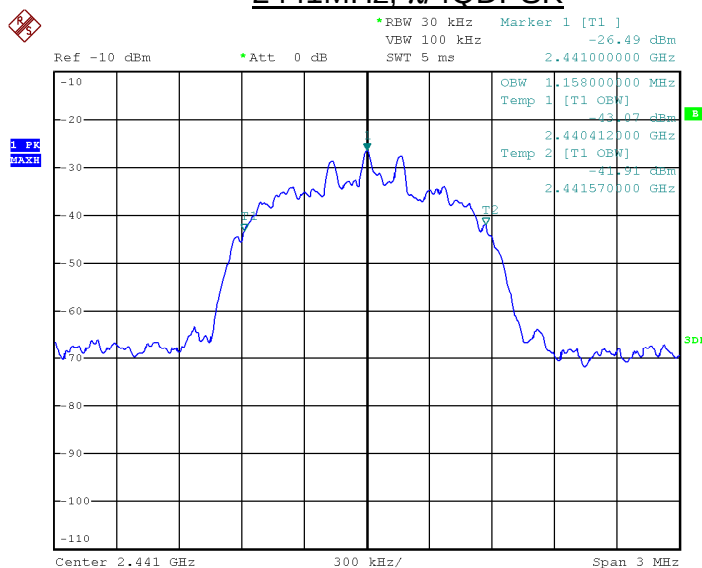

2441MHz, 8DPSK



CMA Testing and Certification Laboratories

廠商會檢定中心


TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018



2480MHz, GFSK

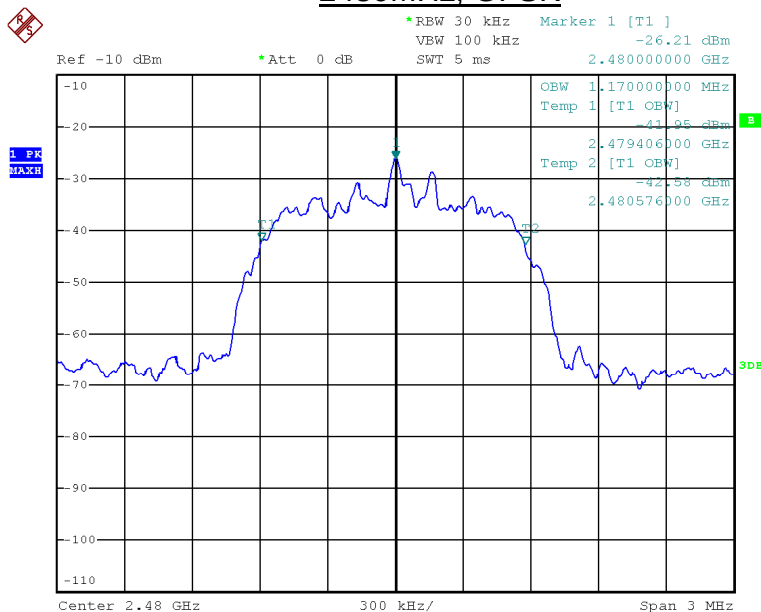

2480MHz, $\pi/4$ QDPSK




CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

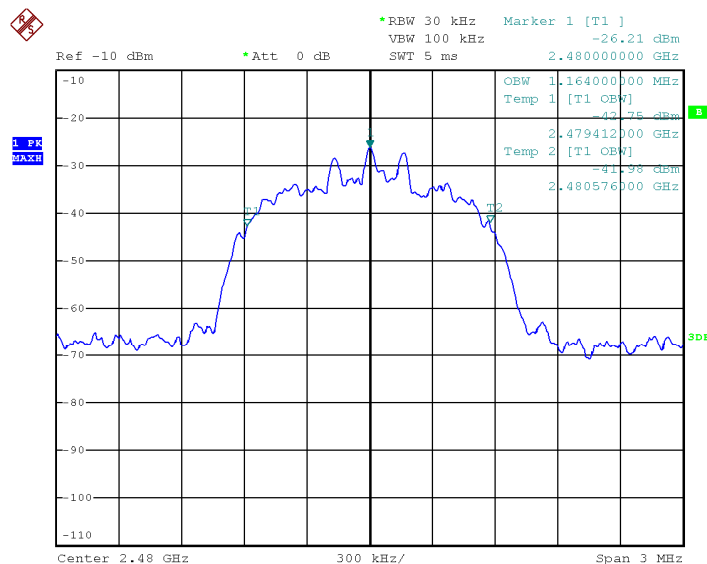

2480MHz, 8DPSK



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)


Date : 16 Jan 2018

Conducted Emission

Scan Settings		(2 Ranges)		Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge	
150kHz	500kHz	3.9063kHz	9kHz	PK+AV	5msec	10 dB	OFF	60dB	
500kHz	30MHz	3.9063kHz	9kHz	PK+AV	2msec	10 dB	OFF	60dB	

Transducer	No.	Start	Stop	Name
	11	9kHz	30MHz	EL228

Final Measurement: Detectors: X QP / + AV
Meas Time: 1sec
Subranges: 8
Acc Margin: 25 dB

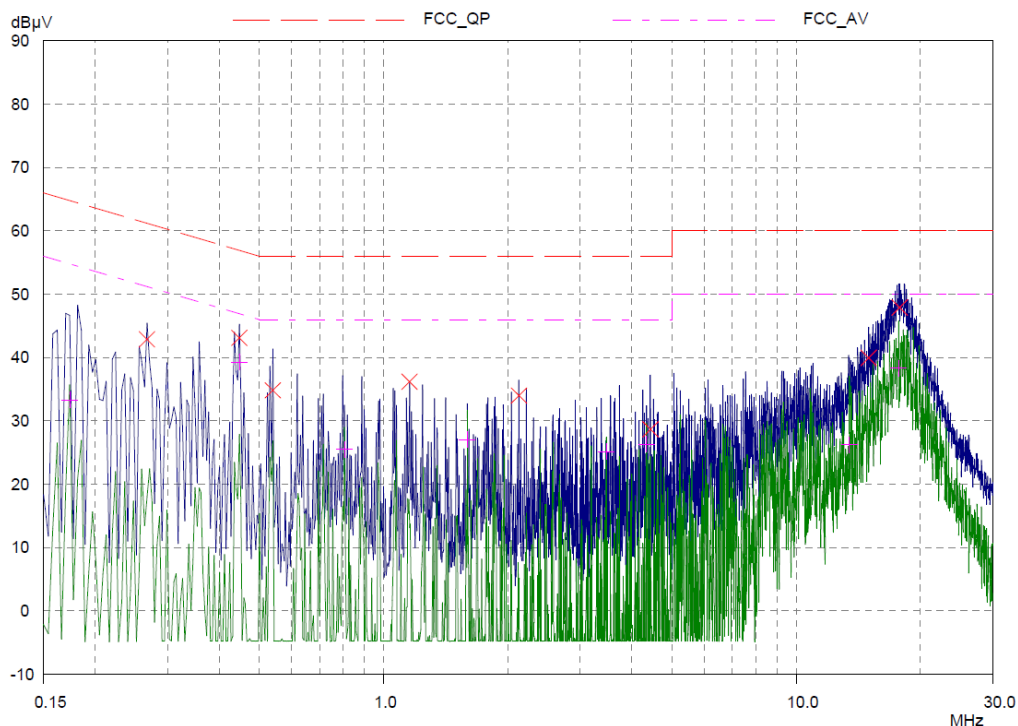



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0004237(5)

Date : 16 Jan 2018

Scan Settings		(2 Ranges)		Receiver Settings	
Frequencies					
Start	Stop	Step	IF BW	Detector	M-Time
150kHz	500kHz	3.9063kHz	9kHz	PK+AV	5msec
500kHz	30MHz	3.9063kHz	9kHz	PK+AV	2msec
Atten	Preamp	OpRge			
10 dB	OFF	60dB			
10 dB	OFF	60dB			

Transducer	No.	Start	Stop	Name
	11	9kHz	30MHz	EL228

Final Measurement:	Detectors:	X QP / + AV
	Meas Time:	1sec
	Subranges:	8
	Acc Margin:	25 dB

Final Measurement Results

Frequency MHz	QP Level dBμV	QP Limit dBμV	QP Delta dB	Phase -	PE -
0.26718	42.89	61.21	18.32	N	gnd
0.44687	43.12	56.93	13.81	N	gnd
0.53906	34.82	56.00	21.18	L1	gnd
1.15625	36.18	56.00	19.82	N	gnd
2.1289	34.00	56.00	22.00	N	gnd
4.4414	28.66	56.00	27.34	L1	gnd
14.99609	39.95	60.00	20.05	N	gnd
17.83593	47.91	60.00	12.09	N	gnd

Frequency MHz	AV Level dBμV	AV Limit dBμV	AV Delta dB	Phase -	PE -
0.17343	33.27	54.79	21.52	N	gnd
0.44687	39.29	46.93	7.64	N	gnd
0.80468	25.50	46.00	20.50	N	gnd
1.59765	26.99	46.00	19.01	N	gnd
3.46484	25.12	46.00	20.88	N	gnd
4.34765	26.33	46.00	19.67	N	gnd
13.48046	26.24	50.00	23.76	L1	gnd
17.73828	38.31	50.00	11.69	N	gnd

* limit exceeded

Indicated Phase/PE shows Configuration of max. Emission

***** End of Report *****