

FCC TEST REPORT	
FCC 47 CFR Part 15C Industry Canada RSS-247 Frequency hopping systems operating within the 2400 – 2483.5 MHz band	
Report Reference No. :	G0M-1506-4874-TFC247BT-V01
Testing Laboratory	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	  A2LA Accredited Testing Laboratory, Certificate No.: 1983.01 FCC Filed Test Laboratory, Reg.-No.: 96970 IC OATS Filing assigned code: 3470A
Applicant's name	Panasonic Industrial Devices Europe GmbH
Address	Zeppelinstr. 19 21337 Lüneburg GERMANY
Test specification:	
Standard..... :	47 CFR Part 15C RSS-247, Issue 1, 2015-05 RSS-Gen, Issue 4, 2014-11 ANSI C63.10:2013 ANSI C63.4:2014
Test scope..... :	C2PC
Equipment under test (EUT):	
Product description	Bluetooth Module
Model No.	ENW89829C3KF
Additional Model(s)	ENW89829A3KF; ENW89829A2KF; ENW89829C2KF
Brand Name(s)	PAN1315
Hardware version	45
Firmware / Software version	03
	FCC-ID: T7V1315 IC: 216Q-1315
Test result	Passed

Possible test case verdicts:

- neither assessed nor tested : N/N
- required by standard but not appl. to test object : N/A
- required by standard but not tested : N/T
- not required by standard for the test object : N/R
- test object does meet the requirement : P (Pass)
- test object does not meet the requirement : F (Fail)

Testing:

Test Lab Temperature : 20 – 23 °C

Test Lab Humidity : 32 – 38 %

Date of receipt of test item : 2015-07-28

Date (s) of performance of tests : 2015-07-27 - 2015-07-28

Compiled by : Christian Weber

Tested by (+ signature) : Christian Weber
(Responsible for Test)

Approved by (+ signature) : Toralf Jahn
(Deputy Head of Lab)

Date of issue : 2015-10-05

Total number of pages : 80

C. Weber
T. Jahn
General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

Additional comments:

Brand name	Model number	IC	Antenna	Difference	HW	SW
PAN1315	ENW89829C2KF	CC2560A	no		4x	02
PAN1325	ENW89829A2KF	CC2560A	yes		4x	02
PAN1315	ENW89829C3KF	CC2560B	no	New FW only (CC2560A to CC2560B)	4x	03
PAN1325	ENW89829A3KF	CC2560B	yes	New FW only (CC2560A to CC2560B)	4x	03

The integrated radio circuits (CC2560A and CC2560B) are electrically and mechanically identical with slightly different ROM software (device firmware). The differences are not related to the essential radio frequency parameters of the radio circuit according costumer document TILAW#291292.

Version History

Version	Issue Date	Remarks	Revised by
01	2015-10-05	Initial Release	

REPORT INDEX


1	EQUIPMENT (TEST ITEM) DESCRIPTION	6
1.1	Photos – Equipment External	7
1.2	Photos – Equipment internal	9
1.3	Photos – Test setup	11
1.4	Supporting Equipment Used During Testing	12
1.5	Test Modes	13
1.6	Test Equipment Used During Testing	15
1.7	Sample emission level calculation	17
2	RESULT SUMMARY	18
3	TEST CONDITIONS AND RESULTS	19
3.1	Test Conditions and Results – Occupied Bandwidth	19
3.2	Test Conditions and Results – 20 dB Bandwidth	29
3.3	Test Conditions and Results – Number of hopping frequencies	39
3.4	Test Conditions and Results – Frequency hopping channel separation	43
3.5	Test Conditions and Results – Time of occupancy (Dwell Time)	45
3.6	Test Conditions and Results – Maximum peak conducted power	47
3.7	Test Conditions and Results – AC power line conducted emissions	49
3.8	Test Conditions and Results – Band edge compliance	52
3.9	Test Conditions and Results – Conducted spurious emissions	66
3.10	Test Conditions and Results – Transmitter radiated emissions	76
3.11	Test Conditions and Results – Receiver radiated emissions	79

1 Equipment (Test item) Description


Description	Bluetooth Module	
Model	ENW89829C3KF	
Additional Model(s)	ENW89829A3KF; ENW89829A2KF; ENW89829C2KF	
Brand Name(s)	PAN1315	
Serial number	None	
Hardware version	45	
Software / Firmware version	03	
FCC-ID	T7V1315	
IC	216Q-1315	
Equipment type	Radio module	
Radio type	Transceiver	
Radio technology	Bluetooth	
Operating frequency range	2402 - 2480 MHz	
Assigned frequency band	2400 - 2483.5 MHz	
Main test frequencies	F _{LOW}	2402 MHz
	F _{MID}	2441 MHz
	F _{HIGH}	2480 MHz
Spreading	FHSS	
Modulations	GFSK, PI/4-DQPSK, 8-PSK	
Number of channels	79 hopping channels at all	
Channel spacing	1 MHz	
Number of antennas	1	
Antenna	Type	integrated
	Model	LDA21K
	Manufacturer	Murata
	Gain	1.3 dBi
Manufacturer	Panasonic Industrial Devices Europe GmbH Zeppelinstr. 19 21337 Lüneburg GERMANY	
Power supply	V _{NOM}	3.3 VDC
	V _{MIN}	2.2 VDC
	V _{MIN}	4.8 VDC

1.1 Photos – Equipment External


EUT (PAN 1315 - ENW89829C3KF) ON EVALUATION BOARD TOP

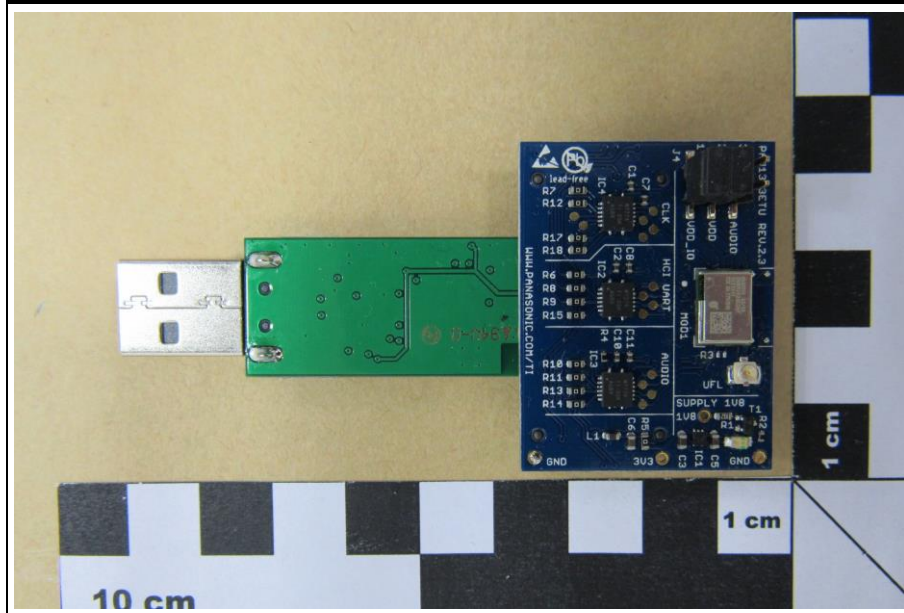


EVALUATION BOARD BOTTOM (PAN 1315 - ENW89829C3KF)

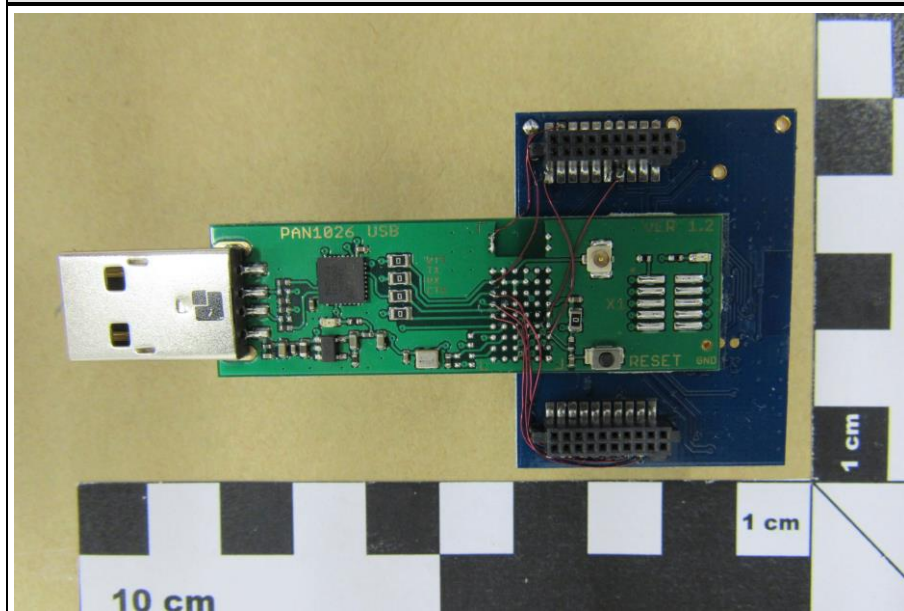

EUT (PAN 1325 - ENW89829A3KF) ON EVALUATION BOARD TOP

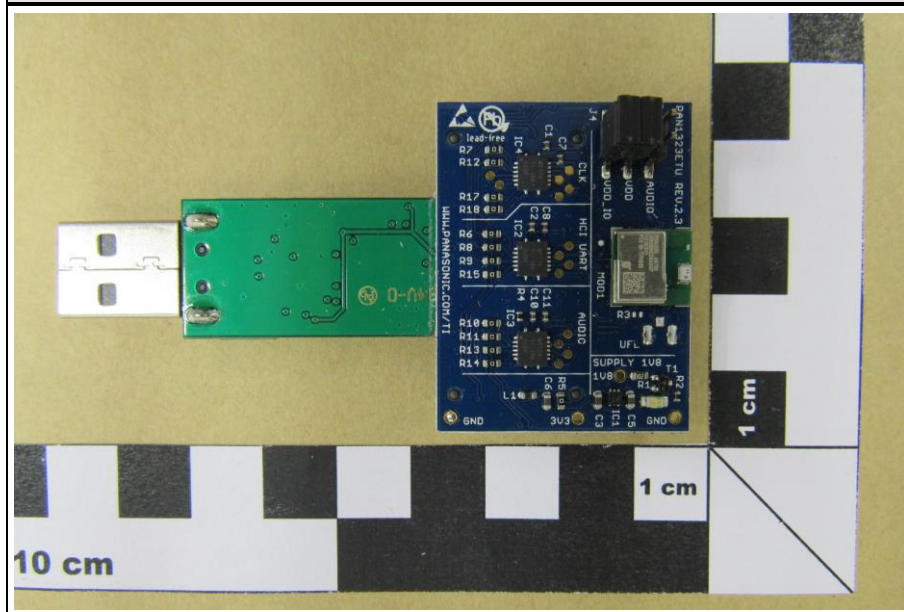


EVALUATION BOARD BOTTOM (PAN 1325 - ENW89829A3KF)

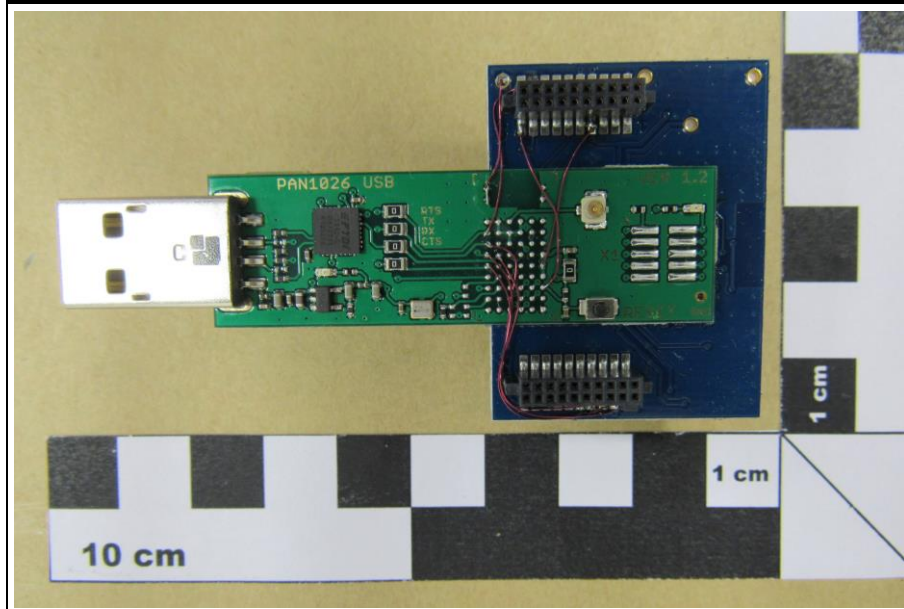

1.2 Photos – Equipment internal

EUT (PAN 1315 - ENW89829C3KF) with and without shielding

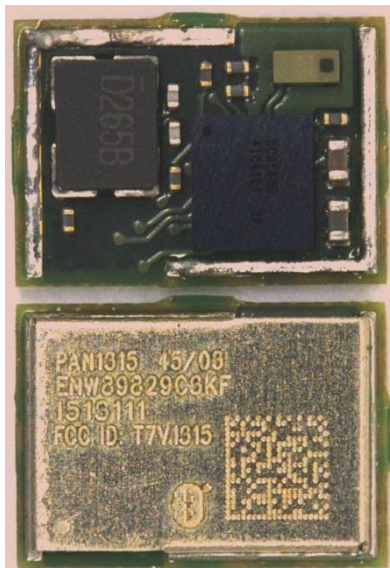


EUT (PAN 1325 - ENW89829A3KF) with and without shielding





EUT (PAN 1315 - ENW89829C2KF) with and without shielding



EUT (PAN 1325 - ENW89829A2KF) with and without shielding

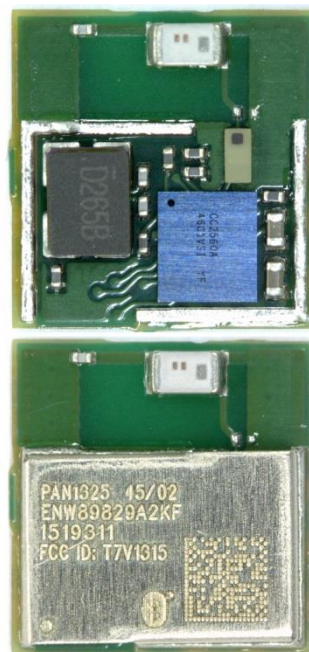

1.3 Photos – Test setup

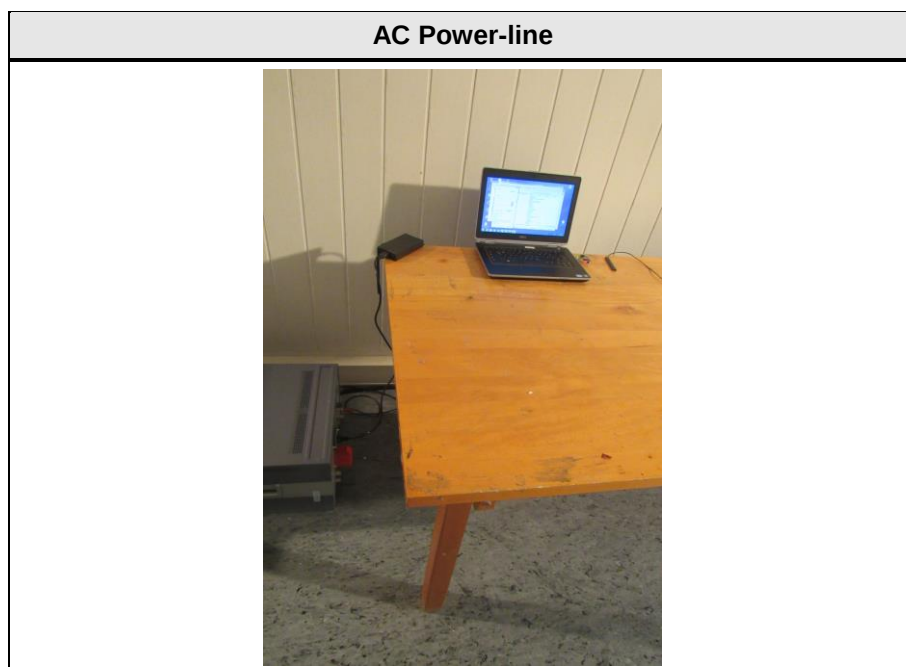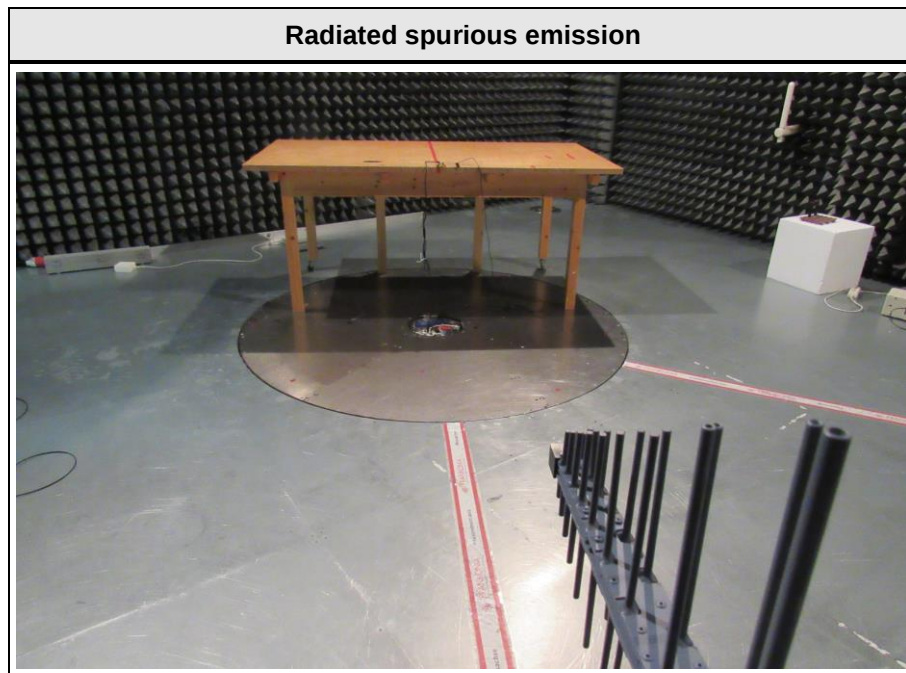

1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
SIM	Communication tester	Rohde & Schwarz	CBT	Signaling
SIM : Simulator (Not Subjected to Test)				

1.5 Test Modes

Mode #	Description	
DH5-Sngl	General conditions:	EUT powered by laboratory power supply via USB over evaluation board
	Radio conditions:	Mode = standalone transmit Spreading = Hopping stopped (single hopping channel) Modulation = GFSK Packet type = DH5 Data rate = 1 Mbps Duty cycle = 77 % Power level = Maximum
2DH5-Sngl	General conditions:	EUT powered by laboratory power supply via USB over evaluation board
	Radio conditions:	Mode = standalone transmit Spreading = Hopping stopped (single hopping channel) Modulation = $\pi/4$ -DQPSK Packet type = 2DH5 Data rate = 2 Mbps Duty cycle = 77 % Power level = Maximum
3DH5-Sngl	General conditions:	EUT powered by laboratory power supply via USB over evaluation board
	Radio conditions:	Mode = standalone transmit Spreading = Hopping stopped (single hopping channel) Modulation = 8-DPSK Packet type = 3DH5 Data rate = 3 Mbps Duty cycle = 77 % Power level = Maximum
DH5-Hop	General conditions:	EUT powered by laboratory power supply via USB over evaluation board
	Radio conditions:	Mode = standalone transmit Spreading = Hopping Modulation = GFSK Packet type = DH5 Data rate = 1 Mbps Duty cycle = 77 % Power level = Maximum

2DH5-Hop	General conditions:	EUT powered by laboratory power supply via USB over evaluation board
	Radio conditions:	Mode = standalone transmit Spreading = Hopping Modulation = $\pi/4$ -DQPSK Packet type = 2DH5 Data rate = 2 Mbps Duty cycle = 77 % Power level = Maximum
3DH5-Hop	General conditions:	EUT powered by laboratory power supply via USB over evaluation board
	Radio conditions:	Mode = standalone transmit Spreading = Hopping Modulation = 8-DPSK Packet type = 3DH5 Data rate = 3 Mbps Duty cycle = 77 % Power level = Maximum
Receive	General conditions:	EUT powered by laboratory power supply via USB over evaluation board
	Radio conditions:	Mode = standalone receive Spreading = Hopping
AC-Powerline	General conditions:	EUT powered by commercial AC/DC-Adapter
	Radio conditions:	Mode = standalone transmit Spreading = Hopping Power level = Maximum

1.6 Test Equipment Used During Testing

Measurement Software			
Description	Manufacturer	Name	Version
EMC Test Software	Dare Instruments	Radimation	2014.1.15

20dB Bandwidth					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum analyzer	R&S	FSU 26	EF01003	2015-04	2016-04

Number of hopping frequencies					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum analyzer	R&S	FSU 26	EF01003	2015-04	2016-04

Time of occupancy					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum analyzer	R&S	FSU 26	EF01003	2015-04	2016-04

Maximum peak conducted power					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum analyzer	R&S	FSU 26	EF01003	2015-04	2016-04

Band edge compliance					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum analyzer	R&S	FSU 26	EF01003	2015-04	2016-04

Conducted spurious emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum analyzer	R&S	FSU 26	EF01003	2015-04	2016-04

Radiated spurious emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Semi-anechoic chamber	Frankonia	AC 1	EF00062	-	-
Spectrum Analyzer	R&S	FSIQ26	EF00242	2015-04	2016-04
Biconical Antenna	R&S	HK 116	EF00012	2013-02	2016-02
LPD Antenna	R&S	HL 223	EF00187	2014-03	2017-03
LPD Antenna	R&S	HL 025	EF00327	2013-02	2016-02

Test Report No.: G0M-1506-4874-TFC247BT-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

AC powerline conducted emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
AMN	R&S	ESH2-Z5	EF00182	2014-11	2016-11
EMI Test Receiver	R&S	ESCS 30	EF00295	2014-10	2015-10

1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBμV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBμV/m). The FCC limits are given in units of μV/m. The following formula is used to convert the units of μV/m to dBμV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 \cdot \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading	+	AF	=	Net Reading	:	Net reading - FCC limit	=	Margin
21.5 dBμV	+	26 dB	=	47.5 dBμV/m	:	47.5 dBμV/m - 57.0 dBμV/m	=	-9.5 dB

2 Result Summary

FCC 47 CFR Part 15C, IC RSS-247				
Product Specific Standard Section	Requirement – Test	Reference Method	Result	Remarks
RSS-Gen 6.6	Occupied Bandwidth	ANSI C63.10	N/R	Informational only
FCC § 15.247(a)(1) IC RSS-247 § 5.1	20 dB Bandwidth	ANSI C63.10	PASS	
FCC § 15.247(a)(1)(iii) IC RSS-247 § 5.1	Number of hopping frequencies	ANSI C63.10	PASS	
FCC § 15.247(a)(1) IC RSS-247 § 5.1	Frequency hopping channel separation	ANSI C63.10	PASS	
FCC § 15.247(a)(1)(iii) IC RSS-247 § 5.1	Time of occupancy (Dwell time)	ANSI C63.10	PASS	
FCC § 15.247(b)(1) IC RSS-247 § 5.4	Maximum peak conducted power	ANSI C63.10	PASS	
47 CFR 15.207 IC RSS-247 § 3.1	AC power line conducted emissions	ANSI C63.4	PASS	
FCC § 15.247(d) IC RSS-247 § 5.5	Band edge compliance	ANSI C63.10	PASS	
FCC § 15.247(d) IC RSS-247 § 5.5	Conducted spurious emissions	ANSI C63.10	PASS	
FCC § 15.247(d) FCC § 15.209 IC RSS-247 § 5.5	Transmitter radiated spurious emissions	ANSI C63.10	PASS	
IC RSS-247 § 3.1	Receiver radiated spurious emissions	ANSI C63.10	PASS	
Remarks:				

3 Test Conditions and Results

3.1 Test Conditions and Results – Occupied Bandwidth


Occupied Bandwidth acc. to IC RSS-Gen			Verdict: PASS
Test according to measurement reference	Reference Method		
	ANSI C63.10		
Test frequency range	Tested frequencies		
	F _{LOW} / F _{MID} / F _{HIGH}		
Limits			
None (Informational only)			
Test setup			
Spectrum Analyzer EUT			
Test procedure			
1. EUT set to test mode (Communication tester is used if needed) 2. Span set to at least twice the emission spectrum 3. Resolution bandwidth set to 1 % of span 4. Occupied Bandwidth (99 %) measurement with spectrum analyzer built in measurement function			
Test results			
Channel	Frequency [MHz]	Mode	Occupied Bandwidth [kHz]
F _{LOW}	2402	DH5-Sngl	905.0
F _{MID}	2441	DH5-Sngl	907.5
F _{HIGH}	2480	DH5-Sngl	916.3
F _{LOW}	2402	2DH5-Sngl	1235.0
F _{MID}	2441	2DH5-Sngl	1235.0
F _{HIGH}	2480	2DH5-Sngl	1236.3
F _{LOW}	2402	3DH5-Sngl	1240.0
F _{MID}	2441	3DH5-Sngl	1242.5
F _{HIGH}	2480	3DH5-Sngl	1245.0
Comments:			

Occupied Bandwidth – DH5-Sngl F_{Low}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89829C3KF
Test Site: Eurofins Product Service GmbH
Operator: Christian Weber
Test Conditions: Tnom / Vnom
Mode: Tx, BR, DH5, 2402 MHz
Test Date: 2015-07-27
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: conducted measurement

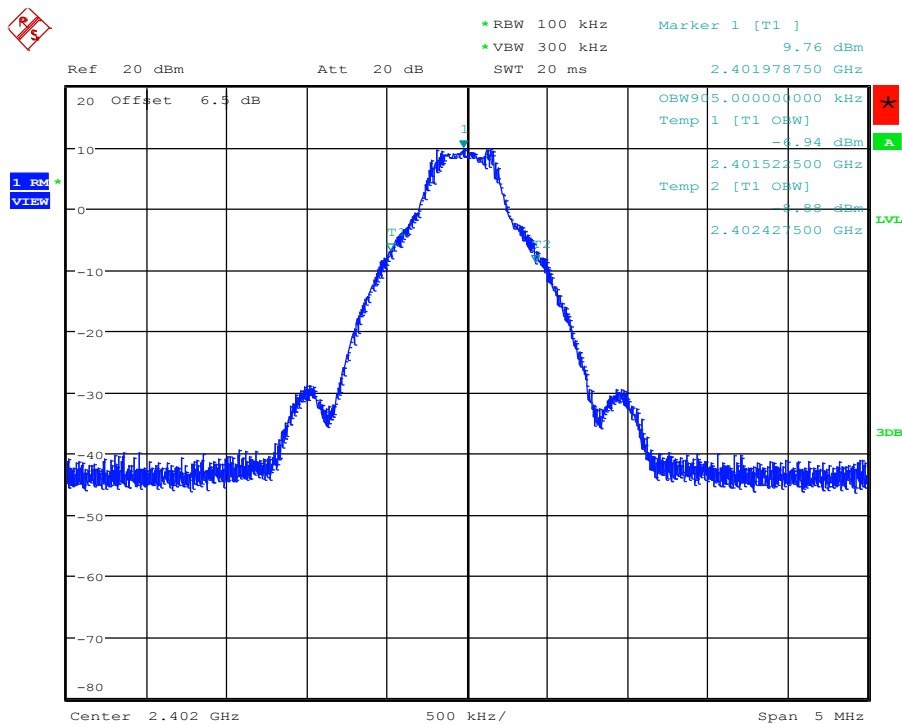

Occupied bandwidth: 905 KHz


Date: 27.JUL.2015 13:17:11

Occupied Bandwidth – DH5-Sngl F_{MID}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89829C3KF
Test Site: Eurofins Product Service GmbH
Operator: Christian Weber
Test Conditions: Tnom / Vnom
Mode: Tx, BR, DH5, 2441 MHz
Test Date: 2015-07-27
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: conducted measurement

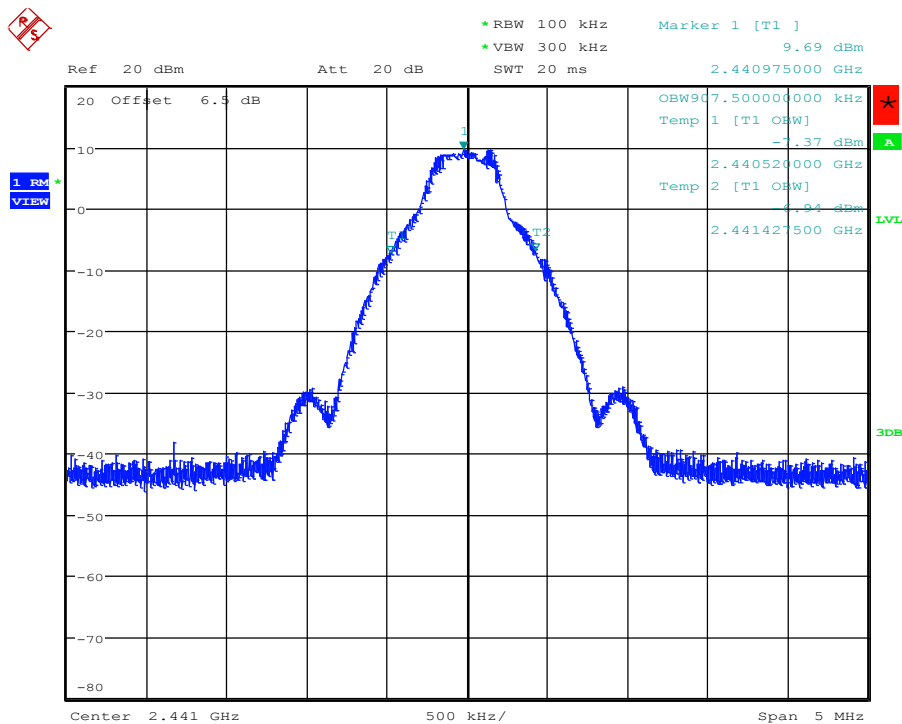

Occupied bandwidth: 907.5 KHz

Date: 27.JUL.2015 13:18:18

Test Report No.: G0M-1506-4874-TFC247BT-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – DH5-Sngl F_{HIGH}

Occupied Bandwidth acc. to RSS-Gen

Project Number: GOM-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89829C3KF
Test Site: Eurofins Product Service GmbH
Operator: Christian Weber
Test Conditions: Tnom / Vnom
Mode: Tx, BR, DH5, 2480 MHz
Test Date: 2015-07-27
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: conducted measurement

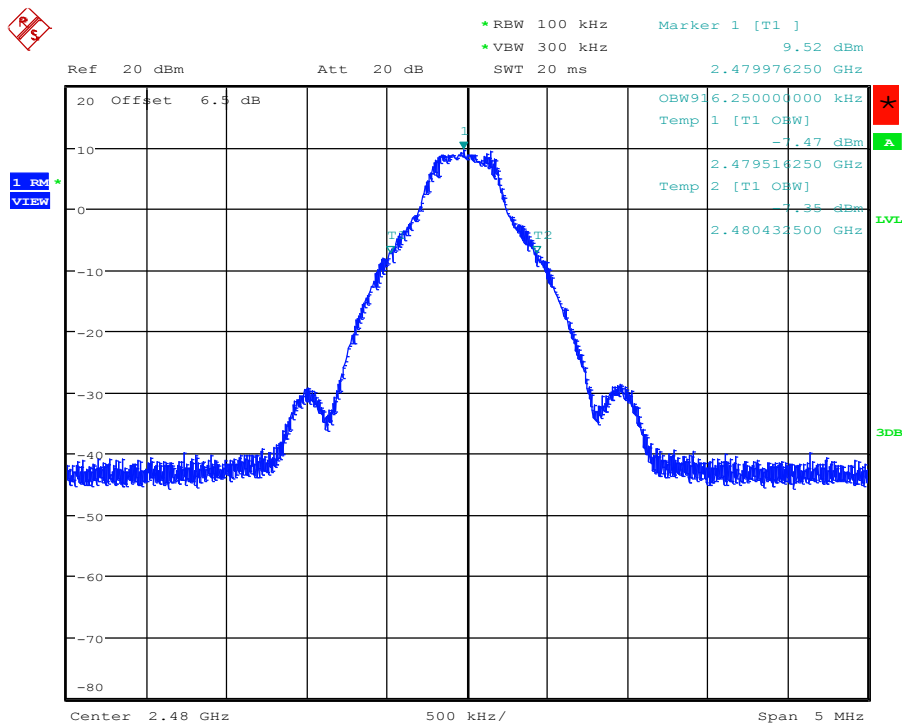

Occupied bandwidth: 916.2 KHz

Date: 27.JUL.2015 13:19:16

Test Report No.: GOM-1506-4874-TFC247BT-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – 2-DH5-Sngl F_{LOW}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89829C3KF
Test Site: Eurofins Product Service GmbH
Operator: Christian Weber
Test Conditions: Tnom / Vnom
Mode: Tx, EDR, 2-DH5, 2402 MHz
Test Date: 2015-07-27
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: conducted measurement

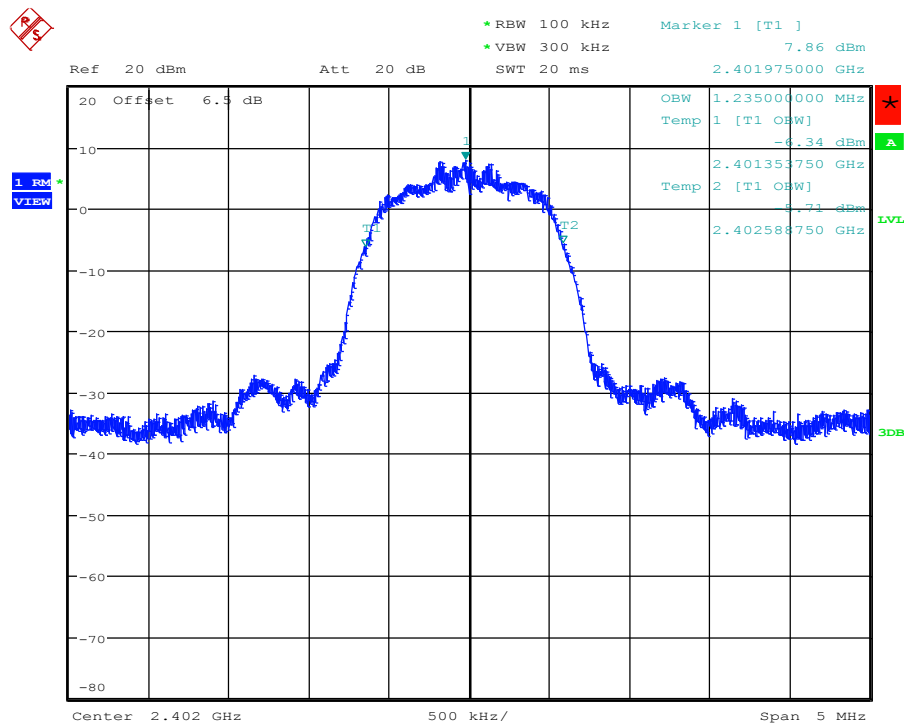

Occupied bandwidth: 1235 KHz

Date: 27.JUL.2015 13:20:40

Test Report No.: G0M-1506-4874-TFC247BT-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – 2-DH5-Sngl F_{MID}

Occupied Bandwidth acc. to RSS-Gen

Project Number: GOM-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89829C3KF
Test Site: Eurofins Product Service GmbH
Operator: Christian Weber
Test Conditions: Tnom / Vnom
Mode: Tx, EDR, 2-DH5, 2441 MHz
Test Date: 2015-07-27
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: conducted measurement

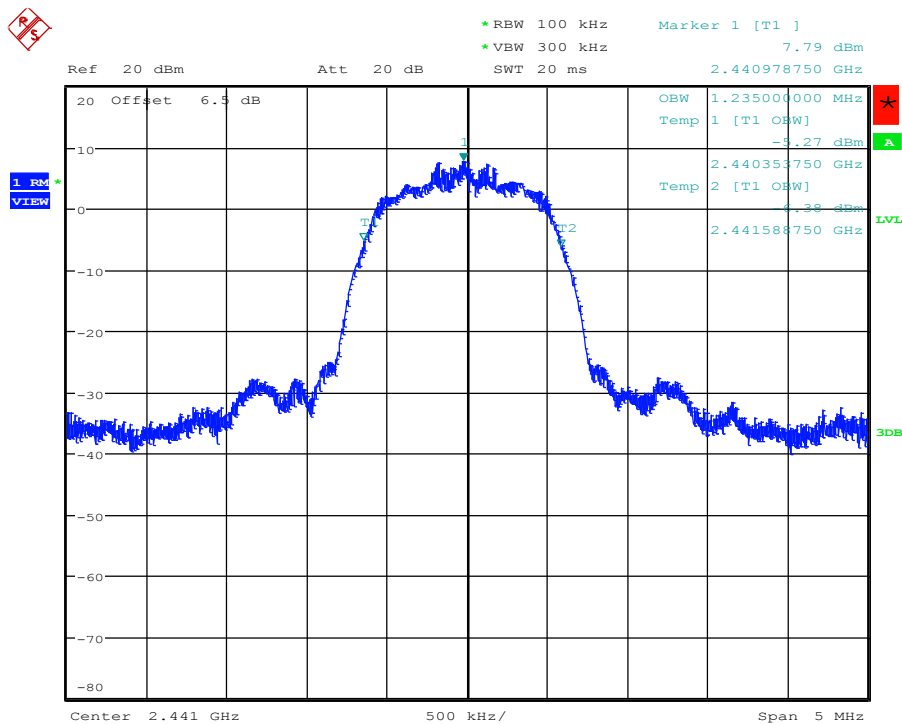

Occupied bandwidth: 1235 KHz

Date: 27.JUL.2015 13:21:36

Test Report No.: GOM-1506-4874-TFC247BT-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – 2-DH5-Sngl F_{HIGH}

Occupied Bandwidth acc. to RSS-Gen

Project Number: GOM-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89829C3KF
Test Site: Eurofins Product Service GmbH
Operator: Christian Weber
Test Conditions: Tnom / Vnom
Mode: Tx, EDR, 2-DH5, 2480 MHz
Test Date: 2015-07-27
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: conducted measurement

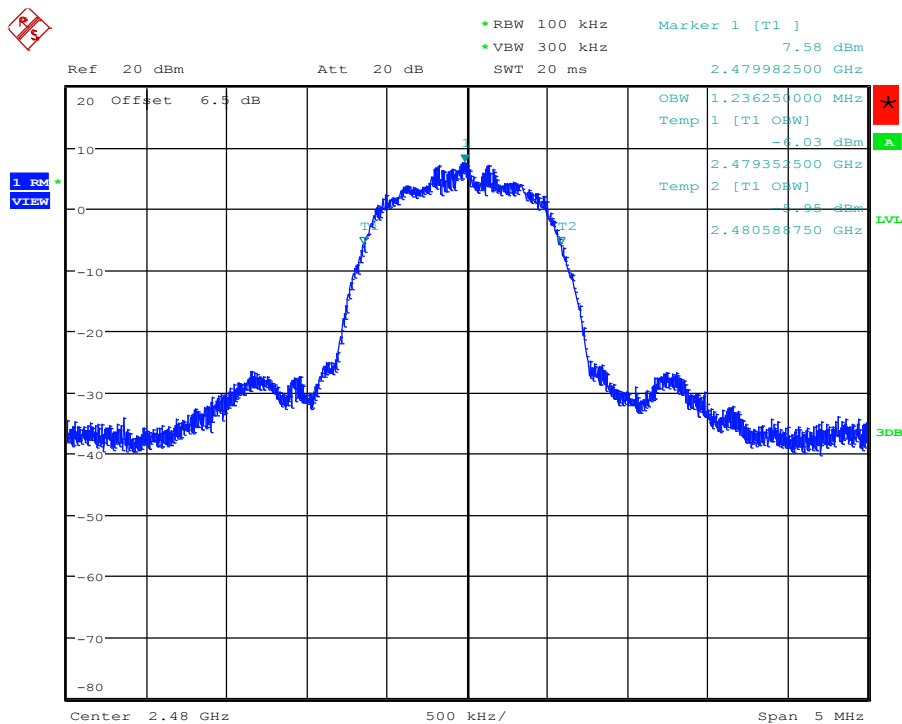

Occupied bandwidth: 1236.2 KHz

Date: 27.JUL.2015 13:22:31

Test Report No.: GOM-1506-4874-TFC247BT-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – 3-DH5-Sngl F_{LOW}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89829C3KF
Test Site: Eurofins Product Service GmbH
Operator: Christian Weber
Test Conditions: Tnom / Vnom
Mode: Tx, EDR, 3-DH5, 2402 MHz
Test Date: 2015-07-27
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: conducted measurement

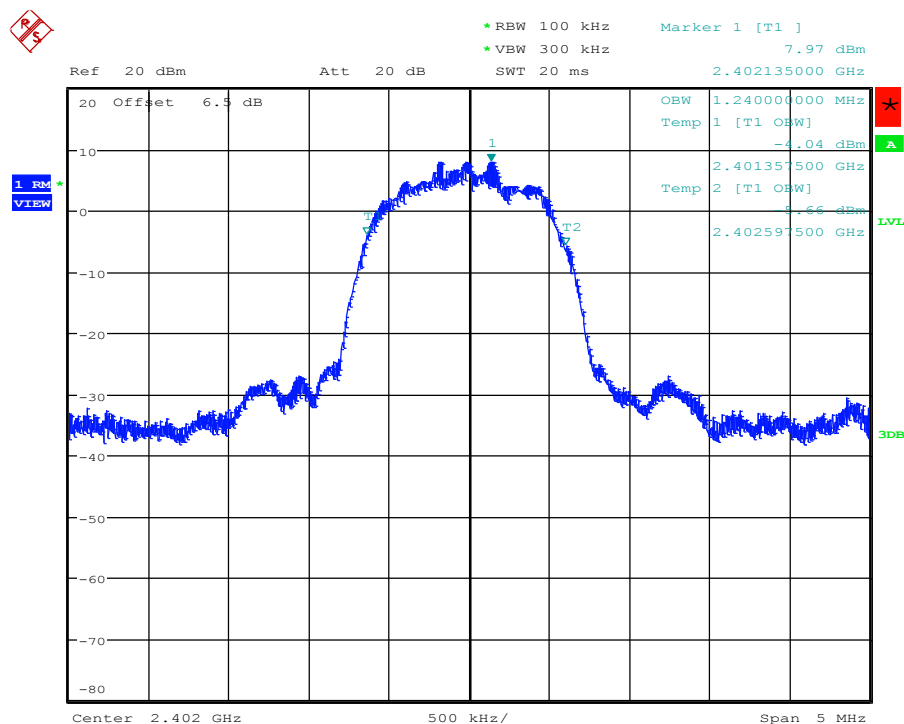

Occupied bandwidth: 1240 KHz

Date: 27.JUL.2015 13:23:45

Test Report No.: G0M-1506-4874-TFC247BT-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – 3-DH5-Sngl F_{MID}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89829C3KF
Test Site: Eurofins Product Service GmbH
Operator: Christian Weber
Test Conditions: Tnom / Vnom
Mode: Tx, EDR, 3-DH5, 2441 MHz
Test Date: 2015-07-27
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: conducted measurement

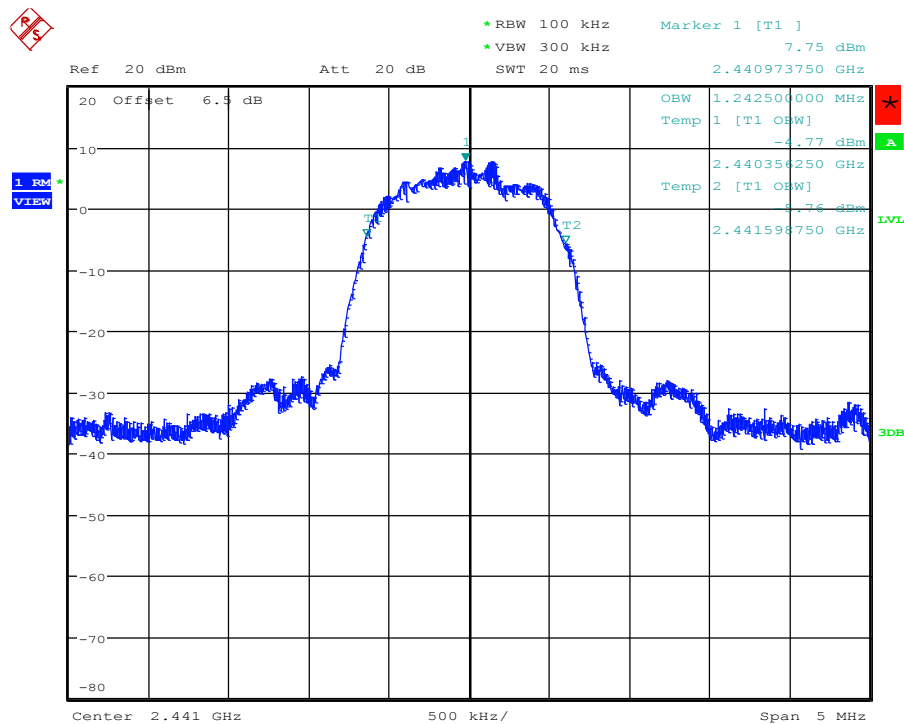

Occupied bandwidth: 1242.5 KHz

Date: 27.JUL.2015 13:24:42

Test Report No.: G0M-1506-4874-TFC247BT-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – 3-DH5-Sngl F_{HIGH}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89829C3KF
Test Site: Eurofins Product Service GmbH
Operator: Christian Weber
Test Conditions: Tnom / Vnom
Mode: Tx, EDR, 3-DH5, 2480 MHz
Test Date: 2015-07-27
Verdict: NONE (INFORMATION ONLY)
Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2: conducted measurement

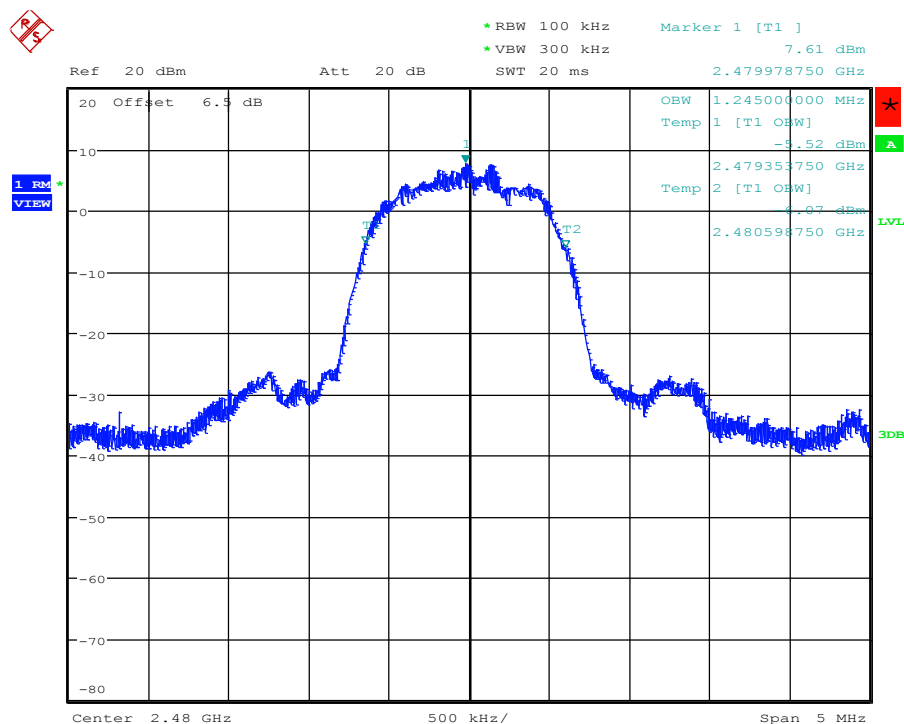

Occupied bandwidth: 1245 KHz

Date: 27.JUL.2015 13:25:42

Test Report No.: G0M-1506-4874-TFC247BT-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.2 Test Conditions and Results – 20 dB Bandwidth

20 dB Bandwidth acc. to FCC 15.247 / IC RSS-247				Verdict: PASS	
EUT requirement rule parts and clause	Reference				
	FCC 15.247(a)(1) / IC RSS-247 5.1				
Test according to measurement reference	Reference Method				
	ANSI C63.10				
Test frequency range	Tested frequencies				
	F _{LOW} / F _{MID} / F _{HIGH}				
Limits					
Limit		Condition			
1.5 · Carrier spacing		Output power ≤ 125 mW / 21 dBm			
1.0 · Carrier spacing		125 mW / 21 dBm < Output power ≤ 1 W / 30 dBm			
Test setup					
Spectrum Analyzer EUT					
Test procedure					
1. EUT set to test mode (Communication tester is used if needed) 2. Span set to at least twice the emission spectrum 3. Detector set to peak and max hold 4. Envelope peak value of emission spectrum is selected 5. Marker on envelope of spectrum is set to level of -20 dB to the left of the peak 6. Marker on envelope of spectrum is set to level of -20 dB to the right of the peak 7. 20dB Bandwidth is determined by marker frequency separation					
Test results					
Channel	Frequency [MHz]	Mode	20 dB Bandwidth [MHz]	Limit [MHz]	Result
F _{LOW}	2402	DH5-Sngl	0.918	1.5	PASS
F _{MID}	2441	DH5-Sngl	0.917	1.5	PASS
F _{HIGH}	2480	DH5-Sngl	0.919	1.5	PASS
F _{LOW}	2402	2DH5-Sngl	1.320	1.5	PASS
F _{MID}	2441	2DH5-Sngl	1.318	1.5	PASS
F _{HIGH}	2480	2DH5-Sngl	1.319	1.5	PASS
F _{LOW}	2402	3DH5-Sngl	1.315	1.5	PASS
F _{MID}	2441	3DH5-Sngl	1.316	1.5	PASS
F _{HIGH}	2480	3DH5-Sngl	1.314	1.5	PASS
Comments:					

Test Report No.: G0M-1506-4874-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

20 dB Bandwidth – DH5-Sngl F_{LOW}

20 dB Bandwidth acc. to FCC 15.247

Project Number: G0M-1506-4874

Applicant:	Panasonic Industrial Devices Europe GmbH
EUT Name:	Bluetooth Module
Model:	ENW89829C3KF
Test Site:	Eurofins Product Service GmbH
Operator:	Christian Weber
Test Conditions:	Tnom / Vnom
Mode:	Tx, BR, DH5, 2402 MHz
Test Date:	2015-07-27
Verdict:	PASS
Note 1:	FCC part 15 section 247 (a)
Note 2:	(ANSI C63.10)

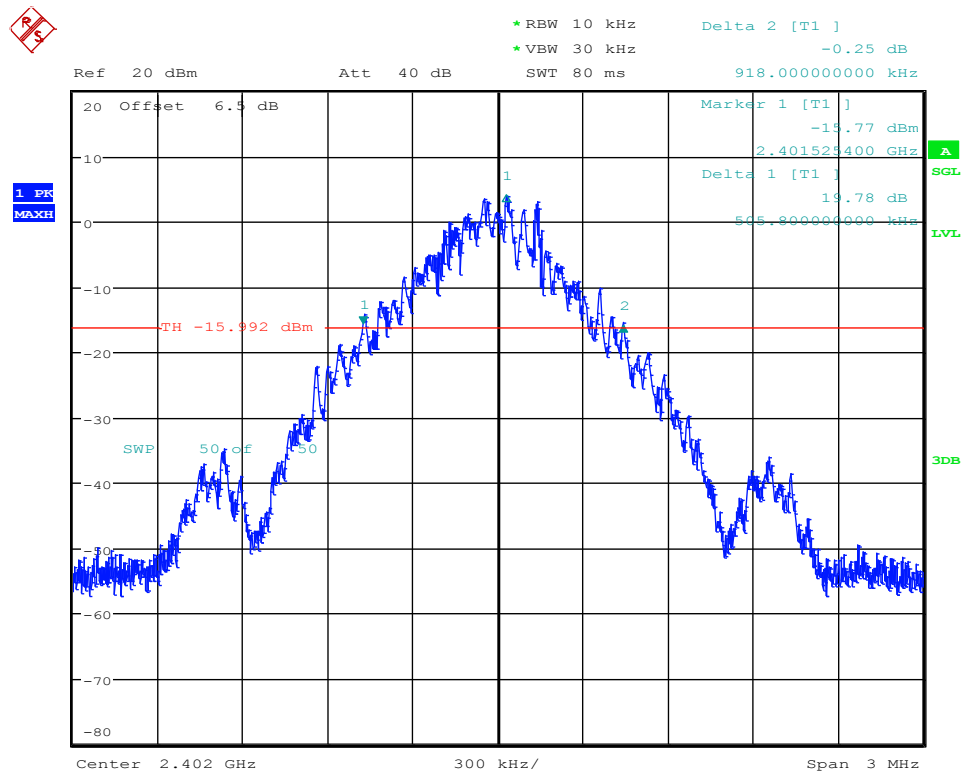

Date: 27.JUL.2015 13:28:21

Test Report No.: G0M-1506-4874-TFC247BT-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

20 dB Bandwidth – DH5-Sngl F_{MID}

20 dB Bandwidth acc. to FCC 15.247

Project Number: GOM-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89829C3KF
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, BR, DH5, 2441 MHz
 Test Date: 2015-07-27
 Verdict: PASS
 Note 1: FCC part 15 section 247 (a)
 Note 2: (ANSI C63.10)

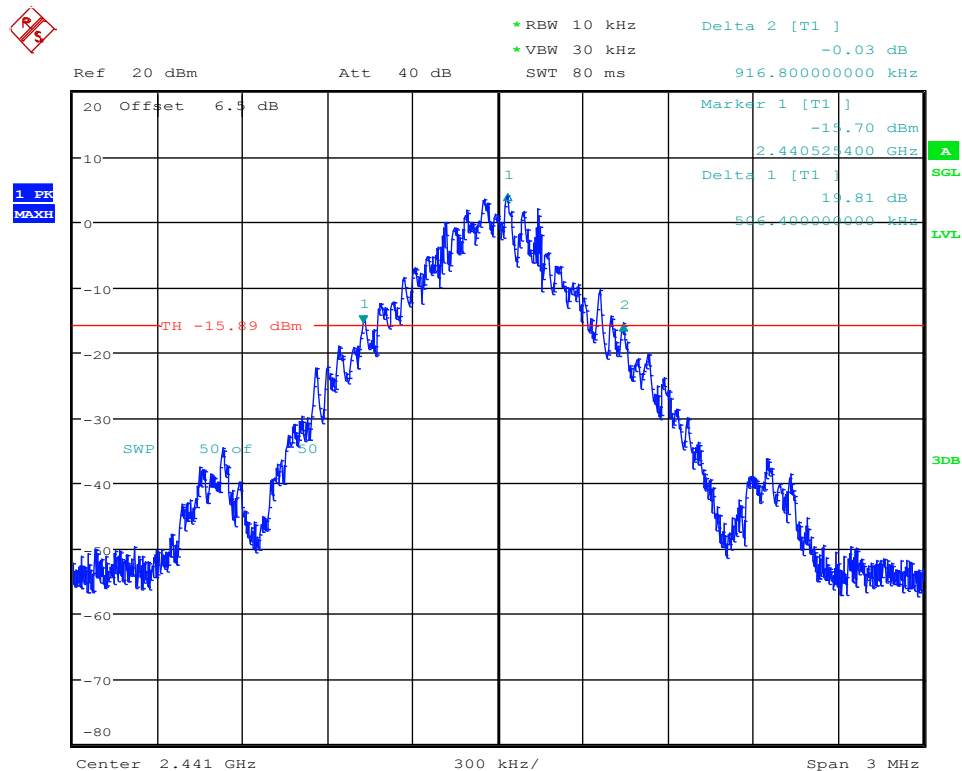

Date: 27.JUL.2015 13:29:35

Test Report No.: GOM-1506-4874-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

20 dB Bandwidth – DH5-Sngl F_{HIGH}

20 dB Bandwidth acc. to FCC 15.247

Project Number: G0M-1506-4874

Applicant:	Panasonic Industrial Devices Europe GmbH
EUT Name:	Bluetooth Module
Model:	ENW89829C3KF
Test Site:	Eurofins Product Service GmbH
Operator:	Christian Weber
Test Conditions:	Tnom / Vnom
Mode:	Tx, BR, DH5, 2480 MHz
Test Date:	2015-07-27
Verdict:	PASS
Note 1:	FCC part 15 section 247 (a)
Note 2:	(ANSI C63.10)

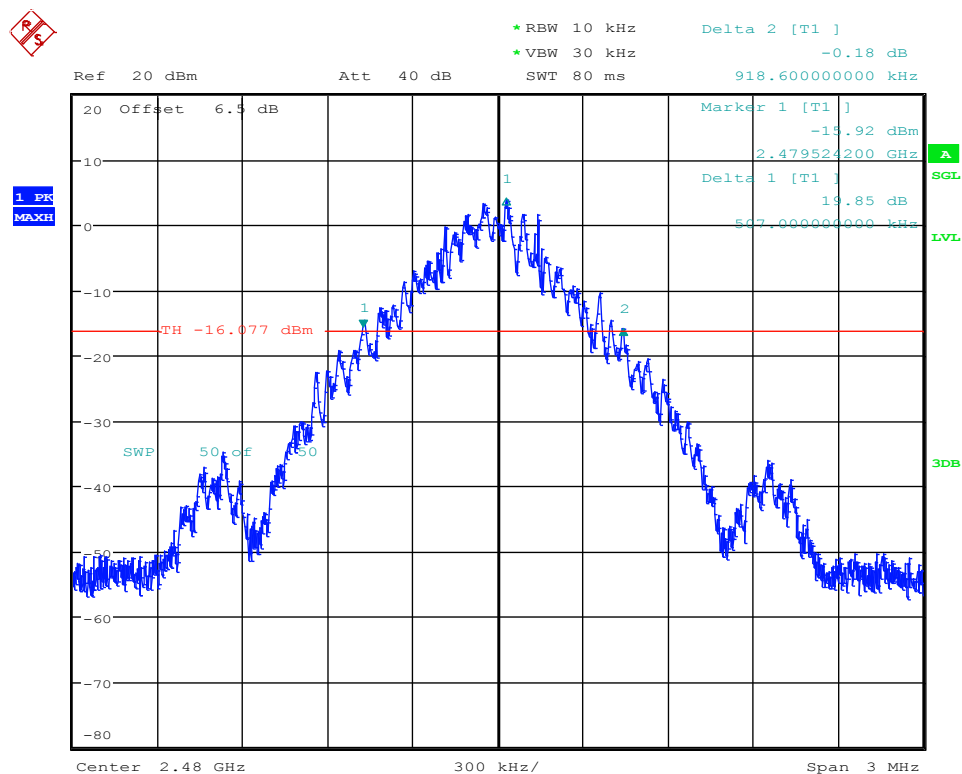


Date: 27.JUL.2015 13:30:43

20 dB Bandwidth – 2-DH5-Sngl F_{Low}

20 dB Bandwidth acc. to FCC 15.247

Project Number: G0M-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89829C3KF
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, BR, 2-DH5, 2402 MHz
 Test Date: 2015-07-27
 Verdict: PASS
 Note 1: FCC part 15 section 247 (a)
 Note 2: (ANSI C63.10)

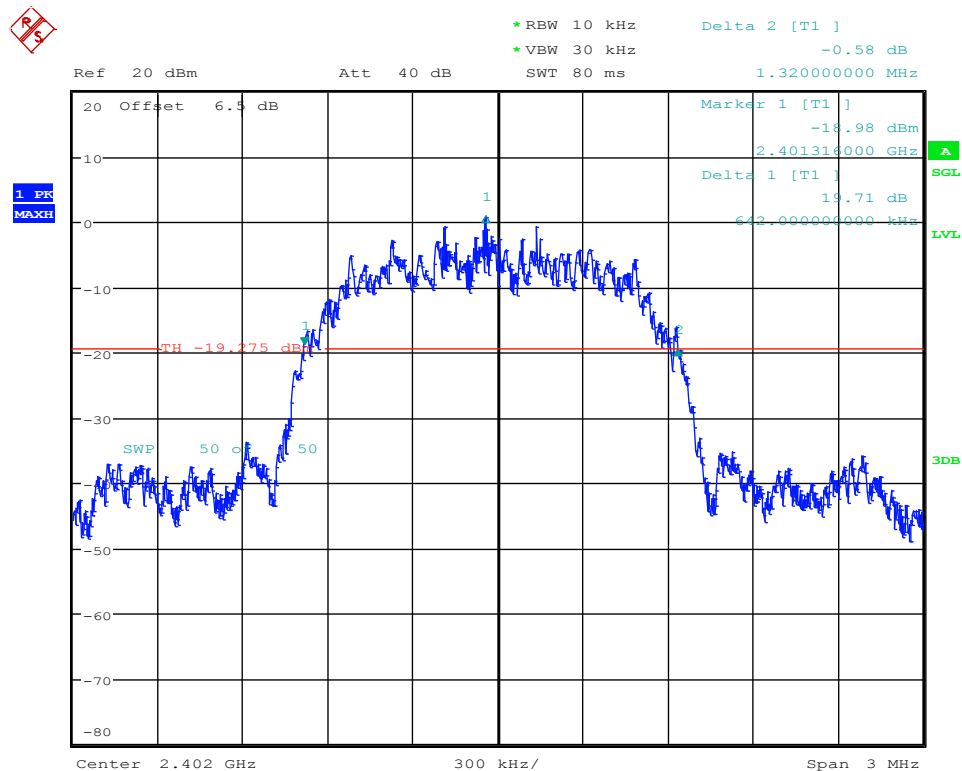


Date: 27.JUL.2015 13:33:25

20 dB Bandwidth – 2-DH5-Sngl F_{MID}

20 dB Bandwidth acc. to FCC 15.247

Project Number: G0M-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89829C3KF
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, BR, 2-DH5, 2441 MHz
 Test Date: 2015-07-27
 Verdict: PASS
 Note 1: FCC part 15 section 247 (a)
 Note 2: (ANSI C63.10)

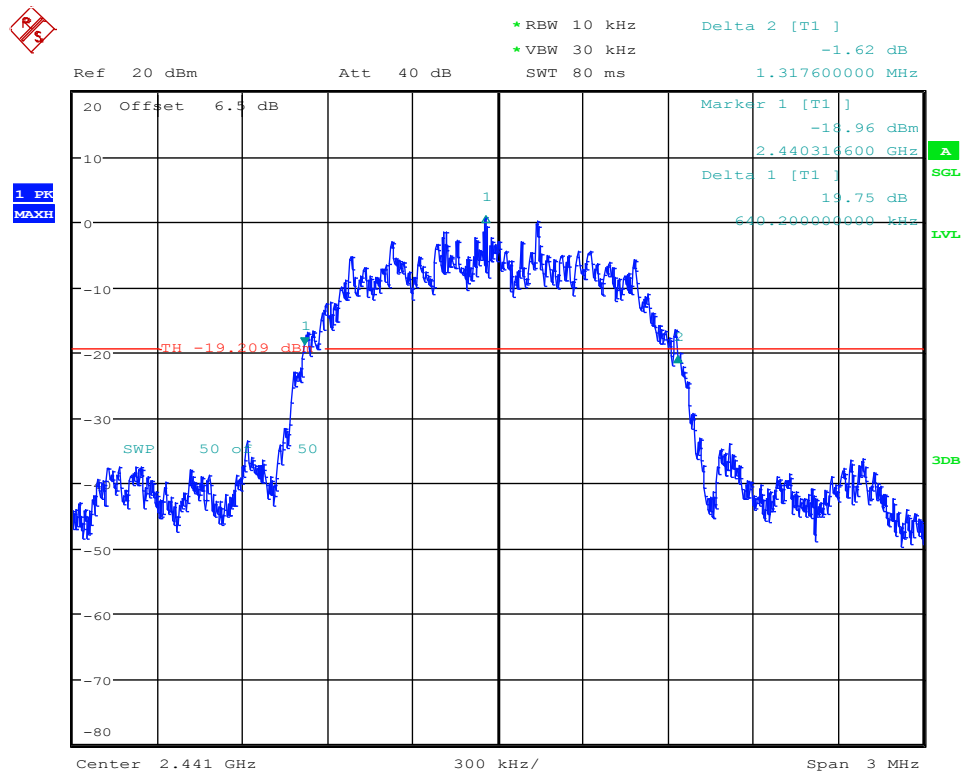

Date: 27.JUL.2015 13:34:39

Test Report No.: G0M-1506-4874-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

20 dB Bandwidth – 2-DH5-Sngl F_{HIGH}

20 dB Bandwidth acc. to FCC 15.247

Project Number: GOM-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89829C3KF
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, BR, 2-DH5, 2480 MHz
 Test Date: 2015-07-27
 Verdict: PASS
 Note 1: FCC part 15 section 247 (a)
 Note 2: (ANSI C63.10)

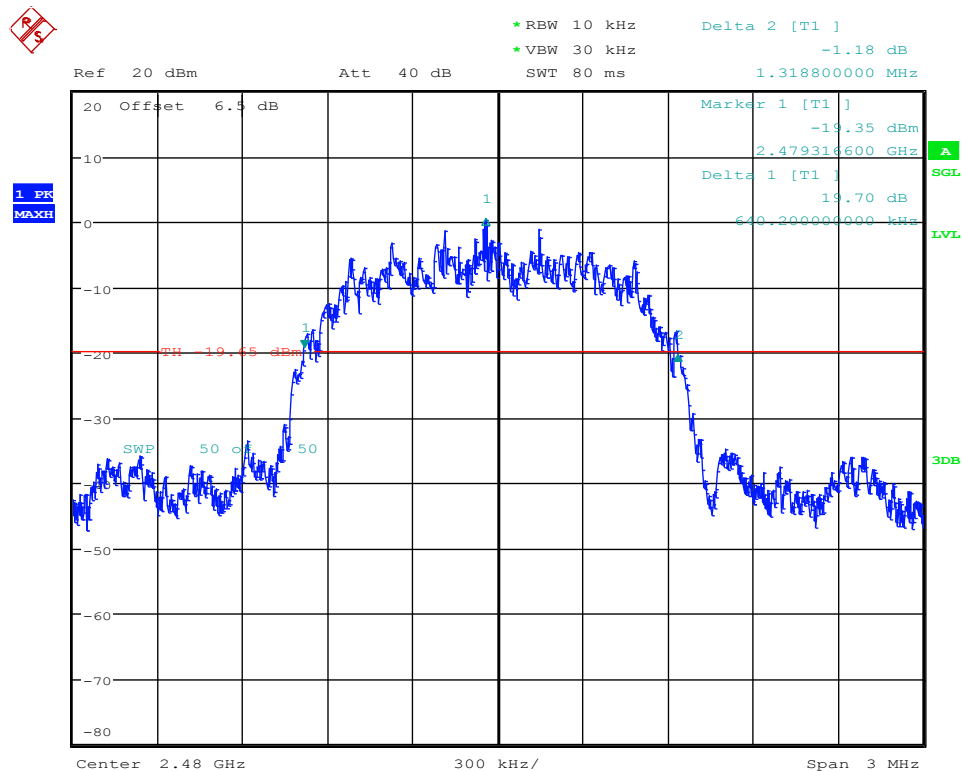

Date: 27.JUL.2015 13:35:32

Test Report No.: GOM-1506-4874-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

20 dB Bandwidth – 3-DH5-Sngl F_{Low}

20 dB Bandwidth acc. to FCC 15.247

Project Number: GOM-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89829C3KF
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, BR, 3-DH5, 2402 MHz
 Test Date: 2015-07-27
 Verdict: PASS
 Note 1: FCC part 15 section 247 (a)
 Note 2: (ANSI C63.10)

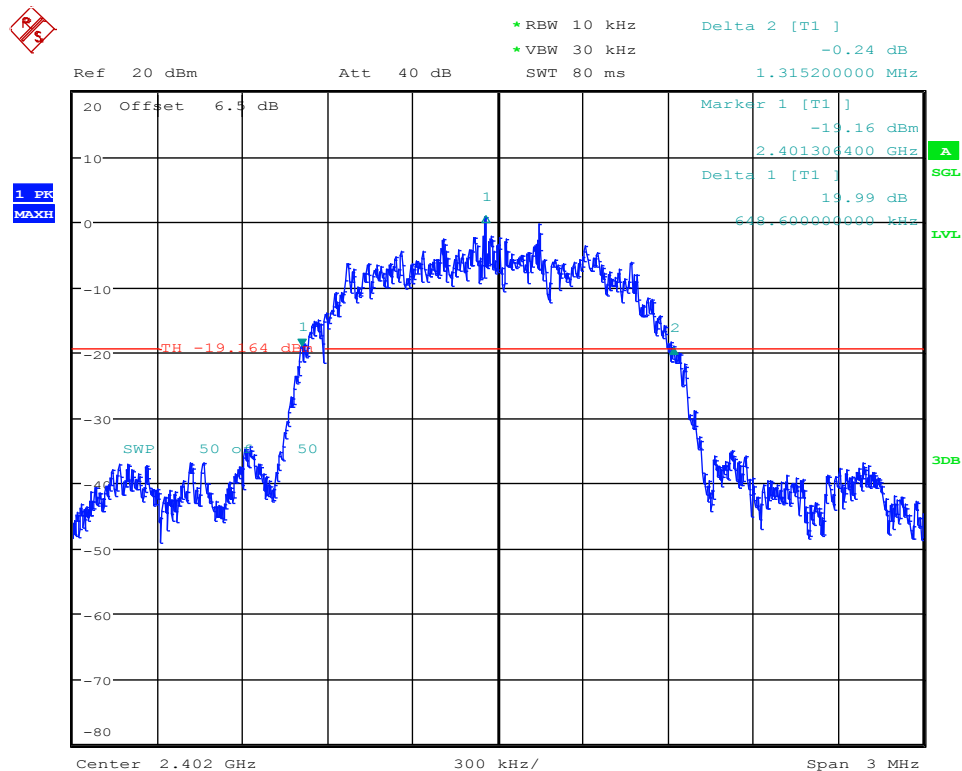


Date: 27.JUL.2015 13:36:35

20 dB Bandwidth – 3-DH5-Sngl F_{MID}

20 dB Bandwidth acc. to FCC 15.247

Project Number: GOM-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89829C3KF
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, BR, 3-DH5, 2441 MHz
 Test Date: 2015-07-27
 Verdict: PASS
 Note 1: FCC part 15 section 247 (a)
 Note 2: (ANSI C63.10)

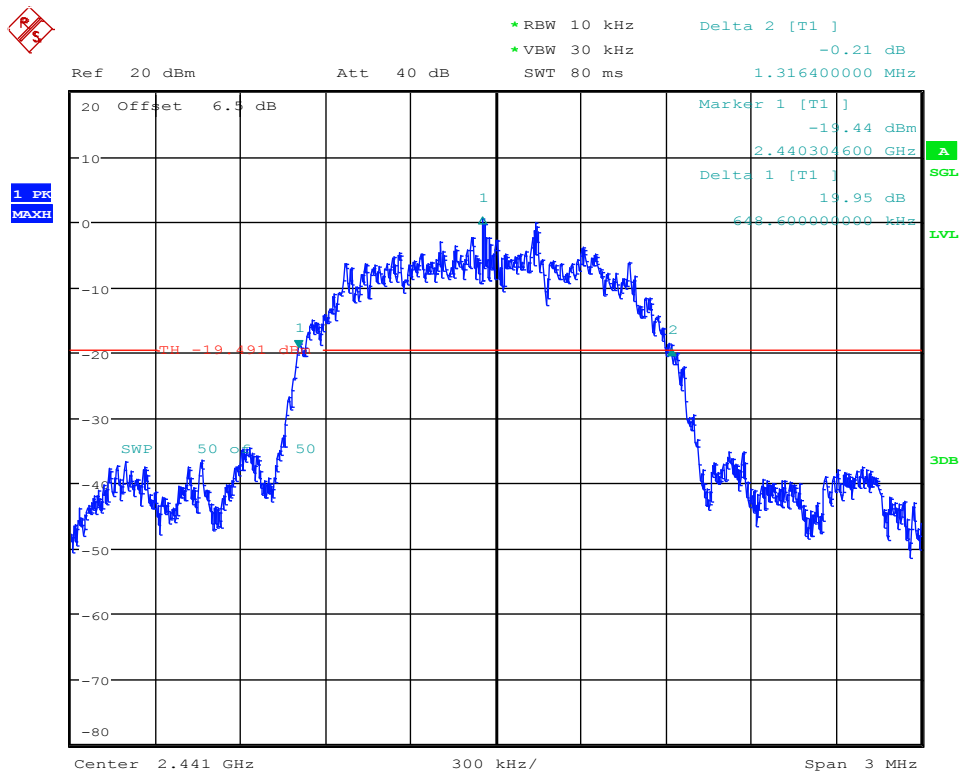

Date: 27.JUL.2015 13:37:21

Test Report No.: GOM-1506-4874-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

20 dB Bandwidth – 3-DH5-Sngl F_{HIGH}

20 dB Bandwidth acc. to FCC 15.247

Project Number: G0M-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89829C3KF
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, BR, 3-DH5, 2480 MHz
 Test Date: 2015-07-27
 Verdict: PASS
 Note 1: FCC part 15 section 247 (a)
 Note 2: (ANSI C63.10)

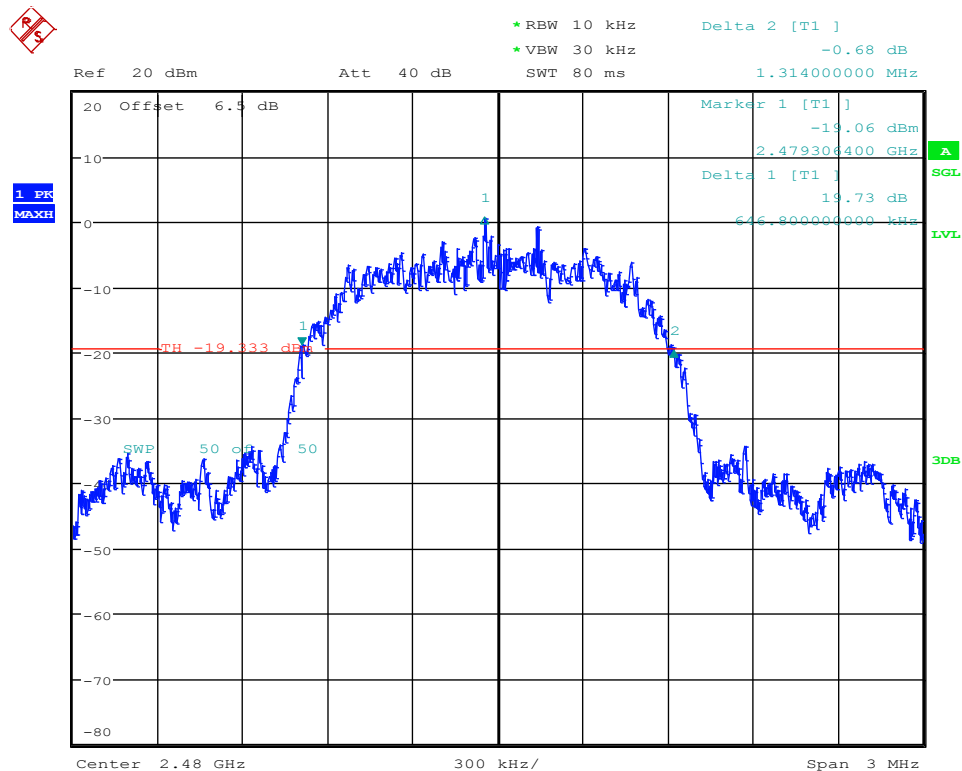

Date: 27.JUL.2015 13:38:15

3.3 Test Conditions and Results – Number of hopping frequencies


Number of hopping frequencies acc. to FCC 15.247 / IC RSS-247		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.247(a)(1)(iii) / IC RSS-247 5.1	
Test according to measurement reference	Reference Method	
	ANSI C63.10	
Test frequency range	Tested frequencies	
	F _{LOW} - F _{HIGH}	
EUT test mode	DH5-Hop	
Limits		
Limit	Condition	
Number of hopping channels ≥ 15	Output power ≤ 125 mW / 21 dBm	
Number of hopping channels ≥ 75	125 mW / 21 dBm < Output power ≤ 1 W / 30 dBm	
Test setup		
Spectrum Analyzer EUT		
Test procedure		
1. EUT set to test mode (Communication tester is used if needed) 2. Span set to measurement frequency range 3. Detector set to peak and max hold 4. Resolution bandwidth is set small enough to resolve hopping channel emission spectra 5. The number of peaks is counted to determine number of hopping frequencies		
Test results		
Number of hopping frequencies	Limit	Result
79	≥ 15	PASS
Comments:		

Number of hopping frequencies - Range A

Number of Hopping Frequencies acc. to FCC 15.247

Project Number: G0M-1506-4874

Applicant:	Panasonic Industrial Devices Europe GmbH
EUT Name:	Bluetooth Module
Model:	ENW89829C3KF
Test Site:	Eurofins Product Service GmbH
Operator:	Christian Weber
Test Conditions:	Tnom / Vnom
Mode:	Tx, GFSK, hopping mode
Test Date:	2015-07-27
Verdict:	PASS
Note 1:	Number of Hopping Frequencies (ANSI C63.10)
Note 2:	conducted measurement, channel 0-24

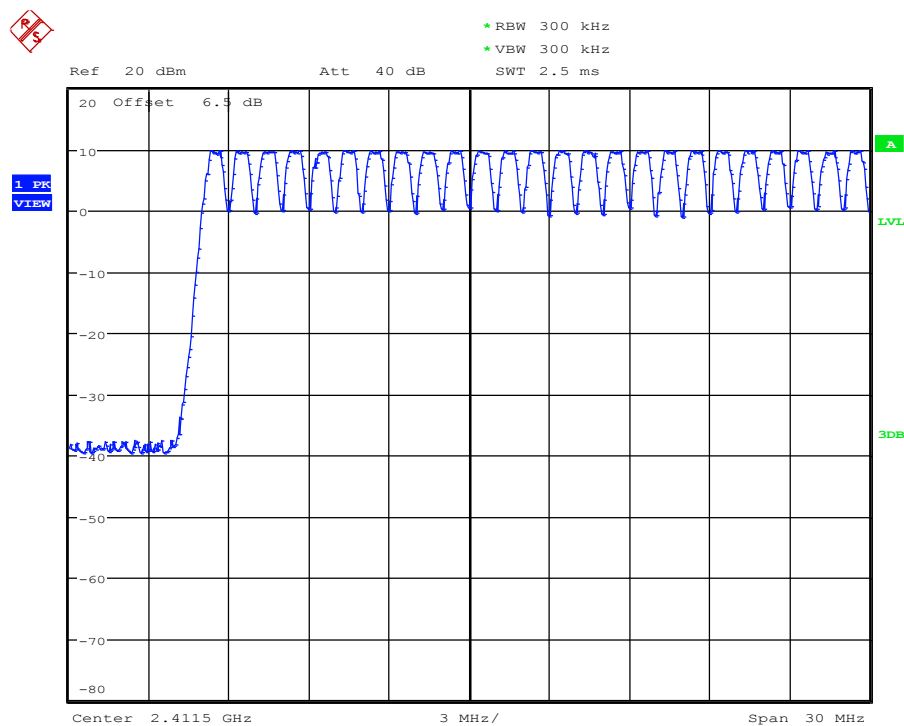


Number of hopping frequencies
Date: 27.JUL.2015 13:40:08

Number of hopping frequencies - Range B

Number of Hopping Frequencies acc. to FCC 15.247

Project Number: G0M-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89829C3KF
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, GFSK, hopping mode
 Test Date: 2015-07-27
 Verdict: PASS
 Note 1: Number of Hopping Frequencies (ANSI C63.10)
 Note 2: conducted measurement, channel 25-53

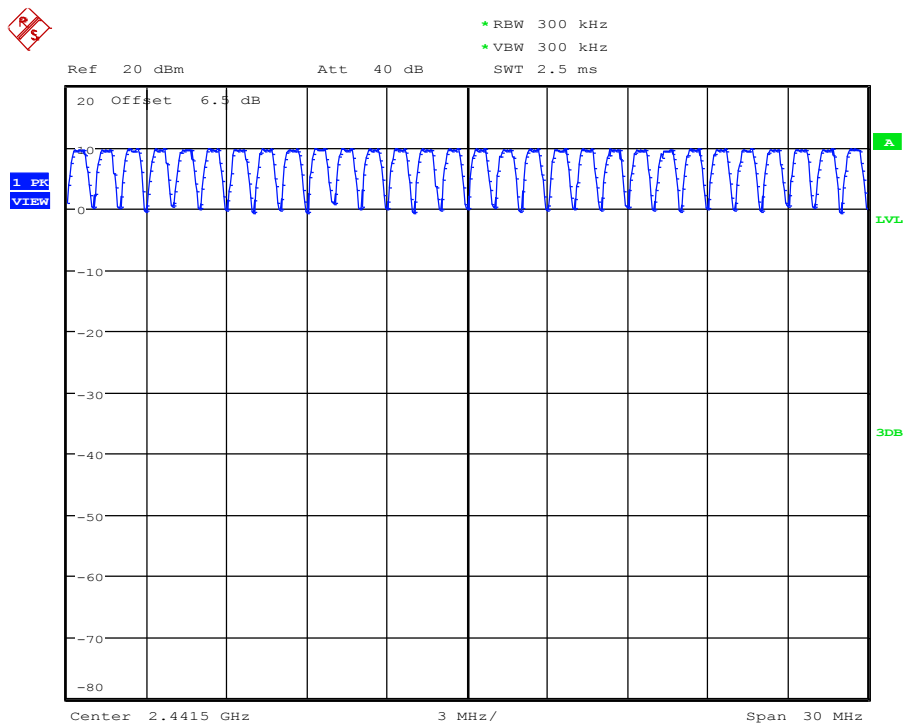

Number of hopping frequencies


Date: 27.JUL.2015 13:41:15

Number of hopping frequencies - Range C

Number of Hopping Frequencies acc. to FCC 15.247

Project Number: G0M-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89829C3KF
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, GFSK, hopping mode
 Test Date: 2015-07-27
 Verdict: PASS
 Note 1: Number of Hopping Frequencies (ANSI C63.10)
 Note 2: conducted measurement, channel 55-78

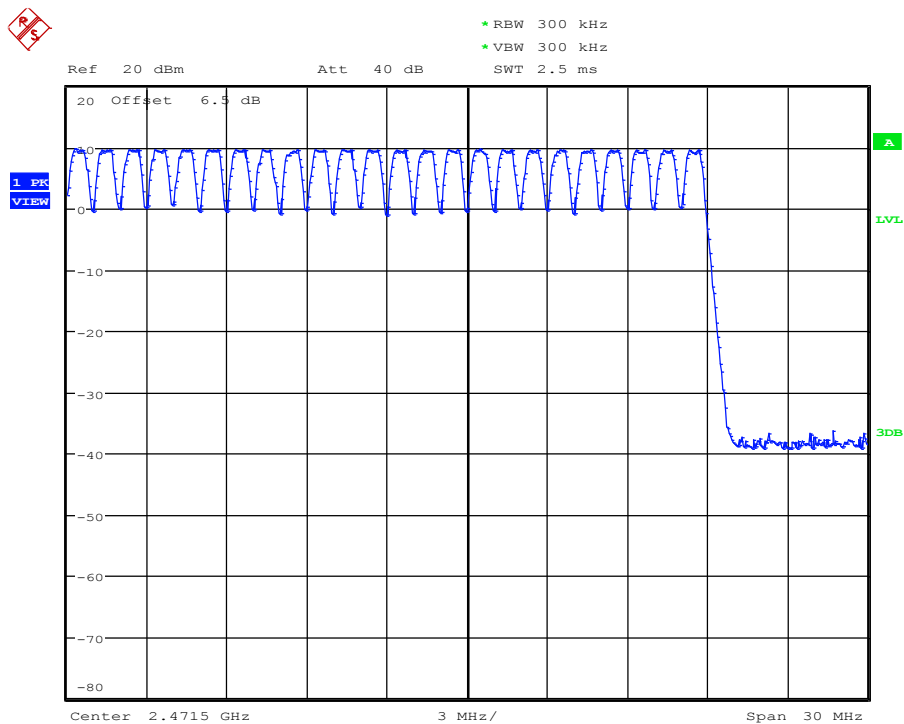

Number of hopping frequencies

Date: 27.JUL.2015 13:42:17

Test Report No.: G0M-1506-4874-TFC247BT-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.4 Test Conditions and Results – Frequency hopping channel separation


Frequency hopping channel separation acc. to FCC 15.247 / IC RSS-247		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.247(a)(1) / IC RSS-247 5.1	
Test according to measurement reference	Reference Method	
	ANSI C63.10	
Test frequency range	Tested frequencies	
	2441 & 2442 MHz	
EUT test mode	DH5-Hop	
Limits		
Limit	Condition	
≥ 25 kHz or ⅔ of 20 dB bandwidth	Output power ≤ 125 mW / 21 dBm	
≥ 25 kHz or 20 dB bandwidth	125 mW / 21 dBm < Output power ≤ 1 W / 30 dBm	
Test setup		
Spectrum Analyzer EUT		
Test procedure		
1. EUT set to test mode (Communication tester is used if needed) 2. Span set to measurement frequency range 3. Detector set to peak and max hold 4. Resolution bandwidth is set small enough to resolve hopping channel emission spectra 5. The two adjacent channel peaks are marked 6. Channel separation is determined from frequency separation of markers		
Test results		
Channel separation [kHz]	Limit [kHz]	Result
1001.3	≥ ⅔ · 917 = 611.34	PASS
Comments:		

Frequency hopping channel separation

Carrier Frequency Separation acc. to FCC 15.247

Project Number: G0M-1506-4874

Applicant:	Panasonic Industrial Devices Europe GmbH
EUT Name:	Bluetooth Module
Model:	ENW89829C3KF
Test Site:	Eurofins Product Service GmbH
Operator:	Christian Weber
Test Conditions:	Tnom / Vnom
Mode:	Tx, GFSK, hopping mode
Test Date:	2015-07-27
Verdict:	PASS
Note 1:	Carrier Frequency Separation (ANSI C63.10)
Note 2:	conducted measurement

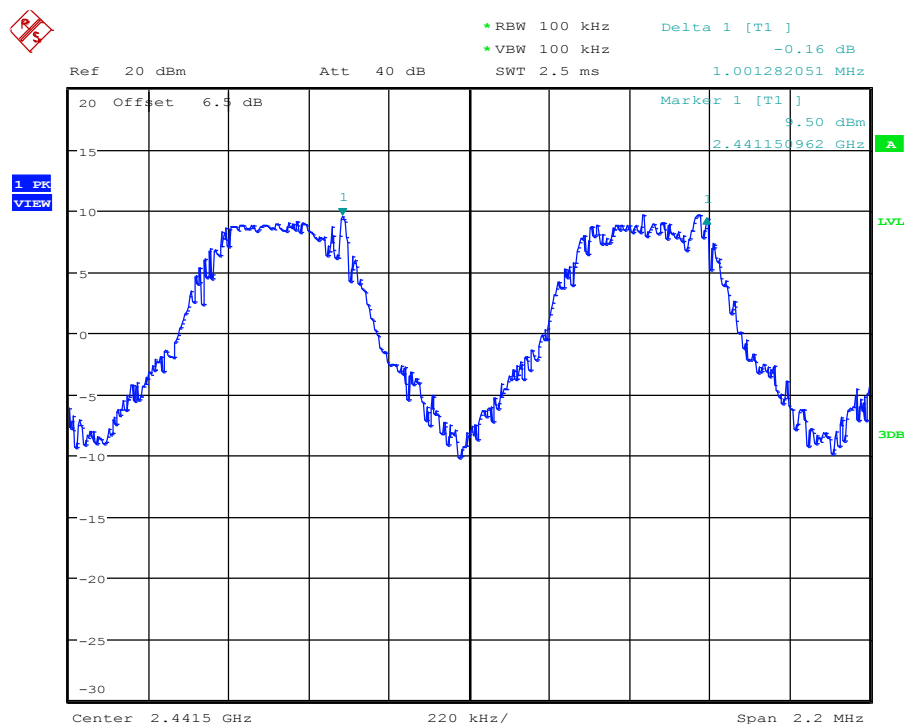

Limit: > two-thirds of the 20 dB bandwidth ; Result: Pass

Date: 27.JUL.2015 13:46:33

3.5 Test Conditions and Results – Time of occupancy (Dwell Time)


Time of occupancy (Dwell time) acc. to FCC 15.247 / IC RSS-247				Verdict: PASS	
EUT requirement rule parts and clause	Reference				
	FCC 15.247(a)(1)(iii) / IC RSS-247 5.1				
Test according to measurement reference	Reference Method				
	ANSI C63.10				
Test frequency range	Tested frequencies				
	2441 MHz				
EUT test mode	DH5-Hop				
Limits					
Limit					
Time of occupancy ≤ 0.4 s within 0.4 s · Number of hopping channels					
Test setup					
Spectrum Analyzer EUT					
Test procedure					
1. EUT set to test mode (Communication tester is used if needed) 2. Center frequency set to test channel center frequency 3. Span set to zero span and detector to peak and max hold 4. Resolution bandwidth is set to 100kHz and sweep time to observation period 5. Time of occupancy determined from number of peaks multiplied by single hop dwell time					
Test results					
Observation period [s]	No. of hops	Dwell time/hop [s]	Time of occupancy [s]	Limit [s]	Result
31.6	87	0.002903	0.2526	≤ 0.4	PASS
Comments:					

Time of occupancy

Time of Occupancy acc. to FCC 15.247

Project Number: GOM-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89829C3KF
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, GFSK, channel 2441MHz, hopping mode
 Test Date: 2015-07-27
 Verdict: PASS
 Note 1: 87 events * 2.903 ms; Result: 252.6 ms Limit < 0.4s
 Note 2: conducted measurement, (ANSI C63.10)

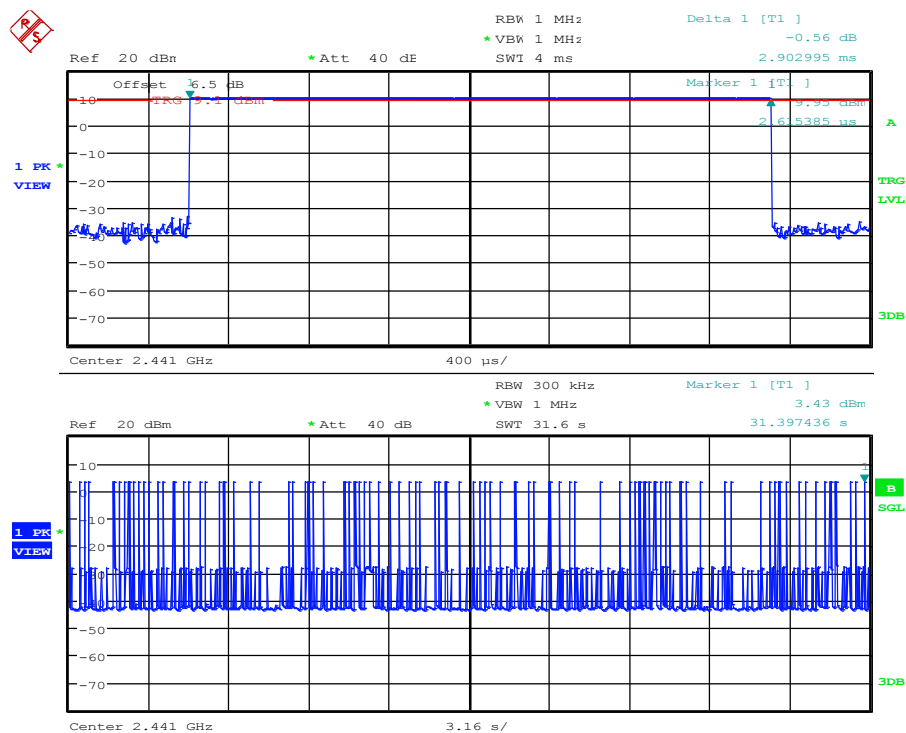

Burst length=2.90299 ms

Date: 27.JUL.2015 13:57:25

Test Report No.: GOM-1506-4874-TFC247BT-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.6 Test Conditions and Results – Maximum peak conducted power

Maximum peak conducted power acc. to FCC 15.247 / IC RSS-247		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.247(b)(1) / IC RSS-247 5.4	
Test according to measurement reference	Reference Method	
	ANSI C63.10	
Test frequency range	Tested frequencies	
	F _{LOW} / F _{MID} / F _{HIGH}	
Measurement mode	Peak	
Maximum antenna gain	1.3 dBi ⇒ Limit correction = 0 dB	
Limits		
Limit	Condition	
1 W (30 dBm)	Number of hopping channels ≥ 75	
0.125 W (21 dBm)	75 > Number of hopping channels ≥ 15	
The conducted output power limit specified above is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in the table, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.		
Test setup		
Spectrum Analyzer EUT		
Test procedure		
1. EUT set to test mode (Communication tester is used if needed) 2. Center frequency set to test channel center frequency 3. Span set to twice the 20 dB bandwidth and detector to peak and max hold 4. Resolution bandwidth is set to 3 MHz 5. Peak conducted power is determined from peak of spectrum envelope		

Test results								
Channel	Frequency [MHz]	Voltage	Mode	Peak power [dbm]	Peak power [W]	Limit [dBm]	Margin [dB]	Result
F _{LOW}	2402	3.3 VDC	DH5-Sngl	10.12	0.01	30	-19.88	PASS
F _{MID}	2441	3.3 VDC	DH5-Sngl	10.13	0.01	30	-19.87	PASS
F _{HIGH}	2480	3.3 VDC	DH5-Sngl	9.92	0.01	30	-20.08	PASS
F _{LOW}	2402	3.3 VDC	2DH5-Sngl	9.90	0.01	30	-20.10	PASS
F _{MID}	2441	3.3 VDC	2DH5-Sngl	9.90	0.01	30	-20.10	PASS
F _{HIGH}	2480	3.3 VDC	2DH5-Sngl	9.70	0.01	30	-20.30	PASS
F _{LOW}	2402	3.3 VDC	3DH5-Sngl	10.44	0.01	30	-19.56	PASS
F _{MID}	2441	3.3 VDC	3DH5-Sngl	10.39	0.01	30	-19.61	PASS
F _{HIGH}	2480	3.3 VDC	3DH5-Sngl	10.25	0.01	30	-19.75	PASS
Comments:								

3.7 Test Conditions and Results – AC power line conducted emissions

Power line conducted emissions acc. to FCC 47 CFR 15.207 / IC RSS-Gen				Verdict: PASS	
Test according referenced standards		Reference Method			
		ANSI C63.4			
Fully configured sample scanned over the following frequency range		Frequency range			
		0.15 MHz to 30 MHz			
Points of Application		Application Interface			
AC Mains		LISN			
EUT test mode		AC-Powerline			
Limits and results					
Frequency [MHz]	Quasi-Peak [dBμV]	Result	Average [dBμV]	Result	
0.15 to 5	66 to 56*	PASS	56 to 46*	PASS	
0.5 to 5	56	PASS	46	PASS	
5 to 30	60	PASS	50	PASS	
Comments:					
* Limit decreases linearly with the logarithm of the frequency.					


Conducted Emissions

EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89829A2KF
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Yu
 Test Conditions: Tnom: 23°C, Unom: 120VAC at AC/DC Adapter from Notebook
 LISN: ESH2-Z5 L
 Mode: Bluetooth link to Communication tester
 Test Date: 2015-09-14
 Note:

Index 1

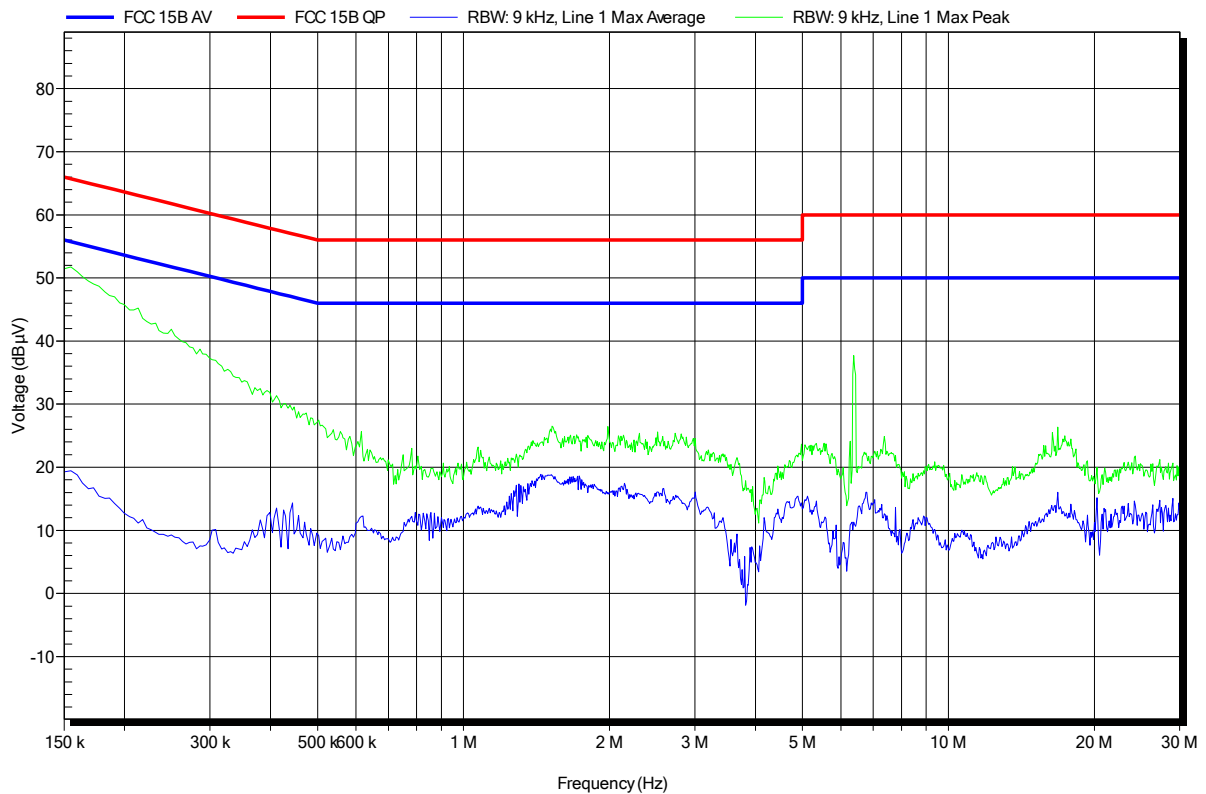


Conducted Emissions
EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89829A2KF
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Yu
 Test Conditions: Tnom: 23°C, Unom: 120VAC at AC/DC Adapter from Notebook
 LISN: ESH2-Z5 N
 Mode: Bluetooth link to Communication tester
 Test Date: 2015-09-14
 Note:

Index 2

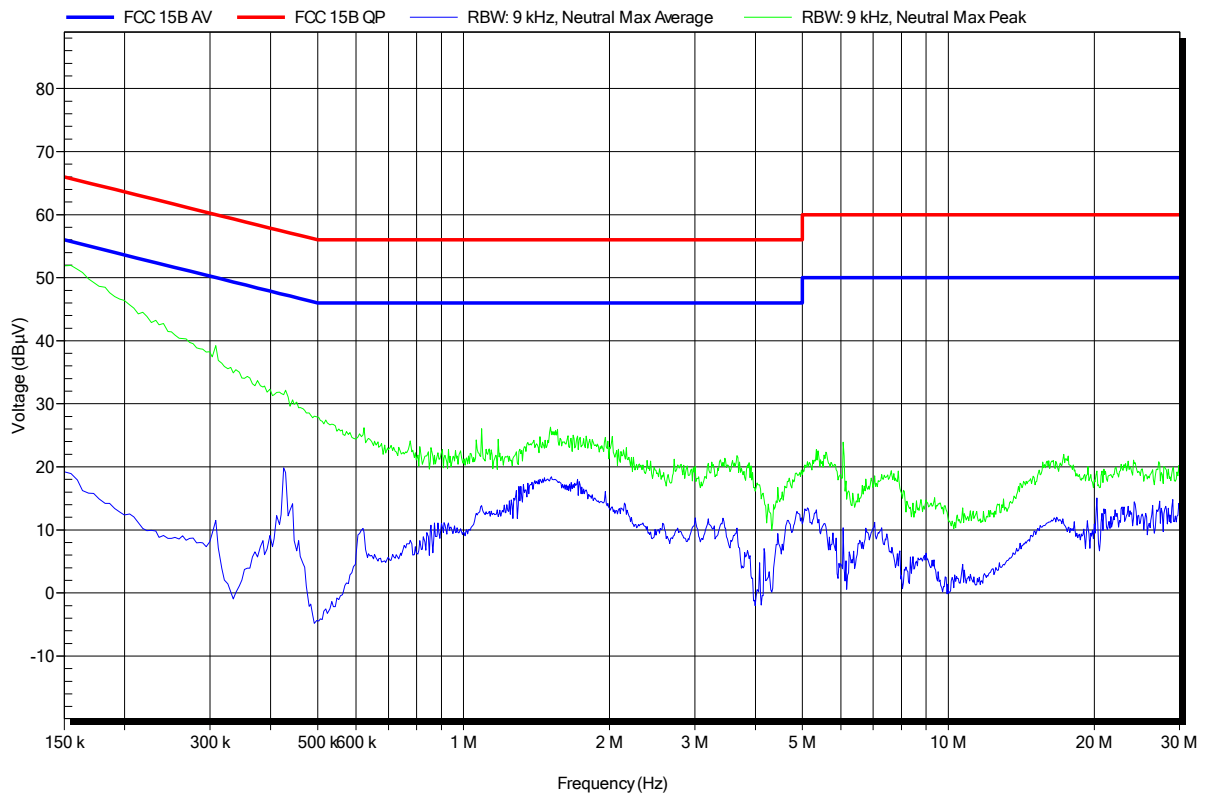

3.8 Test Conditions and Results – Band edge compliance


Band-edge compliance acc. to FCC 15.247 / IC RSS-247				Verdict: PASS		
EUT requirement rule parts and clause		Reference				
		FCC 15.247(d) / IC RSS-247 5.5				
Test according to measurement reference		Reference Method				
		ANSI C63.10				
Test frequency range		Tested frequencies				
		F _{LOW} / F _{HIGH}				
Measurement mode		Peak				
Limits						
Limit			Condition			
≤ -20 dB/100 kHz			Peak power measurement detector = Peak			
≤ -30 dB/100 kHz			Peak power measurement detector = RMS			
Test setup						
Spectrum Analyzer EUT						
Test procedure						
1. EUT set to test mode (Communication tester is used if needed) 2. Span set around lower band edge and detector is set to peak and max hold 3. Resolution bandwidth is set to 100 kHz 4. Markers are set to peak emission levels within frequency band and outside frequency band 5. Band edge attenuation is determined from level difference						
Test results						
Channel	Frequency [MHz]	Mode	Level [dBc]	Limit [dBc]	Margin [dB]	Result
F _{LOW}	2402	DH5-Sngl	-48.99	-20	-28.99	PASS
F _{HIGH}	2480	DH5-Sngl	-48.02	-20	-28.02	PASS
F _{LOW}	2402	DH5-Hop	-48.77	-20	-28.77	PASS
F _{HIGH}	2480	DH5-Hop	-48.50	-20	-28.50	PASS
F _{LOW}	2402	2DH5-Sngl	-39.92	-20	-19.92	PASS
F _{HIGH}	2480	2DH5-Sngl	-46.99	-20	-26.99	PASS
F _{LOW}	2402	2DH5-Hop	-42.32	-20	-22.32	PASS
F _{HIGH}	2480	2DH5-Hop	-43.46	-20	-23.46	PASS

F _{LOW}	2402	3DH5-Sngl	-40.44	-20	-20.44	PASS
F _{HIGH}	2480	3DH5-Sngl	-47.54	-20	-27.54	PASS
F _{LOW}	2402	3DH5-Hop	-40.60	-20	-20.60	PASS
F _{HIGH}	2480	3DH5-Hop	-45.21	-20	-25.21	PASS
Comments:						

Band-edge compliance – DH5-Sngl F_{Low}
Band-edge compliance acc. to FCC 15.247

Project Number: GOM-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89829C3KF
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, DH5, 2402 MHz, single frequency
 Test Date: 2015-07-27
 Verdict: PASS
 Note 1: -20 dBr method (ANSI C63.10)
 Note 2: lower Band-edge, conducted measurement

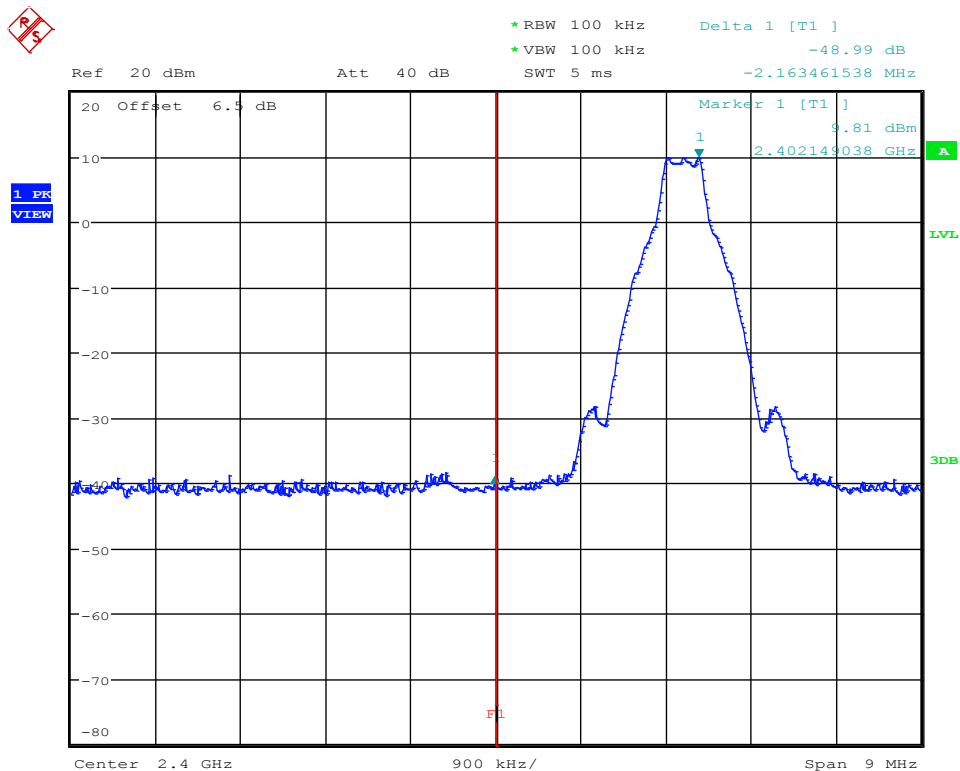

Date: 27.JUL.2015 14:12:18

Test Report No.: GOM-1506-4874-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Band-edge compliance – DH5-Sngl F_{HIGH}

Band-edge compliance acc. to FCC 15.247

Project Number: GOM-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89829C3KF
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, DH5, 2480 MHz, single frequency
 Test Date: 2015-07-27
 Verdict: PASS
 Note 1: -20 dBr method (ANSI C63.10)
 Note 2: upper Band-edge, conducted measurement

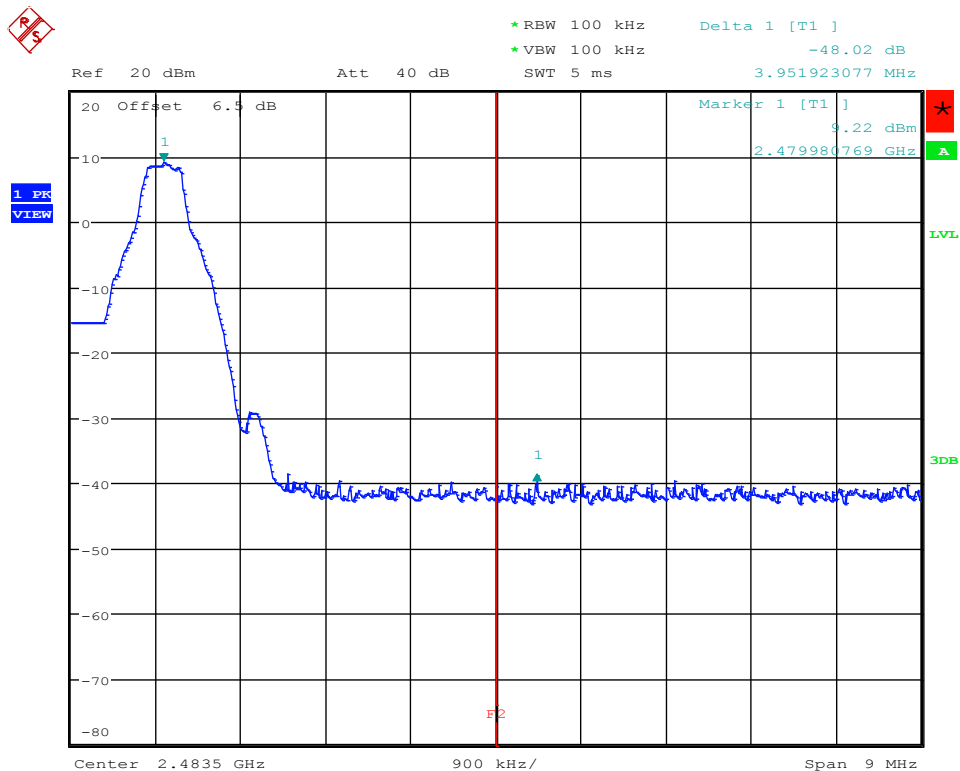

Date: 27.JUL.2015 14:13:43

Test Report No.: GOM-1506-4874-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Band-edge compliance – DH5-Hop F_{LOW}

Band-edge compliance acc. to FCC 15.247

Project Number: G0M-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89829C3KF
Test Site: Eurofins Product Service GmbH
Operator: Christian Weber
Test Conditions: Tnom / Vnom
Mode: Tx, DH5, hopping mode
Test Date: 2015-07-27
Verdict: PASS
Note 1: -20 dBr method (ANSI C63.10)
Note 2: lower Band-edge, conducted measurement

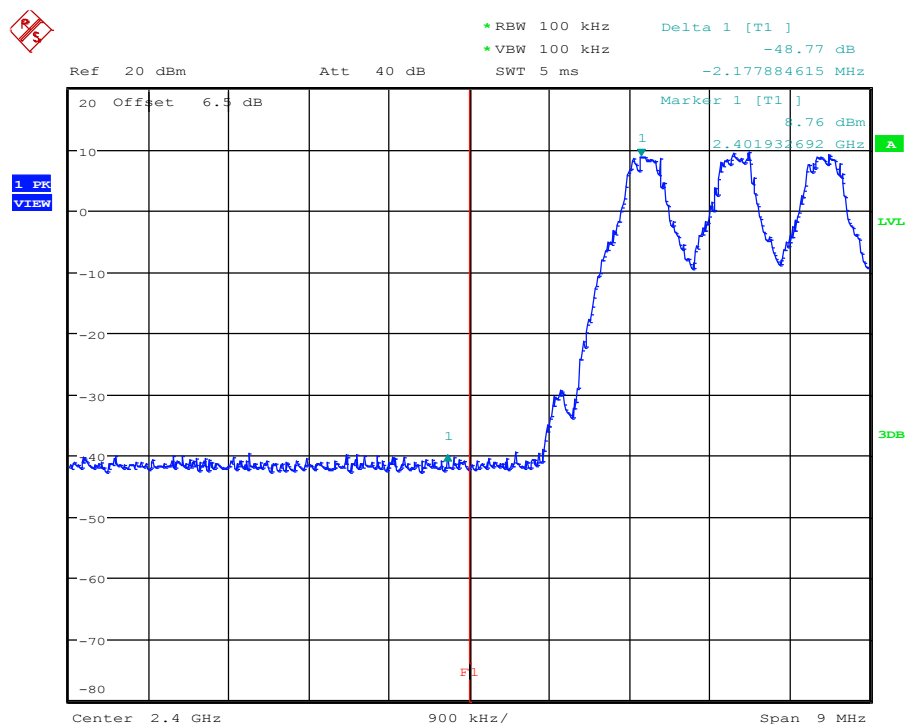


Band-edge compliance – DH5-Hop F_{HIGH}

Band-edge compliance acc. to FCC 15.247

Project Number: GOM-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89829C3KF
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, DH5, hopping mode
 Test Date: 2015-07-27
 Verdict: PASS
 Note 1: -20 dBr method (ANSI C63.10)
 Note 2: upper Band-edge, conducted measurement

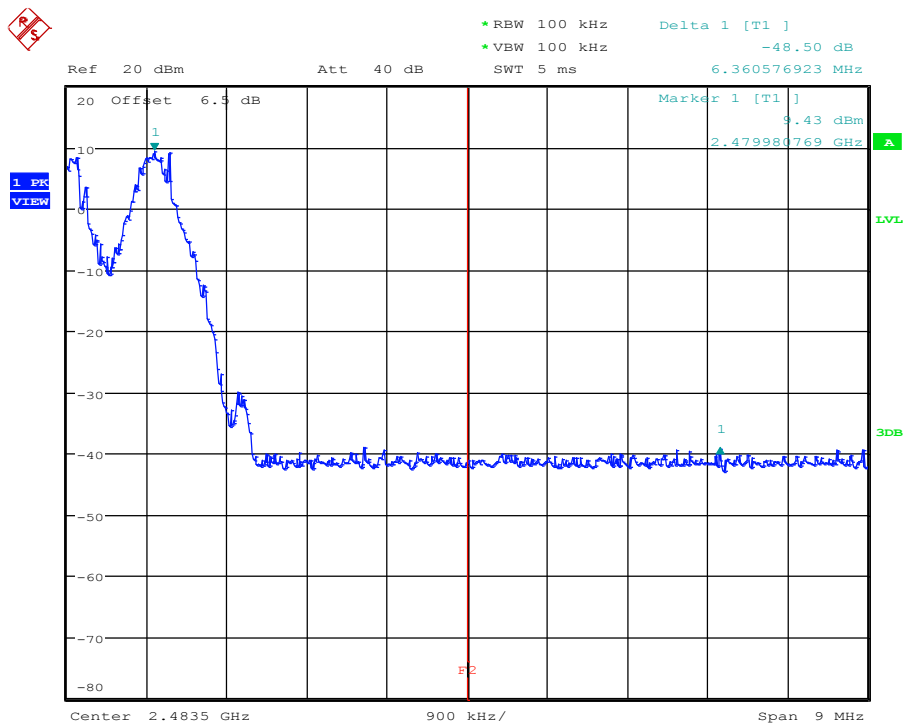

Limit: Marker Delta value >20 dB


Date: 27.JUL.2015 14:25:20

Band-edge compliance – 2-DH5-Sngl F_{LOW}

Band-edge compliance acc. to FCC 15.247

Project Number: GOM-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89829C3KF
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, 2-DH5, 2402 MHz, single frequency
 Test Date: 2015-07-27
 Verdict: PASS
 Note 1: -20 dBm method (ANSI C63.10)
 Note 2: lower Band-edge, conducted measurement

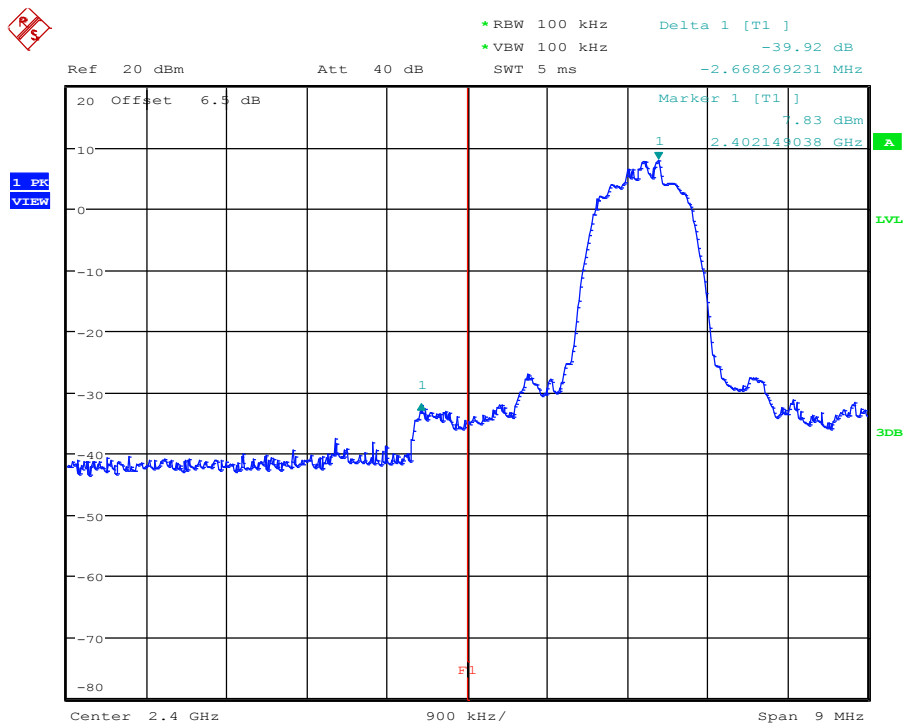

Limit: Marker Delta value >20 dB


Date: 27.JUL.2015 14:14:57

Band-edge compliance – 2-DH5-Sngl F_{HIGH}

Band-edge compliance acc. to FCC 15.247

Project Number: G0M-1506-4874

Applicant:	Panasonic Industrial Devices Europe GmbH
EUT Name:	Bluetooth Module
Model:	ENW89829C3KF
Test Site:	Eurofins Product Service GmbH
Operator:	Christian Weber
Test Conditions:	Tnom / Vnom
Mode:	Tx, 2-DH5, 2480 MHz, single frequency
Test Date:	2015-07-27
Verdict:	PASS
Note 1:	-20 dBr method (ANSI C63.10)
Note 2:	upper Band-edge, conducted measurement

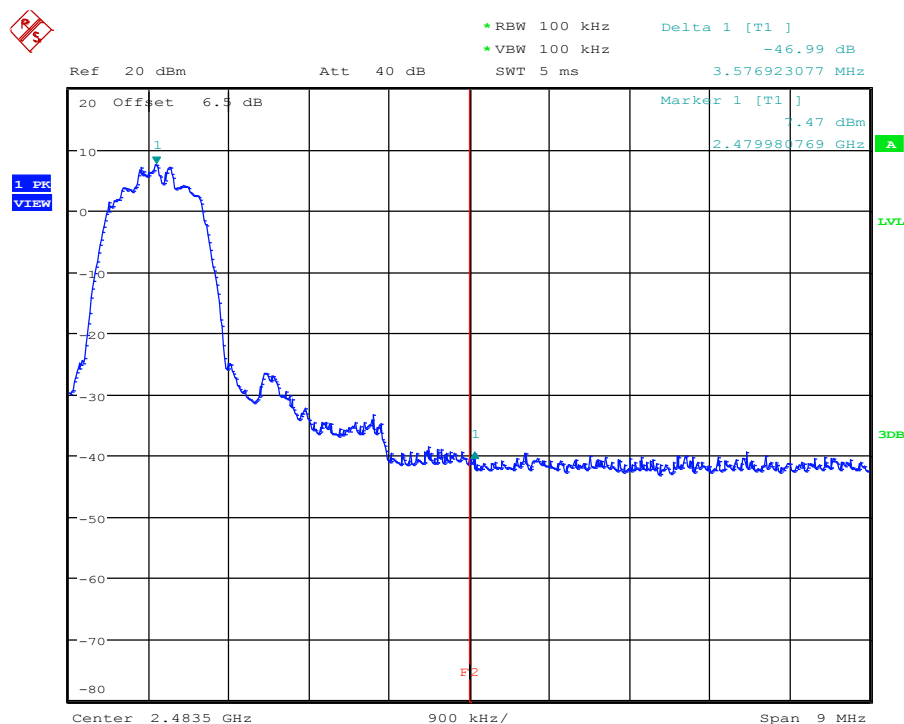

Limit: Marker Delta value >20 dB


Date: 27.JUL.2015 14:16:08

Band-edge compliance – 2-DH5-Hop F_{LOW}

Band-edge compliance acc. to FCC 15.247

Project Number: G0M-1506-4874

Applicant:	Panasonic Industrial Devices Europe GmbH
EUT Name:	Bluetooth Module
Model:	ENW89829C3KF
Test Site:	Eurofins Product Service GmbH
Operator:	Christian Weber
Test Conditions:	Tnom / Vnom
Mode:	Tx, 2-DH5, hopping mode
Test Date:	2015-07-27
Verdict:	PASS
Note 1:	-20 dBr method (ANSI C63.10)
Note 2:	lower Band-edge, conducted measurement

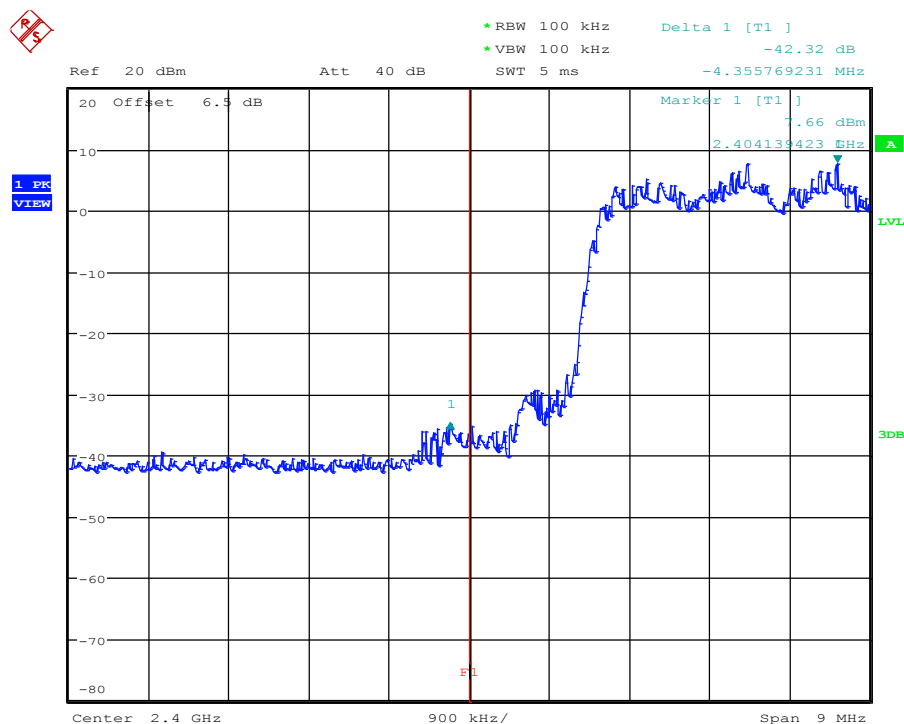

Limit: Marker Delta value >20 dB


Date: 27.JUL.2015 14:26:55

Band-edge compliance – 2-DH5-Hop F_{HIGH}

Band-edge compliance acc. to FCC 15.247

Project Number: GOM-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89829C3KF
Test Site: Eurofins Product Service GmbH
Operator: Christian Weber
Test Conditions: Tnom / Vnom
Mode: Tx, 2-DH5, hopping mode
Test Date: 2015-07-27
Verdict: PASS
Note 1: -20 dBm method (ANSI C63.10)
Note 2: upper Band-edge, conducted measurement

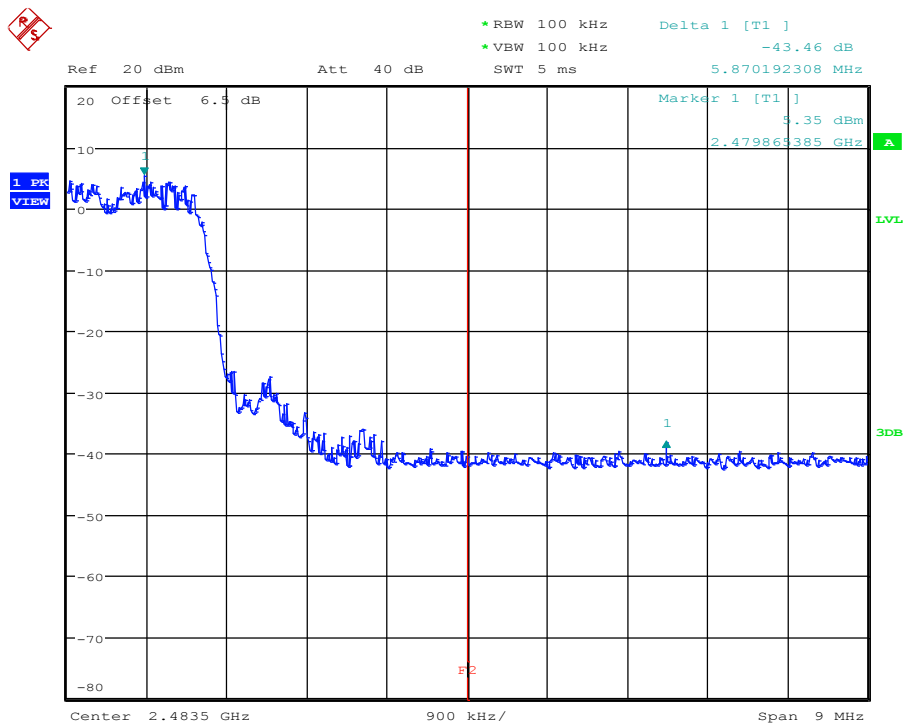

Limit: Marker Delta value >20 dB

Date: 27.JUL.2015 14:28:37

Test Report No.: GOM-1506-4874-TFC247BT-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Band-edge compliance – 3-DH5-Sngl F_{LOW}

Band-edge compliance acc. to FCC 15.247

Project Number: GOM-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89829C3KF
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, 3-DH5, 2402 MHz, single frequency
 Test Date: 2015-07-27
 Verdict: PASS
 Note 1: -20 dBr method (ANSI C63.10)
 Note 2: lower Band-edge, conducted measurement

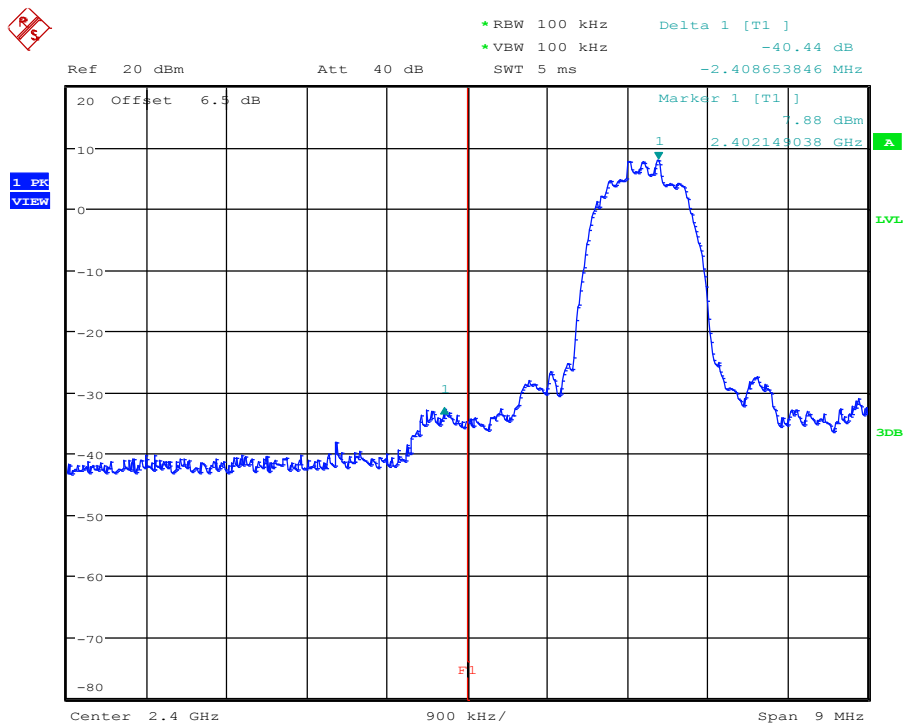

Limit: Marker Delta value >20 dB


Date: 27.JUL.2015 14:18:20

Band-edge compliance – 3-DH5-Sngl F_{HIGH}

Band-edge compliance acc. to FCC 15.247

Project Number: GOM-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89829C3KF
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, 3-DH5, 2480 MHz, single frequency
 Test Date: 2015-07-27
 Verdict: PASS
 Note 1: -20 dBr method (ANSI C63.10)
 Note 2: upper Band-edge, conducted measurement

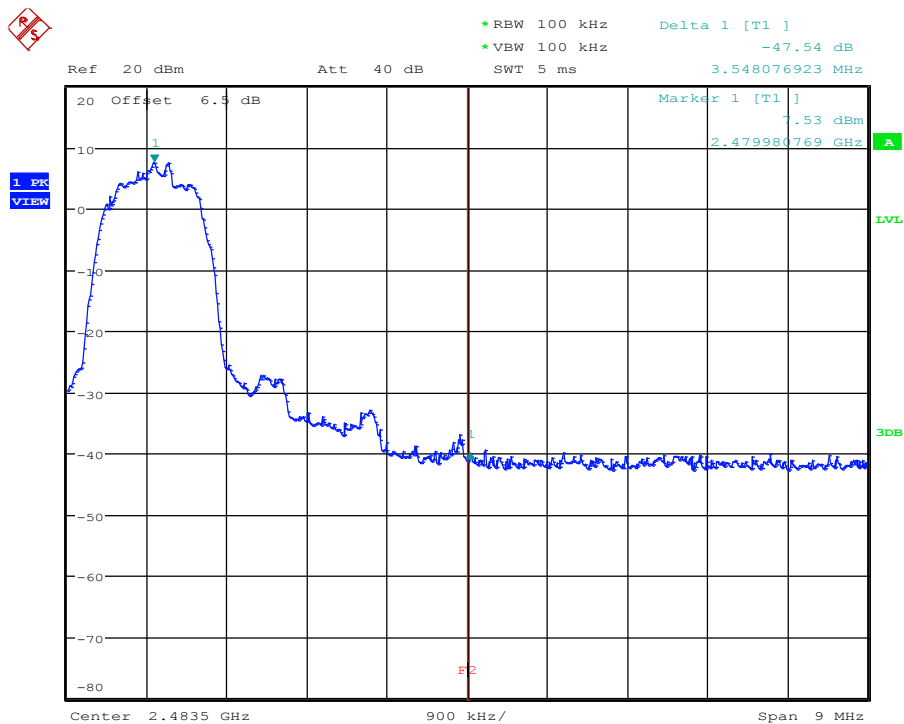

Limit: Marker Delta value >20 dB

Date: 27.JUL.2015 14:19:51

Test Report No.: GOM-1506-4874-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Band-edge compliance – 3-DH5-Hop F_{LOW}

Band-edge compliance acc. to FCC 15.247

Project Number: GOM-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89829C3KF
Test Site: Eurofins Product Service GmbH
Operator: Christian Weber
Test Conditions: Tnom / Vnom
Mode: Tx, 3-DH5, hopping mode
Test Date: 2015-07-27
Verdict: PASS
Note 1: -20 dBm method (ANSI C63.10)
Note 2: lower Band-edge, conducted measurement

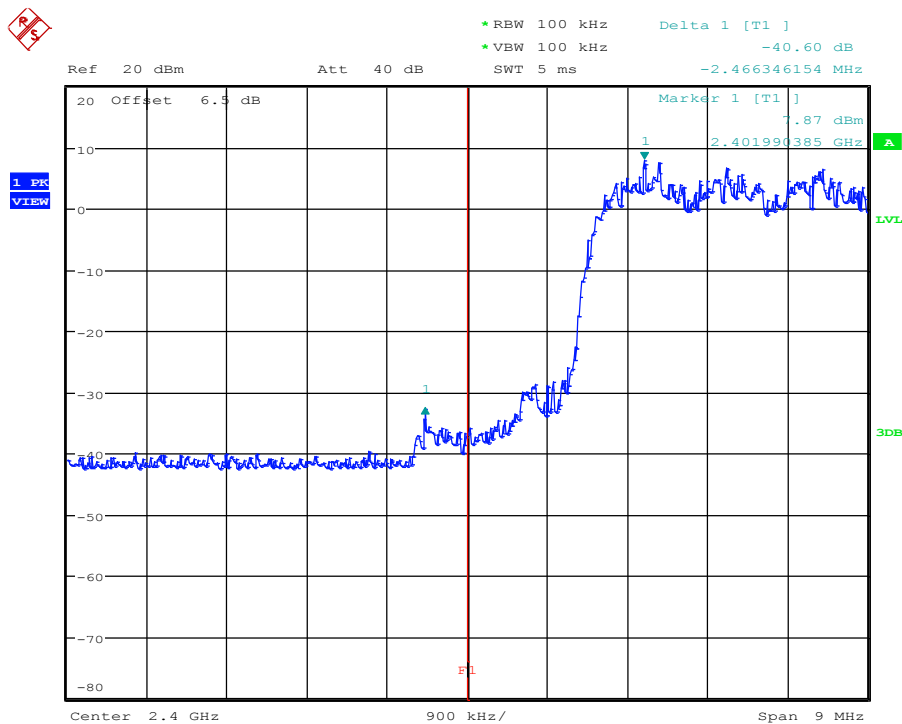

Limit: Marker Delta value >20 dB

Date: 27.JUL.2015 14:30:35

Test Report No.: GOM-1506-4874-TFC247BT-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Band-edge compliance – 3-DH5-Hop F_{HIGH}

Band-edge compliance acc. to FCC 15.247

Project Number: GOM-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89829C3KF
Test Site: Eurofins Product Service GmbH
Operator: Christian Weber
Test Conditions: Tnom / Vnom
Mode: Tx, 3-DH5, hopping mode
Test Date: 2015-07-27
Verdict: PASS
Note 1: -20 dBm method (ANSI C63.10)
Note 2: upper Band-edge, conducted measurement

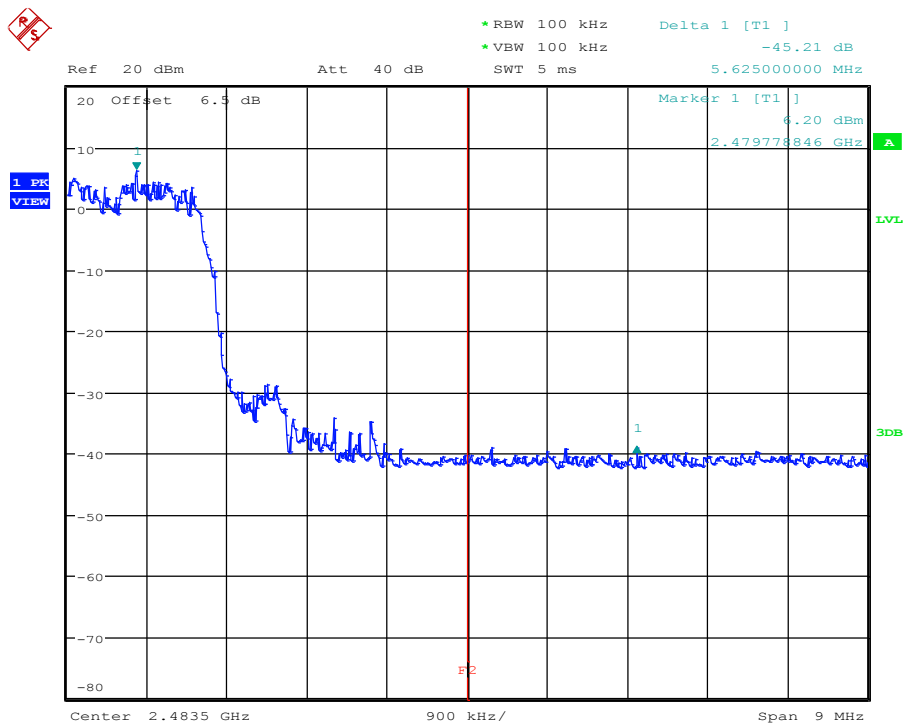

Limit: Marker Delta value >20 dB

Date: 27.JUL.2015 14:32:37

Test Report No.: GOM-1506-4874-TFC247BT-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.9 Test Conditions and Results – Conducted spurious emissions

Conducted spurious emissions acc. to FCC 15.247 / IC RSS-247						Verdict: PASS		
EUT requirement rule parts and clause			Reference					
			FCC 15.247(d) / IC RSS-247 5.5					
Test according to measurement reference			Reference Method					
			ANSI C63.10					
Test frequency range			Tested frequencies					
			10 MHz – 10 th Harmonic					
Measurement mode			Peak					
Limits								
Limit				Condition				
≤ -20 dB/100 kHz				Peak power measurement detector = Peak				
≤ -30 dB/100 kHz				Peak power measurement detector = RMS				
Test setup								
Spectrum Analyzer EUT								
Test procedure								
1. EUT set to test mode (Communication tester is used if needed) 2. Span it set according to measurement range 3. Resolution bandwidth is set to 100 kHz and detector to peak and max hold 4. Markers are set to peak emission levels within frequency band 5. Emission level is determined by second marker on emission peak 6. Attenuation is determined from level difference								
Test results								
Channel	Frequency [MHz]	Mode	Emission [MHz]	Emission Level [dbm]	Peak power [dBm]	Limit [dBm]	Margin [dB]	Result
F _{LOW}	2402	DH5-Sngl	14399	-37.58	9.7	-10.3	-27.28	PASS
F _{MID}	2441	DH5-Sngl	14643	-31.99	9.7	-10.3	-21.69	PASS
F _{HIGH}	2480	DH5-Sngl	14886	-29.98	9.6	-10.4	-19.58	PASS
F _{LOW}	2402	2DH5-Sngl	14399	-38.74	8.0	-12.0	-26.74	PASS
F _{MID}	2441	2DH5-Sngl	14643	-38.33	7.9	-12.1	-26.23	PASS
F _{HIGH}	2480	2DH5-Sngl	14886	-37.03	7.7	-12.3	-24.73	PASS
F _{LOW}	2402	3DH5-Sngl	4804	-42.53	8.0	-12.0	-30.53	PASS
F _{MID}	2441	3DH5-Sngl	2325	-40.57	7.9	-12.1	-28.47	PASS
F _{HIGH}	2480	3DH5-Sngl	14886	-38.66	7.7	-12.3	-26.36	PASS
Comments:								

Test Report No.: G0M-1506-4874-TFC247BT-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Conducted spurious emissions – DH5-Sngl F_{Low}

Spurious Emissions acc. to FCC 15.247

Project Number: G0M-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89829C3KF
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: T_{nom} / V_{nom}
 Mode: Tx, DH5, 2402 MHz
 Test Date: 2015-07-27
 Verdict: PASS
 Note 1: Spurious in non-restricted frequency bands (ANSI C63.10)
 Note 2: conducted measurement

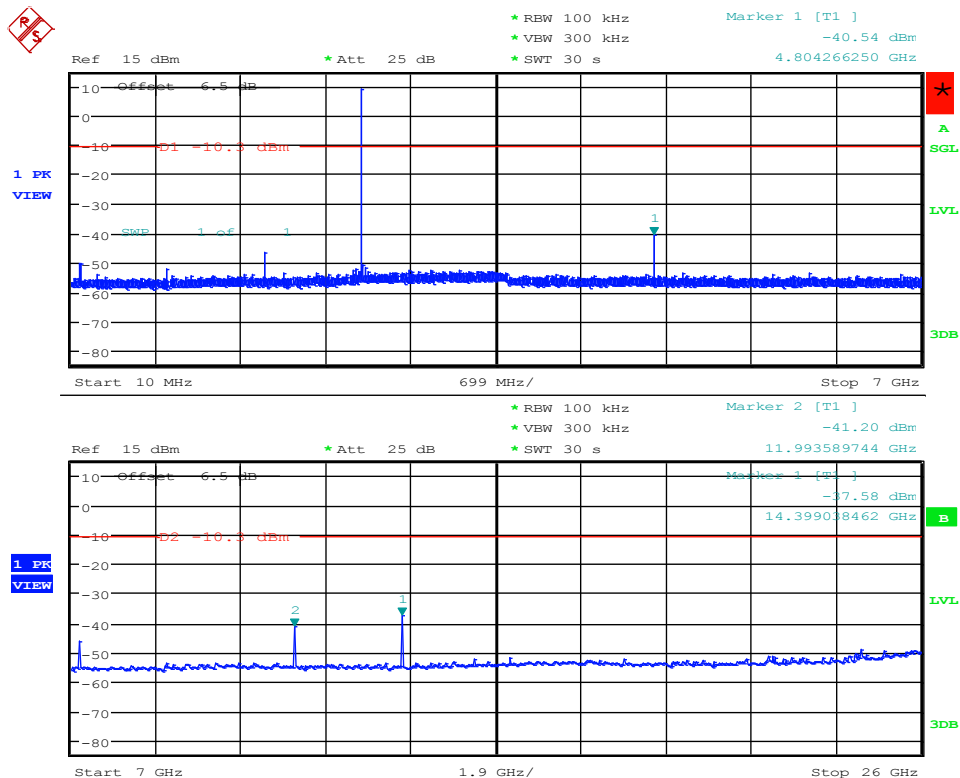

Date: 27.JUL.2015 14:41:57

Test Report No.: G0M-1506-4874-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Conducted spurious emissions – DH5-Sngl F_{MID}

Spurious Emissions acc. to FCC 15.247

Project Number: G0M-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89829C3KF
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, DH5, 2441 MHz
 Test Date: 2015-07-27
 Verdict: PASS
 Note 1: Spurious in non-restricted frequency bands (ANSI C63.10)
 Note 2: conducted measurement

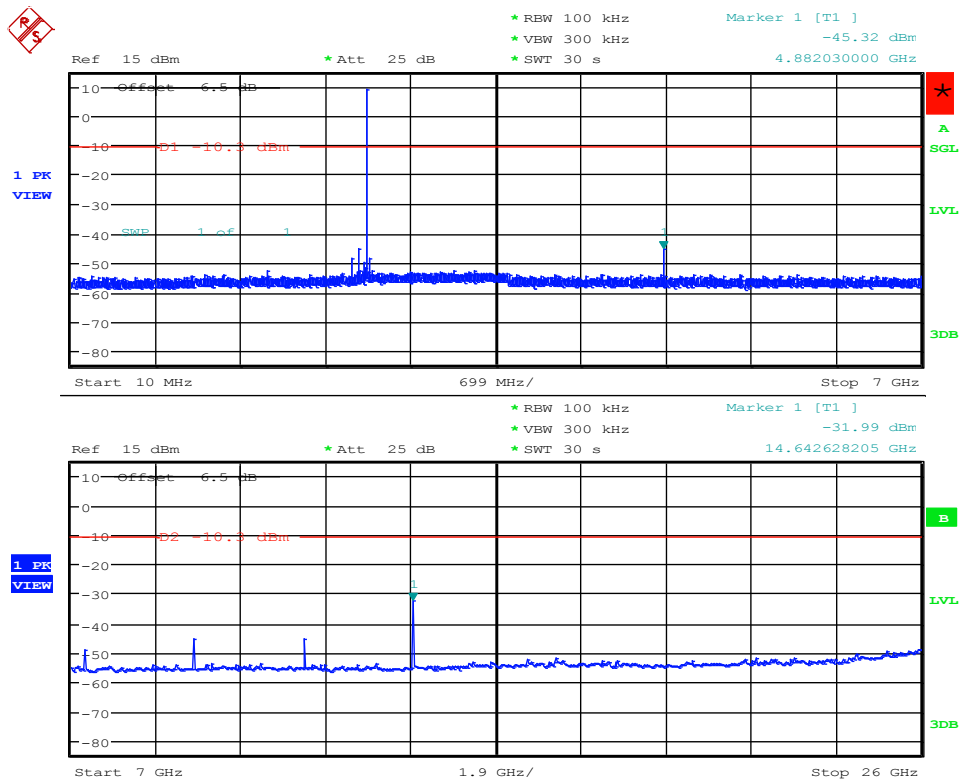

Date: 27.JUL.2015 14:45:41

Test Report No.: G0M-1506-4874-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Conducted spurious emissions – DH5-Sngl F_{HIGH}

Spurious Emissions acc. to FCC 15.247

Project Number: G0M-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89829C3KF
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, DH5, 2480 MHz
 Test Date: 2015-07-27
 Verdict: PASS
 Note 1: Spurious in non-restricted frequency bands (ANSI C63.10)
 Note 2: conducted measurement

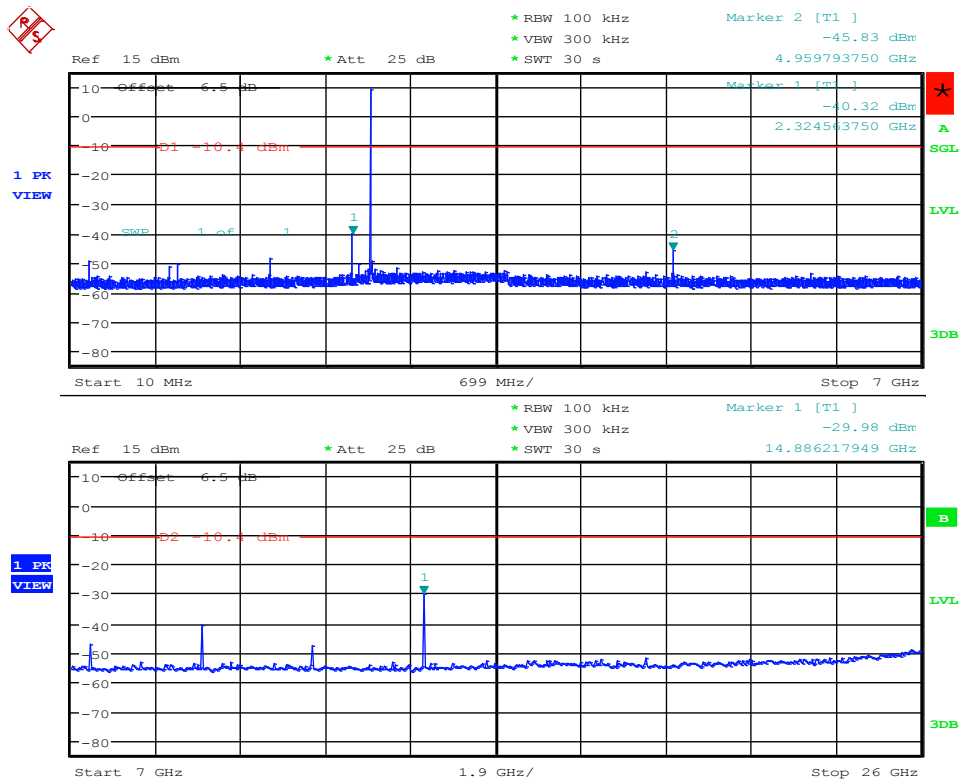

Date: 27.JUL.2015 14:49:08

Test Report No.: G0M-1506-4874-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Conducted spurious emissions – 2-DH5-Sngl F_{Low}

Spurious Emissions acc. to FCC 15.247

Project Number: G0M-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89829C3KF
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, 2-DH5, 2402 MHz
 Test Date: 2015-07-27
 Verdict: PASS
 Note 1: Spurious in non-restricted frequency bands (ANSI C63.10)
 Note 2: conducted measurement

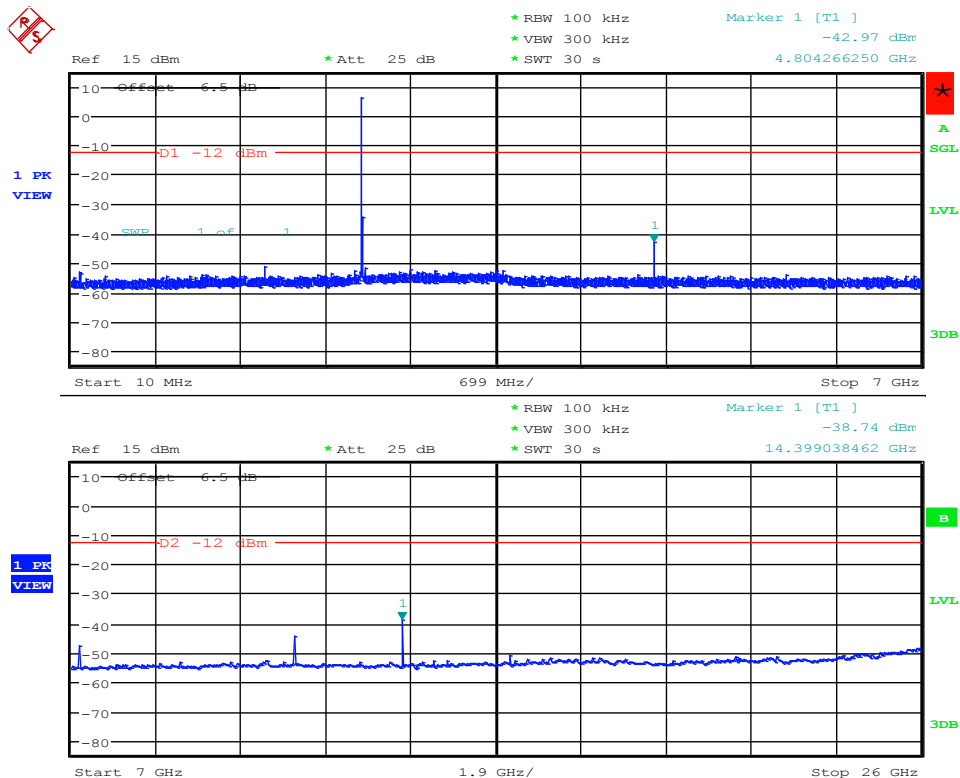

Date: 27.JUL.2015 14:55:31

Test Report No.: G0M-1506-4874-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Conducted spurious emissions – 2-DH5-Sngl F_{MID}

Spurious Emissions acc. to FCC 15.247

Project Number: GOM-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89829C3KF
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, 2-DH5, 2441 MHz
 Test Date: 2015-07-27
 Verdict: PASS
 Note 1: Spurious in non-restricted frequency bands (ANSI C63.10)
 Note 2: conducted measurement

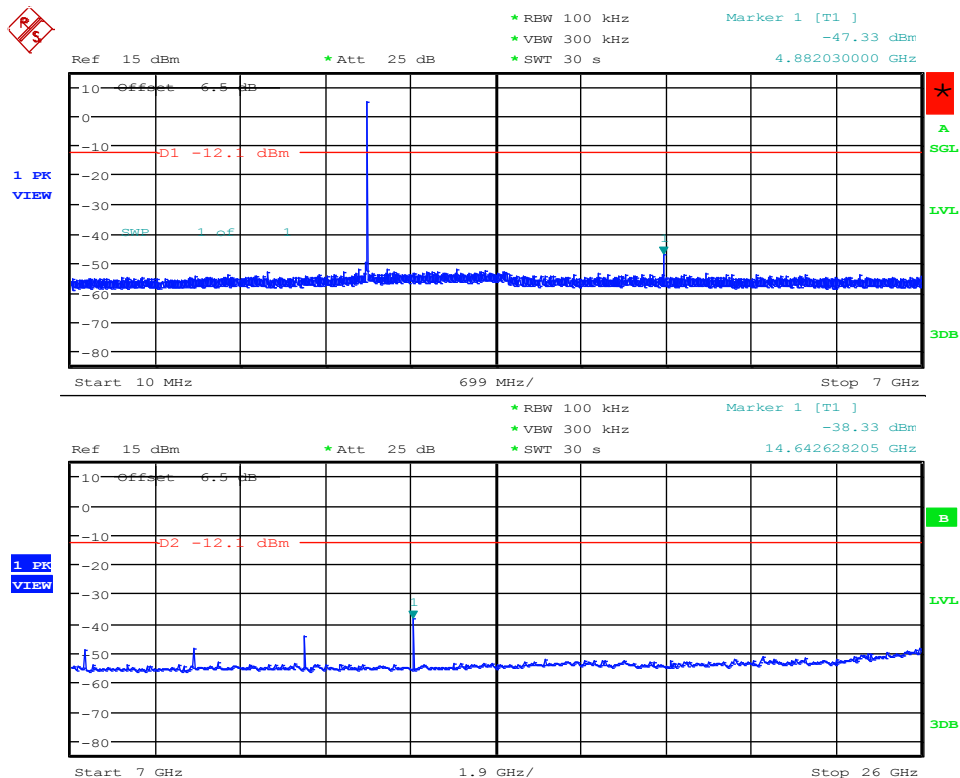

Date: 27.JUL.2015 14:58:20

Test Report No.: GOM-1506-4874-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Conducted spurious emissions – 2-DH5-Sngl F_{HIGH}

Spurious Emissions acc. to FCC 15.247

Project Number: G0M-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89829C3KF
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, 2-DH5, 2480 MHz
 Test Date: 2015-07-27
 Verdict: PASS
 Note 1: Spurious in non-restricted frequency bands (ANSI C63.10)
 Note 2: conducted measurement

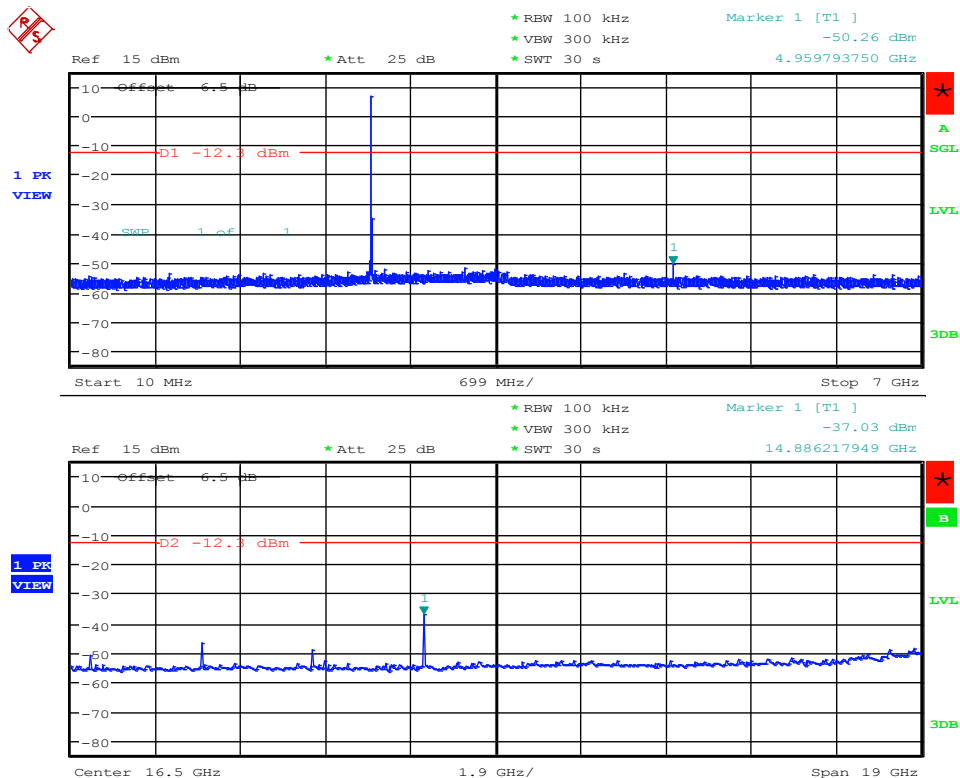

Date: 27.JUL.2015 15:01:16

Test Report No.: G0M-1506-4874-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Conducted spurious emissions – 3-DH5-Sngl F_{Low}

Spurious Emissions acc. to FCC 15.247

Project Number: G0M-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89829C3KF
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, 3-DH5, 2402 MHz
 Test Date: 2015-07-27
 Verdict: PASS
 Note 1: Spurious in non-restricted frequency bands (ANSI C63.10)
 Note 2: conducted measurement

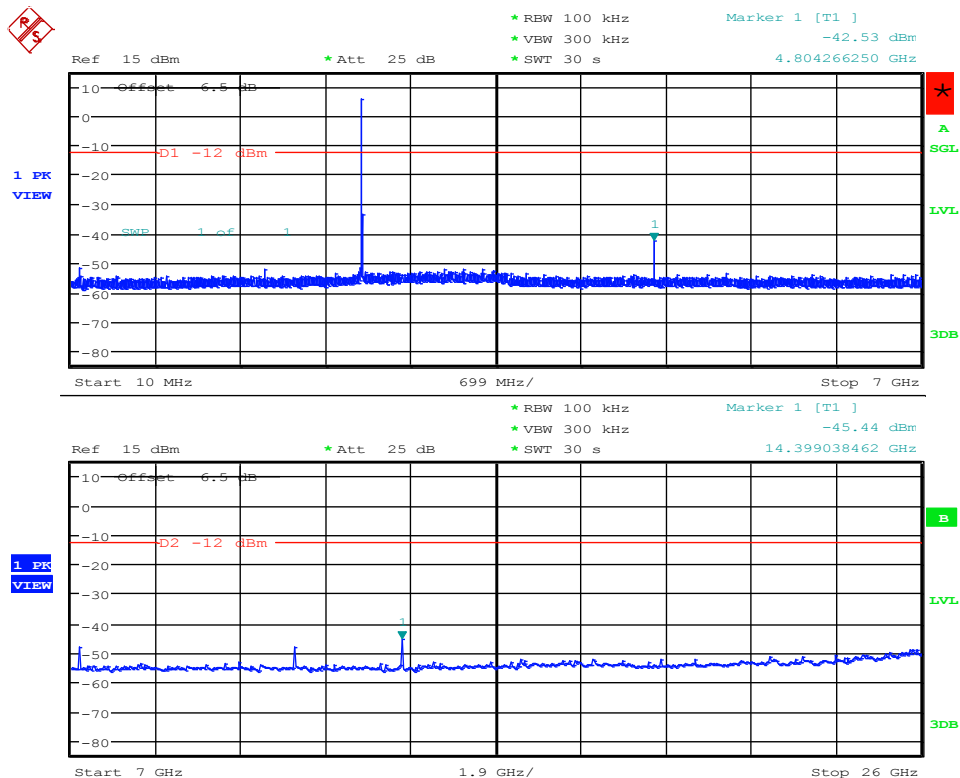

Date: 27.JUL.2015 15:04:40

Test Report No.: G0M-1506-4874-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Conducted spurious emissions – 3-DH5-Sngl F_{MID}

Spurious Emissions acc. to FCC 15.247

Project Number: GOM-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89829C3KF
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, 3-DH5, 2441 MHz
 Test Date: 2015-07-27
 Verdict: PASS
 Note 1: Spurious in non-restricted frequency bands (ANSI C63.10)
 Note 2: conducted measurement

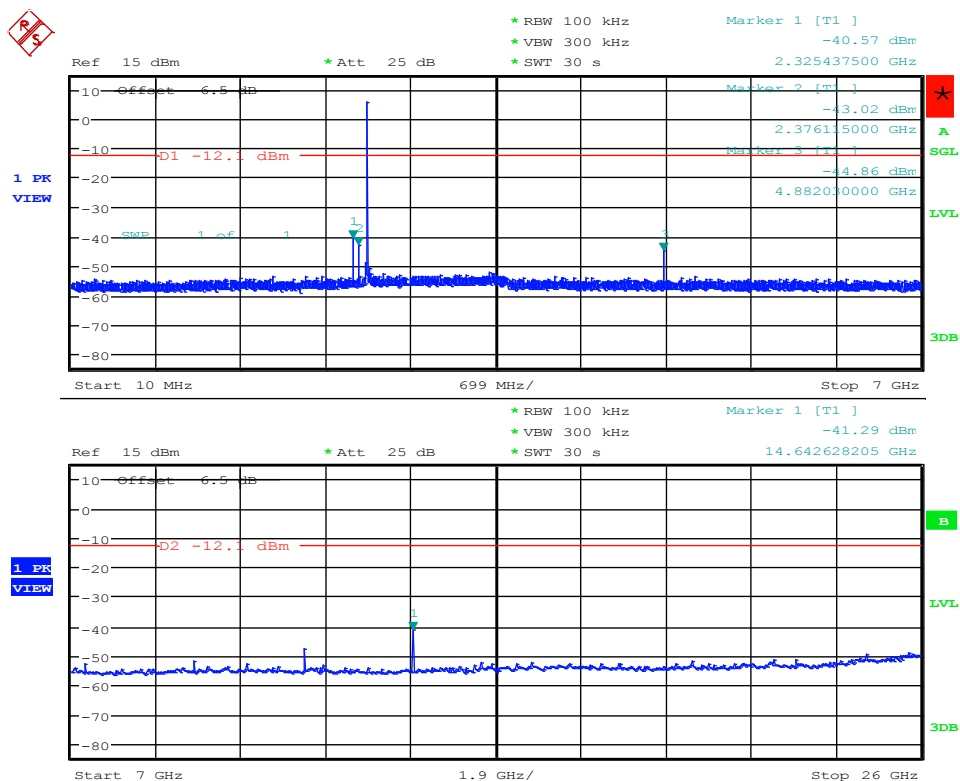

Date: 27.JUL.2015 15:08:04

Test Report No.: GOM-1506-4874-TFC247BT-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Conducted spurious emissions – 3-DH5-Sngl F_{HIGH}

Spurious Emissions acc. to FCC 15.247

Project Number: G0M-1506-4874

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89829C3KF
 Test Site: Eurofins Product Service GmbH
 Operator: Christian Weber
 Test Conditions: Tnom / Vnom
 Mode: Tx, 3-DH5, 2480 MHz
 Test Date: 2015-07-27
 Verdict: PASS
 Note 1: Spurious in non-restricted frequency bands (ANSI C63.10)
 Note 2: conducted measurement

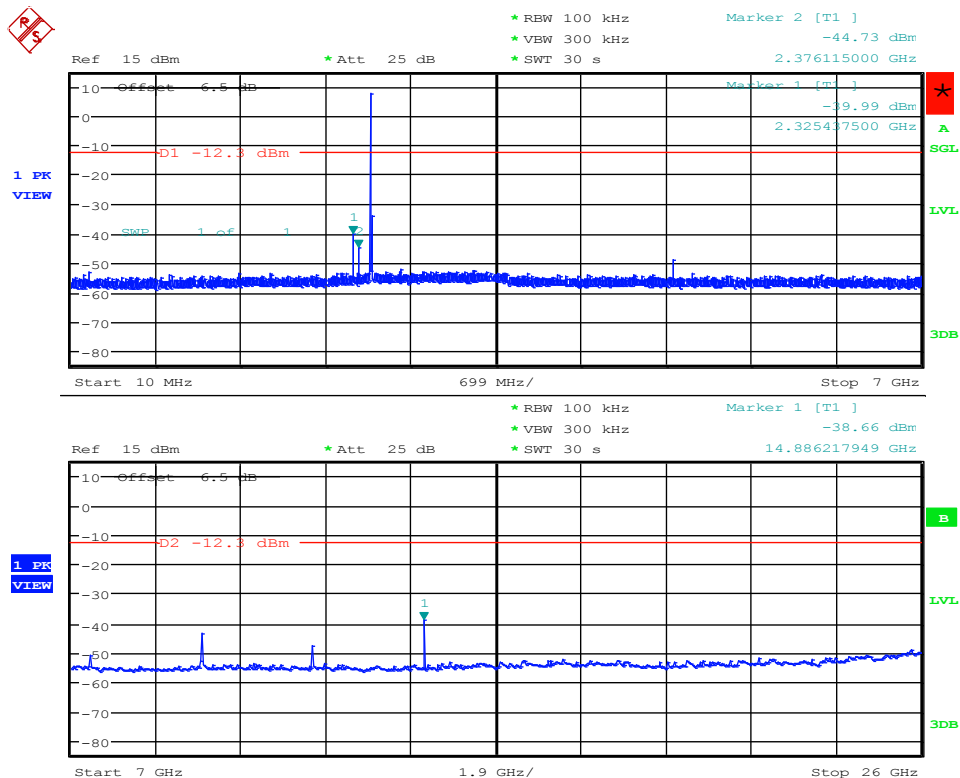

Date: 27.JUL.2015 15:12:25


Test Report No.: G0M-1506-4874-TFC247BT-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.10 Test Conditions and Results – Transmitter radiated emissions

Transmitter radiated emissions acc. to FCC 47 CFR 15.247 / IC RSS-247				Verdict: PASS
Test according referenced standards	Reference Method			
	FCC 15.247(d) / IC RSS-247 5.5			
Test according to measurement reference	Reference Method			
	ANSI C63.10			
Test frequency range	Tested frequencies			
	30 MHz – 10 th Harmonic			
Limits				
Frequency range [MHz]	Detector	Limit [µV/m]	Limit [dBµV/m]	Limit Distance [m]
30 – 88	Quasi-Peak	100	40	3
88 – 216	Quasi-Peak	150	43.5	3
216 – 960	Quasi-Peak	200	46	3
960 – 1000	Quasi-Peak	500	54	3
> 1000	Average	500	54	3

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)). When average radiated emission measurements are specified, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

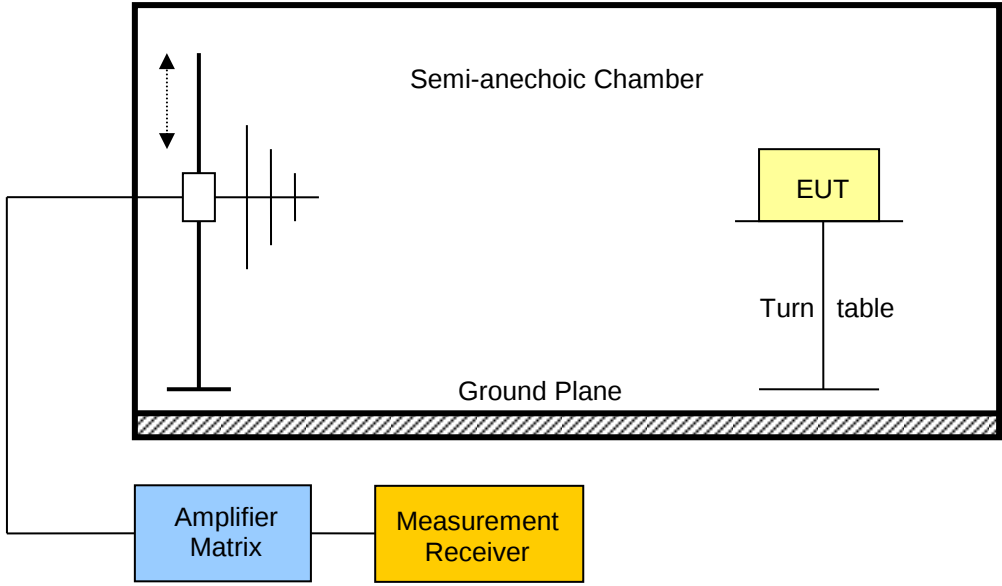Test setup	
	

Test Report No.: G0M-1506-4874-TFC247BT-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany


Test procedure								
1. EUT set to test mode (Communication tester is used if needed) 2. Span it set according to measurement range 3. Resolution bandwidth below 1 GHz is set according to CISPR 16 with peak/quasi-peak detector and RBW of 1 MHz with peak/average detector is used above 1 GHz 4. Markers are set to peak emission levels within restricted bands								
Test results – DH5								
Channel	Frequency [MHz]	Mode	Emission [MHz]	Level [dBμV/m]	Det.	Pol.	Limit [dBμV/m]	Margin [dB]
0	2402	DH5	132	35.01	pk	ver	43.52	-08.51
0	2402	DH5	4800	48.74	pk	hor	74.00	-25.26
0	2402	DH5	4804	52.96	pk	ver	74.00	-21.04
0	2402	DH5	4804	51.19	RMS	ver	54.00	-02.81
39	2441	DH5	2377.1	55.13	pk	hor	74.00	-18.87
39	2441	DH5	2377.1	25.42	RMS	hor	54.00	-28.58
39	2441	DH5	2377.3	48.93	pk	ver	74.00	-25.07
39	2441	DH5	2377.3	27.14	RMS	ver	54.00	-26.86
39	2441	DH5	2491.7	55.66	pk	hor	74.00	-18.34
39	2441	DH5	2491.7	30.31	RMS	hor	54.00	-23.69
39	2441	DH5	4880	45.56	pk	ver	74.00	-28.44
39	2441	DH5	4881	49.07	pk	ver	74.00	-24.93
39	2441	DH5	4881	48.11	RMS	ver	54.00	-05.89
39	2441	DH5	7320	51.64	pk	hor	74.00	-22.36
39	2441	DH5	7323	55.43	pk	ver	74.00	-18.57
39	2441	DH5	7323	52.06	RMS	ver	54.00	-01.94
39	2441	DH5	7323	54.63	pk	ver	74.00	-19.37
39	2441	DH5	7323	51.36	RMS	ver	54.00	-02.64
78	2480	DH5	2377	55.71	pk	hor	74.00	-18.29
78	2480	DH5	2377	26.46	RMS	hor	54.00	-27.54
78	2480	DH5	2483.5	60.16	pk	hor	74.00	-13.84
78	2480	DH5	2483.5	52.56	RMS	hor	54.00	-01.44
78	2480	DH5	4960	51.69	pk	hor	74.00	-22.31
78	2480	DH5	4960	49.60	RMS	hor	54.00	-04.40
78	2480	DH5	4960	53.93	pk	ver	74.00	-20.07
78	2480	DH5	4960	51.57	RMS	ver	54.00	-02.43
78	2480	DH5	7439	54.48	pk	ver	74.00	-19.52
78	2480	DH5	7439	50.28	RMS	ver	54.00	-03.72
Comments:								

Test Report No.: G0M-1506-4874-TFC247BT-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Test results – 3-DH5								
Channel	Frequency [MHz]	Mode	Emission [MHz]	Level [dbμV/m]	Det.	Pol.	Limit [dbμV/m]	Margin [dB]
0	2402	3-DH5	4800	47.89	pk	hor	74.00	-26.11
0	2402	3-DH5	4800	50.16	pk	ver	74.00	-23.84
0	2402	3-DH5	4800	47.27	pk	ver	74.00	-26.73
39	2441	3-DH5	2377.8	55.17	pk	hor	74.00	-18.83
39	2441	3-DH5	2377.8	25.33	RMS	hor	54.00	-28.67
39	2441	3-DH5	4880	46.87	pk	hor	74.00	-27.13
39	2441	3-DH5	4880	49.37	pk	ver	74.00	-24.63
39	2441	3-DH5	4880	48.91	pk	ver	74.00	-25.09
39	2441	3-DH5	4880	46.59	pk	ver	74.00	-27.41
39	2441	3-DH5	7320	46.21	pk	hor	74.00	-27.79
39	2441	3-DH5	7323	55.78	pk	ver	74.00	-18.22
39	2441	3-DH5	7323	51.22	RMS	ver	54.00	-02.78
39	2441	3-DH5	7323	56.00	pk	ver	74.00	-18.00
39	2441	3-DH5	7323	51.52	RMS	ver	54.00	-02.48
39	2441	3-DH5	7323	55.73	pk	ver	74.00	-18.27
39	2441	3-DH5	7323	52.30	RMS	ver	54.00	-01.70
39	2441	3-DH5	7323	53.97	pk	ver	74.00	-20.03
39	2441	3-DH5	7323	50.24	RMS	ver	54.00	-03.76
78	2480	3-DH5	2378	56.24	pk	hor	74.00	-17.76
78	2480	3-DH5	2378	26.46	RMS	hor	54.00	-27.54
78	2480	3-DH5	2483.5	66.38	pk	hor	74.00	-07.62
78	2480	3-DH5	2483.5	53.89	RMS	hor	54.00	-00.11
78	2480	3-DH5	4952	47.21	pk	hor	74.00	-26.79
78	2480	3-DH5	4952	49.42	pk	ver	74.00	-24.58
78	2480	3-DH5	4952	50.86	pk	ver	74.00	-23.14
78	2480	3-DH5	7440	45.76	pk	hor	74.00	-28.24
78	2480	3-DH5	7440	54.11	pk	ver	74.00	-19.89
78	2480	3-DH5	7440	50.07	RMS	ver	54.00	-03.93
78	2480	3-DH5	7440	49.04	pk	ver	74.00	-24.96
Comments:								

3.11 Test Conditions and Results – Receiver radiated emissions

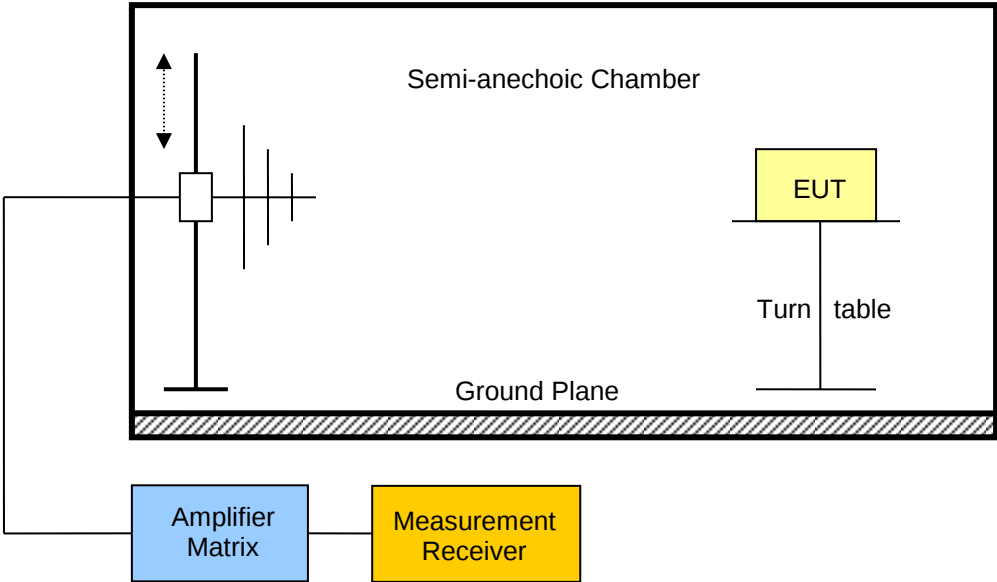Receiver radiated emissions acc. to IC RSS-247				Verdict: PASS
Test according referenced standards	Reference Method			
	IC RSS-247 3.1			
Test according to measurement reference	Reference Method			
	ANSI C63.10			
Test frequency range	Tested frequencies			
	30 MHz – 5 th Harmonic			
EUT test mode	Receive			
Limits				
Frequency range [MHz]	Detector	Limit [μV/m]	Limit [dBμV/m]	Limit Distance [m]
30 – 88	Quasi-Peak	100	40	3
88 – 216	Quasi-Peak	150	43.5	3
216 – 960	Quasi-Peak	200	46	3
960 – 1000	Quasi-Peak	500	54	3
> 1000	Average	500	54	3
Test setup				
				

Test procedure							
1. EUT set to receive mode (Communication tester is used if needed) 2. Span it set according to measurement range 3. Resolution bandwidth below 1 GHz is set according to CISPR 16 with peak/quasi-peak detector and RBW of 1 MHz with peak/average detector is used above 1 GHz 4. Markers are set to peak emission levels							
Test results							
Channel	Frequency [MHz]	Emission [MHz]	Emission Level [dBμV/m]	Det.	Pol.	Limit [dBμV/m]	Margin [dBμV/m]
0-78	2402-2480	31.7	35.61	pk	ver	40.00	-4.39 dB
0-78	2402-2480	36.8	36.24	pk	ver	40.00	-3.76 dB
0-78	2402-2480	43.94	36.49	pk	ver	40.00	-3.51 dB
0-78	2402-2480	56.86	35.23	pk	ver	40.00	-4.77 dB
0-78	2402-2480	132	34.17	pk	ver	43.50	-9.33 dB
0-78	2402-2480	419.2	27.83	pk	ver	46.00	-18.17 dB
0-78	2402-2480	480	31.08	pk	hor	46.00	-14.92 dB
0-78	2402-2480	860.8	32.09	pk	hor	46.00	-13.91 dB
0-78	2402-2480	4832	44.87	pk	hor	53.98	-9.11 dB
Comments:							