



3D Systems, Inc.

Colder Identiquik Smart Coupling

FCC 15.207:2014

FCC 15.225:2014

Report # 3DSY0020



NVLAP Lab Code: 200630-0

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America. This Report may only be duplicated in its entirety

Last Date of Test: October 23, 2014
3D Systems, Inc.
Model: Colder Identiquik Smart Coupling

Radio Equipment Testing

Standards

Specification	Method
FCC 15.207:2014 FCC 15.225:2014	ANSI C63.10:2009

Results

Method Clause	Test Description	Applied	Results	Comments
6.2	Powerline Conducted Emissions	Yes	Pass	
6.4	Field Strength of Fundamental	Yes	Pass	
6.4	Spurious Radiated Emissions ≤ 30 MHz	Yes	Pass	
6.5	Spurious Radiated Emissions ≥ 30 MHz	Yes	Pass	
6.8	Frequency Stability	Yes	Pass	

Deviations From Test Standards

None

Approved By:

Kyle Holgate, Operations Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test.

REVISION HISTORY

Revision Number	Description	Date	Page Number
00	None		

ACCREDITATIONS AND AUTHORIZATIONS

United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC Guide 65 as a product certifier. This allows Northwest EMC to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

IC - Recognized by Industry Canada as a Certification Body (CB). Certification chambers and Open Area Test Sites are filed with IC.

European Union

European Commission – Validated by the European Commission as a Conformity Assessment Body (CAB) under the EMC directive and as a Notified Body under the R&TTE Directive.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIP / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC – Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFTA – Recognized by OFTA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/accreditations/>

Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document WP 342. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) for each test is on each data sheet. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.


The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.

Test	+ MU	- MU
Frequency Accuracy (Hz)	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.19 dB	-1.19 dB
Conducted Power (dB)	0.29 dB	-0.29 dB
Radiated Power via Substitution (dB)	0.71 dB	-0.71 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	5.1 dB	-5.1 dB
AC Powerline Conducted Emissions (dB)	2.9 dB	-2.9 dB

FACILITIES



Oregon Labs EV01-12 22975 NW Evergreen Pkwy Hillsboro, OR 97124 (503) 844-4066	California Labs OC01-13 41 Tesla Irvine, CA 92618 (949) 861-8918	New York Labs NY01-04 4939 Jordan Rd. Elbridge, NY 13060 (315) 685-0796	Minnesota Labs MN01-08 9349 W Broadway Ave. Brooklyn Park, MN 55445 (763) 425-2281	Washington Labs NC01-05, SU02, SU07 19201 120 th Ave. NE Bothell, WA 98011 (425) 984-6600
VCCI				
A-0108	A-0029		A-0109	A-0110
Industry Canada				
2834D-1, 2834D-2	2834B-1, 2834B-2, 2834B-3		2834E-1	2834F-1
NVLAP				
NVLAP Lab Code: 200630-0	NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200761-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200629-0

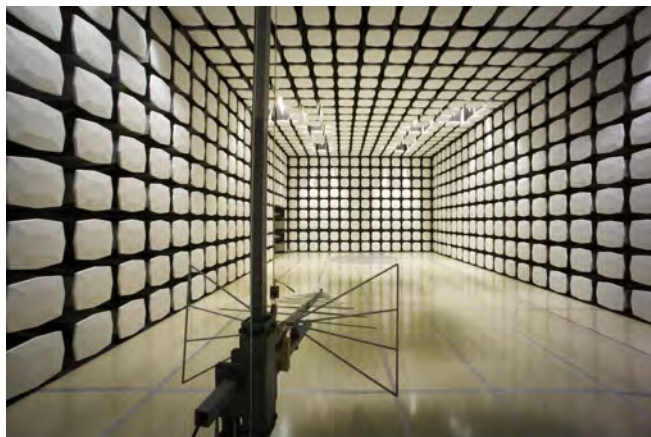

Client and Equipment Under Test (EUT) Information

Company Name:	3D Systems, Inc.
Address:	26600 SW Parkway
City, State, Zip:	Wilsonville, OR 97070-1000
Test Requested By:	Steve Wardle
Model:	Colder Identiquik Smart Coupling
First Date of Test:	October 08, 2014
Last Date of Test:	October 23, 2014
Receipt Date of Samples:	October 08, 2014
Equipment Design Stage:	Production
Equipment Condition:	No Damage

Information Provided by the Party Requesting the Test

Functional Description of the EUT:
13.56 MHz RFID device for use in 3D printers which reads in ISO 15693 RFID tags attached to a cartridge or cap that is inserted into the machine by a user.
Testing Objective:
To demonstrate compliance to FCC Part 15.225 specifications.

Configuration 3DSY0020- 1

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
RFID Device	3D Systems, Inc.	Colder Identiquik Smart Coupling	None

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
DC Power Supply	Topward Electric	TPS-2000	TPD
DC Breakout Adapter	Unknown	DB9 Serial	None

Remote Equipment Outside of Test Setup Boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Remote Laptop Computer	Dell	Latitude D610	591H6B1

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Leads	No	1m	No	DC Power Supply	DC Breakout Adapter
AC Power	No	1.8m	No	AC Mains	DC Power Supply
Serial	Unknown	3m	No	DC Breakout Adapter	Remote Laptop Computer
DC Power/Signal	Unknown	0.9m	No	RFID Device	DC Breakout Adapter

Configuration 3DSY0020- 2

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
RFID Device	3D Systems, Inc.	Colder Identiquik Smart Coupling	None

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
DC Power Supply	Topward Electric	TPS-2000	TPD
DC Breakout Adapter	Unknown	DB9 Serial	None
50 Ohm BNC Terminator	S.M. Electronics	ST3B-C	TMK

Remote Equipment Outside of Test Setup Boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Remote Laptop Computer	Dell	Latitude D610	591H6B1

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Leads	No	1m	No	DC Power Supply	DC Breakout Adapter
AC Power	No	1.8m	No	AC Mains	DC Power Supply
Serial	Unknown	3m	No	DC Breakout Adapter	Remote Laptop Computer
DC Power/Signal	Unknown	0.9m	No	RFID Device	DC Breakout Adapter

Configuration 3DSY0020- 3

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
RFID Device	3D Systems, Inc.	Colder Identiquik Smart Coupling	None

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
DC Power Supply	Topward Electric	TPS-2000	TPD
DC Breakout Adapter	Unknown	DB9 Serial	None

Remote Equipment Outside of Test Setup Boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Remote Laptop Computer	Dell	Latitude D610	591H6B1

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Leads	No	1m	No	DC Power Supply	DC Breakout Adapter
AC Power	No	1.8m	No	AC Mains	DC Power Supply
Serial	Unknown	3m	No	DC Breakout Adapter	Remote Laptop Computer
DC Power/Signal	Unknown	0.9m	No	RFID Device	DC Breakout Adapter

Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	10/08/2014	Field Strength of Fundamental	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
2	10/08/2014	Spurious Radiated Emissions $\leq$ 30 MHz	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
3	10/08/2014	Spurious Radiated Emissions $\geq$ 30 MHz	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
4	10/22/2014	Frequency Stability	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
5	10/23/2014	Powerline Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

TEST DESCRIPTION

Using the mode of operation and configuration noted within this report, conducted emissions tests were performed. The frequency range investigated (scanned), is also noted in this report. Conducted power line measurements are made, unless otherwise specified, over the frequency range from 150 kHz to 30 MHz to determine the line-to-ground radio-noise voltage that is conducted from the EUT power-input terminals that are directly (or indirectly via separate transformer or power supplies) connected to a public power network. Equipment is tested with power cords that are normally used or that have electrical or shielding characteristics that are the same as those cords normally used. Typically those measurements are made using a LISN (Line Impedance Stabilization Network), the 50 Ω measuring port is terminated by a 50 Ω EMI meter or a 50 Ω resistive load. All 50 Ω measuring ports of the LISN are terminated by 50 Ω .

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
EV07 Cables	N/A	Conducted Cables	EVG	03/07/2014	12 mo
Attenuator, BNC MIF 2W 3GHZ 20DB	Fairview Microwave	SA03B-20	AQM	02/03/2014	12 mo
High Pass Filter	TTE	H97-100K-50-720B	HHD	01/22/2014	12 mo
Receiver	Rohde & Schwarz	ESCI	ARH	02/05/2014	12 mo
LISN	Solar	9252-50-R-24-BNC	LIN	02/03/2014	12 mo
50 Ohm Terminator	S.M. Electronics	N/A	TMK	10/22/2014	12 mo

MEASUREMENT UNCERTAINTY

Description		
Expanded k=2	2.9 dB	-2.9 dB

CONFIGURATIONS INVESTIGATED

3DSY0020-1
3DSY0020-2

MODES INVESTIGATED

RFID transmitting on 13.56MHz.

FCC GUIDANCE

In the FCC-TCBC Conference Call Meeting Minutes from April 12, 2005, the FCC stated:

“We are willing to accept measurements on a 13.56 MHz transmitter done with a dummy load under the following conditions. First, perform the AC line conducted tests with the antenna attached to make sure the device complies with the 15.207 limits outside the transmitter’s fundamental emission band, and then retest with a dummy load to make sure the device complies with the 15.207 limits inside the transmitter’s fundamental emission band. For the second portion of these tests, only the fundamental emission band of the transmitter needs to be retested.”

This procedure was followed for the AC powerline conducted emissions testing documented on the following pages. First, the measurements were made with the device transmitting through it’s antenna. The transmitted field coupled onto the AC powerline which resulted in a failing emissions being measured at 13.56 MHz. All other emissions outside the 13.56 MHz band passed. The testing was repeated with a dummy load in place of the antenna and all the emissions passed, therefore the radio is deemed compliant with FCC 15.207 limits.

POWERLINE CONDUCTED EMISSIONS

EUT:	Colder Identiquik Smart Coupling	Work Order:	3DSY0020
Serial Number:	None	Date:	10/23/2014
Customer:	3D Systems, Inc.	Temperature:	22°C
Attendees:	Steve Wardle	Relative Humidity:	50%
Customer Project:	None	Bar. Pressure:	1009 mb
Tested By:	Carl Engholm	Job Site:	EV07
Power:	9 VDC	Configuration:	3DSY0020-1

TEST SPECIFICATIONS

Specification:	Method:
FCC 15.207:2014	ANSI C63.10:2009

TEST PARAMETERS

Run #:	3	Line:	High Line	Ext. Attenuation (dB):	20
--------	---	-------	-----------	------------------------	----

COMMENTS

None


EUT OPERATING MODES

RFID transmitting on 13.56MHz.


DEVIATIONS FROM TEST STANDARD

None

Quasi Peak Data - vs - Quasi Peak Limit

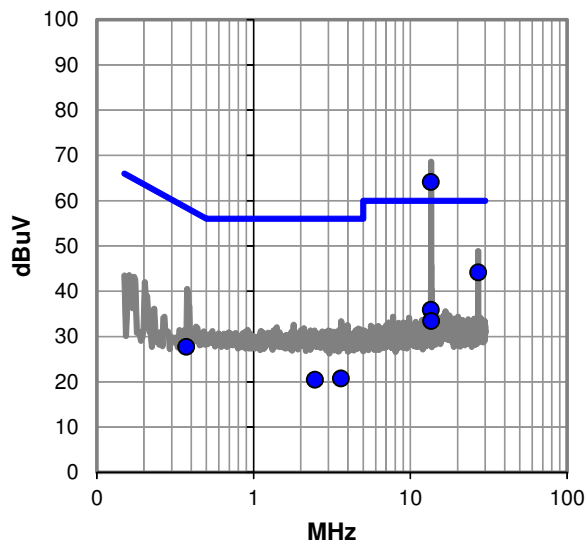

Average Data - vs - Average Limit

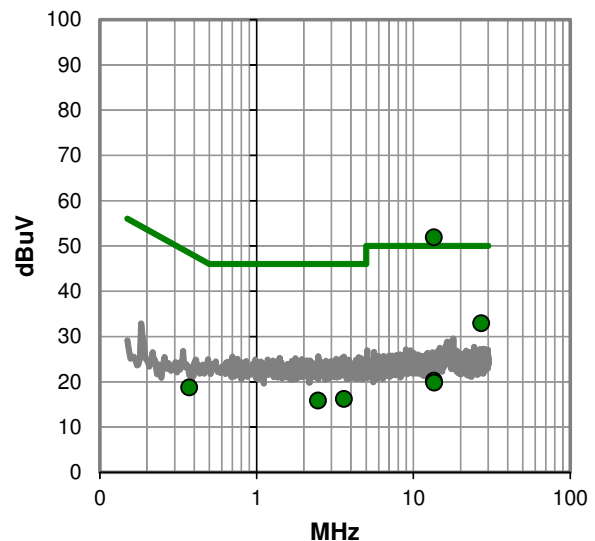

POWERLINE CONDUCTED EMISSIONS

RESULTS - Run #3

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
13.560	42.6	21.5	64.1	60.0	4.1
27.121	21.8	22.3	44.1	60.0	-15.9
13.546	14.4	21.5	35.9	60.0	-24.1
13.599	11.9	21.5	33.4	60.0	-26.6
0.373	7.2	20.5	27.7	58.4	-30.7
3.610	-0.1	20.8	20.7	56.0	-35.3
2.467	-0.3	20.7	20.4	56.0	-35.6

Average Data - vs - Average Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
13.560	30.4	21.5	51.9	50.0	1.9
27.121	10.6	22.3	32.9	50.0	-17.1
0.373	-1.8	20.5	18.7	48.4	-29.7
13.546	-1.3	21.5	20.2	50.0	-29.8
3.610	-4.6	20.8	16.2	46.0	-29.8
2.467	-4.9	20.7	15.8	46.0	-30.2
13.599	-1.7	21.5	19.8	50.0	-30.2

CONCLUSION

Fail



Tested By

POWERLINE CONDUCTED EMISSIONS

EUT:	Colder Identiquik Smart Coupling	Work Order:	3DSY0020
Serial Number:	None	Date:	10/23/2014
Customer:	3D Systems, Inc.	Temperature:	22°C
Attendees:	Steve Wardle	Relative Humidity:	50%
Customer Project:	None	Bar. Pressure:	1009 mb
Tested By:	Carl Engholm	Job Site:	EV07
Power:	9 VDC	Configuration:	3DSY0020-1

TEST SPECIFICATIONS

Specification:	Method:
FCC 15.207:2014	ANSI C63.10:2009

TEST PARAMETERS

Run #:	14	Line:	Neutral	Ext. Attenuation (dB):	20
--------	----	-------	---------	------------------------	----

COMMENTS



None

EUT OPERATING MODES

RFID transmitting on 13.56MHz.

DEVIATIONS FROM TEST STANDARD

None

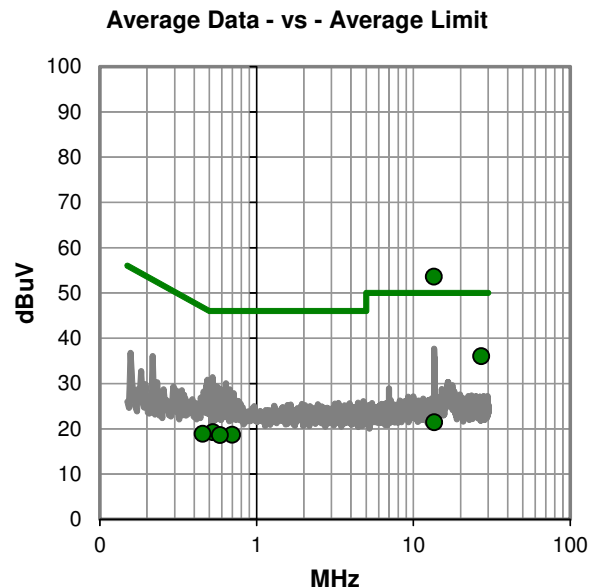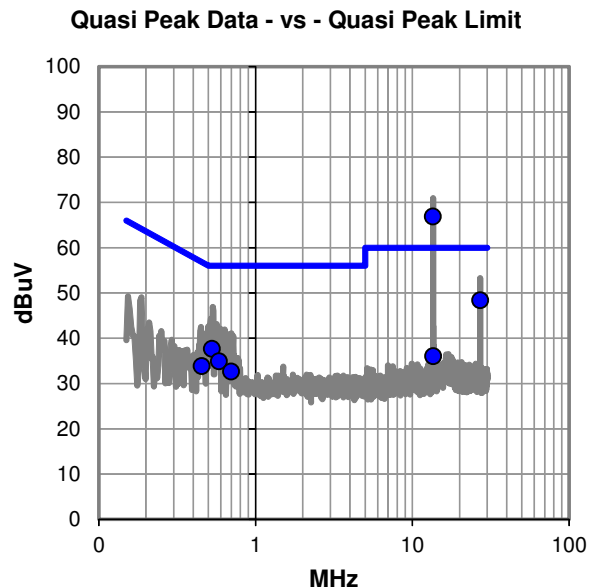

POWERLINE CONDUCTED EMISSIONS

RESULTS - Run #14

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
13.560	45.4	21.5	66.9	60.0	6.9
27.120	26.0	22.3	48.3	60.0	-11.7
0.527	17.1	20.5	37.6	56.0	-18.4
0.584	14.4	20.5	34.9	56.0	-21.1
0.453	13.3	20.5	33.8	56.8	-23.0
0.699	12.1	20.5	32.6	56.0	-23.4
13.589	14.5	21.5	36.0	60.0	-24.0

Average Data - vs - Average Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
13.560	32.1	21.5	53.6	50.0	3.6
27.120	13.7	22.3	36.0	50.0	-14.0
0.527	-1.3	20.5	19.2	46.0	-26.8
0.699	-1.9	20.5	18.6	46.0	-27.4
0.584	-1.9	20.5	18.6	46.0	-27.4
0.453	-1.6	20.5	18.9	46.8	-27.9
13.589	-0.1	21.5	21.4	50.0	-28.6

CONCLUSION

Fail



Tested By

POWERLINE CONDUCTED EMISSIONS

EUT:	Colder Identiquik Smart Coupling	Work Order:	3DSY0020
Serial Number:	None	Date:	10/23/2014
Customer:	3D Systems, Inc.	Temperature:	22°C
Attendees:	Steve Wardle	Relative Humidity:	50%
Customer Project:	None	Bar. Pressure:	1009 mb
Tested By:	Carl Engholm	Job Site:	EV07
Power:	9 VDC	Configuration:	3DSY0020-2

TEST SPECIFICATIONS

Specification:	Method:
FCC 15.207:2014	ANSI C63.10:2009

TEST PARAMETERS

Run #:	16	Line:	Neutral	Ext. Attenuation (dB):	20
--------	----	-------	---------	------------------------	----

COMMENTS



50 Ohm BNC termination on antenna port.

EUT OPERATING MODES

RFID transmitting on 13.56MHz.

DEVIATIONS FROM TEST STANDARD

None

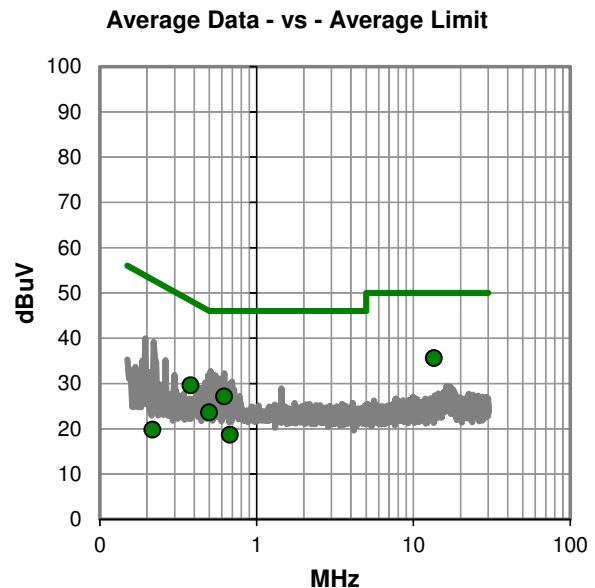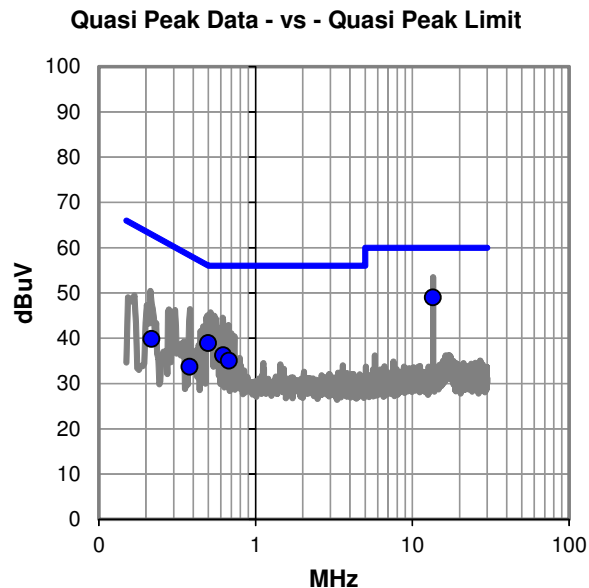

POWERLINE CONDUCTED EMISSIONS

RESULTS - Run #16

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
13.560	27.5	21.5	49.0	60.0	-11.0
0.499	18.4	20.5	38.9	56.0	-17.1
0.621	15.7	20.5	36.2	56.0	-19.8
0.677	14.5	20.5	35.0	56.0	-21.0
0.217	19.3	20.6	39.9	62.9	-23.1
0.380	13.2	20.5	33.7	58.3	-24.6

Average Data - vs - Average Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
13.560	14.1	21.5	35.6	50.0	-14.4
0.380	9.1	20.5	29.6	48.3	-18.7
0.621	6.6	20.5	27.1	46.0	-18.9
0.499	3.1	20.5	23.6	46.0	-22.4
0.677	-1.9	20.5	18.6	46.0	-27.4
0.217	-0.8	20.6	19.8	52.9	-33.2

CONCLUSION

Pass



Tested By

POWERLINE CONDUCTED EMISSIONS

EUT:	Colder Identiquik Smart Coupling	Work Order:	3DSY0020
Serial Number:	None	Date:	10/23/2014
Customer:	3D Systems, Inc.	Temperature:	22°C
Attendees:	Steve Wardle	Relative Humidity:	50%
Customer Project:	None	Bar. Pressure:	1009 mb
Tested By:	Carl Engholm	Job Site:	EV07
Power:	9 VDC	Configuration:	3DSY0020-2

TEST SPECIFICATIONS

Specification:	Method:
FCC 15.207:2014	ANSI C63.10:2009

TEST PARAMETERS

Run #:	17	Line:	High Line	Ext. Attenuation (dB):	20
--------	----	-------	-----------	------------------------	----

COMMENTS

50 Ohm BNC termination on antenna port.


EUT OPERATING MODES

RFID transmitting on 13.56MHz.


DEVIATIONS FROM TEST STANDARD

None

Quasi Peak Data - vs - Quasi Peak Limit

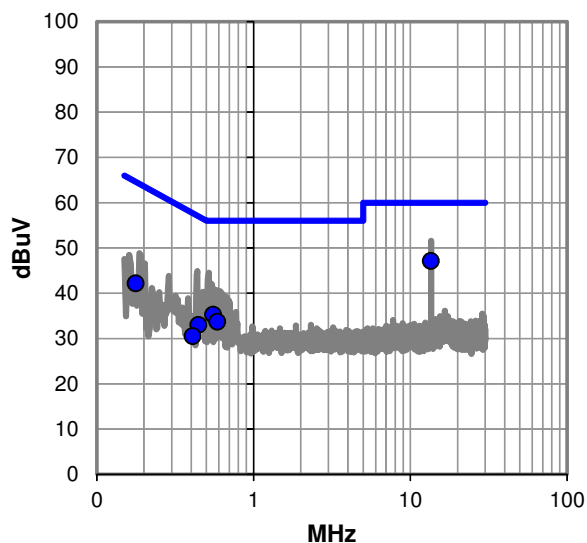

Average Data - vs - Average Limit

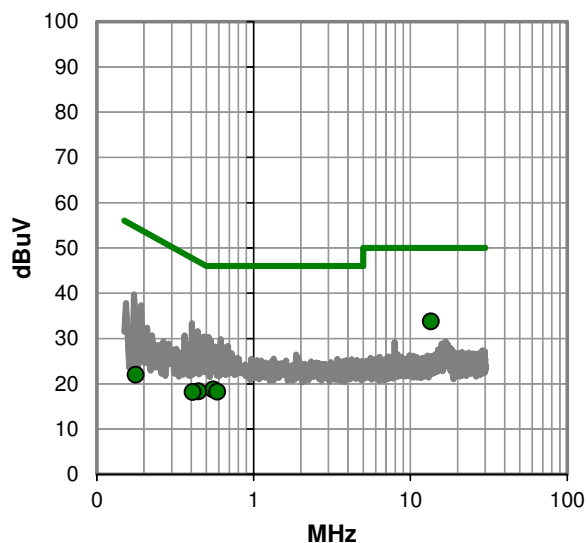

POWERLINE CONDUCTED EMISSIONS

RESULTS - Run #17

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
13.560	25.6	21.5	47.1	60.0	-12.9
0.553	14.7	20.5	35.2	56.0	-20.8
0.587	13.2	20.5	33.7	56.0	-22.3
0.177	21.6	20.6	42.2	64.6	-22.5
0.444	12.5	20.5	33.0	57.0	-24.0
0.409	10.0	20.5	30.5	57.7	-27.2

Average Data - vs - Average Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
13.560	12.3	21.5	33.8	50.0	-16.2
0.553	-1.8	20.5	18.7	46.0	-27.3
0.587	-2.3	20.5	18.2	46.0	-27.8
0.444	-2.2	20.5	18.3	47.0	-28.7
0.409	-2.3	20.5	18.2	47.7	-29.5
0.177	1.4	20.6	22.0	54.6	-32.7

CONCLUSION

Pass



Tested By

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

RFID transmitting at 13.56MHz

POWER SETTINGS INVESTIGATED

7.5 VDC

CONFIGURATIONS INVESTIGATED

3DSY0020 - 1

FREQUENCY RANGE INVESTIGATED

Start Frequency	9 kHz	Stop Frequency	30 MHz
-----------------	-------	----------------	--------

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
EV11 Cables	N/A	10m Test Distance Cables	EVL	8/14/2014	12 mo
Spectrum Analyzer	Agilent	E4443A	AFB	2/12/2014	12 mo
Antenna, Loop	EMCO	6502	AOA	6/24/2014	36 mo

TEST DESCRIPTION

The antennas to be used with the EUT were tested. The EUT was continuously transmitting while set to the channel specified.


While scanning, fundamental carrier from the EUT was maximized by rotating the EUT, adjusting the measurement antenna height and orientation in 3 orthogonal planes, the EUT and/or associated antenna is positioned in 3 orthogonal planes (per ANSI C63.10). An active loop antenna was used for this test in order to provide sufficient measurement sensitivity.

As outlined in 15.209(e) and 15.31(f)(2), measurements may be performed at a distance closer than what is specified with

Work Order:	3DSY0020	Date:	10/08/14	
Project:	None	Temperature:	23 °C	
Job Site:	EV11	Humidity:	43% RH	
Serial Number:	None	Barometric Pres.:	1014 mbar	
EUT:		Colder Identiquik Smart Coupling		
Configuration:		1		
Customer:		3D Systems, Inc.		
Attendees:		Steve Wardle		
EUT Power:		7.5 VDC		
Operating Mode:		RFID transmitting at 13.56MHz		
Deviations:		None		
Comments:		Reference data comments EUT and antenna polarity/orientation. The EUT had only 2 measurable axes based on antenna symmetry. A peak detector was used due to the low maximum duty cycle seen while testing.		

Test Specifications	Test Method
FCC 15.225:2014	ANSI C63.10:2009

Run #	15	Test Distance (m)	10	Antenna Height(s)	1 to 1(m)	Results	Pass
-------	----	-------------------	----	-------------------	-----------	---------	------

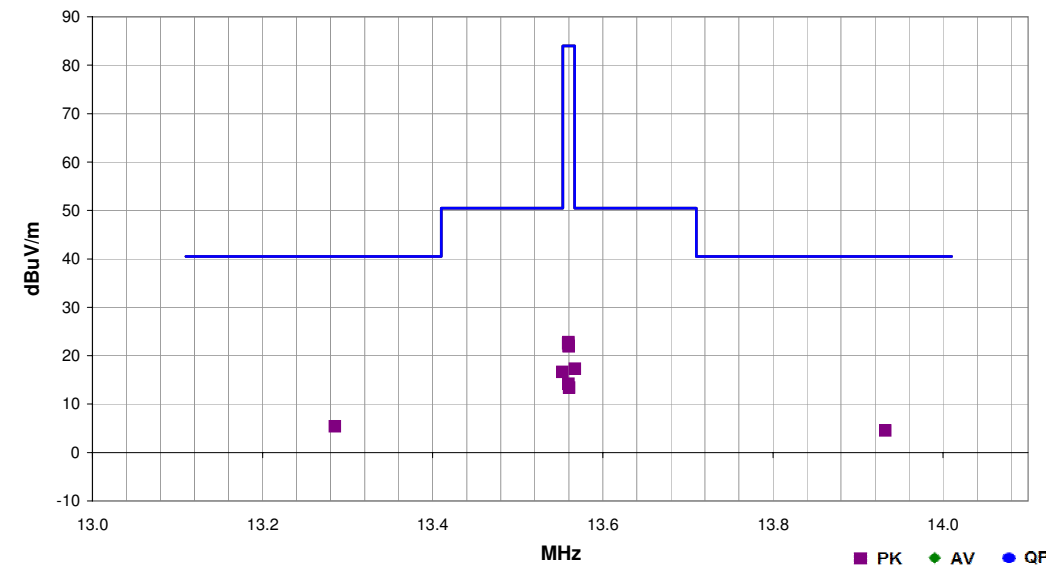

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
13.567	25.6	10.8	1.0	310.0	10.0	0.0	Horz	PK	-19.1	17.3	50.5	-33.2	Ant Perp to EUT and Ant Perp to Gnd, EUT Vert
13.553	24.9	10.8	1.0	311.0	10.0	0.0	Horz	PK	-19.1	16.6	50.5	-33.9	Ant Perp to EUT and Ant Perp to Gnd, EUT Vert
13.285	13.7	10.8	1.0	99.0	10.0	0.0	Horz	PK	-19.1	5.4	40.5	-35.1	Ant Perp to EUT and Ant Perp to Gnd, EUT Vert
13.932	12.8	10.8	1.0	30.0	10.0	0.0	Horz	PK	-19.1	4.5	40.5	-36.0	Ant Perp to EUT and Ant Perp to Gnd, EUT Vert
13.560	31.1	10.8	1.0	293.0	10.0	0.0	Horz	PK	-19.1	22.8	84.0	-61.2	Ant Perp to EUT and Ant Perp to Gnd, EUT Vert
13.560	30.8	10.8	1.0	175.0	10.0	0.0	Horz	PK	-19.1	22.5	84.0	-61.5	Ant Perp to EUT and Ant Perp to Gnd, EUT Horz
13.560	30.3	10.8	1.0	132.0	10.0	0.0	Vert	PK	-19.1	22.0	84.0	-62.0	Ant Perp to EUT and Ant Para to Gnd, EUT Horz
13.560	30.2	10.8	1.0	228.0	10.0	0.0	Vert	PK	-19.1	21.9	84.0	-62.1	Ant Perp to EUT and Ant Para to Gnd, EUT Vert
13.560	22.5	10.8	1.0	175.0	10.0	0.0	Horz	PK	-19.1	14.2	84.0	-69.8	Ant Para to EUT and Ant Perp to Gnd, EUT Horz
13.561	21.7	10.8	1.0	15.0	10.0	0.0	Horz	PK	-19.1	13.4	84.0	-70.6	Ant Para to EUT and Ant Perp to Gnd, EUT Vert

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

RFID transmitting at 13.56MHz

POWER SETTINGS INVESTIGATED

9 VDC

CONFIGURATIONS INVESTIGATED

3DSY0020 - 1

FREQUENCY RANGE INVESTIGATED

Start Frequency	9 kHz	Stop Frequency	30 MHz
-----------------	-------	----------------	--------

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
EV11 Cables	N/A	10m Test Distance Cables	EVL	8/14/2014	12 mo
Spectrum Analyzer	Agilent	E4443A	AFB	2/12/2014	12 mo
Antenna, Loop	EMCO	6502	AOA	6/24/2014	36 mo

TEST DESCRIPTION


The antennas to be used with the EUT were tested. The EUT was continuously transmitting while set to the channel specified.

While scanning, emissions from the EUT were maximized by rotating the EUT, adjusting the measurement antenna height and orientation in 3 orthogonal planes, the EUT and/or associated antenna is positioned in 3 orthogonal planes (per ANSI C63.10). An active loop antenna was used for this test in order to provide sufficient measurement sensitivity.

As outlined in 15.209(e) and 15.31(f)(2), measurements may be performed at a distance closer than what is specified with the limit. The limit at the specified distance is shown on the data sheet. Measurements are made at a closer distance and

Work Order:	3DSY0020	Date:	10/08/14	
Project:	None	Temperature:	23 °C	
Job Site:	EV11	Humidity:	43% RH	
Serial Number:	None	Barometric Pres.:	1014 mbar	
EUT:		Colder Identiquik Smart Coupling		
Configuration:	1			
Customer:	3D Systems, Inc.			
Attendees:	Steve Wardle			
EUT Power:	9 VDC			
Operating Mode:	RFID transmitting at 13.56MHz			
Deviations:	None			
Comments:	Reference data comments EUT and antenna polarity/orientation. The EUT had only 2 measurable axes based on antenna symmetry. A peak detector was used due to the low maximum duty cycle seen while testing.			

Test Specifications	Test Method
FCC 15.225:2014	ANSI C63.10:2009
Run #	16
Test Distance (m)	10
Antenna Height(s)	1 to 1(m)
Results	Pass

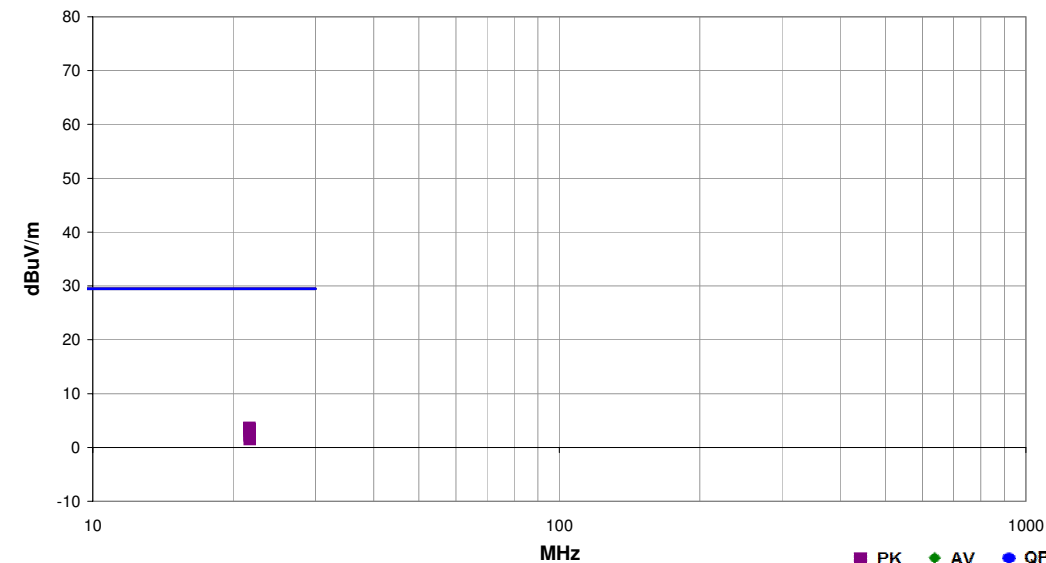

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
21.673	12.2	10.5	1.0	148.0	10.0	0.0	Horz	PK	-19.1	3.6	29.5	-25.9	Ant Perp to EUT and Ant Perp to Gnd, EUT Vert
21.724	12.0	10.5	1.0	175.0	10.0	0.0	Vert	PK	-19.1	3.4	29.5	-26.1	Ant Perp to EUT and Ant Para to Gnd, EUT Vert
21.727	11.7	10.5	1.0	63.0	10.0	0.0	Horz	PK	-19.1	3.1	29.5	-26.4	Ant Para to EUT and Ant Perp to Gnd, EUT Vert
21.706	11.0	10.5	1.0	103.0	10.0	0.0	Horz	PK	-19.1	2.4	29.5	-27.1	Ant Para to EUT and Ant Perp to Gnd, EUT Horz
21.702	10.8	10.5	1.0	303.0	10.0	0.0	Vert	PK	-19.1	2.2	29.5	-27.3	Ant Perp to EUT and Ant Para to Gnd, EUT Horz
21.703	10.1	10.5	1.0	314.0	10.0	0.0	Horz	PK	-19.1	1.5	29.5	-28.0	Ant Perp to EUT and Ant Perp to Gnd, EUT Horz

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

RFID transmitting at 13.56MHz

POWER SETTINGS INVESTIGATED

7.5 VDC

CONFIGURATIONS INVESTIGATED

3DSY0020 - 4

FREQUENCY RANGE INVESTIGATED

Start Frequency	30 MHz	Stop Frequency	1000 MHz
-----------------	--------	----------------	----------

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
EV01 Cables	N/A	Bilog Cables	EVA	2/18/2014	12 mo
Pre-Amplifier	Miteq	AM-1616-1000	AOL	2/18/2014	12 mo
Antenna, Biconilog	EMCO	3141	AXE	8/29/2014	36 mo

TEST DESCRIPTION


The antennas to be used with the EUT were tested. The EUT was transmitting while set at the operating channel.

While scanning, emissions from the EUT were maximized by rotating the EUT, adjusting the measurement antenna height and polarization, and manipulating the EUT antenna in 3 orthogonal planes (per ANSI C63.10:2009).

Work Order:	3DSY0017	Date:	10/08/14	
Project:	None	Temperature:	23 °C	
Job Site:	EV01	Humidity:	44% RH	
Serial Number:	1	Barometric Pres.:	1014 mbar	
EUT:		Colder Identiquik Smart Coupling		
Configuration:	3DSY0020 - 4			
Customer:	3D Systems, Inc.			
Attendees:	Steve Wardle			
EUT Power:	7.5 VDC			
Operating Mode:	RFID transmitting at 13.56MHz			
Deviations:	None			
Comments:	Reference data comments EUT and antenna polarity/orientation. The EUT had only 2 measurable axes based on antenna symmetry. A peak detector was used due to the low maximum duty cycle seen while testing.			

Test Specifications	Test Method
FCC 15.225:2014	ANSI C63.10:2009

Run #	7	Test Distance (m)	3	Antenna Height(s)	1 to 4(m)	Results	Pass
-------	---	-------------------	---	-------------------	-----------	---------	------

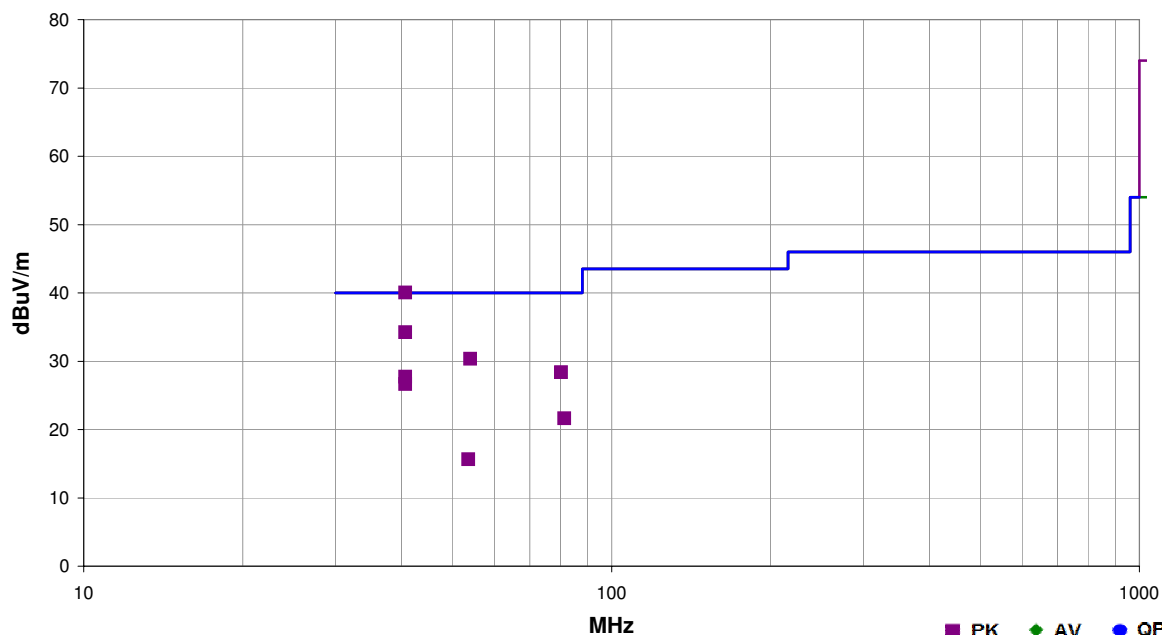

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
40.675	46.3	-6.3	1.0	11.0	3.0	0.0	Vert	PK	0.0	40.0	40.0	0.0	Tx, EUT Vert
40.671	40.5	-6.3	1.0	193.0	3.0	0.0	Vert	PK	0.0	34.2	40.0	-5.8	Tx, EUT Horz
53.985	40.2	-9.9	1.0	118.0	3.0	0.0	Vert	PK	0.0	30.3	40.0	-9.7	Tx, EUT Horz
80.280	39.6	-11.2	1.0	200.0	3.0	0.0	Vert	PK	0.0	28.4	40.0	-11.6	Tx, EUT Vert
40.670	34.0	-6.3	3.6	284.0	3.0	0.0	Horz	PK	0.0	27.7	40.0	-12.3	Tx, EUT Vert
40.673	32.9	-6.3	3.2	235.0	3.0	0.0	Horz	PK	0.0	26.6	40.0	-13.4	Tx, EUT Horz
81.373	32.8	-11.2	3.7	81.0	3.0	0.0	Horz	PK	0.0	21.6	40.0	-18.4	Tx, EUT Vert
53.535	25.4	-9.8	1.0	86.0	3.0	0.0	Horz	PK	0.0	15.6	40.0	-24.4	Tx, EUT Horz

FREQUENCY STABILITY

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval (mo)
Near Field Probe	EMCO	7405	IPD	NCR	0
Spectrum Analyzer	Agilent	E4440A	AFD	7/14/2014	24
Multimeter	Tektronix	DMM912	MMH	2/5/2013	36
DC Power Supply	Topward	TPS-2000	TPD	NCR	0
Humidity and Temperature Chamber	Cincinnati Sub Zero (CSZ)	ZPH-8-2-SCT/AC	TBI	NCR	0
Humidity Temperature Meter	Omega	HH311	DUH	2/19/2013	36
Attenuator, 30db 'N'	Fairview Microwave	SA18N5WA-30	TLE	12/30/2013	12

TEST DESCRIPTION

Variation of Supply Voltage

The primary supply voltage was varied from 85% to 115% of the nominal voltage. A DC lab supply was used to vary the supply voltage.

Variation of Ambient Temperature

Using a temperature chamber, the transmit frequency was recorded at the extremes of the specified temperature range (-20° to +50° C) and at 10°C intervals.

A near field probe measurement was made on the EUT's antenna using a spectrum analyzer. The spectrum analyzer is equipped with a precision frequency reference that exceeds the stability requirement of the EUT.




FREQUENCY STABILITY


XMit 2014.02.07
NweTx 2014.07.18.4

EUT: Colder Identiquik Smart Coupling		Work Order: 3DSY0018				
Serial Number: None		Date: 10/22/14				
Customer: 3D Systems, Inc.		Temperature: 22.1°C				
Attendees: Steve Wardle		Humidity: 49%				
Project: None		Barometric Pres.: 1008.14				
Tested by: Brandon Hobbs		Power: 7.5 VDC Nominal				
		Job Site: EV06				
TEST SPECIFICATIONS		Test Method				
FCC 15.225:2014		ANSI C63.10:2009				
COMMENTS						
The product was operating in CW mode.						
DEVIATIONS FROM TEST STANDARD						
None						
Configuration #	3	Signature 				
		Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
RFID 13.56MHz						
	Voltage: 115%	13.559872	13.56	9.4	100	Pass
	Voltage: 100%	13.559884	13.56	8.6	100	Pass
	Voltage: 85%	13.559886	13.56	8.4	100	Pass
	Temperature: +50°	13.559871	13.56	9.5	100	Pass
	Temperature: +40°	13.559867	13.56	9.8	100	Pass
	Temperature: +30°	13.55985	13.56	11.1	100	Pass
	Temperature: +20°	13.559873	13.56	9.4	100	Pass
	Temperature: +10°	13.559875	13.56	9.2	100	Pass
	Temperature: 0°	13.55989	13.56	8.1	100	Pass
	Temperature: -10°	13.559903	13.56	7.2	100	Pass
	Temperature: -20°	13.559872	13.56	9.4	100	Pass


RFID 13.56MHz, Voltage: 115%					
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
	13.559872	13.56	9.4	100	Pass

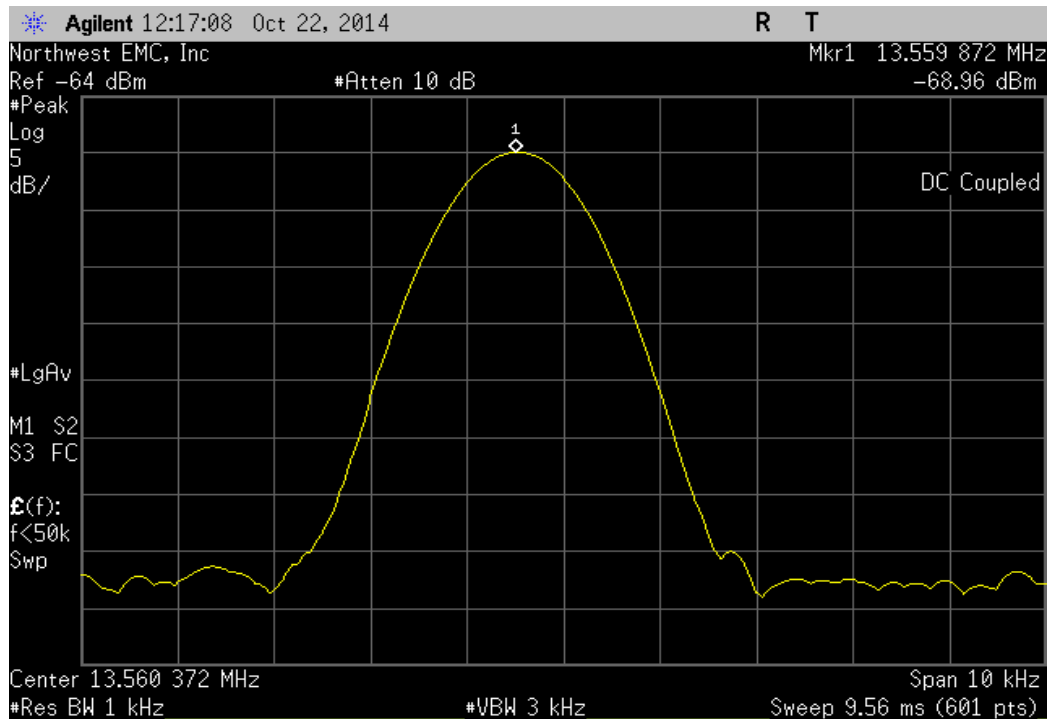


RFID 13.56MHz, Voltage: 100%					
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
	13.559884	13.56	8.6	100	Pass

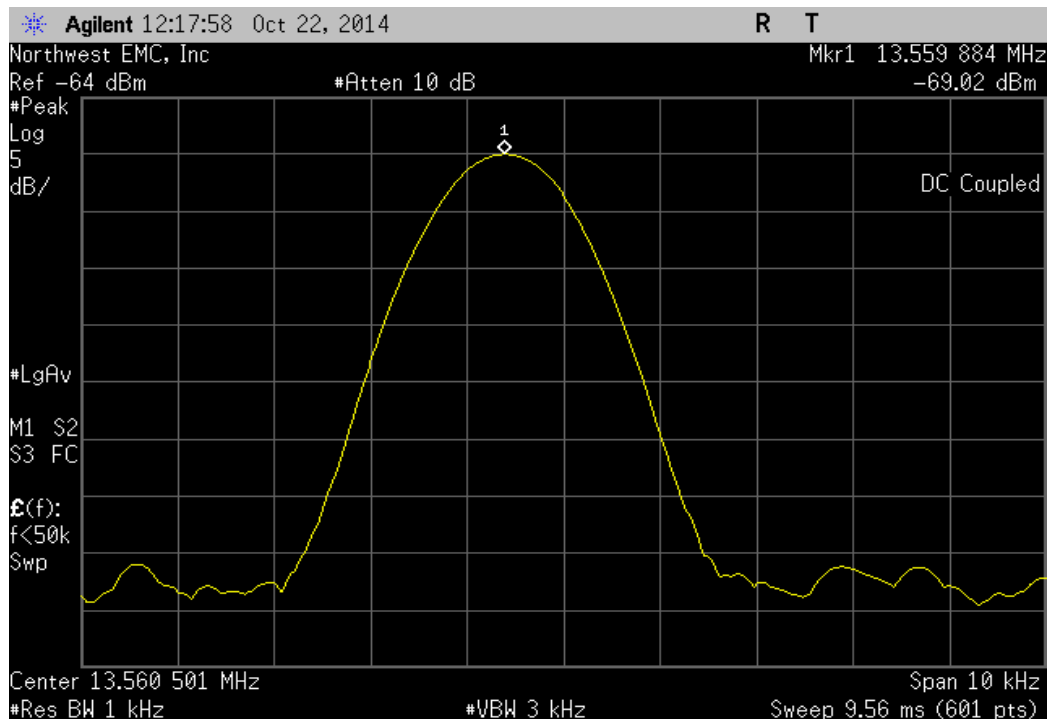


RFID 13.56MHz, Voltage: 85%					
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
	13.559886	13.56	8.4	100	Pass

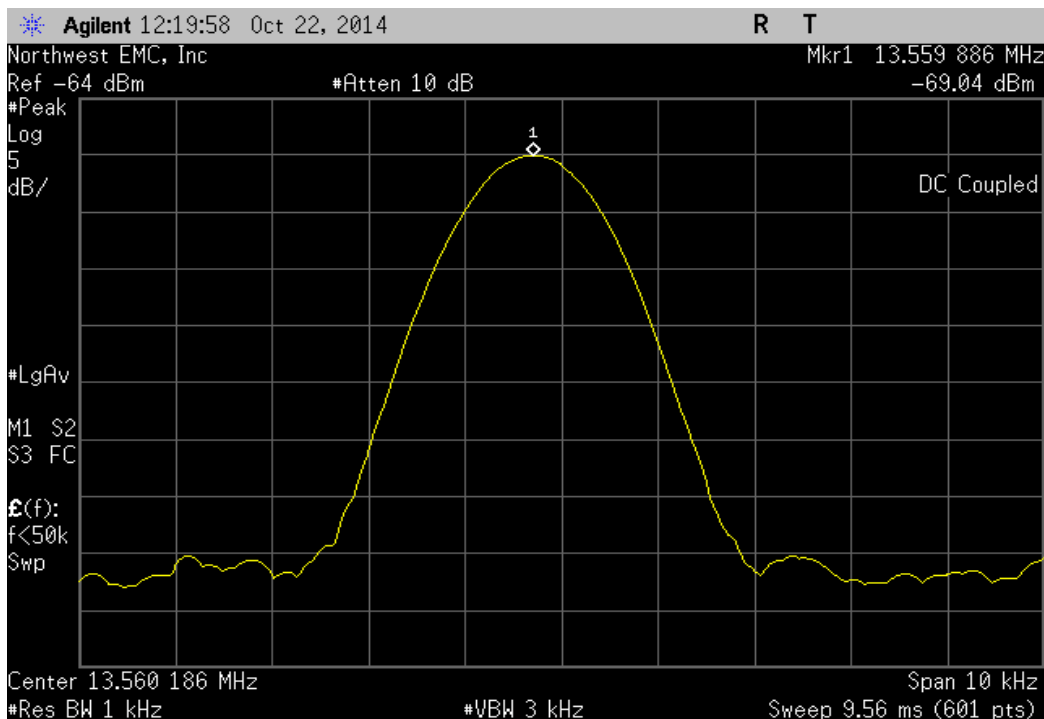


RFID 13.56MHz, Temperature: +50°					
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
	13.559871	13.56	9.5	100	Pass

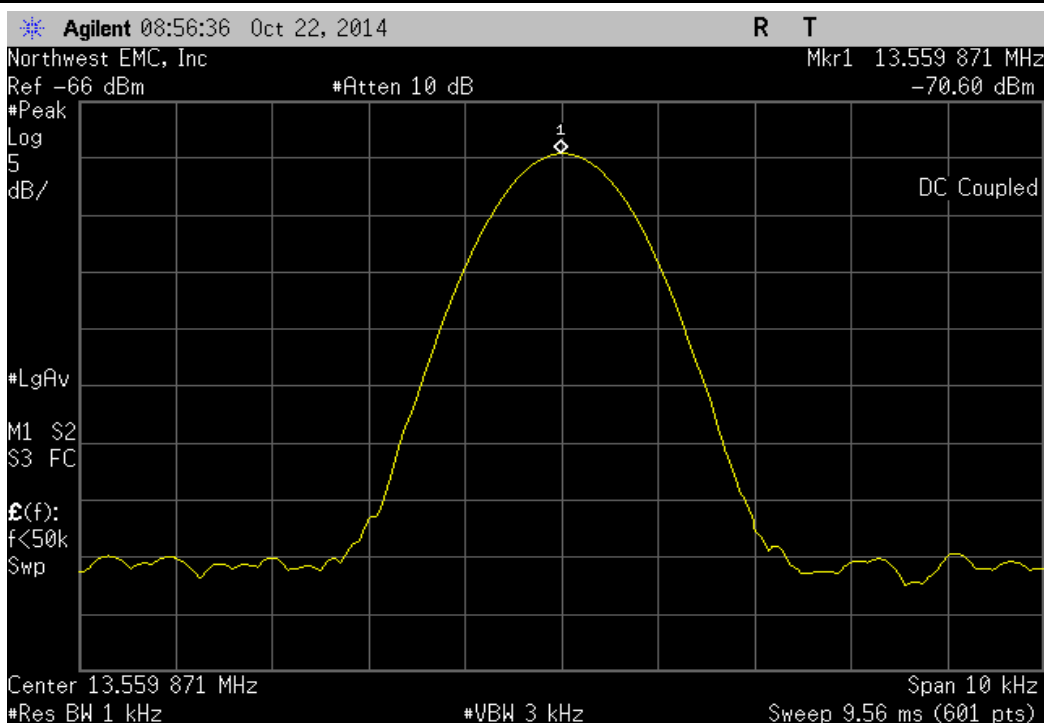


RFID 13.56MHz, Temperature: +40°					
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
	13.559867	13.56	9.8	100	Pass

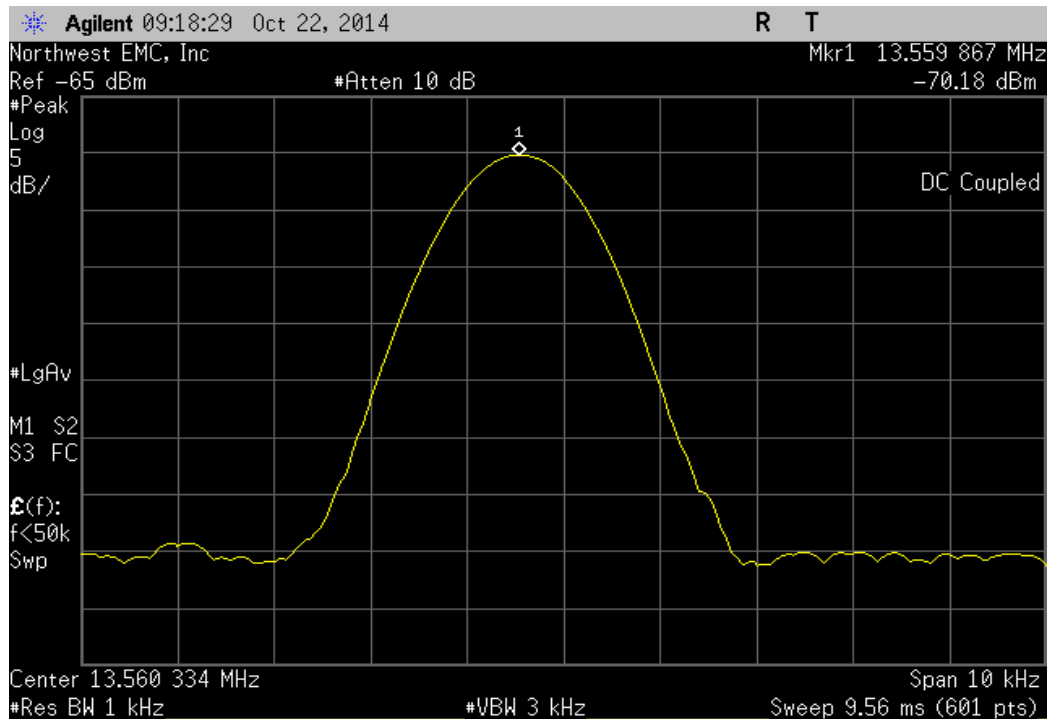


RFID 13.56MHz, Temperature: +30°					
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
	13.55985	13.56	11.1	100	Pass

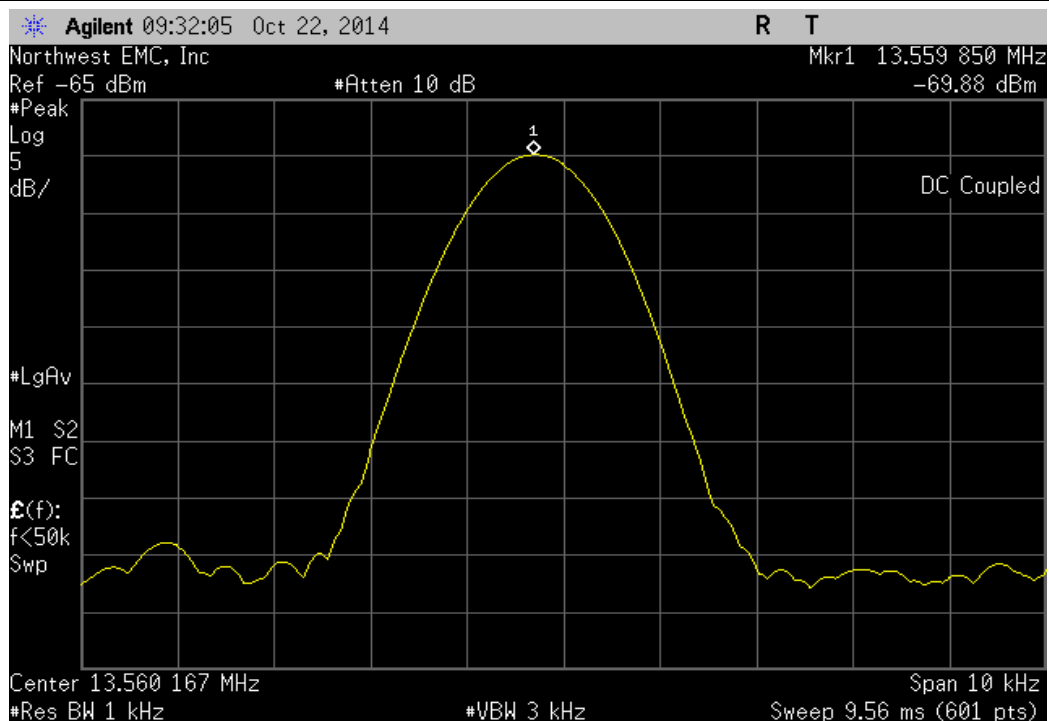


RFID 13.56MHz, Temperature: +20°					
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
	13.559873	13.56	9.4	100	Pass

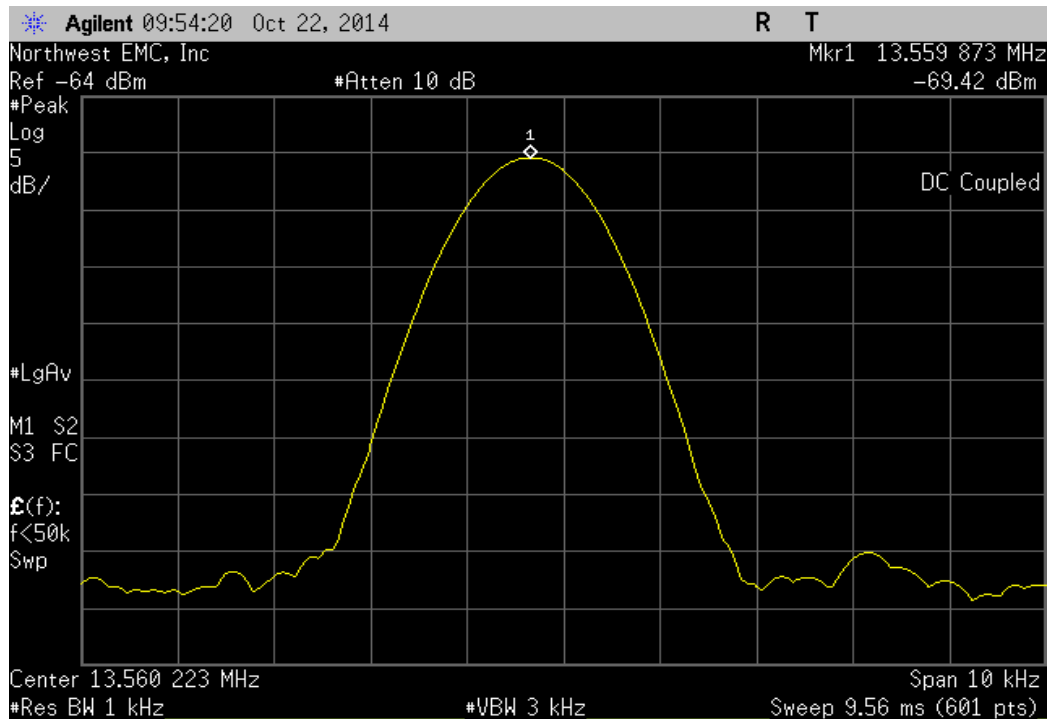


RFID 13.56MHz, Temperature: +10°					
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
	13.559875	13.56	9.2	100	Pass

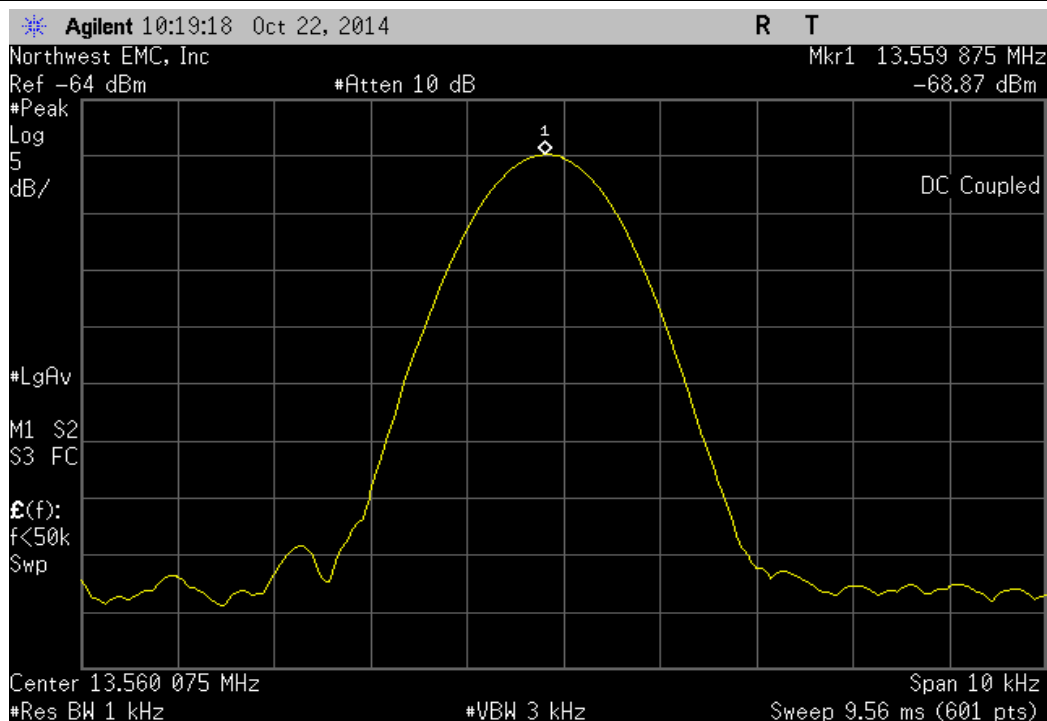

RFID 13.56MHz, Temperature: 0°					
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
	13.55989	13.56	8.1	100	Pass

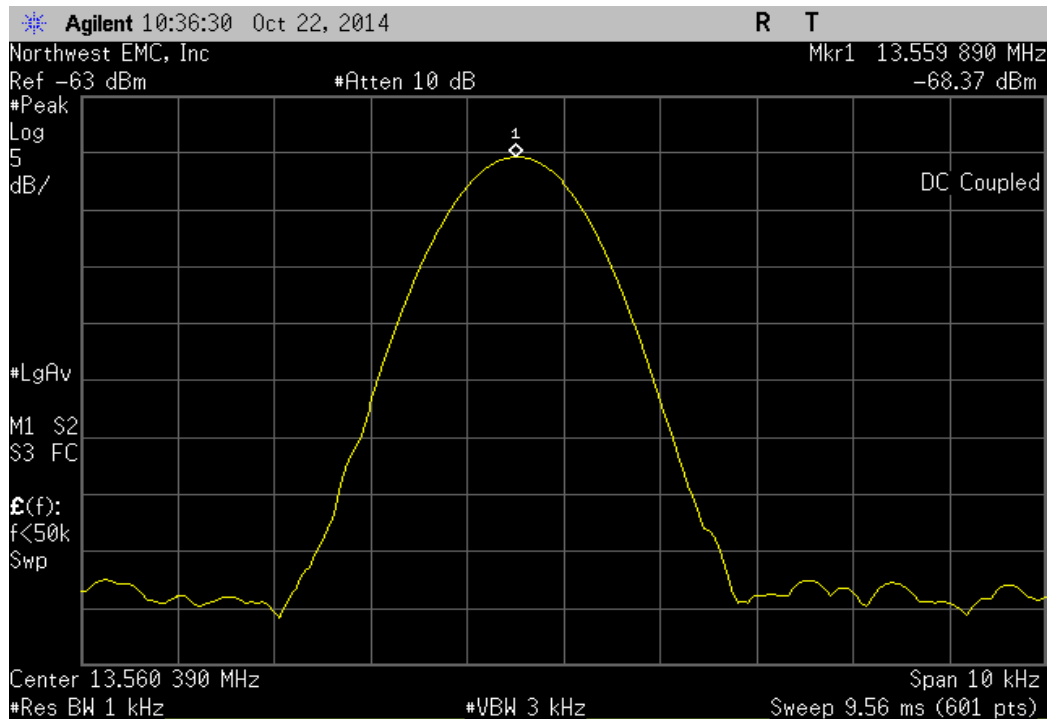

RFID 13.56MHz, Temperature: -10°					
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
	13.559903	13.56	7.2	100	Pass

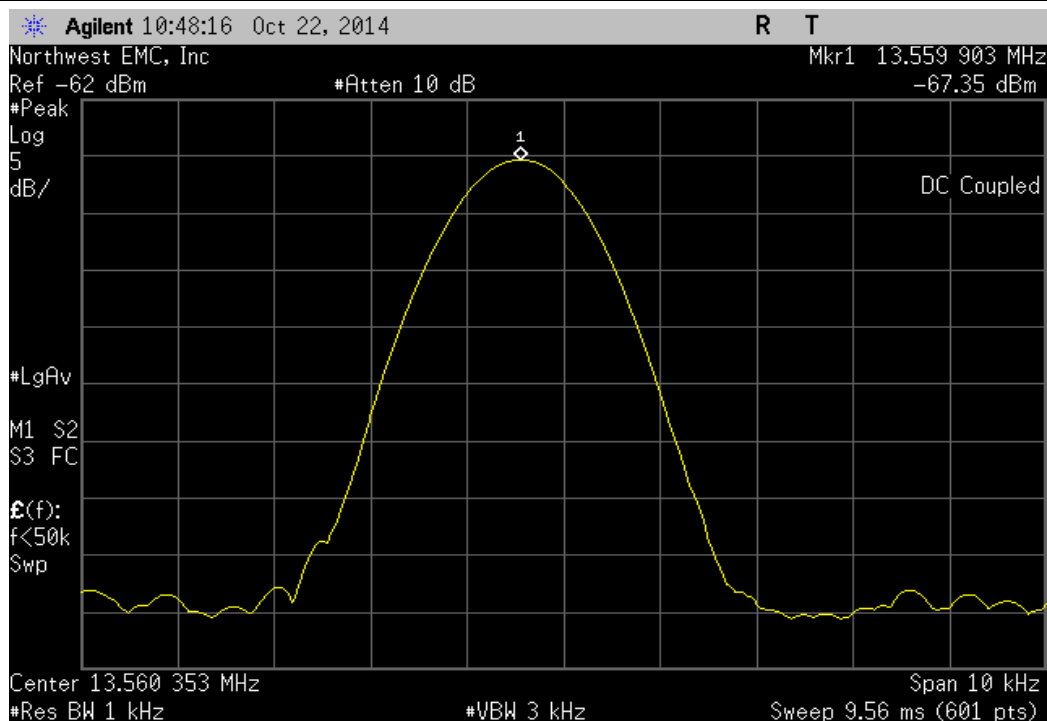

RFID 13.56MHz, Temperature: -20°					
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
	13.559872	13.56	9.4	100	Pass

