



Professional Focus on Services

Shenzhen Blue Asia Technology Limited.

Report No.: GTSE14100178701

FCC REPORT

Applicant: New Focus Lighting & Power Technology(Shanghai)Co., Ltd.

Address of Applicant: No. 4589, WaiQingSong Road, QingPu County, Shanghai, China

Equipment Under Test (EUT)

Product Name: Bluetooth module

Model No.: 7967

FCC ID: 2ADHC-7967

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247:2013

Date of sample receipt: October 15, 2014

Date of Test: October 27-28, 2014

Date of report issued: October 28, 2014

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

A handwritten signature in black ink, appearing to be "Amos", written over a light gray circular stamp.

Laboratory Manager



2 Version

Version No.	Date	Description
00	October 28, 2014	Original

Prepared By:

Edward Pan

Date:

October 28, 2014

Project Engineer

Check By:

Hank Yan

Date:

October 28, 2014

Reviewer



3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF EUT	5
5.3 TEST MODE	7
5.4 DESCRIPTION OF SUPPORT UNITS	7
5.5 TEST FACILITY	7
5.6 TEST LOCATION	7
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA	9
7.1 ANTENNA REQUIREMENT	9
7.2 CONDUCTED OUTPUT POWER	10
7.3 CHANNEL BANDWIDTH	12
7.4 POWER SPECTRAL DENSITY	14
7.5 BAND EDGES	16
7.5.1 Conducted Emission Method	16
7.5.2 Radiated Emission Method	17
7.6 SPURIOUS EMISSION	19
7.6.1 Conducted Emission Method	19
7.6.2 Radiated Emission Method	21
8 TEST SETUP PHOTO	27
9 EUT CONSTRUCTIONAL DETAILS	28

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	NA
Conducted Output Power	15.247 (b)(3)	Pass
Channel Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

Pass: The EUT complies with the essential requirements in the standard.

NA: Not applicable



5 General Information

5.1 Client Information

Applicant:	New Focus Lighting & Power Technology(Shanghai)Co., Ltd.
Address of Applicant:	No. 4589, WaiQingSong Road, QingPu County, Shanghai, China
Manufacturer/Factory:	New Focus Lighting & Power Technology(Shanghai)Co., Ltd.
Address of Manufacturer/Factory:	No. 4589, WaiQingSong Road, QingPu County, Shanghai, China

5.2 General Description of EUT

Product Name:	Bluetooth module
Model No.:	7967
Operation Frequency:	2402MHz~2480MHz
Channel Numbers:	40
Channel Separation:	2MHz
Modulation Type:	GFSK
Antenna Type:	Chip Antenna
Antenna Gain:	2.5dBi (declare by Applicant)
Power Supply:	DC 12.0V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2440MHz
The Highest channel	2480MHz

5.3 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
-------------------	--

5.4 Description of Support Units

Manufacturer	Description	Model	Serial Number	FCC ID/DoC
Apple	PC	A1278	C1MN99ERDTY3	DoC

5.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **CNAS —Registration No.: CNAS L5775**

CNAS has accredited Global United Technology Services Co., Ltd. To ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 28, 2013.

• **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, June 26, 2013.

5.6 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China

Tel: 0755-27798480

Fax: 0755-27798960


6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Mar. 29 2014	Mar. 28 2015
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	Jul. 01 2014	Jun 30 2015
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Jul. 01 2014	Jun 30 2015
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	Jul. 01 2014	Jun 30 2015
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 27 2014	June 26 2015
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 28 2014	Mar. 27 2015
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	GTS	N/A	GTS213	Mar. 29 2014	Mar. 28 2015
10	Coaxial Cable	GTS	N/A	GTS211	Mar. 29 2014	Mar. 28 2015
11	Coaxial cable	GTS	N/A	GTS210	Mar. 29 2014	Mar. 28 2015
12	Coaxial Cable	GTS	N/A	GTS212	Mar. 29 2014	Mar. 28 2015
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	Jul. 01 2014	Jun. 30, 2015
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	Jul. 01 2014	Jun. 30, 2015
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 27 2014	June 26 2015
16	Band filter	Amindeon	82346	GTS219	Mar. 29 2014	Mar. 28 2015
17	Power Meter	Anritsu	ML2495A	GTS540	July 01 2014	June 30 2015
18	Power Sensor	Anritsu	MA2411B	GTS541	July 01 2014	June 30 2015


General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	ChangChun	DYM3	GTS257	July 08 2014	July 07 2015

7 Test results and Measurement Data

7.1 Antenna requirement

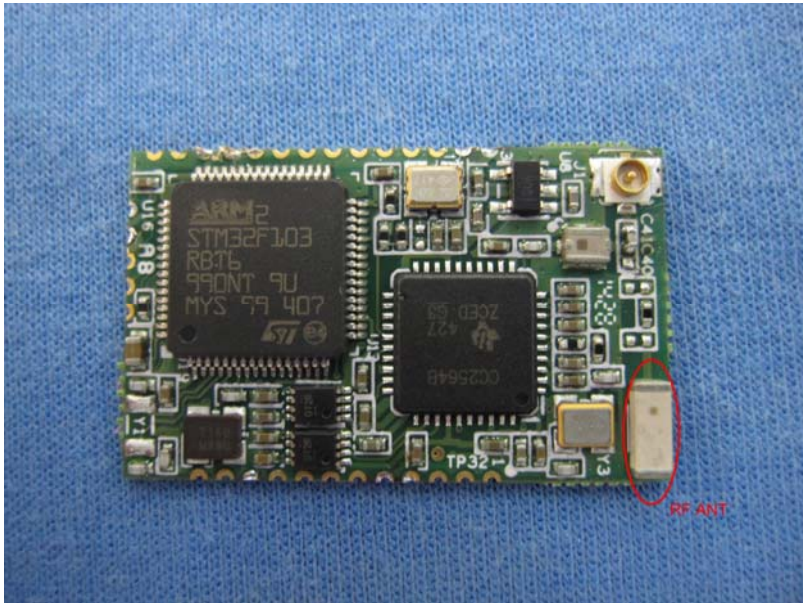Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
E.U.T Antenna:	
The antenna is ChipAntenna, the best case gain of the antenna is 2.5dBi 	


7.2 Conducted Output Power

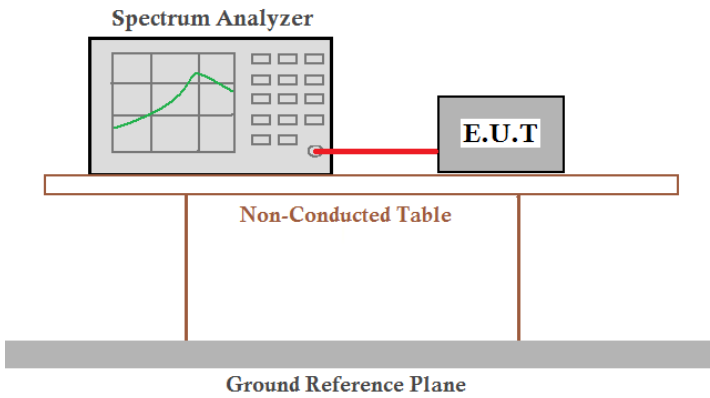Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V03
Limit:	30dBm
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass


Measurement Data

Test channel	Peak Output Power (dBm)	Limit(dBm)	Result
Lowest	3.17	30.00	Pass
Middle	3.21		
Highest	3.59		


Test plot as follows:

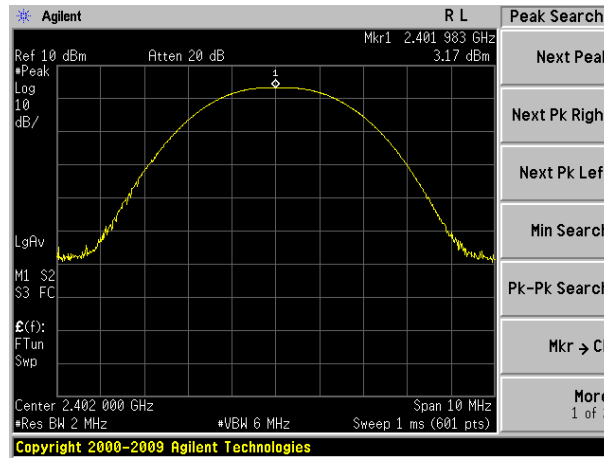

Lowest channel

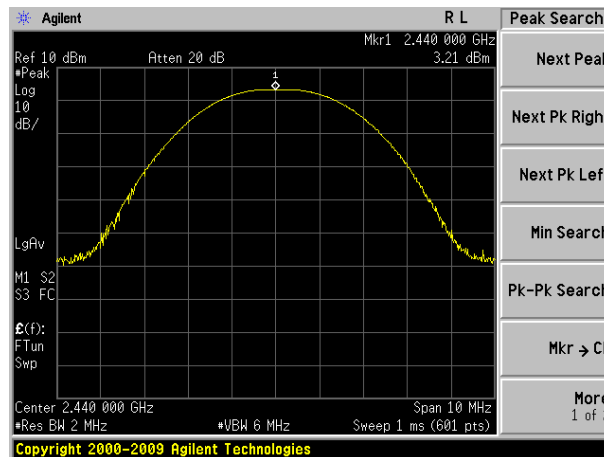


Middle channel

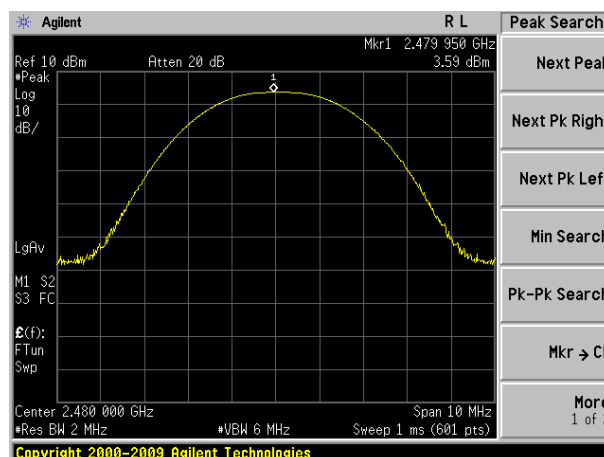

Highest channel


7.3 Channel Bandwidth

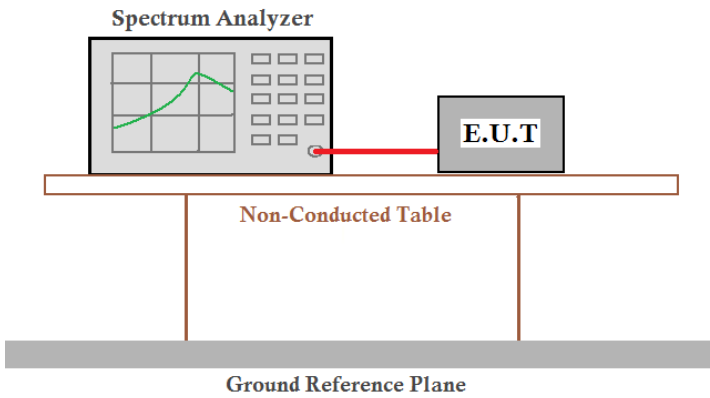Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V03
Limit:	>500KHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass


Measurement Data

Test channel	Channel Bandwidth (KHz)	Limit(KHz)	Result
Lowest	697.973	>500	Pass
Middle	679.876		
Highest	692.249		


Test plot as follows:

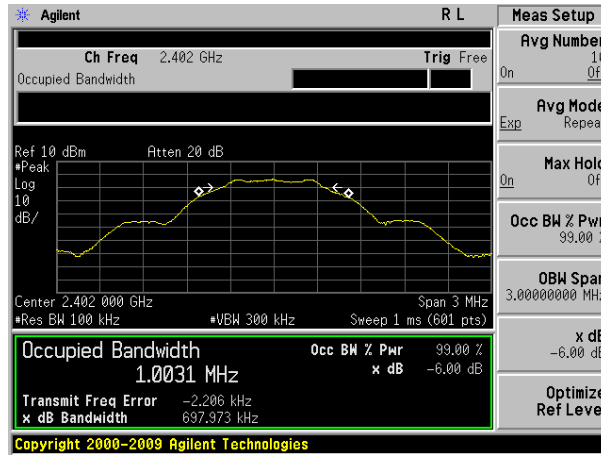

Lowest channel

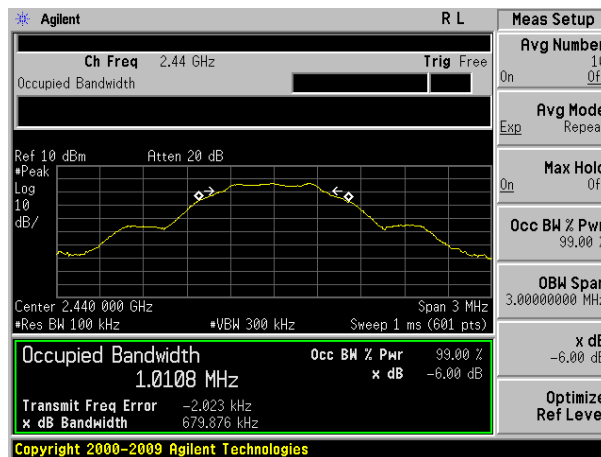


Middle channel

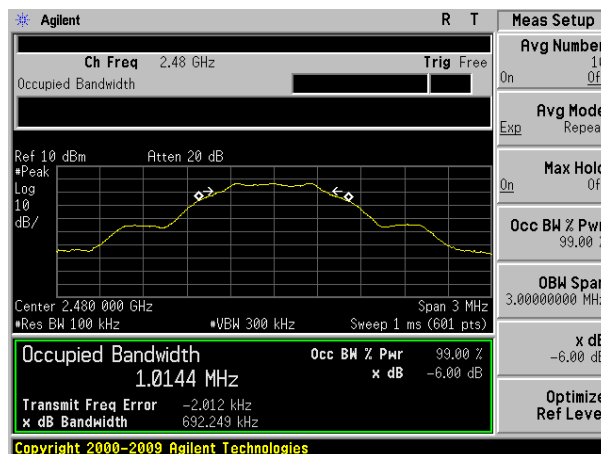

Highest channel


7.4 Power Spectral Density

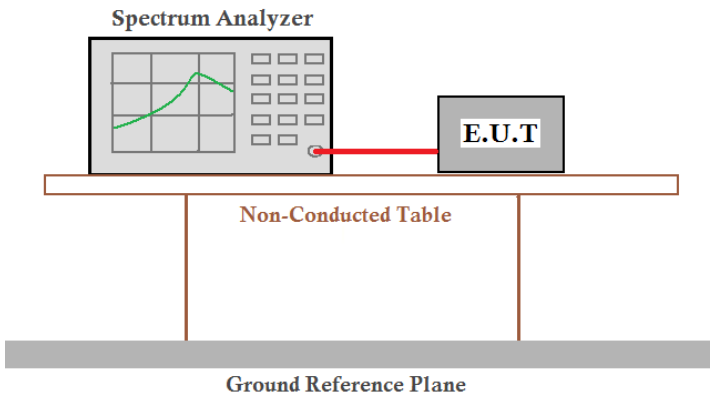Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V03
Limit:	8dBm/3kHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass


Measurement Data

Test channel	Power Spectral Density (dBm)	Limit(dBm/3kHz)	Result
Lowest	3.16	8.00	Pass
Middle	3.20		
Highest	3.58		


Test plot as follows:

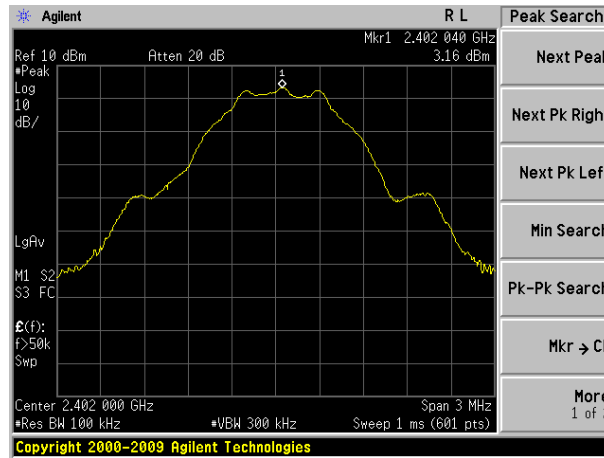

Lowest channel

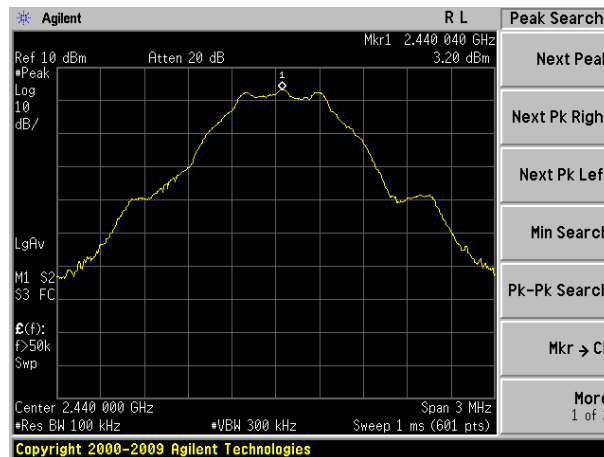


Middle channel

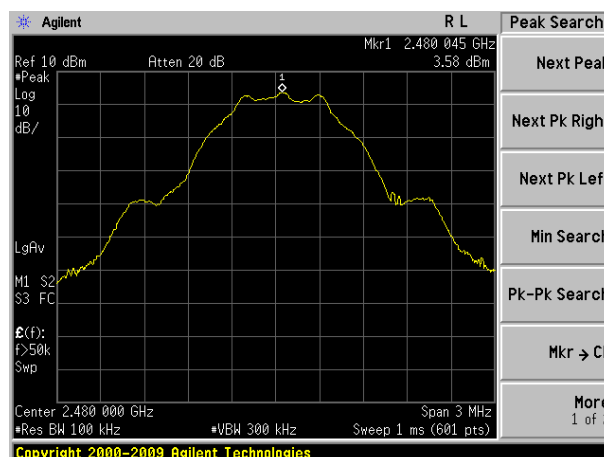


Highest channel

7.5 Band edges


7.5.1 Conducted Emission Method

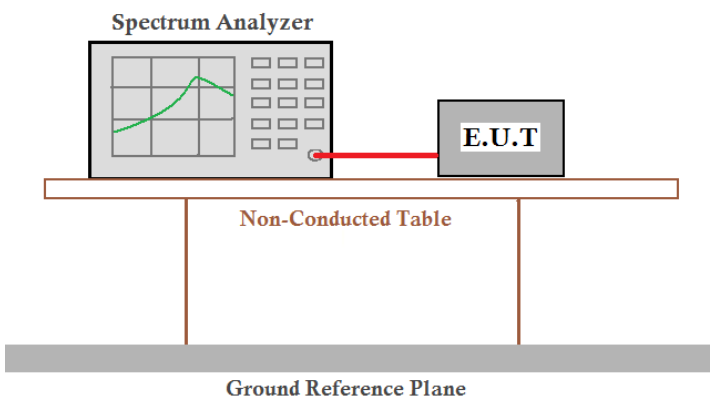Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V03
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Test plot as follows:

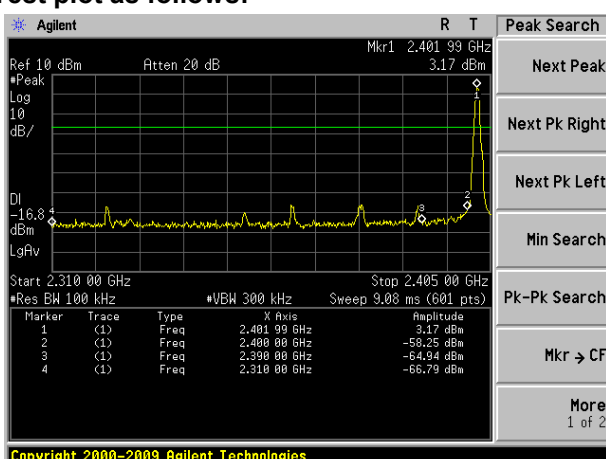


Lowest channel

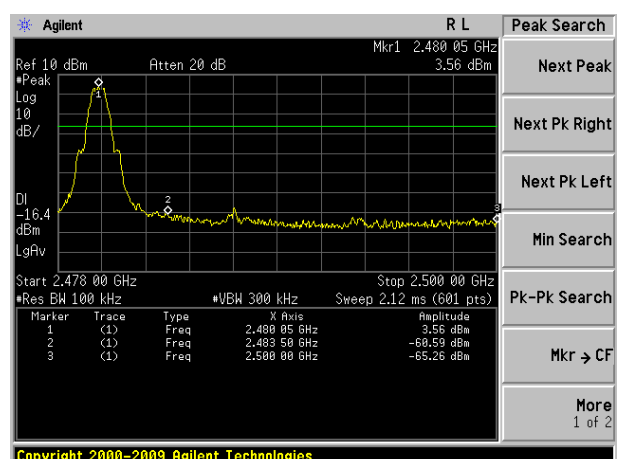

Highest channel

7.5.2 Radiated Emission Method

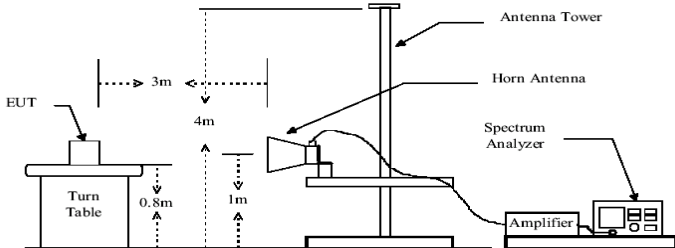Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.4: 2003				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		RMS	1MHz	3MHz	Average
Limit:	Frequency		Limit (dBuV/m @3m)		Value
	Above 1GHz		54.00		Average
			74.00		Peak
Test setup:					
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 7. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.				
Test Instruments:	Refer to section 6.0 for details				
Test mode:	Refer to section 5.3 for details				
Test results:	Pass				

Measurement data:

Remark: The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.

Test channel:	Lowest
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	41.66	27.59	5.38	30.18	44.45	74.00	-29.55	Vertical
2400.00	58.28	27.58	5.39	30.18	61.07	74.00	-12.93	Vertical
2390.00	42.10	27.59	5.38	30.18	44.89	74.00	-29.11	Horizontal
2400.00	60.18	27.58	5.39	30.18	62.97	74.00	-11.03	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	32.49	27.59	5.38	30.18	35.28	54.00	-18.72	Vertical
2400.00	43.65	27.58	5.39	30.18	46.44	54.00	-7.56	Vertical
2390.00	32.35	27.59	5.38	30.18	35.14	54.00	-18.86	Horizontal
2400.00	45.19	27.58	5.39	30.18	47.98	54.00	-6.02	Horizontal

Test channel:	Highest
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	43.62	27.53	5.47	29.93	46.69	74.00	-27.31	Vertical
2500.00	43.03	27.55	5.49	29.93	46.14	74.00	-27.86	Vertical
2483.50	44.26	27.53	5.47	29.93	47.33	74.00	-26.67	Horizontal
2500.00	43.91	27.55	5.49	29.93	47.02	74.00	-26.98	Horizontal

Average value:


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	35.30	27.53	5.47	29.93	38.37	54.00	-15.63	Vertical
2500.00	33.48	27.55	5.49	29.93	36.59	54.00	-17.41	Vertical
2483.50	36.41	27.53	5.47	29.93	39.48	54.00	-14.52	Horizontal
2500.00	33.30	27.55	5.49	29.93	36.41	54.00	-17.59	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.6 Spurious Emission


7.6.1 Conducted Emission Method

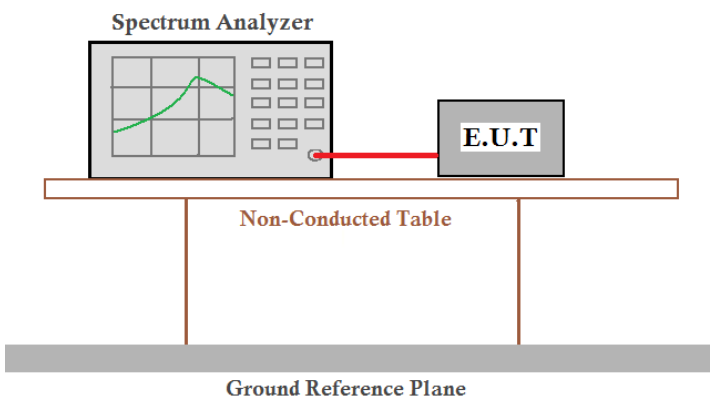Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V03
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 The diagram illustrates the test setup for conducted emission measurement. A Spectrum Analyzer is connected via a red cable to an E.U.T (Equipment Under Test). Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass




Test plot as follows:

Lowest channel

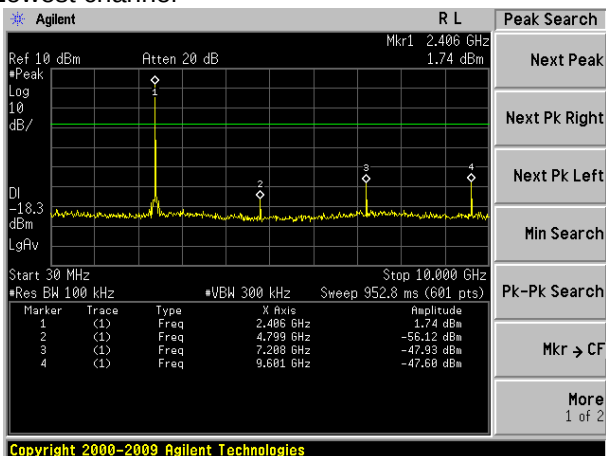


30MHz~10GHz

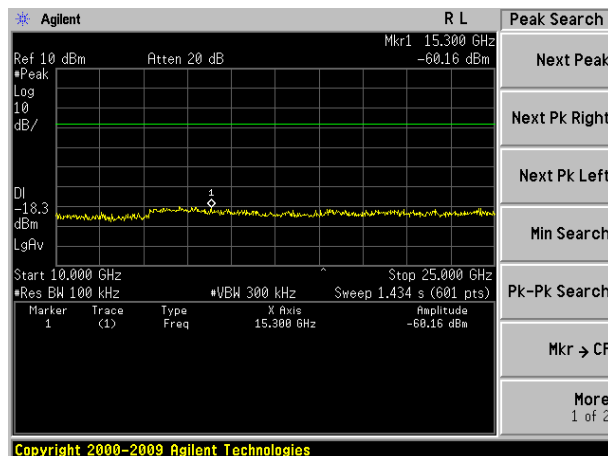


10GHz~25GHz

Middle channel

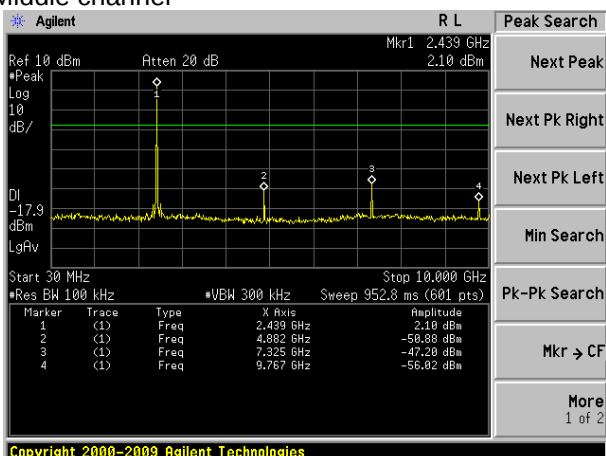


30MHz~10GHz

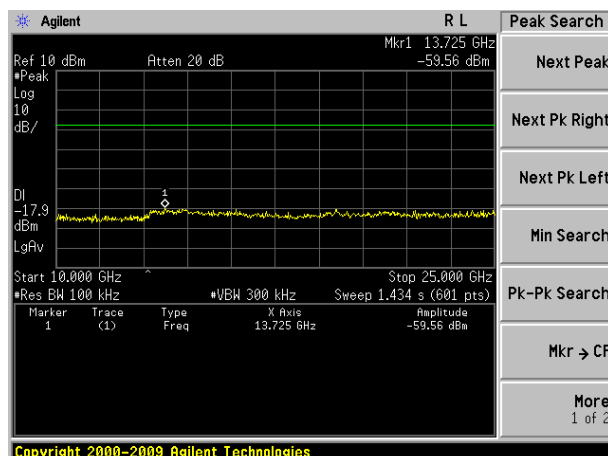


10GHz~25GHz

Highest channel


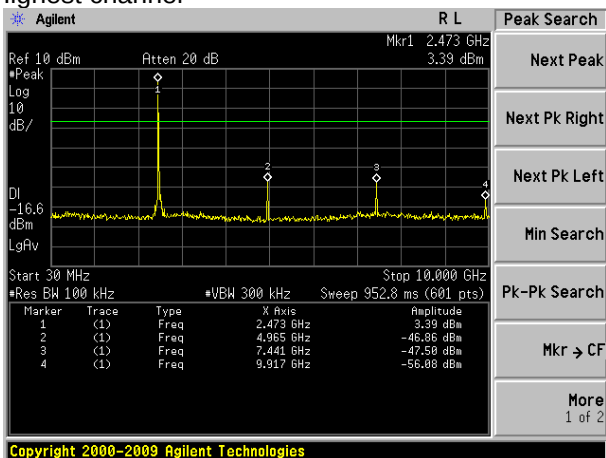


30MHz~10GHz

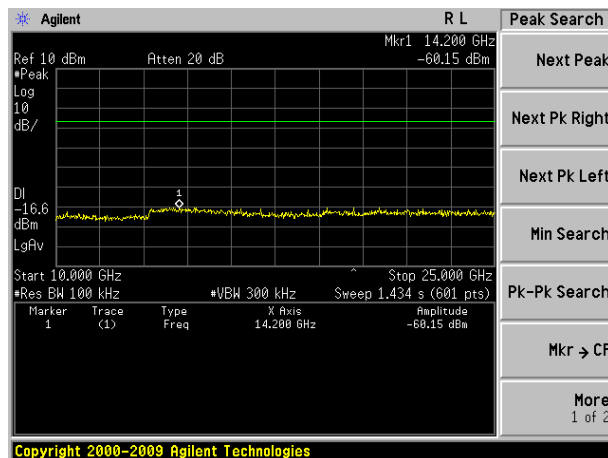

10GHz~25GHz

7.6.2 Radiated Emission Method

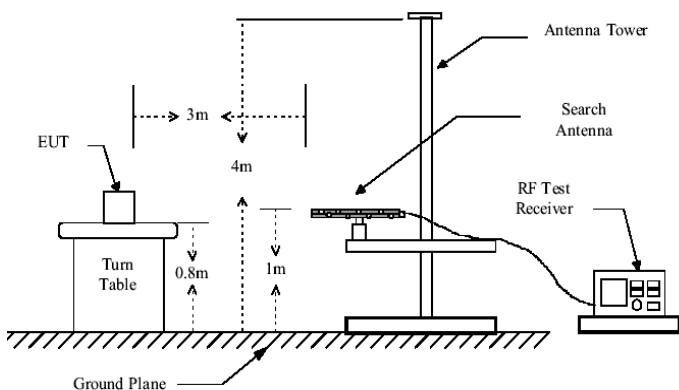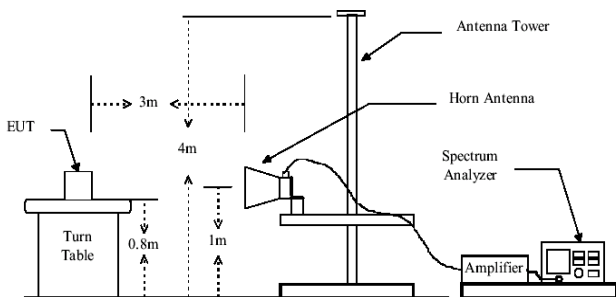Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.4: 2003				
Test Frequency Range:	30MHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		RMS	1MHz	3MHz	Average
Limit:	Frequency		Limit (dBuV/m @3m)		Value
	30MHz-88MHz		40.00		Quasi-peak
	88MHz-216MHz		43.50		Quasi-peak
	216MHz-960MHz		46.00		Quasi-peak
	960MHz-1GHz		54.00		Quasi-peak
	Above 1GHz		54.00		Average
			74.00		Peak
Test setup:	Below 1GHz				
					
Test setup:	Above 1GHz				
					
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to				

	determine the position of the highest radiation. - The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. - For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. - The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. - If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. - The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Remark:

Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis which it is worse case.

Measurement Data

■ Below 1GHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
39.16	37.67	15.34	0.65	32.06	21.60	40.00	-18.40	Vertical
58.82	37.31	14.76	0.85	31.94	20.98	40.00	-19.02	Vertical
111.35	36.16	14.04	1.29	31.82	19.67	43.50	-23.83	Vertical
232.53	37.20	13.72	2.03	32.16	20.79	46.00	-25.21	Vertical
428.02	36.38	17.51	2.99	31.79	25.09	46.00	-20.91	Vertical
863.06	36.95	22.73	4.71	31.23	33.16	46.00	-12.84	Vertical
34.76	36.02	14.30	0.61	32.06	18.87	40.00	-21.13	Horizontal
57.59	35.43	14.85	0.84	31.94	19.18	40.00	-20.82	Horizontal
104.54	35.90	14.73	1.23	31.78	20.08	43.50	-23.42	Horizontal
246.82	37.54	14.08	2.11	32.16	21.57	46.00	-24.43	Horizontal
477.17	36.19	18.01	3.21	31.63	25.78	46.00	-20.22	Horizontal
872.18	35.77	22.82	4.74	31.22	32.11	46.00	-13.89	Horizontal



■ Above 1GHz

Test channel:	Lowest
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	36.98	31.78	8.60	32.09	45.27	74.00	-28.73	Vertical
7206.00	38.90	36.15	11.65	32.00	54.70	74.00	-19.30	Vertical
9608.00	37.44	37.95	14.14	31.62	57.91	74.00	-16.09	Vertical
12010.00	29.30	39.08	15.03	35.51	47.90	74.00	-26.10	Vertical
14412.00	*					74.00		Vertical
4804.00	37.36	31.78	8.60	32.09	45.65	74.00	-28.35	Horizontal
7206.00	43.45	36.15	11.65	32.00	59.25	74.00	-14.75	Horizontal
9608.00	31.24	37.95	14.14	31.62	51.71	74.00	-22.29	Horizontal
12010.00	29.37	39.08	15.03	35.51	47.97	74.00	-26.03	Horizontal
14412.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	27.54	31.78	8.60	32.09	35.83	54.00	-18.17	Vertical
7206.00	29.12	36.15	11.65	32.00	44.92	54.00	-9.08	Vertical
9608.00	27.63	37.95	14.14	31.62	48.10	54.00	-5.90	Vertical
12010.00	19.41	39.08	15.03	35.51	38.01	54.00	-15.99	Vertical
14412.00	*					54.00		Vertical
4804.00	27.79	31.78	8.60	32.09	36.08	54.00	-17.92	Horizontal
7206.00	33.43	36.15	11.65	32.00	49.23	54.00	-4.77	Horizontal
9608.00	22.05	37.95	14.14	31.62	42.52	54.00	-11.48	Horizontal
12010.00	18.63	39.08	15.03	35.51	37.23	54.00	-16.77	Horizontal
14412.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Middle
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4884.00	39.11	31.85	8.66	32.12	47.50	74.00	-26.50	Vertical
7326.00	37.87	36.37	11.72	31.89	54.07	74.00	-19.93	Vertical
9768.00	32.74	38.35	14.25	31.59	53.75	74.00	-20.25	Vertical
12210.00	30.46	38.92	15.14	35.65	48.87	74.00	-25.13	Vertical
14652.00	*					74.00		Vertical
4884.00	37.05	31.85	8.66	32.12	45.44	74.00	-28.56	Horizontal
7326.00	42.25	36.37	11.72	31.89	58.45	74.00	-15.55	Horizontal
9768.00	31.73	38.35	14.25	31.59	52.74	74.00	-21.26	Horizontal
12210.00	28.96	38.92	15.14	35.65	47.37	74.00	-26.63	Horizontal
14652.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4884.00	28.80	31.85	8.66	32.12	37.19	54.00	-16.81	Vertical
7326.00	32.72	36.37	11.72	31.89	48.92	54.00	-5.08	Vertical
9768.00	21.82	38.35	14.25	31.59	42.83	54.00	-11.17	Vertical
12210.00	19.93	38.92	15.14	35.65	38.34	54.00	-15.66	Vertical
14652.00	*					54.00		Vertical
4884.00	28.67	31.85	8.66	32.12	37.06	54.00	-16.94	Horizontal
7326.00	28.00	36.37	11.72	31.89	44.20	54.00	-9.80	Horizontal
9768.00	23.30	38.35	14.25	31.59	44.31	54.00	-9.69	Horizontal
12210.00	20.09	38.92	15.14	35.65	38.50	54.00	-15.50	Horizontal
14652.00	*					54.00		Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *“*” , means this data is the too weak instrument of signal is unable to test.*



Test channel:	Highest
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	36.00	31.93	8.73	32.16	44.50	74.00	-29.50	Vertical
7440.00	34.72	36.59	11.79	31.78	51.32	74.00	-22.68	Vertical
9920.00	34.01	38.81	14.38	31.88	55.32	74.00	-18.68	Vertical
12400.00	29.22	38.76	15.27	35.27	47.98	74.00	-26.02	Vertical
14880.00	*					74.00		Vertical
4960.00	34.94	31.93	8.73	32.16	43.44	74.00	-30.56	Horizontal
7440.00	39.72	36.59	11.79	31.78	56.32	74.00	-17.68	Horizontal
9920.00	29.47	38.81	14.38	31.88	50.78	74.00	-23.22	Horizontal
12400.00	30.56	38.76	15.27	35.27	49.32	74.00	-24.68	Horizontal
14880.00	*					74.00		Horizontal

Average value:



Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	26.07	31.93	8.73	32.16	34.57	54.00	-19.43	Vertical
7440.00	25.40	36.59	11.79	31.78	42.00	54.00	-12.00	Vertical
9920.00	24.64	38.81	14.38	31.88	45.95	54.00	-8.05	Vertical
12400.00	19.76	38.76	15.27	35.27	38.52	54.00	-15.48	Vertical
14880.00	*					54.00		Vertical
4960.00	24.79	31.93	8.73	32.16	33.29	54.00	-20.71	Horizontal
7440.00	29.79	36.59	11.79	31.78	46.39	54.00	-7.61	Horizontal
9920.00	20.06	38.81	14.38	31.88	41.37	54.00	-12.63	Horizontal
12400.00	20.48	38.76	15.27	35.27	39.24	54.00	-14.76	Horizontal
14880.00	*					54.00		Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *“*” , means this data is the too weak instrument of signal is unable to test.*



8 Test Setup Photo



Radiated Emission

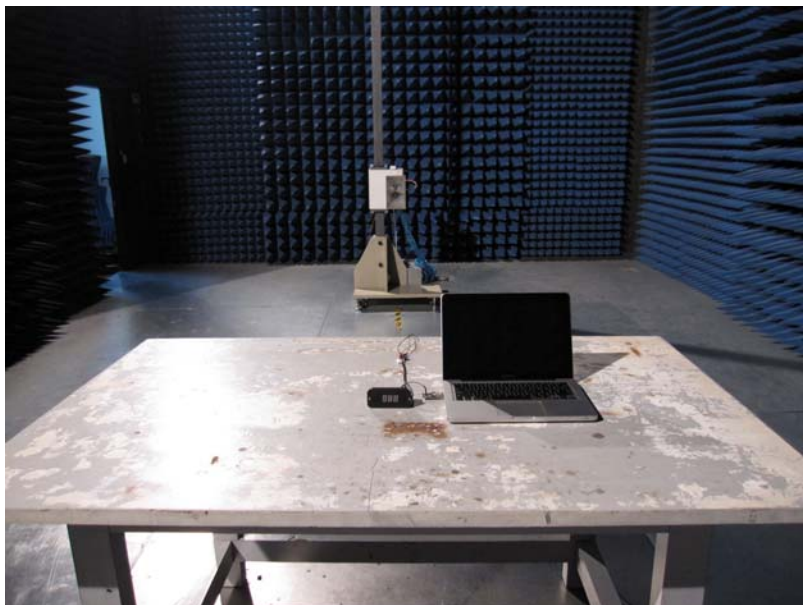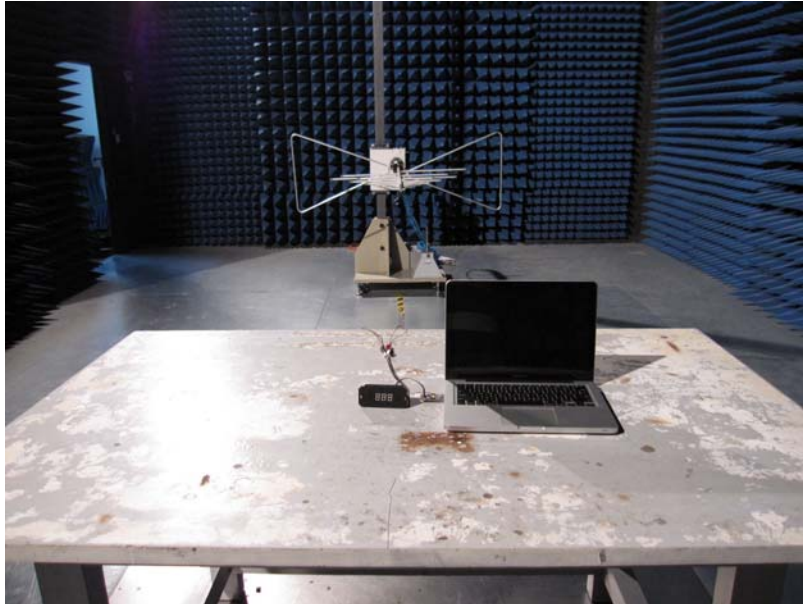




9 EUT Constructional Details





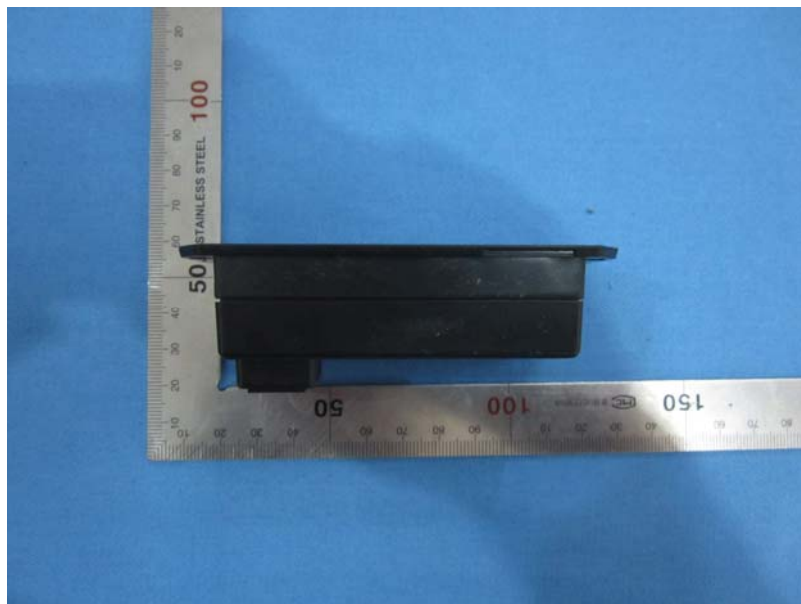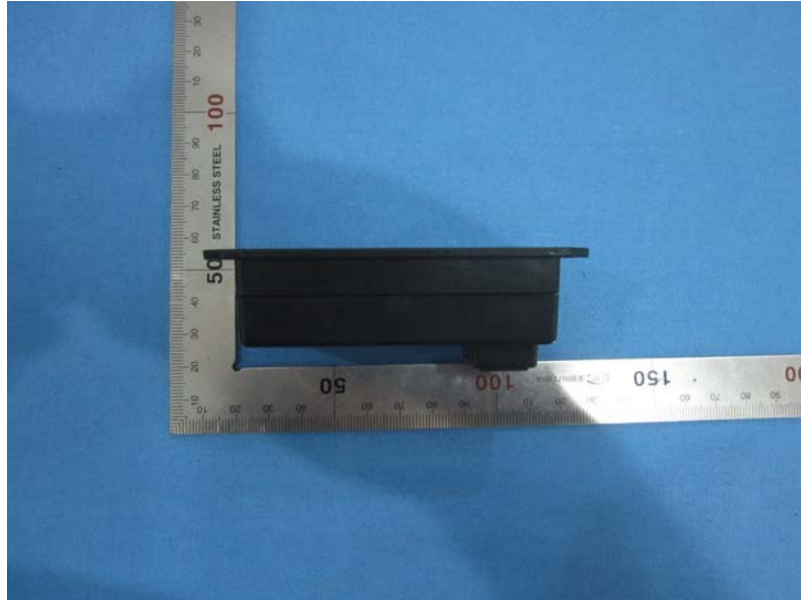

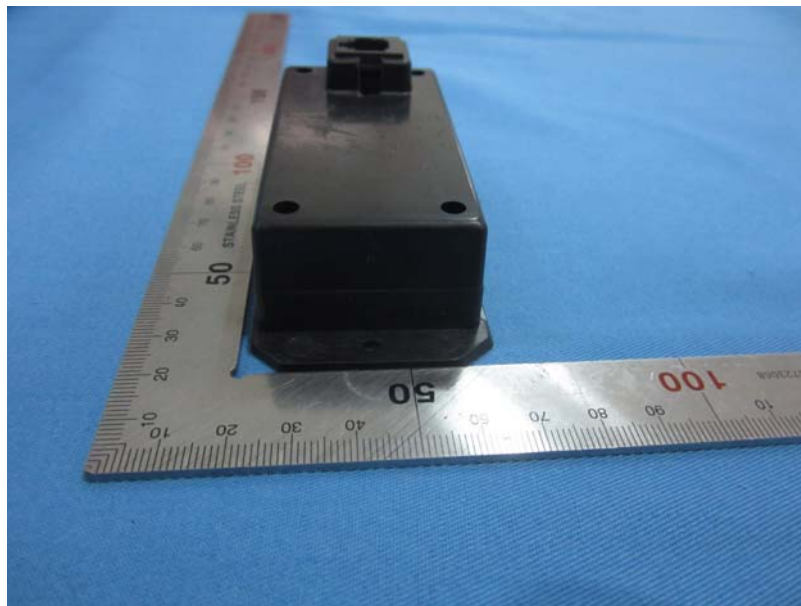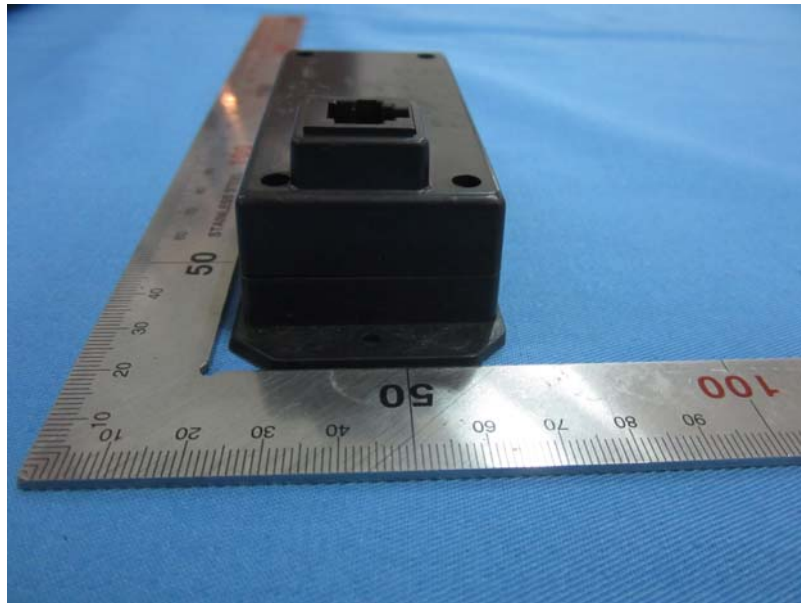

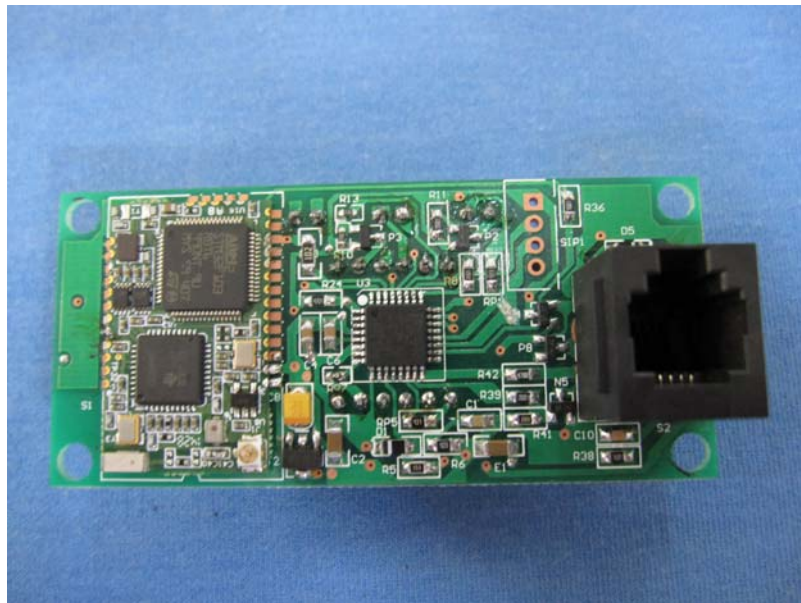

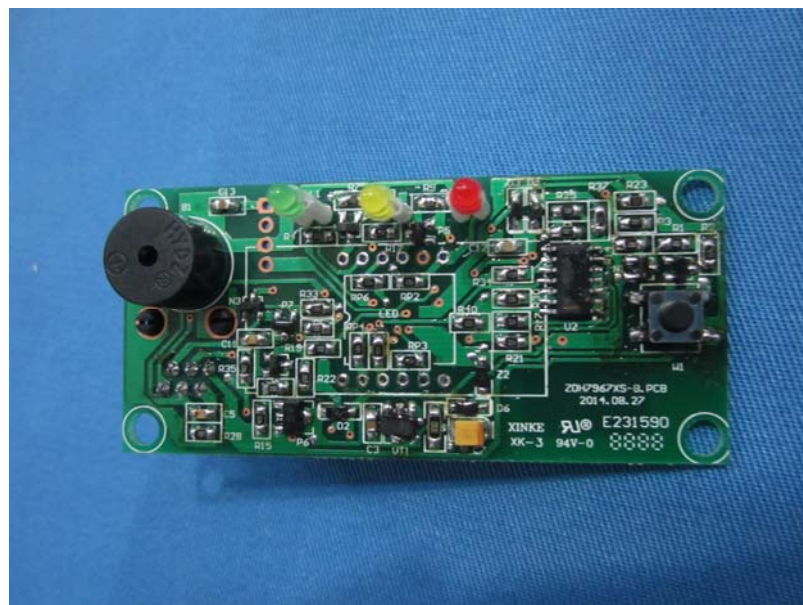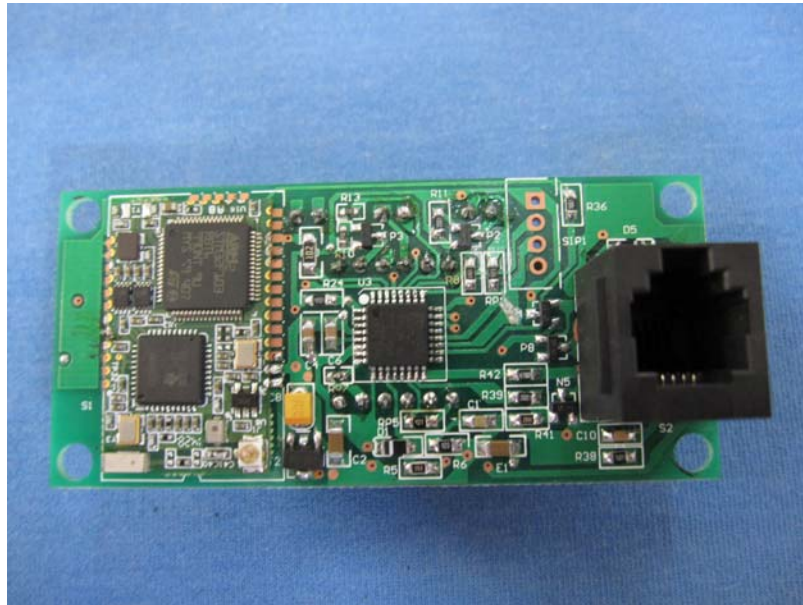

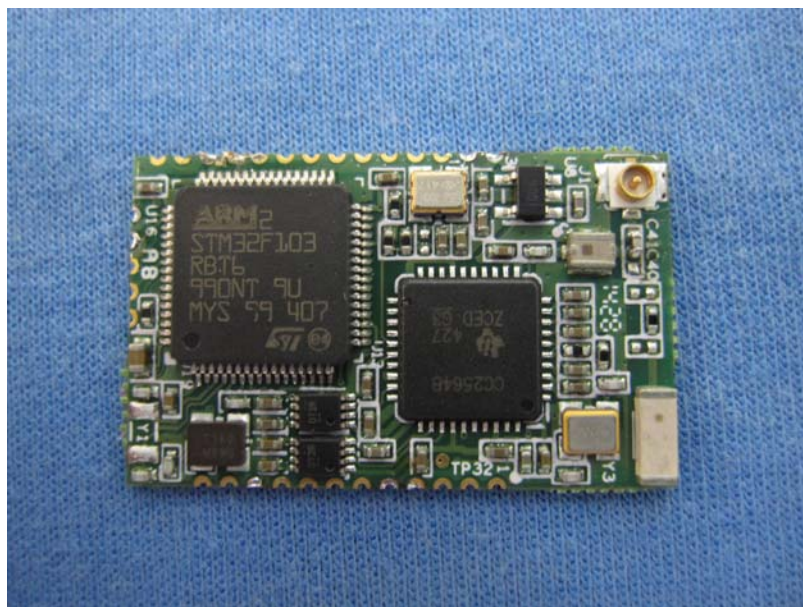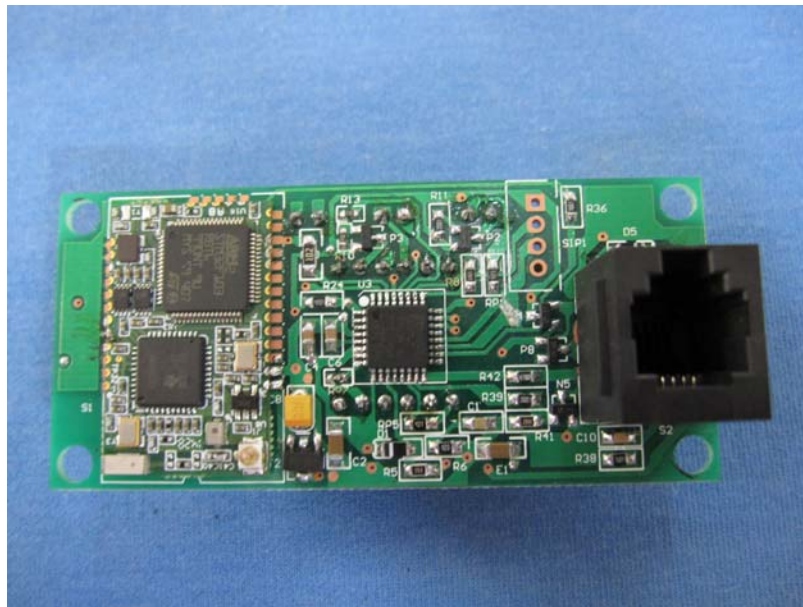



-----End-----