

[illegible]

WAG-F-LTE12-00-185 Specification

1. Explanation of part number :

WAG F LTE12 00 185
(1) (2) (3) (4) (5)

(1) Product Type: Wireless Antenna

(2) Material: FPC

(3) Frequency : 617~960/1710~2690 MHz

(4) Coaxial Cable Type : 00

(5) Suffix : 185

2. Storage Condition:

Temperature -40 to +85°C
Humidity 20 to 65 %RH

Recommended storage condition:

Store in room condition as listed below: Temperature -20°C~+45°C, Humidity 80% Max.

3. Operating Condition:

Temperature -40 to +85°C
Humidity 10 to 85 %RH

4. Electrical Specification :

Those specifications were specially defined for WLAN model, and all characteristics were measured in the customer's machine. .

4-1. Frequency Band:

Frequency Band	MHz
DIV	617~960/1710~2690 MHz

4-2. Impedance

50 ohm nominal

UNLESS OTHER SPECIFIED TOLERANCES ON:

X=± X.X=± X.XX=±
ANGLES=± HOLEDIA=±



INPAQ TECHNOLOGY CO., LTD.

SCALE: UNIT: mm

DRAWN BY: Eason CHECKED BY: dongdongzhang

DESIGNED BY:Eason APPROVED BY: dongdongzhan

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE: WAG-F-LTE12-00-185 Specification

DOCUMENT
NO.

ENS000196300

PAGE REV.
A0

4-3. VSWR

Frequency Band	700	960	1710	1990	2300	2690	
4-3-1.Typical Value:	≤ 9.0	≤ 3.5	≤ 2.5	≤ 3.0	≤ 2.5	≤ 3.5	
4-3-2.Measuring Method	1. A 50Ωcoaxial cable is connected to the pcb antenna. Then this cable is connected to a network analyzer to measure the VSWR. 2. Keeping this jig away from metal at least 20 cm.						
4-3-3.Picture							

4-4. Efficiency and Gain

4-4.1 Measuring equipment

UNLESS OTHER SPECIFIED TOLERANCES ON:

X=± X.X=± X.XX=±

ANGLES=± HOLEDIA=±

SCALE: UNIT: mm

DRAWN BY: Eason CHECKED BY: dongdongzhang

DESIGNED BY:Eason APPROVED BY: dongdongzhan



INPAQ TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE: WAG-F-LTE12-00-185 Specification

DOCUMENT
NO.

ENS000196300

PAGE REV.
A0

Measuring instrument:


Microwave chamber, Network analyzer, and standard antenna.

Instructions for microwave chamber:

This is a microwave chamber set up by our company in Suzhou, This microwave chamber belongs to a set of near-field measurement system. The size of the chamber is 2.95M * 3M * 3M.



RayZone2800 Test Setup

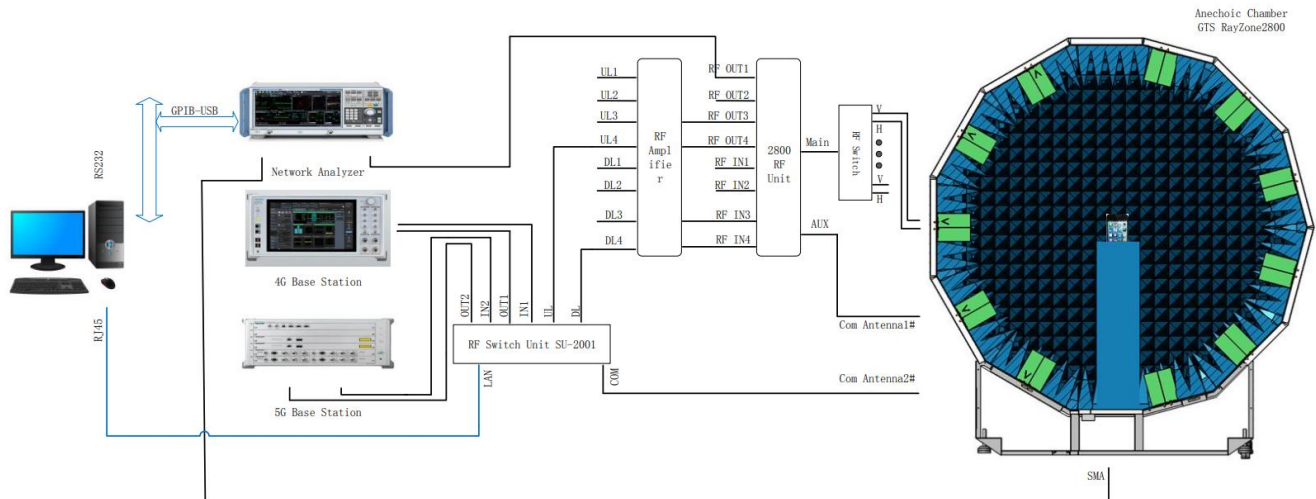

The microwave chamber, shown above, using a unique multi-probe technique, The aim is to reduce the measurement time of the whole measurement system. The measuring system use multi-probe array instead of single probe to scan the measured surface of the antenna under test, a single probe has the capability of measuring orthogonal polarization amplitude and phase, it also has a wide frequency range, the corresponding multi-probe array is switched quickly by electronic switch, greatly improved the measurement efficiency.

The probe model: MA186960A(400MHz~7.5GHz) . Because of its capability of broadband frequency and the orthogonal polarization function, the number of probes needed to be equipped with the system is reduced; The small size of the probe reduces the coupling between the probes, make it is possible to insert probes of other frequency bands between probes, then a single system can support a wider frequency range.

4-4.2 Efficiency and Gain

frequency	efficiency	efficiency	gain
700	3%	-15.23	-16.92

frequency	efficiency	efficiency	gain
2080	13%	-8.79	-8.96

UNLESS OTHER SPECIFIED TOLERANCES ON:

X=± X.X=± X.XX=±
ANGLES=± HOLEDIA=±



INPAQ TECHNOLOGY CO., LTD.

SCALE: UNIT: mm

DRAWN BY: Eason CHECKED BY: dongdongzhang

DESIGNED BY: Eason APPROVED BY: dongdongzhang

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE: WAG-F-LTE12-00-185 Specification

DOCUMENT
NO.

ENS000196300

PAGE REV.
A0

710	2%	-16.99	-16.87
720	2%	-16.78	-16.21
730	3%	-15.23	-16.23
740	3%	-14.95	-16.41
750	3%	-14.95	-16.28
760	3%	-14.81	-16.1
770	4%	-13.87	-15.79
780	4%	-13.77	-15.79
790	4%	-13.57	-15.54
800	5%	-13.37	-15.27
810	5%	-13.28	-15.04
820	5%	-13.19	-15.02
830	5%	-13.10	-14.62
840	5%	-12.84	-14.43
850	5%	-12.68	-14.12
860	6%	-12.52	-13.37
870	6%	-12.37	-12.99
880	6%	-12.15	-12.32
890	7%	-11.87	-12.01
900	7%	-11.61	-11.83
910	7%	-11.31	-11.86
920	8%	-11.19	-12.18
930	8%	-10.92	-13.27
940	8%	-11.19	-14.62
950	7%	-11.67	-15.1
960	6%	-11.94	-15.83
1710	11%	-9.51	-8.26
1720	12%	-9.17	-7.99
1730	13%	-8.79	-7.92
1740	14%	-8.70	-7.8
1750	14%	-8.60	-7.63
1760	14%	-8.48	-7.28
1770	15%	-8.30	-7.02
1780	15%	-8.21	-6.59
1790	16%	-8.10	-6.22

2090	14%	-8.70	-8.85
2090	14%	-8.45	-8.85
2100	14%	-8.60	-8.58
2110	15%	-8.36	-8.97
2120	15%	-8.18	-8.5
2130	16%	-8.07	-8.3
2140	17%	-7.67	-8.52
2150	16%	-7.85	-7.9
2160	16%	-7.93	-7.82
2170	16%	-8.01	-8.25
2180	16%	-8.10	-8.09
2190	15%	-8.12	-8.15
2200	16%	-7.90	-8.56
2210	17%	-7.80	-8.96
2220	17%	-7.72	-9.34
2230	17%	-7.64	-9.85
2240	18%	-7.54	-10.87
2250	17%	-7.75	-11.87
2260	17%	-7.83	-12.07
2270	16%	-7.85	-12.12
2280	15%	-8.12	-12.2
2290	15%	-8.21	-12.68
2300	15%	-8.39	-13.96
2310	14%	-8.42	-13.93
2320	15%	-8.18	-14.82
2330	16%	-8.01	-15.11
2340	17%	-7.83	-15.12
2350	17%	-7.75	-16.18
2360	18%	-7.57	-15.35
2370	18%	-7.50	-15.39
2380	19%	-7.19	-15.64
2390	17%	-7.80	-15.88
2400	17%	-7.77	-17.2
2410	16%	-8.04	-17.15
2420	16%	-8.01	-17.35

UNLESS OTHER SPECIFIED TOLERANCES ON:

X=± X.X=± X.XX=±
 ANGLES=± HOLEDIA=±



INPAQ TECHNOLOGY CO., LTD.

SCALE:

UNIT: mm

DRAWN BY: Eason

CHECKED BY: dongdongzhang

DESIGNED BY:Eason

APPROVED BY: dongdongzhan

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE: WAG-F-LTE12-00-185 Specification

DOCUMENT
NO.

ENS000196300

PAGE REV.
A0

1800	16%	-7.90	-5.77
1810	17%	-7.62	-5.18
1820	18%	-7.35	-4.79
1830	19%	-7.26	-4.19
1840	18%	-7.40	-3.77
1850	18%	-7.57	-4.01
1860	17%	-7.59	-3.12
1870	17%	-7.67	-3.07
1880	17%	-7.83	-3.58
1890	16%	-7.90	-3.16
1900	17%	-7.62	-3.75
1910	18%	-7.54	-4.02
1920	18%	-7.42	-4.53
1930	18%	-7.52	-4.6
1940	17%	-7.75	-4.96
1950	17%	-7.67	-5.21
1960	16%	-7.85	-5.88
1970	16%	-7.90	-6.15
1980	15%	-8.15	-7.04
1990	15%	-8.30	-7.15
2000	15%	-8.36	-7.13
2010	14%	-8.48	-7.93
2020	14%	-8.70	-8.05
2030	13%	-8.76	-8.39
2040	13%	-8.93	-8.9
2050	12%	-9.07	-8.84
2060	13%	-8.79	-9.06
2070	14%	-8.63	-9.41

2430	18%	-7.40	-17.17
2440	19%	-7.24	-17.05
2450	19%	-7.12	-16.85
2460	20%	-7.06	-16.78
2470	18%	-7.38	-16.95
2480	18%	-7.40	-17.45
2490	17%	-7.59	-17.76
2500	17%	-7.67	-18.17
2510	17%	-7.75	-16.97
2520	17%	-7.83	-16.58
2530	15%	-8.12	-15.9
2540	15%	-8.36	-15.2
2550	16%	-7.90	-14.71
2560	17%	-7.75	-14.65
2570	18%	-7.57	-15.24
2580	17%	-7.59	-14.63
2590	17%	-7.62	-14.83
2600	17%	-7.83	-15.04
2610	16%	-7.93	-15.02
2620	18%	-7.54	-16.11
2630	17%	-7.59	-15.15
2640	17%	-7.75	-15.13
2650	18%	-7.42	-15.06
2660	17%	-7.75	-15.09
2670	19%	-7.19	-15.03
2680	19%	-7.17	-14.98
2690	19%	-7.26	-15.51
2080	18%	-7.42	-8.96

UNLESS OTHER SPECIFIED TOLERANCES ON:

X=± X.X=± X.XX=±
 ANGLES=± HOLEDIA=±



INPAQ TECHNOLOGY CO., LTD.

SCALE: UNIT: mm

DRAWN BY: Eason CHECKED BY: dongdongzhang

DESIGNED BY:Eason APPROVED BY: dongdongzhang

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


TITLE: WAG-F-LTE12-00-185 Specification

DOCUMENT
NO.

ENS000196300

PAGE REV.
A0

5. Antenna 3D Radiation Pattern:

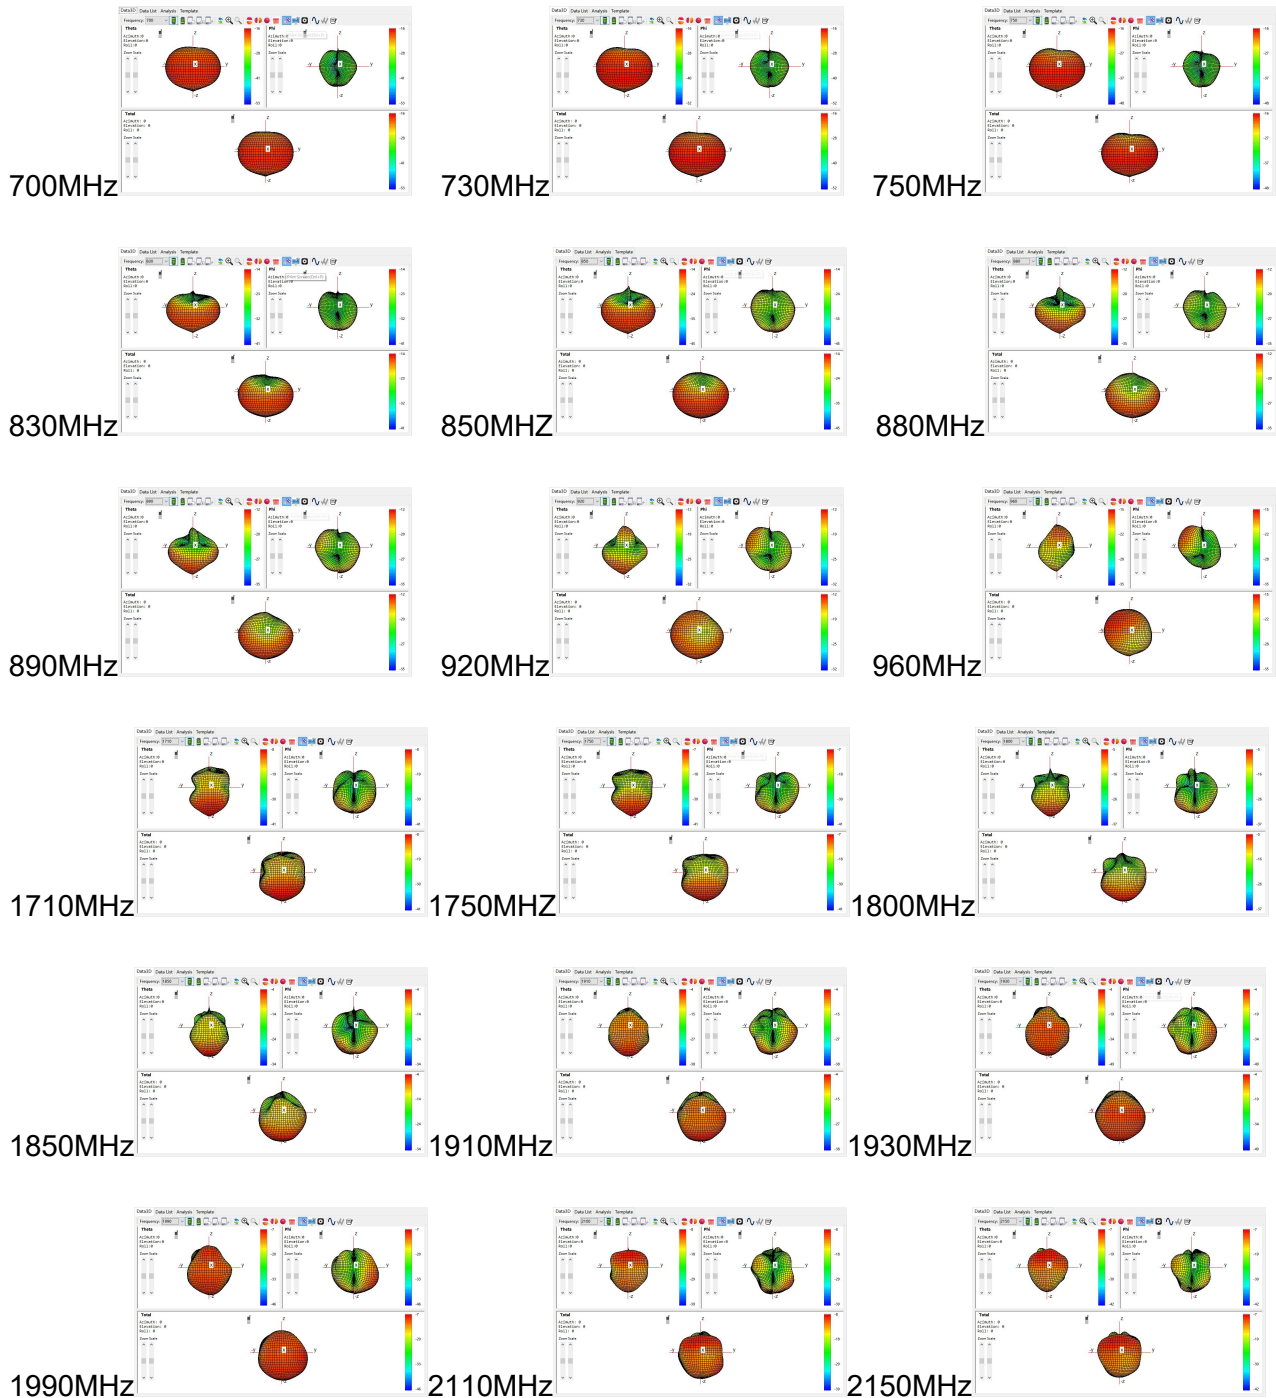

UNLESS OTHER SPECIFIED TOLERANCES ON:

$X = \pm$ $X.X = \pm$ $X.XX = \pm$

ANGLES = $\pm$ HOLEDIA = $\pm$

SCALE:

UNIT: mm

DRAWN BY: Eason

CHECKED BY: dongdongzhang

DESIGNED BY: Eason

APPROVED BY: dongdongzhan



INPAQ TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


TITLE: WAG-F-LTE12-00-185 Specification

DOCUMENT
NO.

ENS000196300

PAGE REV.

A0

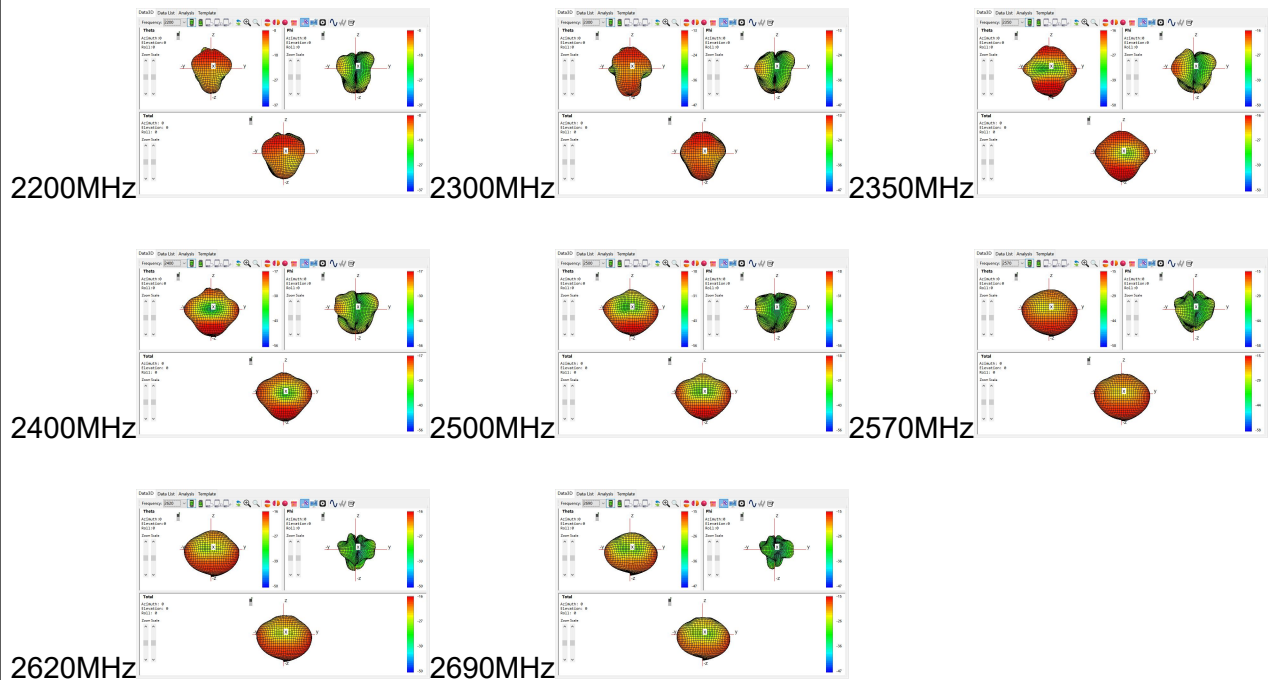

UNLESS OTHER SPECIFIED TOLERANCES ON:

X=± X.X=± X.XX=±

ANGLES=± HOLEDIA=±

SCALE: UNIT: mm

DRAWN BY: Eason CHECKED BY: dongdongzhang

DESIGNED BY:Eason APPROVED BY: dongdongzhang



INPAQ TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE: WAG-F-LTE12-00-185 Specification


DOCUMENT
T
NO.

ENS000196300

PAGE REV.

A0

6. Mechanical Specification:

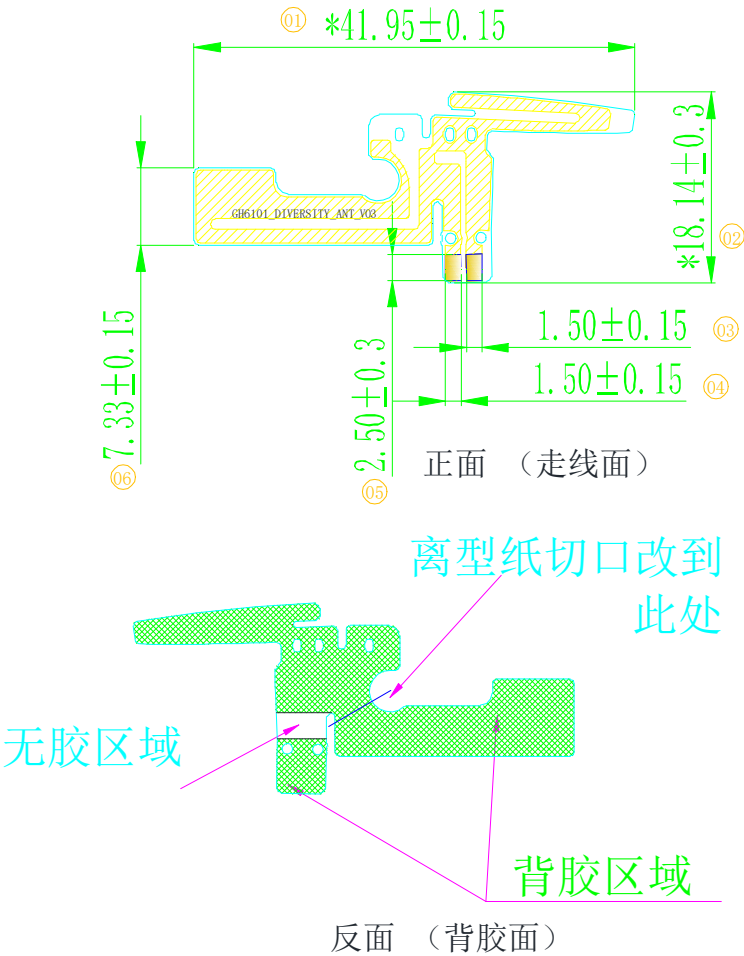

UNLESS OTHER SPECIFIED TOLERANCES ON: X=± X.X=± X.XX=± ANGLES=± HOLEDIA=±		 INPAQ TECHNOLOGY CO., LTD.	
SCALE:	UNIT: mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY: Eason	CHECKED BY: dongdongzhang		
DESIGNED BY:Eason	APPROVED BY: dongdongzhan		
TITLE: WAG-F-LTE12-00-185 Specification		DOCUMENT NO.	PAGE REV.
		ENS000196300	A0