Spurious Emissions at Antenna Terminal		
Channel	**20MHz Bandwidth QPSK**	
Lowest	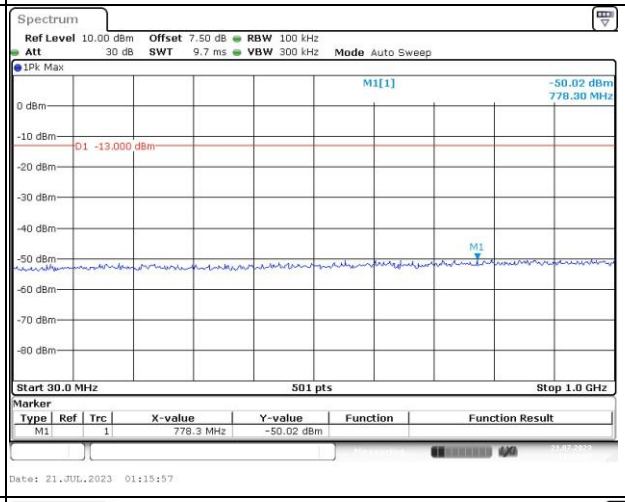	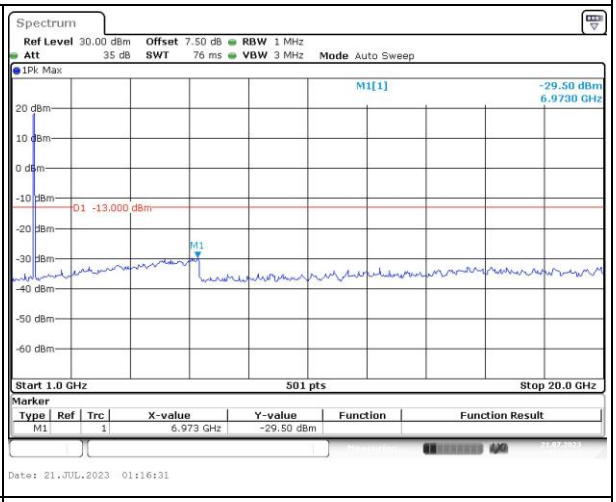
Middle	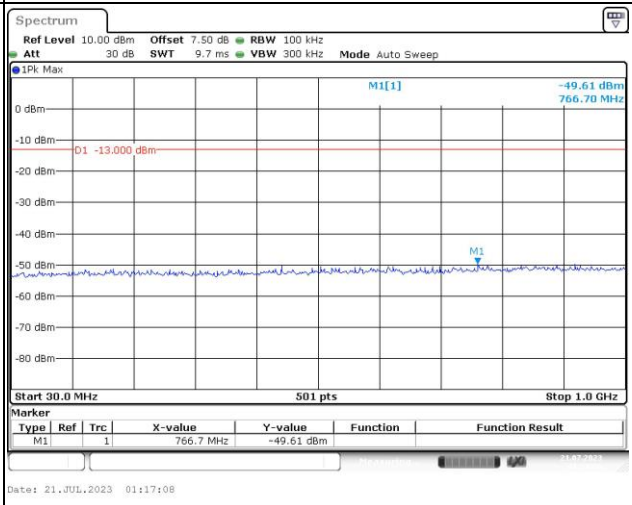	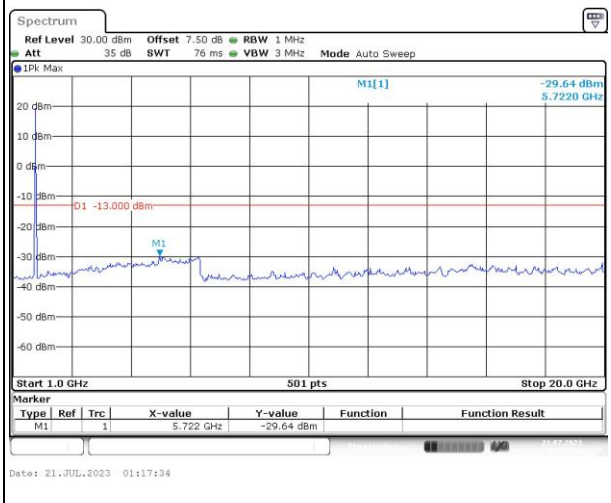
Highest	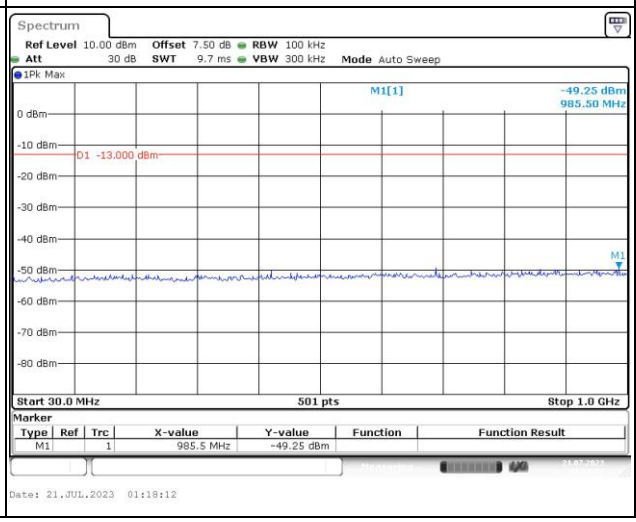	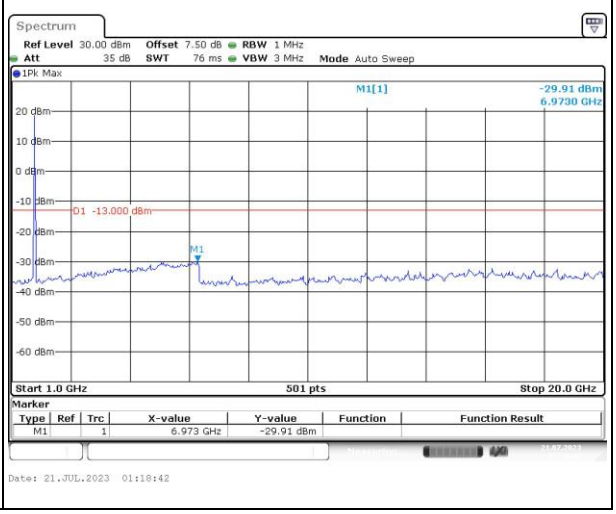

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
QPSK 1.4MHz		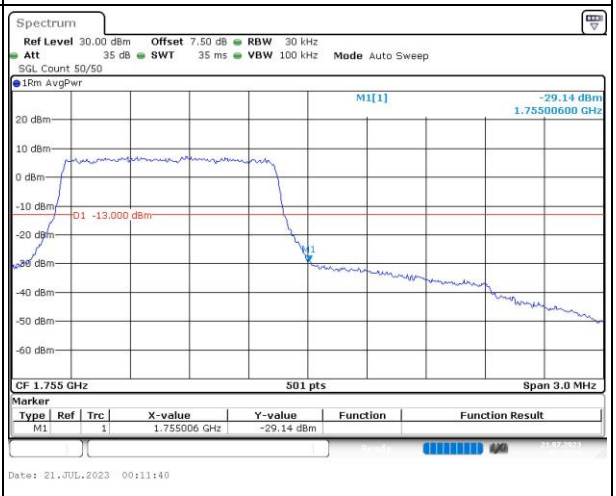
QPSK 3MHz	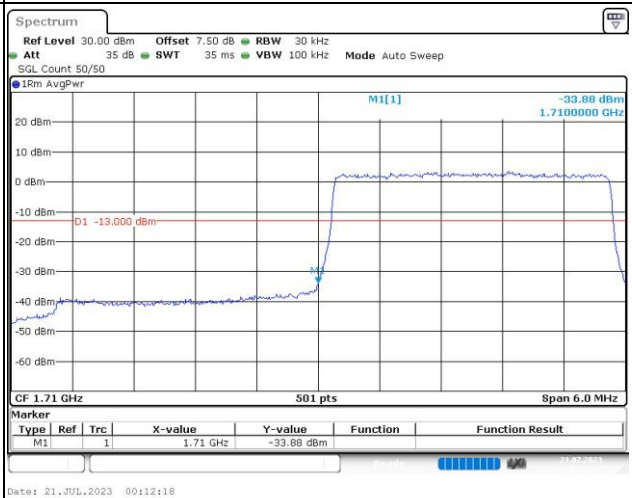	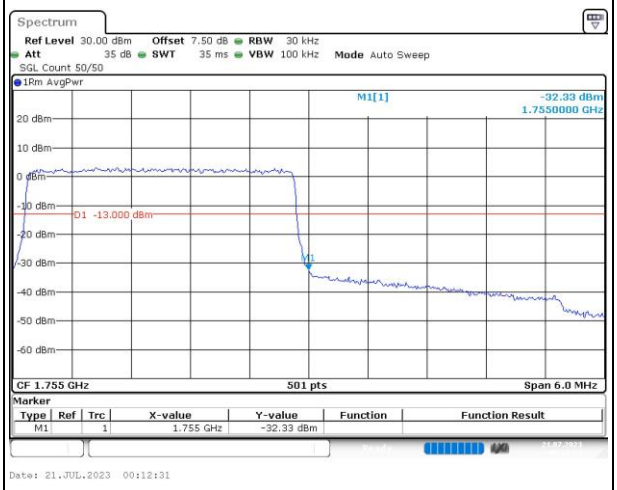
QPSK 5MHz	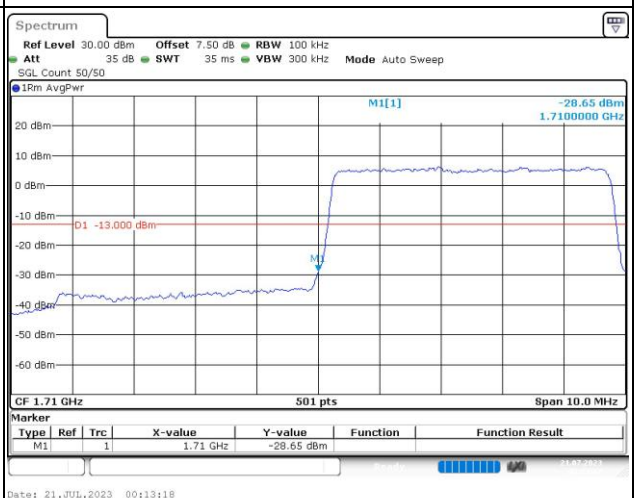	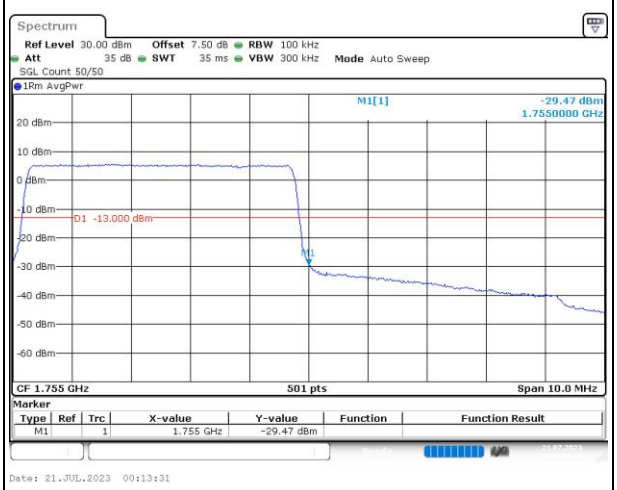

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
QPSK 10MHz	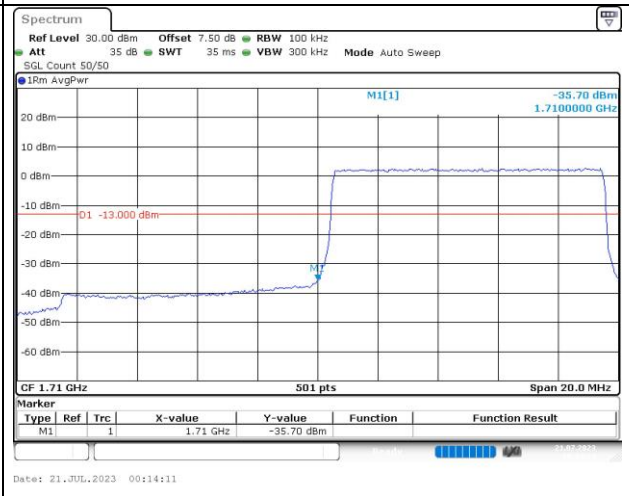	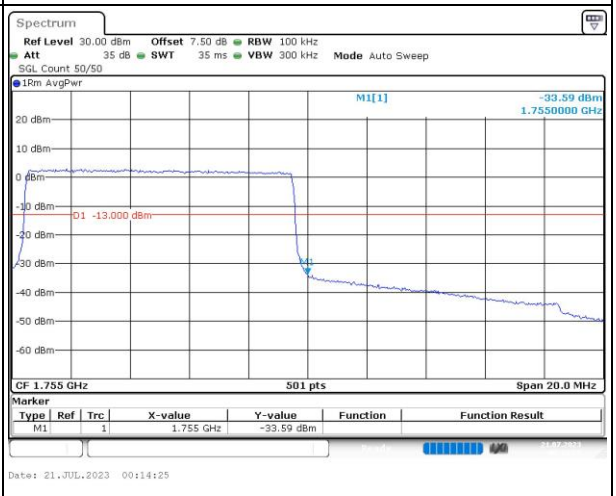
QPSK 15MHz	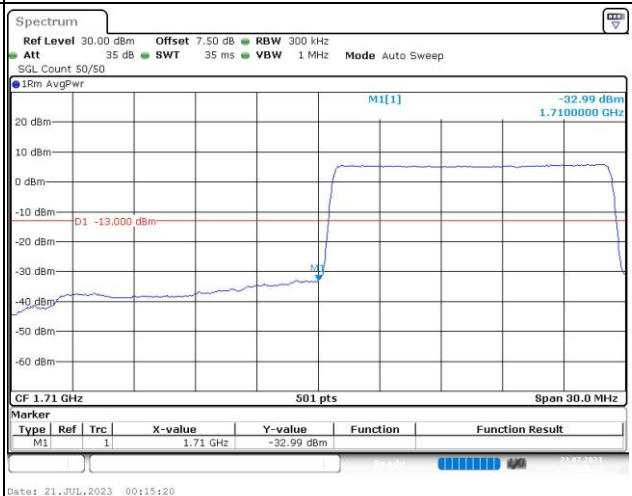	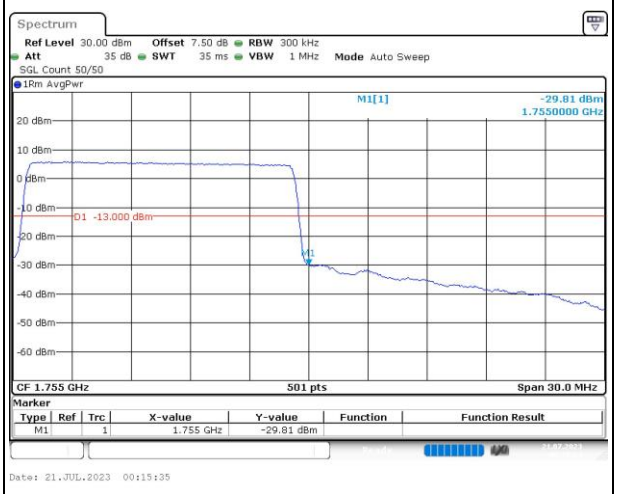
QPSK 20MHz	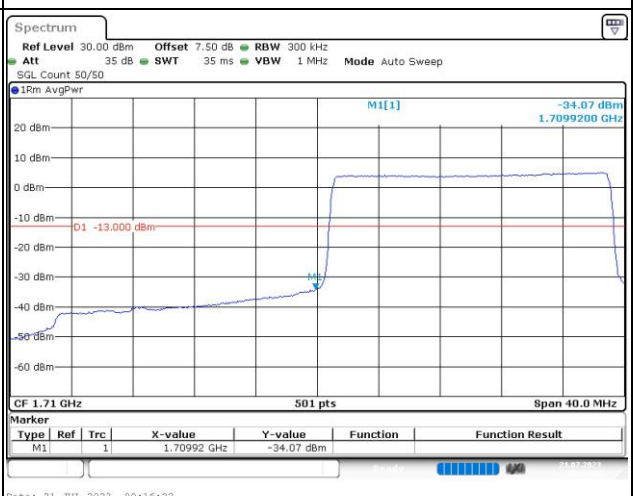	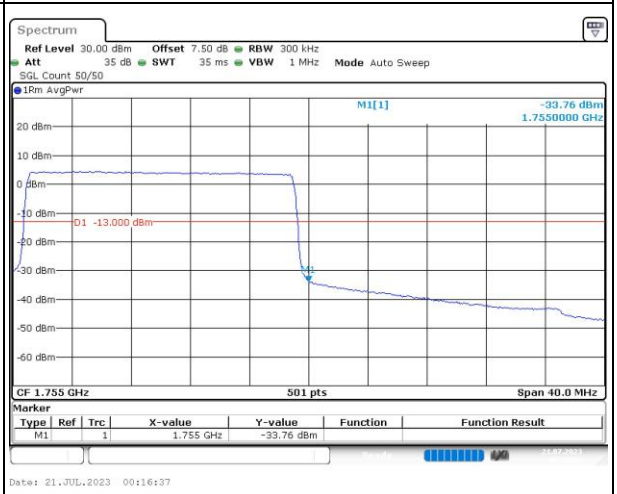

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
16QAM 1.4MHz	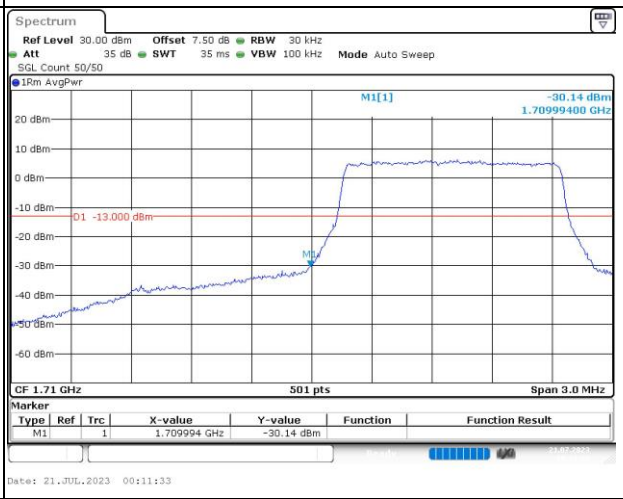	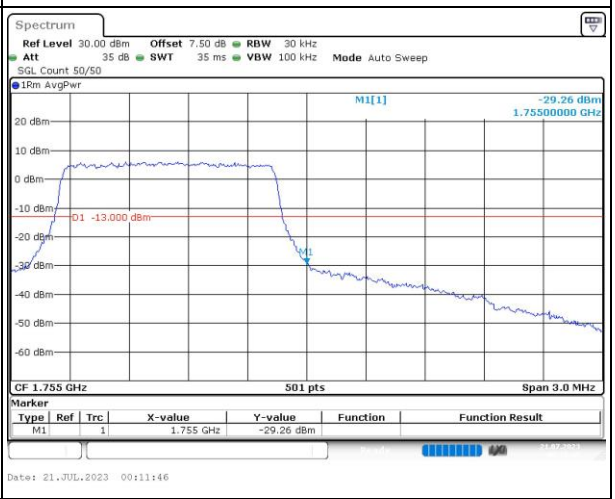
16QAM 3MHz	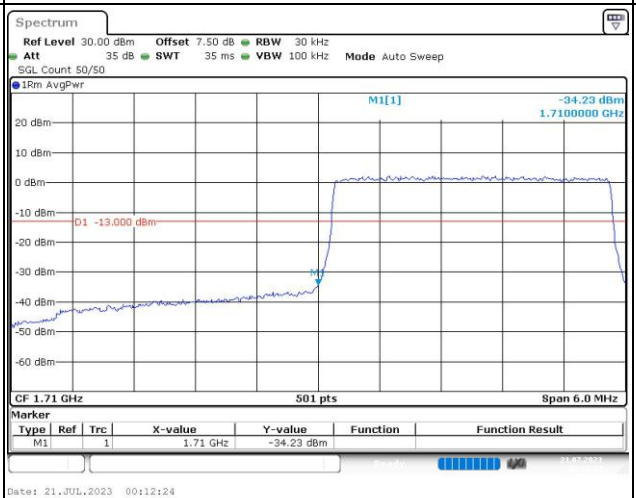	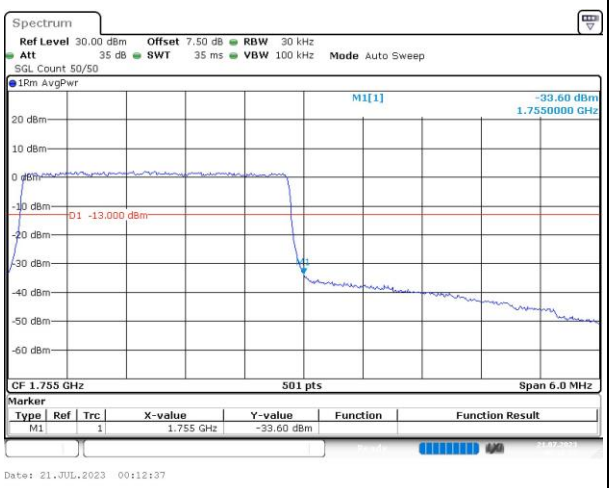
16QAM 5MHz		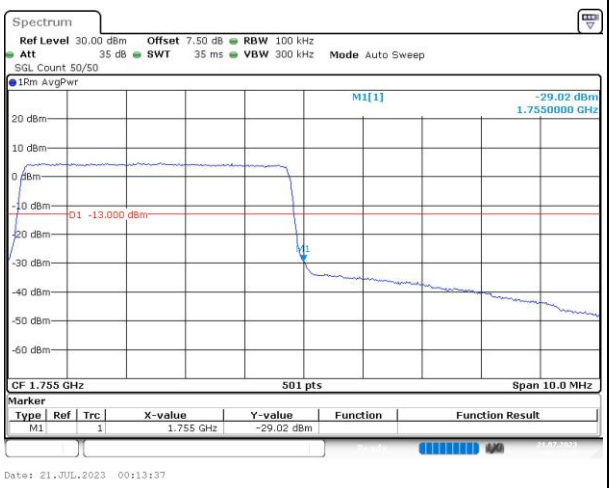

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
16QAM 10MHz	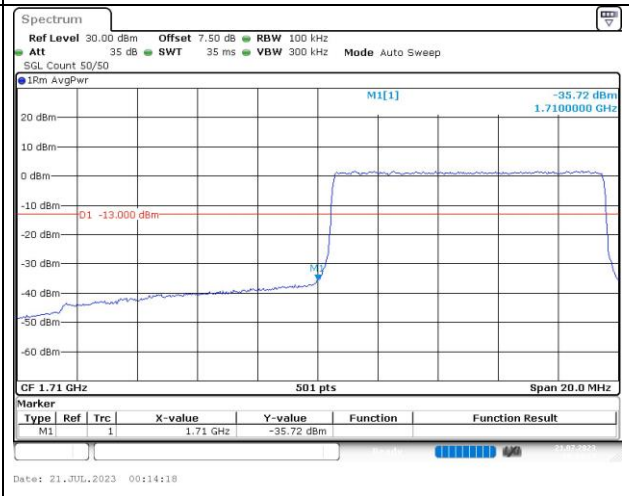	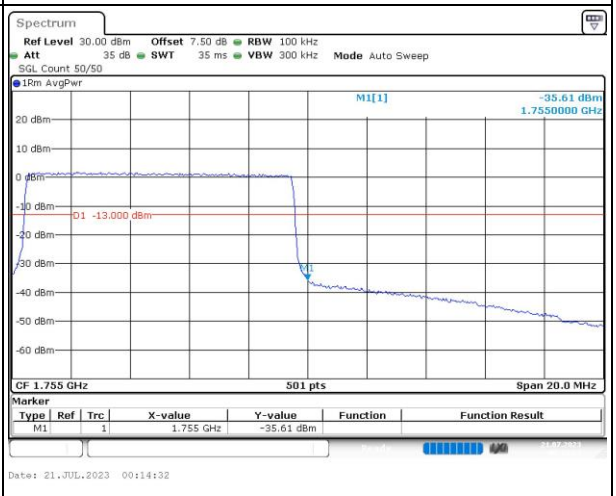
16QAM 15MHz		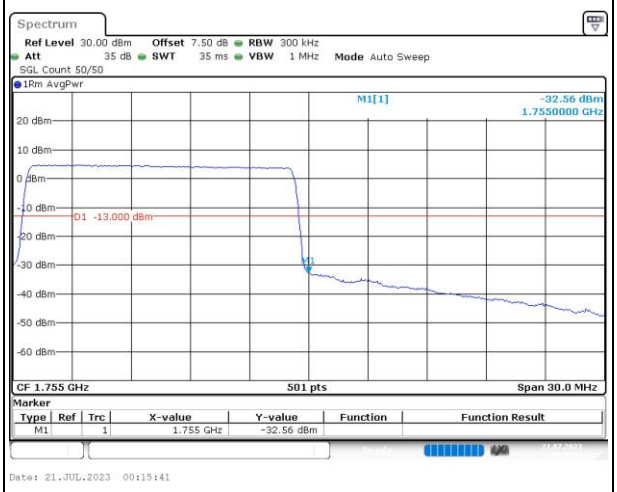
16QAM 20MHz	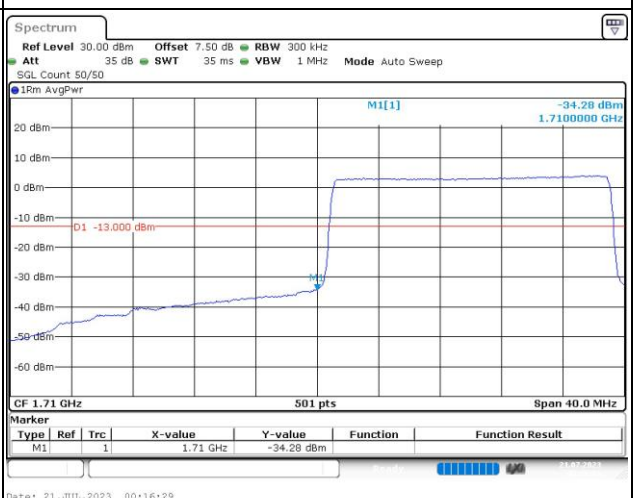	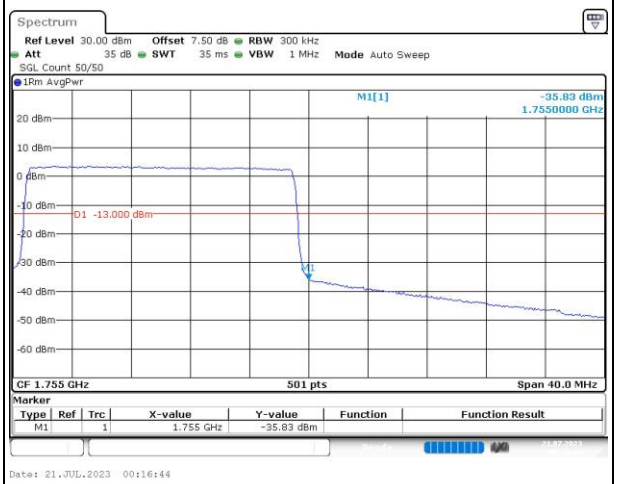

4.8 Antenna Port Test Data and Results for LTE Band 5

Serial Number:	287E_1	Test Date:	2023/7/17~2023/7/28
Test Site:	RF	Test Mode:	Transmitting
Tester:	One Luo	Test Result:	**Pass**

Environmental Conditions:					
Temperature: (℃)	25.8~27.2	Relative Humidity: (%)	46~55	ATM Pressure: (kPa)	99.1~100.3

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2023/7/15	2024/7/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	Each time	N/A
Weinschel	Power Splitter	1515	RA914	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	149218	2023/7/15	2024/7/14
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency For Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	824.7	836.5	848.3
3MHz	825.5	836.5	847.5
5MHz	826.5	836.5	846.5
10MHz	829	836.5	844

Test Data:

FCC §2.1046; § 22.913 (a)

RF Output Power:

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	24.34	24.29	24.26	18.92	38.45
	RB1#3	24.47	24.46	24.45		
	RB1#5	24.35	24.27	24.23		
	RB3#0	24.35	24.37	24.35		
	RB3#3	24.34	24.36	24.28		
	RB6#0	23.43	23.4	23.4		
1.4MHz 16QAM	RB1#0	23.43	23.32	23.29	18.07	38.45
	RB1#3	23.62	23.42	23.4		
	RB1#5	23.46	23.32	23.27		
	RB3#0	23.36	23.44	23.49		
	RB3#3	23.35	23.43	23.43		
	RB6#0	22.36	22.31	22.4		
3MHz QPSK	RB1#0	24.41	24.36	24.38	18.86	38.45
	RB1#8	24.38	24.34	24.39		
	RB1#14	24.36	24.35	24.36		
	RB6#0	23.38	23.42	23.34		
	RB6#9	23.42	23.37	23.36		
	RB15#0	23.36	23.4	23.4		
3MHz 16QAM	RB1#0	23.88	23.48	23.37	18.33	38.45
	RB1#8	23.85	23.5	23.39		
	RB1#14	23.82	23.5	23.35		
	RB6#0	22.39	22.35	22.31		
	RB6#9	22.44	22.38	22.28		
	RB15#0	22.4	22.31	22.41		
5MHz QPSK	RB1#0	24.34	24.26	24.22	18.86	38.45
	RB1#13	24.41	24.36	24.38		
	RB1#24	24.33	24.24	24.22		
	RB15#0	23.33	23.38	23.42		
	RB15#10	23.41	23.36	23.39		
	RB25#0	23.37	23.33	23.33		
5MHz 16QAM	RB1#0	23.59	23.34	23.13	18.12	38.45
	RB1#13	23.67	23.46	23.29		
	RB1#24	23.54	23.35	23.13		
	RB15#0	22.27	22.38	22.45		
	RB15#10	22.36	22.4	22.38		
	RB25#0	22.33	22.38	22.36		
10MHz QPSK	RB1#0	24.28	24.29	24.27	19.03	38.45
	RB1#25	24.58	24.5	24.5		

	RB1#49	24.32	24.32	24.29		
	RB25#0	23.35	23.37	23.38		
	RB25#25	23.43	23.42	23.29		
	RB50#0	23.37	23.36	23.34		
10MHz 16QAM	RB1#0	23.87	23.45	23.29	18.43	38.45
	RB1#25	23.98	23.67	23.49		
	RB1#49	23.84	23.45	23.33		
	RB25#0	22.38	22.36	22.44		
	RB25#25	22.46	22.44	22.4		
	RB50#0	22.37	22.35	22.38		
Note: ERP= Conducted Power(dBm) - L_C(dB) + G_T(dBd) G_T(dBd)=G_T(dBi)-2.15						
					Result:	**Pass**

Peak-to-average Ratio(PAR)

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
10MHz QPSK	RB1#0	4.38	4	4.23	13
	RB50#0	4.7	4.78	4.93	13
10MHz 16QAM	RB1#0	5.19	4.93	4.96	13
	RB50#0	5.57	5.77	5.86	13
				Result:	**Pass**

FCC §2.1049, §22.905:Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.096	1.102	1.096	1.32	1.284	1.308
1.4MHz 16QAM	1.096	1.09	1.096	1.284	1.29	1.326
3MHz QPSK	2.683	2.683	2.683	2.88	2.88	2.868
3MHz 16QAM	2.683	2.683	2.683	2.88	2.88	2.88
5MHz QPSK	4.511	4.511	4.511	4.96	4.98	4.92
5MHz 16QAM	4.491	4.511	4.511	4.94	4.96	4.94
10MHz QPSK	8.942	8.942	8.942	9.76	9.6	9.6
10MHz 16QAM	8.942	8.942	8.982	9.52	9.64	9.6
Note: The test plots please refer to the Plots of Occupied Bandwidth						

FCC §2.1051, §22.917(a):Spurious Emissions at Antenna Terminal	
Result:	**Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.**

FCC §2.1051, §22.917(a):Out of band emission, Band Edge	
Result:	**Pass, Please refer to the test plots of Out of band emission, Band Edge.**

FCC §2.1055, §22.355: Frequency Stability

Test Modulation:	10 MHz QPSK		Test Channel:	836.5	MHz
Test Item	Temperature (℃)	Voltage (V_{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.78	-5.78	-0.007	2.5
	-20	3.78	-6.97	-0.008	2.5
	-10	3.78	-5.5	-0.007	2.5
	0	3.78	6.06	0.007	2.5
	10	3.78	9.8	0.012	2.5
	20	3.78	5.03	0.006	2.5
	30	3.78	-6.62	-0.008	2.5
	40	3.78	-8.73	-0.010	2.5
	50	3.78	-7.05	-0.008	2.5
Frequency Stability vs. Voltage	20	3.6	8.99	0.011	2.5
	20	4.4	-7.17	-0.009	2.5
				Result:	**Pass**

Test Modulation:	10 MHz 16QAM		Test Channel:	836.5	MHz
Test Item	Temperature (℃)	Voltage (V_{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.78	-4.49	-0.005	2.5
	-20	3.78	8.1	0.010	2.5
	-10	3.78	-8.59	-0.010	2.5
	0	3.78	9.33	0.011	2.5
	10	3.78	-6.94	-0.008	2.5
	20	3.78	7.54	0.009	2.5
	30	3.78	6.43	0.008	2.5
	40	3.78	-6.17	-0.007	2.5
	50	3.78	-6.44	-0.008	2.5
Frequency Stability vs. Voltage	20	3.6	6.34	0.008	2.5
	20	4.4	-6.89	-0.008	2.5
				Result:	**Pass**

Test Plots(Note: The 7.5dB is the Insertion loss of the RF cable, Power Splitter and DC Block, which was offset into the Spectrum Analyzer)**:**

Occupied Bandwidth		
Channel	1.4MHz Bandwidth QPSK	1.4MHz Bandwidth 16QAM
Lowest	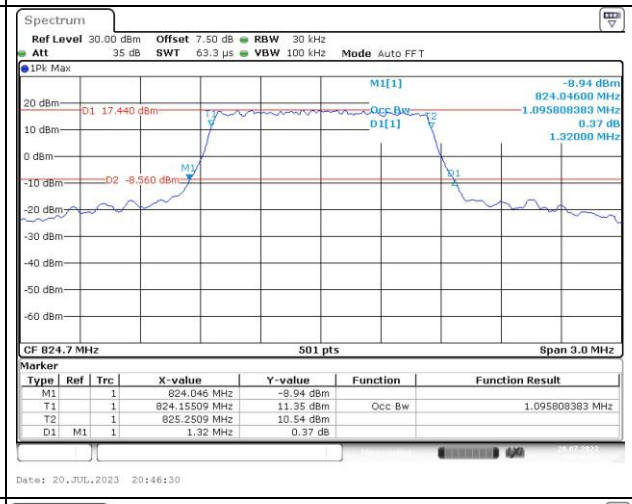	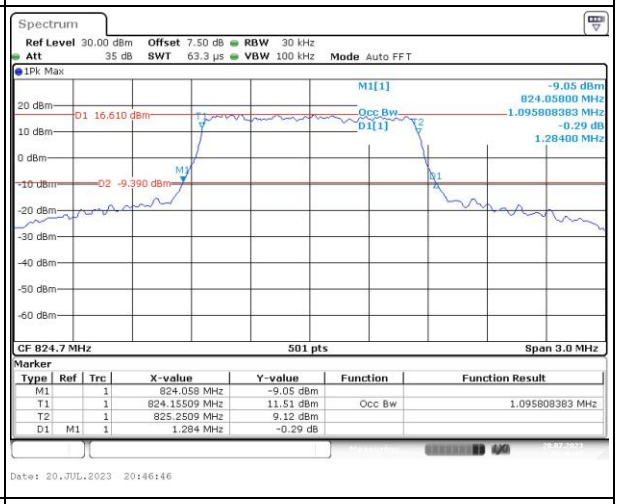
Middle	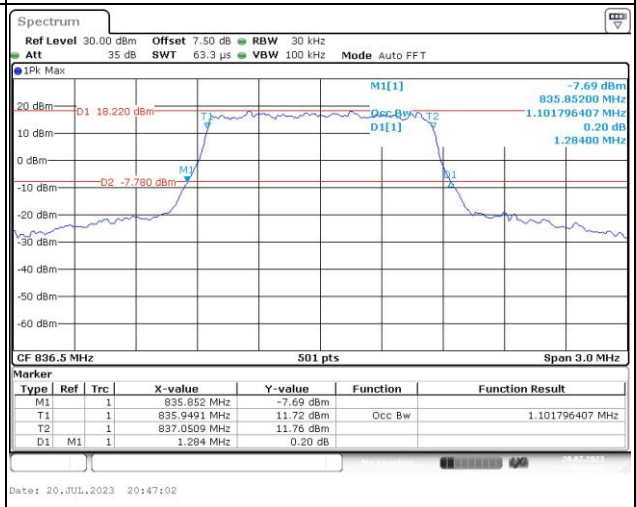	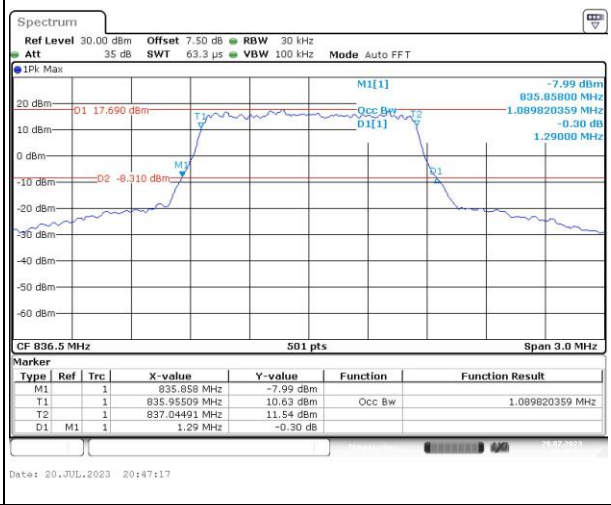
Highest	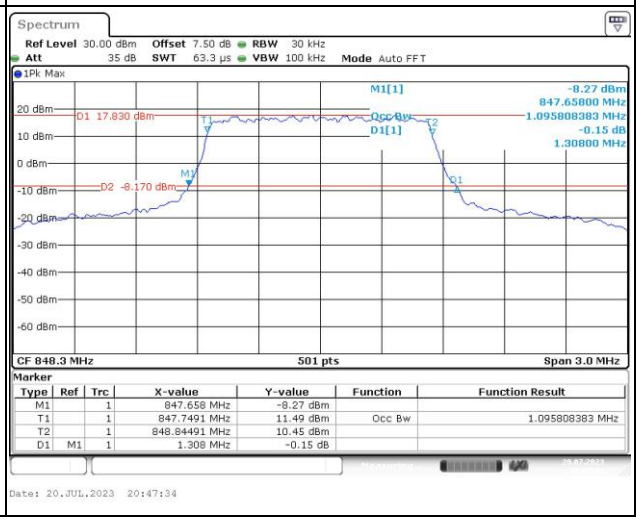	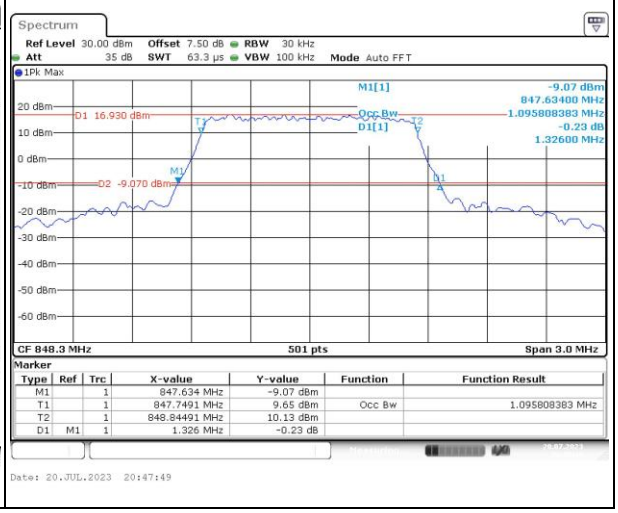

Occupied Bandwidth		
Channel	3MHz Bandwidth QPSK	3MHz Bandwidth 16QAM
Lowest	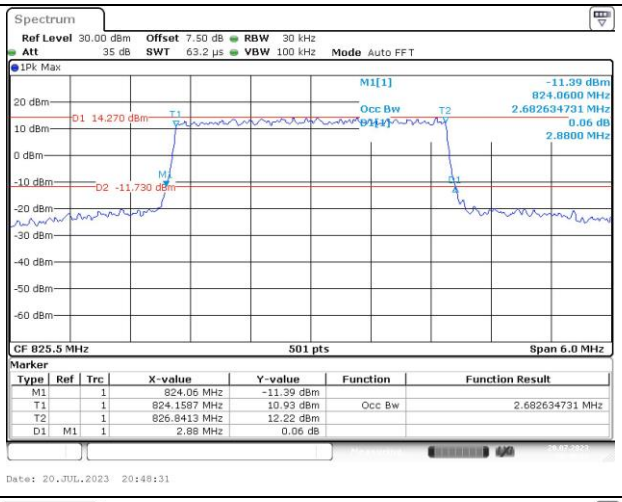	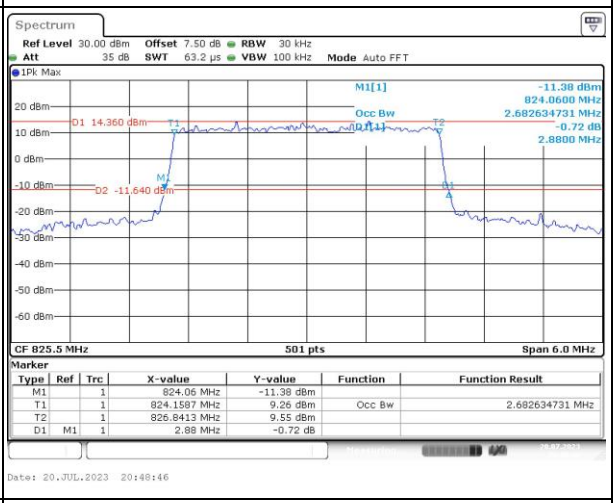
Middle	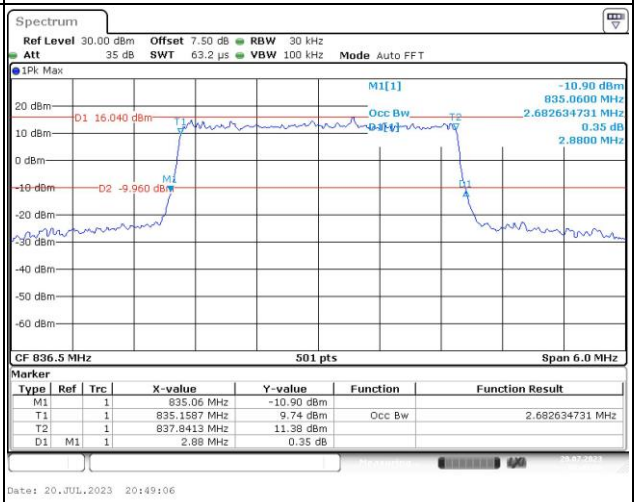	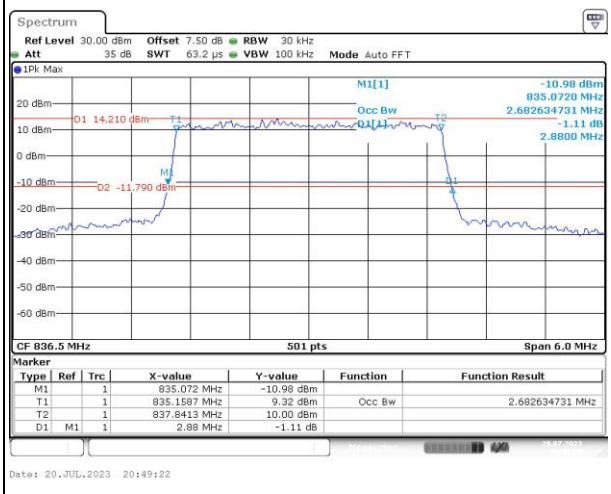
Highest	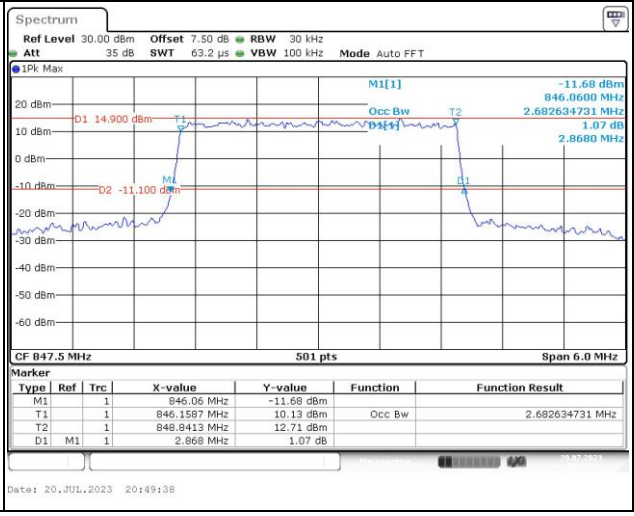	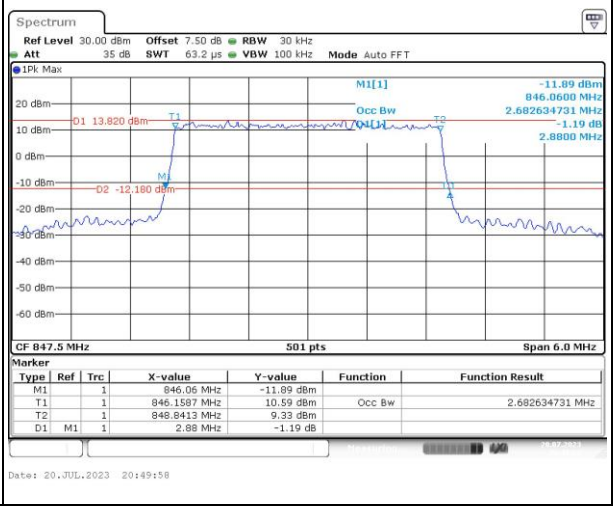

Occupied Bandwidth		
Channel	5MHz Bandwidth QPSK	5MHz Bandwidth 16QAM
Lowest	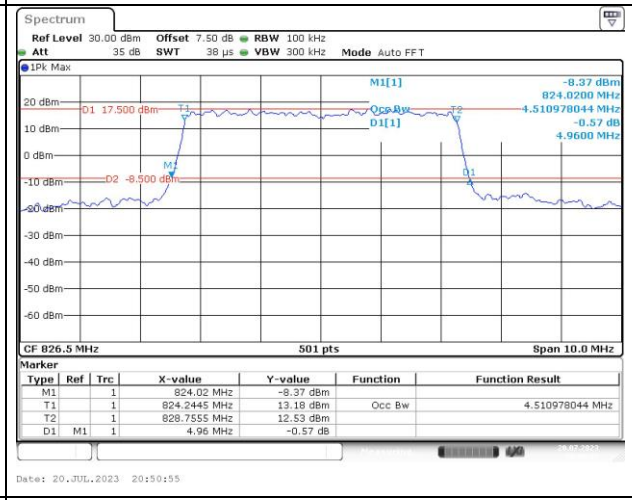	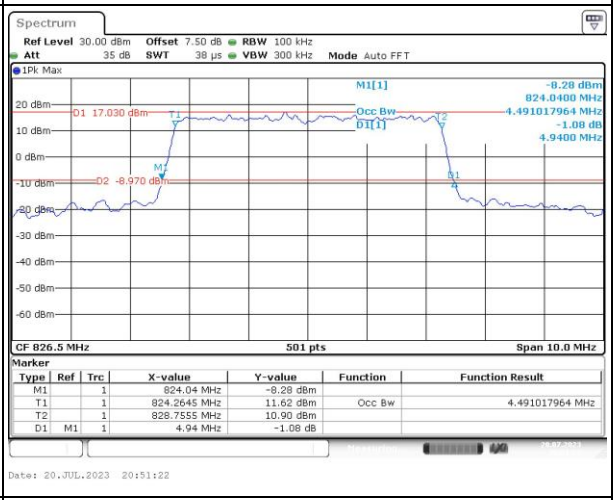
Middle	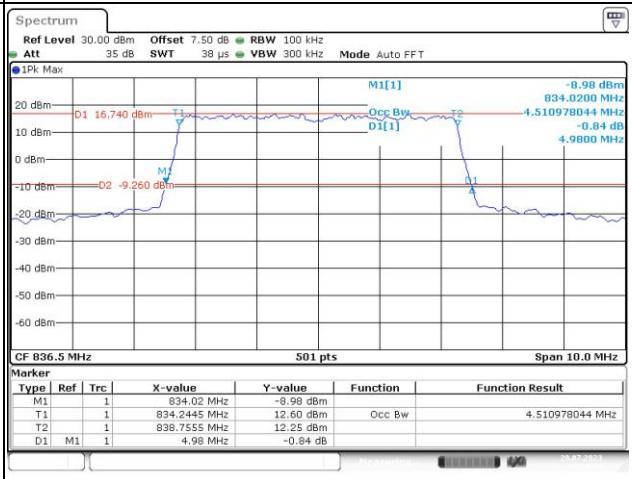	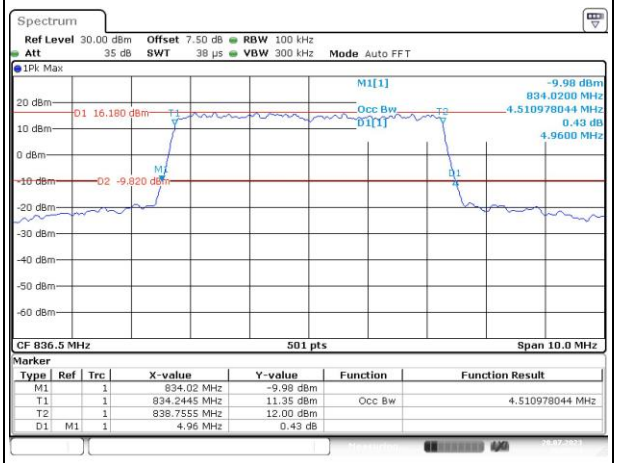
Highest	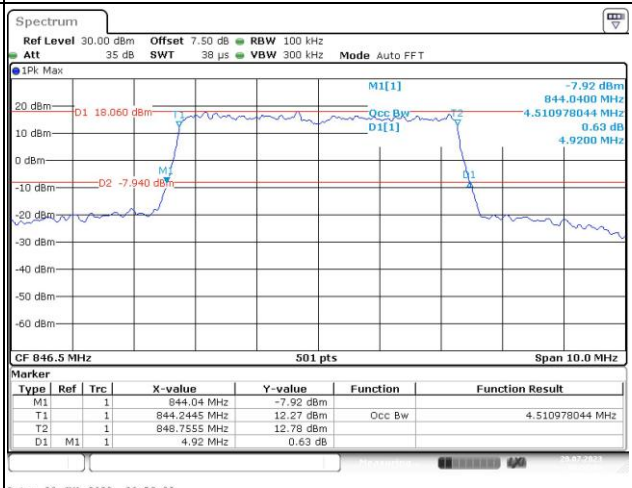	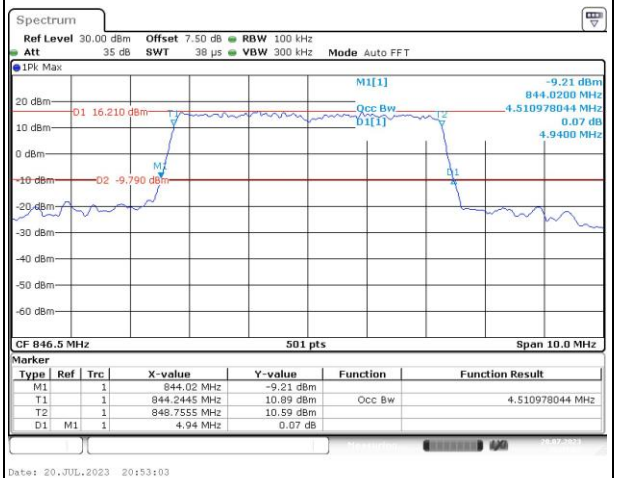

Occupied Bandwidth

Channel	10MHz Bandwidth QPSK	10MHz Bandwidth 16QAM
Lowest	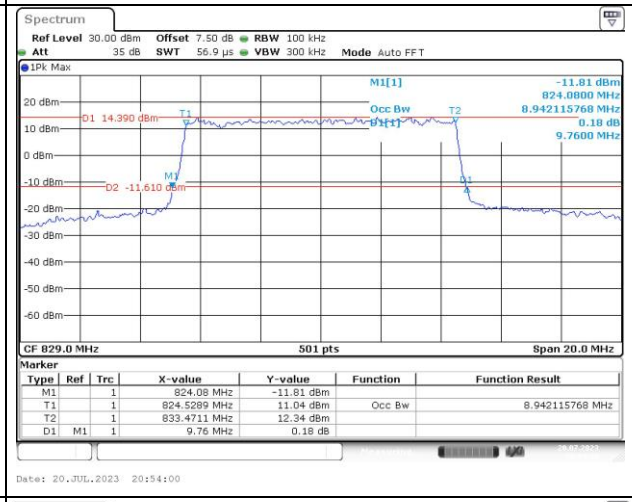	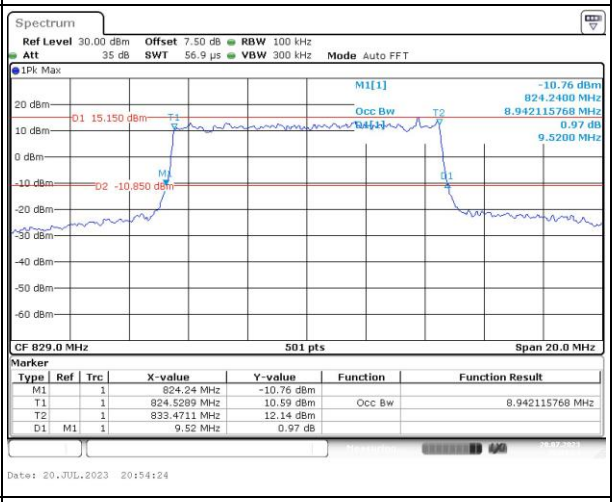
Middle	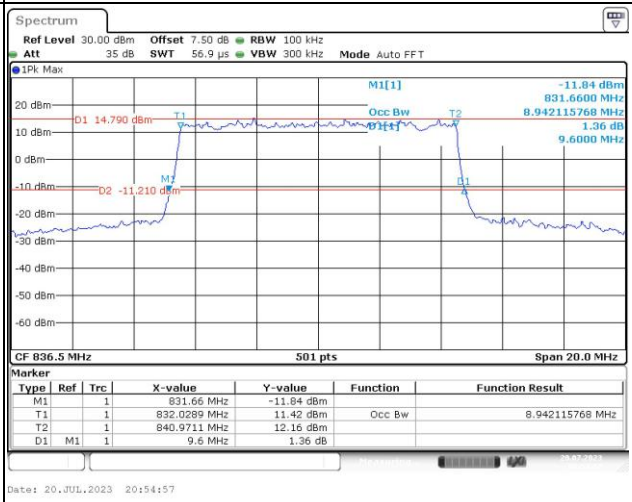	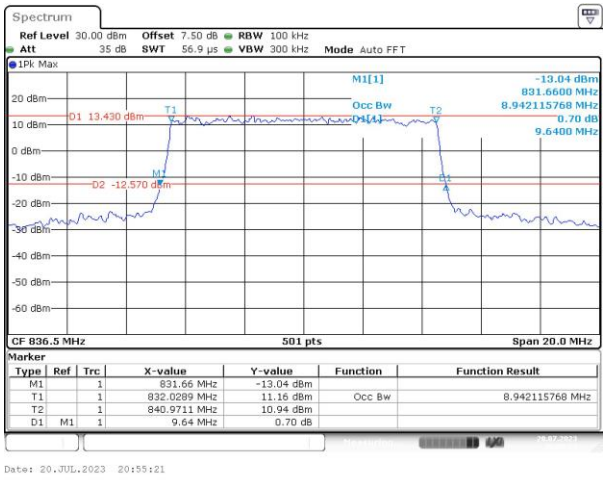
Highest	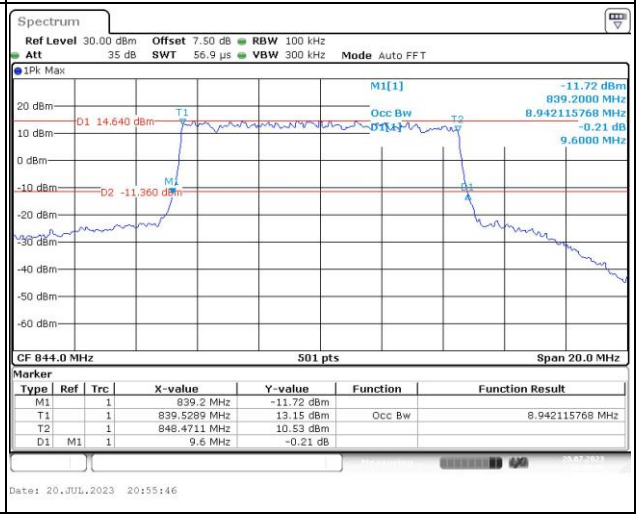	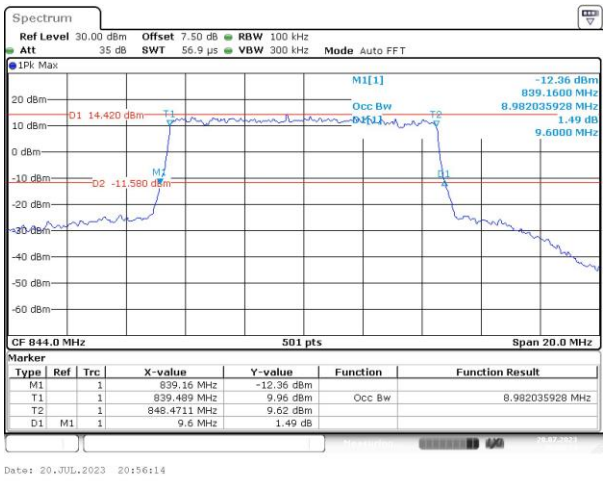

Spurious Emissions at Antenna Terminal		
Channel	**1.4MHz Bandwidth QPSK**	
Lowest	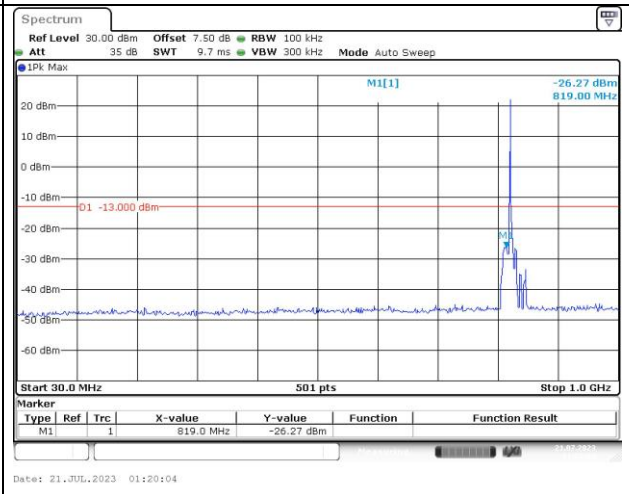	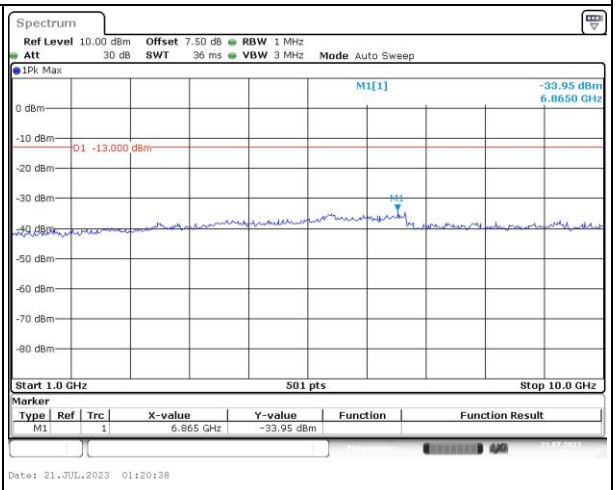
Middle	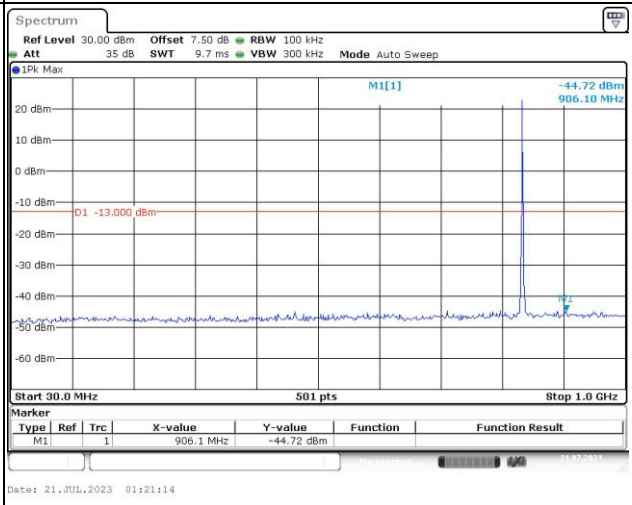	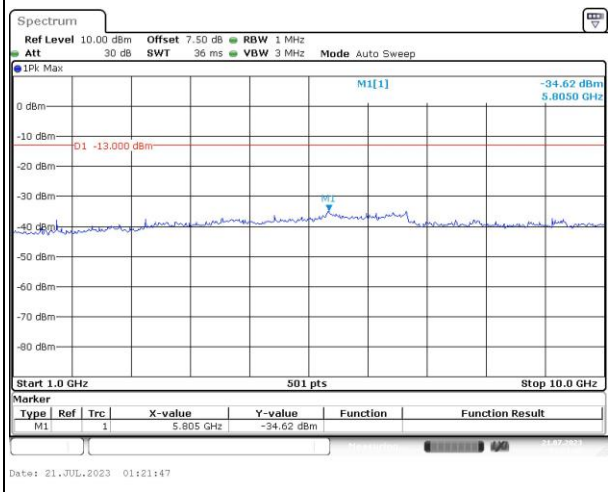
Highest	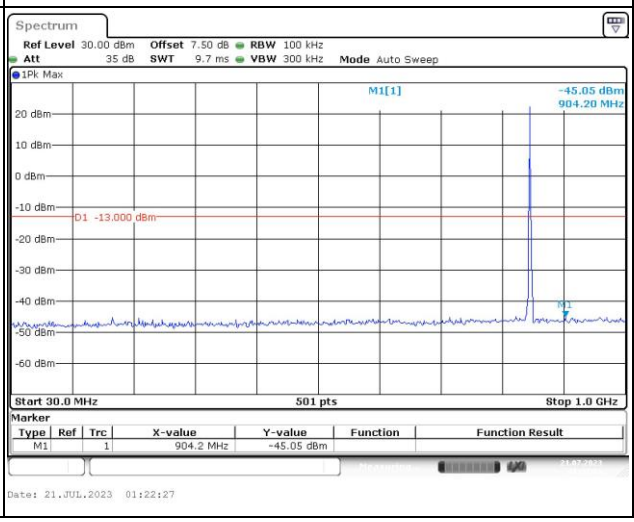	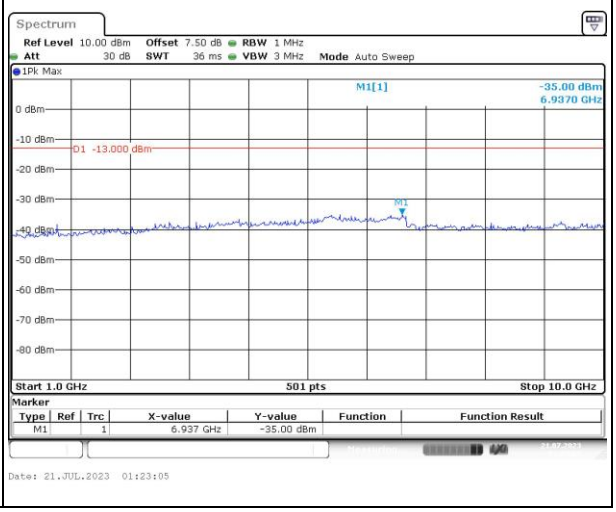

Spurious Emissions at Antenna Terminal		
Channel	**3MHz Bandwidth QPSK**	
Lowest	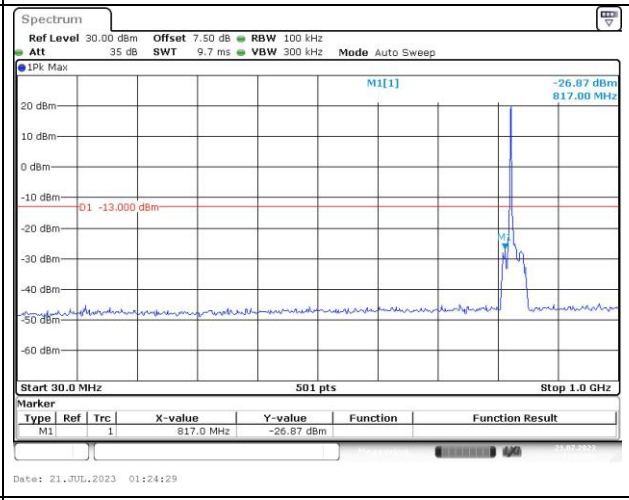	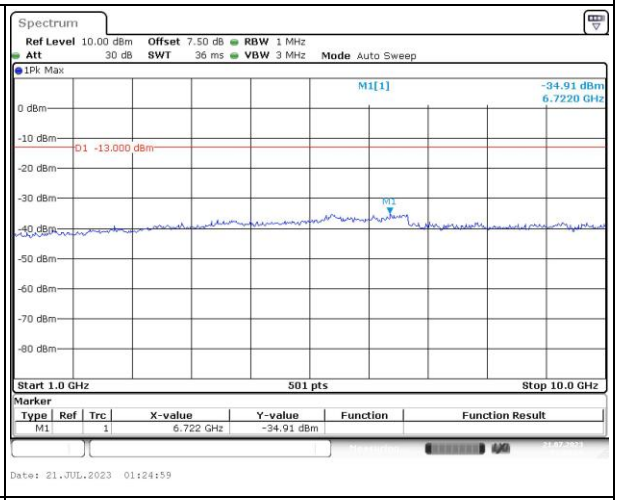
Middle	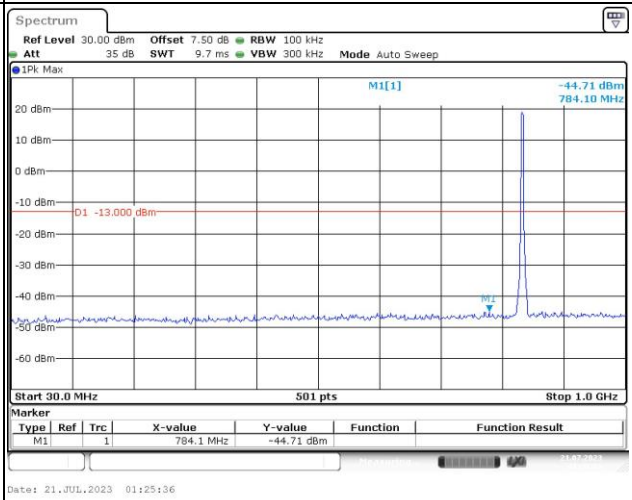	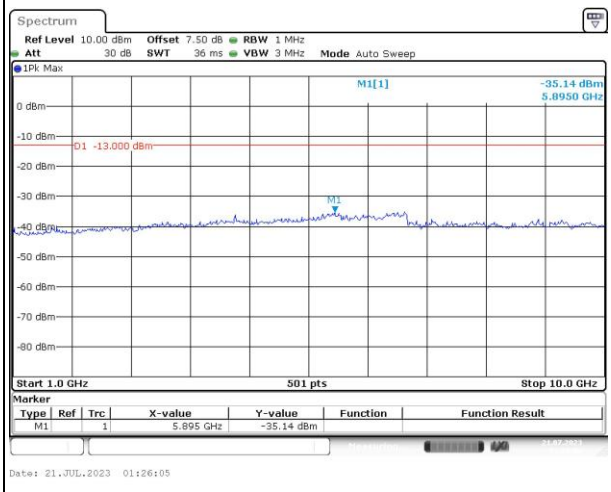
Highest	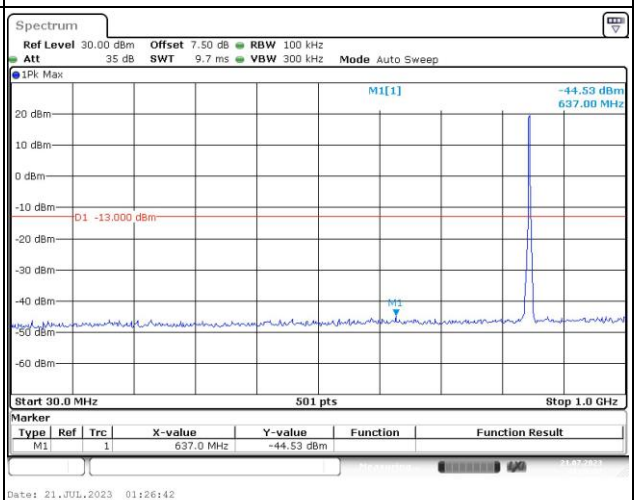	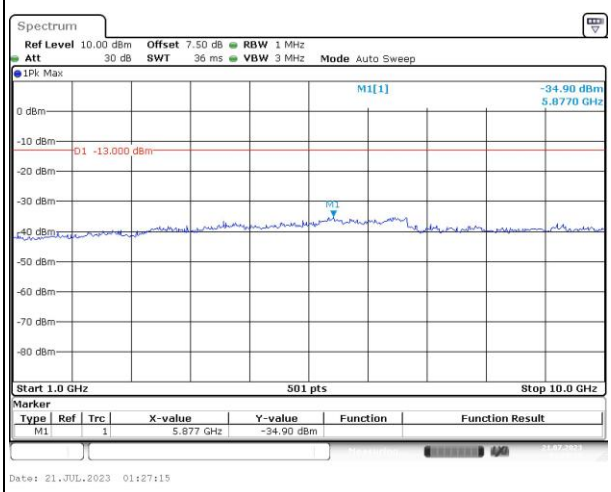

Spurious Emissions at Antenna Terminal		
Channel	**5MHz Bandwidth QPSK**	
Lowest	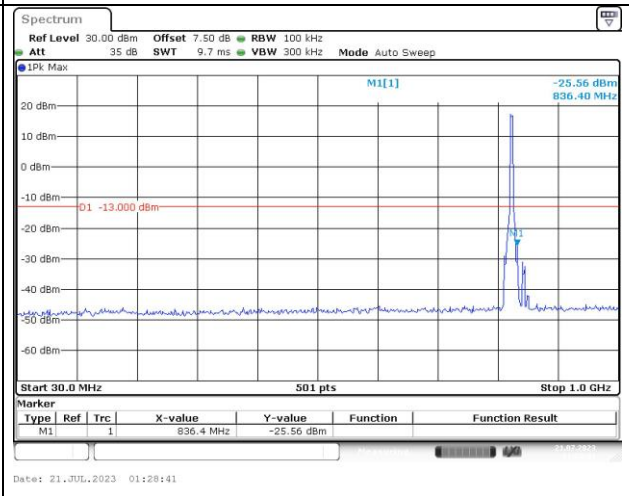	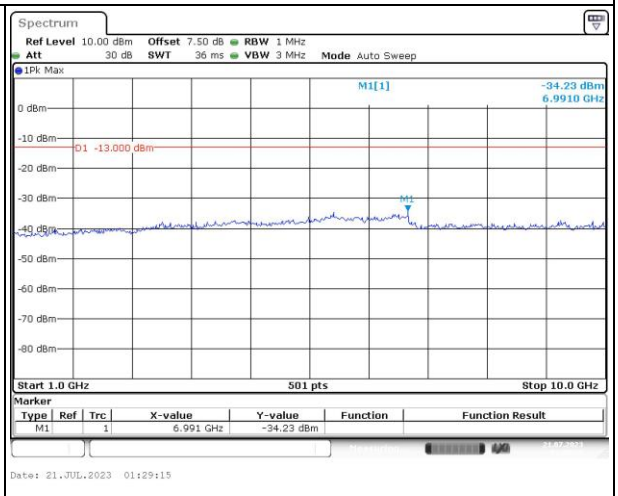
Middle	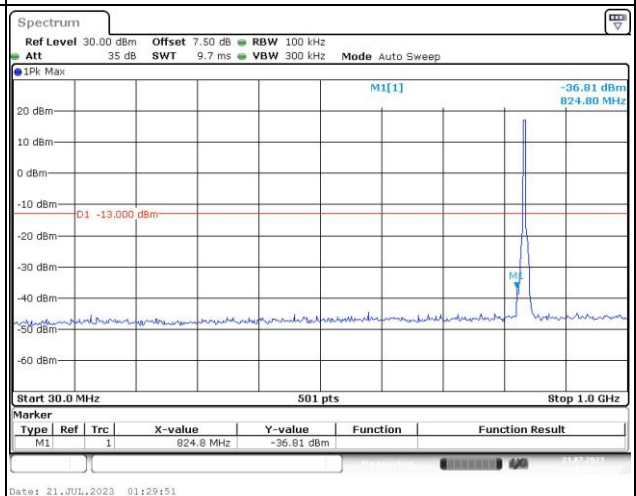	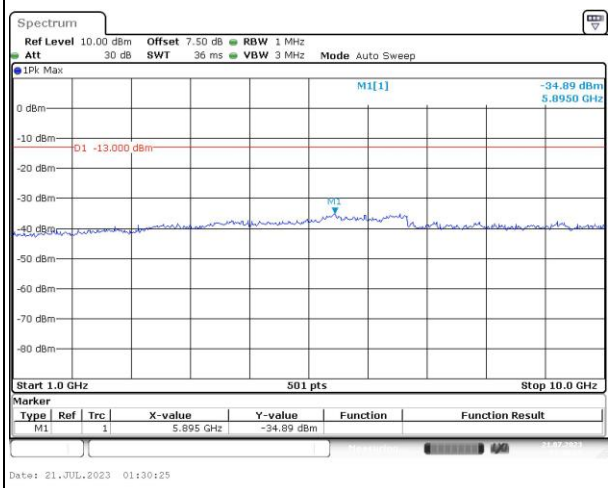
Highest	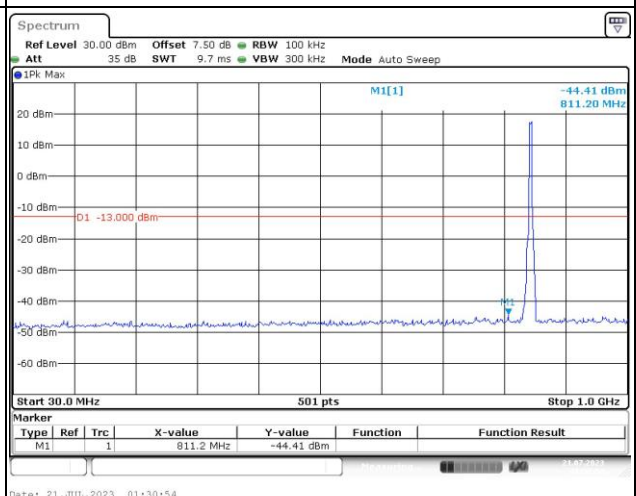	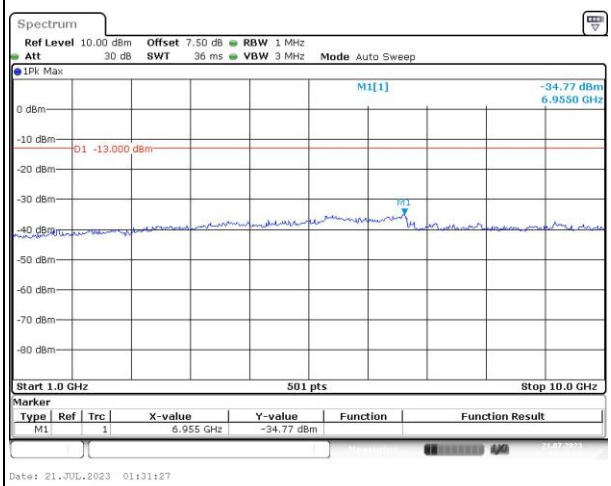

Spurious Emissions at Antenna Terminal		
Channel	**10MHz Bandwidth QPSK**	
Lowest	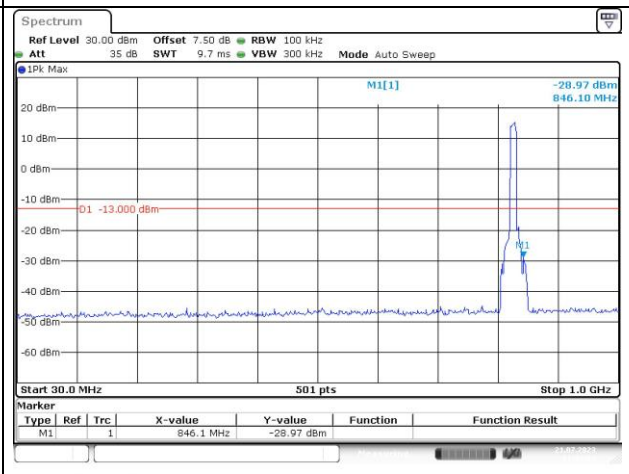	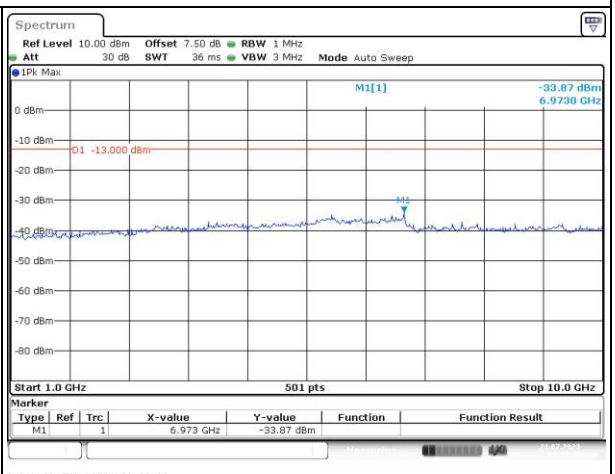
Middle	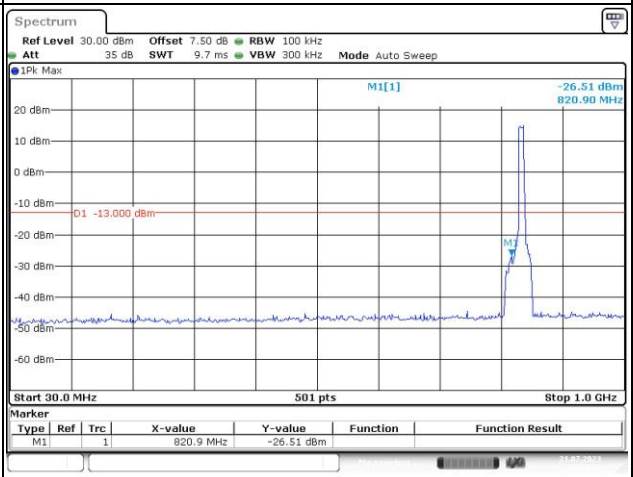	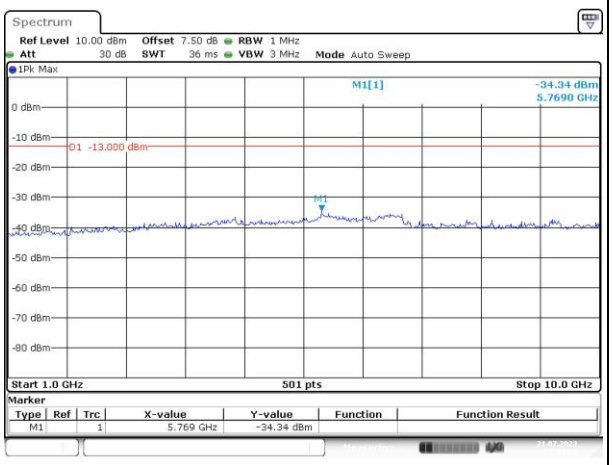
Highest	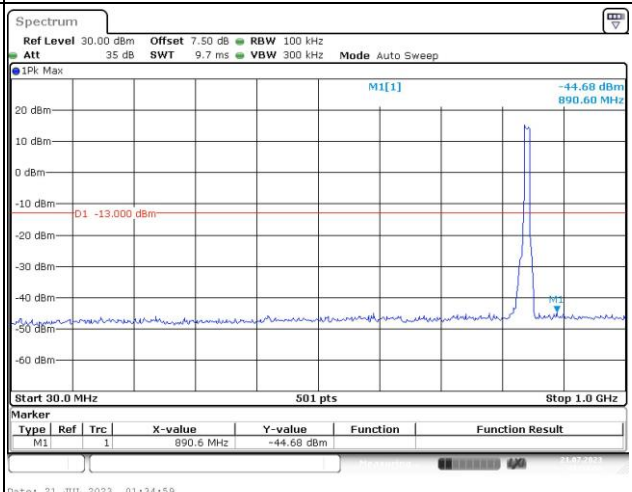	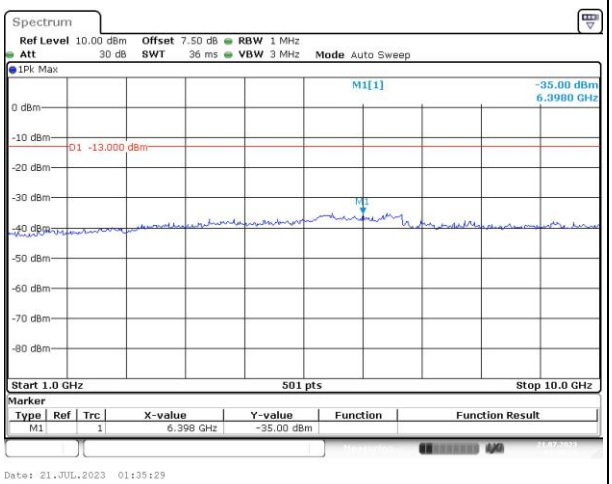

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
QPSK 1.4MHz		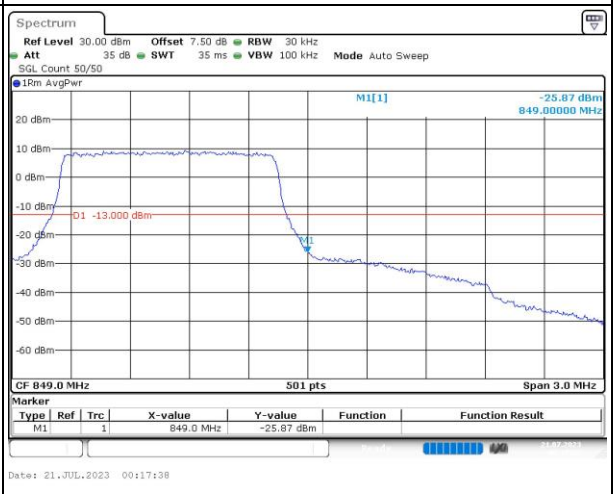
QPSK 3MHz	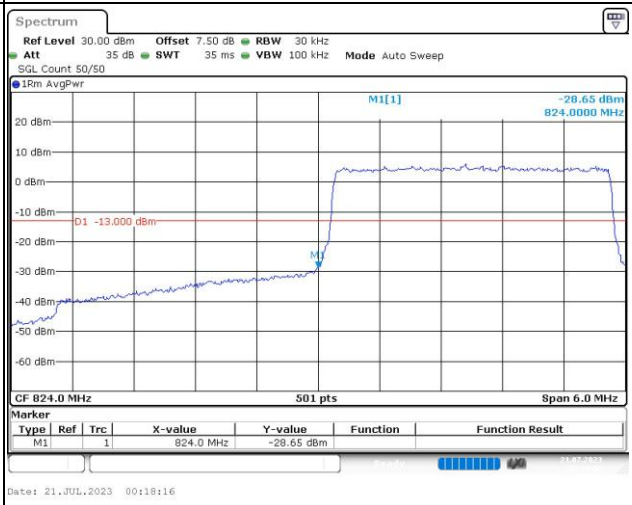	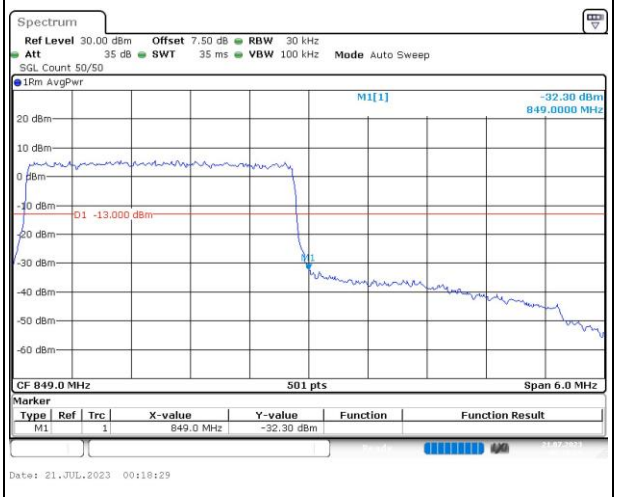
QPSK 5MHz	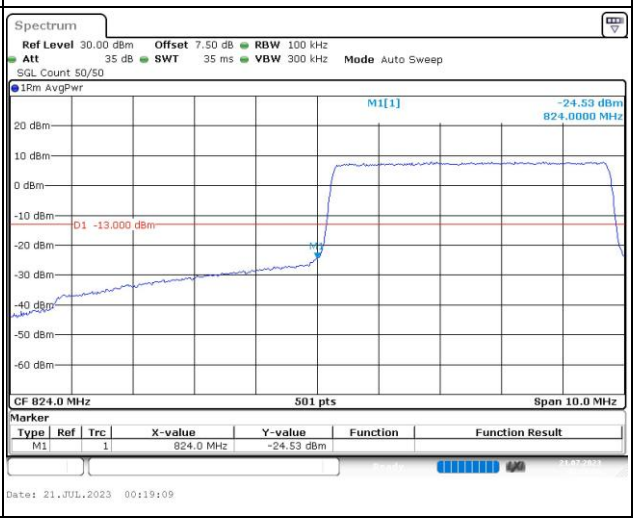	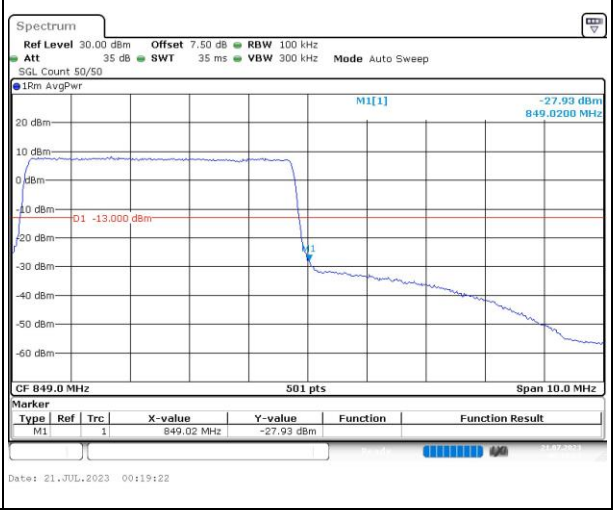

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
QPSK 10MHz	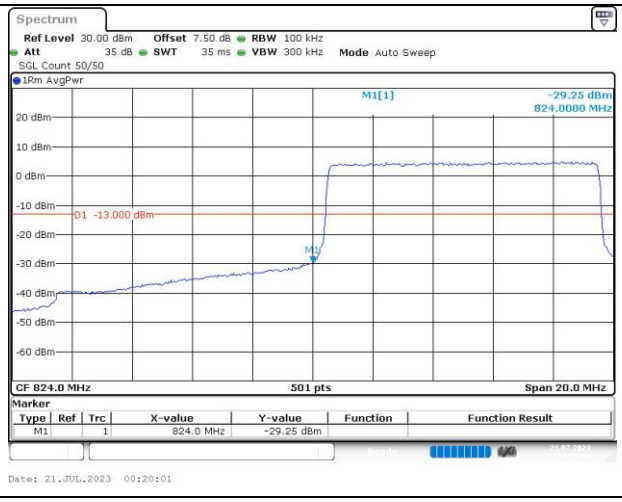	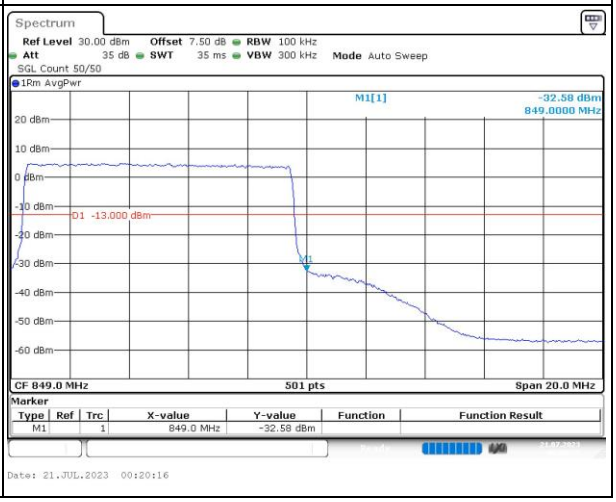

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
16QAM 1.4MHz	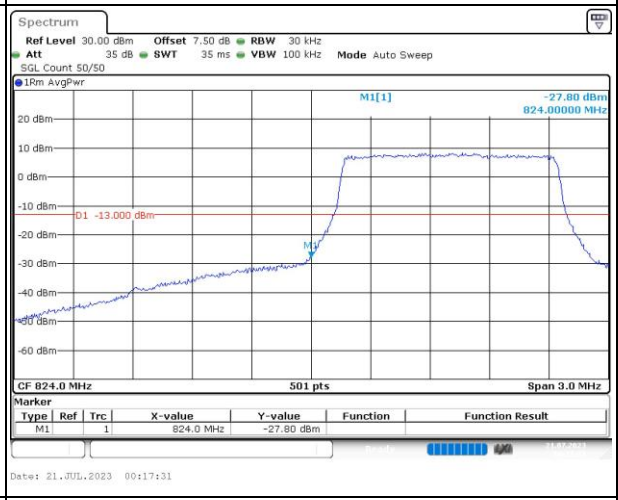	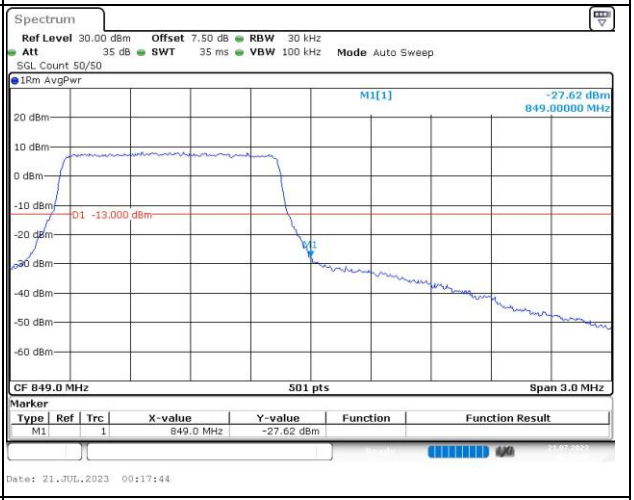
16QAM 3MHz	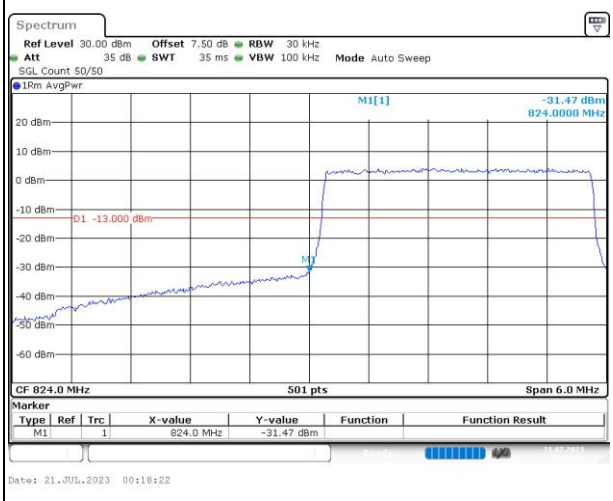	
16QAM 5MHz	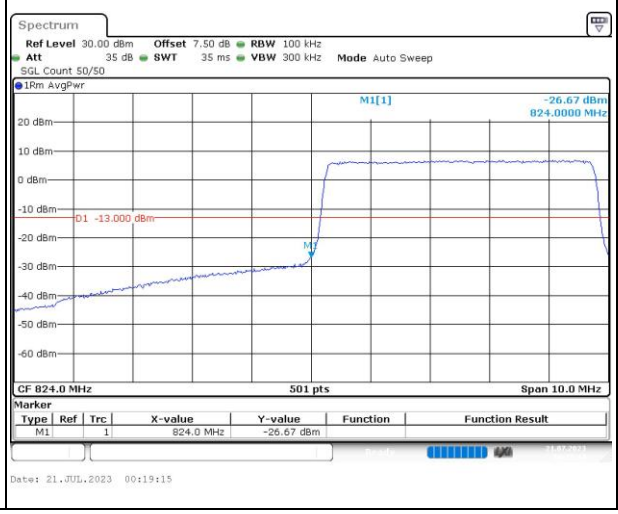	

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
16QAM 10MHz	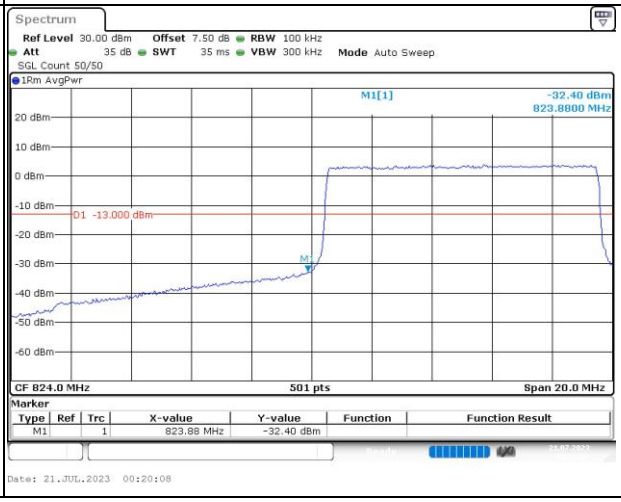	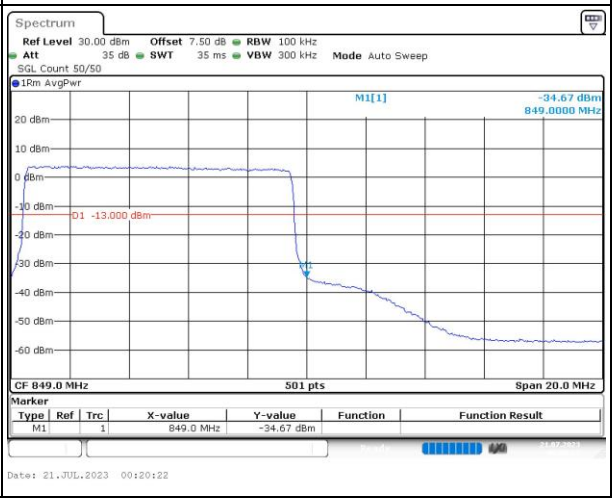

4.9 Antenna Port Test Data and Results for LTE Band 7

Serial Number:	287E_1	Test Date:	2023/7/17~2023/7/28
Test Site:	RF	Test Mode:	Transmitting
Tester:	One Luo	Test Result:	**Pass**

Environmental Conditions:					
Temperature: (℃)	25.8~27.2	Relative Humidity: (%)	46~55	ATM Pressure: (kPa)	99.1~100.3

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2023/7/15	2024/7/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	Each time	N/A
Weinschel	Power Splitter	1515	RA914	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	149218	2023/7/15	2024/7/14
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency For Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
5MHz	2502.5	2535	2567.5
10MHz	2505	2535	2565
15MHz	2507.5	2535	2562.5
20MHz	2510	2535	2560

Test Data:

FCC §2.1046; § 27.50(h)(2)

RF Output Power:

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
5MHz QPSK	RB1#0	22.11	22.3	22.48	19.5	33
	RB1#13	22.25	22.44	22.6		
	RB1#24	22.18	22.33	22.5		
	RB15#0	21.16	21.44	21.63		
	RB15#10	21.23	21.44	21.58		
	RB25#0	21.14	21.41	21.52		
5MHz 16QAM	RB1#0	21.35	21.36	21.33	18.38	33
	RB1#13	21.48	21.45	21.46		
	RB1#24	21.38	21.38	21.34		
	RB15#0	20.12	20.41	20.57		
	RB15#10	20.18	20.4	20.51		
	RB25#0	20.14	20.4	20.54		
10MHz QPSK	RB1#0	22.21	22.41	22.58	19.67	33
	RB1#25	22.41	22.64	22.77		
	RB1#49	22.27	22.52	22.62		
	RB25#0	21.24	21.42	21.65		
	RB25#25	21.31	21.49	21.6		
	RB50#0	21.27	21.47	21.56		
10MHz 16QAM	RB1#0	21.28	21.34	21.98	19.06	33
	RB1#25	21.5	21.56	22.16		
	RB1#49	21.39	21.45	21.99		
	RB25#0	20.21	20.48	20.62		
	RB25#25	20.29	20.59	20.56		
	RB50#0	20.27	20.45	20.55		
15MHz QPSK	RB1#0	22.12	22.29	22.53	19.52	33
	RB1#38	22.3	22.42	22.62		
	RB1#74	22.18	22.44	22.52		
	RB36#0	21.33	21.44	21.68		
	RB36#39	21.41	21.62	21.73		
	RB75#0	21.37	21.55	21.67		
15MHz 16QAM	RB1#0	21.4	21.8	21.57	18.81	33
	RB1#38	21.57	21.91	21.68		
	RB1#74	21.5	21.82	21.6		
	RB36#0	20.21	20.38	20.59		
	RB36#39	20.31	20.52	20.63		
	RB75#0	20.28	20.46	20.62		
20MHz QPSK	RB1#0	21.92	22.14	22.27	19.6	33
	RB1#50	22.37	22.62	22.7		

	RB1#99	22.04	22.32	22.34		
	RB50#0	21.15	21.32	21.51		
	RB50#50	21.28	21.49	21.5		
	RB100#0	21.23	21.44	21.55		
20MHz 16QAM	RB1#0	21.18	21.3	21.75	19.05	33
	RB1#50	21.6	21.73	22.15		
	RB1#99	21.34	21.43	21.79		
	RB50#0	20.11	20.32	20.5		
	RB50#50	20.26	20.48	20.46		
	RB100#0	20.23	20.42	20.57		
Note: EIRP=Conducted Power(dBm) - L_C(dB) + G_T(dBi)						
					Result:	**Pass**

Peak-to-average Ratio(PAR)

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
20MHz QPSK	RB1#0	4.23	4.64	3.88	13
	RB100#0	3.8	3.74	3.59	13
20MHz 16QAM	RB1#0	5.01	5.62	4.55	13
	RB100#0	5.51	5.45	5.36	13
				Result:	**Pass**

FCC §2.1049, §27.53:Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
5MHz QPSK	4.511	4.491	4.511	4.98	4.96	4.96
5MHz 16QAM	4.531	4.511	4.511	4.96	4.96	4.98
10MHz QPSK	8.942	8.942	8.942	9.76	9.6	9.6
10MHz 16QAM	8.942	8.942	8.942	9.6	9.64	9.6
15MHz QPSK	13.533	13.413	13.473	14.64	14.64	14.7
15MHz 16QAM	13.533	13.533	13.533	14.64	14.64	14.7
20MHz QPSK	17.884	17.964	17.964	19.2	19.28	19.36
20MHz 16QAM	17.964	17.964	17.884	19.28	19.52	19.36
Note: The test plots please refer to the Plots of Occupied Bandwidth						

FCC §2.1051, §27.53:Spurious Emissions at Antenna Terminal	
Result:	**Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.**

FCC §2.1051, §27.53:Out of band emission, Band Edge	
Result:	**Pass, Please refer to the test plots of Out of band emission, Band Edge.**

FCC §2.1055, §27.54: Frequency Stability						
Test Mode:	20M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (℃)	Voltage (V_{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.78	2501.006	2500.00	2568.999	2570
	-20	3.78	2501.067	2500.00	2568.979	2570
	-10	3.78	2501.094	2500.00	2568.969	2570
	0	3.78	2501.009	2500.00	2568.978	2570
	10	3.78	2501.087	2500.00	2568.912	2570
	20	3.78	2501.058	2500.00	2568.942	2570
	30	3.78	2501.056	2500.00	2568.929	2570
	40	3.78	2501.100	2500.00	2568.924	2570
	50	3.78	2501.045	2500.00	2568.923	2570
Frequency Stability vs. Voltage	20	3.6	2501.037	2500.00	2568.992	2570
	20	4.4	2501.064	2500.00	2568.972	2570
					Result:	**Pass**

Test Mode:	20M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (℃)	Voltage (V_{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.78	2501.044	2500.00	2568.921	2570
	-20	3.78	2501.011	2500.00	2568.961	2570
	-10	3.78	2501.067	2500.00	2568.981	2570
	0	3.78	2501.053	2500.00	2568.964	2570
	10	3.78	2501.035	2500.00	2568.972	2570
	20	3.78	2501.058	2500.00	2568.942	2570
	30	3.78	2501.046	2500.00	2568.933	2570
	40	3.78	2501.085	2500.00	2568.937	2570
	50	3.78	2501.076	2500.00	2568.905	2570
Frequency Stability vs. Voltage	20	3.6	2501.042	2500.00	2568.920	2570
	20	4.4	2501.003	2500.00	2568.944	2570
					Result:	**Pass**