

**CFR 47 FCC PART 2
CFR 47 FCC PART 22 H
CFR 47 FCC PART 24 E
CFR 47 FCC PART 27
CFR 47 FCC PART 90S**

TEST REPORT

For

LTE Smart Phone

MODEL NUMBER: S6605L, NUU N10 Plus, N10 Plus

REPORT NUMBER: 4792275528-1-RF-7

ISSUE DATE: August 12, 2026

FCC ID: 2ADINS6605L

Prepared for

**Sun Cupid Technology (HK) Ltd.
16/F, CEO Tower, 77 Wing Hong St, Cheung Sha Wan, Kowloon Hong Kong**

Prepared by

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch
Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan, Guangdong, China**

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	August 12, 2026	Initial Issue	\

Note:

1. This test report is only published to and used by the applicant, and it is not for evidence purpose in China.
2. The measurement result for the sample received is <Pass> according to < CFR 47 FCC PART 22 H >< CFR 47 FCC PART 24 E>< CFR 47 FCC PART 27 > when < Simple Acceptance > decision rule is applied.

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	7
4.1. MEASURING INSTRUMENT CALIBRATION	7
4.2. MEASUREMENT UNCERTAINTY	7
5. EQUIPMENT UNDER TEST	8
5.1. DESCRIPTION OF EUT	8
5.2. TEST CHANNEL CONFIGURATION	8
5.3. MAXIMUM AVERAGE OUTPUT POWER	13
5.3.1. LTE Band 2	13
5.3.1. LTE Band 4	14
5.3.2. LTE Band 5	15
5.3.3. LTE Band 7	16
5.3.4. LTE Band 12	17
5.3.5. LTE Band 13	18
5.3.6. LTE Band 25	19
5.3.7. LTE Band 26 (Part 90)	20
5.3.8. LTE Band 26 (Part 22)	21
5.3.9. LTE Band 66	22
5.3.10. LTE Band 71	23
5.4. WORST-CASE CONFIGURATION AND MODE	24
5.5. DESCRIPTION OF AVAILABLE ANTENNAS	25
5.6. DESCRIPTION OF TEST SETUP	26
6. MEASURING INSTRUMENT AND SOFTWARE USED	27
7. ANTENNA TERMINAL TEST RESULTS	28
7.1. EFFECTIVE (ISOTROPIC) RADIATED POWER OF TRANSMITTER	28
7.1.1. LTE Band 2	29
7.1.2. LTE Band 4	31
7.1.3. LTE Band 5	33
7.1.4. LTE Band 7	35
7.1.5. LTE Band 12	37
7.1.6. LTE Band 13	39
7.1.7. LTE Band 25	40
7.1.8. LTE Band 26 (Part 90)	42
7.1.9. LTE Band 26(Part 22)	44
7.1.10. LTE Band 66	46
7.1.11. LTE Band 71	48
7.2. PEAK TO AVERAGE RADIO	50

7.3.	OCCUPIED BANDWIDTH.....	51
7.4.	BAND EDGE EMISSIONS.....	52
7.5.	SPURIOUS EMISSION AT ANTENNA TERMINAL	55
7.6.	FREQUENCY STABILITY.....	57
8.	RADIATED SPURIOUS EMISSIONS.....	58
8.1.	SIMULTANEOUS TRANSMISSION	125
END OF REPORT		128

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Sun Cupid Technology (HK) Ltd.
Address: 16/F, CEO Tower, 77 Wing Hong St, Cheung Sha Wan, Kowloon Hong Kong

Manufacturer Information


Company Name: Sun Cupid Technology (HK) Ltd.
Address: 16/F, CEO Tower, 77 Wing Hong St, Cheung Sha Wan, Kowloon Hong Kong

EUT Information

EUT Name: LTE Smart Phone
Model: S6605L
Series Model: NUU N10 Plus, N10 Plus
Model Difference: Referred to section 5.1
Brand: NUU
Sample Received Date: June 22, 2026
Sample Status: Normal
Sample ID: 9858463
Date of Tested: June 25, 2026 to August 12, 2026

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 22 H	PASS
CFR 47 FCC PART 24 E	PASS
CFR 47 FCC PART 27	PASS
CFR 47 FCC PART 90S	PASS


Prepared By:



James Qin

Project Engineer

Checked By:



Kebo Zhang

Operations Leader

Approved By:



Stephen Guo

Operations Manager

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.26-2015, 971168 D01 Power Meas License Digital Systems v03r01, 971168 D02 Misc Rev Approv License Devices v02r01, 412172 D01 v01r01 Determining ERP and EIRP, CFR 47 FCC Part 2, Part 22 H, Part 24 E, Part 27, Part 90S.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046. VCCI (Registration No.: C-20202, G-20240, R-20248 and T-20202) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the membership No. is 3793. Facility Name: Chamber E, the VCCI registration No. is G-20240 and R-20248 Shielding Room F, the VCCI registration No. is C-20202 and T-20202
---------------------------	--

Note:

1. All tests measurement facilities use to collect the measurement data are located at Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan, Guangdong, China.
2. The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field site and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.
3. Measurements have been performed in an anechoic chamber for below 30 MHz and compared with the measurement result that obtained in an open field site and the measurements result have been corrected to represent the result collected in an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognize national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 40 GHz)	5.78 dB (1 GHz-18 GHz)
	5.23dB (18 GHz-26 GHz)
	5.64 dB (26 GHz-40 GHz)
Bandwidth	1.1 %
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k=2.	

Remark: For Radiated Emission measurements (200 MHz - 18 GHz), the EUT support table is made of Expanded Polystyrene (EPS). This material is characterized by a low dielectric constant, as recognized in CISPR 16-1-4, to minimize its influence on field strength measurements. This influence has been considered in the uncertainty budget.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name:	LTE Smart Phone
Model:	S6605L
Series Model:	NUU N10 Plus, N10 Plus
Model Difference:	NUU N10 Plus and N10 Plus have the same technical construction including circuit diagram, PCB Layout, components and component layout, all electrical construction and mechanical construction with S6605L. The difference lies only in the model number. All these changes do not degrade the unwanted emissions of the certified product.

5.2. TEST CHANNEL CONFIGURATION

Band	Test Frequency ID	Bandwidth [MHz]	NUL	Frequency of Uplink [MHz]	NDL	Frequency of Downlink [MHz]
Band 2	Low Range	1.4	18607	1850.7	607	1930.7
		3	18615	1851.5	615	1931.5
		5	18625	1852.5	625	1932.5
		10	18650	1855	650	1935
		15	18675	1857.5	675	1937.5
		20	18700	1860	700	1940
	Mid Range	1.4/3/5/10/15/20	18900	1880	900	1960
	High Range	1.4	19193	1909.3	1193	1989.3
		3	19185	1908.5	1185	1988.5
		5	19175	1907.5	1175	1987.5
		10	19150	1905	1150	1985
		15	19125	1902.5	1125	1982.5
		20	19100	1900	1100	1980

Band	Test Frequency ID	Bandwidth [MHz]	NUL	Frequency of Uplink [MHz]	NDL	Frequency of Downlink [MHz]
Band 4	Low Range	1.4	19957	1710.7	1957	2110.7
		3	19965	1711.5	1965	2111.5
		5	19975	1712.5	1975	2112.5
		10	20000	1715	2000	2115
		15	20025	1717.5	2025	2117.5
		20	20050	1720	2050	2120
	Mid Range	1.4/3/5/10/15/20	20175	1732.5	2175	2132.5
	High Range	1.4	20393	1754.3	2393	2154.3
		3	20385	1753.5	2385	2153.5
		5	20375	1752.5	2375	2152.5
		10	20350	1750	2350	2150

		15	20325	1747.5	2325	2147.5
		20	20300	1745	2300	2145

Band	Test Frequency ID	Bandwidth [MHz]	NUL	Frequency of Uplink [MHz]	NDL	Frequency of Downlink [MHz]
Band 5	Low Range	1.4	20407	824.7	2407	869.7
		3	20415	825.5	2415	870.5
		5	20425	826.5	2425	871.5
		10	20450	829	2450	874
	Mid Range	1.4/3/5/10	20525	836.5	2525	881.5
	High Range	1.4	20643	848.3	2643	893.3
		3	20635	847.5	2635	892.5
		5	20625	846.5	2625	891.5
		10	20600	844	2600	889

Band	Test Frequency ID	Bandwidth [MHz]	NUL	Frequency of Uplink [MHz]	NDL	Frequency of Downlink [MHz]
Band 7	Low Range	5	20775	2502.5	2775	2622.5
		10	20800	2505	2800	2625
		15	20825	2507.5	2825	2627.5
		20	20850	2510	2850	2630
	Mid Range	5/10/15/20	21100	2535	3100	2655
	High Range	5	21425	2567.5	3425	2687.5
		10	21400	2565	3400	2685
		15	21375	2562.5	3375	2682.5
		20	21350	2560	3350	2680

Band	Test Frequency ID	Bandwidth [MHz]	NUL	Frequency of Uplink [MHz]	NDL	Frequency of Downlink [MHz]
Band 12	Low Range	1.4	23017	699.7	5017	729.7
		3	23025	700.5	5025	730.5
		5	23035	701.5	5035	731.5
		10	23060	704	5060	734
	Mid Range	1.4/3/5 /10	23095	707.5	5095	737.5
	High Range	1.4	23173	715.3	5173	745.3
		3	23165	714.5	5165	744.5
		5	23155	713.5	5155	743.5
		10	23130	711	5130	741

Band	Test Frequency ID	Bandwidth [MHz]	NUL	Frequency of Uplink [MHz]	NDL	Frequency of Downlink [MHz]
Band 25	Low Range	1.4	26047	1850.7	8047	1930.7
		3	26055	1851.5	8055	1931.5
		5	26065	1852.5	8065	1932.5
		10	26090	1855	8090	1935
		15	26115	1857.5	8115	1937.5
		20	26140	1860	8140	1940
	Mid Range	1.4/3/5/10/15/20	26365	1882.5	8365	1962.5
	High Range	1.4	26683	1914.3	8683	1994.3
		3	26675	1913.5	8675	1993.5
		5	26665	1912.5	8665	1992.5
		10	26640	1910	8640	1990
		15	26615	1907.5	8615	1987.5
		20	26590	1905	8590	1985

Band	Test Frequency ID	Bandwidth [MHz]	NUL	Frequency of Uplink [MHz]	NDL	Frequency of Downlink [MHz]
Band 26	Low Range	1.4	26697	814.7	8697	859.7
		3	26705	815.5	8705	860.5
		5	26715	816.5	8715	861.5
		10	26740	819	8740	864
		15	26765	821.5	8765	866.5
	Mid Range	1.4/3/5/10/15	26865	831.5	8865	876.5
	High Range	1.4	27033	848.3	9033	893.3
		3	27025	847.5	9025	892.5
		5	27015	846.5	9015	891.5
		10	26990	844	8990	889
		15	26965	841.5	8965	886.5

Band	Test Frequency ID	Bandwidth [MHz]	EARFCN	Frequency (UL and DL) [MHz]
Band 41	Low Range	5	39675	2498.5
		10	39700	2501
		15	39725	2503.5
		20	39750	2506
	Mid Range	5/10/15/20	40620	2593
	High Range	5	41565	2687.5
		10	41540	2685
		15	41515	2682.5
		20	41490	2680

Band	Test Frequency ID	Bandwidth [MHz]	NUL	Frequency of Uplink [MHz]	N DL	Frequency of Downlink [MHz]
Band 66	Low Range	1.4	131979	1710.7	66443	2110.7
		3	131987	1711.5	66451	2111.5
		5	131997	1712.5	66461	2112.5
		10	132022	1715	66486	2115
		15	132047	1717.5	66511	2117.5
		20	132072	1720	66536	2120
	Mid Range Tx ¹	1.4/3/5/10/15/20	132322	1745	66786	2145
	Mid Range	1.4/3/5/10/15/20	132422	1755	66886	2155
	Paired High Range ²	1.4	132665	1779.3	67129	2179.3
		3	132657	1778.5	67121	2178.5
		5	132647	1777.5	67111	2177.5
		10	132622	1775	67086	2175
		15	132597	1772.5	67061	2172.5
		20	132572	1770	67036	2170
	High Range ³	1.4	NA	NA	67329	2199.3
		3	NA	NA	67321	2198.5
		5	NA	NA	67311	2197.5
		10	NA	NA	67286	2195
		15	NA	NA	67261	2192.5
		20	NA	NA	67236	2190

Note 1: Applicable for transmitter testing.

Note 2: Applicable if UL is configured on the CC.

Note 3: Applicable if no UL is configured on the CC.

Band	Test Frequency ID	Bandwidth [MHz]	NUL	Frequency of Uplink [MHz]	NDL	Frequency of Downlink [MHz]
Band 71	Low Range	5	133147	665.5	68611	619.5
		10	133172	668	68636	622
		15	133197	670.5	68661	624.5
		20	133222	673	68686	627
	Mid Range	5/10/15	133297	680.5	68761	634.5
		20	133322	683	68786	637
	High Range	5	133447	695.5	68911	649.5
		10	133422	693	68886	647
		15	133397	690.5	68861	644.5
		20	133372	688	68836	642

5.3. MAXIMUM AVERAGE OUTPUT POWER

5.3.1. LTE Band 2

LTE Band 2							
Part 24 / RSS-133							
EIRP Limit(W)		2.0					
Antenna Gain (dBi)		-2.56					
Bandwidth (MHz)	Modulation	Lower Freq. (MHz)	Upper Freq. (MHz)	Conducted Average (dBm)	EIRP Average (W)	99% OBW (MHz)	Emission Designator
1.4	QPSK	1850.7	1909.3	21.49	0.078	1.097	1M10D7W
	16QAM			21.01	0.070	1.091	1M09G7W
3	QPSK	1851.5	1908.5	21.48	0.078	2.709	2M71D7W
	16QAM			20.98	0.070	2.708	2M71G7W
5	QPSK	1852.5	1907.5	21.46	0.078	4.518	4M52D7W
	16QAM			21.13	0.072	4.505	4M51G7W
10	QPSK	1855.0	1905.0	21.48	0.078	8.995	9M00D7W
	16QAM			21.05	0.071	8.993	8M99G7W
15	QPSK	1857.5	1902.5	21.49	0.078	13.489	13M5D7W
	16QAM			20.97	0.069	13.472	13M5G7W
20	QPSK	1860.0	1900.0	21.41	0.077	18.044	18M0D7W
	16QAM			21.00	0.070	18.071	18M1G7W

5.3.1. LTE Band 4

LTE Band 4							
Part 27 / RSS-139							
EIRP Limit(W)		1.0					
Antenna Gain (dBi)		-2.39					
Bandwidth (MHz)	Modulation	Lower Freq. (MHz)	Upper Freq. (MHz)	Conducted Average (dBm)	EIRP Average (W)	99% OBW (MHz)	Emission Designator
1.4	QPSK	1710.7	1754.3	23.86	0.140	1.095	1M10D7W
	16QAM			22.94	0.114	1.106	1M11G7W
3	QPSK	1711.5	1753.5	23.83	0.139	2.714	2M71D7W
	16QAM			22.98	0.115	2.712	2M71G7W
5	QPSK	1712.5	1752.5	23.82	0.139	4.511	4M51D7W
	16QAM			22.97	0.114	4.495	4M50G7W
10	QPSK	1715.0	1750.0	23.87	0.141	8.966	8M97D7W
	16QAM			22.96	0.114	8.949	8M95G7W
15	QPSK	1717.5	1747.5	23.79	0.138	13.409	13M4D7W
	16QAM			22.86	0.111	13.420	13M4G7W
20	QPSK	1720.0	1745.0	23.90	0.142	17.985	18M0D7W
	16QAM			22.85	0.111	18.047	18M0G7W

5.3.2. LTE Band 5

LTE Band 5							
Part 22 / RSS-132							
ERP Limit (W) for FCC		7					
ERP Limit (W) for ISED		7					
Antenna Gain (dBi)		-4.54					
Bandwidth (MHz)	Modulation	Lower Freq. (MHz)	Upper Freq. (MHz)	Conducted Average (dBm)	ERP Average (W)	99% OBW (MHz)	Emission Designator
1.4	QPSK	824.7	848.3	23.11	0.044	1.095	1M10G7W
	16QAM			22.23	0.036	1.092	1M09D7W
3	QPSK	825.5	847.5	23.17	0.044	2.716	2M72G7W
	16QAM			22.46	0.038	2.706	2M71D7W
5	QPSK	826.5	846.5	22.97	0.042	4.519	4M52G7W
	16QAM			22.45	0.038	4.504	4M50D7W
10	QPSK	829.0	844.0	23.06	0.043	8.978	8M98G7W
	16QAM			22.45	0.038	8.987	8M99D7W

5.3.3. LTE Band 7

LTE Band 7							
Part 27 / RSS-199							
EIRP Limit(W)		2.0					
Antenna Gain (dBi)		-2.34					
Bandwidth (MHz)	Modulation	Lower Freq. (MHz)	Upper Freq. (MHz)	Conducted Average (dBm)	EIRP Average (W)	99% OBW (MHz)	Emission Designator
5	QPSK	2502.5	2567.5	23.81	0.140	4.497	4M50D7W
	16QAM			22.98	0.116	4.524	4M52G7W
10	QPSK	2505.0	2565.0	23.73	0.138	8.975	8M98D7W
	16QAM			22.90	0.114	8.970	8M97G7W
15	QPSK	2507.5	2562.5	23.90	0.143	13.445	13M4D7W
	16QAM			22.84	0.112	13.438	13M4G7W
20	QPSK	2510.0	2560.0	23.78	0.139	17.988	18M0D7W
	16QAM			22.94	0.115	18.017	18M0G7W

5.3.4. LTE Band 12

LTE Band 12							
Part 27 / RSS-130							
ERP Limit(W)		3.0					
Antenna Gain (dBi)		-3.78					
Bandwidth (MHz)	Modulation	Lower Freq. (MHz)	Upper Freq. (MHz)	Conducted Average (dBm)	ERP Average (W)	99% OBW (MHz)	Emission Designator
1.4	QPSK	699.7	715.3	23.24	0.054	1.097	1M10D7W
	16QAM			22.48	0.045	1.097	1M10G7W
3	QPSK	700.5	714.5	23.15	0.053	2.709	2M71D7W
	16QAM			22.50	0.045	2.707	2M71G7W
5	QPSK	701.5	713.5	23.17	0.053	4.511	4M51D7W
	16QAM			22.50	0.045	4.492	4M49G7W
10	QPSK	704.0	711.0	23.12	0.052	8.942	8M94D7W
	16QAM			22.43	0.045	8.937	8M94G7W

5.3.5. LTE Band 13

LTE Band 13							
Part 27 / RSS-130							
ERP Limit(W)		3.0					
Antenna Gain (dBi)		-4.15					
Bandwidth (MHz)	Modulation	Lower Freq. (MHz)	Upper Freq. (MHz)	Conducted Average (dBm)	ERP Average (W)	99% OBW (MHz)	Emission Designator
5	QPSK	779.5	784.5	23.37	0.051	4.508	4M51D7W
	16QAM			22.46	0.041	4.544	4M54G7W
10	QPSK	782.0	782.0	23.22	0.049	9.033	9M03D7W
	16QAM			22.34	0.040	9.022	9M02G7W

5.3.6. LTE Band 25

LTE Band 25							
Part 24 / RSS-133							
EIRP Limit(W)		2.0					
Antenna Gain (dBi)		-2.49					
Bandwidth (MHz)	Modulation	Lower Freq. (MHz)	Upper Freq. (MHz)	Conducted Average (dBm)	EIRP Average (W)	99% OBW (MHz)	Emission Designator
1.4	QPSK	1850.7	1914.3	21.78	0.085	1.097	1M10D7W
	16QAM			21.75	0.084	1.105	1M11G7W
3	QPSK	1851.5	1913.5	21.85	0.086	2.711	2M71D7W
	16QAM			21.96	0.089	2.710	2M71G7W
5	QPSK	1852.5	1912.5	21.68	0.083	4.519	4M52D7W
	16QAM			21.95	0.088	4.511	4M51G7W
10	QPSK	1855.0	1910.0	21.64	0.082	9.012	9M01D7W
	16QAM			21.97	0.089	9.009	9M01G7W
15	QPSK	1857.5	1907.5	21.82	0.086	13.512	13M5D7W
	16QAM			21.94	0.088	13.503	13M5G7W
20	QPSK	1860.0	1905.0	21.78	0.085	18.087	18M1D7W
	16QAM			21.94	0.088	18.101	18M1G7W

5.3.7. LTE Band 26 (Part 90)

LTE Band 26 (814~824 MHz)							
Part 90S							
Conducted Limit(W)		100.0					
Antenna Gain (dBi)		-4.07					
Bandwidth (MHz)	Modulation	Lower Freq. (MHz)	Upper Freq. (MHz)	Conducted Average (dBm)	Conducted Average (W)	99% OBW (MHz)	Emission Designator
1.4	QPSK	814.7	823.3	23.18	0.208	1.092	1M09D7W
	16QAM			22.35	0.172	1.106	1M11G7W
3	QPSK	815.5	822.5	23.25	0.211	2.711	2M71D7W
	16QAM			22.47	0.177	2.706	2M71G7W
5	QPSK	816.5	821.5	23.26	0.212	4.511	4M51D7W
	16QAM			22.44	0.175	4.499	4M50G7W
10	QPSK	819.0	819.0	23.21	0.209	8.943	8M94D7W
	16QAM			22.21	0.166	8.928	8M93G7W

5.3.8. LTE Band 26 (Part 22)

LTE Band 26 (824~849 MHz)							
Part 22 / RSS-132							
ERP Limit (W) for FCC		7					
ERP Limit (W) for ISED		7					
Antenna Gain (dBi)		-4.07					
Bandwidth (MHz)	Modulation	Lower Freq. (MHz)	Upper Freq. (MHz)	Conducted Average (dBm)	ERP Average (W)	99% OBW (MHz)	Emission Designator
1.4	QPSK	824.7	848.3	23.02	0.048	1.094	1M09G7W
	16QAM			22.32	0.041	1.104	1M10D7W
3	QPSK	825.5	847.5	23.12	0.049	2.716	2M72G7W
	16QAM			22.20	0.040	2.705	2M71D7W
5	QPSK	826.5	846.5	23.02	0.048	4.514	4M51G7W
	16QAM			22.26	0.040	4.503	4M50D7W
10	QPSK	829.0	844.0	22.99	0.048	8.984	8M98G7W
	16QAM			22.18	0.039	8.970	8M97D7W
15	QPSK	831.5	841.5	23.02	0.048	13.460	13M5G7W
	16QAM			22.33	0.041	13.459	13M5D7W

5.3.9. LTE Band 66

LTE Band 66							
Part 27 / RSS-139							
EIRP Limit(W)		1.0					
Antenna Gain (dBi)		-2.39					
Bandwidth (MHz)	Modulation	Lower Freq. (MHz)	Upper Freq. (MHz)	Conducted Average (dBm)	EIRP Average (W)	99% OBW (MHz)	Emission Designator
1.4	QPSK	1710.7	1779.3	23.92	0.142	1.099	1M10D7W
	16QAM			22.90	0.112	1.100	1M10G7W
3	QPSK	1711.5	1778.5	23.83	0.139	2.714	2M71D7W
	16QAM			22.74	0.108	2.712	2M71G7W
5	QPSK	1712.5	1777.5	24.00	0.145	4.528	4M53D7W
	16QAM			22.58	0.104	4.513	4M51G7W
10	QPSK	1715.0	1775.0	23.94	0.143	9.008	9M01D7W
	16QAM			22.62	0.105	9.005	9M01G7W
15	QPSK	1717.5	1772.5	23.88	0.141	13.538	13M5D7W
	16QAM			22.79	0.110	13.550	13M6G7W
20	QPSK	1720.0	1770.0	23.89	0.141	18.115	18M1D7W
	16QAM			22.65	0.106	18.222	18M2G7W

5.3.10. LTE Band 71

LTE Band 71							
Part 27 / RSS-130							
ERP Limit(W)		3.0					
Antenna Gain (dBi)		-4.41					
Bandwidth (MHz)	Modulation	Lower Freq. (MHz)	Upper Freq. (MHz)	Conducted Average (dBm)	ERP Average (W)	99% OBW (MHz)	Emission Designator
5	QPSK	665.5	695.5	23.41	0.048	4.537	4M54D7W
	16QAM			22.71	0.041	4.530	4M53G7W
10	QPSK	668.0	693.0	23.41	0.048	9.097	9M10D7W
	16QAM			22.79	0.042	9.070	9M07G7W
15	QPSK	670.5	690.5	23.41	0.048	13.631	13M6D7W
	16QAM			22.78	0.042	13.610	13M6G7W
20	QPSK	673.0	688.0	23.43	0.049	18.324	18M3D7W
	16QAM			22.80	0.042	18.318	18M3G7W

5.4. WORST-CASE CONFIGURATION AND MODE

During all testing, EUT is in link mode with base station emulator at maximum power level. The worst-case scenario for all measurements is based on the average conducted output power measurement investigation results. Output power measurements were measured on QPSK, 16QAM. All testing was performed using QPSK and 16QAM modulations to represent the worst case.

The radiated spurious emissions measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT was investigated in three orthogonal orientations X,Y and Z. It was determined that X orientation was the worst-case.

Radiated spurious emissions were investigated below 30 MHz, 30 MHz - 1 GHz and above 1 GHz. There are no emissions found on below 1GHz and above 18 GHz, the emissions between 1 GHz – 18 GHz are tested at the low, mid, high channel and the worse configuration.

Test Items	Worst case test configuration			
Description	Modulation	Channel	Bandwidth (MHz)	RB Configuration
Radiated Spurious Emissions	QPSK	L, M, H	Maximum BW	RB size=1, RB Location=Low

5.5. DESCRIPTION OF AVAILABLE ANTENNAS


Antenna	Band	Antenna Type	MAX Antenna Gain (dBi)
Main	LTE Band 2	PIFA	-2.56
Main	LTE Band 4	PIFA	-2.39
Main	LTE Band 5	PIFA	-4.54
Main	LTE Band 7	PIFA	-2.34
Main	LTE Band 12	PIFA	-3.78
Main	LTE Band 13	PIFA	-4.15
Main	LTE Band 25	PIFA	-2.49
Main	LTE Band 26	PIFA	-4.07
Main	LTE Band 26	PIFA	-4.07
Main	LTE Band 66	PIFA	-2.39
Main	LTE Band 71	PIFA	-4.41

Band	Transmit and Receive Mode	Description
LTE Band 2	☒1TX, 2RX	Main antenna can be used as transmitting/receiving antenna, DIV antenna can be used as receiving antenna
LTE Band 4	☒1TX, 2RX	Main antenna can be used as transmitting/receiving antenna, DIV antenna can be used as receiving antenna
LTE Band 5	☒1TX, 2RX	Main antenna can be used as transmitting/receiving antenna, DIV antenna can be used as receiving antenna
LTE Band 7	☒1TX, 2RX	Main antenna can be used as transmitting/receiving antenna, DIV antenna can be used as receiving antenna
LTE Band 12	☒1TX, 2RX	Main antenna can be used as transmitting/receiving antenna, DIV antenna can be used as receiving antenna
LTE Band 13	☒1TX, 2RX	Main antenna can be used as transmitting/receiving antenna, DIV antenna can be used as receiving antenna
LTE Band 25	☒1TX, 2RX	Main antenna can be used as transmitting/receiving antenna, DIV antenna can be used as receiving antenna
LTE Band 26	☒1TX, 2RX	Main antenna can be used as transmitting/receiving antenna, DIV antenna can be used as receiving antenna


Note: The value of the antenna gain was declared by customer.

5.6. DESCRIPTION OF TEST SETUP

Conducted

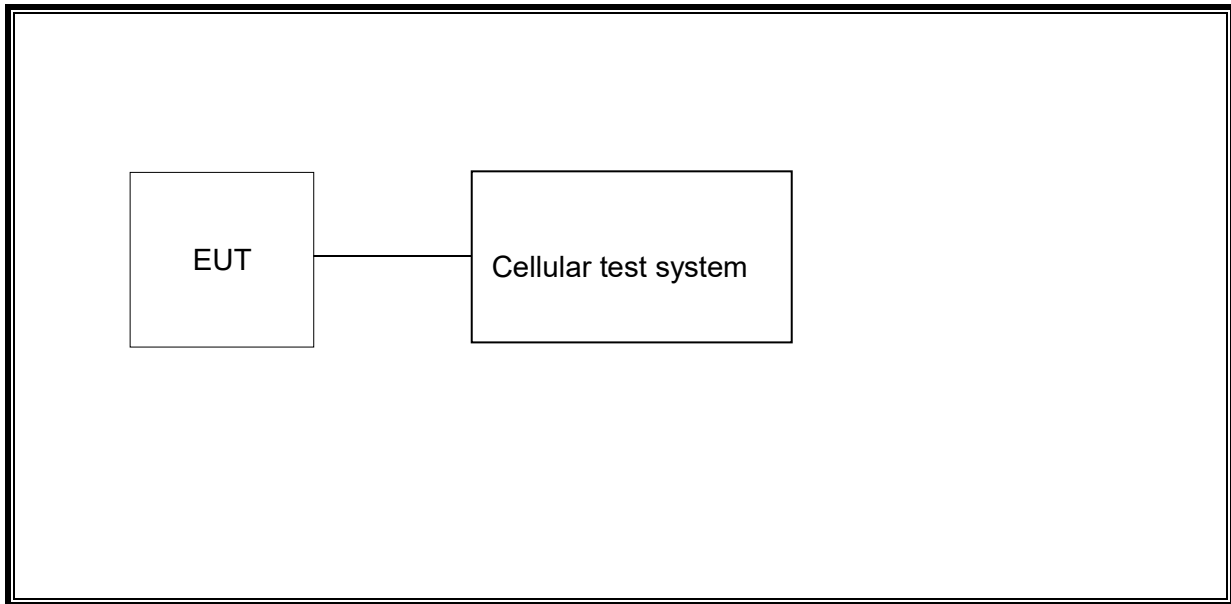

Radiated

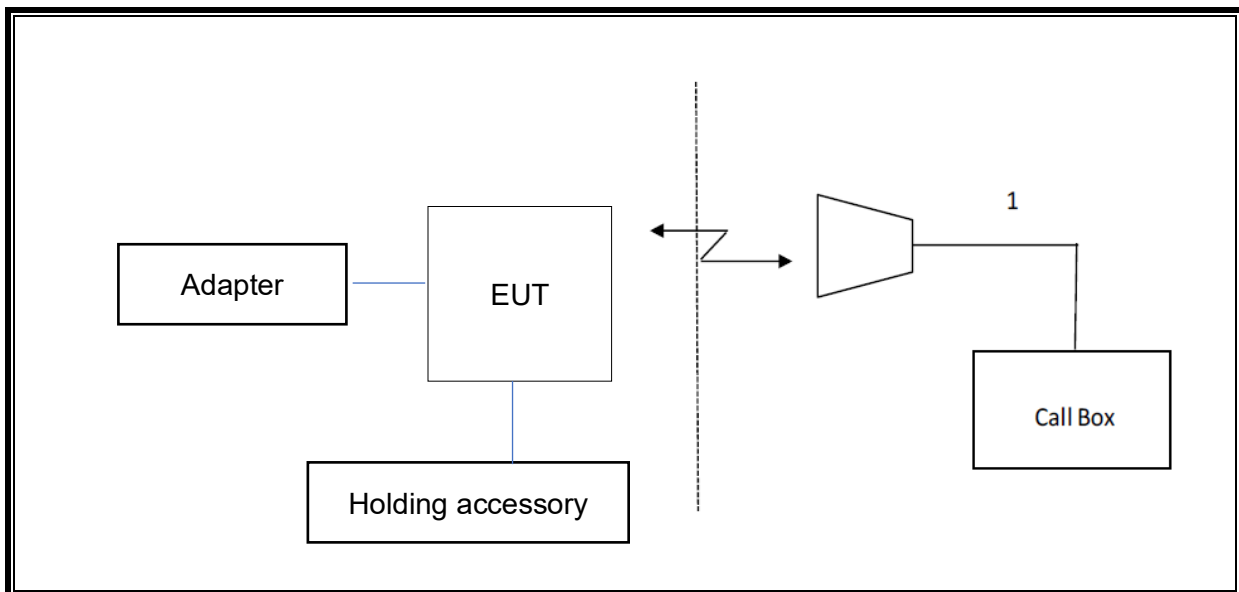

6. MEASURING INSTRUMENT AND SOFTWARE USED

Antenna Terminal Test						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
☒	Spectrum Analyzer	R&S	FSW	1312.8000K26-103950-sj	Sep. 12, 2025	Sep. 11, 2026
☒	Wideband Radio Communication Tester	R&S	CMW500	155523	Sep. 12, 2025	Sep. 11, 2026
Software						
Used	Description		Manufacturer	Name		Version
☒	Tonsend Cellular Test System		Tonsend	JS1120 RF Auto Test System		3.1.46
Radiated Test						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
☒	MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Sep. 12, 2025	Sep. 11, 2026
☒	Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	June.28, 2024	June.27, 2027
☒	Preamplifier	HP	8447D	2944A09099	Sep. 12, 2025	Sep. 11, 2026
☒	EMI Measurement Receiver	R&S	ESR26	101377	Sep. 12, 2025	Sep. 11, 2026
☒	Horn Antenna	TDK	HRN-0118	130940	Dec. 12, 2024	Dece. 11, 2027
☒	Horn Antenna	Schwarzbeck	BBHA9170	697	Jun. 30, 2024	Jun. 29, 2027
☒	Preamplifier	TDK	PA-02-0118	TRS-305-00067	Sep. 12, 2025	Sep. 11, 2026
☒	Preamplifier	TDK	PA-02-2	TRS-307-00003	Sep. 12, 2025	Sep. 11, 2026
☒	Loop antenna	Schwarzbeck	1519B	00008	Dec.09, 2024	Dec.08,2027
☒	High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Sep.12, 2025	Sep.11, 2026
Software						
Used	Description		Manufacturer	Name		Version
☒	Test Software for Radiated disturbance		Farad	EZ-EMC		Ver. UL-3A1

7. ANTENNA TERMINAL TEST RESULTS

7.1. EFFECTIVE (ISOTROPIC) RADIATED POWER OF TRANSMITTER

RULE PART(S)

FCC: §2.1046, §22.913, §24.232, §27.50

LIMITS

22.913(a) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

27.50(c) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

27.50(d) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watts EIRP.

27.50(h) Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

TEST PROCEDURE

Refer to ANSI C63.26:2015 and KDB 971168 D01 Section 5.6

$ERP/EIRP = P_{Meas} + GT - LC$

where:

ERP or EIRP = effective or equivalent isotropically radiated power, respectively (expressed in the same units as P_{Meas} , typically dBW or dBm);


P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB

The transmitter has a maximum output powers as follows and maximum ERP/EIRP is tabulated in section 5.3.

TEST SETUP

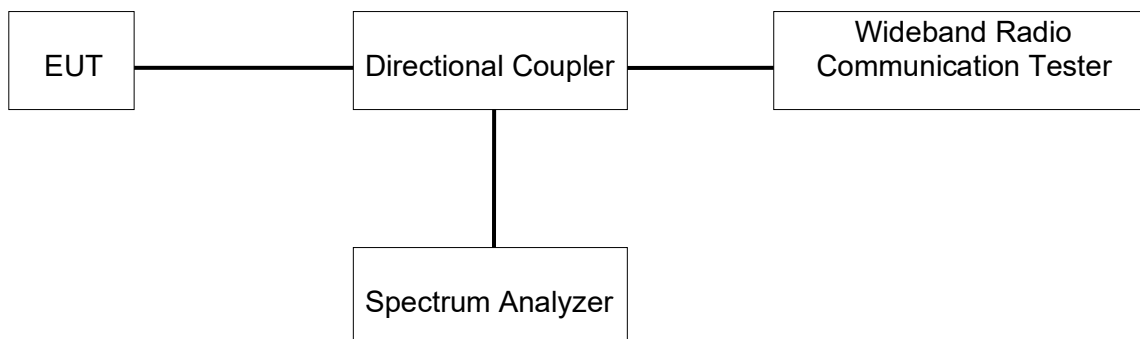

TEST ENVIRONMENT

Temperature	21.6 °C	Relative Humidity	53.2 %
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60HZ

RESULTS

7.1.1. LTE Band 2

Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				18607	18900	19193
				Freq. (MHz)		
				1850.7	1880	1909.3
1.4	QPSK	1	0	20.93	21.26	21.26
		1	2	20.97	21.48	21.13
		1	5	21.20	21.43	21.29
		3	0	21.07	21.16	21.46
		3	1	20.96	21.49	21.12
		3	3	21.24	21.47	21.23
		6	0	20.17	20.05	21.49
	16QAM	1	0	20.19	20.04	20.99
		1	2	20.39	20.38	20.58
		1	5	20.21	20.21	21.01
		3	0	20.43	20.60	20.71
		3	1	20.62	20.87	20.90
		3	3	20.53	20.73	20.44
		6	0	18.38	18.70	18.76
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				18615	18900	19185
				Freq. (MHz)		
				1851.5	1880	1908.5
3	QPSK	1	0	20.99	21.15	21.48
		1	8	20.91	21.38	21.07
		1	14	21.21	21.20	21.14
		8	0	20.13	20.11	21.44
		8	4	20.16	19.90	20.96
		8	7	20.41	20.22	20.68
		15	0	20.22	20.34	21.09
	16QAM	1	0	20.36	20.75	20.54
		1	8	20.71	20.98	20.80
		1	14	20.44	20.73	20.42
		8	0	18.24	18.68	19.25
		8	4	18.09	18.69	18.65
		8	7	18.45	18.67	18.60
		15	0	18.43	18.62	18.81
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				18625	18900	19175
				Freq. (MHz)		
				1852.5	1880	1907.5
5	QPSK	1	0	21.15	21.20	21.46
		1	12	21.05	21.38	21.06
		1	24	21.07	21.36	21.38
		12	0	20.09	20.12	21.30
		12	6	20.30	20.09	20.90
		12	13	20.40	20.18	20.48
		25	0	20.03	20.26	21.06
	16QAM	1	0	20.32	20.56	20.64
		1	12	20.72	21.13	20.76
		1	24	20.27	20.75	20.37
		12	0	18.37	18.80	19.20
		12	6	18.19	18.47	18.57

		12	13	18.28	18.92	18.41
		25	0	18.40	18.56	18.74
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				18650	18900	19150
				Freq. (MHz)		
				1855	1880	1905
10	QPSK	1	0	21.07	21.17	21.28
		1	24	21.01	21.32	21.24
		1	49	21.07	21.48	21.12
		25	0	19.94	20.27	21.46
		25	12	20.16	19.94	21.07
		25	25	20.34	20.22	20.50
		50	0	20.02	20.25	21.06
	16QAM	1	0	20.34	20.70	20.68
		1	24	20.80	21.05	21.01
		1	49	20.32	20.64	20.42
		25	0	18.16	18.65	19.12
		25	12	18.17	18.58	18.57
		25	25	18.41	18.84	18.30
		50	0	18.47	18.76	18.77
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				18675	18900	19125
				Freq. (MHz)		
				1857.5	1880	1902.5
15	QPSK	1	0	20.93	20.99	21.26
		1	38	21.06	21.42	21.06
		1	74	21.23	21.20	21.18
		36	0	20.21	20.08	21.49
		36	18	20.20	19.84	20.86
		36	37	20.30	20.31	20.50
		75	0	20.16	20.10	20.96
	16QAM	1	0	20.33	20.69	20.51
		1	38	20.69	20.97	20.83
		1	74	20.31	20.70	20.56
		36	0	18.08	18.80	19.10
		36	18	18.20	18.48	18.80
		36	37	18.40	18.73	18.31
		75	0	18.40	18.64	18.91
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				18700	18900	19100
				Freq. (MHz)		
				1860	1880	1900
20	QPSK	1	0	21.07	21.12	21.40
		1	49	21.05	21.38	21.21
		1	99	21.11	21.34	21.25
		50	0	20.06	20.12	21.41
		50	25	20.17	19.97	20.93
		50	50	20.33	20.31	20.60
		100	0	20.16	20.20	21.03
	16QAM	1	0	20.47	20.69	20.63
		1	49	20.71	21.00	20.87
		1	99	20.38	20.78	20.47
		50	0	18.23	18.72	19.19
		50	25	18.23	18.59	18.65
		50	50	18.41	18.80	18.45
		100	0	18.36	18.71	18.82

7.1.2. LTE Band 4

Bandwidth	Modulation	RB size	RB offset	Channel No.		
				19957	20175	20393
				Freq. (MHz)		
				1710.7	1732.5	1754.3
1.4	QPSK	1	0	23.44	23.70	23.60
		1	2	23.74	23.43	23.81
		1	5	23.66	23.49	23.86
		3	0	23.32	23.64	23.63
		3	1	23.83	23.52	23.64
		3	3	23.77	23.70	23.62
		6	0	22.67	22.65	22.58
	16QAM	1	0	22.94	22.63	22.60
		1	2	22.90	22.57	22.72
		1	5	22.80	22.64	22.63
		3	0	22.55	22.70	22.85
		3	1	22.46	22.38	22.87
		3	3	22.82	22.82	22.90
		6	0	21.68	21.66	22.07
Bandwidth	Modulation	RB size	RB offset	Channel No.		
				19965	20175	20385
				Freq. (MHz)		
				1711.5	1732.5	1753.5
3	QPSK	1	0	23.28	23.79	23.57
		1	8	23.77	23.65	23.83
		1	14	23.65	23.42	23.73
		8	0	22.80	22.52	22.79
		8	4	22.74	22.54	22.84
		8	7	22.90	22.61	22.84
		15	0	22.89	22.68	22.82
	16QAM	1	0	22.60	22.73	22.98
		1	8	22.49	22.16	22.91
		1	14	22.71	22.79	22.75
		8	0	21.99	21.75	21.79
		8	4	21.91	21.90	21.87
		8	7	22.08	21.68	21.86
		15	0	21.97	21.84	21.90
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				19975	20175	20375
				Freq. (MHz)		
				1712.5	1732.5	1752.5
5	QPSK	1	0	23.58	23.58	23.62
		1	12	23.73	23.51	23.68
		1	24	23.82	23.66	23.71
		12	0	22.79	22.78	22.51
		12	6	22.94	22.59	22.77
		12	13	22.71	22.54	22.86
		25	0	22.74	22.51	22.64
	16QAM	1	0	22.50	22.64	22.97
		1	12	22.60	22.39	22.72
		1	24	22.91	22.79	22.91
		12	0	22.04	21.84	21.88
		12	6	21.85	21.64	21.98
		12	13	22.06	21.68	21.98
		25	0	21.94	21.78	22.04

Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				20000	20175	20350
				Freq. (MHz)		
				1715	1732.5	1750
10	QPSK	1	0	23.34	23.68	23.59
		1	24	23.87	23.62	23.83
		1	49	23.74	23.42	23.84
		25	0	22.78	22.71	22.54
		25	12	22.88	22.70	22.80
		25	25	22.88	22.60	22.75
		50	0	22.68	22.48	22.76
	16QAM	1	0	22.52	22.80	22.70
		1	24	22.37	22.27	22.88
		1	49	22.96	22.71	22.70
		25	0	21.90	21.75	21.67
		25	12	21.99	21.61	21.85
		25	25	22.00	21.81	21.96
		50	0	21.80	21.85	21.96
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				20025	20175	20325
				Freq. (MHz)		
				1717.5	1732.5	1747.5
15	QPSK	1	0	23.34	23.74	23.60
		1	38	23.68	23.45	23.75
		1	74	23.64	23.51	23.79
		36	0	22.60	22.55	22.80
		36	18	22.76	22.51	22.73
		36	37	22.70	22.46	22.90
		75	0	22.75	22.70	22.81
	16QAM	1	0	22.67	22.80	22.83
		1	38	22.39	22.22	22.81
		1	74	22.70	22.86	22.74
		36	0	21.93	21.74	21.68
		36	18	21.79	21.78	21.97
		36	37	21.94	21.82	22.09
		75	0	21.85	21.84	21.95
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				20050	20175	20300
				Freq. (MHz)		
				1720	1732.5	1745
20	QPSK	1	0	23.43	23.69	23.54
		1	49	23.73	23.56	23.90
		1	99	23.73	23.56	23.73
		50	0	22.73	22.65	22.66
		50	25	22.83	22.64	22.74
		50	50	22.78	22.61	22.83
		100	0	22.80	22.61	22.70
	16QAM	1	0	22.59	22.77	22.85
		1	49	22.47	22.28	22.78
		1	99	22.83	22.73	22.81
		50	0	21.90	21.86	21.78
		50	25	21.85	21.75	21.95
		50	50	22.03	21.81	21.99
		100	0	21.88	21.75	21.97

7.1.3. LTE Band 5

Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				20407	20525	20643
				Freq. (MHz)		
				824.7	836.5	848.3
1.4	QPSK	1	0	23.11	22.72	22.93
		1	2	23.01	22.90	22.63
		1	5	22.84	22.59	22.83
		3	0	22.86	22.52	22.72
		3	1	22.96	22.77	22.82
		3	3	22.97	22.67	22.88
		6	0	22.26	21.91	22.01
	16QAM	1	0	22.03	21.90	21.90
		1	2	21.88	22.01	21.98
		1	5	21.84	21.96	22.15
		3	0	22.23	22.19	22.10
		3	1	21.94	21.94	21.93
		3	3	21.94	22.09	21.95
		6	0	21.09	21.01	21.10
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				20415	20525	20635
				Freq. (MHz)		
				825.5	836.5	847.5
3	QPSK	1	0	23.13	22.44	22.99
		1	8	23.17	23.03	22.80
		1	14	22.72	22.82	22.94
		8	0	22.29	22.04	21.98
		8	4	22.16	22.01	22.07
		8	7	21.73	22.00	21.99
		15	0	21.99	21.86	21.83
	16QAM	1	0	22.28	21.74	22.27
		1	8	22.46	22.42	22.46
		1	14	22.04	21.73	22.36
		8	0	20.90	21.23	21.18
		8	4	21.35	20.98	20.90
		8	7	21.64	21.26	21.17
		15	0	21.50	20.85	20.91
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				20425	20525	20625
				Freq. (MHz)		
				826.5	836.5	846.5
5	QPSK	1	0	22.85	22.45	22.97
		1	12	22.91	22.88	22.85
		1	24	22.96	22.68	22.75
		12	0	22.25	21.95	21.96
		12	6	21.94	21.95	22.05
		12	13	21.87	21.93	21.97
		25	0	22.02	21.86	21.96
	16QAM	1	0	22.14	21.62	22.41
		1	12	22.33	22.26	22.45
		1	24	22.00	21.92	22.33
		12	0	21.03	21.13	21.22
		12	6	21.29	20.99	20.94
		12	13	21.42	21.25	21.05
		25	0	21.66	21.06	21.09

Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				20450	20525	20600
				Freq. (MHz)		
				829	836.5	844
10	QPSK	1	0	22.99	22.58	22.87
		1	24	23.06	22.88	22.72
		1	49	22.86	22.70	22.82
		25	0	22.17	22.05	22.00
		25	12	22.01	21.90	21.94
		25	25	21.85	22.07	22.09
		50	0	21.89	21.98	21.91
	16QAM	1	0	22.22	21.73	22.38
		1	24	22.43	22.39	22.45
		1	49	21.95	21.87	22.41
		25	0	21.01	21.12	21.14
		25	12	21.44	21.04	21.00
		25	25	21.53	21.18	21.10
		50	0	21.51	20.91	21.02

7.1.4. LTE Band 7

Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				20775	21100	21425
				Freq. (MHz)		
				2502.5	2535	2567.5
5	QPSK	1	0	23.66	23.57	23.48
		1	12	23.53	23.81	23.31
		1	24	23.43	23.49	23.59
		12	0	22.74	22.61	22.63
		12	6	22.64	22.87	22.67
		12	13	22.72	22.61	22.89
		25	0	22.59	22.72	22.64
	16QAM	1	0	22.60	22.78	22.61
		1	12	22.45	22.73	22.73
		1	24	22.72	22.68	22.98
		12	0	21.89	21.86	21.89
		12	6	21.80	21.94	21.79
		12	13	21.80	21.80	21.88
		25	0	21.83	21.79	21.89
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				20800	21100	21400
				Freq. (MHz)		
				2505	2535	2565
10	QPSK	1	0	23.66	23.33	23.58
		1	24	23.42	23.73	23.39
		1	49	23.66	23.61	23.67
		25	0	22.55	22.82	22.48
		25	12	22.74	22.83	22.52
		25	25	22.68	22.54	22.76
		50	0	22.70	22.60	22.66
	16QAM	1	0	22.50	22.76	22.76
		1	24	22.36	22.75	22.90
		1	49	22.77	22.67	22.80
		25	0	21.88	21.90	22.00
		25	12	21.90	21.76	21.79
		25	25	21.86	21.80	21.85
		50	0	21.90	21.70	21.69
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				20825	21100	21375
				Freq. (MHz)		
				2507.5	2535	2562.5
15	QPSK	1	0	23.65	23.58	23.58
		1	38	23.59	23.90	23.40
		1	74	23.47	23.63	23.72
		36	0	22.59	22.73	22.48
		36	18	22.53	22.77	22.72
		36	37	22.69	22.60	22.77
		75	0	22.56	22.81	22.53
	16QAM	1	0	22.49	22.57	22.75
		1	38	22.47	22.72	22.84
		1	74	22.62	22.67	22.80
		36	0	21.96	21.88	21.98
		36	18	21.73	21.72	21.68
		36	37	21.73	21.82	21.84
		75	0	21.92	21.89	21.63

Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				20850	21100	21350
				Freq. (MHz)		
				2510	2535	2560
20	QPSK	1	0	23.53	23.43	23.53
		1	49	23.47	23.78	23.46
		1	99	23.52	23.52	23.60
		50	0	22.64	22.70	22.60
		50	25	22.68	22.74	22.65
		50	50	22.58	22.66	22.76
		100	0	22.64	22.74	22.65
	16QAM	1	0	22.57	22.68	22.66
		1	49	22.46	22.75	22.87
		1	99	22.65	22.78	22.94
		50	0	21.94	21.82	21.85
		50	25	21.87	21.84	21.79
		50	50	21.81	21.89	21.97
		100	0	21.78	21.80	21.74

7.1.5. LTE Band 12

Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				23017	23095	23173
				Freq. (MHz)		
				699.7	707.5	715.3
1.4	QPSK	1	0	23.07	22.62	22.97
		1	2	23.12	22.96	22.80
		1	5	22.93	22.77	22.76
		3	0	22.97	22.52	23.24
		3	1	22.98	23.17	22.63
		3	3	22.83	22.57	22.67
		6	0	22.14	22.32	22.07
	16QAM	1	0	22.00	22.48	21.87
		1	2	22.15	22.11	21.83
		1	5	22.34	22.17	21.98
		3	0	22.25	22.40	22.10
		3	1	22.22	22.24	21.87
		3	3	22.46	22.01	22.17
		6	0	21.00	21.58	21.04
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				23025	23095	23165
				Freq. (MHz)		
				700.5	707.5	714.5
3	QPSK	1	0	22.82	22.55	22.98
		1	8	23.15	23.15	22.71
		1	14	22.86	22.72	22.82
		8	0	22.02	22.34	21.97
		8	4	22.06	22.09	21.96
		8	7	22.49	21.92	22.07
		15	0	22.15	21.93	22.12
	16QAM	1	0	21.96	21.96	22.41
		1	8	22.31	22.28	22.27
		1	14	21.95	21.86	22.50
		8	0	20.93	21.67	21.03
		8	4	21.04	21.17	21.49
		8	7	21.39	21.49	21.43
		15	0	21.15	21.04	21.38
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				23035	23095	23155
				Freq. (MHz)		
				701.5	707.5	713.5
5	QPSK	1	0	23.02	22.63	23.12
		1	12	22.97	23.17	22.77
		1	24	22.92	22.76	22.65
		12	0	22.13	22.44	22.08
		12	6	22.06	22.22	21.79
		12	13	22.22	22.03	22.22
		25	0	22.40	22.05	21.99
	16QAM	1	0	22.11	22.06	22.43
		1	12	22.50	22.30	22.05
		1	24	21.96	21.63	22.43
		12	0	21.05	21.51	21.22
		12	6	20.84	21.15	21.23
		12	13	21.31	21.54	21.55
		25	0	21.31	20.92	21.37

Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				23060	23095	23130
				Freq. (MHz)		
				704	707.5	711
10	QPSK	1	0	22.93	22.67	23.12
		1	24	23.03	23.07	22.67
		1	49	22.78	22.72	22.75
		25	0	22.14	22.43	22.01
		25	12	22.21	22.17	21.82
		25	25	22.37	22.02	22.07
		50	0	22.25	22.05	22.02
	16QAM	1	0	22.00	21.94	22.41
		1	24	22.43	22.15	22.17
		1	49	21.85	21.78	22.38
		25	0	21.06	21.52	21.11
		25	12	20.96	21.18	21.38
		25	25	21.40	21.54	21.41
		50	0	21.16	21.06	21.31

7.1.6. LTE Band 13

Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				23205	23230	23255
				Freq. (MHz)		
				779.5	782	784.5
5	QPSK	1	0	23.02	23.00	22.93
		1	12	23.37	23.23	23.18
		1	24	22.82	23.03	22.77
		12	0	22.35	22.31	22.28
		12	6	22.13	22.12	22.16
		12	13	22.41	22.19	22.26
		25	0	22.19	22.17	22.36
	16QAM	1	0	22.02	21.98	21.96
		1	12	22.46	22.46	22.33
		1	24	21.98	21.94	22.12
		12	0	21.49	21.44	21.65
		12	6	21.26	21.04	21.18
		12	13	21.25	21.03	21.07
		25	0	20.99	20.96	20.93
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				N/A	23230	N/A
				Freq. (MHz)		
				N/A	782	N/A
10	QPSK	1	0	N/A	22.91	N/A
		1	24	N/A	23.22	N/A
		1	49	N/A	22.91	N/A
		25	0	N/A	22.35	N/A
		25	12	N/A	22.21	N/A
		25	25	N/A	22.27	N/A
		50	0	N/A	22.28	N/A
	16QAM	1	0	N/A	22.00	N/A
		1	24	N/A	22.34	N/A
		1	49	N/A	22.02	N/A
		25	0	N/A	21.54	N/A
		25	12	N/A	21.12	N/A
		25	25	N/A	21.17	N/A
		50	0	N/A	21.08	N/A

7.1.7. LTE Band 25

Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				26047	26365	26683
				Freq. (MHz)		
				1850.7	1882.5	1914.3
1.4	QPSK	1	0	21.30	21.09	21.24
		1	2	21.23	21.39	21.05
		1	5	21.27	21.15	21.20
		3	0	21.10	21.13	21.25
		3	1	21.24	21.37	21.23
		3	3	21.09	21.21	21.03
		6	0	20.00	20.20	21.78
	16QAM	1	0	20.25	20.11	21.45
		1	2	20.50	20.26	21.08
		1	5	20.38	20.22	21.56
		3	0	20.59	20.45	20.49
		3	1	20.22	20.95	20.89
		3	3	20.47	20.46	20.09
		6	0	21.24	21.75	21.49
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				26055	26365	26675
				Freq. (MHz)		
				1851.5	1882.5	1913.5
3	QPSK	1	0	21.17	21.09	21.38
		1	8	21.16	21.45	21.13
		1	14	21.21	21.23	21.02
		8	0	20.12	20.37	21.85
		8	4	20.00	20.25	21.22
		8	7	20.55	20.30	21.08
		15	0	20.35	20.48	21.34
	16QAM	1	0	20.55	20.54	20.27
		1	8	20.39	20.86	20.80
		1	14	20.49	20.40	20.29
		8	0	20.96	21.67	21.81
		8	4	21.10	21.96	21.52
		8	7	21.32	21.75	21.11
		15	0	21.21	21.38	21.57
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				26065	26365	26665
				Freq. (MHz)		
				1852.5	1882.5	1912.5
5	QPSK	1	0	21.25	21.27	21.42
		1	12	21.34	21.38	21.14
		1	24	21.29	21.37	21.08
		12	0	20.01	20.48	21.68
		12	6	20.14	20.01	21.47
		12	13	20.39	20.17	21.23
		25	0	20.34	20.22	21.52
	16QAM	1	0	20.78	20.40	20.24
		1	12	20.27	20.73	20.77
		1	24	20.44	20.40	20.24
		12	0	21.13	21.37	21.86
		12	6	21.15	21.75	21.55
		12	13	21.49	21.83	21.05
		25	0	21.06	21.95	21.51

Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				26090	26365	26640
				Freq. (MHz)		
				1855	1882.5	1910
10	QPSK	1	0	21.18	21.27	21.21
		1	24	21.28	21.45	21.07
		1	49	21.24	21.23	21.20
		25	0	20.23	20.44	21.64
		25	12	20.31	20.18	21.39
		25	25	20.25	20.40	21.01
		50	0	20.19	20.33	21.37
	16QAM	1	0	20.81	20.33	20.26
		1	24	20.34	20.68	20.62
		1	49	20.43	20.25	20.10
		25	0	21.17	21.43	21.91
		25	12	21.19	21.73	21.50
		25	25	21.25	21.97	21.04
		50	0	21.07	21.83	21.32
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				26115	26365	26615
				Freq. (MHz)		
				1857.5	1882.5	1907.5
15	QPSK	1	0	21.12	21.11	21.37
		1	38	21.24	21.46	21.05
		1	74	21.24	21.20	21.21
		36	0	20.03	20.37	21.82
		36	18	20.14	20.25	21.45
		36	37	20.49	20.41	21.00
		75	0	20.30	20.45	21.29
	16QAM	1	0	20.72	20.30	20.22
		1	38	20.29	20.96	20.67
		1	74	20.58	20.25	20.11
		36	0	20.97	21.31	21.77
		36	18	21.21	21.94	21.36
		36	37	21.51	21.93	21.15
		75	0	21.17	21.82	21.34
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				26140	26365	26590
				Freq. (MHz)		
				1860	1882.5	1905
20	QPSK	1	0	21.18	21.15	21.40
		1	49	21.19	21.45	21.08
		1	99	21.18	21.24	21.17
		50	0	20.63	21.24	21.78
		50	25	20.62	20.63	21.37
		50	50	20.90	20.81	21.08
		100	0	20.25	20.34	21.43
	16QAM	1	0	20.69	20.40	20.37
		1	49	20.25	20.81	20.74
		1	99	20.56	20.33	20.23
		50	0	21.06	21.25	21.81
		50	25	21.12	21.83	21.42
		50	50	21.37	21.86	21.09
		100	0	21.17	21.94	21.44

7.1.8. LTE Band 26 (Part 90)

Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				26697	26740	26783
				Freq. (MHz)		
				814.7	819	823.3
1.4	QPSK	1	0	23.18	23.00	22.99
		1	2	23.18	23.13	23.10
		1	5	22.83	23.02	22.98
		3	0	22.29	22.22	22.47
		3	1	22.28	22.17	22.53
		3	3	22.18	22.16	22.52
		6	0	22.49	22.06	22.24
	16QAM	1	0	22.25	22.13	22.11
		1	2	22.35	22.24	22.25
		1	5	22.25	22.20	22.28
		3	0	21.29	21.34	21.17
		3	1	21.26	21.28	21.31
		3	3	21.14	21.13	21.25
		6	0	21.30	21.42	21.16
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				26705	26740	26775
				Freq. (MHz)		
				815.5	819	822.5
3	QPSK	1	0	23.13	22.96	23.11
		1	8	23.19	23.08	23.15
		1	14	23.03	22.88	23.25
		8	0	22.49	22.42	22.38
		8	4	22.27	22.37	22.36
		8	7	22.24	22.11	22.40
		15	0	22.50	22.08	22.35
	16QAM	1	0	22.34	22.16	22.32
		1	8	22.47	22.22	22.31
		1	14	22.11	22.12	22.45
		8	0	21.23	21.05	21.11
		8	4	21.25	21.14	21.29
		8	7	21.22	21.33	21.04
		15	0	21.21	21.33	21.32
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				26715	26740	26765
				Freq. (MHz)		
				816.5	819	821.5
5	QPSK	1	0	23.10	22.91	23.08
		1	12	23.26	23.23	23.14
		1	24	22.88	22.89	23.11
		12	0	22.35	22.37	22.37
		12	6	22.41	22.31	22.38
		12	13	22.18	22.20	22.37
		25	0	22.38	22.18	22.32
	16QAM	1	0	22.26	22.19	22.26
		1	12	22.44	22.35	22.27
		1	24	22.13	22.20	22.30
		12	0	21.21	21.20	21.25
		12	6	21.17	21.22	21.21
		12	13	21.12	21.22	21.14
		25	0	21.26	21.33	21.29

Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				N/A	26740	N/A
				Freq. (MHz)		
				N/A	819	N/A
10	QPSK	1	0	N/A	22.98	N/A
		1	24	N/A	23.21	N/A
		1	49	N/A	22.96	N/A
		25	0	N/A	22.32	N/A
		25	12	N/A	22.27	N/A
		25	25	N/A	22.26	N/A
		50	0	N/A	22.30	N/A
	16QAM	1	0	N/A	22.21	N/A
		1	24	N/A	22.12	N/A
		1	49	N/A	22.17	N/A
		25	0	N/A	21.17	N/A
		25	12	N/A	21.09	N/A
		25	25	N/A	21.15	N/A
		50	0	N/A	21.21	N/A

7.1.9. LTE Band 26(Part 22)

Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				26797	26915	27033
				Freq. (MHz)		
				824.7	836.5	848.3
1.4	QPSK	1	0	22.90	22.84	22.59
		1	2	22.95	22.89	23.01
		1	5	22.60	22.89	22.69
		3	0	22.77	22.91	22.68
		3	1	23.01	23.02	22.94
		3	3	22.58	22.70	22.70
		6	0	22.19	22.11	22.18
	16QAM	1	0	22.19	22.10	22.20
		1	2	22.32	21.94	22.07
		1	5	21.82	22.05	22.32
		3	0	22.07	22.12	22.16
		3	1	22.32	22.23	22.21
		3	3	21.92	22.08	22.12
		6	0	20.94	21.25	21.29
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				26805	26915	27025
				Freq. (MHz)		
				825.5	836.5	847.5
3	QPSK	1	0	22.63	22.81	22.66
		1	12	23.04	23.12	23.10
		1	24	22.65	22.74	22.74
		12	0	22.10	22.06	22.07
		12	6	21.91	22.09	22.24
		12	13	22.04	22.18	22.08
		25	0	21.85	22.25	22.25
	16QAM	1	0	22.13	22.15	21.90
		1	12	22.20	22.02	21.91
		1	24	22.11	22.15	22.09
		12	0	21.11	20.88	20.99
		12	6	21.05	21.09	21.00
		12	13	20.97	20.94	21.03
		25	0	20.92	21.01	21.25
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				26815	26915	27015
				Freq. (MHz)		
				826.5	836.5	846.5
5	QPSK	1	0	22.68	22.89	22.70
		1	24	23.02	22.92	22.95
		1	49	22.59	22.89	22.53
		25	0	22.37	22.31	22.14
		25	12	22.17	21.92	22.39
		25	25	22.25	22.17	22.24
		50	0	21.98	22.14	22.39
	16QAM	1	0	22.05	22.12	22.08
		1	24	22.26	22.21	21.95
		1	49	21.87	22.03	21.85
		25	0	21.15	21.00	20.89
		25	12	20.98	20.95	21.01
		25	25	21.17	21.01	21.07

		50	0	21.12	21.01	21.13
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				26840	26915	26990
				Freq. (MHz)		
				829	836.5	844
10	QPSK	1	0	22.84	22.84	22.64
		1	38	22.92	22.90	22.99
		1	74	22.55	22.69	22.71
		36	0	22.24	22.14	22.18
		36	18	21.97	21.93	22.12
		36	37	22.12	22.09	22.14
		75	0	21.84	22.04	22.32
	16QAM	1	0	22.14	22.17	21.87
		1	38	22.18	22.05	21.96
		1	74	21.91	22.08	22.01
		36	0	21.22	21.07	21.12
		36	18	21.14	20.93	21.07
		36	37	20.94	21.14	21.18
		75	0	20.96	21.16	21.21
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				26865	26915	26965
				Freq. (MHz)		
				831.5	836.5	841.5
15	QPSK	1	0	22.75	22.91	22.62
		1	49	22.90	23.02	22.97
		1	99	22.67	22.81	22.66
		50	0	22.23	22.17	22.13
		50	25	22.04	22.06	22.24
		50	50	22.17	22.04	22.12
		100	0	21.95	22.11	22.25
	16QAM	1	0	22.03	22.09	22.02
		1	49	22.33	22.17	22.06
		1	99	22.01	22.17	22.00
		50	0	21.22	20.99	21.00
		50	25	21.09	21.08	21.15
		50	50	21.05	21.04	21.11
		100	0	21.00	21.16	21.15

7.1.10. LTE Band 66

Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				131979	132322	132665
				Freq. (MHz)		
				1710.7	1745	1779.3
1.4	QPSK	1	0	23.55	23.48	23.74
		1	2	23.92	23.43	23.63
		1	5	23.77	23.77	23.38
		3	0	23.63	23.72	23.75
		3	1	23.87	23.60	23.66
		3	3	23.52	23.74	23.26
		6	0	22.75	22.69	22.50
	16QAM	1	0	22.83	22.57	22.57
		1	2	22.83	22.58	22.54
		1	5	22.90	22.90	22.43
		3	0	22.71	22.26	22.05
		3	1	22.46	22.21	22.00
		3	3	22.71	22.35	22.15
		6	0	21.72	21.77	21.61
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				131987	132322	132657
				Freq. (MHz)		
				1711.5	1745	1778.5
3	QPSK	1	0	23.55	23.64	23.78
		1	8	23.83	23.50	23.57
		1	14	23.76	23.80	23.22
		8	0	22.68	22.55	22.51
		8	4	22.91	22.81	22.51
		8	7	22.90	22.84	22.43
		15	0	22.83	22.68	22.65
	16QAM	1	0	22.74	22.16	22.22
		1	8	22.48	22.06	22.02
		1	14	22.53	22.45	22.16
		8	0	22.02	21.84	21.65
		8	4	22.05	22.04	21.71
		8	7	22.12	21.82	21.63
		15	0	21.82	21.98	21.63
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				131997	132322	132647
				Freq. (MHz)		
				1712.5	1745	1777.5
5	QPSK	1	0	23.57	23.77	23.51
		1	12	23.91	23.63	23.56
		1	24	23.73	24.00	23.10
		12	0	22.83	22.83	22.71
		12	6	22.79	22.79	22.69
		12	13	22.88	22.67	22.28
		25	0	22.91	22.63	22.44
	16QAM	1	0	22.52	22.23	22.09
		1	12	22.58	22.22	21.94
		1	24	22.48	22.51	22.34
		12	0	21.91	21.81	21.77
		12	6	21.98	21.77	21.69
		12	13	22.04	22.08	21.49
		25	0	21.78	22.08	21.72

Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				132022	132322	132622
				Freq. (MHz)		
				1715	1745	1775
10	QPSK	1	0	23.36	23.74	23.49
		1	24	23.94	23.42	23.60
		1	49	23.56	23.92	23.10
		25	0	22.74	22.69	22.74
		25	12	22.88	22.69	22.59
		25	25	22.94	22.83	22.54
		50	0	22.90	22.68	22.51
	16QAM	1	0	22.50	22.26	21.96
		1	24	22.47	22.24	22.09
		1	49	22.62	22.39	22.37
		25	0	22.06	21.91	21.85
		25	12	21.79	21.94	21.60
		25	25	21.89	21.82	21.46
		50	0	22.05	21.79	21.63
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				132047	132322	132597
				Freq. (MHz)		
				1717.5	1745	1772.5
15	QPSK	1	0	23.54	23.65	23.79
		1	38	23.88	23.69	23.64
		1	74	23.69	23.84	23.24
		36	0	22.73	22.75	22.55
		36	18	22.74	22.60	22.69
		36	37	22.76	22.88	22.40
		75	0	22.76	22.74	22.49
	16QAM	1	0	22.79	22.28	22.20
		1	38	22.48	22.01	22.14
		1	74	22.45	22.61	22.27
		36	0	22.09	21.96	21.80
		36	18	21.80	22.06	21.87
		36	37	22.17	21.99	21.47
		75	0	22.00	21.95	21.66
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				132072	132322	132572
				Freq. (MHz)		
				1720	1745	1770
20	QPSK	1	0	23.48	23.63	23.64
		1	49	23.79	23.56	23.61
		1	99	23.67	23.89	23.24
		50	0	22.70	22.70	22.65
		50	25	22.88	22.69	22.60
		50	50	22.85	22.73	22.41
		100	0	22.82	22.77	22.54
	16QAM	1	0	22.65	22.29	22.10
		1	49	22.56	22.11	22.06
		1	99	22.57	22.50	22.23
		50	0	21.96	21.86	21.80
		50	25	21.91	21.91	21.75
		50	50	22.04	21.97	21.49
		100	0	21.90	21.94	21.61

7.1.11. LTE Band 71

Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				133147	133297	133447
				Freq. (MHz)		
				665.5	680.5	695.5
5	QPSK	1	0	23.41	23.19	23.24
		1	12	23.21	23.29	23.37
		1	24	23.20	23.14	23.07
		12	0	22.56	22.54	22.62
		12	6	22.88	22.37	22.26
		12	13	22.60	22.52	22.36
		25	0	22.65	22.36	22.29
	16QAM	1	0	22.12	22.71	22.56
		1	12	22.55	22.65	22.26
		1	24	22.20	22.49	22.22
		12	0	21.66	21.61	21.38
		12	6	21.82	21.29	21.86
		12	13	21.72	21.66	21.90
		25	0	21.64	21.40	21.68
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				133172	133297	133422
				Freq. (MHz)		
				668	680.5	693
10	QPSK	1	0	23.41	23.29	23.08
		1	24	23.23	23.37	23.22
		1	49	23.15	23.28	22.99
		25	0	22.53	22.67	22.38
		25	12	22.74	22.23	22.36
		25	25	22.62	22.32	22.24
		50	0	22.89	22.51	22.37
	16QAM	1	0	22.18	22.49	22.56
		1	24	22.28	22.79	22.52
		1	49	22.35	22.36	22.27
		25	0	21.67	21.72	21.63
		25	12	21.85	21.45	21.92
		25	25	21.83	21.84	21.89
		50	0	21.70	21.47	21.78
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				133197	133297	133397
				Freq. (MHz)		
				670.5	680.5	690.5
15	QPSK	1	0	23.39	23.32	23.08
		1	38	23.13	23.41	23.26
		1	74	23.21	23.18	23.00
		36	0	22.39	22.73	22.59
		36	18	22.97	22.32	22.33
		36	37	22.80	22.35	22.22
		75	0	22.89	22.26	22.52
	16QAM	1	0	22.10	22.43	22.78
		1	38	22.29	22.70	22.51
		1	74	22.12	22.38	22.34
		36	0	21.76	21.76	21.63
		36	18	21.78	21.28	21.70
		36	37	21.94	21.63	21.94

		75	0	21.81	21.42	21.63
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.		
				133222	133322	133372
				Freq. (MHz)		
				673	683	688
20	QPSK	1	0	23.33	23.22	23.10
		1	49	23.20	23.43	23.29
		1	99	23.16	23.25	23.10
		50	0	22.50	22.64	22.51
		50	25	22.82	22.34	22.39
		50	50	22.65	22.40	22.35
		100	0	22.78	22.37	22.37
	16QAM	1	0	22.21	22.57	22.65
		1	49	22.43	22.80	22.41
		1	99	22.22	22.51	22.34
		50	0	21.62	21.69	21.51
		50	25	21.83	21.32	21.85
		50	50	21.81	21.77	21.82
		100	0	21.78	21.47	21.75

7.2. PEAK TO AVERAGE RADIO

LIMITS


In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

TEST PROCEDURE

Refer to KDB 971168 D01 Power Meas License Digital Systems v03r01;

The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The PAR was measured on the Spectrum Analyzer.

TEST SETUP

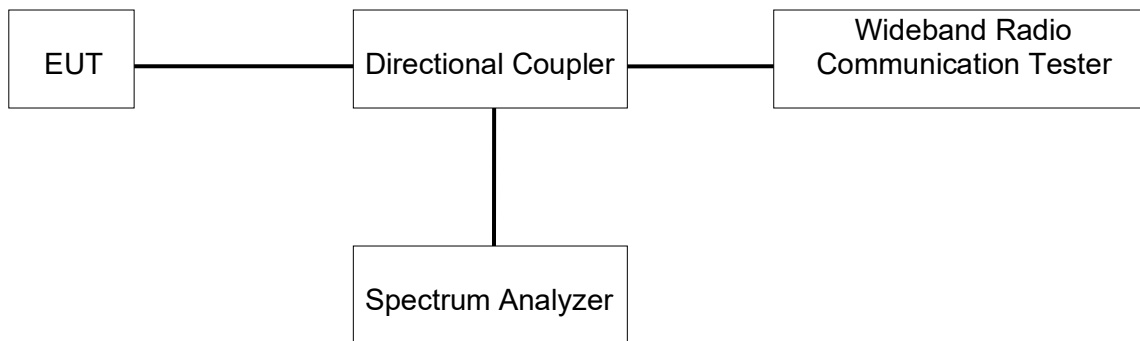

TEST ENVIRONMENT

Temperature	21.6 °C	Relative Humidity	53.2 %
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60HZ

RESULTS

Middle was used to measure as the worst case. The results from all CCDF plots are passed with 13dB peak-to-average power ratio criteria.

Please refer to Appendix LTE.

7.3. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS


For reporting purposes only.

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

(Refer to KDB 971168 D01 Power Meas License Digital Systems v03r01)

TEST SETUP

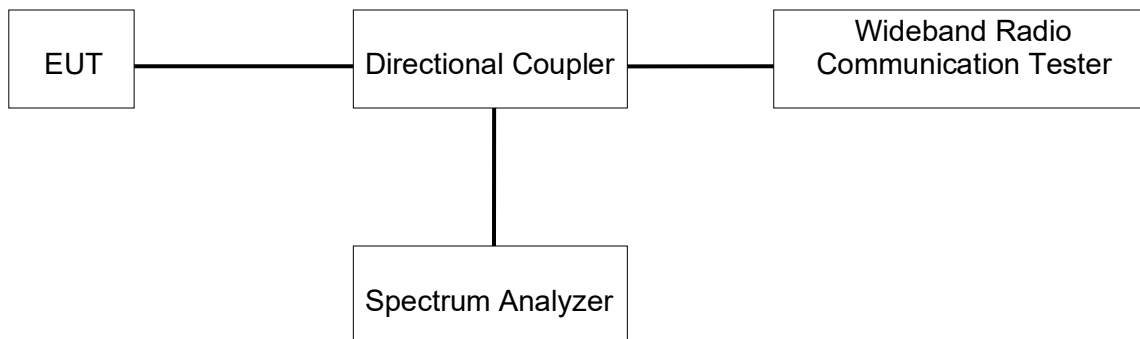

TEST ENVIRONMENT

Temperature	21.6 °C	Relative Humidity	53.2 %
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60HZ

RESULTS

There is no limit required and power is the same for low, middle and high channel, therefore, only middle channel was tested.

Please refer to Appendix LTE.

7.4. BAND EDGE EMISSIONS

RULE PART(S)

FCC §2.1051, §22.917, §24.238, §27.53, §90.691

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

FCC: §27.53 (m)(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

FCC: §90.691 (a)(1)

For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

TEST PROCEDURE

Refer to KDB 971168 D01 Power Meas License Digital Systems v03r01

The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

- a) Set the RBW = 1 ~ 5 % of OBW (Typically limited to a minimum RBW of 1% of the OBW)
- b) Set VBW $\geq 3 \times$ RBW;
- c) Set span ≥ 1.5 times the OBW;
- d) Sweep time = Auto;
- e) Detector = RMS;
- f) Ensure that the number of measurement points $\geq 2 \times$ Span/RBW;
- g) Trace mode = Average (100);

Test procedure for LTE Band 7/38/41


(m)(6) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed; for mobile digital stations, in the 1 megahertz bands immediately outside and adjacent to the frequency block a resolution

bandwidth of at least two percent may be employed, except when the 1 megahertz band is 2495-2496 MHz, in which case a resolution bandwidth of at least one percent may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 megahertz or 1 percent of emission bandwidth, as specified; or 1 megahertz or 2 percent for mobile digital stations, except in the band 2495-2496 MHz). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. With respect to television operations, measurements must be made of the separate visual and aural operating powers at sufficiently frequent intervals to ensure compliance with the rules.

Test procedure for LTE Band 40

(a)(5)Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the channel blocks at 2305, 2310, 2315, 2320, 2345, 2350, 2355, and 2360 MHz, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e., 1 MHz). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

TEST SETUP

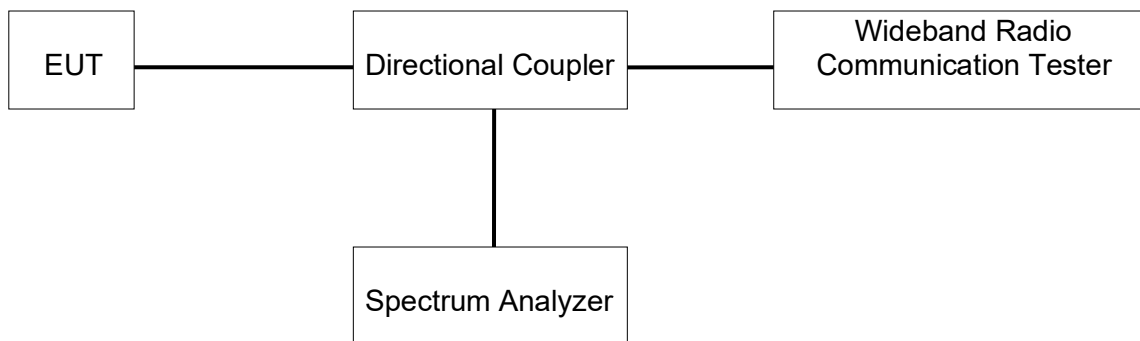

TEST ENVIRONMENT

Temperature	21.6 °C	Relative Humidity	53.2 %
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60HZ

RESULTS

Please refer to Appendix LTE.

7.5. SPURIOUS EMISSION AT ANTENNA TERMINAL

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238, §27.53, §90.691

LIMITS

FCC: §22.901, §22.917, §24.238, §90.691

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

Limit for Band 7

At least $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section.


TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v03r01

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

- a) Set the RBW = 100 kHz for emission below 1GHz and 1MHz for emissions above 1GHz
(Tests were performed 1 MHz [Worst case], to sweep 1 time for all frequency range)
- b) Set VBW $\geq 3 \times$ RBW;
- c) Set span ≥ 1.5 times the OBW;
- d) Sweep time = auto couple;
- e) Detector = rms;
- f) Ensure that the number of measurement points = Max (20001 for below 1GHz, 40001 for above 1GHz);
- g) Trace mode = average (LTE 5), Maxhold (LTE Band7);

Note: Please refer to section 5.4 for bandwidth and RB setting about LTE bands.

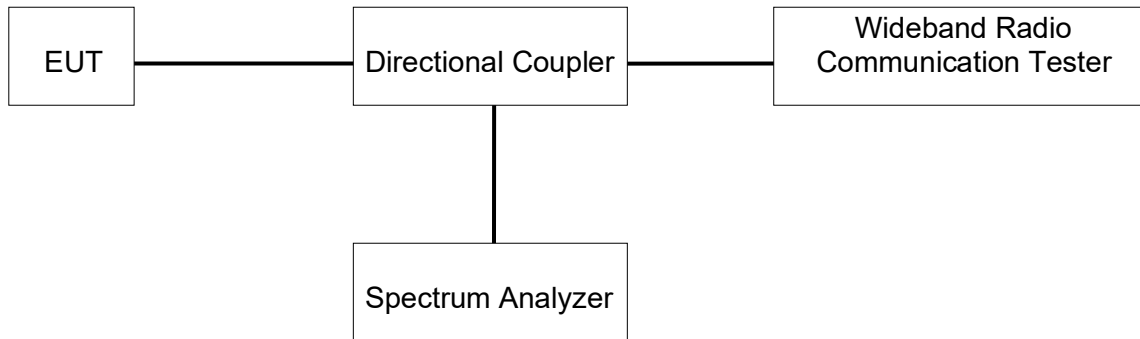TEST SETUP**TEST ENVIRONMENT**

Temperature	21.6 °C	Relative Humidity	53.2 %
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60HZ

RESULTS

Please refer to Appendix LTE.

7.6. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, §27.54, §90.213

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 and §27.54 - The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.


§90.213, transmitters used in the services governed by this part must have a minimum frequency stability ± 2.5 ppm

TEST PROCEDURE

Refer to KDB 971168 D01 Power Meas License Digital Systems v03r01.

	Normal Test Conditions	Extreme Test Conditions
Relative Humidity	45 % - 75 %	/
Atmospheric Pressure	100 kPa ~102 kPa	/
Temperature	T _N (Normal Temperature): 24.5 °C	T _L (Low Temperature): -30 °C
		T _H (High Temperature): 50 °C
Supply Voltage	V _N (Normal Voltage): AC 120V 60HZ	V _L (Low Voltage): AC 102 V
		V _H (High Voltage): AC 138 V

TEST SETUP

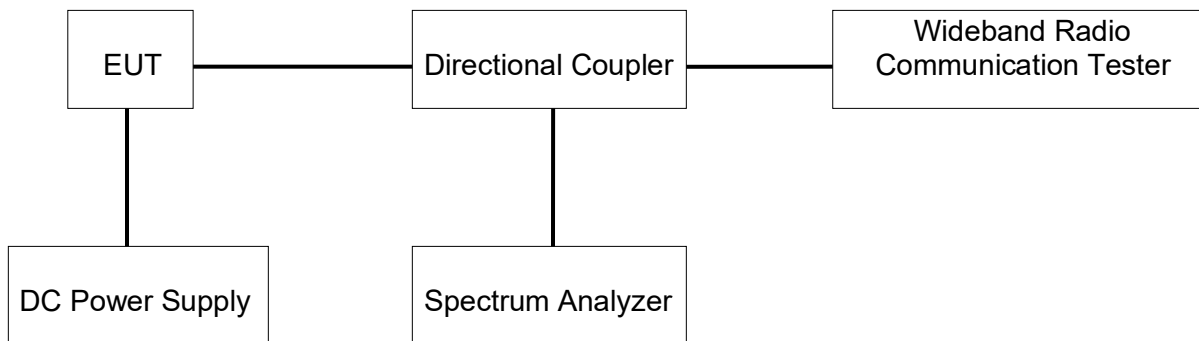

RESULTS

The peak frequency error is recorded (worst-case).

Please refer to Appendix LTE.

8. RADIATED SPURIOUS EMISSIONS

LIMIT

FCC: §27.53 (m), LTE (B7/38/41)

At least $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section.

FCC: §27.53 (a), LTE (B40)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $70 + 10 \log (P)$ dB.

FCC: §24.238(a), LTE (B2)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

FCC: §22.917(a) LTE (B5)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

FCC: §27.53(h) LTE (B4/66)


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

Following the test configuration shown below, radiated emissions measured directly from the EUT and convert the measured field strength or received power to ERP or EIRP, as required, for comparison to the applicable limits. As stated in section 5.5.1 of ANSI C63.26-2015. The field strength measurement method by using a test site validated to the requirement of ANSI C63.4 is an alternative method to the substitution measurement.

For Radiate Spurious Emission (1 GHz ~ 3 GHz):

All bands have been tested, but only the worst data was recorded in the report.

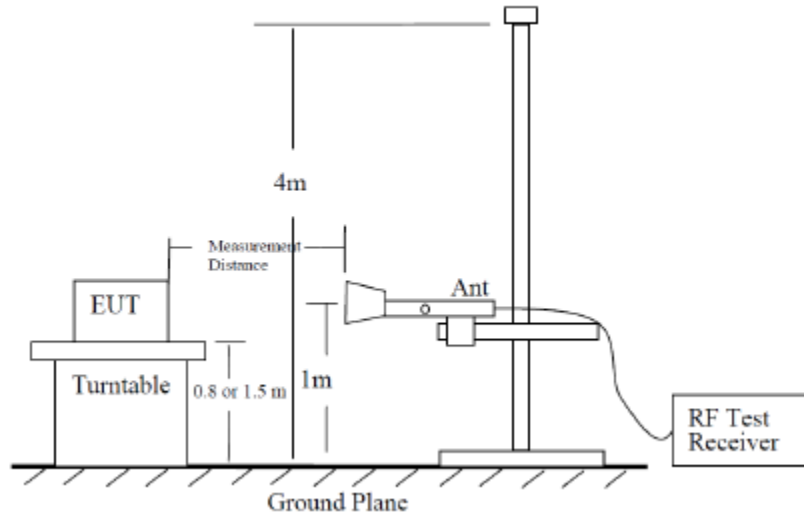

Radiated Power Measurement Calculation According to ANSI C63.26-2015


- $E \text{ (dB}\mu\text{V/m)} = \text{Measured amplitude level (dB}\mu\text{V)} + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}.$
- $E \text{ (dB}\mu\text{V/m)} = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}.$
- $E \text{ (dB}\mu\text{V/m)} = \text{EIRP (dBm)} - 20\log(D) + 104.8$, where D is the measurement distance (in the far field region) in m.
- $\text{EIRP (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8$, where D is the measurement distance (in the far field region) in m.

So, from d)

The measuring distance is at 3m, then $20 \cdot \log(3) = 9.5424$

Then, $\text{EIRP (dBm)} = E \text{ (dB}\mu\text{V/m)} + 9.5424 - 104.8 = E \text{ (dB}\mu\text{V/m)} - 95.2576$

X axis, Y axis, Z axis:

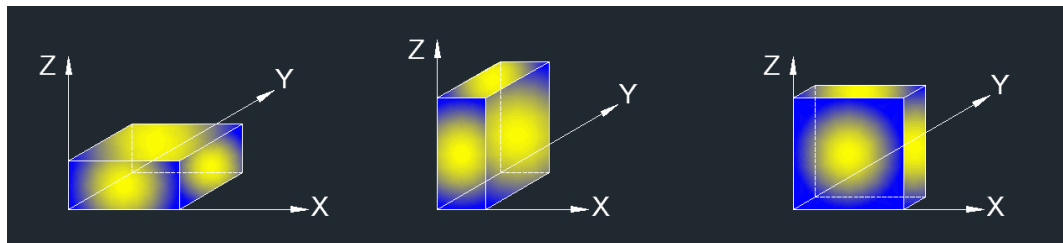


Note: The EUT was investigated in three orthogonal orientations X/Y/Z on ANT0 and ANT3 to determine the worst-case orientation. X orientation is finally determined the worst.

TEST ENVIRONMENT


Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60HZ
---------------------	--------	--------------	--------------

RESULTS

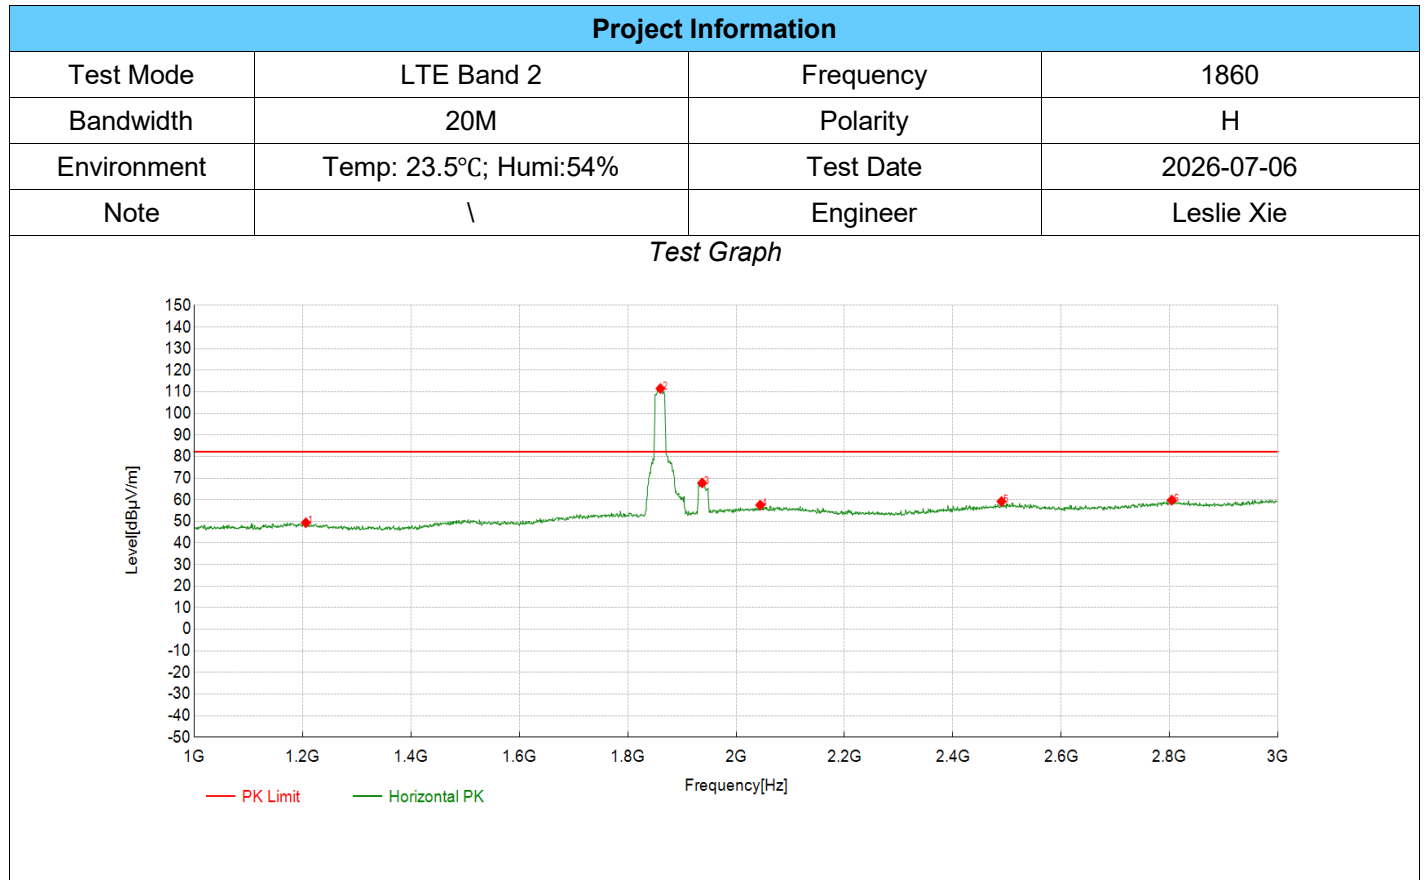


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1206.10	45.01	49.36	4.35	82.25	32.89	PK	Horizontal	PASS
2	1860.43	103.27	111.53	8.26	\	\	PK	Horizontal	Fundamental
3	1937.47	58.82	67.80	8.98	82.25	14.45	PK	Horizontal	PASS
4	2044.52	47.40	57.52	10.12	82.25	24.73	PK	Horizontal	PASS
5	2489.74	49.13	59.21	10.08	82.25	23.04	PK	Horizontal	PASS
6	2803.90	48.48	59.84	11.36	82.25	22.41	PK	Horizontal	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

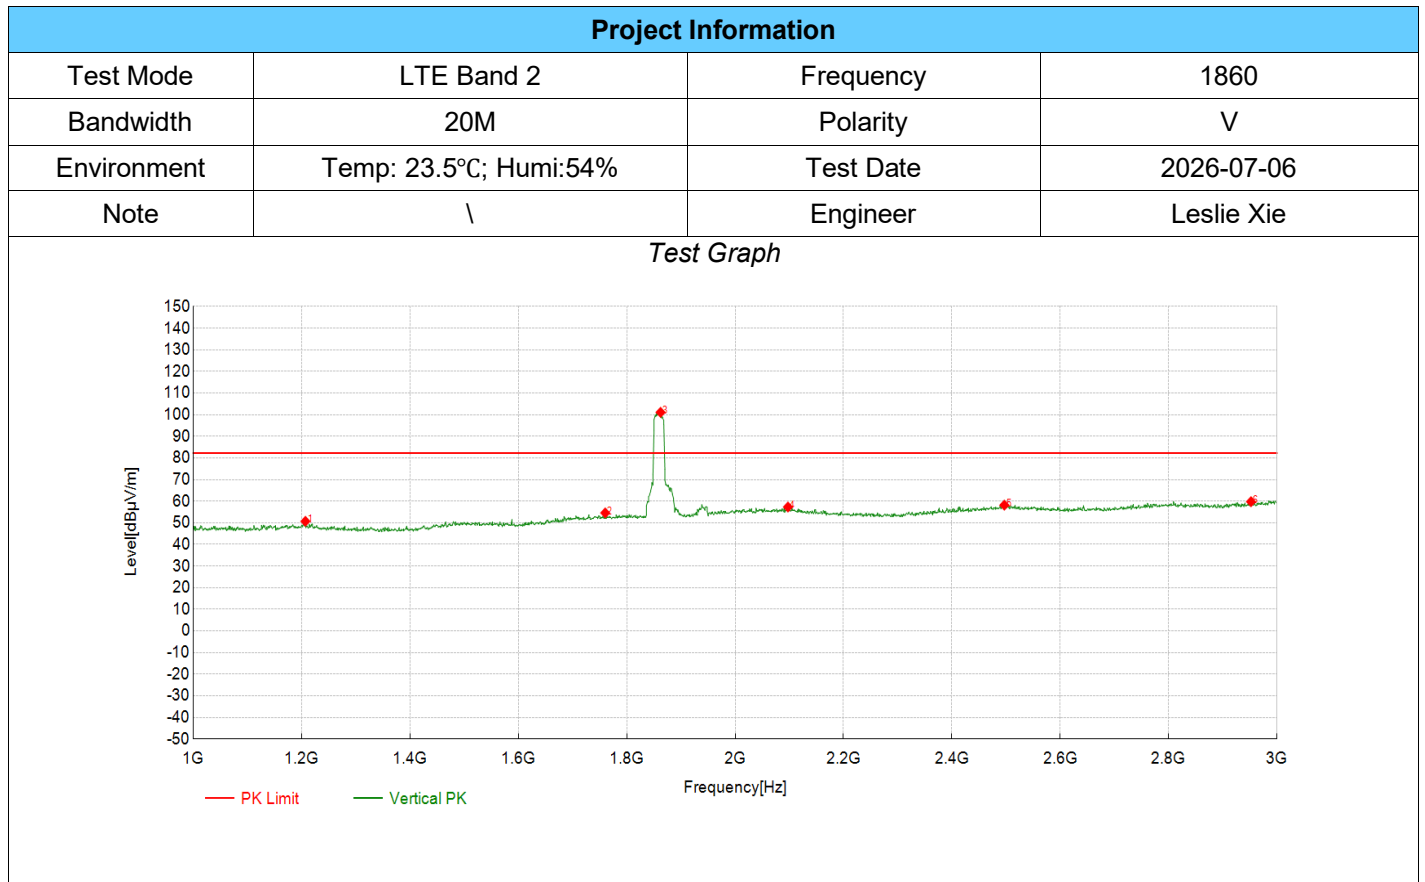


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1207.10	46.38	50.71	4.33	82.25	31.54	PK	Vertical	PASS
2	1760.38	46.67	54.58	7.91	82.25	27.67	PK	Vertical	PASS
3	1862.43	92.84	101.09	8.25	\	\	PK	Vertical	Fundamental
4	2097.55	47.30	57.30	10.00	82.25	24.95	PK	Vertical	PASS
5	2496.75	48.00	58.18	10.18	82.25	24.07	PK	Vertical	PASS
6	2951.98	48.34	59.78	11.44	82.25	22.47	PK	Vertical	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

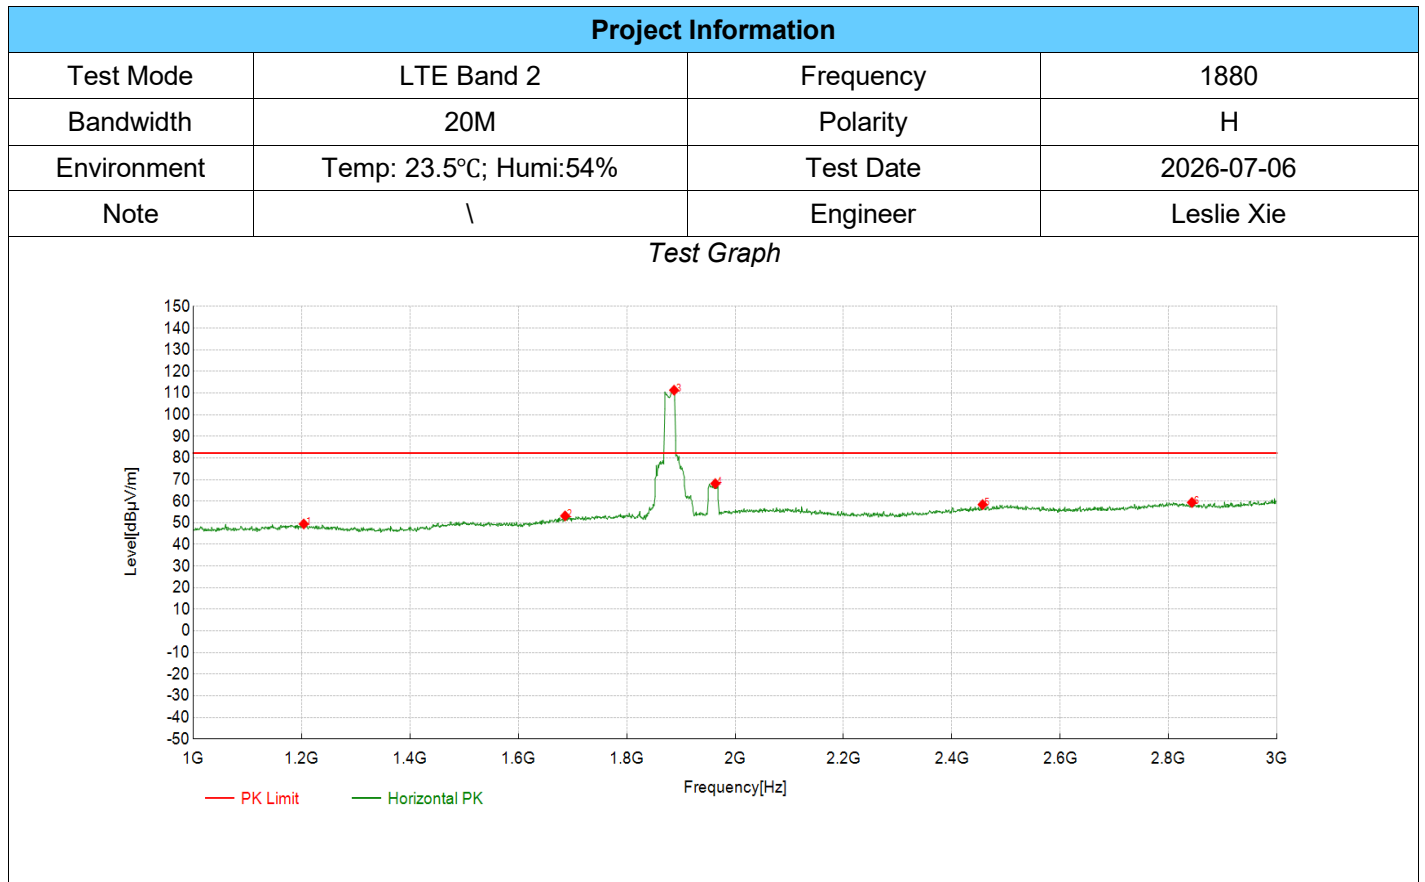


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1204.10	45.07	49.46	4.39	82.25	32.79	PK	Horizontal	PASS
2	1686.34	46.27	53.20	6.93	82.25	29.05	PK	Horizontal	PASS
3	1887.44	103.08	111.33	8.25	\	\	PK	Horizontal	Fundamental
4	1963.48	58.65	68.14	9.49	82.25	14.11	PK	Horizontal	PASS
5	2456.73	48.80	58.42	9.62	82.25	23.83	PK	Horizontal	PASS
6	2842.92	48.31	59.41	11.10	82.25	22.84	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

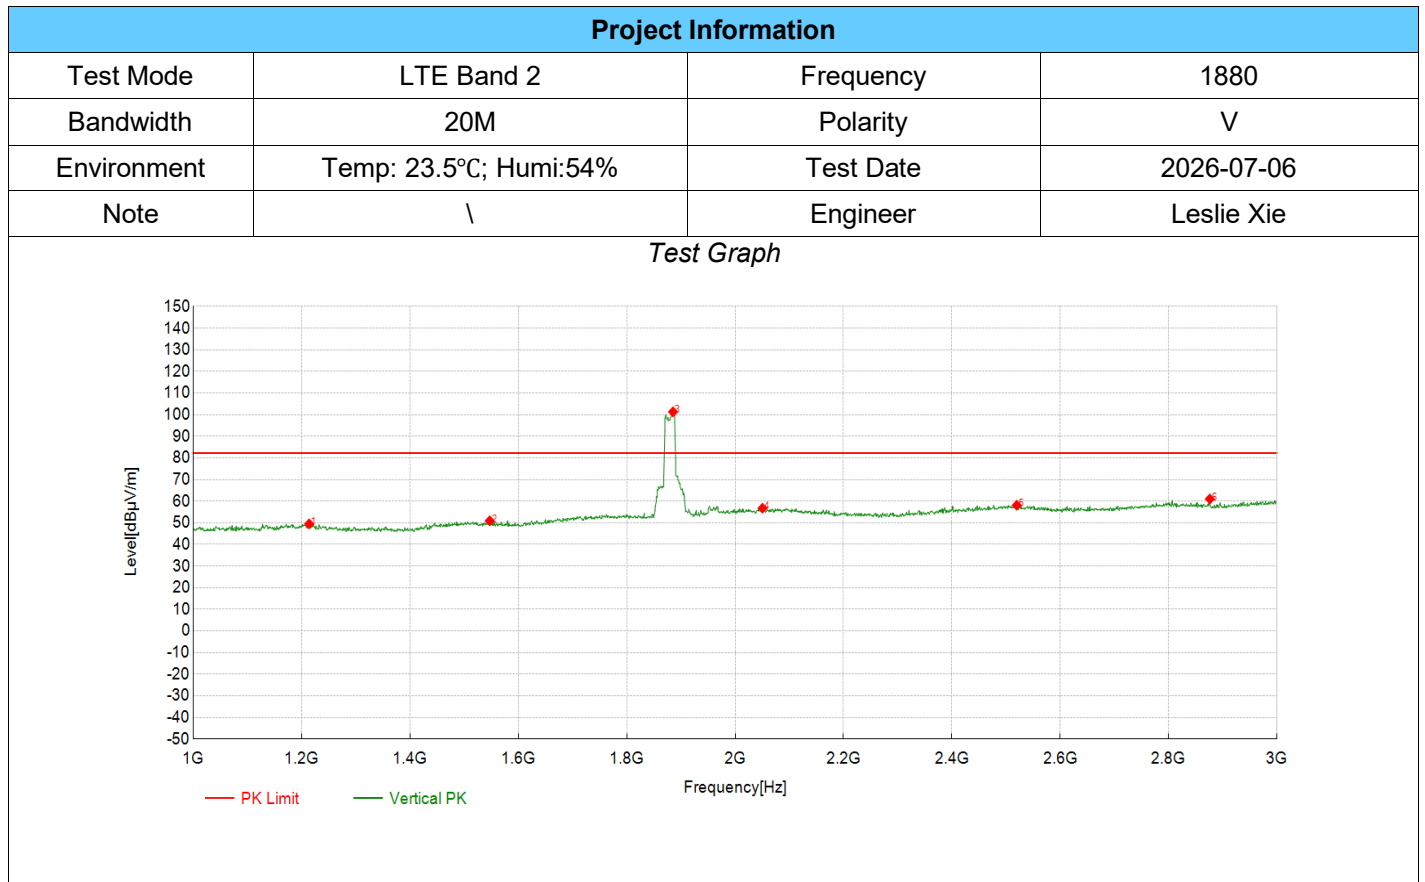


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1214.11	45.31	49.51	4.20	82.25	32.74	PK	Vertical	PASS
2	1547.27	45.95	50.92	4.97	82.25	31.33	PK	Vertical	PASS
3	1885.44	93.09	101.34	8.25	\	\	PK	Vertical	Fundamental
4	2050.53	46.67	56.77	10.10	82.25	25.48	PK	Vertical	PASS
5	2519.76	48.20	58.14	9.94	82.25	24.11	PK	Vertical	PASS
6	2875.94	50.13	61.02	10.89	82.25	21.23	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

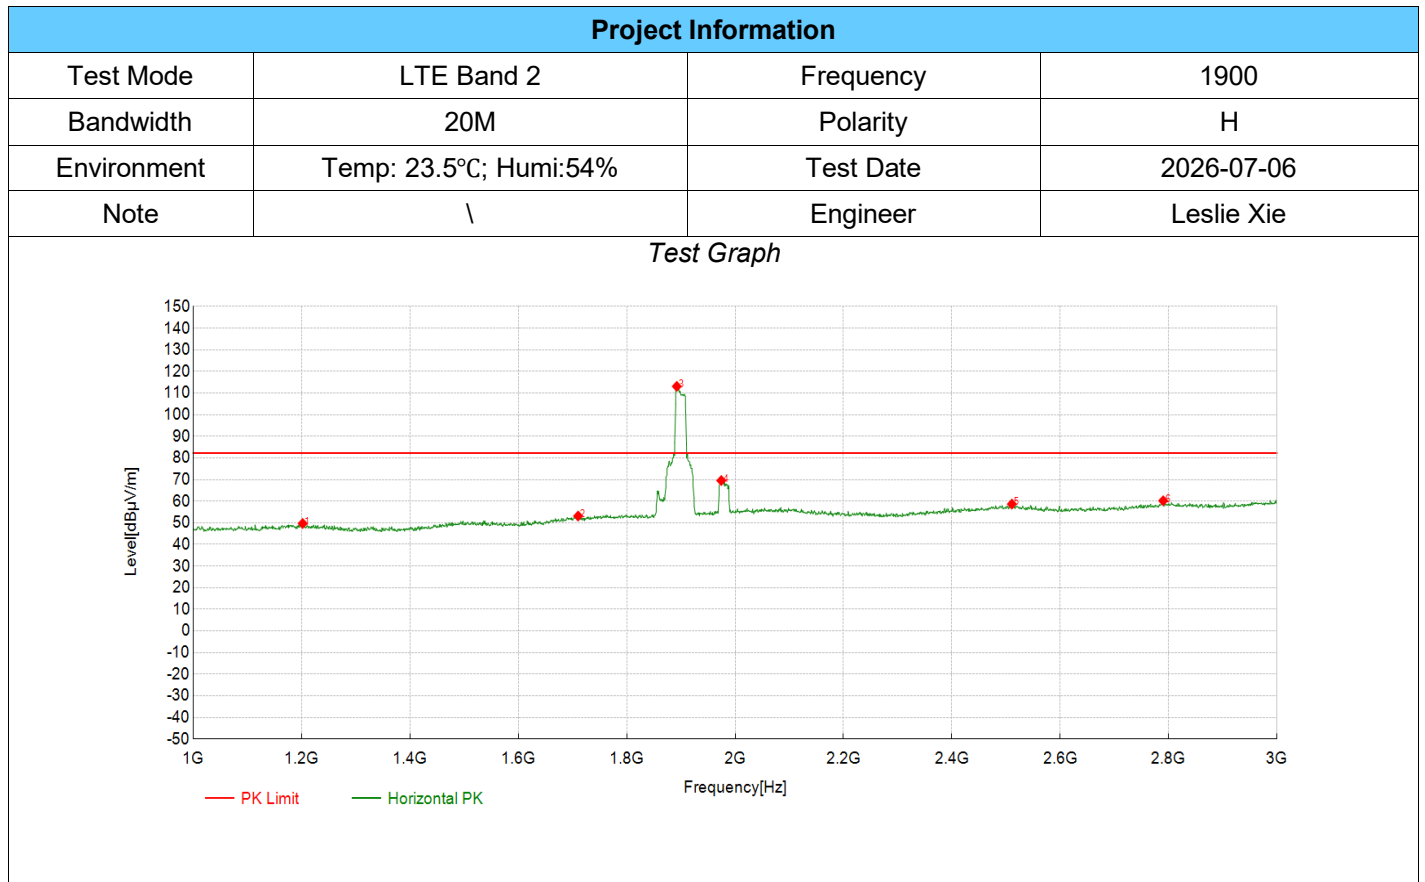


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1202.10	45.26	49.69	4.43	82.25	32.56	PK	Horizontal	PASS
2	1710.36	45.71	53.13	7.42	82.25	29.12	PK	Horizontal	PASS
3	1892.45	104.88	113.12	8.24	\	\	PK	Horizontal	Fundamental
4	1974.49	59.84	69.55	9.71	82.25	12.70	PK	Horizontal	PASS
5	2510.76	48.60	58.67	10.07	82.25	23.58	PK	Horizontal	PASS
6	2789.89	49.04	60.20	11.16	82.25	22.05	PK	Horizontal	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

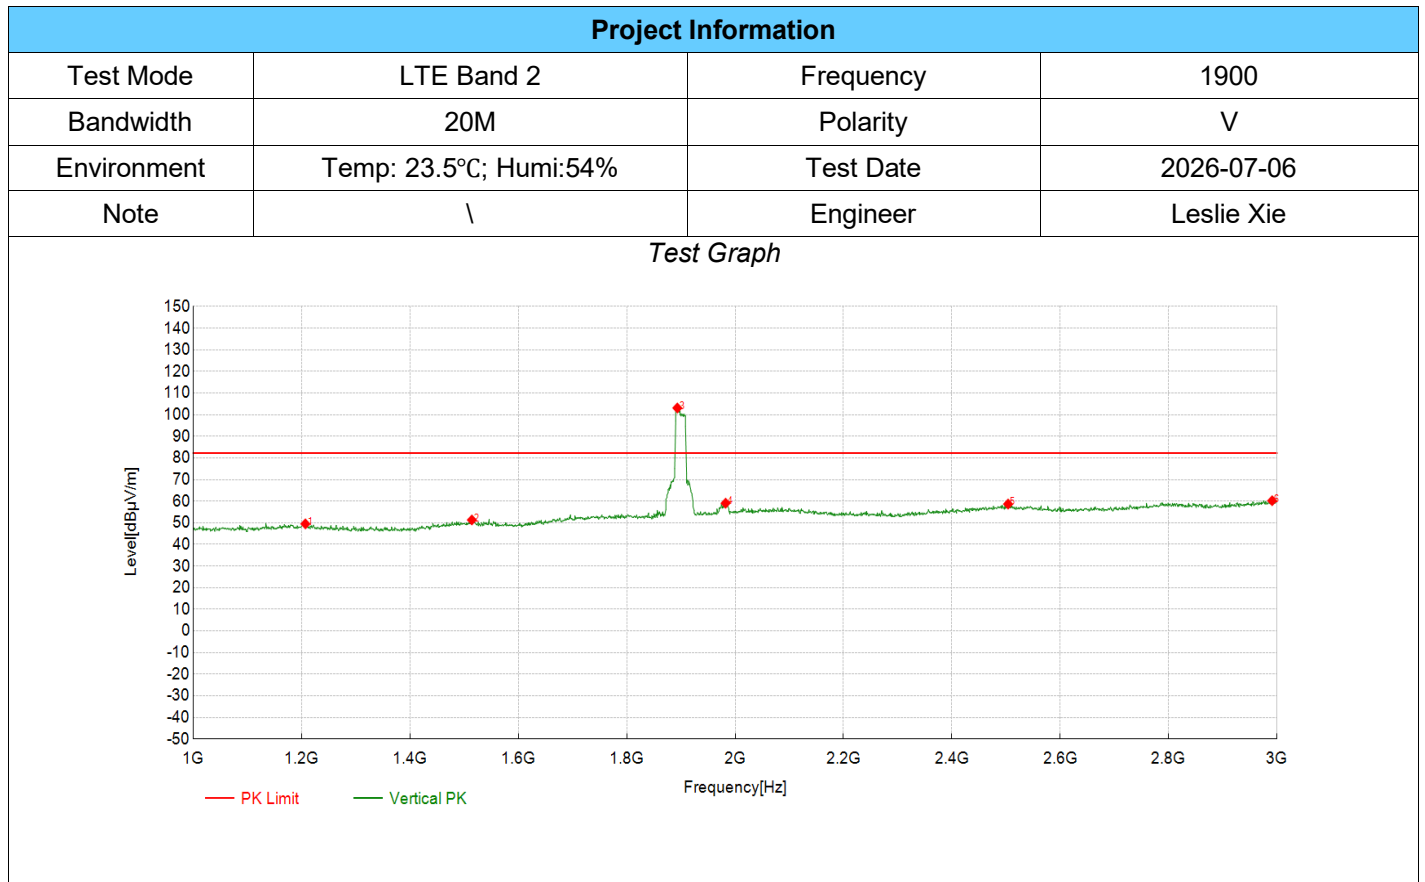


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1207.10	45.18	49.51	4.33	82.25	32.74	PK	Vertical	PASS
2	1514.26	45.98	51.33	5.35	82.25	30.92	PK	Vertical	PASS
3	1893.45	94.87	103.12	8.25	\	\	PK	Vertical	Fundamental
4	1982.49	49.20	59.07	9.87	82.25	23.18	PK	Vertical	PASS
5	2503.75	48.51	58.68	10.17	82.25	23.57	PK	Vertical	PASS
6	2991.00	48.24	60.23	11.99	82.25	22.02	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

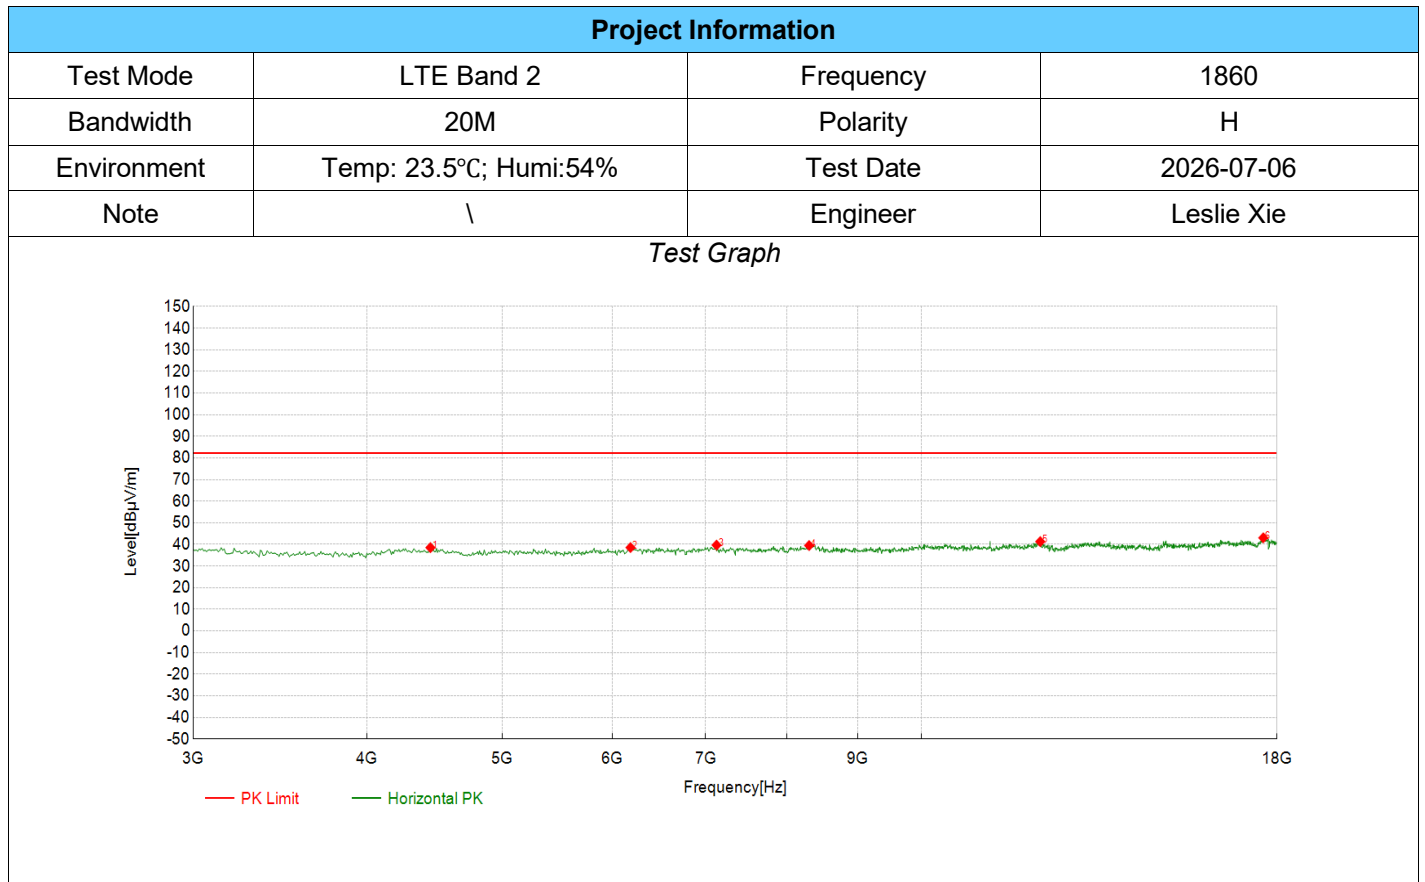


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4440.72	56.54	38.53	-18.01	82.25	43.72	PK	Horizontal	PASS
2	6181.59	54.89	38.57	-16.32	82.25	43.68	PK	Horizontal	PASS
3	7127.06	54.78	39.70	-15.08	82.25	42.55	PK	Horizontal	PASS
4	8305.15	52.82	39.49	-13.33	82.25	42.76	PK	Horizontal	PASS
5	12169.58	51.03	41.30	-9.73	82.25	40.95	PK	Horizontal	PASS
6	17594.80	48.13	43.06	-5.07	82.25	39.19	PK	Horizontal	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

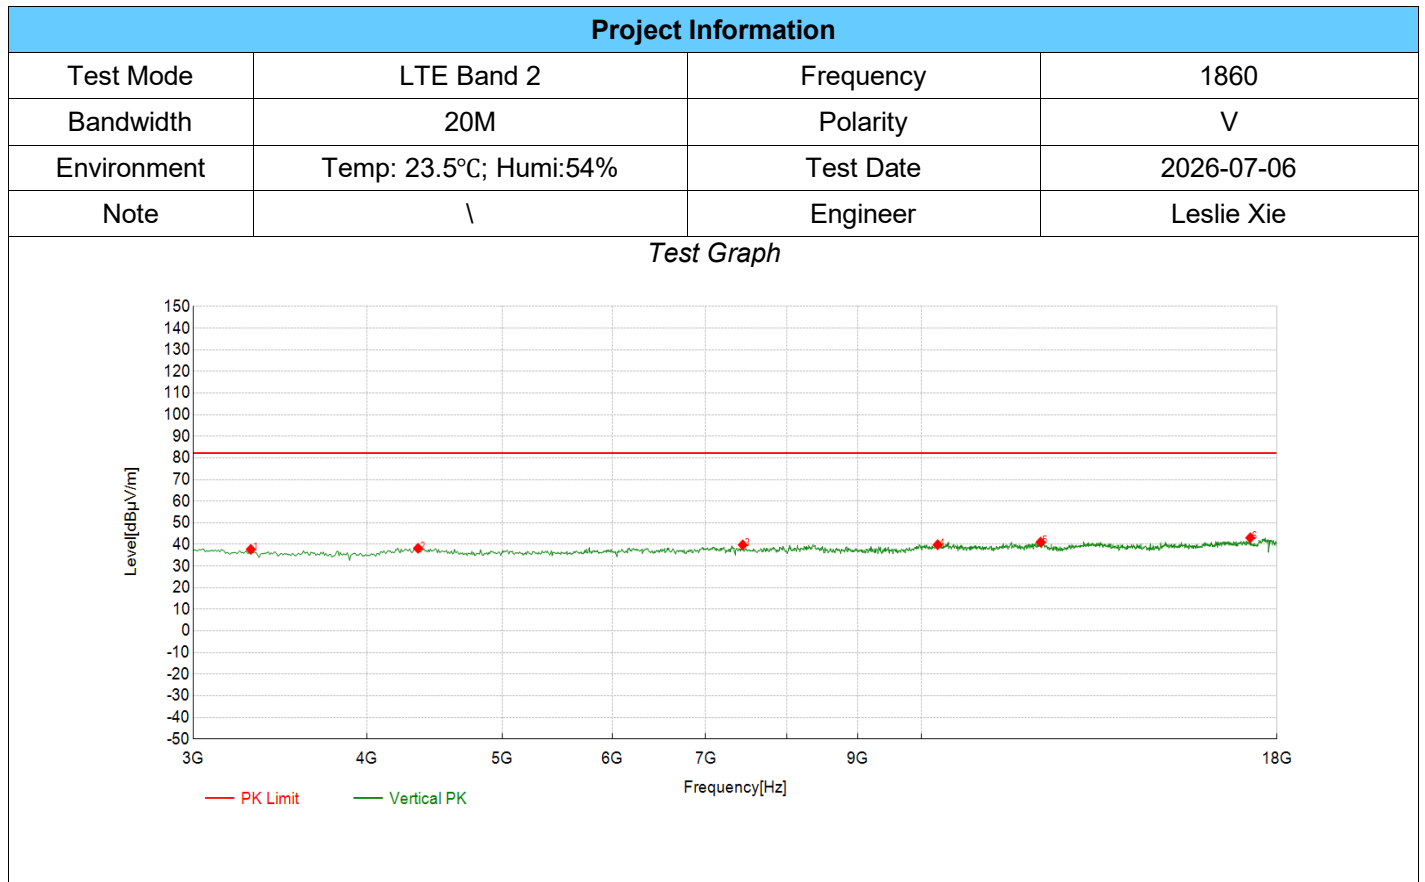

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3300.15	56.29	37.70	-18.59	82.25	44.55	PK	Vertical	PASS
2	4350.68	56.07	38.22	-17.85	82.25	44.03	PK	Vertical	PASS
3	7442.22	55.02	39.79	-15.23	82.25	42.46	PK	Vertical	PASS
4	10271.14	50.58	39.86	-10.72	82.25	42.39	PK	Vertical	PASS
5	12177.09	50.83	41.09	-9.74	82.25	41.16	PK	Vertical	PASS
6	17219.61	50.05	43.06	-6.99	82.25	39.19	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

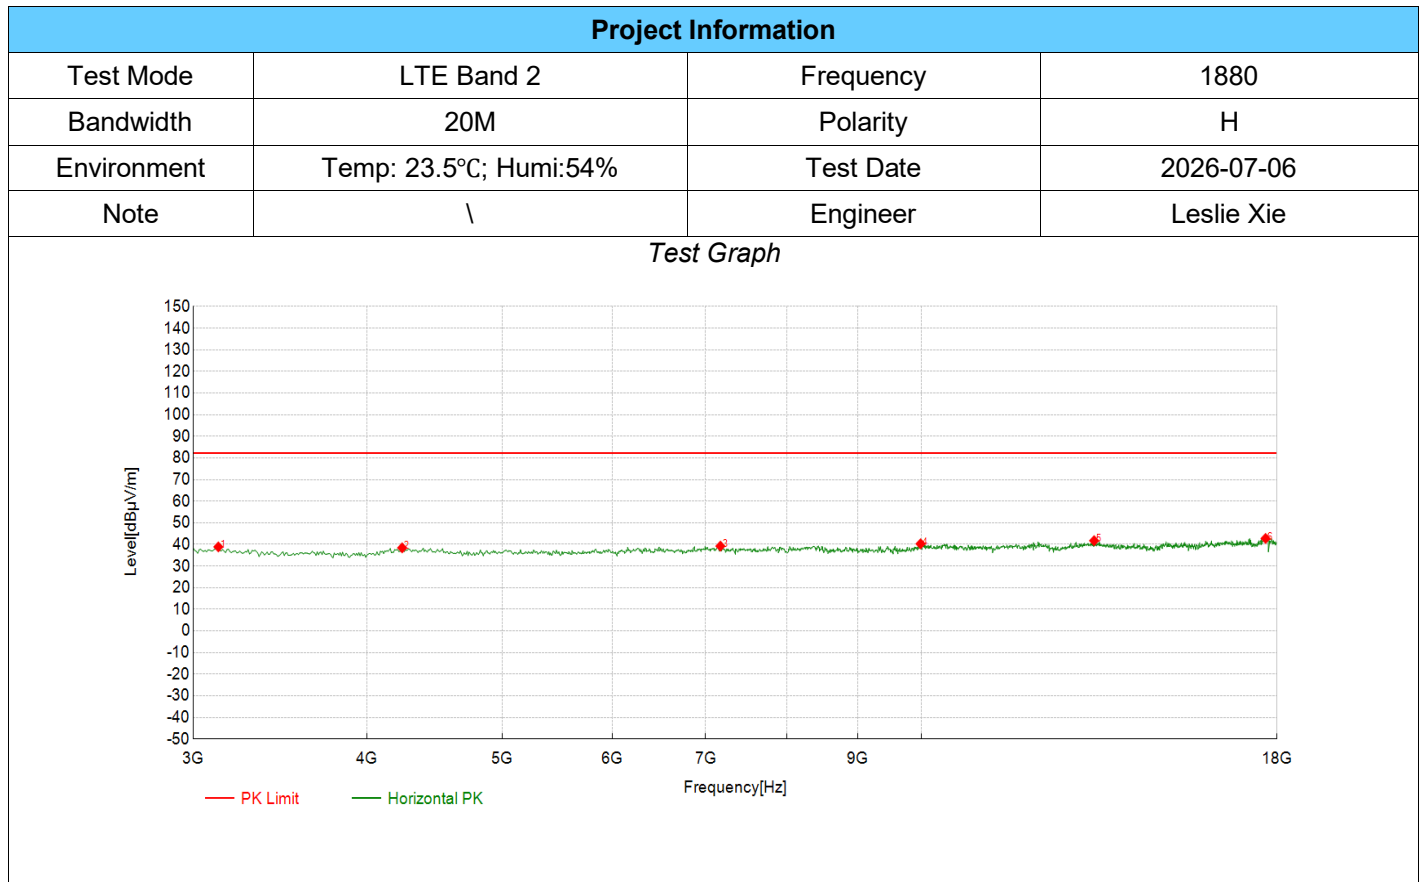

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3127.56	56.84	38.87	-17.97	82.25	43.38	PK	Horizontal	PASS
2	4238.12	56.00	38.42	-17.58	82.25	43.83	PK	Horizontal	PASS
3	7172.09	54.42	39.23	-15.19	82.25	43.02	PK	Horizontal	PASS
4	9985.99	51.02	40.29	-10.73	82.25	41.96	PK	Horizontal	PASS
5	13302.65	52.80	41.73	-11.07	82.25	40.52	PK	Horizontal	PASS
6	17662.33	47.80	42.76	-5.04	82.25	39.49	PK	Horizontal	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

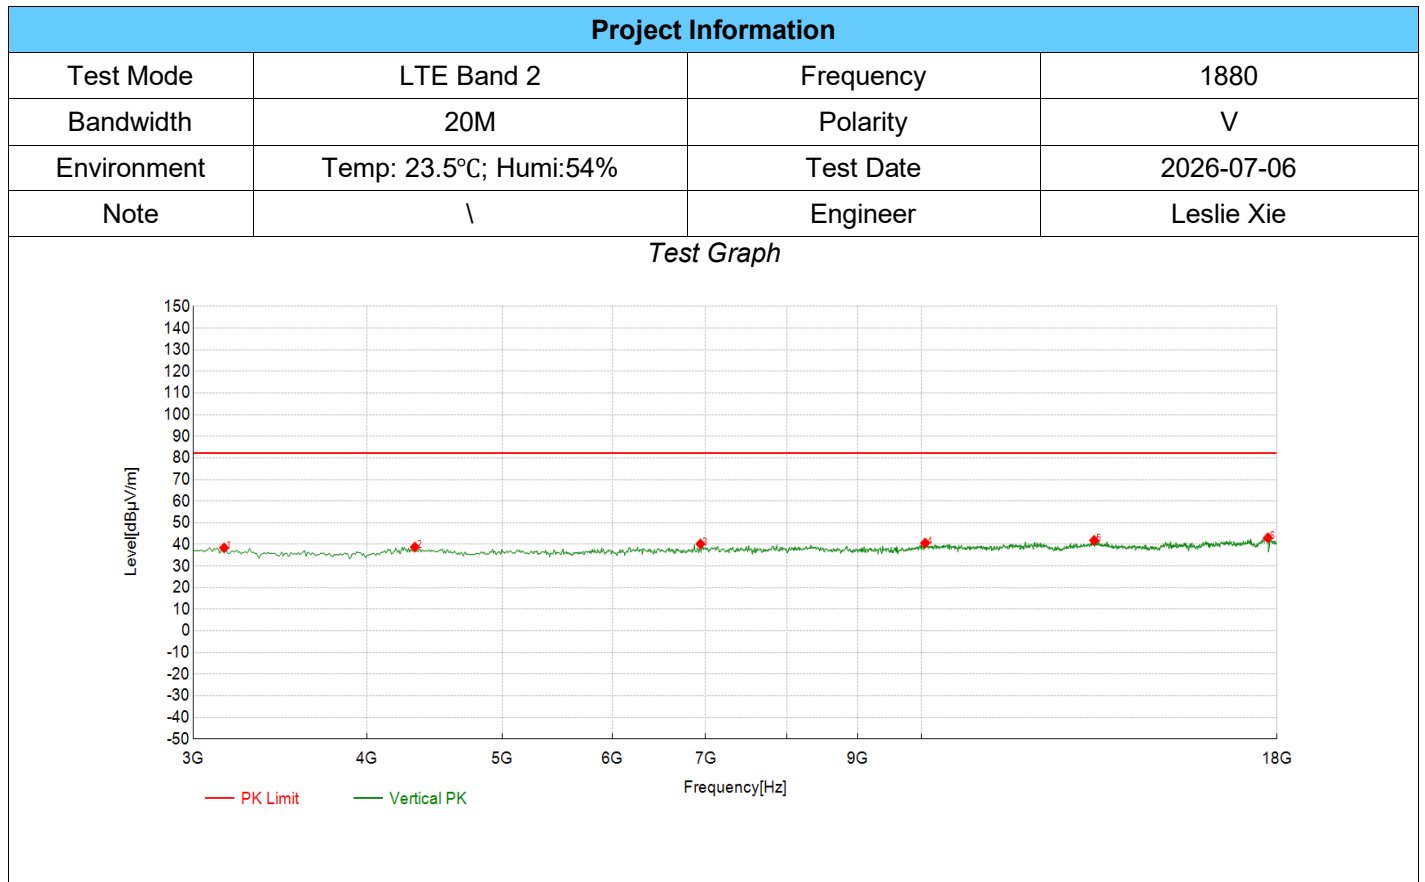


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3157.58	56.55	38.42	-18.13	82.25	43.83	PK	Vertical	PASS
2	4328.16	56.56	38.76	-17.80	82.25	43.49	PK	Vertical	PASS
3	6939.47	55.31	40.23	-15.08	82.25	42.02	PK	Vertical	PASS
4	10061.03	51.47	40.62	-10.85	82.25	41.63	PK	Vertical	PASS
5	13302.65	52.96	41.89	-11.07	82.25	40.36	PK	Vertical	PASS
6	17729.86	48.12	43.05	-5.07	82.25	39.20	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

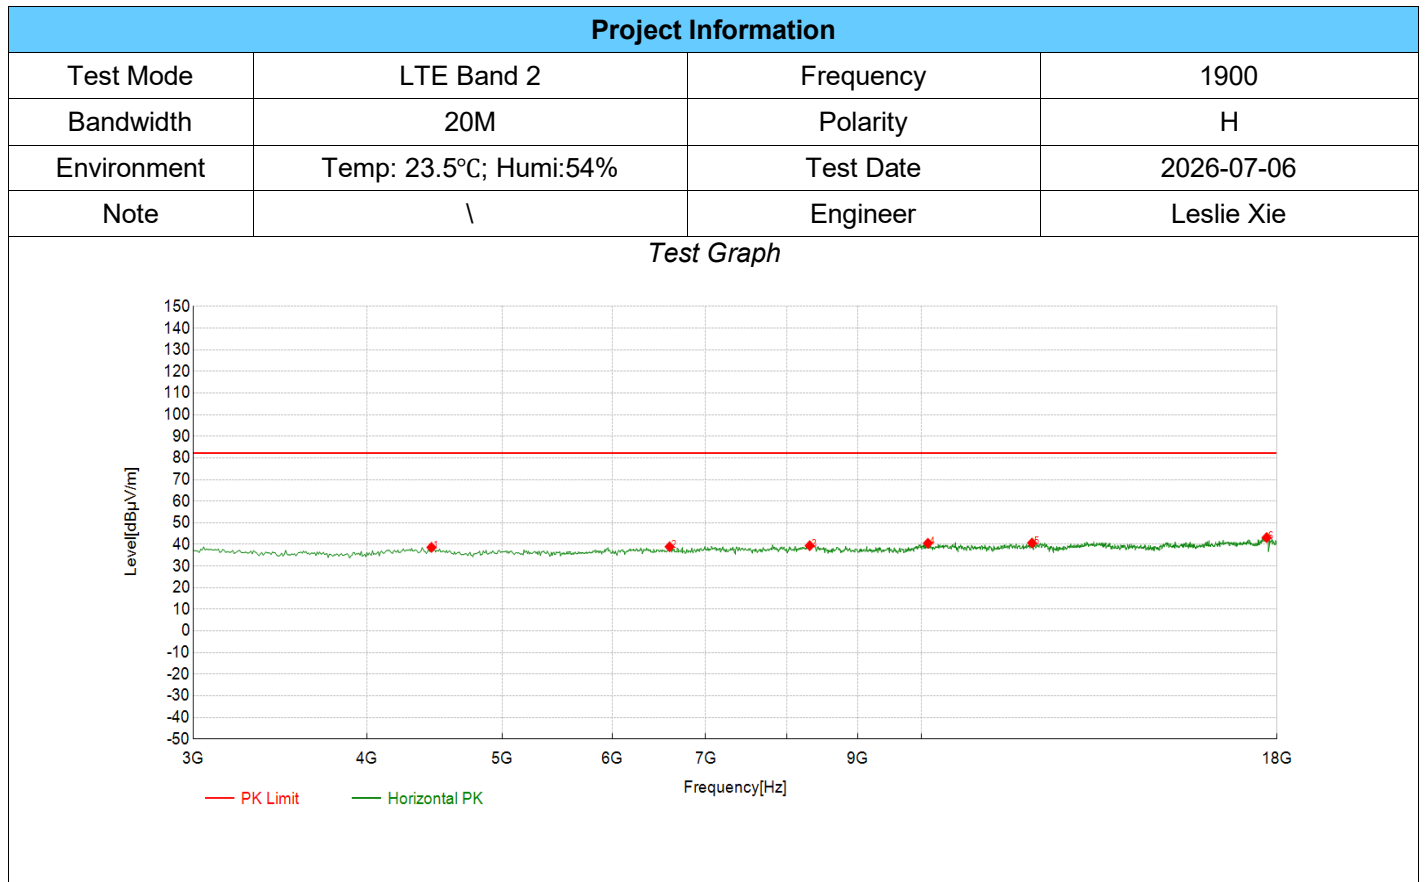


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4448.22	56.67	38.65	-18.02	82.25	43.60	PK	Horizontal	PASS
2	6594.30	55.07	38.94	-16.13	82.25	43.31	PK	Horizontal	PASS
3	8312.66	52.70	39.43	-13.27	82.25	42.82	PK	Horizontal	PASS
4	10106.05	51.52	40.52	-11.00	82.25	41.73	PK	Horizontal	PASS
5	12004.50	50.30	40.68	-9.62	82.25	41.57	PK	Horizontal	PASS
6	17692.35	48.23	43.17	-5.06	82.25	39.08	PK	Horizontal	PASS

Note: (1) Level = Reading + Factor
 (2) Margin = Limit - Level

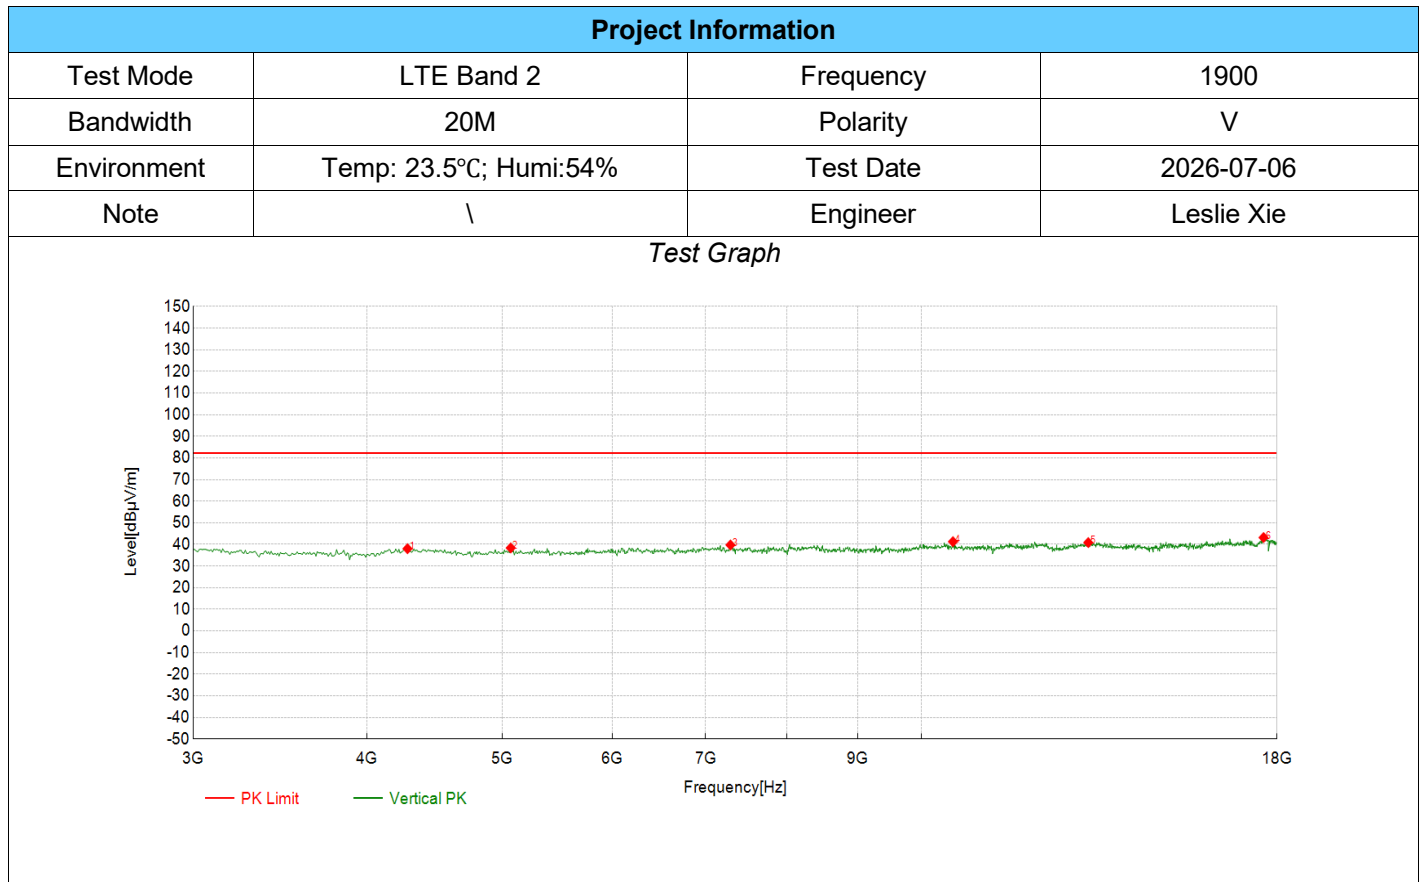


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4275.64	55.70	38.02	-17.68	82.25	44.23	PK	Vertical	PASS
2	5071.04	56.17	38.39	-17.78	82.25	43.86	PK	Vertical	PASS
3	7292.15	54.95	39.76	-15.19	82.25	42.49	PK	Vertical	PASS
4	10533.77	50.82	41.28	-9.54	82.25	40.97	PK	Vertical	PASS
5	13175.09	51.79	40.87	-10.92	82.25	41.38	PK	Vertical	PASS
6	17602.30	48.20	43.20	-5.00	82.25	39.05	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

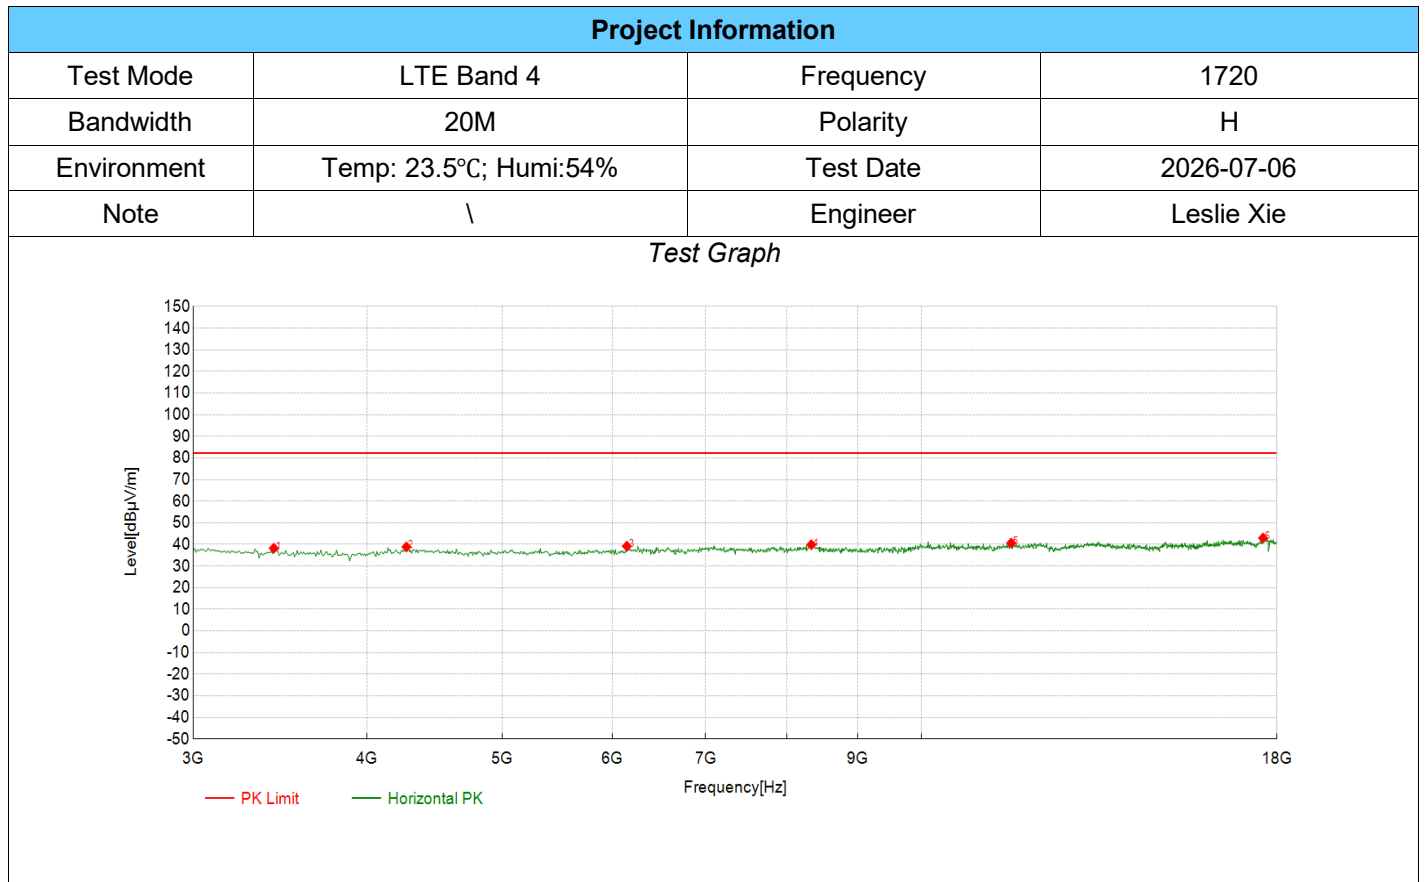


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3427.71	57.06	38.24	-18.82	82.25	44.01	PK	Horizontal	PASS
2	4268.13	56.51	38.85	-17.66	82.25	43.40	PK	Horizontal	PASS
3	6144.07	55.69	39.21	-16.48	82.25	43.04	PK	Horizontal	PASS
4	8335.17	52.94	39.88	-13.06	82.25	42.37	PK	Horizontal	PASS
5	11599.30	49.25	40.66	-8.59	82.25	41.59	PK	Horizontal	PASS
6	17587.29	48.15	42.97	-5.18	82.25	39.28	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

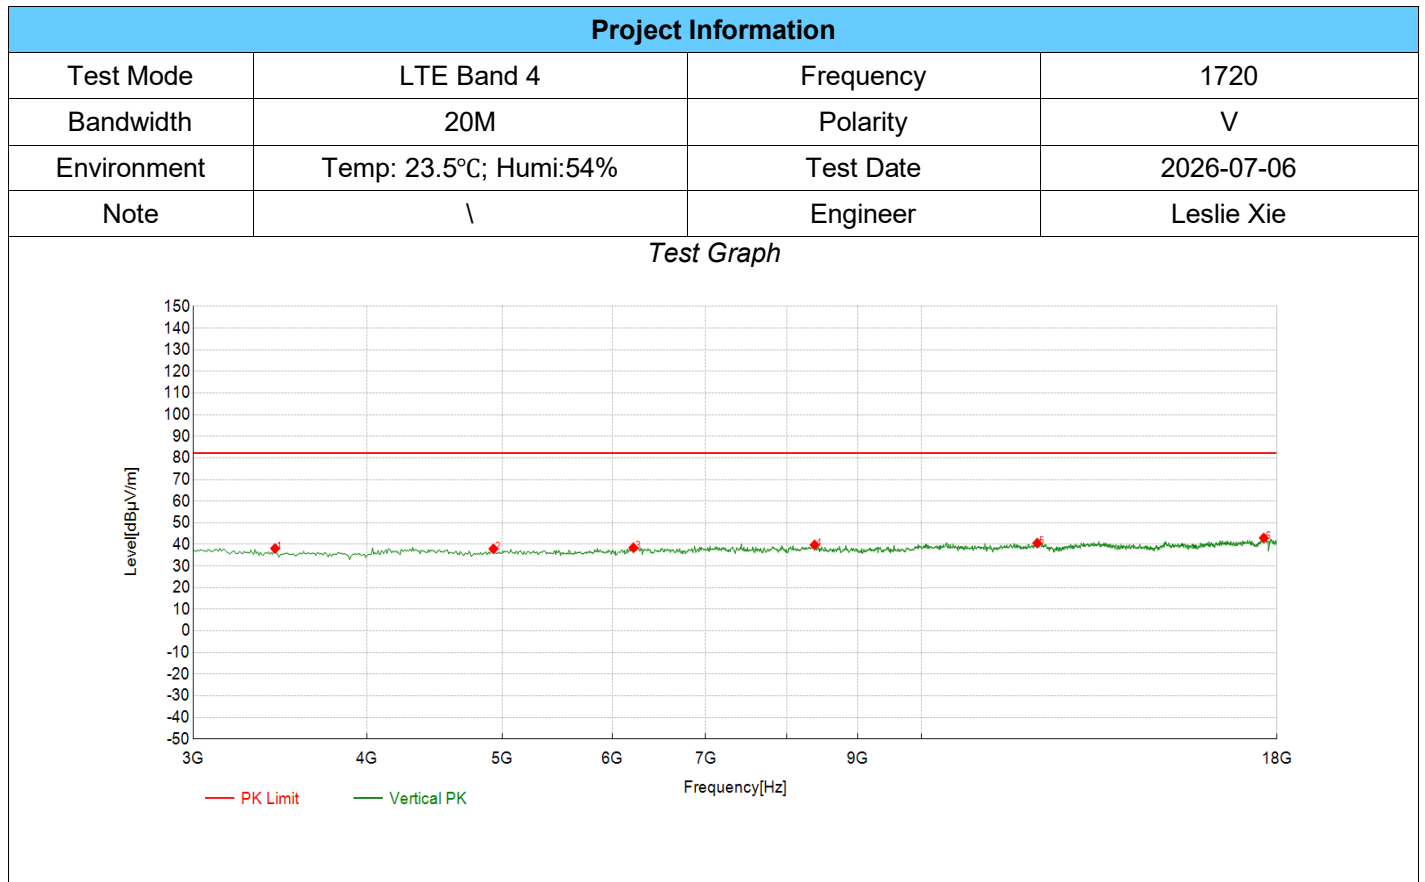


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3435.22	56.96	38.14	-18.82	82.25	44.11	PK	Vertical	PASS
2	4928.46	55.86	37.96	-17.90	82.25	44.29	PK	Vertical	PASS
3	6211.61	54.73	38.48	-16.25	82.25	43.77	PK	Vertical	PASS
4	8380.19	52.42	39.77	-12.65	82.25	42.48	PK	Vertical	PASS
5	12109.55	50.31	40.61	-9.70	82.25	41.64	PK	Vertical	PASS
6	17609.80	47.99	42.99	-5.00	82.25	39.26	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

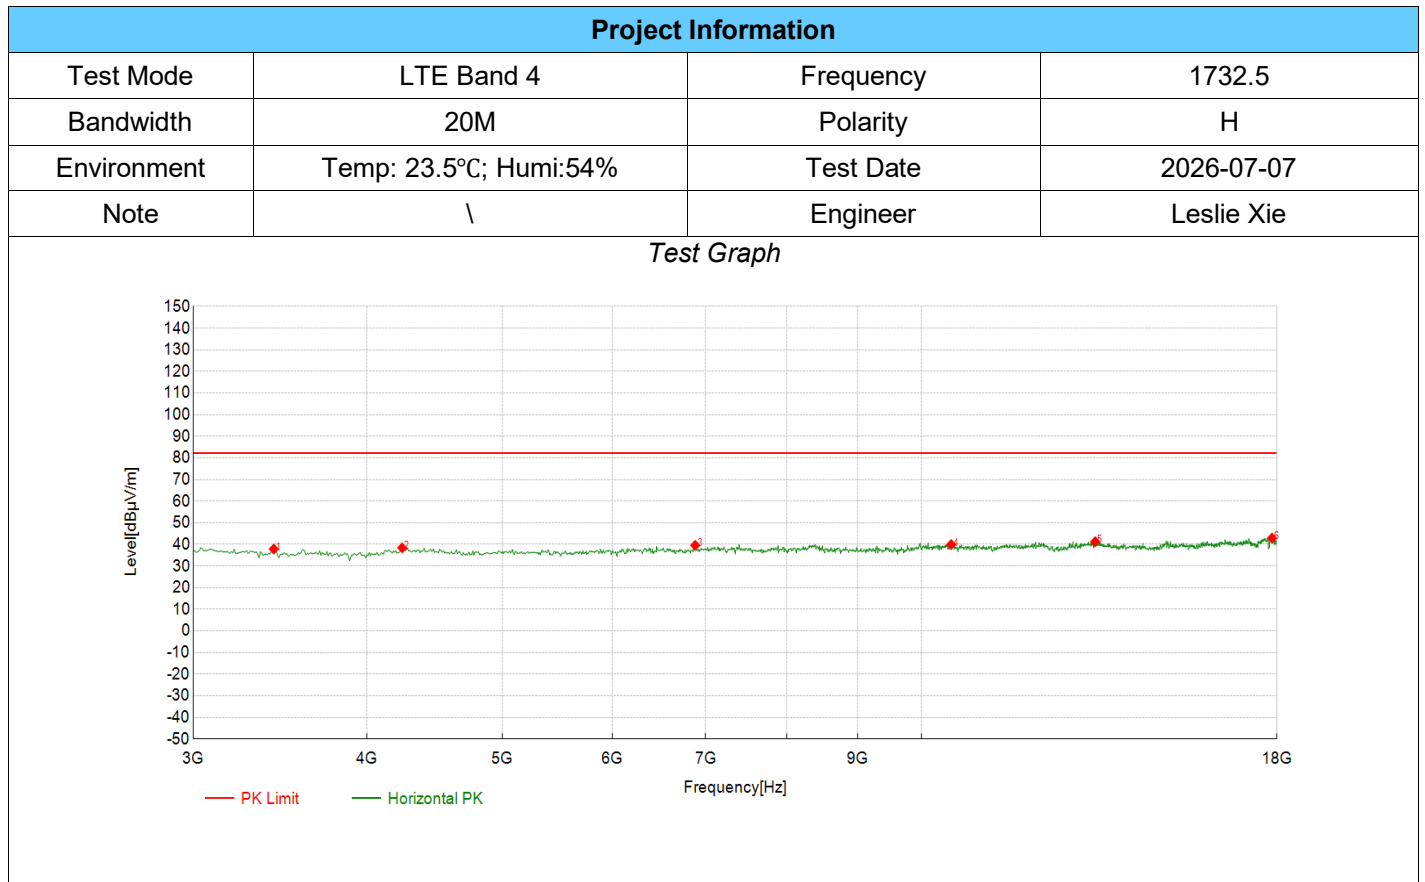

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3427.71	56.70	37.88	-18.82	82.25	44.37	PK	Horizontal	PASS
2	4238.12	56.01	38.43	-17.58	82.25	43.82	PK	Horizontal	PASS
3	6879.44	54.93	39.59	-15.34	82.25	42.66	PK	Horizontal	PASS
4	10503.75	49.51	39.95	-9.56	82.25	42.30	PK	Horizontal	PASS
5	13325.16	52.43	41.30	-11.13	82.25	40.95	PK	Horizontal	PASS
6	17849.92	48.26	42.95	-5.31	82.25	39.30	PK	Horizontal	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

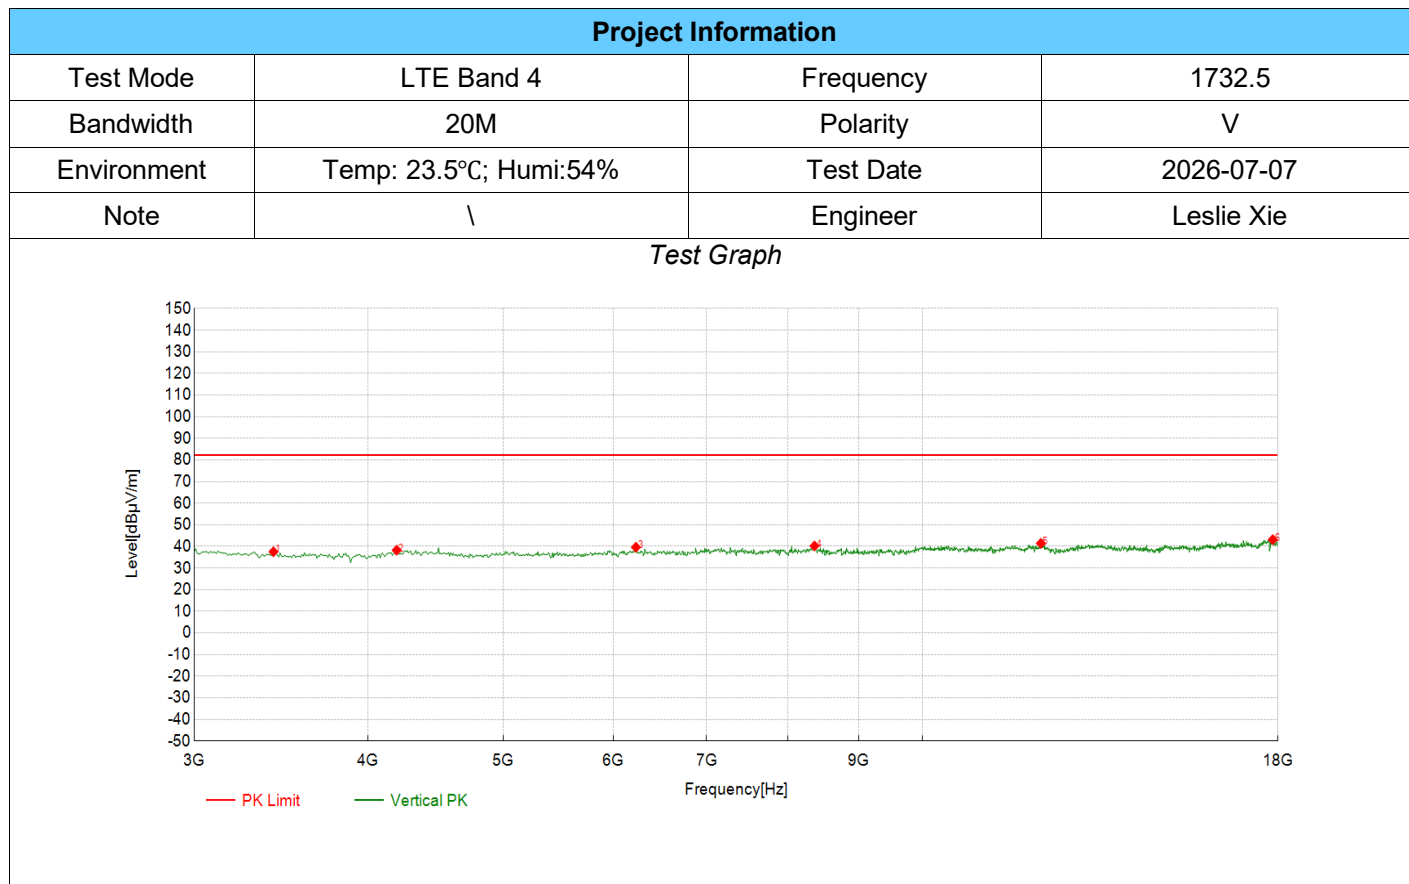

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3420.21	56.35	37.54	-18.81	82.25	44.71	PK	Vertical	PASS
2	4193.10	55.85	38.27	-17.58	82.25	43.98	PK	Vertical	PASS
3	6226.61	55.89	39.64	-16.25	82.25	42.61	PK	Vertical	PASS
4	8365.18	52.99	40.21	-12.78	82.25	42.04	PK	Vertical	PASS
5	12162.08	51.15	41.41	-9.74	82.25	40.84	PK	Vertical	PASS
6	17842.42	48.41	43.14	-5.27	82.25	39.11	PK	Vertical	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

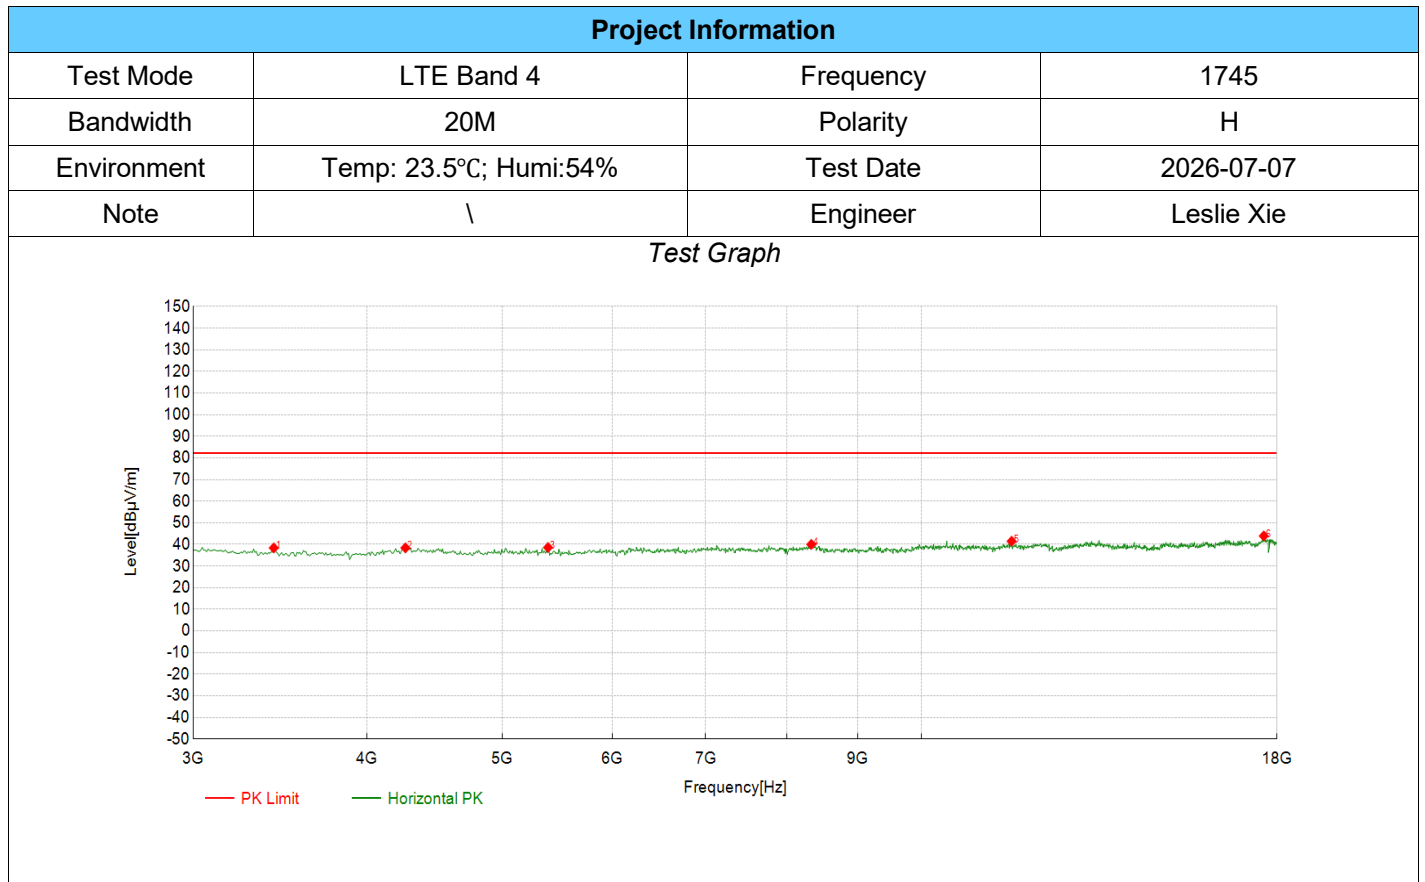


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3427.71	57.22	38.40	-18.82	82.25	43.85	PK	Horizontal	PASS
2	4260.63	56.06	38.41	-17.65	82.25	43.84	PK	Horizontal	PASS
3	5393.70	55.86	38.61	-17.25	82.25	43.64	PK	Horizontal	PASS
4	8335.17	53.07	40.01	-13.06	82.25	42.24	PK	Horizontal	PASS
5	11606.80	50.11	41.46	-8.65	82.25	40.79	PK	Horizontal	PASS
6	17609.80	48.93	43.93	-5.00	82.25	38.32	PK	Horizontal	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

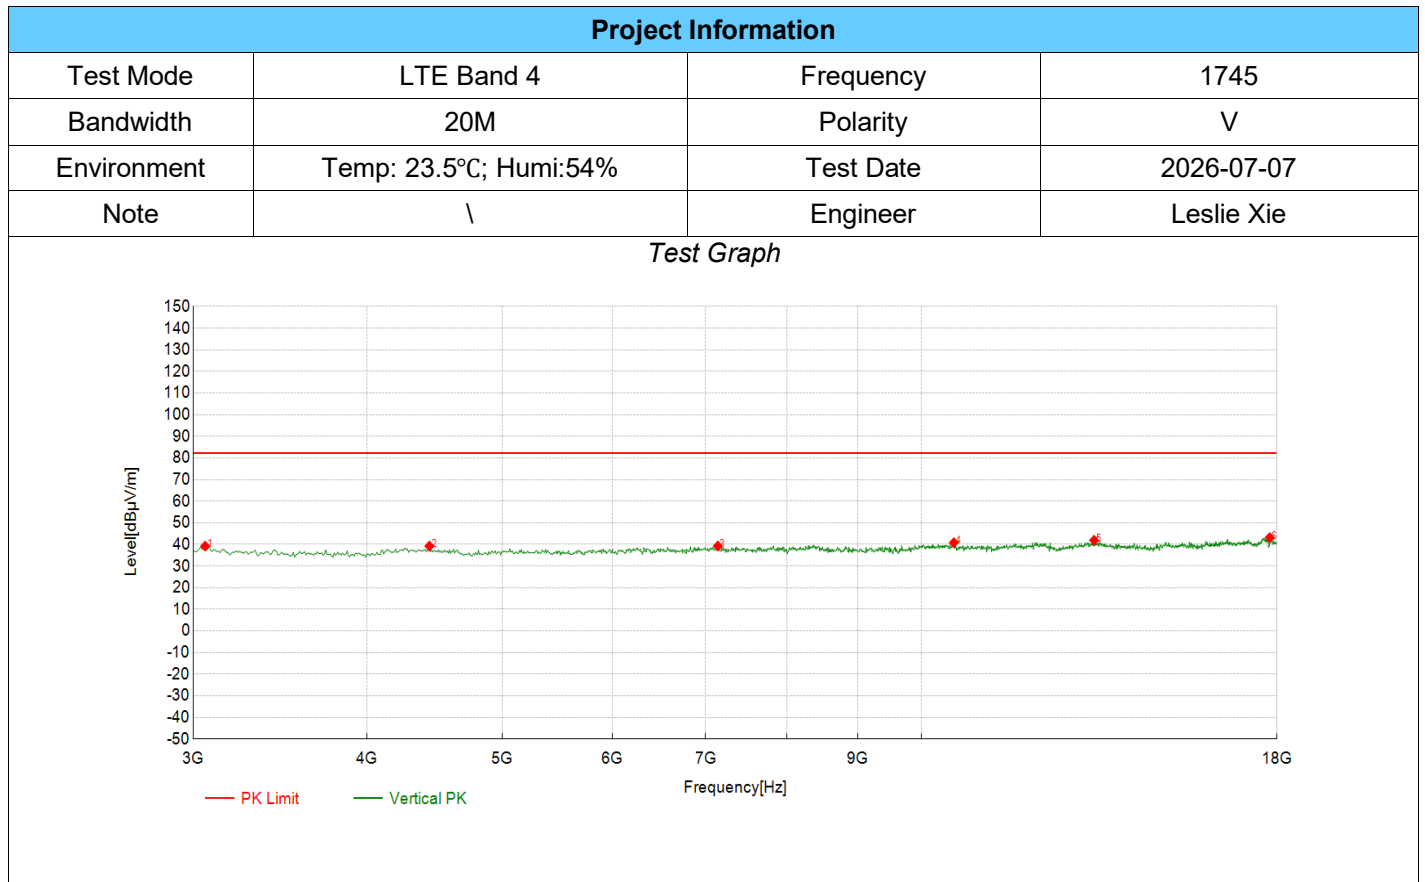


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3060.03	56.81	39.24	-17.57	82.25	43.01	PK	Vertical	PASS
2	4433.22	57.24	39.24	-18.00	82.25	43.01	PK	Vertical	PASS
3	7142.07	54.37	39.26	-15.11	82.25	42.99	PK	Vertical	PASS
4	10548.77	50.35	40.81	-9.54	82.25	41.44	PK	Vertical	PASS
5	13302.65	52.99	41.92	-11.07	82.25	40.33	PK	Vertical	PASS
6	17782.39	48.25	43.15	-5.10	82.25	39.10	PK	Vertical	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

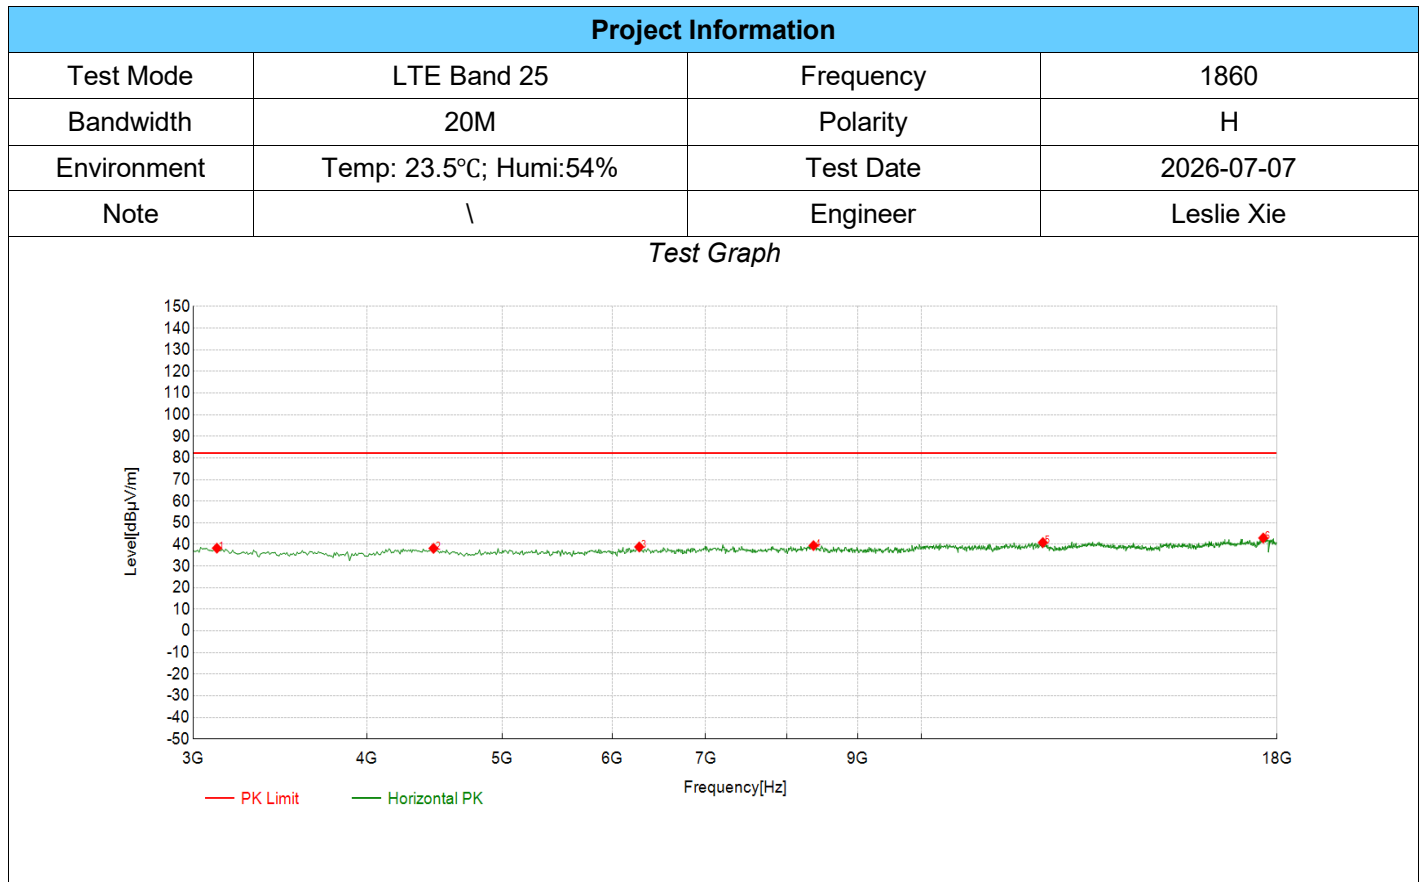

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3120.06	56.20	38.27	-17.93	82.25	43.98	PK	Horizontal	PASS
2	4463.23	56.22	38.18	-18.04	82.25	44.07	PK	Horizontal	PASS
3	6271.64	55.10	38.84	-16.26	82.25	43.41	PK	Horizontal	PASS
4	8365.18	52.23	39.45	-12.78	82.25	42.80	PK	Horizontal	PASS
5	12222.11	50.78	40.87	-9.91	82.25	41.38	PK	Horizontal	PASS
6	17594.80	48.05	42.98	-5.07	82.25	39.27	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

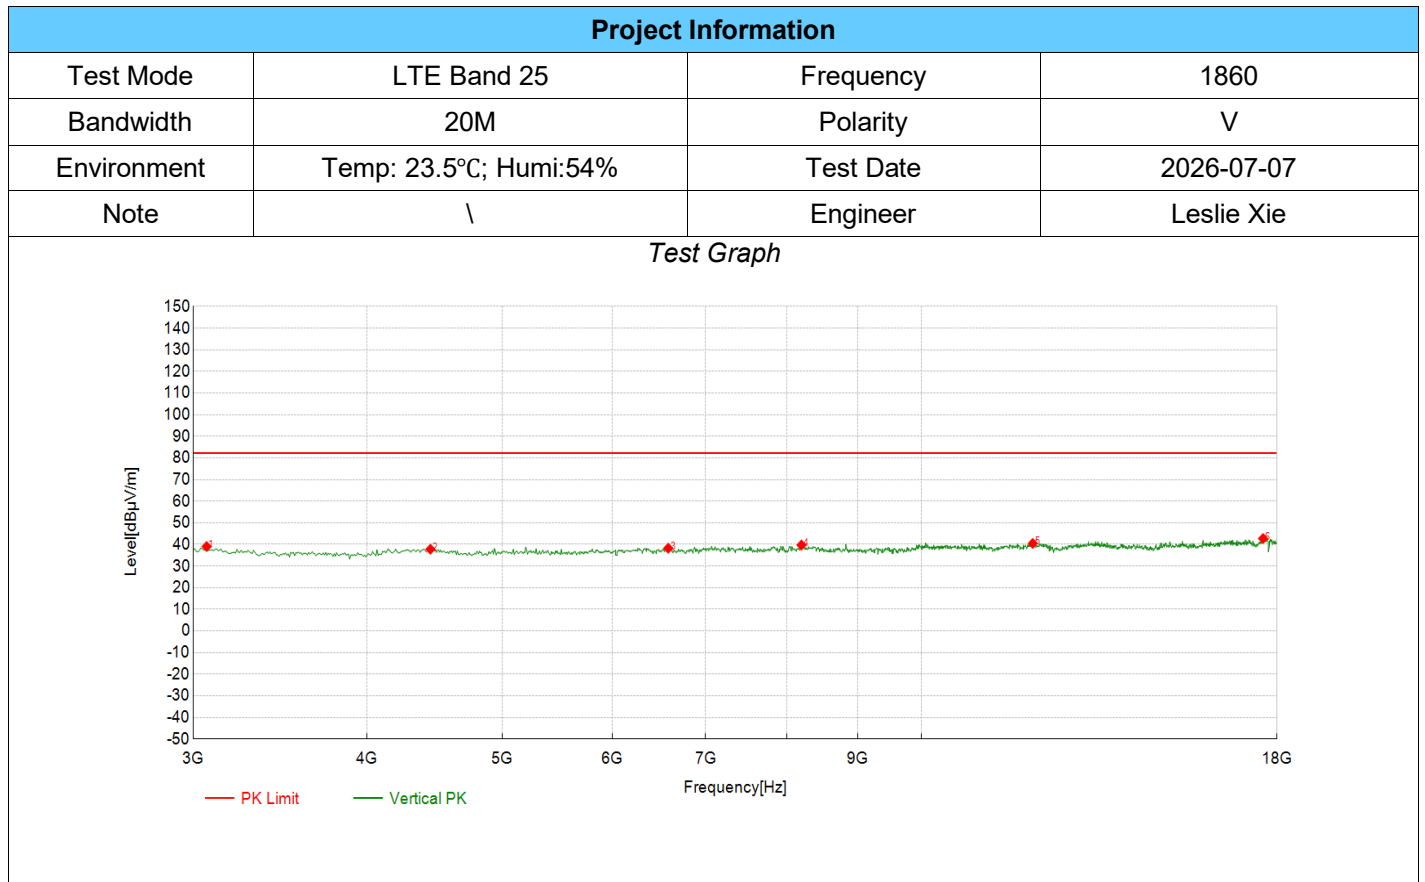

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3067.53	56.67	39.05	-17.62	82.25	43.20	PK	Vertical	PASS
2	4440.72	55.81	37.80	-18.01	82.25	44.45	PK	Vertical	PASS
3	6579.29	54.40	38.26	-16.14	82.25	43.99	PK	Vertical	PASS
4	8200.10	54.03	39.73	-14.30	82.25	42.52	PK	Vertical	PASS
5	12019.51	50.10	40.47	-9.63	82.25	41.78	PK	Vertical	PASS
6	17587.29	47.92	42.74	-5.18	82.25	39.51	PK	Vertical	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

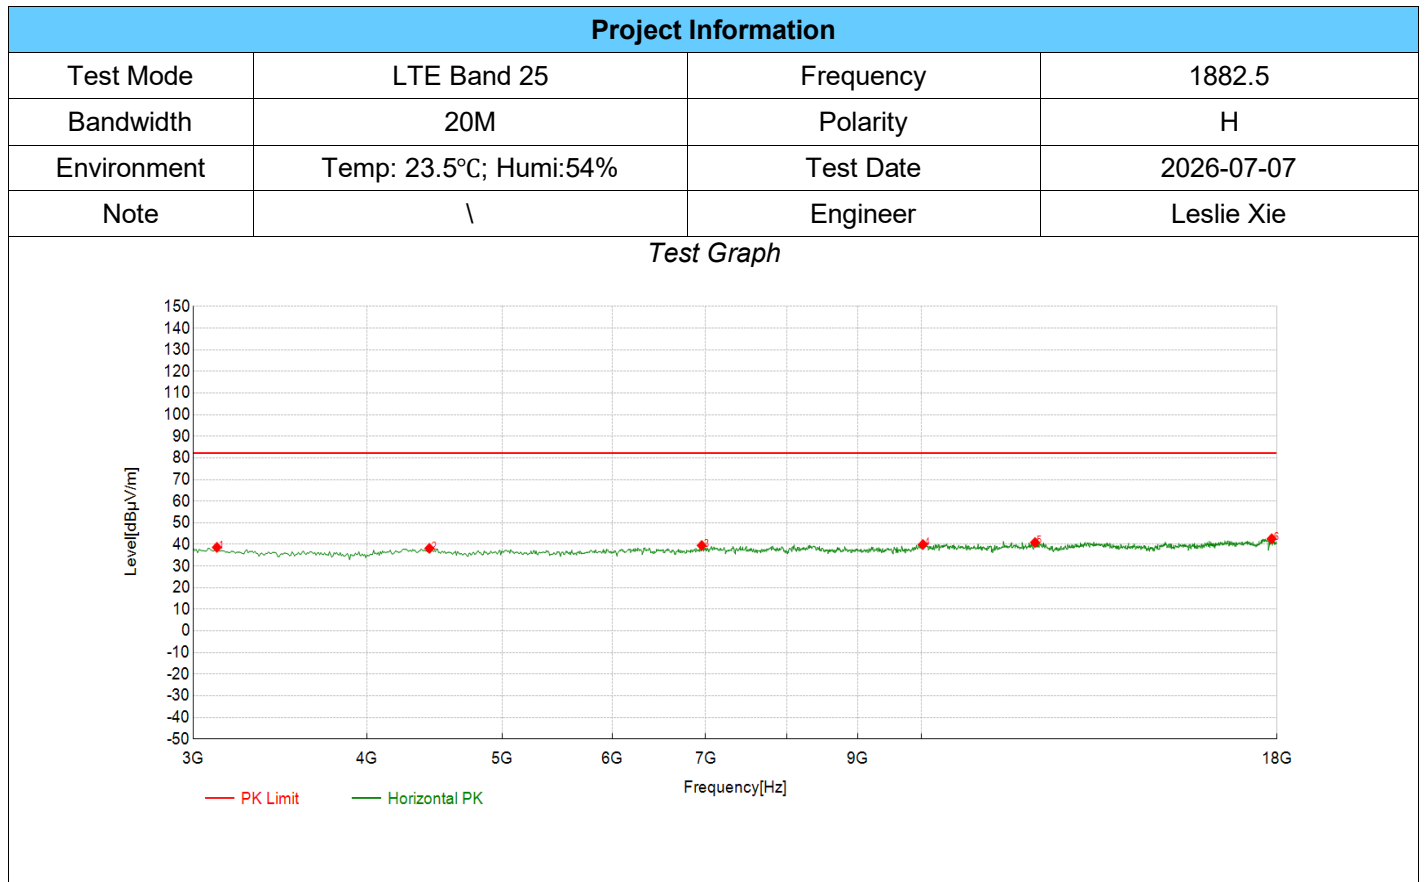

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3120.06	56.59	38.66	-17.93	82.25	43.59	PK	Horizontal	PASS
2	4433.22	56.20	38.20	-18.00	82.25	44.05	PK	Horizontal	PASS
3	6954.48	54.53	39.51	-15.02	82.25	42.74	PK	Horizontal	PASS
4	10023.51	50.70	39.97	-10.73	82.25	42.28	PK	Horizontal	PASS
5	12064.53	50.55	40.89	-9.66	82.25	41.36	PK	Horizontal	PASS
6	17842.42	47.90	42.63	-5.27	82.25	39.62	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

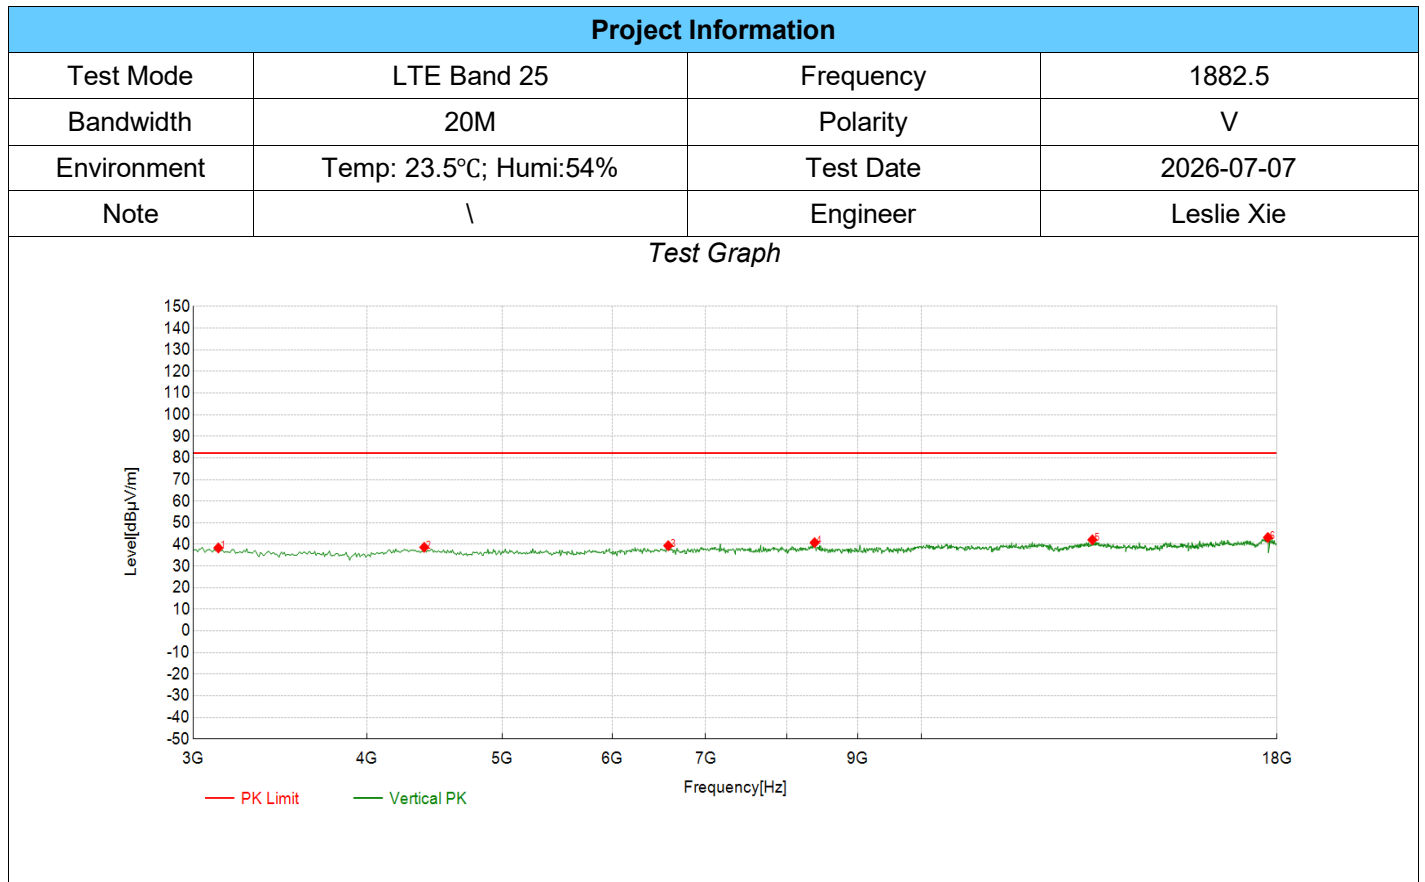

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3127.56	56.36	38.39	-17.97	82.25	43.86	PK	Vertical	PASS
2	4395.70	56.64	38.68	-17.96	82.25	43.57	PK	Vertical	PASS
3	6579.29	55.57	39.43	-16.14	82.25	42.82	PK	Vertical	PASS
4	8380.19	53.49	40.84	-12.65	82.25	41.41	PK	Vertical	PASS
5	13265.13	53.12	42.14	-10.98	82.25	40.11	PK	Vertical	PASS
6	17729.86	48.28	43.21	-5.07	82.25	39.04	PK	Vertical	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

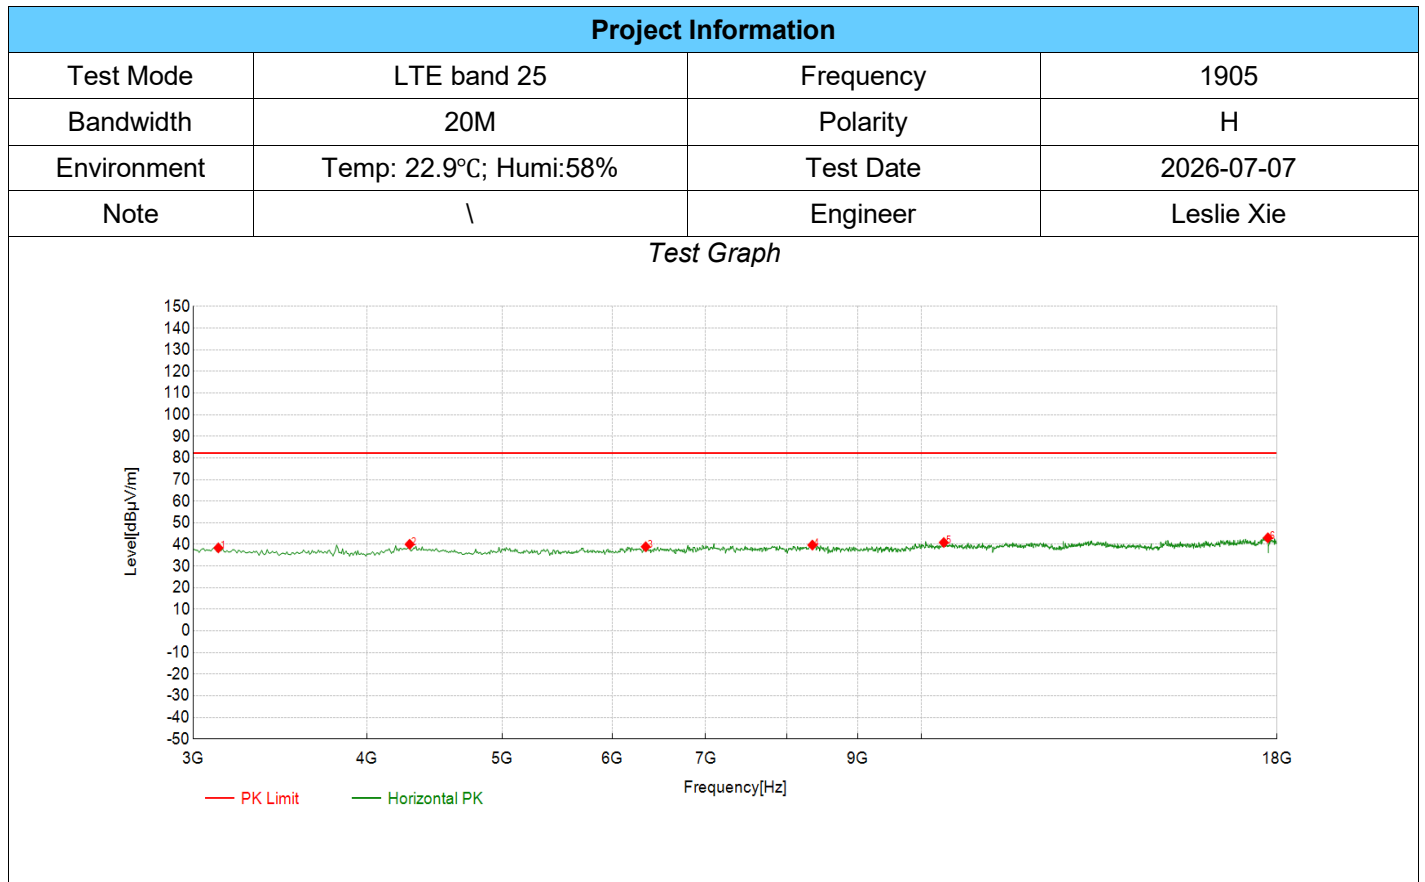

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3127.56	56.38	38.41	-17.97	82.25	43.84	PK	Horizontal	PASS
2	4290.65	57.77	40.06	-17.71	82.25	42.19	PK	Horizontal	PASS
3	6339.17	55.23	38.94	-16.29	82.25	43.31	PK	Horizontal	PASS
4	8350.18	52.61	39.69	-12.92	82.25	42.56	PK	Horizontal	PASS
5	10376.19	50.71	40.88	-9.83	82.25	41.37	PK	Horizontal	PASS
6	17729.86	48.13	43.06	-5.07	82.25	39.19	PK	Horizontal	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

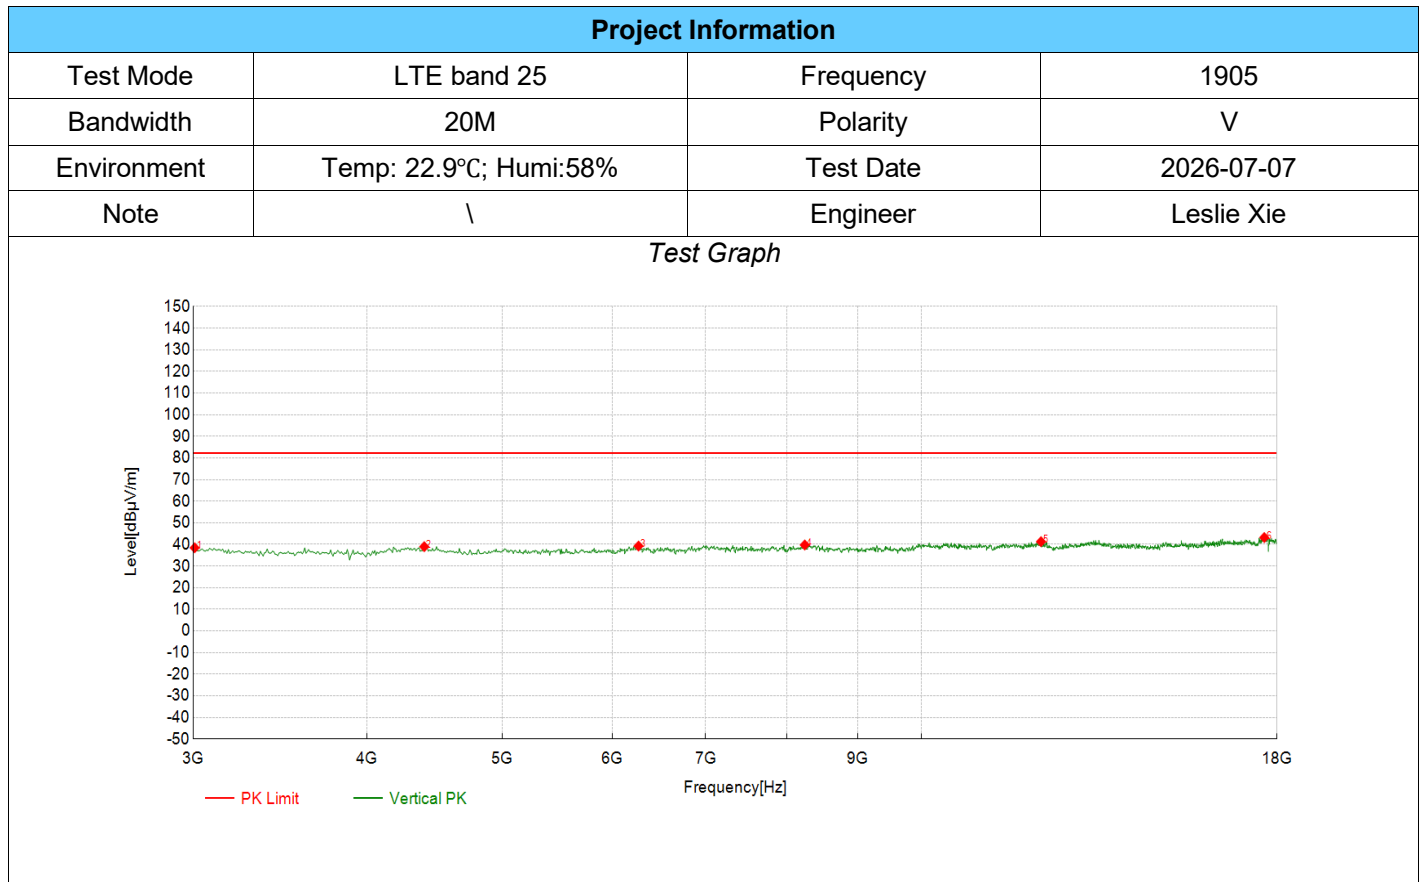


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3007.50	55.72	38.46	-17.26	82.25	43.79	PK	Vertical	PASS
2	4395.70	56.92	38.96	-17.96	82.25	43.29	PK	Vertical	PASS
3	6264.13	55.53	39.27	-16.26	82.25	42.98	PK	Vertical	PASS
4	8245.12	53.65	39.76	-13.89	82.25	42.49	PK	Vertical	PASS
5	12184.59	51.05	41.30	-9.75	82.25	40.95	PK	Vertical	PASS
6	17624.81	48.21	43.19	-5.02	82.25	39.06	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

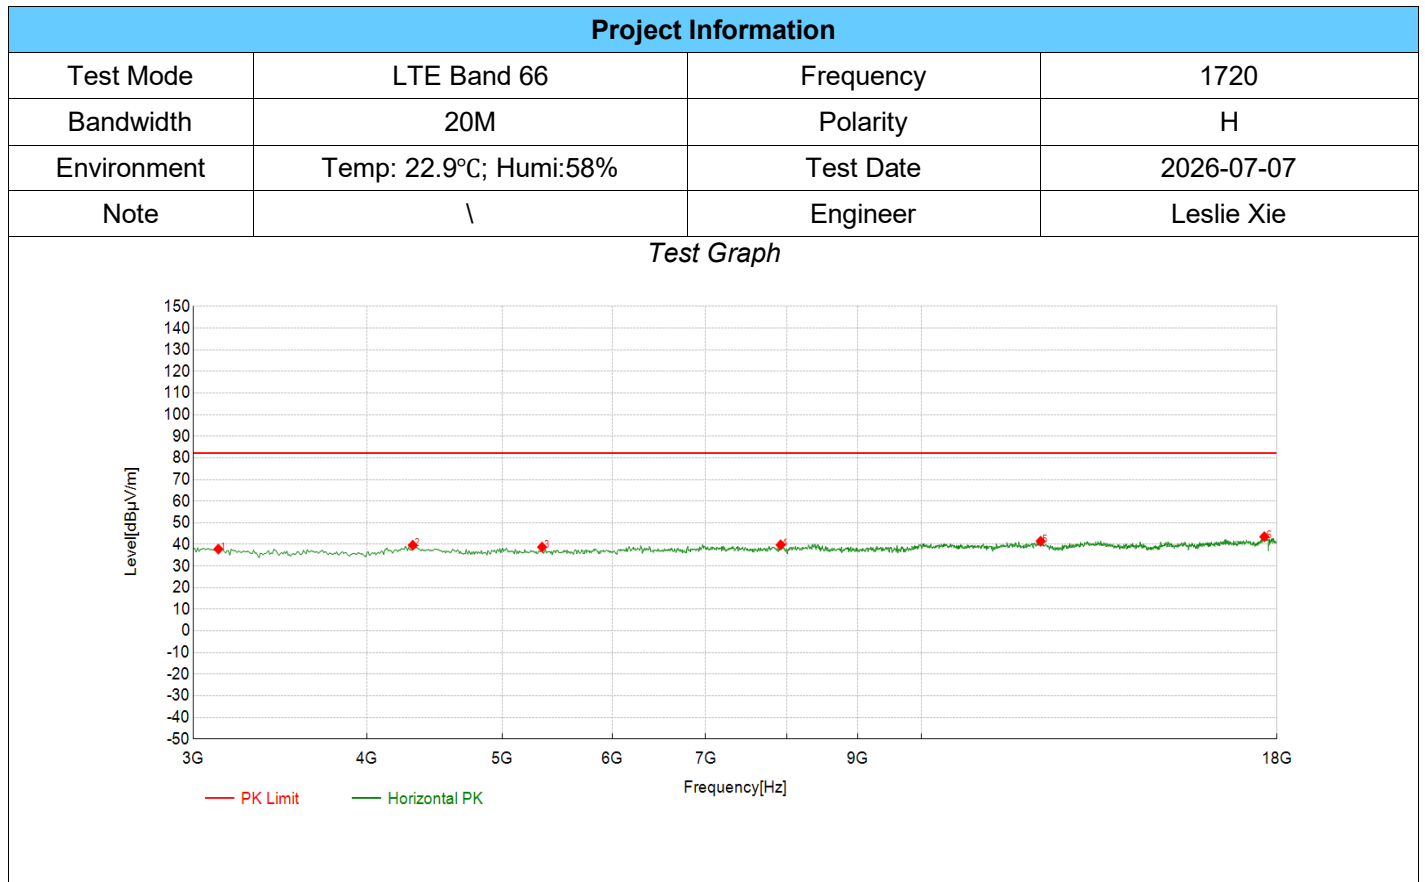

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3127.56	55.82	37.85	-17.97	82.25	44.40	PK	Horizontal	PASS
2	4313.16	57.38	39.63	-17.75	82.25	42.62	PK	Horizontal	PASS
3	5341.17	56.31	38.77	-17.54	82.25	43.48	PK	Horizontal	PASS
4	7922.46	54.76	39.81	-14.95	82.25	42.44	PK	Horizontal	PASS
5	12177.09	51.24	41.50	-9.74	82.25	40.75	PK	Horizontal	PASS
6	17624.81	48.60	43.58	-5.02	82.25	38.67	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
 (2) Margin = Limit - Level

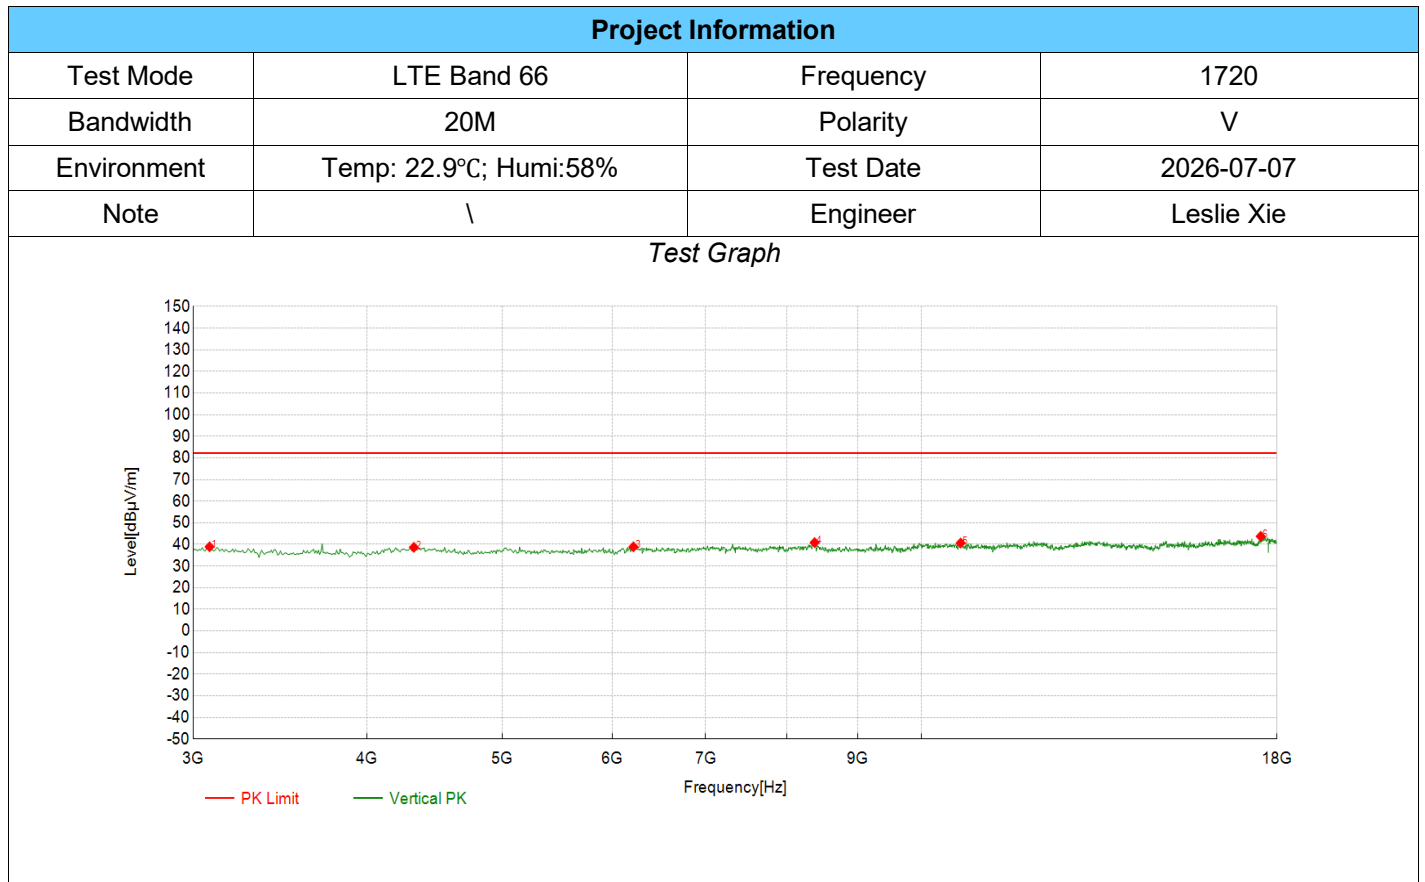

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3082.54	56.63	38.93	-17.70	82.25	43.32	PK	Vertical	PASS
2	4320.66	56.46	38.68	-17.78	82.25	43.57	PK	Vertical	PASS
3	6211.61	55.16	38.91	-16.25	82.25	43.34	PK	Vertical	PASS
4	8380.19	53.50	40.85	-12.65	82.25	41.40	PK	Vertical	PASS
5	10668.83	50.03	40.66	-9.37	82.25	41.59	PK	Vertical	PASS
6	17519.76	49.94	43.76	-6.18	82.25	38.49	PK	Vertical	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

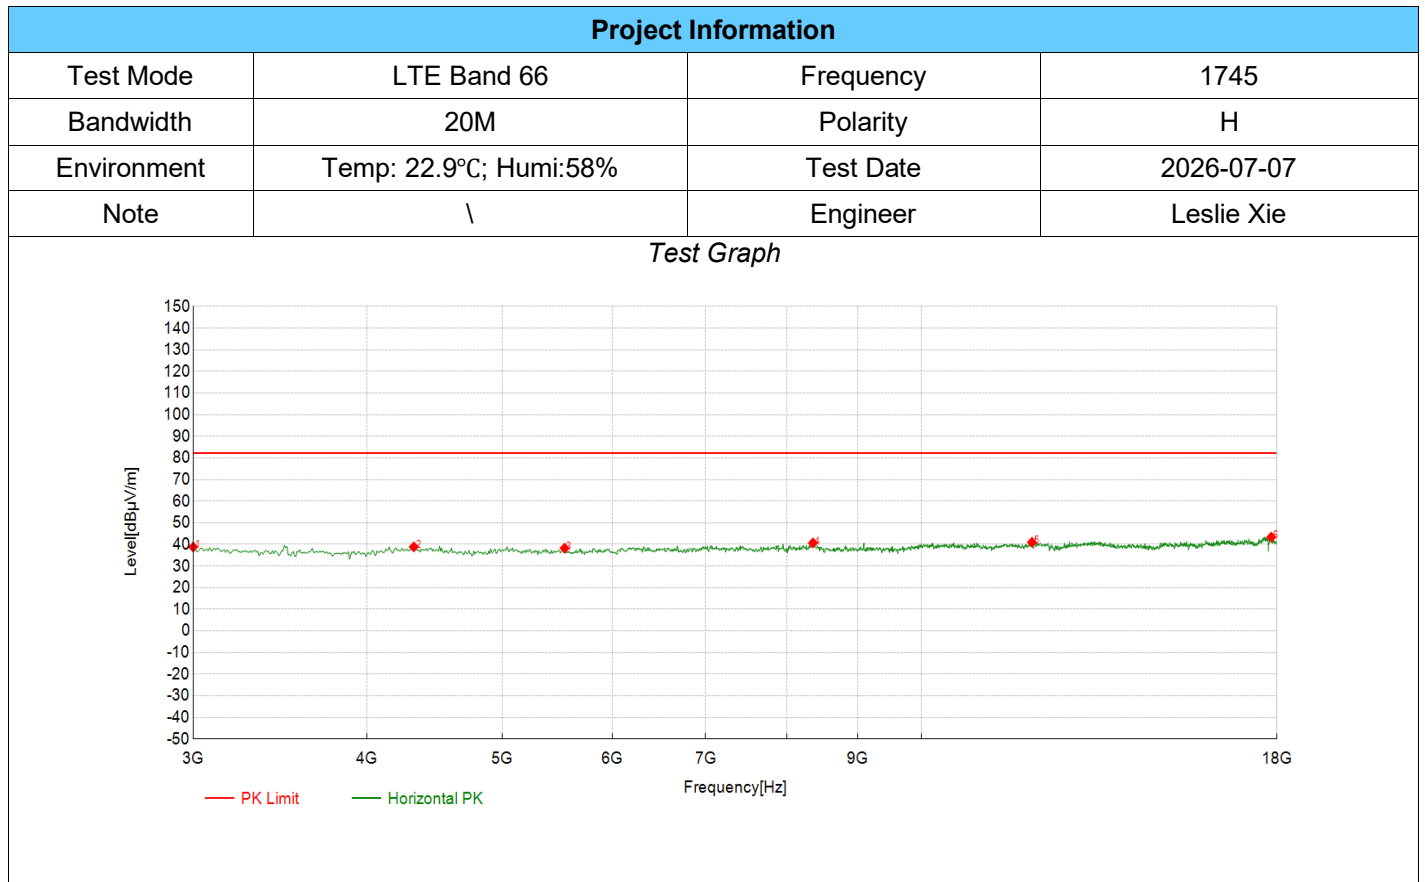

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3000.00	56.05	38.83	-17.22	82.25	43.42	PK	Horizontal	PASS
2	4320.66	56.66	38.88	-17.78	82.25	43.37	PK	Horizontal	PASS
3	5543.77	55.70	38.27	-17.43	82.25	43.98	PK	Horizontal	PASS
4	8357.68	53.52	40.67	-12.85	82.25	41.58	PK	Horizontal	PASS
5	12004.50	50.65	41.03	-9.62	82.25	41.22	PK	Horizontal	PASS
6	17827.41	48.58	43.37	-5.21	82.25	38.88	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

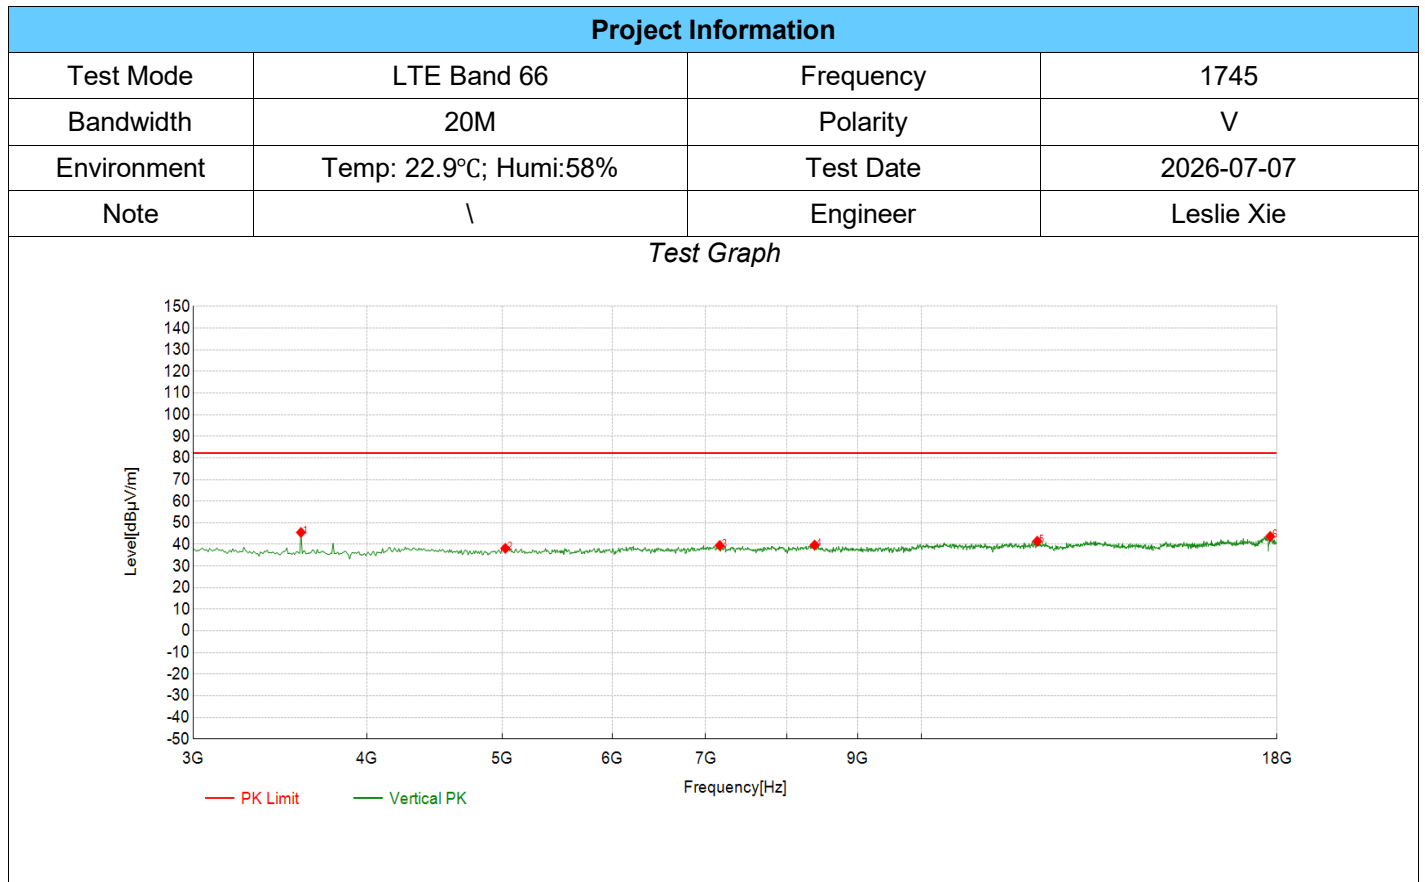

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3585.29	64.45	45.56	-18.89	82.25	36.69	PK	Vertical	PASS
2	5026.01	55.81	38.19	-17.62	82.25	44.06	PK	Vertical	PASS
3	7164.58	54.67	39.50	-15.17	82.25	42.75	PK	Vertical	PASS
4	8380.19	52.35	39.70	-12.65	82.25	42.55	PK	Vertical	PASS
5	12109.55	51.18	41.48	-9.70	82.25	40.77	PK	Vertical	PASS
6	17797.40	48.81	43.69	-5.12	82.25	38.56	PK	Vertical	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

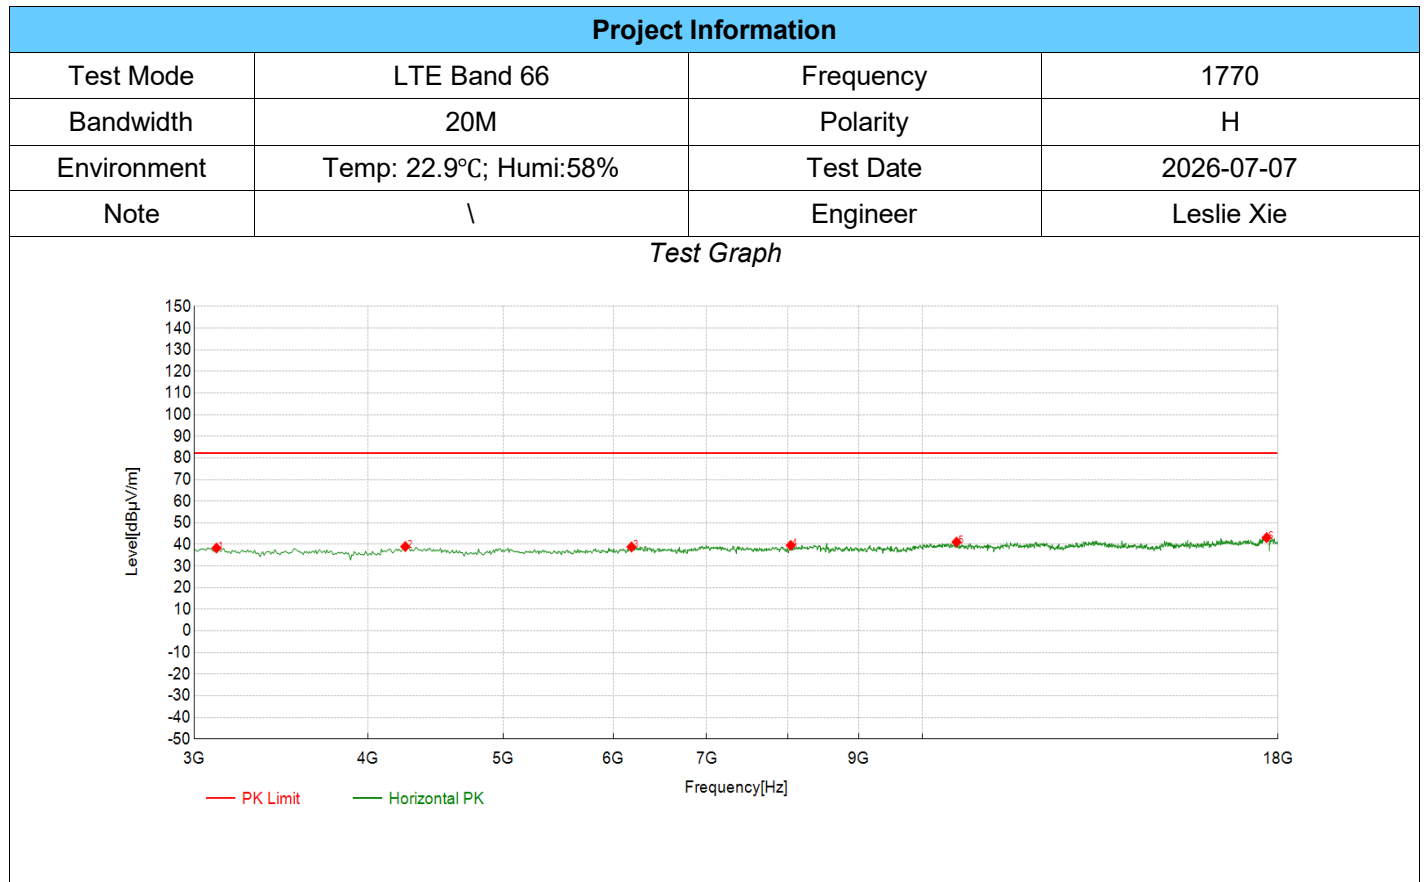

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3112.56	56.23	38.34	-17.89	82.25	43.91	PK	Horizontal	PASS
2	4253.13	56.65	39.02	-17.63	82.25	43.23	PK	Horizontal	PASS
3	6181.59	55.17	38.85	-16.32	82.25	43.40	PK	Horizontal	PASS
4	8042.52	54.45	39.58	-14.87	82.25	42.67	PK	Horizontal	PASS
5	10578.79	50.62	41.10	-9.52	82.25	41.15	PK	Horizontal	PASS
6	17662.33	48.16	43.12	-5.04	82.25	39.13	PK	Horizontal	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

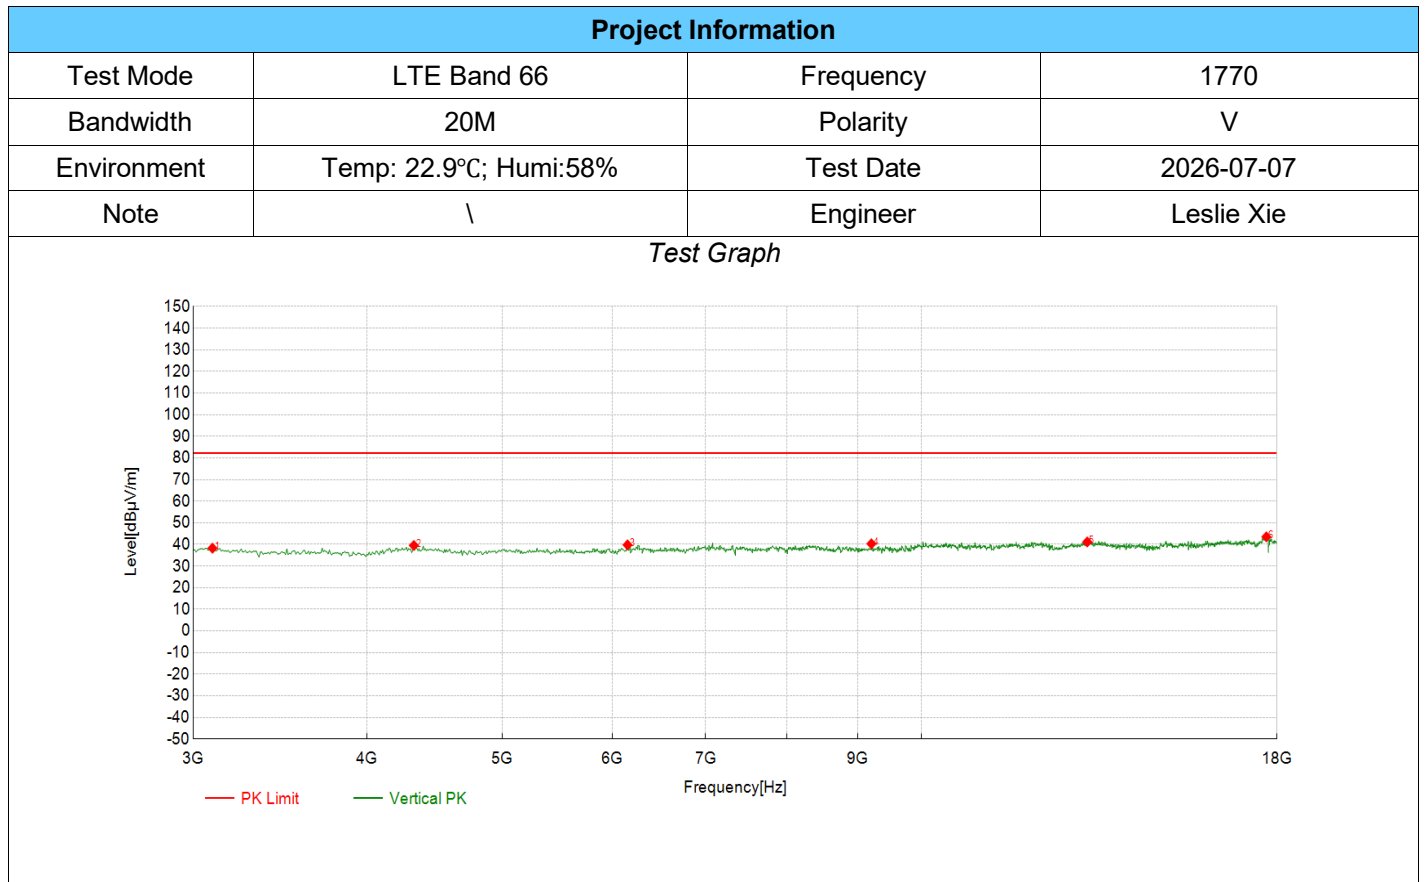


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3097.55	56.05	38.26	-17.79	82.25	43.99	PK	Vertical	PASS
2	4320.66	57.32	39.54	-17.78	82.25	42.71	PK	Vertical	PASS
3	6151.58	56.27	39.81	-16.46	82.25	42.44	PK	Vertical	PASS
4	9205.60	52.15	40.31	-11.84	82.25	41.94	PK	Vertical	PASS
5	13152.58	52.15	41.15	-11.00	82.25	41.10	PK	Vertical	PASS
6	17684.84	48.59	43.54	-5.05	82.25	38.71	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

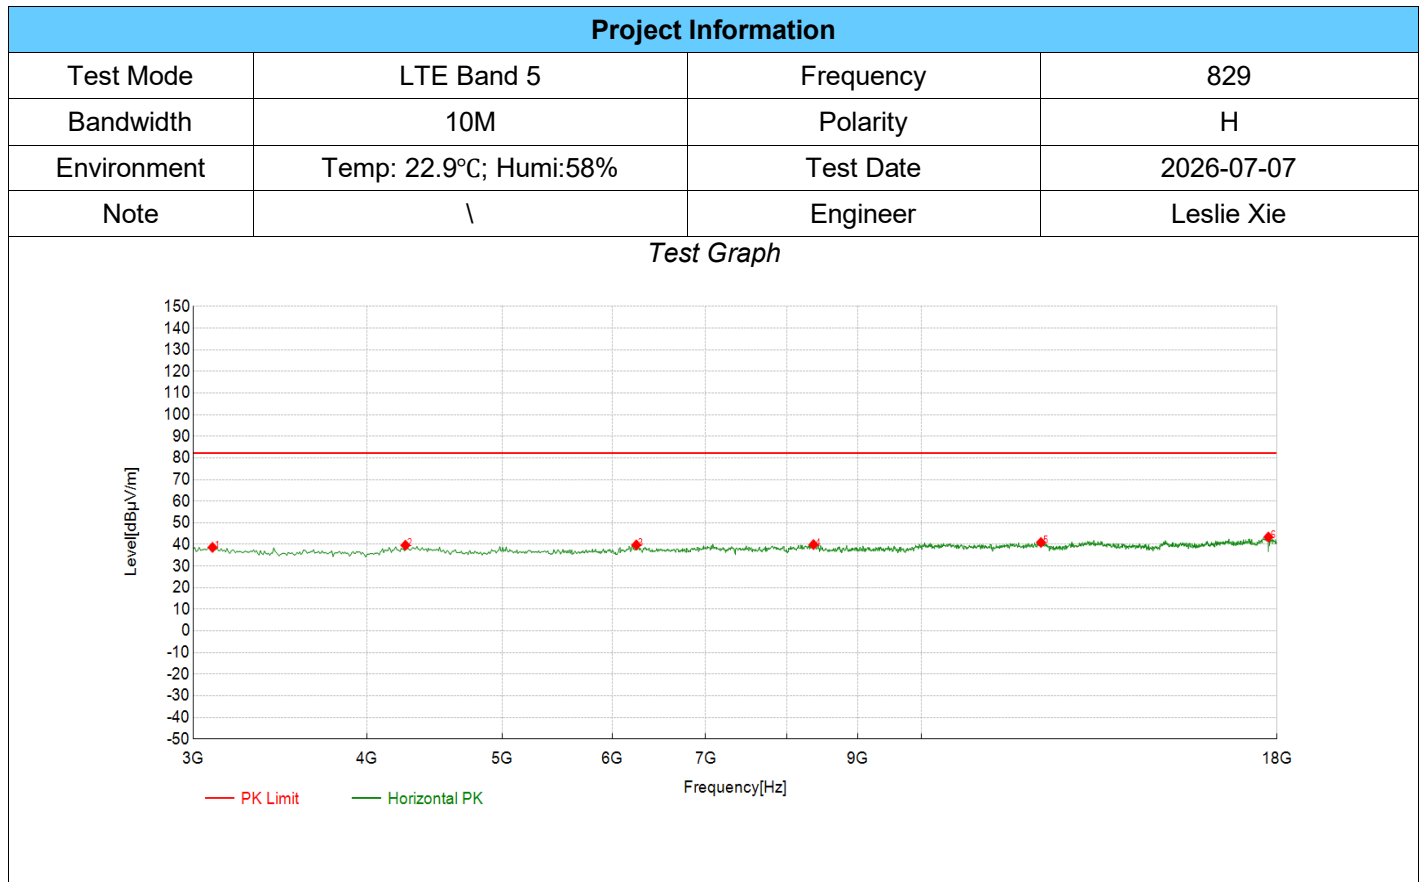

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3097.55	56.44	38.65	-17.79	82.25	43.60	PK	Horizontal	PASS
2	4260.63	57.28	39.63	-17.65	82.25	42.62	PK	Horizontal	PASS
3	6241.62	56.05	39.79	-16.26	82.25	42.46	PK	Horizontal	PASS
4	8365.18	52.71	39.93	-12.78	82.25	42.32	PK	Horizontal	PASS
5	12184.59	50.66	40.91	-9.75	82.25	41.34	PK	Horizontal	PASS
6	17744.87	48.51	43.42	-5.09	82.25	38.83	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
 (2) Margin = Limit - Level

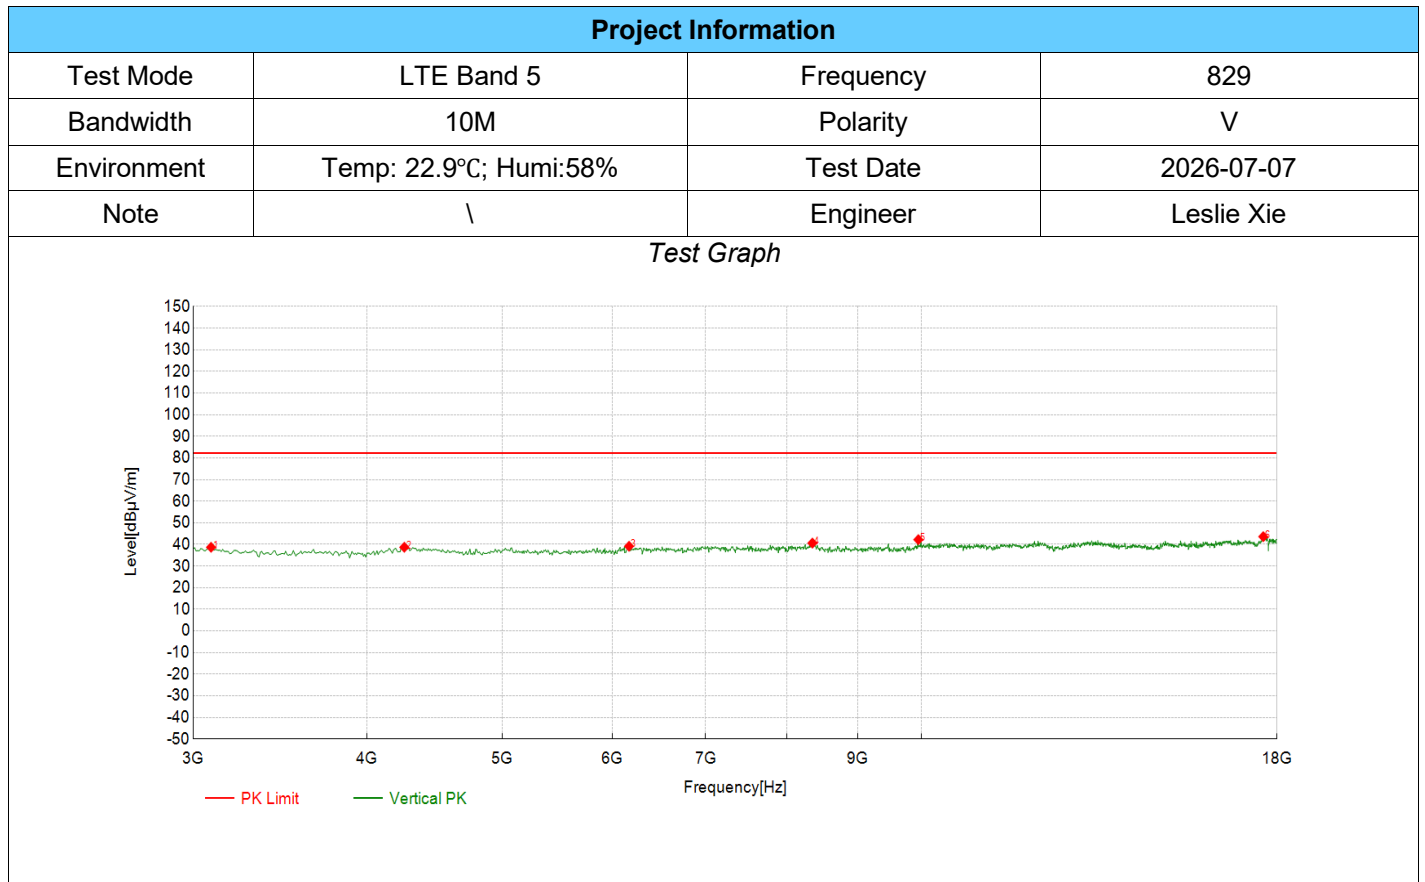

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3090.05	56.43	38.68	-17.75	82.25	43.57	PK	Vertical	PASS
2	4253.13	56.34	38.71	-17.63	82.25	43.54	PK	Vertical	PASS
3	6166.58	55.56	39.17	-16.39	82.25	43.08	PK	Vertical	PASS
4	8350.18	53.54	40.62	-12.92	82.25	41.63	PK	Vertical	PASS
5	9948.47	53.21	42.22	-10.99	82.25	40.03	PK	Vertical	PASS
6	17594.80	48.67	43.60	-5.07	82.25	38.65	PK	Vertical	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

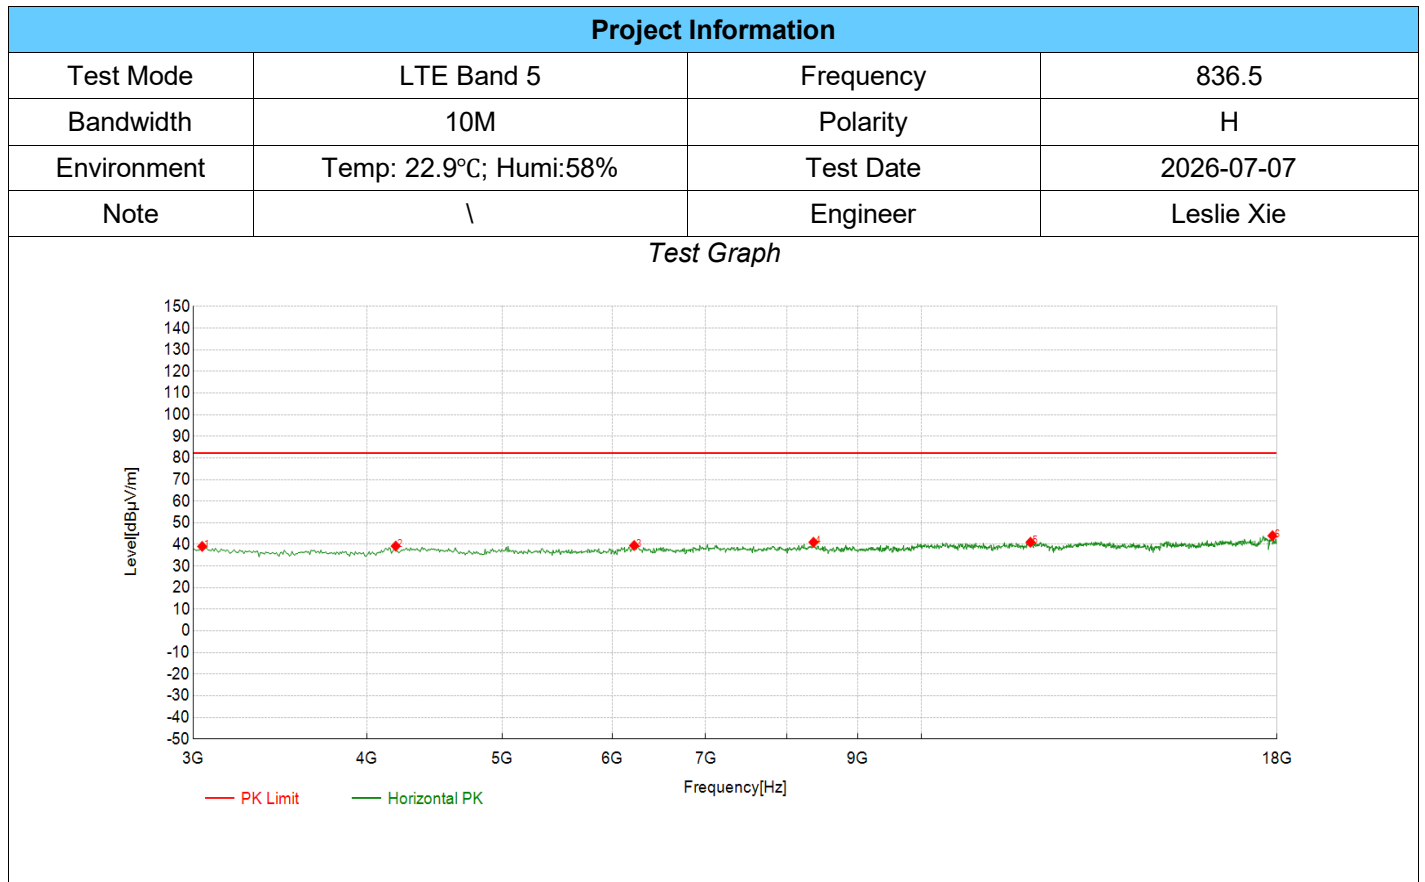


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3045.02	56.55	39.06	-17.49	82.25	43.19	PK	Horizontal	PASS
2	4193.10	56.81	39.23	-17.58	82.25	43.02	PK	Horizontal	PASS
3	6219.11	55.75	39.51	-16.24	82.25	42.74	PK	Horizontal	PASS
4	8365.18	53.77	40.99	-12.78	82.25	41.26	PK	Horizontal	PASS
5	11974.49	50.70	41.00	-9.70	82.25	41.25	PK	Horizontal	PASS
6	17864.93	49.38	44.02	-5.36	82.25	38.23	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

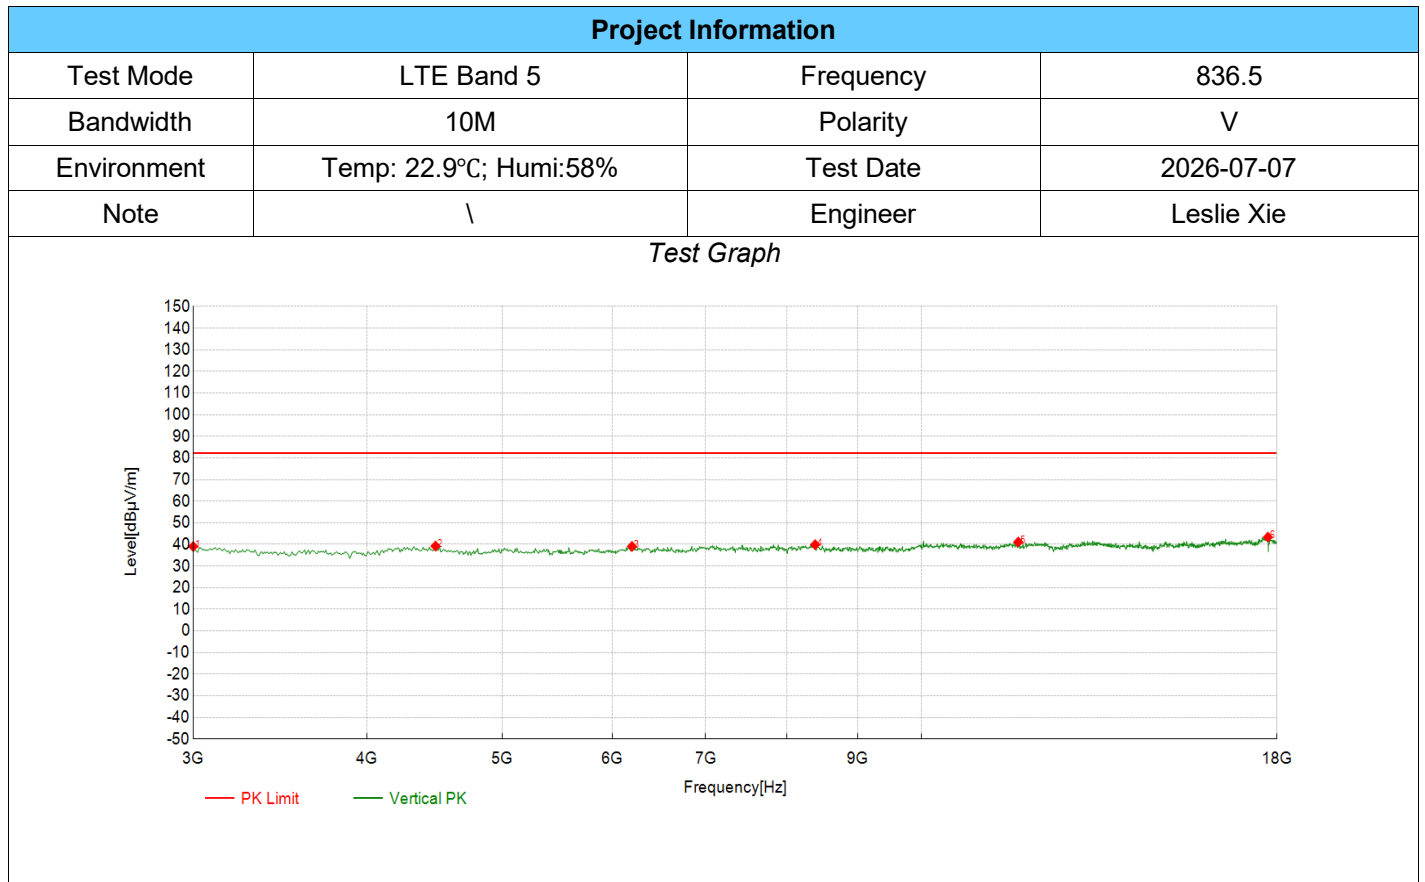

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3000.00	56.27	39.05	-17.22	82.25	43.20	PK	Vertical	PASS
2	4478.24	57.32	39.25	-18.07	82.25	43.00	PK	Vertical	PASS
3	6196.60	55.32	39.07	-16.25	82.25	43.18	PK	Vertical	PASS
4	8387.69	52.46	39.89	-12.57	82.25	42.36	PK	Vertical	PASS
5	11734.37	50.80	41.09	-9.71	82.25	41.16	PK	Vertical	PASS
6	17729.86	48.46	43.39	-5.07	82.25	38.86	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
 (2) Margin = Limit - Level

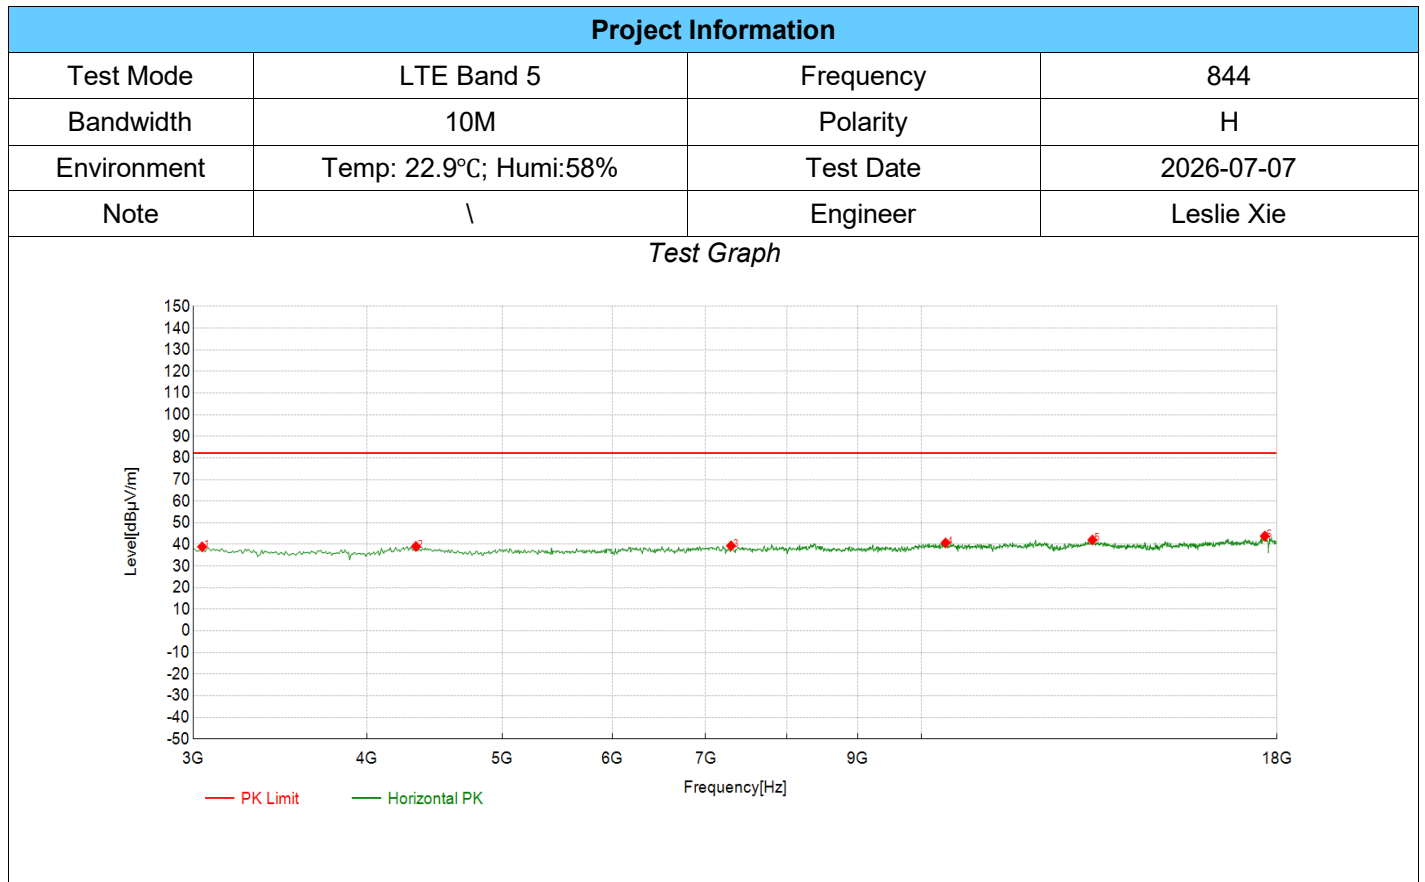

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3045.02	56.39	38.90	-17.49	82.25	43.35	PK	Horizontal	PASS
2	4335.67	56.88	39.07	-17.81	82.25	43.18	PK	Horizontal	PASS
3	7299.65	54.57	39.38	-15.19	82.25	42.87	PK	Horizontal	PASS
4	10406.20	50.33	40.71	-9.62	82.25	41.54	PK	Horizontal	PASS
5	13265.13	53.05	42.07	-10.98	82.25	40.18	PK	Horizontal	PASS
6	17639.82	48.86	43.84	-5.02	82.25	38.41	PK	Horizontal	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

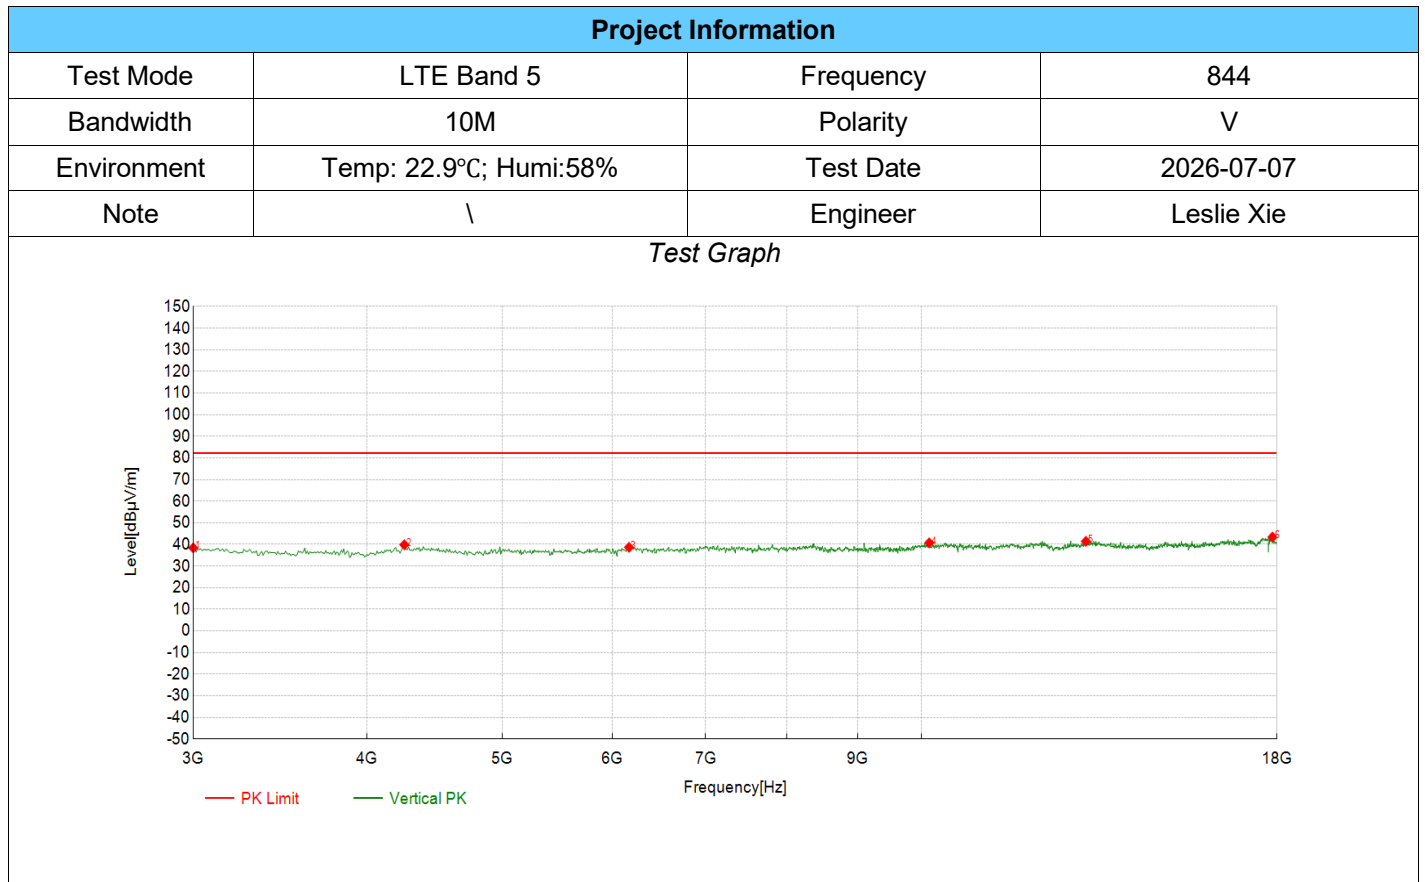


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3000.00	55.64	38.42	-17.22	82.25	43.83	PK	Vertical	PASS
2	4253.13	57.49	39.86	-17.63	82.25	42.39	PK	Vertical	PASS
3	6166.58	55.07	38.68	-16.39	82.25	43.57	PK	Vertical	PASS
4	10128.56	51.80	40.71	-11.09	82.25	41.54	PK	Vertical	PASS
5	13122.56	52.55	41.43	-11.12	82.25	40.82	PK	Vertical	PASS
6	17864.93	48.76	43.40	-5.36	82.25	38.85	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

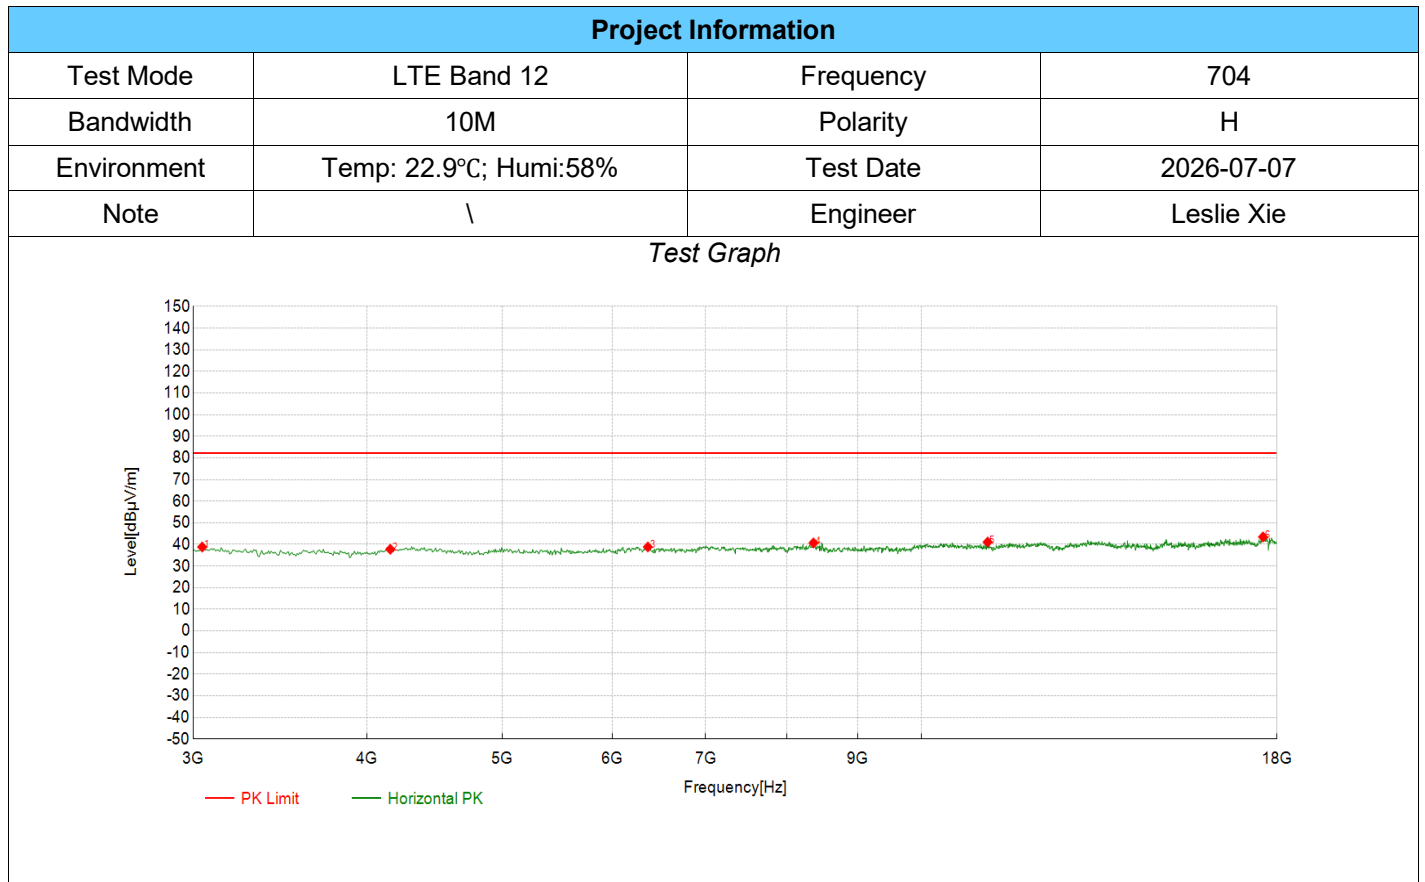

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3045.02	56.30	38.81	-17.49	82.25	43.44	PK	Horizontal	PASS
2	4155.58	55.76	37.79	-17.97	82.25	44.46	PK	Horizontal	PASS
3	6361.68	55.15	38.84	-16.31	82.25	43.41	PK	Horizontal	PASS
4	8365.18	53.47	40.69	-12.78	82.25	41.56	PK	Horizontal	PASS
5	11156.58	49.79	41.10	-8.69	82.25	41.15	PK	Horizontal	PASS
6	17587.29	48.65	43.47	-5.18	82.25	38.78	PK	Horizontal	PASS


Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

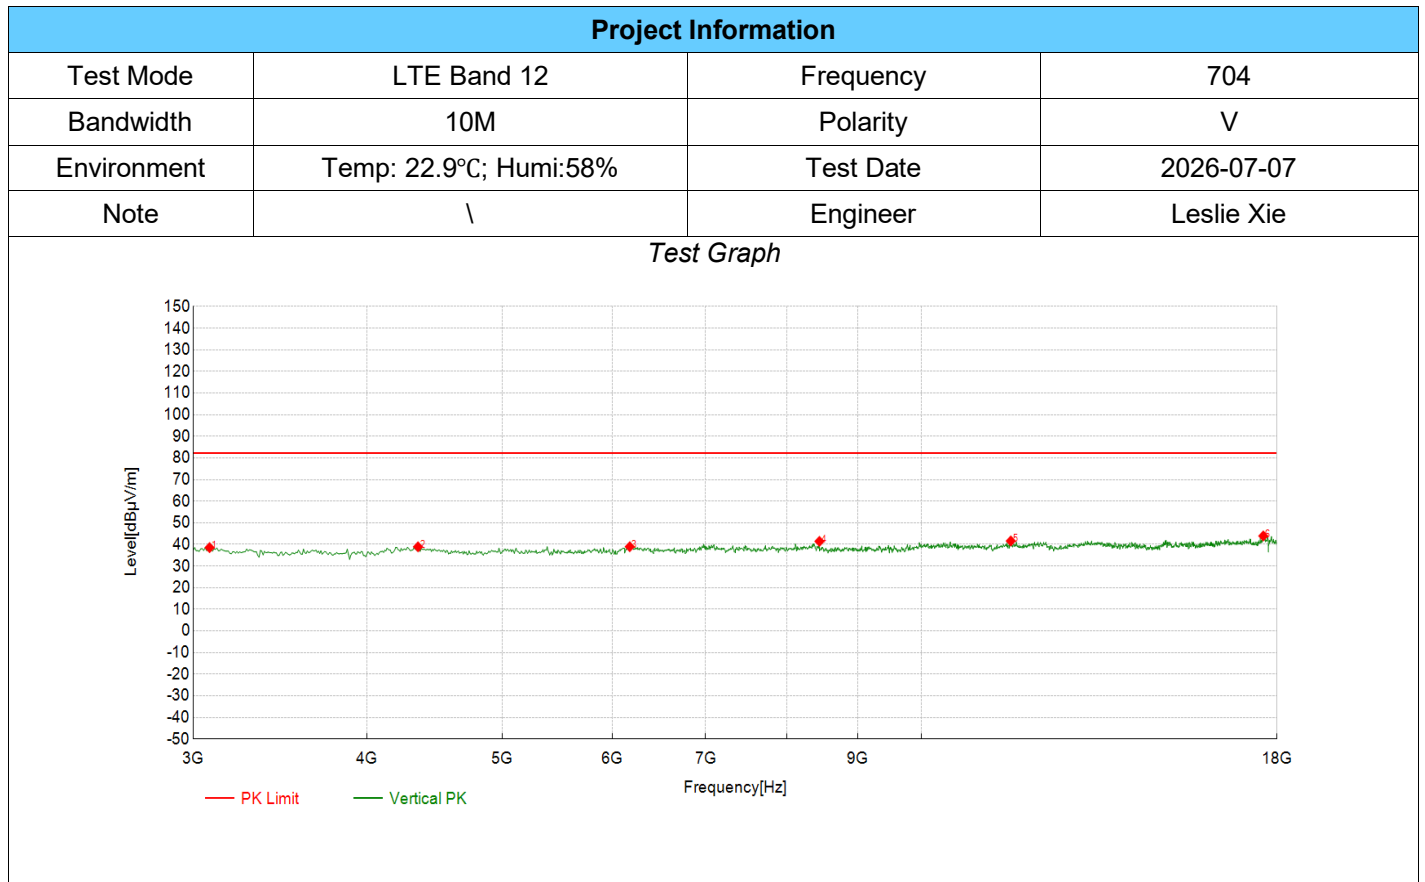

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3082.54	56.25	38.55	-17.70	82.25	43.70	PK	Vertical	PASS
2	4350.68	56.75	38.90	-17.85	82.25	43.35	PK	Vertical	PASS
3	6174.09	55.32	38.96	-16.36	82.25	43.29	PK	Vertical	PASS
4	8447.72	54.14	41.41	-12.73	82.25	40.84	PK	Vertical	PASS
5	11591.80	50.21	41.61	-8.60	82.25	40.64	PK	Vertical	PASS
6	17594.80	49.01	43.94	-5.07	82.25	38.31	PK	Vertical	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

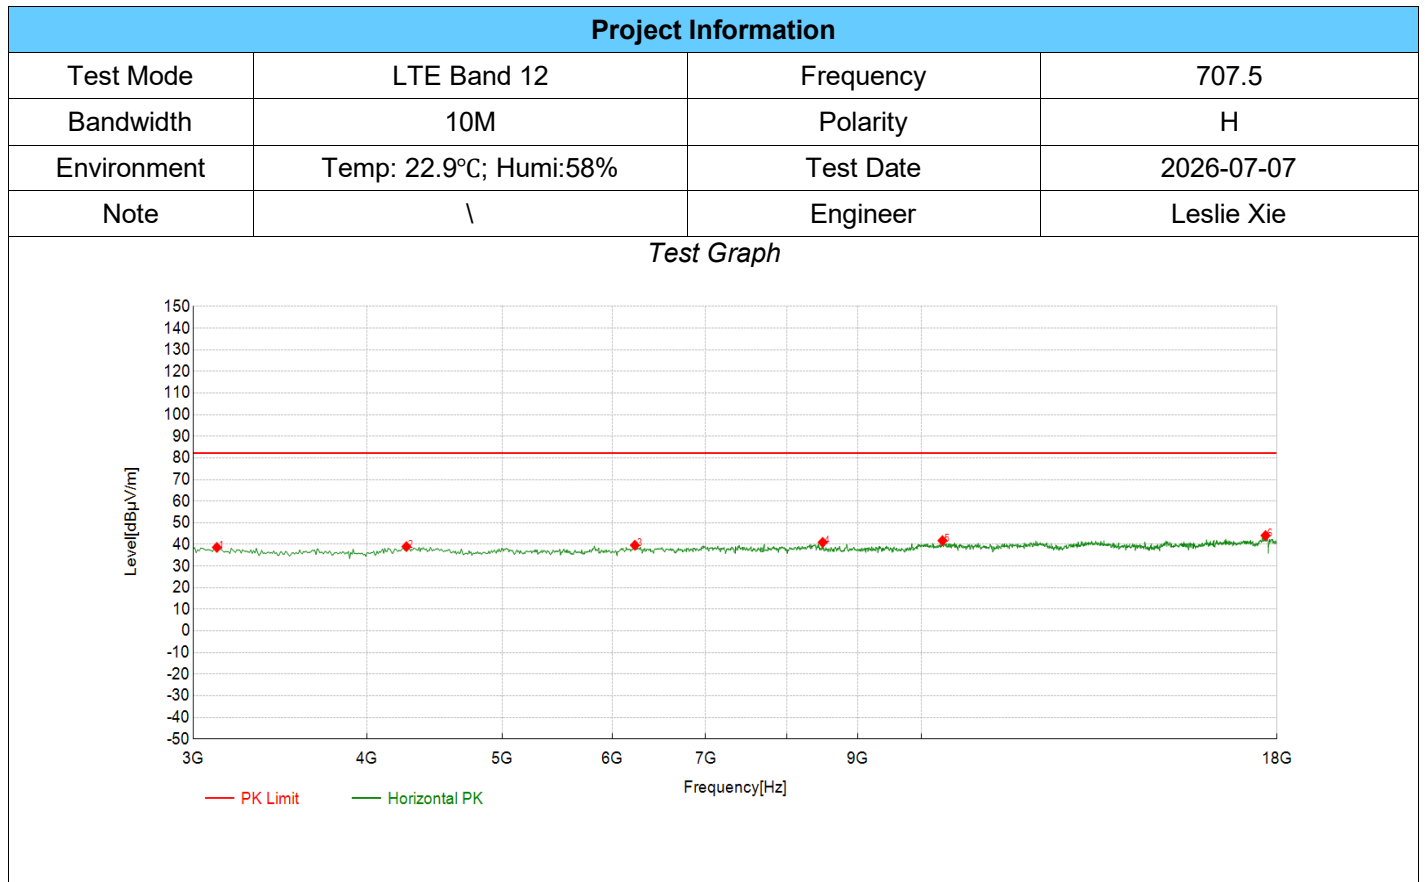

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3120.06	56.55	38.62	-17.93	82.25	43.63	PK	Horizontal	PASS
2	4268.13	56.66	39.00	-17.66	82.25	43.25	PK	Horizontal	PASS
3	6226.61	55.88	39.63	-16.25	82.25	42.62	PK	Horizontal	PASS
4	8492.75	53.93	40.94	-12.99	82.25	41.31	PK	Horizontal	PASS
5	10353.68	51.78	41.75	-10.03	82.25	40.50	PK	Horizontal	PASS
6	17662.33	49.16	44.12	-5.04	82.25	38.13	PK	Horizontal	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

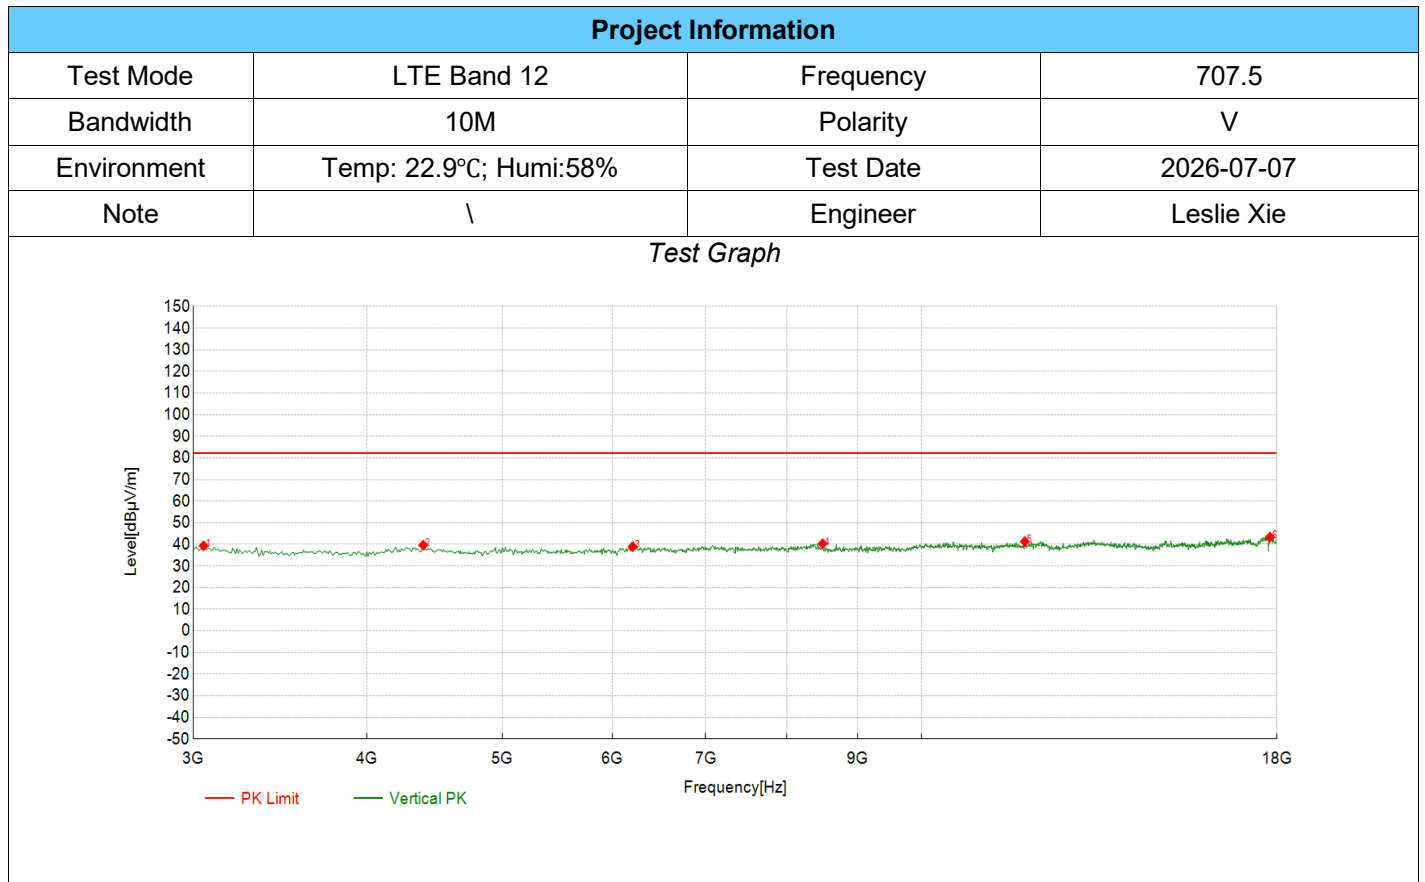

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3052.53	56.90	39.37	-17.53	82.25	42.88	PK	Vertical	PASS
2	4388.19	57.63	39.70	-17.93	82.25	42.55	PK	Vertical	PASS
3	6204.10	55.22	38.97	-16.25	82.25	43.28	PK	Vertical	PASS
4	8492.75	53.30	40.31	-12.99	82.25	41.94	PK	Vertical	PASS
5	11861.93	51.41	41.34	-10.07	82.25	40.91	PK	Vertical	PASS
6	17789.89	48.50	43.39	-5.11	82.25	38.86	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
 (2) Margin = Limit - Level

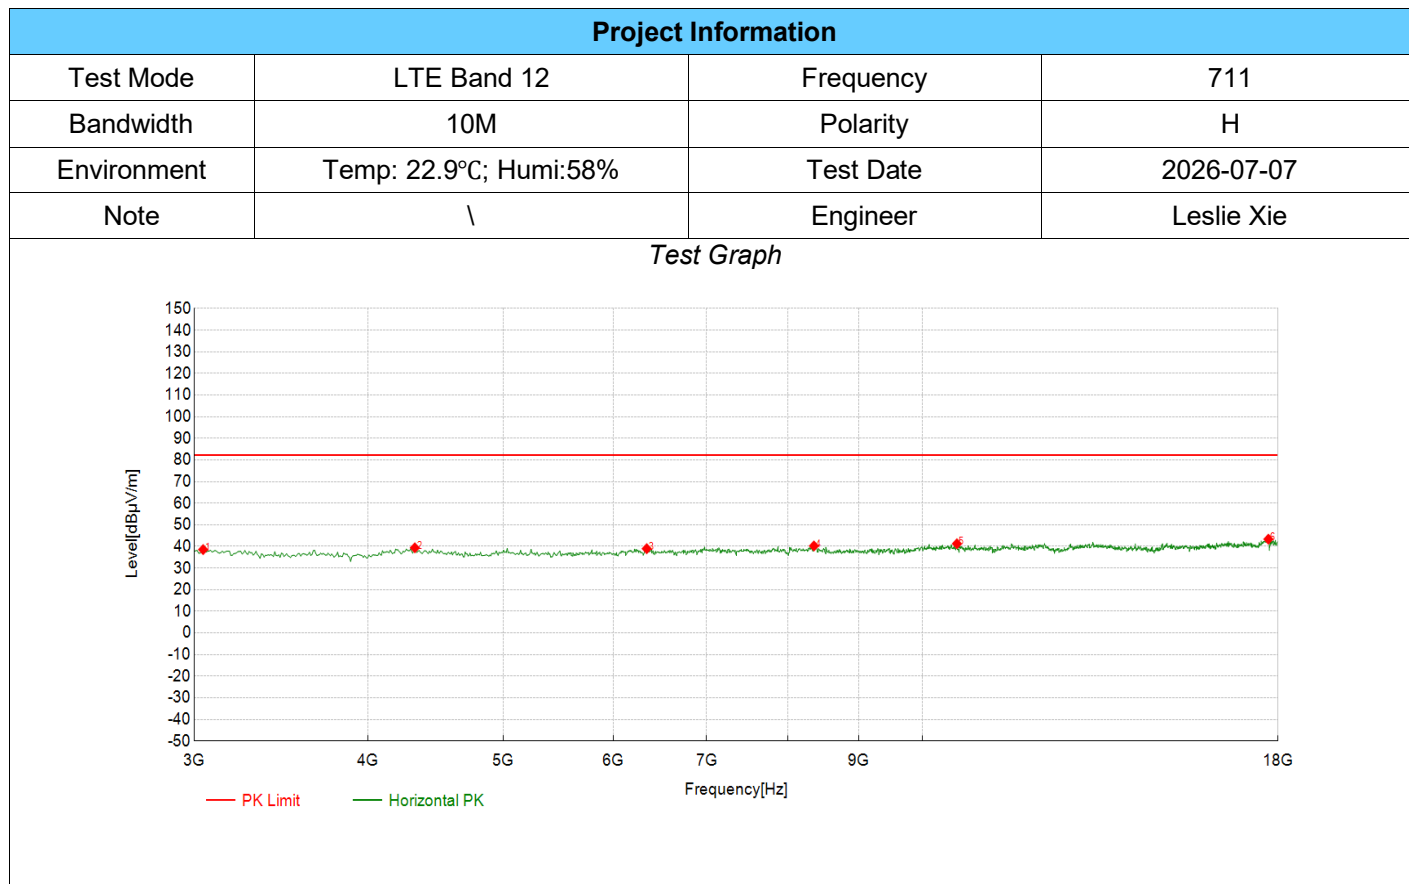

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3045.02	56.03	38.54	-17.49	82.25	43.71	PK	Horizontal	PASS
2	4320.66	57.15	39.37	-17.78	82.25	42.88	PK	Horizontal	PASS
3	6339.17	55.27	38.98	-16.29	82.25	43.27	PK	Horizontal	PASS
4	8357.68	53.07	40.22	-12.85	82.25	42.03	PK	Horizontal	PASS
5	10586.29	50.76	41.24	-9.52	82.25	41.01	PK	Horizontal	PASS
6	17714.86	48.43	43.36	-5.07	82.25	38.89	PK	Horizontal	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

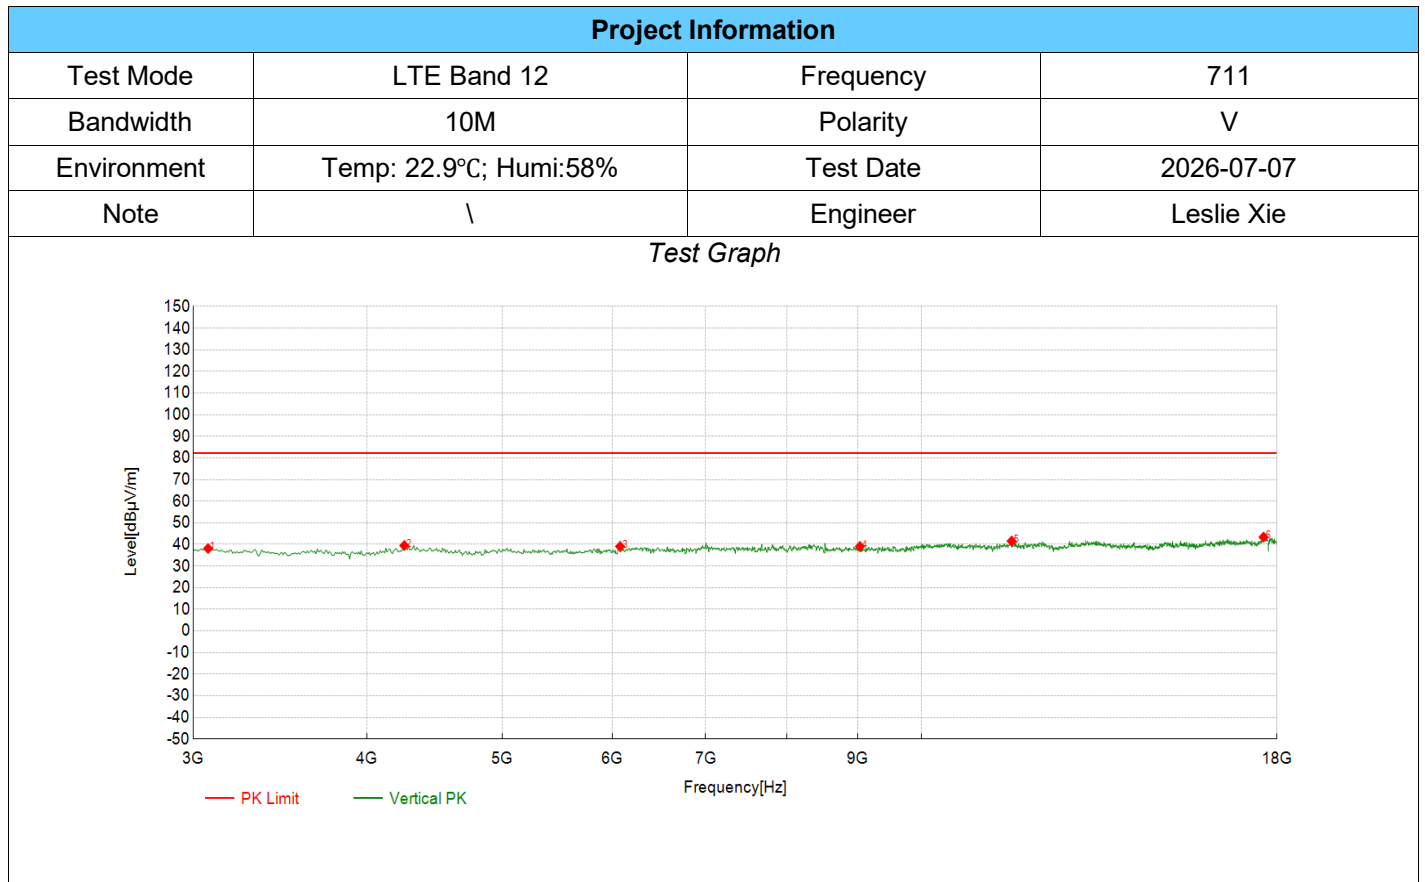


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3075.04	55.79	38.13	-17.66	82.25	44.12	PK	Vertical	PASS
2	4253.13	57.14	39.51	-17.63	82.25	42.74	PK	Vertical	PASS
3	6076.54	55.90	39.10	-16.80	82.25	43.15	PK	Vertical	PASS
4	9033.02	51.83	39.06	-12.77	82.25	43.19	PK	Vertical	PASS
5	11606.80	50.21	41.56	-8.65	82.25	40.69	PK	Vertical	PASS
6	17602.30	48.40	43.40	-5.00	82.25	38.85	PK	Vertical	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

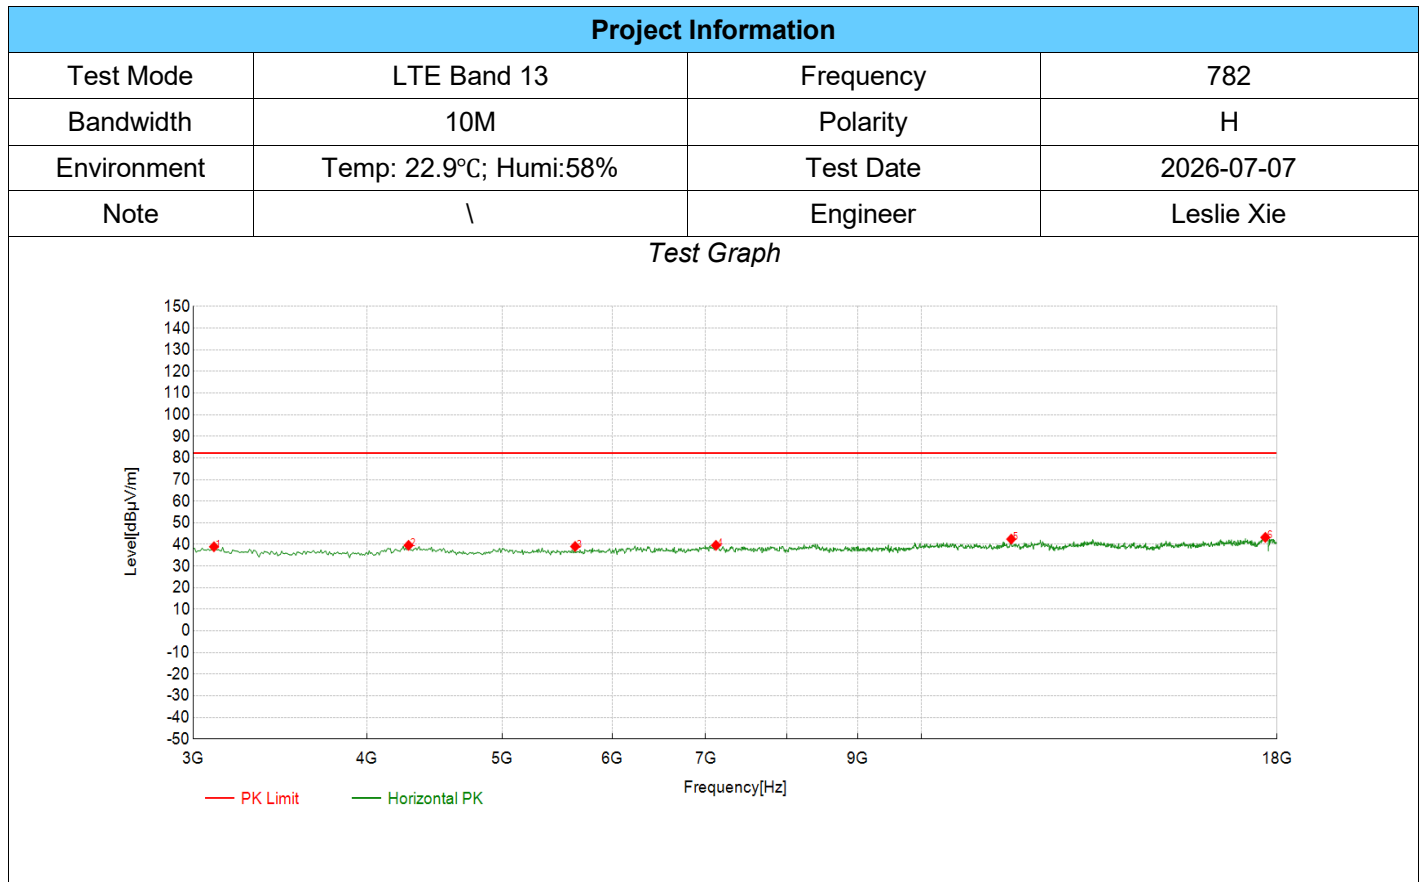


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3105.05	56.78	38.94	-17.84	82.25	43.31	PK	Horizontal	PASS
2	4283.14	57.28	39.59	-17.69	82.25	42.66	PK	Horizontal	PASS
3	5641.32	56.47	39.05	-17.42	82.25	43.20	PK	Horizontal	PASS
4	7119.56	54.66	39.59	-15.07	82.25	42.66	PK	Horizontal	PASS
5	11599.30	51.05	42.46	-8.59	82.25	39.79	PK	Horizontal	PASS
6	17654.83	48.28	43.25	-5.03	82.25	39.00	PK	Horizontal	PASS

Note: (1) Level = Reading + Factor
 (2) Margin = Limit - Level

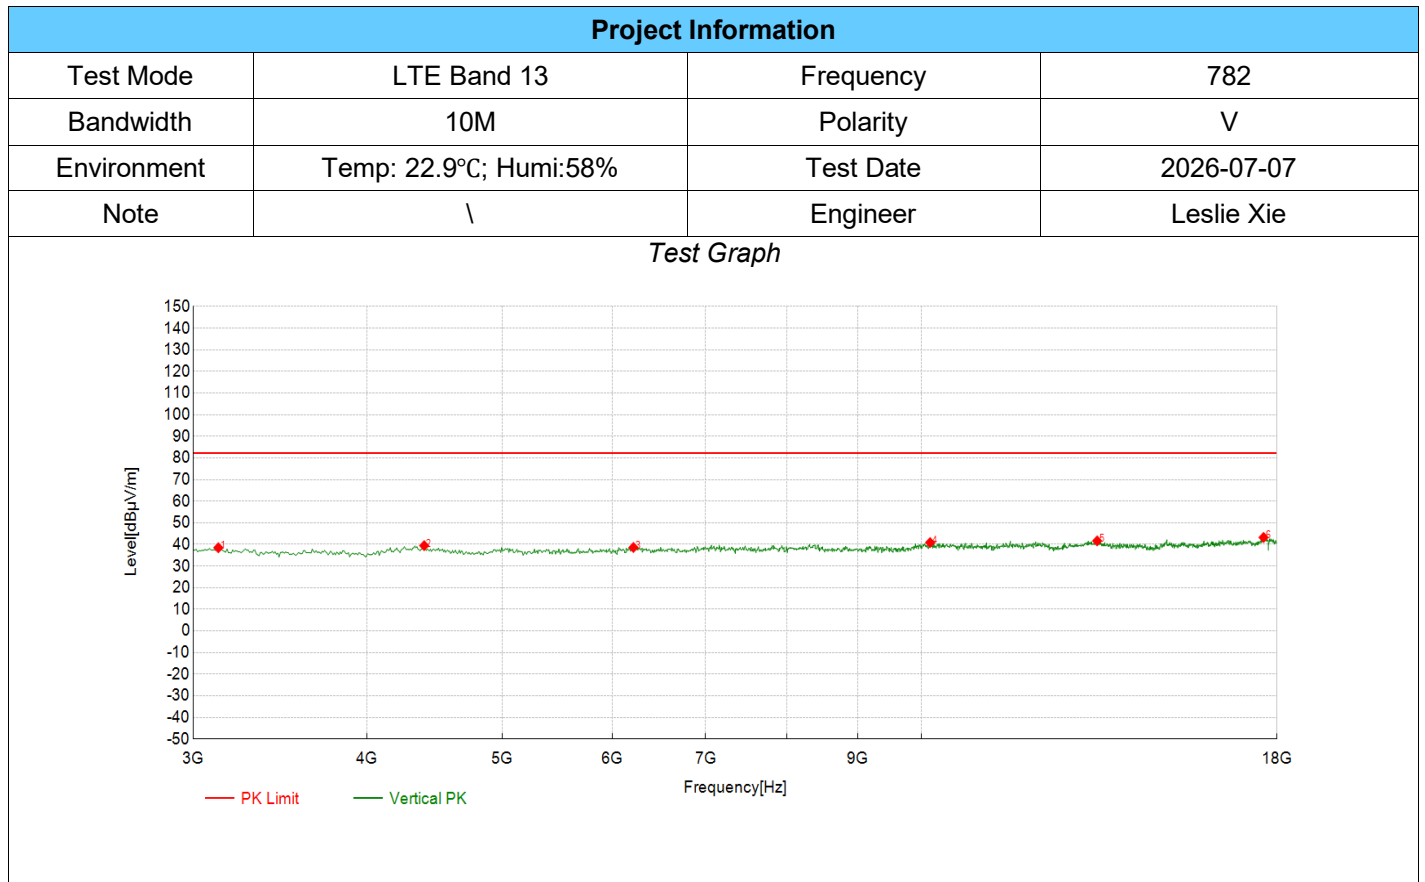


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3127.56	56.46	38.49	-17.97	82.25	43.76	PK	Vertical	PASS
2	4395.70	57.41	39.45	-17.96	82.25	42.80	PK	Vertical	PASS
3	6211.61	54.85	38.60	-16.25	82.25	43.65	PK	Vertical	PASS
4	10143.57	52.01	40.87	-11.14	82.25	41.38	PK	Vertical	PASS
5	13370.19	52.89	41.65	-11.24	82.25	40.60	PK	Vertical	PASS
6	17602.30	48.23	43.23	-5.00	82.25	39.02	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

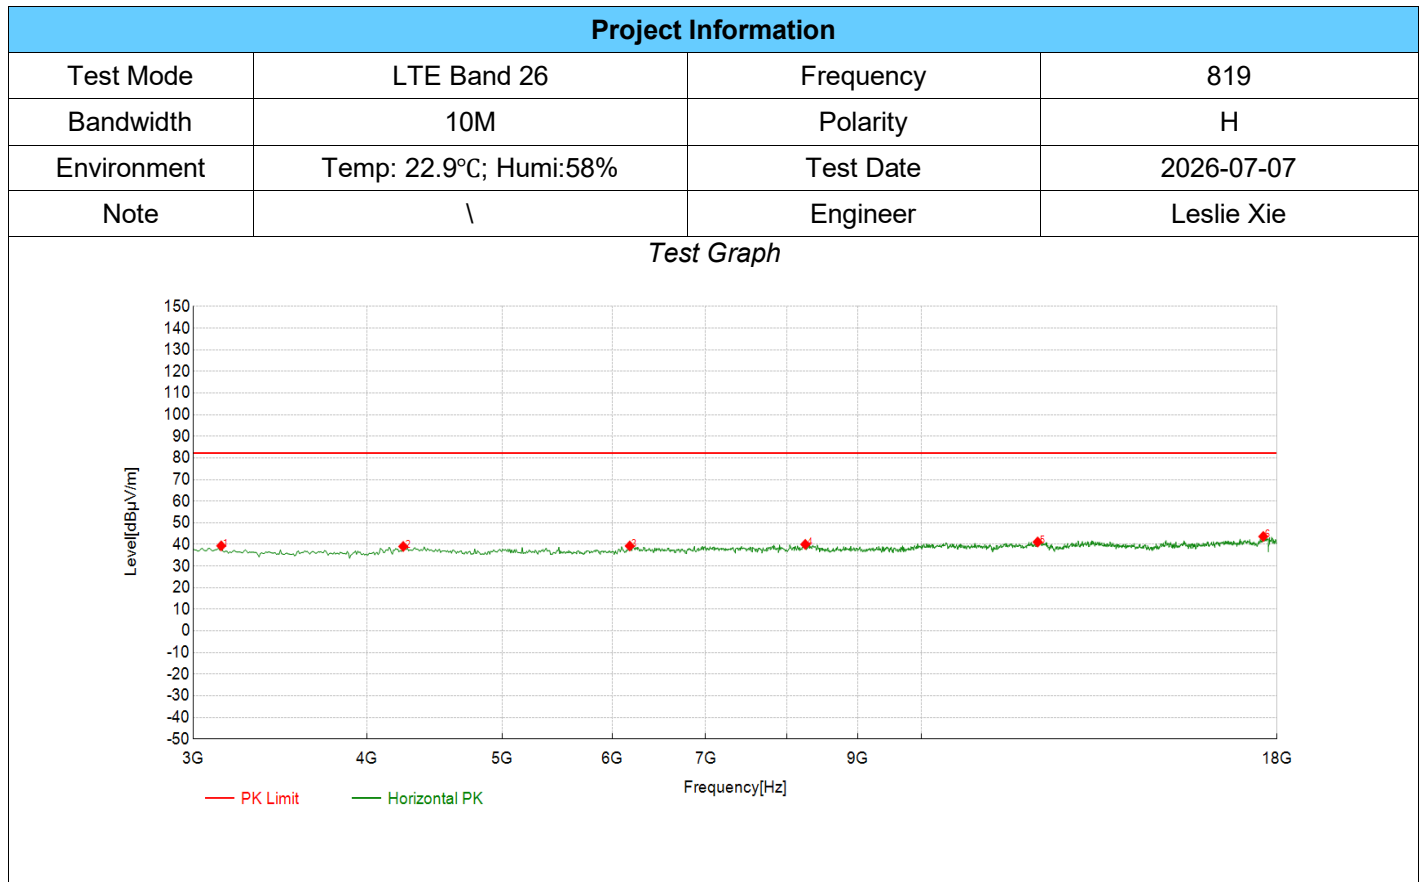


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3142.57	57.40	39.34	-18.06	82.25	42.91	PK	Horizontal	PASS
2	4245.62	56.67	39.06	-17.61	82.25	43.19	PK	Horizontal	PASS
3	6174.09	55.64	39.28	-16.36	82.25	42.97	PK	Horizontal	PASS
4	8252.63	53.84	40.02	-13.82	82.25	42.23	PK	Horizontal	PASS
5	12117.06	50.84	41.14	-9.70	82.25	41.11	PK	Horizontal	PASS
6	17594.80	48.75	43.68	-5.07	82.25	38.57	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

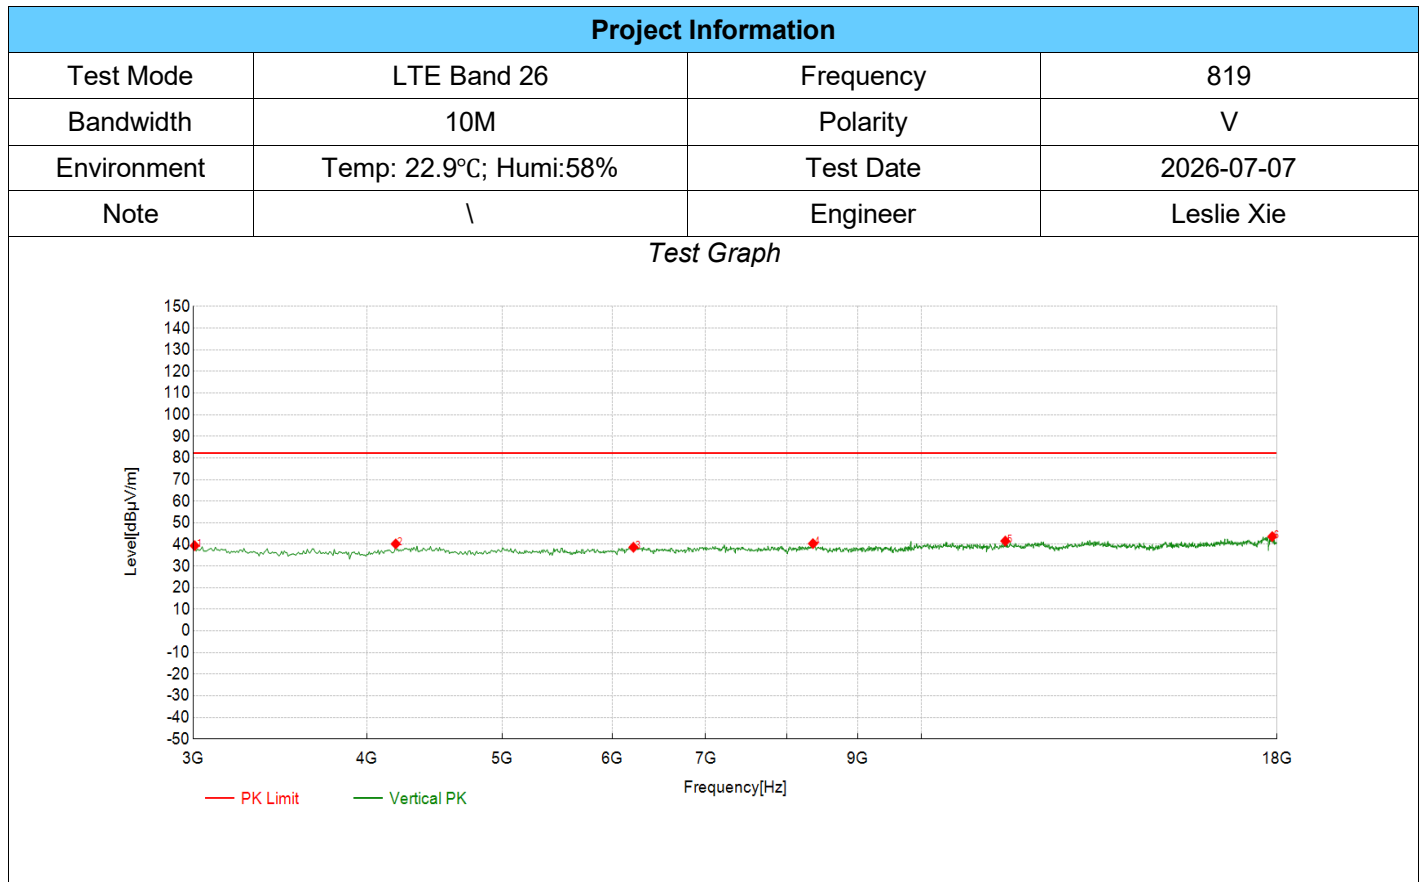


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3007.50	56.69	39.43	-17.26	82.25	42.82	PK	Vertical	PASS
2	4193.10	57.83	40.25	-17.58	82.25	42.00	PK	Vertical	PASS
3	6211.61	54.94	38.69	-16.25	82.25	43.56	PK	Vertical	PASS
4	8357.68	53.23	40.38	-12.85	82.25	41.87	PK	Vertical	PASS
5	11486.74	50.37	41.58	-8.79	82.25	40.67	PK	Vertical	PASS
6	17857.43	48.95	43.62	-5.33	82.25	38.63	PK	Vertical	PASS

Note: (1) Level = Reading + Factor
 (2) Margin = Limit - Level

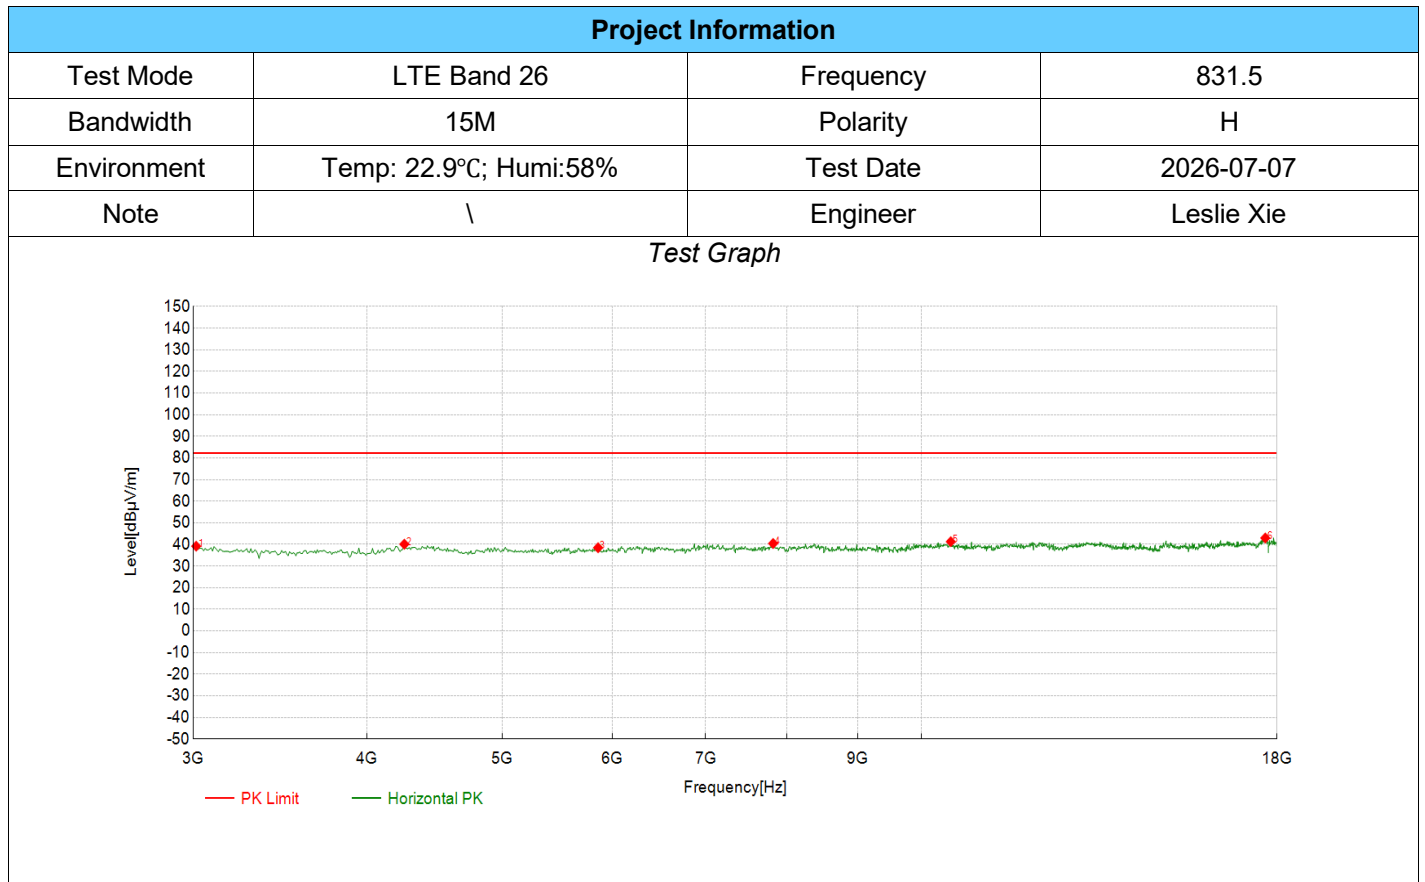


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3015.01	56.51	39.20	-17.31	82.25	43.05	PK	Horizontal	PASS
2	4253.13	57.74	40.11	-17.63	82.25	42.14	PK	Horizontal	PASS
3	5858.93	55.63	38.48	-17.15	82.25	43.77	PK	Horizontal	PASS
4	7824.91	55.29	40.44	-14.85	82.25	41.81	PK	Horizontal	PASS
5	10496.25	50.84	41.28	-9.56	82.25	40.97	PK	Horizontal	PASS
6	17654.83	48.01	42.98	-5.03	82.25	39.27	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

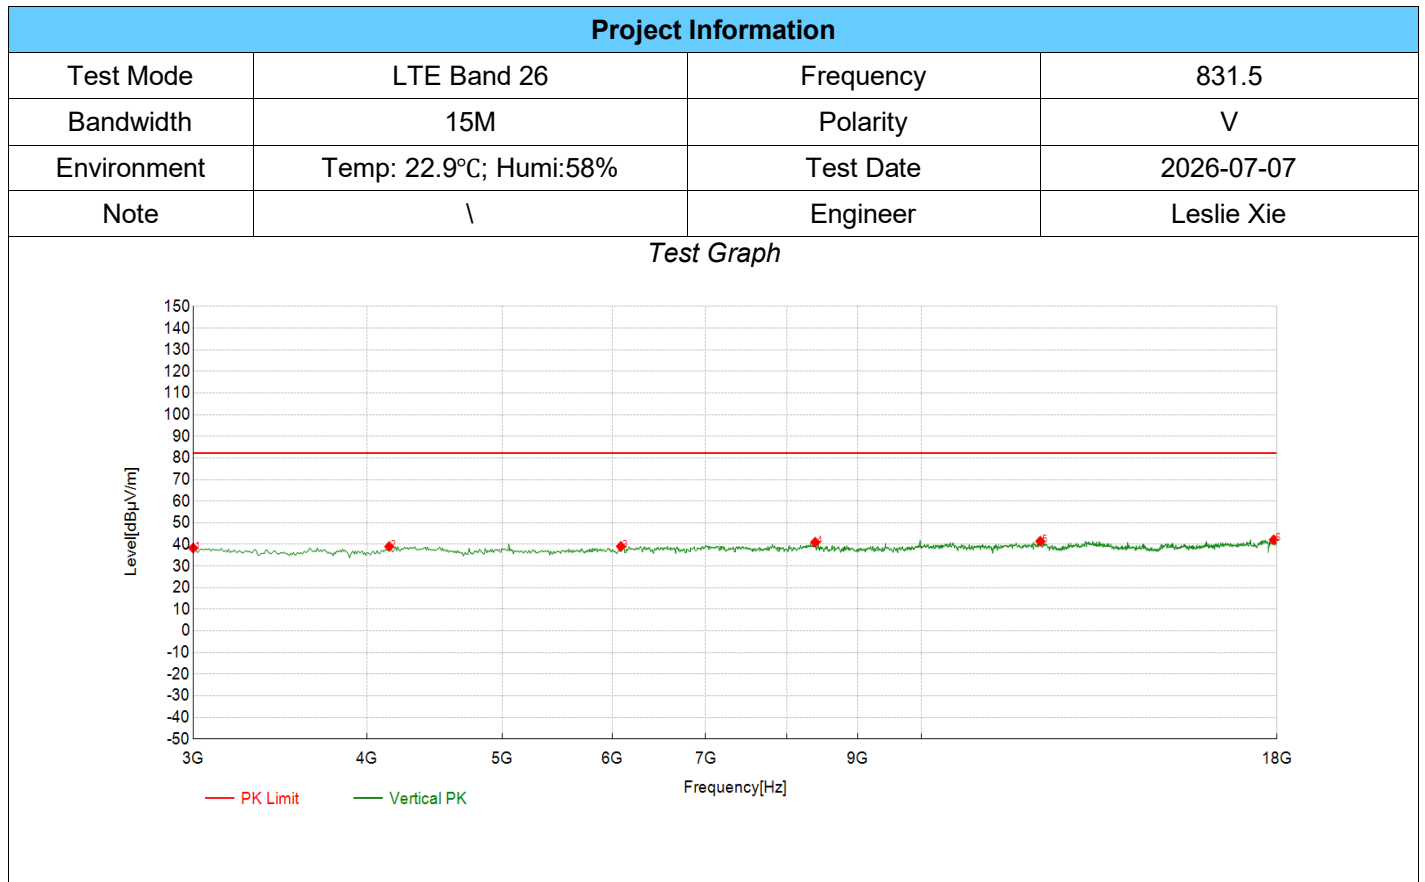


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3000.00	55.56	38.34	-17.22	82.25	43.91	PK	Vertical	PASS
2	4148.07	57.08	39.04	-18.04	82.25	43.21	PK	Vertical	PASS
3	6084.04	55.85	39.09	-16.76	82.25	43.16	PK	Vertical	PASS
4	8387.69	53.57	41.00	-12.57	82.25	41.25	PK	Vertical	PASS
5	12169.58	51.24	41.51	-9.73	82.25	40.74	PK	Vertical	PASS
6	17902.45	47.63	42.13	-5.50	82.25	40.12	PK	Vertical	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

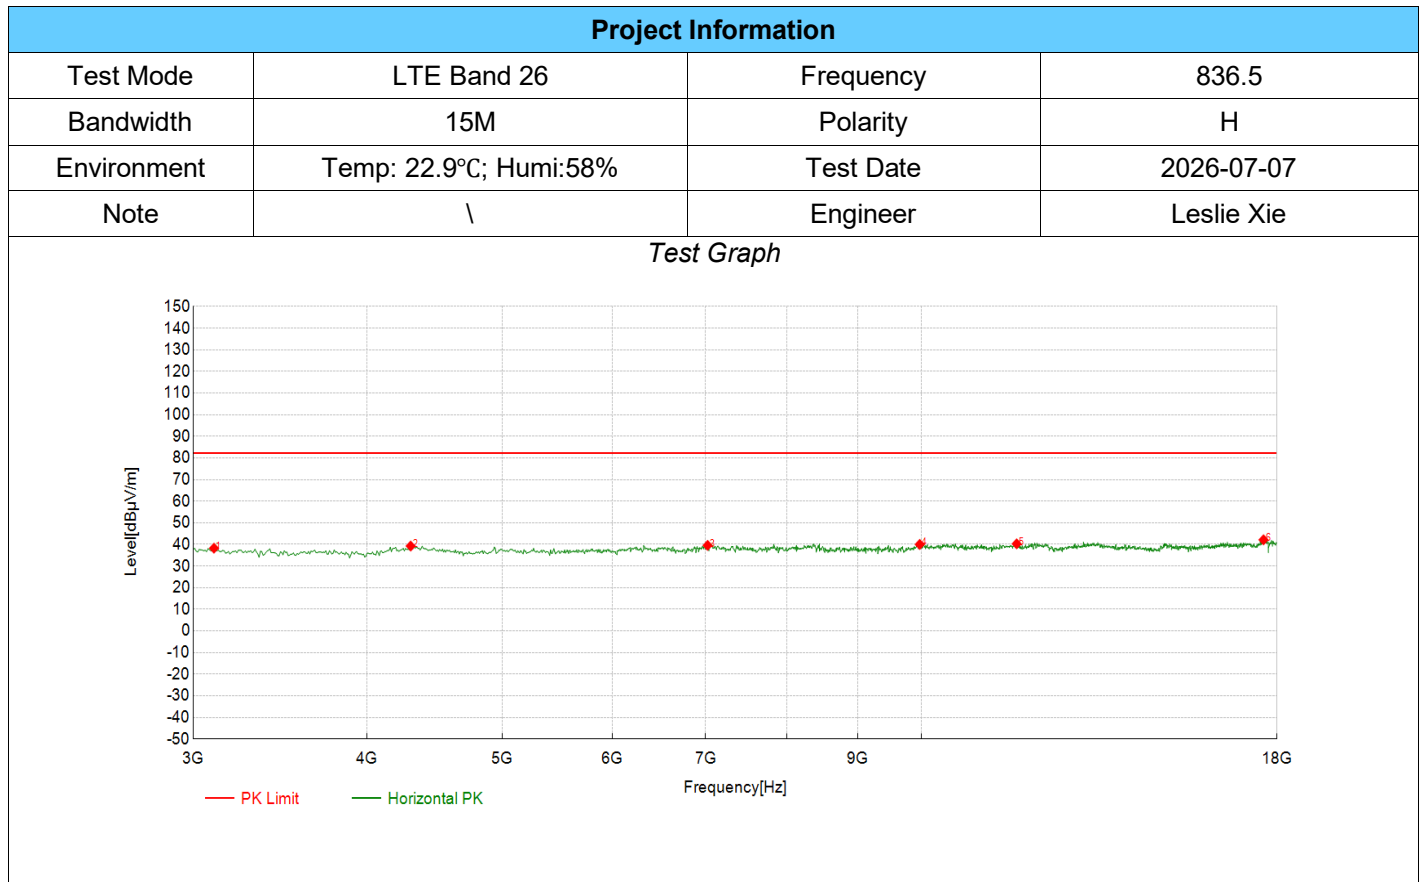


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3105.05	56.12	38.28	-17.84	82.25	43.97	PK	Horizontal	PASS
2	4298.15	56.98	39.26	-17.72	82.25	42.99	PK	Horizontal	PASS
3	7022.01	54.43	39.56	-14.87	82.25	42.69	PK	Horizontal	PASS
4	9970.99	50.85	40.01	-10.84	82.25	42.24	PK	Horizontal	PASS
5	11704.35	49.74	40.28	-9.46	82.25	41.97	PK	Horizontal	PASS
6	17602.30	47.14	42.14	-5.00	82.25	40.11	PK	Horizontal	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

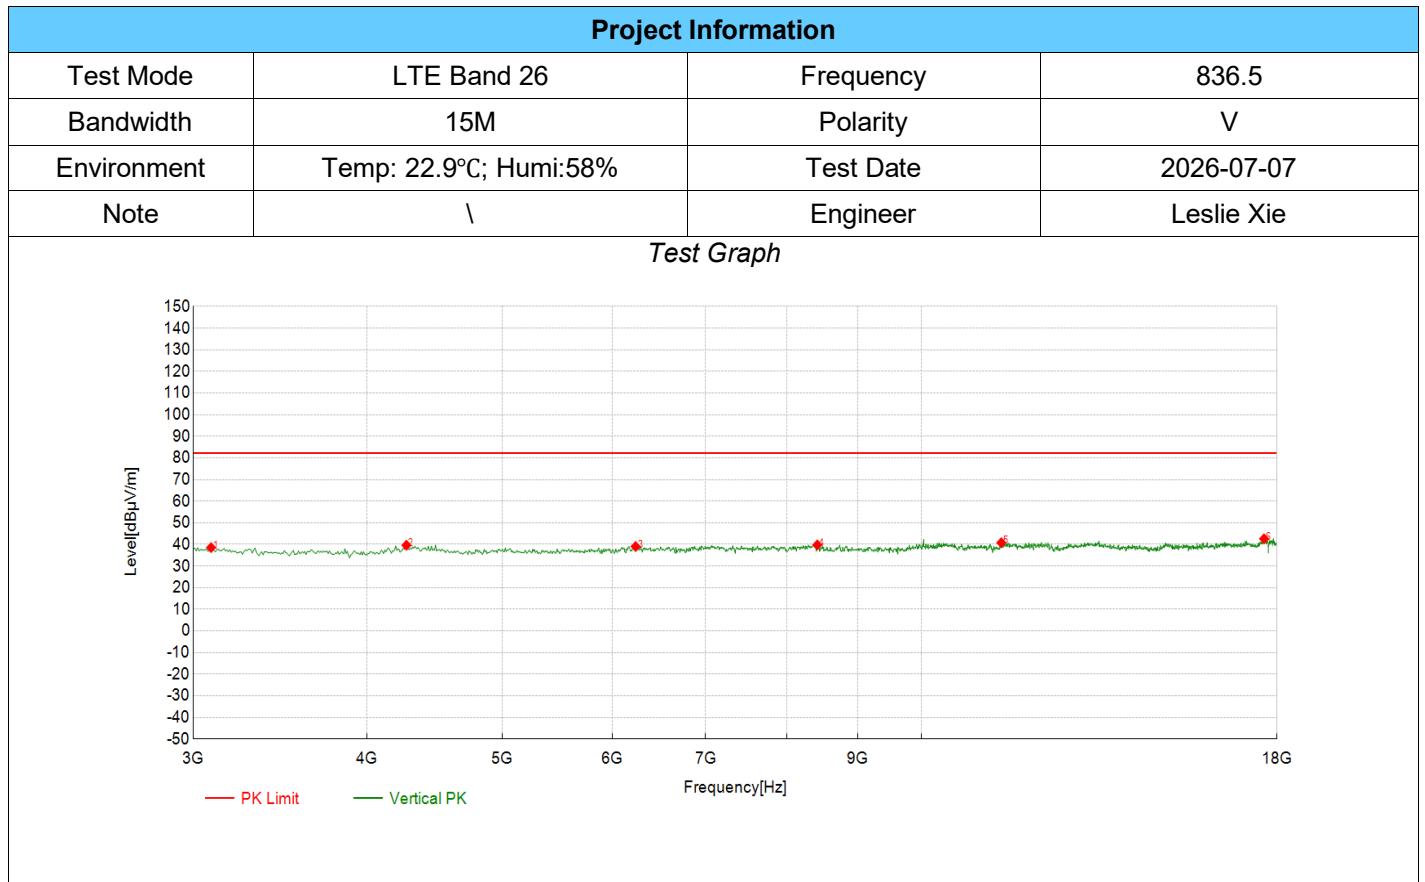


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3090.05	56.28	38.53	-17.75	82.25	43.72	PK	Vertical	PASS
2	4268.13	57.29	39.63	-17.66	82.25	42.62	PK	Vertical	PASS
3	6234.12	55.30	39.05	-16.25	82.25	43.20	PK	Vertical	PASS
4	8417.71	52.32	39.76	-12.56	82.25	42.49	PK	Vertical	PASS
5	11411.71	49.78	40.80	-8.98	82.25	41.45	PK	Vertical	PASS
6	17617.31	47.64	42.62	-5.02	82.25	39.63	PK	Vertical	PASS

Note: (1) Level = Reading + Factor
 (2) Margin = Limit - Level

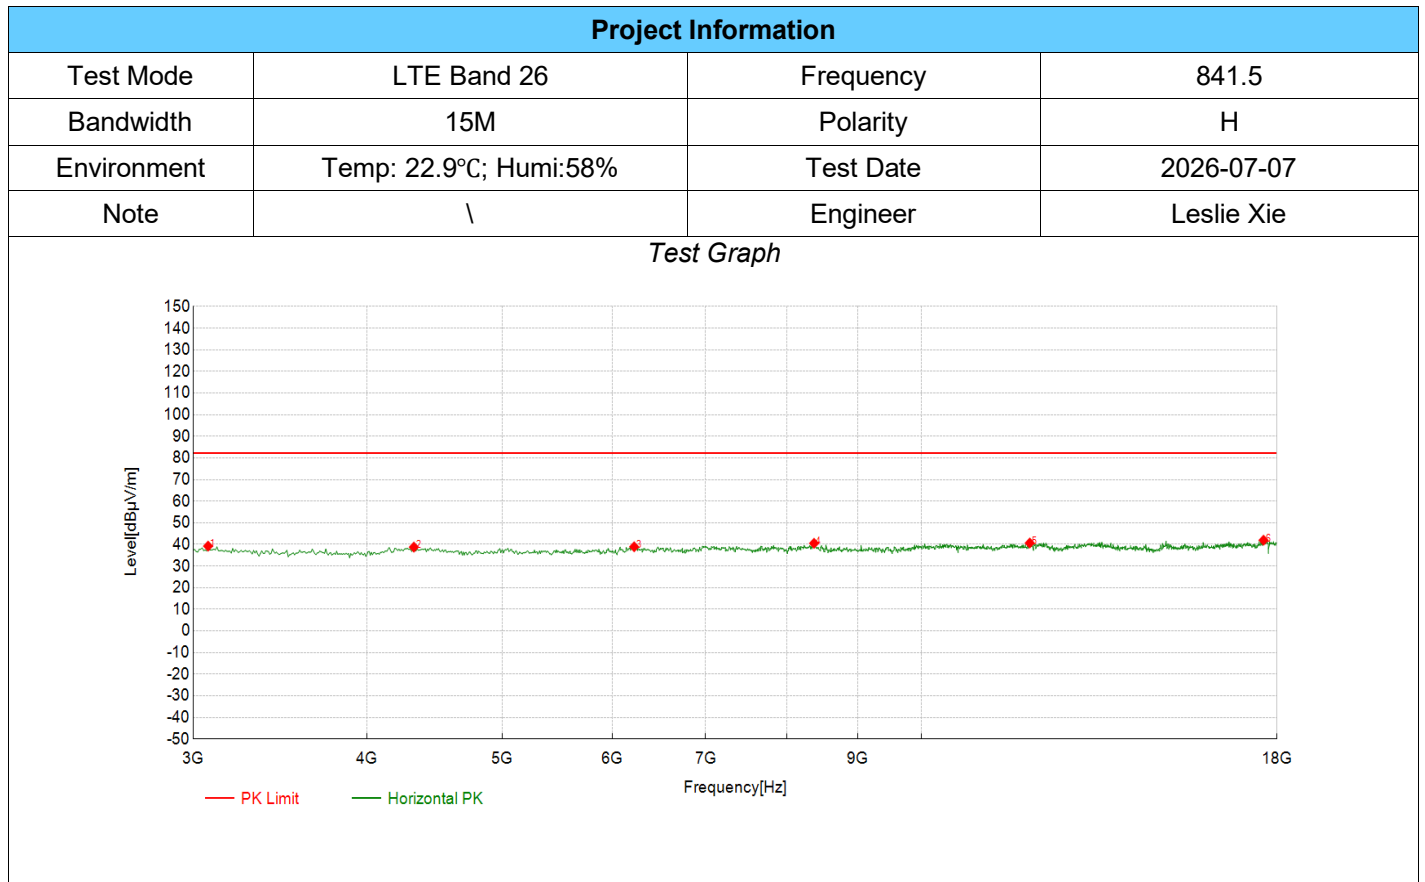


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3075.04	56.88	39.22	-17.66	82.25	43.03	PK	Horizontal	PASS
2	4320.66	56.55	38.77	-17.78	82.25	43.48	PK	Horizontal	PASS
3	6219.11	55.15	38.91	-16.24	82.25	43.34	PK	Horizontal	PASS
4	8372.69	53.22	40.51	-12.71	82.25	41.74	PK	Horizontal	PASS
5	11959.48	50.40	40.65	-9.75	82.25	41.60	PK	Horizontal	PASS
6	17602.30	46.95	41.95	-5.00	82.25	40.30	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

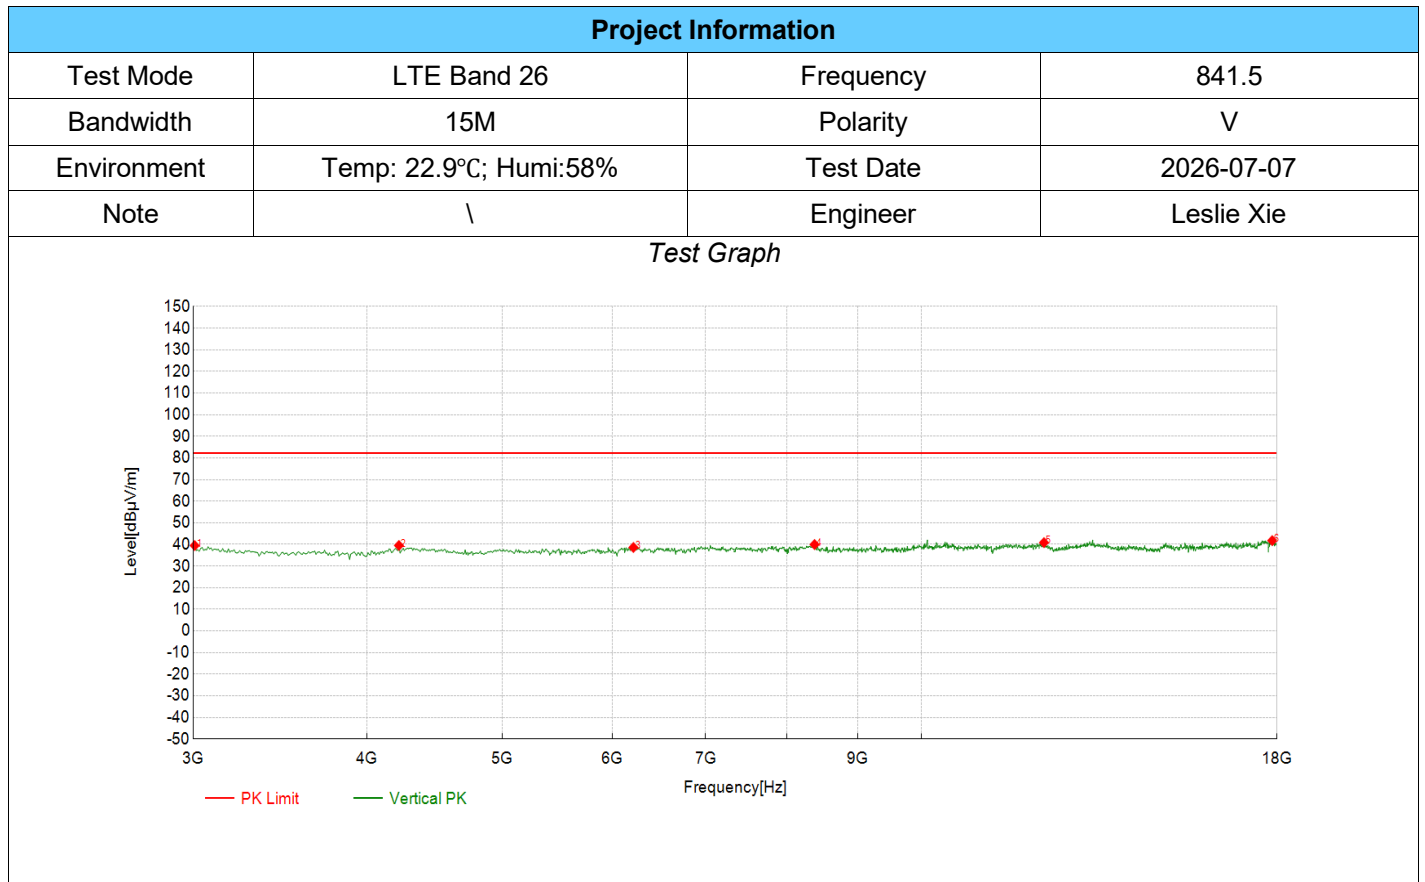


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3007.50	56.76	39.50	-17.26	82.25	42.75	PK	Vertical	PASS
2	4215.61	57.05	39.52	-17.53	82.25	42.73	PK	Vertical	PASS
3	6211.61	54.86	38.61	-16.25	82.25	43.64	PK	Vertical	PASS
4	8380.19	52.61	39.96	-12.65	82.25	42.29	PK	Vertical	PASS
5	12244.62	50.90	40.86	-10.04	82.25	41.39	PK	Vertical	PASS
6	17857.43	47.10	41.77	-5.33	82.25	40.48	PK	Vertical	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

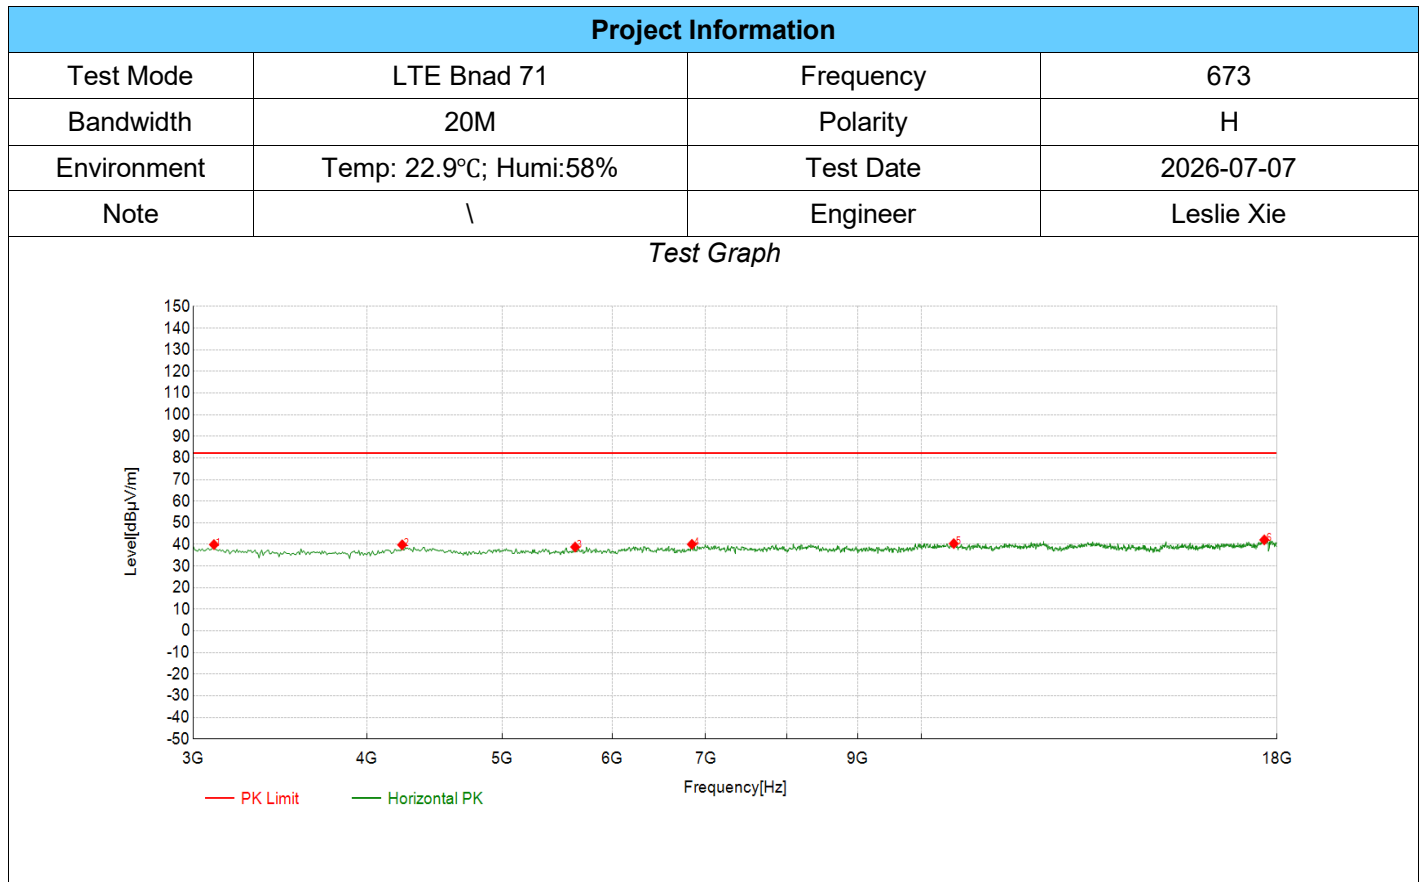


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3105.05	57.76	39.92	-17.84	82.25	42.33	PK	Horizontal	PASS
2	4238.12	57.41	39.83	-17.58	82.25	42.42	PK	Horizontal	PASS
3	5641.32	56.23	38.81	-17.42	82.25	43.44	PK	Horizontal	PASS
4	6841.92	55.56	40.06	-15.50	82.25	42.19	PK	Horizontal	PASS
5	10548.77	49.92	40.38	-9.54	82.25	41.87	PK	Horizontal	PASS
6	17624.81	47.12	42.10	-5.02	82.25	40.15	PK	Horizontal	PASS

Note: (1) Level = Reading + Factor
 (2) Margin = Limit - Level

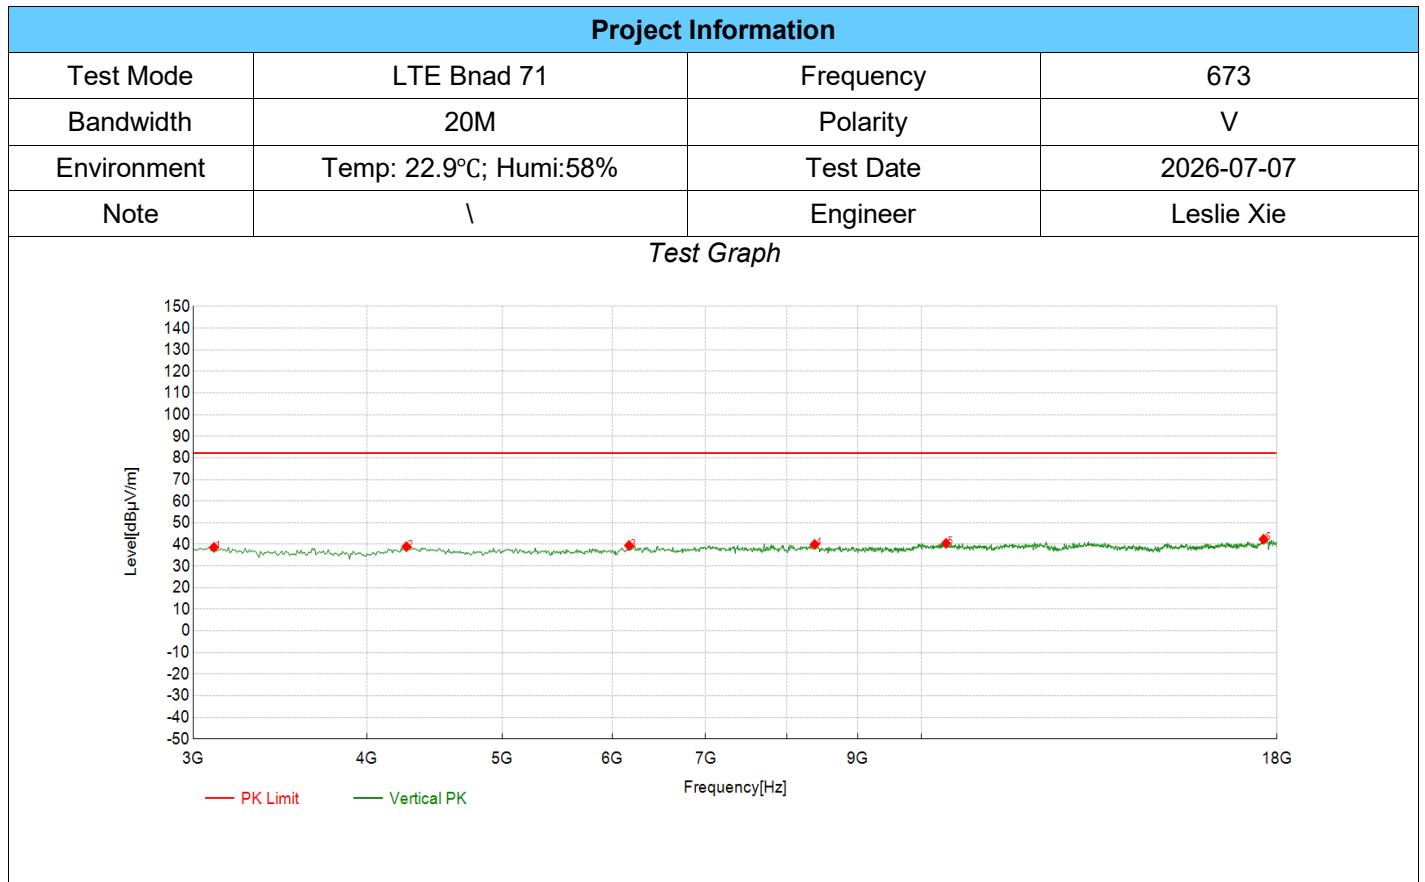


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3105.05	56.51	38.67	-17.84	82.25	43.58	PK	Vertical	PASS
2	4268.13	56.64	38.98	-17.66	82.25	43.27	PK	Vertical	PASS
3	6166.58	55.91	39.52	-16.39	82.25	42.73	PK	Vertical	PASS
4	8380.19	52.64	39.99	-12.65	82.25	42.26	PK	Vertical	PASS
5	10413.71	50.11	40.49	-9.62	82.25	41.76	PK	Vertical	PASS
6	17602.30	47.43	42.43	-5.00	82.25	39.82	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

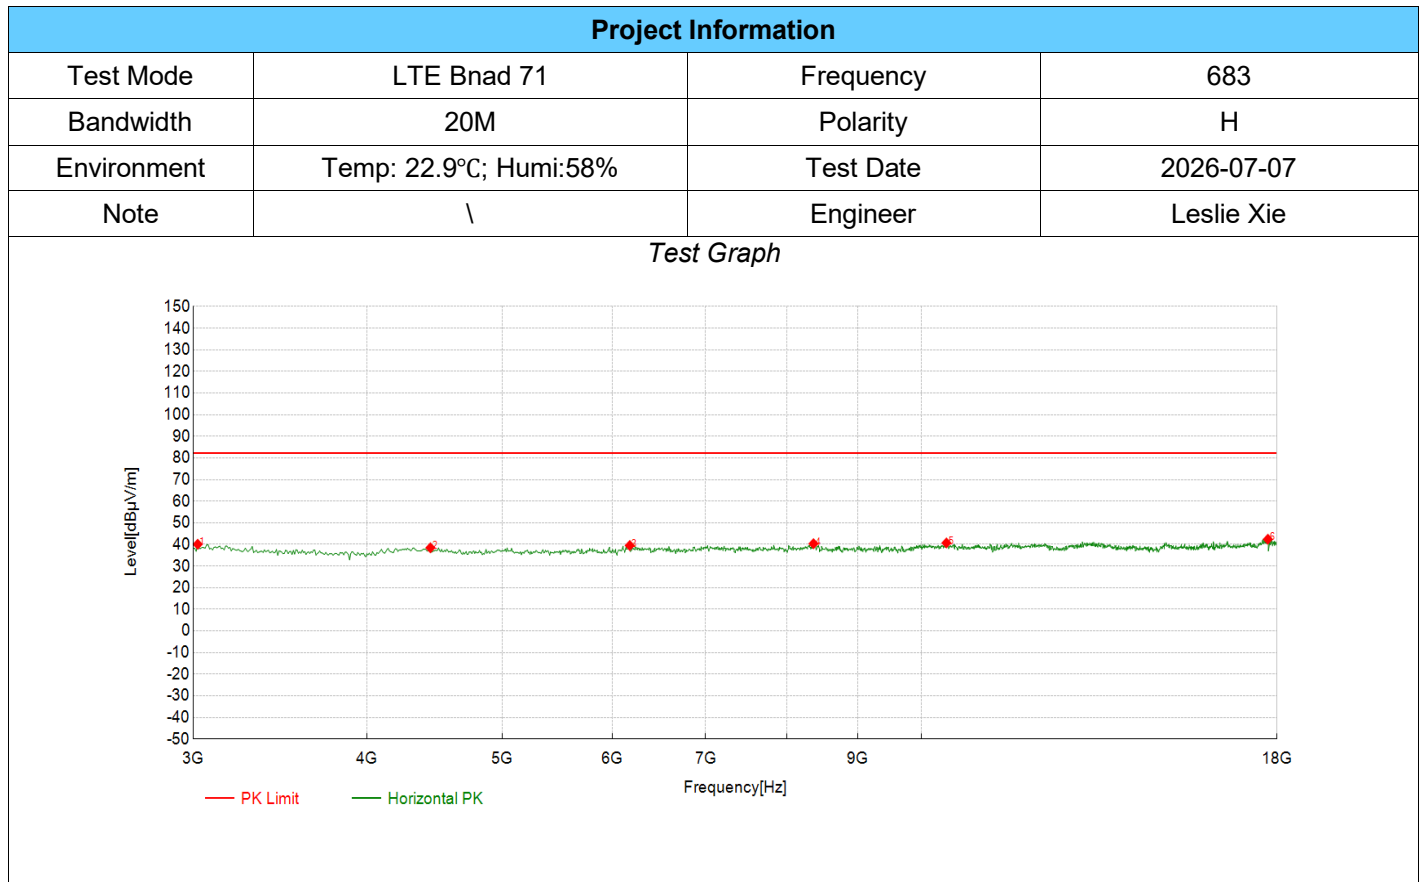


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3022.51	57.43	40.08	-17.35	82.25	42.17	PK	Horizontal	PASS
2	4440.72	56.47	38.46	-18.01	82.25	43.79	PK	Horizontal	PASS
3	6174.09	55.88	39.52	-16.36	82.25	42.73	PK	Horizontal	PASS
4	8365.18	53.13	40.35	-12.78	82.25	41.90	PK	Horizontal	PASS
5	10421.21	50.31	40.69	-9.62	82.25	41.56	PK	Horizontal	PASS
6	17729.86	47.50	42.43	-5.07	82.25	39.82	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

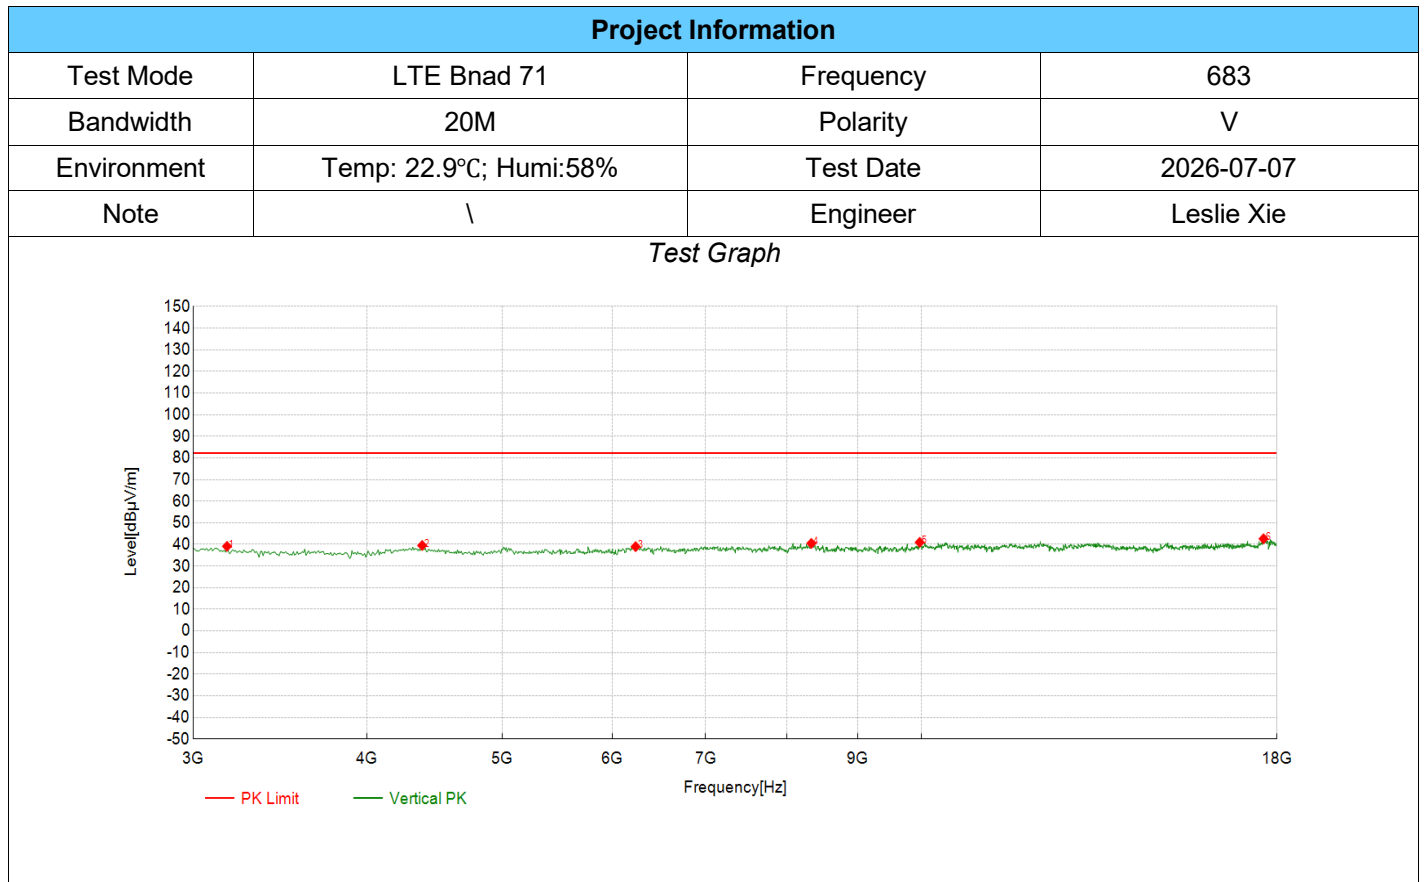


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3172.59	57.35	39.12	-18.23	82.25	43.13	PK	Vertical	PASS
2	4380.69	57.45	39.54	-17.91	82.25	42.71	PK	Vertical	PASS
3	6234.12	55.23	38.98	-16.25	82.25	43.27	PK	Vertical	PASS
4	8335.17	53.54	40.48	-13.06	82.25	41.77	PK	Vertical	PASS
5	9970.99	51.80	40.96	-10.84	82.25	41.29	PK	Vertical	PASS
6	17602.30	47.61	42.61	-5.00	82.25	39.64	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

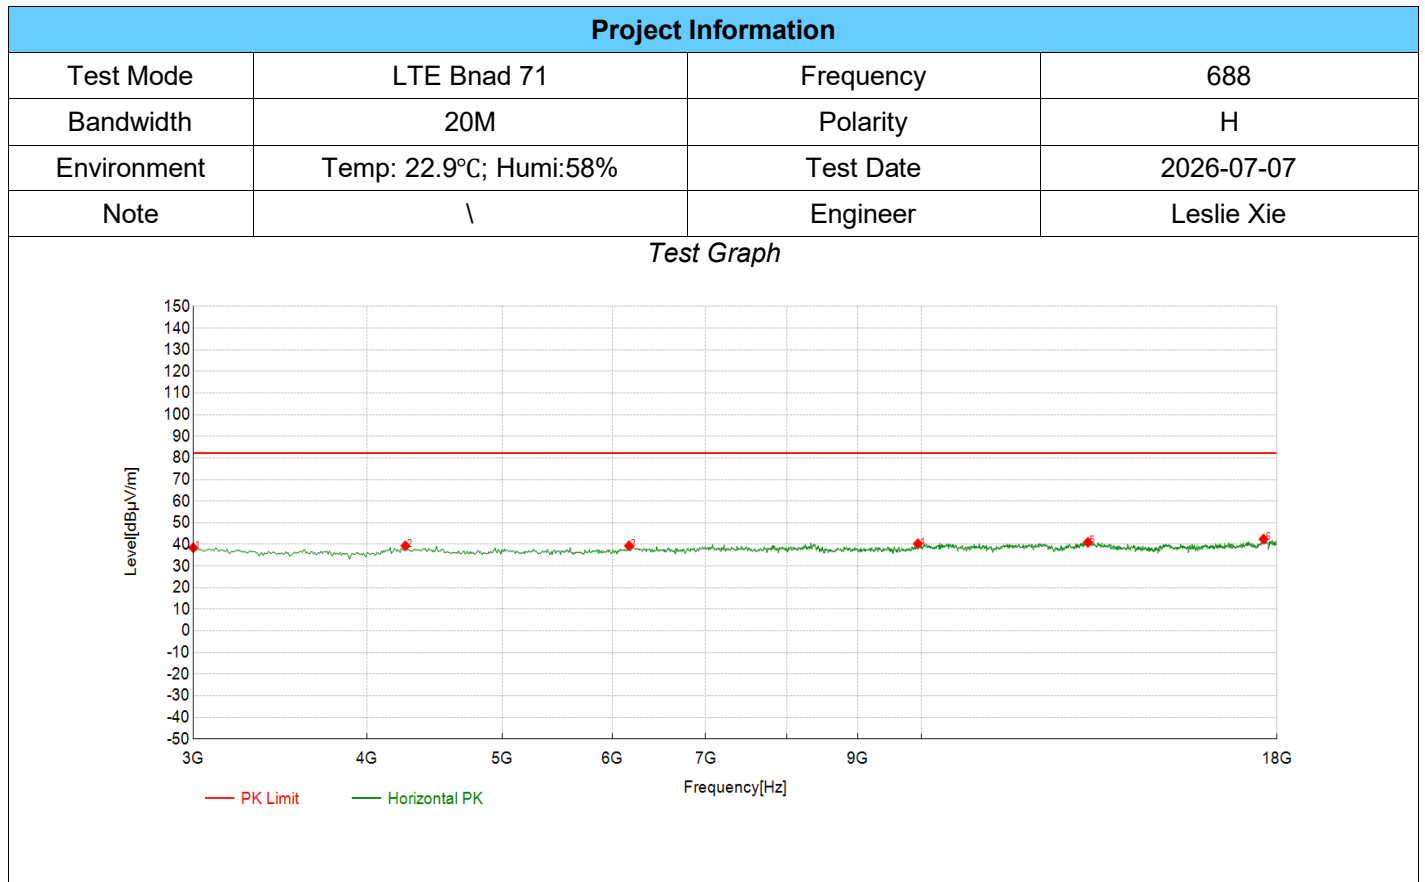


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3000.00	55.70	38.48	-17.22	82.25	43.77	PK	Horizontal	PASS
2	4260.63	57.01	39.36	-17.65	82.25	42.89	PK	Horizontal	PASS
3	6166.58	55.75	39.36	-16.39	82.25	42.89	PK	Horizontal	PASS
4	9940.97	51.37	40.33	-11.04	82.25	41.92	PK	Horizontal	PASS
5	13167.58	51.91	40.97	-10.94	82.25	41.28	PK	Horizontal	PASS
6	17602.30	47.48	42.48	-5.00	82.25	39.77	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

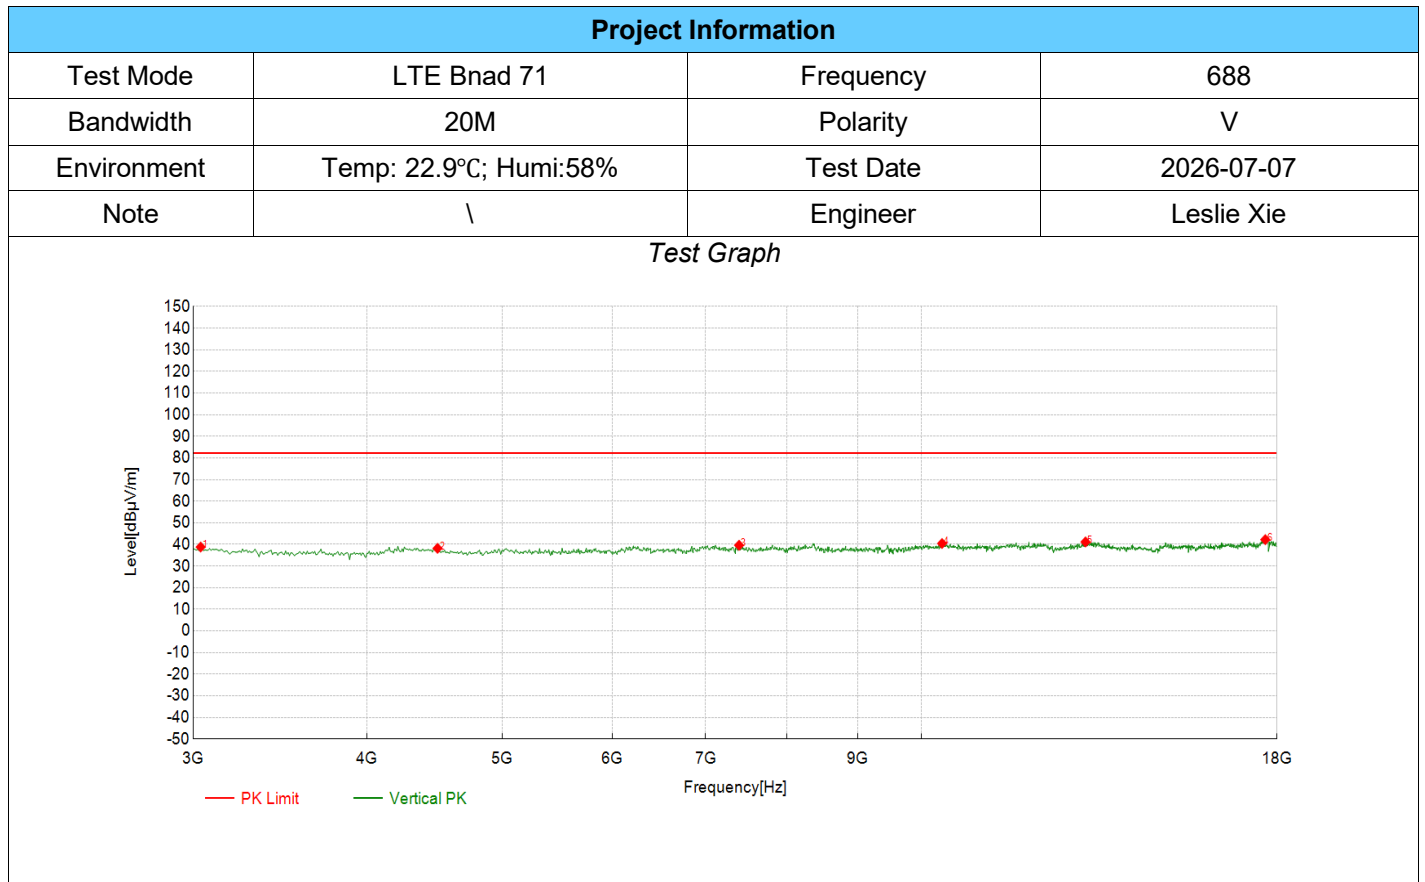


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3037.52	56.26	38.81	-17.45	82.25	43.44	PK	Vertical	PASS
2	4493.25	56.28	38.20	-18.08	82.25	44.05	PK	Vertical	PASS
3	7397.20	54.77	39.64	-15.13	82.25	42.61	PK	Vertical	PASS
4	10346.17	50.51	40.43	-10.08	82.25	41.82	PK	Vertical	PASS
5	13115.06	52.29	41.15	-11.14	82.25	41.10	PK	Vertical	PASS
6	17654.83	47.25	42.22	-5.03	82.25	40.03	PK	Vertical	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

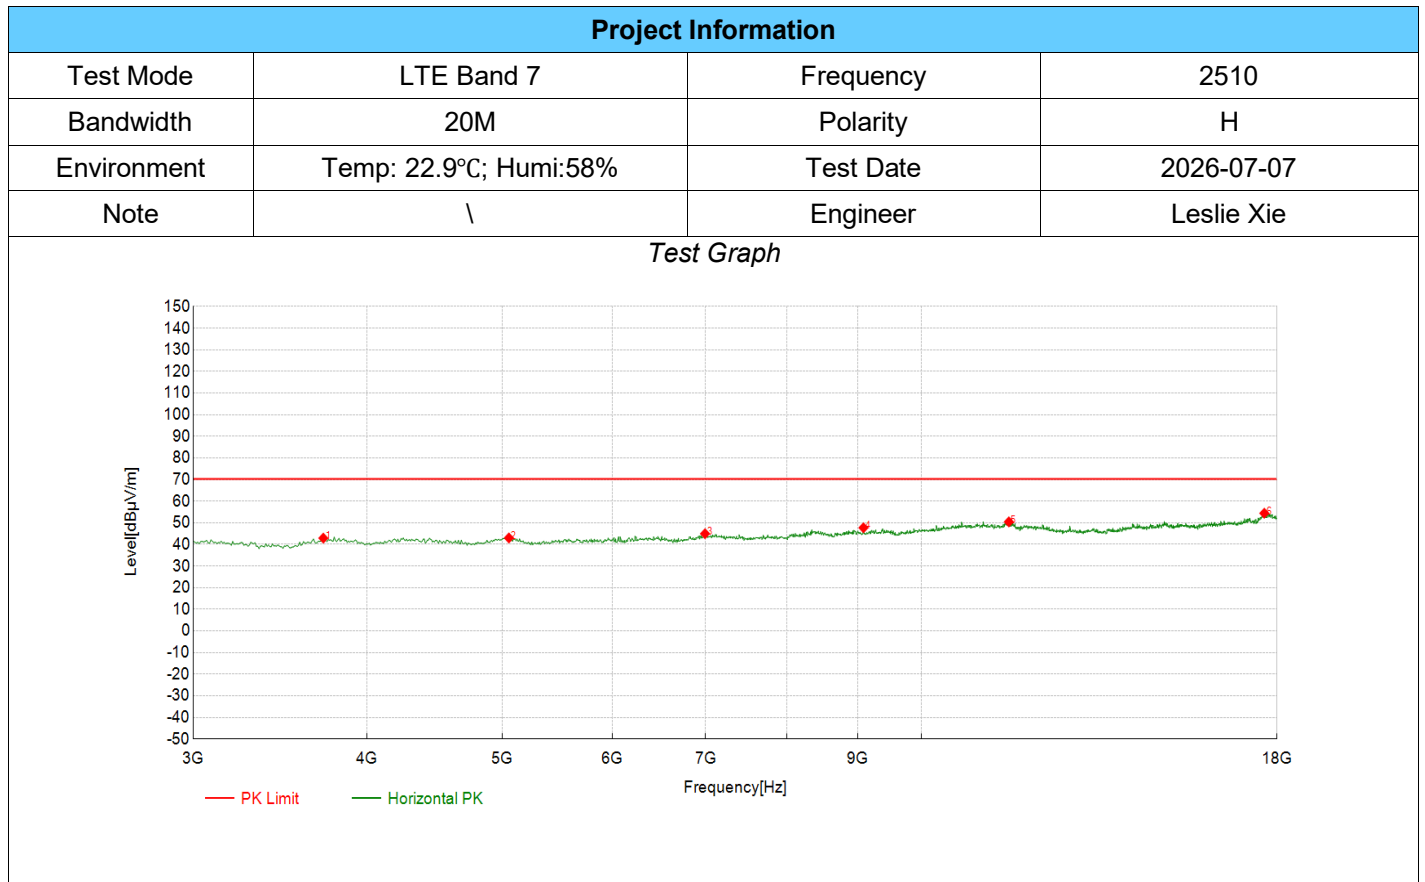


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3720.36	61.96	42.91	-19.05	70.25	27.34	PK	Horizontal	PASS
2	5056.03	60.73	43.00	-17.73	70.25	27.25	PK	Horizontal	PASS
3	6992.00	59.82	44.97	-14.85	70.25	25.28	PK	Horizontal	PASS
4	9085.54	60.19	47.71	-12.48	70.25	22.54	PK	Horizontal	PASS
5	11554.28	59.12	50.45	-8.67	70.25	19.80	PK	Horizontal	PASS
6	17624.81	59.45	54.43	-5.02	70.25	15.82	PK	Horizontal	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

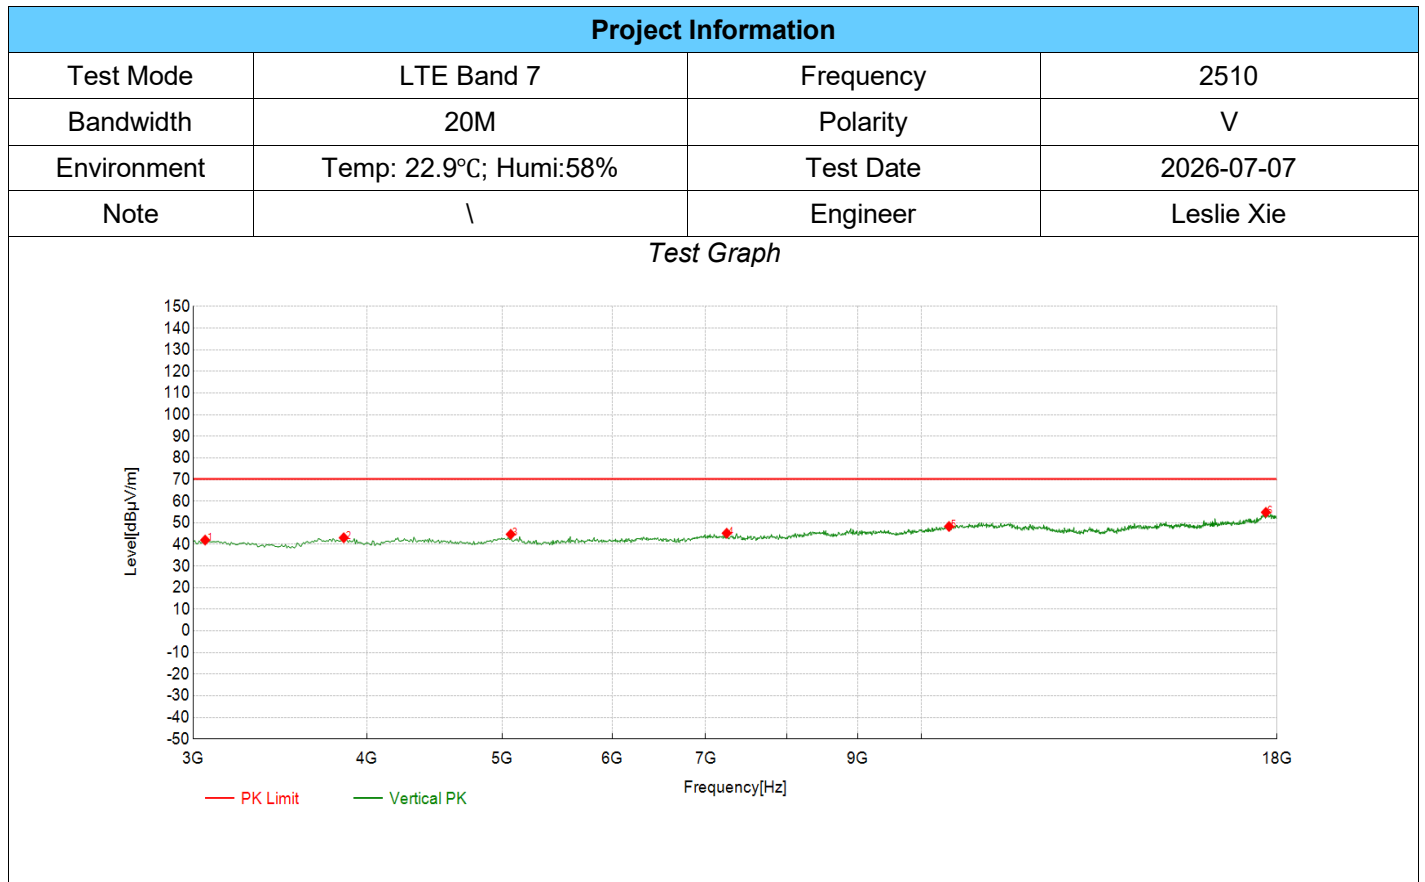


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3060.03	59.58	42.01	-17.57	70.25	28.24	PK	Vertical	PASS
2	3847.92	62.35	43.09	-19.26	70.25	27.16	PK	Vertical	PASS
3	5071.04	62.47	44.69	-17.78	70.25	25.56	PK	Vertical	PASS
4	7247.12	60.40	45.19	-15.21	70.25	25.06	PK	Vertical	PASS
5	10466.23	57.88	48.30	-9.58	70.25	21.95	PK	Vertical	PASS
6	17669.83	59.88	54.84	-5.04	70.25	15.41	PK	Vertical	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

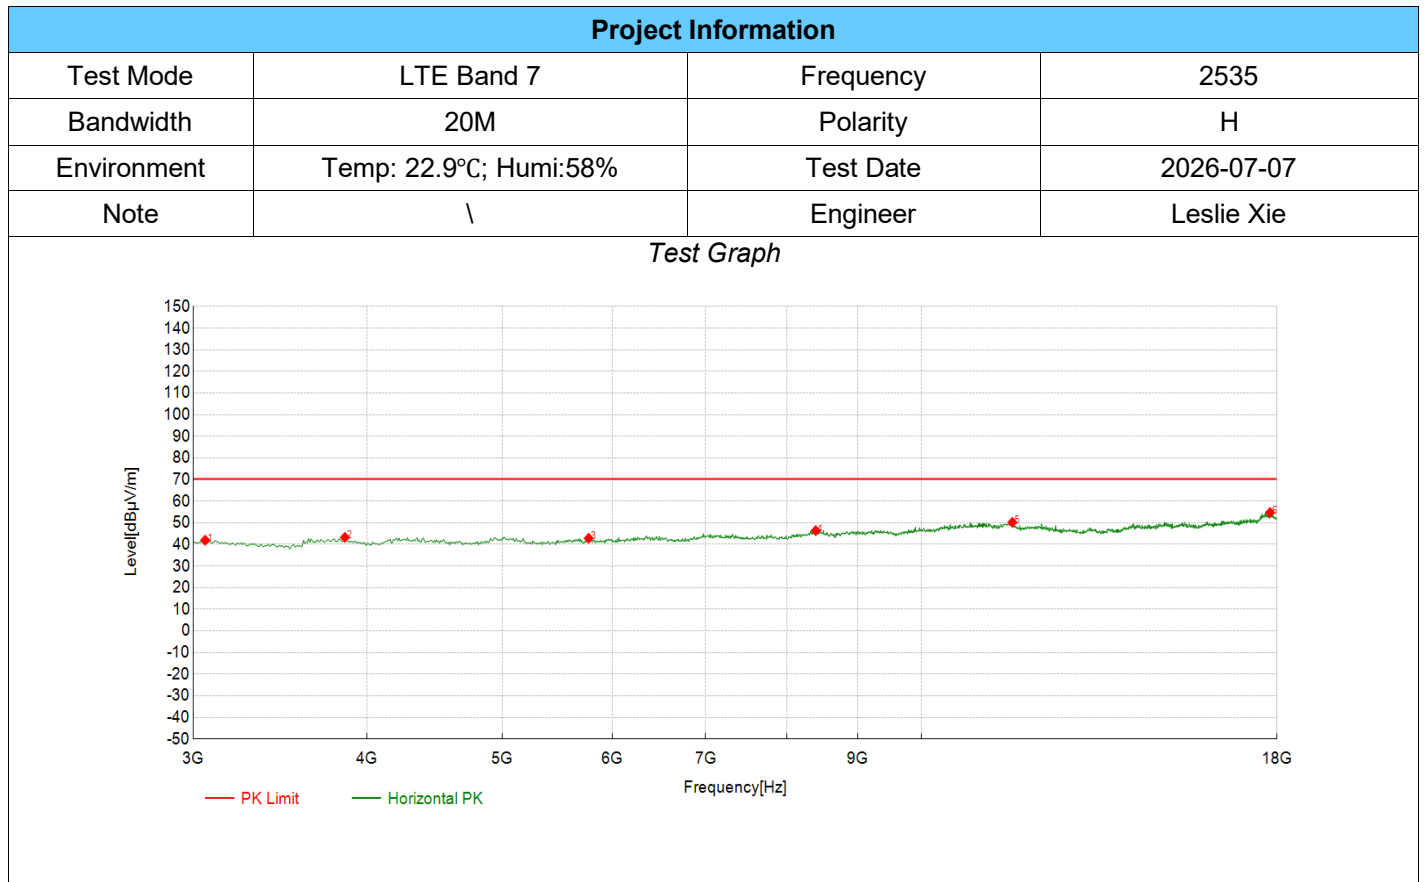


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3060.03	59.54	41.97	-17.57	70.25	28.28	PK	Horizontal	PASS
2	3855.43	62.56	43.29	-19.27	70.25	26.96	PK	Horizontal	PASS
3	5768.88	60.07	42.87	-17.20	70.25	27.38	PK	Horizontal	PASS
4	8395.20	58.90	46.39	-12.51	70.25	23.86	PK	Horizontal	PASS
5	11621.81	58.99	50.22	-8.77	70.25	20.03	PK	Horizontal	PASS
6	17789.89	59.87	54.76	-5.11	70.25	15.49	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

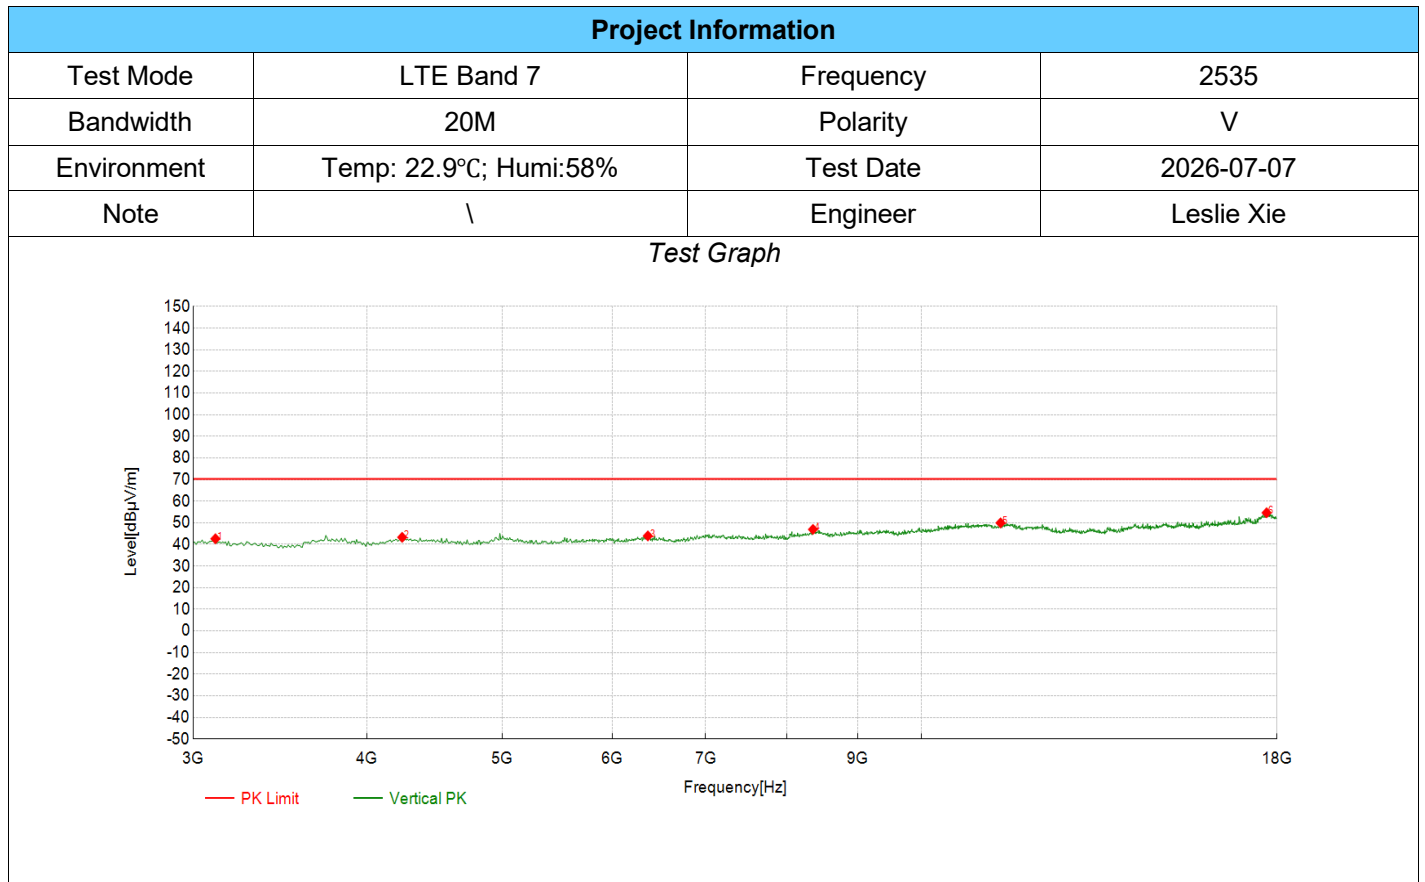


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3112.56	60.52	42.63	-17.89	70.25	27.62	PK	Vertical	PASS
2	4238.12	60.88	43.30	-17.58	70.25	26.95	PK	Vertical	PASS
3	6361.68	60.25	43.94	-16.31	70.25	26.31	PK	Vertical	PASS
4	8357.68	59.80	46.95	-12.85	70.25	23.30	PK	Vertical	PASS
5	11396.70	58.94	49.95	-8.99	70.25	20.30	PK	Vertical	PASS
6	17692.35	59.70	54.64	-5.06	70.25	15.61	PK	Vertical	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

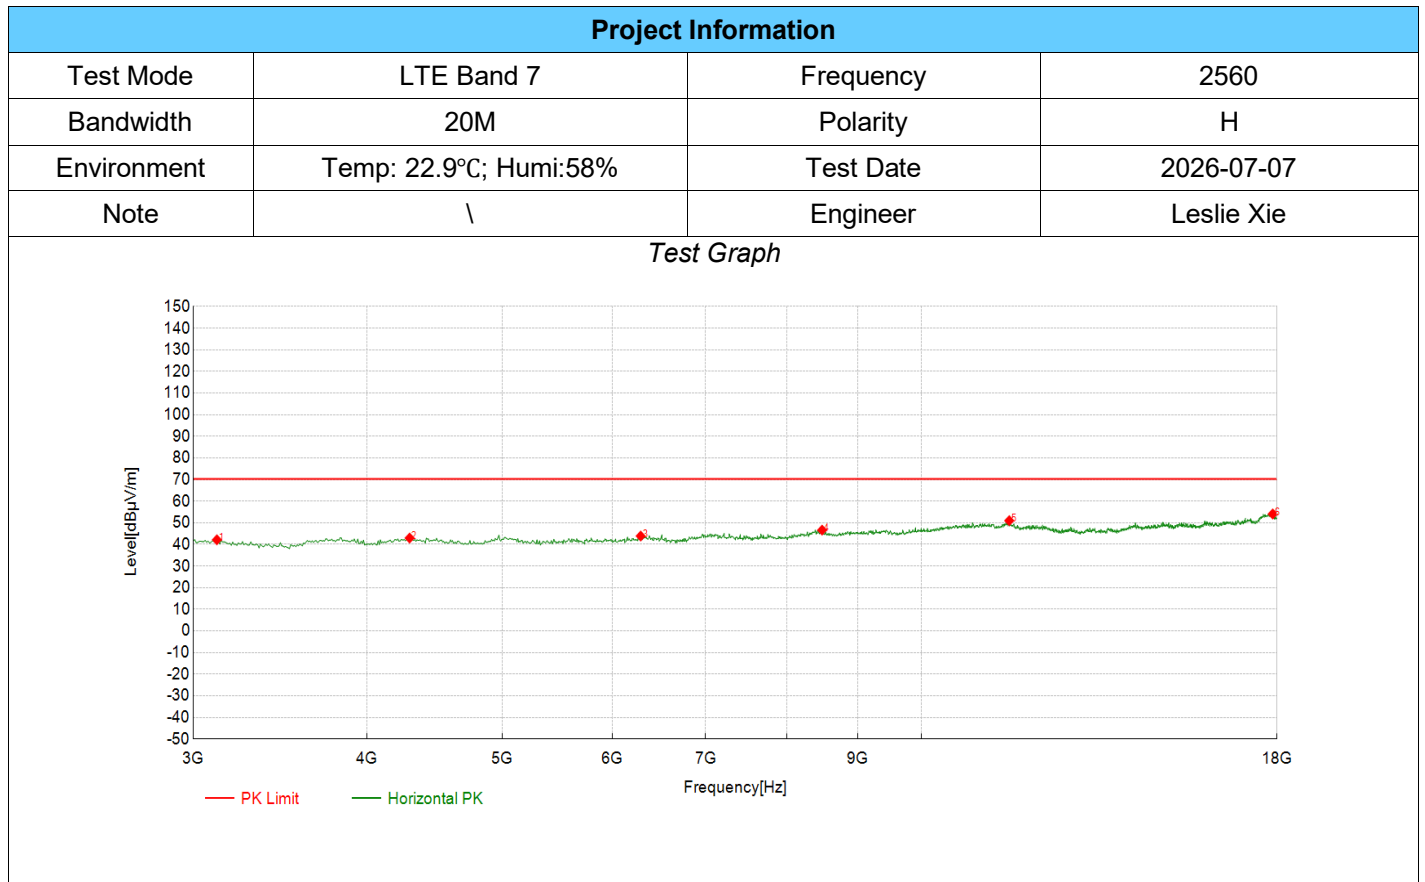

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3120.06	60.09	42.16	-17.93	70.25	28.09	PK	Horizontal	PASS
2	4290.65	60.67	42.96	-17.71	70.25	27.29	PK	Horizontal	PASS
3	6286.64	60.16	43.88	-16.28	70.25	26.37	PK	Horizontal	PASS
4	8485.24	59.58	46.62	-12.96	70.25	23.63	PK	Horizontal	PASS
5	11561.78	59.67	51.01	-8.66	70.25	19.24	PK	Horizontal	PASS
6	17872.44	59.48	54.09	-5.39	70.25	16.16	PK	Horizontal	PASS


Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

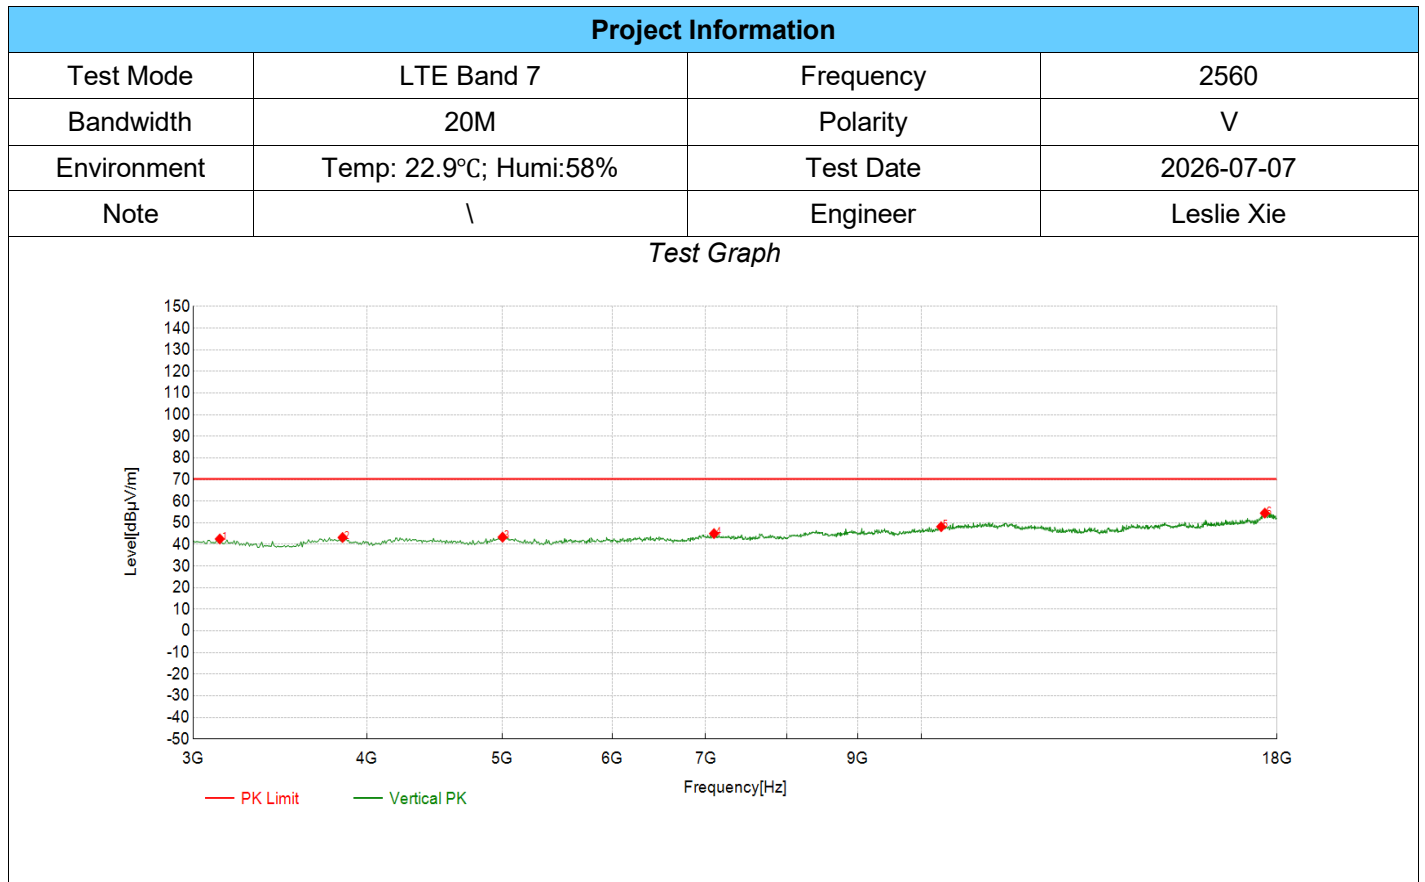

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3135.07	60.55	42.54	-18.01	70.25	27.71	PK	Vertical	PASS
2	3840.42	62.44	43.20	-19.24	70.25	27.05	PK	Vertical	PASS
3	5003.50	60.90	43.37	-17.53	70.25	26.88	PK	Vertical	PASS
4	7097.05	60.03	45.01	-15.02	70.25	25.24	PK	Vertical	PASS
5	10331.17	58.41	48.19	-10.22	70.25	22.06	PK	Vertical	PASS
6	17639.82	59.48	54.46	-5.02	70.25	15.79	PK	Vertical	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

8.1. SIMULTANEOUS TRANSMISSION

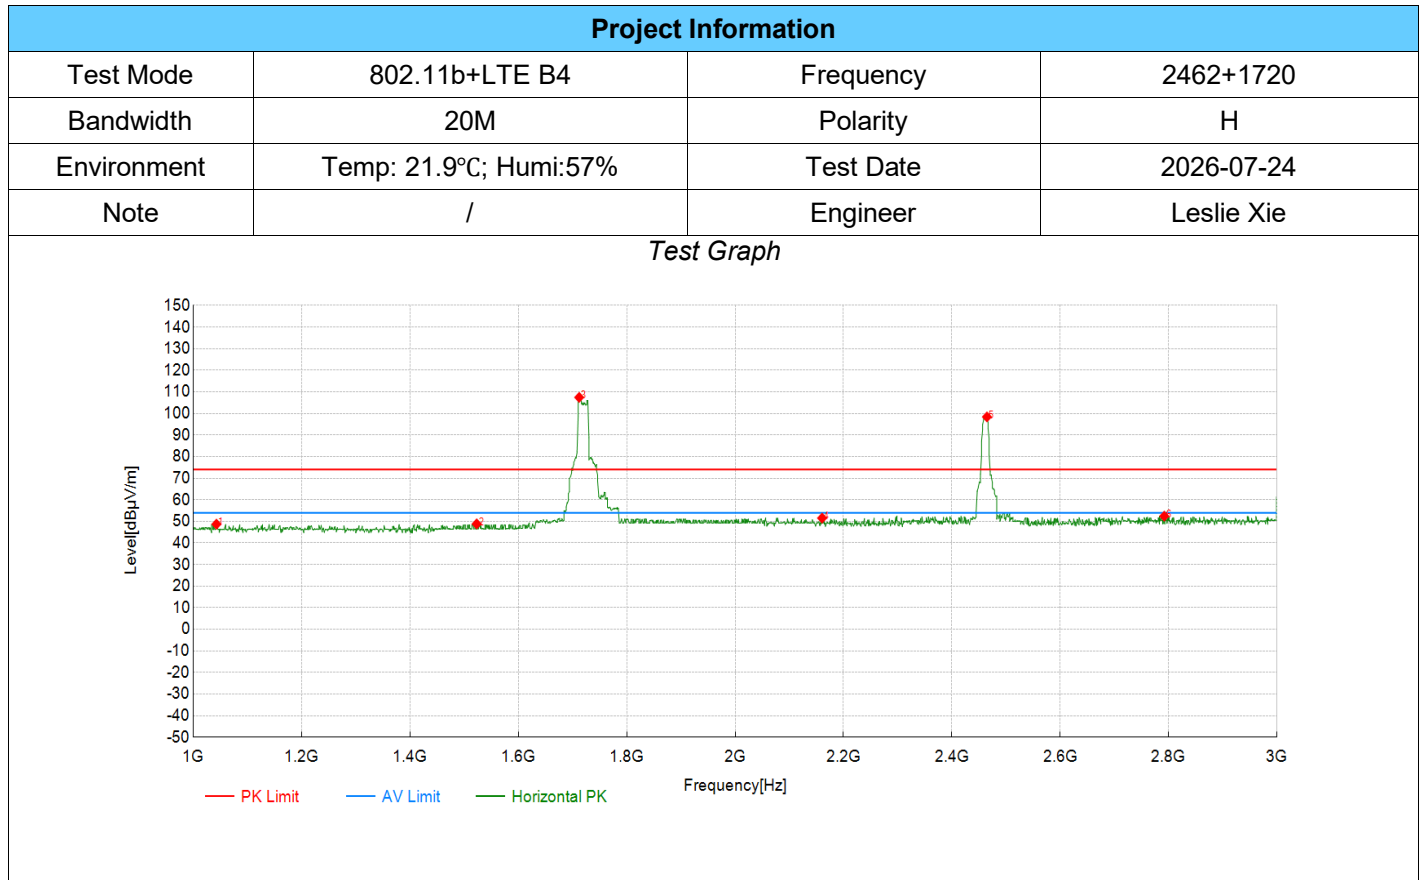


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1043.02	19.14	48.71	29.57	74.00	25.29	PK	Horizontal	PASS
2	1523.26	18.38	48.84	30.46	74.00	25.16	PK	Horizontal	PASS
3	1712.36	75.20	107.46	32.26	\	\	PK	Horizontal	Fundamental
4	2160.58	16.07	51.53	35.46	74.00	22.47	PK	Horizontal	PASS
5	2464.73	62.77	98.41	35.64	\	\	PK	Horizontal	Fundamental
6	2791.90	15.65	52.43	36.78	74.00	21.57	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

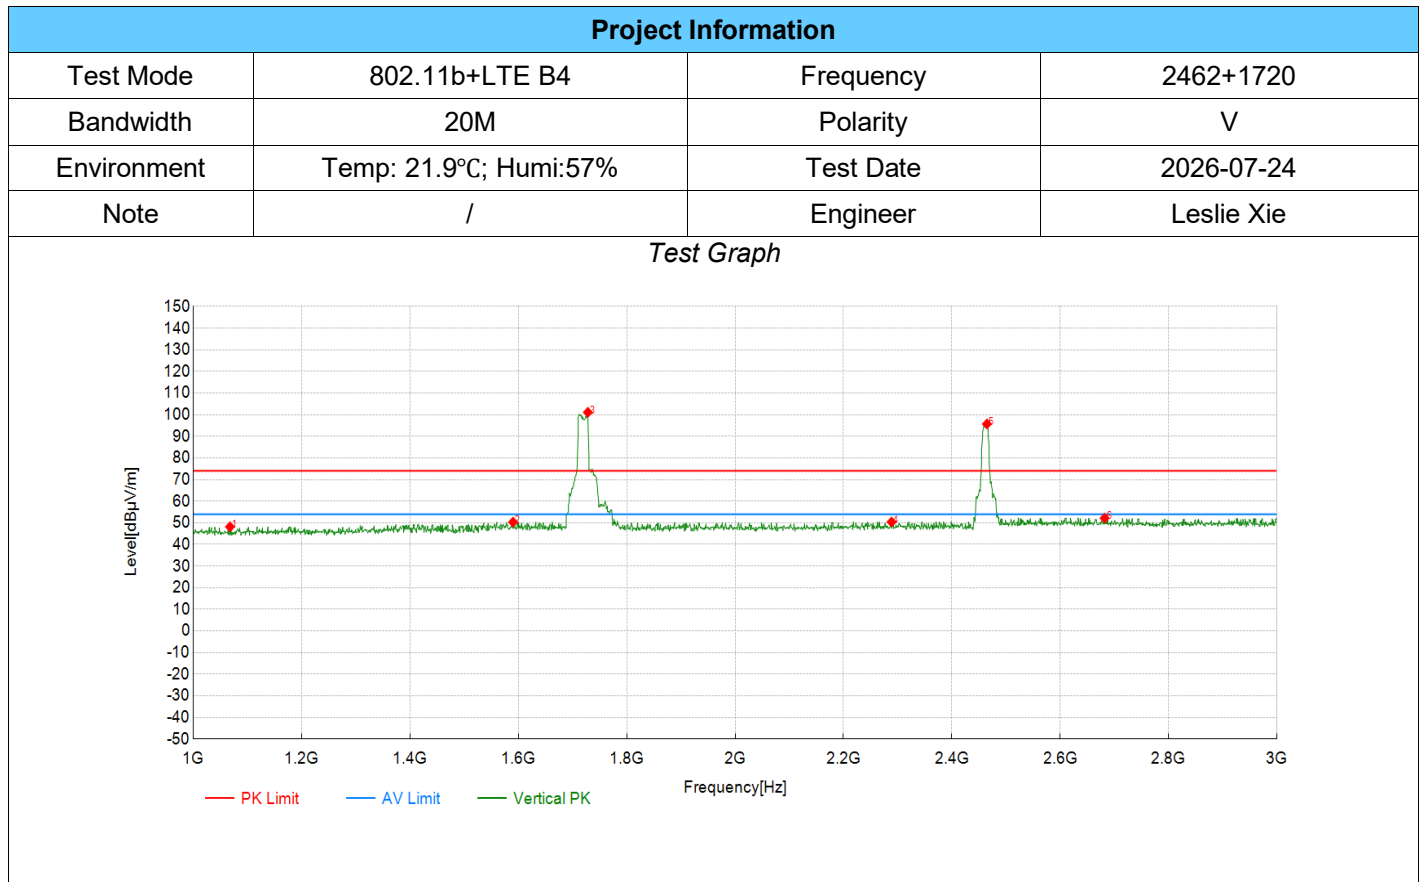

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1068.03	18.50	48.16	29.66	74.00	25.84	PK	Vertical	PASS
2	1590.30	19.30	50.32	31.02	74.00	23.68	PK	Vertical	PASS
3	1728.36	68.69	101.12	32.43	\	\	PK	Vertical	Fundamental
4	2288.64	14.82	50.38	35.56	74.00	23.62	PK	Vertical	PASS
5	2464.73	60.08	95.72	35.64	\	\	PK	Vertical	Fundamental
6	2681.84	15.79	52.15	36.36	74.00	21.85	PK	Vertical	PASS


Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

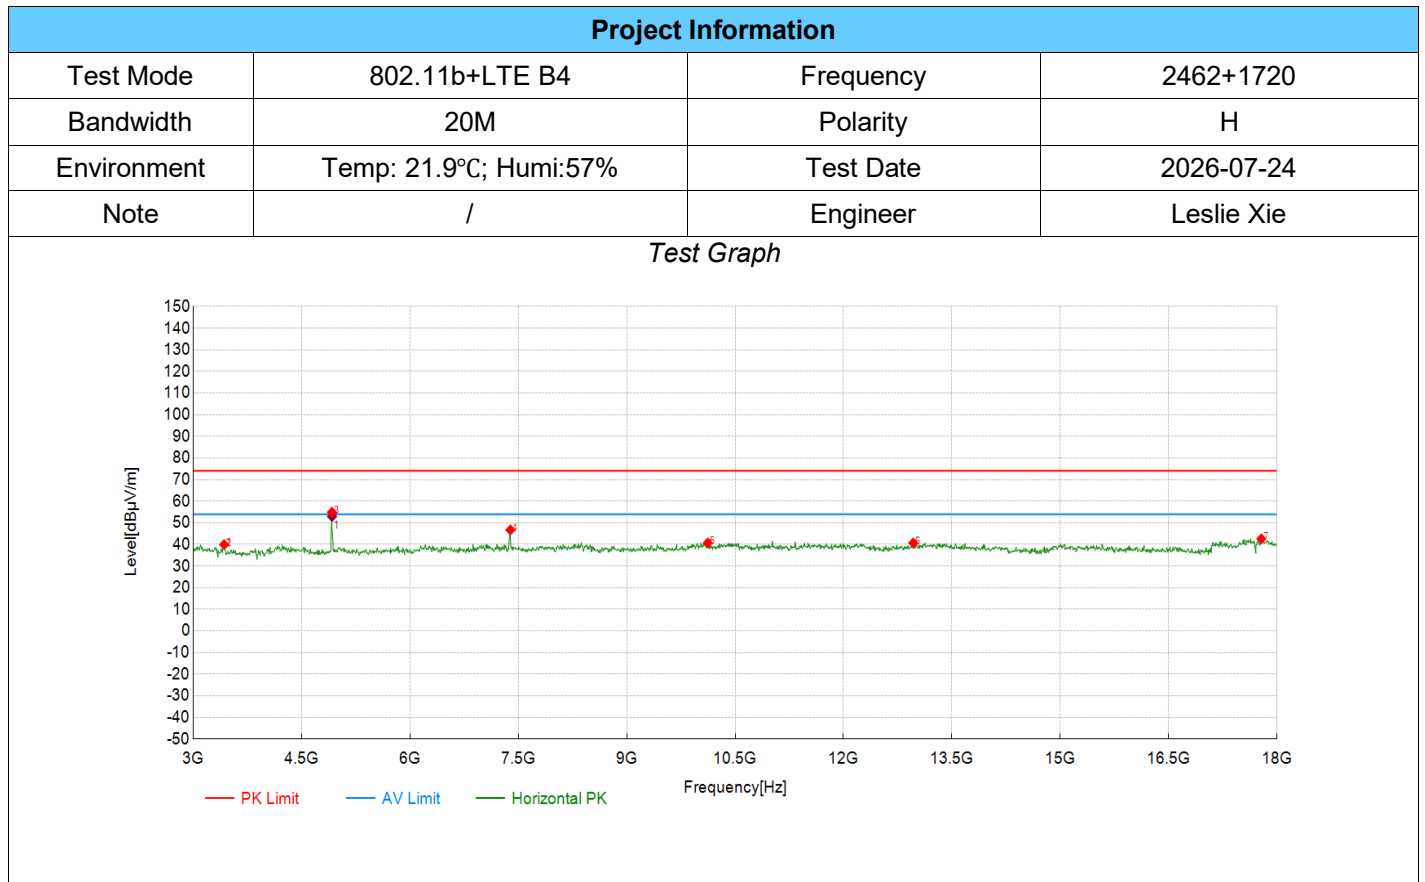

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3427.71	58.75	39.93	-18.82	74.00	34.07	PK	Horizontal	PASS
2	3427.71	58.75	39.93	-18.82	74.00	34.07	PK	Horizontal	PASS
3	4920.96	72.86	54.92	-17.94	74.00	19.08	PK	Horizontal	PASS
4	7389.69	61.84	46.71	-15.13	74.00	27.29	PK	Horizontal	PASS
5	10121.06	51.78	40.72	-11.06	74.00	33.28	PK	Horizontal	PASS
6	12964.98	52.22	40.68	-11.54	74.00	33.32	PK	Horizontal	PASS
7	17782.39	47.69	42.59	-5.10	74.00	31.41	PK	Horizontal	PASS

AVG Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	4920.96	-18.88	71.78	52.90	54.00	1.10	Horizontal	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

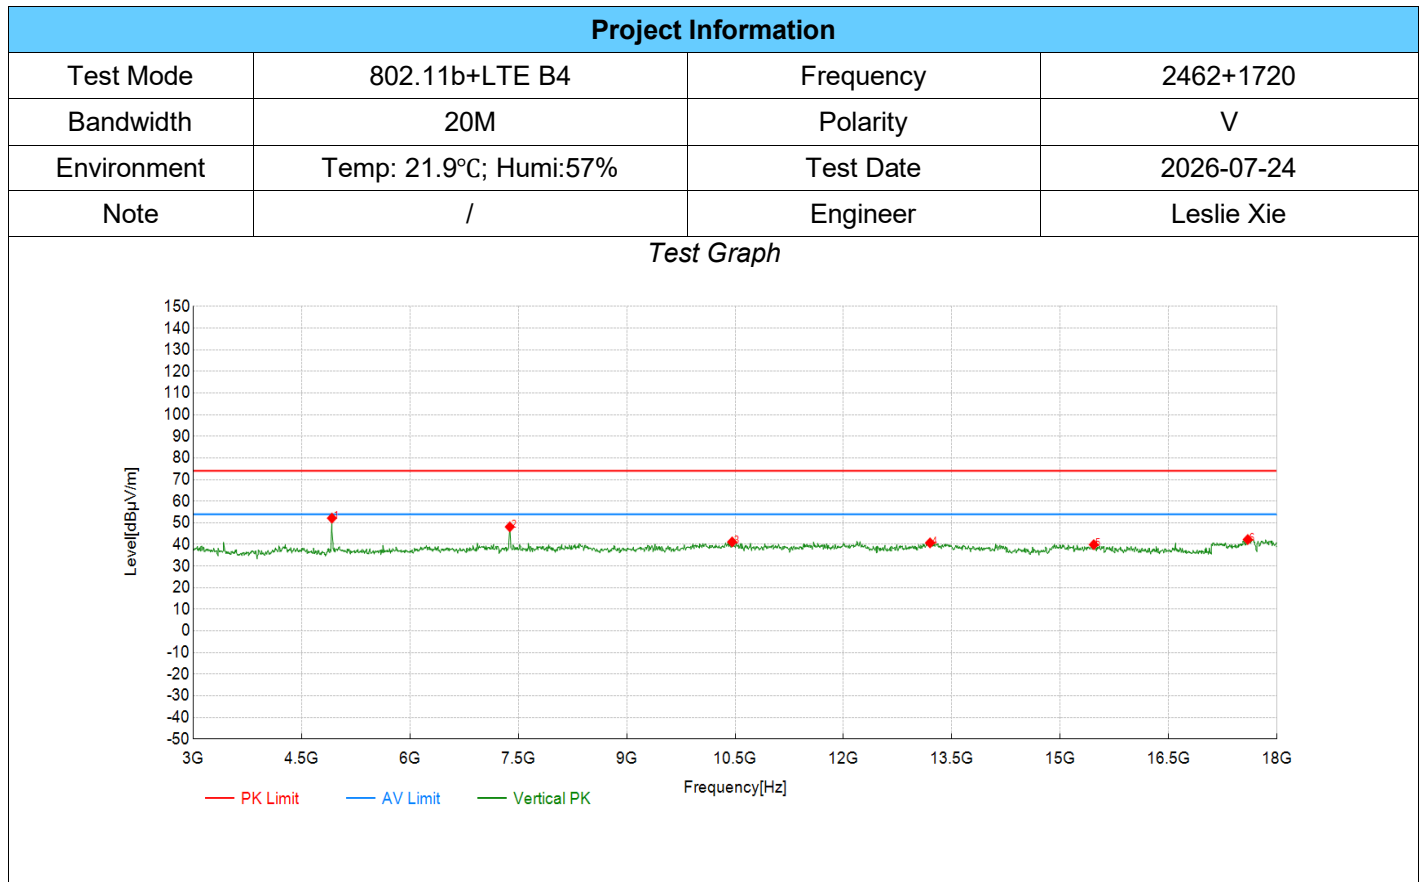

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4920.96	70.10	52.16	-17.94	74.00	21.84	PK	Vertical	PASS
2	7382.19	63.29	48.15	-15.14	74.00	25.85	PK	Vertical	PASS
3	10458.73	50.75	41.16	-9.59	74.00	32.84	PK	Vertical	PASS
4	13197.60	51.54	40.71	-10.83	74.00	33.29	PK	Vertical	PASS
5	15463.73	49.23	39.89	-9.34	74.00	34.11	PK	Vertical	PASS
6	17594.80	47.34	42.27	-5.07	74.00	31.73	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

END OF REPORT