

# HEARING AID COMPATIBILITY T-COIL TEST REPORT

FCC ID : 2ADLJ-CG65  
Equipment : smart phone  
Brand Name : Vortex  
Model Name : CG65  
T-Rating : T3  
Applicant : Xwireless LLC  
11565 Old Georgetown Road, Rockville, MD, USA  
Manufacturer : BOPEL MOBILE TECHNOLOGY CO., LTD.  
RM603, 6/F, HANG PONT COMM BLDG, 31 TONKIN  
ST, CHEUNG SHA WAN, KOWLOON, HONG KONG  
Standard : FCC 47 CFR §20.19  
ANSI C63.19-2011

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.



Approved by: Si Zhang

**Sporton International Inc. (Shenzhen)**

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055  
People's Republic of China



## **Table of Contents**

|                                                       |           |
|-------------------------------------------------------|-----------|
| <b>1. Attestation of Test Results .....</b>           | <b>4</b>  |
| <b>2. General Information .....</b>                   | <b>5</b>  |
| <b>3. Testing Location.....</b>                       | <b>6</b>  |
| <b>4. Applied Standards .....</b>                     | <b>6</b>  |
| <b>5. Air Interface and Operating Mode.....</b>       | <b>7</b>  |
| <b>6. Measurement standards for T-Coil .....</b>      | <b>8</b>  |
| 6.1 Frequency Response .....                          | 8         |
| 6.2 T-Coil Signal Quality Categories .....            | 8         |
| 6.3 Description of EUT Test Position .....            | 9         |
| <b>7. T-Coil Test Procedure .....</b>                 | <b>10</b> |
| 7.1 Test Flow Chart.....                              | 11        |
| 7.2 Test Setup Diagram for GSM/UMTS/VoLTE/VoWiFi..... | 12        |
| <b>8. Test Equipment List .....</b>                   | <b>14</b> |
| <b>9. T-Coil testing for CMRS Voice .....</b>         | <b>15</b> |
| 9.1 GSM Tests Results .....                           | 15        |
| 9.2 UMTS Tests Results .....                          | 16        |
| <b>10. T-Coil testing for CMRS IP Voice .....</b>     | <b>17</b> |
| 10.1 VoLTE Tests Results .....                        | 17        |
| 10.2 VoWiFi Tests Results .....                       | 20        |
| <b>11. Uncertainty Assessment .....</b>               | <b>22</b> |
| <b>12. References.....</b>                            | <b>23</b> |

**Appendix A. Plots of T-Coil Measurement**

**Appendix B. DASy Calibration Certificate**

**Appendix C. Test Setup Photos**



### History of this test report

| Report No. | Version | Description             | Issued Date   |
|------------|---------|-------------------------|---------------|
| HA3O0801B  | Rev. 01 | Initial issue of report | Nov. 02, 2023 |
|            |         |                         |               |
|            |         |                         |               |

## 1. Attestation of Test Results

| Air Interface   | Band MHz                | T-Rating | Frequency Response | Magnetic Intensity |
|-----------------|-------------------------|----------|--------------------|--------------------|
| GSM CMRS Voice  | GSM850                  | T3       | Pass               | Pass               |
|                 | GSM1900                 | T4       | Pass               | Pass               |
| UMTS CMRS Voice | Band II                 | T4       | Pass               | Pass               |
|                 | Band IV                 | T4       | Pass               | Pass               |
|                 | Band V                  | T4       | Pass               | Pass               |
| VoLTE           | Band 12/17              | T4       | Pass               | Pass               |
|                 | Band 13                 | T4       | Pass               | Pass               |
|                 | Band 25/2               | T4       | Pass               | Pass               |
|                 | Band 26/5               | T4       | Pass               | Pass               |
|                 | Band 41                 | T4       | Pass               | Pass               |
|                 | Band 66/4               | T4       | Pass               | Pass               |
|                 | Band 71                 | T4       | Pass               | Pass               |
| VoWiFi          | 2450                    | T4       | Pass               | Pass               |
|                 | 5200                    | T4       | Pass               | Pass               |
|                 | 5300                    | T4       | Pass               | Pass               |
|                 | 5500                    | T4       | Pass               | Pass               |
|                 | 5800                    | T4       | Pass               | Pass               |
| Date Tested     | 2023/10/20 ~ 2023/10/25 |          |                    |                    |

1. The device is compliance with HAC limits specified in guidelines FCC 47CFR §20.19 and ANSI Standard ANSI C63.19.
2. This is partial report for CMRS voice T-Coil testing . VOIP test report will be separately submitted.



## 2. General Information

| Product Feature & Specification                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Applicant Name                                                          | Xwireless LLC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Equipment Name                                                          | smart phone                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Brand Name                                                              | Vortex                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Model Name                                                              | CG65                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| IMEI Code                                                               | 352078504080003                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| FCC ID                                                                  | 2ADLJ-CG65                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| HW                                                                      | J527G_6761&6762_D3F_1.0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| SW                                                                      | Vortex_CG65_V01_20231013_userdebug                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| EUT Stage                                                               | Production Unit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Frequency Band                                                          | GSM850: 824 MHz ~ 849 MHz<br>GSM1900: 1850 MHz ~ 1910 MHz<br>WCDMA Band II: 1850 MHz ~ 1910 MHz<br>WCDMA Band IV: 1710 MHz ~ 1755 MHz<br>WCDMA Band V: 824 MHz ~ 849 MHz<br>LTE Band 2: 1850 MHz ~ 1910 MHz<br>LTE Band 4: 1710 MHz ~ 1755 MHz<br>LTE Band 5: 824 MHz ~ 849 MHz<br>LTE Band 12: 699 MHz ~ 716 MHz<br>LTE Band 13: 777 MHz ~ 787 MHz<br>LTE Band 17: 704 MHz ~ 716 MHz<br>LTE Band 25: 1850 MHz ~ 1915 MHz<br>LTE Band 26: 814 MHz ~ 849 MHz<br>LTE Band 66: 1710 MHz ~ 1780 MHz<br>LTE Band 71: 663 MHz ~ 698 MHz<br>LTE Band 41: 2496 MHz ~ 2690 MHz<br>WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz<br>WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz<br>WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz<br>WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz<br>WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz<br>Bluetooth: 2402 MHz ~ 2480 MHz |
| Mode                                                                    | GSM/GPRS<br>AMR / RMC 12.2Kbps<br>HSDPA<br>HSUPA<br>DC-HSDPA<br>HSPA+ (16QAM uplink is supported)<br>LTE: QPSK, 16QAM, 64QAM<br>WLAN 2.4GHz : 802.11b/g/n HT20<br>WLAN 5GHz : 802.11a/n/ac HT20/HT40/VHT20/VHT40/VHT80<br>Bluetooth BR/EDR/LE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Remark: LTE Band 41 supports HPUE mode only (Declared by Manufacturer). |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |



### **3. Testing Location**

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

| Testing Laboratory |                                                                                                                                                                            |                     |                                |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|--------------------------------|
| Test Firm          | Sporton International Inc. (Shenzhen)                                                                                                                                      |                     |                                |
| Test Site Location | 1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055<br>People's Republic of China<br>TEL: +86-755-86379589<br>FAX: +86-755-86379595 |                     |                                |
| Test Site No.      | Sporton Site No.                                                                                                                                                           | FCC Designation No. | FCC Test Firm Registration No. |
|                    | SAR01-SZ                                                                                                                                                                   | CN1256              | 421272                         |

### **4. Applied Standards**

- FCC CFR47 Part 20.19
- ANSI C63.19-2011
- FCC KDB 285076 D01 HAC Guidance v06r04
- FCC KDB 285076 D02 T-Coil testing v04
- FCC KDB 285076 D03 HAC FAQ v01r06

## 5. Air Interface and Operating Mode

| Air Interface | Band MHz | Type | C63.19 Tested | Simultaneous Transmitter            | Name of Voice Service                              | Power Reduction |
|---------------|----------|------|---------------|-------------------------------------|----------------------------------------------------|-----------------|
| GSM           | GSM850   | VO   | Yes           | WLAN, BT                            | CMRS Voice                                         | No              |
|               | GSM1900  |      |               | WLAN, BT                            |                                                    | No              |
| UMTS          | Band II  | VO   | Yes           | WLAN, BT                            | CMRS Voice                                         | No              |
|               | Band IV  |      |               | WLAN, BT                            |                                                    | No              |
|               | Band V   |      |               | WLAN, BT                            |                                                    | No              |
|               | HSPA     | VD   | Yes           | WLAN, BT                            | Google Meet <sup>(1)</sup>                         | No              |
| LTE (FDD)     | Band 2   | VD   | Yes           | WLAN, BT                            | VoLTE / Google Meet <sup>(1)</sup>                 | No              |
|               | Band 4   |      |               | WLAN, BT                            |                                                    | No              |
|               | Band 5   |      |               | WLAN, BT                            |                                                    | No              |
|               | Band 12  |      |               | WLAN, BT                            |                                                    | No              |
|               | Band 13  |      |               | WLAN, BT                            |                                                    | No              |
|               | Band 17  |      |               | WLAN, BT                            |                                                    | No              |
|               | Band 25  |      |               | WLAN, BT                            |                                                    | No              |
|               | Band 26  |      |               | WLAN, BT                            |                                                    | No              |
|               | Band 66  |      |               | WLAN, BT                            |                                                    | No              |
|               | Band 71  |      |               | WLAN, BT                            |                                                    | No              |
| LTE (TDD)     | Band 41  | VD   | Yes           | WLAN, BT                            | VoLTE / Google Meet <sup>(1)</sup>                 | No              |
| Wi-Fi         | 2450     | VD   | Yes           | GSM,WCDMA,LTE, WLAN5GHz, BT         | VoWiFi <sup>(1)</sup> / Google Meet <sup>(1)</sup> | No              |
|               | 5200     | VD   | Yes           | GSM,WCDMA,LTE, WLAN2.4GHz, BT       |                                                    | No              |
|               | 5300     |      |               |                                     |                                                    | No              |
|               | 5500     |      |               |                                     |                                                    | No              |
|               | 5800     |      |               |                                     |                                                    | No              |
| BT            | 2450     | DT   | No            | GSM,WCDMA,LTE, WLAN2.4GHz, WLAN5GHz | NA                                                 | No              |

**Type Transport:**

VO= Voice only

DT= Digital Transport only (no voice)

VD= CMRS and IP Voice Service over Digital Transport

**Remark:**


- For protocols not listed in Table 7.1 of ANSI C63.19-2011 or the ANSI C63.19-2011 VoLTE interpretation, the average speech level of -20 dBm0 should be used.
- The device have similar frequency in some LTE bands: LTE B2/B25, B4/B66, B5/B26, B12/B17 since the supported frequency spans for the smaller LTE bands are completely cover by the larger LTE bands, therefore, only larger LTE bands were required to be tested for hearing-aid compliance.
- This is partial report for CMRS voice T-Coil testing . VOIP test report will be separately submitted.

## 6. Measurement standards for T-Coil

### 6.1 Frequency Response


The frequency response of the perpendicular component of the magnetic field, measured in 1/3 octave bands, shall follow the response curve specified in this sub-clause, over the frequency range 300 Hz to 3000 Hz.

Figure 1.1 and Figure 1.2 provide the boundaries as a function of frequency. These response curves are for true field-strength measurements of the T-Coil signal. Thus, the 6 dB/octave probe response has been corrected from the raw readings.

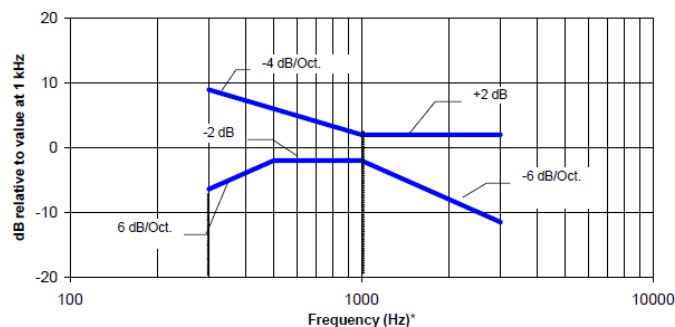

NOTE—The frequency response is between 300 Hz and 3000 Hz.

**Fig. 1.1 Magnetic field frequency response for WDs with field strength  $\leq -15$  dB at 1 KHz**

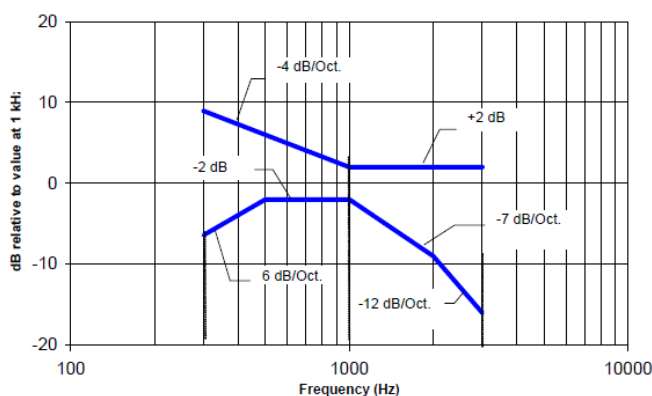

NOTE—The frequency response is between 300 Hz and 3000 Hz.

**Fig. 1.2 Magnetic field frequency response for WDs with a field that exceeds  $-15$  dB(A/m) at 1 kHz**

### 6.2 T-Coil Signal Quality Categories

This section provides the signal quality requirement for the intended T-Coil signal from a WD. Only the RF immunity of the hearing aid is measured in T-Coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. A device is assessed beginning by determining the category of the RF environment in the area of the T-Coil source.

The RF measurements made for the T-Coil evaluation are used to assign the category T1 through T4. The limitation is given in Table 1. This establishes the RF environment presented by the WD to a hearing aid.


| Category    | Telephone parameters WD signal quality<br>(signal + noise) to noise ratio in dB) |
|-------------|----------------------------------------------------------------------------------|
| Category T1 | 0 to 10 dB                                                                       |
| Category T2 | 10 to 20 dB                                                                      |
| Category T3 | 20 to 30 dB                                                                      |
| Category T4 | > 30 dB                                                                          |

**Table 1 T-Coil Signal Quality Categories**

### **6.3 Description of EUT Test Position**

Fig.3 illustrate the references and reference plane that shall be used in a typical EUT emissions measurement. The principle of this section is applied to EUT with similar geometry. Please refer to Appendix C for the setup photographs.

- ◆ The area is 5 cm by 5 cm.
- ◆ The area is centered on the audio frequency output transducer of the EUT.
- ◆ The area is in a reference plane, which is defined as the planar area that contains the highest point in the area of the phone that normally rests against the user's ear. It is parallel to the centerline of the receiver area of the phone and is defined by the points of the receiver-end of the EUT handset, which, in normal handset use, rest against the ear.
- ◆ The measurement plane is parallel to, and 10 mm in front of, the reference plane.

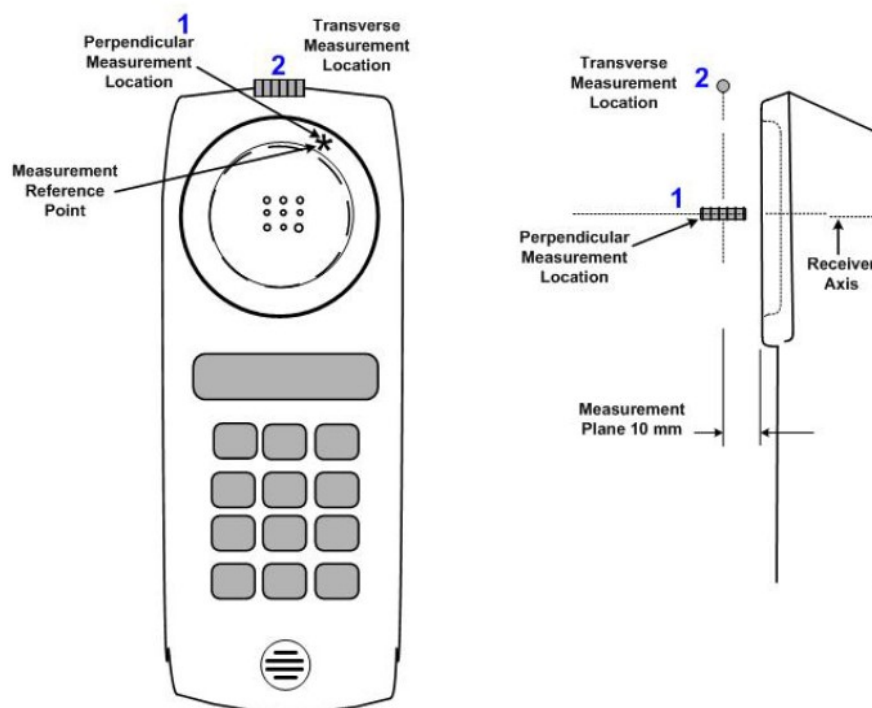

**Fig.3 A typical EUT reference and plane for T-Coil measurements**

## **7. T-Coil Test Procedure**

Referenced to ANSI C63.19-2011, Section 7.4

This section describes the procedures used to measure the ABM (T-Coil) performance of the WD. In addition to measuring the absolute signal levels, the A-weighted magnitude of the unintended signal shall also be determined. To assure that the required signal quality is measured, the measurement of the intended signal and the measurement of the unintended signal must be made at the same location for each measurement position. In addition, the RF field strength at each measurement location must be at or below that required for the assigned category.

Measurements shall not include undesired properties from the WD's RF field; therefore, use of a coaxial connection to a base station simulator or non-radiating load, there might still be RF leakage from the WD, which can interfere with the desired measurement. Pre-measurement checks should be made to avoid this possibility. All measurements shall be performed with the WD operating on battery power with an appropriate normal speech audio signal input level given in ANSI C63.19-2011 Table 7.1. If the device display can be turned off during a phone call, then that may be done during the measurement as well.

Measurement shall be performed at two locations specified in ANSI C63.19-2011 A.3, with the correct probe orientation for a particular location, in a multistage sequence by first measuring the field intensity of the desired T-Coil signal the same location as the desired ABM or T-Coil signal (ABM1), and the ratio of desired to undesired magnetic components (ABM2) must be measured at the same location as the desired ABM or T-Coil signal (ABM1), and the ratio of desired to undesired ABM signals must be calculated. For the perpendicular field location, only the ABM1 frequency response shall be determined in a third measurement stage.

The following steps summarize the basic test flow for determining ABM1 and ABM2. These steps assume that a sine wave or narrowband 1/3 octave signal can be used for the measurement of ABM1.

- a. A validation of the test setup and instrumentation may be performed using a TMFS or Helmholtz coil Measure the emissions and confirm that they are within the specified tolerance.
- b. Position the WD in the test setup and connect the WD RF connector to a base station simulator or a non-radiating load. Confirm that equipment that requires calibration has been calibrated, and that the noise level meets the requirements given in ANSI C63.19-2011 clause 7.3.1.
- c. The drive level to the WD is set such that the reference input level specified in ANSI C63.19-2011 Table 7.1 is input to the base station simulator (or manufacturer's test mode equivalent) in 1 kHz, 1/3 octave band. This drive level shall be used for the T-Coil signal test (ABM1) at  $f = 1$  kHz. Either a sine wave at 1025 Hz or a voice-like signal, band-limited to the 1 kHz 1/3 octave, as defined in ANSI C63.19-2011 clause 7.4.2, shall be used for the reference audio signal. If interference is found at 1025 Hz an alternative nearby reference audio signal frequency may be used. The same drive level shall be used for the ABM1 frequency response measurements at each 1/3 octave band center frequency. The WD volume control may be set at any level up to maximum, provided that a signal at any frequency at maximum modulation would not result in clipping or signal overload.
- d. Determine the magnetic measurement locations for the WD device (A.3), if not already specified by the manufacturer, as described in ANSI C63.19-2011 clause 7.4.4.1.1 and 7.4.4.2.
- e. At each measurement location, measure and record the desired T-Coil magnetic signals (ABM1 at  $f_i$ ) as described in ANSI C63.19-2011 clause 7.4.4.2 in each individual ISO 266-1975 R10 standard 1/3 octave band. The desired audio band input frequency ( $f_i$ ) shall be centered in each 1/3 octave band maintaining the same drive level as determined in item c) and the reading taken for that band.
- f. Equivalent methods of determining the frequency response may also be employed, such as fast Fourier transform (FFT) analysis using noise excitation or input-output comparison using simulated speech. The full-band integrated probe output, as specified in D.9, may be used, as long as the appropriate calibration curve is applied to the measured result, so as to yield an accurate measurement of the field magnitude. (The resulting measurement shall be an accurate measurement in dB A/m.)
- g. All Measurements of the desired signal shall be shown to be of the desired signal and not of an undesired signal. This may be shown by turning the desired signal ON and OFF with the probe measuring the same location. If the scanning method is used the scans shall show that all measurement points selected for the ABM1 measurement meet the ambient and test system noise criteria in ANSI C63.19-2011 clause 7.3.1.
- h. At the measurement location for each orientation, measure and record the undesired broadband audio magnetic signal (ABM2) as specified in ANSI C63.19-2011 clause 7.4.4.4 with no audio signal applied (or digital zero applied, if appropriate) using A-weighting and the half-band integrator. Calculate the ratio of the desired to undesired signal strength (i.e., signal quality).
- i. Obtain the data from the postprocessor, SEMCAD, and determine the category that properly classifies the signal quality based on ANSI C63.19-2011 Table 8.5.

## 7.1 Test Flow Chart


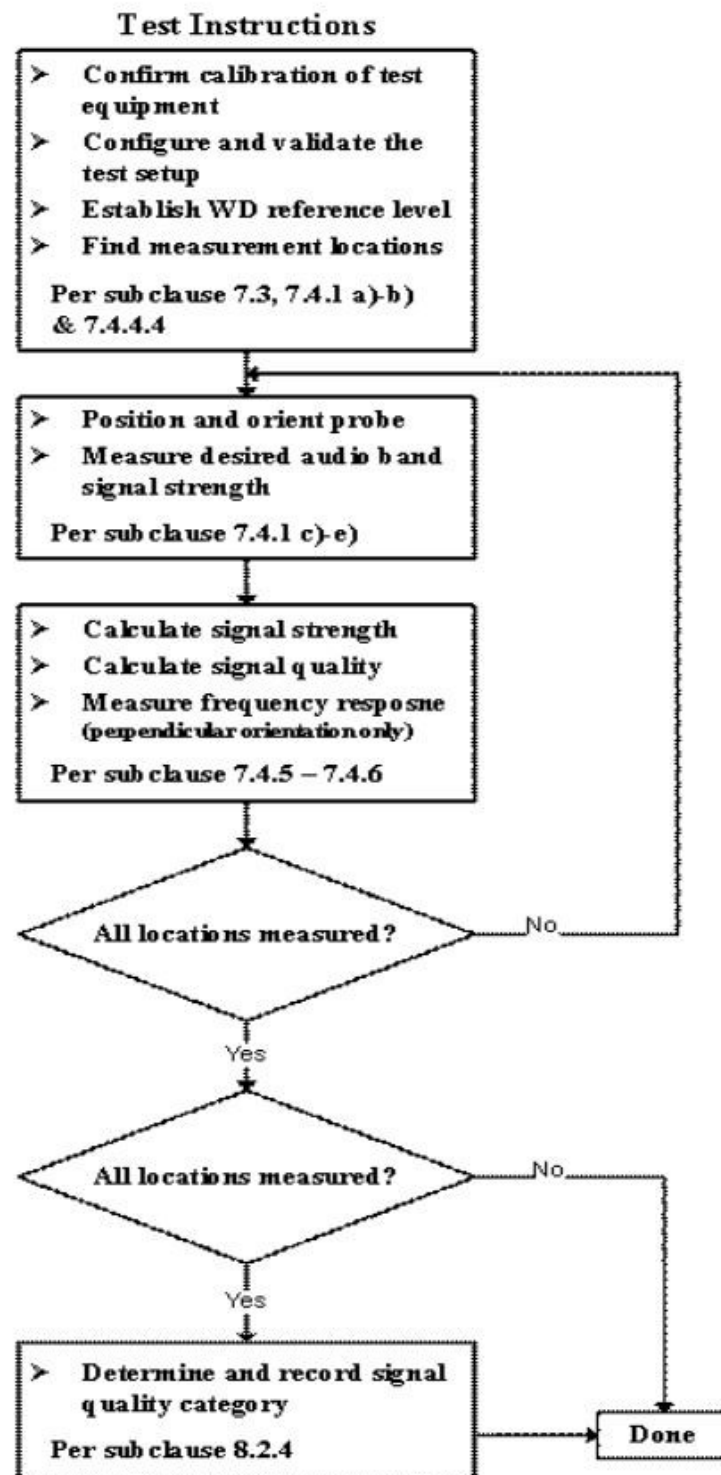


Fig. 2 T-Coil Signal Test flowchart

## 7.2 Test Setup Diagram for GSM/UMTS/VoLTE/VoWiFi

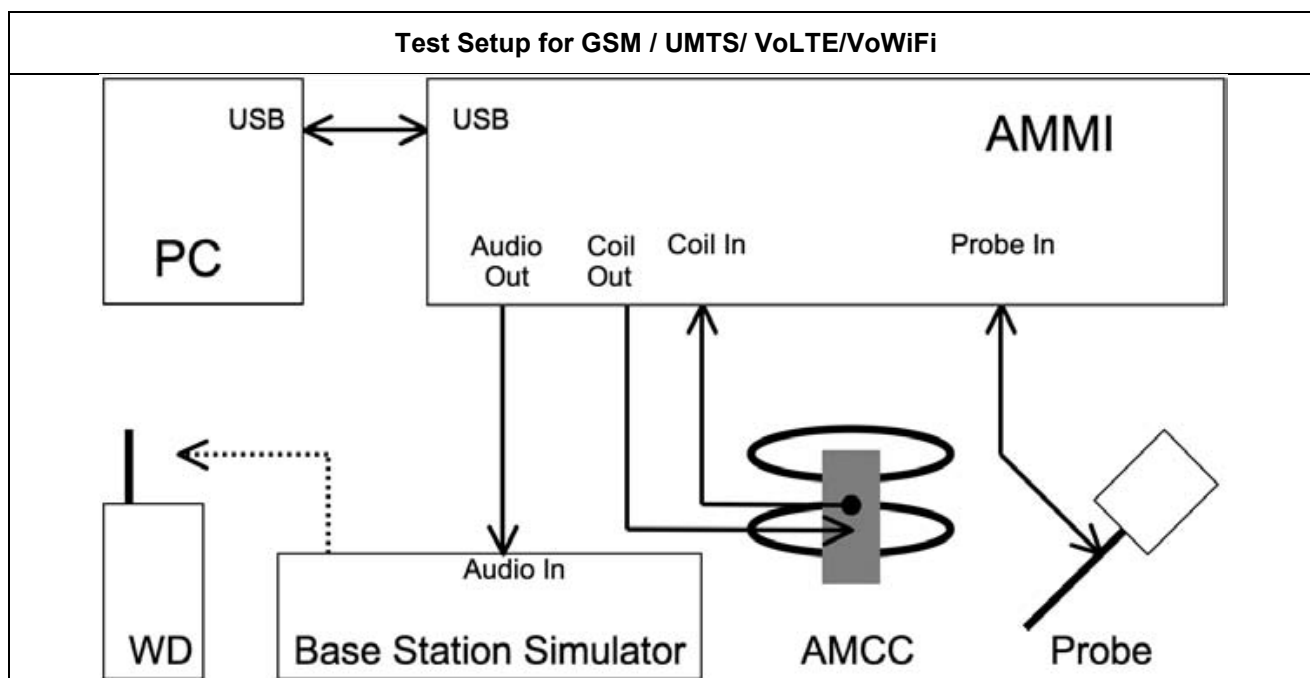

### General Note:

- Define the all applicable input audio level as below according to C63 and KDB 285076 D02v04:
  - GSM input level: -16dBm0
  - UMTS input level: -16dBm0
  - VoLTE input level: -16dBm0
  - VoWiFi input level: -20dBm0
- For GSM / UMTS test setup and input level, the correct input level definition is via a communication tester CMU200's "Decoder Cal" and "Codec Cal" with audio option B52 and B85 to set the correct audio input levels.
- CMU200 is able to output 1kHz audio signal equivalent to 3.14dBm0 at "Decoder Cal." configuration, the signal reference is used to adjust the AMMI gain setting to reach -16dBm0 for GSM/UMTS and -18dBm0 for CDMA. CMW500 input is calibrated and the relation between the analog input voltage and the internal level in dBm0 can be determined
- Voice over Long-Term Evolution (VoLTE) is a standard for high-speed wireless communication for mobile phones and data terminals — including IoT devices and wearables. It is based on the IP Multimedia Subsystem (IMS) network, with specific profiles for control and media planes of voice service on LTE defined by GSMA in PRD IR.92. This approach results in the voice service (control and media planes) being delivered as data flows within the LTE data bearer. This means that there is no dependency on the legacy circuit-switched voice network to be maintained
- The test setup used for VoLTE and VoWiFi over IMS is via the callbox of CMW500 for T-coil measurement, The data application unit of the CMW500 was used to simulate the IP multimedia subsystem server. The CMW500 can be manually configured to ensure and control the speech input level result is -16dBm0 for VoLTE, -20dBm0 for VoWiFi when the device during the IMS connection.
- According to KDB 285076 D02, T-Coil testing for VoLTE and VoWiFi requires test instrumentation that can (1) for the system to be able to establish an IP call from/to the handset under test, (2) through an IMS (IP Multimedia Subsystem) and SIP/IP server, (3) to an analog audio adapter containing the permissible set of codecs used by the device under test, and (4) inject the necessary C63.19 test tones at the average speech level for the measurement. The test setup is illustrated in Figure 3.9. The R&S CMW500 was used as system simulator for VoLTE and VoWiFi T-Coil testing. The DAU (Data Application Unit) in CMW500 integrates IMS and SIP/IP server that can establish VoLTE and Wi-Fi calling, and transport the test tones from AMMI (Audio Magnetic Measuring Instrument) to EUT.
- T-coil performance assessment for 5G FR1 was performed according to KDB 285076 D03 v01r06, Q&A 9, details are illustrated in section 7.3.

**<Define the input level for GSM/UMTS>**

1. The Required gain factor for the specific signal shall typically be multiplied by this factor to achieve approx. the same level as for the 1kHz sine signal
2. The below calculation formula is an example and showing how to determine the input level for the device.

The predefined signal types have the following differences / factors compared to the 1kHz sine signal:

| Signal<br>[file name]         | Duration<br>[s] | Peak-to-<br>RMS [dB] | RMS<br>[dB] | Required gain<br>factor *) | Gain<br>setting |
|-------------------------------|-----------------|----------------------|-------------|----------------------------|-----------------|
| 1kHz sine                     | ---             | 3.0                  | 0.0         | 1.00                       |                 |
| 48k_1.025kHz_10s.wav          | 10              | 3.0                  | 0.0         | 1.00                       |                 |
| 48k_1kHz_3.15kHz_10s.wav      | 10              | 6.0                  | -3.0        | 1.42                       |                 |
| 48k_315Hz_1kHz_10s.wav        | 10              | 6.0                  | -2.9        | 1.40                       |                 |
| 48k_csek_8k_441_white_10s.wav | 10              | 13.8                 | -10.5       | 3.34                       |                 |
| 48k_multisine_50-5000_10s.wav | 10              | 11.1                 | -7.9        | 2.49                       |                 |
| 48k_voice_1kHz_1s.wav         | 1               | 16.2                 | -12.7       | 4.33                       |                 |
| 48k_voice_300-3000_2s.wav     | 2               | 21.6                 | -18.6       | 8.48                       |                 |

(\*) The gain for the specific signal shall typically be multiplied by this factor to achieve approx. the same level as for the 1kHz sine signal.

Insert the gain applicable for your setup in the last column of the table.

**<Example define the input level for GSM/UMTS>**

| Gain Value | 20* log(gain) | AMCC Coil In | Level  |
|------------|---------------|--------------|--------|
| (linear)   | dB            | (dBv RMS)    | dBm0   |
|            |               | -2.47        | 3.14   |
| 10         | 20            | -19.85       | -14.24 |
| 8.17       | 18.24         | -21.61       | -16    |

| Signal Type            | Duration<br>(s) | Peak to RMS<br>(dB) | RMS<br>(dB) | Required Gain<br>Factor | Calculated<br>Gain Setting |
|------------------------|-----------------|---------------------|-------------|-------------------------|----------------------------|
| 1kHz sine              | -               | 3                   | 0           | 1                       | 8.17                       |
| 48k_voice_1kHz         | 1               | 16.2                | -12.7       | 4.33                    | 35.36                      |
| 48k_voice_300Hz ~ 3kHz | 2               | 21.6                | -18.6       | 8.48                    | 69.25                      |

**<Example define the input level for VoLTE>**

| Gain Value         | dBm0            | Full scal Voltage   | dB          | AMMI audio out<br>dBv (RMS) | AMCC Coil Out<br>(dBv (RMS)) |
|--------------------|-----------------|---------------------|-------------|-----------------------------|------------------------------|
|                    | 3.14            | 1.5                 |             | 0.51                        |                              |
| 100                | 5.57            |                     | 40          | 2.94                        | 3.09                         |
| 8.35               | -16             |                     | 18.43       |                             | -18.48                       |
| Signal Type        | Duration<br>(s) | Peak to RMS<br>(dB) | RMS<br>(dB) | Gain Factor                 | Gain Setting                 |
| 1kHz sine          | -               | 3                   | 0           | 1                           | 8.35                         |
| 48k_voice_1kHz     | 1               | 16.2                | -12.7       | 4.33                        | 36.15                        |
| 48k_voice_300-3000 | 2               | 21.6                | -18.6       | 8.48                        | 70.79                        |

**<Example define the input level for VoWiFi>**

| Gain Value         | dBm0            | Full scal Voltage   | dB          | AMMI audio out<br>dBv (RMS) | AMCC Coil Out<br>(dBv (RMS)) |
|--------------------|-----------------|---------------------|-------------|-----------------------------|------------------------------|
|                    | 3.14            | 1.5                 |             | 0.51                        |                              |
| 100                | 5.57            |                     | 40          | 2.94                        | 3.09                         |
| 5.27               | -20             |                     | 14.43       |                             | -22.48                       |
| Signal Type        | Duration<br>(s) | Peak to RMS<br>(dB) | RMS<br>(dB) | Gain Factor                 | Gain Setting                 |
| 1kHz sine          | -               | 3                   | 0           | 1                           | 5.27                         |
| 48k_voice_1kHz     | 1               | 16.2                | -12.7       | 4.33                        | 22.81                        |
| 48k_voice_300-3000 | 2               | 21.6                | -18.6       | 8.48                        | 44.67                        |

**8. Test Equipment List**

| Manufacturer | Name of Equipment               | Type/Model | Serial Number | Calibration   |               |
|--------------|---------------------------------|------------|---------------|---------------|---------------|
|              |                                 |            |               | Last Cal.     | Due Date      |
| SPEAG        | Audio Magnetic 1D Field Probe   | AM1DV3     | 3106          | Dec. 13, 2022 | Dec. 12, 2023 |
| SPEAG        | Data Acquisition Electronics    | DAE4       | 1386          | Jul. 17, 2023 | Jul. 16, 2024 |
| SPEAG        | Audio Magnetic Calibration Coil | AMCC       | 1128          | NCR           | NCR           |
| SPEAG        | Audio Measuring Instrument      | AMMI       | 1137          | NCR           | NCR           |
| SPEAG        | Test Arch Phantom               | N/A        | N/A           | NCR           | NCR           |
| SPEAG        | Phone Positioner                | N/A        | N/A           | NCR           | NCR           |
| R&S          | Base Station(Measure)           | CMU200     | 108440        | Dec. 27, 2022 | Dec. 26, 2023 |
| R&S          | Base Station(Measure)           | CMW500     | 157651        | Jan. 04, 2023 | Jan. 03, 2024 |
| Anymetre     | Thermo-Hygrometer               | JR593      | 2020062101    | Jul. 08, 2023 | Jul. 07, 2024 |

**Note:**

1. NCR: "No-Calibration Required"

## 9. T-Coil testing for CMRS Voice

### General Note:

1. **Codec Investigation:** For a voice service/air interface, investigate the variations of codec configurations (WB, NB bit rate) and document the parameters (ABM1, ABM2, S+N/N, frequency response) for that voice service. It is only necessary to document this for one channel/band, the following worst investigation codec would be remarked to be used for the testing for the handset.
2. **Air Interface Investigation:**
  - a. Use the worst-case codec test and document a limited set of bands/channel/bandwidths. Observe the effect of changing the band and bandwidth to ensure that there are no unexpected variations. Using the knowledge of the observed variations, it is necessary to report only a set band/channel/bandwidth for each orientation for a voice service/air interface.
  - b. According to the ANSI C63.19 2011 section 7.3.2, test middle channel of each frequency band for HAC testing for each orientation to determine worst HAC T-Coil rating.

### 9.1 GSM Tests Results

#### <Codec Investigation>

| GSM Codec           |           |           |                 |             |                |
|---------------------|-----------|-----------|-----------------|-------------|----------------|
| Codec               | AMR NB FR | AMR WB FR | GSM EFR (FR V2) | Orientation | Band / Channel |
| ABM 1 (dBA/m)       | 3.83      | 3.06      | 3.69            | Axial       | GSM850 / 189   |
| ABM 2 (dBA/m)       | -24       | -24.61    | -24.33          |             |                |
| Signal Quality (dB) | 27.83     | 27.67     | 28.02           |             |                |
| Freq. Response      | PASS      | PASS      | PASS            |             |                |

Remark: According to codec investigation, the worst codec is AMR WB FR.

#### <Air Interface Investigation>

| Plot No. | Air Interface | Mode  | Channel | Probe Position  | ABM1 dB (A/m) | ABM2 dB (A/m) | Signal Quality dB | T Rating | Ambient Noise dB (A/m) | Freq. Response Variation dB | Frequency Response |
|----------|---------------|-------|---------|-----------------|---------------|---------------|-------------------|----------|------------------------|-----------------------------|--------------------|
| 1        | GSM850        | Voice | 189     | Axial (Z)       | 3.06          | -24.61        | 27.67             | T3       | -53.59                 | 2                           | PASS               |
|          |               |       |         | Transversal (Y) | -5.57         | -42.44        | 36.87             | T4       | -54.08                 |                             |                    |
| 2        | GSM1900       | Voice | 661     | Axial (Z)       | 4.07          | -28.26        | 32.33             | T4       | -53.53                 | 1.88                        | PASS               |
|          |               |       |         | Transversal (Y) | -5.19         | -44.19        | 39.00             | T4       | -54.25                 |                             |                    |

## 9.2 UMTS Tests Results

### <Codec Investigation>

| UMTS AMR Codec         |                    |                    |                    |                     |             |                        |
|------------------------|--------------------|--------------------|--------------------|---------------------|-------------|------------------------|
| Codec                  | NB AMR<br>4.75Kbps | WB AMR<br>6.60Kbps | NB AMR<br>12.2Kbps | WB AMR<br>23.85Kbps | Orientation | Band / BW /<br>Channel |
| ABM 1 (dBA/m)          | 2.63               | 4.21               | 4.57               | 4.75                | Axial       | B5 / 4182              |
| ABM 2 (dBA/m)          | -40.34             | -40.84             | -40.78             | -41.17              |             |                        |
| Signal Quality<br>(dB) | 42.97              | 45.05              | 45.35              | 45.92               |             |                        |
| Freq. Response         | PASS               | PASS               | PASS               | PASS                |             |                        |

Remark: According to codec investigation, the worst codec is NB AMR 4.75Kbps.

### <Air Interface Investigation>

| Plot<br>No. | Air Interface | Mode  | Channel | Probe<br>Position | ABM1<br>dB<br>(A/m) | ABM2<br>dB<br>(A/m) | Signal<br>Quality<br>dB | T<br>Rating | Ambient<br>Noise<br>dB (A/m) | Freq.<br>Response<br>Variation<br>dB | Frequency<br>Response |
|-------------|---------------|-------|---------|-------------------|---------------------|---------------------|-------------------------|-------------|------------------------------|--------------------------------------|-----------------------|
| 3           | WCDMA V       | Voice | 4182    | Axial (Z)         | 2.63                | -40.34              | 42.97                   | T4          | -54.30                       | 1.68                                 | PASS                  |
|             |               |       |         | Transversal (Y)   | -6.49               | -46.59              | 40.10                   | T4          | -53.61                       |                                      |                       |
| 4           | WCDMA IV      | Voice | 1413    | Axial (Z)         | 2.12                | -39.92              | 42.04                   | T4          | -53.33                       | 1.34                                 | PASS                  |
|             |               |       |         | Transversal (Y)   | -6.45               | -46.73              | 40.28                   | T4          | -53.54                       |                                      |                       |
| 5           | WCDMA II      | Voice | 9400    | Axial (Z)         | 2.27                | -39.94              | 42.21                   | T4          | -53.97                       | 1.82                                 | PASS                  |
|             |               |       |         | Transversal (Y)   | -6.03               | -46.30              | 40.27                   | T4          | -53.14                       |                                      |                       |

## 10. T-Coil testing for CMRS IP Voice

### 10.1 VoLTE Tests Results

**General Note:**

1. Codec Investigation: For a voice service/air interface, investigate the variations of codec configurations (WB, NB bit rate) and document the parameters (ABM1, ABM2, S+N/N, frequency response) for that voice service. It is only necessary to document this for one channel / band, the following worst investigation codec would be remarked to be used for the testing for the handset.
2. Air Interface Investigation:
  - a. Use the worst-case codec test and document a limited set of bands / channel / bandwidths. Observe the effect of changing the band and bandwidth to ensure that there are no unexpected variations. Using the knowledge of the observed variations, it is necessary to report only a set band/channel/bandwidth for each orientation for a voice service/air interface and the following worst configure would be remarked to be used for the testing for the handset.
  - b. Select LTE FDD/TDD one frequency band to do measurement at the worst SNR position was additionally performed with varying the BWs/Modulations/RB size to verify the variation to find out worst configuration , the observed variation is very little to be within 1.5 dB which is much less than the margin from the rating threshold.
  - c. According to the ANSI C63.19 2011 section 7.3.2, test middle channel of each frequency band for HAC testing for each orientation to determine worst HAC T-Coil rating.

#### <Codec Investigation>

##### LTE FDD

| VoLTE AMR Codec        |                    |                    |                    |                     |             |                        |
|------------------------|--------------------|--------------------|--------------------|---------------------|-------------|------------------------|
| Codec                  | NB AMR<br>4.75Kbps | WB AMR<br>6.60Kbps | NB AMR<br>12.2Kbps | WB AMR<br>23.85Kbps | Orientation | Band / BW /<br>Channel |
| ABM 1 (dBA/m)          | 2.16               | 4.51               | 2.44               | 5.04                | Axial       | B25 / 20M /<br>26340   |
| ABM 2 (dBA/m)          | -37.25             | -36.79             | -36.69             | -37.54              |             |                        |
| Signal Quality<br>(dB) | 39.41              | 41.3               | 39.13              | 42.58               |             |                        |
| Freq. Response         | PASS               | PASS               | PASS               | PASS                |             |                        |

| VoLTE EVS Codec     |                 |                 |                |                |                |                 |             |                     |
|---------------------|-----------------|-----------------|----------------|----------------|----------------|-----------------|-------------|---------------------|
| Codec               | EVS SWB 9.6Kbps | EVS SWB 128Kbps | EVS WB 5.9Kbps | EVS WB 128Kbps | EVS NB 5.9Kbps | EVS NB 24.4Kbps | Orientation | Band / BW / Channel |
| ABM 1 (dBA/m)       | 4.95            | 4.79            | 7.9            | 4.24           | 7.84           | 8.17            | Axial       | B25 / 20M / 26340   |
| ABM 2 (dBA/m)       | -34.92          | -34.6           | -35.46         | -35.29         | -35.65         | -35.43          |             |                     |
| Signal Quality (dB) | 39.87           | 39.39           | 43.36          | 39.53          | 43.49          | 43.6            |             |                     |
| Freq. Response      | PASS            | PASS            | PASS           | PASS           | PASS           | PASS            |             |                     |

Remark: According to codec investigation, the worst codec is NB AMR 12.2Kbps

**LTE TDD**

| VoLTE AMR Codec        |                    |                    |                    |                     |             |                        |
|------------------------|--------------------|--------------------|--------------------|---------------------|-------------|------------------------|
| Codec                  | NB AMR<br>4.75Kbps | WB AMR<br>6.60Kbps | NB AMR<br>12.2Kbps | WB AMR<br>23.85Kbps | Orientation | Band / BW /<br>Channel |
| ABM 1 (dBA/m)          | 1.36               | 4.23               | 1.66               | 4.12                | Axial       | B41 / 20M /<br>40620   |
| ABM 2 (dBA/m)          | -29.1              | -28.66             | -28.96             | -28.85              |             |                        |
| Signal Quality<br>(dB) | 30.46              | 32.89              | 30.62              | 32.97               |             |                        |
| Freq. Response         | PASS               | PASS               | PASS               | PASS                |             |                        |

| VoLTE EVS Codec        |                    |                    |                   |                   |                   |                    |             |                        |
|------------------------|--------------------|--------------------|-------------------|-------------------|-------------------|--------------------|-------------|------------------------|
| Codec                  | EVS SWB<br>9.6Kbps | EVS SWB<br>128Kbps | EVS WB<br>5.9Kbps | EVS WB<br>128Kbps | EVS NB<br>5.9Kbps | EVS NB<br>24.4Kbps | Orientation | Band / BW /<br>Channel |
| ABM 1<br>(dBA/m)       | 4.51               | 4.44               | 1.35              | 2.07              | 4.84              | 5.15               | Axial       | B41 / 20M /<br>40620   |
| ABM 2<br>(dBA/m)       | -28.7              | -29.41             | -30.63            | -31.01            | -30.69            | -30.77             |             |                        |
| Signal<br>Quality (dB) | 33.21              | 33.85              | 31.98             | 33.08             | 35.53             | 35.92              |             |                        |
| Freq.<br>Response      | PASS               | PASS               | PASS              | PASS              | PASS              | PASS               |             |                        |

Remark: According to codec investigation, the worst codec is NB AMR 4.75Kbps



## <Air Interface Investigation>

| Air Interface |             | BW (MHz) | Modulation | RB Size | RB offset | Channel | UL-DL Configuration | ABM1 dB (A/m) | ABM2 dB (A/m) | Signal Quality dB |
|---------------|-------------|----------|------------|---------|-----------|---------|---------------------|---------------|---------------|-------------------|
| FDD           | LTE B25     | 20       | QPSK       | 1       | 0         | 26340   |                     | 0.18          | -36.25        | 36.43             |
|               | LTE B25     | 20       | QPSK       | 50      | 0         | 26340   |                     | -0.51         | -38.20        | 37.69             |
|               | LTE B25     | 20       | QPSK       | 100     | 0         | 26340   |                     | -0.57         | -37.78        | 37.21             |
|               | LTE B25     | 20       | 16QAM      | 1       | 0         | 26340   |                     | -0.51         | -37.19        | 36.68             |
|               | LTE B25     | 20       | 64QAM      | 1       | 0         | 26340   |                     | -0.43         | -38.10        | 37.67             |
|               | LTE B25     | 15       | QPSK       | 1       | 0         | 26340   |                     | -1.20         | -37.67        | 36.47             |
|               | LTE B25     | 10       | QPSK       | 1       | 0         | 26340   |                     | -1.19         | -37.76        | 36.57             |
|               | LTE B25     | 5        | QPSK       | 1       | 0         | 26340   |                     | -0.41         | -37.33        | 36.92             |
|               | LTE B25     | 3        | QPSK       | 1       | 0         | 26340   |                     | -0.51         | -38.04        | 37.53             |
|               | LTE B25     | 1.4      | QPSK       | 1       | 0         | 26340   |                     | -1.29         | -38.96        | 37.67             |
| TDD           | LTE B41_PC2 | 20       | QPSK       | 1       | 0         | 40620   | 1                   | -2.29         | -32.80        | 30.51             |
|               | LTE B41_PC2 | 20       | QPSK       | 1       | 0         | 40620   | 2                   | -2.36         | -32.96        | 30.60             |
|               | LTE B41_PC2 | 20       | QPSK       | 1       | 0         | 40620   | 3                   | -2.38         | -33.96        | 31.58             |
|               | LTE B41_PC2 | 20       | QPSK       | 1       | 0         | 40620   | 4                   | -2.09         | -33.62        | 31.53             |
|               | LTE B41_PC2 | 20       | QPSK       | 1       | 0         | 40620   | 5                   | -2.30         | -33.65        | 31.35             |

| Plot No. | Air Interface | BW (MHz) | Modulation / Mode | RB Size | RB offset | Channel | Probe Position  | ABM1 dB (A/m) | ABM2 dB (A/m) | Signal Quality dB | T Rating | Ambient Noise dB (A/m) | Freq. Response Variation dB | Frequency Response |
|----------|---------------|----------|-------------------|---------|-----------|---------|-----------------|---------------|---------------|-------------------|----------|------------------------|-----------------------------|--------------------|
| 6        | LTE Band 12   | 10       | QPSK              | 1RB     | 0         | 23095   | Axial (Z)       | 1.35          | -37.46        | 38.81             | T4       | -54.10                 | 1.96                        | PASS               |
|          |               |          |                   |         |           |         | Transversal (Y) | -6.15         | -43.34        | 37.19             | T4       | -54.07                 |                             |                    |
| 7        | LTE Band 13   | 10       | QPSK              | 1RB     | 0         | 23230   | Axial (Z)       | 1.17          | -38.19        | 39.36             | T4       | -53.31                 | 1.95                        | PASS               |
|          |               |          |                   |         |           |         | Transversal (Y) | -6.25         | -43.22        | 36.97             | T4       | -53.14                 |                             |                    |
| 8        | LTE Band 25   | 20       | QPSK              | 1RB     | 0         | 26340   | Axial (Z)       | 2.44          | -36.69        | 39.13             | T4       | -53.04                 | 1.99                        | PASS               |
|          |               |          |                   |         |           |         | Transversal (Y) | -8.09         | -44.18        | 36.09             | T4       | -53.11                 |                             |                    |
| 9        | LTE Band 26   | 15       | QPSK              | 1RB     | 0         | 26865   | Axial (Z)       | 1.27          | -38.48        | 39.75             | T4       | -53.51                 | 1.89                        | PASS               |
|          |               |          |                   |         |           |         | Transversal (Y) | -6.20         | -42.41        | 36.21             | T4       | -53.68                 |                             |                    |
| 10       | LTE Band 66   | 20       | QPSK              | 1RB     | 0         | 132322  | Axial (Z)       | -0.32         | -37.11        | 36.79             | T4       | -53.45                 | 1.86                        | PASS               |
|          |               |          |                   |         |           |         | Transversal (Y) | -7.14         | -43.43        | 36.29             | T4       | -54.30                 |                             |                    |
| 11       | LTE Band 71   | 20       | QPSK              | 1RB     | 0         | 133297  | Axial (Z)       | -0.74         | -39.93        | 39.19             | T4       | -53.26                 | 1.95                        | PASS               |
|          |               |          |                   |         |           |         | Transversal (Y) | -9.02         | -44.64        | 35.62             | T4       | -53.93                 |                             |                    |
| 12       | LTE Band 41   | 20       | QPSK              | 1RB     | 0         | 40620   | Axial (Z)       | 1.36          | -29.10        | 30.46             | T4       | -53.50                 | 1.01                        | PASS               |
|          |               |          |                   |         |           |         | Transversal (Y) | -9.66         | -41.55        | 31.89             | T4       | -54.14                 |                             |                    |

## 10.2 VoWiFi Tests Results

### General Note:

1. Codec Investigation: For a voice service/air interface, investigate the variations of codec configurations (WB, NB bit rate) and document the parameters (ABM1, ABM2, S+N/N, frequency response) for that voice service. It is only necessary to document this for one channel/band, the following worst investigation codec would be remarked to be used for the testing for the handset.
2. Air Interface Investigation:
  - a. Use the worst-case codec test and document a limited set of bands/channel/bandwidths. Observe the effect of changing the band and bandwidth to ensure that there are no unexpected variations. Using the knowledge of the observed variations, it is necessary to report only a set band/channel/bandwidth for each orientation for a voice service/air interface and the following worst configure would be remarked to be used for the testing for the handset.
  - b. Select WLAN 2.4GHz and WLAN 5GHz one frequency band to do measurement at the worst SNR position was additionally performed with varying the BWs/Modulations/data rate to verify the variation to find out worst configuration , the observed variation is very little to be within 1 dB which is much less than the margin from the rating threshold.
  - c. According to the ANSI C63.19 2011 section 7.3.2, test middle channel of each frequency band for HAC testing for each orientation to determine worst HAC T-Coil rating.

### <Codec Investigation>

| VoWiFi AMR Codec    |                    |                    |                    |                     |             |                    |
|---------------------|--------------------|--------------------|--------------------|---------------------|-------------|--------------------|
| Codec               | NB AMR<br>4.75Kbps | WB AMR<br>6.60Kbps | NB AMR<br>12.2Kbps | WB AMR<br>23.85Kbps | Orientation | Band / Channel     |
| ABM 1 (dBA/m)       | -1.14              | 0.66               | -1.24              | 1.20                | Axial       | 2.4GHz WLAN /<br>6 |
| ABM 2 (dBA/m)       | -40.73             | -38.38             | -41.2              | -38.10              |             |                    |
| Signal Quality (dB) | 39.59              | 39.04              | 39.96              | 39.3                |             |                    |
| Freq. Response      | PASS               | PASS               | PASS               | PASS                |             |                    |

| VoWiFi EVS Codec    |                 |                 |                |                |                |                 |             |                     |
|---------------------|-----------------|-----------------|----------------|----------------|----------------|-----------------|-------------|---------------------|
| Codec               | EVS SWB 9.6Kbps | EVS SWB 128Kbps | EVS WB 5.9Kbps | EVS WB 128Kbps | EVS NB 5.9Kbps | EVS NB 24.4Kbps | Orientation | Band / BW / Channel |
| ABM 1 (dBA/m)       | 0.34            | 0.22            | -1.67          | -0.08          | -7.31          | -1.59           | Axial       | 2.4GHz WLAN / 6     |
| ABM 2 (dBA/m)       | -41.23          | -38.97          | -41.54         | -38.74         | -41.46         | -41.36          |             |                     |
| Signal Quality (dB) | 41.57           | 39.19           | 39.87          | 38.66          | 34.15          | 39.77           |             |                     |
| Freq. Response      | PASS            | PASS            | PASS           | PASS           | PASS           | PASS            |             |                     |

Remark: According to codec investigation, the worst codec is EVS NB 5.9Kbps.

**<Air Interface Investigation>**

| Frequency Bands | Modulation     | Bandwidth | Data Rate | Channel | ABM1<br>dB (A/m) | ABM2<br>dB (A/m) | Signal Quality<br>dB |
|-----------------|----------------|-----------|-----------|---------|------------------|------------------|----------------------|
| WLAN 2.4GHz     | 802.11b        | 20        | 1M        | 6       | -7.31            | -41.46           | 34.15                |
|                 | 802.11b        | 20        | 11M       | 6       | -6.23            | -40.66           | 34.43                |
|                 | 802.11g        | 20        | 6M        | 6       | -5.62            | -42.61           | 36.99                |
|                 | 802.11g        | 20        | 54M       | 6       | -6.65            | -41.71           | 35.06                |
|                 | 802.11n-HT20   | 20        | MCS0      | 6       | -5.98            | -40.47           | 34.49                |
|                 | 802.11n-HT20   | 20        | MCS7      | 6       | -5.17            | -40.58           | 35.41                |
| WLAN 5GHz       | 802.11a        | 20        | 6M        | 40      | -4.41            | -42.14           | 37.73                |
|                 | 802.11a        | 20        | 54M       | 40      | -5.04            | -41.65           | 36.61                |
|                 | 802.11an-HT20  | 20        | MCS0      | 40      | -5.17            | -42.00           | 36.83                |
|                 | 802.11an-HT20  | 20        | MCS7      | 40      | -5.62            | -43.33           | 37.71                |
|                 | 802.11an-HT40  | 40        | MCS0      | 38      | -7.61            | -41.70           | 34.09                |
|                 | 802.11an-HT40  | 40        | MCS7      | 38      | -6.81            | -42.71           | 35.90                |
|                 | 802.11ac-VHT20 | 20        | MCS0      | 40      | -4.49            | -42.41           | 37.92                |
|                 | 802.11ac-VHT20 | 20        | MCS8      | 40      | -6.45            | -43.57           | 37.12                |
|                 | 802.11ac-VHT40 | 40        | MCS0      | 38      | -7.36            | -43.49           | 36.13                |
|                 | 802.11ac-VHT40 | 40        | MCS8      | 38      | -7.07            | -43.42           | 36.35                |
|                 | 802.11ac-VHT80 | 80        | MCS0      | 42      | -7.40            | -41.86           | 34.46                |
|                 | 802.11ac-VHT80 | 80        | MCS8      | 42      | -6.10            | -41.02           | 34.92                |

| Plot No. | Air Interface | BW (MHz) | Modulation / Mode    | Channel | Probe Position  | ABM1<br>dB (A/m) | ABM2<br>dB (A/m) | Signal Quality<br>dB | T Rating | Ambient Noise<br>dB (A/m) | Freq. Response Variation<br>dB | Frequency Response |
|----------|---------------|----------|----------------------|---------|-----------------|------------------|------------------|----------------------|----------|---------------------------|--------------------------------|--------------------|
| 13       | WLAN2.4GHz    | 20       | 802.11b-1Mbps        | 6       | Axial (Z)       | -5.22            | -40.77           | 35.55                | T4       | -53.95                    | 1.61                           | Pass               |
|          |               |          |                      |         | Transversal (Y) | -17.38           | -48.83           | 31.45                | T4       | -53.55                    |                                |                    |
| 14       | WLAN5GHz      | 40       | 802.11n-HT40<br>MCS0 | 38      | Axial (Z)       | -5.59            | -43.34           | 37.75                | T4       | -53.25                    | 1.38                           | Pass               |
|          |               |          |                      |         | Transversal (Y) | -12.69           | -47.57           | 34.88                | T4       | -53.36                    |                                |                    |
| 15       | WLAN5GHz      | 40       | 802.11n-HT40<br>MCS0 | 54      | Axial (Z)       | -6.53            | -42.36           | 35.83                | T4       | -53.38                    | 1.35                           | Pass               |
|          |               |          |                      |         | Transversal (Y) | -12.19           | -47.98           | 35.79                | T4       | -53.41                    |                                |                    |
| 16       | WLAN5GHz      | 40       | 802.11n-HT40<br>MCS0 | 110     | Axial (Z)       | -1.21            | -44.00           | 42.79                | T4       | -53.39                    | 1.47                           | Pass               |
|          |               |          |                      |         | Transversal (Y) | -12.20           | -49.94           | 37.74                | T4       | -53.35                    |                                |                    |
| 17       | WLAN5GHz      | 40       | 802.11n-HT40<br>MCS0 | 159     | Axial (Z)       | -6.66            | -43.85           | 37.19                | T4       | -53.29                    | 1.07                           | Pass               |
|          |               |          |                      |         | Transversal (Y) | -12.04           | -46.27           | 34.23                | T4       | -53.25                    |                                |                    |

**Remark:**

1. Phone Condition: Mute on; Backlight off; Max Volume
2. The detail frequency response results please refer to appendix A.

**Test Engineer : Hank Huang, Kevin Xu, David Dai, Bin He**

## 11. Uncertainty Assessment

The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance. The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances. Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is showed in Table 8.2. The judgment of conformity in the report is based on the measurement results excluding the measurement uncertainty.

| Error Description                | Uncertainty Value (±%) | Probability | Divisor | (Ci) ABM1 | (Ci) ABM2 | Standard Uncertainty (ABM1) (±%) | Standard Uncertainty (ABM2) (±%) |
|----------------------------------|------------------------|-------------|---------|-----------|-----------|----------------------------------|----------------------------------|
| <b>Probe Sensitivity</b>         |                        |             |         |           |           |                                  |                                  |
| Reference Level                  | 3.0                    | N           | 1       | 1         | 1         | 3.0                              | 3.0                              |
| AMCC Geometry                    | 0.4                    | R           | 1.732   | 1         | 1         | 0.2                              | 0.2                              |
| AMCC Current                     | 1.0                    | R           | 1.732   | 1         | 1         | 0.6                              | 0.6                              |
| Probe Positioning during Calibr. | 0.1                    | R           | 1.732   | 1         | 1         | 0.1                              | 0.1                              |
| Noise Contribution               | 0.7                    | R           | 1.732   | 0.014     | 1         | 0.0                              | 0.4                              |
| Frequency Slope                  | 5.9                    | R           | 1.732   | 0.1       | 1         | 0.3                              | 3.4                              |
| <b>Probe System</b>              |                        |             |         |           |           |                                  |                                  |
| Repeatability / Drift            | 1.0                    | R           | 1.732   | 1         | 1         | 0.6                              | 0.6                              |
| Linearity / Dynamic Range        | 0.6                    | R           | 1.732   | 1         | 1         | 0.3                              | 0.3                              |
| Acoustic Noise                   | 1.0                    | R           | 1.732   | 0.1       | 1         | 0.1                              | 0.6                              |
| Probe Angle                      | 2.3                    | R           | 1.732   | 1         | 1         | 1.3                              | 1.3                              |
| Spectral Processing              | 0.9                    | R           | 1.732   | 1         | 1         | 0.5                              | 0.5                              |
| Integration Time                 | 0.6                    | N           | 1       | 1         | 5         | 0.6                              | 3.0                              |
| Field Distribution               | 0.2                    | R           | 1.732   | 1         | 1         | 0.1                              | 0.1                              |
| <b>Test Signal</b>               |                        |             |         |           |           |                                  |                                  |
| Ref. Signal Spectral Response    | 0.6                    | R           | 1.732   | 0         | 1         | 0.0                              | 0.3                              |
| <b>Positioning</b>               |                        |             |         |           |           |                                  |                                  |
| Probe Positioning                | 1.9                    | R           | 1.732   | 1         | 1         | 1.1                              | 1.1                              |
| Phantom Thickness                | 0.9                    | R           | 1.732   | 1         | 1         | 0.5                              | 0.5                              |
| DUT Positioning                  | 1.9                    | R           | 1.732   | 1         | 1         | 1.1                              | 1.1                              |
| <b>External Contributions</b>    |                        |             |         |           |           |                                  |                                  |
| RF Interference                  | 0.0                    | R           | 1.732   | 1         | 0.3       | 0.0                              | 0.0                              |
| Test Signal Variation            | 2.0                    | R           | 1.732   | 1         | 1         | 1.2                              | 1.2                              |
| <b>Combined Std. Uncertainty</b> |                        |             |         |           |           | 4.0%                             | 6.1%                             |
| <b>Coverage Factor for 95 %</b>  |                        |             |         |           |           | K=2                              | K=2                              |
| <b>Expanded STD Uncertainty</b>  |                        |             |         |           |           | 8.1%                             | 12.2%                            |

**Table 8.2 Uncertainty Budget of audio band magnetic measurement**



## **12. References**

- [1] ANSI C63.19-2011, "American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids", 27 May 2011.
- [2] FCC KDB 285076 D01v06r04, "Equipment Authorization Guidance for Hearing Aid Compatibility", September 29, 2023
- [3] FCC KDB 285076 D02 v04, "Guidance for performing T-Coil tests for air interfaces supporting voice over IP (e.g., LTE and WiFi) to support CMRS based telephone services", Feb. 23, 2022
- [4] FCC KDB 285076 D03v01r06, "Hearing aid compatibility frequently asked questions", July 20, 2022
- [5] SPEAG DASY System Handbook

-----THE END-----



## **Appendix A.     Plots of T-Coil Measurement**

The plots are shown as follows.

**01\_HAC T-Coil\_GSM850\_Voice\_Ch189\_Z**

Communication System: UID 0, Generic GSM (0); Frequency: 836.4 MHz; Duty Cycle: 1:8.30042

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3106; ; Calibrated: 2022/12/13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)


**Ch189/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):**

Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 27.67 dB

ABM1 comp = 3.06 dBA/m


Location: 6.3, 17.1, 3.7 mm

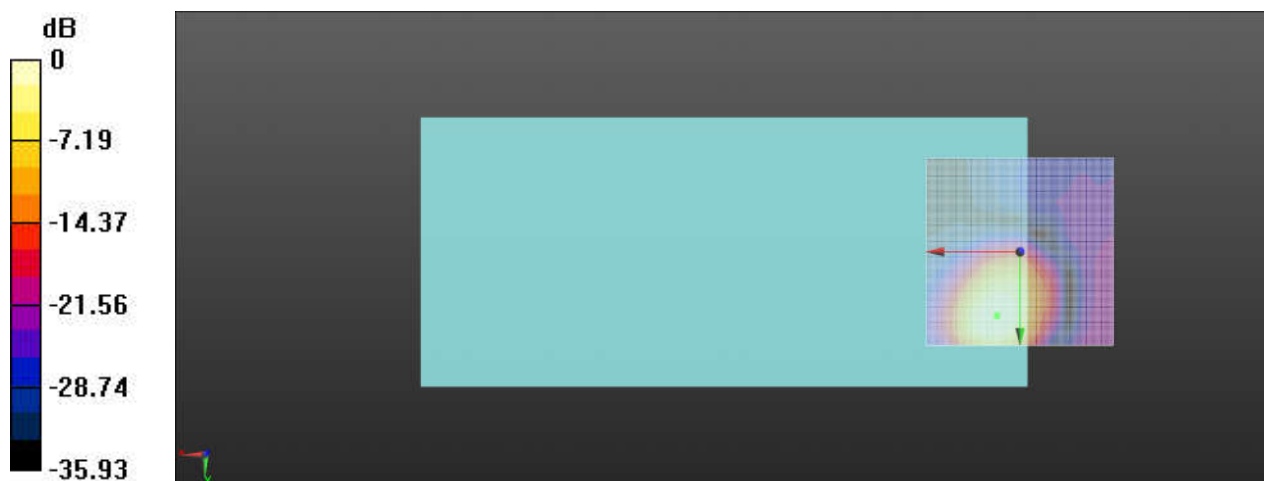

0 dB = 24.19 = 27.67 dB

# Ch189/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: 6.1, 16.9, 3.7 mm Diff: 2dB

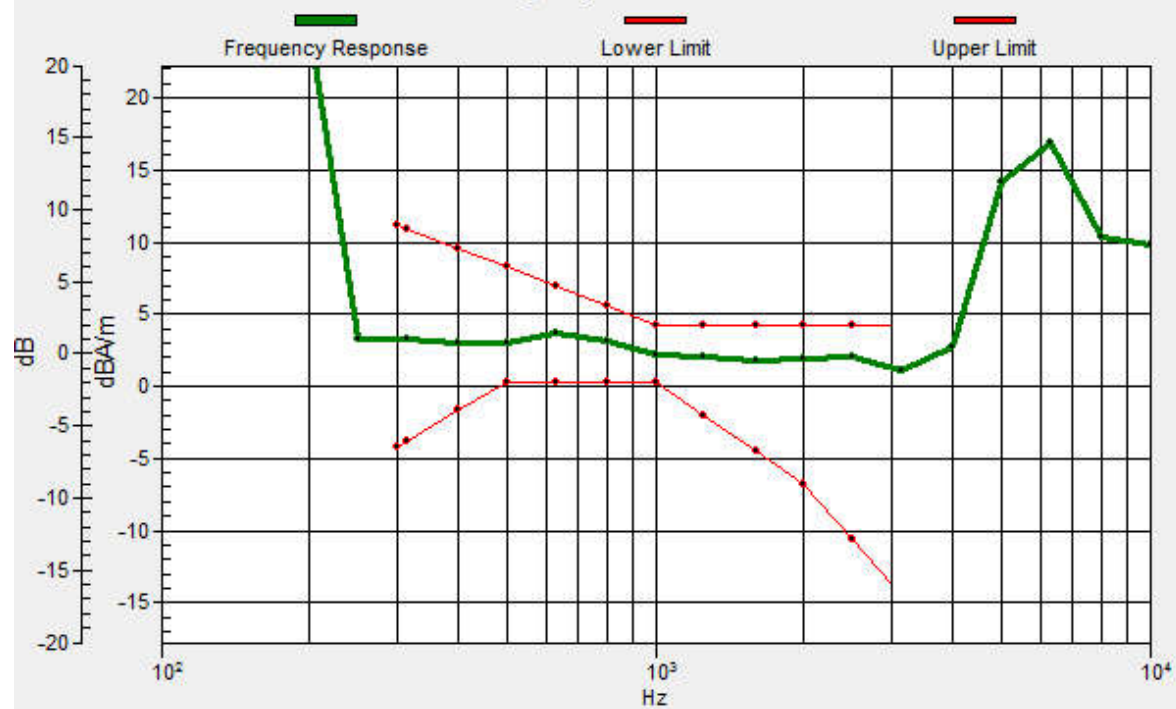

**01\_HAC T-Coil\_GSM850\_Voice\_Ch189\_Y**

Communication System: UID 0, Generic GSM (0); Frequency: 836.4 MHz; Duty Cycle: 1:8.30042

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3106; ; Calibrated: 2022/12/13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch189/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):**

Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 36.87 dB

ABM1 comp = -5.57 dBA/m

Location: 2.9, 25, 3.7 mm



## 02\_HAC T-Coil\_GSM1900\_Voice\_Ch661\_Z

Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3106; ; Calibrated: 2022/12/13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)


### Ch661/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 32.33 dB

ABM1 comp = 4.07 dBA/m


Location: 7.9, 17.1, 3.7 mm

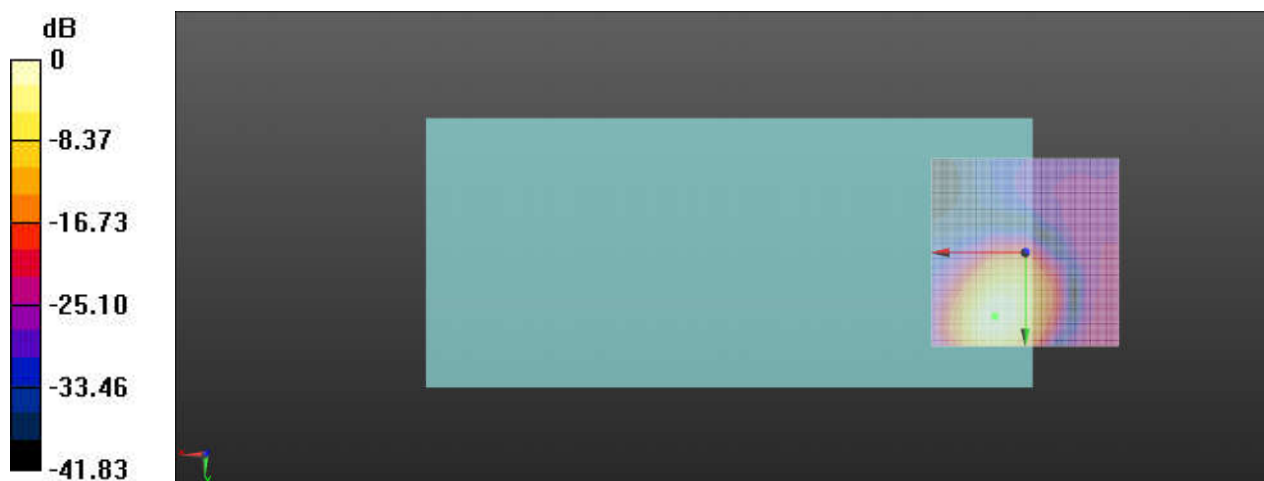

0 dB = 41.36 = 32.33 dB

# Ch661/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: 8.1, 16.9, 3.7 mm Diff: 1.88dB

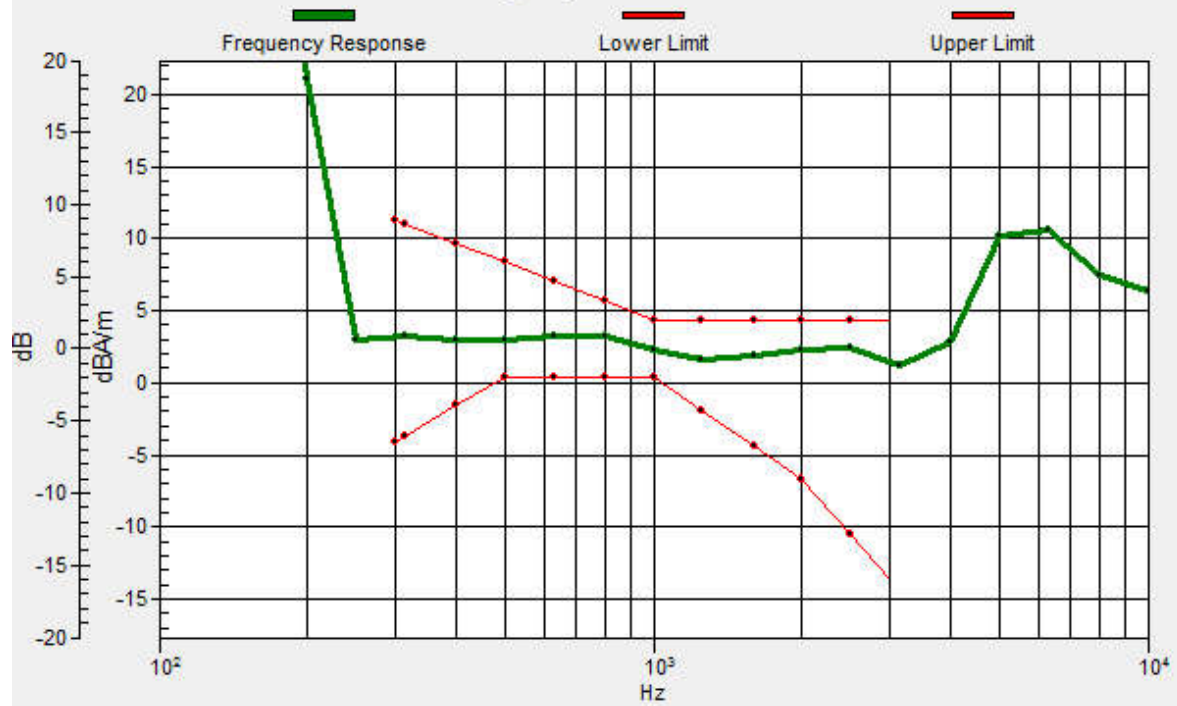

## 02\_HAC T-Coil\_GSM1900\_Voice\_Ch661\_Y

Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3106; ; Calibrated: 2022/12/13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)


### Ch661/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 39.00 dB

ABM1 comp = -5.19 dBA/m

Location: 4.6, 25, 3.7 mm

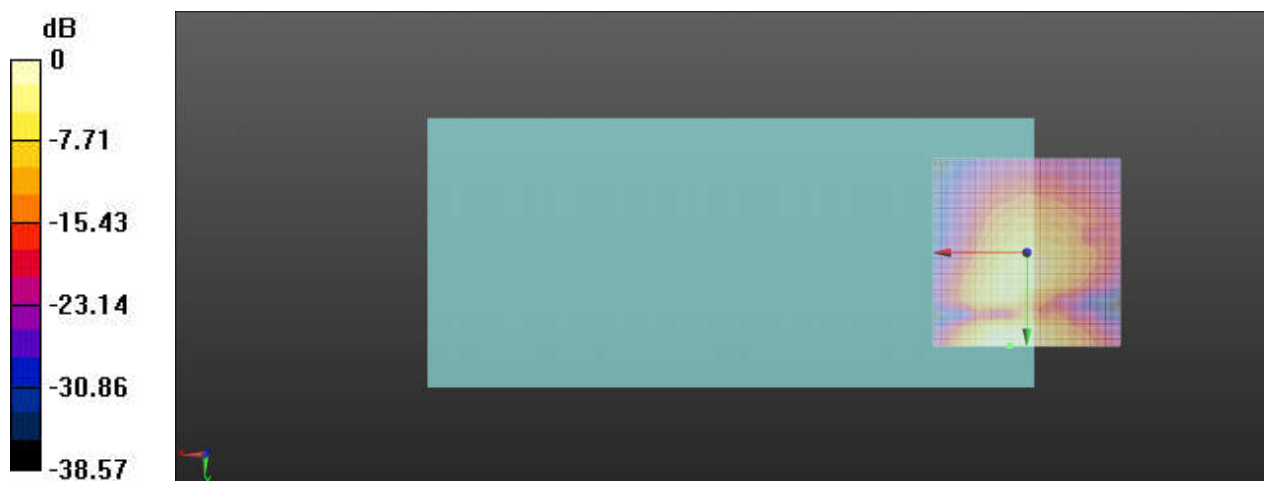

0 dB = 89.07 = 38.99 dB

**03\_HAC T-Coil\_WCDMA V\_Voice\_Ch4182\_Z**

Communication System: UID 0, UMTS (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3106; ; Calibrated: 2022/12/13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch4182/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):**

Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 42.97 dB


ABM1 comp = 2.63 dBA/m

Location: 7.9, 15.8, 3.7 mm



# Ch4182/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: 7.8, 15.8, 3.7 mm Diff: 1.68dB

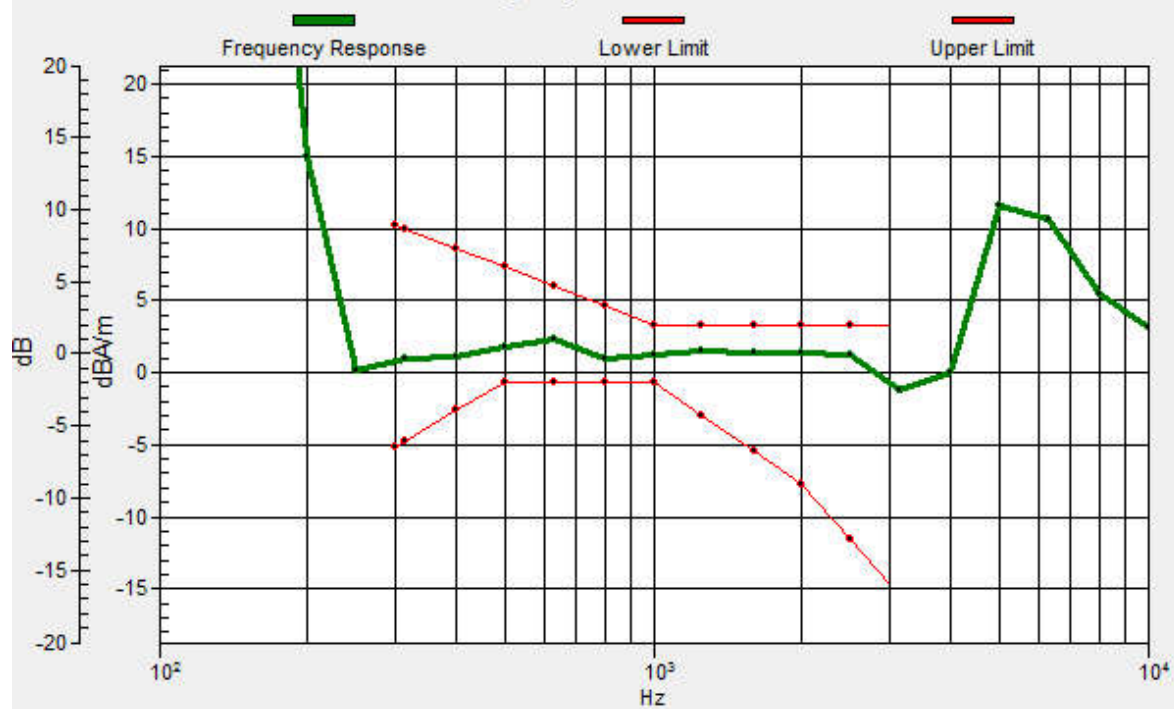

### 03\_HAC T-Coil\_WCDMA V\_Voice\_Ch4182\_Y

Communication System: UID 0, UMTS (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3106; ; Calibrated: 2022/12/13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

#### Ch4182/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 40.10 dB

ABM1 comp = -6.49 dBA/m

Location: 5, 25, 3.7 mm



## 04\_HAC T-Coil\_WCDMA IV\_Voice\_Ch1413\_Z

Communication System: UID 0, UMTS (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3106; ; Calibrated: 2022/12/13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)


### Ch1413/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 42.04 dB

ABM1 comp = 2.12 dBA/m


Location: 7.5, 15.4, 3.7 mm

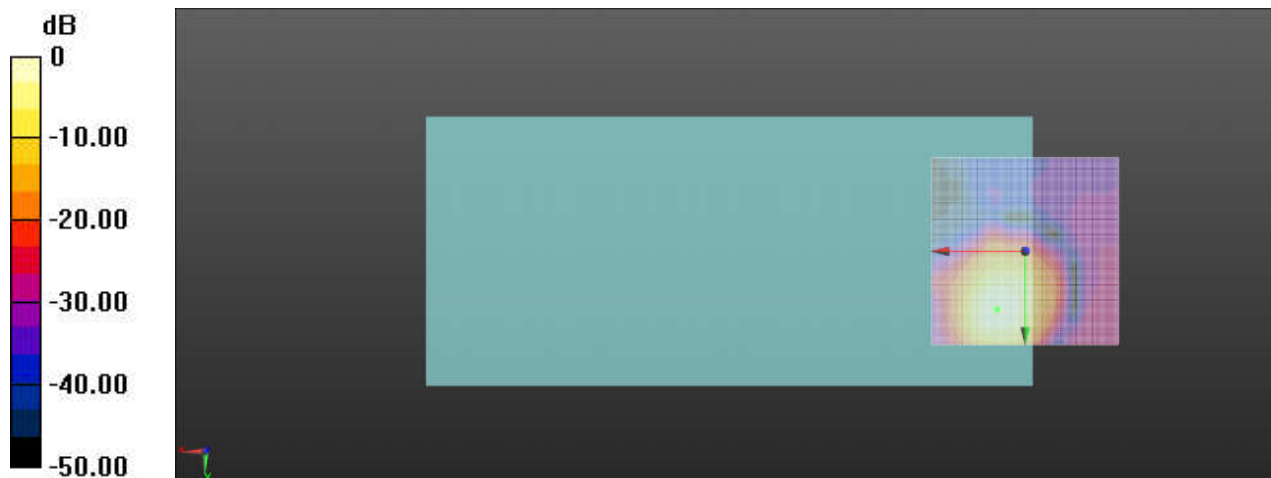

0 dB = 126.5 = 42.04 dB

# Ch1413/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: 7.5, 15.5, 3.7 mm Diff: 1.34dB

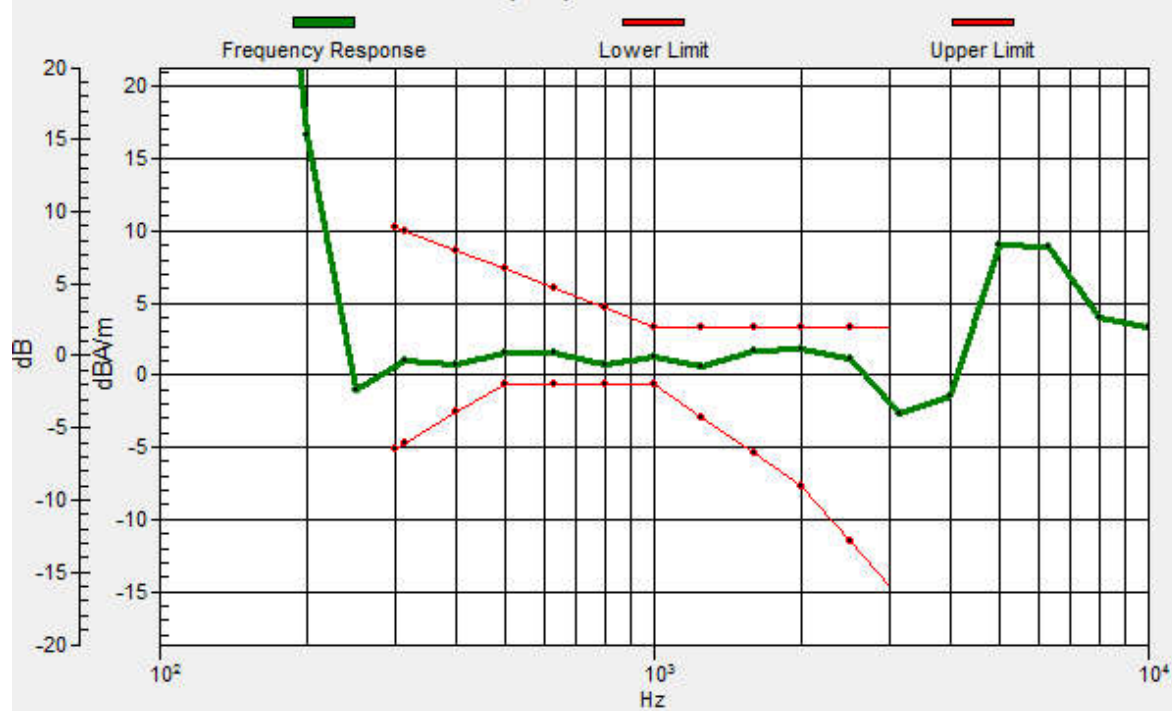

## 04\_HAC T-Coil\_WCDMA IV\_Voice\_Ch1413\_Y

Communication System: UID 0, UMTS (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3106; ; Calibrated: 2022/12/13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)


### Ch1413/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 40.28 dB

ABM1 comp = -6.45 dBA/m

Location: 4.6, 25, 3.7 mm

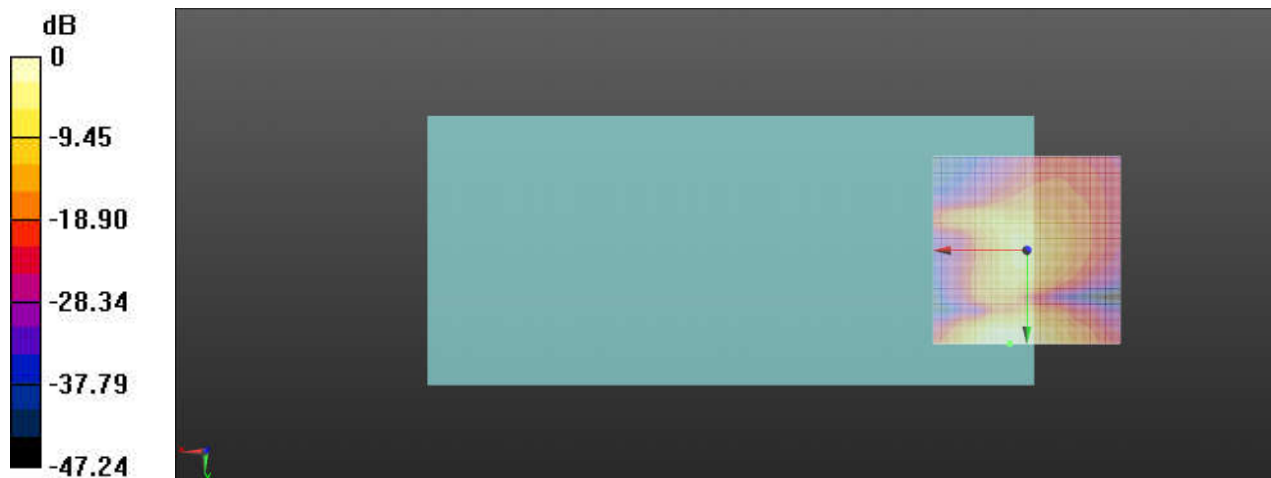

0 dB = 103.3 = 40.28 dB

**05\_HAC T-Coil\_WCDMA II\_Voice\_Ch9400\_Z**

Communication System: UID 0, UMTS (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3106; ; Calibrated: 2022/12/13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)


**Ch9400/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):**

Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 42.21 dB

ABM1 comp = 2.27 dBA/m


Location: 7.5, 15.4, 3.7 mm

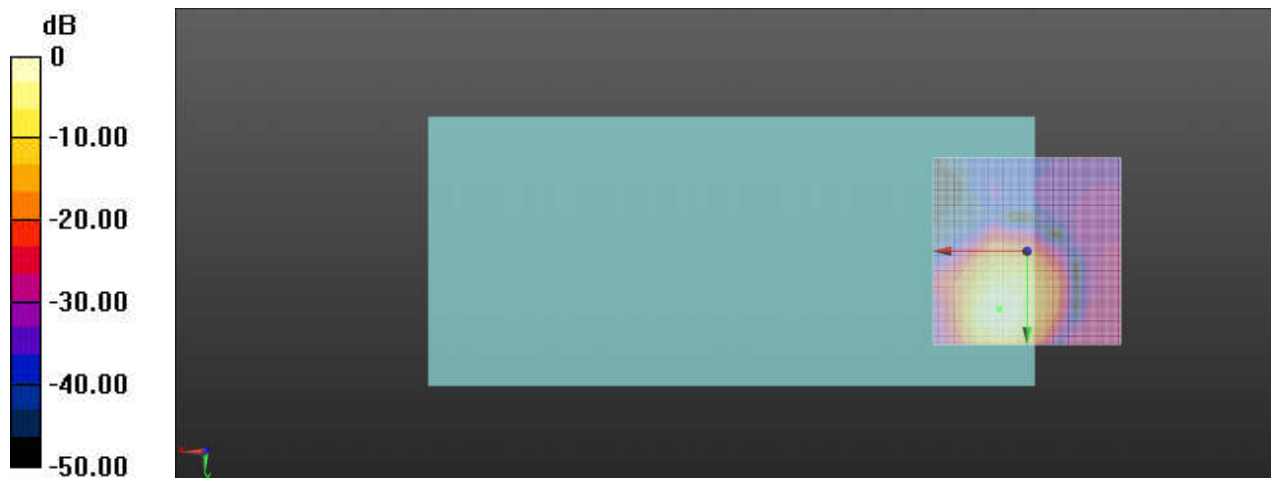

0 dB = 129.0 = 42.21 dB

# Ch9400/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: 7.4, 15.5, 3.7 mm Diff: 1.82dB

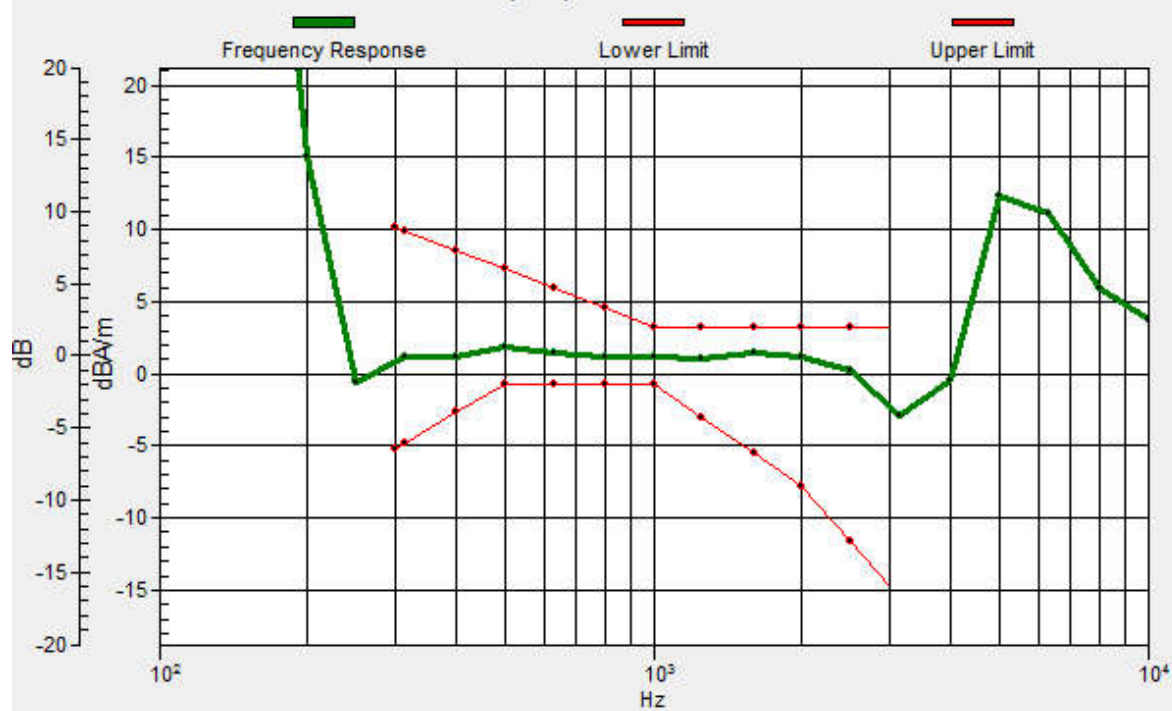

**05\_HAC T-Coil\_WCDMA II\_Voice\_Ch9400\_Y**

Communication System: UID 0, UMTS (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3106; ; Calibrated: 2022/12/13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)


**Ch9400/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):**

Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 40.27 dB

ABM1 comp = -6.03 dBA/m

Location: 5.8, 25, 3.7 mm

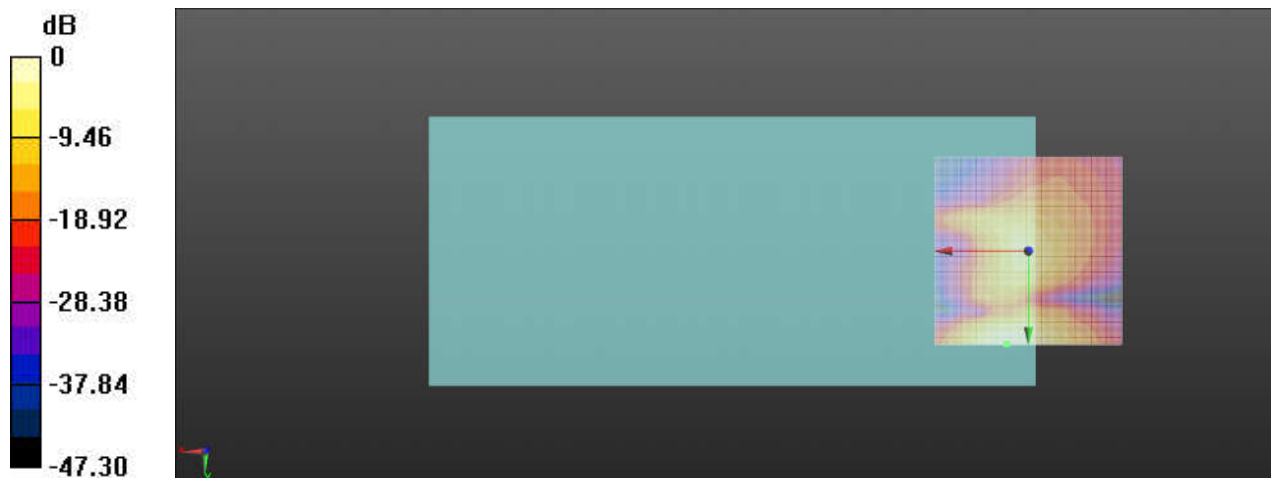

0 dB = 103.2 = 40.27 dB

**06\_HAC T-Coil\_LTE Band 12\_10M\_QPSK\_1RB\_0Offset\_Ch23095\_Z**

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3106; ; Calibrated: 2022/12/13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)


**Ch23095/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):**

Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 38.81 dB

ABM1 comp = 1.35 dBA/m


Location: 7.5, 15.4, 3.7 mm

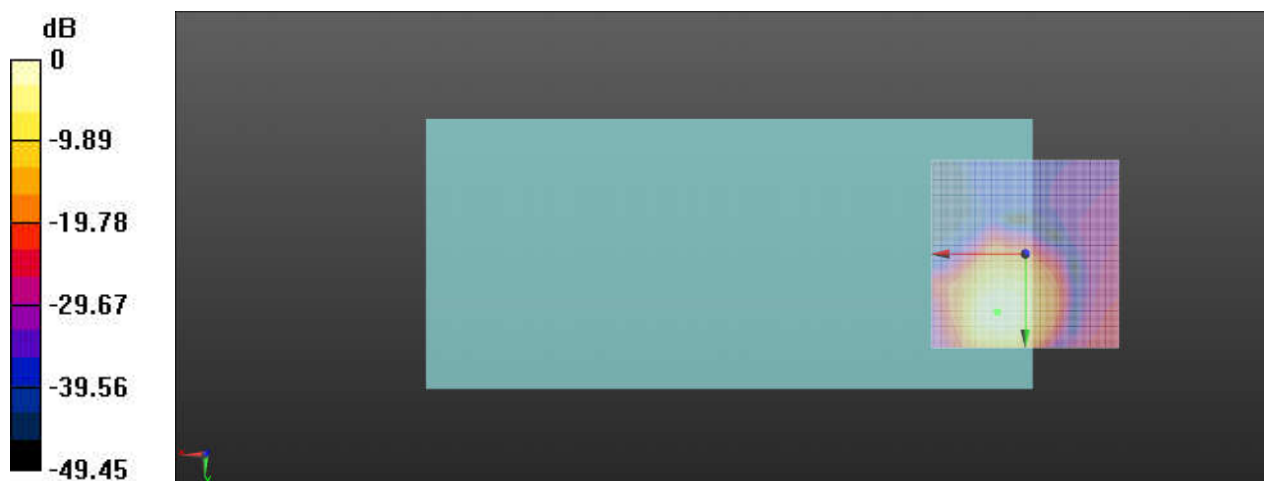

0 dB = 87.21 = 38.81 dB

# Ch23095/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: 7.3, 15.5, 3.7 mm Diff: 1.96dB

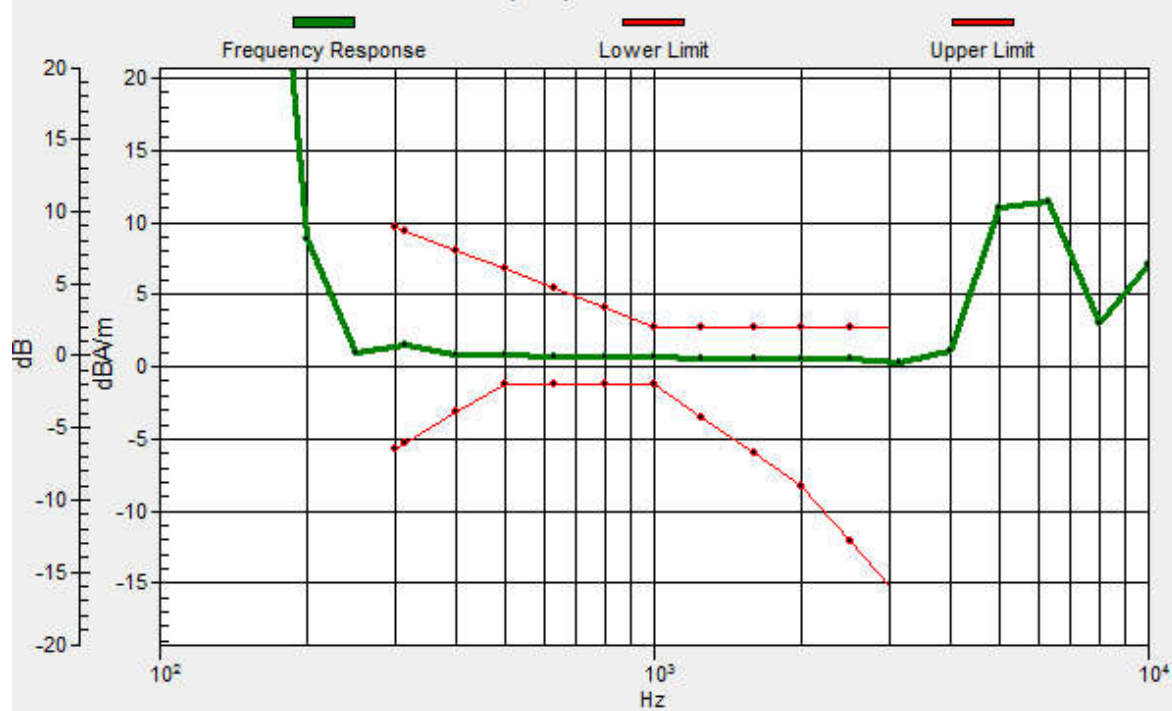

**06\_HAC T-Coil\_LTE Band 12\_10M\_QPSK\_1RB\_0Offset\_Ch23095\_Y**

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3106; ; Calibrated: 2022/12/13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)


**Ch23095/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):**

Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 37.19 dB

ABM1 comp = -6.15 dBA/m

Location: 5, 25, 3.7 mm

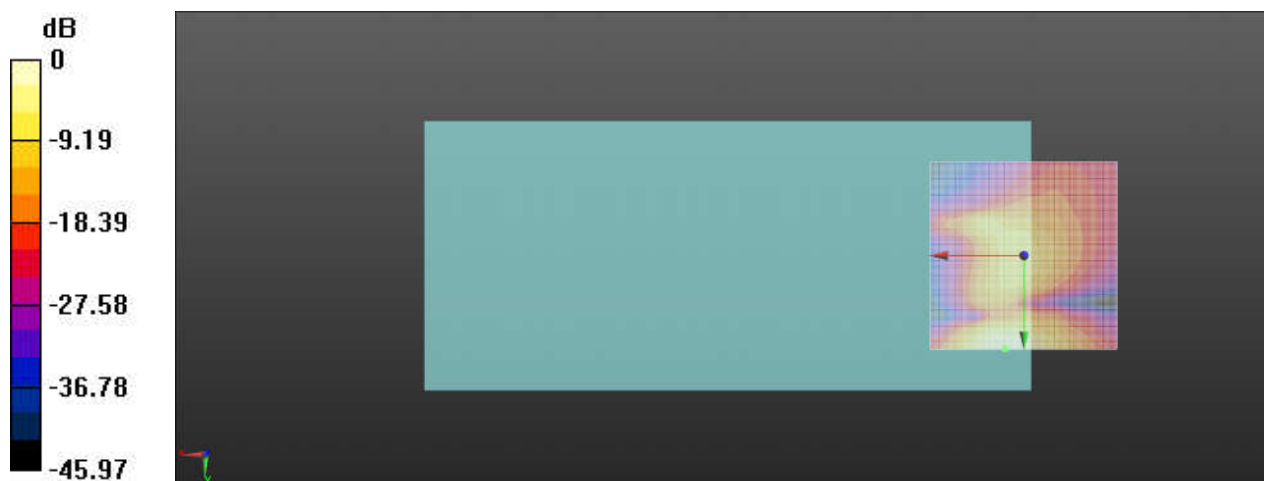

0 dB = 72.34 = 37.19 dB

**07\_HAC T-Coil\_LTE Band 13\_10M\_QPSK\_1RB\_0Offset\_Ch23230\_Z**

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3106; ; Calibrated: 2022/12/13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)


**Ch23230/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):**

Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 39.36 dB


ABM1 comp = 1.17 dBA/m

Location: 7.5, 15.4, 3.7 mm

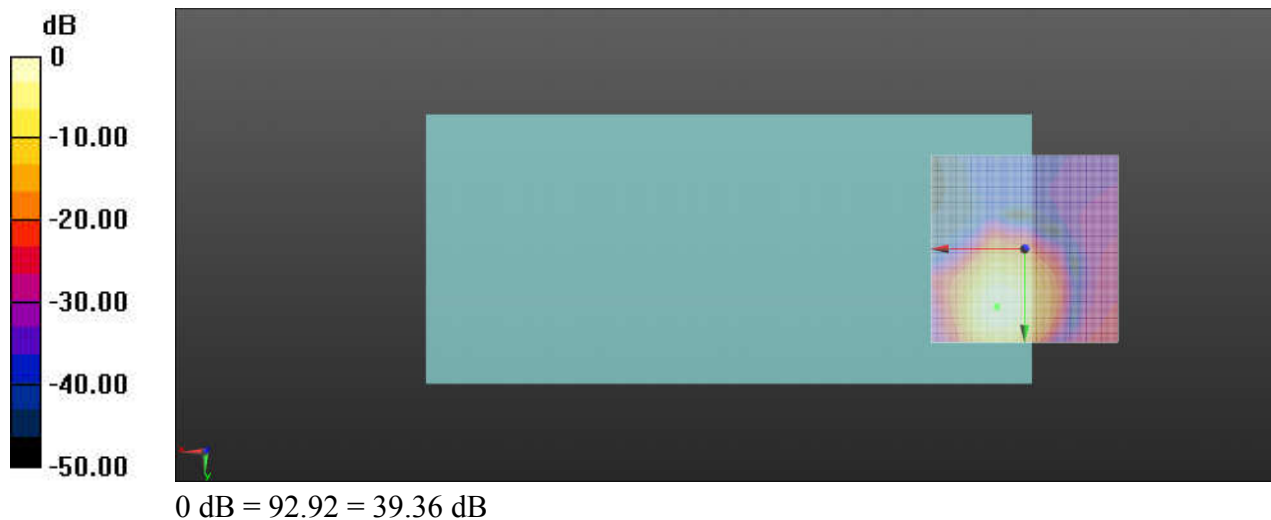

# Ch23230/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: 7.4, 15.5, 3.7 mm Diff: 1.95dB

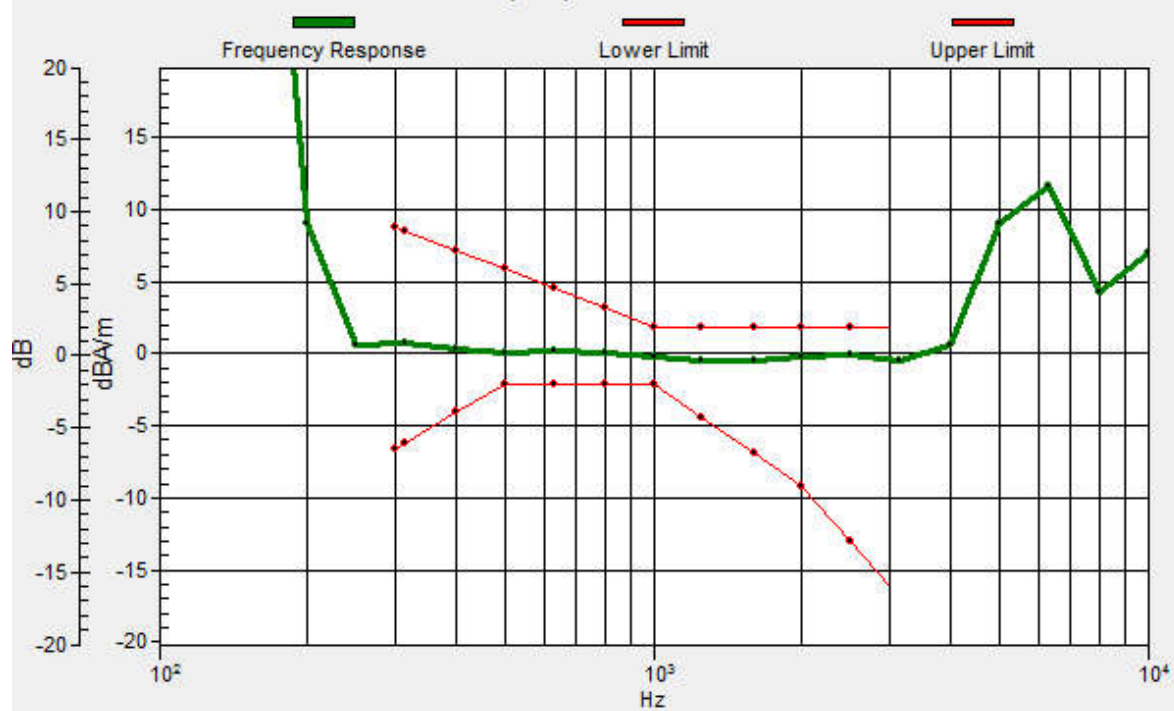

**07\_HAC T-Coil\_LTE Band 13\_10M\_QPSK\_1RB\_0Offset\_Ch23230\_Y**

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3106; ; Calibrated: 2022/12/13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch23230/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):**

Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 36.97 dB

ABM1 comp = -6.25 dBA/m

Location: 5, 25, 3.7 mm



**08\_HAC T-Coil\_LTE Band 25\_20M\_QPSK\_1RB\_0Offset\_Ch26340\_Z**

Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3106; ; Calibrated: 2022/12/13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)


**Ch26340/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):**

Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 39.13 dB

ABM1 comp = 2.44 dBA/m


Location: 7.9, 15.4, 3.7 mm

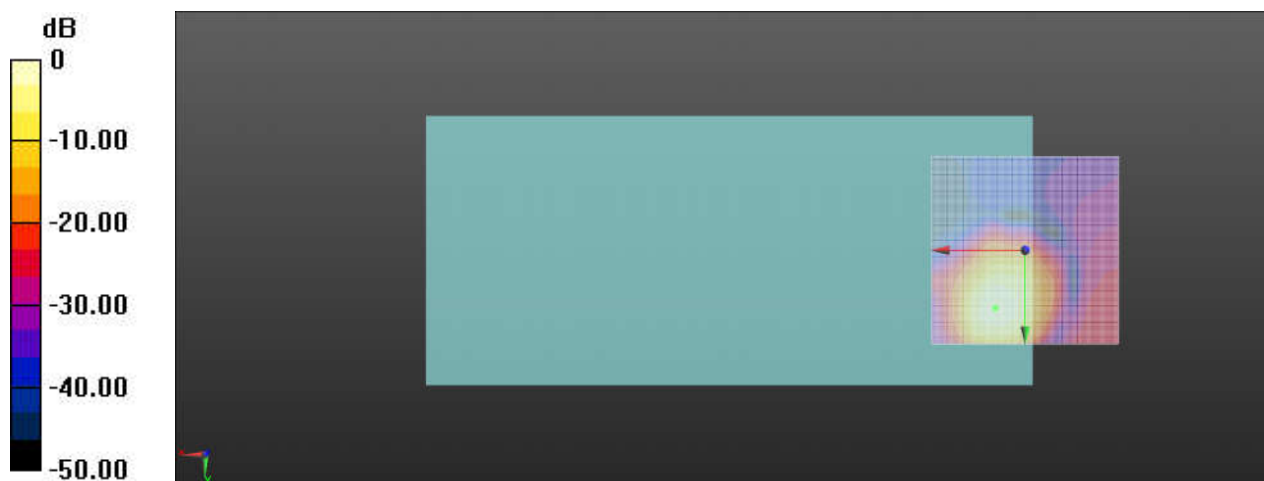

0 dB = 90.52 = 39.13 dB

# Ch26340/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: 7.9, 15.3, 3.7 mm Diff: 1.99dB

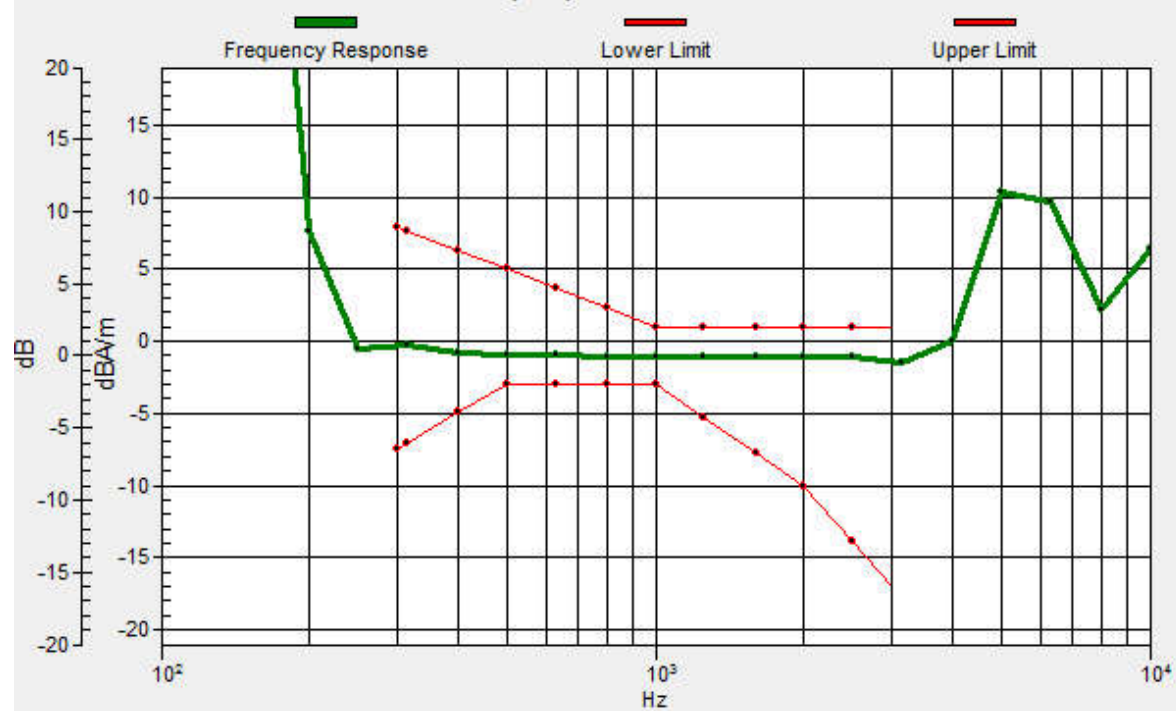

**08\_HAC T-Coil\_LTE Band 25\_20M\_QPSK\_1RB\_0Offset\_Ch26340\_Y**

Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3106; ; Calibrated: 2022/12/13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)


**Ch26340/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):**

Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 36.09 dB

ABM1 comp = -8.09 dBA/m

Location: 5, 25, 3.7 mm

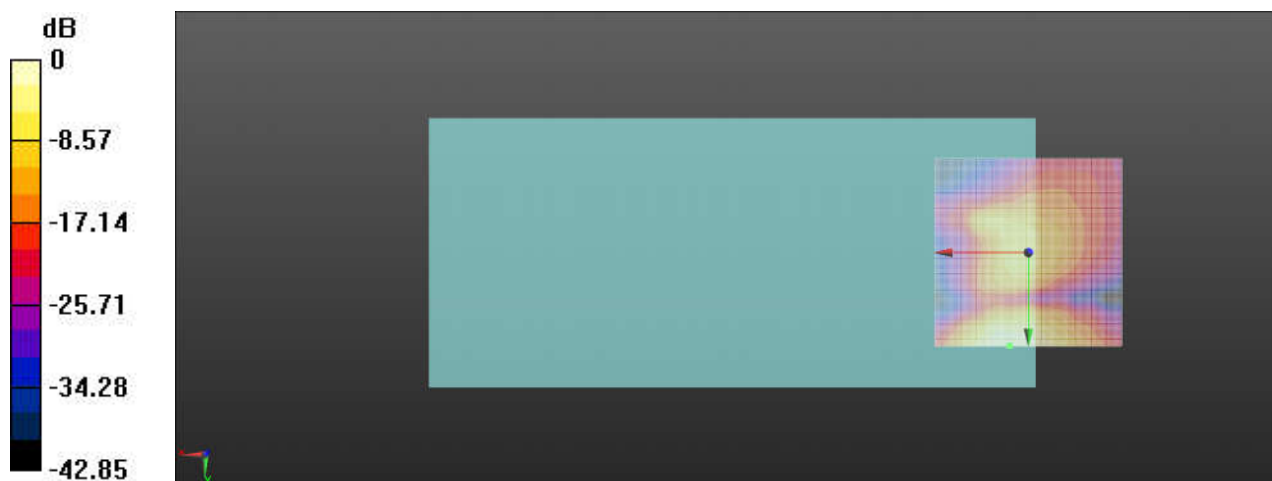

0 dB = 63.74 = 36.09 dB

**09\_HAC T-Coil\_LTE Band 26\_15M\_QPSK\_1RB\_0Offset\_Ch26865\_Z**

Communication System: UID 0, LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3106; ; Calibrated: 2022/12/13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)


**Ch26865/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):**

Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 39.75 dB

ABM1 comp = 1.27 dBA/m


Location: 7.9, 15.4, 3.7 mm

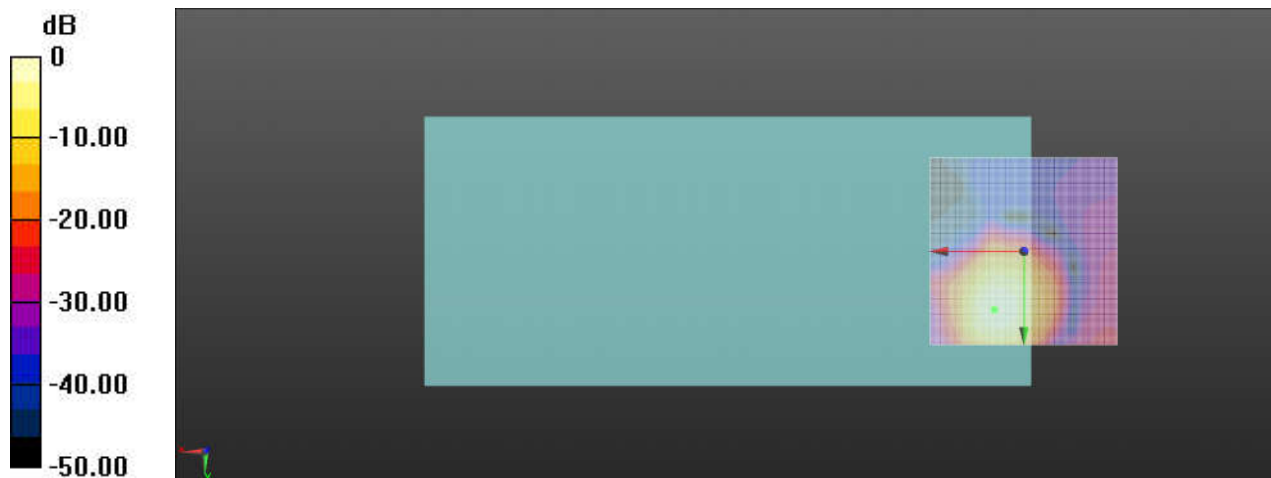

0 dB = 97.16 = 39.75 dB

# Ch26865/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: 7.7, 15.6, 3.7 mm Diff: 1.89dB

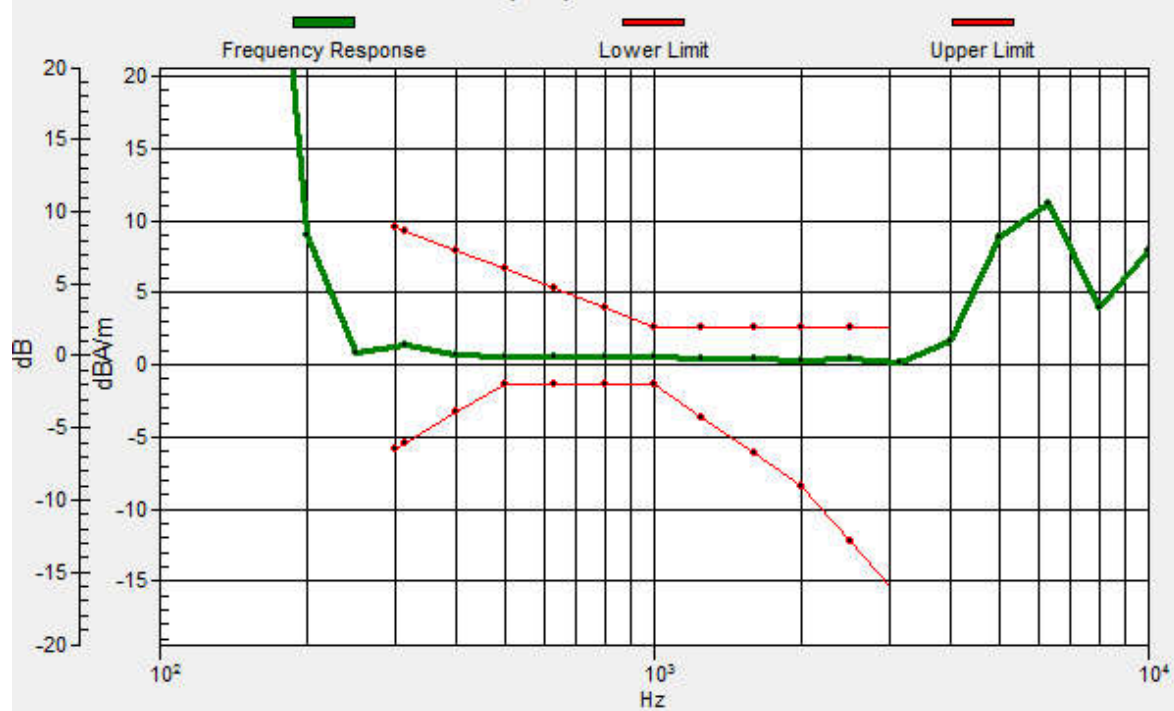

**09\_HAC T-Coil\_LTE Band 26\_15M\_QPSK\_1RB\_0Offset\_Ch26865\_Y**

Communication System: UID 0, LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3106; ; Calibrated: 2022/12/13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)


**Ch26865/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):**

Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 36.21 dB

ABM1 comp = -6.20 dBA/m

Location: 5, 25, 3.7 mm

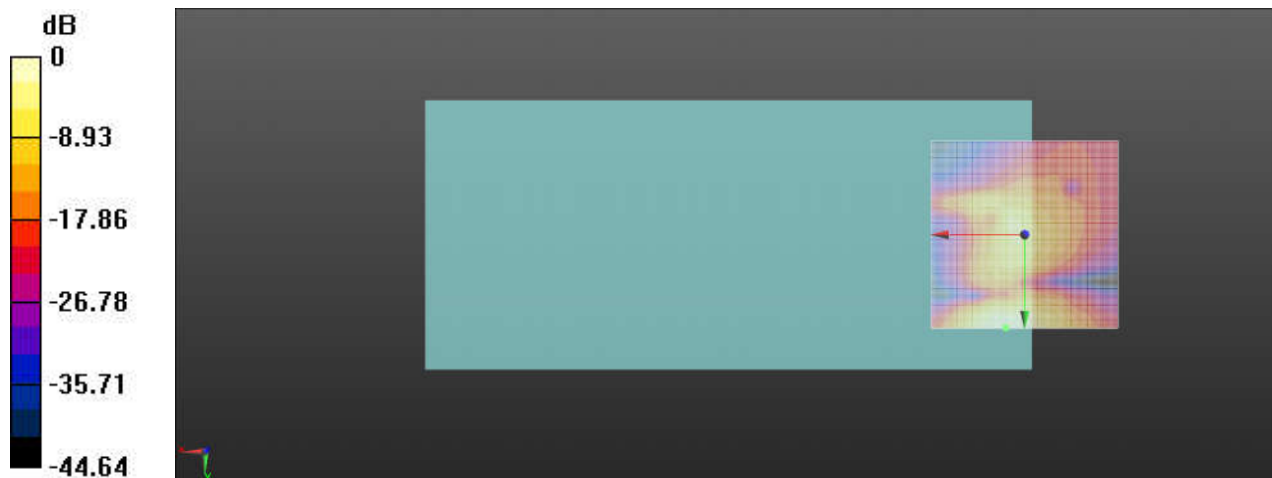

**10\_HAC T-Coil\_LTE Band 66\_20M\_QPSK\_1RB\_0Offset\_Ch132322\_Z**

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3106; ; Calibrated: 2022/12/13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)


**Ch132322/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):**

Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 36.79 dB

ABM1 comp = -0.32 dBA/m


Location: 7.9, 13.3, 3.7 mm

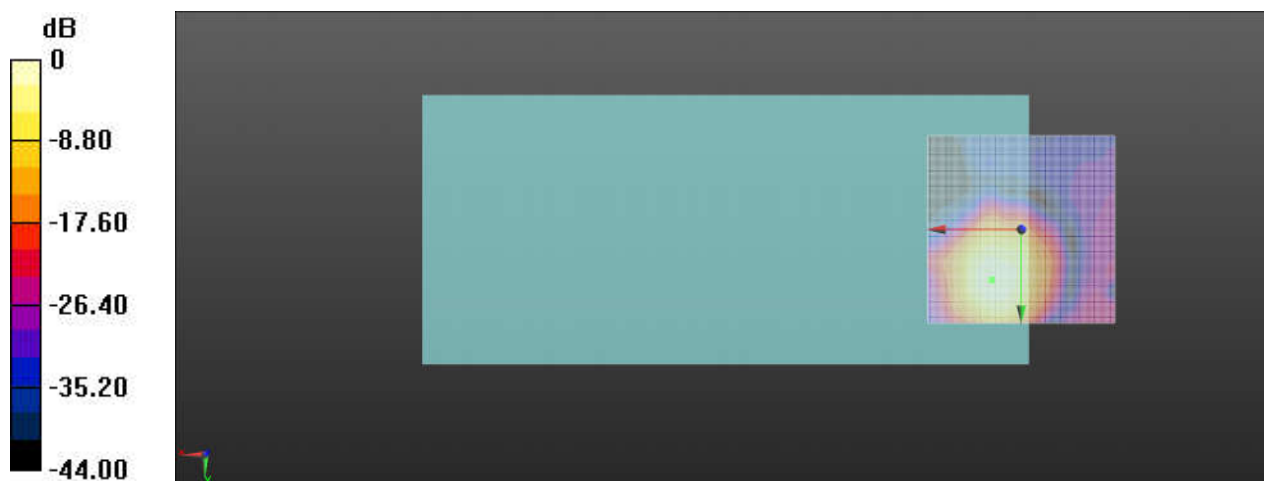

0 dB = 69.11 = 36.79 dB

# Ch132322/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)


Loc: 7.8, 13.5, 3.7 mm Diff: 1.86dB

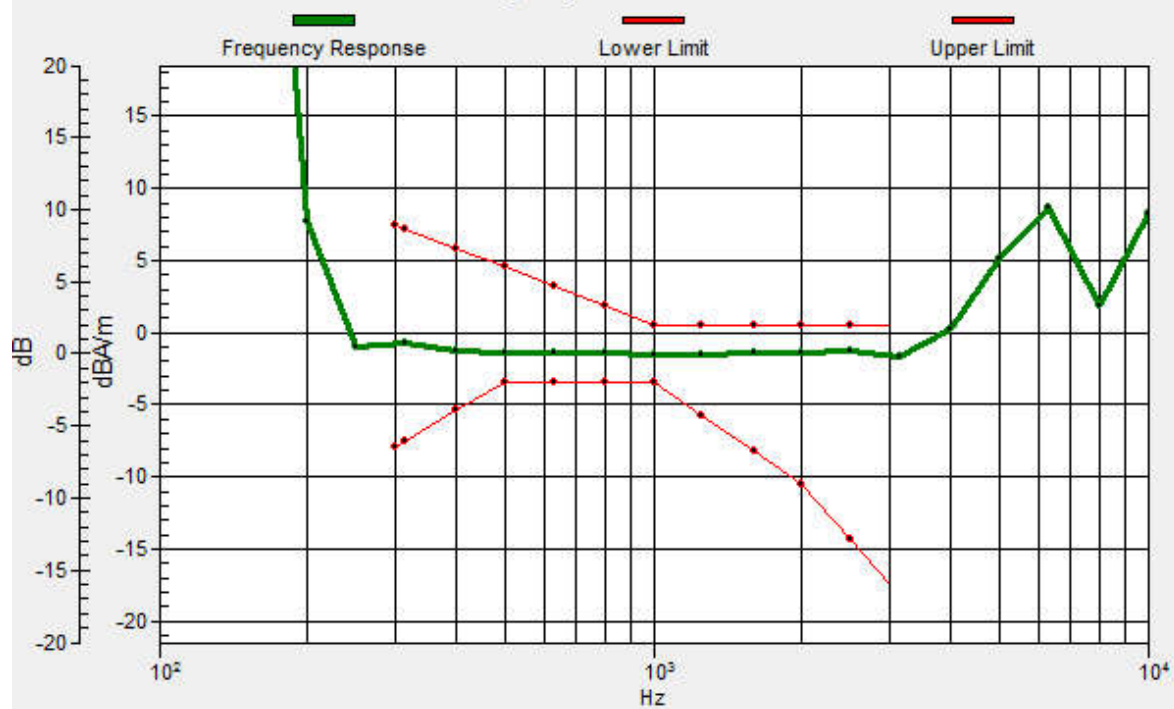

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C

- Probe: AM1DV3 - 3106; ; Calibrated: 2022/12/13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Location: 7.1, 25, 3.7 mm

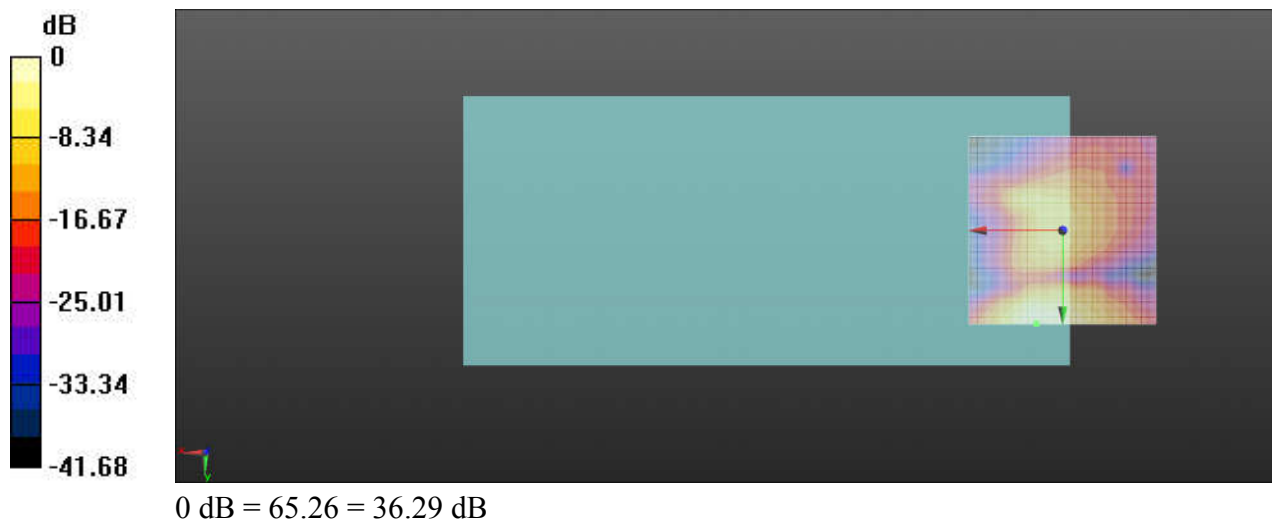

**11\_HAC T-Coil\_LTE Band 71\_20M\_QPSK\_1RB\_0Offset\_Ch133297\_Z**

Communication System: UID 0, LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3106; ; Calibrated: 2022/12/13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)


**Ch133297/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):**

Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 39.19 dB

ABM1 comp = -0.74 dBA/m


Location: 7.9, 12.9, 3.7 mm

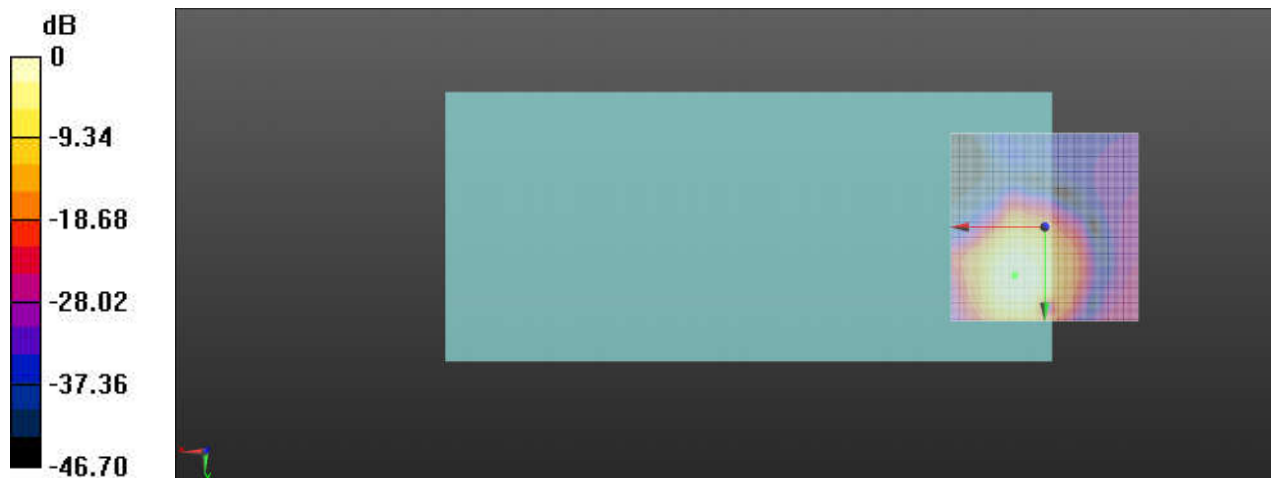

0 dB = 91.15 = 39.20 dB

# Ch133297/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: 8, 13, 3.7 mm Diff: 1.95dB

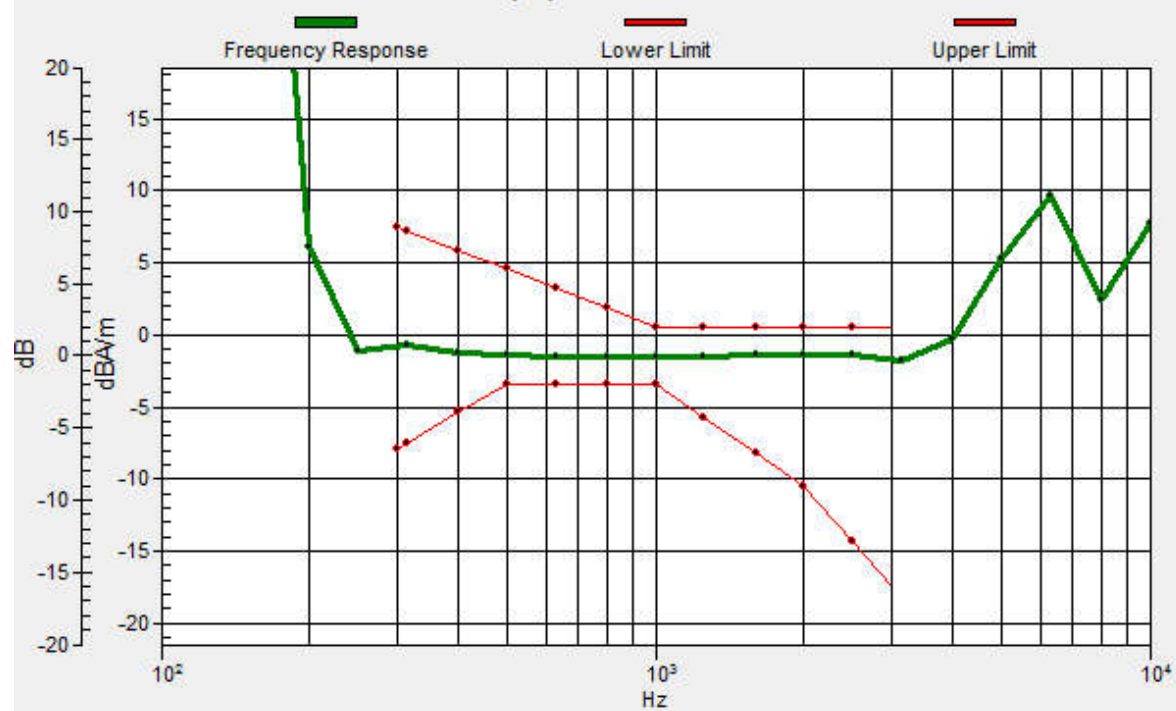

**11\_HAC T-Coil\_LTE Band 71\_20M\_QPSK\_1RB\_0Offset\_Ch133297\_Y**

Communication System: UID 0, LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3106; ; Calibrated: 2022/12/13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)


**Ch133297/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)**

**(121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 35.62 dB

ABM1 comp = -9.02 dBA/m

Location: 4.2, 25, 3.7 mm

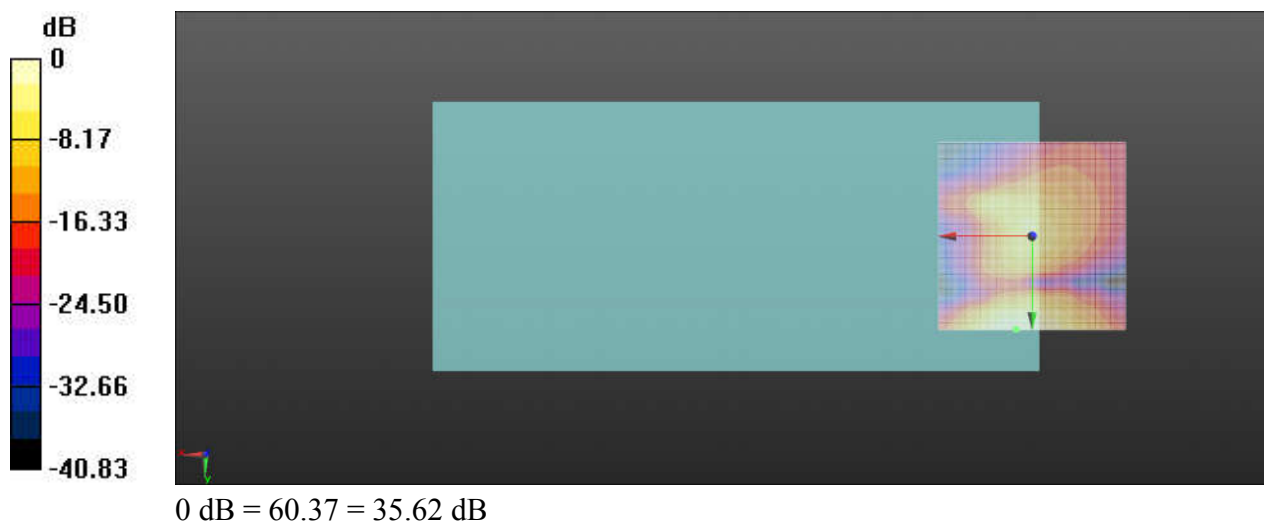

**12\_HAC T-Coil\_LTE Band 41\_20M\_QPSK\_1RB\_0Offset\_Ch40620\_Z**

Communication System: UID 0, LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:2.331

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3106; ; Calibrated: 2022/12/13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)


**Ch40620/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):**

Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 30.46 dB


ABM1 comp = 1.36 dBA/m

Location: 7.1, 15, 3.7 mm

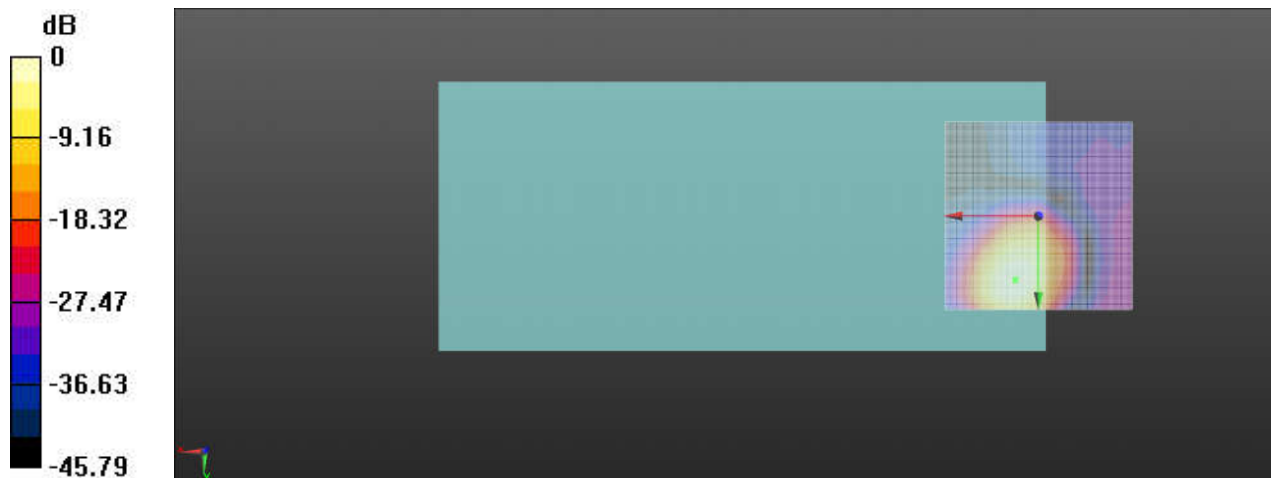

# Ch40620/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: 7.1, 15.2, 3.7 mm Diff: 1.01dB

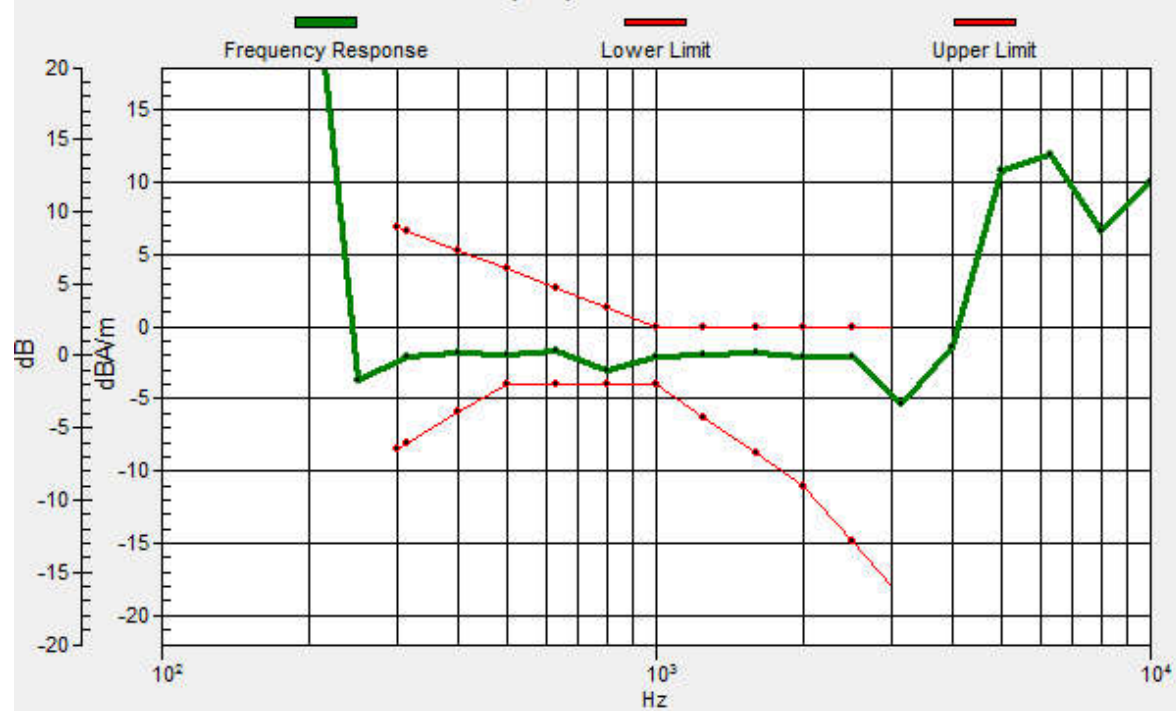

**12\_HAC T-Coil\_LTE Band 41\_20M\_QPSK\_1RB\_0Offset\_Ch40620\_Y**

Communication System: UID 0, LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:2.331

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3106; ; Calibrated: 2022/12/13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)



**Ch40620/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):**

Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 31.89 dB

ABM1 comp = -9.66 dBA/m

Location: 3.8, 25, 3.7 mm

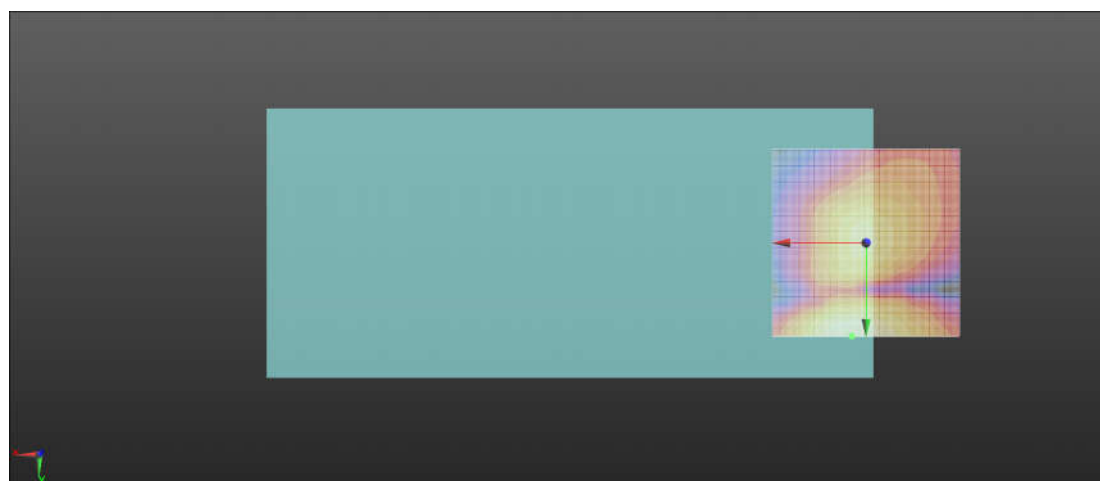

0 dB = 39.29 = 31.89 dB

**13\_HAC T-Coil\_WLAN 2.4GHz\_802.11b 1Mbps\_Ch6\_Z**

Communication System: UID 0, WIFI (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3106; ; Calibrated: 2022/12/13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)


**Ch6/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):** Interpolated

grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 35.55 dB


ABM1 comp = -5.22 dBA/m

Location: 7.9, 16.2, 3.7 mm

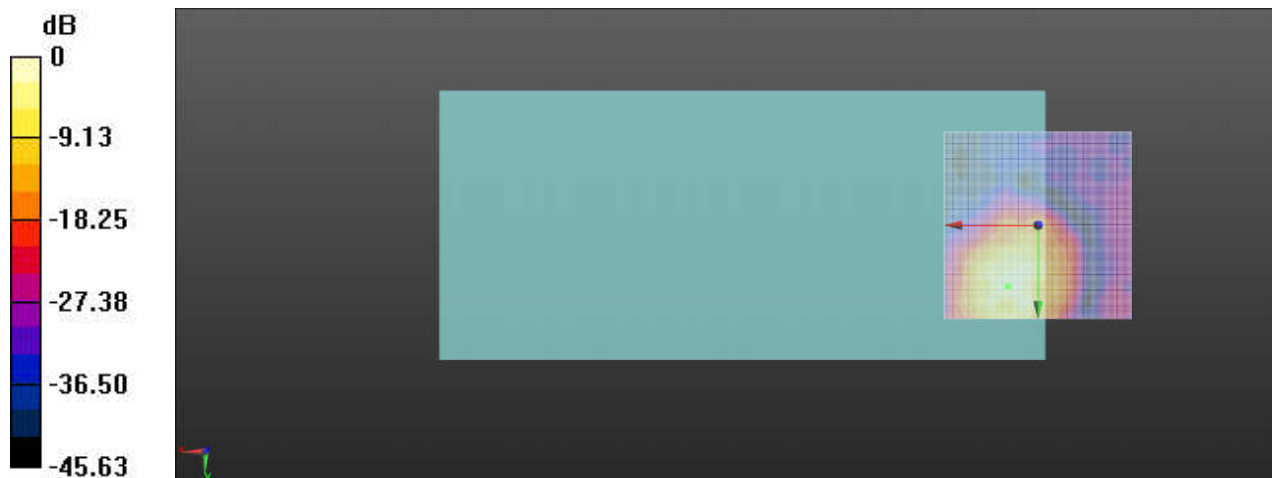

# Ch6/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: 8.2, 16.2, 3.7 mm Diff: 1.61dB

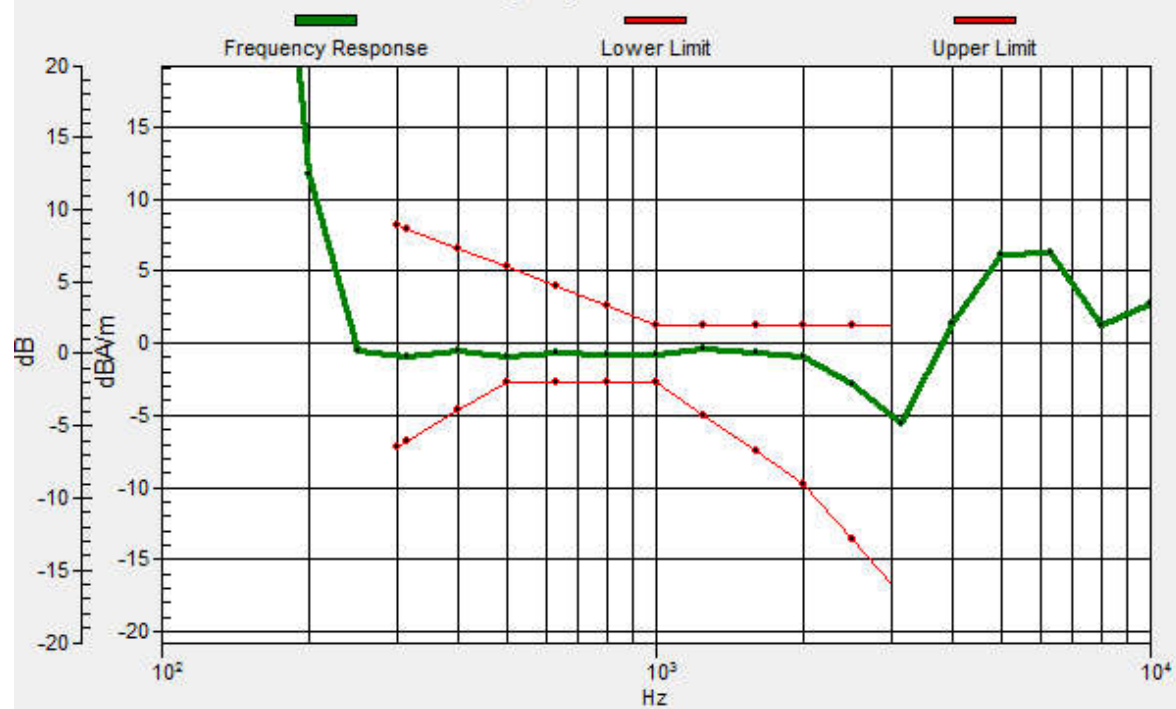

### 13\_HAC T-Coil\_WLAN 2.4GHz\_802.11b 1Mbps\_Ch6\_Y

Communication System: UID 0, WIFI (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3106; ; Calibrated: 2022/12/13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)


#### Ch6/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 31.45 dB

ABM1 comp = -17.38 dBA/m

Location: 4.6, 25, 3.7 mm

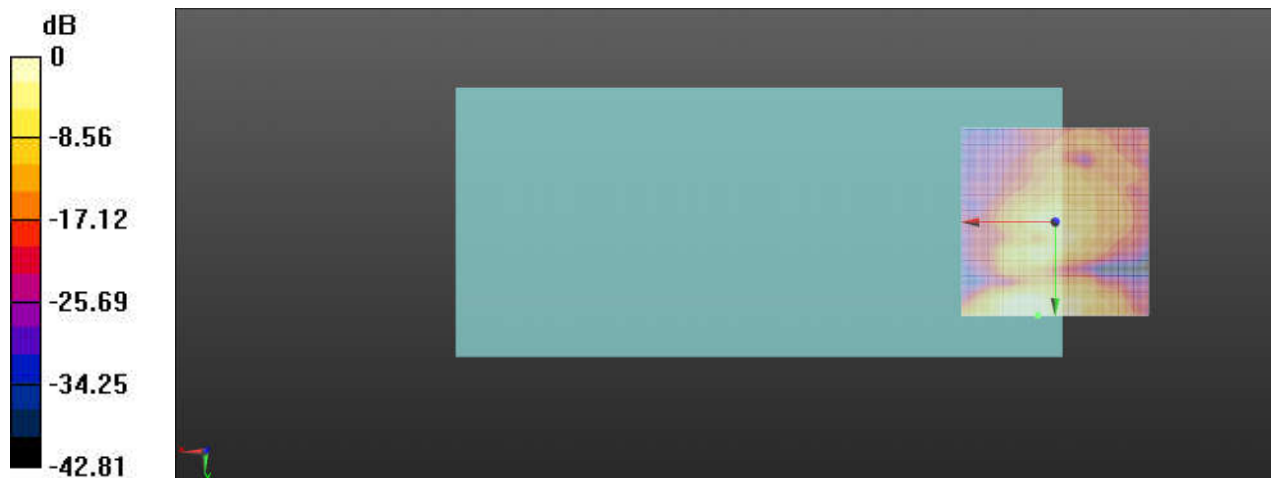

0 dB = 37.38 = 31.45 dB

**14\_HAC T-Coil\_WLAN 5GHz\_802.11n-HT40 MCS0\_Ch38\_Z**

Communication System: UID 0, WIFI (0); Frequency: 5190 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3106; ; Calibrated: 2022/12/13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)


**Ch38/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):** Interpolated

grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 37.75 dB


ABM1 comp = -5.59 dBA/m

Location: 8.3, 13.7, 3.7 mm

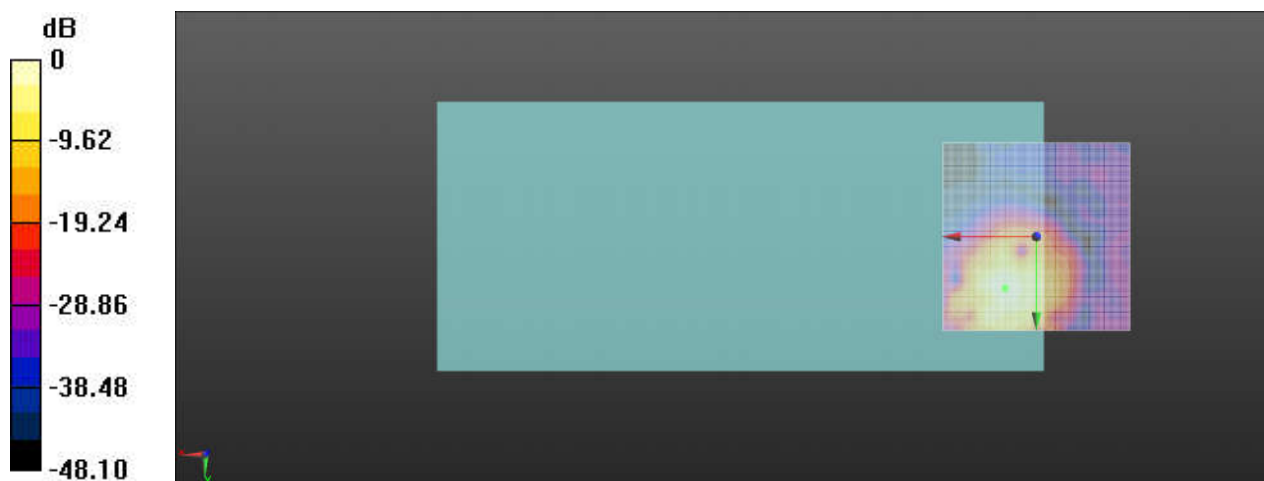

# Ch38/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: 8.3, 13.8, 3.7 mm Diff: 1.38dB

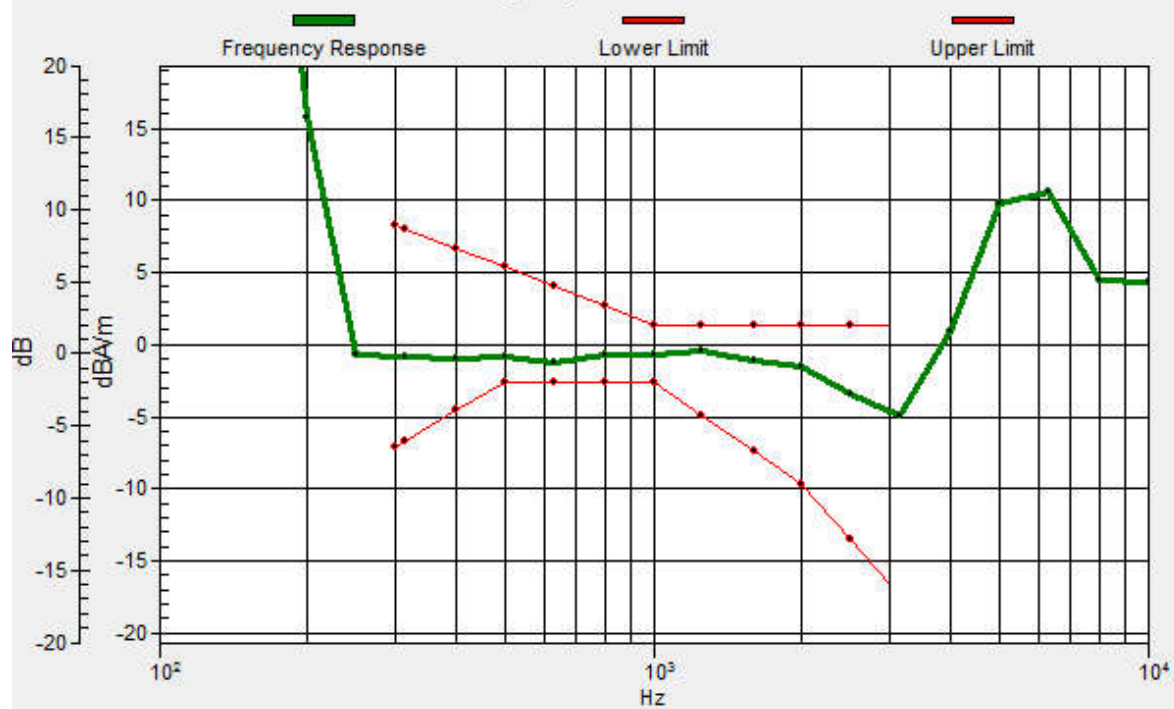

**14\_HAC T-Coil\_WLAN 5GHz\_802.11n-HT40 MCS0\_Ch38\_Y**

Communication System: UID 0, WIFI (0); Frequency: 5190 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3106; ; Calibrated: 2022/12/13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)


**Ch38/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):**

Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 34.88 dB

ABM1 comp = -12.69 dBA/m

Location: 7.9, 25, 3.7 mm

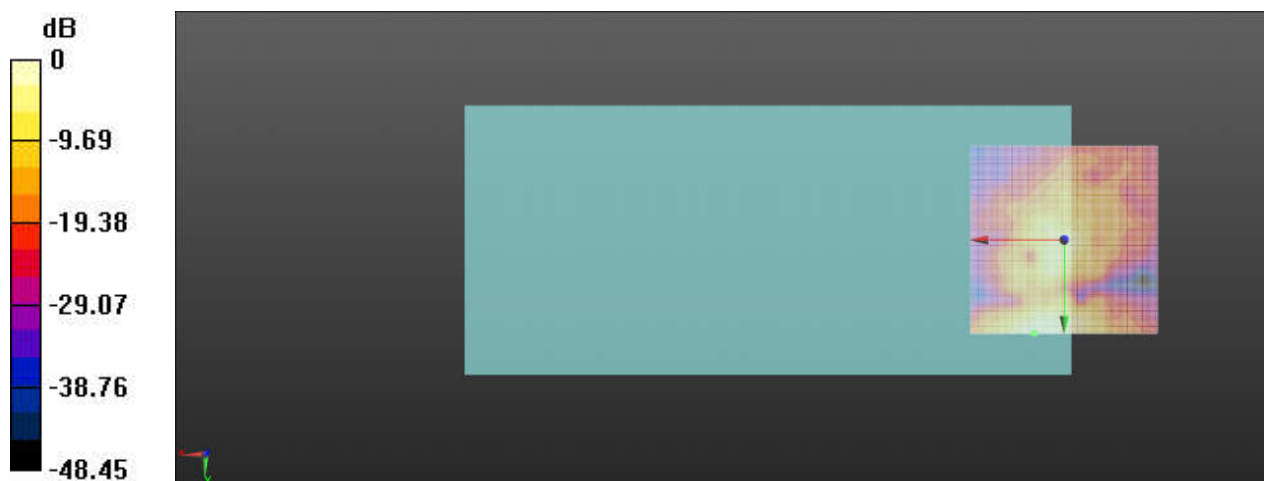

0 dB = 55.47 = 34.88 dB

**15\_HAC T-Coil\_WLAN 5GHz\_802.11n-HT40 MCS0\_Ch54\_Z**

Communication System: UID 0, WIFI (0); Frequency: 5270 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3106; ; Calibrated: 2022/12/13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)


**Ch54/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):** Interpolated

grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 35.83 dB

ABM1 comp = -6.53 dBA/m


Location: 10.4, 12.5, 3.7 mm

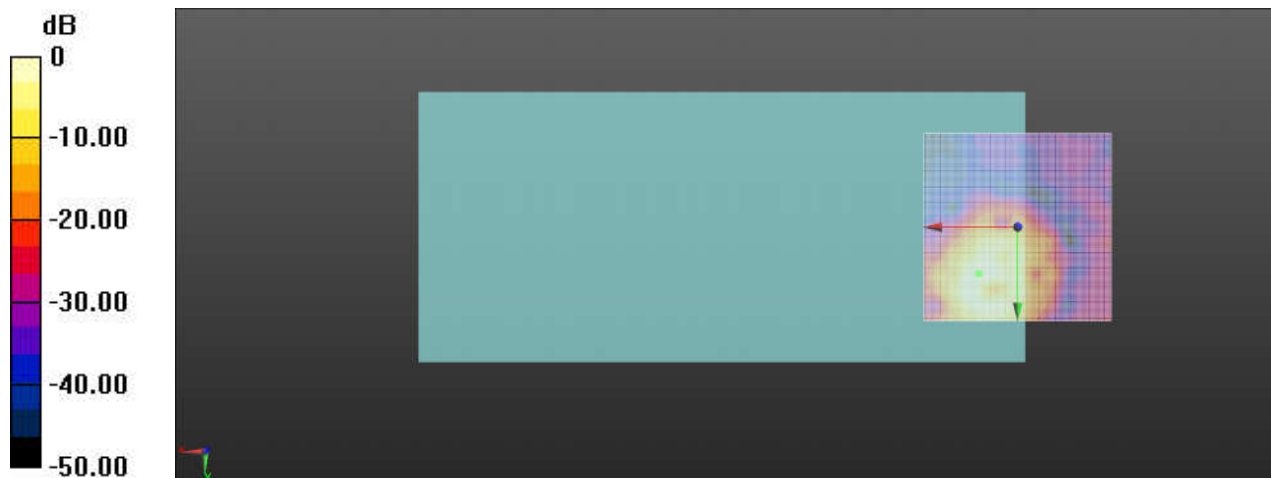

0 dB = 61.90 = 35.83 dB

# Ch54/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: 10.2, 12.4, 3.7 mm Diff: 1.35dB

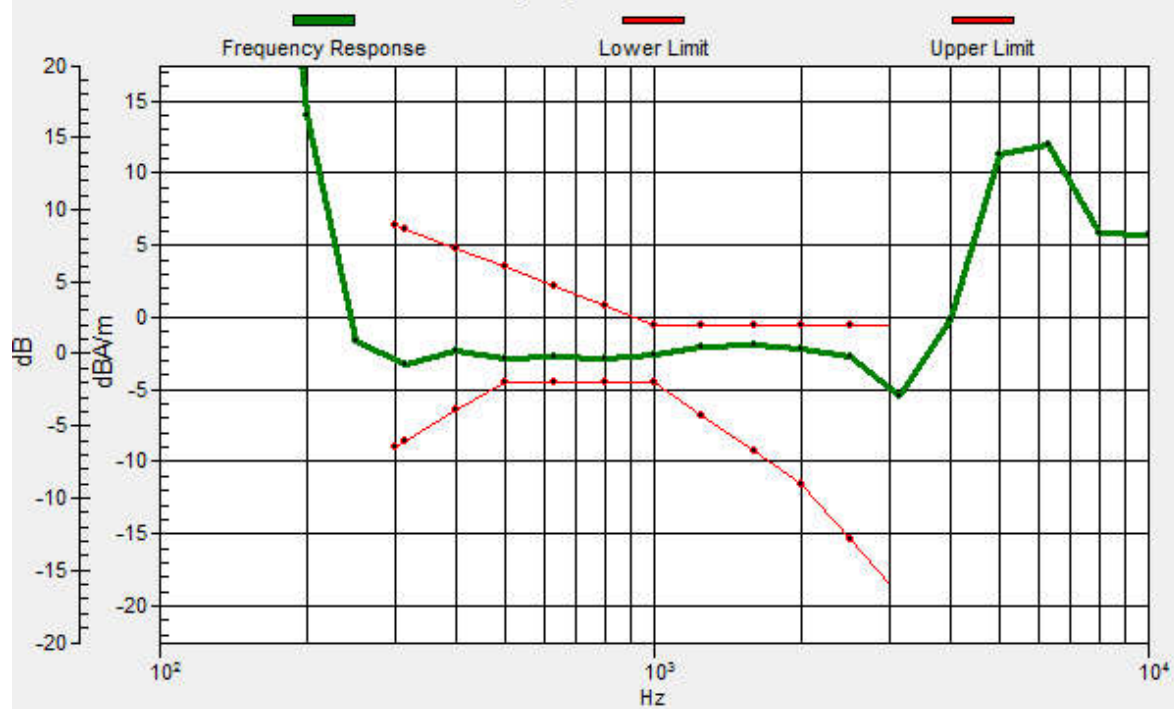

**15\_HAC T-Coil\_WLAN 5GHz\_802.11n-HT40 MCS0\_Ch54\_Y**

Communication System: UID 0, WIFI (0); Frequency: 5270 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3106; ; Calibrated: 2022/12/13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)


**Ch54/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):**

Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 35.79 dB

ABM1 comp = -12.19 dBA/m

Location: 7.1, 25, 3.7 mm

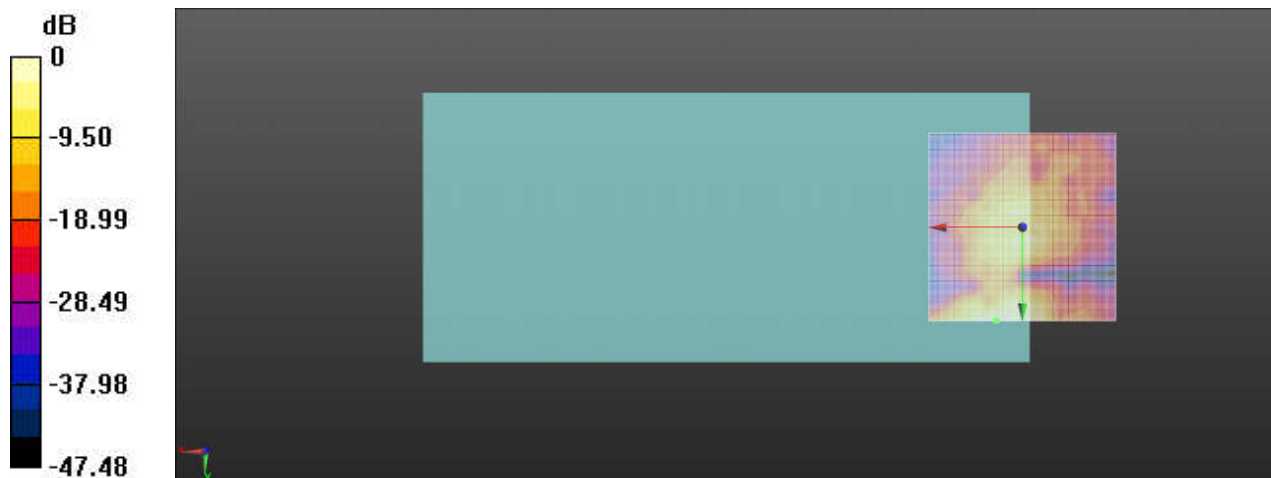

0 dB = 61.57 = 35.79 dB

**16\_HAC T-Coil\_WLAN 5GHz\_802.11n-HT40 MCS0\_Ch110\_Z**

Communication System: UID 0, WIFI (0); Frequency: 5550 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3106; ; Calibrated: 2022/12/13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)


**Ch110/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):**

Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 42.79 dB


ABM1 comp = -1.21 dBA/m

Location: 8.3, 16.7, 3.7 mm

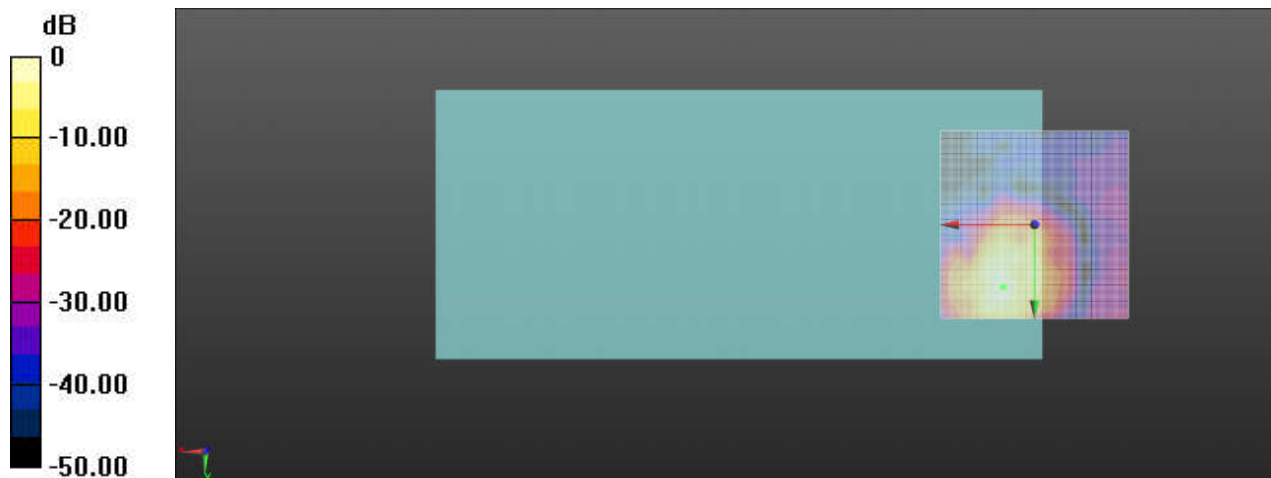

# Ch110/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: 8.4, 16.6, 3.7 mm Diff: 1.47dB

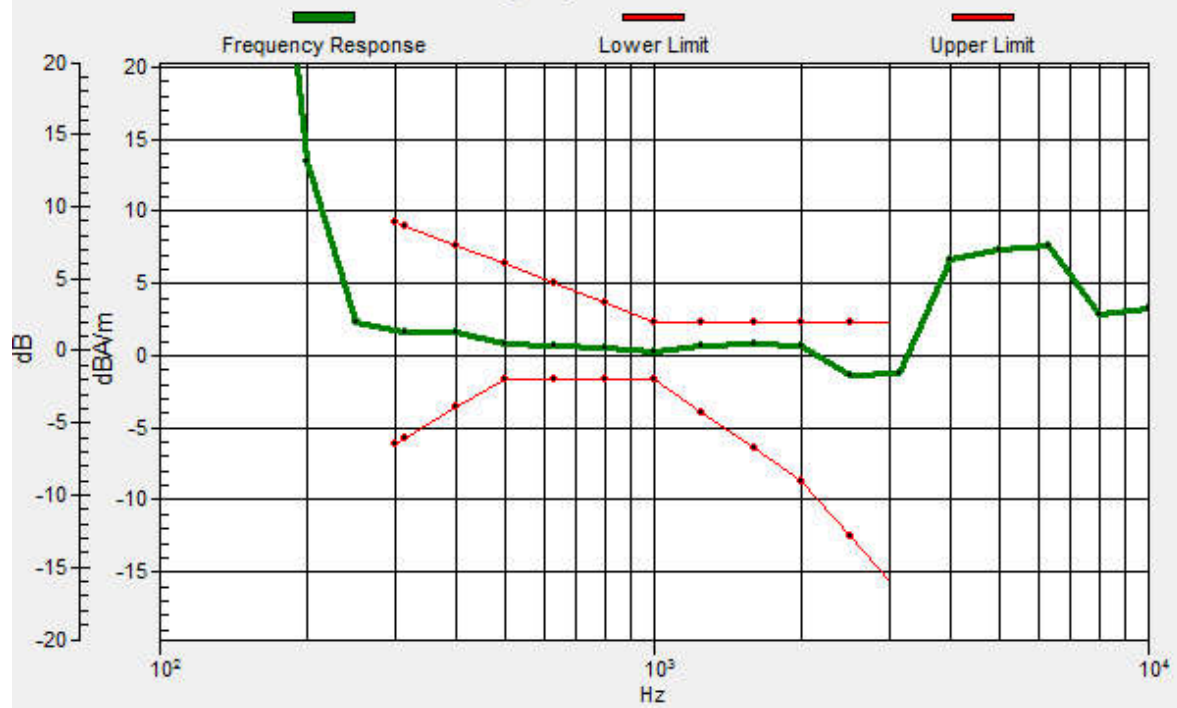

**16\_HAC T-Coil\_WLAN 5GHz\_802.11n-HT40 MCS0\_Ch110\_Y**

Communication System: UID 0, WIFI (0); Frequency: 5550 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3106; ; Calibrated: 2022/12/13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)


**Ch110/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):**

Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 37.74 dB

ABM1 comp = -12.20 dBA/m

Location: 1.3, 25, 3.7 mm

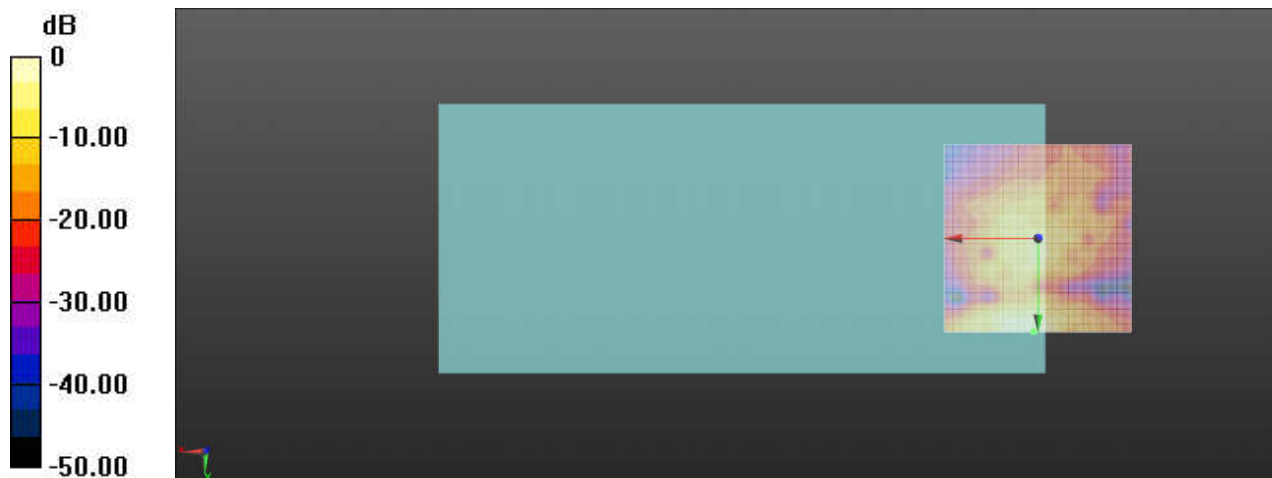

**17\_HAC T-Coil\_WLAN 5GHz\_802.11n-HT40 MCS0\_Ch159\_Z**

Communication System: UID 0, WIFI (0); Frequency: 5795 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3106; ; Calibrated: 2022/12/13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch159/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):**

Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 37.19 dB


ABM1 comp = -6.66 dBA/m

Location: 8.8, 12.5, 3.7 mm



# Ch159/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: 8.8, 12.7, 3.7 mm Diff: 1.07dB

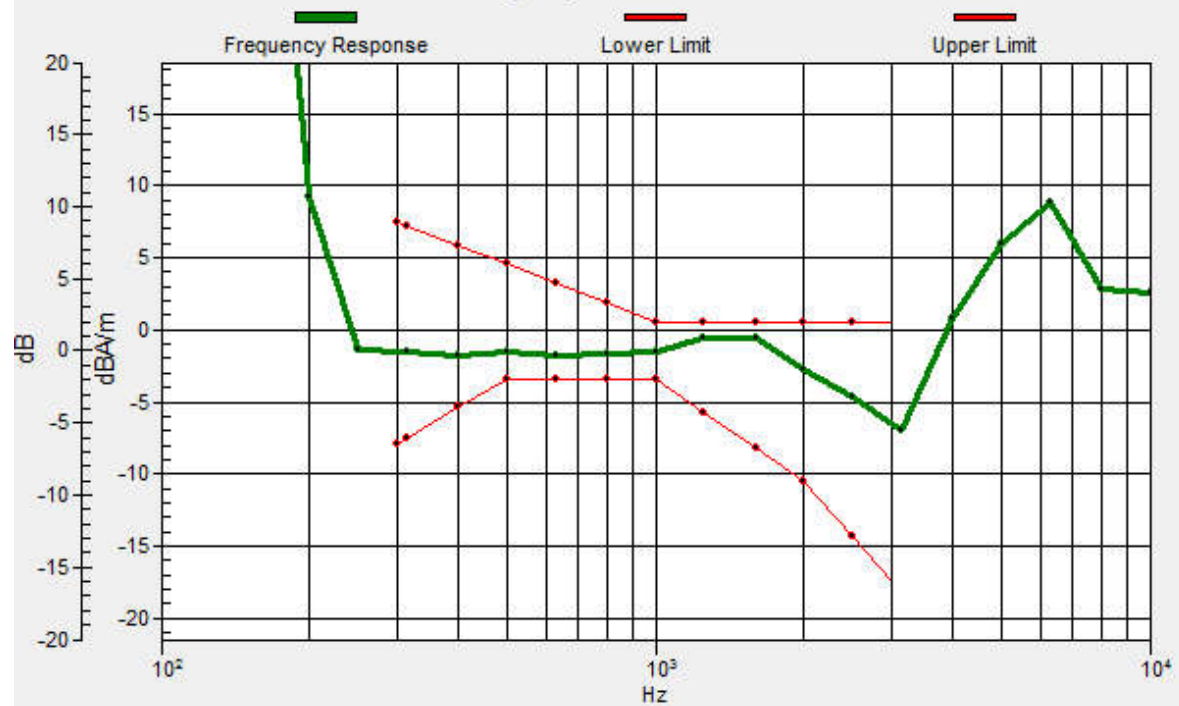

**17\_HAC T-Coil\_WLAN 5GHz\_802.11n-HT40 MCS0\_Ch159\_Y**

Communication System: UID 0, WIFI (0); Frequency: 5795 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: AM1DV3 - 3106; ; Calibrated: 2022/12/13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)


**Ch159/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):**

Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 34.23 dB

ABM1 comp = -12.04 dBA/m

Location: 11.3, 25, 3.7 mm

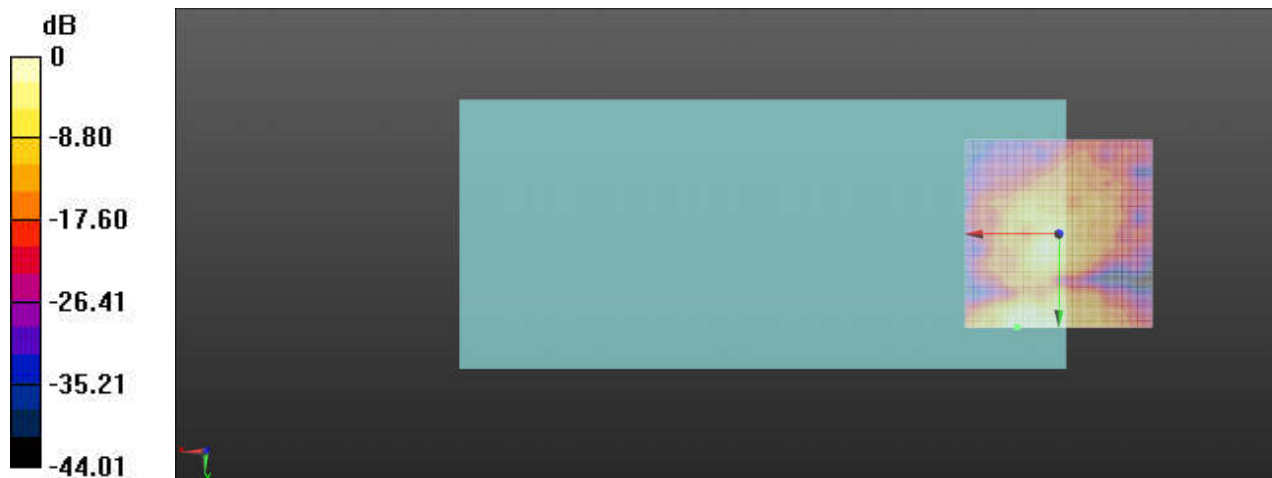

0 dB = 51.44 = 34.23 dB



## ***Appendix B. Calibration Data***

The DASY calibration certificates are shown as follows.