

Test of: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Test Report Serial No.: ATHO02-U2 Rev A



TEST REPORT

FROM



Test of: Mad Apparel Inc. - Model A100

to

To: FCC 47 CFR Part 15.247 & IC RSS-210

Test Report Serial No.: ATH002-U2 Rev A

This report supersedes: NONE

Applicant: Live Athos (MAD Apparel Inc.)
201 Arch Street
Redwood City
California 94062, USA

Product Function: Bluetooth (BLE) Health Fitness
Device

Copy No: pdf Issue Date: 14th January 2015

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.

575 Boulder Court
Pleasanton, CA 94566 USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



TESTING CERT #2381.01

MiCOM Labs is an ISO 17025 Accredited Testing Laboratory



Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 3 of 71

This page has been left intentionally blank



Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 4 of 71

TABLE OF CONTENTS

ACCREDITATION, LISTINGS & RECOGNITION	5
TESTING ACCREDITATION.....	5
RECOGNITION	6
PRODUCT CERTIFICATION	7
TEST RESULT CERTIFICATE.....	9
1. REFERENCES AND MEASUREMENT UNCERTAINTY	10
1.1. Normative References	10
1.2. Test and Uncertainty Procedures	11
2. PRODUCT DETAILS AND TEST CONFIGURATIONS.....	12
2.1. Technical Details.....	12
2.2. Scope of Test Program	13
2.3. Equipment Model(s) and Serial Number(s).....	15
2.4. Antenna Details.....	15
2.5. Cabling and I/O Ports	15
2.6. Test Configurations.....	16
2.7. Equipment Modifications	16
2.8. Deviations from the Test Standard	16
3. TEST EQUIPMENT CONFIGURATION(S)	17
3.1. Conducted RF Emission Test Set-up	17
3.2. Radiated Spurious Emission Test Set-up > 1 GHz	19
3.3. Digital Emissions Test Set-up (0.03 – 1 GHz)	20
3.4. ac Wireline Emission Test Set-up.....	21
4. TEST SUMMARY	22
5. TEST RESULTS	24
5.1. Device Characteristics	24
5.1.1. Conducted Testing.....	24
5.1.2. Radiated Emission Testing	38
5.1.3. AC Wireline Conducted Emissions (150 kHz – 30 MHz)	51
6. PHOTOGRAPHS.....	53
6.1. Conducted Test Setup	53
6.2. Radiated Test Set-up	54
6.3. Digital Emissions > 1 GHz.....	55
6.4. Radiated Emissions Test Setup <1 GHz	56
6.5. ac Wireline Test Setup	57
7. TEST EQUIPMENT	58
APPENDIX.....	59
A. SUPPORTING INFORMATION.....	59
A.1. CONDUCTED TEST PLOTS.....	59
A.1.1. 6 dB & 99% Bandwidth	60
A.1.2. Conducted Spurious Emissions	63
A.1.3. Power Spectral Density.....	68

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

ACCREDITATION, LISTINGS & RECOGNITION

TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard EN ISO/IEC 17025. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



RECOGNITION

MiCOM Labs, Inc has widely recognized Electrical testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA** countries. Our test reports are widely accepted for global type approvals.

Country	Recognition Body	Status	Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Listing #: 102167
Canada	Industry Canada (IC)	FCB	APEC MRA 2	US0159 Listing #: 4143A-2
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	APEC MRA 2	RCB 210
	VCCI	--	--	A-0012
Europe	European Commission	NB	EU MRA	NB 2280
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	CAB	APEC MRA 1	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	CAB	APEC MRA 1	
Singapore	Infocomm Development Authority (IDA)	CAB	APEC MRA 1	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

**APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

N/A – Not Applicable

**EU MRA – European Union Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the EU member countries.

**NB – Notified Body

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard EN ISO/IEC 17065. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



American Association for Laboratory Accreditation

Accredited Product Certification Body

A2LA has accredited

MICOM LABS


Pleasanton, CA

for technical competence as a

Product Certification Body

This product certification body is accredited in accordance with the recognized International Standard ISO/IEC 17065:2012 - Requirements for bodies certifying products, processes and services. This accreditation demonstrates technical competence for a defined scope and the operation of a quality management system.

Presented this 28th day of February 2014.



President & CEO
For the Accreditation Council
Certificate Number 2381.02
Valid to November 30, 2015

For the product certification schemes to which this accreditation applies, please refer to the organization's Product Certification Scope of Accreditation

United States of America – Telecommunication Certification Body (TCB)

TCB Identifier – US0159

Industry Canada – Certification Body

CAB Identifier – US0159

Europe – Notified Body

Notified Body Identifier - 2280

Japan – Recognized Certification Body (RCB)

RCB Identifier - 210

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 8 of 71

DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft	21 st November 2014	
Rev A	14 th January 2015	Initial release

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 9 of 71

TEST RESULT CERTIFICATE

Manufacturer:	Live Athos (MAD Apparel Inc.) 201 Arch Street Redwood City California 94062, USA	Tested By:	MiCOM Labs, Inc. 575 Boulder Court Pleasanton California, 94566, USA
EUT:	Bluetooth (BLE) Health Fitness Device	Telephone:	+1 925 462 0304
Model(s):	A100	Fax:	+1 925 462 0306
S/N's:	Development		
Test Date(s):	18th - 19th November 2014	Website:	www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC 47 CFR Part 15.247 & IC RSS-210	EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.


Approved & Released for MiCOM Labs, Inc. by:



TESTING CERT #2381.01



Graeme Grieve
Quality Manager MiCOM Labs,



Gordon Hurst
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

1. REFERENCES AND MEASUREMENT UNCERTAINTY

1.1. Normative References

REF.	PUBLICATION	YEAR	TITLE
i.	FCC 47 CFR Part 15, Subpart C	2012	Title 47: Telecommunication PART 15—RADIO FREQUENCY DEVICES Subpart C—Intentional Radiators
ii.	RSS-210 Annex 8	2010	Radio Standards Specification 210, Issue 8, Low-power License-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment
iii.	FCC OET KDB 662911	31 st October 2013	Emissions Testing of Transmitters with Multiple Outputs in the Same Band
iv.	RSS-GEN	2010	Radio Standards Specification-Gen, Issue 3, General Requirements and Information for the Certification of Radiocommunication Equipment
v.	FCC 47 CFR Part 15, Subpart B	2012	47 CFR Part 15, SubPart B; Unintentional Radiators
vi.	ICES-003	31 st August 2013	Spectrum Management and Telecommunications Policy Interference-Causing Equipment Standard Digital Apparatus; Issue 5
vii.	ANSI C63.4	2009	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
viii.	CISPR 22/ EN 55022	2010	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
ix.	M 3003	Edition 1 Dec. 1997	Expression of Uncertainty and Confidence in Measurements
x.	LAB34	Edition 1 Aug 2002	The expression of uncertainty in EMC Testing
xi.	ETSI TR 100 028	2001	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
xii.	A2LA	July 2014	Reference to A2LA Accreditation Status – A2LA Advertising Policy



Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 11 of 71

1.2. Test and Uncertainty Procedures

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.



Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 12 of 71

2. PRODUCT DETAILS AND TEST CONFIGURATIONS

2.1. Technical Details

Details	Description
Purpose:	Test of the Mad Apparel Inc. - Model A100 to FCC Part 15.247 and Industry Canada RSS-210 regulations.
Applicant:	MAD Apparel Inc. 201 Arch Street, Redwood City, California 94062, USA
Manufacturer:	As applicant.
Laboratory performing the tests:	MiCOM Labs, Inc. 575 Boulder Court, Pleasanton, California 94566 USA
Test report reference number:	ATHO02-U2 Rev A
Date EUT received:	17 th November 2014
Standard(s) applied:	FCC 47 CFR Part 15.247 & IC RSS-210
Dates of test (from - to):	18th - 19th November 2014
No of Units Tested:	One
Type of Equipment:	Bluetooth (BLE)
Manufacturers Trade Name:	Athos Core
Model(s):	A100
Location for use:	Indoor and Outdoor
Declared Frequency Range(s):	2400 - 2483.5 MHz
Hardware Rev	1.3
Software Rev	Development
Type of Modulation:	GFSK
EUT Modes of Operation:	BLE
Declared Nominal Average Output Power:	2.4 GHz Operation +4.0 dBm
System Beam Forming:	None
Transmit/Receive Operation:	Time Division Duplex
Rated Input Voltage and Current:	Battery: 3.8 Vdc Nom, Min 3.0Vdc, Max 4.3 Vdc
Operating Temperature Range:	Declared range 0° to +50°.
ITU Emission Designator:	1M04F1D
Equipment Dimensions:	65 mm x 34 mm x 12.5 mm (L x W x H)
Weight:	22 grams
Primary function of equipment:	Health fitness

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


2.2. Scope of Test Program

Athos Bluetooth Low Energy (BLE) Device – A100


The scope of the test program was to test the Athos BLE model A100 in the frequency range 2400 - 2483.5 MHz for compliance against FCC 47 CFR Part 15.247 and Industry Canada RSS-210 specifications.

As the Athos Bluetooth Low Energy frequency hopping spread spectrum device had a bandwidth greater than 500 kHz the 15.247 DTS was used to prove compliance.

Athos Bluetooth Low Energy (BLE)

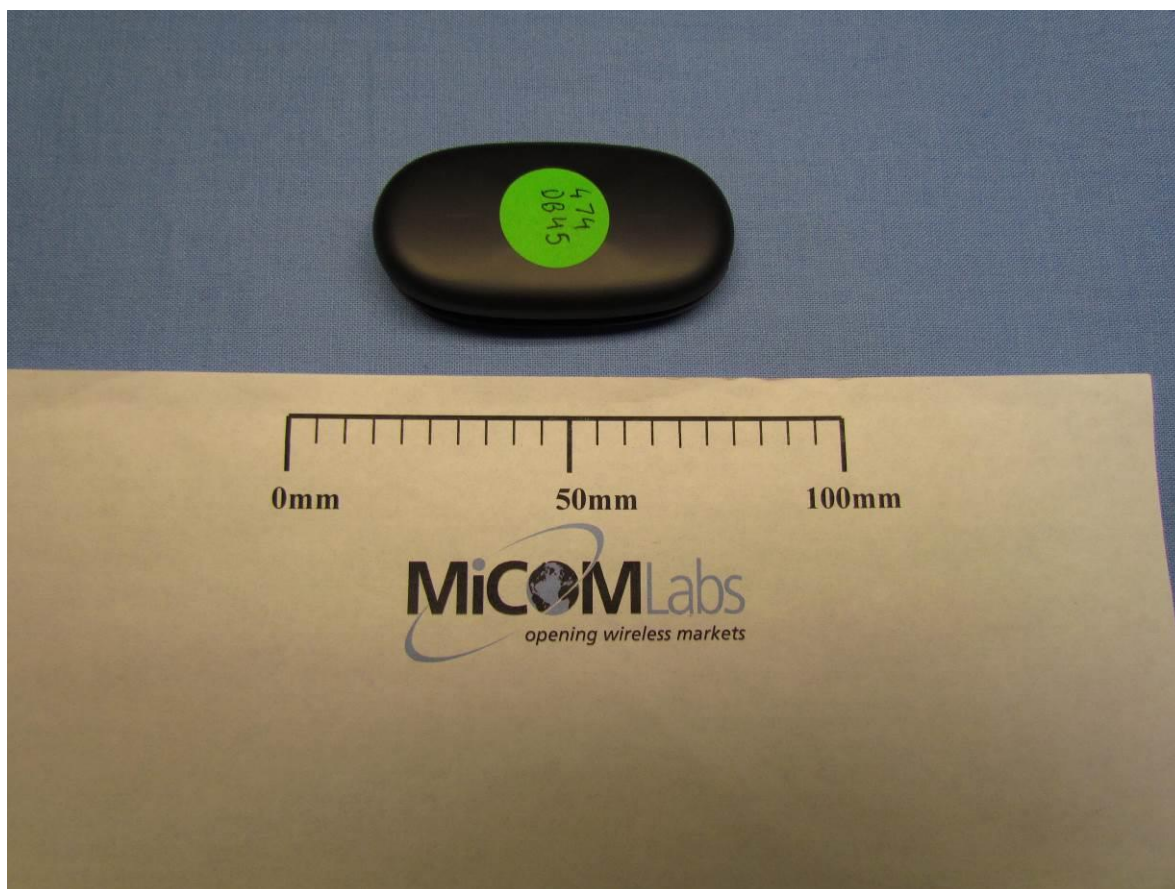

Athos
Bluetooth Low Energy (BLE)

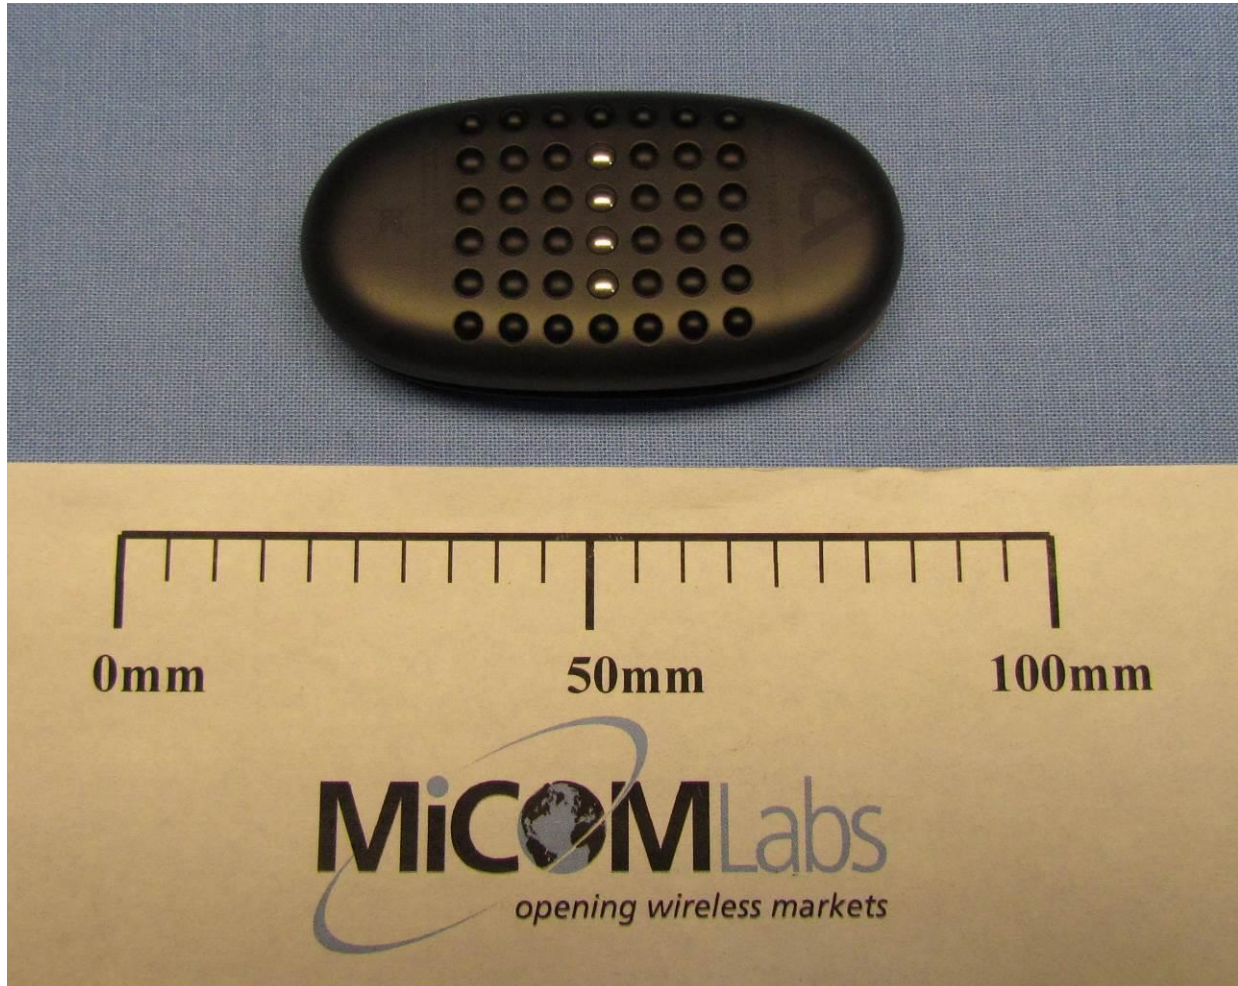



Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 15 of 71

2.3. Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description (Including Brand Name)	Mfr	Model No.	Serial No.
EUT	Bluetooth Frequency Hopping	MAD Apparel Inc.	A100	--
Support	Laptop PC			None

2.4. Antenna Details

Integral Antenna

Model	Type	Gain	Freq. Band	Note
		dBi	MHz	
Trace Antenna	PCB	0.0	2400 - 2500	

2.5. Cabling and I/O Ports

Number and type of I/O ports

1. NONE

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



2.6. Test Configurations

Testing was performed to determine the highest power level versus bit rate. The variant with the highest power was used to exercise the product.

Operational Mode(s) (802.11a/b/g/n/ac)	Variant	Data Rate with Highest Power	Frequencies (MHz)
2.4 GHz			
BLE	--	1 MBit/s	2,402 2,442 2,480

Results for the above configurations are provided in this report

Antenna Test Configurations for Radiated Emissions

Results for the following configurations are provided in this report.

Radiated emissions testing was performed for all possible configurations on the integral antenna, the table below identifies all radiated testing completed on the device.

15.247		KEY:- SE – Spurious Emission BE – Band-Edge
BLE Operation	SE 2402	
	SE 2442	
	SE 2480	
	BE 2390	
	BE 2483.5	

2.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

2.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:


1. NONE

3. TEST EQUIPMENT CONFIGURATION(S)

3.1. Conducted RF Emission Test Set-up

The following tests were performed using the conducted test set-up shown in the diagram below.

1. Section 6.1.1.1. 6 dB and 99% Bandwidth
2. Section 6.1.1.2. Peak Output Power
3. Section 6.1.1.3. Power Spectral Density
4. Section 6.1.1.4. Conducted Spurious Emissions

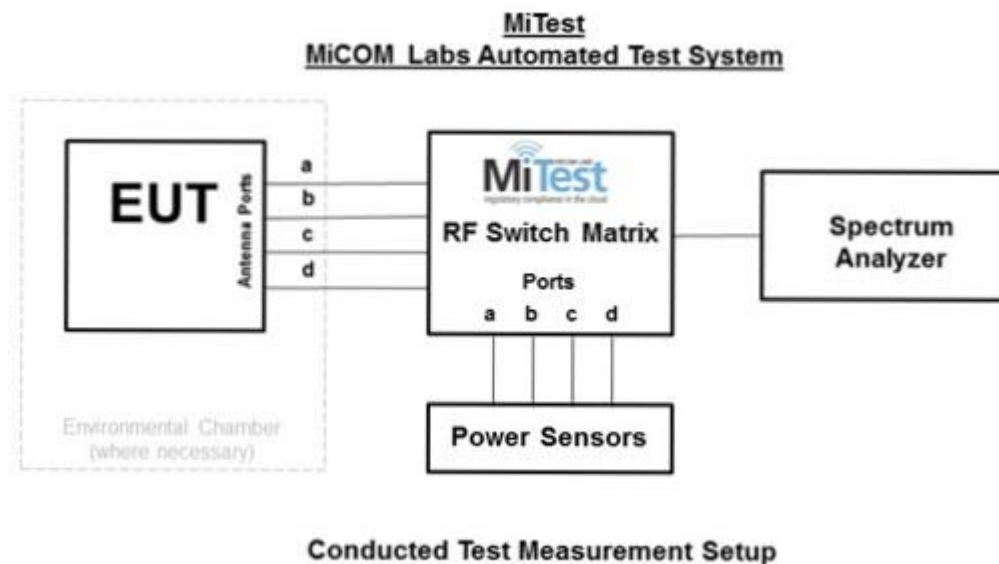

Measurement and Presentation of Test Data

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by [MiTest](#). [MiTest](#) is an automated test system developed by MiCOM Labs. [MiTest](#) is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.




The MiCOM Labs “[MiTest](#)” Automated Test System“ (Patent Pending)

3.2. Radiated Spurious Emission Test Set-up > 1 GHz

The following tests were performed using the conducted test set-up shown in the diagram below.


Radiated Emission Measurement Setup – Above 1 GHz

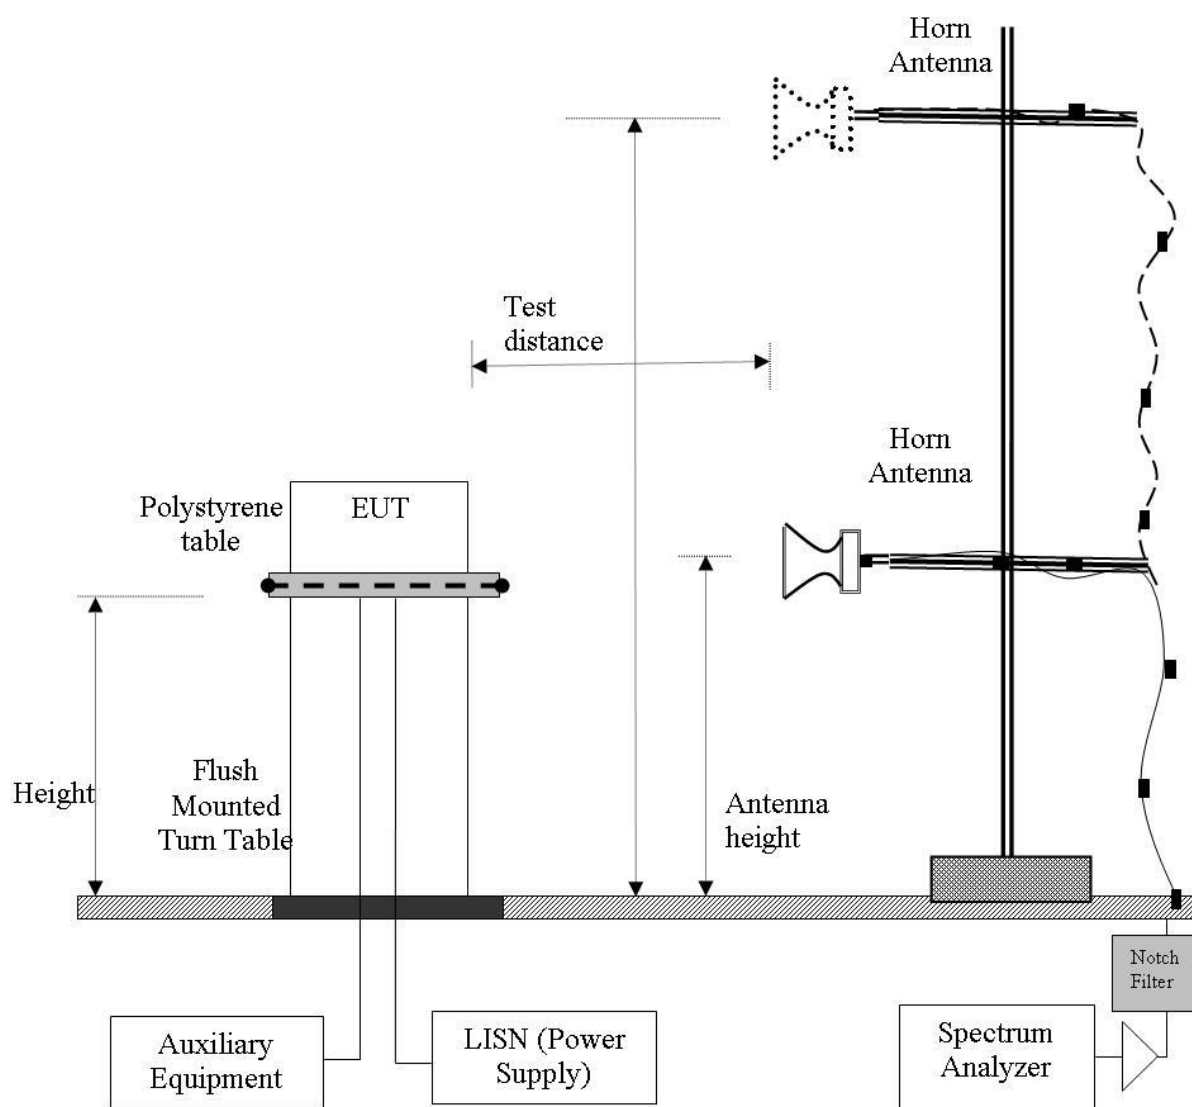

3.3. Digital Emissions Test Set-up (0.03 – 1 GHz)

The following tests were performed using the conducted test set-up shown in the diagram below.

Digital Emission Measurement Setup – Below 1 GHz

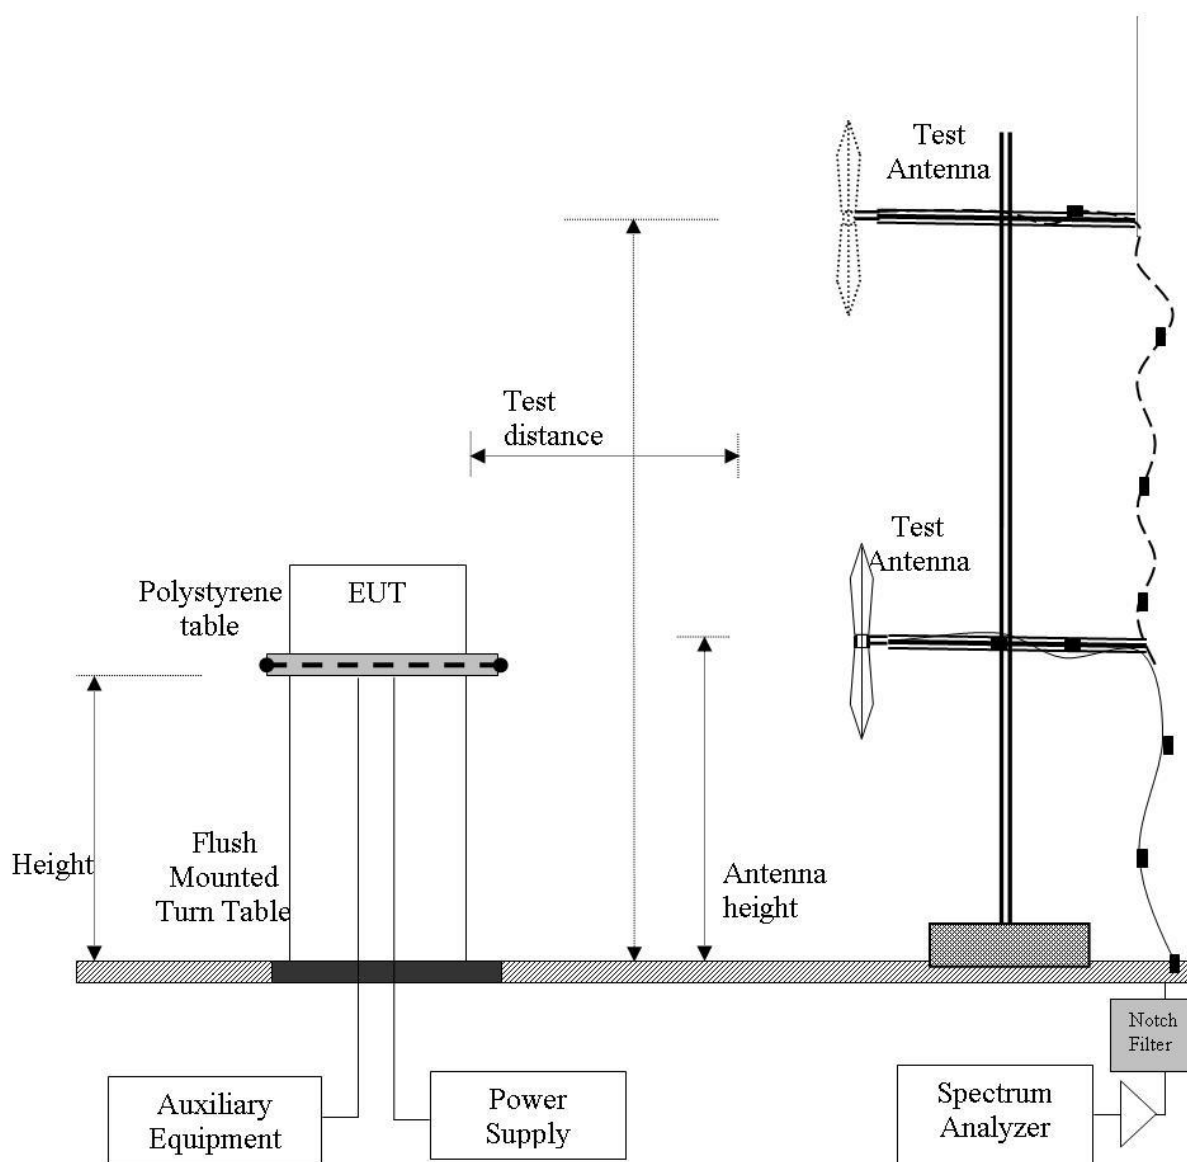


3.4. ac Wireline Emission Test Set-up

The following tests were performed using the conducted test set-up shown in the diagram below.

1. Section 5.1.3 ac Wireline Conducted Emissions

Test Measurement Set up

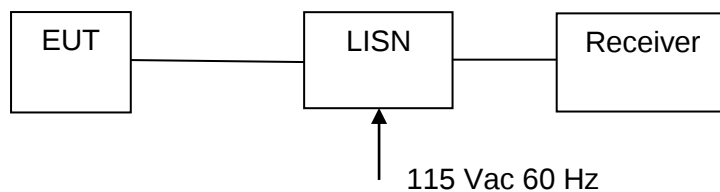

Measurement set up for AC Wireline Conducted Emissions Test



Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 22 of 71

4. TEST SUMMARY

List of Measurements

The following table represents the list of measurements required under the **FCC CFR47 Part 15.247** and **Industry Canada RSS-210** and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
15.247(a)(2) A8.2(1) 4.4	6 dB and 99 % Bandwidths	≥500 kHz	Conducted	Complies	5.1.1.1
15.247(b)(3) 15.31(e) A8.4(4)	Peak Output Power Voltage Variation	Shall not exceed 1W Variation of supply voltage 85 % -115 %	Conducted	Complies	5.1.1.2
15.247(e) A8.2	Peak Power Spectral Density	Shall not be greater than +8 dBm in any 3 kHz band	Conducted	Complies	5.1.1.3
15.247(d) 15.205 / 15.209 A8.5 2.2 4.7	Spurious Emissions (30MHz - 26 GHz b/g and 30 MHz – 40 GHz a)	The radiated emission in any 100 kHz of out-band shall be at least 20 dB below the highest in-band spectral density	Conducted	Complies	5.1.1.4

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 23 of 71

List of Measurements (continued)

The following table represents the list of measurements required under the **FCC CFR47 Part 15.247**, **Industry Canada RSS-210**, and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
15.247(d) 15.205 / 15.209 A8.5 2.2 2.6 4.7	Radiated Emissions	Restricted Bands	Radiated	Complies	5.1.2
	Transmitter Radiated Spurious Emissions	Emissions above 1 GHz		Complies	
	Radiated Band Edge	Band-edge results Peak Emissions		Complies	
15.205 / 15.209 2.2	Radiated Spurious Emissions	Emissions <1 GHz (30M-1 GHz)	Radiated	Complies	5.1.2.4
15.207 7.2.2	AC Wireline Conducted Emissions 150 kHz–30 MHz	Conducted Emissions	Conducted	N/A EUT is battery powered	5.1.3

Note 1: Test results reported in this document relate only to the items tested

Note 2: The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria

Note 3: Section 3.7 Equipment Modifications highlights the equipment modifications that were required to bring the product into compliance with the above test matrix



Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 24 of 71

5. TEST RESULTS

5.1. Device Characteristics

5.1.1. Conducted Testing

5.1.1.1. 6 dB and 99 % Bandwidth

Conducted Test Conditions for 6 dB and 99% Bandwidth			
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	6 dB and 99 % Bandwidth	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (a)(2)	Pressure (mBars):	999 - 1001
Reference Document(s):	KDB 558074 - D01 DTS Measurement Guidance v01: Section 5.1 Emission Bandwidth		
Test Procedure for 6 dB and 99% Bandwidth Measurement The bandwidth at 6 dB and 99 % was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.			

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 25 of 71

Equipment Configuration for 6 dB & 99% Bandwidth

Variant:	Bluetooth Low Energy	Duty Cycle (%):	88
Data Rate:	1 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 6 dB Bandwidth (MHz)				6 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest	KHz	MHz
MHz	a	b	c	d				
2402.0	0.673	--	--	--	0.673	0.673	≥500.0	-0.17
2440.0	0.673	--	--	--	0.673	0.673	≥500.0	-0.17
2480.0	0.665	--	--	--	0.665	0.665	≥500.0	-0.17

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d			
2402.0	1.042	--	--	--	1.042		
2440.0	1.042	--	--	--	1.042		
2480.0	1.042	--	--	--	1.042		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 26 of 71

Specification

Limits

§15.247 (a)(2) & RSS-210 §A8.2(1)

The minimum 6 dB bandwidth shall be at least 500 kHz.

§ IC RSS-Gen 4.4.1 Occupied Bandwidth When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

§ IC RSS-Gen 4.4.2 6 dB Bandwidth Where indicated, the 6 dB bandwidth is measured at the points when the spectral density of the signal is 6 dB down from the in-band spectral density of the modulated signal, with the transmitter modulated by a representative signal.

Traceability

Test Equipment Used
0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 27 of 71

5.1.1.2. Peak Output Power

Conducted Test Conditions for Fundamental Emission Output Power			
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Emission Output Power	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (a)(2)	Pressure (mBars):	999 - 1001
Reference Document(s):	KDB 558074 - D01 DTS Measurement Guidance v01: Section 5.2 Fundamental Emission Output Power		
	KDB 662911 was implemented for In-band power measurements. The measure and sum technique was implemented in all cases.		
Test Procedure for Fundamental Emission Output Power Measurement The transmitter terminal of EUT was connected to the input of the spectrum analyzer set to measure peak power. The resolution filter bandwidth was set to 6 dB, peak detector selected and the analyzer built-in power function was used to integrate peak power over the 20 dB bandwidth.			
Supporting Information Calculated Power = A + G + 10 log (1/x) dBm A = Total Power [10 Log10 (10 ^{a/10} + 10 ^{b/10} + 10 ^{c/10} + 10 ^{d/10})], G = Antenna Gain, x = Duty Cycle			

15.247 (c) Operation with directional antenna gains greater than 6 dBi.

If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Athos Core Antenna gain < 6dBi therefore maximum permitted output power ≤ 30 dBm

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATH002-U2 Rev A
Issue Date: 14th January 2015
Page: 28 of 71

Equipment Configuration for Average Output Power

Variant:	Bluetooth Low Energy	Duty Cycle (%):	88.0
Data Rate:	1 MBit/s	Antenna Gain (dBi):	0.0
Modulation:	GFSK	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s) + Duty Cycle Correction Factor : +0.04 dB	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dB	
2402.0	2.24	--	--	--	2.24	30.00	-27.76	Max
2440.0	1.65	--	--	--	1.65	30.00	-28.35	Max
2480.0	1.89	--	--	--	1.89	30.00	-28.11	Max

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	± 1.33 dB

Antenna Type V's Power Setting

The following **Antenna Types V's Power Setting** table consolidates the results of all tests performed on the Athos Core;

PCB Antenna

Channel	2.4 GHz
	BLE
2402.0	Max Power
2440.0	Max Power
2480.0	Max Power

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Specification

Limits

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands: 1.0 watt.

15.247 (b) (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

15.247 (c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:

(i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(ii) Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

§15.31 (e) For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

§ RSS-210 A8.4(4) For systems employing digital modulation techniques operating in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands the maximum peak conducted power shall not exceed 1 watt.

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-01 'Measuring RF Output Power'	0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 30 of 71

5.1.1.3. Power Spectral Density

Conducted Test Conditions for Power Spectral Density			
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Power Spectral Density	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (e)	Pressure (mBars):	999 - 1001
Reference Document(s):	KDB 558074 - D01 DTS Measurement Guidance v01: Section 5.3 Maximum Power Spectral Density Level in the Emission Bandwidth		
Test Procedure for Power Spectral Density The transmitter output was connected to a spectrum analyzer and the maximum level in a 3 kHz bandwidth was measured. A peak value was found over the full emission bandwidth and the frequency span reduced to obtain enhanced resolution. Sweep time ≥ span / 3 kHz with video averaging turned off. The Peak Power Spectral Density is the highest level found across the emission in a 3 kHz resolution bandwidth.			
Supporting Information Calculated Power = A + 10 log (1/x) dBm A = Total Power Spectral Density [10 Log10 (10 ^{a/10} + 10 ^{b/10} + 10 ^{c/10} + 10 ^{d/10})] x = Duty Cycle Limit Line: KDB 662911 was implemented for In-band power spectral density (PSD) measurements - Option (2) measure and subtract 10 log (N) dB from the limit for devices with multiple RF ports			

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 31 of 71

Equipment Configuration for Power Spectral Density - Average

Variant:	Bluetooth Low Energy	Duty Cycle (%):	88.0
Data Rate:	1 MBit/s	Antenna Gain (dBi):	0.00
Modulation:	GFSK	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Amplitude Summation + DCCF Duty Cycle Correction Factor : +0.56 dB	Limit	Margin
	Port(s) (dBm/3KHz)						
MHz	a	b	c	d	dBm/3KHz	dBm/3KHz	dB
2402.0	-8.924	--	--	--	-8.369	8.0	-16.4
2440.0	-10.166	--	--	--	-9.611	8.0	-17.6
2480.0	-6.127	--	--	--	-5.572	8.0	-13.6

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 32 of 71

Specification

Peak Power Spectral Density Limits

§15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission

RSS-210 §A8.2(2) The transmitter power spectral density (into the antenna) shall not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission or over 1.0 second if the transmission exceeds 1.0 second duration.

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-01 'Measuring RF Output Power'	0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 33 of 71

5.1.1.4. Conducted Spurious Emissions

Conducted Test Conditions for Transmitter Conducted Spurious and Band-Edge Emissions			
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Max Unwanted Emission Levels	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (d)	Pressure (mBars):	999 - 1001
Reference Document(s):	KDB 558074 - D01 DTS Measurement Guidance v01: Section 5.4 Maximum Unwanted Emission Levels		
Test Procedure for Transmitter Conducted Spurious and Band-Edge Emissions Measurement Transmitter Conducted Spurious and Band-Edge emissions were measured at a limit of 20 dB below the highest in-band spectral density measured with a spectrum analyzer connected to the antenna terminal. Measurements were made while EUT was operating in transmit mode of operation at the appropriate centre frequency closest to the band-edge. Emissions were maximized during the measurement and limits derived from the peak spectral power and drawn on each plot.			

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 34 of 71

Equipment Configuration for Conducted Low Band-Edge Emissions - Average

Variant:	Bluetooth Low Energy	Duty Cycle (%):	88.0
Data Rate:	1 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	2402.0 MHz					
Band-Edge Frequency:	2400.0 MHz					
Test Frequency Range:	2350.0 - 2405.0 MHz					
Port(s)	Band-Edge Markers and Limit			Amended Limit		Margin
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	-65.66	-31.00	2401.60	--	--	-1.600

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ± 2.37 dB, > 40 GHz ± 4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 35 of 71

Equipment Configuration for Conducted High Band-Edge Emissions - Average

Variant:	Bluetooth Low Energy	Duty Cycle (%):	88.0
Data Rate:	1 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	2480.0 MHz					
Band-Edge Frequency:	2483.5 MHz					
Test Frequency Range:	2475.0 - 2524.0 MHz					
Port(s)	Band-Edge Markers and Limit			Amended Limit		Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	-72.92	-32.00	2480.50	--	--	-3.000

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ± 2.37 dB, > 40 GHz ± 4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 36 of 71

Equipment Configuration for Transmitter Conducted Spurious Emissions

Variant:	Bluetooth Low Energy	Duty Cycle (%):	88.0
Data Rate:	1 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Frequency Range	Transmitter Conducted Spurious Emissions (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
2402.0	30.0 - 26000.0	-71.586	-64.00	--	--	--	--	--	--
2440.0	30.0 - 26000.0	-71.586	-70.00	--	--	--	--	--	--
2480.0	30.0 - 26000.0	-71.586	-70.00	--	--	--	--	--	--

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ± 2.37 dB, > 40 GHz ± 4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 37 of 71

Specification

Limits Band-Edge

Lower Limit Band-edge	Upper Limit Band-edge	Limit below highest level of desired power
2,400 MHz	2,483.5 MHz	≥ 20 dB
5725 MHz	5850 MHz	

§15.247(d) and RSS-210 §A8.5 In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

§15.247(d)

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section §15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(a)).

RSS-210 §A8.5 If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required. In addition, radiated emissions which fall in the restricted bands of Table 1 must also comply with the radiated emission limits specified in Tables 2 and 3.

RSS-Gen §4.7

The search for unwanted emissions shall be from the lowest frequency internally generated or used in the device (local oscillator, intermediate of carrier frequency), or from 30 MHz, whichever is the lowest frequency, to the 5th harmonic of the highest frequency generated without exceeding 40 GHz.

Laboratory Measurement Uncertainty for Conducted Spurious Emissions

Measurement uncertainty	±2.37 dB
-------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-05 'Measurement of Spurious Emissions'	0088, 0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 38 of 71

5.1.2. Radiated Emission Testing

Transmitter Radiated Spurious Emissions (above 1 GHz); Peak Field Strength Measurements; and Radiated Band Edge Measurements – Restricted Bands

FCC, Part 15 Subpart C §15.247(d) 15.205; 15.209

Industry Canada RSS-210 §A8.5, §2.2, §2.6

Industry Canada RSS-Gen §4.7

Test Procedure

Radiated emissions above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned.

All measurements on any frequency or frequencies over 1 MHz are based on the use of measurement instrumentation employing an average detector function. All measurements above 1 GHz were performed using a minimum resolution bandwidth of 1 MHz.

Operational Modes

Operational mode(s) tested for spurious emissions were the modes which delivered maximum spectral density 802.11b and 802.11a.



Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where: FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss

For example:

Given receiver input reading of 51.5 dB μ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu V/m))}$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$


NOTE: KDB 662911 was implemented for Out-of-Band measurements. Where necessary Option (2) Measure and add 10 log (N) dB was implemented



Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 40 of 71

5.1.2.1. PCB integral antenna – Spurious and Band-Edge Emissions

Test Freq.	2402 MHz	Engineer	SB
Variant	Digital Emissions	Temp (°C)	18.5
Freq. Range	30 MHz - 1000 MHz	Rel. Hum.(%)	38
Power Setting	Max Power	Press. (mBars)	1007
Antenna	Integral Trace Antenna	Duty Cycle (%)	100
Test Notes 1	Battery Powered EUT;		
Test Notes 2			

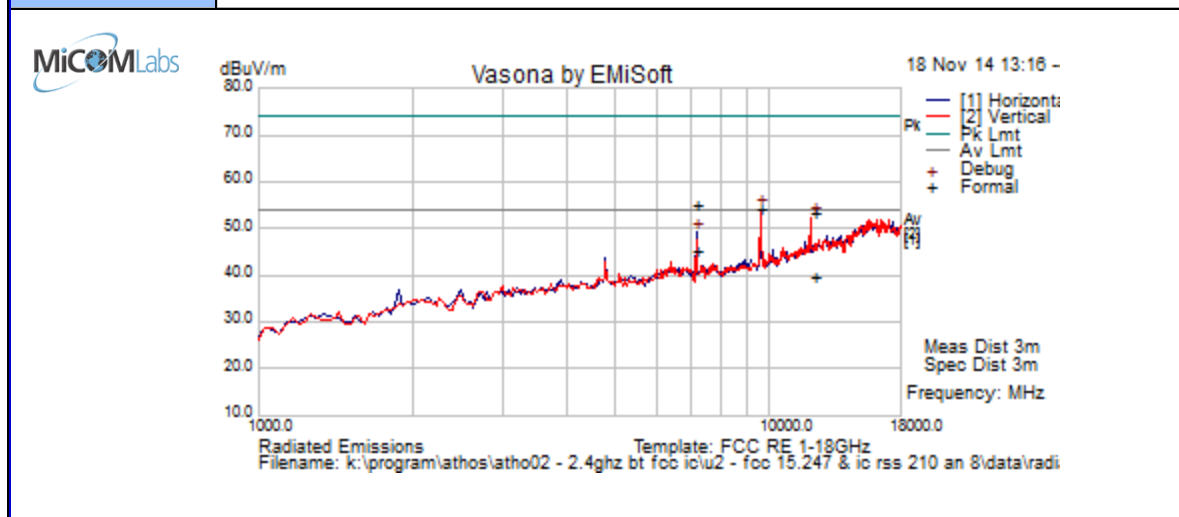

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
12219.940	48.6	9.7	-5.0	53.3	Peak Max	V	116	268	74.0	-20.7	Pass	RB
7200.4008	55.2	7.1	-7.4	55.0	Peak Max	H	108	25	74.0	-19.0	Pass	RB
12219.940	35.1	9.7	-5.0	39.8	Average Max	V	116	268	54	-14.2	Pass	RB
7200.401	45.6	7.1	-7.4	45.4	Average Max	H	108	25	54	-8.6	Pass	RB
9601.303	51.6	8.5	-6.0	54.1	Peak [Scan]	V	100					NRB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 41 of 71

Test Freq.	2440 MHz	Engineer	SB
Variant	Digital Emissions	Temp (°C)	18.5
Freq. Range	30 MHz - 1000 MHz	Rel. Hum.(%)	38
Power Setting	Max Power	Press. (mBars)	1007
Antenna	Integral Trace Antenna	Duty Cycle (%)	100
Test Notes 1	Battery Powered EUT;		
Test Notes 2			

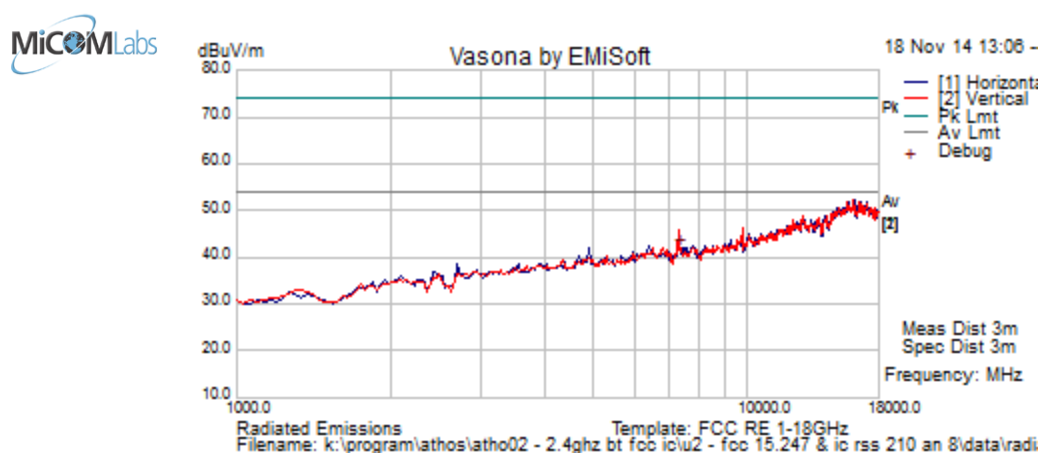

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass/Fail	Comments
7336.863	41.7	7.2	-7.2	41.7	Peak [Scan]	V	98	-1	54.0	-12.3	Pass	RB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 42 of 71

Test Freq.	2480 MHz	Engineer	SB
Variant	Digital Emissions	Temp (°C)	18.5
Freq. Range	30 MHz - 1000 MHz	Rel. Hum.(%)	38
Power Setting	Max Power	Press. (mBars)	1007
Antenna	Integral Trace Antenna	Duty Cycle (%)	100
Test Notes 1	Battery Powered EUT;		
Test Notes 2			

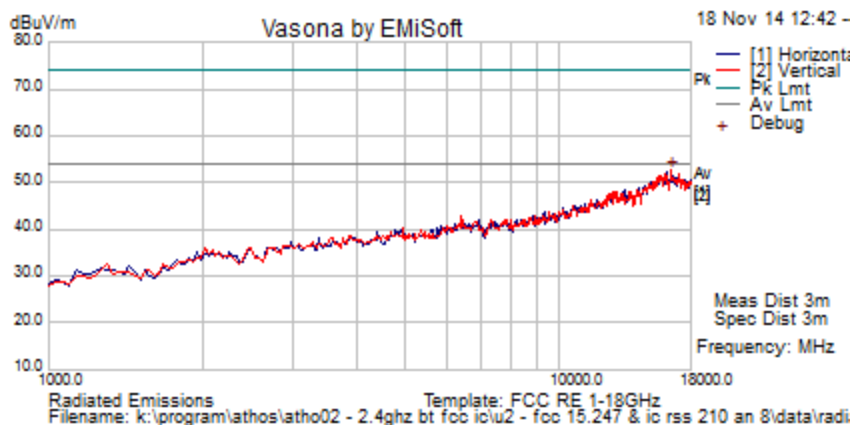

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass/Fail	Comments
No Emissions observed within 6 dB of the limit.												
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Band-Edge Antenna Integral

Peak Limit 74.0 dB μ V/m, Average Limit 54.0 dB μ V/m

2.4 GHz Frequency Band


Operational Mode	Restricted Band 2390 MHz			Restricted Band 2483.5 MHz		
	dB μ V/m		Power Setting	dB μ V/m		Power Setting
	Peak	Average		Peak	Average	
BLE	55.42	32.59	Max	60.49	45.14	Max



Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 44 of 71

Restricted Band-Edge 2390 MHz

Transmitting Frequency 2402 MHz

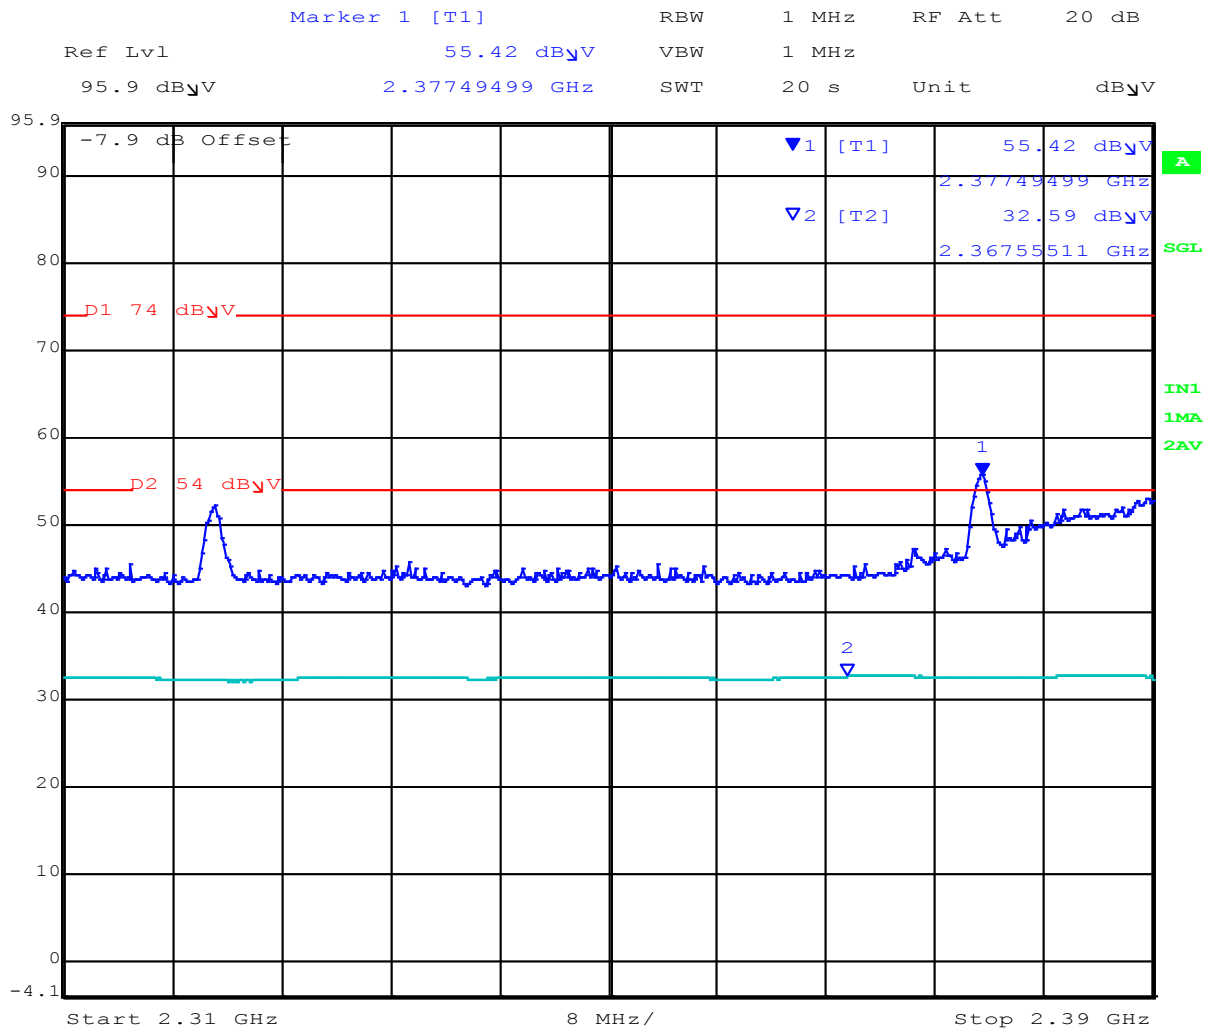

Date: 18.NOV.2014 12:08:54


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 45 of 71

Restricted Band-Edge 2483.5 MHz

Transmitting Frequency 2480 MHz

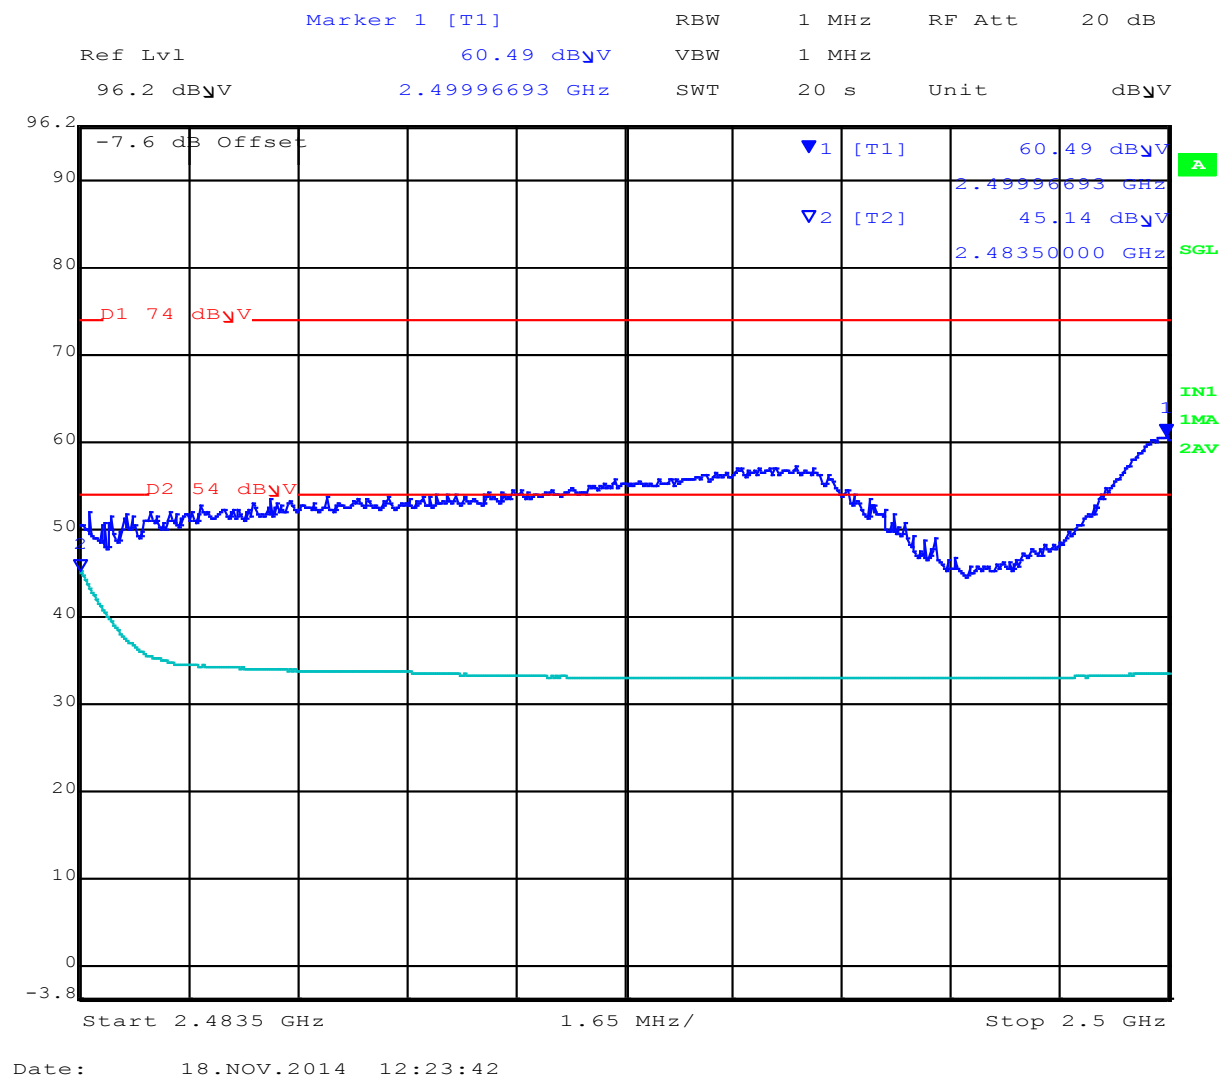

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Specification Limits

FCC §15.247(d) and RSS-210 §A8.5 In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

FCC §15.247(d)

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section §15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(a)).

IC RSS-210 §A8.5 If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required. In addition, radiated emissions which fall in the restricted bands of Table 1 must also comply with the radiated emission limits specified in Tables 2 and 3.

IC RSS-Gen §4.7

The search for unwanted emissions shall be from the lowest frequency internally generated or used in the device (local oscillator, intermediate or carrier frequency), or from 30 MHz, whichever is the lowest frequency, to the 5th harmonic of the highest frequency generated without exceeding 40 GHz.

FCC §15.205 (a) Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

FCC §15.205 (a) Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

FCC §15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.



Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 47 of 71

§15.209 (a) Limit Matrix

Frequency(MHz)	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



5.1.2.2. Digital Emissions (0.03-1 GHz)

FCC, Part 15 Subpart C §15.205/ §15.209
Industry Canada RSS-210 §2.2

Test Procedure

Testing 30M-1 GHz was performed in a 3-meter anechoic chamber using a CISPR compliant receiver. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. To further maximize emissions the receive antenna was varied between 1 and 4 meters. The emissions are recorded with receiver in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed. The anechoic chamber test set-up is identified in Section 6 Test Set-Up Photographs.

The EUT had two methods of powering on ac/dc converter and Power over Ethernet (POE). Both modes were tested for emissions below 1GHz.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength
R = Measured Receiver Input Amplitude
AF = Antenna Factor
CORR = Correction Factor = CL – AG + NFL
CL = Cable Loss
AG = Amplifier Gain

For example:

Given a Receiver input reading of 51.5dB μ V; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (}\mu\text{V/m))}$$


$$40 \text{ dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250\mu\text{V/m}$$



Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 49 of 71

Test Freq.	2440 MHz	Engineer	SB
Variant	Digital Emissions	Temp (°C)	18.5
Freq. Range	30 MHz - 1000 MHz	Rel. Hum.(%)	38
Power Setting	Max Power	Press. (mBars)	1007
Antenna	Integral Trace Antenna		
Test Notes 1	Battery Powered EUT;		
Test Notes 2			

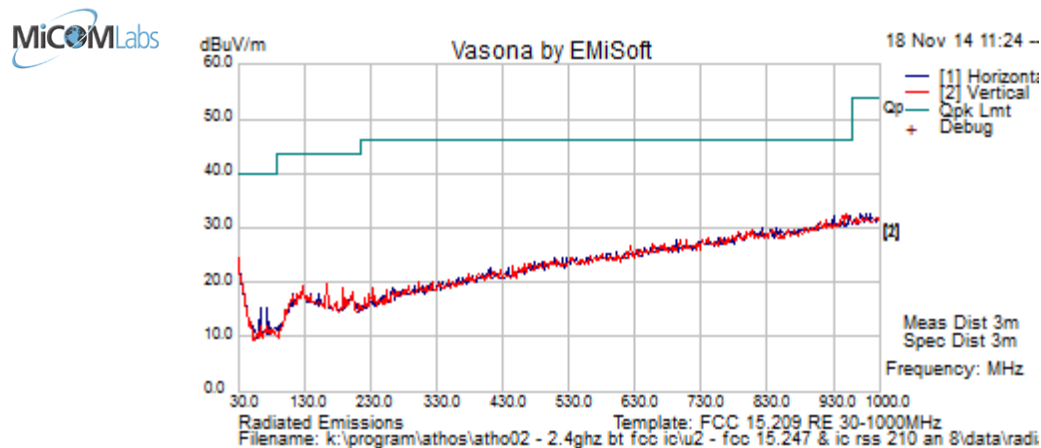

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass/Fail	Comments
63.135	35.0	3.8	-23.7	15.1	Peak [Scan]	H	98	360	40	-24.9	Pass	
74.396	33.7	3.9	-23.1	14.4	Peak [Scan]	H	98	360	40	-25.6	Pass	
30.871	30.5	3.5	-10.5	23.5	Peak [Scan]	V	98	360	40	-16.5	Pass	
163.860	33.4	4.4	-18.9	19.0	Peak [Scan]	V	98	360	43.5	-24.5	Pass	
623.155	31.1	6.3	-11.1	26.4	Peak [Scan]	V	98	360	46	-19.7	Pass	
233.215	32.3	4.8	-19.2	17.9	Peak [Scan]	V	98	360	46	-28.1	Pass	
Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency												
NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Specification

Limits

§15.205 (a) Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

§15.205 (a) Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

§15.209 (a) and RSS-Gen §2.2 Limit Matrix

Frequency(MHz)	Field Strength (μ V/m)	Field Strength (dB μ V/m)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312

5.1.3. AC Wireline Conducted Emissions (150 kHz – 30 MHz)


Test not applicable, device is battery powered

FCC, Part 15 Subpart C §15.207
Industry Canada RSS-Gen §7.2.2

Test Procedure

The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

Test Measurement Set up

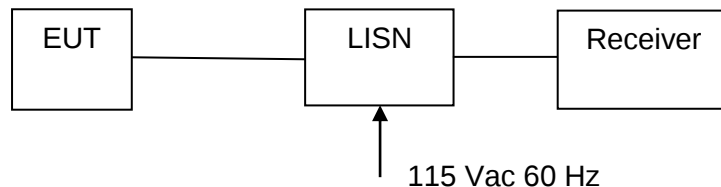

Measurement set up for AC Wireline Conducted Emissions Test

Measurement Results for AC Wireline Conducted Emissions (150 kHz – 30 MHz)

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar



Specification

Limit

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu\Omega$ line impedance stabilization network (LISN), see §15.207 (a) matrix below. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

RSS-Gen §7.2.2

The radio frequency voltage that is conducted back into the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table below. The tighter limit applies at the frequency range boundaries.

§15.207 (a) and **RSS-Gen §7.2.2** Limit Matrix

The lower limit applies at the boundary between frequency ranges

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency

Laboratory Measurement Uncertainty for Conducted Emissions

Measurement uncertainty	± 2.64 dB
-------------------------	---------------

Traceability


Method	Test Equipment Used
Measurements were made per work instruction WI-EMC-01 'Measurement of Conducted Emissions'	0158, 0184, 0287, 0190, 0293, 0307

6. PHOTOGRAPHS


6.1. Conducted Test Setup



6.2. Radiated Test Set-up

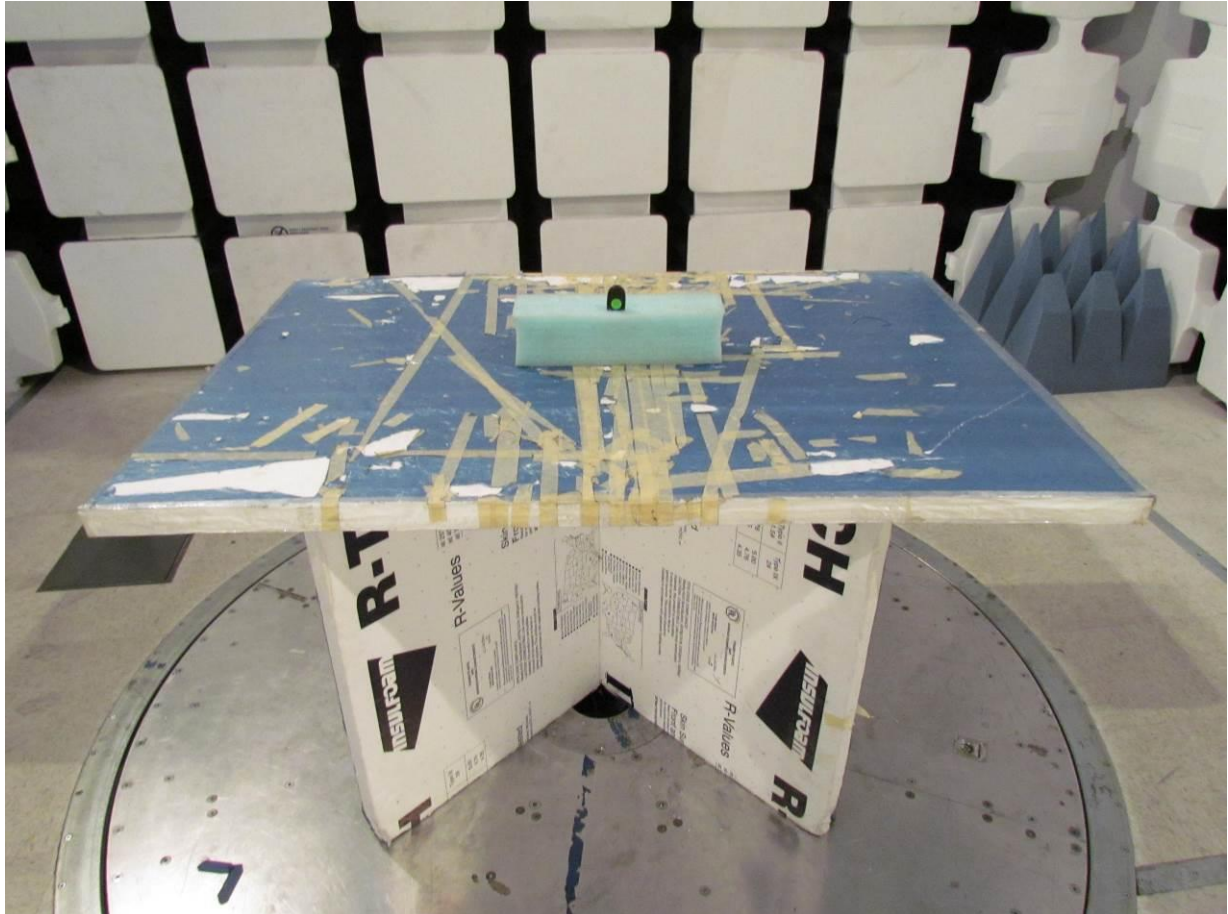

6.3. Digital Emissions > 1 GHz

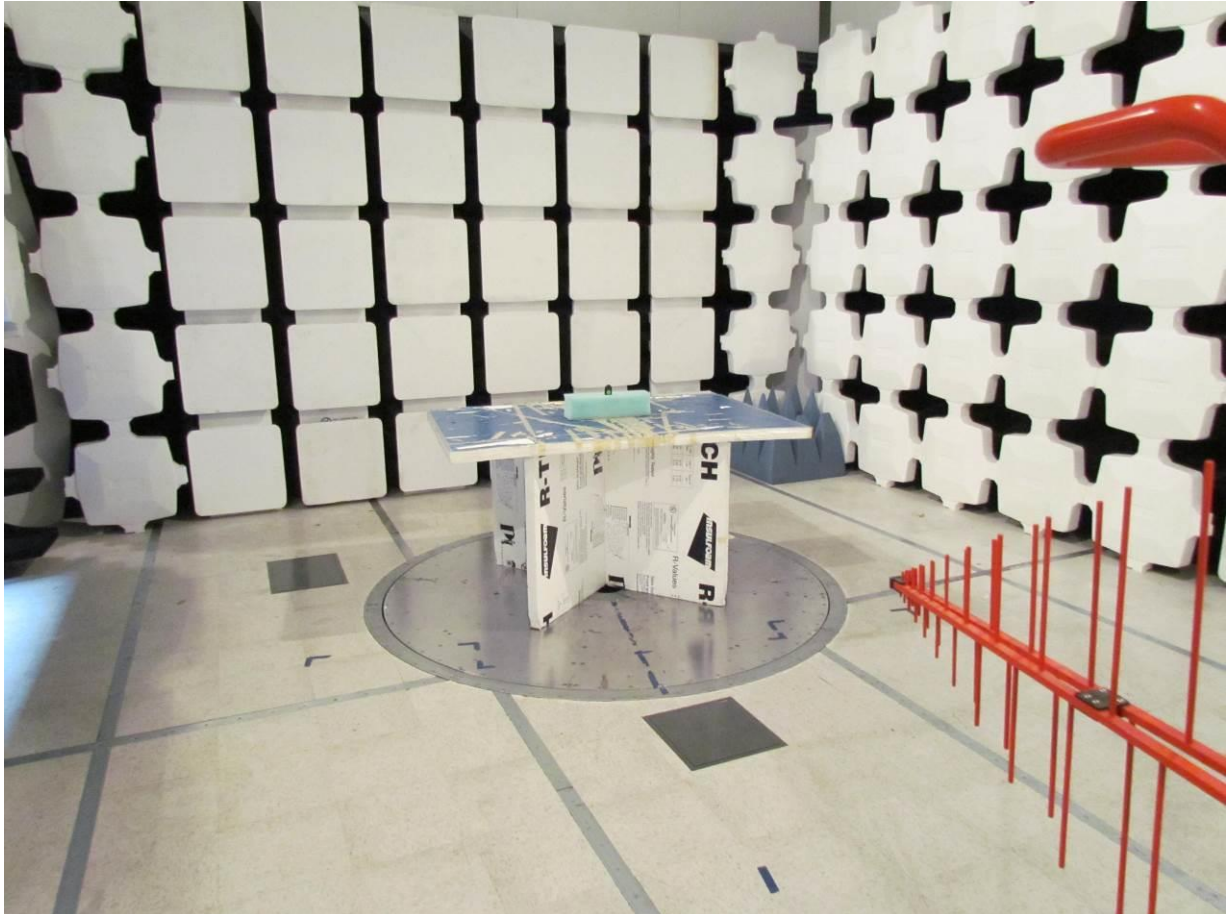

6.4. Radiated Emissions Test Setup <1 GHz





Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 57 of 71

6.5. ac Wireline Test Setup

Not applicable, device battery powered



Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 58 of 71

7. TEST EQUIPMENT

Asset #	Instrument	Manufacturer	Part #	Serial #	Calibration Due Date
0376	Power Sensor	Agilent	U2000A	MY51440005	28 th Oct 15
0390	Power Sensor	Agilent	U2002A	MY50000103	17 th Oct 15
0158	Barometer /Thermometer	Control Co.	4196	E2846	6 th Dec 14
0287	EMI Receiver	Rhode & Schwartz	ESIB40	100201	31 st Jul 15
0378	EMI Receiver	Rhode & Schwartz	ESIB40	100107/040	17 th Jul 15
0338	30 - 3000 MHz Antenna	Sunol	JB3	A052907	14 th Aug 15
0399	1-18 GHz Horn Antenna	EMCO	3117	00154575	10 th Oct 15
0252	SMA Cable	Megaphase	Sucoflex 104	None	N/A
0310	2m SMA Cable	Micro-Coax	UFA210A-0-0787-3G03G0	209089-001	N/A
0312	3m SMA Cable	Micro-Coax	UFA210A-1-1181-3G0300	209092-001	N/A
0314	30dB N-Type Attenuator	ARRA	N9444-30	1623	N/A
0502	EMC Test Software	EMISoft	Vasona	5.0051	N/A
0503	RF Conducted Test Software	National Instruments	Labview	Version 8.2	N/A
0398	RF Conducted Test Software	MiCOM Labs ATS	--	Version 1.8	N/A
0380	RF Switch	MiCOM Labs	MIC001	MIC001	20 th Dec 14

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 59 of 71

APPENDIX

A. SUPPORTING INFORMATION

A.1. CONDUCTED TEST PLOTS

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




A.1.1.1. 6 dB & 99% Bandwidth



6 dB & 99% BANDWIDTH

Variant: Bluetooth Low Energy, Channel: 2402.00 MHz, Chain a, Temp: Ambient, Voltage: 3.8 Vdc

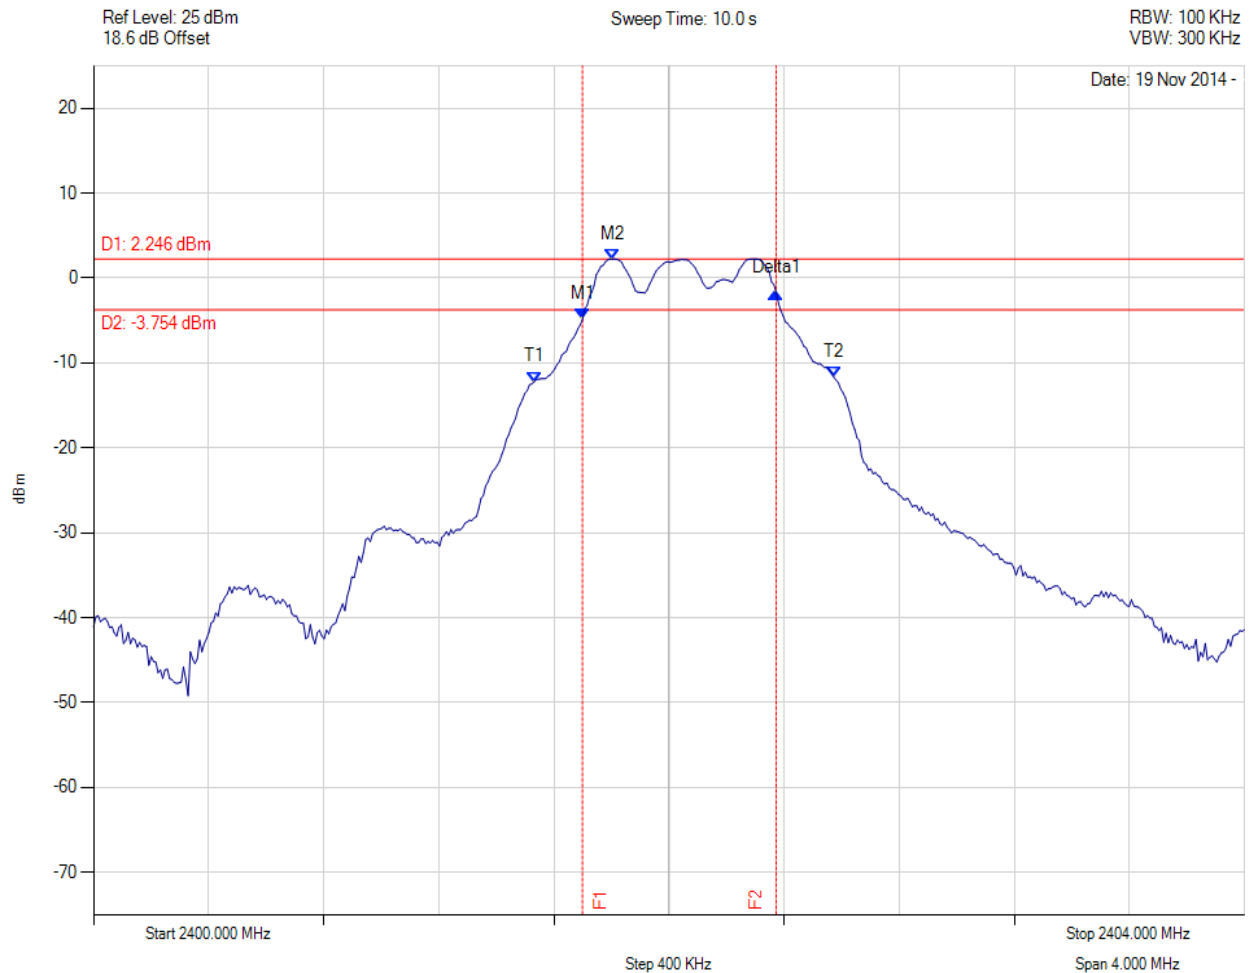

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2401.699 MHz : -4.888 dBm M2 : 2401.804 MHz : 2.246 dBm Delta1 : 673 KHz : 3.097 dB T1 : 2401.531 MHz : -12.236 dBm T2 : 2402.573 MHz : -11.687 dBm OBW : 1.042 MHz	Measured 6 dB Bandwidth: 0.673 MHz Limit: ≥500.0 kHz Margin: -0.17 MHz

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 61 of 71



6 dB & 99% BANDWIDTH

Variant: Bluetooth Low Energy, Channel: 2440.00 MHz, Chain a, Temp: Ambient, Voltage: 3.8 Vdc

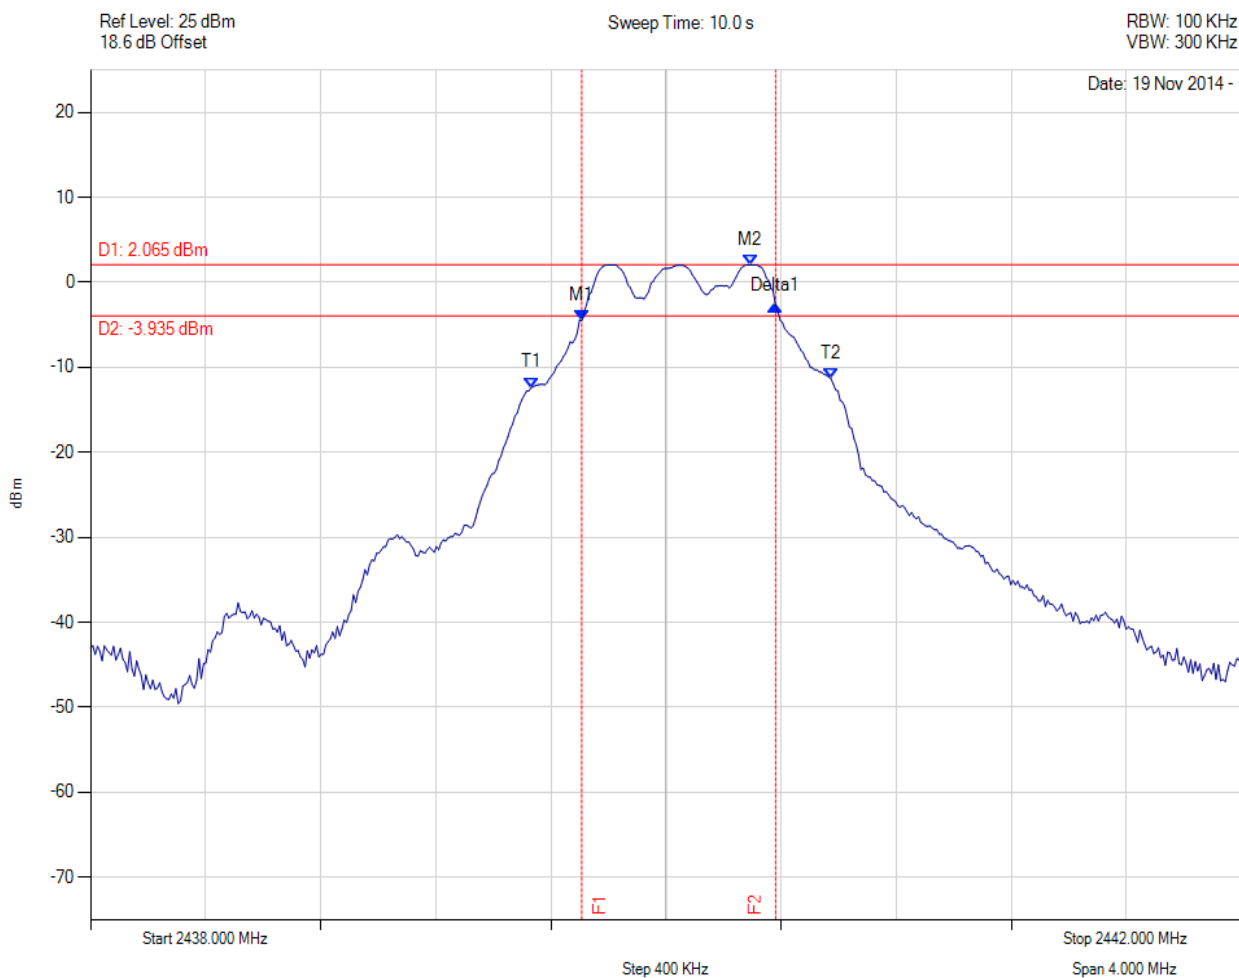

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2439.707 MHz : -4.467 dBm M2 : 2440.293 MHz : 2.065 dBm Delta1 : 673 KHz : 1.735 dB T1 : 2439.531 MHz : -12.394 dBm T2 : 2440.573 MHz : -11.308 dBm OBW : 1.042 MHz	Measured 6 dB Bandwidth: 0.673 MHz Limit: ≥ 500.0 kHz Margin: -0.17 MHz

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 62 of 71



6 dB & 99% BANDWIDTH

Variant: Bluetooth Low Energy, Channel: 2480.00 MHz, Chain a, Temp: Ambient, Voltage: 3.8 Vdc

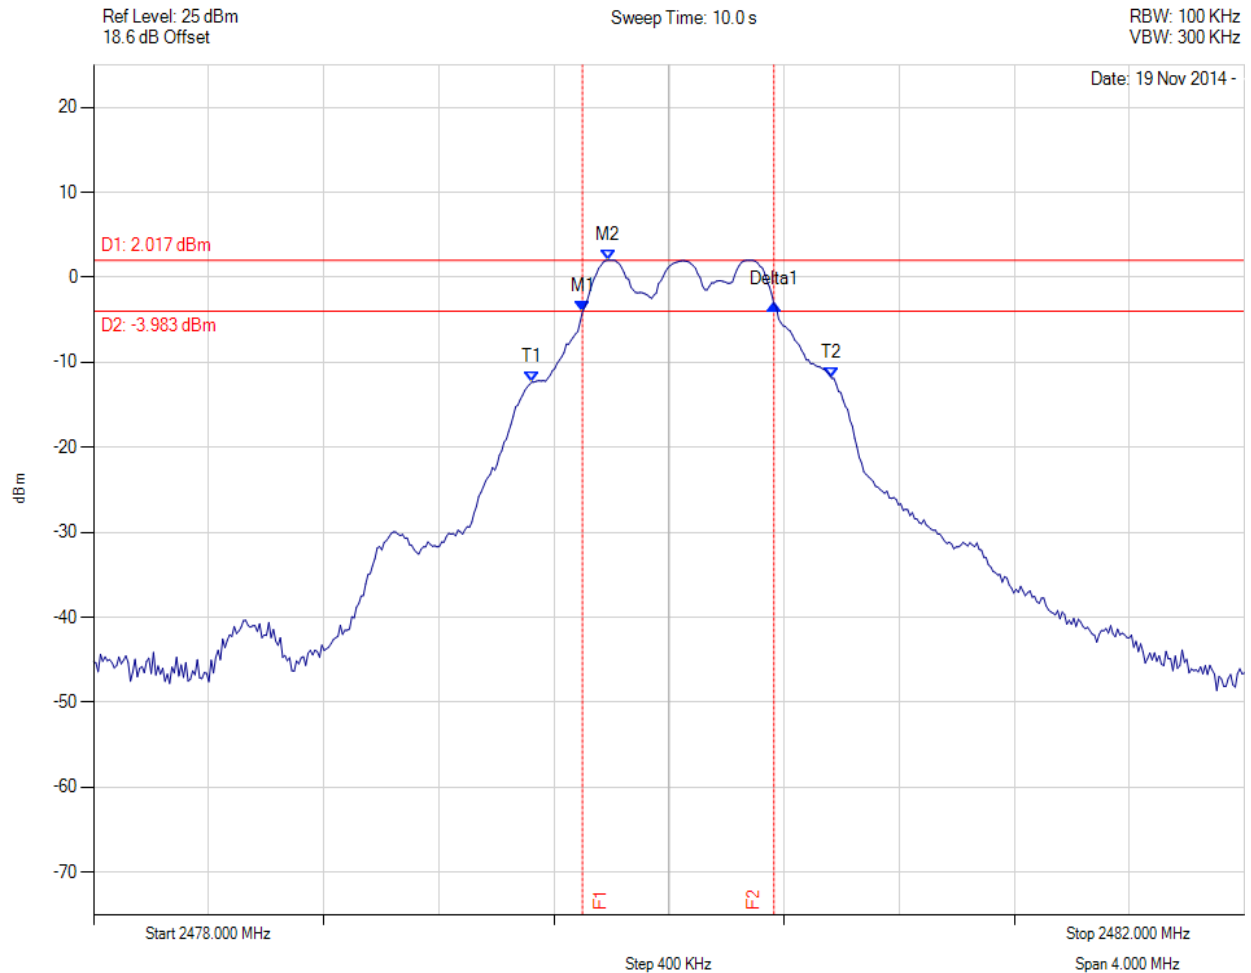

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2479.699 MHz : -4.032 dBm M2 : 2479.788 MHz : 2.017 dBm Delta1 : 665 KHz : 0.872 dB T1 : 2479.523 MHz : -12.319 dBm T2 : 2480.565 MHz : -11.864 dBm OBW : 1.042 MHz	Measured 6 dB Bandwidth: 0.665 MHz Limit: ≥ 500.0 kHz Margin: -0.17 MHz

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 63 of 71

A.1.2. Conducted Spurious Emissions



CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE

Variant: Bluetooth Low Energy, Channel: 2402.00 MHz, Chain a, Temp: Ambient, Voltage: 3.8 Vdc

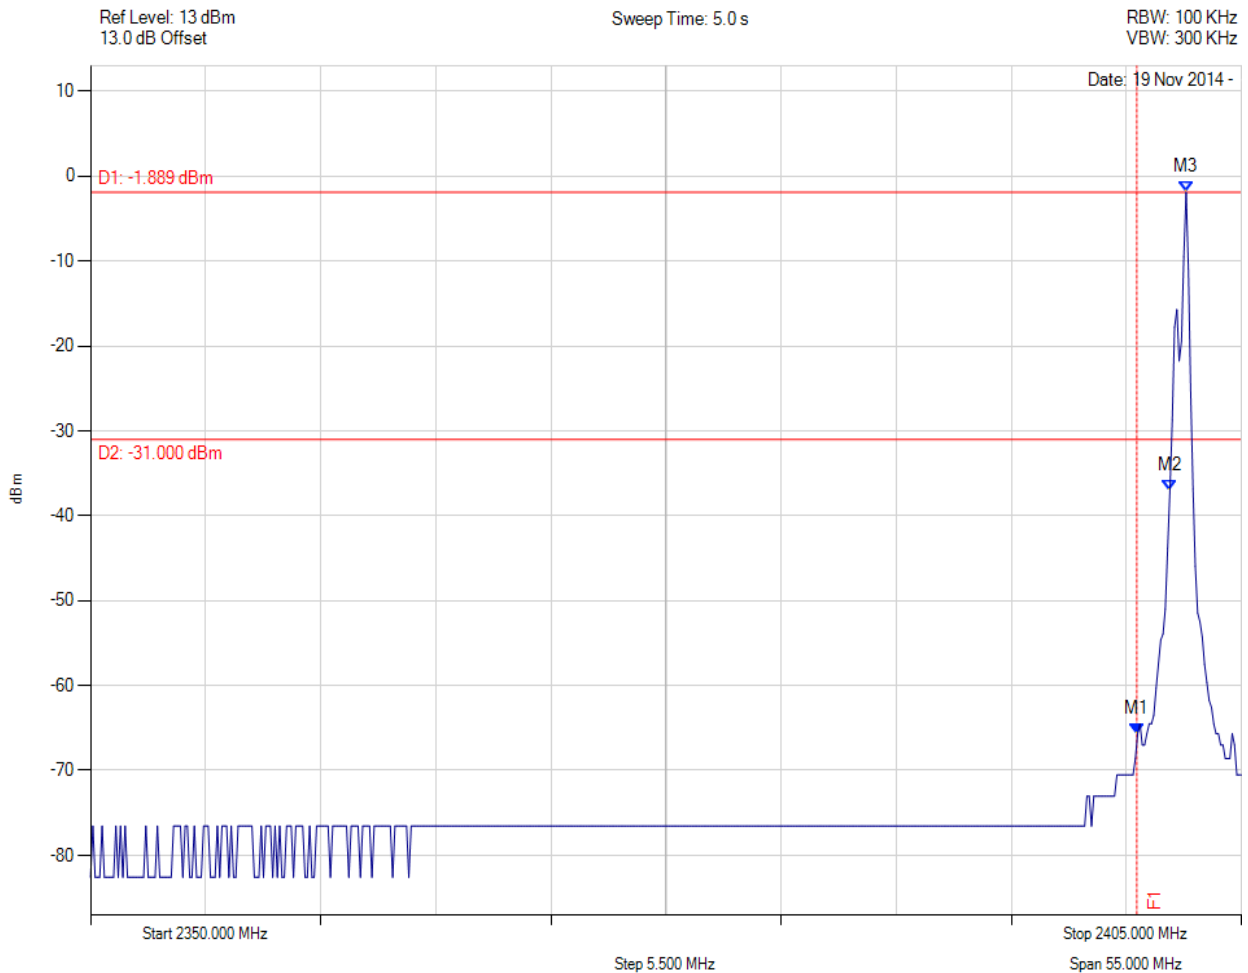

Analysers Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2400.000 MHz : -65.663 dBm M2 : 2401.583 MHz : -36.990 dBm M3 : 2402.355 MHz : -1.889 dBm	Channel Frequency: 2402.00 MHz

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 64 of 71



CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE

Variant: Bluetooth Low Energy, Channel: 2480.00 MHz, Chain a, Temp: Ambient, Voltage: 3.8 Vdc

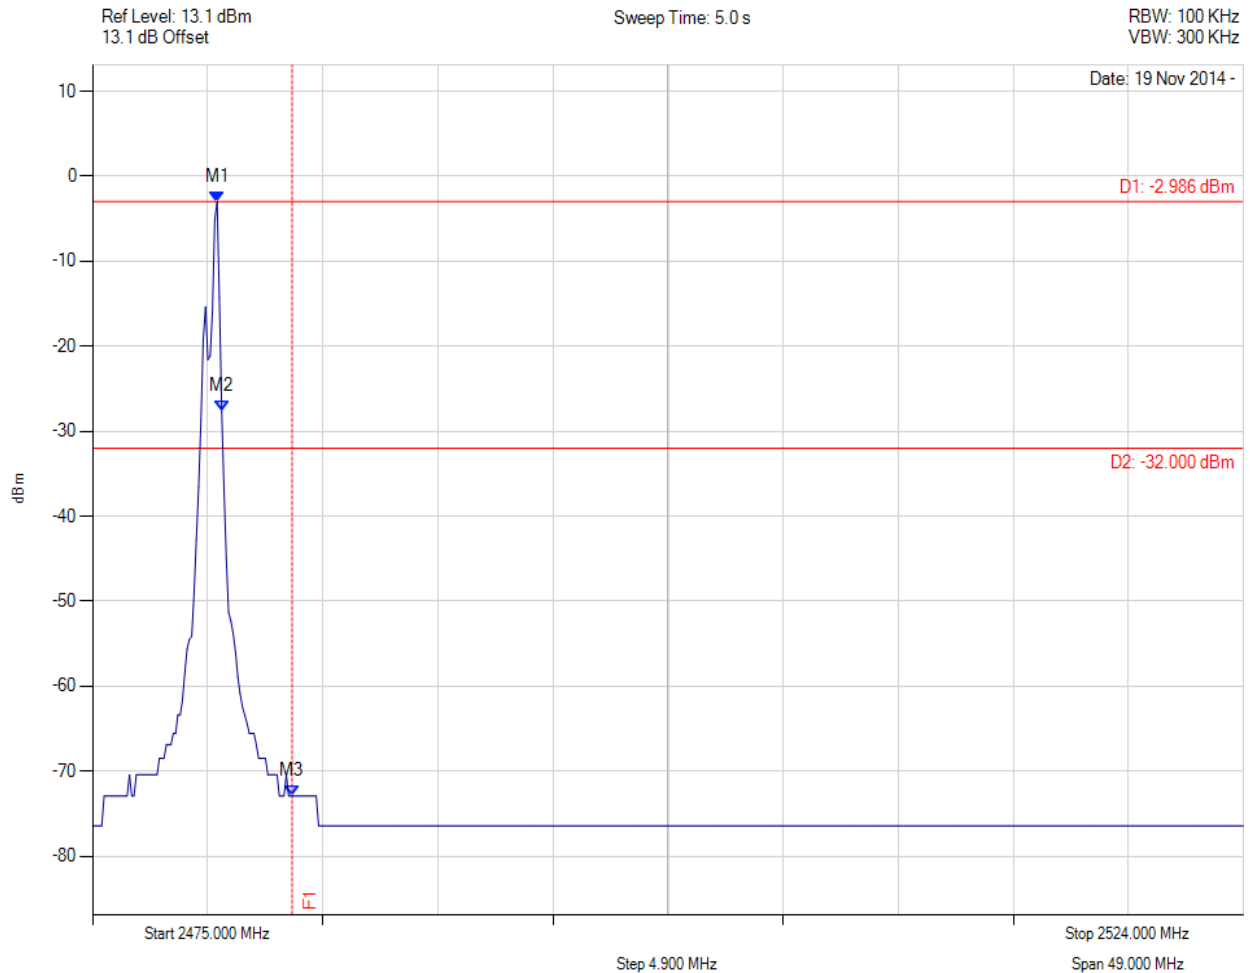

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2480.303 MHz : -2.986 dBm M2 : 2480.499 MHz : -27.706 dBm M3 : 2483.500 MHz : -72.923 dBm	Channel Frequency: 2480.00 MHz

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 65 of 71



CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: Bluetooth Low Energy, Channel: 2402.00 MHz, Chain a, Temp: Ambient, Voltage: 3.8 Vdc

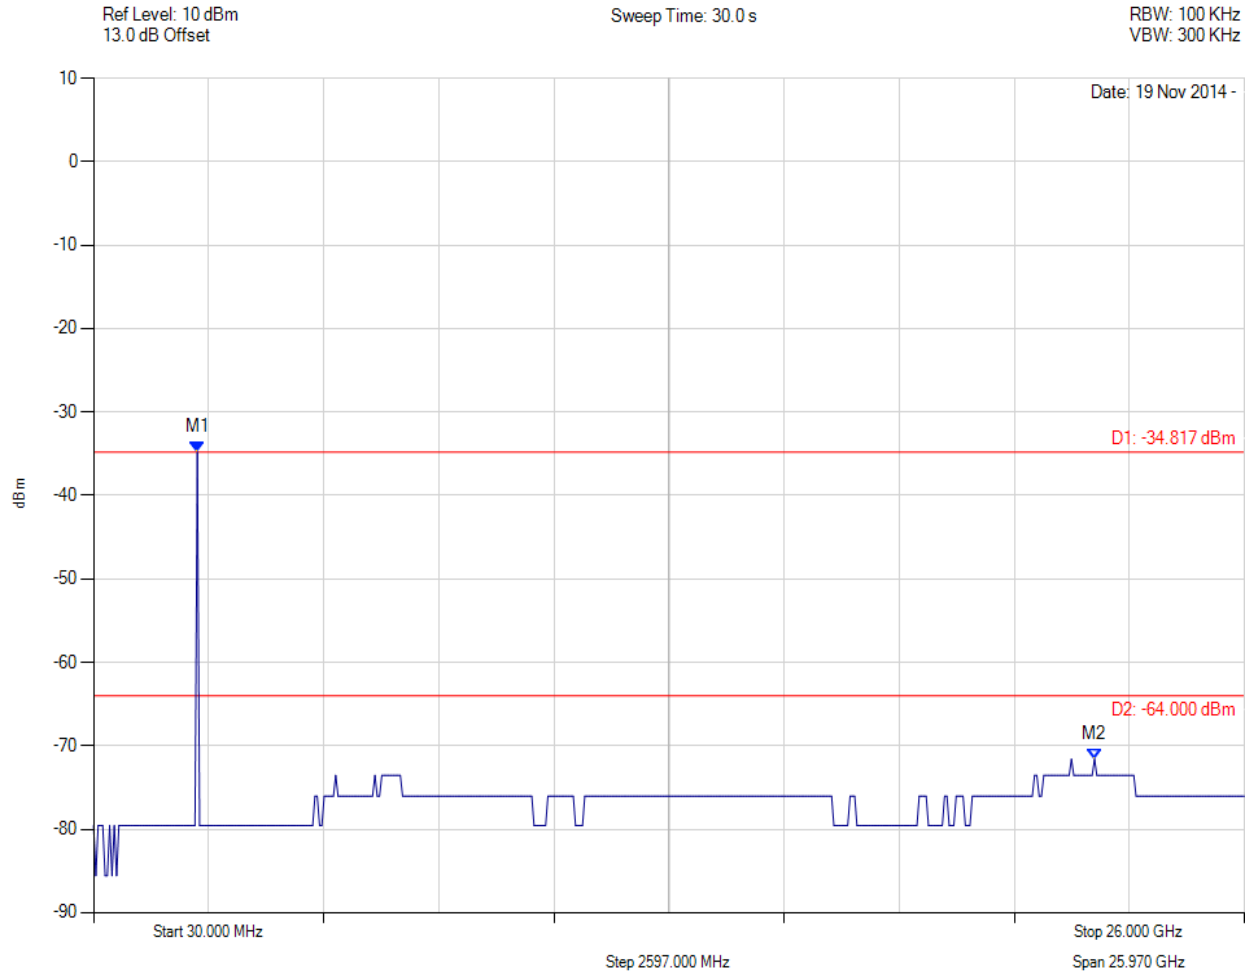

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2371.984 MHz : -34.817 dBm M2 : 22.617 GHz : -71.586 dBm	Limit: -64.00 dBm Margin: -7.59 dB

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATH002-U2 Rev A
Issue Date: 14th January 2015
Page: 66 of 71



CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: Bluetooth Low Energy, Channel: 2440.00 MHz, Chain a, Temp: Ambient, Voltage: 3.8 Vdc

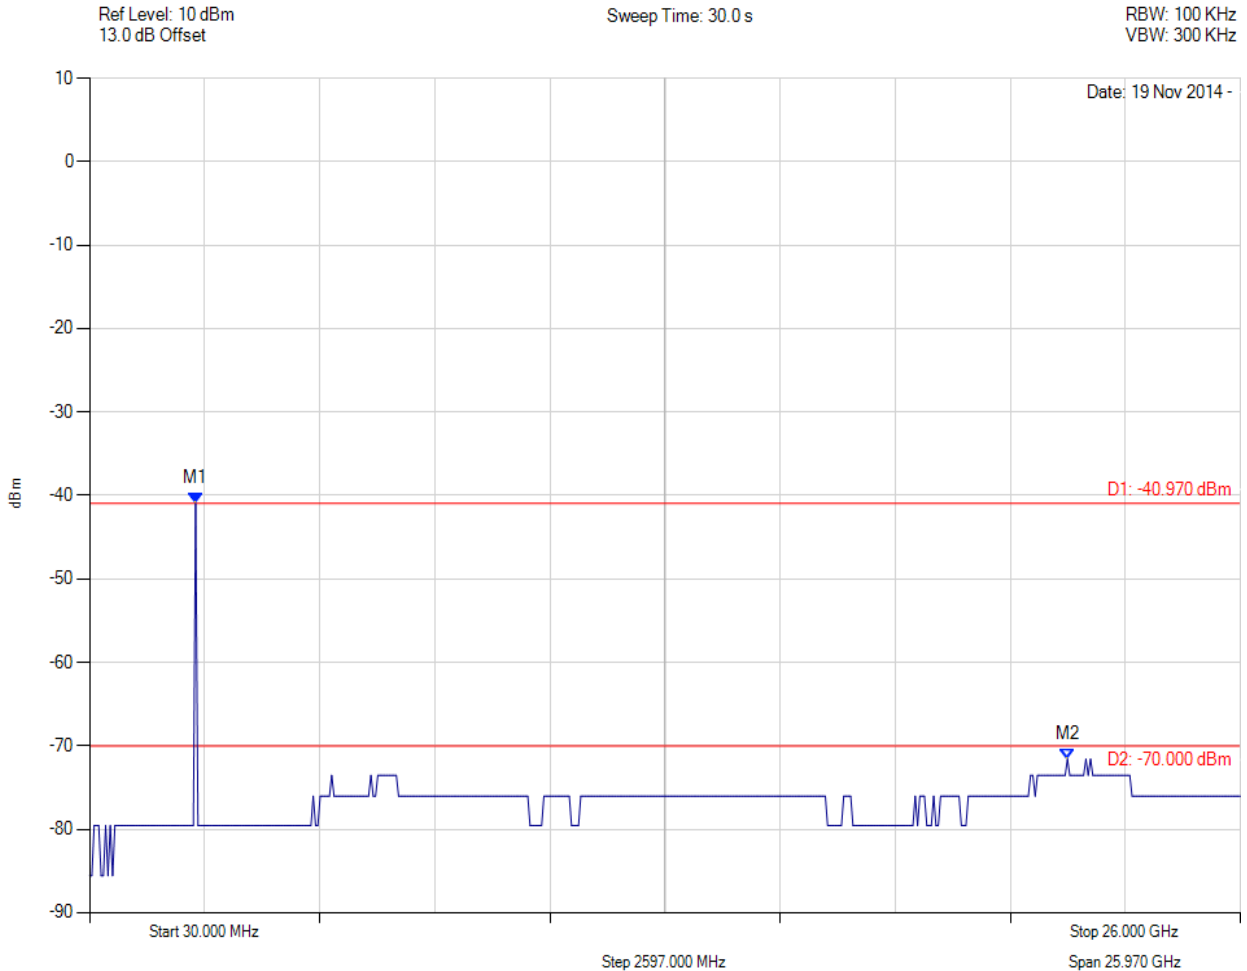

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -40.970 dBm M2 : 22.097 GHz : -71.586 dBm	Limit: -70.00 dBm Margin: -1.59 dB

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 67 of 71



CONDUCTED SPURIOUS EMISSIONS - AVERAGE

Variant: Bluetooth Low Energy, Channel: 2480.00 MHz, Chain a, Temp: Ambient, Voltage: 3.8 Vdc

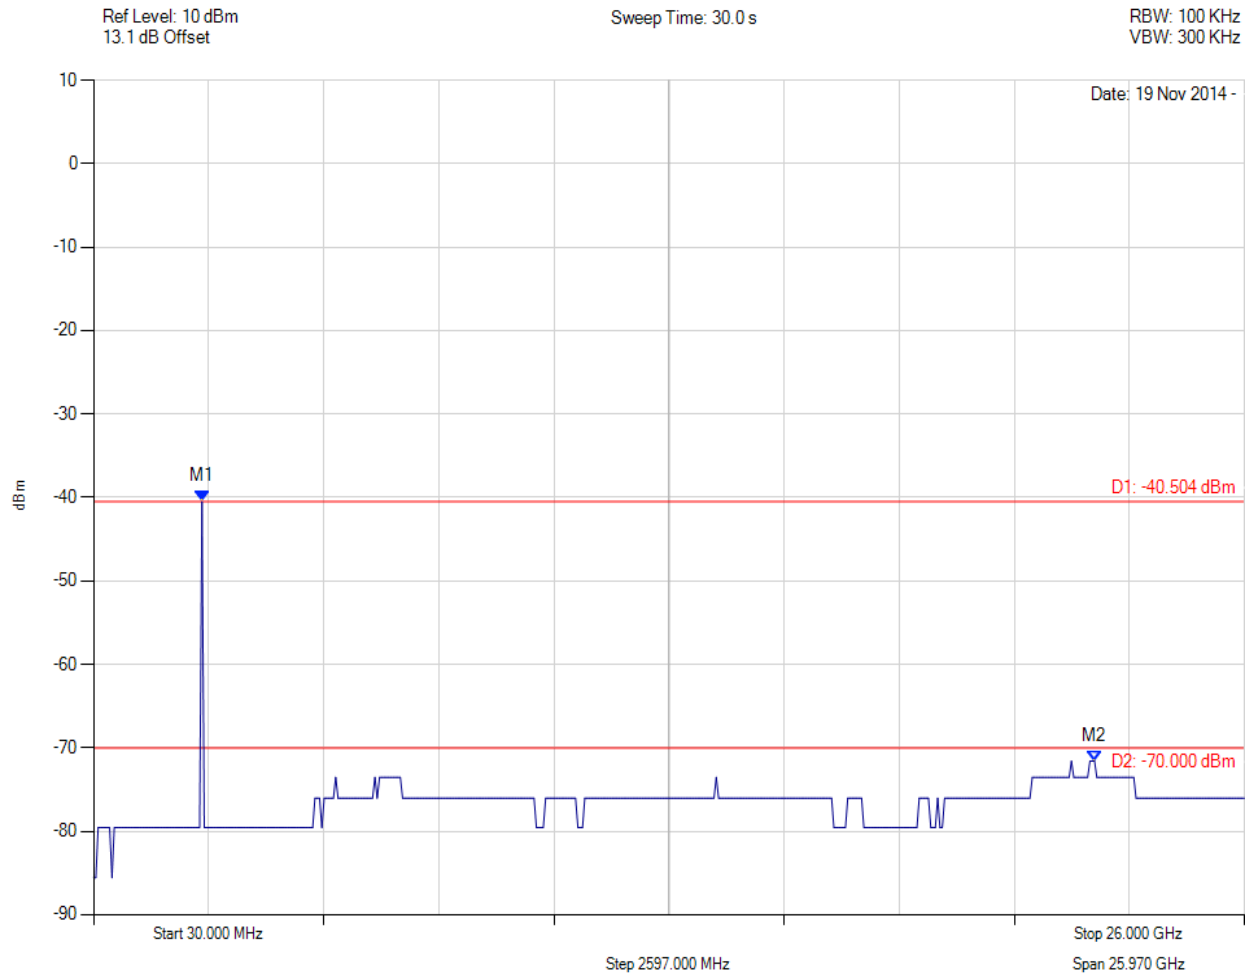

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2476.072 MHz : -40.504 dBm M2 : 22.617 GHz : -71.586 dBm	Limit: -70.00 dBm Margin: -1.59 dB

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 68 of 71

A.1.3. Power Spectral Density



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11g, Channel: 2402.00 MHz, Chain a, Temp: Ambient, Voltage: 3.8 Vdc

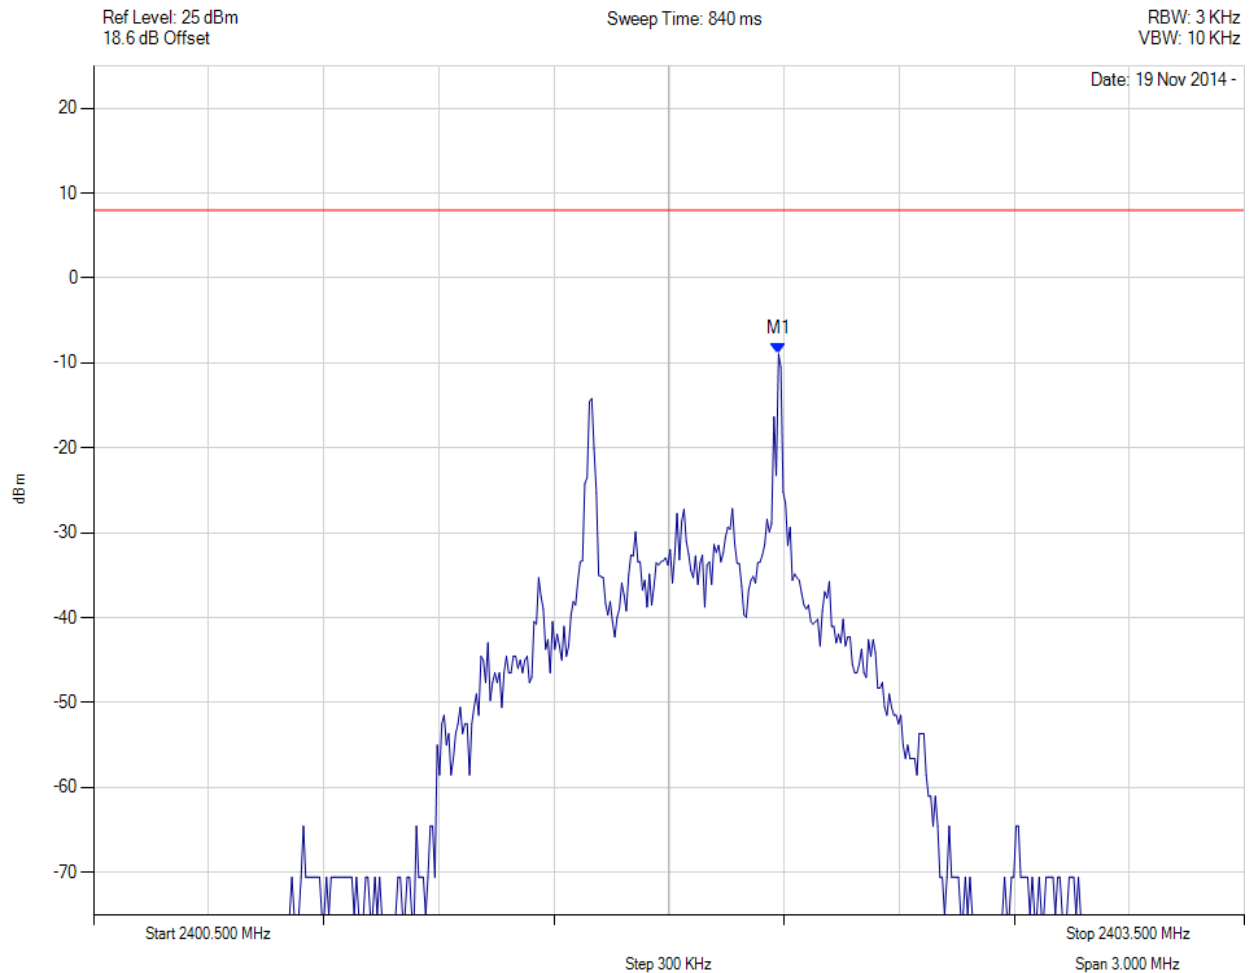

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2402.286 MHz : -8.924 dBm	Limit: ≤ 8.000 dBm

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 69 of 71



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11g, Channel: 2440.00 MHz, Chain a, Temp: Ambient, Voltage: 3.8 Vdc



Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2440.280 MHz : -10.166 dBm	Limit: ≤ 8.000 dBm

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Mad Apparel Inc. - Model A100
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ATHO02-U2 Rev A
Issue Date: 14th January 2015
Page: 70 of 71



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11g, Channel: 2480.00 MHz, Chain a, Temp: Ambient, Voltage: 3.8 Vdc

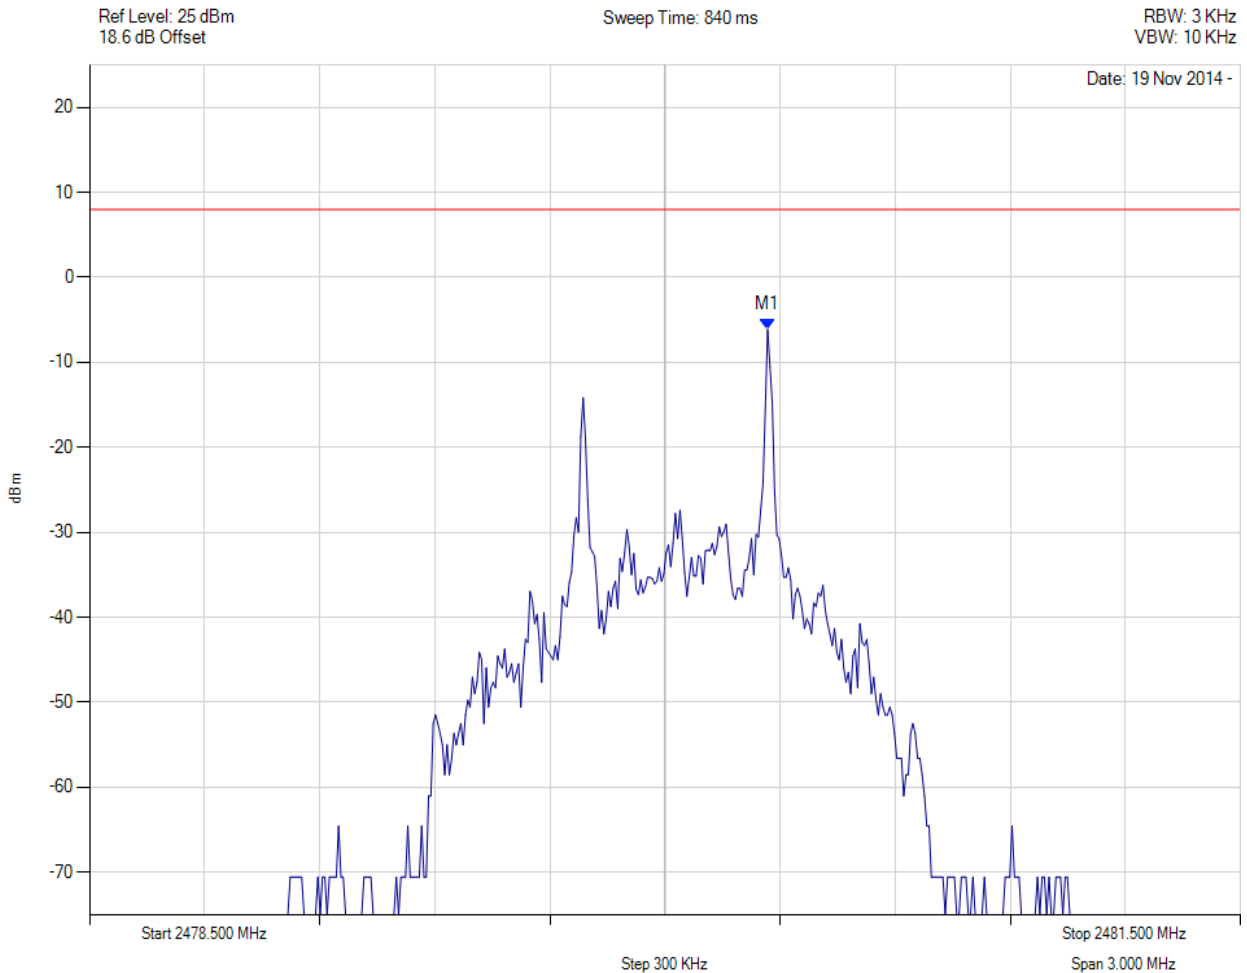

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2480.268 MHz : -6.127 dBm	Limit: ≤ 8.000 dBm

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



575 Boulder Court
Pleasanton, California 94566, USA
Tel: 1.925.462.0304
Fax: 1.925.462.0306
www.micomlabs.com