

TEST REPORT

of

FCC Part 15 Subpart C

☒ New Application; ☐ Class I PC; ☐ Class II PC

Product : Smart Lock

Brand: LEON

Model: CL5510; CL4510

Model Difference: The color of these two are same.
The hardware of unlocking are different.
CL5510 is cylindrical to drive latch.
CL4510 is tubular to drive latch.

FCC ID: 2ADR8CL455510

FCC Rule Part: §15.247, Cat: DTS

Applicant: Leon Specialty Inc.

Address: 7F,No.95, Minquan Road,Xindian Dist., New Taipei City 23141, Taiwan (R.O.C.)

Test Performed by:
International Standards Laboratory

<Lung-Tan LAB>

*Site Registration No.

BSMI: SL2-IN-E-0013; MRA TW1036; TAF: 0997; IC: IC4067B-3;

*Address:

No. 120, Lane 180, Hsin Ho Rd.,
Lung-Tan Dist., Tao Yuan City 325, Taiwan

*Tel : 886-3-407-1718; Fax: 886-3-407-1738

Report No.: **ISL-15LR355FC**

Issue Date : **2016/01/04**



Test results given in this report apply only to the specific sample(s) tested and are traceable to national or international standard through calibration of the equipment and evaluating measurement uncertainty herein.

This report MUST not be used to claim product endorsement by TAF, NVLAP or any agency of the Government.

This test report shall not be reproduced except in full, without the written approval of International Standards Laboratory.

VERIFICATION OF COMPLIANCE

Applicant: Leon Specialty Inc.

Product Description: Smart Lock

Brand Name: LEON

Model No.: CL5510; CL4510
The color of these two are same.
The hardware of unlocking are different.

Model Difference: CL5510 is cylindrical to drive latch.
CL4510 is tubular to drive latch.

FCC ID: 2ADR8CL455510

Date of test: 2015/12/23 ~ 2015/12/31

Date of EUT Received: 2015/12/23

We hereby certify that:

All the tests in this report have been performed and recorded in accordance with the standards described above and performed by an independent electromagnetic compatibility consultant, International Standards Laboratory.

The test results contained in this report accurately represent the measurements of the characteristics and the energy generated by sample equipment under test at the time of the test. The sample equipment tested as described in this report is in compliance with the limits of above standards.

Test By:



Date:

2016/01/04

Dion Chang / Engineer

Prepared By:



Date:

2016/01/04

Gigi Yeh / Specialist

Approved By:



Date:

2016/01/04

Vincent Su / Technical Manager

Version

Version No.	Date	Description
00	2016/01/04	Initial creation of document

Table of Contents

1	GENERAL INFORMATION	6
1.1	Related Submittal(s) / Grant (s)	7
1.2	Test Methodology	7
1.3	Test Facility	7
1.4	Special Accessories	7
1.5	Equipment Modifications	7
2	SYSTEM TEST CONFIGURATION	8
2.1	EUT Configuration	8
2.2	EUT Exercise	8
2.3	Test Procedure	8
2.4	Configuration of Tested System	9
3	SUMMARY OF TEST RESULTS	10
4	DESCRIPTION OF TEST MODES	10
5	AC POWER LINE CONDUCTED EMISSION TEST	11
5.1	Standard Applicable:	11
5.2	Measurement Equipment Used:	11
5.3	EUT Setup:	12
5.4	Measurement Procedure:	12
5.5	Measurement Result:	12
6	PEAK OUTPUT POWER MEASUREMENT	13
6.1	Standard Applicable:	13
6.2	Measurement Equipment Used:	14
6.3	Test Set-up:	14
6.4	Measurement Procedure:	14
6.5	Measurement Result:	14
7	6dB Bandwidth	15
7.1	Standard Applicable:	15
7.2	Measurement Equipment Used:	15
7.3	Test Set-up:	15
7.4	Measurement Procedure:	15
7.5	Measurement Result:	15
8	100KHz BANDWIDTH OF BAND EDGES MEASUREMENT	18
8.1	Standard Applicable:	18
8.2	Measurement Equipment Used:	18
8.3	Test SET-UP:	19
8.4	Measurement Procedure:	20
8.5	Field Strength Calculation:	20
8.6	Measurement Result:	20
9	SPURIOUS RADIATED EMISSION TEST	23
9.1	Standard Applicable	23
9.2	Measurement Equipment Used:	23
9.3	Test SET-UP:	23
9.4	Measurement Procedure:	24
9.5	Field Strength Calculation	24
9.6	Measurement Result:	24

10	Peak Power Spectral Density	31
10.1	Standard Applicable:	31
10.2	Measurement Equipment Used:	31
10.3	Test Set-up:	31
10.4	Measurement Procedure:	31
10.5	Measurement Result:	32
11	ANTENNA REQUIREMENT	35
11.1	Standard Applicable:	35
11.2	Antenna Connected Construction:	35

1 GENERAL INFORMATION

General:

Product Name	Smart Lock
Brand Name	LEON
Model Name	CL5510; CL4510
Model Difference	The color of these two are same. The hardware of unlocking are different. CL5510 is cylindrical to drive latch. CL4510 is tubular to drive latch.
Power Supply	6Vdc(1.5Vdc AA battery*4)

Bluetooth:

Frequency Range:	2402 – 2480MHz
Bluetooth Version:	V4.0
Channel number:	40 channels, 2MHz step
Modulation type:	Wide band Modulation (GFSK)
Transmit Power:	-3.35 dBm Peak
Dwell Time:	N/A
Antenna Designation:	Chip Antenna , 2.5dBi

NFC:

Operating Frequency	13.56MHz
Transmit Power	70.25 dBuV/m Peak at 3m
Number of Channels	1
Antenna Type	Loop Antenna
Module Type	ASK

The Test report is applied for BT 4.0 (BLE).

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.1 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2ADR8CL455510** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

1.2 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI 63.4: 2014. Radiated testing was performed at an antenna to EUT distance 3 meters. Radiated testing was performed at an antenna to EUT distance 3 meters.

KDB Document: 558074 D01 DTS Meas Guidance v03r02

1.3 Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of **International Standards Laboratory** <Lung-Tan LAB> No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist., Tao Yuan City 325, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI 63.4: 2014. FCC Registration Number is: TW1036, Canada Registration Number: 4067B-3.

1.4 Special Accessories

Not available for this EUT intended for grant.

1.5 Equipment Modifications

Not available for this EUT intended for grant.

2 SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 7 and 13 of ANSI C63.4: 2014, conducted emissions from the EUT are measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and Average detector mode.

2.3.2 Radiated Emissions

The EUT is placed on a turn table which is 0.8 m/1.5 m (Frequency above 1 GHz) above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) were rotated through three orthogonal axes according to the requirements in Section 6 and 11 of ANSI C63.10: 2013.

2.4 Configuration of Tested System

Fig. 2-1 Configuration of Tested System (Fixed channel)




Table 1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.	Data Cable	Power Cord
1	N/A					

3 SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
-----------	---------------------	--------

5 AC POWER LINE CONDUCTED EMISSION TEST

5.1 Standard Applicable:

According to §15.207, frequency range within 150KHz to 30MHz shall not exceed the Limit table as below.

Frequency range MHz	Limits dB(uV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Note

- 1.The lower limit shall apply at the transition frequencies
- 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

5.2 Measurement Equipment Used:

AC Power Line Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Conduction 04-3 Cable	WOKEN	CFD 300-NL	Conduction 04 -3	07/28/2015	07/27/2016
EMI Receiver 17	Rohde & Schwarz	ESCI 7	100887	09/08/2015	09/07/2016
LISN 18	ROHDE & SCHWARZ	ENV216	101424	02/11/2015	02/10/2016
LISN 19	ROHDE & SCHWARZ	ENV216	101425	03/12/2015	03/11/2016

5.3 EUT Setup:

1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4: 2014.
2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
3. The LISN was connected with 120Vac/60Hz power source.

5.4 Measurement Procedure:

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

5.5 Measurement Result:

N/A, this device uses DC power supply.

6 PEAK OUTPUT POWER MEASUREMENT


6.1 Standard Applicable:

According to

6.2 Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Power Meter 05	Anritsu	ML2495A	1116010	07/29/2015	07/28/2016
Power Sensor 05	Anritsu	MA2411B	34NKF50	07/29/2015	07/28/2016
Power Sensor 06	DARE	RPR3006W	13I00030SNO33	11/03/2015	11/02/2016
Power Sensor 07	DARE	RPR3006W	13I00030SNO34	11/03/2015	11/02/2016
Temperature Chamber	KSON	THS-B4H100	2287	06/05/2015	06/04/2016
DC Power supply	ABM	8185D	N/A	09/05/2015	09/04/2016
AC Power supply	EXTECH	CFC105W	NA	12/27/2015	12/26/2016
Attenuator	Woken	Watt-65m3502	11051601	NA	NA
Splitter	MCLI	PS4-199	12465	12/27/2015	12/26/2017
Spectrum analyzer	Agilent	N9030A	MY51360021	10/02/2015	10/01/2016

6.3 Test Set-up:

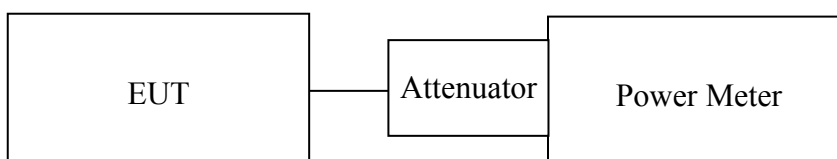

6.4 Measurement Procedure:

Refer to section 9.1.3 and 9.2.3 Peak and Average Conducted Output Power Measurement Procedure of KDB Document: 558074 D01 DTS Meas Guidance v03r02

6.5 Measurement Result:

Frequency (MHz)	Peak Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)	Limit (W)
Low	-3.35	0.00	-3.35	0.00046	1
Mid	-3.44	0.00	-3.44	0.00045	1
High	-3.49	0.00	-3.49	0.00045	1


Offset: 1dB

7 6dB Bandwidth


7.1 Standard Applicable:

According to


6dB Bandwidth Test Data CH-Low

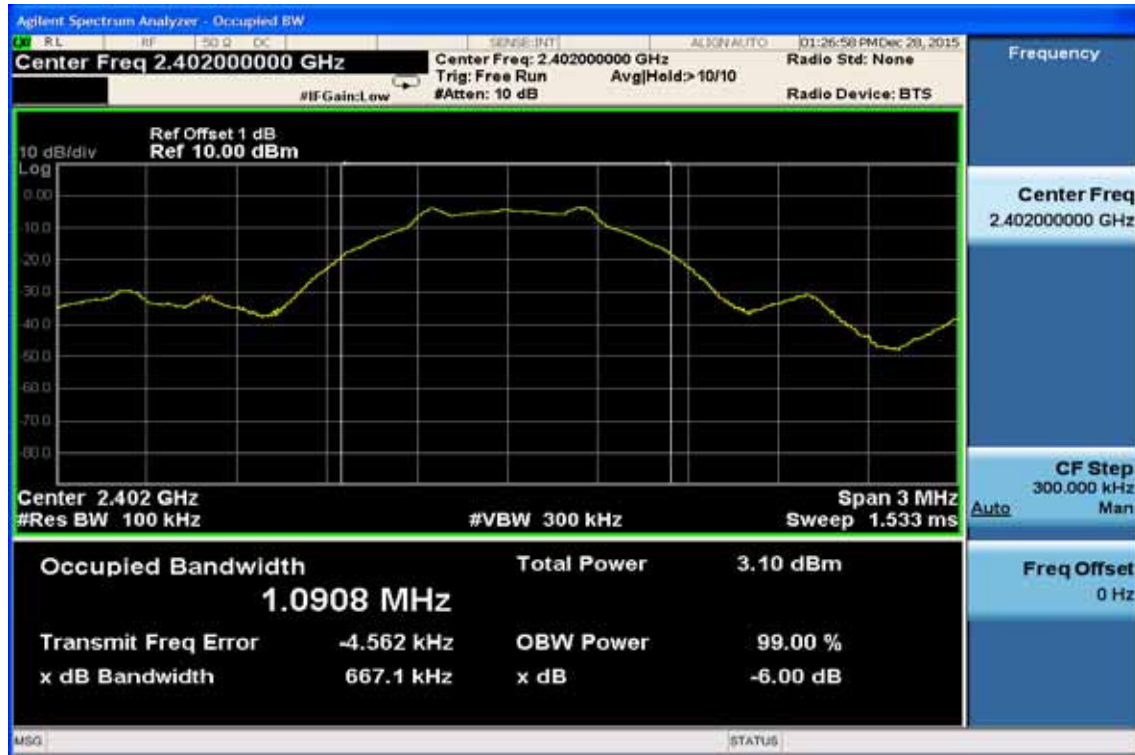

6dB Band Width Test Data CH-Mid

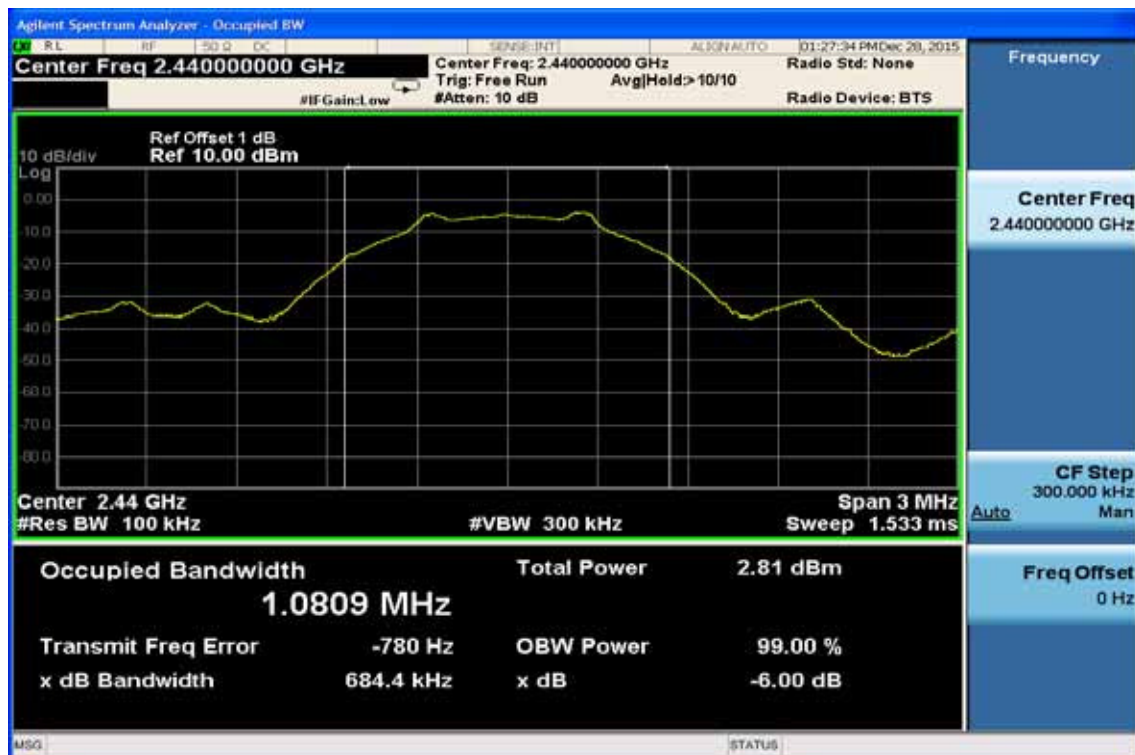

6dB Band Width Test Data CH-High

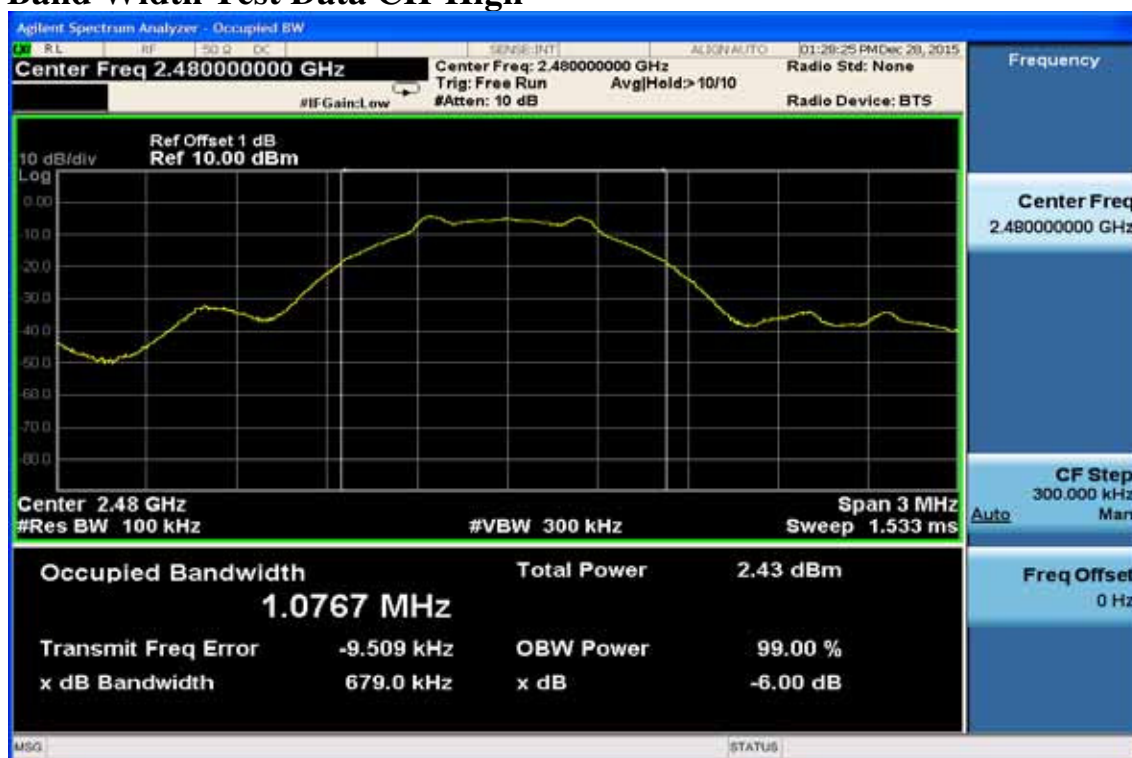

8 100KHz BANDWIDTH OF BAND EDGES MEASUREMENT

8.1 Standard Applicable:

According to


8.3 Test SET-UP:

8.3.1 Conducted Emission at antenna port:


Refer to section 6.3 for details.

8.3.2 Radiated emission:

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

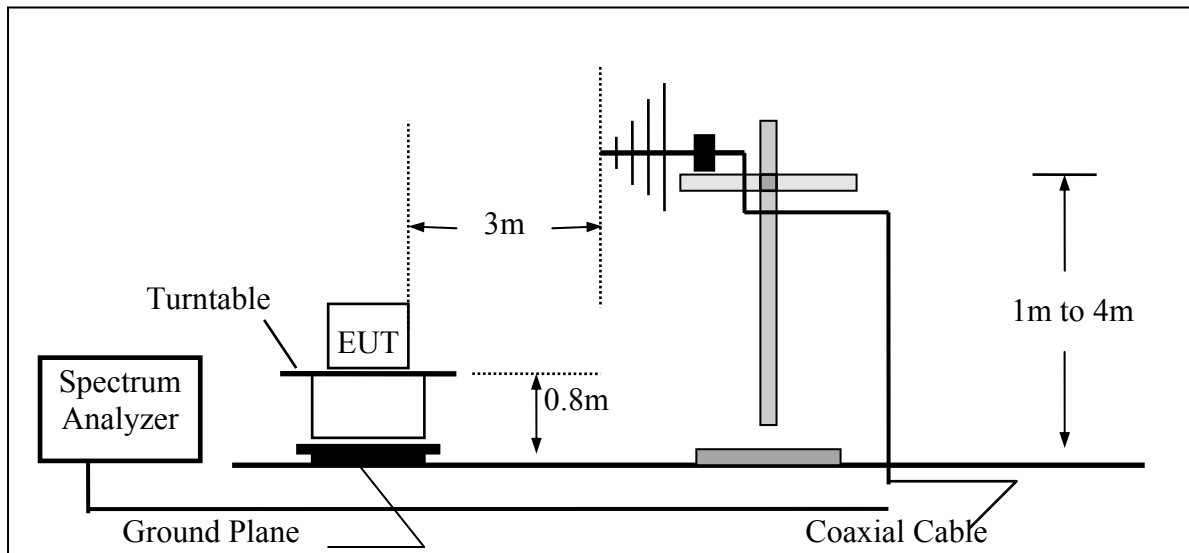

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

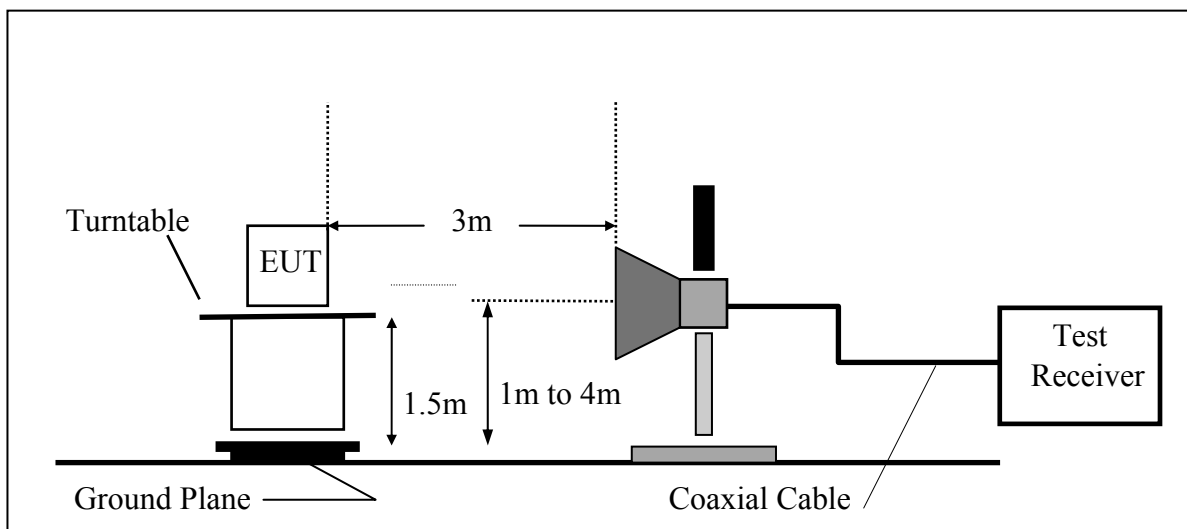

8.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=100KHz, Span=25MHz, Sweep = auto
5. Mark Peak, 2.390GHz and 2.4835GHz and record the max. level.
6. Repeat above procedures until all frequency measured were complete.

Refer to section 11 and 12 emissions in restricted and non-restricted frequency bands Measurement Procedure of KDB Document: 558074 D01 DTS Meas Guidance v03r02

The measurement of unwanted emissions at the edge of the authorized frequency bands can be complicated by the leakage of RF energy from the fundamental emission into the RBW pass band. Thus, for measurements at the band edges, a narrower resolution bandwidth (no less than 10 kHz) can be used within the first 1 MHz beyond the fundamental emission, provided that that measured energy is subsequently integrated over the appropriate reference bandwidth (i.e., 100 kHz or 1 MHz). This integration can be performed using the band power function of the spectrum analyzer or by summing the spectral levels (in linear power units) over the appropriate reference bandwidth.

8.5 Field Strength Calculation:

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and EUTy Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

8.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Band Edges Test Data

Radiated Emission:

Operation Mode TX CH Low
Fundamental Frequency 2402 MHz
Temperature 25

Test Date 2015/12/28
Test By Dino

Operation Mode	TX CH High
Fundamental Frequency	2480 MHz
Temperature	25

Test Date	2015/12/28
Test By	Dino

9 SPURIOUS RADIATED EMISSION TEST

9.1 Standard Applicable

According to

9.4 Measurement Procedure:

1. The EUT was placed on a turn table which is 0.8m/1.5m above ground plane.
2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Repeat above procedures until all frequency measured were complete.

Refer to section 11 and 12 emissions in restricted and non-stricted frequency bands Measurement Procedure of KDB Document: 558074 D01 DTS Meas Guidance v03r02

9.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and EUTy Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

9.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Radiated Spurious Emission Measurement Result: (below 1GHz)

Operation Mode	TX CH Low	Test Date	2015/12/28
Fundamental Frequency	2402MHz	Test By	Dino
Temperature	25		

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	TX CH Mid	Test Date	2015/12/28
Fundamental Frequency	2442MHz	Test By	Dino
Temperature	25		

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	TX CH High	Test Date	2015/12/28
Fundamental Frequency	2480MHz	Test By	Dino
Temperature	25		

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH Low	Test Date	2015/12/28
Fundamental Frequency	2402 MHz	Test By	Dino
Temperature	25		

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH Mid	Test Date	2015/12/28
Fundamental Frequency	2442 MHz	Test By	Dino
Temperature	25		

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH High	Test Date	2015/12/28
Fundamental Frequency	2480 MHz	Test By	Dino
Temperature	25		

10 Peak Power Spectral Density

10.1 Standard Applicable:

According to


10.5 Measurement Result:

LE mode


Frequency MHz	Power Density Reading (dBm)	Maximum Limit (dBm)
Low	-15.237	8
Mid	-16.918	8
High	-16.750	8

LT mode

Power Spectral Density Test Plot (CH-Low)

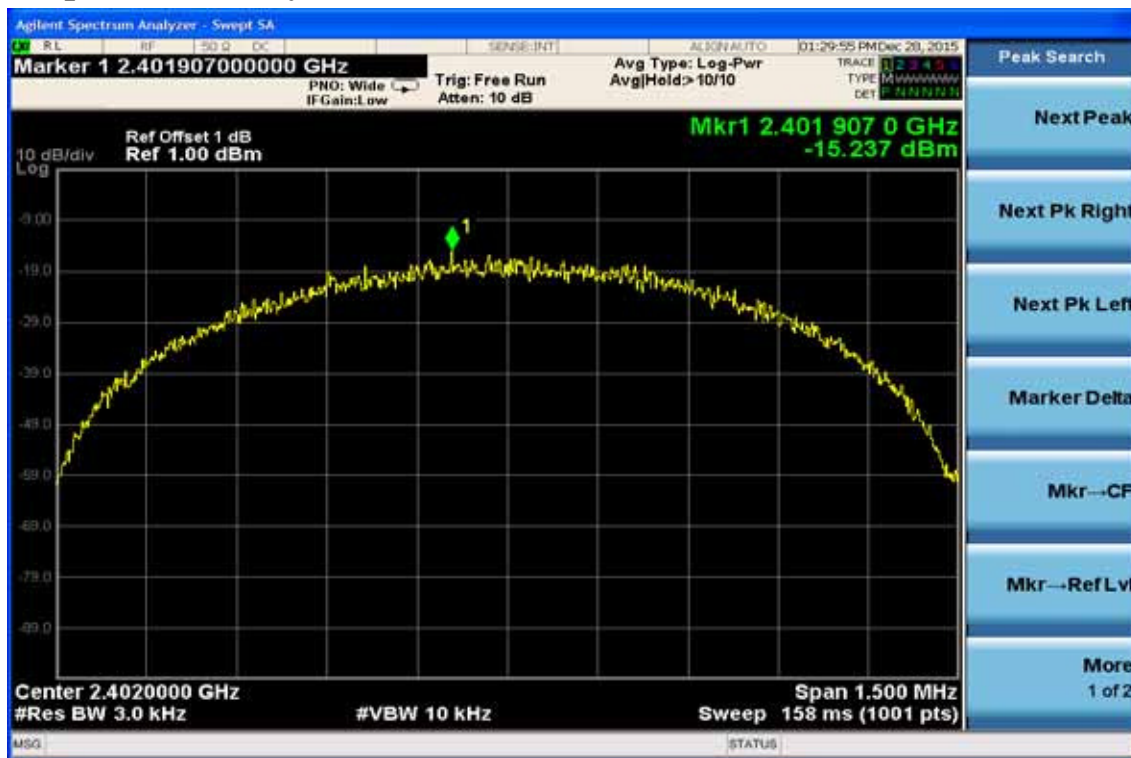

Power Spectral Density Test Plot (CH-Mid)

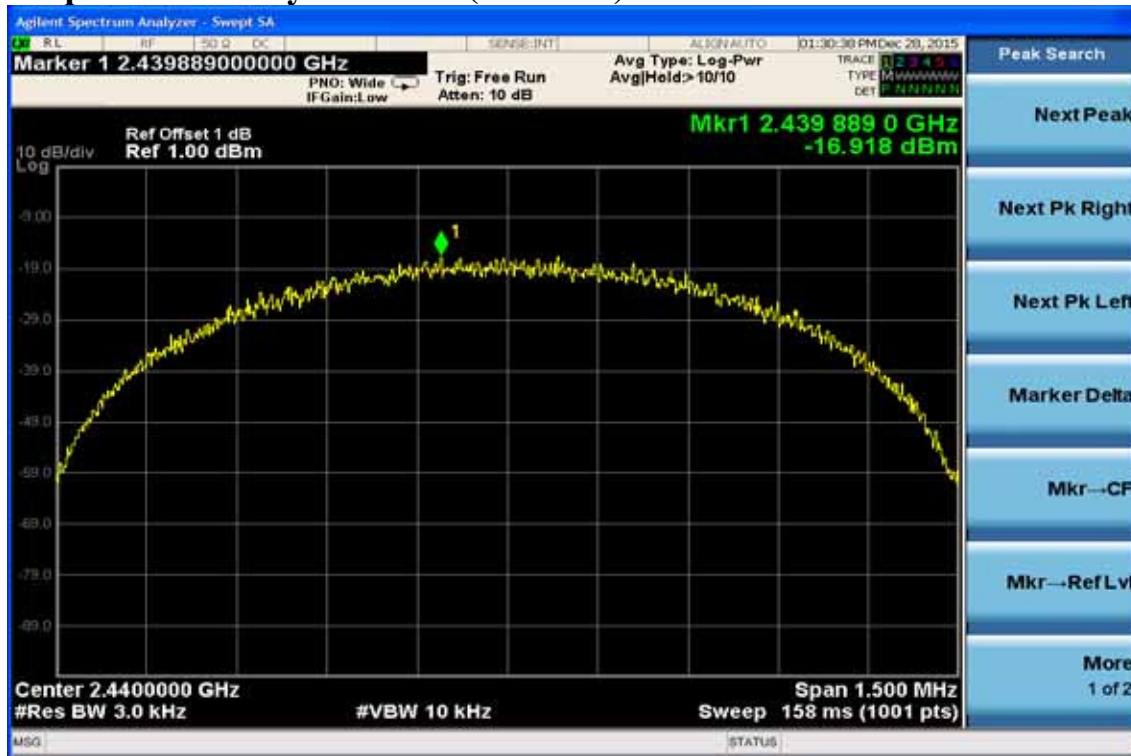

Power Spectral Density Test Plot (CH-High)



11 ANTENNA REQUIREMENT

11.1 Standard Applicable:

According to