

FCC Part 15C Measurement and Test Report

For

Apex Toys (Shenzhen)Co., Ltd.

A.Floor 4,A001 Building,Zhi Ji Industrial Park, No.92 KuiChong

Street,LongGang district, Shenzhen, China

FCC ID: 2ADSO-GD-90A

FCC Rule(s):	<u>FCC Part 15.249</u>
Product Description:	<u>ELF B</u>
Tested Model:	<u>GD-90A</u>
Report No.:	<u>HCT17JR304E-1</u>
Sample Receipt Date:	<u>2017-10-25</u>
Tested Date:	<u>2017-10-26 to 2017-11-18</u>
Issued Date:	<u>2017-11-20</u>
Tested By:	<u>Jason Su / Engineer</u>
Reviewed By:	<u>Silin Chen / EMC Manager</u>
Approved & Authorized By:	<u>JandySo/PSQ Manager</u>
Prepared By:	

Jason Su
Silin Chen
JandySo

Shenzhen SEM Test Technology Co., Ltd

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,

Bao'an District, Shenzhen, 518101,China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permission by Shenzhen SEM Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY	4
1.5 EUT SETUP AND TEST MODE.....	5
1.6 MEASUREMENT UNCERTAINTY	5
1.7 TEST EQUIPMENT LIST AND DETAILS	6
2. SUMMARY OF TEST RESULTS	7
3. ANTENNA REQUIREMENTS.....	8
3.1 STANDARD APPLICABLE.....	8
3.2 TEST RESULT.....	8
4. RADIATED EMISSIONS.....	9
4.1 STANDARD APPLICABLE.....	9
4.2 TEST PROCEDURE.....	9
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	11
4.4 ENVIRONMENTAL CONDITIONS	11
4.5 SUMMARY OF TEST RESULTS/PLOTS	11
5. OUT OF BAND EMISSIONS.....	20
5.1 STANDARD APPLICABLE.....	20
5.2 TEST PROCEDURE.....	20
5.3 ENVIRONMENTAL CONDITIONS	20
5.4 SUMMARY OF TEST RESULTS/PLOTS	20
6. EMISSION BANDWIDTH.....	23
6.1 STANDARD APPLICABLE.....	23
6.2 TEST PROCEDURE.....	23
6.3 ENVIRONMENTAL CONDITIONS	23
6.4 SUMMARY OF TEST RESULTS/PLOTS	23
7. CONDUCTED EMISSIONS	26
7.1 TEST PROCEDURE.....	26
7.2 BASIC TEST SETUP BLOCK DIAGRAM.....	26
7.3 ENVIRONMENTAL CONDITIONS	26
7.4 TEST RECEIVER SETUP	27
7.5 SUMMARY OF TEST RESULTS/PLOTS	27
7.6 CONDUCTED EMISSIONS TEST DATA.....	27

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Apex Toys (Shenzhen)Co., Ltd.
 Address of applicant: A.Floor 4,A001 Building,Zhi Ji Industrial Park, No.92
 KuiChong Street,LongGang district, Shenzhen,China
 Manufacturer: Apex Toys (Shenzhen)Co., Ltd.
 Address of manufacturer: A.Floor 4,A001 Building,Zhi Ji Industrial Park, No.92
 KuiChong Street,LongGang district, Shenzhen,China

General Description of EUT	
Product Name:	ELF B
Trade Name:	APEX
Model No.:	GD-90A
Adding Model(s):	/
Rated Voltage:	3.7V by battery
Power Adapter Model:	/
Note: The test data is gathered from a production sample,provided by the manufacturer.	

Technical Characteristics of EUT	
Frequency Range:	2402-2479MHz
Max. Field Strength:	39.22dBuV/m
Data Rate:	/
Modulation:	GFSK
Quantity of Channels:	78
Channel Separation:	1MHz
Antenna Type:	Whip antenna
Antenna Gain:	0dBi
Lowest Internal Frequency of EUT:	12MHz

1.2 Test Standards

The following report is prepared on behalf of the Apex Toys (Shenzhen)Co., Ltd. in accordance with FCC Part 15, Subpart B, Subpart C, and section 15.107, 15.203, 15.205, 15.207, 15.209 and 15.249 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.107,15.203, 15.205, 15.207, 15.209 and 15.249 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission, should be checked to ensure compliance has been maintained.

1.3Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard forTesting Unlicensed Wireless Devices, andANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Low Channel	2402MHz
TM2	Middle Channel	2441MHz
TM3	High Channel	2479MHz

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	$\pm 2.88\text{dB}$
Transmitter Spurious Emissions	Radiated	$\pm 5.1\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2017-06-12	2018-06-11
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2017-06-12	2018-06-11
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2017-06-12	2018-06-11
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2017-06-12	2018-06-11
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2017-06-12	2018-06-11
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2018-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2018-06-07
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2017-06-08	2018-06-07
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2018-06-07
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2017-06-12	2018-06-11
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2017-06-12	2018-06-11
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2017-06-12	2018-06-11

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.203	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	N/A
§ 15.209(a)(f)	Radiated Spurious Emissions	Compliant
§15.249(a)	Field Strength of Emissions	Compliant
§15.249(d)	Out of Band Emission	Compliant
§15.215 (c)	Emission Bandwidth	Compliant

N/A: not applicable.

3. Antenna Requirements

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has a whip antenna, fulfill the requirement of this section.

4. Radiated Emissions

4.1 Standard Applicable

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field strength of fundamental (milli-volts/meter)	Field strength of Harmonics (micro-volts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.



The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

4.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.249(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

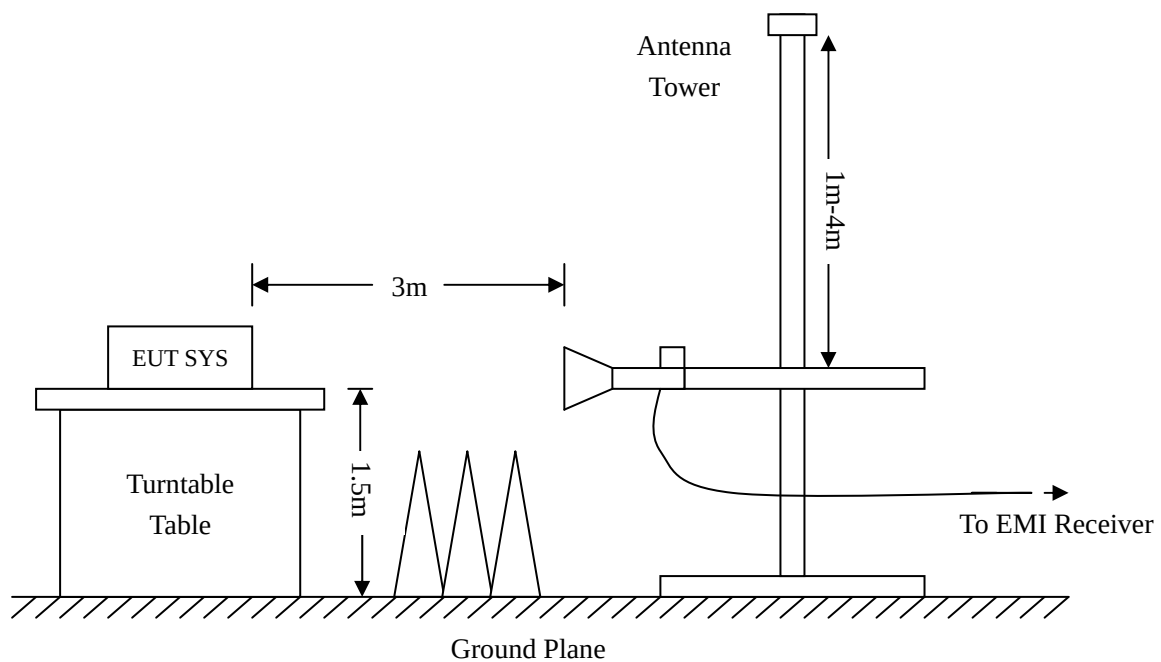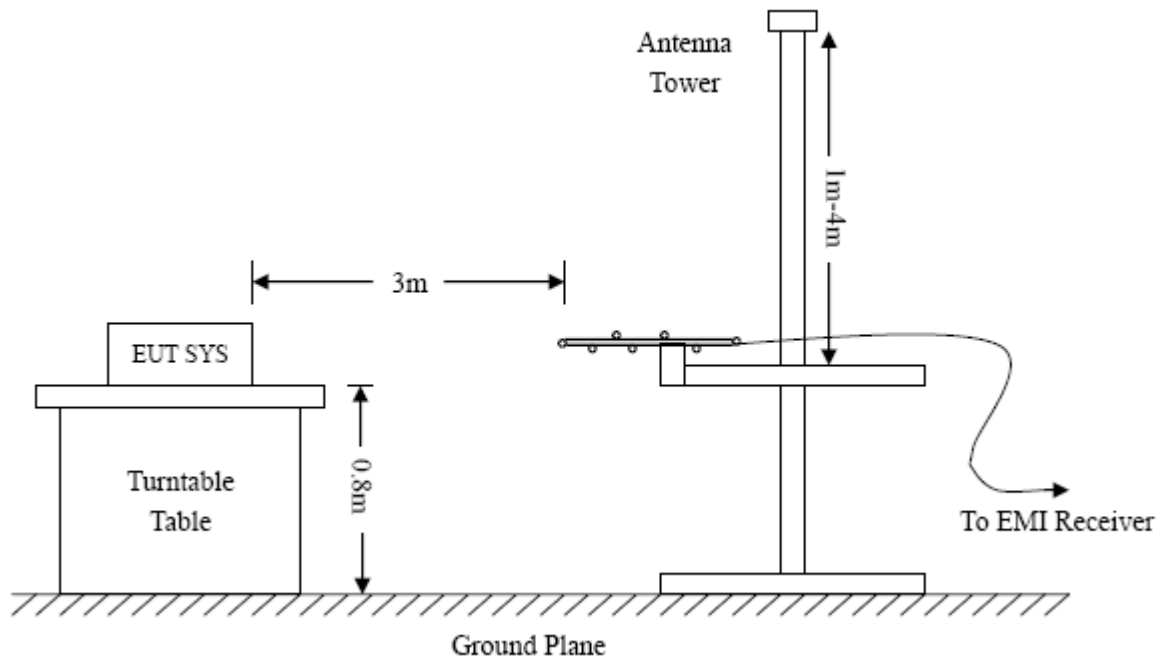

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15C Limit}$$

4.4 Environmental Conditions

Temperature:	24°C
Relative Humidity:	60 %
ATM Pressure:	1012 mbar

4.5 Summary of Test Results/Plots


According to the data below, the FCC Part 15.205, 15.209 and 15.249 standards, and had the worst margin.

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Plot of Radiated Emissions Test Data (30MHz to 1GHz)


EUT: ELF B
 Tested Model: GD-90A
 Operating Condition: Transmitting Low Channel (2402MHz)
 Comment: DC3.7V by battery

Test Specification: Horizontal

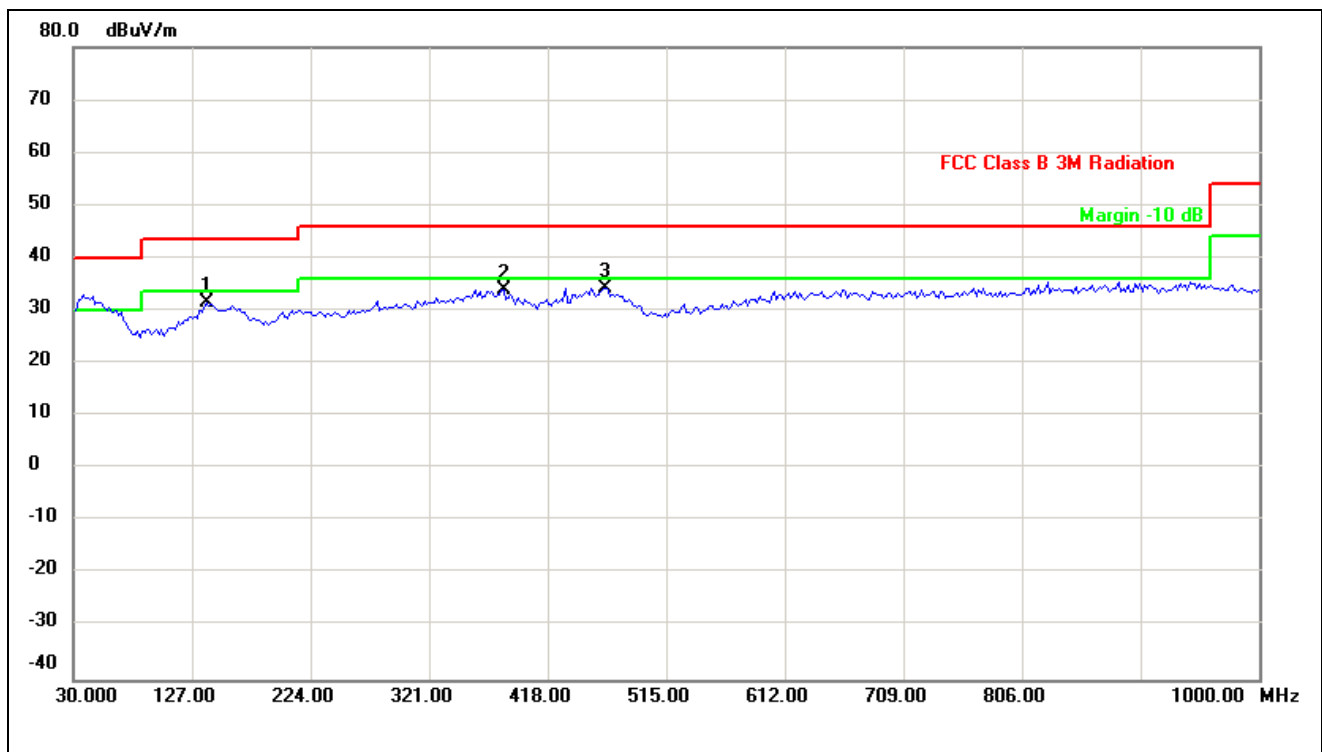

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	138.8577	15.46	16.11	31.57	43.50	-11.93	115	100	QP
2	381.8437	15.66	18.42	34.08	46.00	-11.92	198	300	QP
3	465.4309	15.79	18.47	34.26	46.00	-11.74	262	300	QP

Test Specification: Vertical

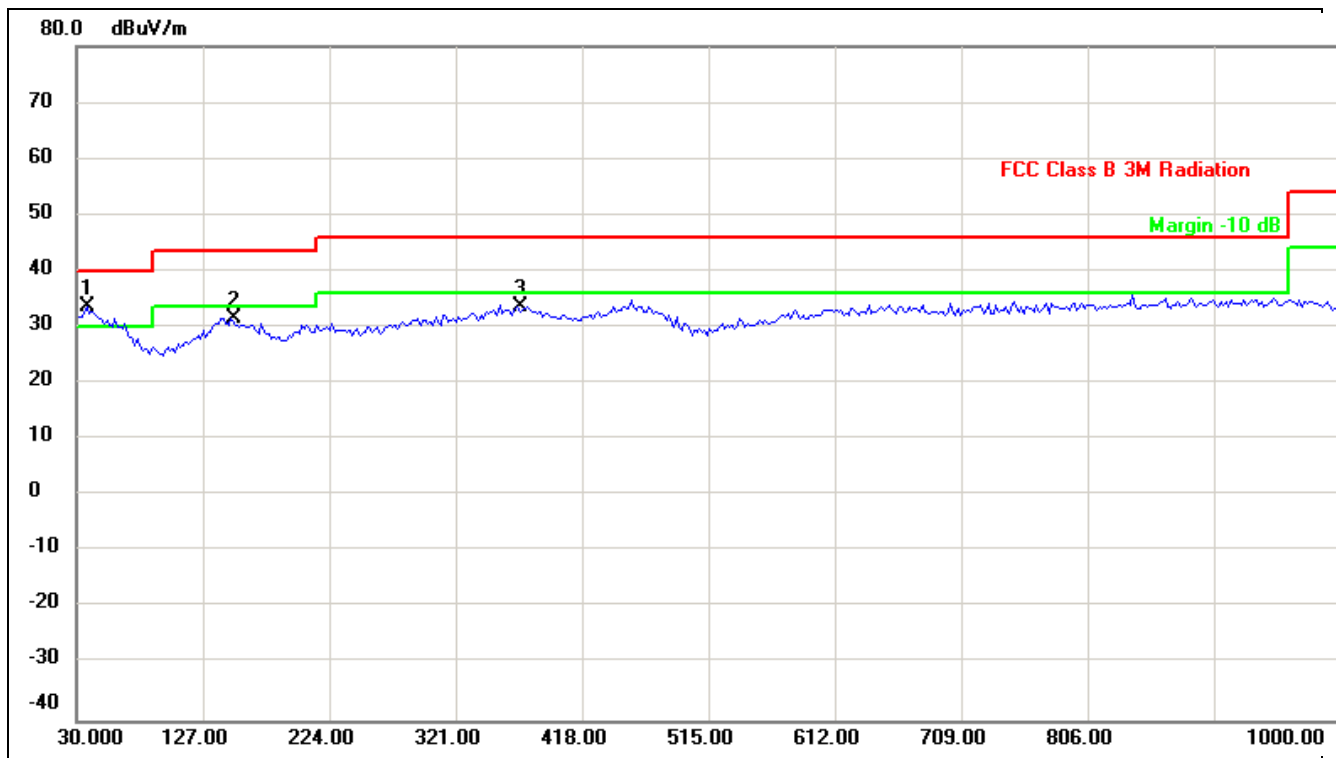


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	37.7756	16.33	17.31	33.64	40.00	-6.36	156	300	QP
2	148.5772	15.72	15.85	31.57	43.50	-11.93	134	100	QP
3	368.2365	15.00	18.61	33.61	46.00	-12.39	78	100	QP

Operating Condition: Transmitting Middle Channel (2441MHz)


Comment: DC3.7V by battery

Test Specification: Horizontal

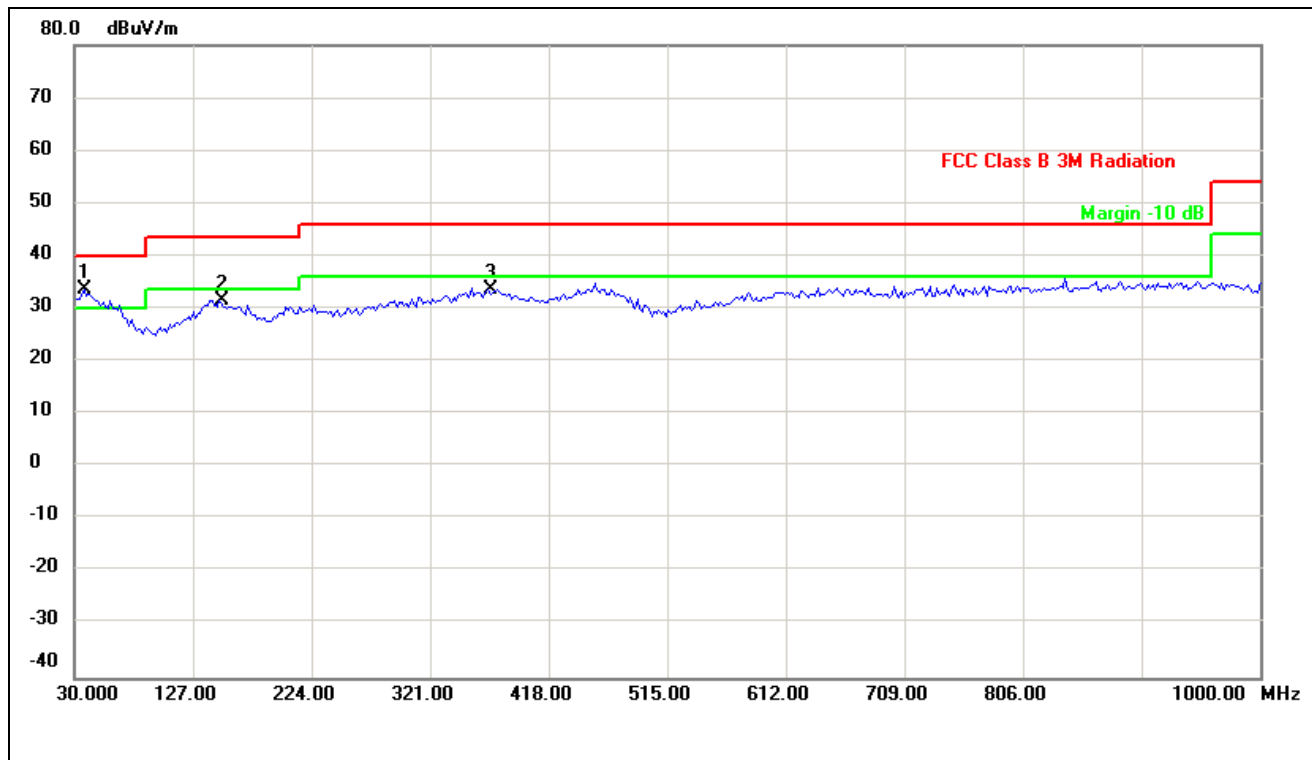

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	37.7756	16.33	17.31	33.64	40.00	-6.36	156	300	QP
2	148.5772	15.72	15.85	31.57	43.50	-11.93	134	100	QP
3	368.2365	15.00	18.61	33.61	46.00	-12.39	78	100	QP

Test Specification: Vertical

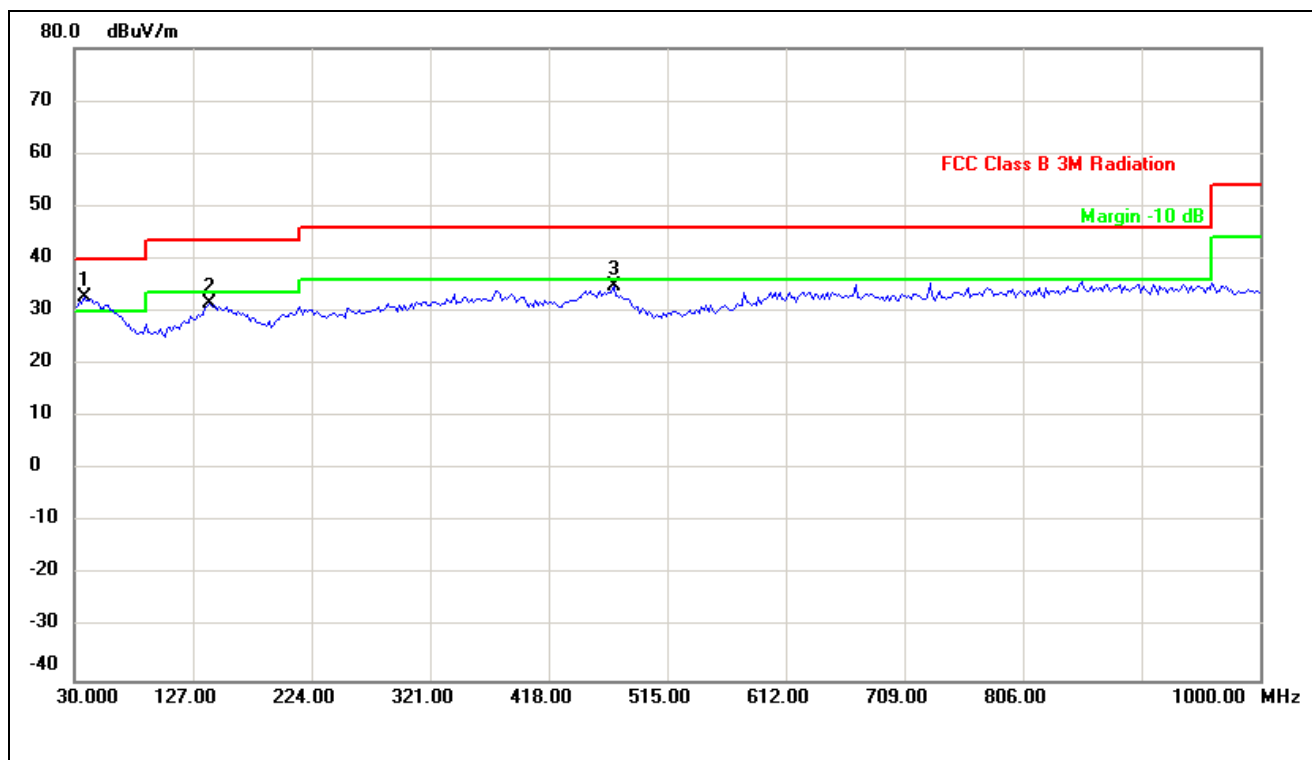


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	37.7756	15.35	17.31	32.66	40.00	-7.34	321	300	QP
2	140.8016	15.36	16.32	31.68	43.50	-11.82	265	100	QP
3	471.2625	16.62	18.35	34.97	46.00	-11.03	87	100	QP

Operating Condition: Transmitting High Channel (2479MHz)


Comment:

Test Specification: Horizontal

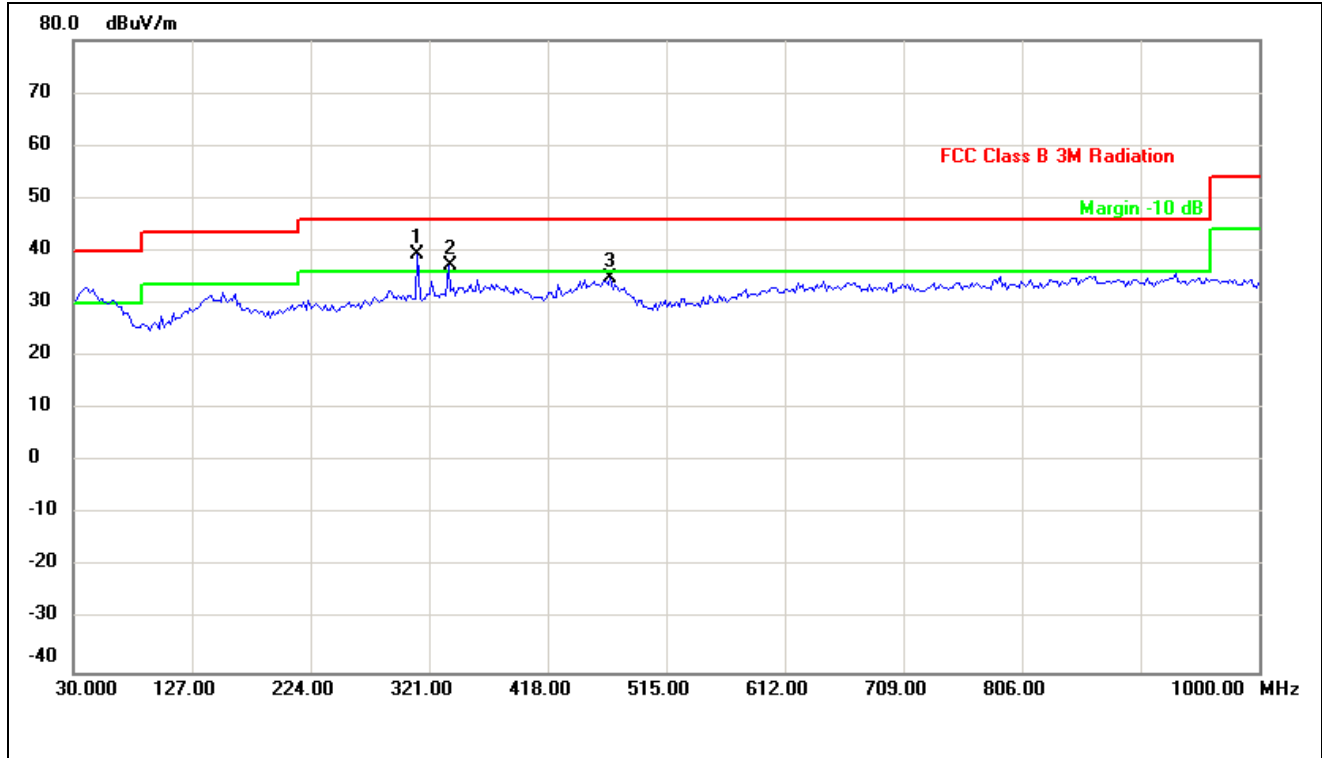

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	311.8637	22.35	16.87	39.22	46.00	-6.78	136	100	QP
2	337.1343	19.62	17.66	37.28	46.00	-8.72	142	300	QP
3	469.3186	16.44	18.39	34.83	46.00	-11.17	265	100	QP

Test Specification: Vertical

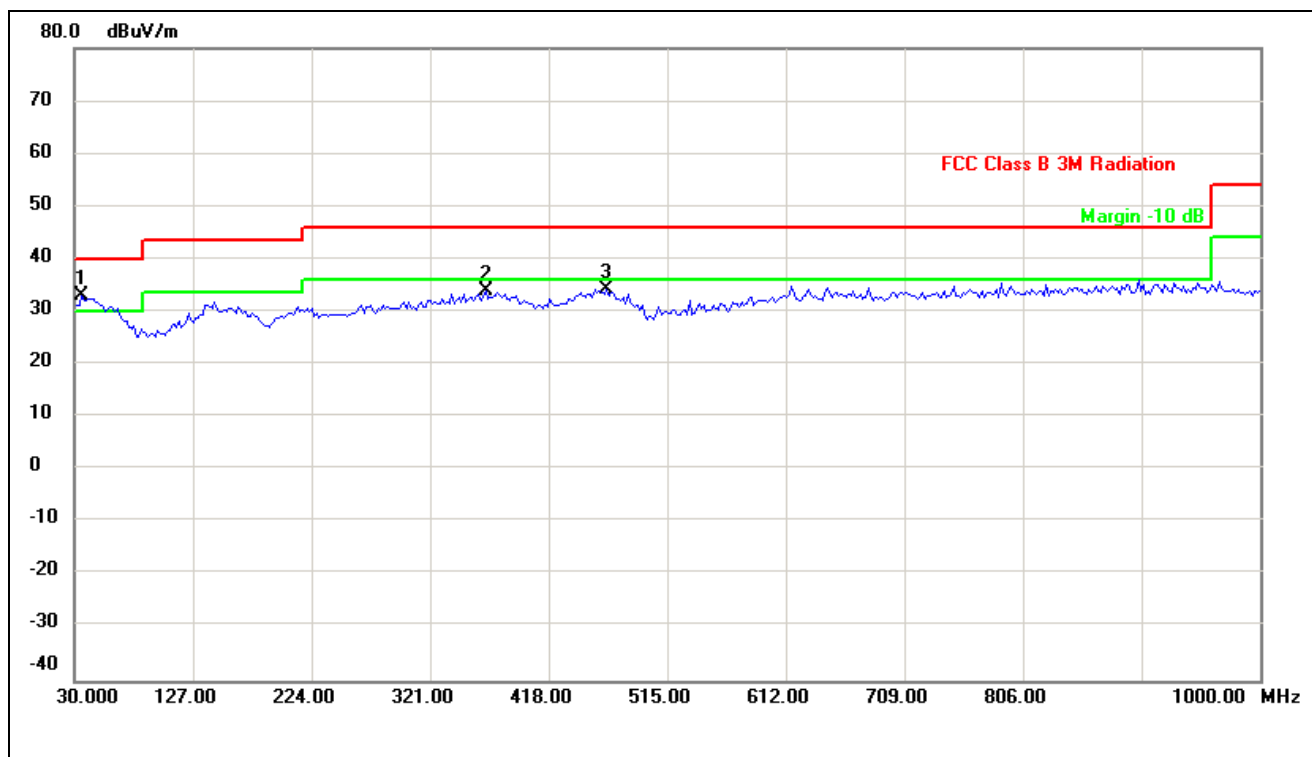

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	35.8317	16.15	17.01	33.16	40.00	-6.84	32	300	QP
2	366.2926	15.33	18.54	33.87	46.00	-12.13	165	100	QP
3	465.4309	15.82	18.47	34.29	46.00	-11.71	214	100	QP

Spurious Emissions Above 1GHz

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2402MHz							
2402	91.68	-5.03	86.65	114	-27.35	H	PK
2402	77.96	-5.03	72.93	94	-21.07	H	AV
4804	53.74	-3.87	49.87	74	-24.13	H	PK
4804	38.49	-3.87	34.62	54	-19.38	H	AV
7206	45.95	1.14	47.09	74	-26.91	H	PK
7206	34.63	1.19	35.82	54	-18.18	H	AV
2402	91.50	-5.04	86.46	114	-27.54	V	PK
2402	78.21	-5.04	73.17	94	-20.83	V	AV
4804	56.00	-3.86	52.14	74	-21.86	V	PK
4804	46.33	-3.86	42.47	54	-11.53	V	AV
7206	47.01	1.10	48.11	74	-25.89	V	PK
7206	35.30	1.10	36.40	54	-17.60	V	AV
Middle Channel-2441MHz							
2441	91.33	-4.95	86.38	114	-27.62	H	PK
2441	77.61	-4.95	72.66	94	-21.34	H	AV
4882	53.39	-3.74	49.65	74	-24.35	H	PK
4882	38.14	-3.74	34.40	54	-19.60	H	AV
7323	45.60	1.26	46.86	74	-27.14	H	PK
7323	34.28	1.26	35.54	54	-18.46	H	AV
2441	91.15	-4.97	86.18	114	-27.82	V	PK
2441	77.86	-4.97	72.89	94	-21.11	V	AV
4882	55.65	-3.80	51.85	74	-22.15	V	PK
4882	45.98	-3.80	42.18	54	-11.82	V	AV
7323	46.66	1.25	47.91	74	-26.09	V	PK
7323	34.95	1.25	36.20	54	-17.80	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2479MHz							
2480	90.98	-4.85	86.13	114	-27.87	H	PK
2480	77.26	-4.85	72.41	94	-21.59	H	AV
4960	53.04	-3.65	49.39	74	-24.61	H	PK
4960	37.79	-3.65	34.14	54	-19.86	H	AV
7440	45.25	1.31	46.56	74	-27.44	H	PK
7440	33.93	1.31	35.24	54	-18.76	H	AV
2480	90.8	-4.86	85.94	114	-28.06	V	PK
2480	77.51	-4.86	72.65	94	-21.35	V	AV
4960	55.3	-3.72	51.58	74	-22.42	V	PK
4960	45.63	-3.72	41.91	54	-12.09	V	AV
7440	46.31	1.31	47.62	74	-26.38	V	PK
7440	34.6	1.31	35.91	54	-18.09	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 5th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

The measurements greater than 20dB below the limitfrom 9kHz to 30MHz..

5. Out of Band Emissions

5.1 Standard Applicable

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

5.2 Test Procedure

As the radiation test, set the Lowest and Highest Transmitting Channel, observed the outside band of 2400MHz to 2483.5MHz, than mark the higher-level emission for comparing with the FCC rules.

5.3 Environmental Conditions

Temperature:	24°C
Relative Humidity:	60%
ATM Pressure:	1012 mbar

5.4 Summary of Test Results/Plots


Test mode	Frequency	Limit	Result
	MHz	dBuV /dBc	
Lowest	2310.00	<54 dBuV	Pass
	2390.00	<54 dBuV	Pass
	2400.00	<54 dBuV	Pass
Highest	2483.50	<54 dBuV	Pass
	2500.00	<54 dBuV	Pass

The edge emissions are below the FCC 15.209 Limits or complies with the 15.249 requirements.

Please refer to the test plots as below.


Lowest Bandedge

Vertical (Worst case)

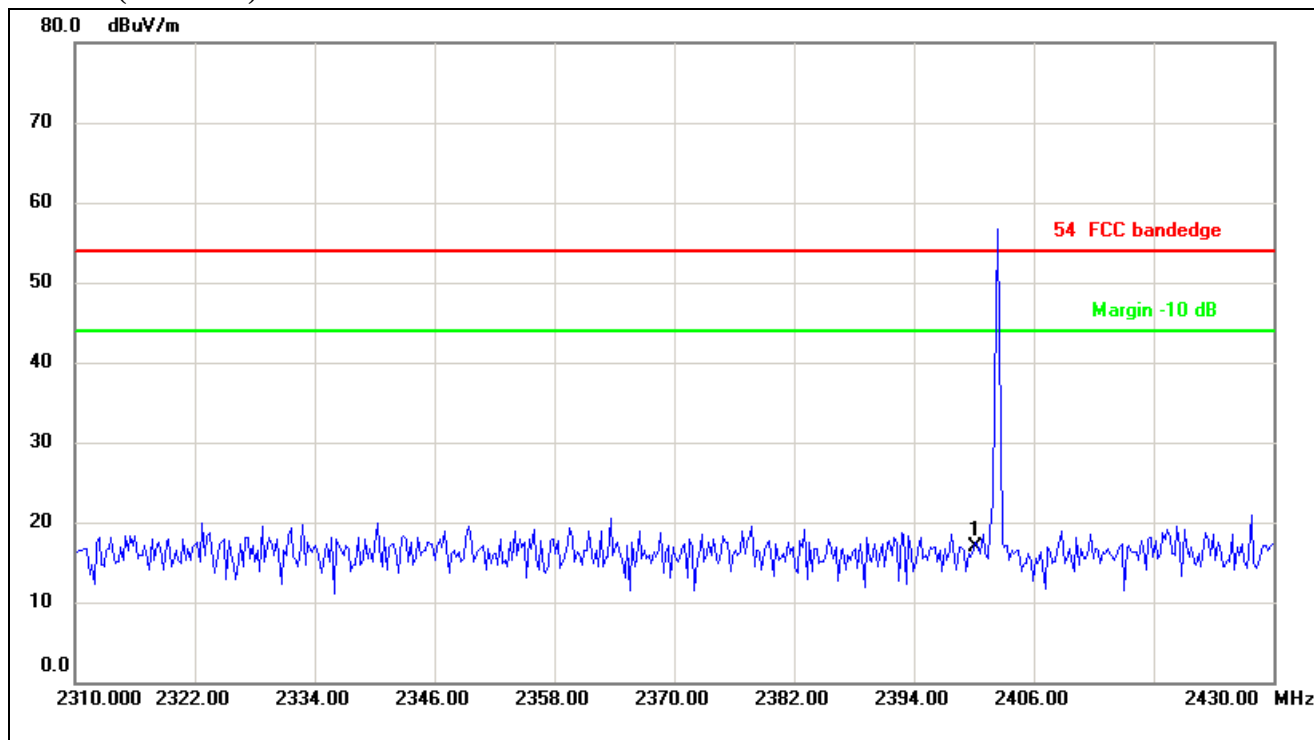

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2400.000	30.55	-13.55	17.00	54.00	-37.00	Ave Detector
	2400.000	45.97	-13.55	32.42	74.00	-41.58	Peak Detector

Highest Bandedge
Vertical (Worst case)

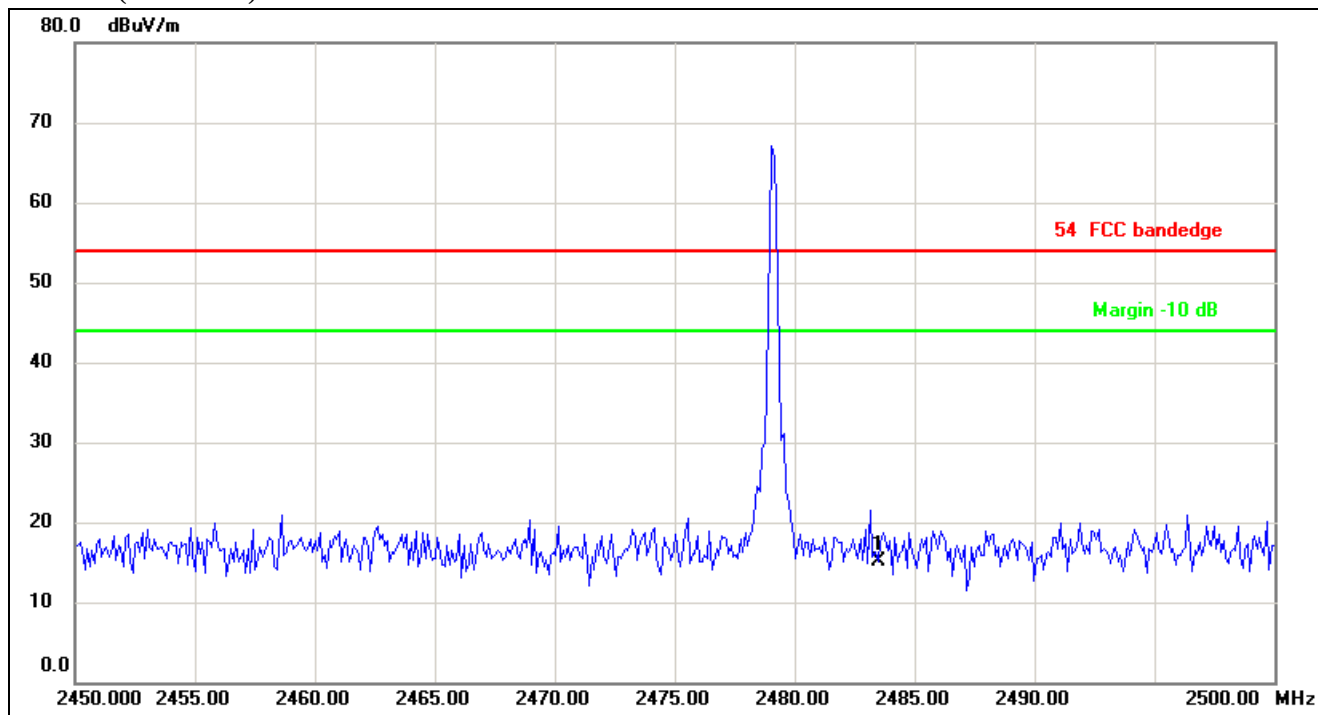

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.467	28.50	-13.41	15.09	54.00	-38.91	Ave Detector
	2483.467	43.15	-13.41	29.74	74.00	-44.26	Peak Detector

6. Emission Bandwidth

6.1 Standard Applicable

According to 15.215 (c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

6.2 Test Procedure

According to the ANSI 63.10-2013, the emission bandwidth test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = 1MHz, centered on a transmitting channel

RBW $\geq$ 1% 20dB Bandwidth, VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down and 99% bandwidth of the emission.

6.3 Environmental Conditions


Temperature:	25 °C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

6.4 Summary of Test Results/Plots


Channel	Frequency MHz	20dB Bandwidth kHz	99% Bandwidth kHz
Low Channel	2402	180.476	215.6
Middle Channel	2441	171.713	226.7
High Channel	2479	204.153	215.5

Please refer to the following test plots


Low Channel:

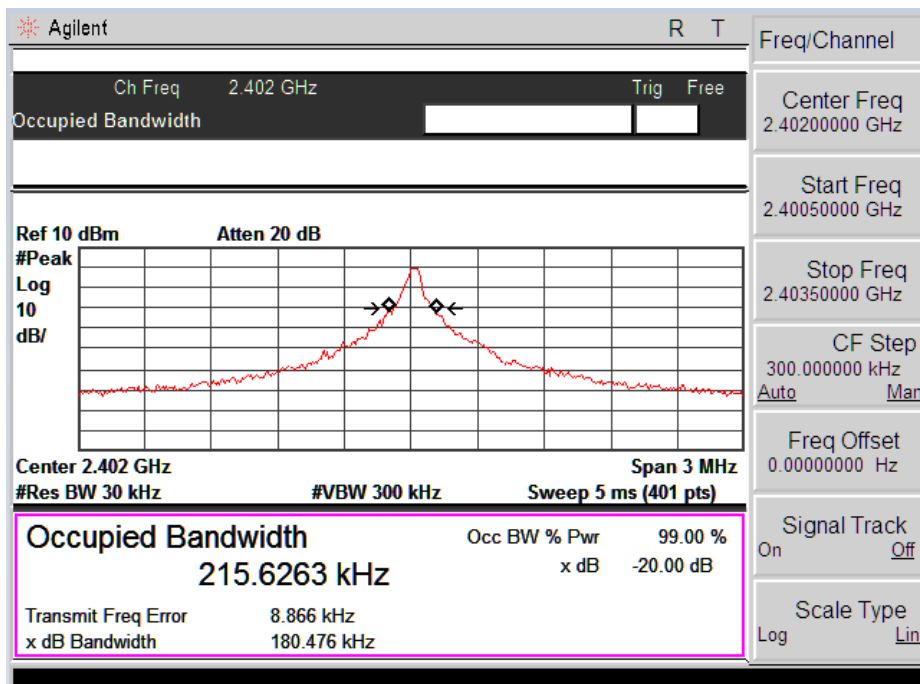

Middle Channel:

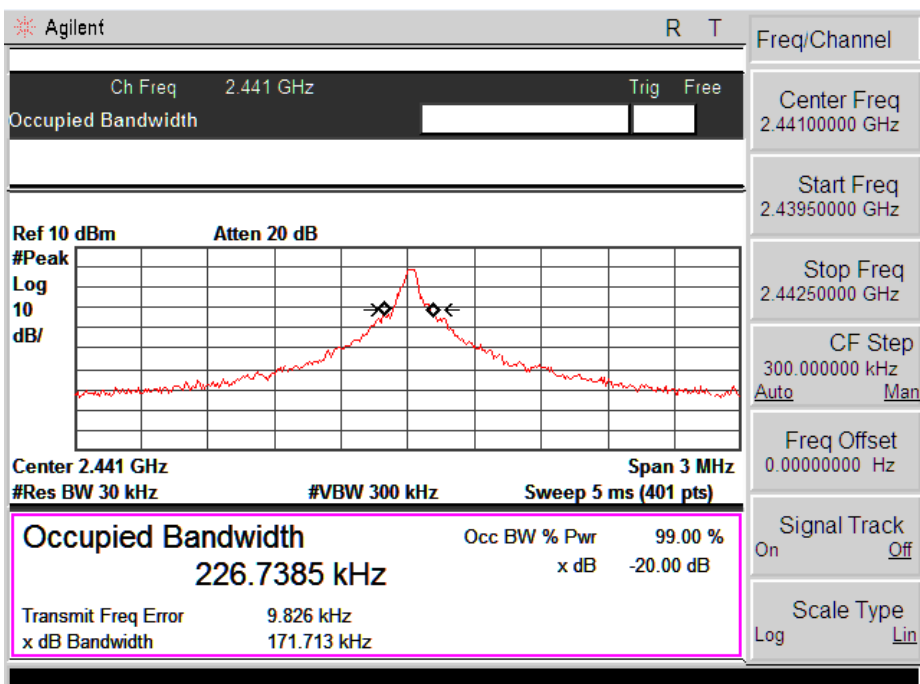

High Channel:

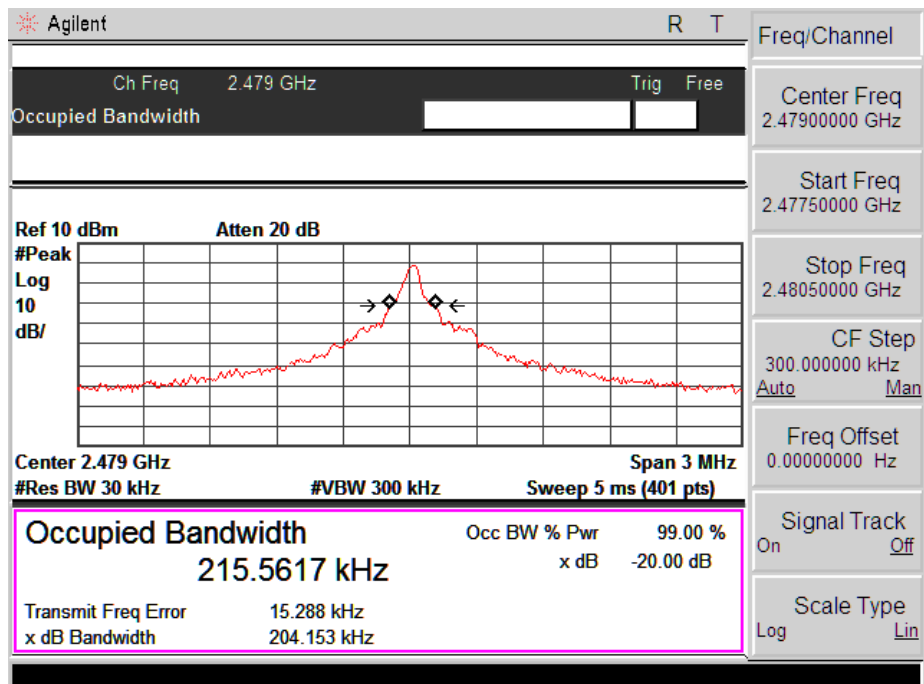


7. Conducted Emissions

7.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

7.2 Basic Test Setup Block Diagram

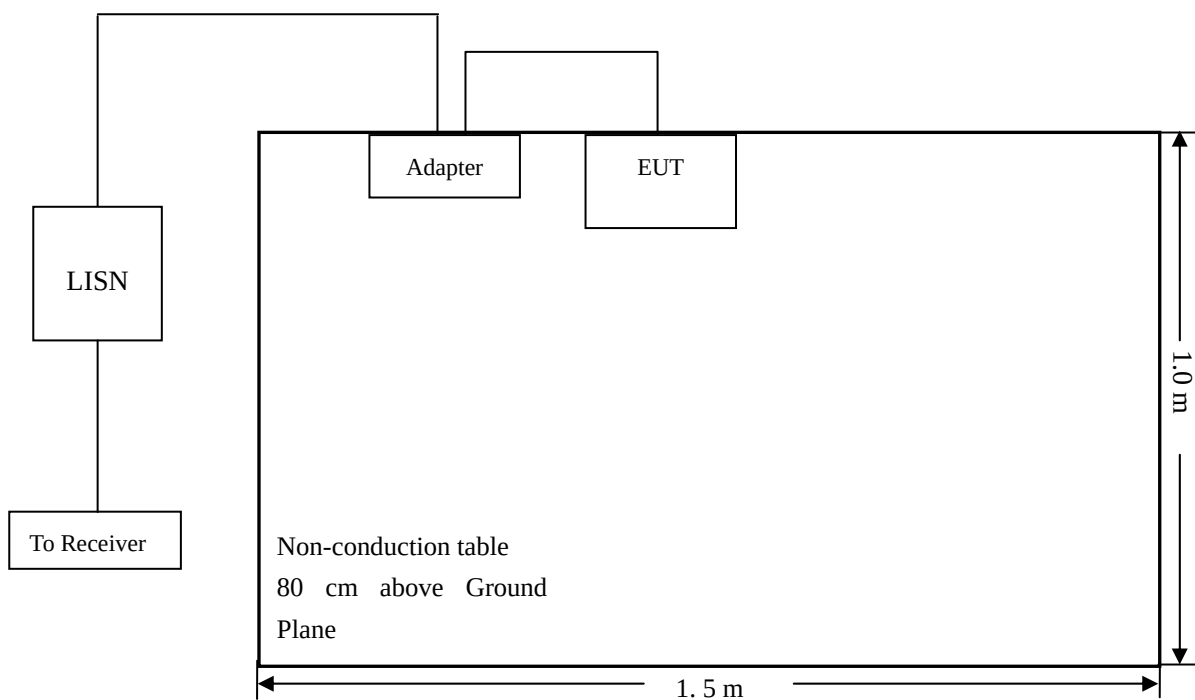

7.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

7.4 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150 kHz
Stop Frequency	30 MHz
Sweep Speed	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth	9 kHz
Quasi-Peak Adapter Mode	Normal

7.5 Summary of Test Results/Plots

According to the data in section 7.7, the EUT complied with the FCC Part 15.207Conducted margin for this device, with the *worst* margin reading.

7.6 Conducted Emissions Test Data

Not applicable. Because the EUT is powered by battery.

******* END OF REPORT *******