



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China
Telephone: +86 (0) 21 6191 5666
Fax: +86 (0) 21 6191 5678
ee.shanghai@sgs.com

Report No.: SHEM170300119802
Page: 1 of 72

1 Cover Page

RF TEST REPORT

Application No.:	SHEM1703001198CR
Applicant:	Hangzhou Hikvision Digital Technology Co., Ltd.
FCC ID:	2ADTD-HW10000
IC:	20199-HW10000
Equipment Under Test (EUT): NOTE: The following sample(s) was/were submitted and identified by the client as	
Product Name:	Mobile NAS
Model No.:	DS-UAFS-W100I
Standards:	FCC PART 15 Subpart E: 2016 RSS-247 Issue 2 (February 2017) RSS-Gen Issue 4 (November 2014)
Date of Receipt:	2017-03-13
Date of Test:	2016-03-15 to 2017-05-05
Date of Issue:	2017-05-08
Test Result:	Pass*

*In the configuration tested, the EUT detailed in this report complied with the standards specified above.



Parlam Zhan
E&E Section Manager
SGS-CSTC (Shanghai) Co., Ltd.


The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00	/	2017-05-08	/	Original

Authorized for issue by:				
Engineer		Eddy Zong		
		Print Name		
Clerk		Susie Liu		
		Print Name		
Reviewer		Parlam Zhan		
		Print Name		

3 Test Summary

Test Item	FCC Requirement	IC Requirement	Test method	Result
Antenna Requirement	15.203 & 15.407 a(1)&(3)	RSS-Gen Issue 4 Clause 8.3	-	PASS
AC Power Line Conducted Emission	15.407 b(6)	RSS-Gen Issue 4 Clause 8.8	ANSI C63.10 (2013) Clause 6.2	PASS
26 dB Emission bandwidth	15.403 i	RSS-Gen Issue 4 Clause 6.6	KDB 789033 D02 KDB 644545 KDB662911 D01	PASS
Minimum 6 dB bandwidth (5.725-5.85 GHz band)	15.407 (e)	RSS-247 Issue 2 Clause 6.2.4.1		PASS
Maximum Conducted output power	15.407 a(1)&(3)	RSS-247 Issue 2 Clause 6.2		PASS
Transmitter Power Control	15.407 (h)(1)	RSS-247 Issue 2 Clause 6.2.3		N/A
Peak Power spectrum density	15.407 a(1)&(3)	RSS-247 Issue 2 Clause 6.2		PASS
Radiated Spurious emissions and Band-edge	15.209 & 15.407	RSS-247 Issue 2 Clause 6.2		PASS
Transmission in the Absence of Data	15.407 (c)	RSS-247 Issue 2 Clause 6.4		PASS
Frequency Stability	15.407 (g)	RSS-Gen Issue 4 Clause 8.11		PASS
Dynamic Frequency Selection	15.407 (h)(2)	RSS-247 Issue 2 Clause 6.3	KDB 905462 D02 KDB 905462 D03	N/A
99% Occupied bandwidth	-	RSS-Gen Issue 4 section 6.6	RSS-Gen Issue 4 section 6.6	PASS

Notes: N/A: The device no DFS Band.

4 Contents

	Page
1 COVER PAGE.....	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENTS	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF E.U.T.	5
5.3 TECHNICAL SPECIFICATIONS.....	5
5.4 TEST MODE.....	5
5.5 TEST CHANNEL	6
5.6 DESCRIPTION OF SUPPORT UNITS.....	6
5.7 TEST LOCATION	7
5.8 TEST FACILITY	7
5.9 MEASUREMENT UNCERTAINTY	7
6 EQUIPMENTS USED DURING TEST.....	8
7 TEST RESULTS.....	9
7.1 E.U.T. TEST CONDITIONS	9
7.2 ANTENNA REQUIREMENT.....	10
7.3 CONDUCTED EMISSIONS ON MAINS TERMINALS	11
7.4 DUTY CYCLE	15
7.5 EMISSION BANDWIDTH	16
7.6 99% OCCUPIED BANDWIDTH	17
7.7 MAXIMUM CONDUCTED OUTPUT POWER	18
7.8 PEAK POWER SPECTRAL DENSITY	19
7.9 RADIATED SPURIOUS EMISSIONS AND BAND-EDGE	20
7.10 TRANSMISSION IN THE ABSENCE OF DATA	70
7.11 FREQUENCY STABILITY	71
8 TEST SETUP PHOTOGRAPHS	72
9 EUT CONSTRUCTIONAL DETAILS.....	72

5 General Information

5.1 Client Information

Applicant:	Hangzhou Hikvision Digital Technology Co., Ltd.
Address of Applicant:	No. 555 Qianmo Road, Binjiang District, Hangzhou 310052, China
Manufacturer:	Hangzhou Hikvision Digital Technology Co., Ltd.
Address of Manufacturer:	No. 555 Qianmo Road, Binjiang District, Hangzhou 310052, China
Factory:	1. Hangzhou Hikvision Technology Co., Ltd. 2. Hangzhou Hikvision Electronics Co., Ltd.
Address of Factory:	1. No.700, Dongliu Road, Binjiang District, Hangzhou City, Zhejiang, 310052, China 2. No.299, Qiushi Road, Tonglu Economic Development Zone, Tonglu County, Hangzhou, Zhejiang, 310052, China.

5.2 General Description of E.U.T.

Product Description:	Portable product with WiFi function
Brand Name:	HIKVISION
Rechargeable Batteries:	DC 3.7V Li-on Rechargeable Battery, 6700mAh Supply the EUT with fully charged battery during the testing.
Rated Input:	DC 5V 2A
Rated Output:	DC 5V 1.5A
Test Voltage:	AC 120V 60Hz for adapter

5.3 Technical Specifications

Operation Frequency:	802.11a/n(HT20)/ac(HT20): 5180-5240MHz, 5745MHz-5825MHz 802.11n(HT40)/ac(HT40): 5190-5230MHz, 5755MHz-5795MHz 802.11ac(HT80): 5210MHz, 5775MHz
Modulation Technique:	OFDM(256QAM, 64QAM, 16QAM, QPSK, BPSK) Remark: 256QAM for 802.11 ac only
Data Rate:	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n: MCS0-7 802.11ac: MCS0-9
Number of Channel:	802.11 a/n(HT20)/ac(HT20): 9 Channel 36, 40, 44, 48, 149, 153, 157, 161, 165 802.11 n(HT40)/ac(HT40): 4 Channel 38, 46, 151, 159 802.11 ac(HT80): 2 Channel 42, 155
Antenna Type	Integral
Antenna Gain	0.5 dBi

5.4 Test Mode

Test Mode	Description of Test Mode
Engineering mode	Using test software to control EUT working in continuous transmitting, and select channel and modulation type.

5.5 Test Channel

Preliminary tests were performed in all tests in different data rate and antenna configurations at lowest channel, the data rates of worse case as below were chosen for final test.

Band	802.11a			802.11 n(HT20)			802.11n(HT40)		
	Channel	Freq	Rate	Chan	Freq	Rate	Channel	Freq	Rate
U-NII 1	36	5180	6 Mbps	36	5180	MSC0	38	5190	MSC0
	44	5220	6 Mbps	44	5220	MSC0	-	-	-
	48	5240	6 Mbps	48	5240	MSC0	46	5230	MSC0
U-NII 3	149	5745	6 Mbps	149	5745	MSC0	151	5755	MSC0
	157	5785	6 Mbps	157	5785	MSC0	-	-	-
	165	5825	6Mbps	165	5825	MSC0	159	5795	MSC0
Band	802.11ac(HT20)			802.11 ac(HT40)			802.11ac(HT80)		
	Channel	Freq	Rate	Chan	Freq	Rate	Channel	Freq	Rate
U-NII 1	36	5180	MSC0	38	5190	MSC0	42	5210	MSC0
	44	5220	MSC0	-	-	-	-	-	-
	48	5240	MSC0	46	5230	MSC0			
U-NII 3	149	5745	MSC0	151	5755		155	5775	MSC0
	157	5785	MSC0	-	-	-	-	-	-
	165	5825	MSC0	159	5795	MSC0	-	-	-

5.6 Description of Support Units

The EUT has been tested with support equipments as below.

Description	Manufacturer	Model No.	Supplied By
Laptop	Lenovo	ThinkPad X100e	SGS

Software name	Manufacturer	Version	Supplied By
SecureCRT	VanDyke	V 6.2.0	SGS

5.7 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

No.588 West Jindu Road, Songjiang District, Shanghai, China.201612.

Tel: +86 21 6191 5666

Fax: +86 21 6191 5678

5.8 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L0599)**

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **FCC – Registration No.: 402683**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered and fully described in a report filed with the Federal Communications Commission (FCC). The acceptance letter from the FCC is maintained in our files. Registration No.: 402683.

- **Industry Canada (IC) – IC Assigned Code: 8617A**

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 8617A-1.

- **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-3868 and C-4336 respectively.

5.9 Measurement Uncertainty

No.	Parameter	Measurement Uncertainty
1	Radio Frequency	$< \pm 1 \times 10^{-5}$
2	Total RF power, conducted	$< \pm 1.5 \text{ dB}$
3	RF power density, conducted	$< \pm 3 \text{ dB}$
4	Spurious emissions, conducted	$< \pm 3 \text{ dB}$
5	All emissions, radiated	$< \pm 6 \text{ dB (30MHz – 1GHz)}$ $< \pm 6 \text{ dB (above 1GHz)}$
6	Temperature	$< \pm 1^{\circ}\text{C}$
7	Humidity	$< \pm 5 \%$
8	DC and low frequency voltages	$< \pm 3 \%$

6 Equipments Used during Test

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due date
1	Power meter	Rohde & Schwarz	NRP	101641	2017-01-14	2018-01-13
2	Power Sensor	Rohde & Schwarz	NRP-Z22	101096	2017-08-06	2018-08-05
3	Spectrum Analyzer	Rohde & Schwarz	FSP-30	2705121009	2017-01-14	2018-01-13
4	EMI test receiver	Rohde & Schwarz	ESU40	100109	2017-02-13	2018-01-15
5	Active Loop Antenna (9kHz to 30MHz)	Rohde & Schwarz	FMZB1519	1519-034	2017-02-13	2018-01-15
6	Broadband UHF-VHF ANTENNA (25MHz to 2GHz)	SCHWARZBECK	VULB9168	9168-313	2017-02-13	2018-01-15
7	Ultra broadband antenna (25MHz to 3GHz)	Rohde & Schwarz	HL562	100227	2015-08-30	2016-08-29
8	Horn Antenna (1GHz to 18GHz)	Rohde & Schwarz	HF906	100284	2017-02-13	2018-01-15
9	Horn Antenna (1GHz to 18GHz)	SCHWARZBECK	BBHA9120D	9120D-679	2017-02-13	2018-01-15
10	Horn Antenna(14GHz to 40GHz)	SCHWARZBECK	BBHA 9170	BBHA917-0373	2017-02-13	2018-01-15
11	Pre-amplifier (9KHz – 2GHz)	LNA6900	TESEQ	71033	/	/
12	Pre-amplifier (1GHz – 26.5GHz)	SCHWARZBECK	SCU-F0118- G40-BZ4- CSS(F)	10001	2017-01-14	2018-01-13
13	Pre-amplifie (14GHz – 40GHz)	SCHWARZBECK	SCU-F1840- G35-BZ3- CSS(F)	10001	2017-01-14	2018-01-13
14	Tunable Notch Filter	Wainwright instruments GmbH	WRCT800.0/880 .0-0.2/40-5SSK	170397 169777 169780 192507	/	/
15	High pass Filter	FSCW	HP 12/2800- 5AA2	19A45-02	/	/
16	High-low temperature cabinet	Suzhou Zhihe	TL-40	50110050	2016-09-11	2017-09-10
17	AC power stabilizer	WOCEN	6100	51122	2017-01-14	2018-01-13
18	DC power	QJE	QJ30003SII	3573/4/3	2017-01-14	2018-01-13
19	Signal Generator (Interferer)	Rohde & Schwarz	SMR40	100555	2016-08-13	2017-08-12
20	Signal Generator (Blocker)	Rohde & Schwarz	SMJ100A	101394	2017-01-14	2018-01-13
21	Splitter	Anritsu	MA1612A	M12265	/	/
22	Coupler	e-meca	803-S-1	900-M01	/	/

7 Test Results

7.1 E.U.T. Test Conditions

Test Voltage: DC 3.7V

Requirements: 15.31(e) For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

Operating Environment:	Temperature:	20.0 -25.0 °C
	Humidity:	35-75 % RH
	Atmospheric Pressure:	99.2 -102.0 kPa

Test frequencies: According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

Frequency range over which device operates	Number of frequencies	Location in the range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

Pursuant to Part 15.31(c) For swept frequency equipment, measurements shall be made with the frequency sweep stopped at those frequencies chosen for the measurements to be reported

7.2 Antenna Requirement

Standard requirement:


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

This requirement does not apply to carrier current devices. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

EUT Antenna:

The antenna is integral antenna. The gain is less than 0.5dBi.

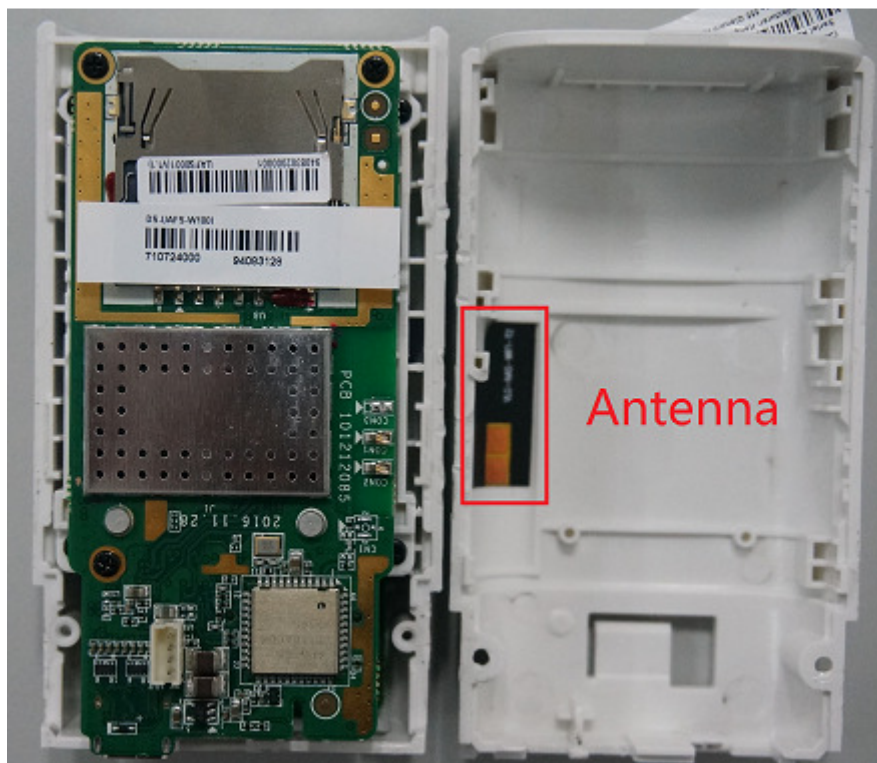

7.3 Conducted Emissions on Mains Terminals

Frequency Range: 150 KHz to 30 MHz

Class/Severity: Class B


Limit:

Frequency range MHz	Class B Limits: dB (μV)	
	Quasi-peak	Averageage
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Note1: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.
Note2: The lower limit is applicable at the transition frequency.

Test site/setup: Test instrumentation set-up:

Frequency Range	Detector	RBW	VBW
9KHz to 150Hz	Quasi-peak	200Hz	500Hz
150KHz to 30MHz	Quasi-peak	9kHz	30kHz

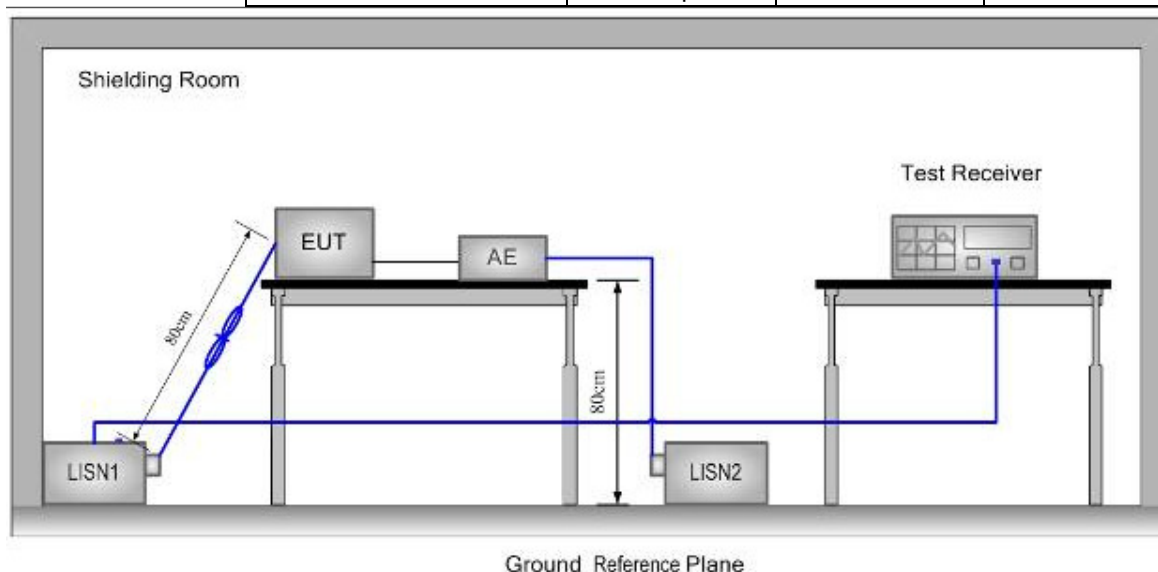

Test Procedure:

- The mains terminal disturbance voltage was measured with the EUT in a shielded room.
- The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides $50\Omega/50\mu H + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN, which was bonded to the ground reference plane in the same way as the LISN for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded
- The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
- The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to


the horizontal ground reference plane. The LISN was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance was between the closest points of the LISN and the EUT. The mains lead of EUT excess 0.8m was folded back and forth parallel to the lead so as to form a horizontal bundle with a length between 0.3m and 0.4m. All other units of the EUT and associated equipment were at least 0.8 m from the LISN.

Remark: Pre-scan was performed with peak detected on all ports, Quasi-peak & Averageage measurements were performed at the frequencies at which maximum peak emission level were detected. Pretest under all modes; choose the worst case mode (802.11a in channel 157) record on the report. Please see the attached Quasi-peak and Averageage test results.

Test Result: Pass


Test Data:

Test Mode:	802.11a	Test Channel:	Channel 157
Test Port:	AC Live Line		

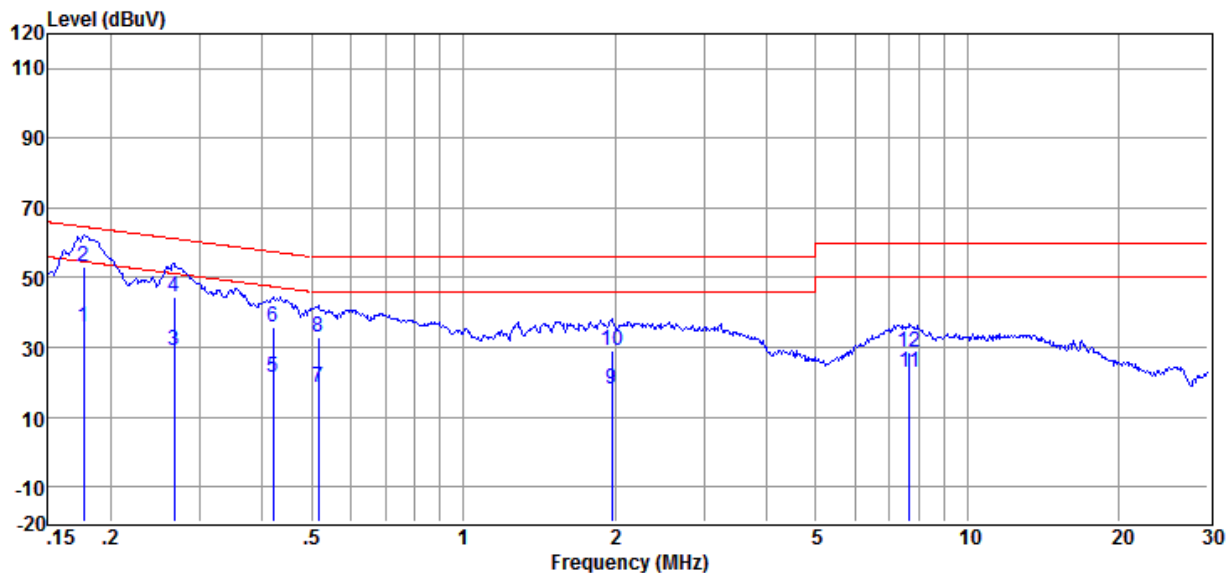

Item	Freq.	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)	
1	0.177	25.76	0.07	10.15	35.98	54.64	-18.66	Averageer age
2	0.177	42.90	0.07	10.15	53.12	64.64	-11.52	QP
3	0.267	18.79	0.09	10.16	29.04	51.20	-22.16	Averageer age
4	0.267	34.19	0.09	10.16	44.44	61.20	-16.76	QP
5	0.419	11.17	0.10	10.17	21.44	47.46	-26.02	Averageer age
6	0.419	25.73	0.10	10.17	36.00	57.46	-21.46	QP
7	0.516	8.31	0.10	10.17	18.58	46.00	-27.42	Averageer age
8	0.516	22.75	0.10	10.17	33.02	56.00	-22.98	QP
9	1.970	7.56	0.08	10.19	17.83	46.00	-28.17	Averageer age
10	1.970	19.03	0.08	10.19	29.30	56.00	-26.70	QP
11	7.687	12.51	0.17	10.29	22.97	50.00	-27.03	Averageer age
12	7.687	18.34	0.17	10.29	28.80	60.00	-31.20	QP

Test Port: AC Neutral Line

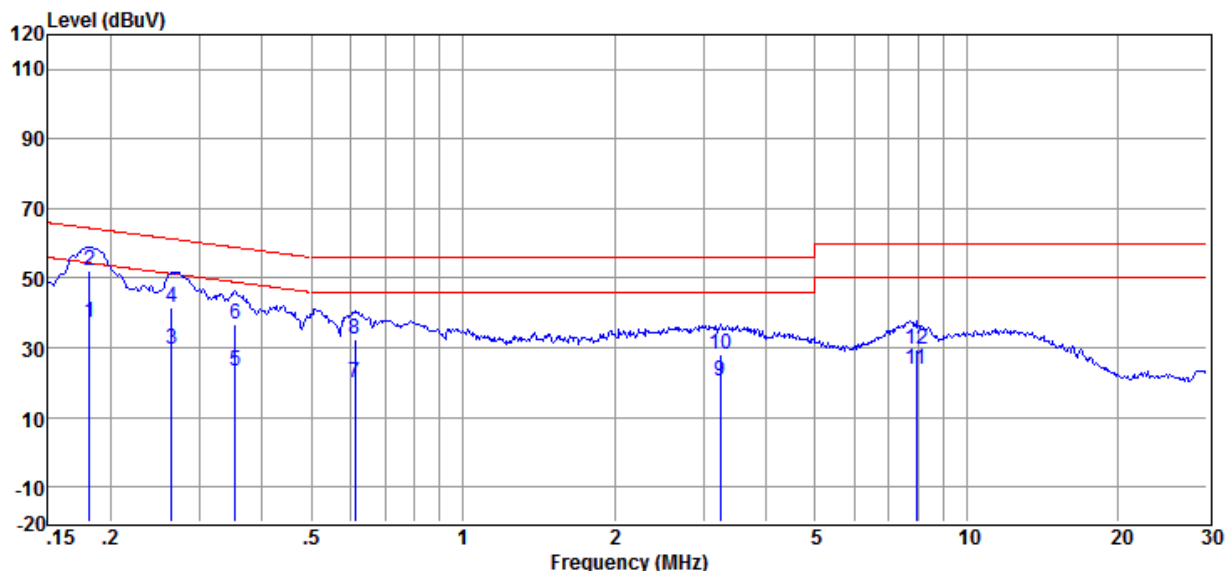

Item	Freq.	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)	
1	0.182	27.03	0.05	10.15	37.23	54.42	-17.19	Average age
2	0.182	42.08	0.05	10.15	52.28	64.42	-12.14	QP
3	0.264	19.22	0.05	10.16	29.43	51.29	-21.86	Average age
4	0.264	31.44	0.05	10.16	41.65	61.29	-19.64	QP
5	0.354	13.07	0.04	10.16	23.27	48.87	-25.60	Average age
6	0.354	26.75	0.04	10.16	36.95	58.87	-21.92	QP
7	0.611	9.66	0.05	10.17	19.88	46.00	-26.12	Average age
8	0.611	22.09	0.05	10.17	32.31	56.00	-23.69	QP
9	3.241	10.21	0.12	10.20	20.53	46.00	-25.47	Average age
10	3.241	17.62	0.12	10.20	27.94	56.00	-28.06	QP
11	7.935	13.34	0.20	10.29	23.83	50.00	-26.17	Average age
12	7.935	19.24	0.20	10.29	29.73	60.00	-30.27	QP

Remark: Level = Read Level + LISN/ISN Factor + Cable Loss.

7.4 Duty Cycle

In order to assist with the determination of the Averageage level of fundamental and spurious emissions field strength, measurements were made of duty cycle to determine the transmission duration and the silent period time of the transmitter. The transmitter duty cycle was measured using a spectrum analyser in the time domain and calculated by using the following calculation:

Duty cycle= T on time / Period

Duty factor = $10 * \log (1/\text{Duty cycle})$

If duty cycle of test signal is > 98%, duty factor is not required.


If duty cycle of test signal is < 98%, duty factor shall be considered.

Test Data:

The detailed test data see: Appendix A for SHEM170300119802

7.5 Emission Bandwidth

Test Configuration:

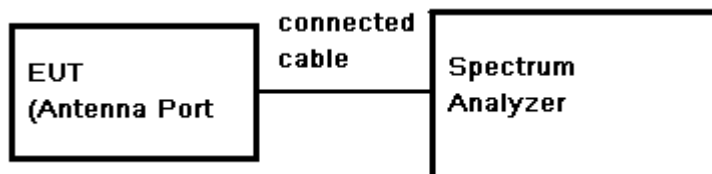

Test Procedure:

- Place the EUT on the table and set it in transmitting mode.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- Set the spectrum analyzer as RBW= approximately 1% of the emission bandwidth or 100KHz(for 5.725-5.85 GHz band), VBW $\geq$ 3* RBW, Span=40/80/160MHz, Sweep=auto couple
- Mark the peak frequency and -6dB (upper and lower) frequency.
- Repeat above procedures until all frequency measured was complete.

Limit: $\geq$ 500 kHz (For 5.725-5.85 GHz band)


Test Result: Pass

Test Data:

The detailed test data see: Appendix A for SHEM170300119802

7.6 99% Occupied Bandwidth

Test Configuration:

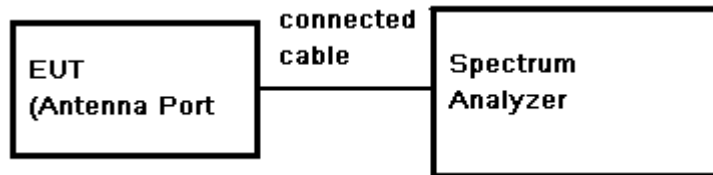

Test Procedure:


- 1) Place the EUT on the table and set it in transmitting mode.
- 2) Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3) Set the spectrum analyzer: Span = 1.5 times to 5.0 times the OBW, RBW = 1 % to 5 % of the OBW. VBW $\geq$ 3*RBW. Sweep = auto; Detector Function = Peak. Trace = Max Hold.
- 4) Use the 99 % power bandwidth function of the instrument.
- 5) Repeat above procedures until all frequency measured was complete.

Test Data:

The detailed test data see: Appendix A for SHEM170300119802

7.7 Maximum Conducted output power

Test Setup:

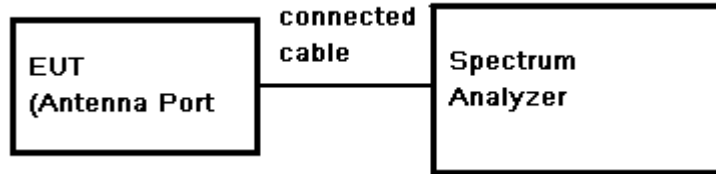

Test Procedure:

- Place the EUT on the table and set it in transmitting mode.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum.
- Set the spectrum analyzer as RBW=1MHz, VBW≥3* RBW, Span=40/80MHz, Sweep=auto, Detector = RMS
- Set the occur band to the entire emission 26dB bandwidth of the signal.
- Trace Averageage at least 100 traces in power Averageeraging (i.e., RMS) mode.
- Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 26dB occupied bandwidth) of the signal using the instrument' s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges.
- Record the max. Power channel reading.
- Repeat above procedures until all the frequency measured were complete.

Test Limit:

Frequency Band	EUT Category	Limit
U-NII-1	☐ Outdoor Access Point	1W(30dBm) The maximum e.i.r.p≤125 mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon.
	☐ Fixed Point-to-point Access Point	1W(30dBm)
	☐ Indoor Access Point	
	☒ Mobile and Portable client device	250mW (24dBm)
U-NII-2a	-	Lesser of 250mW (24dBm) or 11dBm + 10log B*
U-NII-2c		
U-NII-3		1W (30dBm)
Note: *Where B is the 26dB emission bandwidth in MHz.		


Test Result: Pass

Test Data:

The detailed test data see: Appendix A for SHEM170300119802

7.8 Peak Power Spectral Density

Test Setup:

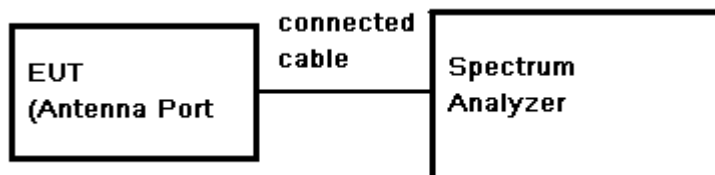

Test Procedure:

- Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- Set span 40/80/160MHz; RBW = 1 MHz/510KHz; VBW $\geq$ 3 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW; Sweep time = auto.
- Detector = RMS, Trigger = Free run Record the marker level for the particular mode.
- Use the peak search function on the instrument to find the peak of the spectrum and record its value.
- Repeat these steps for other channel and device modes.

Test Limit:

Frequency Band	EUT Category	Limit
U-NII-1	☐ Outdoor Access Point	17dBm/MHz
	☐ Fixed Point-to-point Access Point	11 dBm/MHz
	☐ Indoor Access Point	
	☒ Mobile and Portable client device	11 dBm/MHz
U-NII-2a	-	11 dBm/MHz
U-NII-2c		
U-NII-3		30 dBm/500KHz

Test Result: Pass

Test Data:

The detailed test data see: Appendix A for SHEM170300119802

7.9 Radiated Spurious Emissions and Band-edge

Test site/setup: Measurement Distance: 3m
Test instrumentation set-up:

Frequency Range(MHz)	Detector	RBW	VBW
0.009-0.090	Peak	10kHz	30kHz
0.009-0.090	Averageage	10kHz	30kHz
0.090-0.110	Quasi-peak	10kHz	30kHz
0.110-0.490MHz	Peak	10kHz	30kHz
0.110-0.490	Averageage	10kHz	30kHz
0.490 -30	Quasi-peak	10kHz	30kHz
30-1000	Quasi-peak	100kHz	300kHz
Above 1000	Peak	RBW=1MHz	VBW≥RBW
	Averageage		VBW=10Hz

Sweep=Auto

15.209 Limit:

Frequency(MHz)	Limit (dBuV/m)
0.009-0.490	128.5 ~ 93.8
0.490-1.705	73.8 ~63.0
1.705-30	69.5
30-88	40.0
88-216	43.5
216-960	46.0
960-1000	54.0
Above 1000	54.0

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted Averageage emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

15.407 Limit:

Operation Frequency (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength (dBuV/m)
5150-5250	-27	68.3
5250-5350		
5470-5725		
5725-5850	-27* ¹	68.3* ¹
	-17* ²	78.3* ²

Note: The following formula is used to convert the EIRP to field strength

$$E = \frac{1000000 \sqrt{30P}}{3} \text{ uV/m, where P is the EIRP (Watts).}$$

Remark: *¹ Without 10MHz of band edge; *² Within 10MHz of band edge

Test Setup:

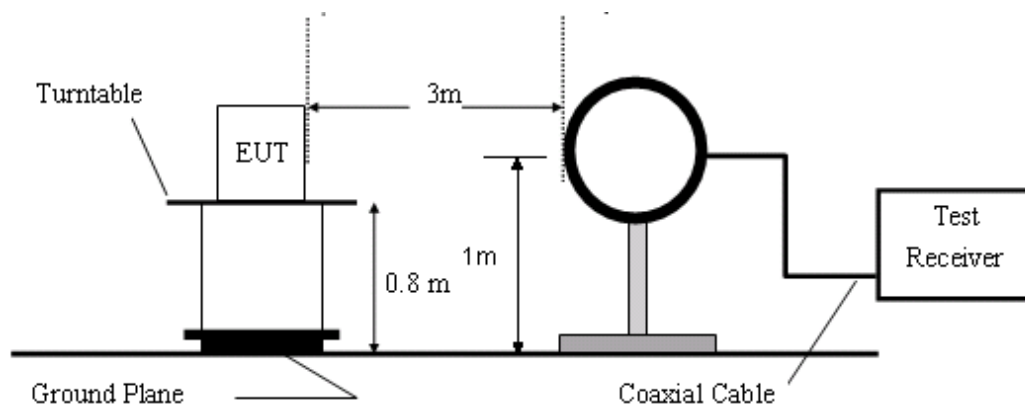


Figure1. Below 30MHz radiated emissions test configuration

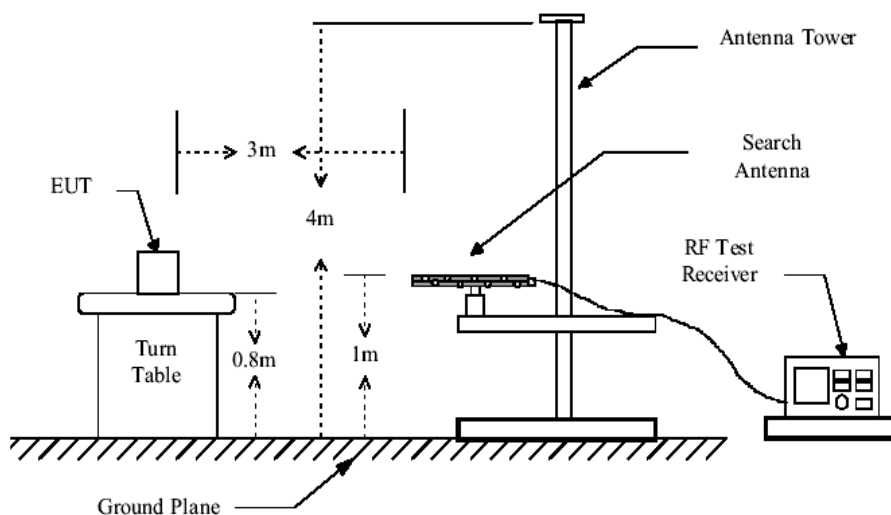


Figure2. 30MHz to 1GHz radiated emissions test configuration

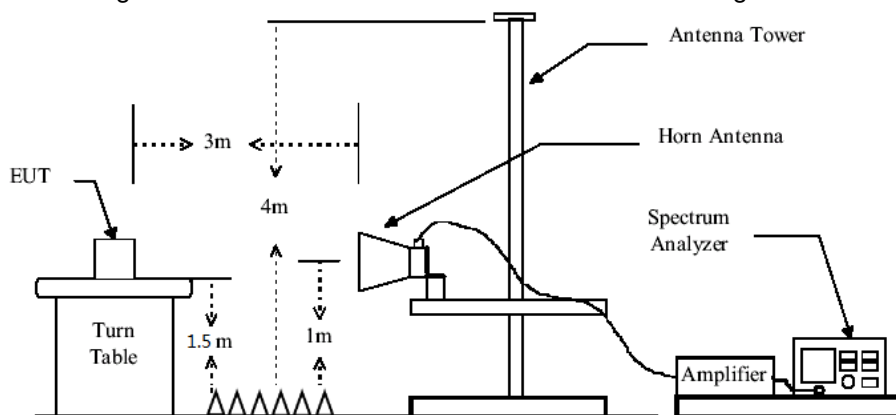


Figure3. Above 1GHz radiated emissions test configuration

Test Procedure:

- 1) The procedure used was ANSI Standard C63.10. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.
- 2) Low noise amplifier was used below 1GHz, High pass Filter and amplifier was used above 3GHz. We did not use any amplifier or filter between 1G and 3GHz.
- 3) Test were performed for their spatial orthogonal(X, Y, Z), the worst test data (X orthogonal) was submitted.
 - a) For this intentional radiator operates below 25 GHz. the spectrum shall be investigated to the tenth harmonic of the highest fundamental frequency. And above the third harmonic of this intentional radiator, the disturbance is very low. So the test result only displays to 5rd harmonic.
 - b) As shown in Section, for frequencies above 1000MHz. the above field strength limits are based on Averageage limits. However, the peak field strength of any emission shall not exceed the maximum permitted Averageage limits specified above by more than 20 dB under any condition of modulation.
- 4) Pretest under all modes during 30MHz to 1GHz; choose the worst case mode (Middle channel of 802.11a on band 1) record on the report.
- 5) No spurious emissions were detected within 20dB of limit below 30MHz.

Test Result:

Pass

7.9.1 Radiated Spurious Emissions

30MHz-1GHz:


802.11 a

Channel: 149


Item	Freq.	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		
1	47.99	25.07	13.90	28.80	0.25	10.42	40.00	-29.58	QP	Horizontal
2	55.42	24.01	13.17	28.80	0.28	8.66	40.00	-31.34	QP	Horizontal
3	105.64	27.22	10.17	28.60	0.48	9.27	43.50	-34.23	QP	Horizontal
4	199.99	27.77	10.80	28.10	0.69	11.16	43.50	-32.34	QP	Horizontal
5	584.79	24.61	20.27	29.24	1.35	16.99	46.00	-29.01	QP	Horizontal
6	810.27	25.98	23.61	29.08	2.08	22.59	46.00	-23.41	QP	Horizontal
1	41.71	26.36	13.84	28.80	0.23	11.63	40.00	-28.37	QP	Vertical
2	47.66	26.33	13.78	28.80	0.25	11.56	40.00	-28.44	QP	Vertical
3	96.10	31.37	9.06	28.60	0.44	12.27	43.50	-31.23	QP	Vertical
4	276.12	26.72	12.24	27.90	0.81	11.87	46.00	-34.13	QP	Vertical
5	601.43	35.67	20.23	29.25	1.38	28.03	46.00	-17.97	QP	Vertical
6	801.79	31.51	23.53	29.10	2.08	28.02	46.00	-17.98	QP	Vertical

Remark: 1. Result Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Below is the plot of worst case:
Vertical:

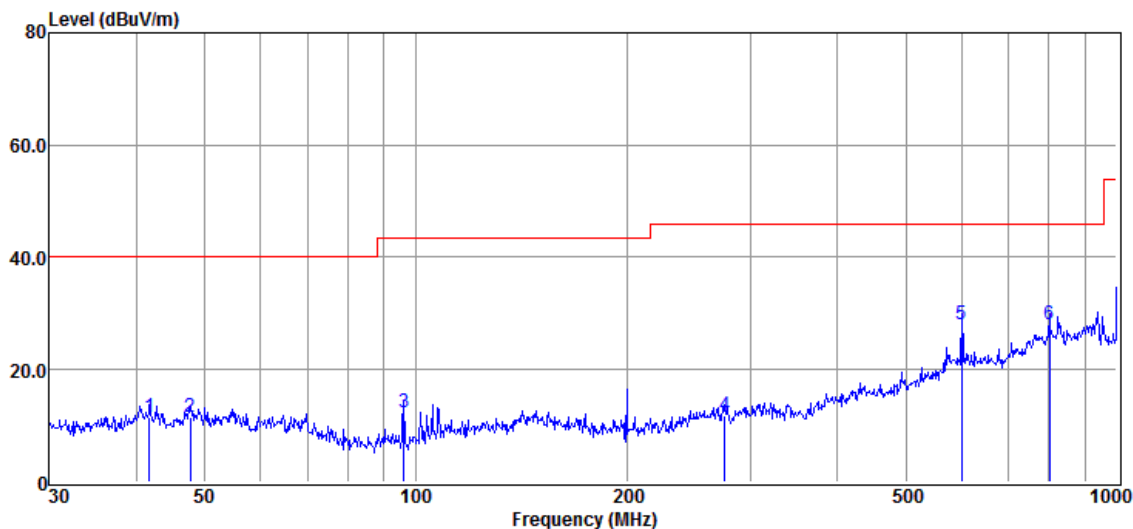

Horizontal:

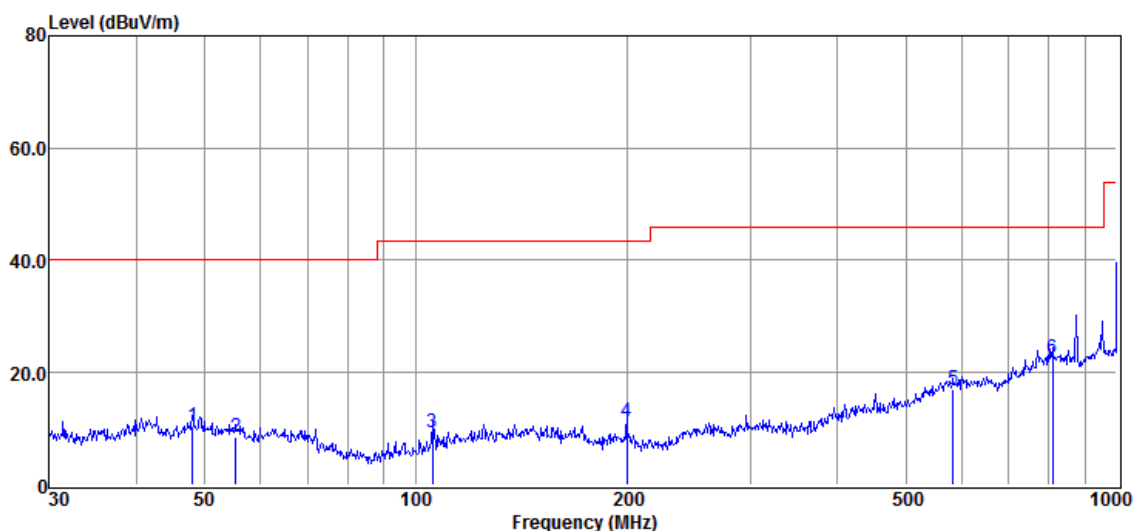

Above 1GHz

802.11a

Channel: 36

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	6418	40.12	8.14	48.26	54	-5.74	peak	Horizontal
2	9505	33.39	14.42	47.81	54	-6.19	peak	Horizontal
3	10360	32.33	14.28	46.61	54	-7.39	peak	Horizontal
4	7627.6	37.8	12.02	49.82	54	-4.18	peak	Vertical
5	10360	32.96	14.28	47.24	54	-6.76	peak	Vertical
6	13096	35.15	15.33	50.48	54	-3.52	peak	Vertical

802.11a

Channel: 40

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	7753.6	37.1	12.21	49.31	54	-4.69	peak	Horizontal
2	9517.6	33.65	14.41	48.06	54	-5.94	peak	Horizontal
3	10400	31.19	14.22	45.41	54	-8.59	peak	Horizontal
4	6342.4	41.3	7.84	49.14	54	-4.86	peak	Vertical
5	9555.4	37.06	14.39	51.45	54	-2.55	peak	Vertical
6	10400	32.49	14.22	46.71	54	-7.29	peak	Vertical

802.11a

Channel: 48

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	9542.8	34.2	14.41	48.61	54	-5.39	peak	Horizontal
2	10480	34.96	14.08	49.04	54	-4.96	peak	Horizontal
3	13058.2	36.59	15.25	51.84	54	-2.16	peak	Horizontal
4	6405.4	42.3	8.09	50.39	54	-3.61	peak	Vertical
5	9605.8	38.36	14.38	52.74	54	-1.26	peak	Vertical
6	10480	33.67	14.08	47.75	54	-6.25	peak	Vertical

802.11a

Channel: 149

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	9505	33.69	14.42	48.11	54	-5.89	peak	Horizontal
2	11490	32.26	14.41	46.67	54	-7.33	peak	Horizontal
3	13096	37.19	15.33	52.52	54	-1.48	peak	Horizontal
4	6418	43.62	8.14	51.76	54	-2.24	peak	Vertical
5	7867	36.51	12.37	48.88	54	-5.12	peak	Vertical
6	11490	32.92	14.41	47.33	54	-6.67	peak	Vertical

802.11a

Channel: 157

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	6418	42.4	8.14	50.54	54	-3.46	peak	Horizontal
2	11570	33.3	14.25	47.55	54	-6.45	peak	Horizontal
3	13234.6	36.26	15.61	51.87	54	-2.13	peak	Horizontal
4	6518.8	43.6	8.45	52.05	54	-1.95	peak	Vertical
5	9580.6	36.82	14.39	51.21	54	-2.79	peak	Vertical
6	11570	36.22	14.25	50.47	54	-3.53	peak	Vertical

802.11a

Channel: 165

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	7816.6	36.8	12.29	49.09	54	-4.91	peak	Horizontal
2	11650	34.69	14.06	48.75	54	-5.25	peak	Horizontal
3	13259.8	34.79	15.66	50.45	54	-3.55	peak	Horizontal
4	6418	43.81	8.14	51.95	54	-2.05	peak	Vertical
5	9605.8	38.39	14.38	52.77	54	-1.23	peak	Vertical
6	11650	33.12	14.06	47.18	54	-6.82	peak	Vertical

802.11 n(HT20)

Channel: 36

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	6405.4	44.32	8.09	52.41	54	-1.59	peak	Horizontal
2	9505	37.38	14.42	51.8	54	-2.2	peak	Horizontal
3	10360	31.51	14.28	45.79	54	-8.21	peak	Horizontal
4	6468.4	43.75	8.31	52.06	54	-1.94	peak	Vertical
5	10360	37.07	14.28	51.35	54	-2.65	peak	Vertical
6	11836	36.15	13.74	49.89	54	-4.11	peak	Vertical

802.11 n(HT20)

Channel: 40

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	7665.4	35.86	12.07	47.93	54	-6.07	peak	Horizontal
2	9631	37.5	14.36	51.86	54	-2.14	peak	Horizontal
3	10400	31.02	14.22	45.24	54	-8.76	peak	Horizontal
4	7375.6	38.27	11.37	49.64	54	-4.36	peak	Vertical
5	10400	33.95	14.22	48.17	54	-5.83	peak	Vertical
6	12970	34.98	15.07	50.05	54	-3.95	peak	Vertical

802.11 n(HT20)

Channel: 48

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	6329.8	41.06	7.79	48.85	54	-5.15	peak	Horizontal
2	7287.4	40.1	10.98	51.08	54	-2.92	peak	Horizontal
3	10480	34.56	14.08	48.64	54	-5.36	peak	Horizontal
4	7879.6	37.11	12.39	49.5	54	-4.5	peak	Vertical
5	10480	30.99	14.08	45.07	54	-8.93	peak	Vertical
6	12730.6	35.11	14.42	49.53	54	-4.47	peak	Vertical

802.11 n(HT20)

Channel: 149

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	6342.4	42.96	7.84	50.8	54	-3.2	peak	Horizontal
2	9353.8	36.77	14.34	51.11	54	-2.89	peak	Horizontal
3	11490	34.54	14.41	48.95	54	-5.05	peak	Horizontal
4	8383.6	35.49	11.93	47.42	54	-6.58	peak	Vertical
5	11490	33.29	14.41	47.7	54	-6.3	peak	Vertical
6	11722.6	33.8	13.89	47.69	54	-6.31	peak	Vertical

802.11 n(HT20)

Channel: 157

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	7287.4	39.34	10.98	50.32	54	-3.68	peak	Horizontal
2	9668.8	34.94	14.36	49.3	54	-4.7	peak	Horizontal
3	11570	36.08	14.25	50.33	54	-3.67	peak	Horizontal
4	8484.4	38.27	12.12	50.39	54	-3.61	peak	Vertical
5	11570	35.61	14.25	49.86	54	-4.14	peak	Vertical
6	11735.2	35.17	13.87	49.04	54	-4.96	peak	Vertical

802.11 n(HT20)

Channel: 165

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	7438.6	38.19	11.64	49.83	54	-4.17	peak	Horizontal
2	9568	38.39	14.4	52.79	54	-1.21	peak	Horizontal
3	11650	33.97	14.06	48.03	54	-5.97	peak	Horizontal
4	6468.4	42.15	8.31	50.46	54	-3.54	peak	Vertical
5	7312.6	38.94	11.09	50.03	54	-3.97	peak	Vertical
6	11650	34.68	14.06	48.74	54	-5.26	peak	Vertical

802.11 n(HT40)

Channel: 38

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	6468.4	43.04	8.31	51.35	54	-2.65	peak	Horizontal
2	9618.4	37.92	14.37	52.29	54	-1.71	peak	Horizontal
3	10380	32.64	14.25	46.89	54	-7.11	peak	Horizontal
4	6405.4	44.6	8.09	52.69	54	-1.31	peak	Vertical
5	9517.6	35.36	14.41	49.77	54	-4.23	peak	Vertical
6	10380	34.76	14.25	49.01	54	-4.99	peak	Vertical

802.11 n(HT40)

Channel: 46

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	7426	40.75	11.58	52.33	54	-1.67	peak	Horizontal
2	10460	33.42	14.11	47.53	54	-6.47	peak	Horizontal
3	11710	37.52	13.92	51.44	54	-2.56	peak	Horizontal
4	7665.4	38.26	12.07	50.33	54	-3.67	peak	Vertical
5	9605.8	33.9	14.38	48.28	54	-5.72	peak	Vertical
6	10460	31.97	14.11	46.08	54	-7.92	peak	Vertical

802.11 n(HT40)

Channel: 151

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	9593.2	33.9	14.38	48.28	54	-5.72	peak	Horizontal
2	11510	33.21	14.4	47.61	54	-6.39	peak	Horizontal
3	11760.4	36.14	13.8	49.94	54	-4.06	peak	Horizontal
4	6342.4	43.71	7.84	51.55	54	-2.45	peak	Vertical
5	7879.6	40.05	12.39	52.44	54	-1.56	peak	Vertical
6	11510	32.32	14.4	46.72	54	-7.28	peak	Vertical

802.11 n(HT40)

Channel: 159

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	6405.4	44.19	8.09	52.28	54	-1.72	peak	Horizontal
2	7665.4	39.89	12.07	51.96	54	-2.04	peak	Horizontal
3	11590	34.59	14.2	48.79	54	-5.21	peak	Horizontal
4	5422.6	40.86	7.25	48.11	54	-5.89	peak	Vertical
5	7867	37.12	12.37	49.49	54	-4.51	peak	Vertical
6	11590	35.39	14.2	49.59	54	-4.41	peak	Vertical

802.11 ac(VHT20)

Channel: 36

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	7627.6	38.14	12.02	50.16	54	-3.84	peak	Horizontal
2	9593.2	36.5	14.38	50.88	54	-3.12	peak	Horizontal
3	10360	34.49	14.28	48.77	54	-5.23	peak	Horizontal
4	6418	44.46	8.14	52.6	54	-1.4	peak	Vertical
5	7665.4	38.12	12.07	50.19	54	-3.81	peak	Vertical
6	10360	31.66	14.28	45.94	54	-8.06	peak	Vertical

802.11 ac(VHT20)

Channel: 40

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	7438.6	39.62	11.64	51.26	54	-2.74	peak	Horizontal
2	9694	36.6	14.34	50.94	54	-3.06	peak	Horizontal
3	10400	33.5	14.22	47.72	54	-6.28	peak	Horizontal
4	6594.4	42.66	8.55	51.21	54	-2.79	peak	Vertical
5	7879.6	40.34	12.39	52.73	54	-1.27	peak	Vertical
6	10400	31.48	14.22	45.7	54	-8.3	peak	Vertical

802.11 ac(VHT20)

Channel: 48

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	7892.2	38.03	12.42	50.45	54	-3.55	peak	Horizontal
2	9517.6	37.12	14.41	51.53	54	-2.47	peak	Horizontal
3	10480	32.46	14.08	46.54	54	-7.46	peak	Horizontal
4	6493.6	43.23	8.4	51.63	54	-2.37	peak	Vertical
5	9530.2	34.69	14.4	49.09	54	-4.91	peak	Vertical
6	10480	35.34	14.08	49.42	54	-4.58	peak	Vertical

802.11 ac(VHT20)

Channel: 149

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	7930	36.27	12.3	48.57	54	-5.43	peak	Horizontal
2	11490	34.2	14.41	48.61	54	-5.39	peak	Horizontal
3	13121.2	37.6	15.38	52.98	54	-1.02	peak	Horizontal
4	7526.8	38.08	11.92	50	54	-4	peak	Vertical
5	9492.4	37.92	14.42	52.34	54	-1.66	peak	Vertical
6	11490	33.34	14.41	47.75	54	-6.25	peak	Vertical

802.11 ac(VHT20)

Channel: 157

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	7892.2	38.2	12.42	50.62	54	-3.38	peak	Horizontal
2	9530.2	38.02	14.4	52.42	54	-1.58	peak	Horizontal
3	11570	36.26	14.25	50.51	54	-3.49	peak	Horizontal
4	9542.8	36.66	14.41	51.07	54	-2.93	peak	Vertical
5	11570	31.94	14.25	46.19	54	-7.81	peak	Vertical
6	13133.8	37.21	15.4	52.61	54	-1.39	peak	Vertical

802.11 ac(VHT20)

Channel: 165

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	6468.4	41.65	8.31	49.96	54	-4.04	peak	Horizontal
2	9366.4	38.46	14.36	52.82	54	-1.18	peak	Horizontal
3	11650	35.25	14.06	49.31	54	-4.69	peak	Horizontal
4	9605.8	37.87	14.38	52.25	54	-1.75	peak	Vertical
5	11650	32.22	14.06	46.28	54	-7.72	peak	Vertical
6	13133.8	35.61	15.4	51.01	54	-2.99	peak	Vertical

802.11 ac(VHT40)

Channel: 38

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	6418	40.57	8.14	48.71	54	-5.29	peak	Horizontal
2	7816.6	38.69	12.29	50.98	54	-3.02	peak	Horizontal
3	10380	33.24	14.25	47.49	54	-6.51	peak	Horizontal
4	6418	42.03	8.14	50.17	54	-3.83	peak	Vertical
5	9542.8	37.87	14.41	52.28	54	-1.72	peak	Vertical
6	10380	31.99	14.25	46.24	54	-7.76	peak	Vertical

802.11 ac(VHT40)

Channel: 46

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	9618.4	35.54	14.37	49.91	54	-4.09	peak	Horizontal
2	10460	30.12	14.11	44.23	54	-9.77	peak	Horizontal
3	13310.2	36.75	15.87	52.62	54	-1.38	peak	Horizontal
4	6401	41.74	8.08	49.82	74	-24.18	peak	Vertical
5	8645	39.24	12.6	51.84	74	-22.16	peak	Vertical
6	10460	36.11	14.11	50.22	74	-23.78	peak	Vertical

802.11 ac(VHT40)

Channel: 151

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	7791.4	38.48	12.26	50.74	54	-3.26	peak	Horizontal
2	9580.6	35.8	14.39	50.19	54	-3.81	peak	Horizontal
3	11510	34.22	14.4	48.62	54	-5.38	peak	Horizontal
4	6418	44.28	8.14	52.42	54	-1.58	peak	Vertical
5	7375.6	40.19	11.37	51.56	54	-2.44	peak	Vertical
6	11510	36.07	14.4	50.47	54	-3.53	peak	Vertical

802.11 ac(VHT40)

Channel: 159

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	6392.8	40.43	8.05	48.48	54	-5.52	peak	Horizontal
2	7892.2	37.75	12.42	50.17	54	-3.83	peak	Horizontal
3	11590	31.88	14.2	46.08	54	-7.92	peak	Horizontal
4	9505	37.53	14.42	51.95	54	-2.05	peak	Vertical
5	10563.4	38.34	14.05	52.39	54	-1.61	peak	Vertical
6	11590	35.41	14.2	49.61	54	-4.39	peak	Vertical

802.11 ac(VHT80)

Channel:42

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	6405.4	40.58	8.09	48.67	54	-5.33	peak	Horizontal
2	8308	37.83	11.78	49.61	54	-4.39	peak	Horizontal
3	10420	32.18	14.17	46.35	54	-7.65	peak	Horizontal
4	7879.6	38.18	12.39	50.57	54	-3.43	peak	Vertical
5	9593.2	37.84	14.38	52.22	54	-1.78	peak	Vertical
6	10420	34.38	14.17	48.55	54	-5.45	peak	Vertical

802.11 ac(VHT80)

Channel: 155


Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	7753.6	38.82	12.21	51.03	54	-2.97	peak	Horizontal
2	9505	36.47	14.42	50.89	54	-3.11	peak	Horizontal
3	11550	31.74	14.3	46.04	54	-7.96	peak	Horizontal
4	7879.6	36.65	12.39	49.04	54	-4.96	peak	Vertical
5	9542.8	36.31	14.41	50.72	54	-3.28	peak	Vertical
6	11550	35.9	14.3	50.2	54	-3.8	peak	Vertical

7.9.2 Radiated Band-edge


802.11 a

Channel: 5180

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	5129.77	51.23	7.04	58.27	74	-15.73	Peak	Horizontal
2	5150	49.45	6.92	56.37	74	-17.63	Peak	Horizontal
3	5174.5	99.95	6.79	106.74	74	32.74	Peak	Horizontal
1	5132.61	36.62	7.01	43.63	54	-10.37	Average	Horizontal
2	5150	36.86	6.92	43.78	54	-10.22	Average	Horizontal
3	5173.79	84.3	6.8	91.1	54	37.1	Average	Horizontal

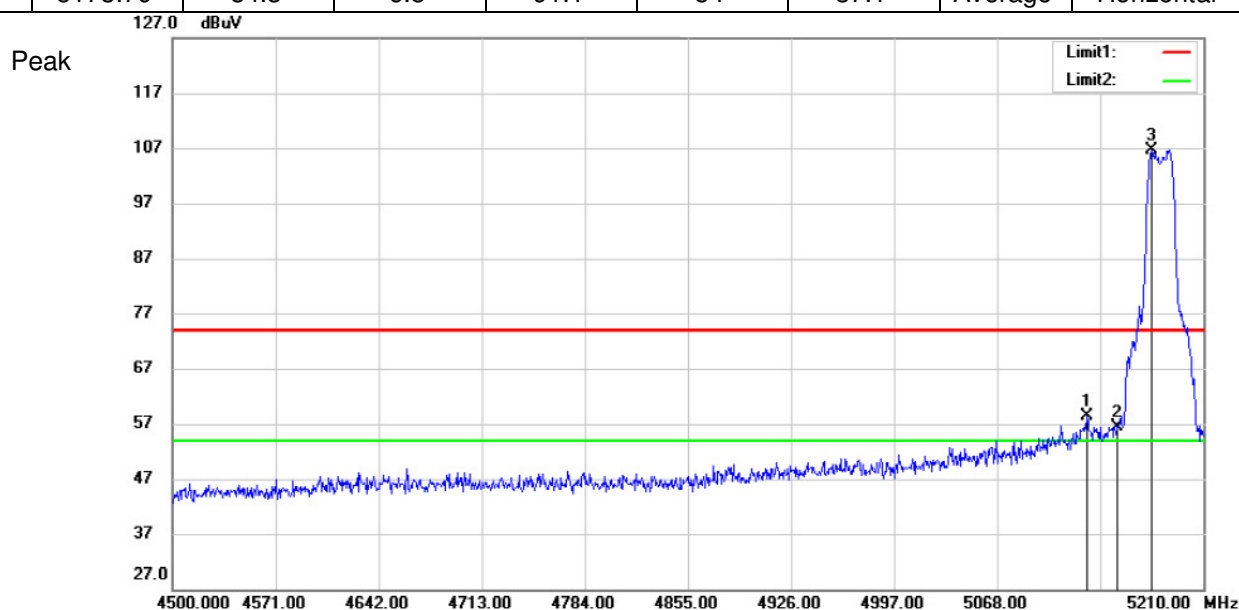


Average

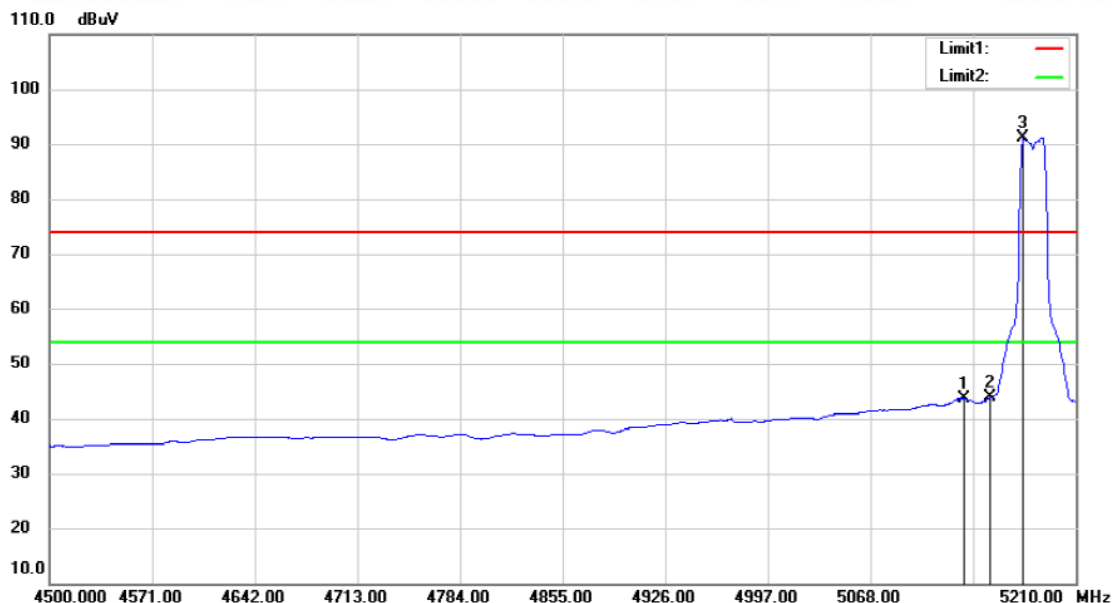

802.11 a

Channel: 5180



MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	5121.25	45.79	7.08	52.87	54	-1.13	Peak	Vertical
2	5150	45.57	6.92	52.49	54	-1.51	Peak	Vertical
3	5178.05	93.6	6.76	100.36	54	46.36	Peak	Vertical

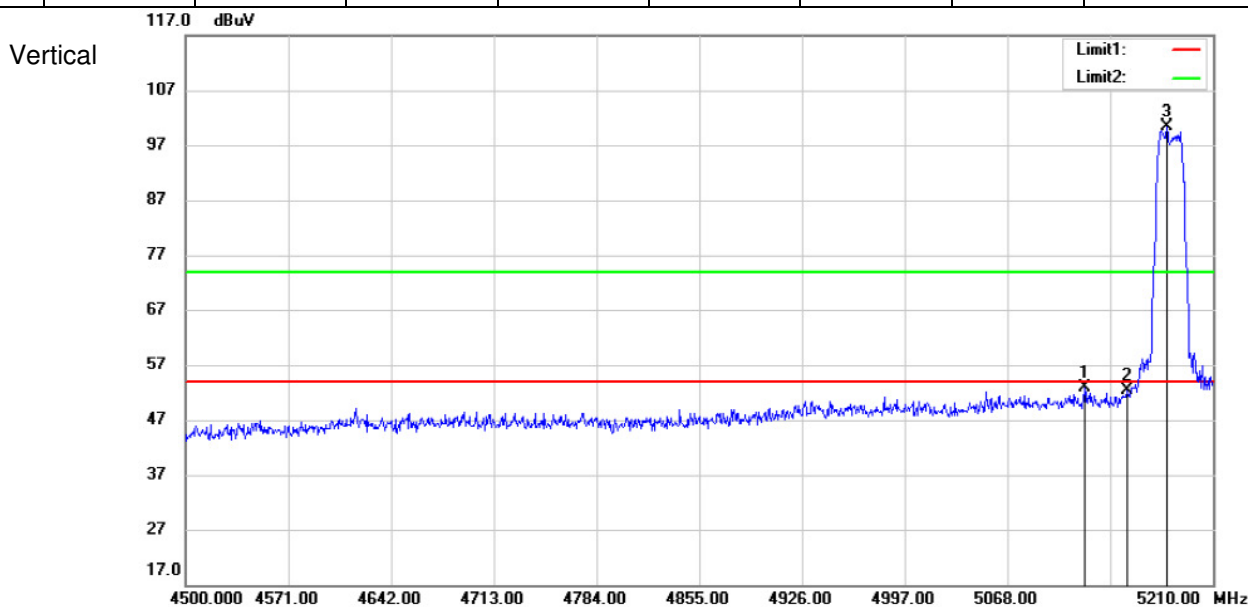

802.11 a

Channel: 5240



MK.	Frequency (MHz)	Reading (dBUV/m)	Corrected factor(dB)	Result (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	5246.98	96.35	6.65	103	54	49	Peak	Horizontal
2	5350	42.34	6.98	49.32	54	-4.68	Peak	Horizontal
3	5359.03	45.55	7.04	52.59	54	-1.41	Peak	Horizontal
1	5246.98	101.73	6.65	108.38	54	54.38	Peak	Vertical
2	5350	42.79	6.98	49.77	54	-4.23	Peak	Vertical
3	5417.08	45.33	7.27	52.6	54	-1.4	Peak	Vertical

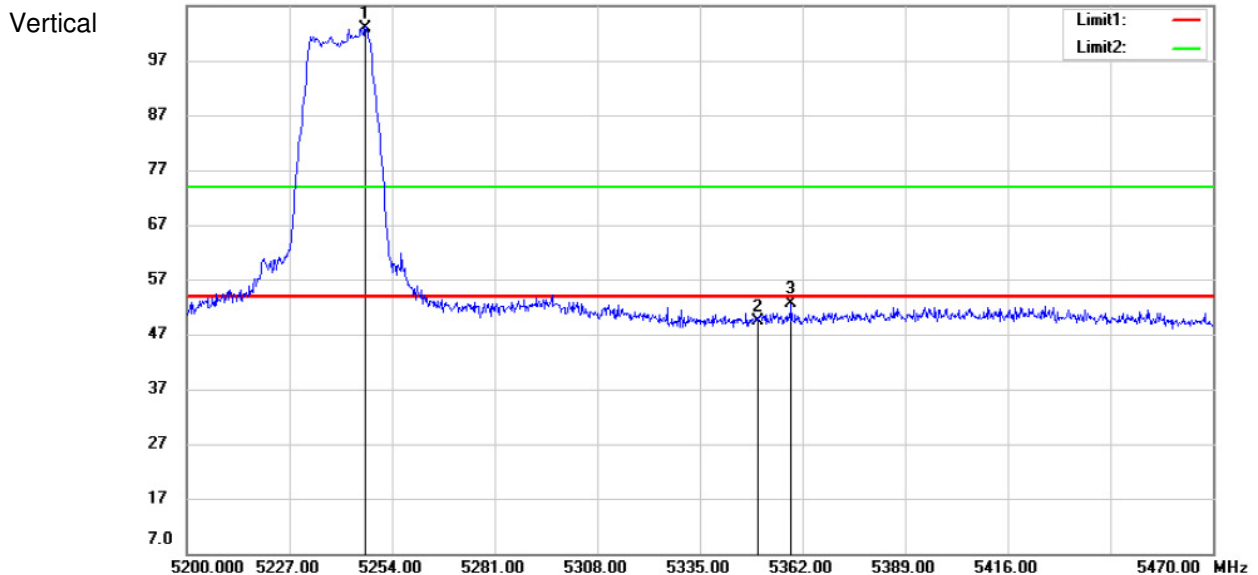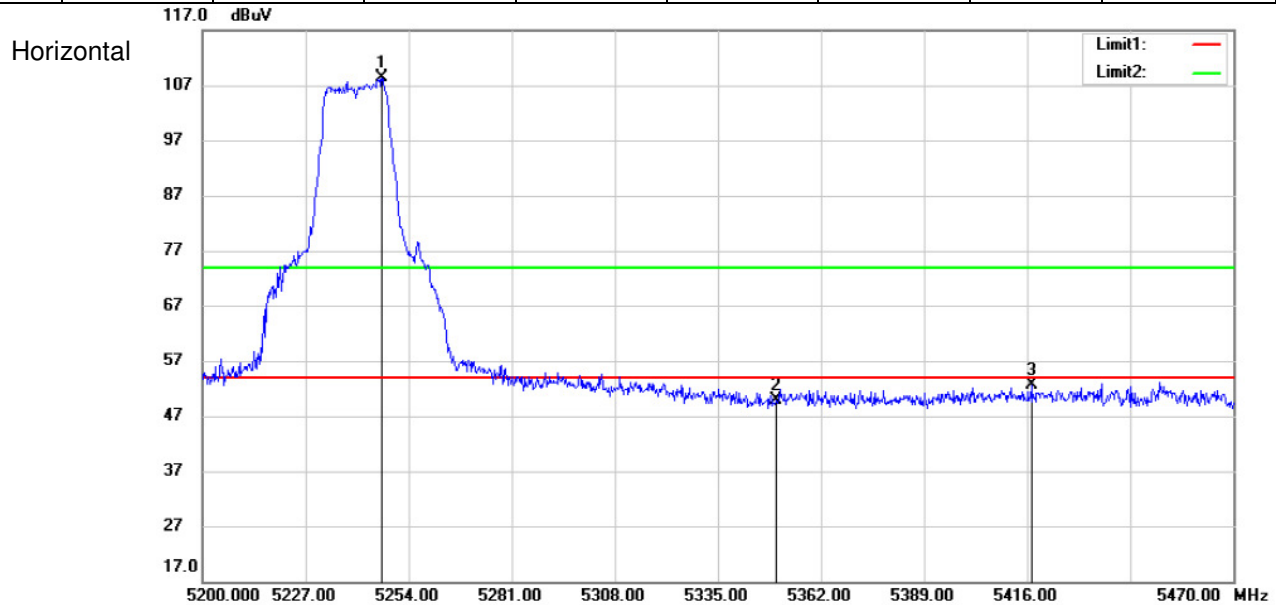

802.11 a

Channel: 5745


MK.	Frequency (MHz)	Reading (dBUV/m)	Corrected factor(dB)	Result (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	5720.79	47.65	6.82	54.47	74	-19.53	Peak	Horizontal
2	5725	45.58	6.82	52.4	74	-21.6	Peak	Horizontal
3	5742.99	96.06	6.79	102.85	74	28.85	Peak	Horizontal
1	5713.39	33.89	6.84	40.73	54	-13.27	Average	Horizontal
2	5725	33.66	6.82	40.48	54	-13.52	Average	Horizontal
3	5741.51	79.3	6.79	86.09	54	32.09	Average	Horizontal

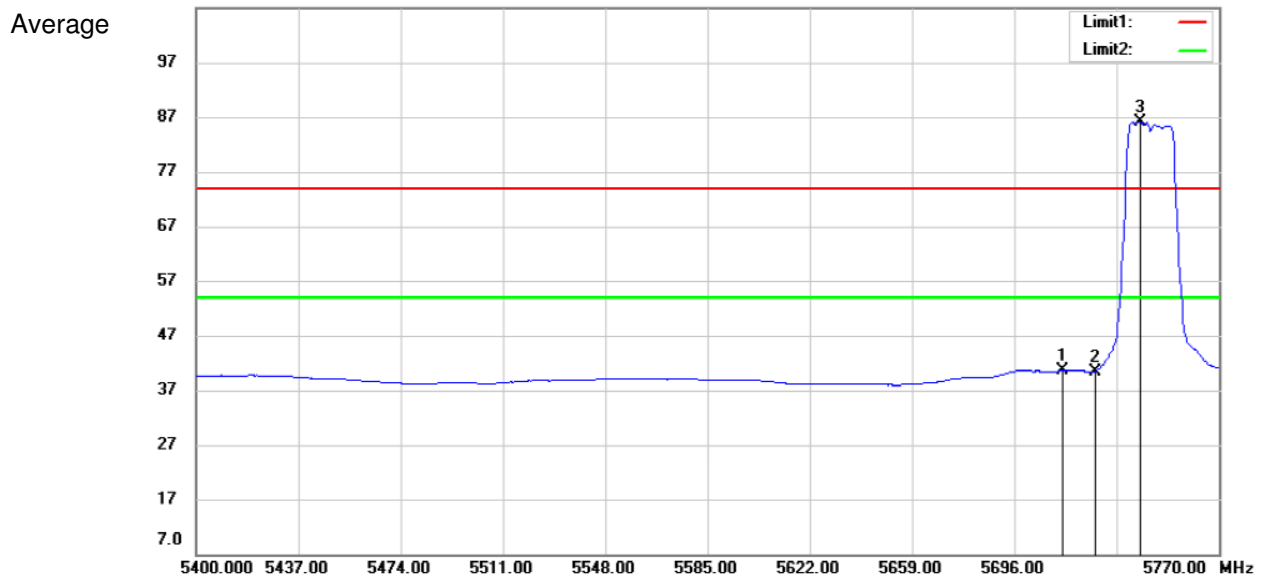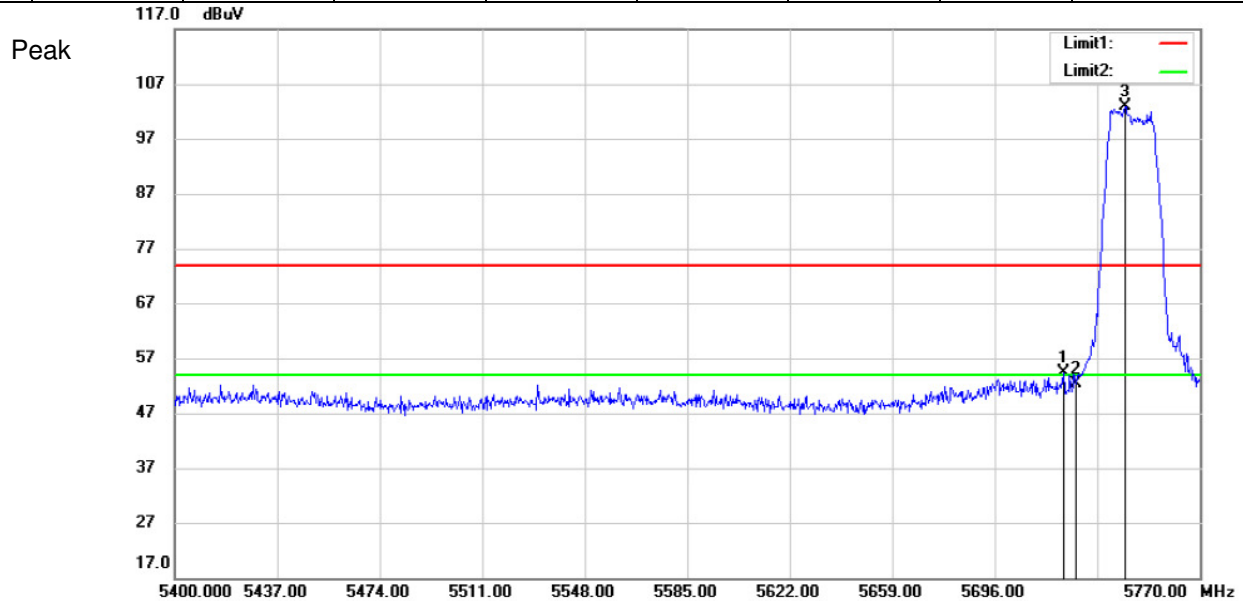

802.11 a

Channel: 5745

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	5719.68	44.55	6.82	51.37	54	-2.63	Peak	Vertical
2	5725	44.91	6.82	51.73	54	-2.27	Peak	Vertical
3	5738.18	87.89	6.8	94.69	54	40.69	Peak	Vertical

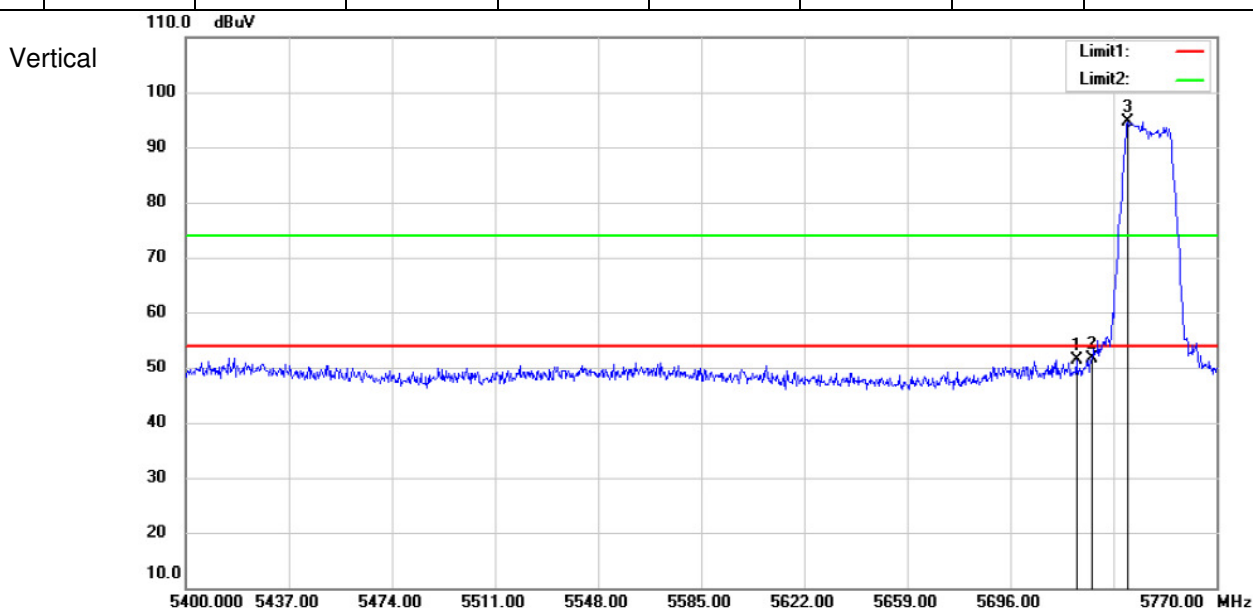


802.11 a


Channel: 5825

MK.	Frequency (MHz)	Reading (dBUV/m)	Corrected factor(dB)	Result (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	5822.8	88.25	6.65	94.9	54	40.9	Peak	Vertical
2	5850	42.64	6.64	49.28	54	-4.72	Peak	Vertical
3	5880.6	44.49	6.63	51.12	54	-2.88	Peak	Vertical
1	5818	94.99	6.66	101.65	54	47.65	Peak	Horizontal
2	5850	43.49	6.64	50.13	54	-3.87	Peak	Horizontal
3	5881.6	45.23	6.61	51.84	54	-2.16	Peak	Horizontal

Vertical

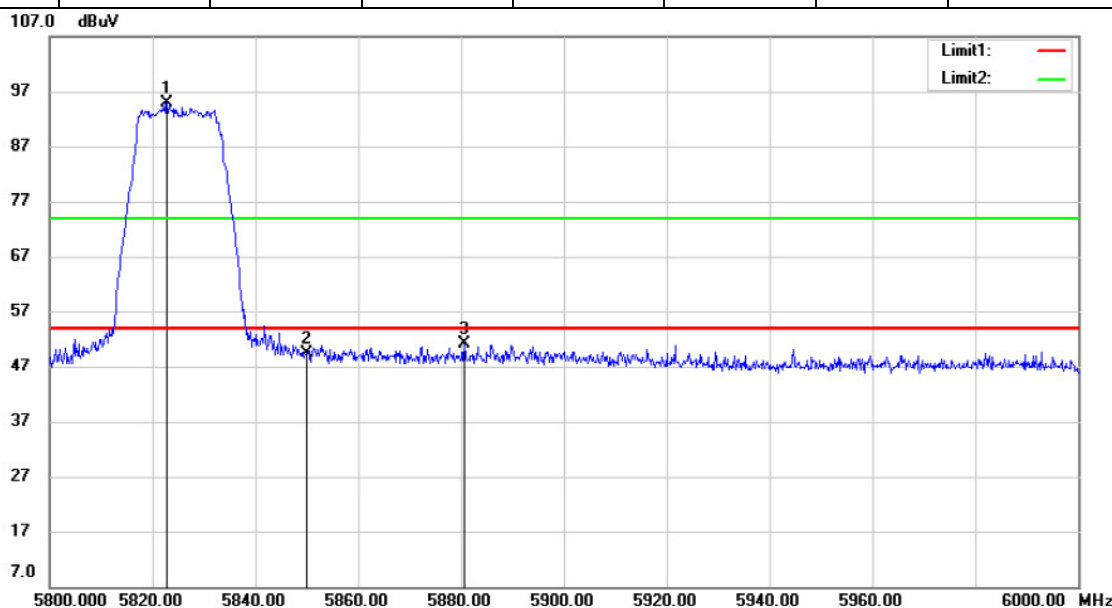



Horizontal

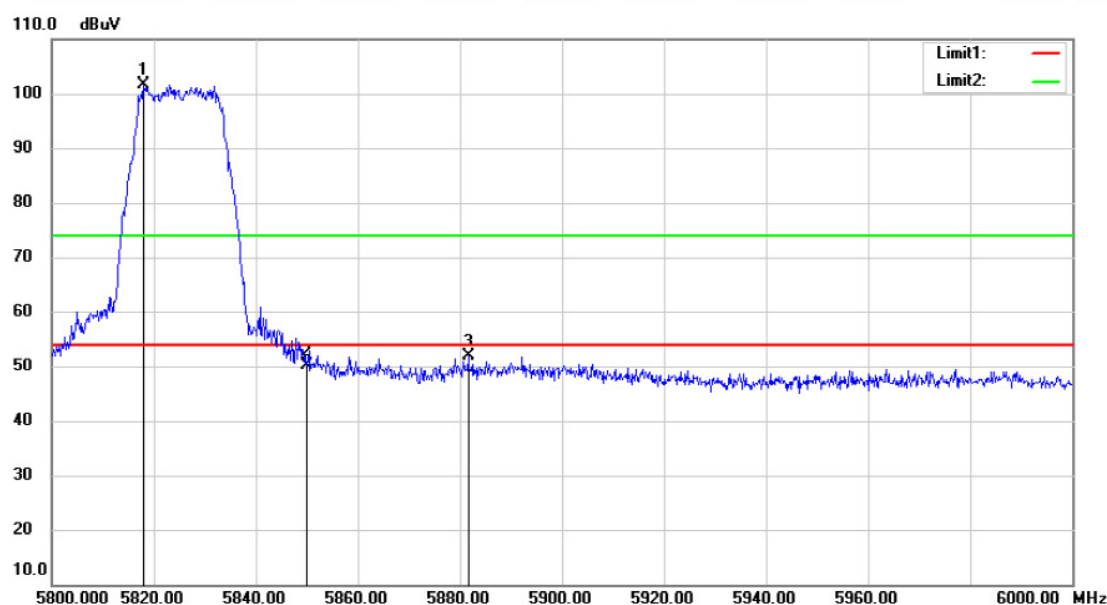

802.11 n(HT20)

Channel: 5180


MK.	Frequency (MHz)	Reading (dBUV/m)	Corrected factor(dB)	Result (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	5126.22	50.81	7.05	57.86	74	-16.14	Peak	Horizontal
2	5150	50.25	6.92	57.17	74	-16.83	Peak	Horizontal
3	5173.79	100.78	6.8	107.58	74	33.58	Peak	Horizontal
1	5133.32	36.36	7.01	43.37	54	-10.63	Average	Horizontal
2	5150	36.57	6.92	43.49	54	-10.51	Average	Horizontal
3	5187.99	83.7	6.71	90.41	54	36.41	Average	Horizontal

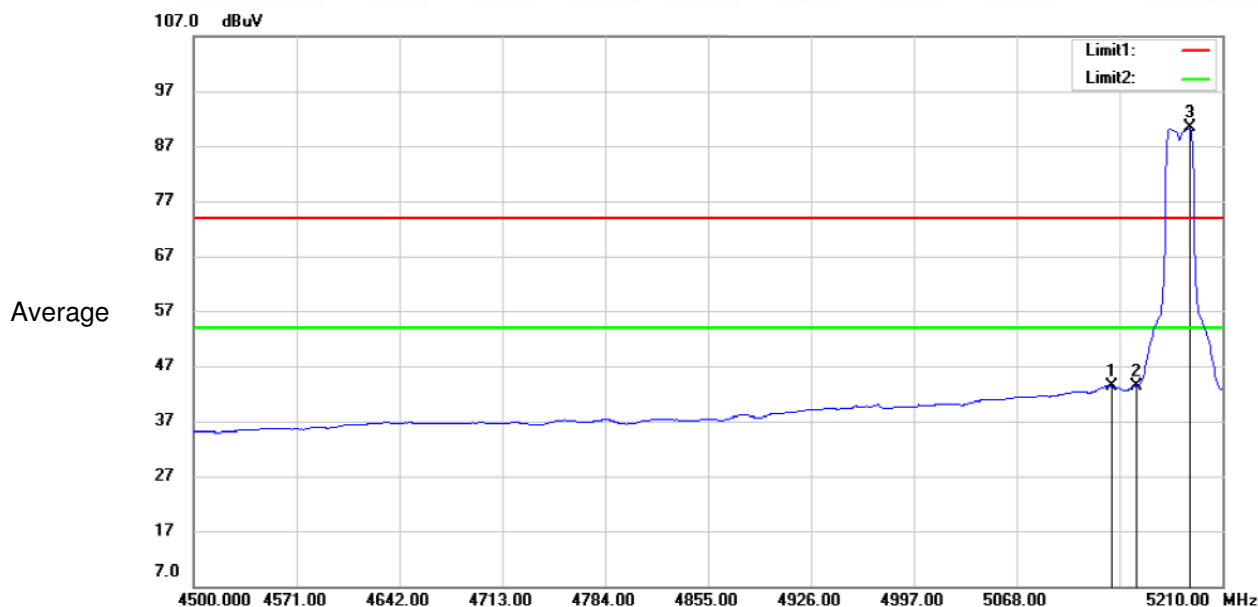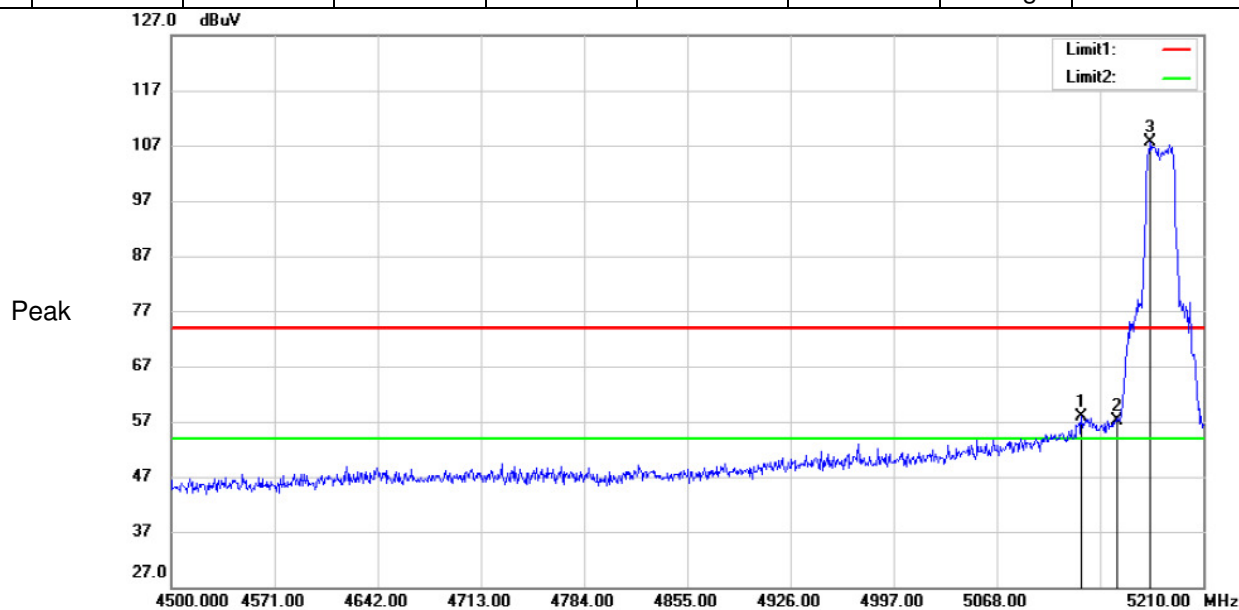

802.11 n(HT20)

Channel: 5180



MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	5142.55	45.89	6.96	52.85	54	-1.15	Peak	Vertical
2	5150	44.82	6.92	51.74	54	-2.26	Peak	Vertical
3	5178.05	92.17	6.76	98.93	54	44.93	Peak	Vertical

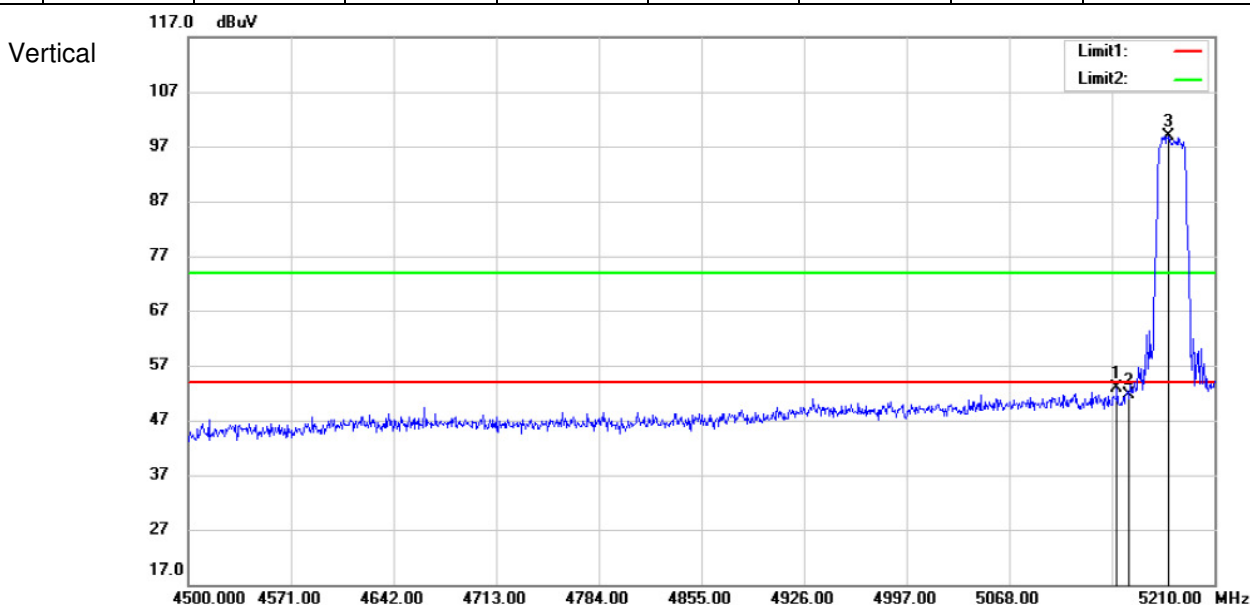

802.11 n(HT20)

Channel: 5240



MK.	Frequency (MHz)	Reading (dBUV/m)	Corrected factor(dB)	Result (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	5247.52	101.49	6.65	108.14	54	54.14	Peak	Horizontal
2	5350	41.68	6.98	48.66	54	-5.34	Peak	Horizontal
3	5417.08	45.29	7.27	52.56	54	-1.44	Peak	Horizontal
1	5238.61	95.77	6.65	102.42	54	48.42	Peak	Vertical
2	5350	41.39	6.98	48.37	54	-5.63	Peak	Vertical
3	5415.73	45.24	7.27	52.51	54	-1.49	Peak	Vertical

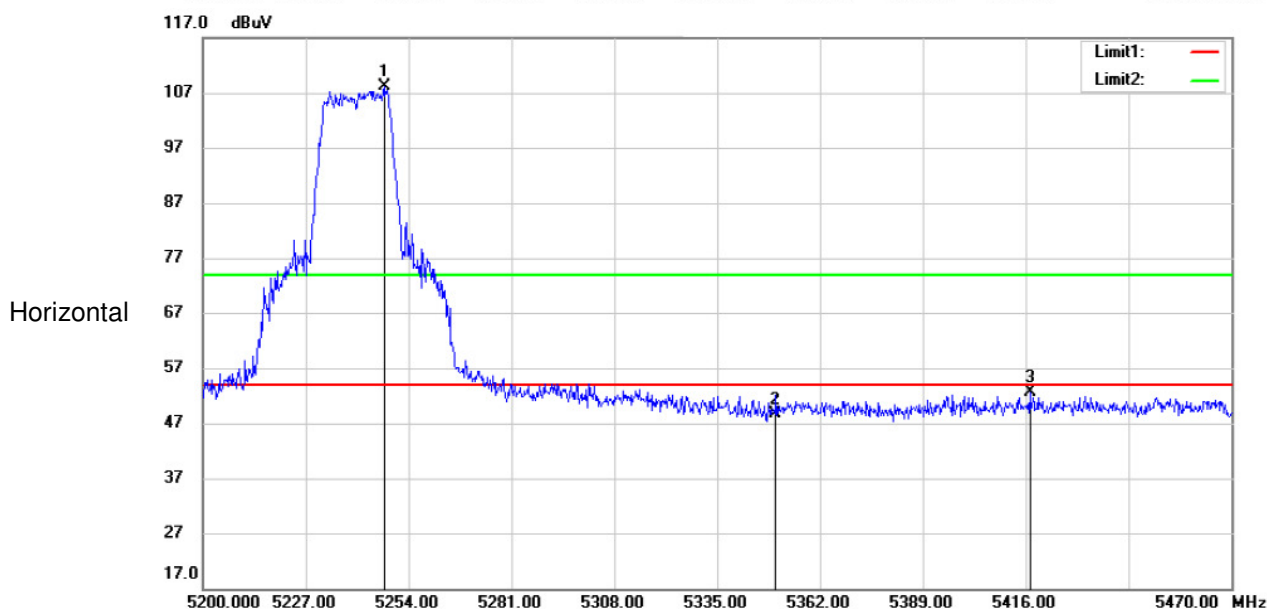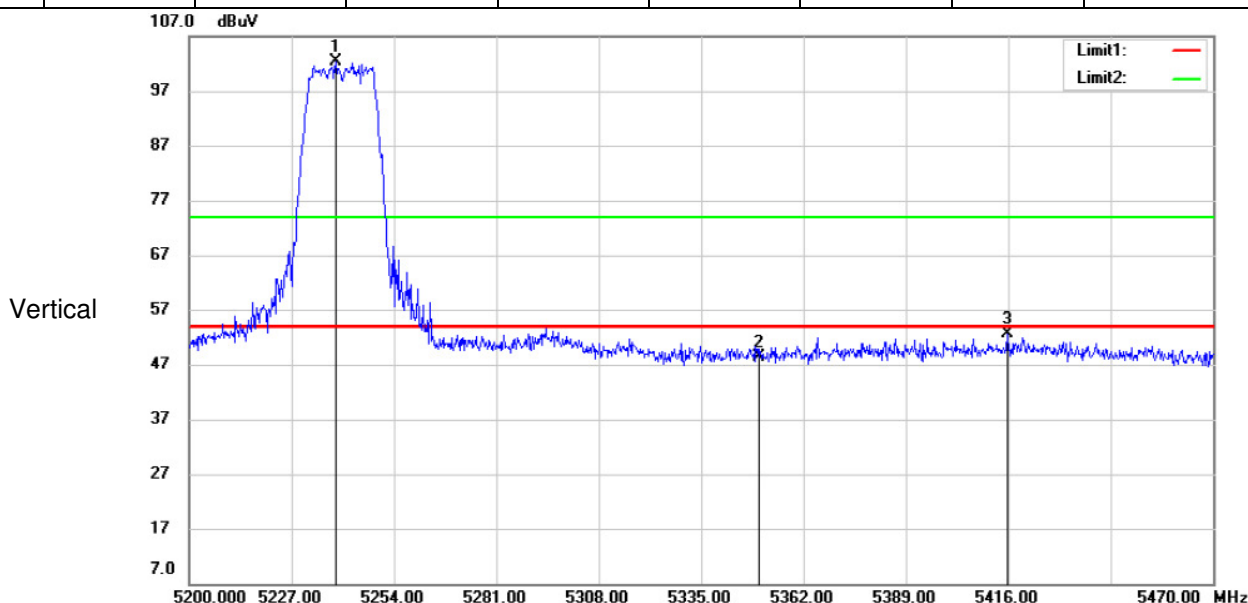

802.11 n(HT20)

Channel: 5745



MK.	Frequency (MHz)	Reading (dBUV/m)	Corrected factor(dB)	Result (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	5721.9	52.1	6.83	58.93	74	-15.07	Peak	Horizontal
2	5725	51.85	6.82	58.67	74	-15.33	Peak	Horizontal
3	5743.73	95.46	6.79	102.25	74	28.25	Peak	Horizontal
1	5714.13	33.77	6.84	40.61	54	-13.39	Average	Horizontal
2	5725	33.7	6.82	40.52	54	-13.48	Average	Horizontal
3	5741.51	78.7	6.79	85.49	54	31.49	Average	Horizontal

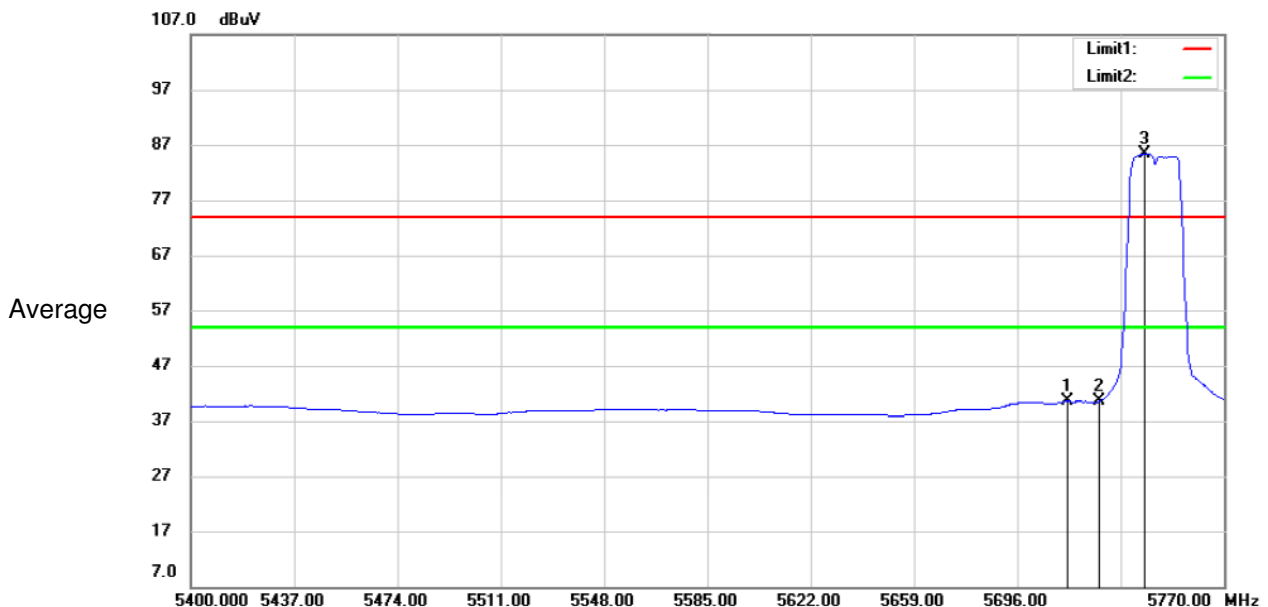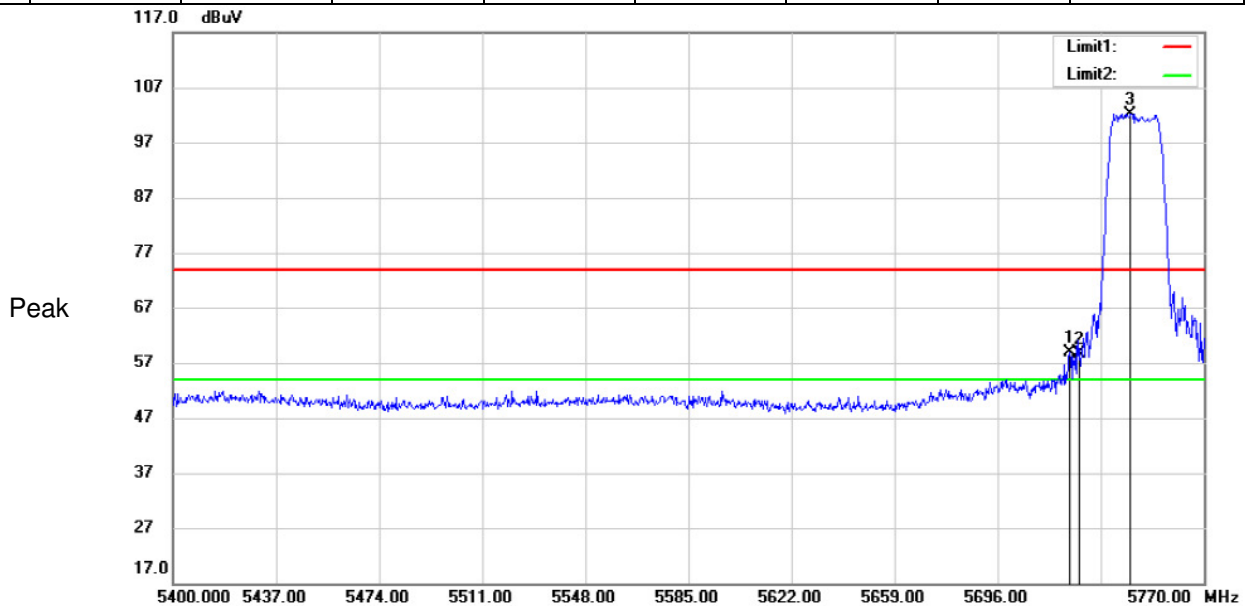

802.11 n(HT20)

Channel: 5745



MK.	Frequency (MHz)	Reading (dBUV/m)	Corrected factor(dB)	Result (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	5724.49	47.15	6.82	53.97	74	-20.03	Peak	Vertical
2	5725	44.72	6.82	51.54	74	-22.46	Peak	Vertical
3	5752.24	87.48	6.77	94.25	74	20.25	Peak	Vertical
1	5714.5	32.47	6.84	39.31	54	-14.69	Average	Vertical
2	5725	33.37	6.82	40.19	54	-13.81	Average	Vertical
3	5752.98	71.12	6.77	77.89	54	23.89	Average	Vertical

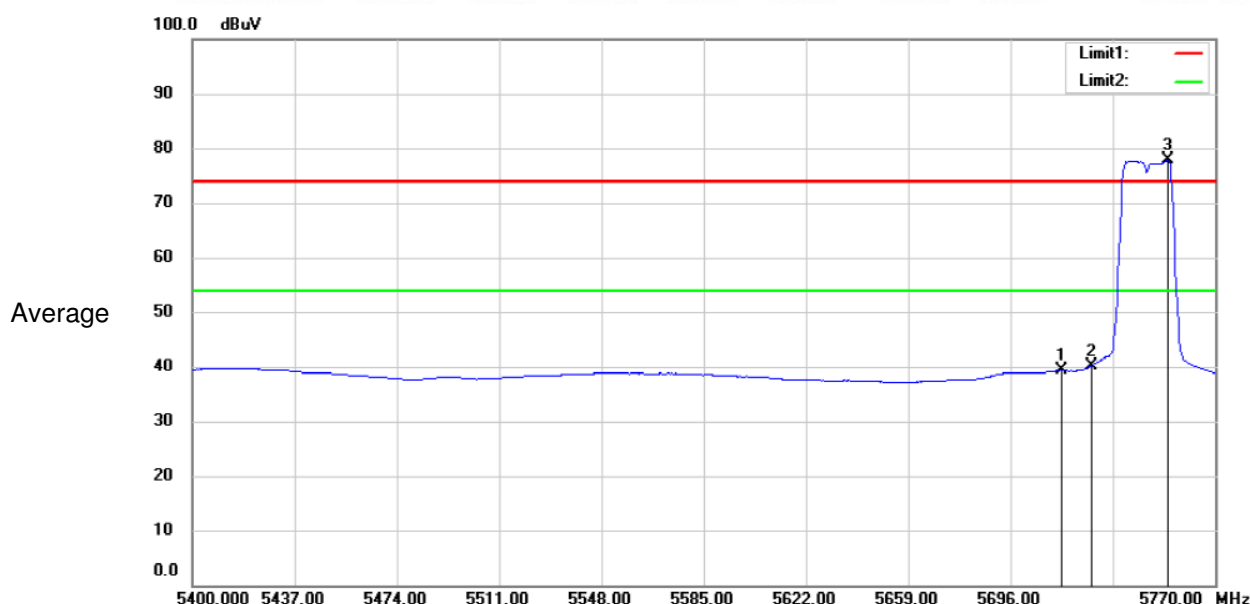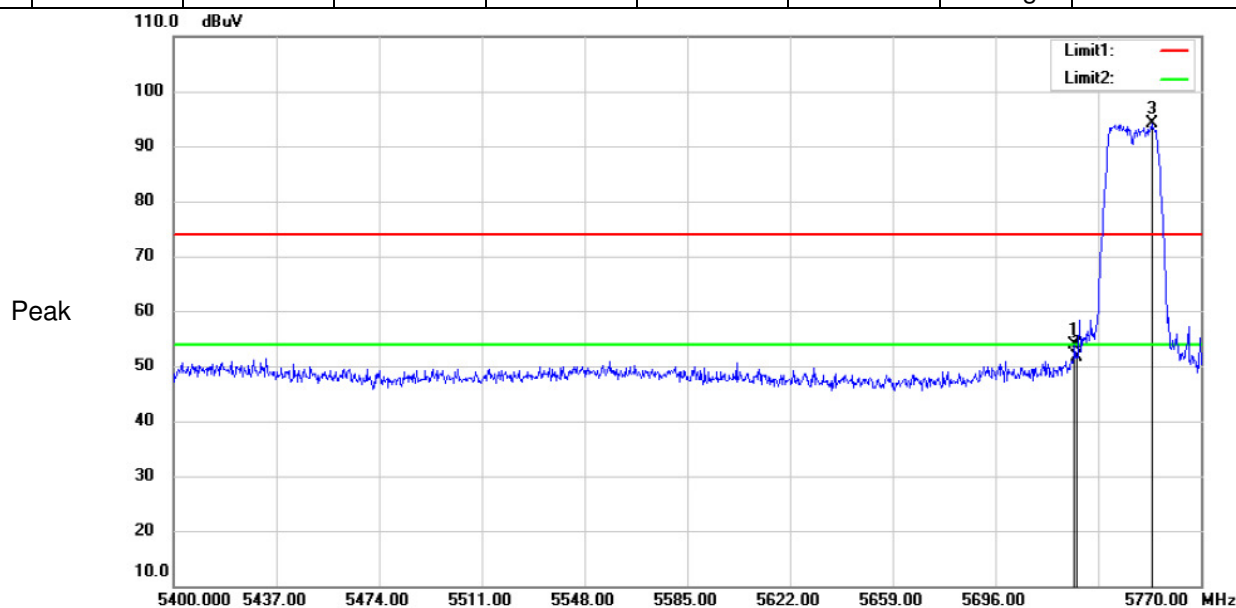

802.11 n(HT20)

Channel: 5825


MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	5827.6	94.64	6.66	101.3	74	27.3	Peak	Horizontal
2	5850	51.53	6.64	58.17	74	-15.83	Peak	Horizontal
3	5852.4	49.84	6.64	56.48	74	-17.52	Peak	Horizontal
1	5817.4	78.06	6.66	84.72	54	30.72	Average	Horizontal
2	5850	33.4	6.64	40.04	54	-13.96	Average	Horizontal
3	5852.4	33.03	6.64	39.67	54	-14.33	Average	Horizontal

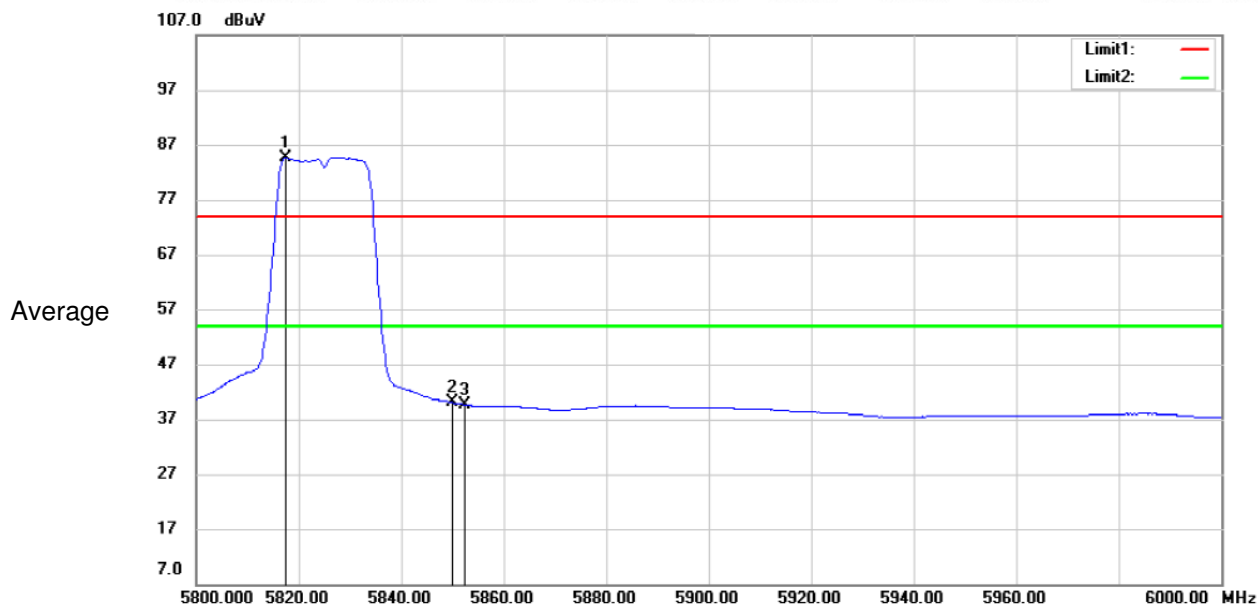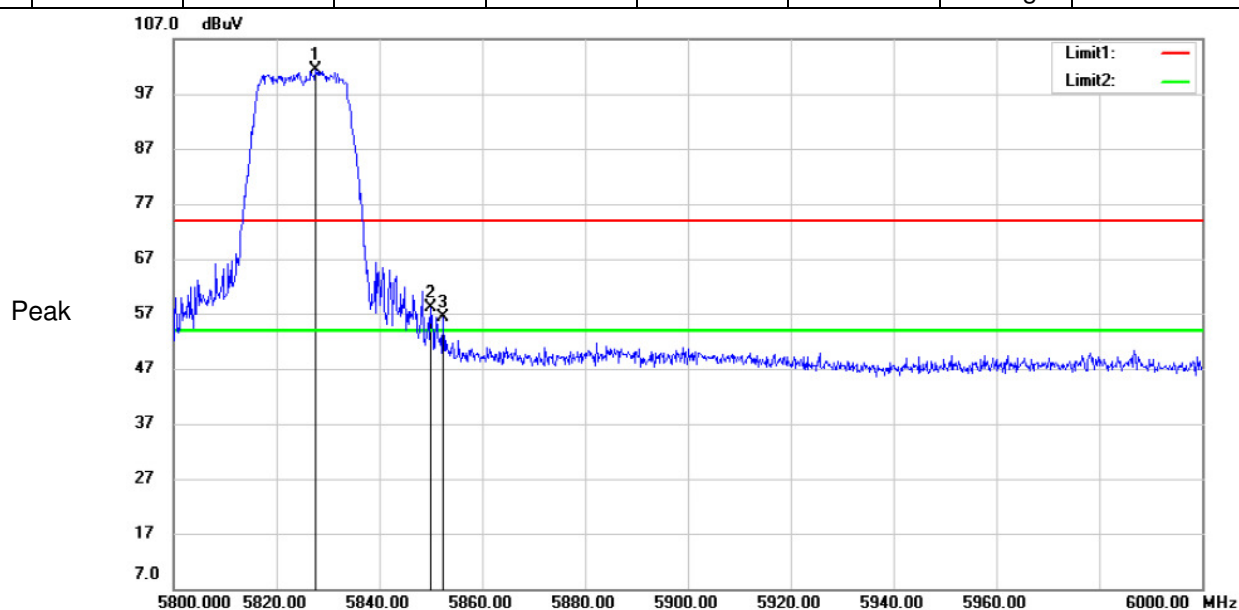

802.11 n(HT20)

Channel: 5825



MK.	Frequency (MHz)	Reading (dBUV/m)	Corrected factor(dB)	Result (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	5820.2	86.77	6.65	93.42	54	39.42	Peak	Vertical
2	5850	39.89	6.64	46.53	54	-7.47	Peak	Vertical
3	5887.4	43.57	6.61	50.18	54	-3.82	Peak	Vertical

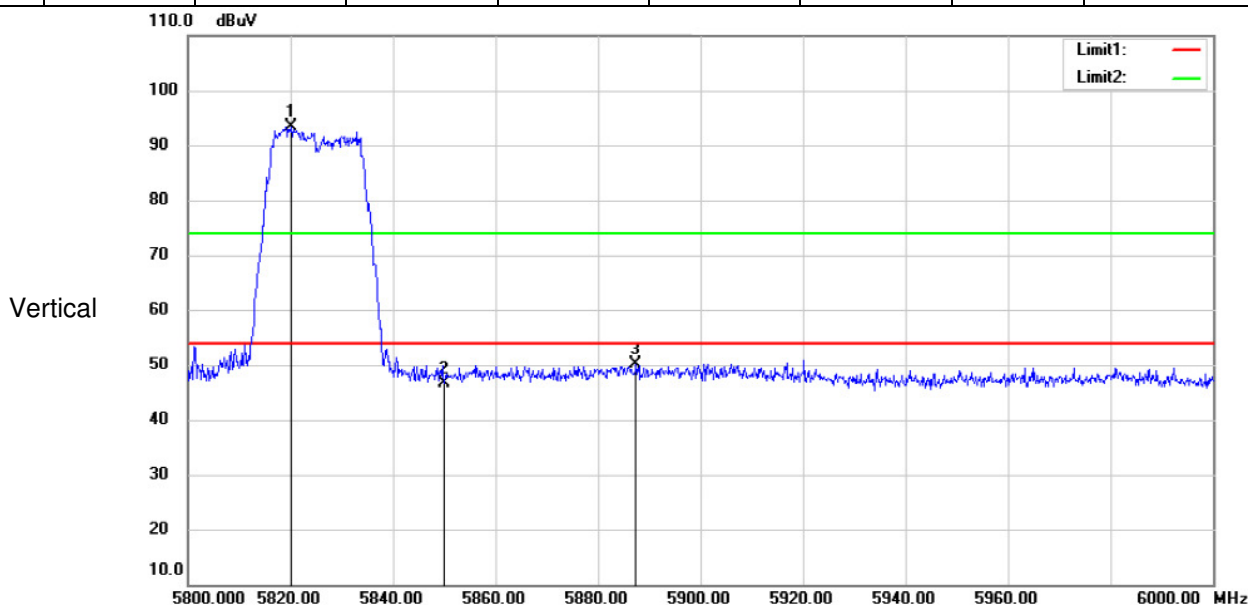

802.11 n(HT40)

Channel: 5190



MK.	Frequency (MHz)	Reading (dBUV/m)	Corrected factor(dB)	Result (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	5145.32	62.07	6.95	69.02	74	-4.98	Peak	Horizontal
2	5150	57.84	6.92	64.76	74	-9.24	Peak	Horizontal
3	5188.39	96.63	6.71	103.34	74	29.34	Peak	Horizontal
1	5138.02	38.24	6.99	45.23	54	-8.77	Average	Horizontal
2	5150	38.71	6.92	45.63	54	-8.37	Average	Horizontal
3	5194.23	81.52	6.68	88.2	54	34.2	Average	Horizontal

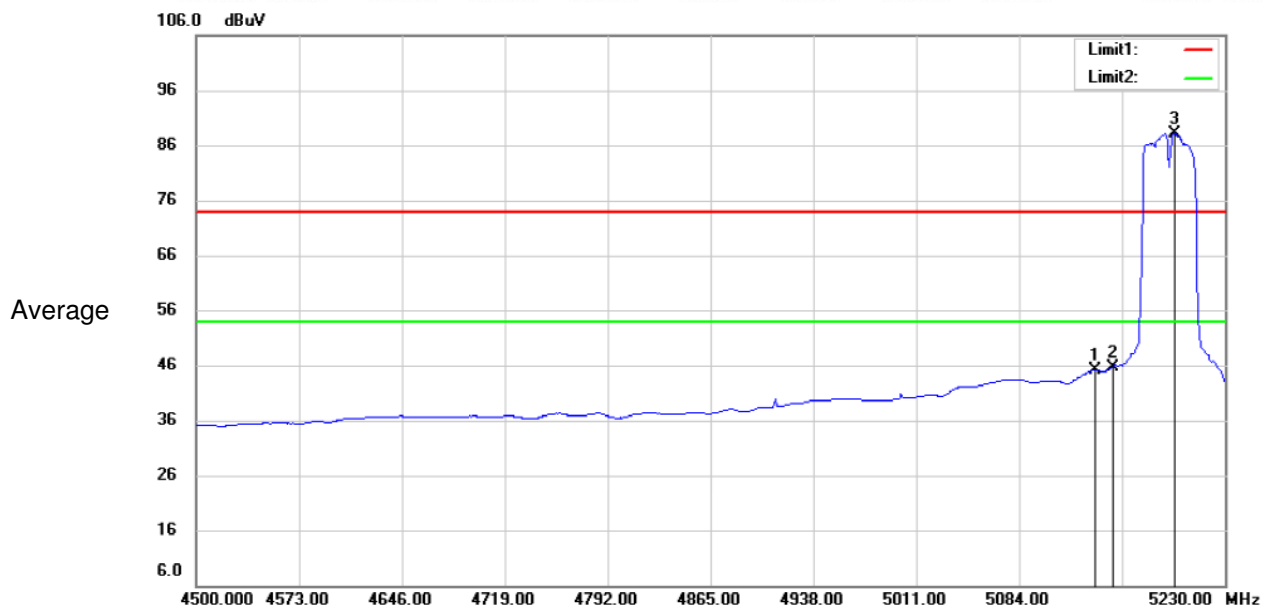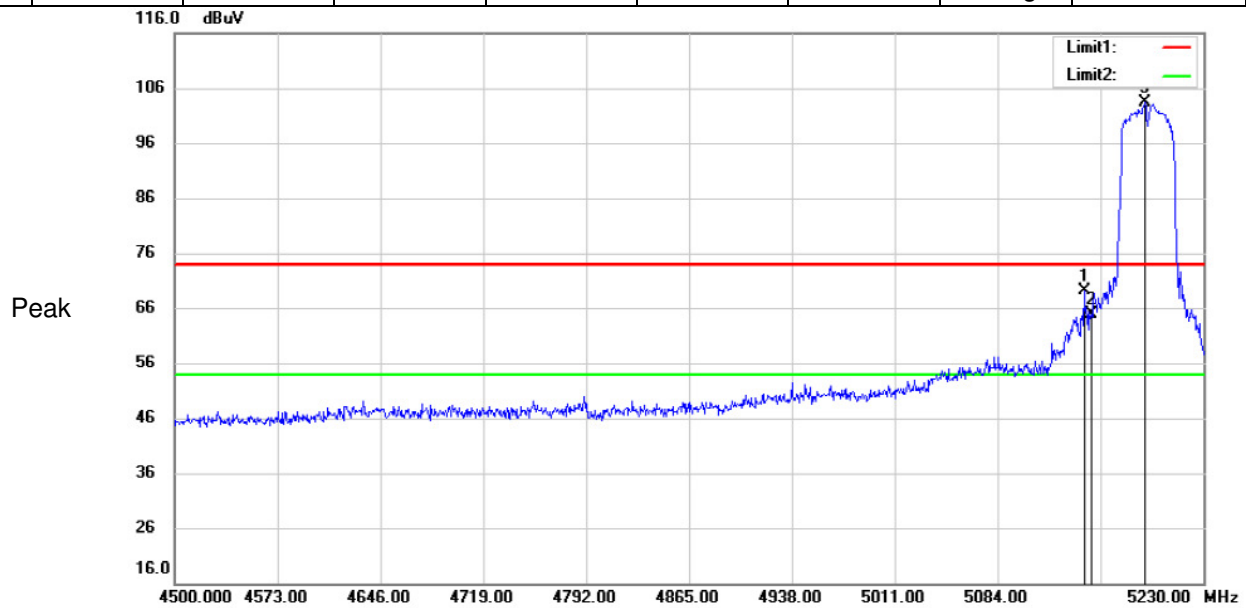

802.11 n(HT40)

Channel: 5190



MK.	Frequency (MHz)	Reading (dBUV/m)	Corrected factor(dB)	Result (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	5143.86	49.5	6.96	56.46	74	-17.54	Peak	Vertical
2	5150	51.52	6.92	58.44	74	-15.56	Peak	Vertical
3	5192.04	91.62	6.7	98.32	74	24.32	Peak	Vertical
1	5074.51	34.02	7.33	41.35	54	-12.65	Average	Vertical
2	5150	35.39	6.92	42.31	54	-11.69	Average	Vertical
3	5194.23	76.94	6.68	83.62	54	29.62	Average	Vertical

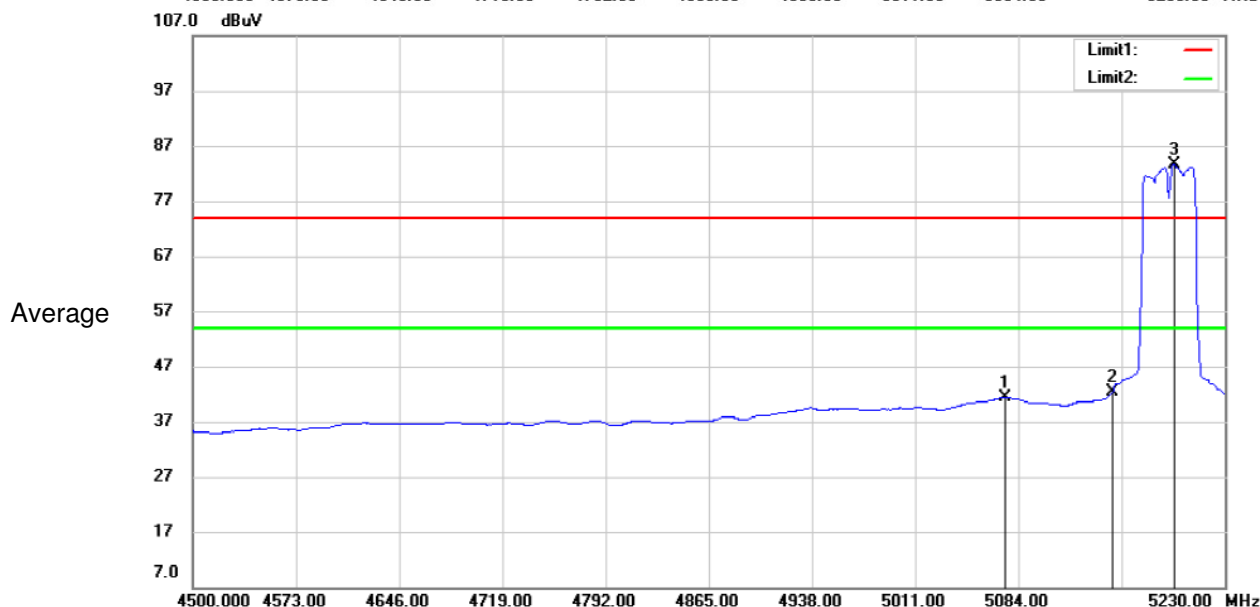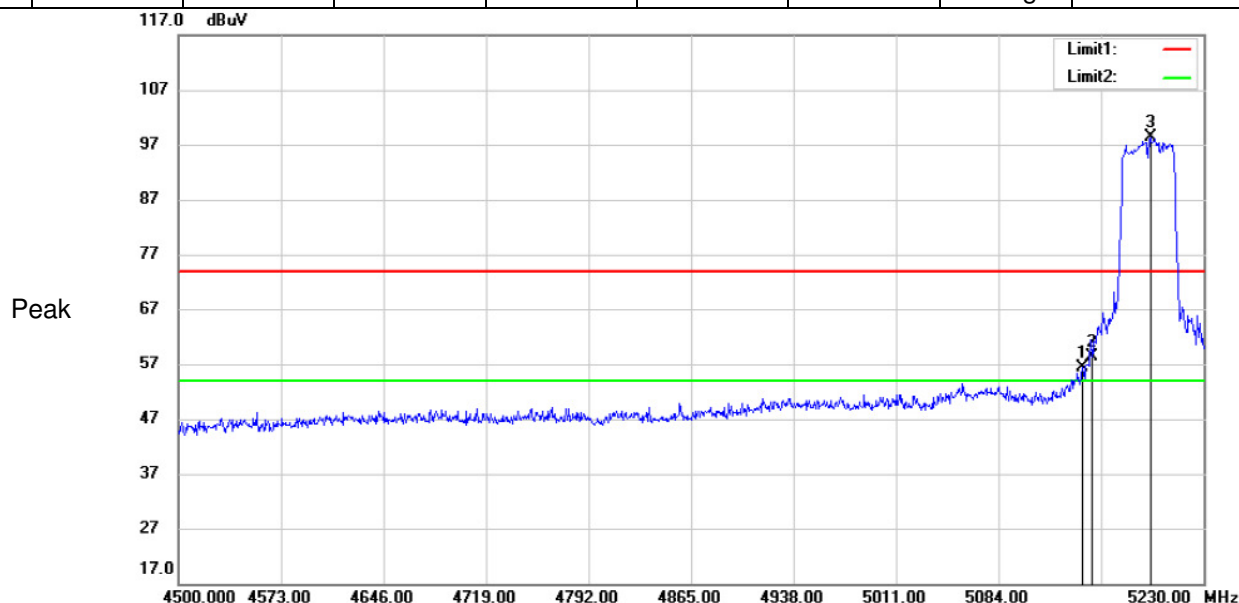

802.11 n(HT40)

Channel: 5230



MK.	Frequency (MHz)	Reading (dBUV/m)	Corrected factor(dB)	Result (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	5241.58	99.67	6.65	106.32	54	52.32	Peak	Horizontal
2	5350	42.79	6.98	49.77	54	-4.23	Peak	Horizontal
3	5430.31	46.17	7.22	53.39	54	-0.61	Peak	Horizontal
1	5244.82	90.48	6.64	97.12	54	43.12	Peak	Vertical
2	5350	42.04	6.98	49.02	54	-4.98	Peak	Vertical
3	5359.3	44.49	7.04	51.53	54	-2.47	Peak	Vertical

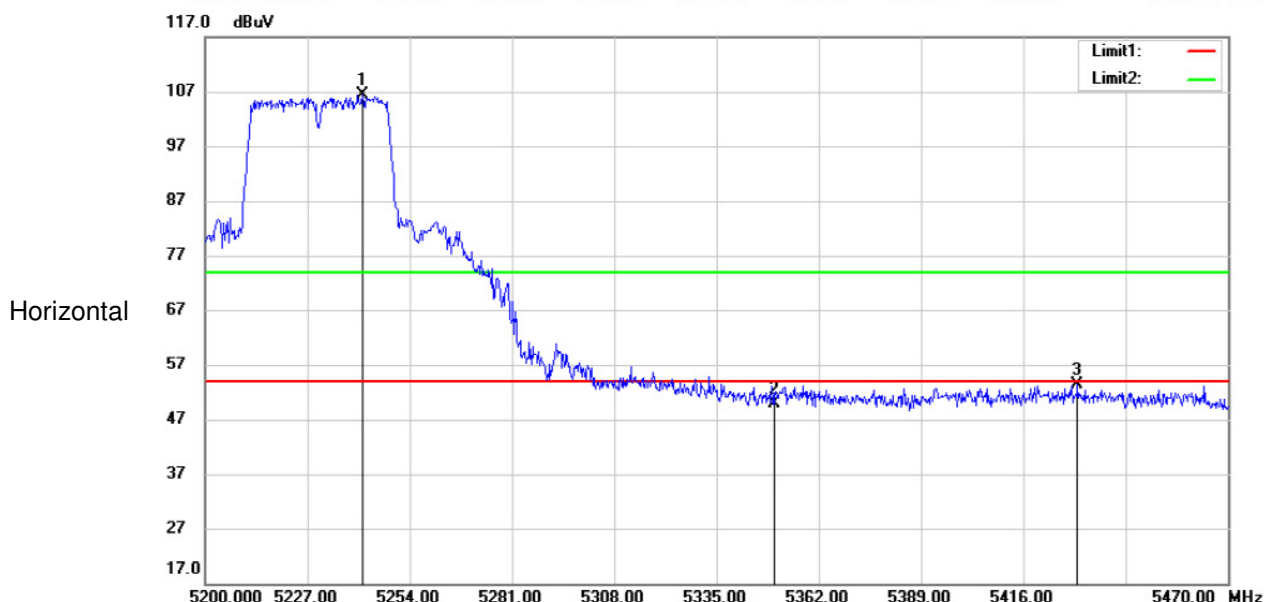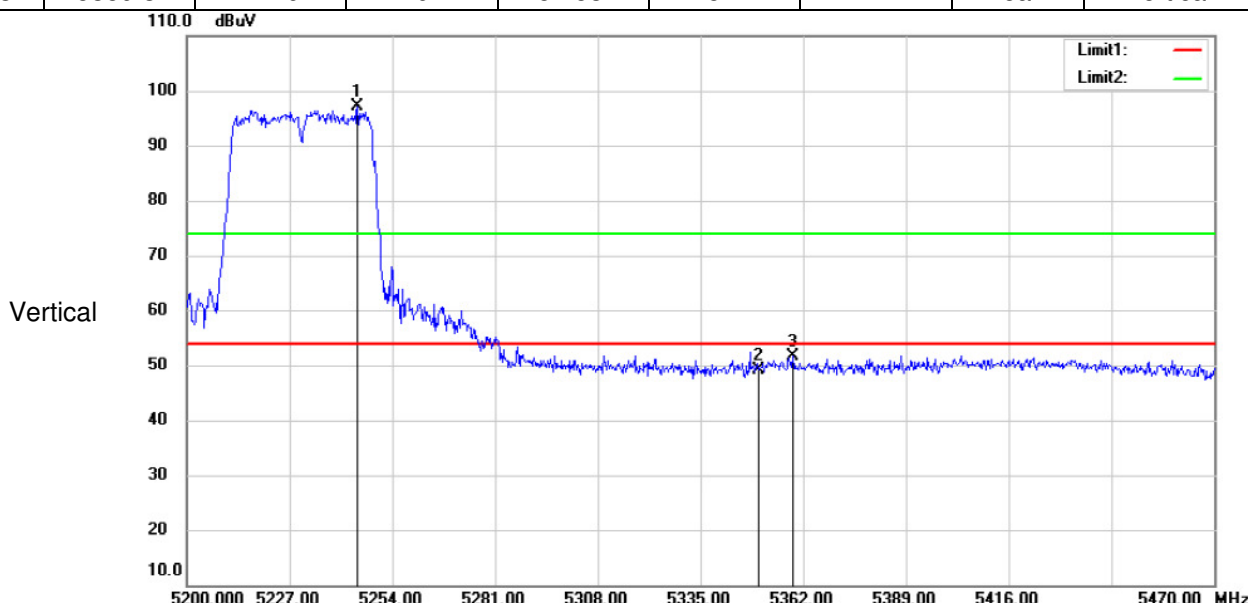

802.11 n(HT40)

Channel: 5755



MK.	Frequency (MHz)	Reading (dBUV/m)	Corrected factor(dB)	Result (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	5721.75	64.88	6.83	71.71	74	-2.29	Peak	Horizontal
2	5725	62.46	6.82	69.28	74	-4.72	Peak	Horizontal
3	5763.87	97.86	6.74	104.6	74	30.6	Peak	Horizontal
1	5718.63	43.64	6.83	50.47	54	-3.53	Average	Horizontal
2	5725	43.12	6.82	49.94	54	-4.06	Average	Horizontal
3	5761.53	82.46	6.74	89.2	54	35.2	Average	Horizontal

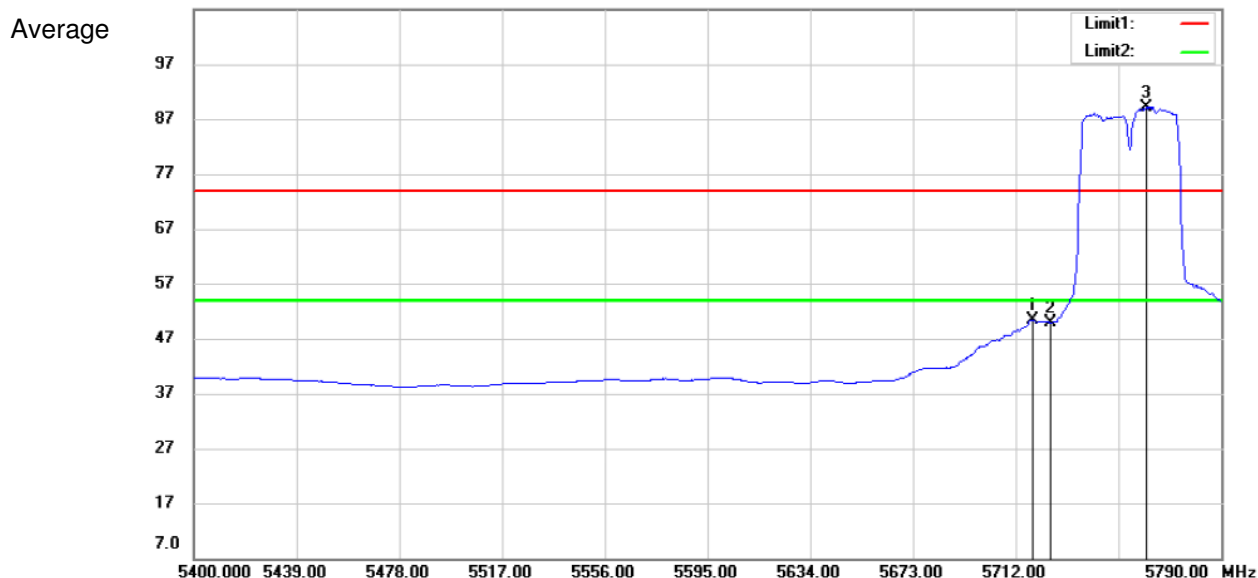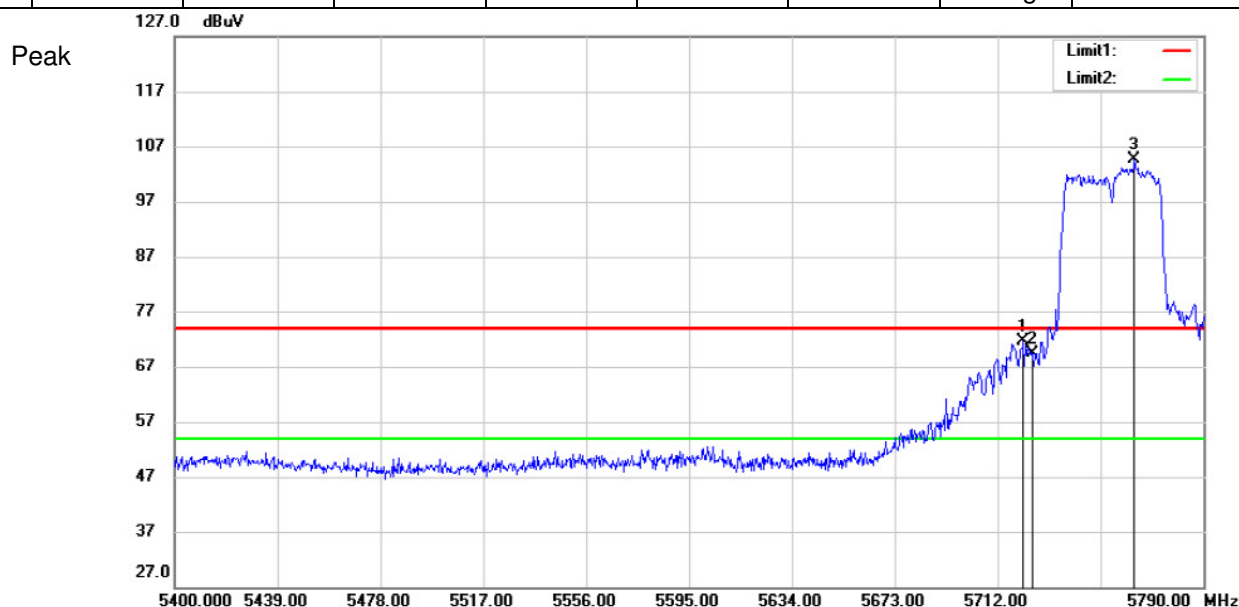

802.11 n(HT40)

Channel: 5755



MK.	Frequency (MHz)	Reading (dBUV/m)	Corrected factor(dB)	Result (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	5717.46	55.85	6.84	62.69	74	-11.31	Peak	Vertical
2	5725	56.83	6.82	63.65	74	-10.35	Peak	Vertical
3	5747.88	91.94	6.77	98.71	74	24.71	Peak	Vertical
1	5723.31	38.15	6.83	44.98	54	-9.02	Average	Vertical
2	5725	38.75	6.82	45.57	54	-8.43	Average	Vertical
3	5746.71	76.97	6.77	83.74	54	29.74	Average	Vertical

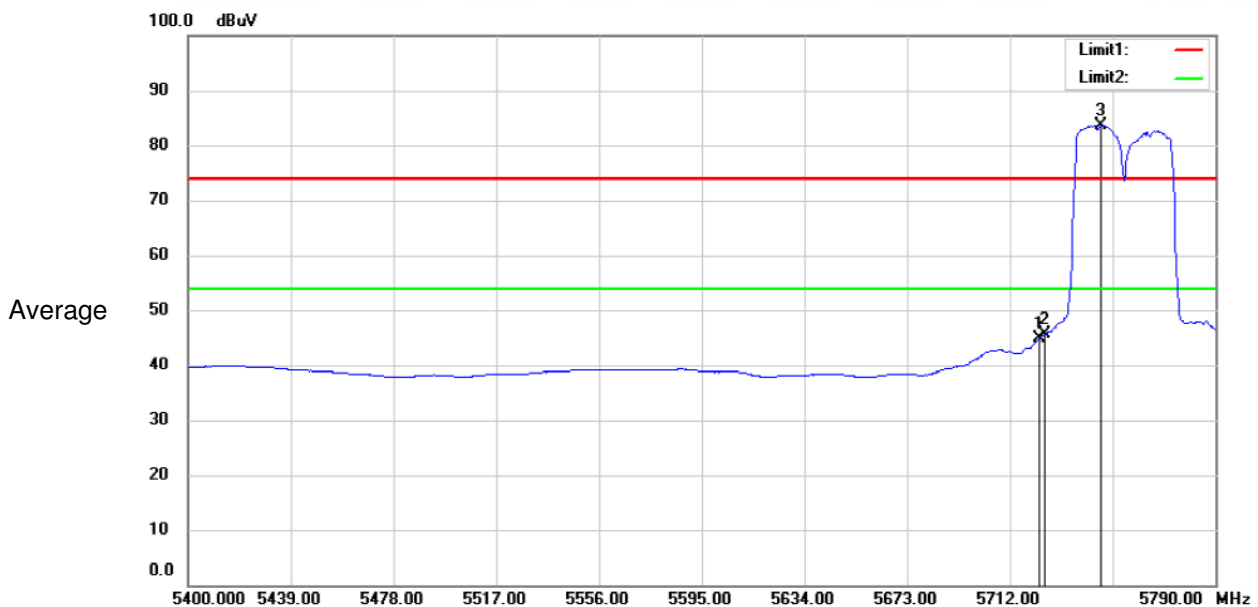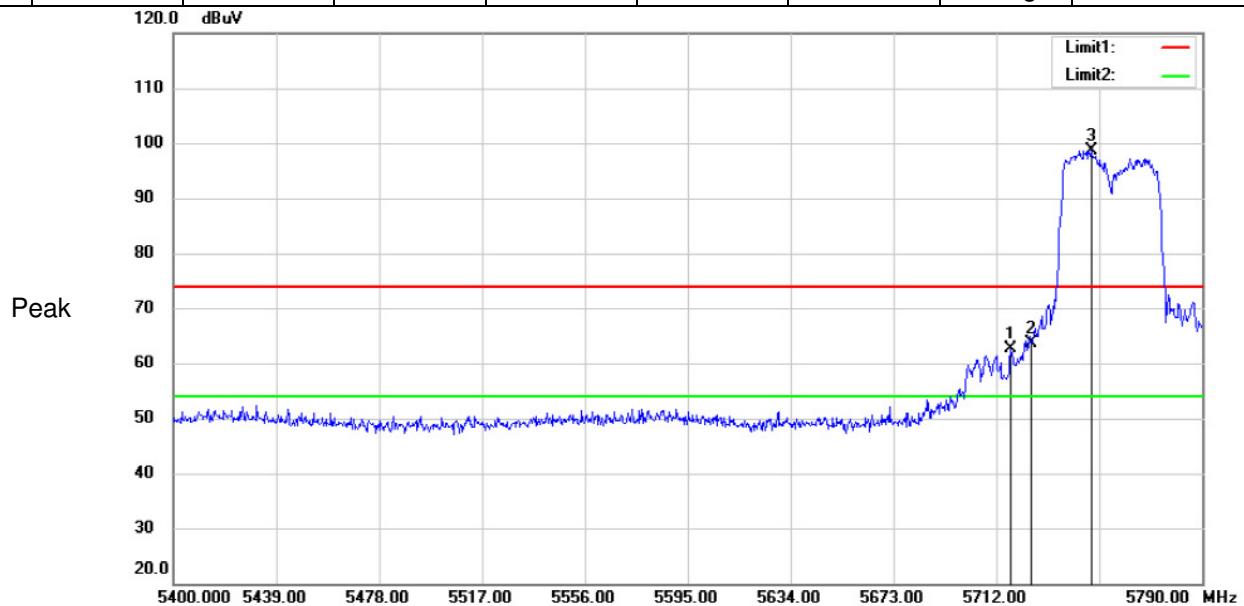

802.11 n(HT40)

Channel: 5795



MK.	Frequency (MHz)	Reading (dBUV/m)	Corrected factor(dB)	Result (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	5810.16	98.2	6.67	104.87	74	30.87	Peak	Horizontal
2	5850	51.78	6.64	58.42	74	-15.58	Peak	Horizontal
3	5851.44	50.66	6.64	57.3	74	-16.7	Peak	Horizontal
1	5781.36	82.75	6.71	89.46	54	35.46	Average	Horizontal
2	5850	36.78	6.64	43.42	54	-10.58	Average	Horizontal
3	5852.88	35.78	6.64	42.42	54	-11.58	Average	Horizontal

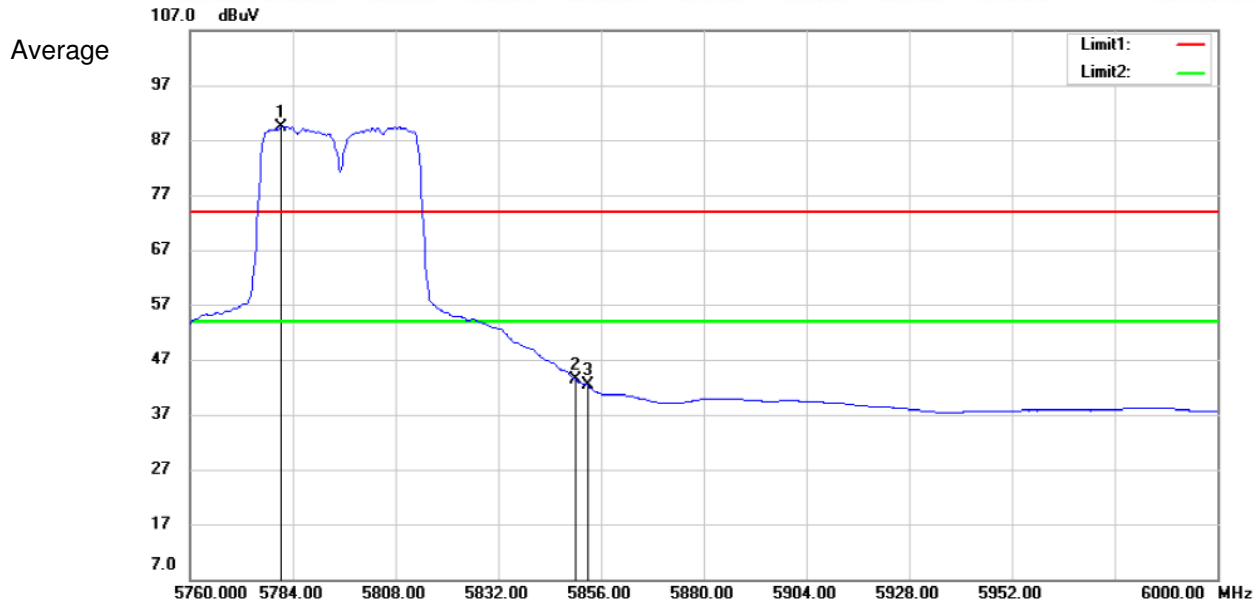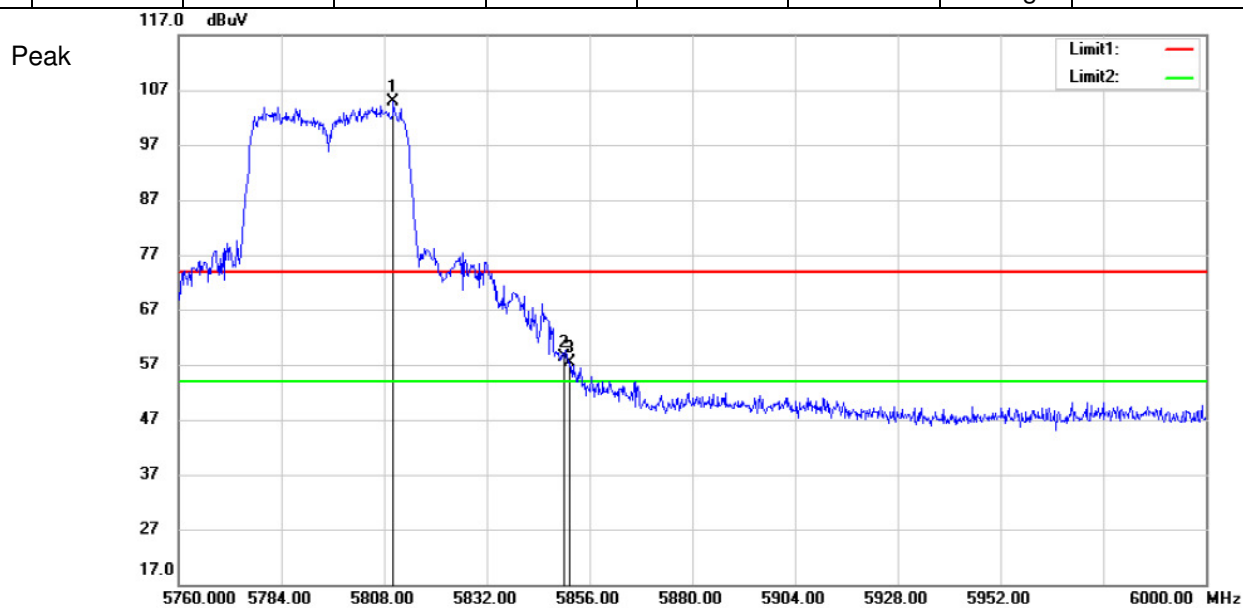

802.11 n(HT40)

Channel: 5795



MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	5804.64	91.12	6.67	97.79	74	23.79	Peak	Vertical
2	5850	47.75	6.64	54.39	74	-19.61	Peak	Vertical
3	5851.92	48.94	6.64	55.58	74	-18.42	Peak	Vertical
1	5803.92	76.43	6.67	83.1	54	29.1	Average	Vertical
2	5850	34.32	6.64	40.96	54	-13.04	Average	Vertical
3	5852.88	34.2	6.64	40.84	54	-13.16	Average	Vertical

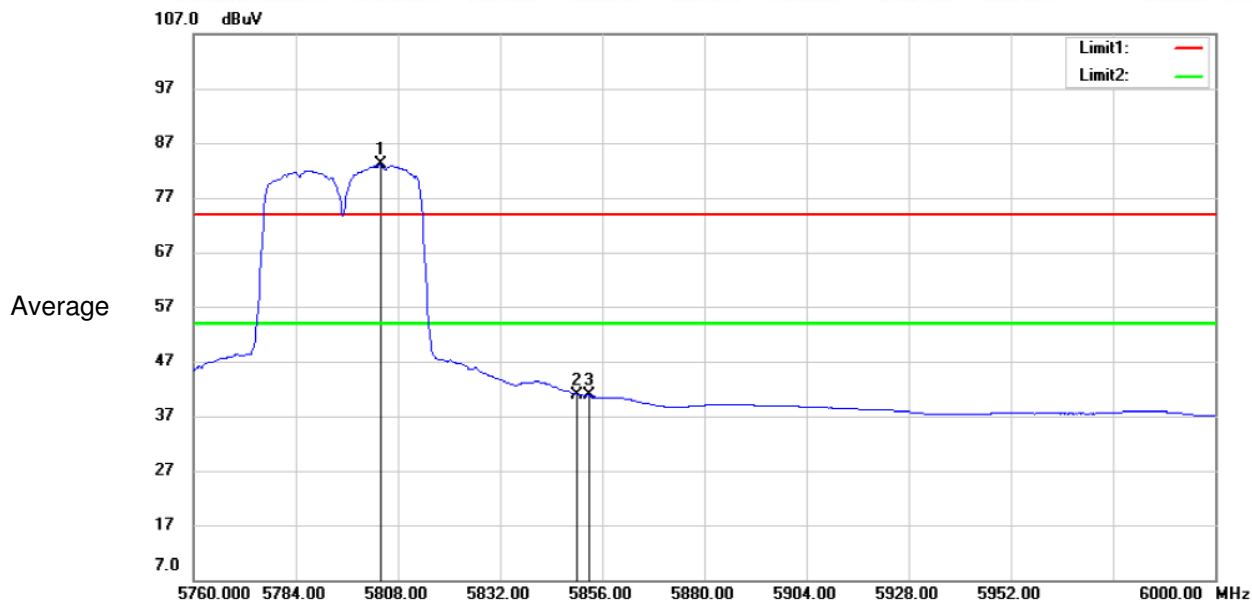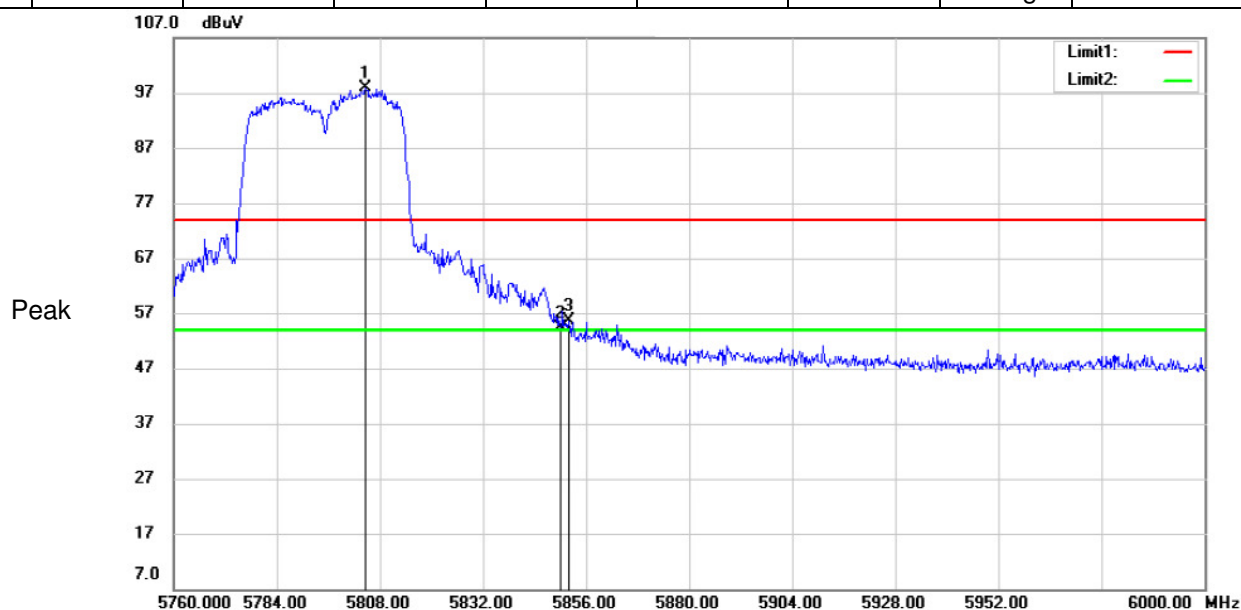

802.11 ac(VHT20)

Channel: 5180


MK.	Frequency (MHz)	Reading (dBUV/m)	Corrected factor(dB)	Result (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	5132.61	49.34	7.01	56.35	74	-17.65	Peak	Horizontal
2	5150	48.87	6.92	55.79	74	-18.21	Peak	Horizontal
3	5177.34	99.76	6.77	106.53	74	32.53	Peak	Horizontal
1	5129.06	35.53	7.05	42.58	54	-11.42	Average	Horizontal
2	5150	35.55	6.92	42.47	54	-11.53	Average	Horizontal
3	5187.99	81.74	6.71	88.45	54	34.45	Average	Horizontal

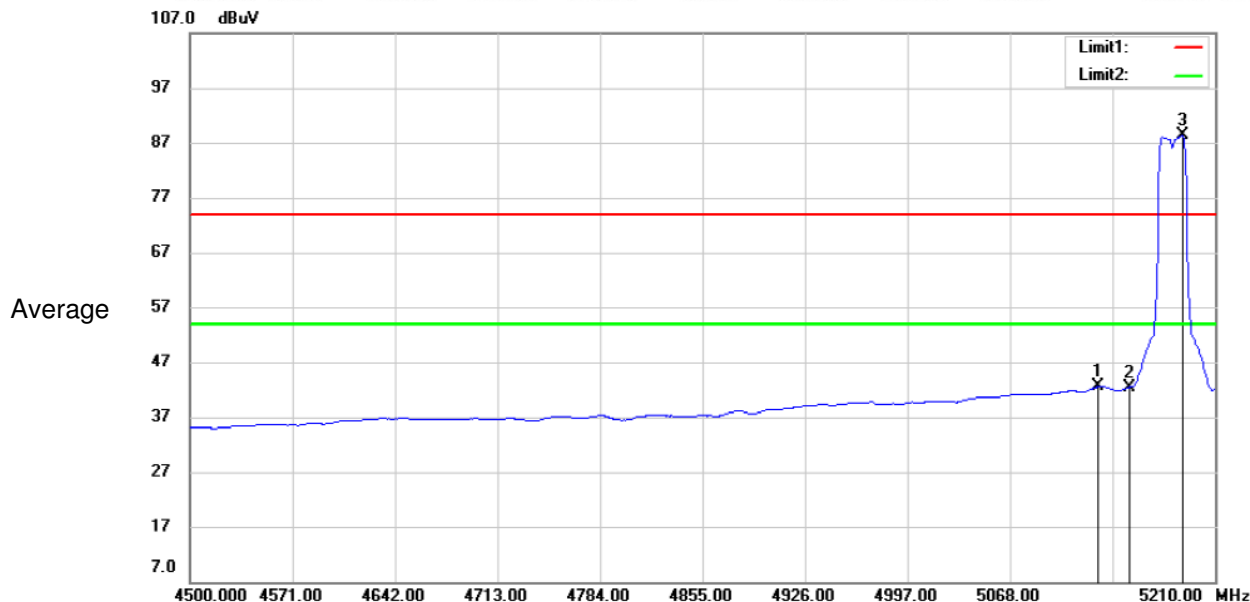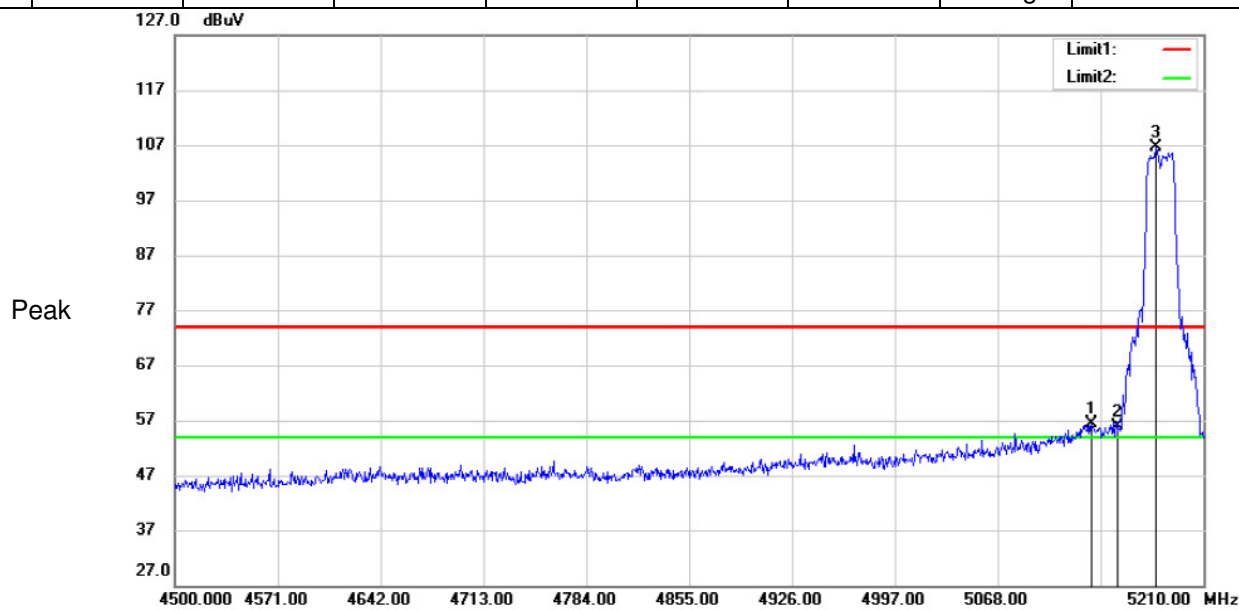

802.11 ac(VHT20)

Channel: 5180



MK.	Frequency (MHz)	Reading (dBUV/m)	Corrected factor(dB)	Result (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	5078.65	45.72	7.31	53.03	54	-0.97	Peak	Vertical
2	5150	44.34	6.92	51.26	54	-2.74	Peak	Vertical
3	5181.6	93.4	6.75	100.15	54	46.15	Peak	Vertical

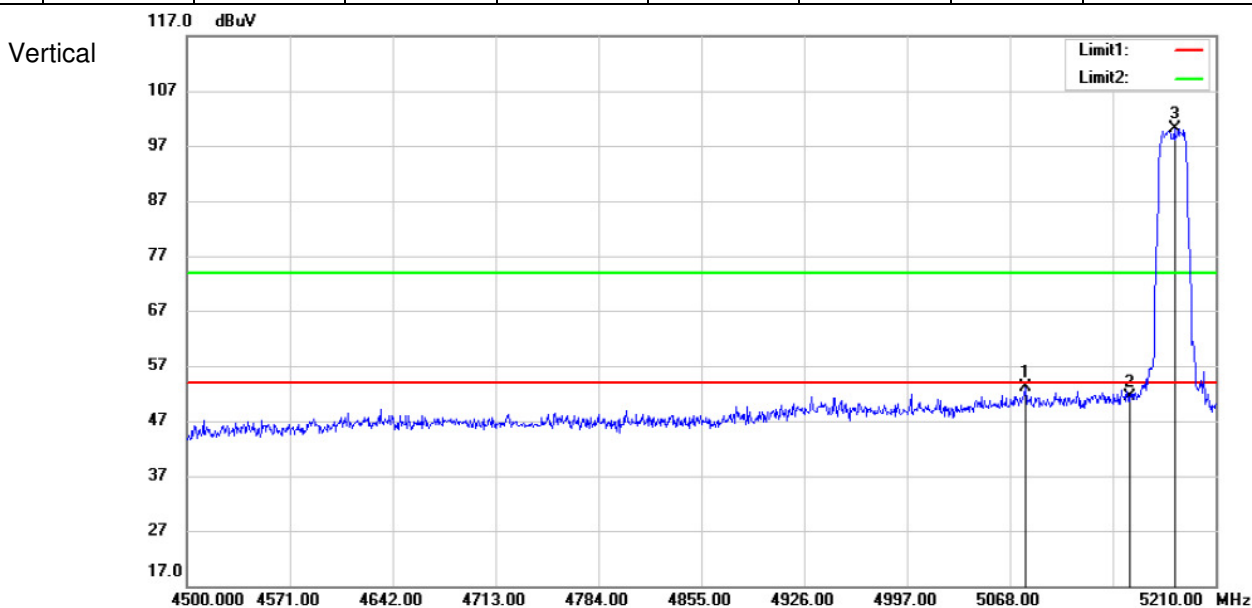

802.11 ac(VHT20)

Channel: 5240



MK.	Frequency (MHz)	Reading (dBUV/m)	Corrected factor(dB)	Result (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	5241.58	100.54	6.65	107.19	54	53.19	Peak	Horizontal
2	5350	43.15	6.98	50.13	54	-3.87	Peak	Horizontal
3	5397.64	45	7.31	52.31	54	-1.69	Peak	Horizontal
1	5246.98	93.15	6.65	99.8	54	45.8	Peak	Vertical
2	5350	42.24	6.98	49.22	54	-4.78	Peak	Vertical
3	5421.67	44.56	7.24	51.8	54	-2.2	Peak	Vertical

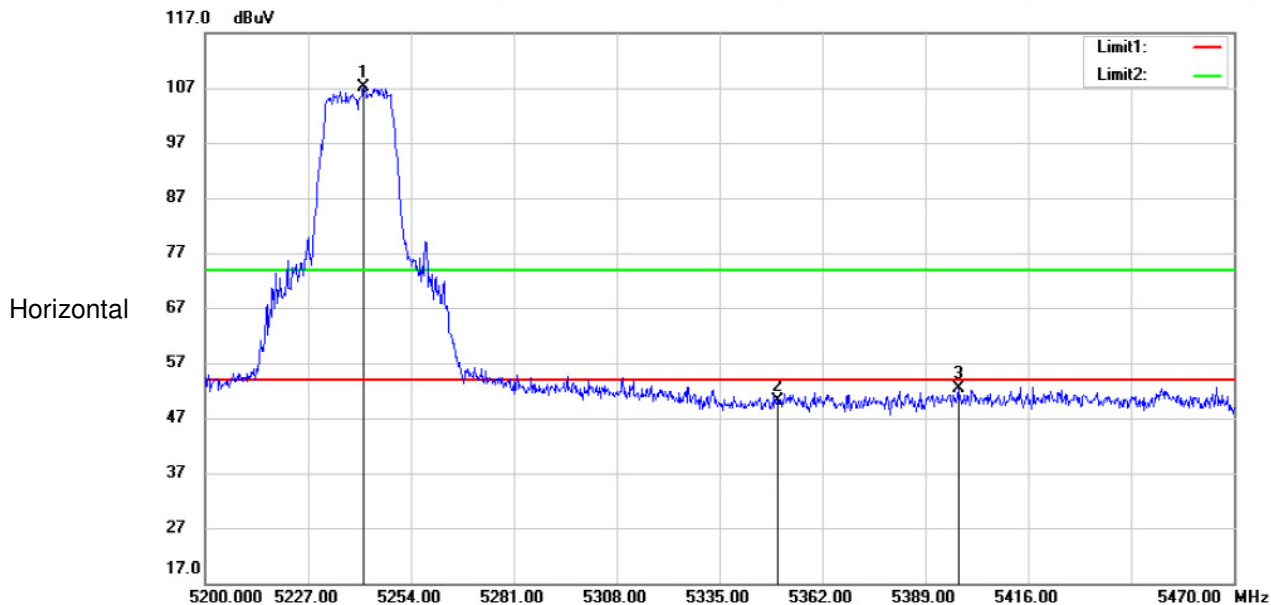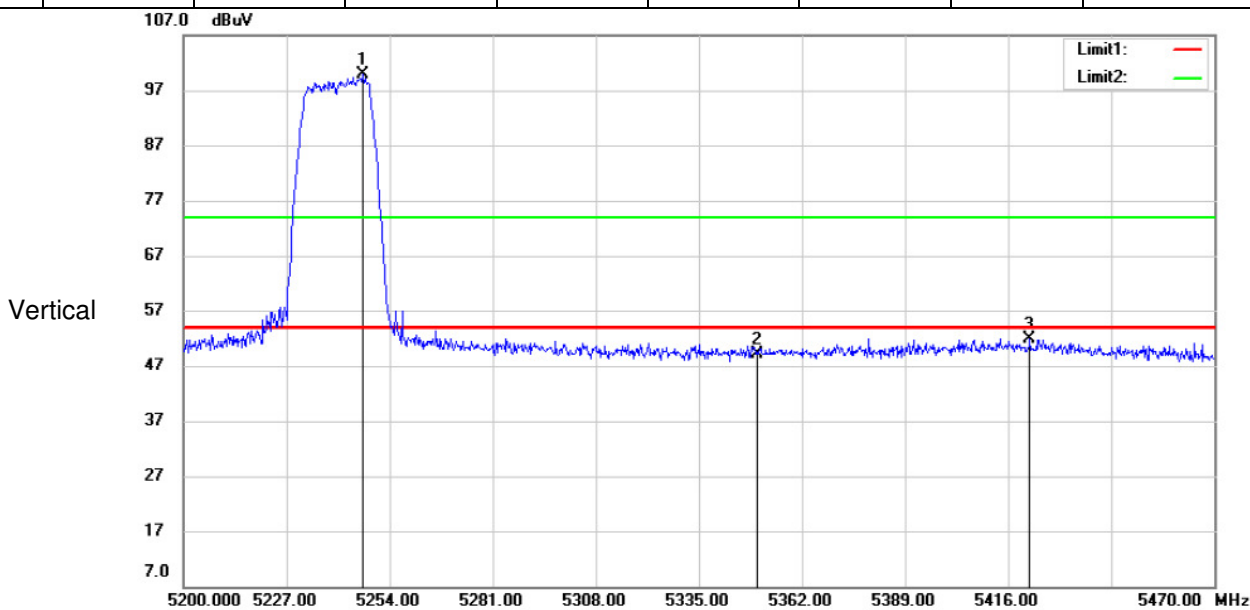

802.11 ac(VHT20)

Channel: 5745


MK.	Frequency (MHz)	Reading (dBUV/m)	Corrected factor(dB)	Result (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	5723.75	47.04	6.82	53.86	74	-20.14	Peak	Horizontal
2	5725	42.71	6.82	49.53	74	-24.47	Peak	Horizontal
3	5741.51	93.89	6.79	100.68	74	26.68	Peak	Horizontal
1	5714.13	33.53	6.84	40.37	54	-13.63	Average	Horizontal
2	5725	33.32	6.82	40.14	54	-13.86	Average	Horizontal
3	5741.51	76.62	6.79	83.41	54	29.41	Average	Horizontal

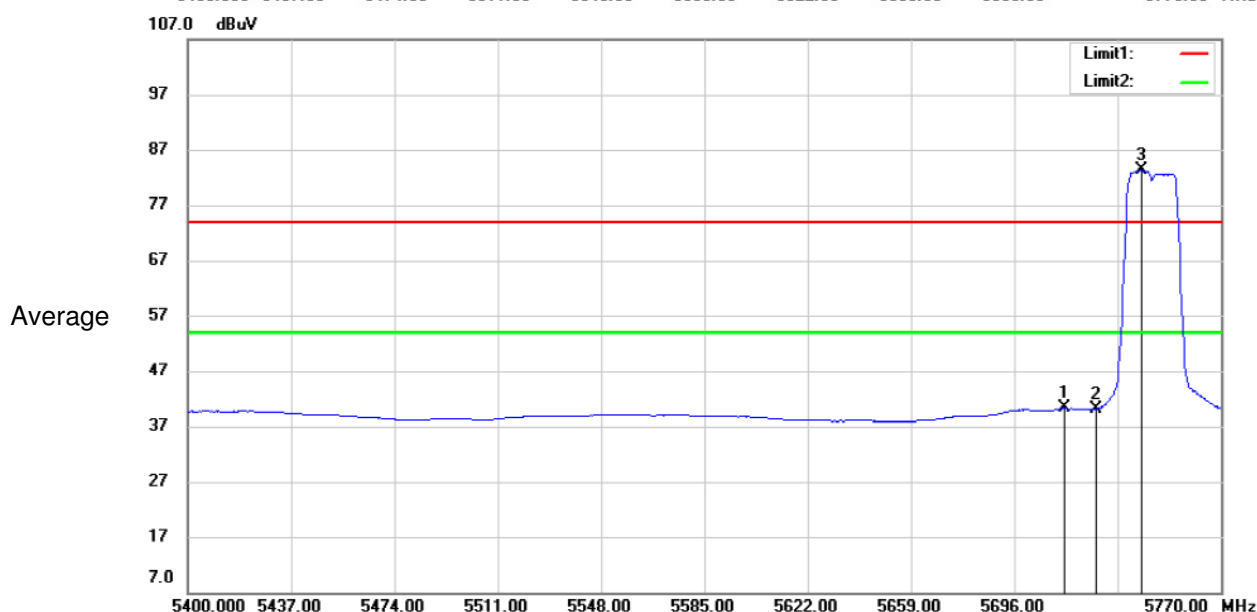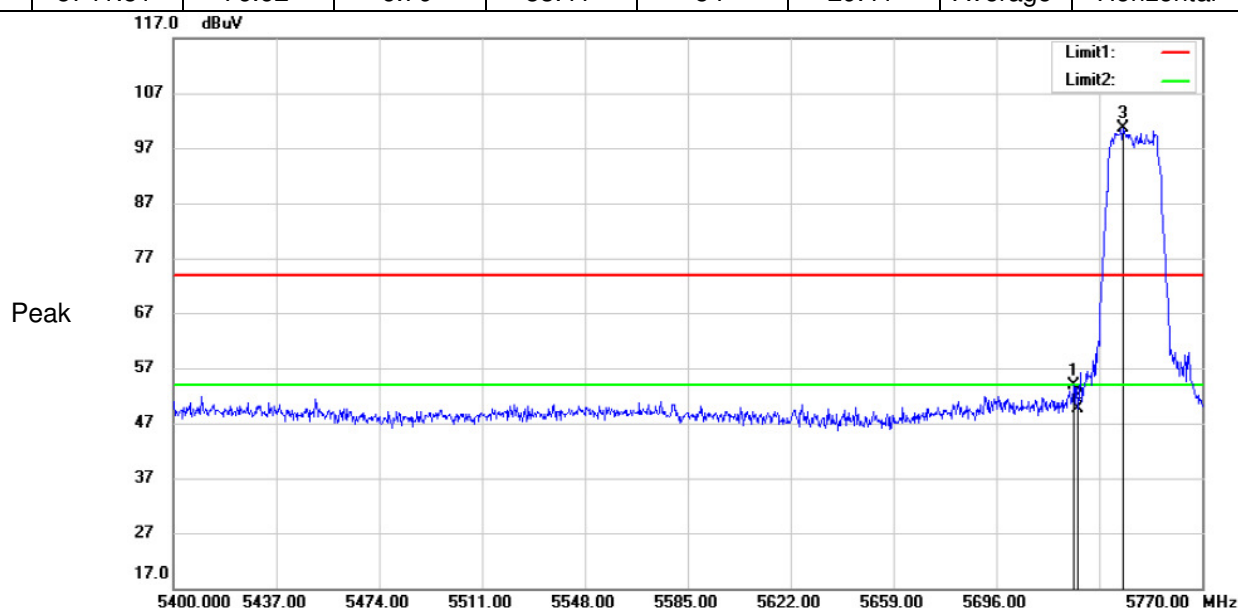

802.11 ac(VHT20)

Channel: 5745



MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	5687.49	43.73	6.86	50.59	54	-3.41	Peak	Vertical
2	5725	42.73	6.82	49.55	54	-4.45	Peak	Vertical
3	5746.32	91	6.77	97.77	54	43.77	Peak	Vertical

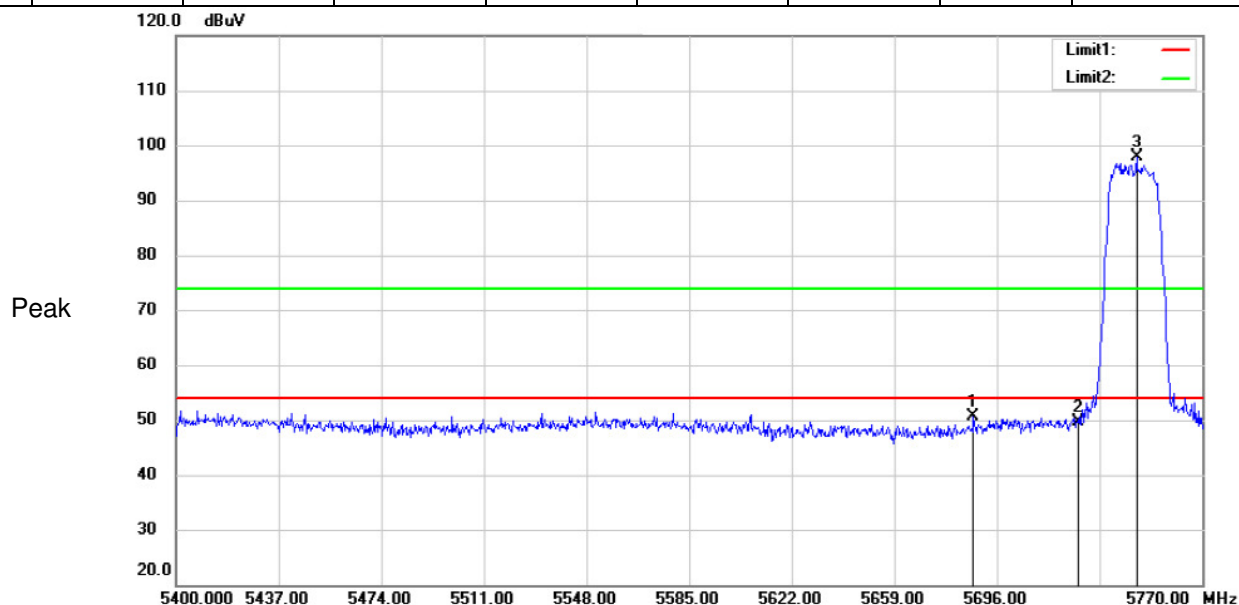

802.11 ac(VHT20)

Channel: 5825



MK.	Frequency (MHz)	Reading (dBUV/m)	Corrected factor(dB)	Result (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	5823.6	94.36	6.65	101.01	54	47.01	Peak	Horizontal
2	5850	44.24	6.64	50.88	54	-3.12	Peak	Horizontal
3	5896	44.47	6.61	51.08	54	-2.92	Peak	Horizontal
1	5823.4	88.6	6.65	95.25	54	41.25	Peak	Vertical
2	5850	42.47	6.64	49.11	54	-4.89	Peak	Vertical
3	5885.6	45.03	6.61	51.64	54	-2.36	Peak	Vertical

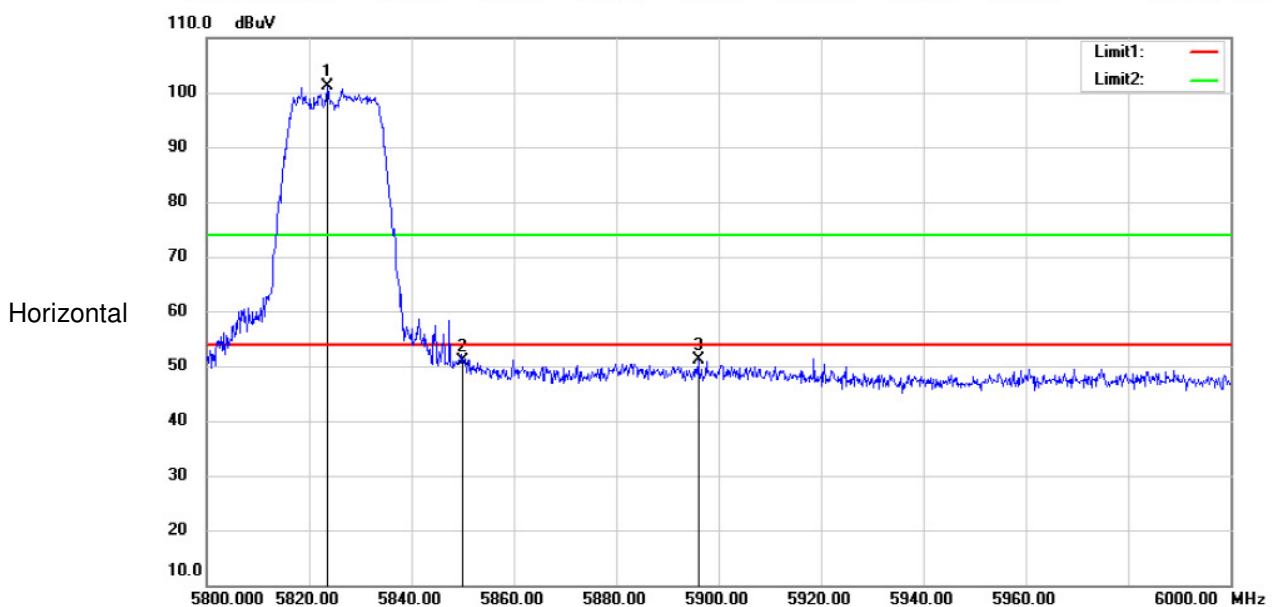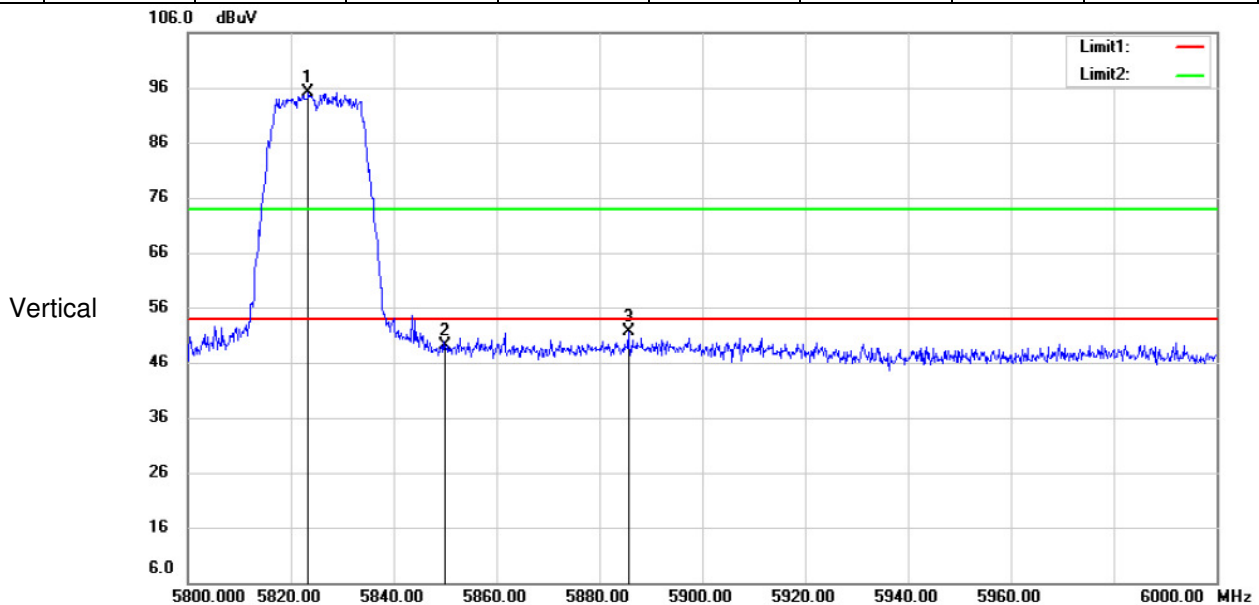

802.11 ac(VHT40)

Channel: 5190



MK.	Frequency (MHz)	Reading (dBUV/m)	Corrected factor(dB)	Result (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	5148.24	64.01	6.94	70.95	74	-3.05	Peak	Horizontal
2	5150	64.57	6.92	71.49	74	-2.51	Peak	Horizontal
3	5192.77	99.98	6.69	106.67	74	32.67	Peak	Horizontal
1	5146.78	43.12	6.94	50.06	54	-3.94	Average	Horizontal
2	5150	44.84	6.92	51.76	54	-2.24	Average	Horizontal
3	5194.23	84.11	6.68	90.79	54	36.79	Average	Horizontal

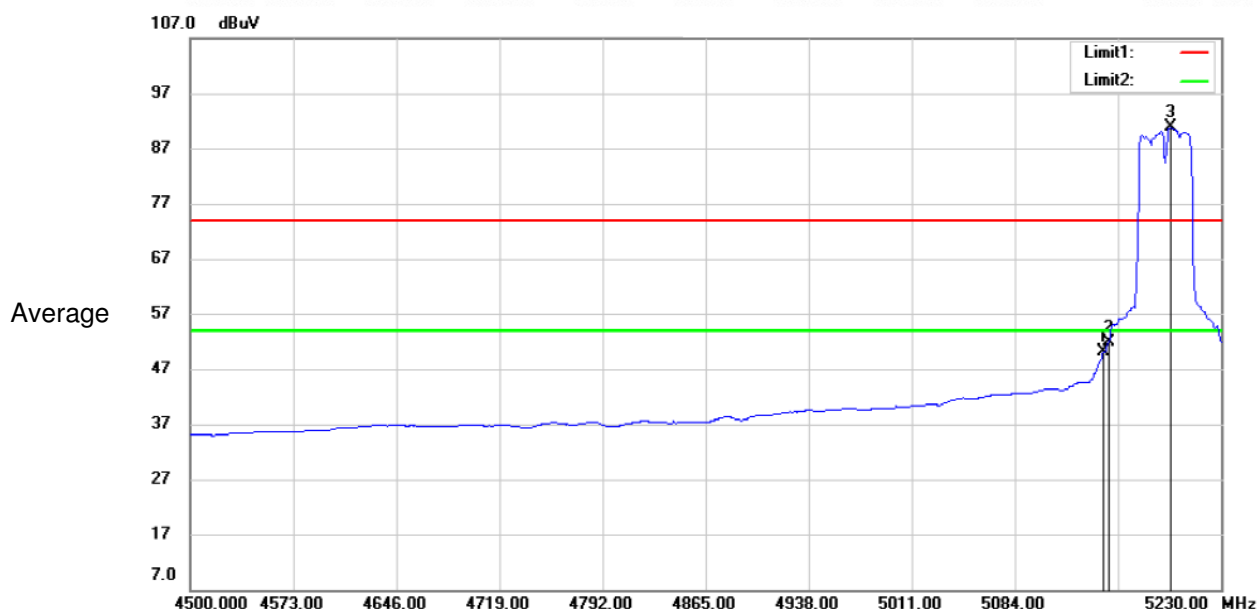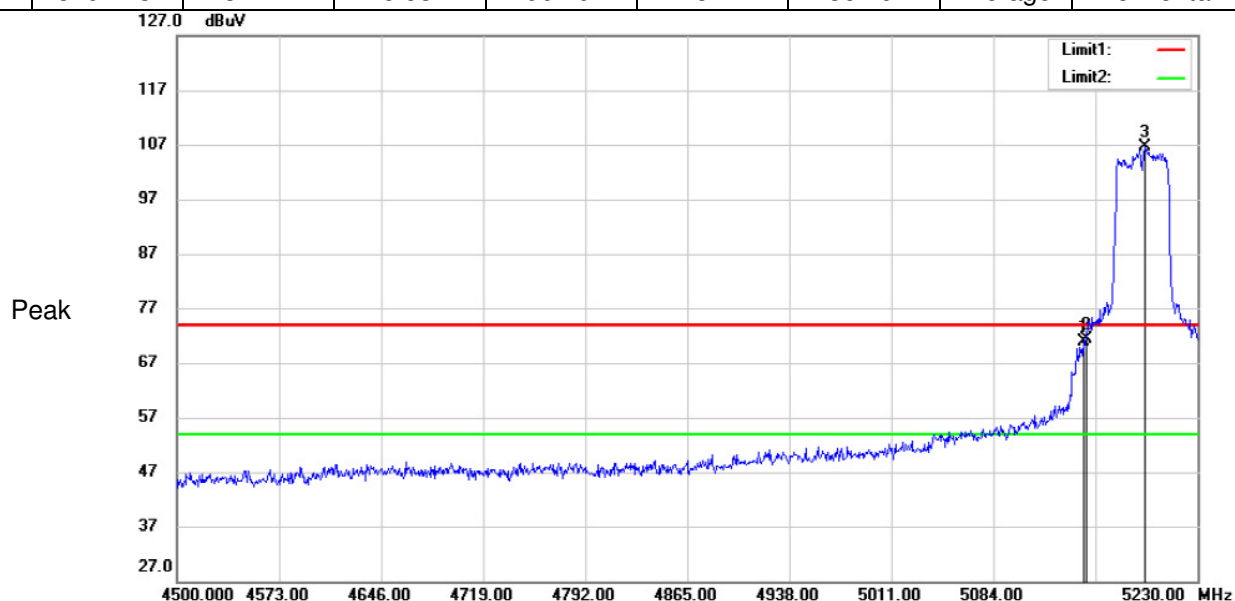

802.11 ac(VHT40)

Channel: 38



MK.	Frequency (MHz)	Reading (dBUV/m)	Corrected factor(dB)	Result (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	5147.51	48.72	6.94	55.66	74	-18.34	Peak	Vertical
2	5150	47.56	6.92	54.48	74	-19.52	Peak	Vertical
3	5192.77	92.12	6.69	98.81	74	24.81	Peak	Vertical
1	5127.07	34.26	7.05	41.31	54	-12.69	Average	Vertical
2	5150	34.67	6.92	41.59	54	-12.41	Average	Vertical
3	5194.23	76.35	6.68	83.03	54	29.03	Average	Vertical

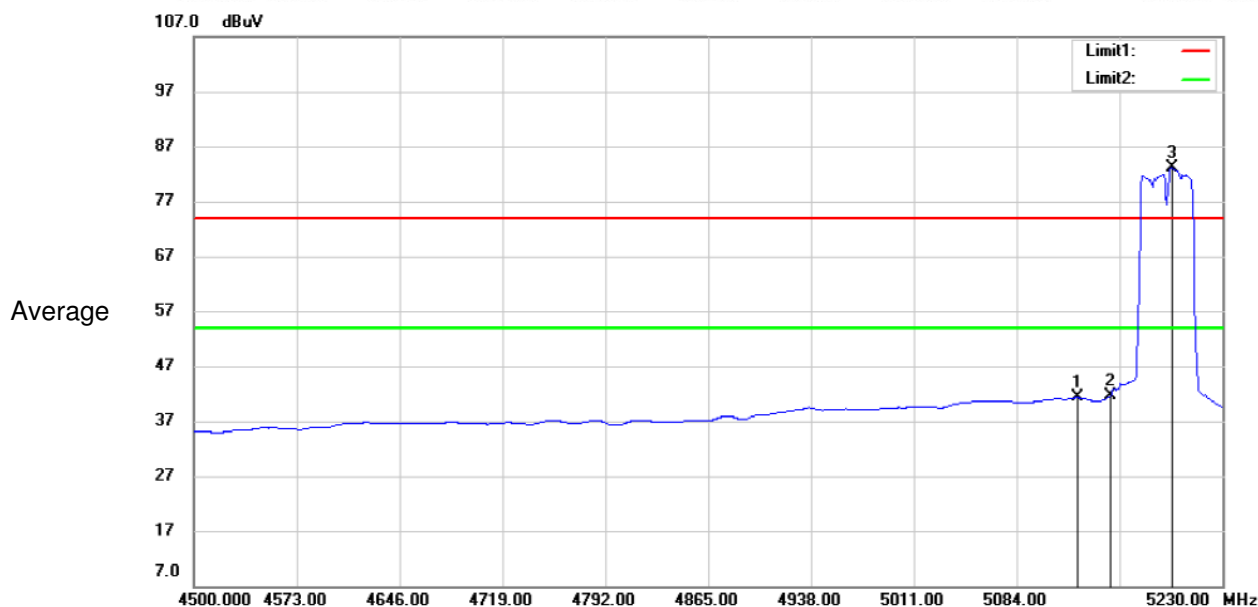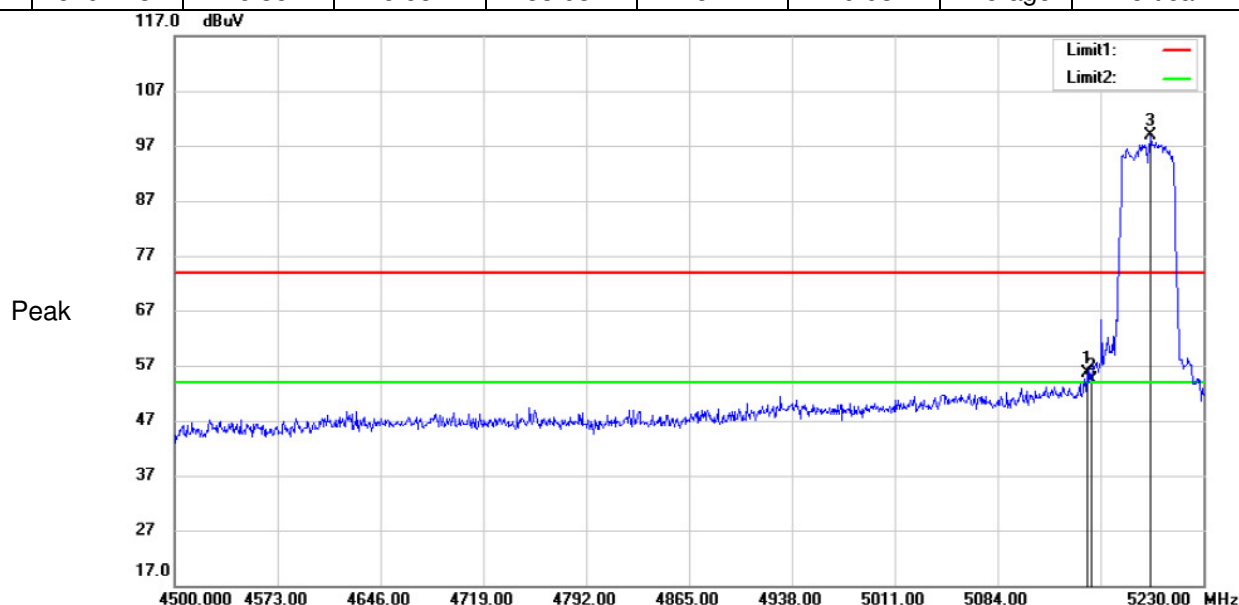

802.11 ac(VHT40)

Channel: 5230



MK.	Frequency (MHz)	Reading (dBUV/m)	Corrected factor(dB)	Result (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	5235.37	92.32	6.65	98.97	54	44.97	Peak	Horizontal
2	5350	42.09	6.98	49.07	54	-4.93	Peak	Horizontal
3	5386.84	44.68	7.23	51.91	54	-2.09	Peak	Horizontal
1	5239.42	99.96	6.65	106.61	54	52.61	Peak	Vertical
2	5350	41.89	6.98	48.87	54	-5.13	Peak	Vertical
3	5410.6	45.57	7.29	52.86	54	-1.14	Peak	Vertical

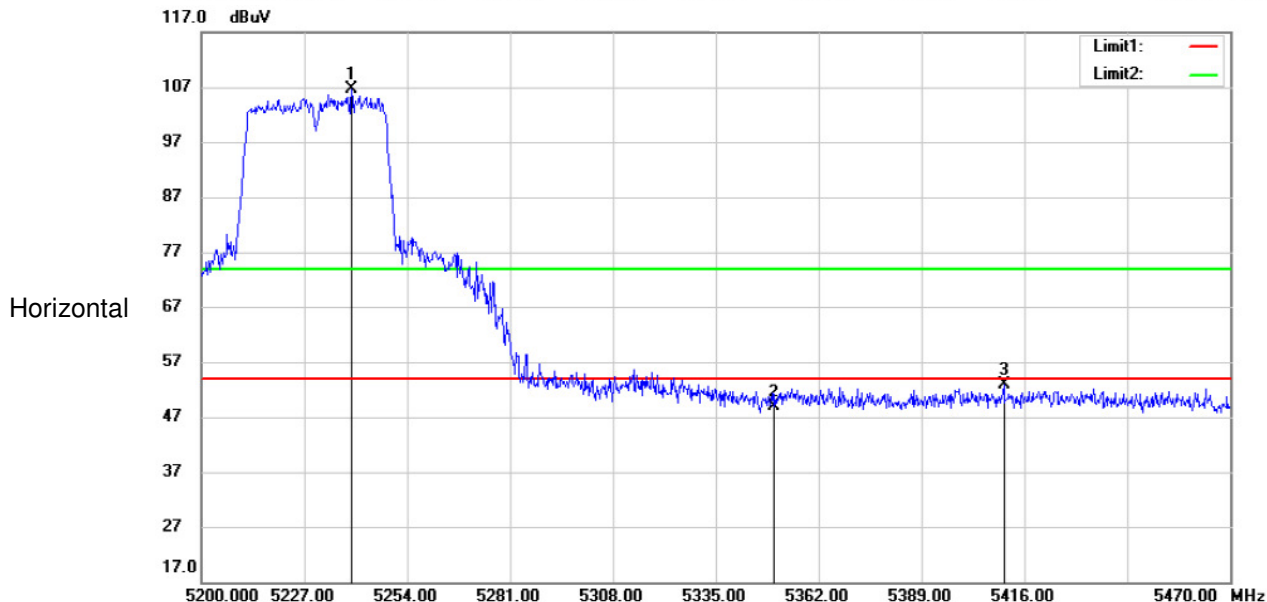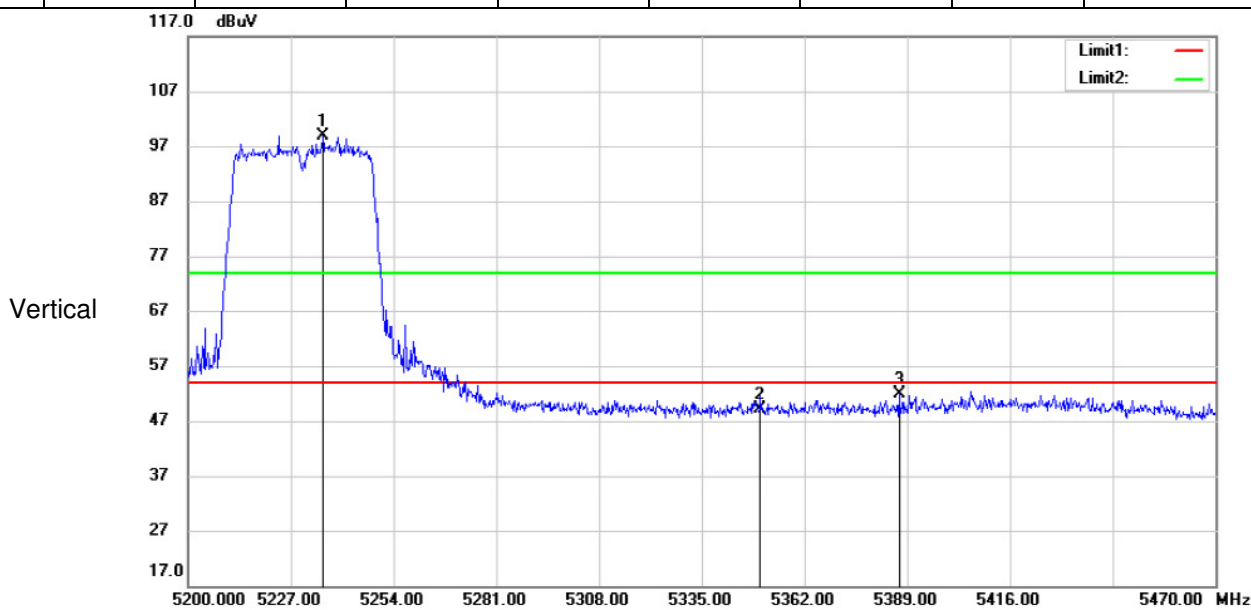

802.11 ac(VHT40)

Channel: 5755



MK.	Frequency (MHz)	Reading (dBUV/m)	Corrected factor(dB)	Result (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	5720.58	61.27	6.82	68.09	74	-5.91	Peak	Horizontal
2	5725	58.2	6.82	65.02	74	-8.98	Peak	Horizontal
3	5763.09	96.2	6.74	102.94	74	28.94	Peak	Horizontal
1	5717.85	40.93	6.84	47.77	54	-6.23	Average	Horizontal
2	5725	40.15	6.82	46.97	54	-7.03	Average	Horizontal
3	5762.7	81.34	6.74	88.08	54	34.08	Average	Horizontal

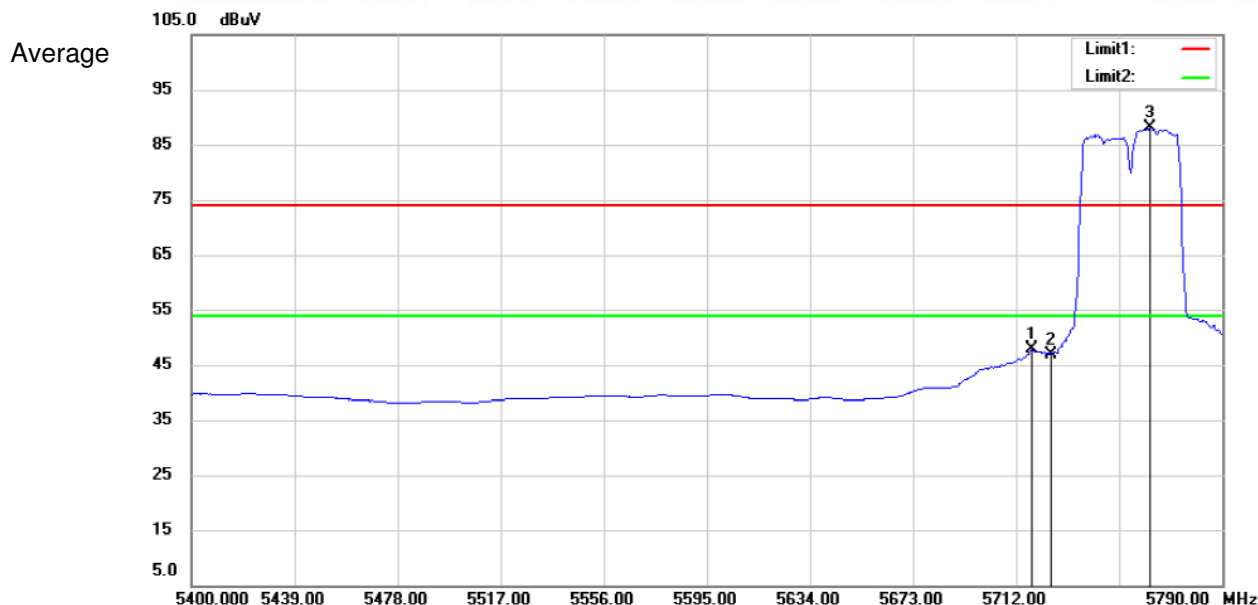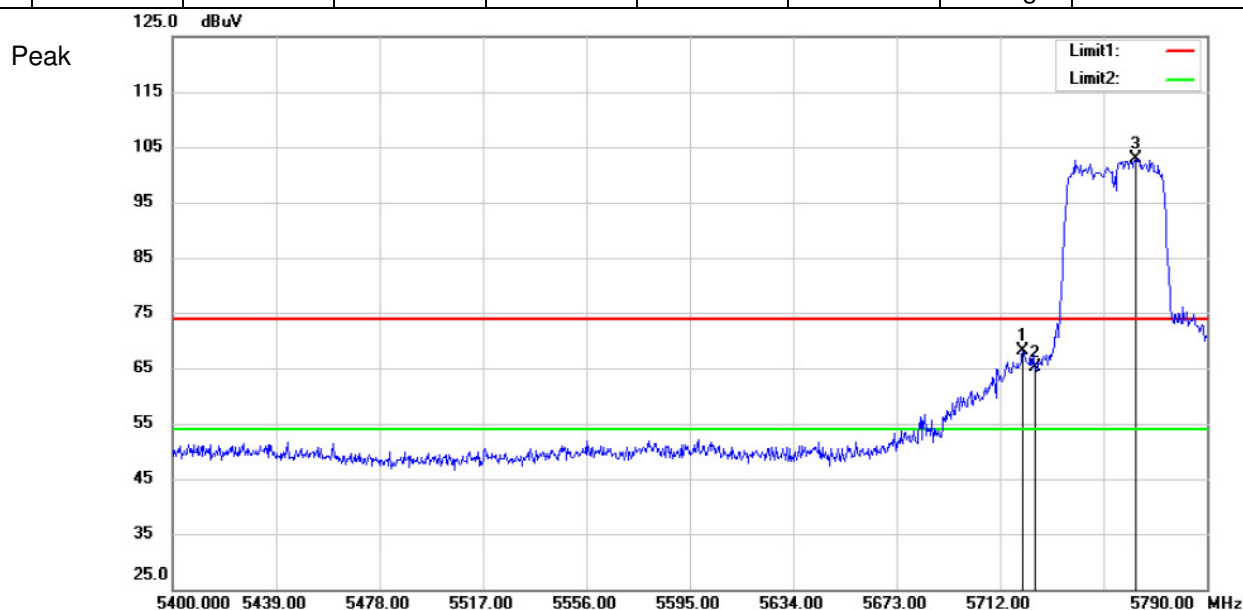

802.11 ac(VHT40)

Channel: 5755



MK.	Frequency (MHz)	Reading (dBUV/m)	Corrected factor(dB)	Result (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	5713.56	56.07	6.84	62.91	74	-11.09	Peak	Vertical
2	5725	59.66	6.82	66.48	74	-7.52	Peak	Vertical
3	5739.3	90.67	6.8	97.47	74	23.47	Peak	Vertical
1	5722.92	38.86	6.83	45.69	54	-8.31	Average	Vertical
2	5725	38.96	6.82	45.78	54	-8.22	Average	Vertical
3	5738.13	74.41	6.8	81.21	54	27.21	Average	Vertical

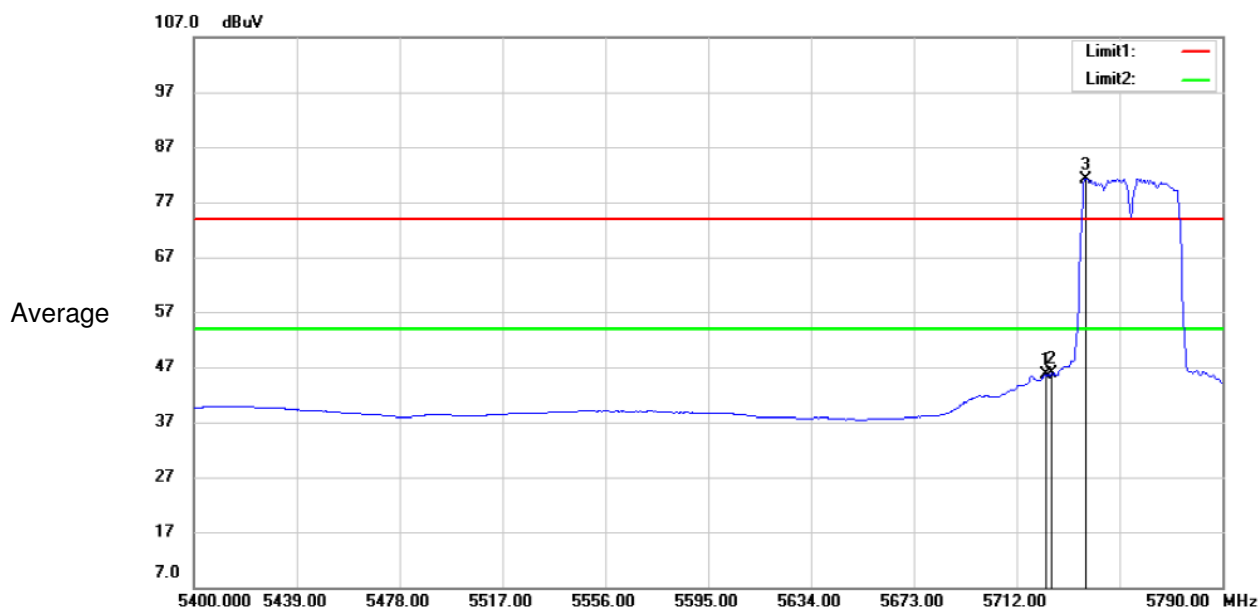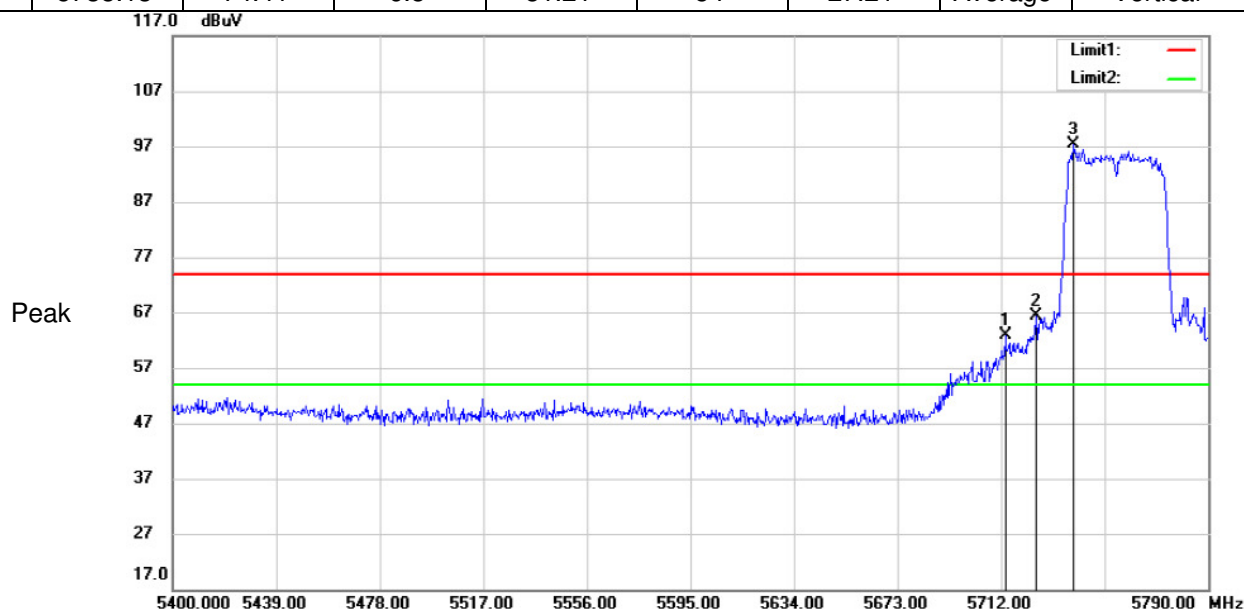

802.11 ac(VHT40)

Channel: 5795


MK.	Frequency (MHz)	Reading (dBUV/m)	Corrected factor(dB)	Result (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	5804.64	96.64	6.67	103.31	74	29.31	Peak	Horizontal
2	5850	49.73	6.64	56.37	74	-17.63	Peak	Horizontal
3	5852.88	49.5	6.64	56.14	74	-17.86	Peak	Horizontal
1	5782.56	82.11	6.7	88.81	54	34.81	Average	Horizontal
2	5850	36.18	6.64	42.82	54	-11.18	Average	Horizontal
3	5852.64	35.26	6.64	41.9	54	-12.1	Average	Horizontal

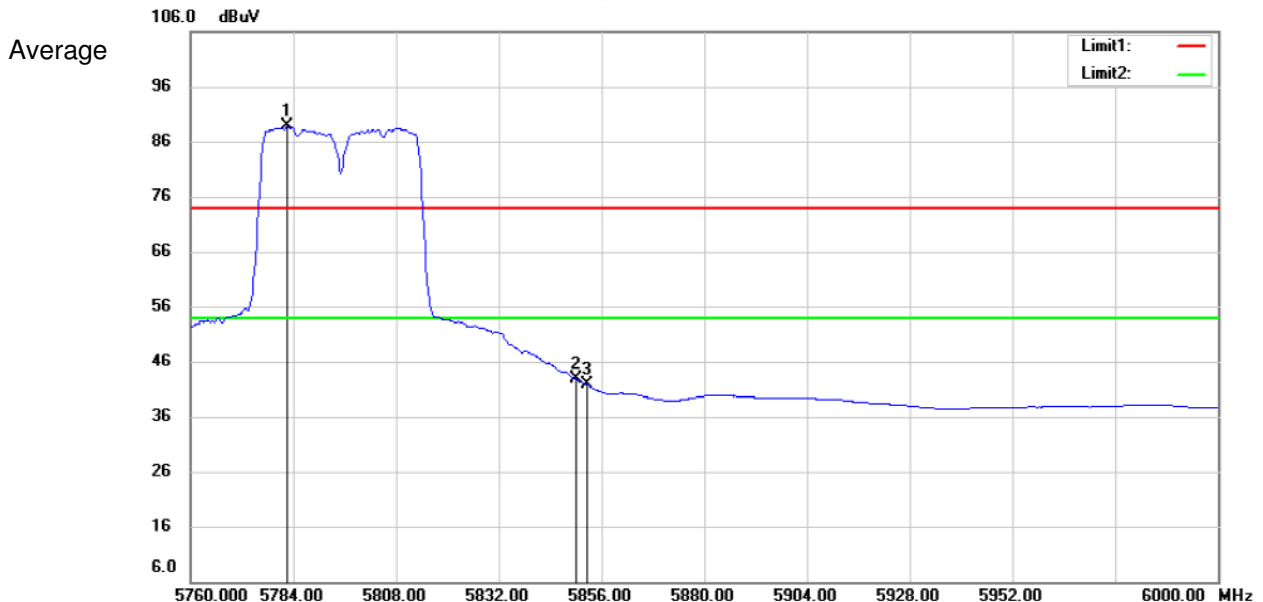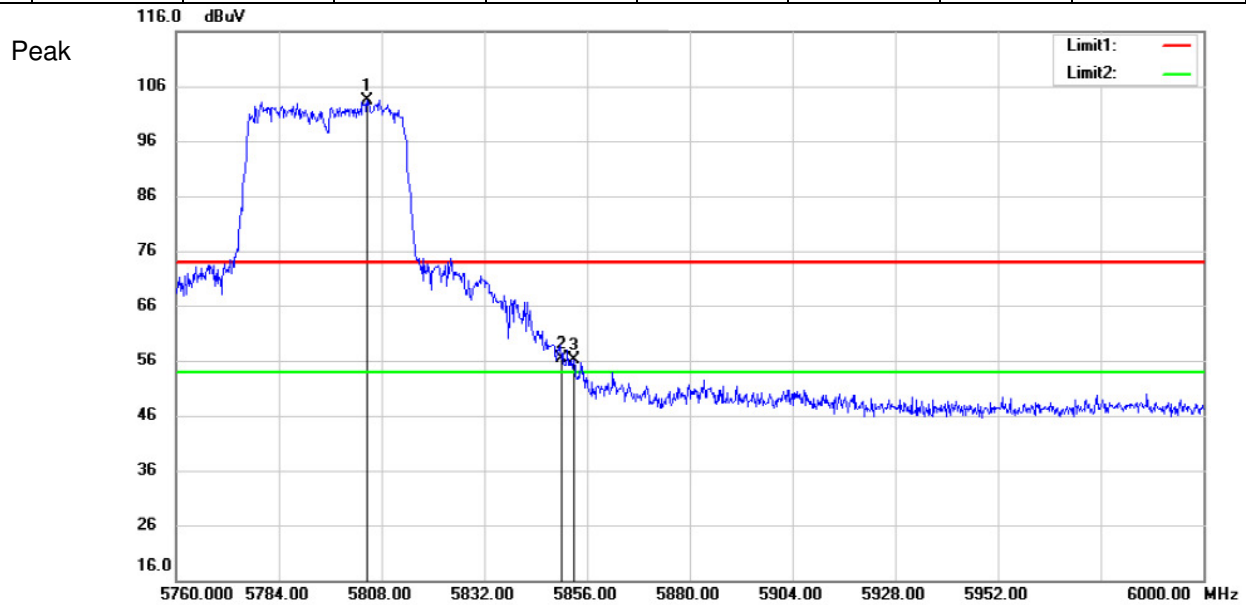

802.11 ac(VHT40)

Channel: 5755



MK.	Frequency (MHz)	Reading (dBUV/m)	Corrected factor(dB)	Result (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	5796.24	88.63	6.68	95.31	54	41.31	Peak	Vertical
2	5850	43.26	6.64	49.9	54	-4.1	Peak	Vertical
3	5857.92	45.57	6.62	52.19	54	-1.81	Peak	Vertical

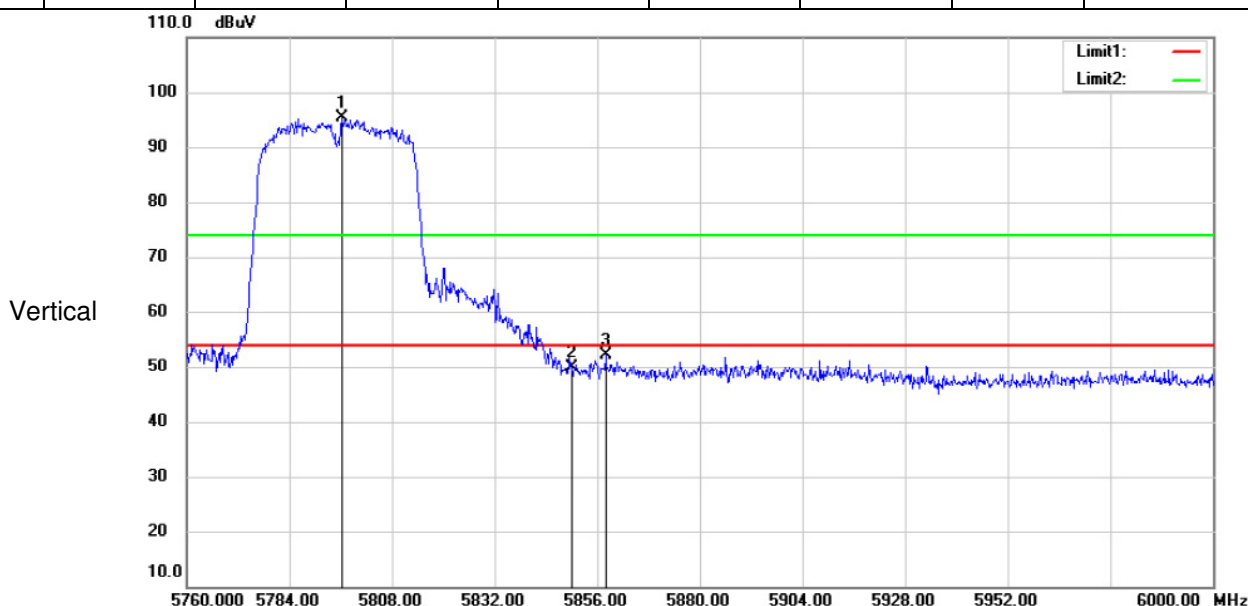

802.11 ac(VHT80)

Channel: 5210



MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	5128.56	59.28	7.05	66.33	74	-7.67	Peak	Horizontal
2	5150	58.5	6.92	65.42	74	-8.58	Peak	Horizontal
3	5196.46	94.52	6.66	101.18	74	27.18	Peak	Horizontal
4	5350	44.71	6.98	51.69	74	-22.31	Peak	Horizontal
5	5366.21	46.78	7.1	53.88	74	-20.12	Peak	Horizontal
1	5135.35	38.68	7.01	45.69	54	-8.31	Average	Horizontal
2	5150	38.5	6.92	45.42	54	-8.58	Average	Horizontal
3	5197.43	76.73	6.67	83.4	54	29.4	Average	Horizontal
4	5350	33.08	6.98	40.06	54	-13.94	Average	Horizontal
5	5361.36	33.55	7.07	40.62	54	-13.38	Average	Horizontal

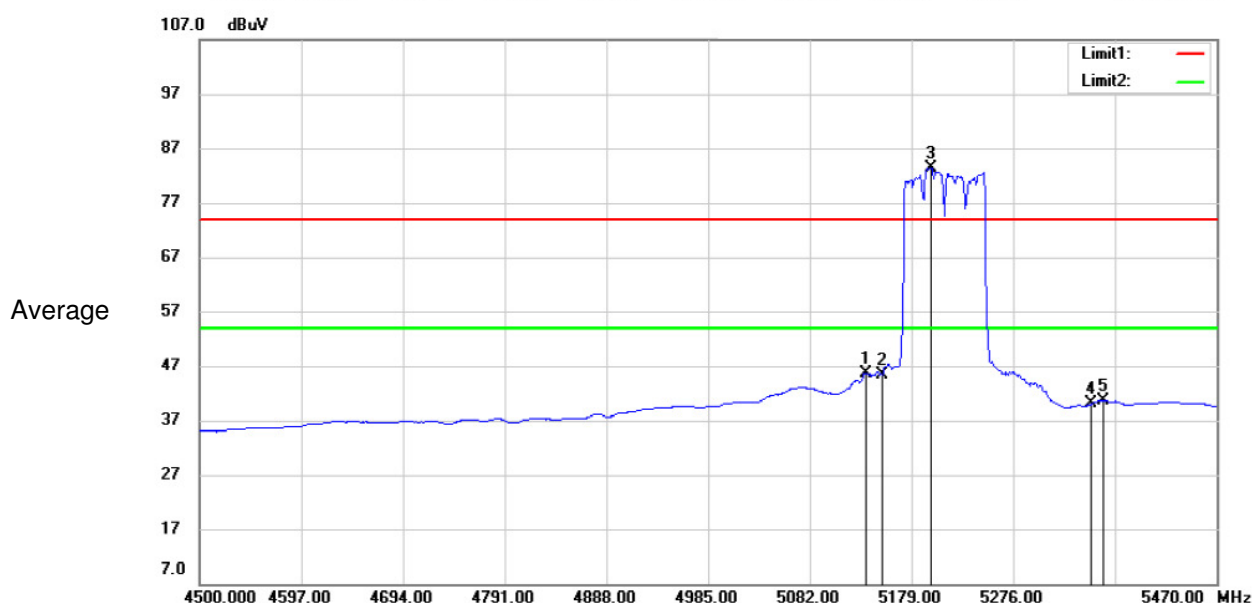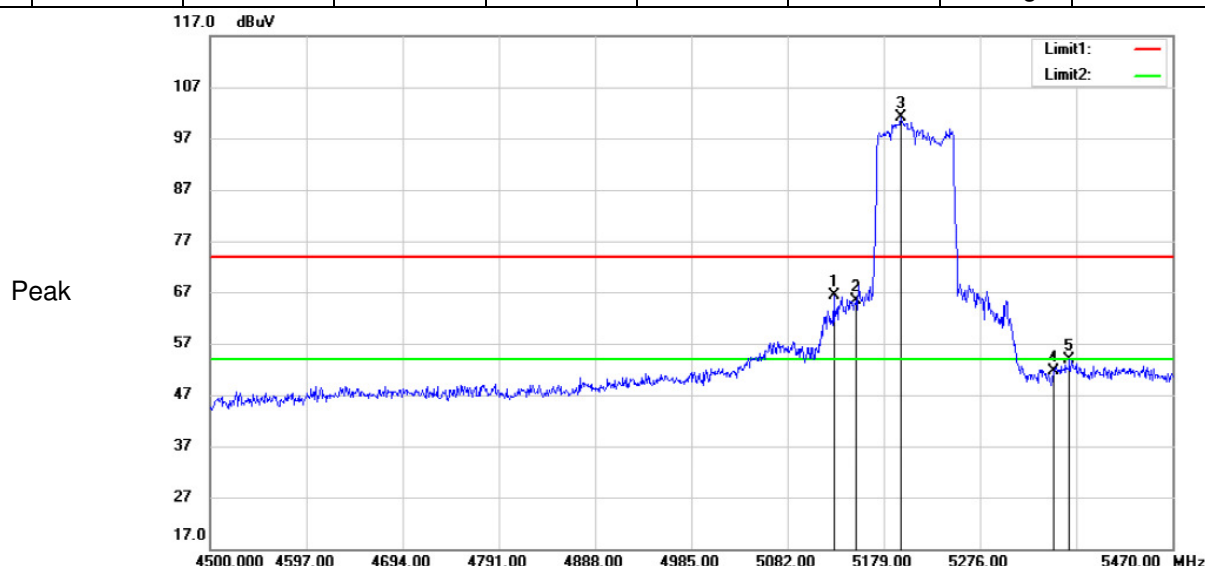

802.11 ac(VHT80)

Channel: 5210



MK.	Frequency (MHz)	Reading (dBUV/m)	Corrected factor(dB)	Result (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	5138.26	52.28	6.99	59.27	74	-14.73	Peak	Vertical
2	5150	52.43	6.92	59.35	74	-14.65	Peak	Vertical
3	5205.19	92.11	6.65	98.76	74	24.76	Peak	Vertical
4	5350	43.3	6.98	50.28	74	-23.72	Peak	Vertical
5	5378.82	46.38	7.19	53.57	74	-20.43	Peak	Vertical
1	5146.02	35.69	6.94	42.63	54	-11.37	Average	Vertical
2	5150	35.74	6.92	42.66	54	-11.34	Average	Vertical
3	5212.95	75.09	6.65	81.74	54	27.74	Average	Vertical
4	5350	32.18	6.98	39.16	54	-14.84	Average	Vertical
5	5373.97	33.27	7.15	40.42	54	-13.58	Average	Vertical

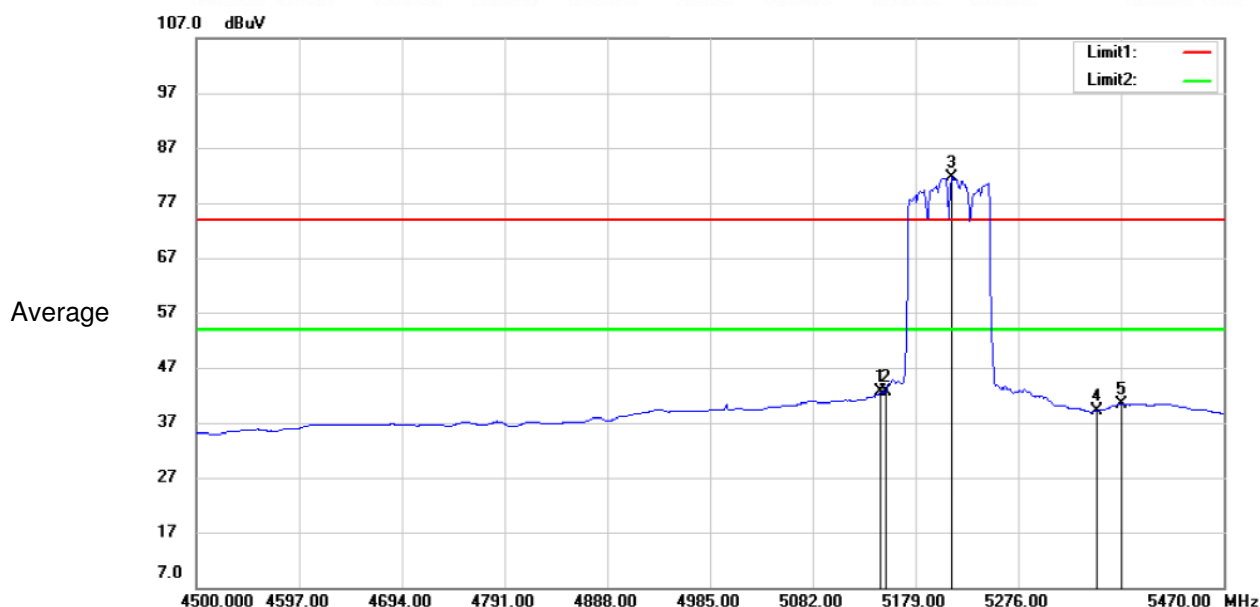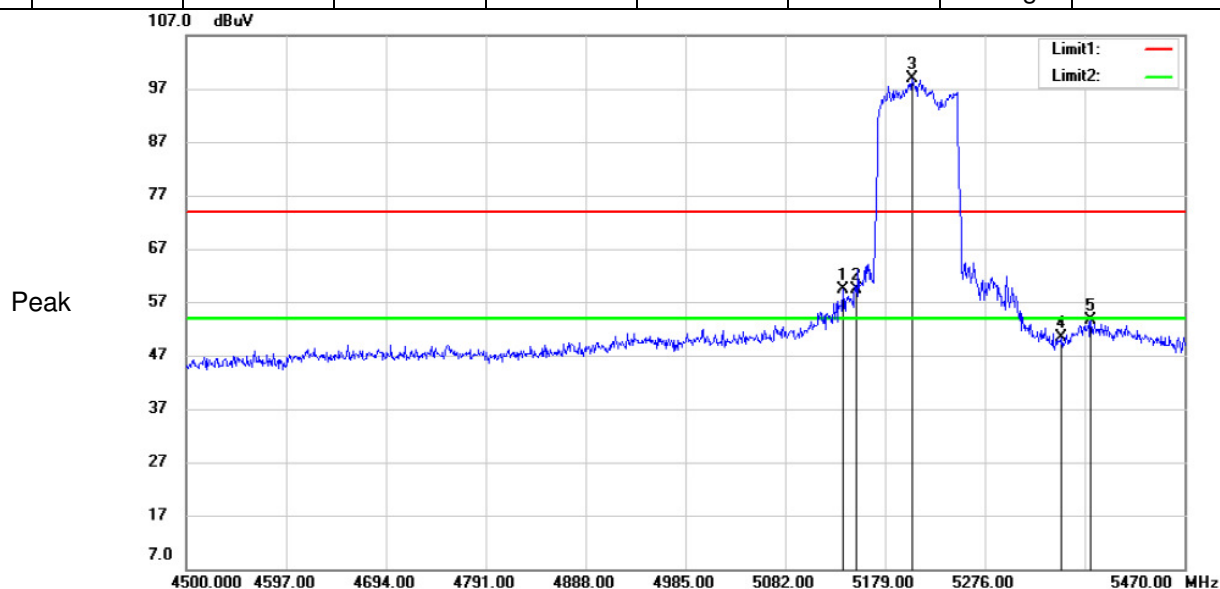

802.11 ac(VHT80)

Channel: 5775



MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	5720.8	62.89	6.82	69.71	74	-4.29	Peak	Horizontal
2	5725	59.63	6.82	66.45	74	-7.55	Peak	Horizontal
3	5786.4	92.68	6.7	99.38	74	25.38	Peak	Horizontal
4	5850	60.51	6.64	67.15	74	-6.85	Peak	Horizontal
5	5856.8	61.45	6.63	68.08	74	-5.92	Peak	Horizontal
1	5722.4	41.96	6.83	48.79	54	-5.21	Average	Horizontal
2	5725	40.01	6.82	46.83	54	-7.17	Average	Horizontal
3	5762.8	75.49	6.74	82.23	54	28.23	Average	Horizontal
4	5850	39.05	6.64	45.69	54	-8.31	Average	Horizontal
5	5861.2	37.77	6.63	44.4	54	-9.6	Average	Horizontal

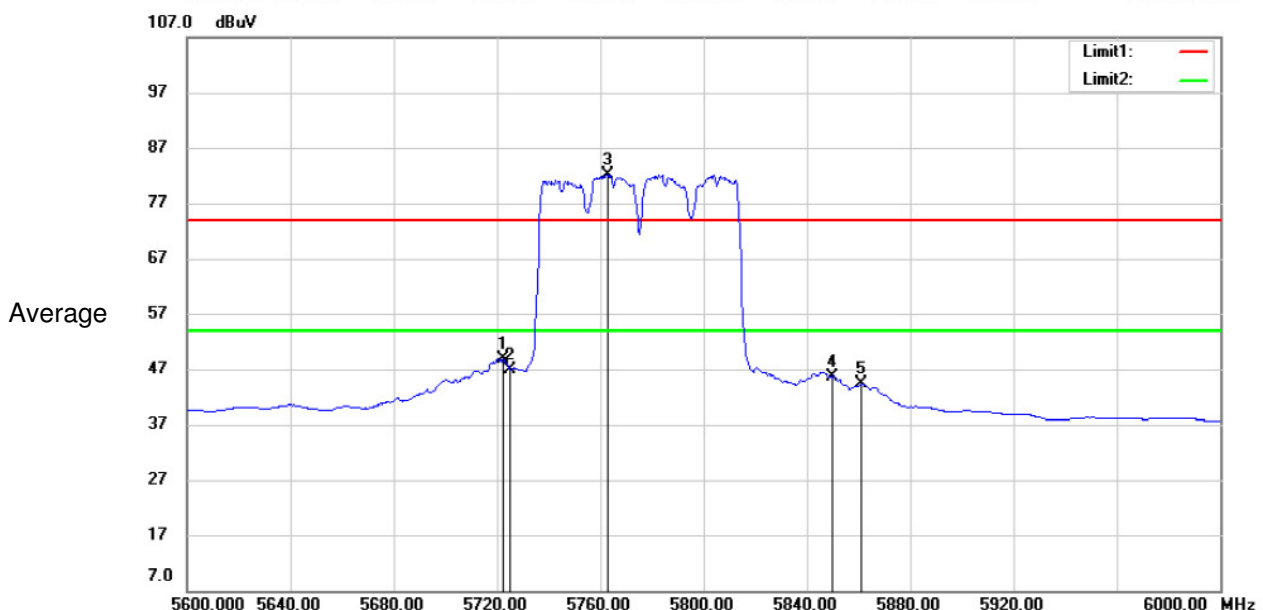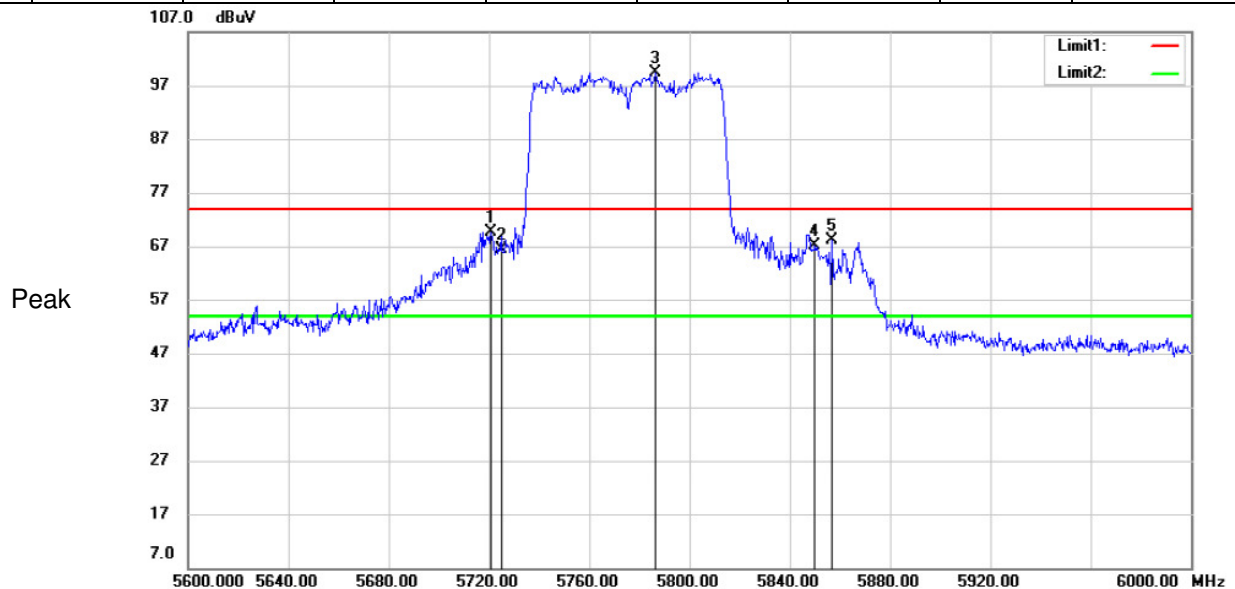

802.11 ac(VHT80)

Channel: 5775

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	5697.2	53.88	6.87	60.75	74	-13.25	Peak	Vertical
2	5725	54.9	6.82	61.72	74	-12.28	Peak	Vertical
3	5746.8	88.7	6.77	95.47	74	21.47	Peak	Vertical
4	5850	52.14	6.64	58.78	74	-15.22	Peak	Vertical
5	5856.8	53.61	6.63	60.24	74	-13.76	Peak	Vertical
1	5722.4	36.48	6.83	43.31	54	-10.69	Average	Vertical
2	5725	35.88	6.82	42.7	54	-11.3	Average	Vertical
3	5746.4	71.96	6.77	78.73	54	24.73	Average	Vertical
4	5850	34.35	6.64	40.99	54	-13.01	Average	Vertical
5	5861.2	34.04	6.63	40.67	54	-13.33	Average	Vertical

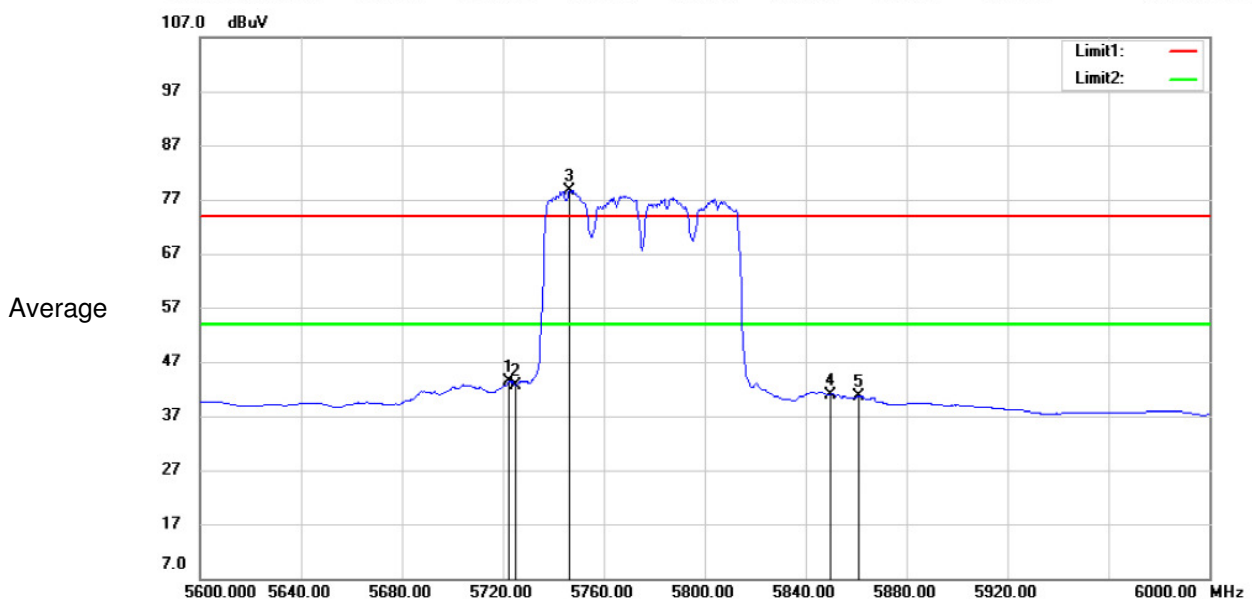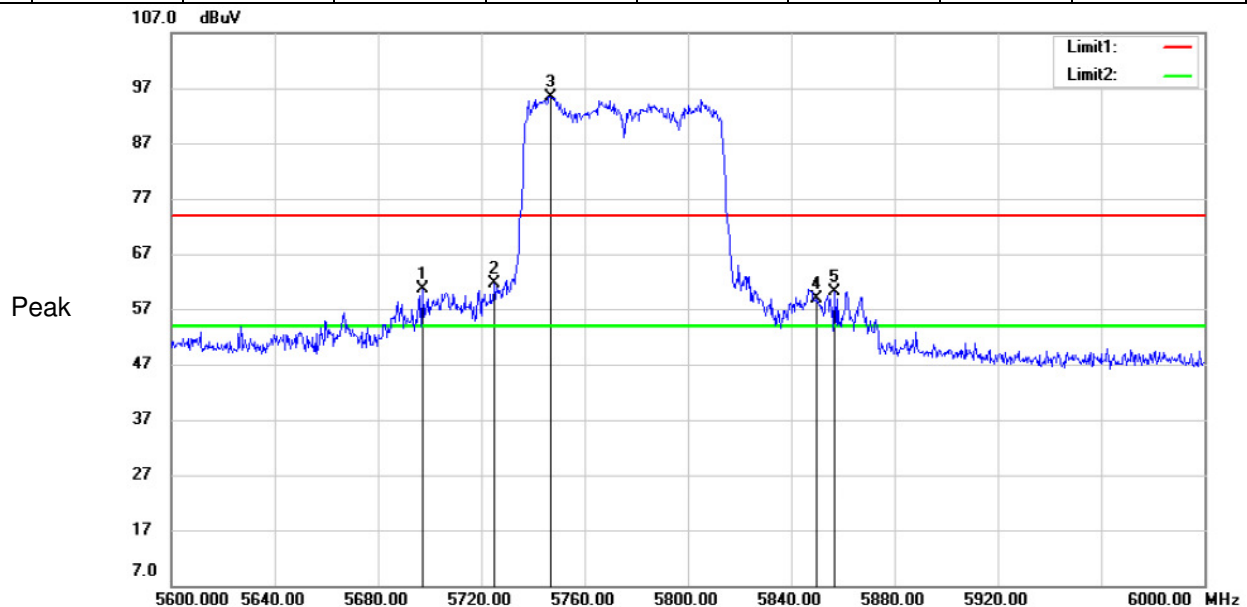

- Remark: 1. Test Level = Receiver Reading + Antenna Factor + Cable Loss- Preamplifier Factor
2. No any other emission which falls in restricted bands can be detected and be reported.
3. If the Peak value below the AVERAGE Limit, the AVERAGE test doesn't perform for this submission.

All frequencies within the "Restricted bands" have been evaluated to compliance. Section 15.205 Restricted bands of operation.

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.5 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	
13.36 - 13.41			

7.10 Transmission in the Absence of Data

7.10.1 Standard Applicable


The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

7.10.2 Test Result

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power sAverageing. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

7.11 Frequency stability

Test setup:

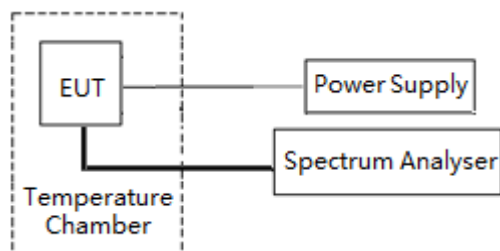

Test Procedure:

- The EUT was placed in the temperature chamber, the DC leads and RF output cable exited the chamber through an opening made for that purpose.
- After operating the equipment in standby conditions for 15 minutes before proceeding. The temperature was varied from -20°C to +55°C at intervals of not more than 10°C. The frequency stability was read from the spectrum analyzer and the frequency stability and input voltage was recorded.

Test Limit:

The frequency of carrier signal shall be maintained within the band of operation

Test Data:

Band	Test Conditions		Operation Frequency(MHz)	Test Frequency (MHz)	Freq. Dev. (MHz)	Limit (GHz)	Result
	Volt (V DC)	Temp (°C)					
Band U-NII 1	Normal(3.8)	Extreme(-20)	5180	5180.0617	0.0617	5.15-5.25	Pass
		Extreme(-10)		5180.0575	0.0575		Pass
		Extreme(0)		5180.0660	0.0660		Pass
		Extreme(+10)		5180.0490	0.0490		Pass
		Extreme(+20)		5180.0753	0.0753		Pass
		Extreme(+30)		5180.0602	0.0602		Pass
		Extreme(+40)		5180.0753	0.0753		Pass
		Extreme(+55)		5180.0452	0.0452		Pass
	Extreme(3.23)	Norma(+20)		5180.0328	0.0328		Pass
	Extreme(4.37)			5180.0851	0.0851		Pass
Band U-NII 3	Normal(12)	Extreme(-20)	5825	5825.0069	0.0069	5.725-5.85	Pass
		Extreme(-10)		5825.0563	0.0563		Pass
		Extreme(0)		5825.0138	0.0138		Pass
		Extreme(+10)		5825.0425	0.0425		Pass
		Extreme(+20)		5825.0069	0.0069		Pass
		Extreme(+30)		5825.0138	0.0138		Pass
		Extreme(+40)		5825.0394	0.0394		Pass
		Extreme(+55)		5825.0494	0.0494		Pass
	Extreme(3.23)	Norma(20)		5825.0298	0.0298		Pass
	Extreme(4.37)			5825.0076	0.0076		Pass

Remark: Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

8 Test Setup Photographs

Refer to the < DS-UAFS-W100I _Test Setup photos-FCC>.

9 EUT Constructional Details

Refer to the < DS-UAFS-W100I _External Photos > & < DS-UAFS-W100I _Internal Photos >.

--End of the Report--