

FCC PART 15.225

TEST REPORT

For

Hangzhou Hikvision Digital Technology Co., Ltd.

No.555 Qianmo Road, Binjiang District, Hangzhou 310052, China

FCC ID: 2ADTD-KD3002VM

Report Type: Original Report	Product Type: Video Intercom Door Station
Test Engineer: Kyle Xu	
Report Number: RKS170613001-00A	
Report Date: 2017-06-21	
Reviewed By: RF Leader	Oscar Ye 
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
JUSTIFICATION	5
EUT EXERCISE SOFTWARE	5
EQUIPMENT MODIFICATIONS	5
LOCAL SUPPORT EQUIPMENT.....	5
EXTERNAL I/O CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP	5
SUMMARY OF TEST RESULTS	6
TEST EQUIPMENT LIST	7
FCC§15.203 - ANTENNA REQUIREMENT.....	8
APPLICABLE STANDARD	8
ANTENNA CONNECTED CONSTRUCTION	8
FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS	9
APPLICABLE STANDARD	9
EUT SETUP	9
EMI TEST RECEIVER SETUP.....	9
TEST PROCEDURE	9
CORRECTED FACTOR & MARGIN CALCULATION	10
TEST RESULTS SUMMARY	10
TEST DATA	10
FCC§15.225, §15.205 & §15.209 - RADIATED EMISSIONS TEST	13
APPLICABLE STANDARD	13
EUT SETUP	13
EMI TEST RECEIVER SETUP.....	14
CORRECTED AMPLITUDE & MARGIN CALCULATION	14
TEST RESULTS SUMMARY	14
TEST DATA	14
FCC§15.225(E) - FREQUENCY STABILITY.....	16
APPLICABLE STANDARD	16
TEST PROCEDURE	16
TEST DATA	16
§15.215(C) - 20DB EMISSION BANDWIDTH TESTING	17
REQUIREMENT	17
TEST PROCEDURE	17
TEST DATA	17

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	Hangzhou Hikvision Digital Technology Co., Ltd.
Tested Model	DS-KD3002-VM
Series Model	DS-KD6002-VM
Product Type	Video Intercom Door Station
Dimension	343mm(L) x113mm(W) x55 mm(H)
Power Supply	DC 12V

Note: The difference between tested model and series model was explained in the declaration letter.

** All measurement and test data in this report was gathered from production sample serial number: 20170613001 (Assigned by BACL, Kunshan). The EUT supplied by the applicant was received on 2017-06-13.*

Objective

This Type approval report is prepared on behalf of Hangzhou Hikvision Digital Technology Co., Ltd. in accordance with Part 2- Subpart J, and Part 15-Subparts A and C of the Federal Communication Commission's rules.

The objective is to determine the compliance of the EUT with FCC rules, sec 15.203, 15.205, 15.207, 15.209 and 15.225.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP submission with FCC ID: 2ADTD-KD3002VM.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Lab Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19 dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road,Kunshan,Jiangsu province,China.

Test site at Bay Area Compliance Laboratories Corp. (Kunshan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 06, 2014. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

EUT Exercise Software

No exercise software.

Equipment Modifications

No modification on the EUT.

Local Support Equipment


Manufacturer	Description	Model	Serial Number
DELL	Notebook	GX620	D65874152

External I/O Cable

Cable Description	Length (m)	From/Port	To
Power Cable	0.8	EUT	DC Power Supply
RJ45 Cable	1.2	EUT	Notebook

Block Diagram of Test Setup

For conducted emission:

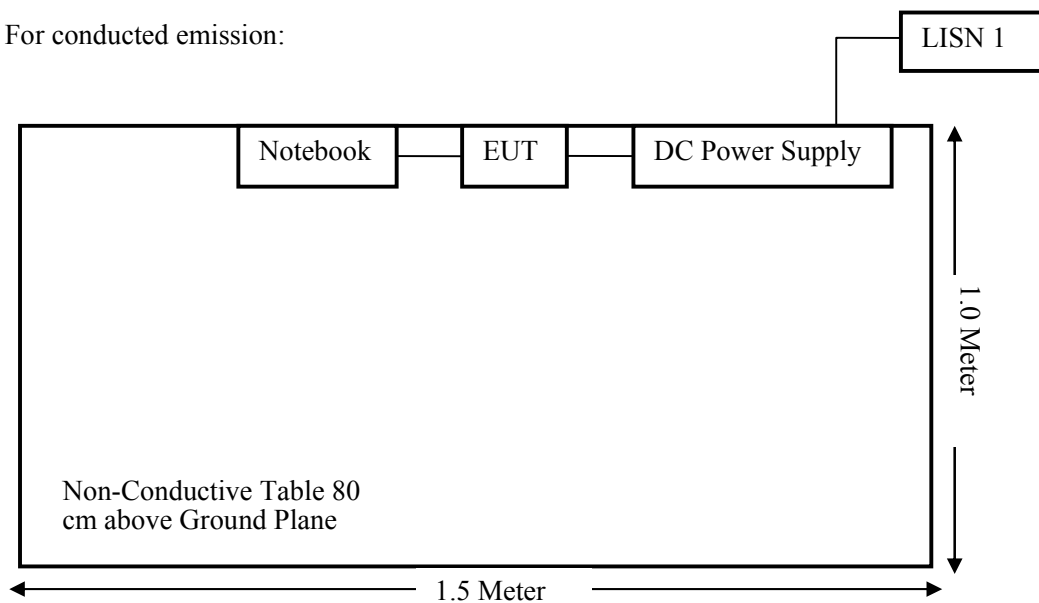

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.225 §15.209 §15.205	Radiated Emission Test	Compliance
§15.225(e)	Frequency Stability	Compliance
§15.215(c)	20dB Emission Bandwidth Testing	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2016-11-25	2017-11-24
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2016-11-25	2017-11-24
Sunol Sciences	Broadband Antenna	JB3	A090314-2	2016-01-09	2019-01-08
ETS	Horn Antenna	3115	6229	2016-01-11	2019-01-10
ETS-LINDGREN	PASSIVE LOOP	6512	108100	2016-01-09	2019-01-08
Sonoma Instrunent	Pre-amplifier	330	171377	2016-12-12	2017-12-11
Narda	Pre-amplifier	AFS42-00101800	2001270	2016-12-12	2017-12-11
R&S	Auto test Software	EMC32	100361	/	/
Haojintech	Coaxial Cable	Cable-1	001	2016-12-12	2017-12-11
Haojintech	Coaxial Cable	Cable-2	002	2016-12-12	2017-12-11
Haojintech	Coaxial Cable	Cable-3	003	2016-12-12	2017-12-11
MICRO-COAX	Coaxial Cable	Cable-4	004	2016-12-12	2017-12-11
MICRO-COAX	Coaxial Cable	Cable-5	005	2016-12-12	2017-12-11
EAST	Regulated DC Power Supply	MCH-303D-II	14070562	/	/
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2016-09-21	2017-09-20
EAST	Regulated DC Power Supply	MCH-303D-II	14070562	/	/
Hikvision	RF Cable	N/A	N/A	2017-06-14	2018-06-13
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2016-11-25	2017-11-24
Rohde & Schwarz	LISN	ESH3-Z5	862770/011	2016-10-10	2017-10-09
ROHDE&SCHWARZ	LISN	ENV216	3560655016	2016-11-25	2017-11-24
Rohde & Schwarz	CE Test software	EMC 32	100357	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2016-09-08	2017-09-07

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Antenna Connected Construction

The EUT has a PCB antenna arrangement and antenna gain is 0 dBi, which was permanently attached ,fulfill the requirement of this section, please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup

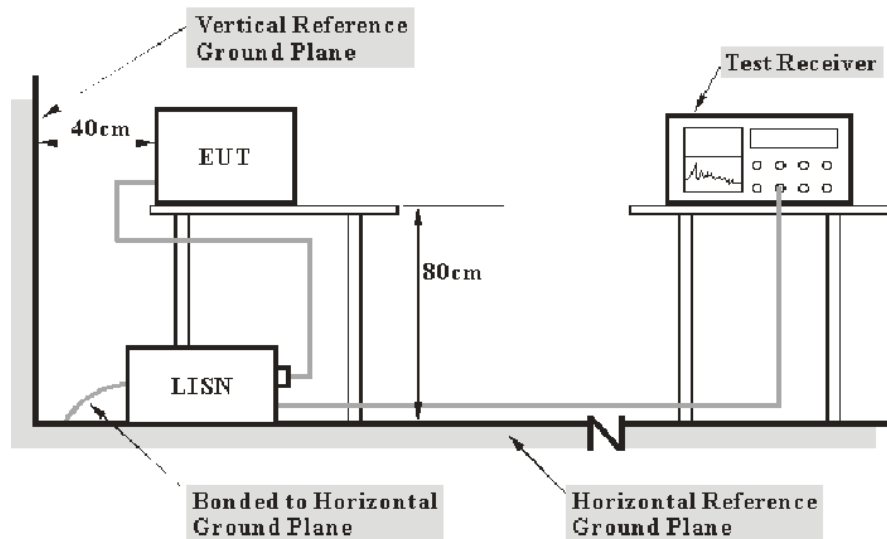

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data

Environmental Conditions


Temperature:	23.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

The testing was performed by Kyle Xu on 2017-06-14.

EUT operation mode: Transmitting

AC 120V/60 Hz, Line


Full Spectrum

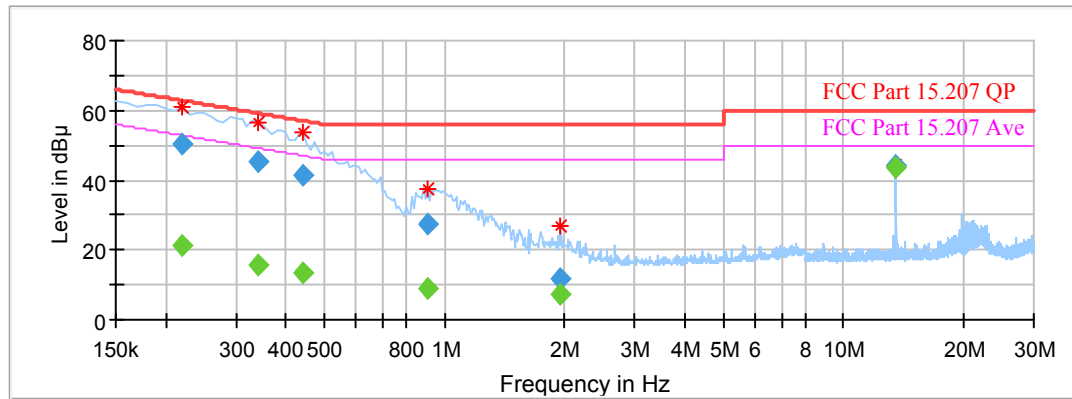

Frequency (MHz)	QuasiPeak (dBμV)	Average (dB μ V)	Bandwidth (kHz)	Line	Limit (dBμV)	Margin (dB)	Corr. (dB)	Comment
0.220000	---	21.19	9.000	L1	52.82	31.63	10.0	Compliance
0.220000	50.46	---	9.000	L1	62.82	12.36	10.0	Compliance
0.340000	---	15.59	9.000	L1	49.20	33.61	10.0	Compliance
0.340000	45.21	---	9.000	L1	59.20	13.99	10.0	Compliance
0.440000	---	13.38	9.000	L1	47.06	33.68	10.1	Compliance
0.440000	41.42	---	9.000	L1	57.06	15.64	10.1	Compliance
0.910000	---	8.78	9.000	L1	46.00	37.22	9.9	Compliance
0.910000	27.54	---	9.000	L1	56.00	28.46	9.9	Compliance
1.960000	---	7.20	9.000	L1	46.00	38.80	9.9	Compliance
1.960000	11.77	---	9.000	L1	56.00	44.23	9.9	Compliance
13.560000	---	43.87	9.000	L1	50.00	6.13	10.2	Compliance
13.560000	44.08	---	9.000	L1	60.00	15.92	10.2	Compliance

AC 120V/60 Hz, Neutral

Full Spectrum

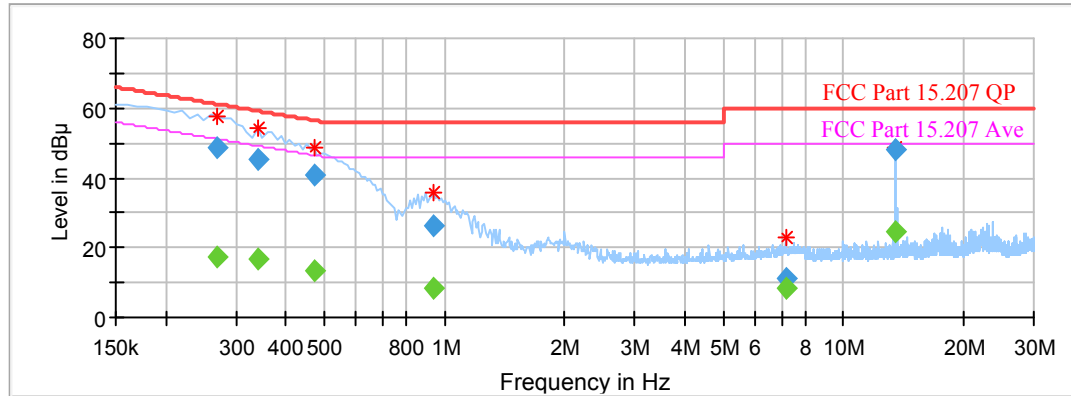

Frequency (MHz)	QuasiPeak (dBμV)	Average (dB μ V)	Bandwidth (kHz)	Line	Limit (dBμV)	Margin (dB)	Corr. (dB)	Comment
0.270000	---	17.32	9.000	N	51.12	33.80	10.1	Compliance
0.270000	48.47	---	9.000	N	61.12	12.65	10.1	Compliance
0.340000	---	16.84	9.000	N	49.20	32.36	10.1	Compliance
0.340000	45.12	---	9.000	N	59.20	14.08	10.1	Compliance
0.470000	---	13.50	9.000	N	46.51	33.01	10.1	Compliance
0.470000	40.58	---	9.000	N	56.51	15.93	10.1	Compliance
0.940000	---	8.14	9.000	N	46.00	37.86	9.9	Compliance
0.940000	26.55	---	9.000	N	56.00	29.45	9.9	Compliance
7.150000	---	8.51	9.000	N	50.00	41.49	9.9	Compliance
7.150000	11.28	---	9.000	N	60.00	48.72	9.9	Compliance
13.560000	---	24.89	9.000	N	50.00	25.11	10.0	Compliance
13.560000	48.20	---	9.000	N	60.00	11.80	10.0	Compliance

Note:

- 1) Corr.=LISN VDF (Voltage Division Factor) + Cable Loss
- 2) Corrected Amplitude = Reading + Corr.
- 3) Margin = Limit –Corrected Amplitude


FCC§15.225, §15.205 & §15.209 - RADIATED EMISSIONS TEST

Applicable Standard

As per FCC Part 15.225

- (a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

EUT Setup

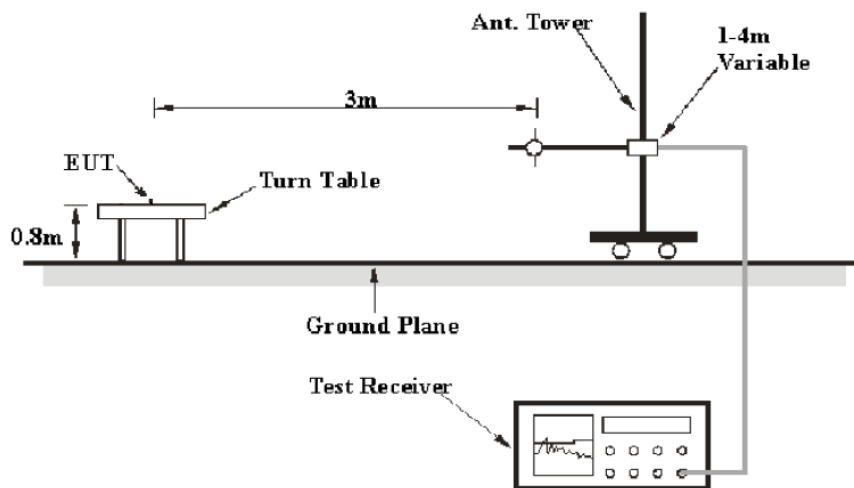

The radiated emission tests were performed in the 3-meter chamber a test site, using the setup accordance with the ANSI C63.10. The specification used was the FCC Part Subpart C limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

According to FCC Rules, 47 CFR 15.33, the EUT emissions were investigated up to 1000 MHz.

During the radiated emission test, the EMI test Receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
9 kHz – 150 kHz	300 Hz	1 kHz	/	QP
150 kHz – 30 MHz	10 kHz	30 kHz	/	QP
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Factor = Antenna Factor + Cable Loss- Amplifier Gain

Corrected Amplitude = Meter Reading + Corrected Factor

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15C.

Test Data

Environmental Conditions

Temperature:	23.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

The testing was performed by Kyle Xu on 2017-06-14.

Test mode: Charging and Transmitting.

1) Spurious Emissions (9 kHz~30 MHz):

Indicated		Detector PK/QP/Ave.	Correction Factor			Corrected Amplitude (dB μ V/m) @3m	FCC Part 15.225\15.209	
Frequency (MHz)	Maximum Reading (dBuV)		Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. Gain (dB)		Limit (dB μ V/m) @3m	Margin (dB)
0.560	15.93	QP	51.53	0.32	20.00	47.78	52.64	4.86
13.315	25.36	QP	35.40	0.32	20.00	41.08	80.50	39.42
13.496	26.77	QP	35.40	0.32	20.00	42.49	90.50	48.01
13.617	24.63	QP	35.40	0.32	20.00	40.35	90.50	50.15
13.560	51.12	QP	35.40	0.32	20.00	66.84	124.00	57.16

2) Spurious Emissions (30 MHz ~1 GHz):

Frequency (MHz)	Maximum Reading (dBuV)	Detector PK/QP /Ave.	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Position (deg)	Correction Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
92.20	34.27	QP	112	V	34	-5.24	29.03	43.50	14.47
189.39	37.42	QP	129	V	321	-1.41	36.01	43.50	7.49
243.83	39.85	QP	135	H	307	-0.83	39.02	46.00	6.98
257.43	37.52	QP	124	H	25	-0.59	36.93	46.00	9.07
515.97	36.28	QP	123	V	284	5.83	42.11	46.00	3.89
556.81	34.83	QP	136	V	13	5.95	40.78	46.00	5.22

Note:

Corrected Amplitude = Corrected Factor + Reading

Corrected Factor = Antenna factor (Rx) + cable loss – amplifier factor

Margin = Limit - Corr. Amplitude

FCC§15.225(e) - FREQUENCY STABILITY

Applicable Standard

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to PC, then to an external AC power supply and inductive antenna was connected to a Spectrum Analyzer. The EUT was placed inside the temperature chamber.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the Spectrum Analyzer.

Frequency Stability vs. Voltage: An external variable AC power supply Source. The voltage was set to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the end point. The output frequency was recorded for each voltage.

Test Data

Environmental Conditions

Temperature:	23.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

The testing was performed by Kyle Xu on 2017-06-14.

Test Mode: Transmitting.

Test Result: Pass

$F_0 = 13.56\text{MHz}$				
Power Supply	Temperature (°C)	Measured Frequency (MHz)	Frequency Error	Part 15.225 Limit
12.0V	-20	13.56072	-0.00531%	$\pm 0.01\%$
	0	13.56071	-0.00524%	$\pm 0.01\%$
	20	13.56021	-0.00155%	$\pm 0.01\%$
	50	13.56027	-0.00199%	$\pm 0.01\%$
10.2V	20	13.56051	-0.00376%	$\pm 0.01\%$
13.8V	20	13.56038	-0.00280%	$\pm 0.01\%$

§15.215(c) - 20dB EMISSION BANDWIDTH TESTING

Requirement

Per 15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.

Test Data

Environmental Conditions

Temperature:	23.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa


The testing was performed by Kyle Xu on 2017-06-14.

Test Mode: Transmitting

Test Result: Pass

Frequency (MHz)	20 dB Bandwidth (kHz)
13.56	18.64

20 dB Emission Bandwidth

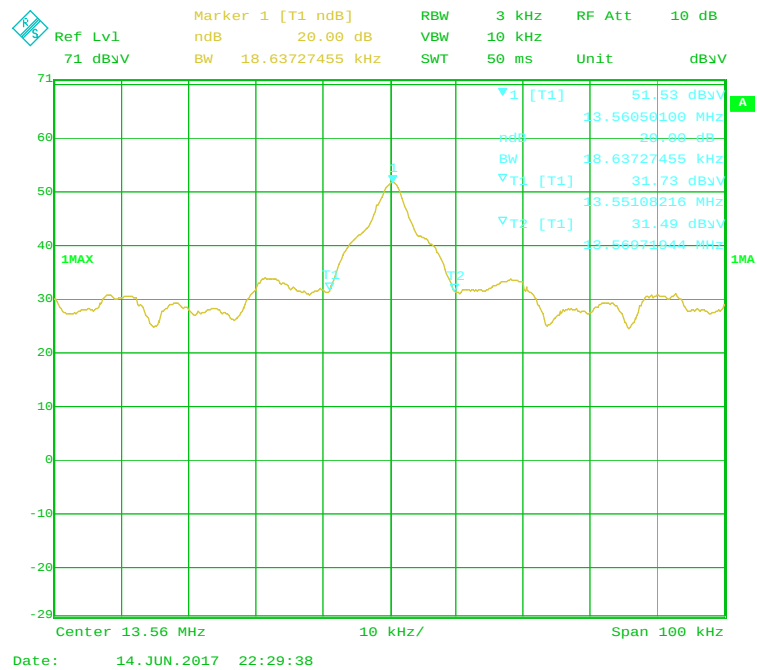

***** END OF REPORT *****