



TEST REPORT



Report No. : KES-RF250720-R1
Page 1 / 78

KES Co., Ltd.
#3002, #3503, #3701, 40, Simin-daero365beon-gil, Dongan-gu,
Anyang-si, Gyeonggi-do, 14057, Republic of Korea
Tel : +82-31-425-6200, Fax : +82-31-341-3838

■ FCC TEST REPORT

1. Client

- Name : THINKWARE CORPORATION
- Address : A, 9FL., Samwhan Hipex, 240, Pangyoyeok-ro, Bundang-gu, Seongnam-si, Gyeonggi-do, South Korea

2. Sample Description

- Product item : CAR DASH CAM
- Model name : ARC 900
- Manufacturer etc. : THINKWARE CORPORATION

3. Date of test : 2025.10.14 ~ 2025.10.27

4. Location of Test : ☒ Permanent Testing Lab ☐ On Site Testing

- Address : 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, Korea

5. Test method used : Part 15 Subpart E 15.407

6. Test result : PASS

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test report cannot be reproduced and copied without permission without the written consent of KES Co., Ltd.

This laboratory is not accredited for the test results marked *.

This test report is not related to KOLAS accreditation.

Affirmation	Tested by	Technical Manager
	Name : Gu-Bong, Kang (Signature)	Name : Yeong-Jun Cho (Signature)

[김구봉]2025/11/12

[조영준]2025/11/12

2025. 11. 12.

KES Co., Ltd.



REPORT REVISION HISTORY

Date	Test Report No.	Revision History
2025.11.11	KES-RF250720	Initial
2025.11.12	KES-RF250720-R1	1. Page 15, 16, 18, 19 : Corrected 'EUT Category' and limit at test item 'Maximum conducted output power, Power spectral density'

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.





TABLE OF CONTENTS

1.	General information	4
1.1.	EUT description	4
1.2.	Test configuration.....	5
1.3.	Information about derivative model	5
1.4.	Accessory information	5
1.5.	Device modifications.....	5
1.6.	Sample calculation	5
1.7.	Worst case data rate.....	5
1.8.	Measurement Uncertainty	6
1.9.	Frequency/channel operations	6
2.	Summary of tests	8
3.	Test results	9
3.1.	26 dB bandwidth	9
3.2.	Maximum conducted output power.....	14
3.3.	Power spectral density	17
3.4.	Frequency Stability	23
3.5.	Radiated restricted band and emissions	25
3.6.	Antenna Requirement.....	77
Appendix A.	Measurement equipment.....	78



Report No. : KES-RF250720-R1

1. General information

Applicant: THINKWARE CORPORATION
Applicant address: A, 9FL., Samwhan Hipex, 240, Pangyoyeok-ro, Bundang-gu, Seongnam-si, Gyeonggi-do, South Korea
Test site: KES Co., Ltd.
Test site address: ☐ #3002, #3503, #3701, 40, Simin-daero365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Republic of Korea
☒ 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, Korea
Test Facility: FCC Accreditation Designation No.: KR0100, Registration No.: 444148
FCC rule part(s): 15.407
FCC ID: 2ADTG-ARC900
Test device serial No.: ☒ Production ☐ Pre-production ☐ Engineering

1.1. EUT description

Equipment under test: CAR DASH CAM
Frequency range & Number of channels:
2 412 MHz ~ 2 462 MHz (802.11b/g/n_HT20) : 11 ch
2 422 MHz ~ 2 452 MHz (802.11n_HT40) : 7 ch
UNII-1 for FCC
5 180 MHz ~ 5 240 MHz (802.11a/n_HT20/ac_VHT20) : 4 ch
5 190 MHz ~ 5 230 MHz (802.11n_HT40/ac_VHT40) : 2 ch
5 210 MHz (802.11ac_VHT80) : 1 ch
UNII-3 for IC
5 745 MHz ~ 5 825 MHz (802.11a/n_HT20/ac_VHT20) : 5 ch
5 755 MHz ~ 5 795 MHz (802.11n_HT40/ac_VHT40) : 2 ch
5 775 MHz (802.11ac_VHT80) : 1 ch
Model: ARC 900
Modulation technique: DSSS, OFDM
Antenna specification:
2.4 GHz band Chip Antenna // Peak gain: 1.47 dBi
UNII-1 Chip Antenna // Peak gain: 2.54 dBi
UNII-3 Chip Antenna // Peak gain: 3.36 dBi
Power source: DC 12 V, 24 V
H/W version: V4.0
S/W version: V1.0
Serial Number: SOLMPVT009



1.2. Test configuration

The **THINKWARE CORPORATION // CAR DASH CAM // ARC 900 // FCC ID: 2ADTG-ARC900 // IC number : 12594A-ARC900** was tested according to the specification of EUT, the EUT must comply with following standards and KDB documents.

FCC Part 15.407
KDB 789033 D02 v02r01
ANSI C63.10-2020

1.3. Information about derivative model

N/A.

1.4. Accessory information

Equipment	Manufacturer	Model	Serial No.	Power source
Main unit (Front camera)	THINKWARE CORPORATION	-	-	DC 12 V, DC 24 V
Hardwiring cable	-	-	-	-
Rear camera cable	-	-	-	-
MicroSD memory card	-	-	-	-
Car charger	-	-	-	-
Mount	-	-	-	-
Adhesive cable holder	-	-	-	-
Rear camera (Optional)	THINKWARE CORPORATION	BCQH-700	-	-
Warranty & Quick Start Guide	-	-	-	-

1.5. Device modifications

N/A

1.6. Sample calculation

Where relevant, the following sample calculation is provided
For all conducted test items :

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 0.95 + 20 = 20.95 \text{ (dB)}\end{aligned}$$

For Radiation test :

$$\text{Field strength level (dB}\mu\text{V/m)} = \text{Measured level (dB}\mu\text{V)} + \text{Antenna factor (dB)} + \text{Cable loss (dB)} - \text{Amplifier gain (dB)}$$

1.7. Worst case data rate

1. Worst-case data rates were:

802.11a : 6 Mbps

802.11n_HT20/40 : MCS0

802.11ac_VHT20/40/80 : MCS0

**1.8. Measurement Uncertainty**

Test Item		Uncertainty
Uncertainty for Conduction emission test		2.22 dB (SHIELD ROOM #6)
Uncertainty for Radiation emission test (include Fundamental emission)	Below 1 GHz	4.04 dB (SAC #6)
	Above 1 GHz	5.32 dB (SAC #5)
Note. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.		

1.9. Frequency/channel operations

Ch.	Frequency (MHz)	Mode
1	2 412	802.11b/g/n_HT20
.	.	.
6	2 437	802.11b/g/n_HT20
.	.	.
11	2 462	802.11b/g/n_HT20

Ch.	Frequency (MHz)	Mode
3	2 422	802.11n_HT40
.	.	.
6	2 437	802.11n_HT40
.	.	.
9	2 452	802.11n_HT40



For FCC

Ch.	Frequency (MHz)	Mode
36	5 180	802.11a/an_HT20/ac_VHT20
.	.	.
44	5 220	802.11a/an_HT20/ac_VHT20
.	.	.
48	5 240	802.11a/an_HT20/ac_VHT20

Ch.	Frequency (MHz)	Mode
38	5 190	802.11an_HT40/ac_VHT40
.	.	.
46	5 230	802.11an_HT40/ac_VHT40

Ch.	Frequency (MHz)	Mode
42	5 210	802.11ac_VHT80

For IC

Ch.	Frequency (MHz)	Mode
149	5 745	802.11a/an_HT20/ac_VHT20
.	.	.
157	5 785	802.11a/an_HT20/ac_VHT20
.	.	.
165	5 825	802.11a/an_HT20/ac_VHT20

Ch.	Frequency (MHz)	Mode
151	5 755	802.11an_HT40/ac_VHT40
.	.	.
159	5 795	802.11an_HT40/ac_VHT40

Ch.	Frequency (MHz)	Mode
155	5 775	802.11ac_VHT80



2. Summary of tests

Section in FCC Part 15	Parameter	Test results
15.407(a)	26 dB bandwidth	Pass
15.407(a)	Maximum conducted output power	Pass
15.407(a)	Power spectral density	Pass
15.407(g)	Frequency stability	Pass
15.205, 15.209, 15.407(b)	Radiated restricted band and emission	Pass
15.207(a)	AC power line conducted emissions	N/T ^{Note.1}
15.203	Antenna Requirement	Pass

*N/T: Not Tested

Note.

1. This device is powered by DC 12 V or DC 24 V.
2. Since the DUT contains an voltage regulator, the Conducted test items were only tested at DC 24 V.
3. By the request of applicant, test is performed with power setting value below :


Mode	UNII-1	
	Frequency (Mhz)	Setting value
802.11a (6 Mbps)	5 180 ~ 5 240	54
802.11n_HT20 (MCS0)		54
802.11ac_VHT20 (MCS0)		54
802.11n_HT40 (MCS0)	5 190 ~ 5 230	48
802.11ac_VHT40 (MCS0)		48
802.11ac_VHT80 (MCS0)	5 210	46



3. Test results

3.1. 26 dB bandwidth

Test setup



Test procedure

26 dB bandwidth

KDB 789033 D02 v02r01- Section C.1

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.


Limit


N/A




Test results

Band	Frequency(MHz)	Mode	26 dB bandwidth(MHz)
UNII-1	5 180	802.11a (6 Mbps)	21.29
	5 220		30.29
	5 240		26.20
	5 180	802.11n _HT20 (MCS0)	21.96
	5 220		25.23
	5 240		28.87
	5 180	802.11ac _VHT20 (MCS0)	23.02
	5 220		25.94
	5 240		30.21
	5 190	802.11n _HT40 (MCS0)	42.30
	5 230		42.27
	5 190	802.11ac _VHT40 (MCS0)	41.60
	5 230		47.46
	5 210	802.11ac _VHT80 (MCS0)	86.19

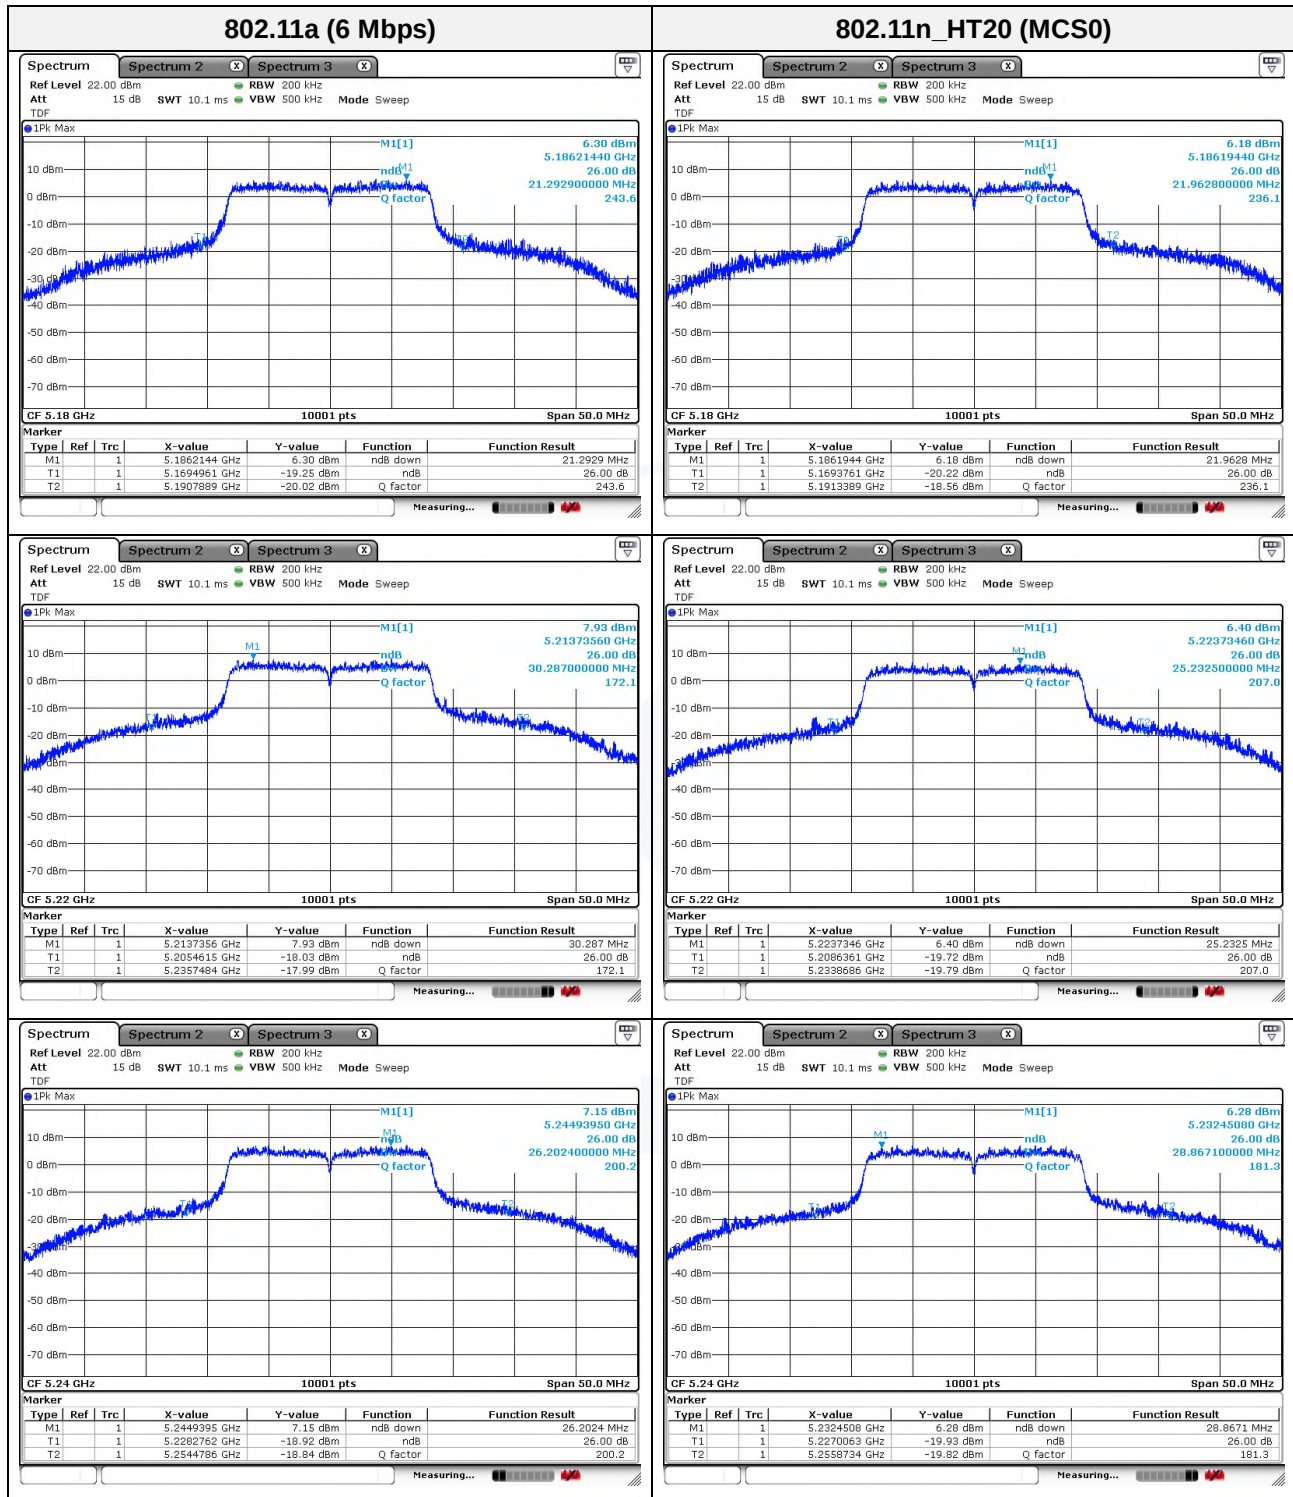**26 dB bandwidth**

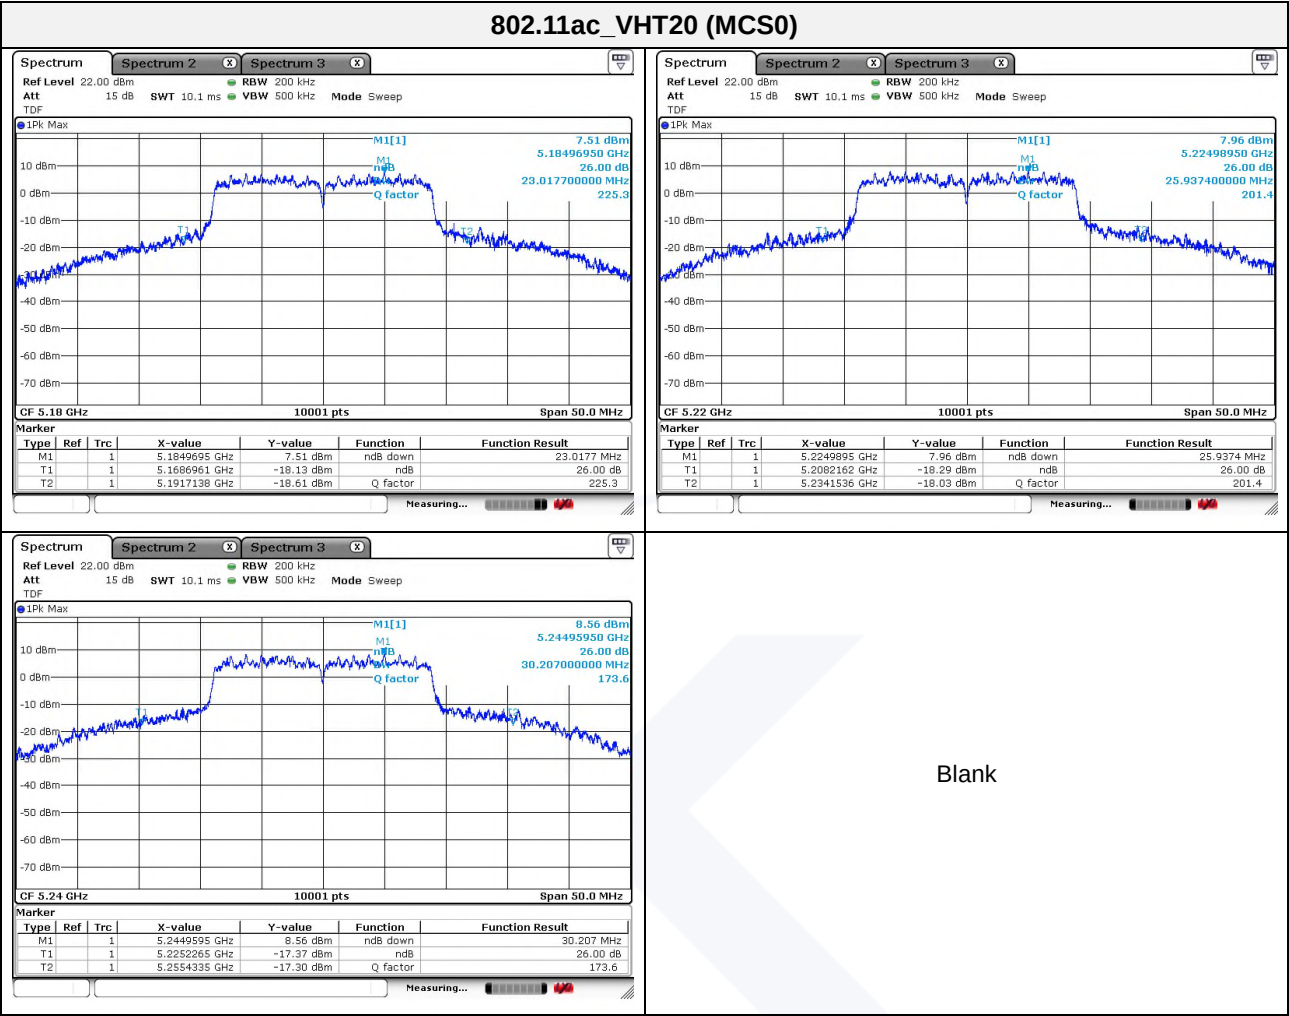

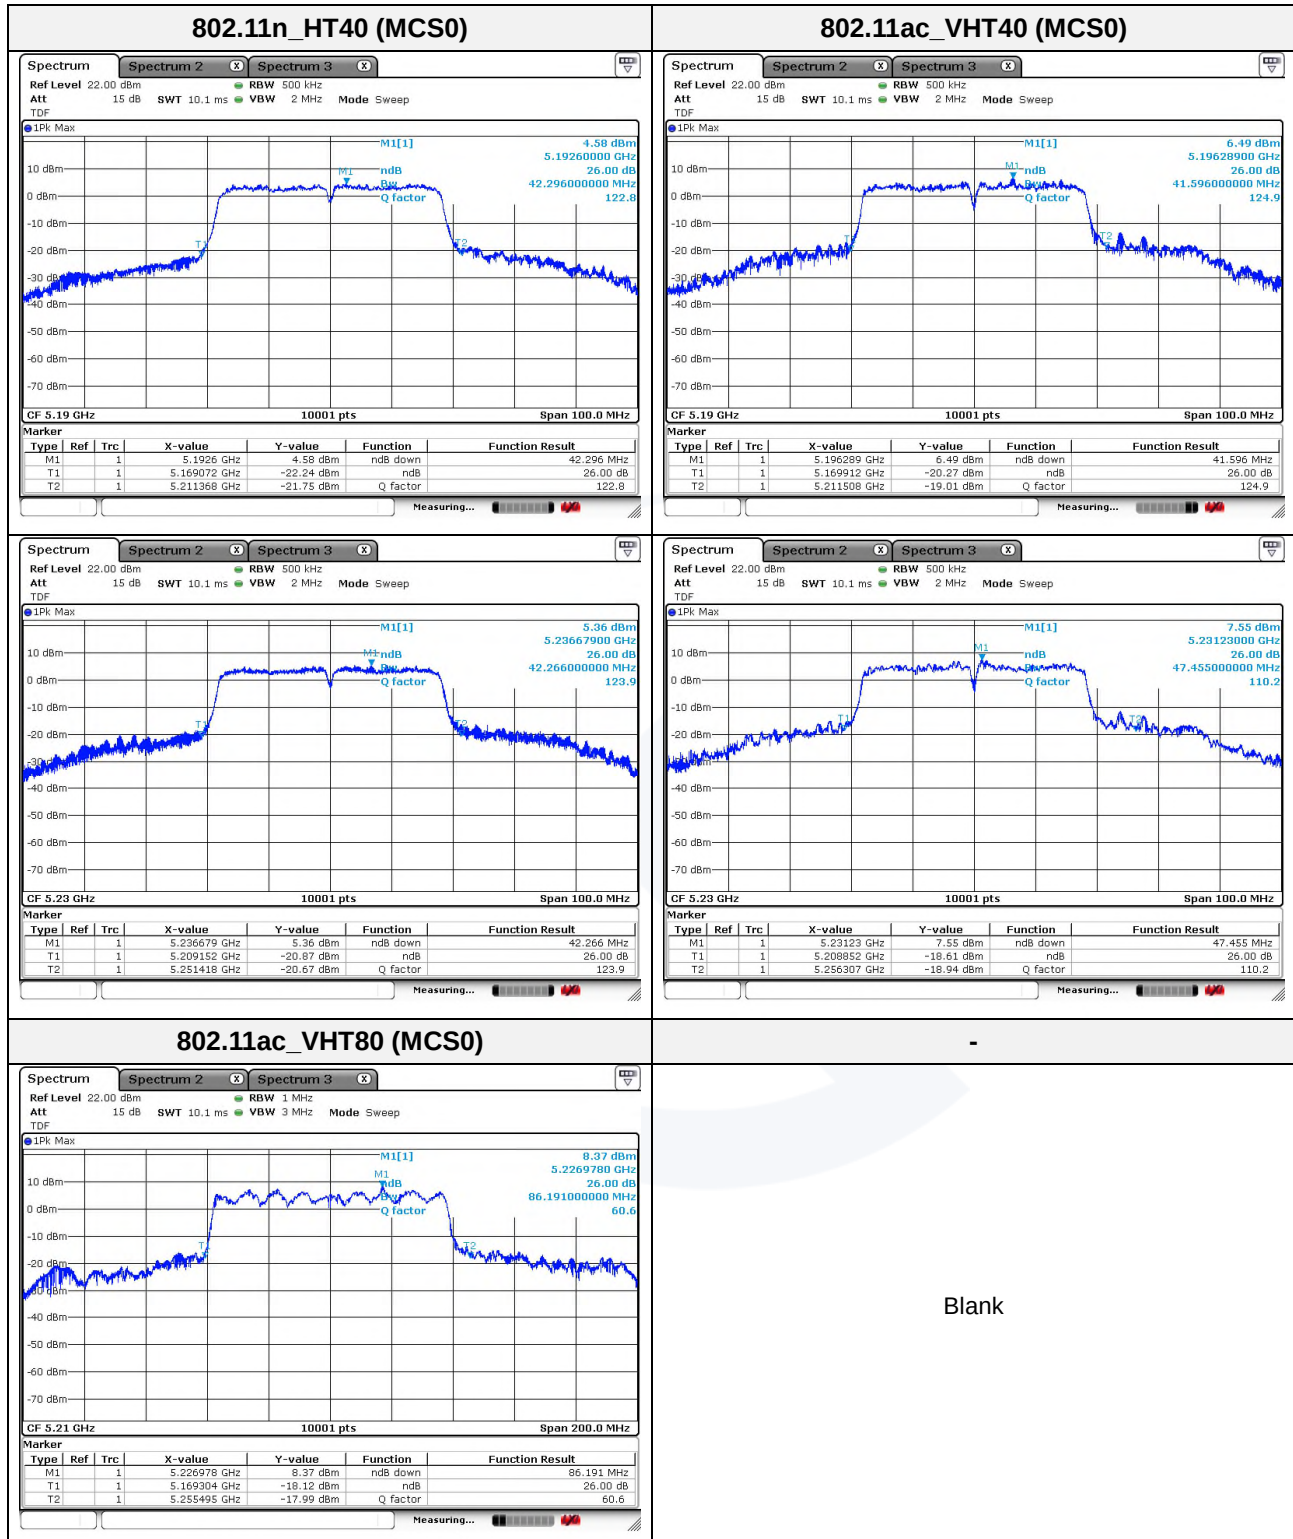




3.2. Maximum conducted output power

Test procedure

KDB 789033 D02 v02r01– Section E.3.a) or b)

Used test method is Section E.3.b)

Test setup

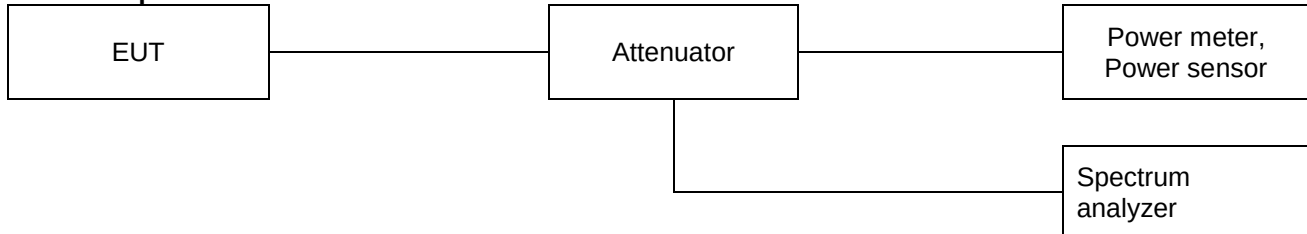

Section E.3.a)

Method PM (Measurement using an RF average power meter):

- i. Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.
 - The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
 - At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
 - The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- ii. If the transmitter does not transmit continuously, measure the duty cycle, x , of the transmitter output signal as described in section II.B.
- iii. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
- iv. Adjust the measurement in dBm by adding $10 \log (1/x)$ where x is the duty cycle (e.g., $10 \log (1/0.25)$ if the duty cycle is 25 %).

Section E.3.b)

Method PM-G (Measurement using a gated RF average power meter):

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

**Limit**

Band	EUT Category		Limit
UNII-1		Outdoor access point	1 W (30 dBm)
		Indoor access point	
		Fixed point-to-point access point	
	✓	Mobile and portable client device	250 mW(23.97 dBm)
UNII-2A			250 mW or 11 dBm + 10logB*
UNII-2C			250 mW or 11 dBm + 10logB*
UNII-3			1 W (30 dBm)

Note.

1. Limit B is the 26 dB emission bandwidth.





Test results

Band	Frequency (MHz)	Mode	Detector mode	Ant Gain (dBi)	Output power (dBm)	Limit (dBm)
UNII-1	5 180	802.11a (6 Mbps)	AV	2.54	15.59	23.97
	5 220		AV		16.14	
	5 240		AV		16.44	
	5 180	802.11n_HT20 (MCS0)	AV		15.83	
	5 220		AV		16.57	
	5 240		AV		16.69	
	5 180	802.11ac_VHT20 (MCS0)	AV		16.55	
	5 220		AV		17.20	
	5 240		AV		17.21	
	5 190	802.11n_HT40 (MCS0)	AV		13.33	
	5 230		AV		13.85	
	5 190	802.11ac_VHT40 (MCS0)	AV		14.74	
	5 230		AV		15.13	
	5 210	802.11ac_VHT80 (MCS0)	AV		14.31	




3.3. Power spectral density

Test procedure

KDB 789033 D02 v02r01 – Section F

Test setup



Section F

1. Create an average power spectrum for the EUT operating mode being tested by following the instructions in section II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...." (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)
2. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
3. Make the following adjustments to the peak value of the spectrum, if applicable:
 - a) If Method SA-2 or SA-2 Alternative was used, add $10 \log (1/x)$, where x is the duty cycle, to the peak of the spectrum.
 - b) If Method SA-3 Alternative was used and the linear mode was used in step II.E.2.g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
4. The result is the Maximum PSD over 1 MHz reference bandwidth.
5. For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:
 - a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a)
 - b) Set $VBW \geq 3$ RBW.
 - c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500 \text{ kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
 - d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1 \text{ MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
 - e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note.

As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ kHz}$ is available on nearly all spectrum analyzers.

**Limit**

Band	EUT Category		Limit
UNII-1		Outdoor access point	17 dBm/MHz
		Indoor access point	
		Fixed point-to-point access point	
	✓	Mobile and portable client device	11 dBm/MHz
UNII-2A			11 dBm/MHz
UNII-2C			11 dBm/MHz
UNII-3			30 dBm/500 kHz

Note.

1. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceed 6 dBi.



Test results


Mode	Frequency (MHz)	RBWF Note1	DCF Note2	Measured PSD (dBm/MHz)	Result (dBm/MHz)	Limit
802.11a(6 Mbps)	5 180	-	0.27	5.41	5.68	11 (dBm/ MHz)
	5 220	-		6.41	6.68	
	5 240	-		6.46	6.73	
802.11n_HT20 (MCS0)	5 180	-	0.22	5.84	6.06	
	5 220	-		5.81	6.03	
	5 240	-		6.09	6.31	
802.11ac_VHT20 (MCS0)	5 180	-	0.36	5.22	5.58	
	5 220	-		5.89	6.25	
	5 240	-		5.29	5.65	
802.11n_HT40 (MCS0)	5 190	-	0.71	-0.01	0.70	
	5 230	-		0.48	1.19	
802.11ac_VHT40 (MCS0)	5 190	-	0.71	-0.28	0.43	
	5 230	-		0.24	0.95	
802.11ac_VHT80 (MCS0)	5 210	-	1.14	-2.60	-1.46	


Note.


1. UNII-1 : $10\log(1 \text{ MHz} / 1 \text{ MHz}) = 0$
2. Refer to the page 30 on this report.
3. $\text{Sum(dBm)} = \text{PSD(dBm)} + \text{RBWF} + \text{Duty correction factor (dB)}$



Test Plot

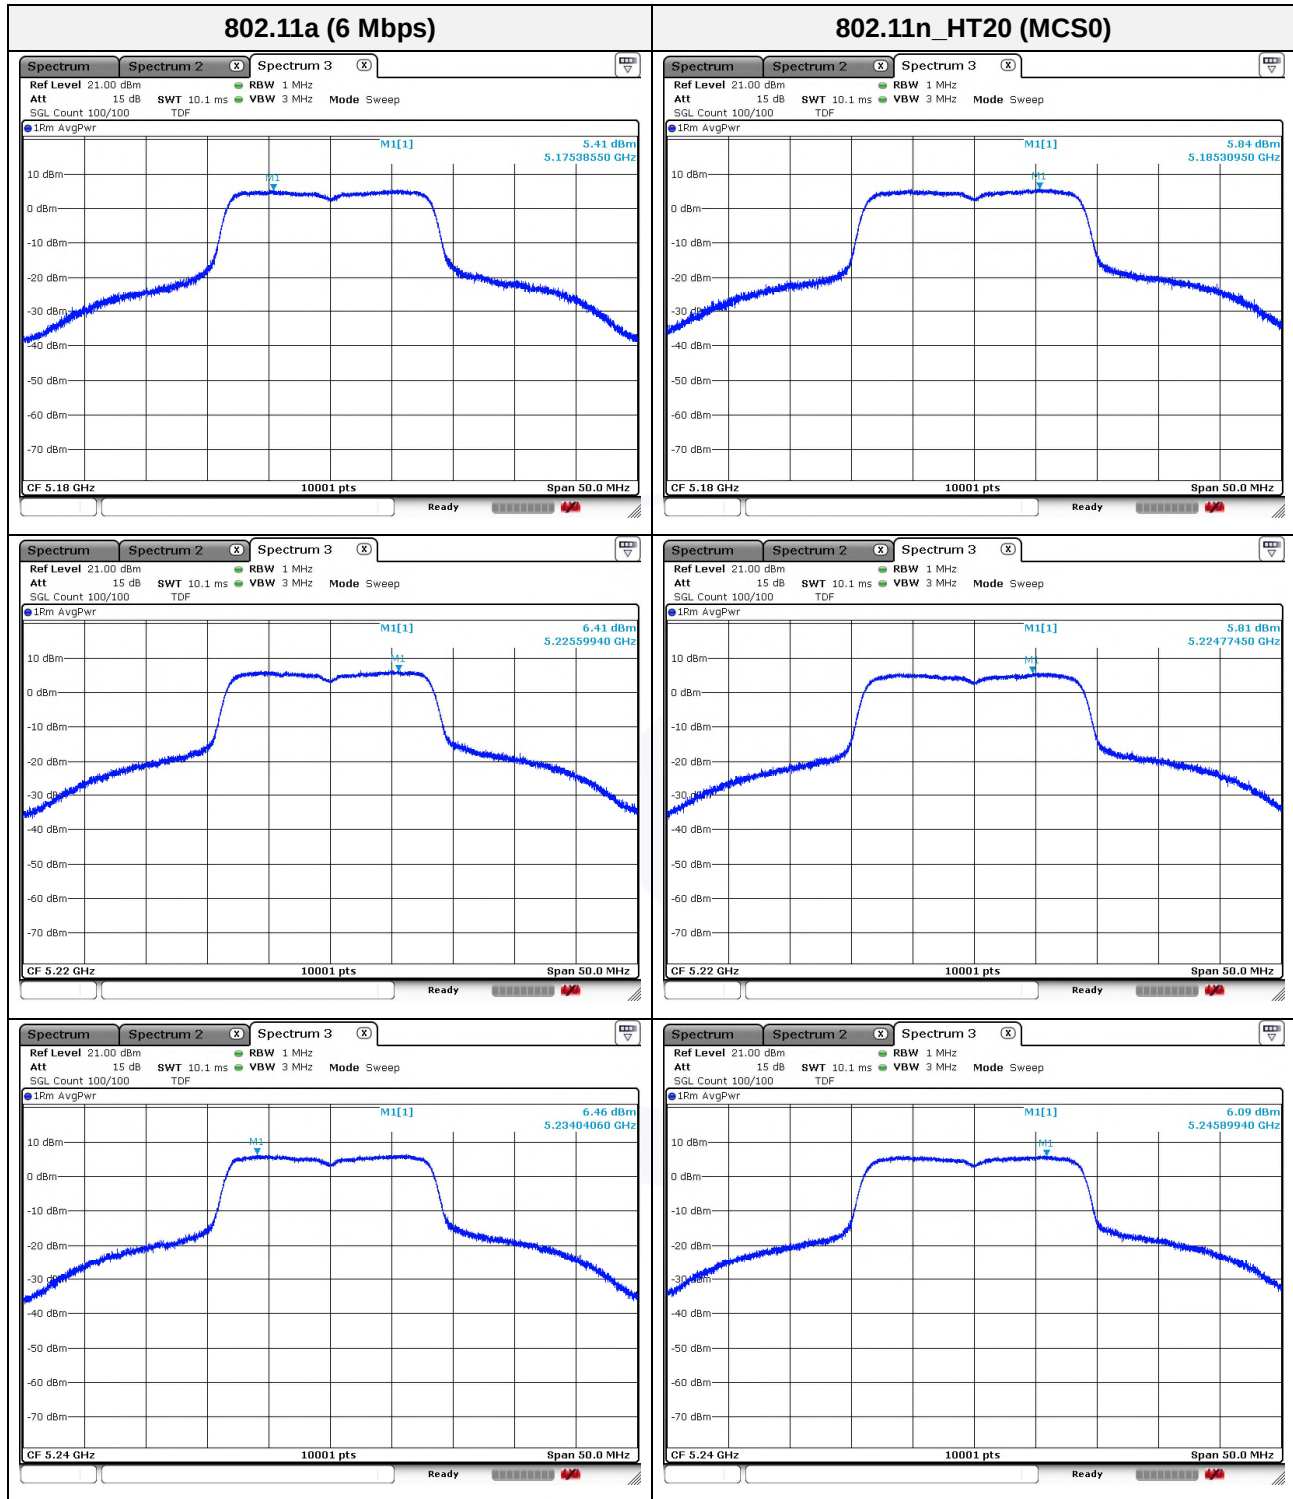

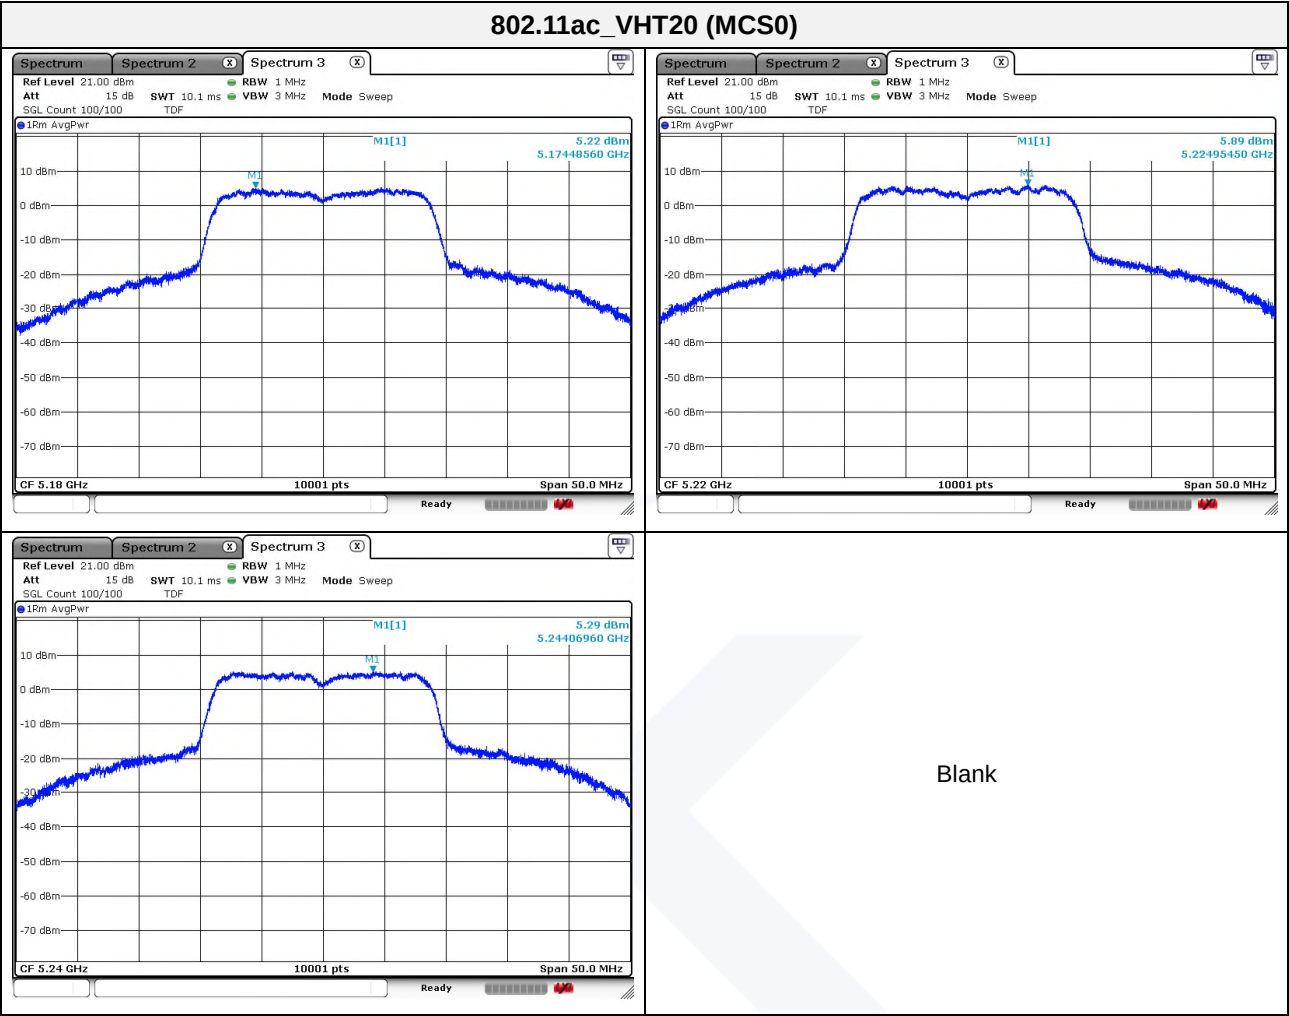

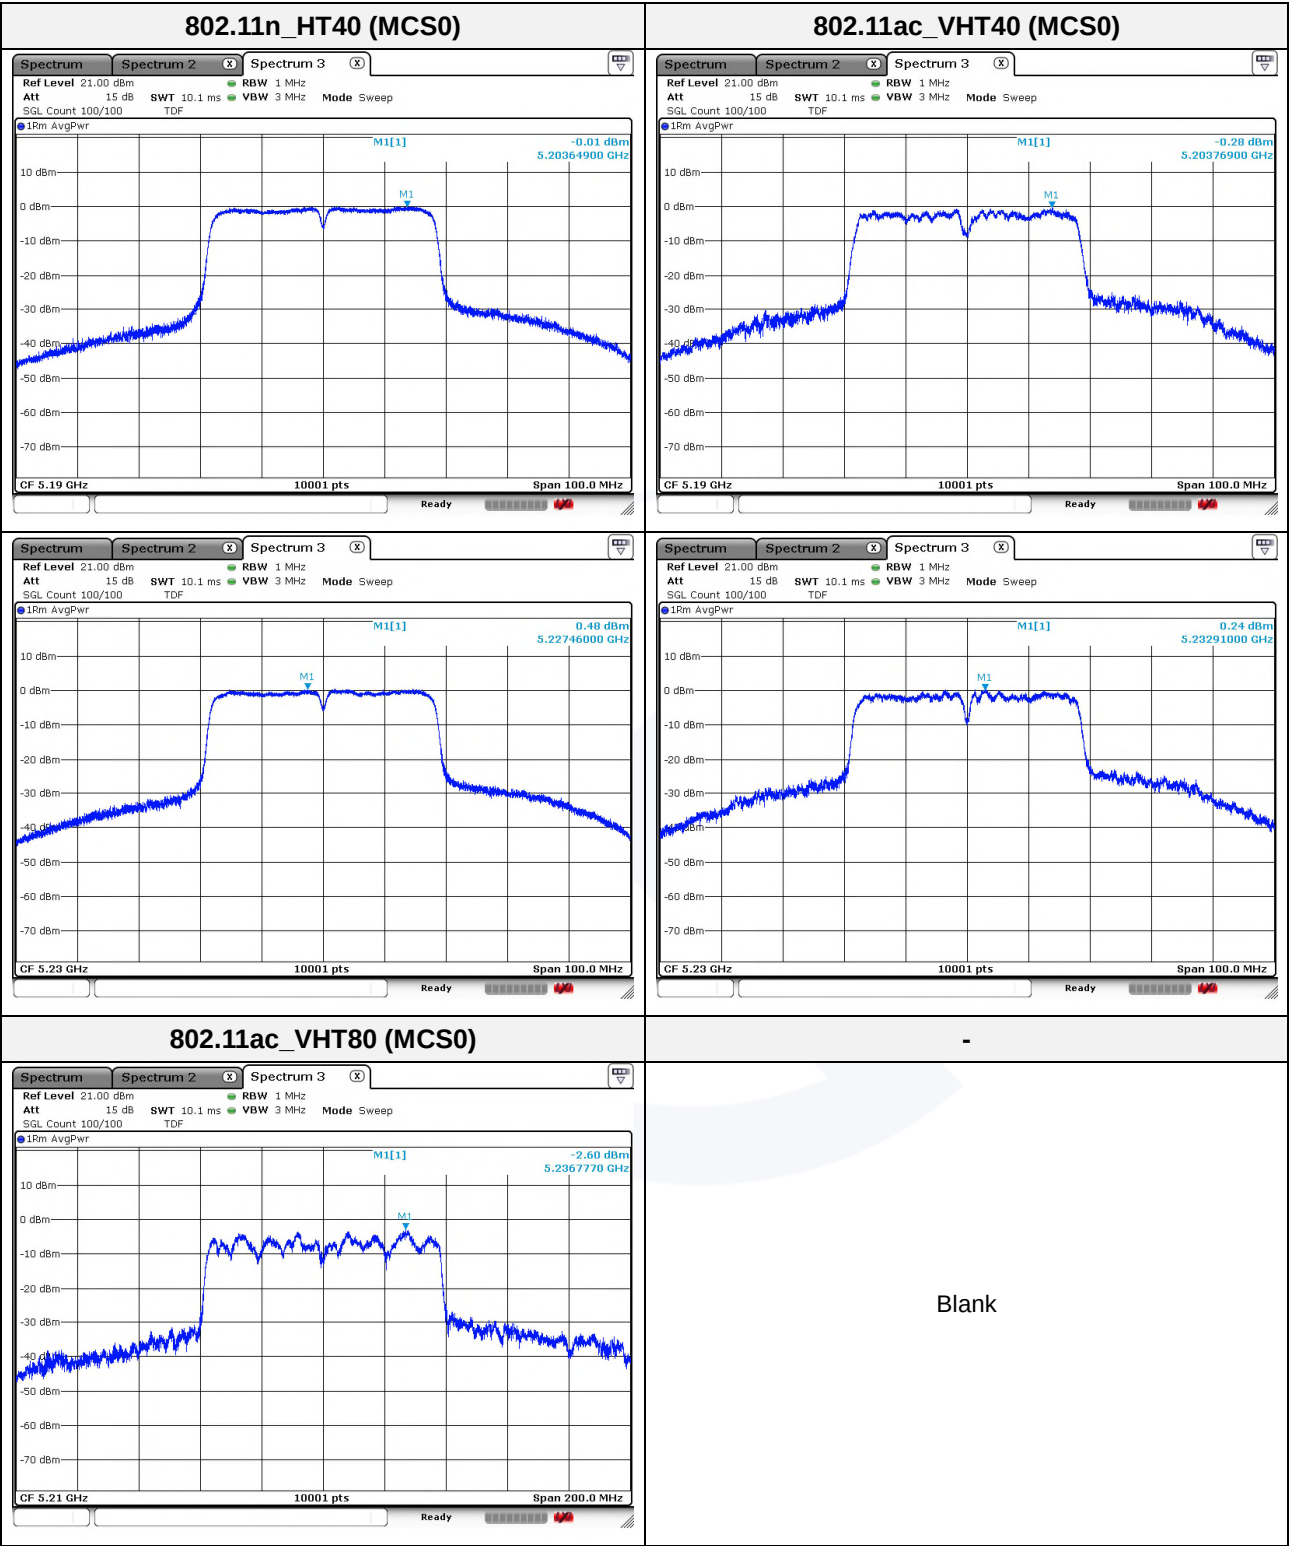




3.4. Frequency Stability

Test procedure

ANSI C63.10-2020, clause 6.8.1

Test setup

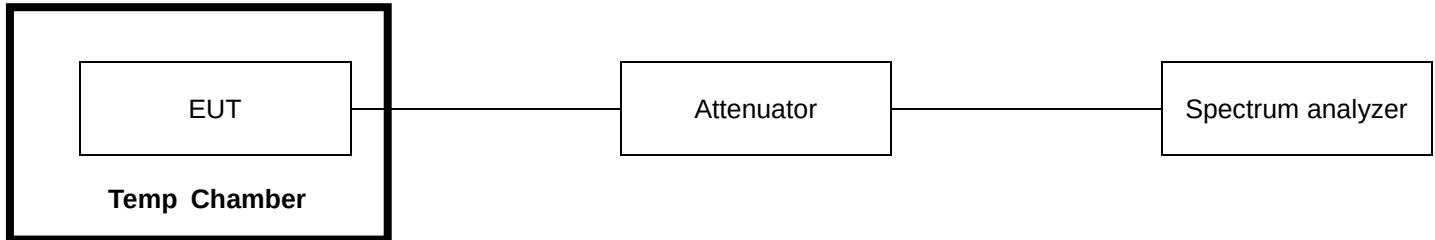

1. The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
2. Turn the EUT on and couple its output to a spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.
7. While maintaining a constant temperature inside the environmental chamber, turn the EUT on and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.

Limit

N/A

**Test results**

Mode: UNII-1

Operating frequency: 5 180 MHz


Test voltage (%)	Test voltage (V)	Temperature (°C)	Maintaining time	Measure frequency (MHz)	Frequency deviation (Hz)	Deviation (%)
100 %	DC 24.0	-20.0	Startup	5 180.044 505	44 505	0.000 86
			2 minutes	5 180.044 584	44 584	0.000 86
			5 minutes	5 180.044 428	44 428	0.000 86
			10 minutes	5 180.044 394	44 394	0.000 86
100 %		-10.0	Startup	5 180.041 668	41 668	0.000 80
			2 minutes	5 180.041 493	41 493	0.000 80
			5 minutes	5 180.041 763	41 763	0.000 81
			10 minutes	5 180.041 816	41 816	0.000 81
100 %		0.0	Startup	5 180.026 442	26 442	0.000 51
			2 minutes	5 180.026 326	26 326	0.000 51
			5 minutes	5 180.026 232	26 232	0.000 51
			10 minutes	5 180.026 423	26 423	0.000 51
100 %		10.0	Startup	5 180.006 114	6 114	0.000 12
			2 minutes	5 180.006 136	6 136	0.000 12
			5 minutes	5 180.006 177	6 177	0.000 12
			10 minutes	5 180.005 944	5 944	0.000 11
100 %		20.0	Startup	5 179.978 575	-21 425	-0.000 41
			2 minutes	5 179.978 449	-21 551	-0.000 42
			5 minutes	5 179.978 436	-21 564	-0.000 42
			10 minutes	5 179.978 764	-21 236	-0.000 41
100 %		25.6	Startup	5 179.964 773	-35 227	-0.000 68
			2 minutes	5 179.964 696	-35 304	-0.000 68
			5 minutes	5 179.964 813	-35 187	-0.000 68
			10 minutes	5 179.964 873	-35 127	-0.000 68
100 %		30.0	Startup	5 179.984 095	-15 905	-0.000 31
			2 minutes	5 179.983 956	-16 044	-0.000 31
			5 minutes	5 179.984 275	-15 725	-0.000 30
			10 minutes	5 179.984 303	-15 697	-0.000 30
100 %		40.0	Startup	5 179.972 802	-27 198	-0.000 53
			2 minutes	5 179.972 686	-27 314	-0.000 53
			5 minutes	5 179.972 894	-27 106	-0.000 52
			10 minutes	5 179.972 925	-27 075	-0.000 52
100 %		50.0	Startup	5 179.966 925	-33 075	-0.000 64
			2 minutes	5 179.967 020	-32 980	-0.000 64
			5 minutes	5 179.967 118	-32 882	-0.000 63
			10 minutes	5 179.966 785	-33 215	-0.000 64
100 %		60.0	Startup	5 179.962 088	-37 912	-0.000 73
			2 minutes	5 179.962 047	-37 953	-0.000 73
			5 minutes	5 179.961 996	-38 004	-0.000 73
			10 minutes	5 179.961 945	-38 055	-0.000 73
85 %	DC 20.4	25.6	Startup	5 179.966 785	-33 215	-0.000 64
			2 minutes	5 179.966 677	-33 323	-0.000 64
			5 minutes	5 179.966 878	-33 122	-0.000 64
			10 minutes	5 179.966 892	-33 108	-0.000 64
115 %	DC 27.6	25.6	Startup	5 179.966 576	-33 424	-0.000 65
			2 minutes	5 179.966 679	-33 321	-0.000 64
			5 minutes	5 179.966 487	-33 513	-0.000 65
			10 minutes	5 179.966 689	-33 311	-0.000 64




3.5. Radiated restricted band and emissions

Test setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

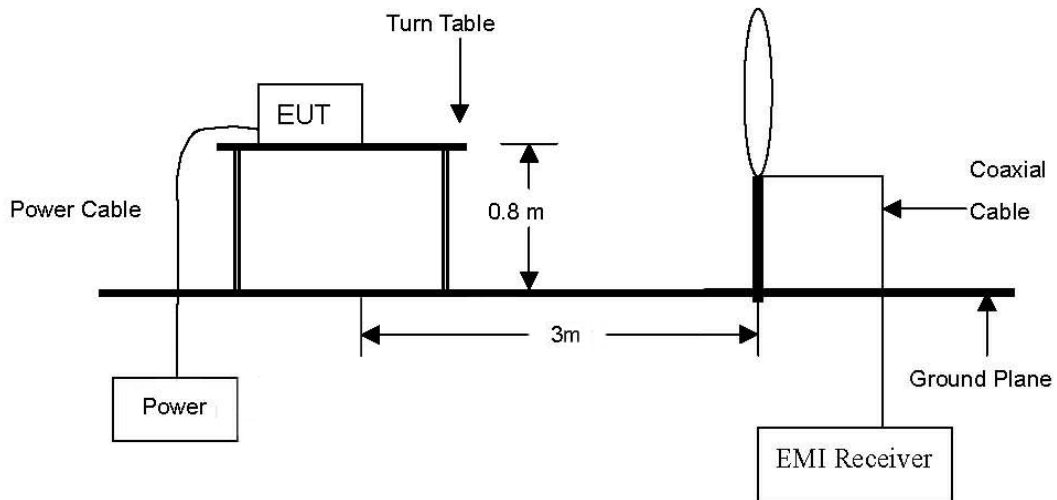


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

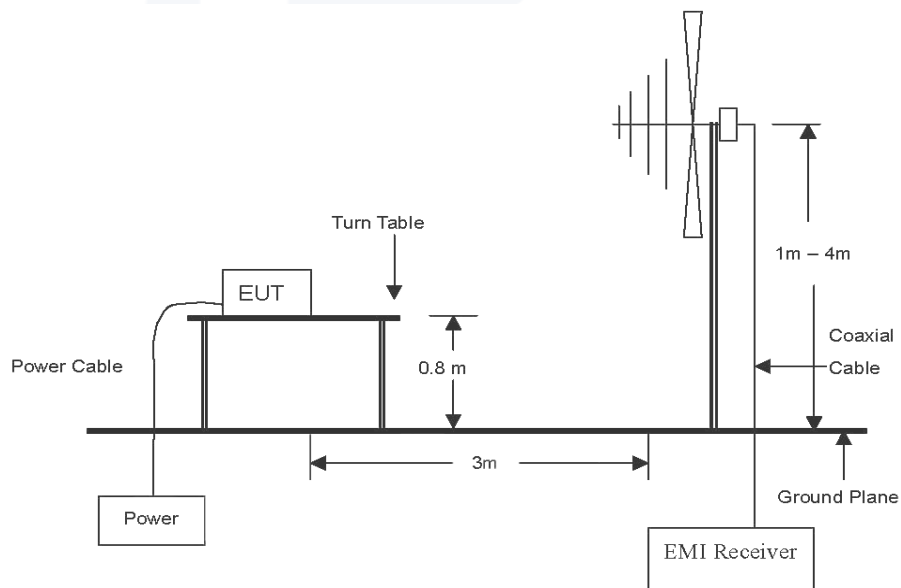



The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

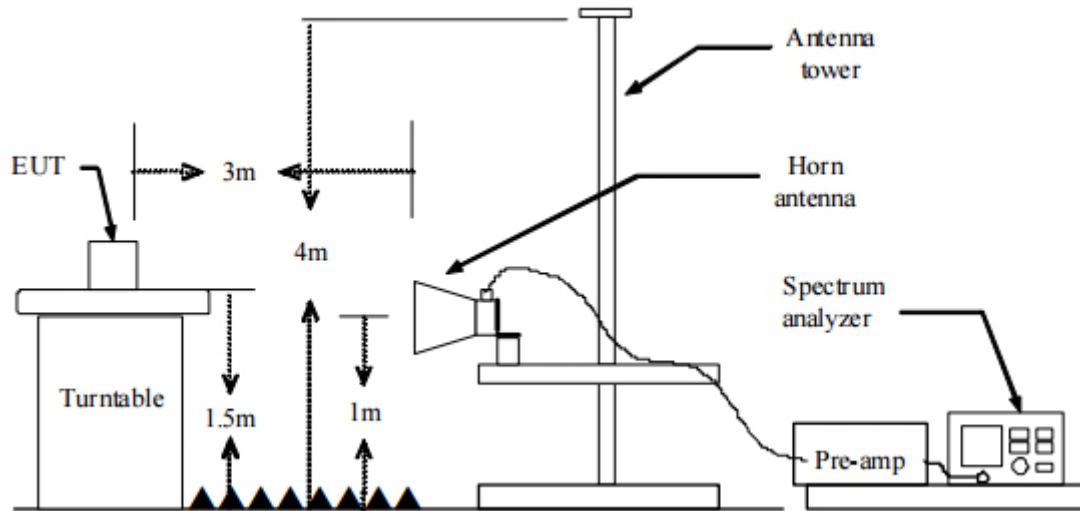

Test procedure

Radiated emissions from the EUT were measured according to the dictates in section 11.11 & 11.12 of ANSI C63.10-2020 (FCC) & ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 (IC).

Test procedure below 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel, ground parallel and perpendicular of the antenna are set to make the measurement. It was determined that **parallel** was worst-case orientation; therefore, all final radiated testing was performed with the EUT in **parallel**.
3. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test-receiver system was set to average or quasi peak detect function and Specified Bandwidth with Maximum hold mode.

Test procedure above 30 MHz

1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The antenna is a bi-log antenna, a horn antenna ,and its height are varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
5. Spectrum analyzer settings for $f < 1$ GHz:
 - ① Span = wide enough to fully capture the emission being measured
 - ② RBW = 100 kHz
 - ③ VBW $\geq$ RBW
 - ④ Detector = quasi peak
 - ⑤ Sweep time = auto
 - ⑥ Trace = max hold



6. Spectrum analyzer settings for $f \geq 1$ GHz: Peak

- ① Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- ② RBW = 1 MHz
- ③ VBW ≥ 3 MHz
- ④ Detector = peak
- ⑤ Sweep time = auto
- ⑥ Trace = max hold
- ⑦ Trace was allowed to stabilize

7. Spectrum analyzer settings for $f \geq 1$ GHz: Average

- ① Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- ② RBW = 1 MHz
- ③ VBW $\geq 3 \times$ RBW
- ④ Detector = RMS, if $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- ⑤ Averaging type = power(i.e., RMS)
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- ⑥ Sweep = auto
- ⑦ Trace = max hold
- ⑧ Perform a trace average of at least 100 traces.
- ⑨ A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (RMS) mode was used in step ⑤, then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
 - 2) If linear voltage averaging mode was used in step ⑤, then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

**Note.**

1. $f < 30$ MHz, extrapolation factor of 40 dB/decade of distance. $F_d = 40\log(D_m/D_s)$
 $f \geq 30$ MHz, extrapolation factor of 20 dB/decade of distance. $F_d = 20\log(D_m/D_s)$
 Where:
 F_d = Distance factor in dB
 D_m = Measurement distance in meters
 D_s = Specification distance in meters
2. Field strength(dB μ V/m) = Level(dB μ V) + CF (dB) + or DCF(dB)
3. Margin(dB) = Limit(dB μ V/m) - Field strength(dB μ V/m)
4. Emissions below 18 GHz were measured at a 3 meter test distance while emissions above 18 GHz were measured at a 1 meter test distance with the application of a distance correction factor.
5. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z, it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.
6. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.
7. According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Limit

According to 15.209(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

Frequency (MHz)	Distance (Meters)	Radiated (μ V/m)
0.009 ~ 0.490	300	2400/F(kHz)
0.490 ~ 1.705	30	24000/F(kHz)
1.705 ~ 30.0	30	30
30 ~ 88	3	100**
88 ~ 216	3	150**
216 ~ 960	3	200**
Above 960	3	500

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 MHz, 76 ~ 88 MHz, 174 ~ 216 MHz or 470 ~ 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.



According to 15.407(b), (b) Undesirable emission limits: Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an e.i.r.p of –27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of –27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of –27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - i) All emissions shall be limited to a level of –27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm /MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm /MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
 - ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

**Duty cycle**

Regarding to KDB 789033 D02 v02r01, B)2)b), the maximum duty cycles of all modes were investigated and set the spectrum analyzer as below.


Set RBW $\geq$ OBW if possible; otherwise, set RBW to the largest available value. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in II.B.1.a), and the number of sweep points across duration T exceeds 100.

Test mode	T _{on} time (ms)	Period (ms)	Duty cycle (Linear)	Duty cycle (%)	Duty cycle correction factor (dB)
802.11a	2.068	2.201	0.94	93.96	0.27
802.11n_HT20	1.924	2.021	0.95	95.20	0.22
802.11ac_VHT20	1.938	2.106	0.92	92.02	0.36
802.11n_HT40	0.947	1.117	0.85	84.78	0.71
802.11ac_VHT40	0.955	1.125	0.85	84.89	0.71
802.11ac_VHT80	0.461	0.596	0.77	77.35	1.14

Note:

Duty cycle (Linear) = T_{on} time/Period


DCF(Duty cycle correction factor (dB)) = $10\log(1/\text{duty cycle})$

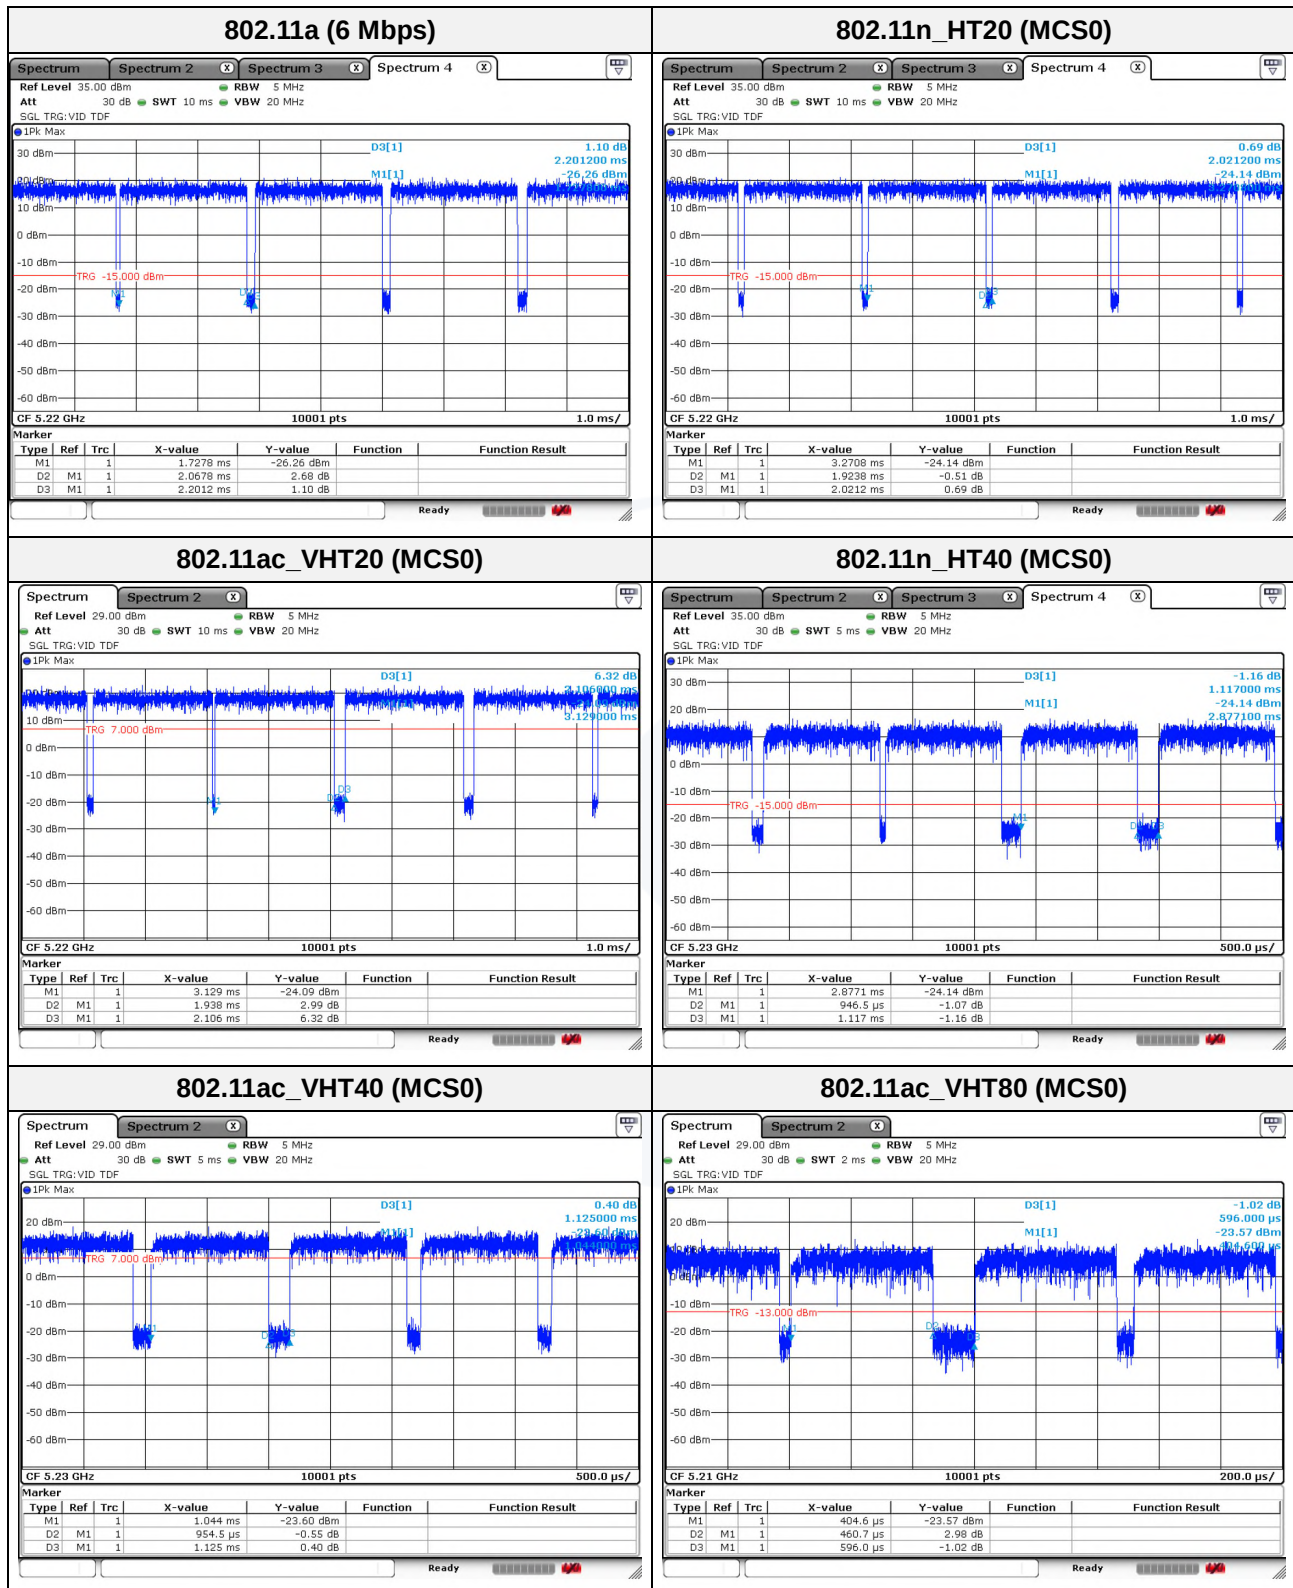



Test results (Below 30 MHz)

Band DC 12 V_802.11n_HT20 (MCS0) (Worst Case)
Distance of measurement: 3 meter
Channel 48 (Worst Case)

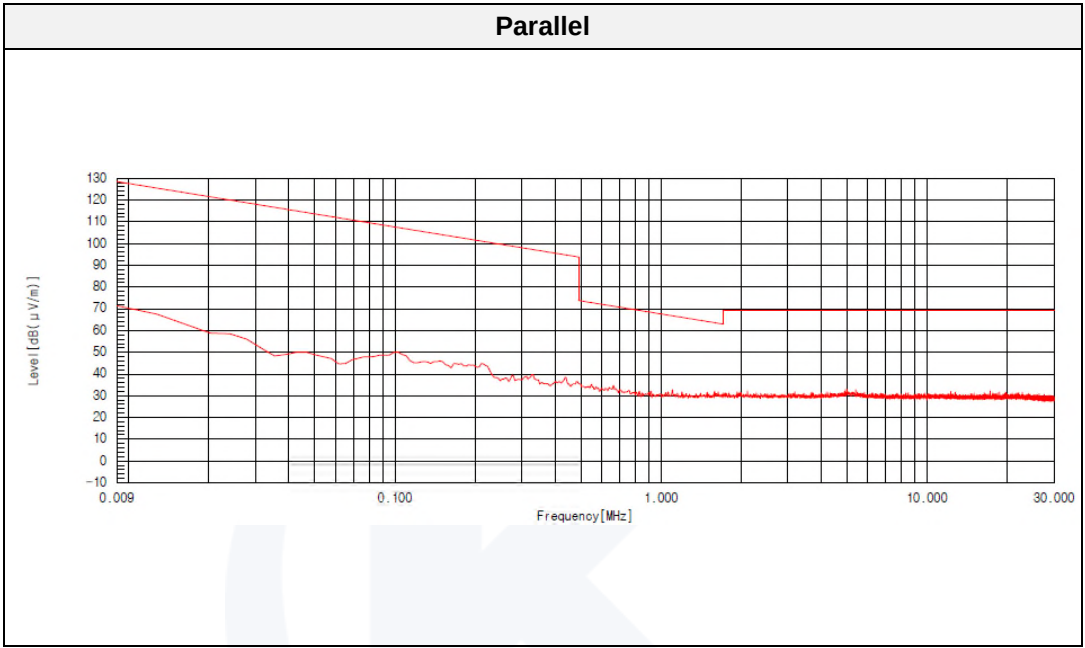


Note.

1. No spurious emission were detected under 30 MHz.



Band DC 24V_802.11n_HT20 (MCS0) (Worst Case)
Distance of measurement: 3 meter
Channel 48 (Worst Case)

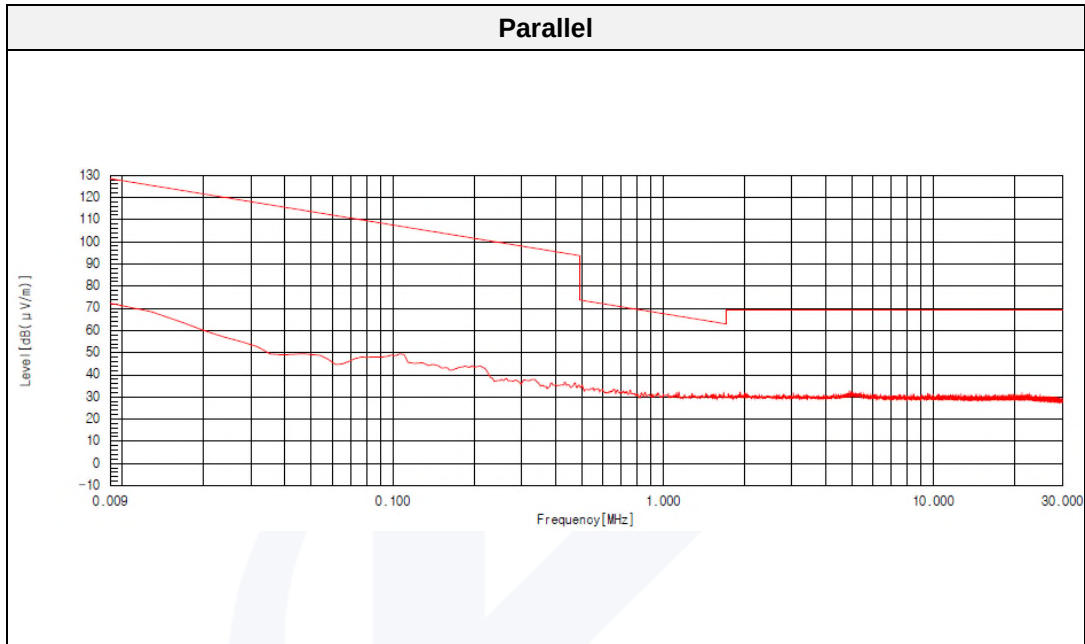

Note.


1. No spurious emission were detected under 30 MHz.

**Test results (Below 1 000 MHz)**

Band DC 12 V_802.11n_HT20 (MCS0) (Worst Case)

Distance of measurement: 3 meter

Channel 48 (Worst Case)

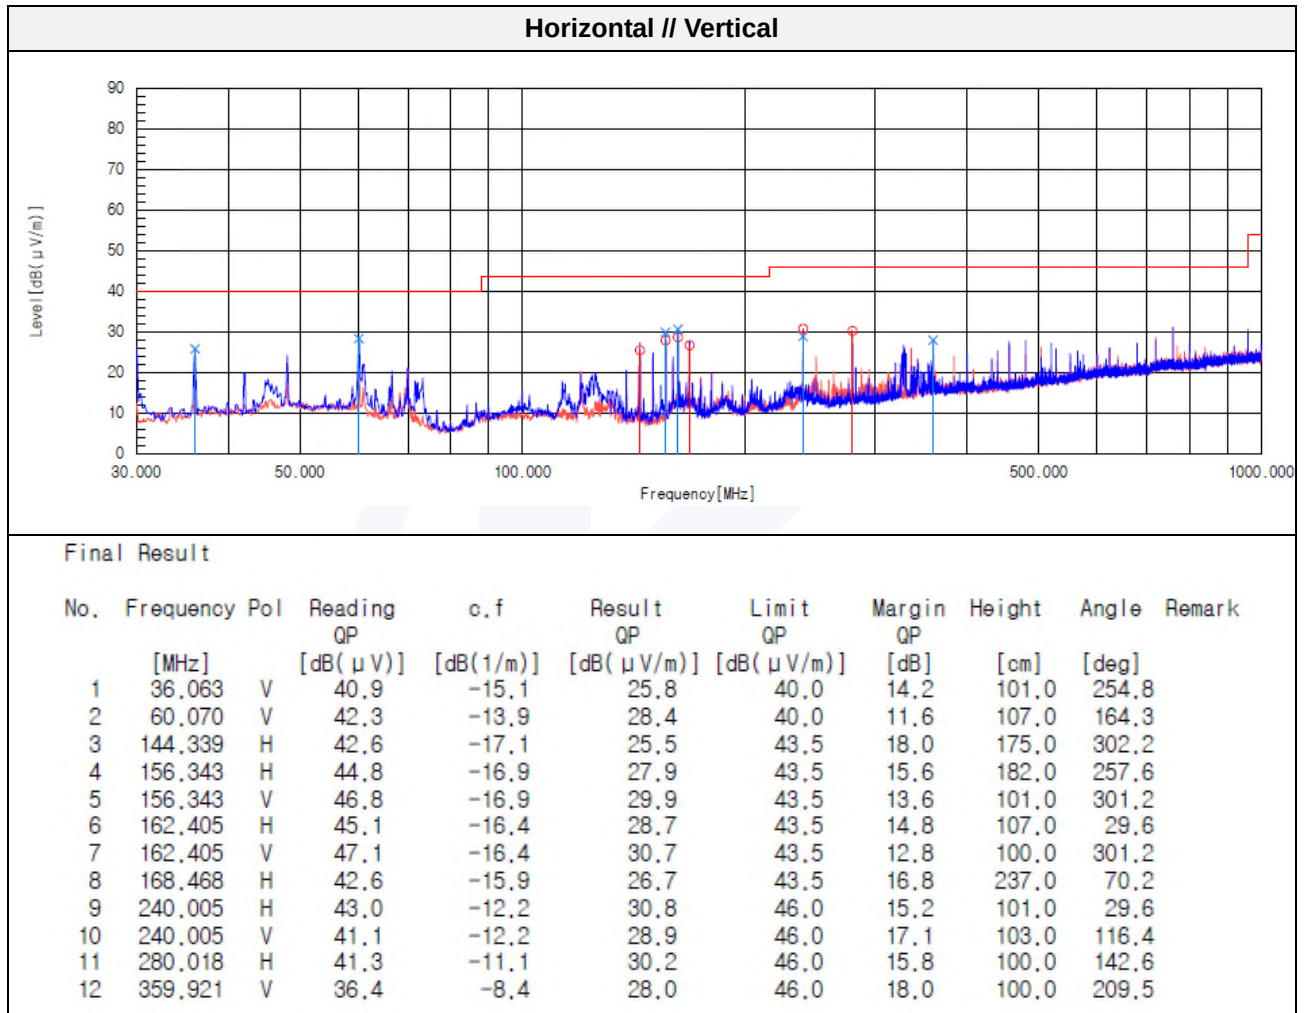




Band DC 24 V_802.11n_HT20 (MCS0) (Worst Case)

Distance of measurement: 3 meter

Channel 48 (Worst Case)

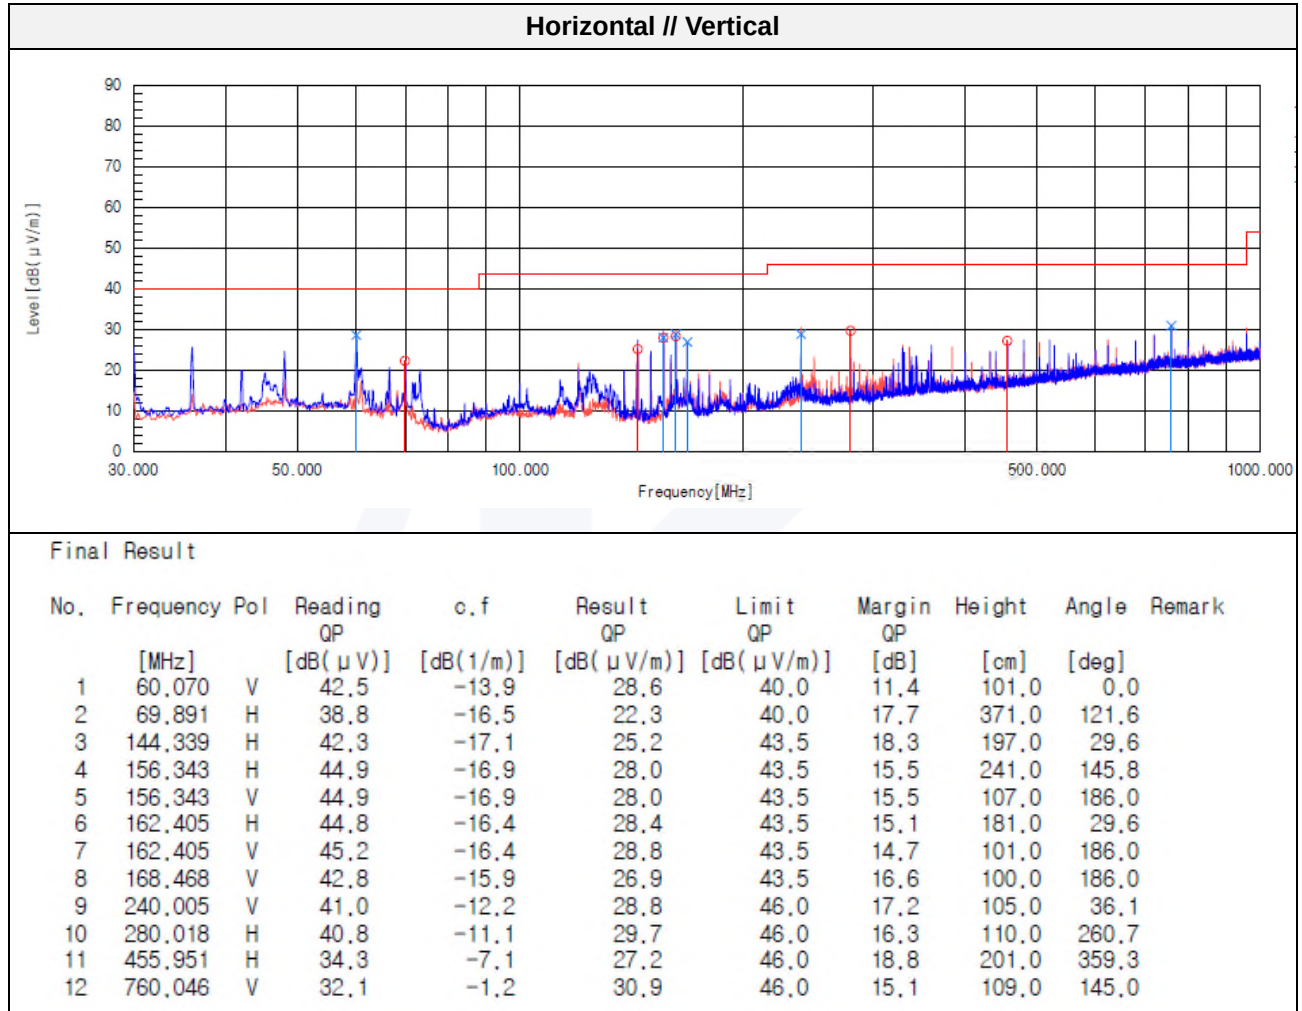

**Test results (Above 1 000 MHz)**

Mode: DC 12 V_802.11a (6 Mbps)

Distance of measurement: 3 meter


Channel: 36


- Spurious

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 007.75	44.85	Peak	H	-8.10	-	36.75	74.00	37.25
1 030.75	44.00	Peak	V	-7.96	-	36.04	74.00	37.96

- Band edge

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
5 148.52	57.55	Peak	V	7.54	-	65.09	74.00	8.91
5 148.52	39.34	Average	V	7.54	0.27	47.15	54.00	6.85
5 149.06	53.27	Peak	H	7.54	-	60.81	74.00	13.19
5 149.06	37.51	Average	H	7.54	0.27	45.32	54.00	8.68

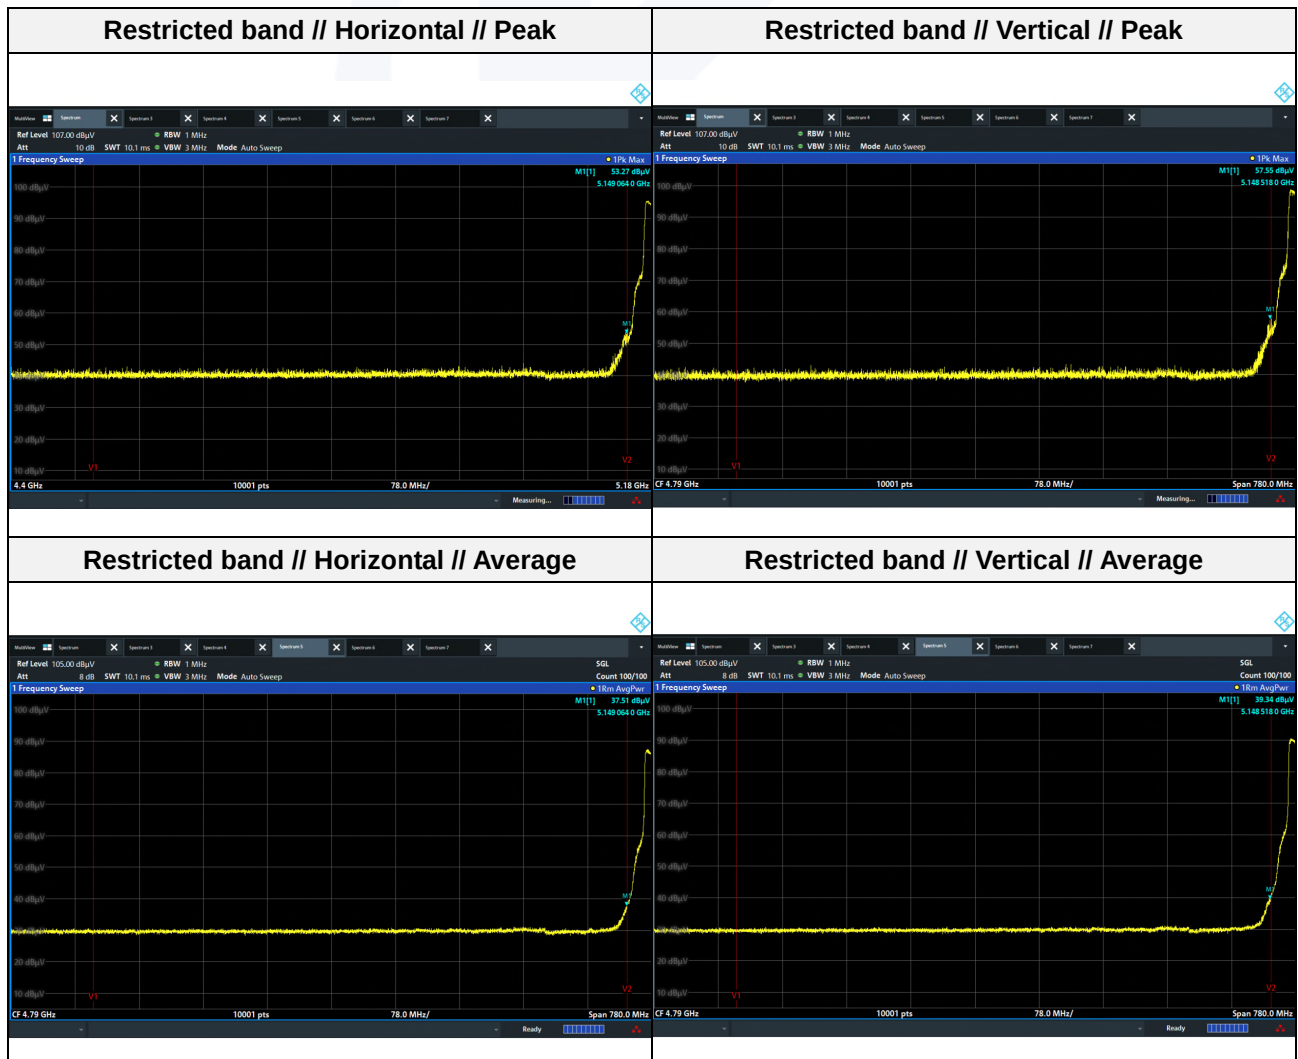

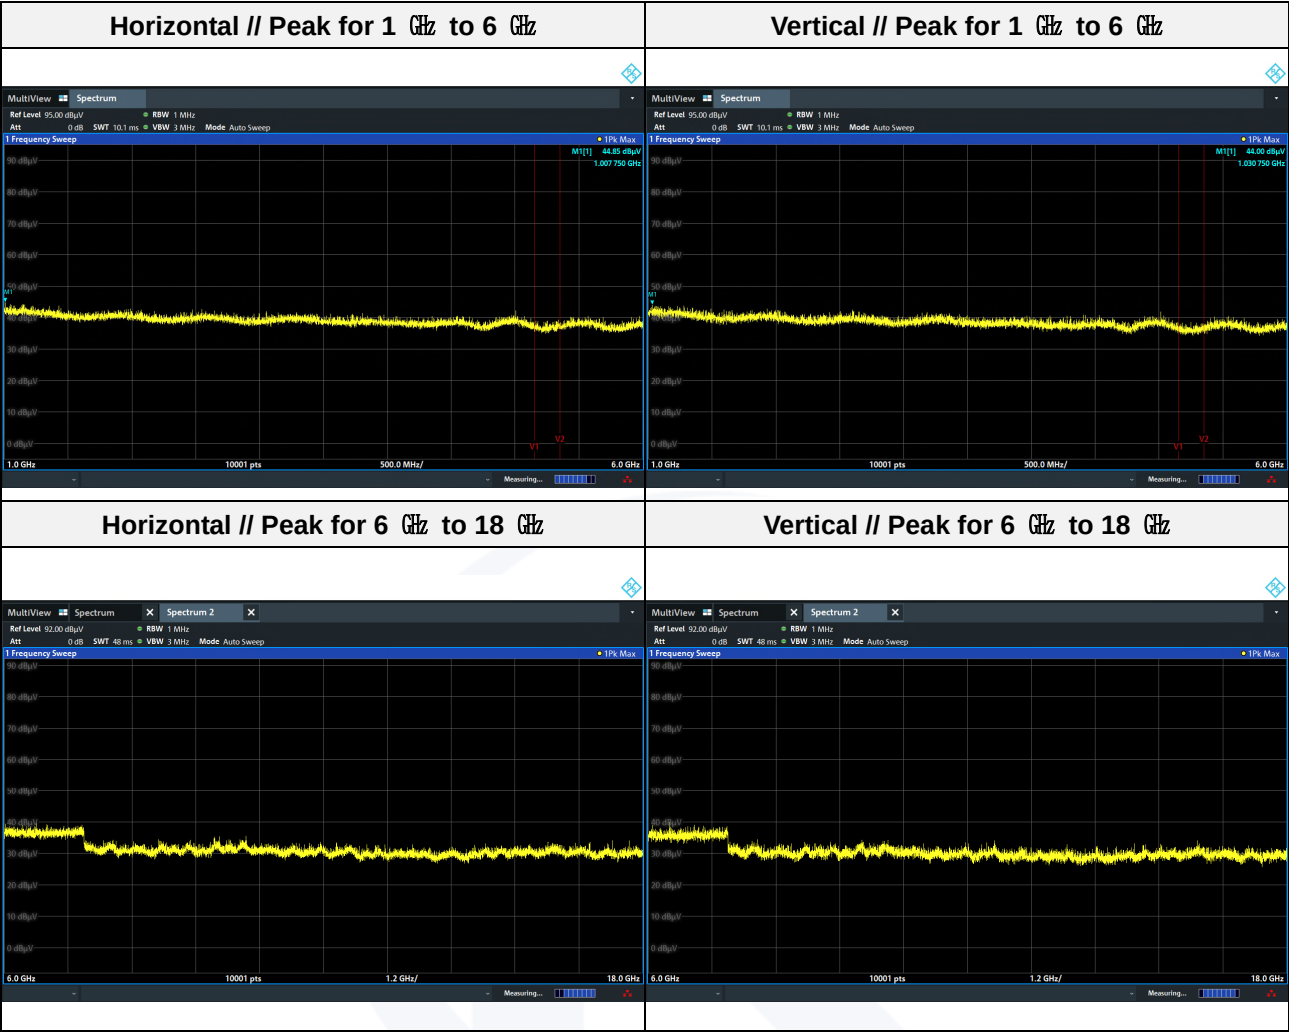

- Note.
1. No spurious emission were detected above 6 GHz.
 2. Average test would be performed if the peak result were greater than the average limit.




Mode: DC 12 V_802.11a (6 Mbps)

Distance of measurement: 3 meter

Channel: 44

- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 189.23	43.79	Peak	V	-7.02	-	36.77	74.00	37.23
1 393.71	44.01	Peak	H	-5.55	-	38.46	74.00	35.54

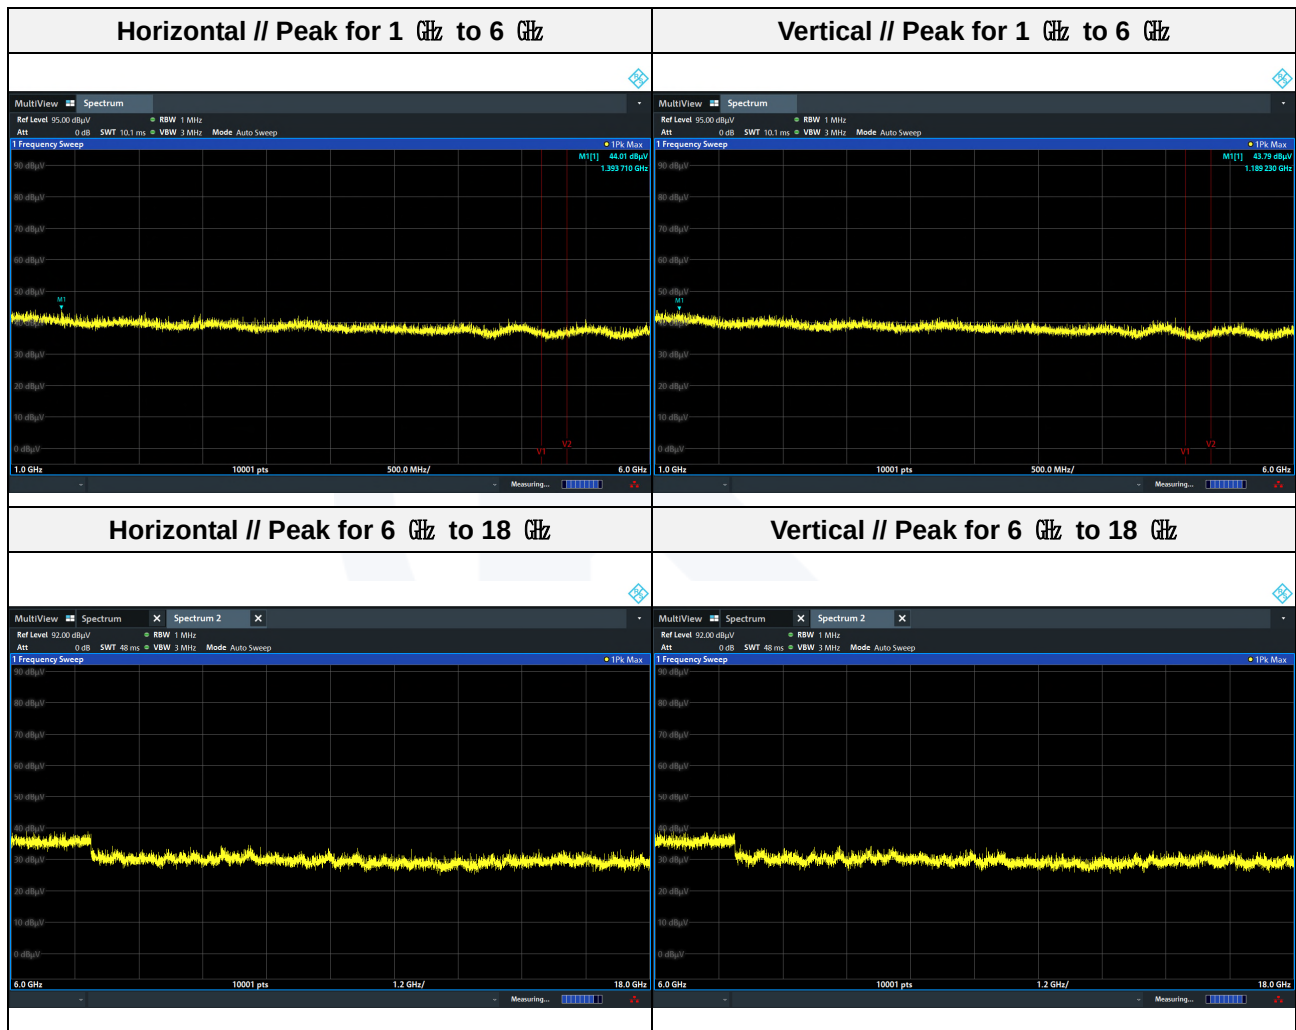

Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.




Mode: DC 12 V_802.11a (6 Mbps)

Distance of measurement: 3 meter

Channel: 48

- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 005.75	43.97	Peak	V	-8.11	-	35.86	74.00	38.14
1 042.75	44.06	Peak	H	-7.89	-	36.17	74.00	37.83

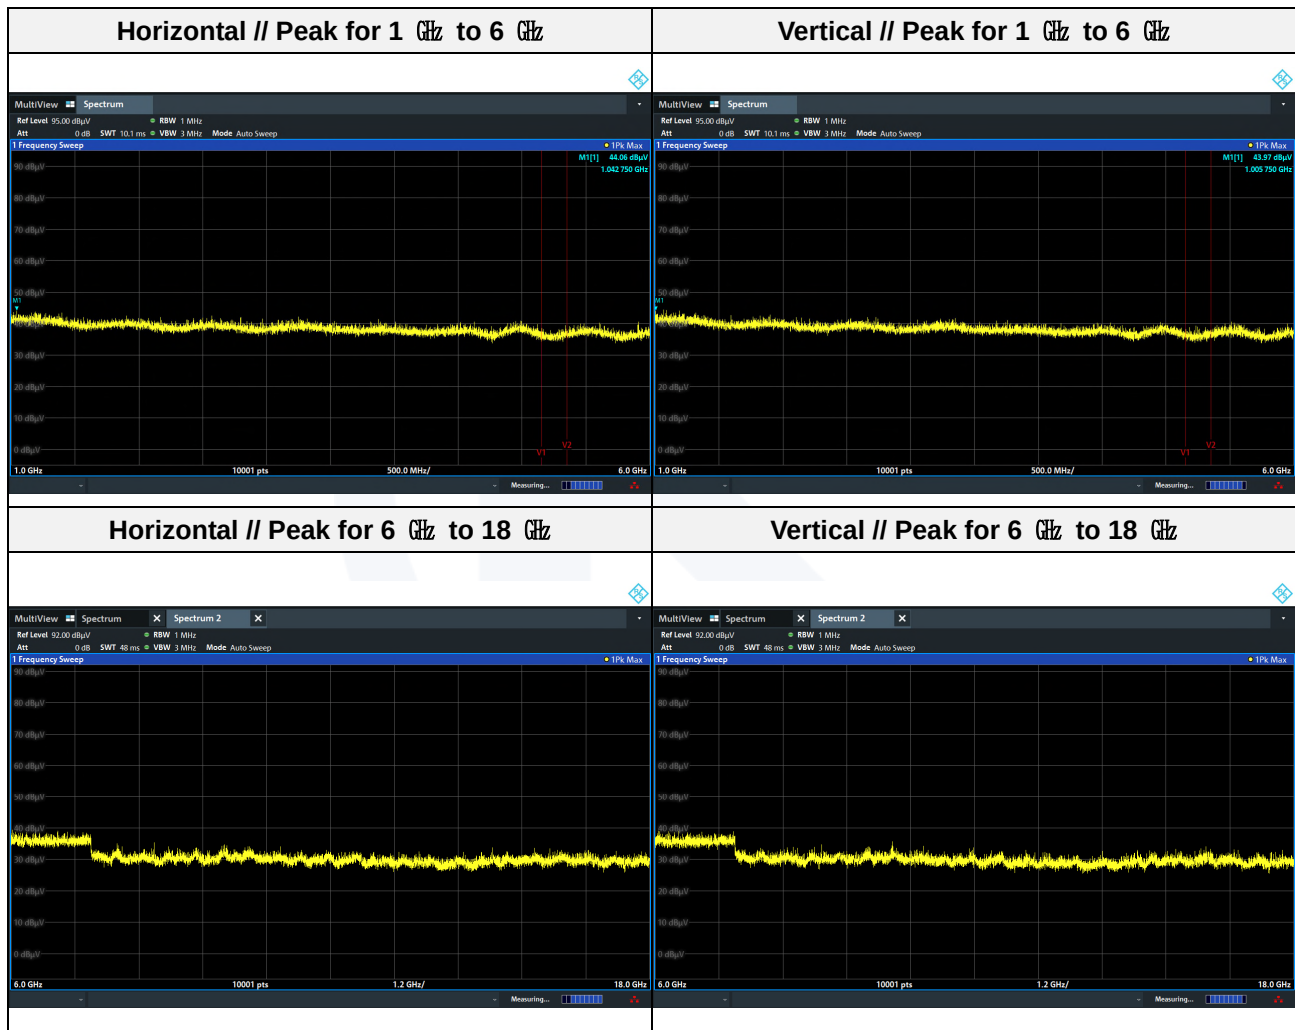

Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.



Mode: DC 24 V_802.11a (6 Mbps)

Distance of measurement: 3 meter


Channel: 36


- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 151.23	44.62	Peak	V	-7.25	-	37.37	74.00	36.63
1 518.20	44.15	Peak	H	-4.83	-	39.32	74.00	34.68

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
5 148.52	57.55	Peak	V	7.54	-	65.09	74.00	8.91
5 148.52	39.99	Average	V	7.54	0.27	47.80	54.00	6.20
5 149.77	54.15	Peak	H	7.54	-	61.69	74.00	12.31
5 149.77	38.03	Average	H	7.54	0.27	45.84	54.00	8.16

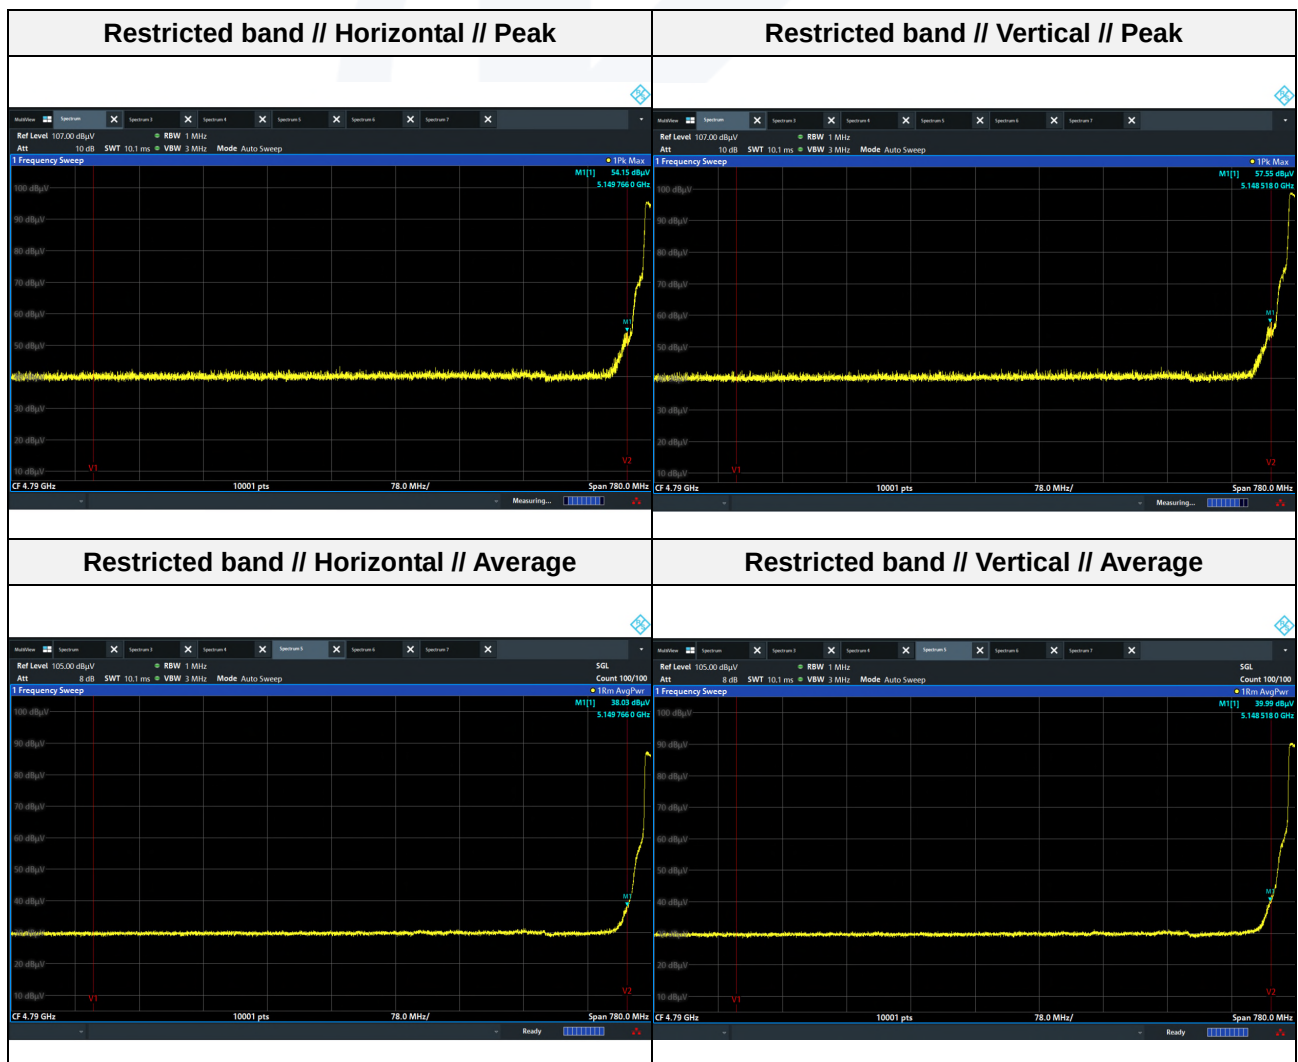

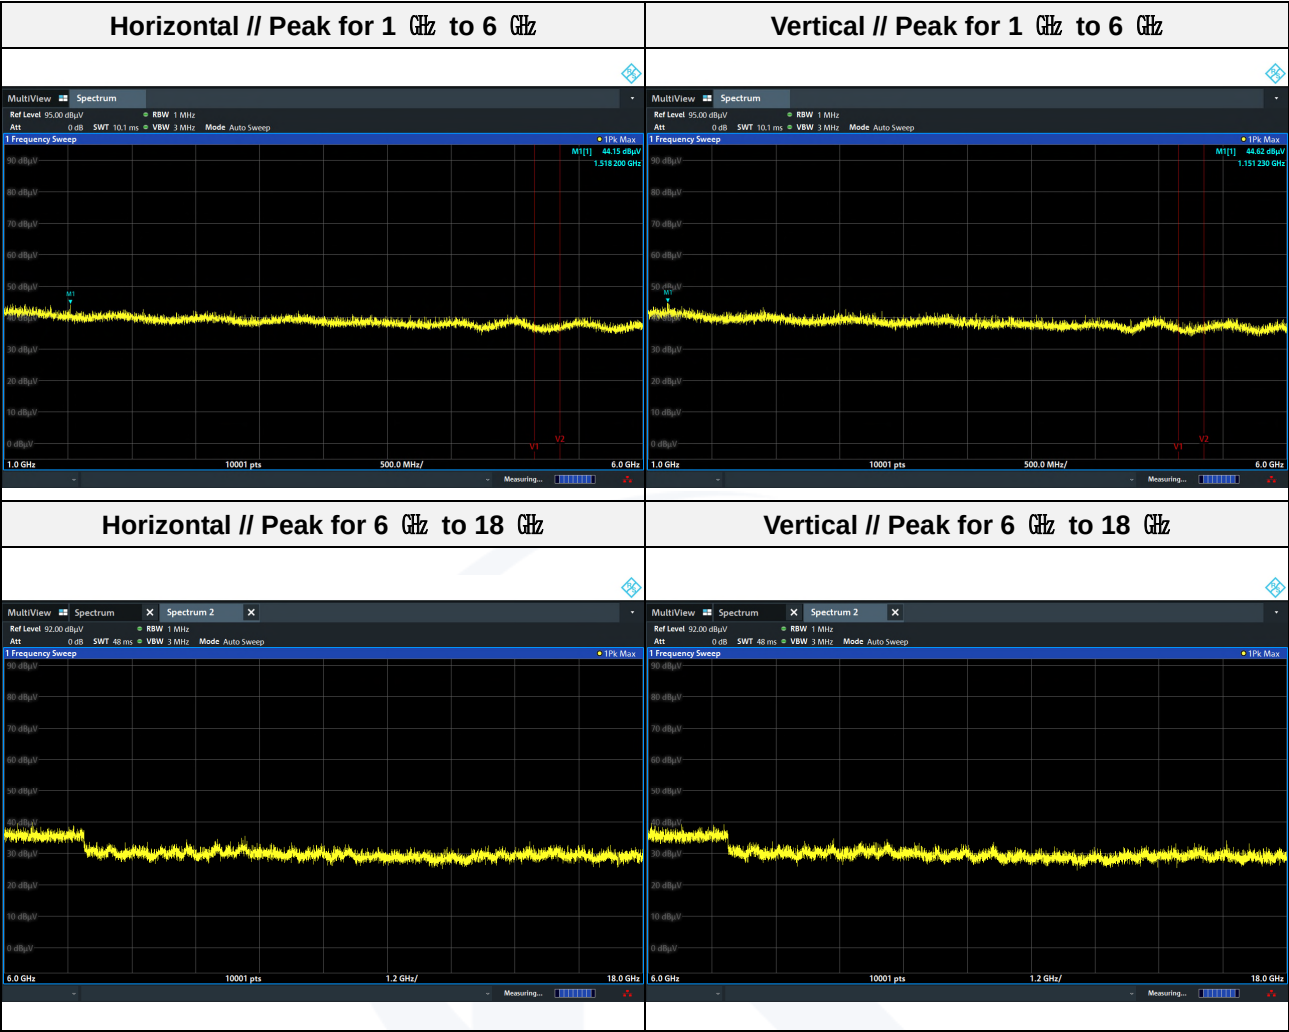

- Note.
1. No spurious emission were detected above 6 GHz.
 2. Average test would be performed if the peak result were greater than the average limit.