



EMC TEST REPORT

Test Report No. : KES-E2-18T0055-R2
Date of Issue : Dec. 28, 2018
Product name : THINKWARE DASH CAM
Model/Type No. : Q800PRO
Variant Mode : QA100
FCC ID : 2ADTG-Q800PRO
Applicant : THINKWARE CORPORATION
Applicant Address : A, 9FL., Samwhan Hipex, 240, Pangyoyeok-ro, Bundang-gu, Seongnam-si, Gyeonggi-do, South Korea
Manufacturer : THINKWARE CORPORATION
Manufacturer Address : A, 9FL., Samwhan Hipex, 240, Pangyoyeok-ro, Bundang-gu, Seongnam-si, Gyeonggi-do, South Korea
Equipment authorization : **Supply's Declaration of Conformity**
Date of Receipt : Nov. 22, 2018
Test date : Dec. 11, 2018 ~ Dec. 24, 2018
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Mun Hye, Jung
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KOLAS.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E2-18T0055-R2
Page (2) of (26)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Dec. 14, 2018	KES-E2-18T0055	Issued
Dec. 26, 2018	KES-E2-18T0055-R1	1.Changed class A to Class B. 2.For above 1GHz test result section,update the result tables to be in English and also attach the test plots to the report. 3.The EUT photos deleted. . 4.Added FCC ID.
Dec. 28, 2018	KES-E2-18T0055-R2	IC ID was deleted.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E2-18T0055-R2
Page (3) of (26)

TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	5
1.2	Variant Model Differences	5
1.3	Device Modifications	5
1.4	Equipment Under Test.....	5
1.5	Support Equipments	5
1.6	External I/O Cabling	6
1.7	EUT Operating Mode(s)	6
1.8	Configuration.....	7
1.9	Remarks when standards applied	8
1.10	Calibration Details of Equipment Used for Measurement	8
1.11	Test Facility	8
1.12	Laboratory Accreditations and Listings	8
2.0	Test Regulations.....	9
2.1	Conducted Emissions at Mains Power Ports	11
2.2	Radiated Electric Field Emissions(Below 1 GHz)	12
2.3	Radiated Electric Field Emissions(Above 1 GHz)	13
APPENDIX A – TEST DATA.....		14
Conducted Emissions at Mains Power Ports.....		14
Radiated Electric Field Emissions(Below 1 GHz)		16
Radiated Electric Field Emissions(Above 1 GHz)		18
APPENDIX B – Test Setup Photos and Configuration		24
Conducted Voltage Emissions		24
Radiated Electric Field Emissions(Below 1 GHz)		25
Radiated Electric Field Emissions(Above 1 GHz)		26

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E2-18T0055-R2
Page (4) of (26)

1.0 General Product Description

Main Specifications of EUT are:

Item	Specification	Remarks
Model name	Q800 PRO	
Dimensions / Weight	107 x 60.5 x 30 mm / 102.7 g 4.2 x 2.4 x 1.18 inch / 0.22 lb	
Memory	microSD memory card	16 GB, 32 GB, 64 GB, 128 GB (UHS-I)
Recording mode	Continuous Rec	Records videos in 1-minute segments (dual channels are supported for recording the front and rear view)
	Incident Rec	Records 10 seconds before and after the incident (total 20 seconds)
	Manual Rec	Records from 10 seconds before and 50 seconds after manually starting the recording (total 1 minute)
	Parking Rec (parking mode)	(Optional)
	Audio Recording	Press the voice recording button to turn the audio recording on or off
Camera sensor	5.14 Megapixel, 1/2.8" Sony STARVIS	
Angle of view (Lens)	Approximately 140° (diagonally)	
Video	QHD (2560 x 1440) / H.264 / file extension: MP4	
Frame rate	Maximum 30 fps	Applies equally to the front / rear recording
Audio	HE-AAC	
Acceleration sensor	3-axis acceleration sensor (3D, ±3G)	5 levels for sensitivity adjustment available
Rear camera (optional)	V-IN port	Optional accessory that requires separate purchase
GPS	Embedded GPS	Safety driving section alert supported
Power input	DC 12 / 24 V supported	
Power consumption	2ch: 4.2 W / 1ch: 2.9 W (mean)	Except for the fully charged supercapacitor / GPS
Auxiliary power unit	Super capacitor	
LED indicator	• Front: Security LED • Rear: GPS LED, Rec LED, Wi-Fi LED	
Alarm	Built-in speakers	Voice guide (buzzer sounds)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 230 Vac ☐ 120 Vac ☒ 12 Vdc ☒ 24 Vdc ☐ PoE

Frequency ☐ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Add Simple Derivatives

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
THINKWARE DASH CAM	Q800PRO	-	THINKWARE CORPORATION	EUT
Micro SD card	-	-	-	-

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
THINKWARE REAR CAM	BCFH-200	-	THINKWARE CORPORATION	-
GPS receiver	-	-	THINKWARE CORPORATION	-
SmartPhone	SHV-E210L	R33D713KA3F	Samsung Electronics Co., Ltd.	-



1.6 External I/O Cabling

■ WIFI(12 Vdc/24 Vdc) MODE

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
Wireless Video Baby Camera (EUT)	DC IN	DC POWER	DC OUT	2.5	U
	V-IN	THINKWARE REAR CAM	V-OUT	7.5	U
	GPS	GPS receiver	GPS	5.0	U
	Wireless	Smart Phone	Wireless	-	-
	Micro SD slot	Micro SD card	Micro SD slot	-	-

* Unshielded=U, Shielded=S

■ Recording(12 Vdc/24 Vdc) MODE

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
THINKWARE DASH CAM (EUT)	DC IN	DC POWER	DC OUT	2.5	U
	V-IN	THINKWARE REAR CAM	V-OUT	7.5	U
	GPS	GPS receiver	GPS	5.0	U
	Micro SD slot	Micro SD card	Micro SD slot	-	-

* Unshielded=U, Shielded=S

1.7 EUT Operating Mode(s)

Test mode	operating
WIFI (12 Vdc/24 Vdc)	Connect the EUT and SmartPhone wirelessly and check network status on SmartPhone.
Recording (12 Vdc/24 Vdc)	1. During the test, the EUT operation was confirmed with REC LED. 2. After the test, it was confirmed that the images of the EUT were recorded on the Micro SD card.


EUT Test operating S/W		
Name	Version	Manufacture Company
-	-	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


1.8 Configuration

■ AC Main
 □ DC Main

■ WIFI(12 Vdc/24 Vdc) MODE

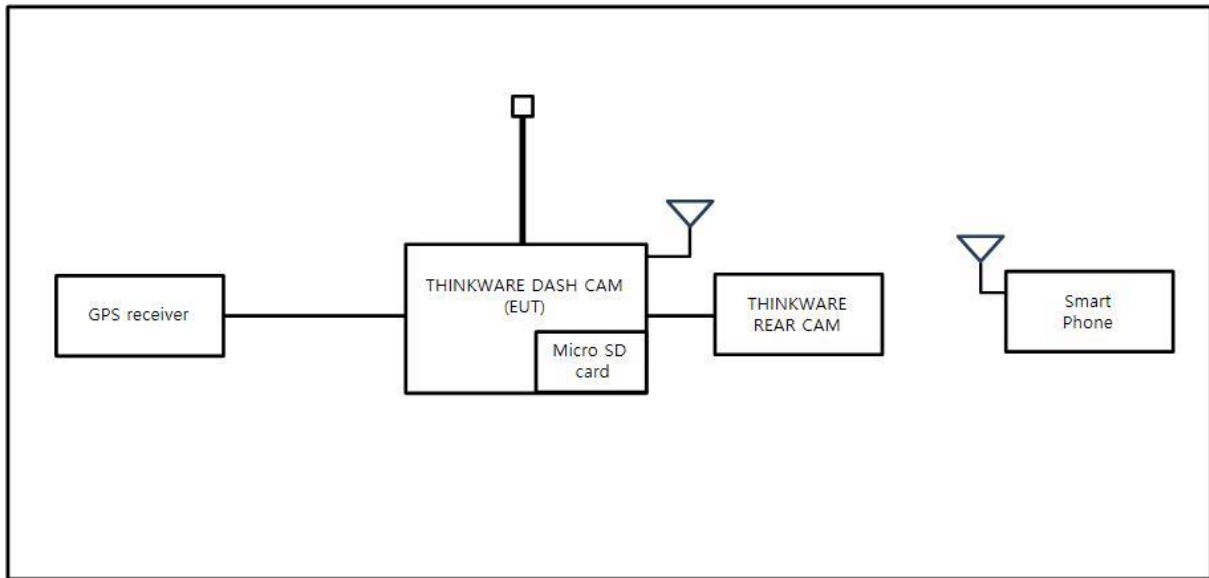

■ Recording(12 Vdc/24 Vdc) MODE

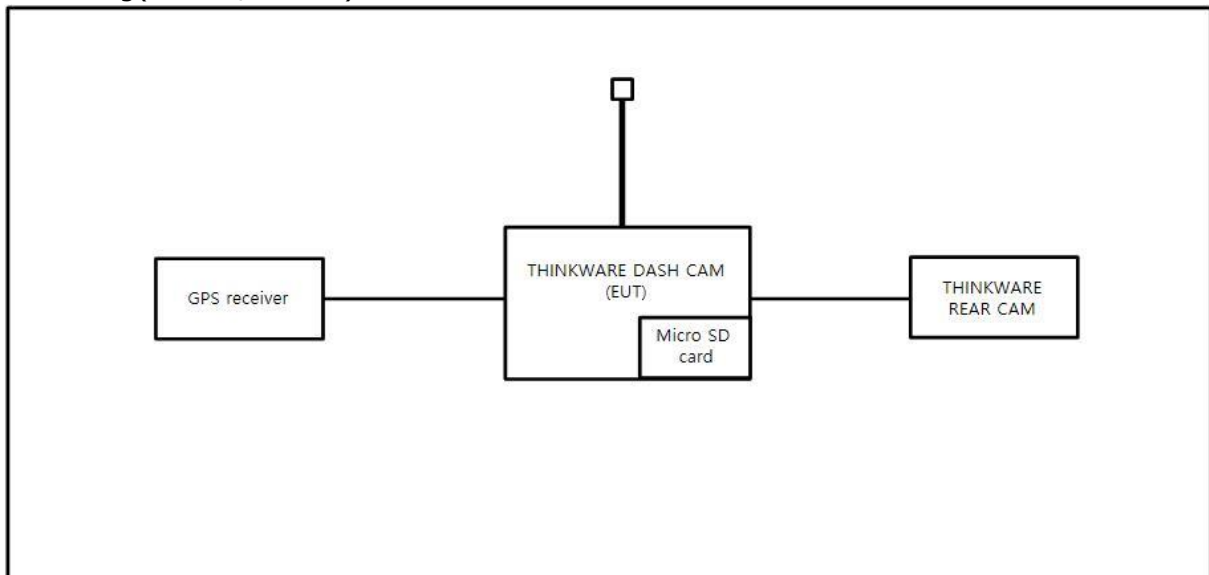

1.9 Remarks when standards applied

N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4:2014 and CISPR 16-1-4:2012

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Aechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Aechoic Chamber , and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Aechoic Chamber, 10 m Open Area and Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Aechoic Chamber and Conducted test site	 23298-1
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-4308, C-4798, T-2311, G-914
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Aechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 17 07 01633 001

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 55032:2015

☐ Class A

☐ Class B

☐ EN 55024:2010

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E2-18T0055-R2
Page (10) of (26)

- | | | |
|--|----------------------------------|---|
| ☐ VCCI V-3 / 2015.04 | ☐ Class A | ☐ Class B |
| ☐ AS/NZS:2013 | ☐ Class A | ☐ Class B |
| ☒ 47 CFR Part 15, Subpart B | | |
| ☐ CISPR 22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☒ ANSI C63.4-2014 | ☐ Class A | ☒ Class B |
| ☒ IC Regulation ICES-003 | | |
| ☐ CAN/CSA CISPR 22-10 | ☐ Class A | ☐ Class B |
| ☒ ANSI C63.4-2014 | ☐ Class A | ☒ Class B |
| ☐ RE- Directive 2014/53/EU | | |
| ☐ EN 301 489-1 V1.9.2 | | |
| ☐ Equipment for fixed use | | |
| ☐ Equipment for vehicular use | | |
| ☐ Equipment for portable use | | |
| ☐ EN 301 489-3 V1.6.1 | | |
| ☐ EN 301 489-17 V2.2.1 | | |
| ☐ EN 60945:2002 | | |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



2.1 Conducted Emissions at Mains Power Ports

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test S/W	EMC32	R & S	9.12.00	-
☐	EMI TEST RECEIVER	ESR3	R & S	101781	04, 25, 2019
☐	LISN	ENV216	R & S	101787	01, 05, 2019
☐	LISN	ESH2-Z5	R & S	100450	04, 25, 2019
☐	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 26, 2019

Test Conditions

Temperature:

°C

Relative Humidity:

% R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks

N/A: It is not tested apply because it is powered by DC and PoE.



2.2 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Dec. 24, 2018

Test Location

☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10 m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 11, 2019
☒	AMPLIFIER	SCU 01	R & S	100603	11, 26, 2019
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	714	11, 26, 2020

Test Conditions

Temperature: 21,0 °C
Relative Humidity: 50,5 % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.3 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Dec. 11, 2018

Test Location

SEMI ANECHOIC CHAMBER #4(10 m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 11, 2019
☒	PREAMPLIFIER	8449B	AGILENT	3008A01742	01, 11, 2019
☐	ATTENUATOR	8491A	HP	35496	03, 21, 2019
☒	HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1802	03, 12, 2020

Test Conditions

Temperature: 20,7 °C
Relative Humidity: 50,6 % R.H.

Frequency Range of Measurement

1 GHz to 12.4 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

HOT LINE

N/A



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E2-18T0055-R2
Page (15) of (26)

NEUTRAL LINE

N/A

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:

KES-E2-18T0055-R2

Page (16) of (26)

Radiated Electric Field Emissions(Below 1 GHz)


WIFI 12 Vdc

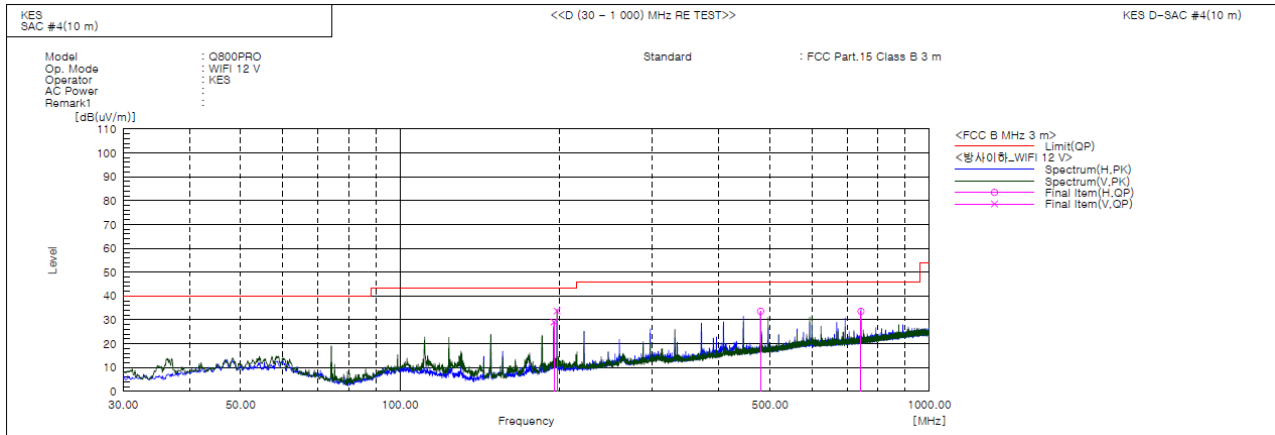

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	195.375	V	57.9	-28.8	29.1	43.5	14.4	100.0	102.0	
2	198.004	V	62.3	-28.6	33.7	43.5	9.8	123.0	82.0	
3	480.024	H	54.2	-20.6	33.6	46.0	12.4	100.0	324.0	
4	742.586	H	49.5	-15.9	33.6	46.0	12.4	154.0	130.0	

WIFI 24 Vdc

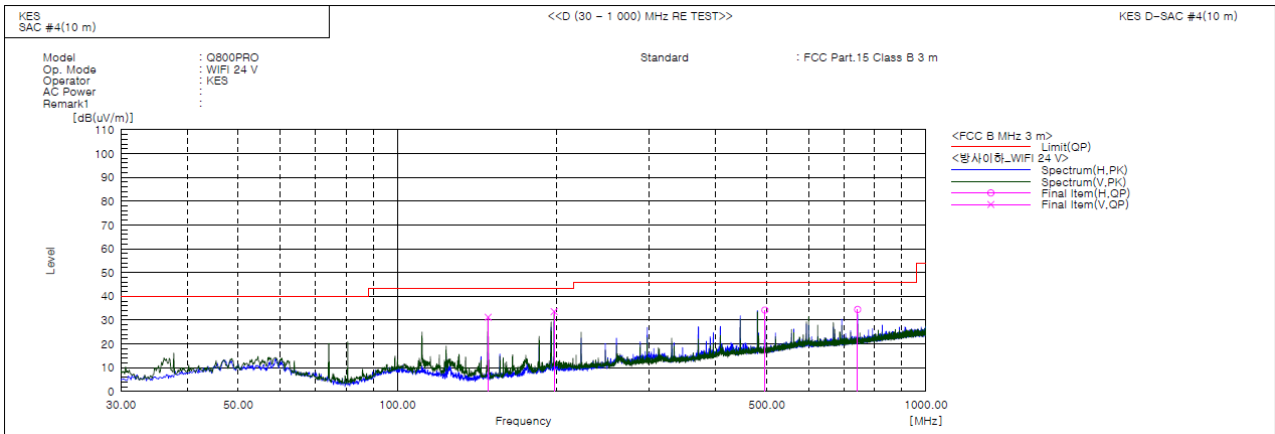

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	148.491	V	63.7	-32.5	31.2	43.5	12.3	100.0	267.0	
2	197.931	V	62.2	-28.6	33.6	43.5	9.9	123.0	96.0	
3	495.843	H	54.3	-20.1	34.2	46.0	11.8	211.0	115.0	
4	742.586	H	50.4	-15.9	34.5	46.0	11.5	100.0	131.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E2-18T0055-R2

Page (17) of (26)


Recording 12 Vdc

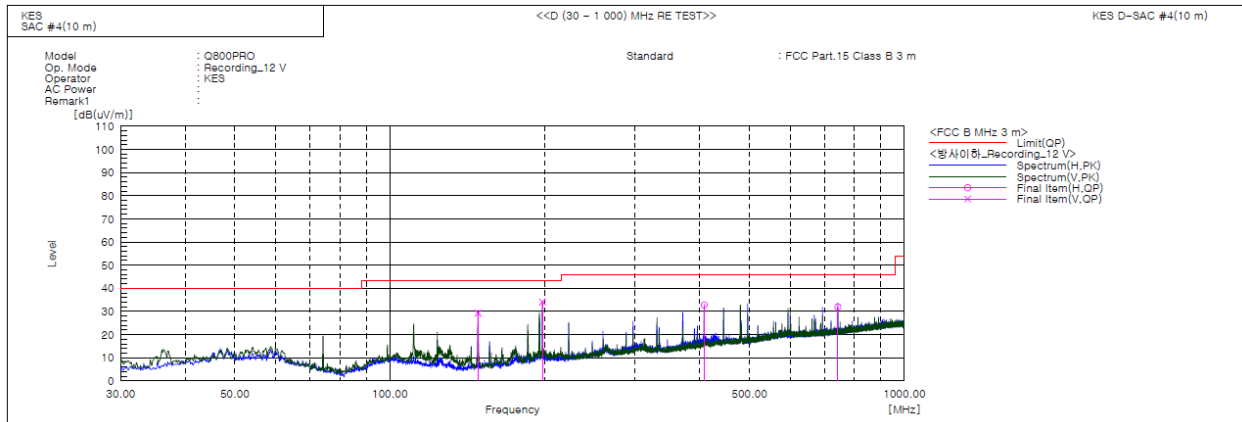

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	148.461	V	61.8	-32.5	29.3	43.5	14.2	107.0	267.0	
2	197.931	V	62.7	-28.6	34.1	43.5	9.4	100.0	97.0	
3	408.300	H	55.2	-22.4	32.8	46.0	13.2	206.0	349.0	
4	742.586	H	47.9	-15.9	32.0	46.0	14.0	113.0	139.0	

Recording 24 Vdc

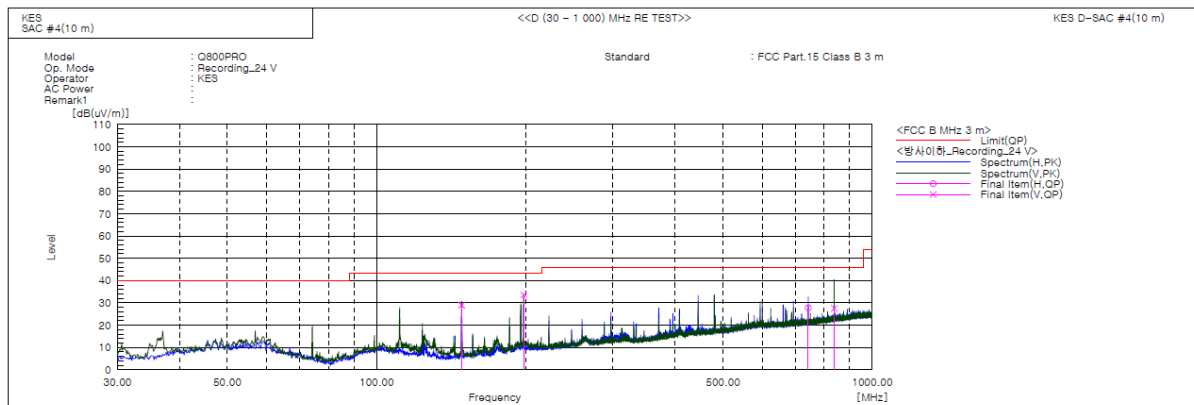

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	148.461	V	61.5	-32.5	29.0	43.5	14.5	100.0	293.0	
2	197.931	V	62.2	-28.6	33.6	43.5	9.9	116.0	58.0	
3	742.586	H	43.7	-15.9	27.8	46.0	18.2	100.0	101.0	
4	837.889	V	42.0	-14.5	27.5	46.0	18.5	151.0	119.0	

◆ Calculation – SAC #4(10 m)

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr



Radiated Electric Field Emissions(Above 1 GHz)

■ WIFI 12 Vdc
(1 - 5) GHz

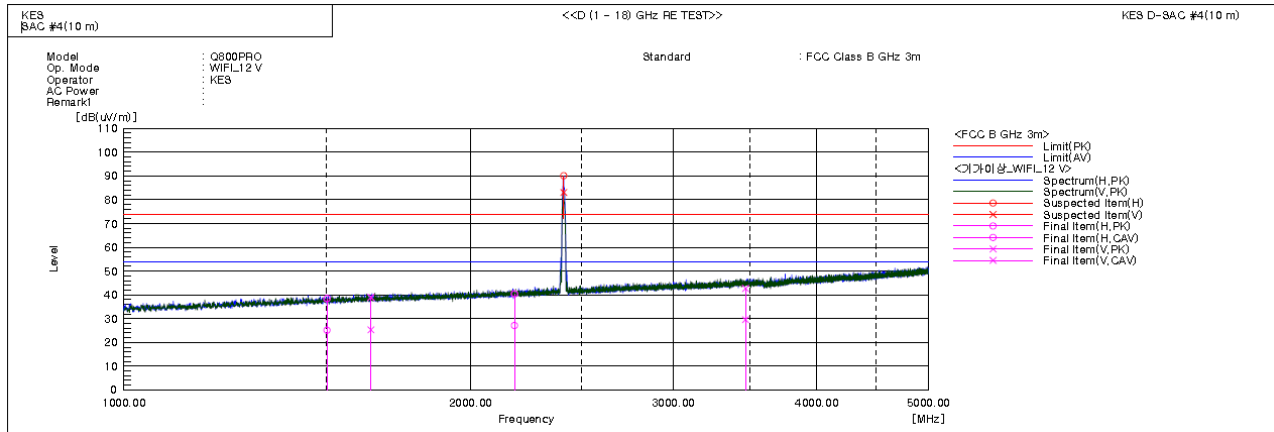

PK

Frequency [MHz]	Reading [dB/μV]	Polari zation	Antenna Hight [m]	Factor value		AMP Factor (dB)	Result [dB/μV / m]	Limit [dB/μV / m]	Margin [dB]
				안테나 [dB/m]	케이블 [dB]				
1 501.000	44.880	H	1.240	25.160	9.120	37.360	41.800	74.000	32.200
1 639.000	43.480	V	3.590	25.840	9.530	37.350	41.500	74.000	32.500
2 185.000	38.640	H	0.000	28.070	11.070	37.580	40.200	74.000	33.800
3 469.000	30.770	V	1.000	30.960	13.950	37.880	37.800	74.000	36.200

AV

Frequency [MHz]	Reading [dB/μV]	Polari zation	Antenna Hight [m]	Factor value		AMP Factor (dB)	Result [dB/μV / m]	Limit [dB/μV / m]	Margin [dB]
				안테나 [dB/m]	케이블 [dB]				
1 501.000	44.880	H	1.240	25.160	9.120	37.360	41.800	74.000	32.200
1 639.000	43.480	V	3.590	25.840	9.530	37.350	41.500	74.000	32.500
2 185.000	38.640	H	0.000	28.070	11.070	37.580	40.200	74.000	33.800
3 469.000	30.770	V	1.000	30.960	13.950	37.880	37.800	74.000	36.200



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E2-18T0055-R2

Page (19) of (26)

WIFI 24 Vdc (1 - 5) GHz

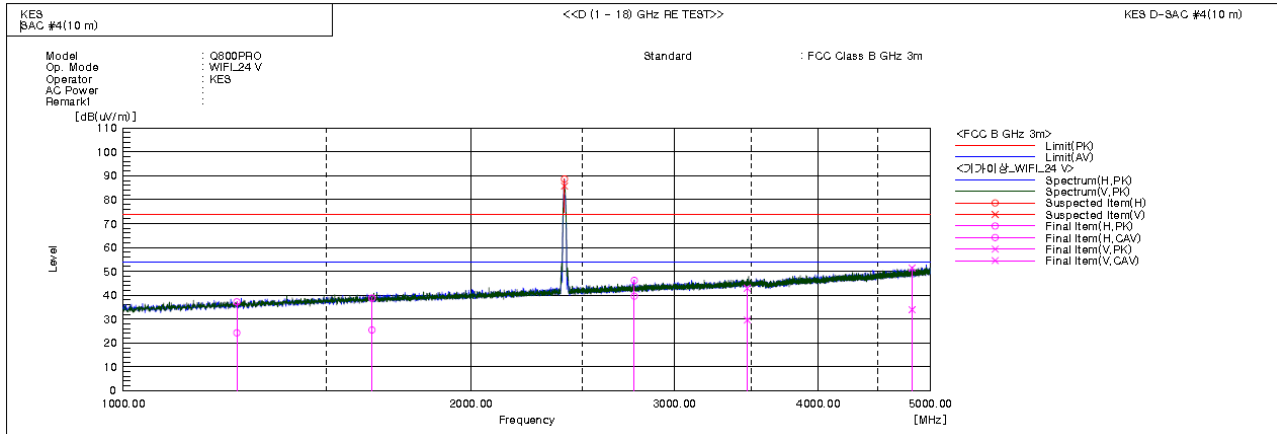

PK

Frequency [MHz]	Reading [dBμV]	Pol ari zat ion	Antenna Hight [m]	Factor value		AMP Factor (dB)	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]
				안테나 [dB/m]	케이블 [dB]				
1 501.000	44.880	H	1.240	25.160	9.120	37.360	41.800	74.000	32.200
1 639.000	43.480	V	3.590	25.840	9.530	37.350	41.500	74.000	32.500
2 185.000	38.640	H	0.000	28.070	11.070	37.580	40.200	74.000	33.800
3 469.000	30.770	V	1.000	30.960	13.950	37.880	37.800	74.000	36.200

AV

Frequency [MHz]	Reading [dBμV]	Pol ari zat ion	Antenna Hight [m]	Factor value		AMP Factor (dB)	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]
				안테나 [dB/m]	케이블 [dB]				
1 501.000	44.880	H	1.240	25.160	9.120	37.360	41.800	74.000	32.200
1 639.000	43.480	V	3.590	25.840	9.530	37.350	41.500	74.000	32.500
2 185.000	38.640	H	0.000	28.070	11.070	37.580	40.200	74.000	33.800
3 469.000	30.770	V	1.000	30.960	13.950	37.880	37.800	74.000	36.200

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E2-18T0055-R2
Page (20) of (26)

■ Recording 12 Vdc (1 - 5) GHz

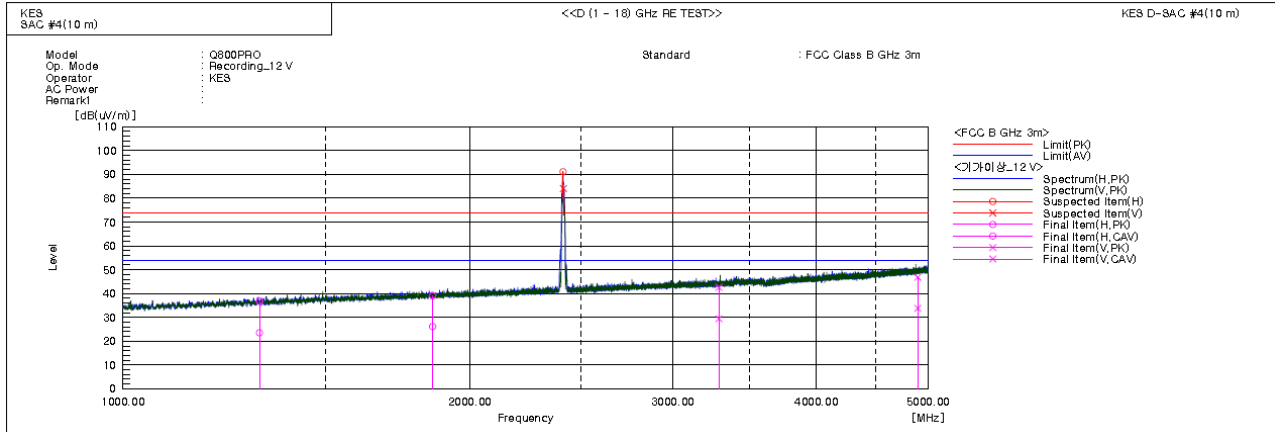

PK

Frequency [MHz]	Reading [dB μ V]	Polari zation	Antenna Hight [m]	Factor value		AMP Factor (dB)	Result [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
				안테나 [dB/m]	케이블 [dB]				
1 501.000	44.880	H	1.240	25.160	9.120	37.360	41.800	74.000	32.200
1 639.000	43.480	V	3.590	25.840	9.530	37.350	41.500	74.000	32.500
2 185.000	38.640	H	0.000	28.070	11.070	37.580	40.200	74.000	33.800
3 469.000	30.770	V	1.000	30.960	13.950	37.880	37.800	74.000	36.200

AV

Frequency [MHz]	Reading [dB μ V]	Polari zation	Antenna Hight [m]	Factor value		AMP Factor (dB)	Result [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
				안테나 [dB/m]	케이블 [dB]				
1 501.000	44.880	H	1.240	25.160	9.120	37.360	41.800	74.000	32.200
1 639.000	43.480	V	3.590	25.840	9.530	37.350	41.500	74.000	32.500
2 185.000	38.640	H	0.000	28.070	11.070	37.580	40.200	74.000	33.800
3 469.000	30.770	V	1.000	30.960	13.950	37.880	37.800	74.000	36.200

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E2-18T0055-R2

Page (21) of (26)

■ Recording 24 Vdc (1 - 5) GHz

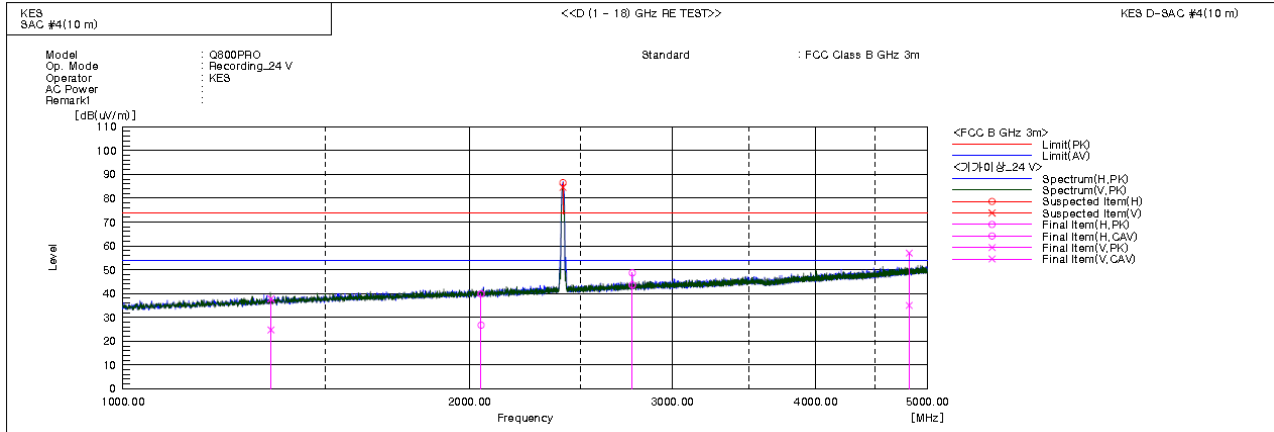

PK

Frequency [MHz]	Reading [dB/μV]	Pol ari zat ion	Antenna Hight [m]	Factor value		AMP Factor (dB)	Result [dB/μV /m]	Limit [dB/μV /m]	Margin [dB]
				안테나 [dB/m]	케이블 [dB]				
1 501.000	44.880	H	1.240	25.160	9.120	37.360	41.800	74.000	32.200
1 639.000	43.480	V	3.590	25.840	9.530	37.350	41.500	74.000	32.500
2 185.000	38.640	H	0.000	28.070	11.070	37.580	40.200	74.000	33.800
3 469.000	30.770	V	1.000	30.960	13.950	37.880	37.800	74.000	36.200

AV

Frequency [MHz]	Reading [dB/μV]	Pol ari zat ion	Antenna Hight [m]	Factor value		AMP Factor (dB)	Result [dB/μV /m]	Limit [dB/μV /m]	Margin [dB]
				안테나 [dB/m]	케이블 [dB]				
1 501.000	44.880	H	1.240	25.160	9.120	37.360	41.800	74.000	32.200
1 639.000	43.480	V	3.590	25.840	9.530	37.350	41.500	74.000	32.500
2 185.000	38.640	H	0.000	28.070	11.070	37.580	40.200	74.000	33.800
3 469.000	30.770	V	1.000	30.960	13.950	37.880	37.800	74.000	36.200

Exclusion Band: 2.4 GHz

◆ Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)]

Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value


Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




■ WIFI 12 Vdc

(5 - 12) GHz

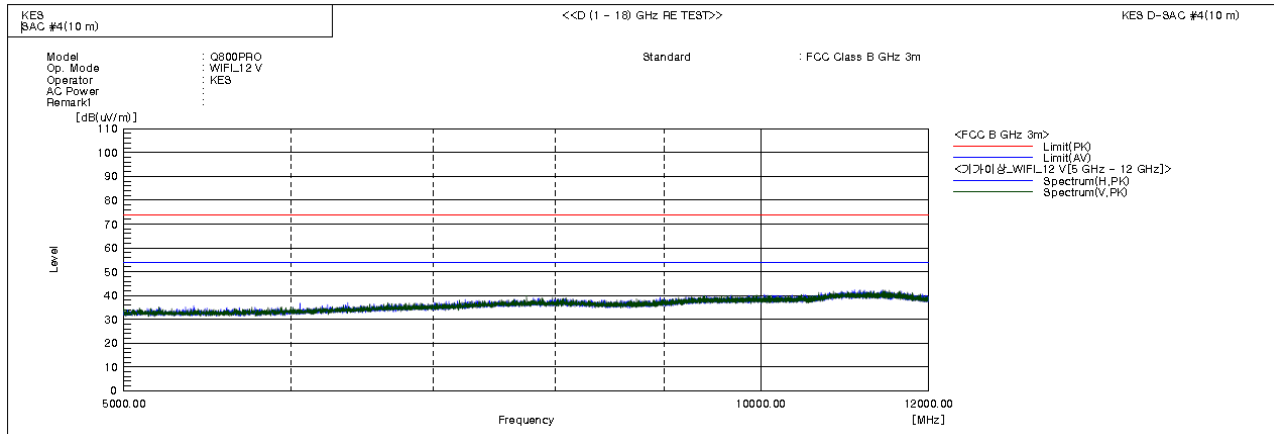

■ WIFI 24 Vdc

(5 - 12) GHz

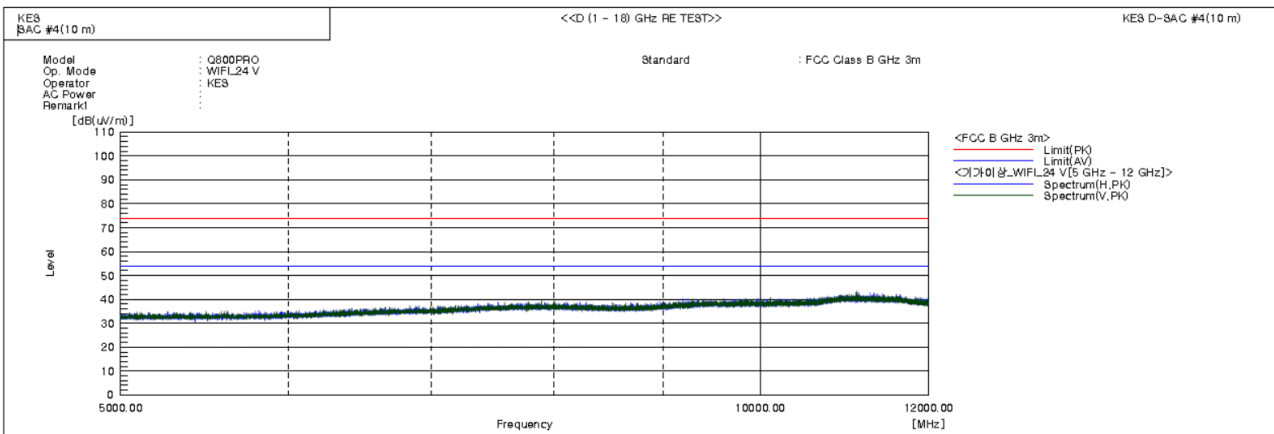



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:

KES-E2-18T0055-R2

Page (23) of (26)


■ Recording 12 Vdc

(5 – 12) GHz

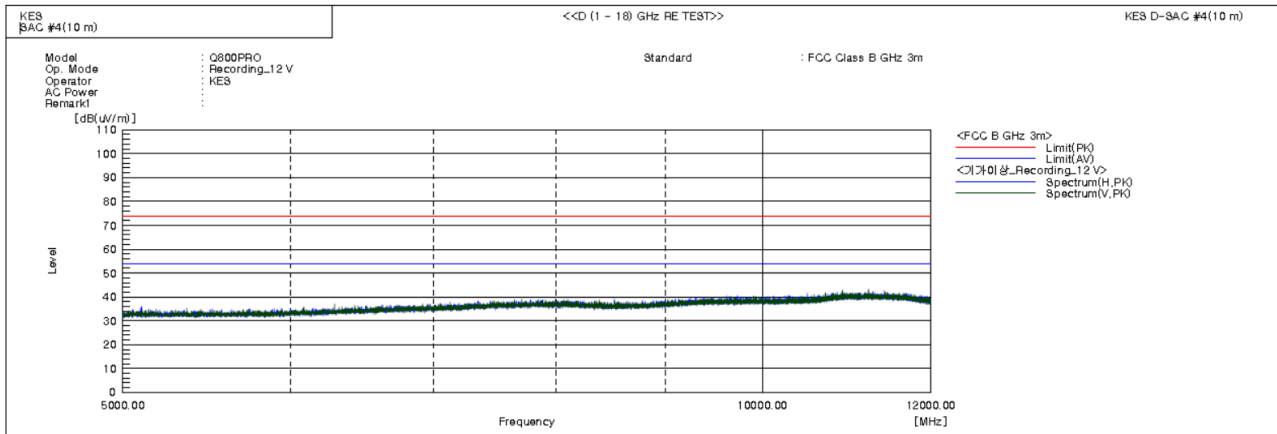

■ Recording 24 Vdc

(5 – 12) GHz

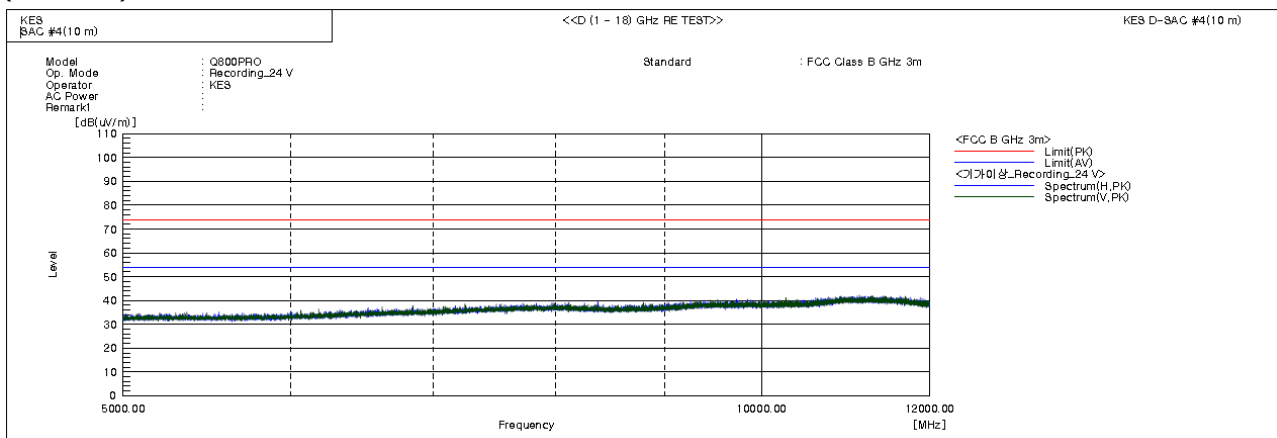

(5 – 12) GHz: No spurious emission were detected above 5 GHz.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr