



SGS-CSTC Standards Technical Services Ltd.

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan
District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053
Fax: +86 (0) 755 2671 0594
Email: ee.shenzhen@sgs.com

Report No.: SZEM141100609202
Page: 1 of 29

Appendix B for Test Report SZEM141100609202

Authorized Signature:



Jack Zhang
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



2 Content

	Page
1 COVER PAGE.....	1
APPENDIX B FOR TEST REPORT SZEM141100609202.....	1
2 CONTENT.....	2
3 APPENDIX_A: EFFECTIVE (ISOTROPIC) RADIATED POWER OUTPUT DATA.....	3
PART I - TEST RESULTS	3
4 APPENDIX_B: PEAK-TO-AVERAGE RATIO.....	5
PART I - TEST RESULTS	5
5 APPENDIX_C: MODULATION CHARACTERISTICS.....	6
PART I - TEST PLOTS.....	6
5.1 FOR GSM	6
5.1.1 Test Band = GSM850.....	6
5.1.2 Test Band = GSM1900.....	7
6 APPENDIX_D: BANDWIDTH	8
6.1 FOR GSM	9
6.1.1 Test Band = GSM850.....	9
6.1.2 Test Band = GSM1900.....	12
7 APPENDIX_E: BAND EDGES COMPLIANCE.....	15
7.1 FOR GSM	15
7.1.1 Test Band = GSM850.....	15
7.1.2 Test Band = GSM1900.....	17
8 APPENDIX_F: SPURIOUS EMISSION AT ANTENNA TERMINAL.....	19
8.1 FOR GSM	19
8.1.1 Test Band = GSM850.....	19
8.1.2 Test Band = GSM1900.....	22
9 APPENDIX_G: FIELD STRENGTH OF SPURIOUS RADIATION.....	25
9.1 FOR GSM	25
9.1.1 Test Band = GSM850.....	25
9.1.2 Test Band = GSM1900.....	26
10 APPENDIX_H: FREQUENCY STABILITY	27
10.1 FOR GSM	27
10.1.1 Frequency Error VS. Voltage:.....	27
10.1.2 Frequency Error VS. Temperature:.....	28-29



3 Appendix_A: Effective (Isotropic) Radiated Power Output Data

Part I - Test Results

Test Band	Test Mode	Test Channel	Measured[dBm]	ERP [dBm]	Limit [dBm]	Verdict
GSM850	GSM/TM1	LCH	33.13	33.98	38.5	PASS
		MCH	33.12	33.97	38.5	PASS
		HCH	33.04	33.89	38.5	PASS

Note1:

- a. For getting the ERP (Efficient Radiated Power) in substitution method, the following formula should be taken to calculate it,

$$\text{ERP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBd]}$$

- b. SGP=Signal Generator Level

Note2:

RBW > emission bandwidth, VBW > 3 x RBW.

Detector: RMS



SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM141100609202

Page: 4 of 29

Test Band	Test Mode	Test Channel	Measured[dBm]	EIRP [dBm]	Limit [dBm]	Verdict
GSM1900	GSM/TM1	LCH	28.85	31.85	33	PASS
		MCH	28.65	31.65	33	PASS
		HCH	28.34	31.34	33	PASS

Note1:

- a. For getting the EIRP (Efficient Isotropic Radiated Power) in substitution method, the following formula should be taken to calculate it,

$$\text{EIRP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBi]}$$

- b. SGP=Signal Generator Level

Note2:

RBW > emission bandwidth, VBW > 3 x RBW.

Detector: RMS



4 Appendix_B: Peak-to-Average Ratio

Part I - Test Results

Test Band	Test Mode	Test Channel	Measured[dB]	Limit [dB]	Verdict
GSM850	GSM/TM1	LCH	0.08	13	PASS
		MCH	0.13	13	PASS
		HCH	0.09	13	PASS
GSM1900	GSM/TM1	LCH	0.12	13	PASS
		MCH	0.10	13	PASS
		HCH	0.07	13	PASS

5 Appendix_C: Modulation Characteristics


Part I - Test Plots

5.1 For GSM

5.1.1 Test Band = GSM850

5.1.1.1 Test Mode = GSM/TM1

5.1.1.1.1 Test Channel = MCH

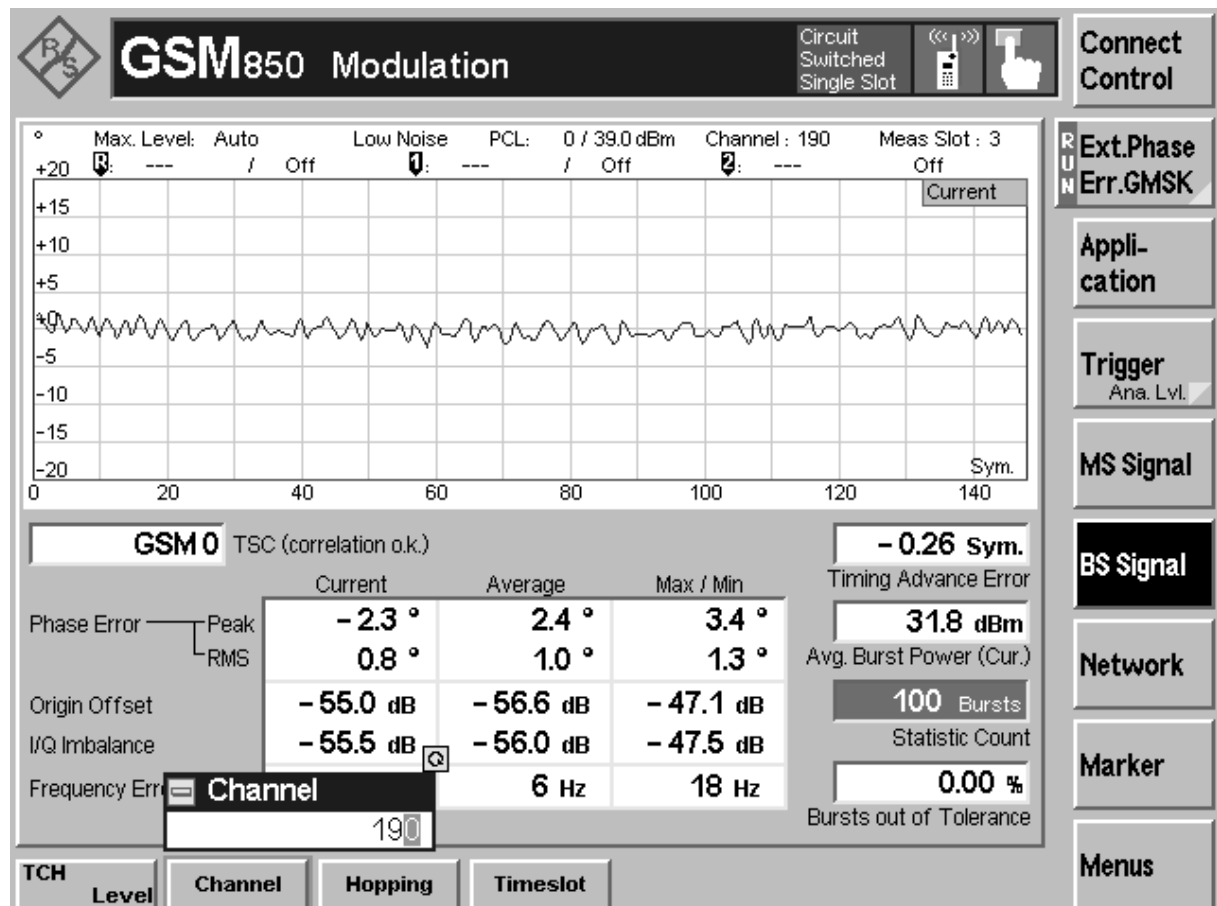




5.1.2 Test Band = GSM1900

5.1.2.1 Test Mode = GSM/TM1

5.1.2.1.1 Test Channel = MCH

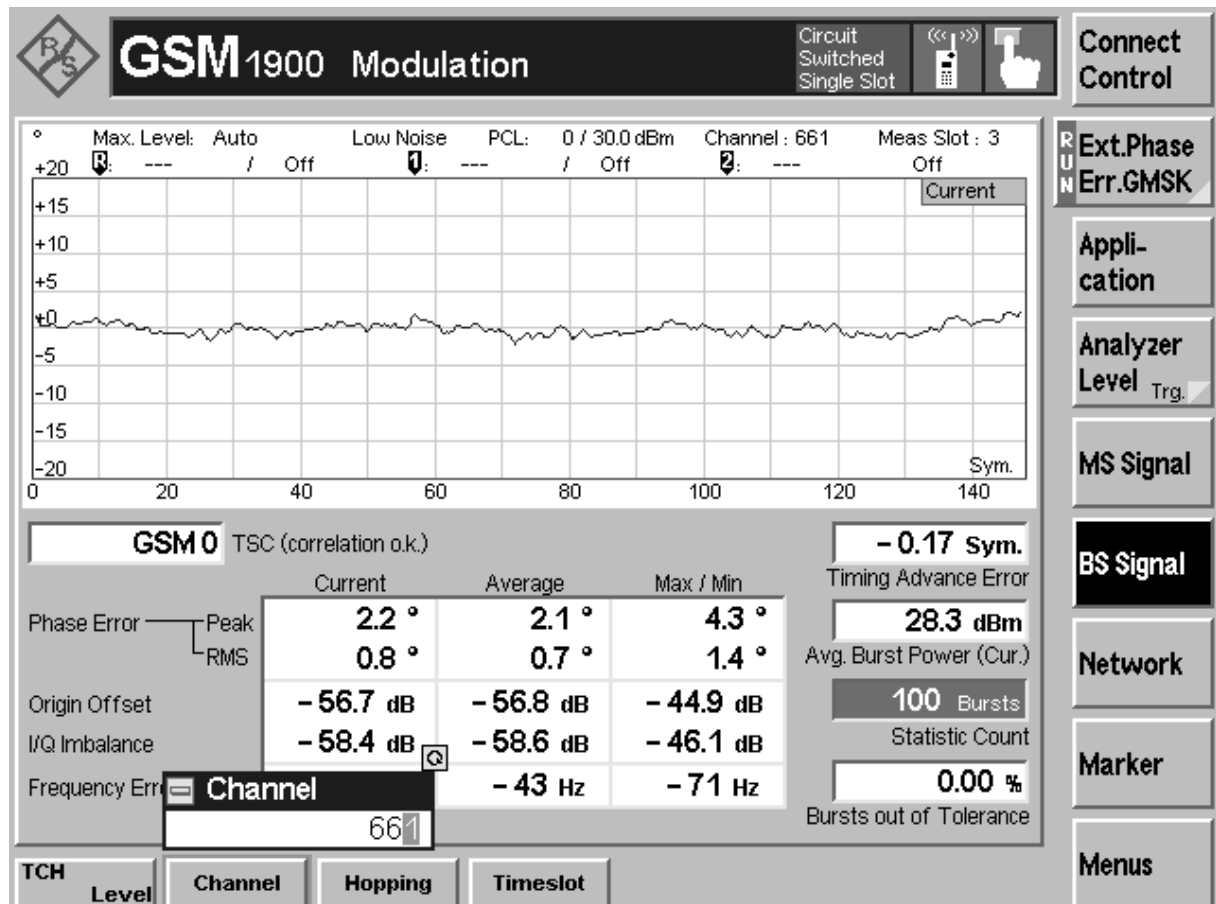



6 Appendix_D: Bandwidth

Part I - Test Results

Test Band	Test Mode	Test Channel	Occupied Bandwidth [kHz]	Emission Bandwidth [kHz]	Verdict
GSM850	GSM/TM1	LCH	243.8	313.9	PASS
		MCH	243.2	318.8	PASS
		HCH	242.1	321.5	PASS
GSM1900	GSM/TM1	LCH	240.0	310.3	PASS
		MCH	242.1	313.8	PASS
		HCH	246.3	317.2	PASS




Part II - Test Plots

6.1 For GSM

6.1.1 Test Band = GSM850


6.1.1.1 Test Mode = GSM/TM1

6.1.1.1.1 Test Channel = LCH

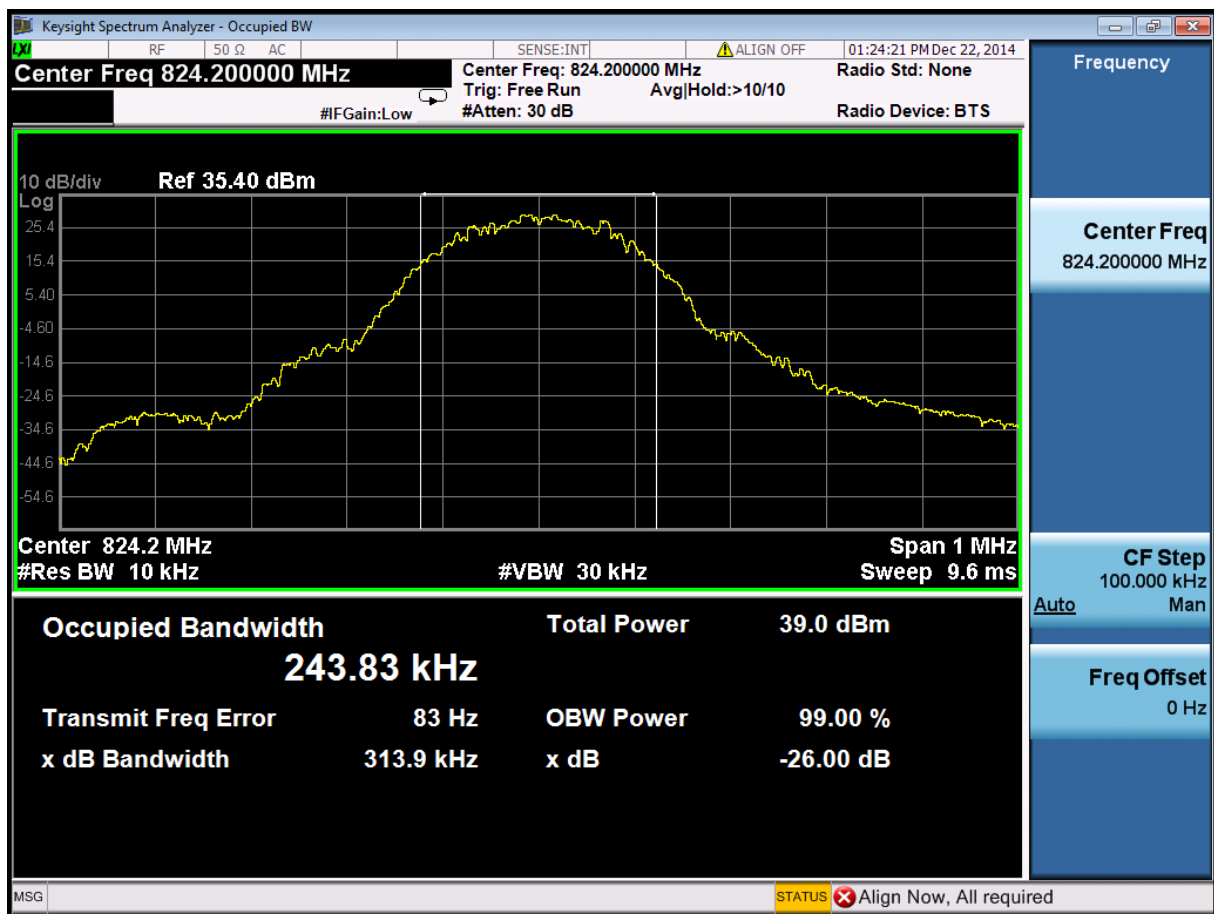




6.1.1.1.2 Test Channel = MCH

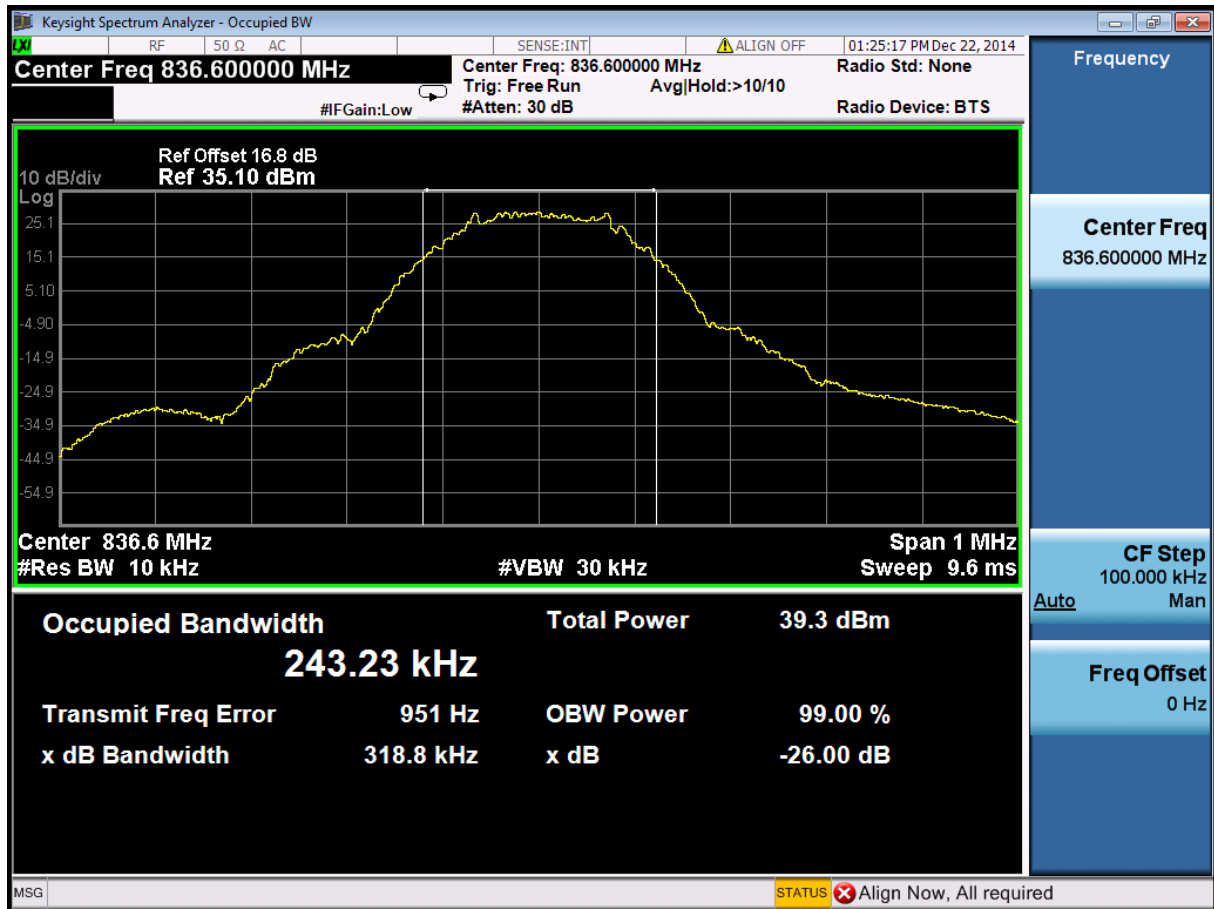



6.1.1.1.3 Test Channel = HCH

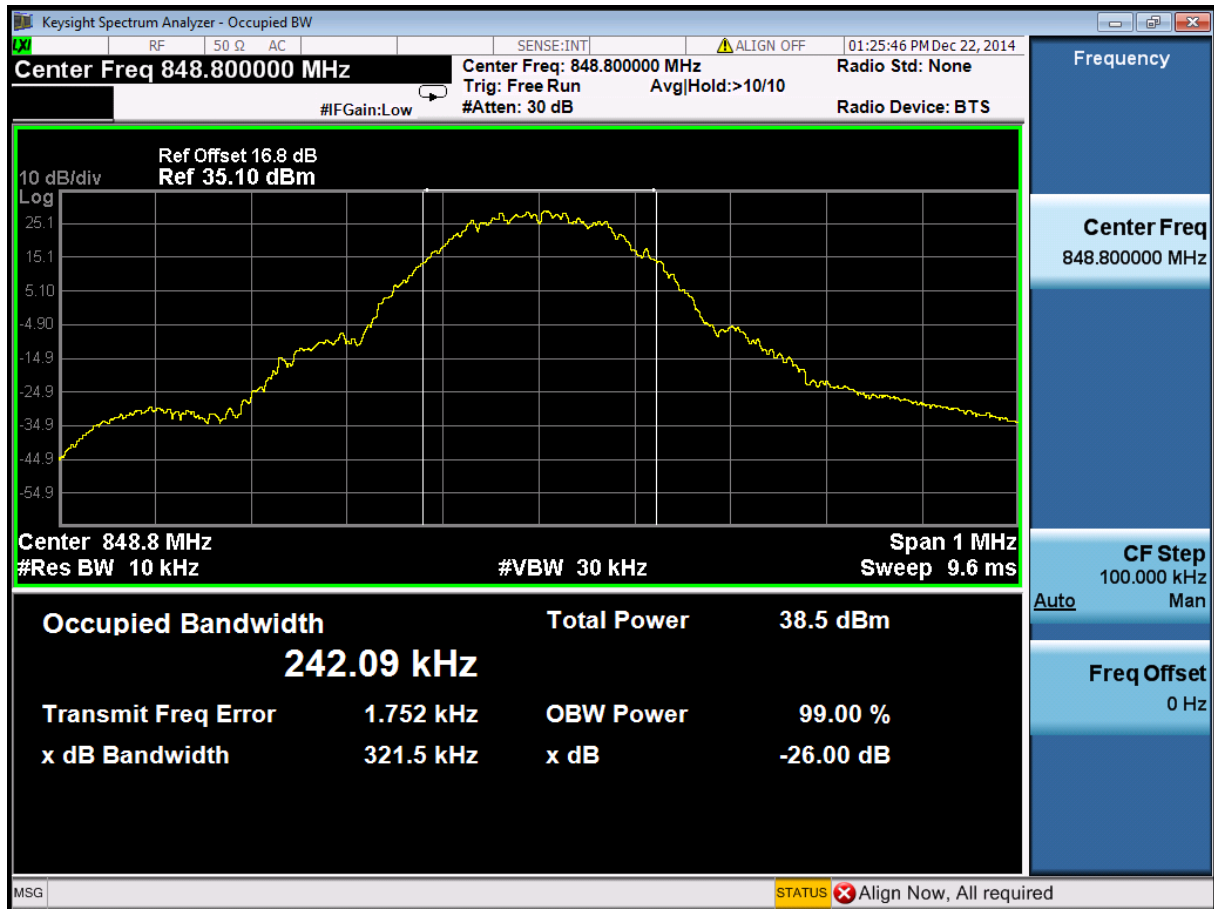




6.1.2 Test Band = GSM1900


6.1.2.1 Test Mode = GSM/TM1

6.1.2.1.1 Test Channel = LCH

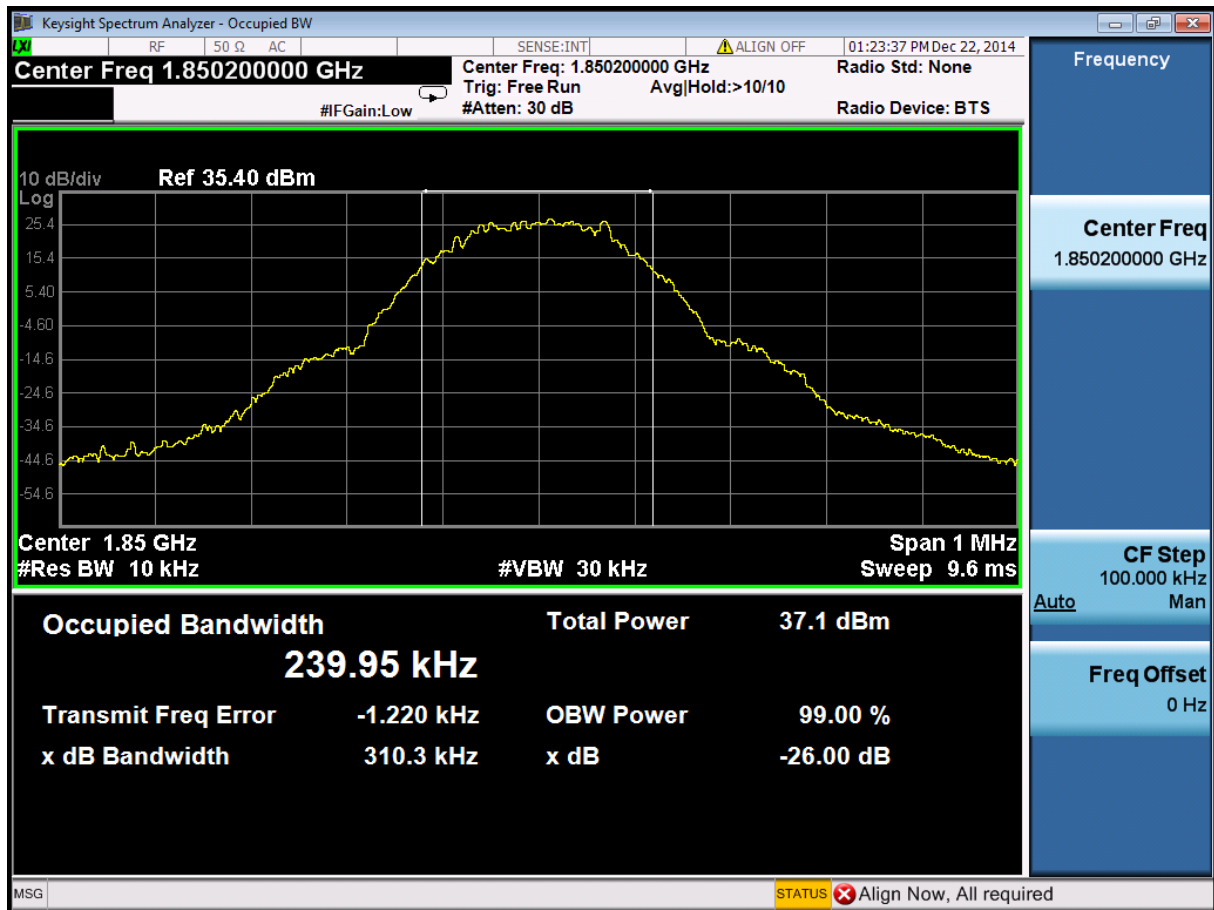




6.1.2.1.2 Test Channel = MCH

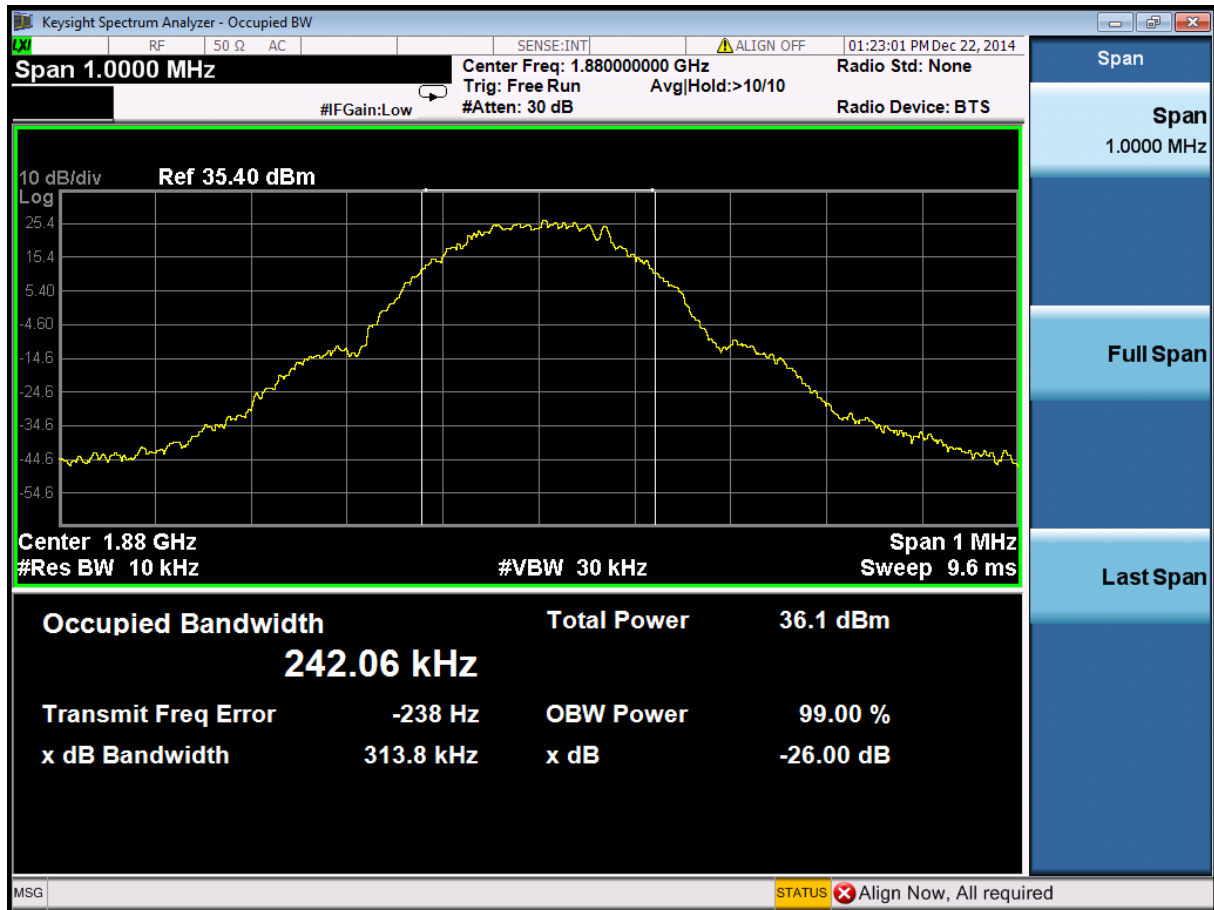



6.1.2.1.3 Test Channel = HCH

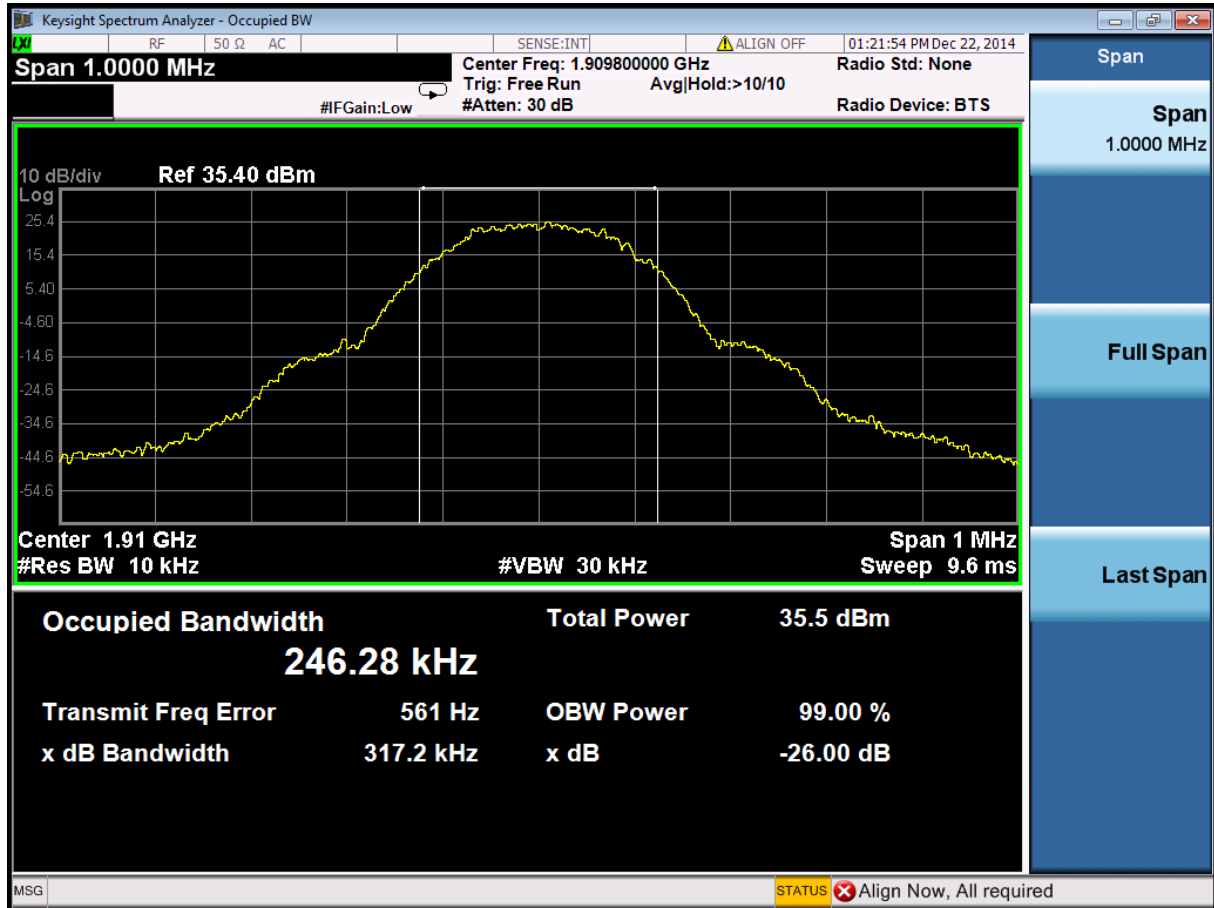



7 Appendix_E: Band Edges Compliance


Part I - Test Plots

7.1 For GSM

7.1.1 Test Band = GSM850


7.1.1.1 Test Mode = GSM/TM1

7.1.1.1.1 Test Channel = LCH

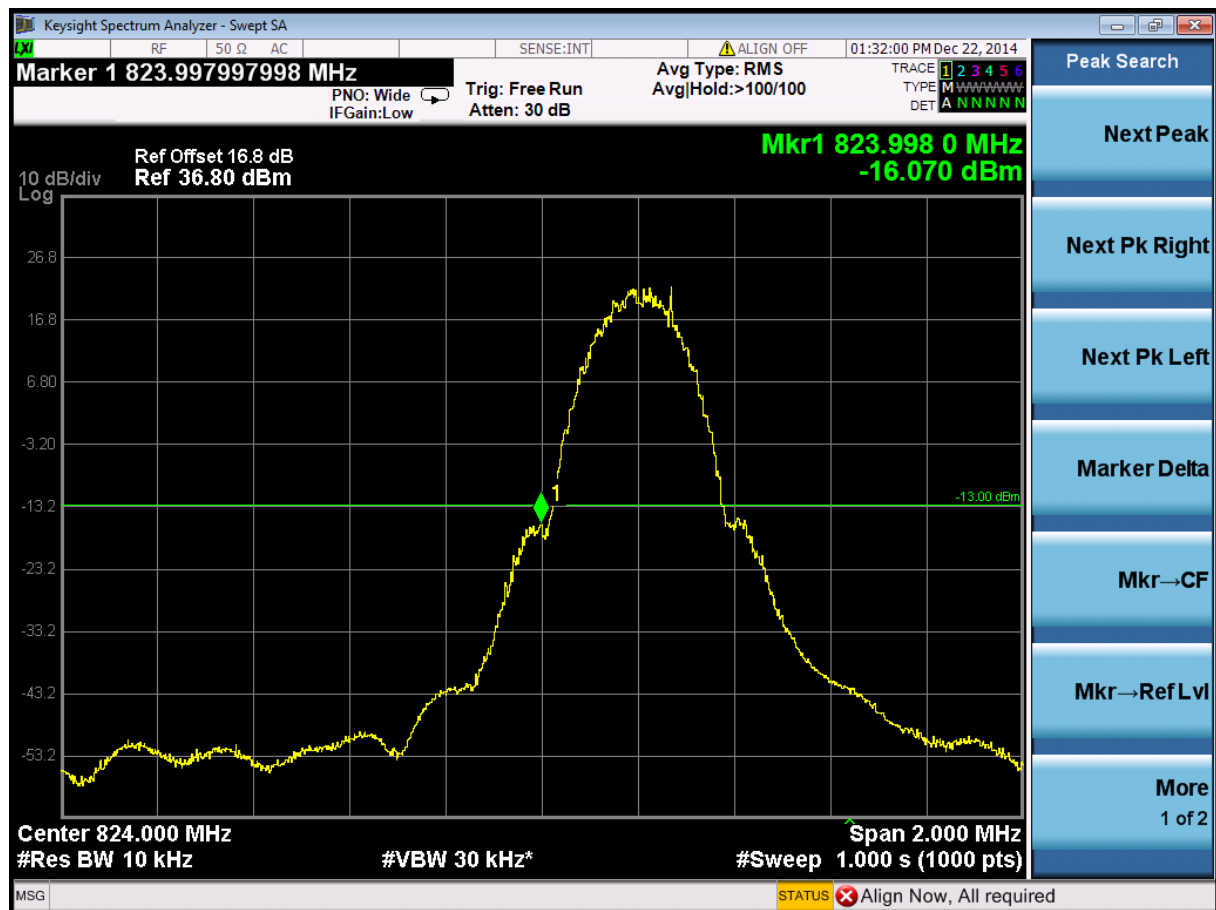




7.1.1.1.2 Test Channel = HCH

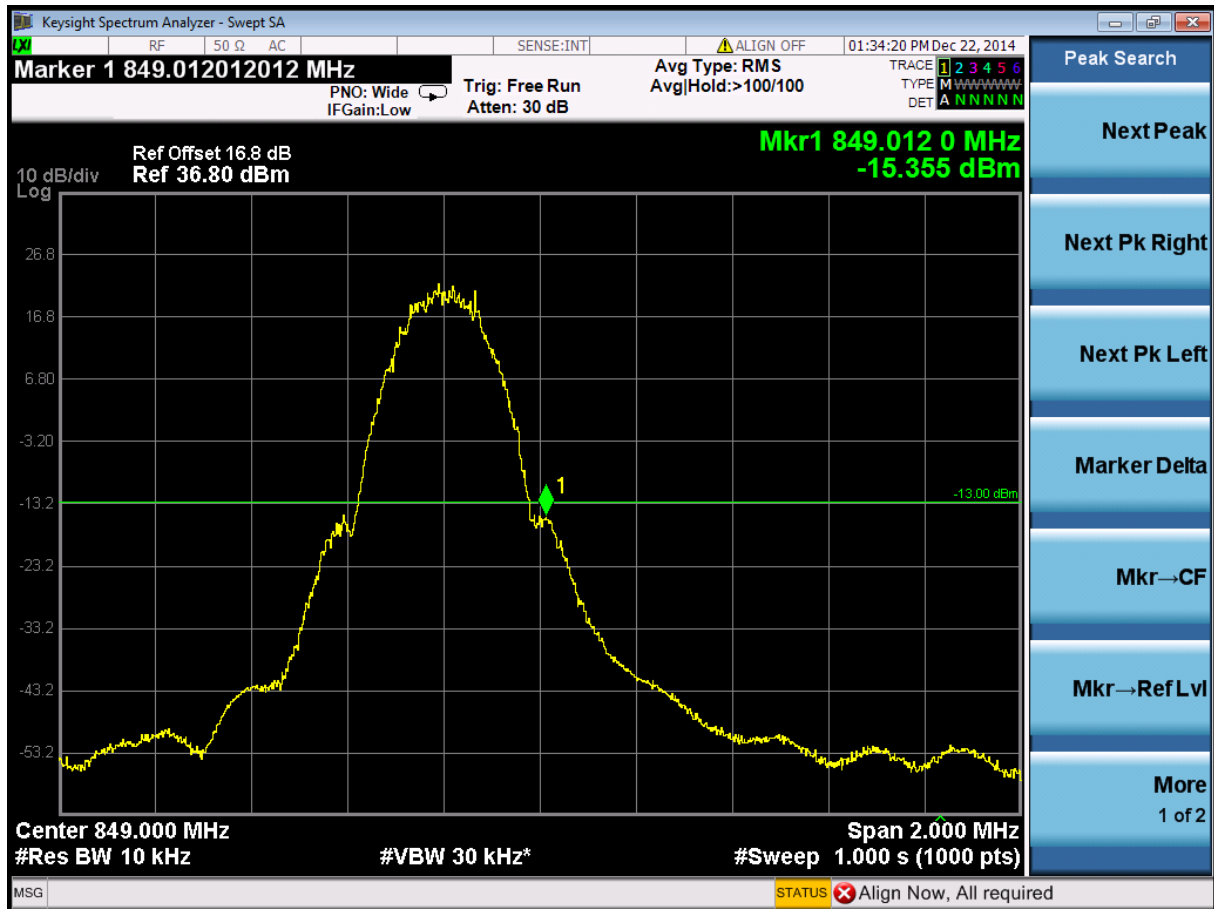

7.1.2 Test Band = GSM1900

7.1.2.1 Test Mode = GSM/TM1


7.1.2.1.1 Test Channel = LCH

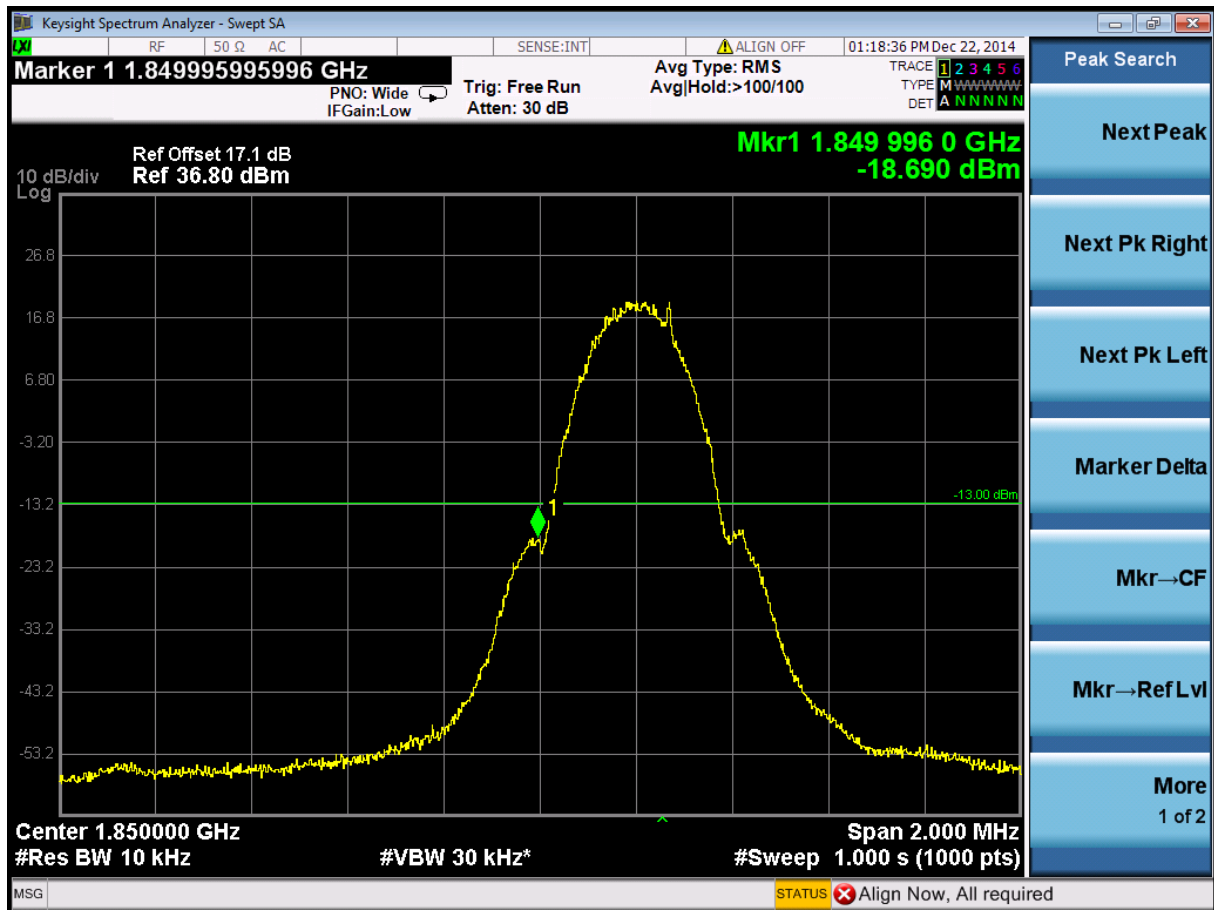

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



7.1.2.1.2 Test Channel = HCH

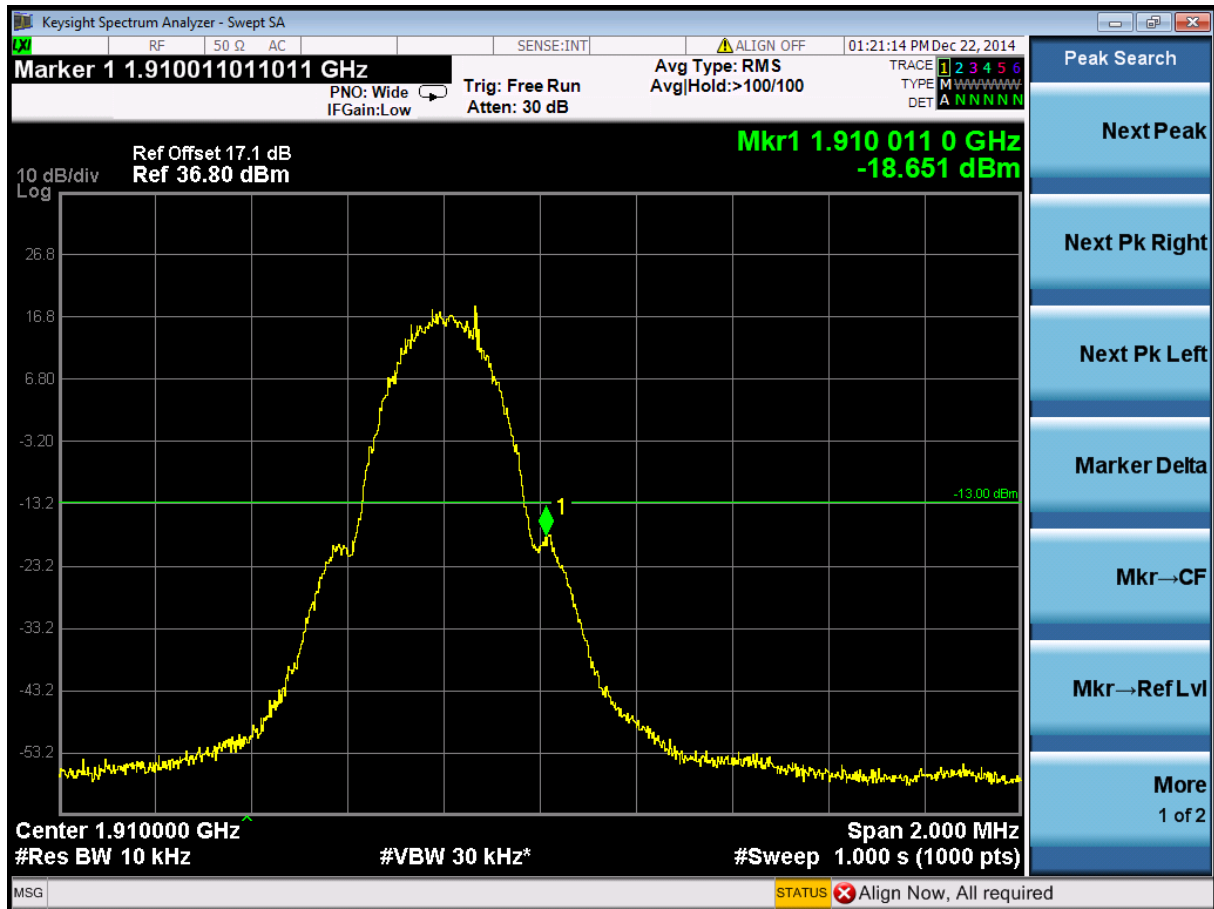



8 Appendix_F: Spurious Emission at Antenna Terminal

NOTE: For the averaged unwanted emissions measurements, the measurement points in each sweep is greater than twice the Span/RBW in order to ensure bin-to-bin spacing of $< RBW/2$ so that narrowband signals are not lost between frequency bins. As to the present test item, the "Measurement Points = $k * (\text{Span} / \text{RBW})$ " with k between 4 and 5, which results in an acceptable level error of less than 0.5 dB.


Part I - Test Plots

8.1 For GSM

8.1.1 Test Band = GSM850


8.1.1.1 Test Mode = GSM/TM1

8.1.1.1.1 Test Channel = LCH

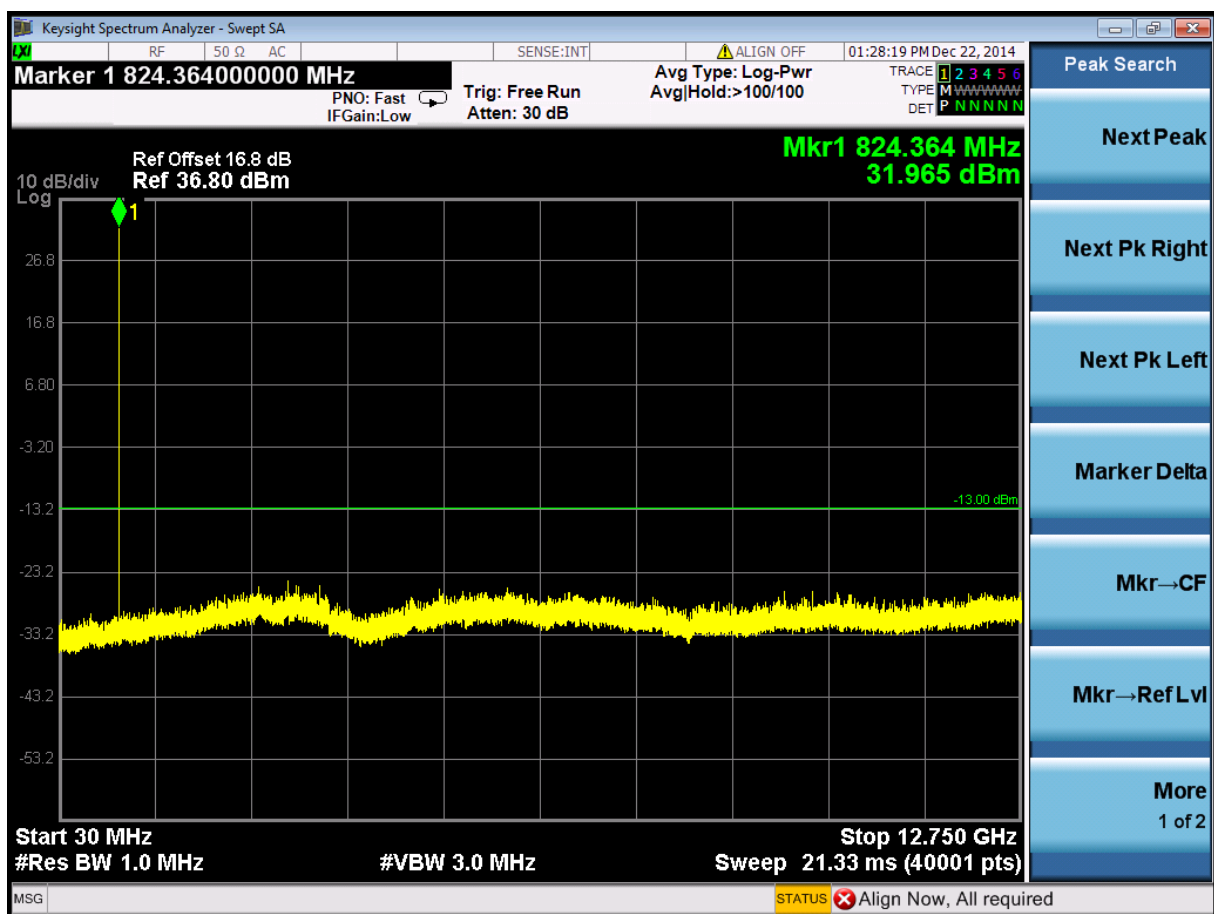




8.1.1.1.2 Test Channel = MCH

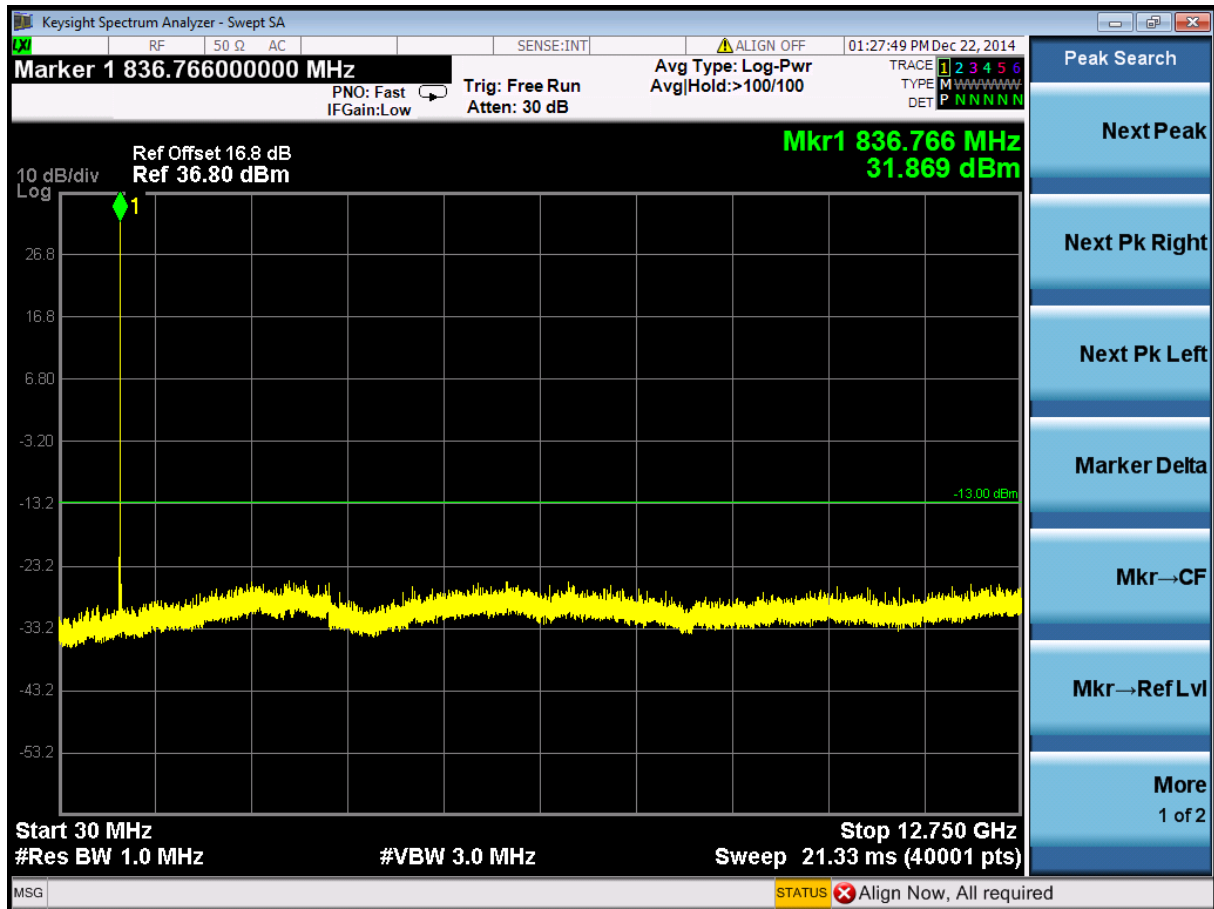



8.1.1.1.3 Test Channel = HCH

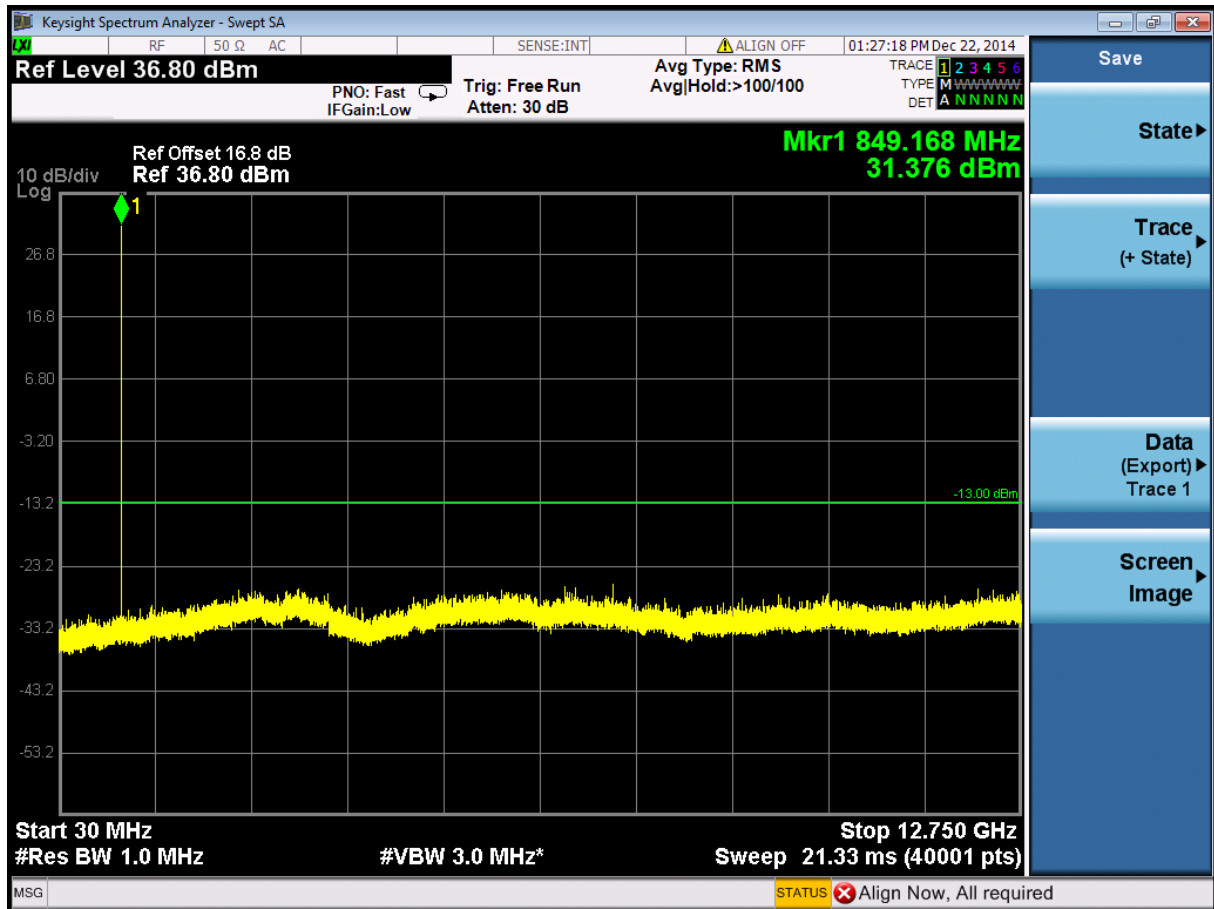




8.1.2 Test Band = GSM1900


8.1.2.1 Test Mode = GSM/TM1

8.1.2.1.1 Test Channel = LCH

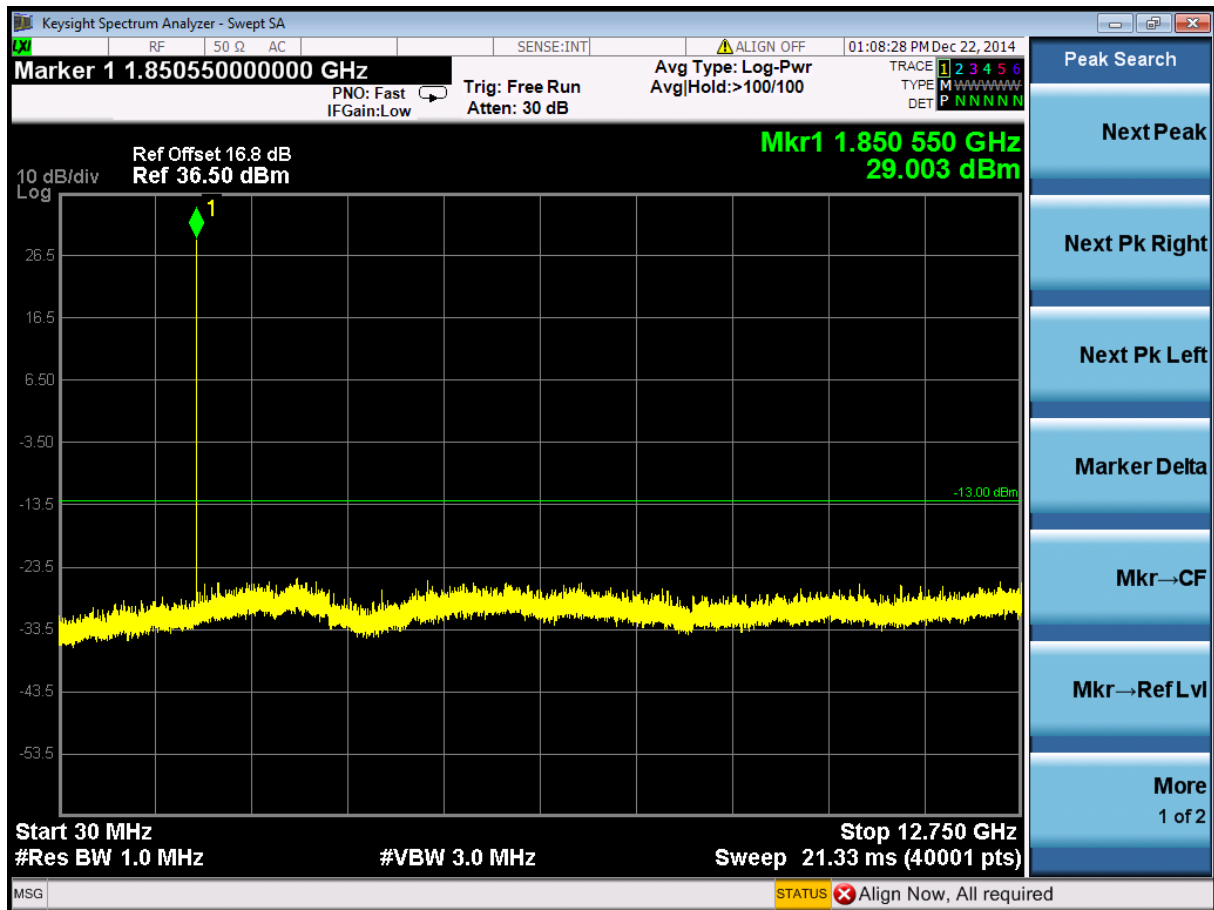




8.1.2.1.2 Test Channel = MCH

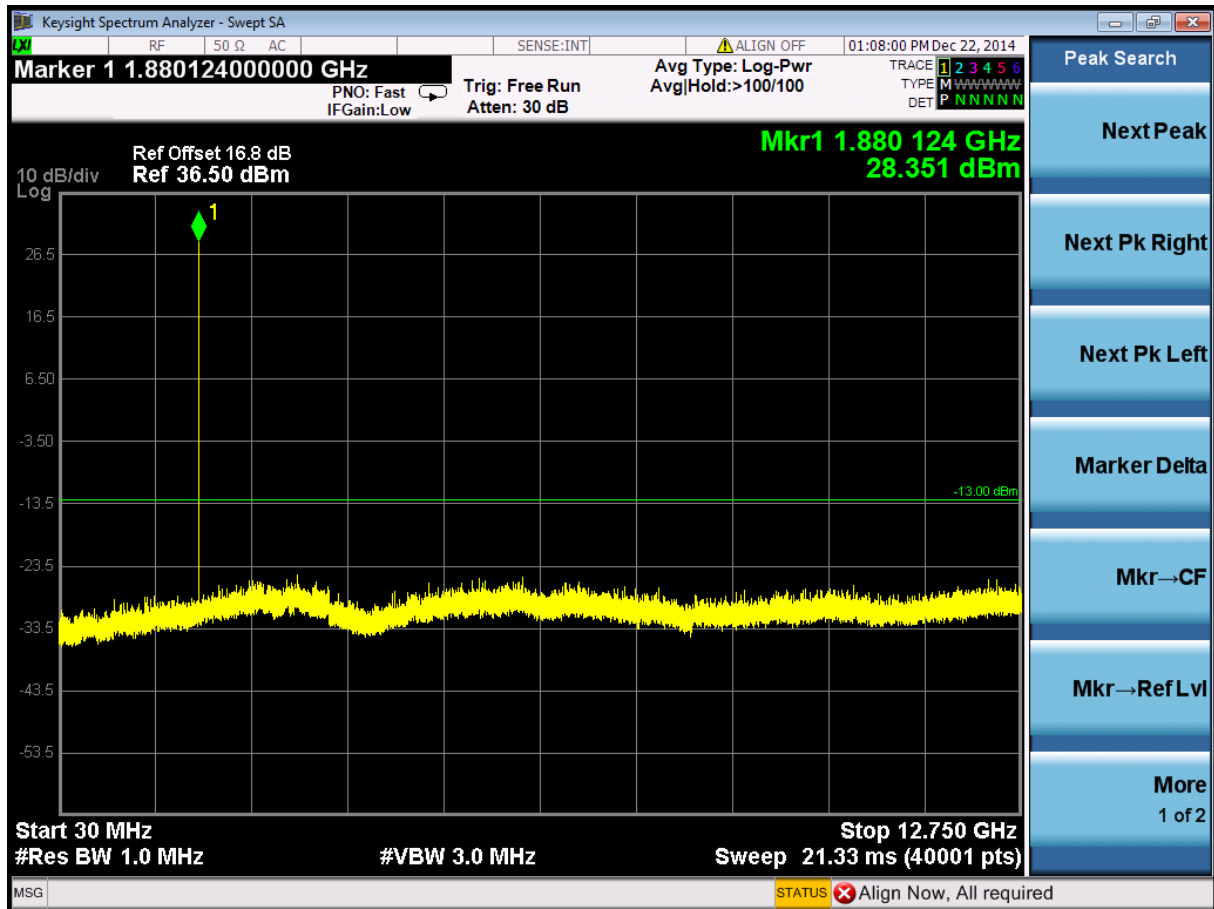



8.1.2.1.3 Test Channel = HCH

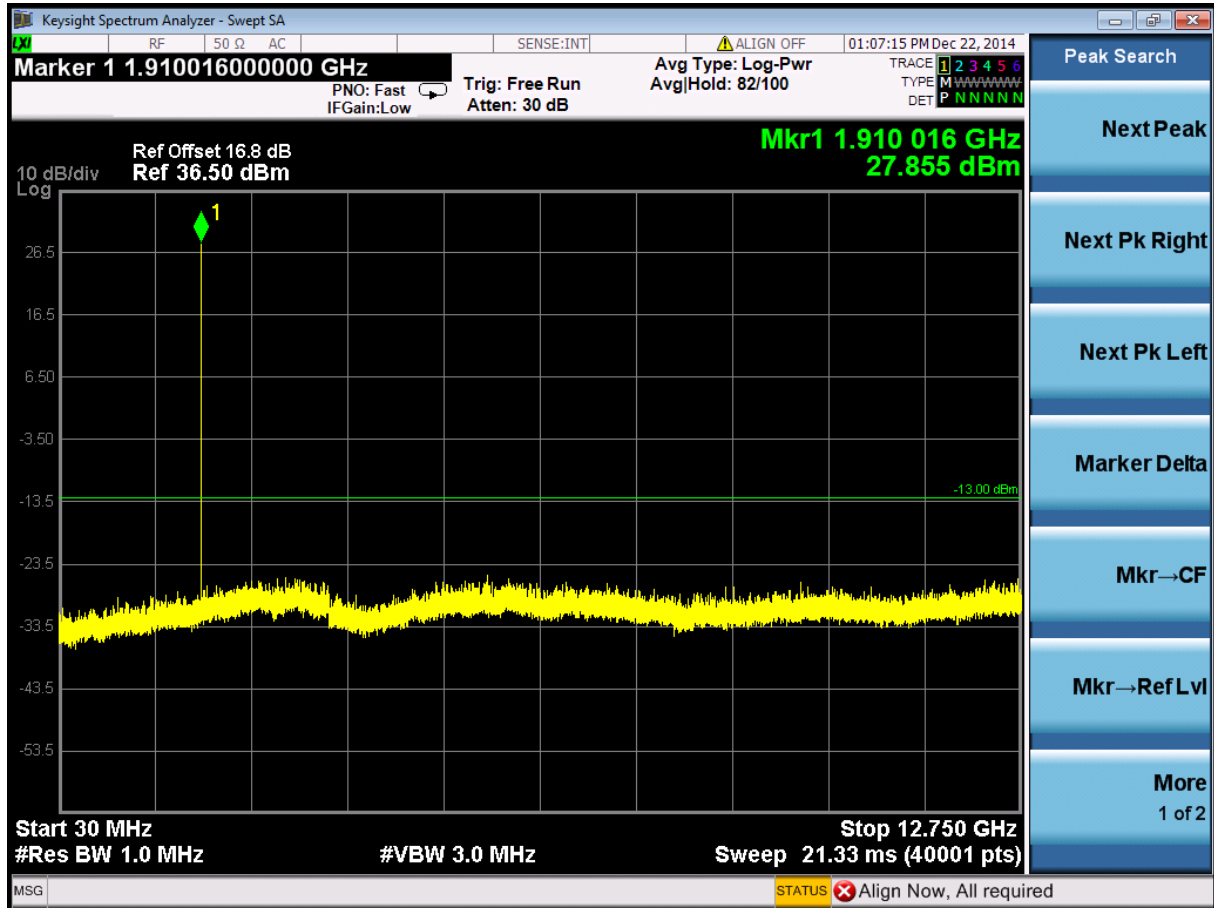



9 Appendix_G: Field Strength of Spurious Radiation

Part I - Test Plots

9.1 For GSM

9.1.1 Test Band = GSM850

9.1.1.1 Test Mode = GSM/TM1

Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
34.891	-64.0	-13.0	-51.0	Vertical
59.783	-68.8	-13.0	-55.8	Vertical
98.151	-66.1	-13.0	-53.1	Vertical
274.299	-67.0	-13.0	-54.0	Vertical
413.495	-65.4	-13.0	-52.4	Vertical
591.427	-61.7	-13.0	-48.7	Vertical
1673.978	-23.8	-13.0	-10.8	Vertical
2509.725	-23.9	-13.0	-10.9	Vertical
4183.536	-21.1	-13.0	-8.1	Vertical
6698.310	-23.9	-13.0	-10.9	Vertical
8368.569	-19.3	-13.0	-6.3	Vertical
9206.362	-25.2	-13.0	-12.2	Vertical

Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
40.182	-67.8	-13.0	-54.8	Horizontal
87.496	-68.9	-13.0	-55.9	Horizontal
210.243	-67.5	-13.0	-54.5	Horizontal
336.228	-66.1	-13.0	-53.1	Horizontal
557.485	-62.0	-13.0	-49.0	Horizontal
713.150	-60.2	-13.0	-47.2	Horizontal
1673.978	-26.3	-13.0	-13.3	Horizontal
2509.725	-25.4	-13.0	-12.4	Horizontal
3348.556	-31.2	-13.0	-18.2	Horizontal
4183.536	-17.9	-13.0	-4.9	Horizontal
5020.349	-31.0	-13.0	-18.0	Horizontal
8368.569	-23.8	-13.0	-10.8	Horizontal

**9.1.2 Test Band = GSM1900****9.1.2.1 Test Mode = GSM/TM1**

Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
41.660	-68.8	-13.0	-55.8	Vertical
97.830	-67.3	-13.0	-54.3	Vertical
160.090	-68.9	-13.0	-55.9	Vertical
330.753	-64.3	-13.0	-51.3	Vertical
589.488	-62.3	-13.0	-49.3	Vertical
831.260	-58.0	-13.0	-45.0	Vertical
3759.831	-23.6	-13.0	-10.6	Vertical
5636.772	-32.7	-13.0	-19.7	Vertical
7521.645	-24.8	-13.0	-11.8	Vertical
9409.829	-25.1	-13.0	-12.1	Vertical
11276.518	-30.1	-13.0	-17.1	Vertical
12556.370	-28.9	-13.0	-15.9	Vertical

Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
44.781	-67.8	-13.0	-54.8	Horizontal
58.042	-67.7	-13.0	-54.7	Horizontal
97.830	-68.9	-13.0	-55.9	Horizontal
242.124	-66.5	-13.0	-53.5	Horizontal
490.479	-63.3	-13.0	-50.3	Horizontal
802.118	-58.9	-13.0	-45.9	Horizontal
3205.626	-44.3	-13.0	-31.3	Horizontal
3759.831	-24.2	-13.0	-11.2	Horizontal
5636.772	-34.4	-13.0	-21.4	Horizontal
7521.645	-30.0	-13.0	-17.0	Horizontal
9409.829	-30.5	-13.0	-17.5	Horizontal
11500.976	-30.9	-13.0	-17.9	Horizontal

NOTE:

- 1) The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
- 2) Pretest was performed at the EUT in low, middle, high channel, but only the worst test channel(Channel 192 for GSM850 and Channel 661 for GSM1900)and only the data of the worst case show in the test report.



10 Appendix_H: Frequency Stability

10.1 For GSM

10.1.1 Frequency Error VS. Voltage:

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt.	Freq. Error [Hz]	Freq. vs. rated [ppm]	Limit [ppm]	Verdict
GSM850	GSM/TM1	LCH	TN	VL	-2.91	-0.00353	±2.5	PASS
				VN	-7.81	-0.00948	±2.5	PASS
				VH	0.71	0.00086	±2.5	PASS
		MCH	TN	VL	-7.55	-0.00902	±2.5	PASS
				VN	-6.33	-0.00757	±2.5	PASS
				VH	-4.97	-0.00594	±2.5	PASS
		HCH	TN	VL	-1.03	-0.00121	±2.5	PASS
				VN	-5.75	-0.00677	±2.5	PASS
				VH	-9.17	-0.0108	±2.5	PASS
GSM1900	GSM/TM1	LCH	TN	VL	-12.79	-0.00691	±2.5	PASS
				VN	-10.14	-0.00548	±2.5	PASS
				VH	-8.59	-0.00464	±2.5	PASS
		MCH	TN	VL	-2.45	-0.0013	±2.5	PASS
				VN	-1.74	-0.00093	±2.5	PASS
				VH	-7.43	-0.00395	±2.5	PASS
		HCH	TN	VL	-1.10	-0.00058	±2.5	PASS
				VN	-8.33	-0.00436	±2.5	PASS
				VH	-18.98	-0.00994	±2.5	PASS

**10.1.2 Frequency Error VS. Temperature:**

Test Band	Test Mode	Test Channel	Test Volt.	Test Temp.	Freq. Error [Hz]	Freq. vs. rated [ppm]	Limit [ppm]	Verdict
GSM850	GSM/TM1	LCH	VN	-30	-1.81	-0.00220	±2.5	PASS
				-20	-1.10	-0.00133	±2.5	PASS
				-10	-1.42	-0.00172	±2.5	PASS
				0	-3.36	-0.00408	±2.5	PASS
				10	1.42	0.00172	±2.5	PASS
				20	2.65	0.00322	±2.5	PASS
				30	2.32	0.00281	±2.5	PASS
				40	0.84	0.00102	±2.5	PASS
				50	5.94	0.00721	±2.5	PASS
		MCH	VN	-30	0.00	0.00000	±2.5	PASS
				-20	2.71	0.00324	±2.5	PASS
				-10	-0.52	-0.00062	±2.5	PASS
				0	-1.87	-0.00224	±2.5	PASS
				10	0.52	0.00062	±2.5	PASS
				20	-1.03	-0.00123	±2.5	PASS
				30	1.03	0.00123	±2.5	PASS
				40	1.61	0.00192	±2.5	PASS
				50	2.45	0.00293	±2.5	PASS
		HCH	VN	-30	0.26	0.00031	±2.5	PASS
				-20	4.91	0.00578	±2.5	PASS
				-10	-0.71	-0.00084	±2.5	PASS
				0	-1.16	-0.00137	±2.5	PASS
				10	-0.90	-0.00106	±2.5	PASS
				20	-1.16	-0.00137	±2.5	PASS
				30	-1.36	-0.00160	±2.5	PASS
				40	-2.26	-0.00266	±2.5	PASS
				50	-0.19	-0.00022	±2.5	PASS



SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM141100609202

Page: 29 of 29

GSM1900	GSM/TM1	LCH	VN	-30	-14.85	-0.00803	±2.5	PASS
				-20	-8.78	-0.00475	±2.5	PASS
				-10	-13.95	-0.00754	±2.5	PASS
				0	-2.13	-0.00115	±2.5	PASS
				10	1.74	0.00094	±2.5	PASS
				20	-4.97	-0.00269	±2.5	PASS
				30	-13.75	-0.00743	±2.5	PASS
				40	-10.33	-0.00558	±2.5	PASS
				50	1.42	0.00077	±2.5	PASS
		MCH	VN	-30	-5.68	-0.00302	±2.5	PASS
				-20	-7.30	-0.00388	±2.5	PASS
				-10	-13.04	-0.00694	±2.5	PASS
				0	-0.58	-0.00031	±2.5	PASS
				10	-15.24	-0.00811	±2.5	PASS
				20	-7.55	-0.00402	±2.5	PASS
				30	2.52	0.00134	±2.5	PASS
				40	-8.78	-0.00467	±2.5	PASS
				50	-11.82	-0.00629	±2.5	PASS
		HCH	VN	-30	-14.59	-0.00764	±2.5	PASS
				-20	-5.10	-0.00267	±2.5	PASS
				-10	-6.65	-0.00348	±2.5	PASS
				0	-11.62	-0.00608	±2.5	PASS
				10	1.16	0.00061	±2.5	PASS
				20	2.71	0.00142	±2.5	PASS
				30	-6.20	-0.00325	±2.5	PASS
				40	-13.50	-0.00707	±2.5	PASS
				50	-2.07	-0.00108	±2.5	PASS

The End

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."