

FCC RF Test Report


APPLICANT : Lucca Sol Bene Limited Liability Company
EQUIPMENT : Wireless Controller
MODEL NAME : DE38UR
FCC ID : 2ADU7-5487
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The testing was completed on May 15, 2015. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

Report No. : FR511218-01C

Report Version : Rev. 03

Page Number : 1 of 27

Report Template No.: BU5-FR15EWLB4 Version 1.0

TABLE OF CONTENTS

SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Feature of Equipment Under Test	5
1.3 Product Specification of Equipment Under Test.....	5
1.4 Modification of EUT	5
1.5 Testing Location	6
1.6 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Carrier Frequency and Channel	7
2.2 Pre-Scanned RF Power.....	8
2.3 Test Mode.....	8
2.4 Connection Diagram of Test System.....	9
2.5 Support Unit used in test configuration and system	9
2.6 EUT Operation Test Setup	9
2.7 Measurement Results Explanation Example.....	10
3 TEST RESULT	11
3.1 6dB Bandwidth Measurement	11
3.2 Maximum Conducted Output Power Measurement	13
3.3 Power Spectral Density Measurement	14
3.4 Unwanted Emissions Measurement.....	16
3.5 Frequency Stability Measurement.....	22
3.6 Automatically Discontinue Transmission	23
3.7 Antenna Requirements.....	25
4 LIST OF MEASURING EQUIPMENT	26
5 UNCERTAINTY OF EVALUATION	27
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED TEST RESULTS	

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR511218-01C	Rev. 01	Initial issue of report	Apr. 15, 2015
FR511218-01C	Rev. 02	Revising the applicable standard and adding chapter of duty cycle	May 13, 2015
FR511218-01C	Rev. 03	Adding test data of Automatically Discontinue Transmission in section 3.6.3.	May 20, 2015

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	6dB Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	$\leq -17, -27$ dBm/MHz & 15.209(a)	Pass	Under limit 0.80 dB at 5590.000 MHz
-	15.207	AC Conducted Emission	15.207(a)	Not Require	EUT is powered on by battery only without any AC power port.
3.5	15.407(g)	Frequency Stability	Within Operation Band	Pass	-
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.7	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

Lucca Sol Bene Limited Liability Company

100 Chesterfield Business Parkway, Suite 200, Chesterfield, St. Louis, Missouri 63005

1.2 Feature of Equipment Under Test

Product Feature	
Equipment	Wireless Controller
Model Name	DE38UR
FCC ID	2ADU7-5487
EUT supports Radios application	WLAN 11a/g

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.3 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Channel Frequency Range	5725 MHz ~ 5850 MHz
Maximum Output Power	<5725 MHz ~ 5850 MHz> <Ant. 1> 802.11a : 5.83 dBm / 0.0038 W <Ant. 2> 802.11a : 6.10 dBm / 0.0041 W
Type of Modulation	802.11a : OFDM (BPSK / QPSK / 16QAM)
Antenna Type	<5725 MHz ~ 5850 MHz> Antenna 1: Fixed Internal Antenna Antenna 2: Fixed Internal Antenna
Antenna Gain	<5725 MHz ~ 5850 MHz> Antenna 1: 4.72 dBi Antenna 2: 4.45 dBi

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH02-HY	03CH07-HY

Note: The test site complies with ANSI C63.4 2009 requirement.

1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v01
- ♦ ANSI C63.10-2009

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. FCC permits the use of the 1.5 meter table as an alternative in C63.10-2013 through inquiry tracking number 961829.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	165	5825		

2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test in the following tables. Final Output Power equals to Measured Output Power adds the duty factor.

<Ant. 1>

5GHz 802.11a mode					
Data Rate (MHz)	6M bps	9M bps	12M bps	18M bps	24M bps
Average Power (dBm)	5.83	5.74	5.66	5.31	5.52

<Ant. 2>

5GHz 802.11a mode					
Data Rate (MHz)	6M bps	9M bps	12M bps	18M bps	24M bps
Average Power (dBm)	6.10	6.08	5.94	5.58	5.73


2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.

Modulation	Data Rate
802.11a	6 Mbps

Ch. #		Band IV : 5725-5850 MHz
		802.11a
L	Low	149
M	Middle	157
H	High	165

2.4 Connection Diagram of Test System

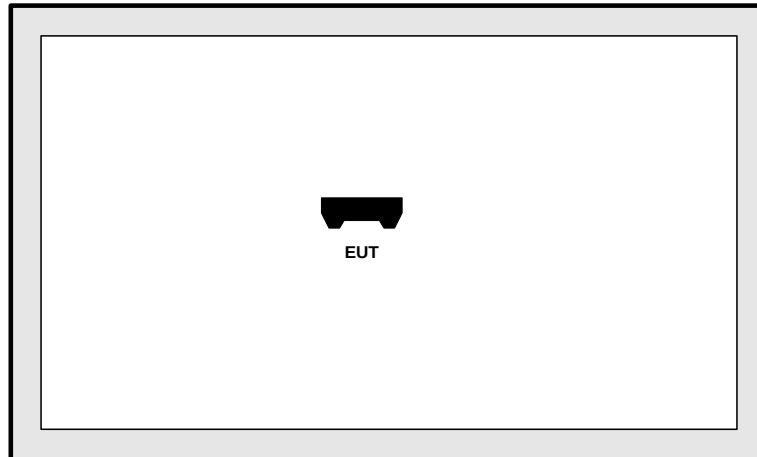

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	AA Battery	N/A	N/A	N/A	N/A	N/A

2.6 EUT Operation Test Setup

For WLAN function, programmed RF utility, “Tera Term” installed in the notebook make the EUT provide functions like channel selection and power level for continuous transmitting and receiving signals.

2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Description of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.

3.1.4 Test Setup

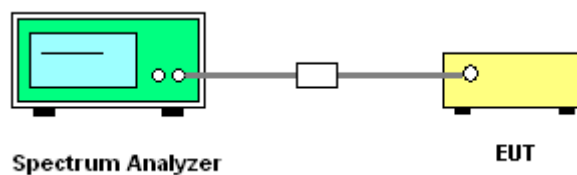

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

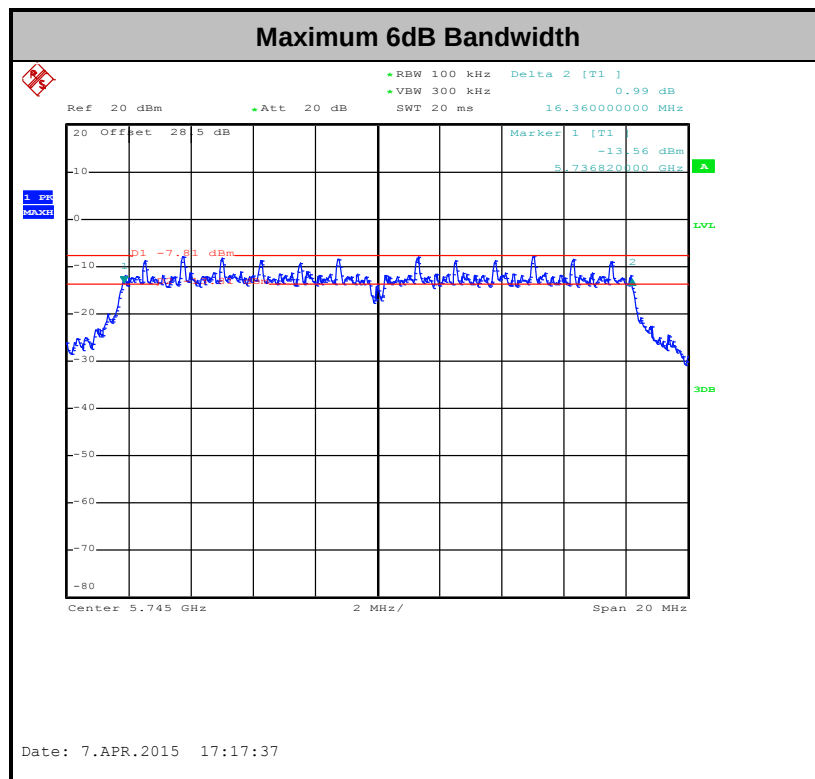

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

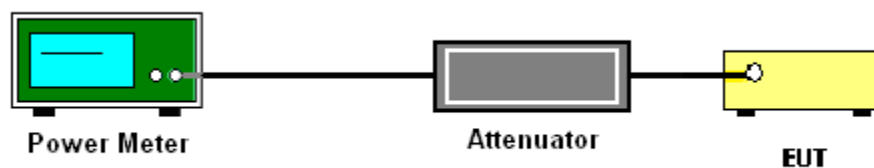

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.
Section F) Maximum power spectral density.


Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

1. The testing follows Method SA-2 of FCC KDB 789033 D01 General UNII Test Procedures v01r03.
 - Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 300 kHz.
 - Set VBW $\geq$ 1 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.


2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

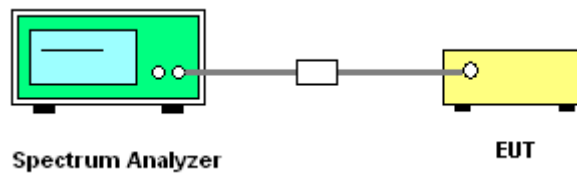

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

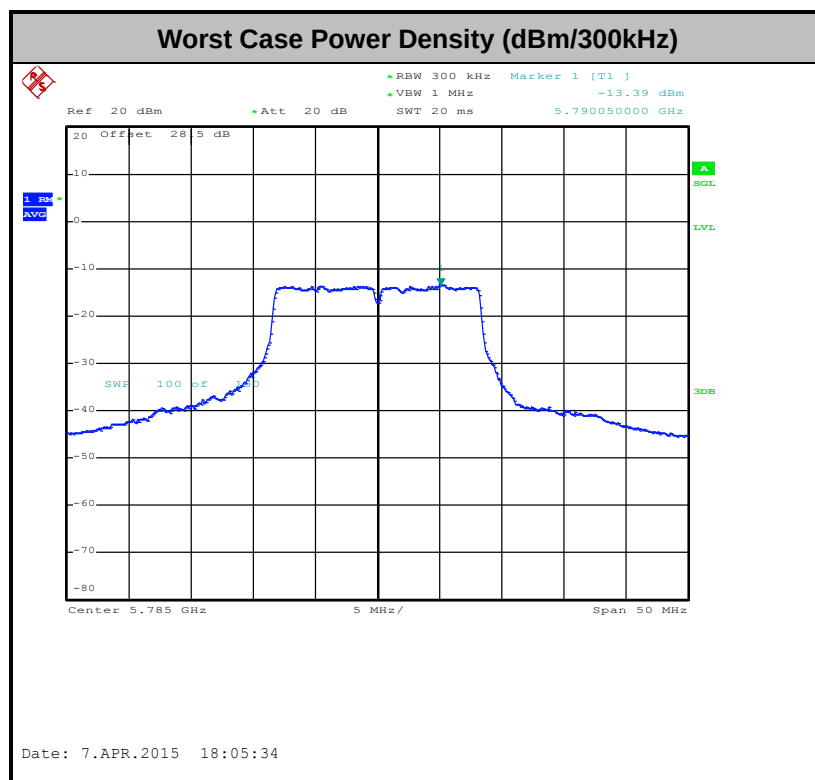

3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5725-5850 MHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBμV/m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBμV/m).
- (2) Unwanted spurious emissions fallen in restricted bands per FCC Part 15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
-17	78.3
- 27	68.3

- (3) KDB789033 v01r03 H)2)c)(i) As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.
Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW $\geq$ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz


- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
1	802.11a	50	1400	0.71	1kHz
2	802.11a	51.09	1400	0.71	1kHz


2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

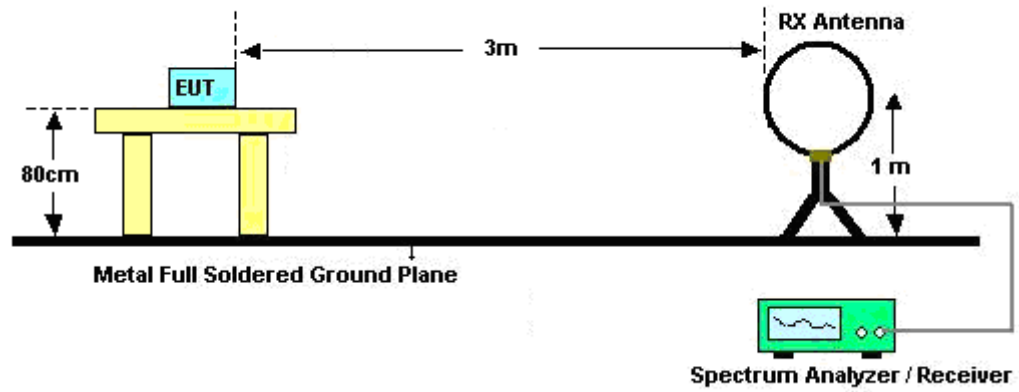

For radiated emissions from 30MHz to 1GHz

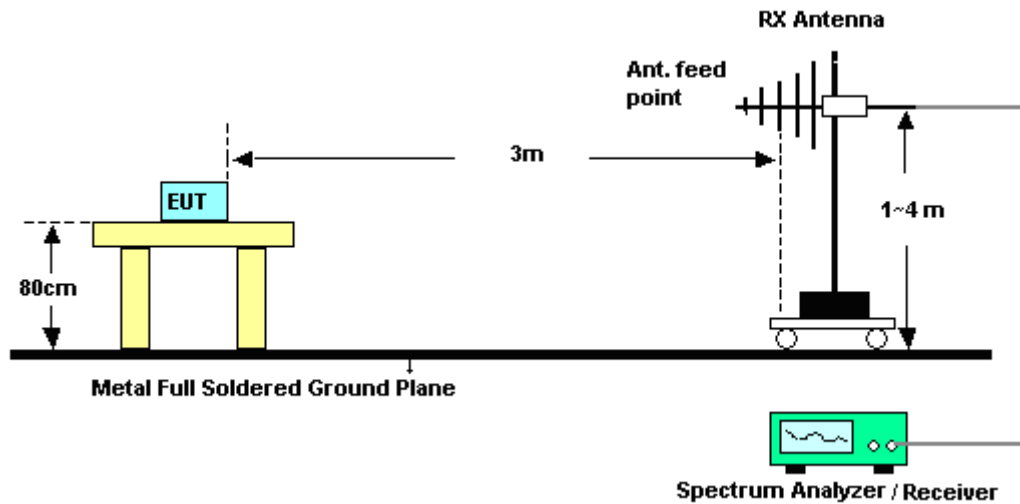

For radiated emissions above 1GHz

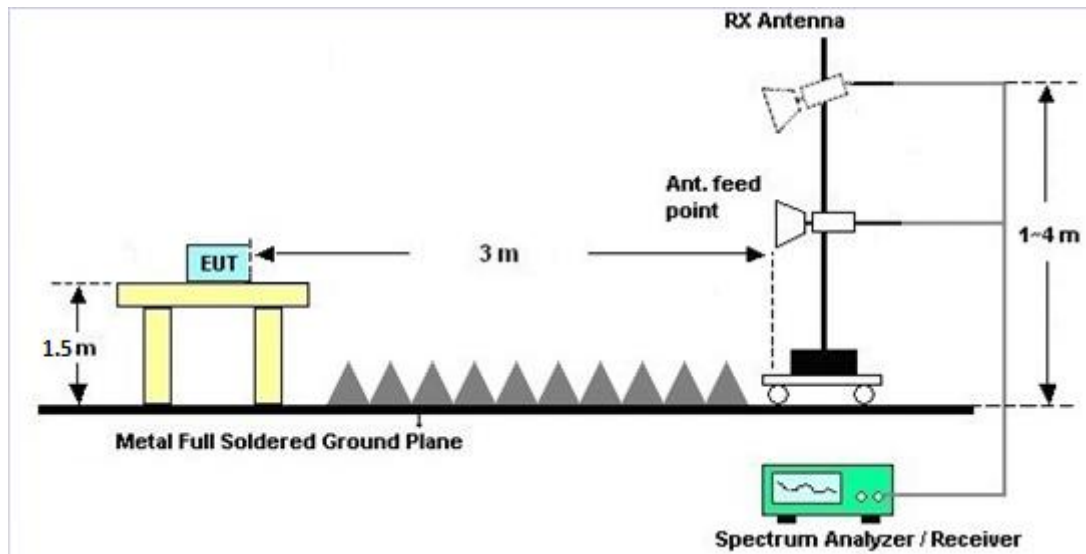



3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix A.

3.4.7 Duty cycle

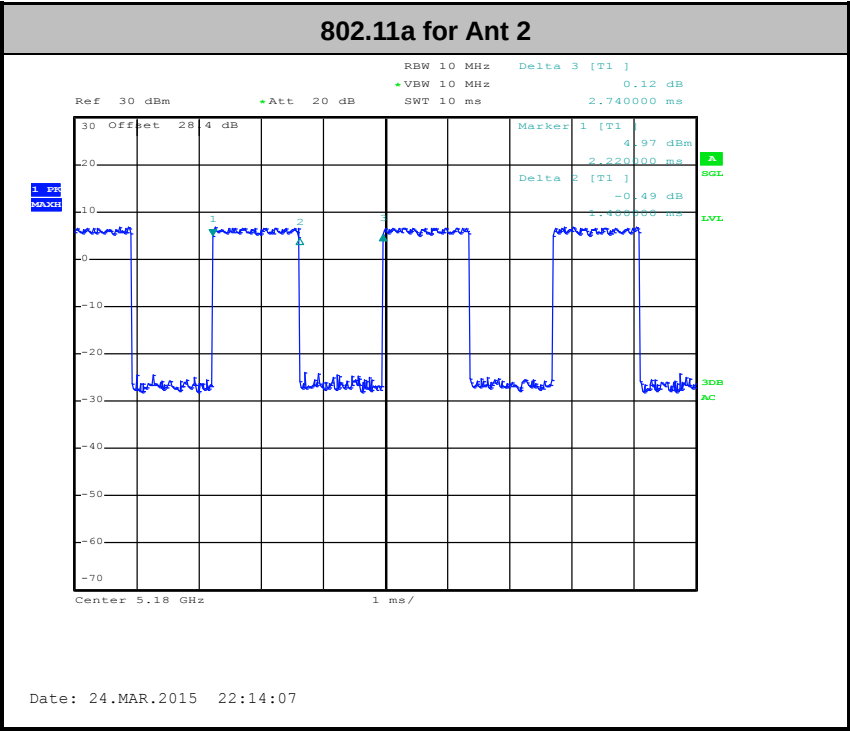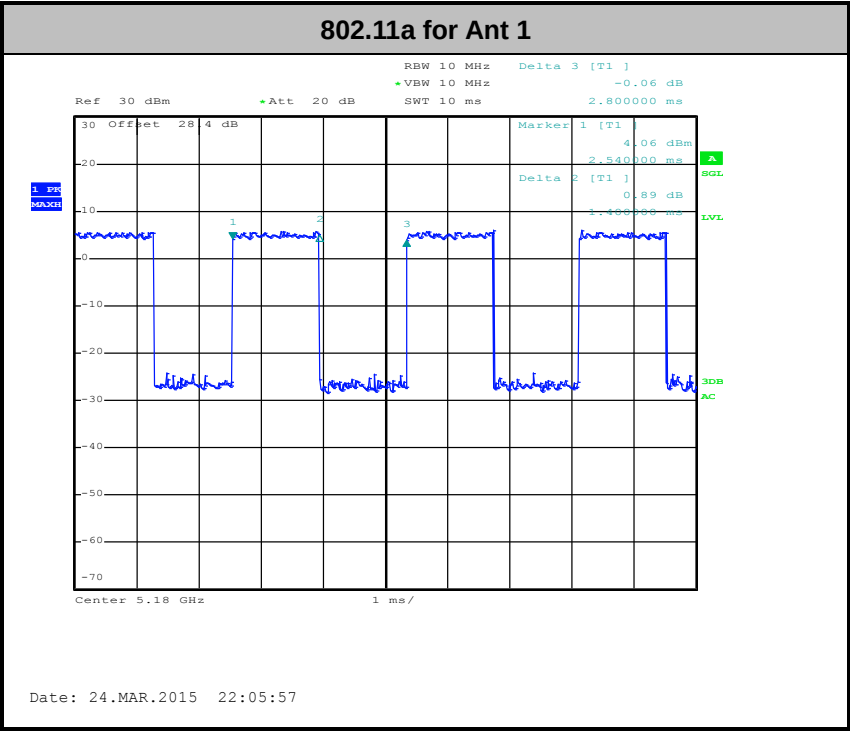

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix A.

3.5 Frequency Stability Measurement

3.5.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

3.5.4 Test Setup

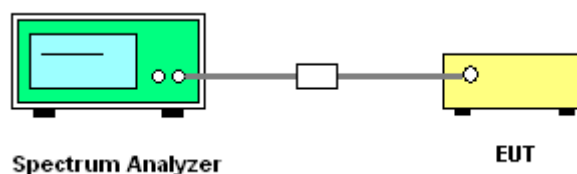

3.5.5 Test Result of Frequency Stability

Please refer to Appendix A.

3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission

EUT is verified this characteristic during the function check of normal sample associated with an access point:


- A. Information start: make EUT supply information to the access point.
- B. Information stop: stop supplying information to the access point.

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving.

- C. Information start: make EUT supply information to the access point again.

The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

5745MHz

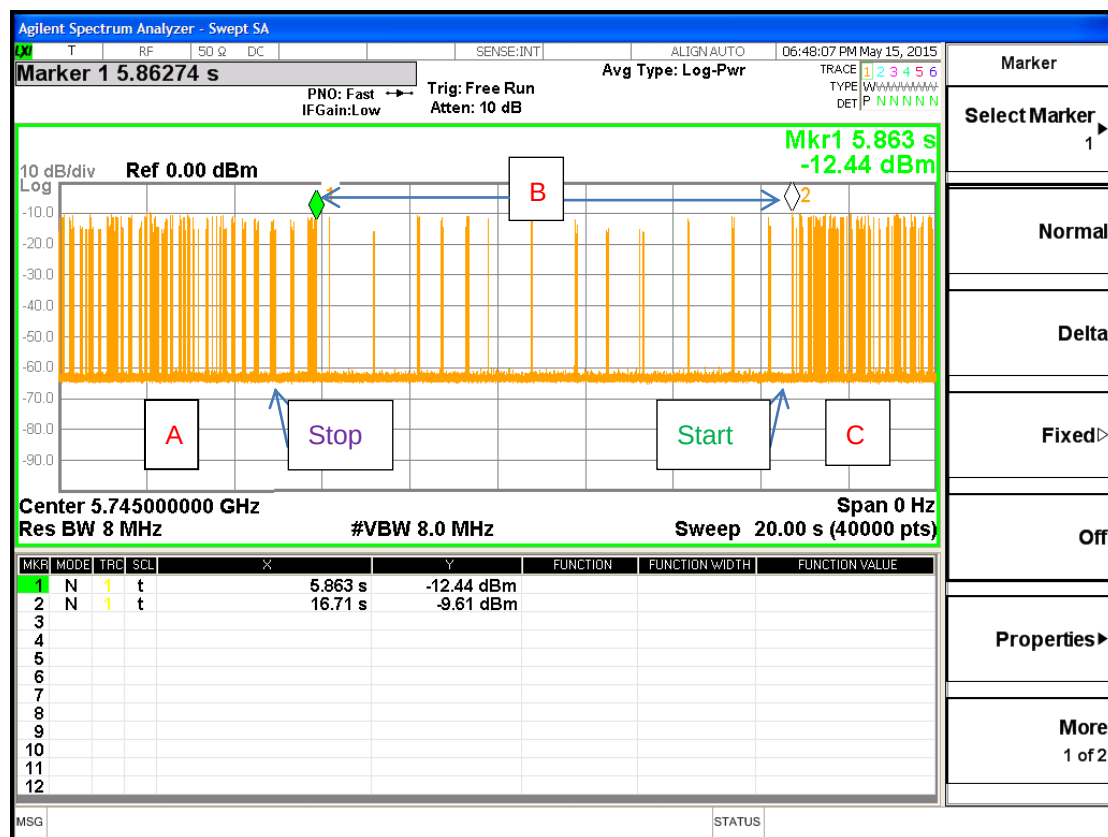

3.7 Antenna Requirements

3.7.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna gain is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 09, 2014	Mar. 24, 2015 ~ Apr. 07, 2015	Jun. 08, 2015	Conducted (TH02-HY)
Power Meter	Anritsu	ML2495A	1036004	300MHz~40GHz	Aug. 09, 2014	Mar. 24, 2015 ~ Apr. 07, 2015	Aug. 08, 2015	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	1027253	300MHz~40GHz	Aug. 09, 2014	Mar. 24, 2015 ~ Apr. 07, 2015	Aug. 08, 2015	Conducted (TH02-HY)
Spectrum Analyzer	Agilent	N9030A	MY52350276	3Hz~44GHz	Mar. 18, 2015	May 15, 2015	Mar. 17, 2016	Conducted (TH02-HY)
Signal Analyzer	Rohde & Schwarz	FSV 30	100895	9kH z~ 30GHz	Mar. 24, 2015	Apr. 09, 2015 ~ Apr. 10, 2015	Mar. 23, 2016	Radiation (03CH07-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9 kHz~7 GHz	Aug. 30, 2014	Apr. 09, 2015 ~ Apr. 10, 2015	Aug. 29, 2015	Radiation (03CH07-HY)
Loop Antenna	R&S	HFH2-Z2	100315	9 kHz~30 MHz	Jul. 28, 2014	Apr. 09, 2015 ~ Apr. 10, 2015	Jul. 27, 2015	Radiation (03CH07-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30MHz ~ 1GHz	Sep. 27, 2014	Apr. 09, 2015 ~ Apr. 10, 2015	Sep. 26, 2015	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	75962	1GHz~18GHz	Aug. 19, 2014	Apr. 09, 2015 ~ Apr. 10, 2015	Aug. 18, 2015	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	18GHz~40GHz	Oct. 02, 2014	Apr. 09, 2015 ~ Apr. 10, 2015	Oct. 01, 2015	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10 MHz ~ 1000MHz	Mar. 12, 2015	Apr. 09, 2015 ~ Apr. 10, 2015	Mar. 11, 2016	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1 GHz~26.5 GHz	Oct. 21, 2014	Apr. 09, 2015 ~ Apr. 10, 2015	Oct. 20, 2015	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	DC~18 GHz	Jul. 07, 2014	Apr. 09, 2015 ~ Apr. 10, 2015	Jul. 06, 2015	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	DC~18 GHz	Apr. 21, 2014	Apr. 09, 2015 ~ Apr. 10, 2015	Apr. 20, 2015	Radiation (03CH07-HY)
Turn Table	ChainTek	ChainTek 3000	N/A	0 ~ 360 degree	N/A	Apr. 09, 2015 ~ Apr. 10, 2015	N/A	Radiation (03CH07-HY)
Antenna Mast	ChainTek	ChainTek 3000	N/A	N/A	N/A	Apr. 09, 2015 ~ Apr. 10, 2015	N/A	Radiation (03CH07-HY)

5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.50
--	------

Appendix A. Conducted Test Results

Appendix A. Conducted Test Results

Test Engineer:	Tommy Lee / Osolemio Chang	Temperature:	21~25	°C
Test Date:	2015/4/7	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% OBW

FCC Band IV									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	6 dB Bandwidth (MHz)		FCC 6 dB Bandwidth Min. Limit (MHz)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	16.36	16.32	0.5	0.5	Pass
11a	6Mbps	1	157	5785	16.32	16.32	0.5	0.5	Pass
11a	6Mbps	1	165	5825	16.32	16.36	0.5	0.5	Pass

TEST RESULTS DATA
Average Power Table

FCC Band IV														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	3.01	2.92	5.83	6.10		30.00	30.00	4.72	4.45	Pass
11a	6Mbps	1	157	5785	3.01	2.92	5.61	6.05		30.00	30.00	4.72	4.45	Pass
11a	6Mbps	1	165	5825	3.01	2.92	5.33	5.45		30.00	30.00	4.72	4.45	Pass

TEST RESULTS DATA
Power Spectral Density

FCC Band IV																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	3.01	2.92	2.22	2.22	-8.82	-8.81		30.00	30.00	4.72	4.45	Pass
11a	6Mbps	1	157	5785	3.01	2.92	2.22	2.22	-8.53	-8.25		30.00	30.00	4.72	4.45	Pass
11a	6Mbps	1	165	5825	3.01	2.92	2.22	2.22	-8.57	-8.65		30.00	30.00	4.72	4.45	Pass

TEST RESULTS DATA
Frequency Stability

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)	Note
11a	6Mbps	1	149	5745	5745.000	0.000	0.00	20	2.1	
11a	6Mbps	1	149	5745	5745.000	0.000	0.00	20	3.6	
11a	6Mbps	1	149	5745	5745.000	0.000	0.00	20	3	
11a	6Mbps	1	149	5745	5745.000	0.000	0.00	0	3	
11a	6Mbps	1	149	5745	5745.000	0.000	0.00	40	3	

Appendix B. Radiated Spurious Emission

Test Engineer :	Nick Yu and Ken Wu and James Chiu	Temperature :	21~23°C
		Relative Humidity :	47~49%

15E Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 149 5745MHz		5713.56	60.42	-13.58	74	47.09	35.22	12.26	34.15	232	26	P	H
		5725	71.51	-6.79	78.3	58.17	35.23	12.26	34.15	232	26	P	H
		5715	48.42	-5.58	54	35.09	35.22	12.26	34.15	232	26	A	H
	*	5745	101.2	-	-	87.8	35.24	12.33	34.17	232	26	P	H
	*	5745	91.1	-	-	77.7	35.24	12.33	34.17	232	26	A	H
		5851.44	57.08	-21.22	78.3	43.63	35.31	12.45	34.31	232	26	P	H
		5860.24	57.01	-16.99	74	43.55	35.32	12.49	34.35	232	26	P	H
		5867.12	44.42	-9.58	54	30.96	35.32	12.49	34.35	232	26	A	H
		5714.52	59.33	-14.67	74	46	35.22	12.26	34.15	223	106	P	V
		5724.68	69.17	-9.13	78.3	55.83	35.23	12.26	34.15	223	106	P	V
		5714.52	46.86	-7.14	54	33.53	35.22	12.26	34.15	223	106	A	V
	*	5741	99.16	-	-	85.76	35.24	12.33	34.17	223	106	P	V
	*	5741	88.42	-	-	75.02	35.24	12.33	34.17	223	106	A	V
		5852.4	56.93	-21.37	78.3	43.48	35.31	12.45	34.31	223	106	P	V
		5868.24	57.79	-16.21	74	44.33	35.32	12.49	34.35	223	106	P	V
		5867.68	44.39	-9.61	54	30.93	35.32	12.49	34.35	223	106	A	V

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 157 5785MHz		5686.92	57.89	-16.11	74	44.62	35.21	12.18	34.12	218	26	P	H
		5716.76	57.56	-20.74	78.3	44.23	35.22	12.26	34.15	218	26	P	H
		5687	44.7	-9.3	54	31.43	35.21	12.18	34.12	218	26	A	H
	*	5780	100.86	-	-	87.46	35.27	12.33	34.2	218	26	P	H
	*	5780	90.98	-	-	77.58	35.27	12.33	34.2	218	26	A	H
		5853.12	57.29	-21.01	78.3	43.84	35.31	12.45	34.31	218	26	P	H
		5875.36	58.16	-15.84	74	44.69	35.33	12.49	34.35	218	26	P	H
		5882.64	44.66	-9.34	54	31.19	35.33	12.49	34.35	218	26	A	H
		5693.24	58.2	-15.8	74	44.93	35.21	12.18	34.12	223	111	P	V
		5715.08	58.02	-20.28	78.3	44.69	35.22	12.26	34.15	223	111	P	V
		5686.68	44.33	-9.67	54	31.06	35.21	12.18	34.12	223	111	A	V
	*	5779	97.19	-	-	83.79	35.27	12.33	34.2	223	111	P	V
	*	5779	87.35	-	-	73.95	35.27	12.33	34.2	223	111	A	V
		5856.56	57.81	-20.49	78.3	44.35	35.32	12.45	34.31	223	111	P	V
		5879.68	58.2	-15.8	74	44.73	35.33	12.49	34.35	223	111	P	V
		5884.32	44.36	-9.64	54	30.93	35.33	12.49	34.39	223	111	A	V

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 165 5825MHz		5687.8	58.25	-15.75	74	44.98	35.21	12.18	34.12	227	24	P	H
		5723.4	58.07	-20.23	78.3	44.73	35.23	12.26	34.15	227	24	P	H
		5688.2	44.71	-9.29	54	31.44	35.21	12.18	34.12	227	24	A	H
	*	5829	99.95	-	-	86.47	35.3	12.45	34.27	227	24	P	H
	*	5829	89.64	-	-	76.16	35.3	12.45	34.27	227	24	A	H
		5850.56	59.33	-18.97	78.3	45.88	35.31	12.45	34.31	227	24	P	H
		5880.96	57.36	-16.64	74	43.89	35.33	12.49	34.35	227	24	P	H
		5865.84	44.74	-9.26	54	31.28	35.32	12.49	34.35	227	24	A	H
		5690.28	57.09	-16.91	74	43.82	35.21	12.18	34.12	218	117	P	V
		5719.08	57.74	-20.56	78.3	44.4	35.23	12.26	34.15	218	117	P	V
		5687.88	44.33	-9.67	54	31.06	35.21	12.18	34.12	218	117	A	V
	*	5821	97.81	-	-	84.33	35.3	12.45	34.27	218	117	P	V
	*	5821	86.96	-	-	73.48	35.3	12.45	34.27	218	117	A	V
		5855.44	58.49	-19.81	78.3	45.03	35.32	12.45	34.31	218	117	P	V
		5861.12	57.67	-16.33	74	44.21	35.32	12.49	34.35	218	117	P	V
		5860.4	44.51	-9.49	54	31.05	35.32	12.49	34.35	218	117	A	V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

15E Band 4 5725~5850MHz
WIFI 802.11a (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 149 5745MHz		5590	65.48	-8.52	74	52.3	35.15	12.04	34.01	234	46	P	H
		5590	53.2	-0.8	54	40.02	35.15	12.04	34.01	234	46	A	H
		11490	45.7	-28.3	74	47.1	38.19	17.38	56.97	100	0	P	H
		17235	51.58	-22.42	74	44.18	42.21	21.38	56.19	100	0	P	H
		17235	40.92	-13.08	54	33.52	42.21	21.38	56.19	100	0	A	H
		5578	65.11	-8.89	74	52	35.14	11.98	34.01	331	239	P	V
		5578	53.11	-0.89	54	40	35.14	11.98	34.01	331	239	A	V
		11490	47.41	-26.59	74	48.81	38.19	17.38	56.97	100	0	P	V
		17235	51.13	-22.87	74	43.73	42.21	21.38	56.19	100	0	P	V
		17235	40.2	-13.8	54	32.8	42.21	21.38	56.19	100	0	A	V
802.11a CH 157 5785MHz		5632	64.26	-9.74	74	51.04	35.17	12.11	34.06	218	26	P	H
		5632	51.96	-2.04	54	38.74	35.17	12.11	34.06	218	26	A	H
		11571	45.09	-28.91	74	46.11	38.3	17.46	56.78	100	0	P	H
		17355	52.07	-21.93	74	44.72	42.12	21.45	56.22	100	0	P	H
		17355	42.17	-11.83	54	34.82	42.12	21.45	56.22	100	0	A	H
		5626	64.81	-9.19	74	51.57	35.17	12.11	34.04	310	230	P	V
		5626	52.49	-1.51	54	39.25	35.17	12.11	34.04	310	230	A	V
		11571	46.05	-27.95	74	47.07	38.3	17.46	56.78	100	0	P	V
		17355	51.39	-22.61	74	44.04	42.12	21.45	56.22	100	0	P	V
		17355	41.24	-12.76	54	33.89	42.12	21.45	56.22	100	0	A	V

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 165 5825MHz		5662	63.41	-10.59	74	50.13	35.19	12.18	34.09	239	36	P	H
		5662	51.13	-2.87	54	37.85	35.19	12.18	34.09	239	36	A	H
		11649	45.11	-28.89	74	45.8	38.39	17.53	56.61	100	0	P	H
		17475	51.33	-22.67	74	44.02	42.03	21.53	56.25	100	0	P	H
		17475	40.94	-13.06	54	33.63	42.03	21.53	56.25	100	0	A	H
		11649	45.95	-28.05	74	46.64	38.39	17.53	56.61	100	0	P	V
		17475	51.17	-22.83	74	43.86	42.03	21.53	56.25	100	0	P	V
		17475	40.56	-13.44	54	33.25	42.03	21.53	56.25	100	0	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

5GHz WIFI 802.11a (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
5GHz 802.11a LF		124.77	14.62	-28.88	43.5	31.74	11.6	2.38	31.1			P	H
		217.38	13.06	-32.94	46	32.13	9.27	2.69	31.03			P	H
		271.65	17.25	-28.75	46	32.19	12.88	3.16	30.98			P	H
		531	22.2	-23.8	46	30.71	18.33	3.89	30.73			P	H
		785.8	26.99	-19.01	46	30.75	21.95	4.62	30.33			P	H
		948.9	29.95	-16.05	46	31.02	24.39	4.94	30.4	196	56	P	H
													H
													H
													H
													H
													H
													H
													H
		66.45	16.29	-23.71	40	39.31	6.16	2.06	31.24			P	V
		106.95	15.45	-28.05	43.5	33.62	10.62	2.38	31.17			P	V
		203.61	21.06	-22.44	43.5	40.33	9.14	2.69	31.1			P	V
		561.1	23.54	-22.46	46	30.33	19.95	4.01	30.75			P	V
		806.8	26.61	-19.39	46	30.16	22.14	4.62	30.31	177	96	P	V
		969.9	29.79	-24.21	54	30.37	24.8	4.94	30.32			P	V
													V
													V
													V
													V
													V
												V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

15E Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 149 5745MHz		5714.28	60.29	-13.71	74	46.96	35.22	12.26	34.15	105	353	P	H
		5724.6	70.7	-7.6	78.3	57.36	35.23	12.26	34.15	105	353	P	H
		5714.36	47.53	-6.47	54	34.2	35.22	12.26	34.15	105	353	A	H
	*	5741	101.05	-	-	87.65	35.24	12.33	34.17	105	353	P	H
	*	5741	91.29	-	-	77.89	35.24	12.33	34.17	105	353	A	H
		5850.48	58.21	-20.09	78.3	44.76	35.31	12.45	34.31	105	353	P	H
		5889	57.75	-16.25	74	44.31	35.34	12.49	34.39	105	353	P	H
		5888.72	44.53	-9.47	54	31.09	35.34	12.49	34.39	105	353	A	H
		5713.72	58.87	-15.13	74	45.54	35.22	12.26	34.15	102	258	P	V
		5724.28	66.96	-11.34	78.3	53.62	35.23	12.26	34.15	102	258	P	V
		5713.32	45.91	-8.09	54	32.58	35.22	12.26	34.15	102	258	A	V
	*	5741	98.78	-	-	85.38	35.24	12.33	34.17	102	258	P	V
	*	5741	87.18	-	-	73.78	35.24	12.33	34.17	102	258	A	V
		5858.48	57.46	-20.84	78.3	44.04	35.32	12.45	34.35	102	258	P	V
		5879.28	57.56	-16.44	74	44.09	35.33	12.49	34.35	102	258	P	V
		5881	44.32	-9.68	54	30.85	35.33	12.49	34.35	102	258	A	V

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 157 5785MHz		5696.6	57.77	-16.23	74	44.5	35.21	12.18	34.12	102	352	P	H
		5719.8	57.37	-20.93	78.3	44.03	35.23	12.26	34.15	102	352	P	H
		5693.96	44.59	-9.41	54	31.32	35.21	12.18	34.12	102	352	A	H
	*	5783	100.65	-	-	87.21	35.27	12.4	34.23	102	352	P	H
	*	5783	91.96	-	-	78.52	35.27	12.4	34.23	102	352	A	H
		5858.72	58.03	-20.27	78.3	44.61	35.32	12.45	34.35	102	352	P	H
		5881.04	57.68	-16.32	74	44.21	35.33	12.49	34.35	102	352	P	H
		5867.84	44.56	-9.44	54	31.1	35.32	12.49	34.35	102	352	A	H
		5713.64	57.68	-16.32	74	44.35	35.22	12.26	34.15	252	150	P	V
		5717.72	57.23	-21.07	78.3	43.89	35.23	12.26	34.15	252	150	P	V
		5689	44.4	-9.6	54	31.13	35.21	12.18	34.12	252	150	A	V
	*	5783	99.52	-	-	86.08	35.27	12.4	34.23	252	150	P	V
	*	5783	89.3	-	-	75.86	35.27	12.4	34.23	252	150	A	V
		5851.28	57.63	-20.67	78.3	44.18	35.31	12.45	34.31	252	150	P	V
		5861.68	57.46	-16.54	74	44	35.32	12.49	34.35	252	150	P	V
		5887.84	44.58	-9.42	54	31.14	35.34	12.49	34.39	252	150	A	V

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 165 5825MHz		5695	57.27	-16.73	74	44	35.21	12.18	34.12	100	347	P	H
		5724.44	56.71	-21.59	78.3	43.37	35.23	12.26	34.15	100	347	P	H
		5688.6	44.53	-9.47	54	31.26	35.21	12.18	34.12	100	347	A	H
	*	5823	100.46	-	-	86.98	35.3	12.45	34.27	100	347	P	H
	*	5823	89.34	-	-	75.86	35.3	12.45	34.27	100	347	A	H
		5850.48	60.03	-18.27	78.3	46.58	35.31	12.45	34.31	100	347	P	H
		5885.76	57.77	-16.23	74	44.34	35.33	12.49	34.39	100	347	P	H
		5864.08	44.84	-9.16	54	31.38	35.32	12.49	34.35	100	347	A	H
		5706.28	57.71	-16.29	74	44.38	35.22	12.26	34.15	288	144	P	V
		5721.08	57.08	-21.22	78.3	43.74	35.23	12.26	34.15	288	144	P	V
		5688.6	44.36	-9.64	54	31.09	35.21	12.18	34.12	288	144	A	V
	*	5823	99.03	-	-	85.55	35.3	12.45	34.27	288	144	P	V
	*	5823	88.73	-	-	75.25	35.3	12.45	34.27	288	144	A	V
		5850.56	59.17	-19.13	78.3	45.72	35.31	12.45	34.31	288	144	P	V
		5866.88	57.6	-16.4	74	44.14	35.32	12.49	34.35	288	144	P	V
		5862.96	44.76	-9.24	54	31.3	35.32	12.49	34.35	288	144	A	V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

15E Band 4 5725~5850MHz
WIFI 802.11a (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 149 5745MHz		5578	64.06	-9.94	74	50.95	35.14	11.98	34.01	103	324	P	H
		5578	51.43	-2.57	54	38.32	35.14	11.98	34.01	103	324	A	H
		11490	46.23	-27.77	74	47.63	38.19	17.38	56.97	100	0	P	H
		17235	51.13	-22.87	74	43.73	42.21	21.38	56.19	100	308	P	H
		17235	44.6	-9.4	54	37.2	42.21	21.38	56.19	100	308	A	H
		11490	48.65	-25.35	74	50.05	38.19	17.38	56.97	100	0	P	V
		17235	52.78	-21.22	74	45.38	42.21	21.38	56.19	100	0	P	V
		17235	46.04	-7.96	54	38.64	42.21	21.38	56.19	100	0	A	V
802.11a CH 157 5785MHz		5476	59.55	-14.45	74	46.3	35.05	11.86	33.66	102	352	P	H
		5476	45.85	-8.15	54	32.6	35.05	11.86	33.66	102	352	A	H
		5620	61.76	-12.24	74	48.59	35.17	12.04	34.04	102	352	P	H
		5620	51.54	-2.46	54	38.37	35.17	12.04	34.04	102	352	A	H
		5950	57.49	-16.51	74	44	35.37	12.58	34.46	102	352	P	H
		5950	48.43	-5.57	54	34.94	35.37	12.58	34.46	102	352	A	H
		11571	45.11	-28.89	74	46.13	38.3	17.46	56.78	400	0	P	H
		17355	50.88	-23.12	74	43.53	42.12	21.45	56.22	100	0	P	H
		17355	39.3	-14.7	54	31.95	42.12	21.45	56.22	100	0	A	H
		5620	59.44	-14.56	74	46.27	35.17	12.04	34.04	252	150	P	V
		5620	50.53	-3.47	54	37.36	35.17	12.04	34.04	252	150	A	V
		5956	57.89	-16.11	74	44.39	35.38	12.58	34.46	252	150	P	V
		5956	47.43	-6.57	54	33.93	35.38	12.58	34.46	252	150	A	V
		11571	46.65	-27.35	74	47.67	38.3	17.46	56.78	100	0	P	V
		17355	50.7	-23.3	74	43.35	42.12	21.45	56.22	100	0	P	V
		17355	39.04	-14.96	54	31.69	42.12	21.45	56.22	100	0	A	V

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 165 5825MHz		5512	56.91	-17.09	74	43.63	35.1	11.92	33.74	100	347	P	H
		5512	48.15	-5.85	54	34.87	35.1	11.92	33.74	100	347	A	H
		5668	59.98	-14.02	74	46.69	35.2	12.18	34.09	100	347	P	H
		5668	49.89	-4.11	54	36.6	35.2	12.18	34.09	100	347	A	H
		11650	45.17	-28.83	74	45.86	38.39	17.53	56.61	100	0	P	H
		17475	51.43	-22.57	74	44.12	42.03	21.53	56.25	100	0	P	H
		17475	39.22	-14.78	54	31.91	42.03	21.53	56.25	100	0	A	H
		5512	57.67	-16.33	74	44.39	35.1	11.92	33.74	288	144	P	V
		5512	47.8	-6.2	54	34.52	35.1	11.92	33.74	288	144	A	V
		5662	59.87	-14.13	74	46.59	35.19	12.18	34.09	288	144	P	V
		5662	49.79	-4.21	54	36.51	35.19	12.18	34.09	288	144	A	V
		11650	46.6	-27.4	74	47.29	38.39	17.53	56.61	100	0	P	V
		17475	51.23	-22.77	74	43.92	42.03	21.53	56.25	100	0	P	V
		17475	39.06	-14.94	54	31.75	42.03	21.53	56.25	100	0	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

5GHz WIFI 802.11a (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
5GHz 802.11a LF		38.64	18.65	-21.35	40	33.66	14.44	1.77	31.22			P	H
		139.89	15.45	-28.05	43.5	32.67	11.5	2.38	31.1			P	H
		243.3	15.08	-30.92	46	31.42	11.7	2.96	31			P	H
		418.3	20.69	-25.31	46	31.38	16.6	3.52	30.81			P	H
		777.4	26.66	-19.34	46	30.51	22.02	4.48	30.35			P	H
		930.7	28.39	-17.61	46	29.65	24.3	4.8	30.36	121	151	P	H
													H
													H
													H
													H
													H
													H
													H
		66.45	16.31	-23.69	40	39.33	6.16	2.06	31.24			P	V
		155.28	13.35	-30.15	43.5	31.2	10.7	2.61	31.16			P	V
		231.15	17.74	-28.26	46	35.56	10.22	2.96	31			P	V
		496.7	21.33	-24.67	46	30.23	17.96	3.77	30.63			P	V
		722.1	26.62	-19.38	46	31.05	21.56	4.41	30.4			P	V
		840.4	28.19	-17.81	46	30.67	23.2	4.7	30.38	148	26	P	V
													V
												V	
												V	
												V	
												V	
												V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical

A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.