


Label location

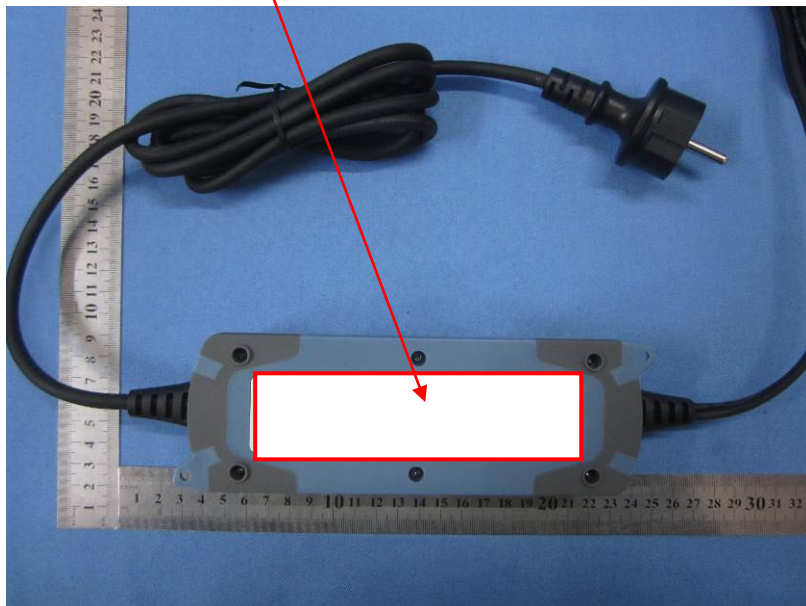

132mm

WARNING: Explosive gases, prevent flames and sparks. Before charging, study instruction sheet.
Disconnect supply before making or breaking battery connections. Provide good ventilation.

CONFORMS TO UL STD. UL1236
CERTIFIED TO CSA STD. C22.2 No. 107.2

BATTERY CHARGER

Model: **70431**

Input: 110-120V AC 60Hz 1.3A 85W


Output: 12V DC 0.8A / 5A

Polarity: red clamp (+), black clamp (-)

 **BENTON**[®]

ICEMAN 5.0 BLE

IP65



FCC ID: 2ADUNICEMAN50BLE