

FCC PART 15.247


TEST REPORT

For

Telecell Mobile (H.K) Ltd.

RM801 Metro Ctr II, 21 Lam Hing Street. KIn Bay. HK

FCC ID: 2ADX3M405B

Report Type: Original Report	Product Type: 3G Smartphone
Test Engineer:	Allen Qiao 
Report Number:	RSZ150928003-00B
Report Date:	2015-11-02
Reviewed By:	Sula Huang  RF Leader
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EQUIPMENT MODIFICATIONS	5
EUT EXERCISE SOFTWARE	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE	9
APPLICABLE STANDARD	9
FCC §15.203 - ANTENNA REQUIREMENT.....	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
MEASUREMENT UNCERTAINTY	11
EUT SETUP	11
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	12
CORRECTED AMPLITUDE & MARGIN CALCULATION	12
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST RESULTS SUMMARY	13
TEST DATA	13
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	18
APPLICABLE STANDARD	18
MEASUREMENT UNCERTAINTY	18
EUT SETUP	18
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	19
TEST PROCEDURE	19
CORRECTED AMPLITUDE & MARGIN CALCULATION	20
TEST EQUIPMENT LIST AND DETAILS.....	20
TEST RESULTS SUMMARY	20
TEST DATA	20
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34
TEST EQUIPMENT LIST AND DETAILS.....	34
TEST DATA	34
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	43

APPLICABLE STANDARD	43
TEST PROCEDURE	43
TEST EQUIPMENT LIST AND DETAILS.....	43
TEST DATA	43
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	45
APPLICABLE STANDARD	45
TEST PROCEDURE	45
TEST EQUIPMENT LIST AND DETAILS.....	45
TEST DATA	45
FCC §15.247(e) - POWER SPECTRAL DENSITY	51
APPLICABLE STANDARD	51
TEST PROCEDURE	51
TEST EQUIPMENT LIST AND DETAILS.....	51
TEST DATA	51
DECLARATION LETTER.....	60

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Telecell Mobile (H.K) Ltd.*'s product, model number: *VIRTURE 4.0 (FCC ID: 2ADX3M405B)* (the "EUT") in this report was a *3G Smartphone*, which was measured approximately: 12.4 cm (L) x 6.1 cm (W) x 1.0 cm (H), rated input voltage: DC3.7V rechargeable Li-ion battery or DC5.0V charging from adapter.

Adapter information:

Model: Figo

Input: AC100-240V, 50/60 Hz, 150mA

Output: DC 5V, 500mA

Note: The series product, model VIRTURE 4.0, M405B are electrically identical, the difference between them is just the model name, we selected VIRTURE 4.0 for fully testing, the details was explained in the attached declaration letter.

All measurement and test data in this report was gathered from production sample serial number: 150928003 (Assigned byBACL, Dongguan). The EUT was received on 2015-09-30.

Objective

This report is prepared on behalf of *Telecell Mobile (H.K) Ltd.* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communications Commission's rules

The tests were performed in order to determine the compliance of the EUT with FCC Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP submissions with FCC ID:2ADX3M405B.

FCC Part 15C DSS submissions with FCC ID:2ADX3M405B.

FCC Part 22H, 24E, 27 PCE submissions with FCC ID:2ADX3M405B.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in testing mode, which was provided by manufacturer.
For 2.4GHz band, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, and 802.11n ht20 modes were tested with channel 1, 6 and 11.
For 802.11n ht40 mode were tested with Channel 3, 6 and 9.

For Bluetooth LE mode, 40 channels are provided for testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	...	...
...	...	...	...
...	...	...	...
..	...	38	2478
19	2440	39	2480

EUT was tested with channel 0, 19 and 39.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

The worst condition (maximum power with 100% duty cycle) was setting by the software as following table:

Test Mode	Test Software Version	Engineering Mode-TX		
802.11b	Test Frequency	2412MHz	2437MHz	2462MHz
	Data Rate	1Mbps	1Mbps	1Mbps
	Power Level Setting	15	15	14.5
802.11g	Test Frequency	2412MHz	2437MHz	2462MHz
	Data Rate	6Mbps	6Mbps	6Mbps
	Power Level Setting	15	15	14
802.11n ht20	Test Frequency	2412MHz	2437MHz	2462MHz
	Data Rate	MCS0	MCS0	MCS0
	Power Level Setting	15	15	14
802.11n ht40	Test Frequency	2422MHz	2437MHz	2452MHz
	Data Rate	MCS0	MCS0	MCS0
	Power Level Setting	16	16	16
BLE	Test Frequency	2402MHz	2440MHz	2480MHz
	BLE	N/A	N/A	N/A


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/

External Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	yes	no	0.85	USB Port of Adapter	EUT
Earphone Cable	no	no	1.2	Audio Port of EUT	Earphone

Block Diagram of Test Setup

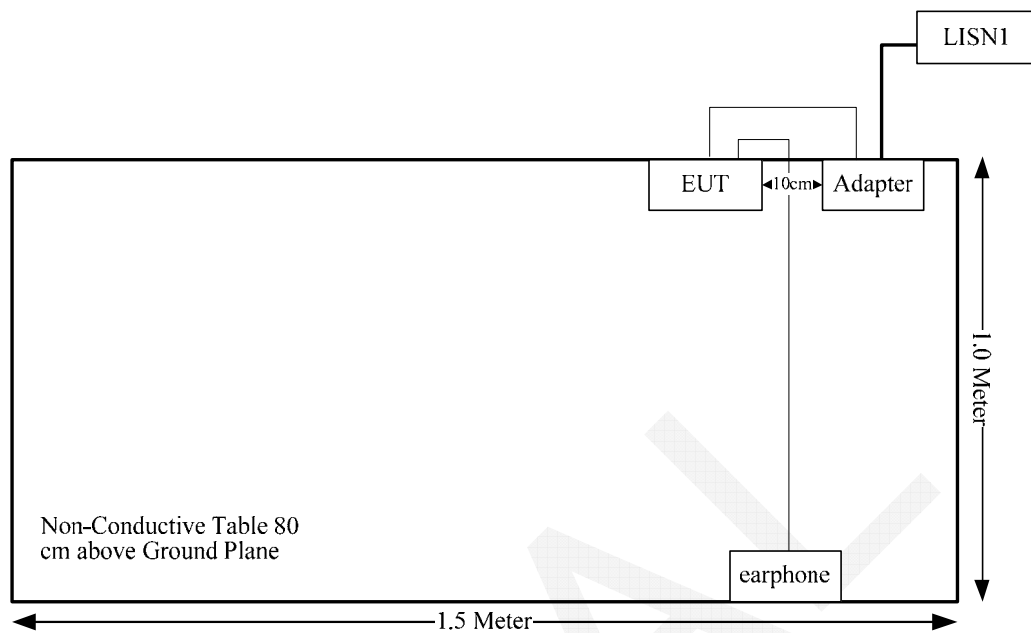

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum conducted output power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE**Applicable Standard**

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v05r02:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Measurement Result**For Wi-Fi mode:**

Compliance, please refer to the SAR report: RSZ150928003-20.

For bluetooth LE mode:

The maximum target peak output power = -3.0 dBm (0.50 mW) at 2480 MHz

$[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})][\sqrt{f(\text{GHz})}]$
 $= 0.50/5 \cdot (\sqrt{2.48}) = 0.157 < 3.0$

So the stand-alone SAR evaluation is not necessary.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT has one integral antenna arrangement for WiFi/BT, which was permanently attached and the antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner :

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cispr}

Measurement	U_{cispr}
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

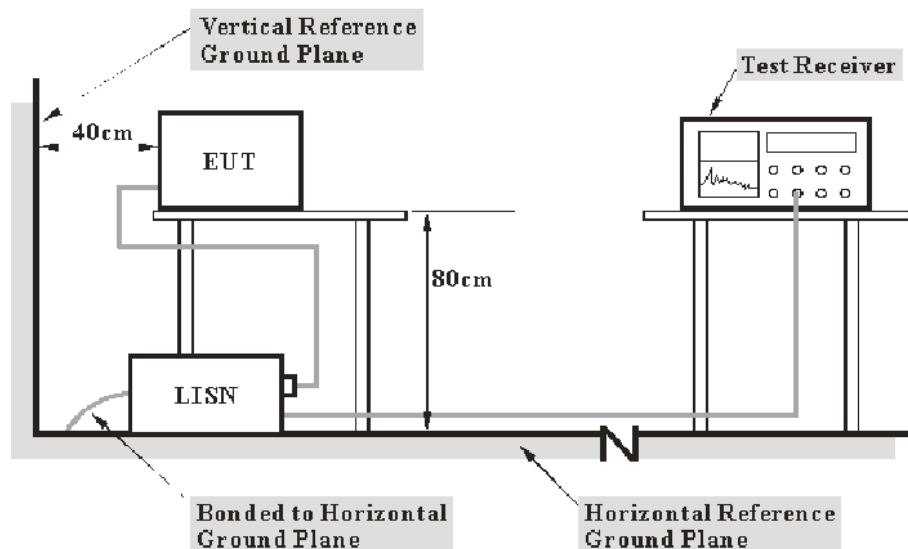

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2014-10-20	2015-10-20
R&S	L.I.S.N	ESH2-Z5	892107/021	2015-07-16	2016-07-15
R&S	Two-line V-network	ENV 216	3560.6550.12	2014-12-11	2015-12-11
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

6.30 dB at 0.375019 MHz in the **Line** conducted mode for BLE.


Test Data**Environmental Conditions**

Temperature:	26.6 °C
Relative Humidity:	50 %
ATM Pressure:	101.1kPa

The testing was performed by Allen Qiao on 2015-10-14.


Test Mode: Transmitting (Wi-Fi)

AC120 V, 60 Hz, Line:

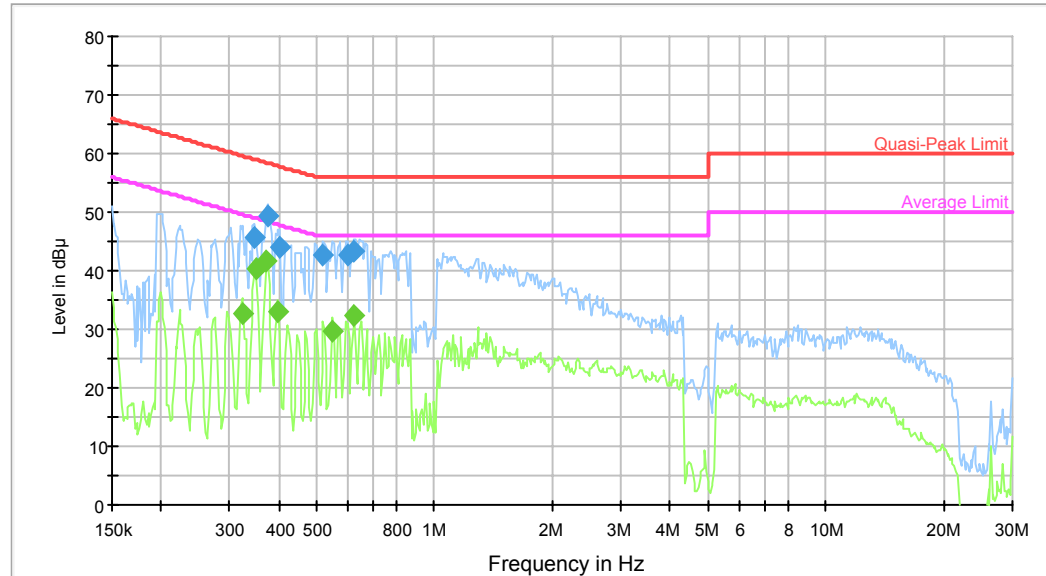

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.346296	45.7	9.000	N	9.8	13.4	59.1	Compliance
0.375019	49.5	9.000	N	9.8	8.9	58.4	Compliance
0.402900	44.1	9.000	N	9.8	13.6	57.8	Compliance
0.519918	42.8	9.000	N	9.8	13.2	56.0	Compliance
0.600101	42.8	9.000	N	9.8	13.2	56.0	Compliance
0.624492	43.4	9.000	N	9.8	12.6	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.322331	32.5	9.000	N	9.8	17.1	49.6	Compliance
0.349066	40.3	9.000	N	9.8	8.7	49.0	Compliance
0.372042	41.8	9.000	N	9.8	6.7	48.5	Compliance
0.399703	32.9	9.000	N	9.8	14.9	47.9	Compliance
0.549741	29.7	9.000	N	9.8	16.3	46.0	Compliance
0.624492	32.4	9.000	N	9.8	13.6	46.0	Compliance

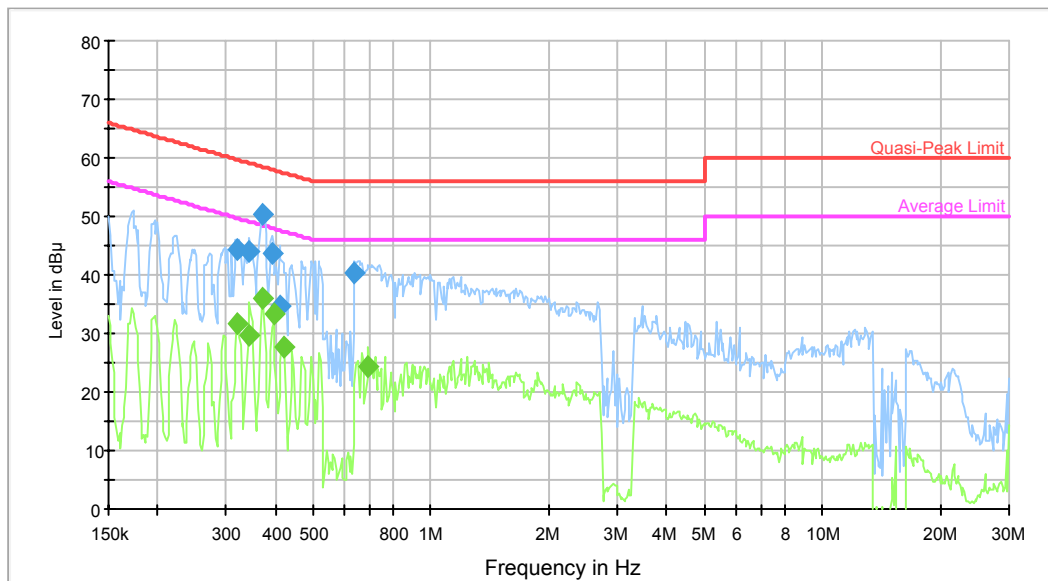
AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.319773	44.5	9.000	L1	9.8	15.2	59.7	Compliance
0.343548	44.1	9.000	L1	9.8	15.0	59.1	Compliance
0.372042	50.2	9.000	L1	9.8	8.3	58.5	Compliance
0.393383	43.8	9.000	L1	9.8	14.2	58.0	Compliance
0.409372	34.5	9.000	L1	9.8	23.1	57.7	Compliance
0.639600	40.4	9.000	L1	9.8	15.6	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.319773	31.8	9.000	L1	9.8	17.9	49.7	Compliance
0.343548	29.5	9.000	L1	9.8	19.6	49.1	Compliance
0.372042	36.1	9.000	L1	9.8	12.3	48.5	Compliance
0.396530	33.4	9.000	L1	9.8	14.5	47.9	Compliance
0.419276	27.5	9.000	L1	9.8	19.9	47.5	Compliance
0.692650	24.5	9.000	L1	9.8	21.5	46.0	Compliance


Test Mode: Transmitting (BLE)

AC120 V, 60 Hz, Line:

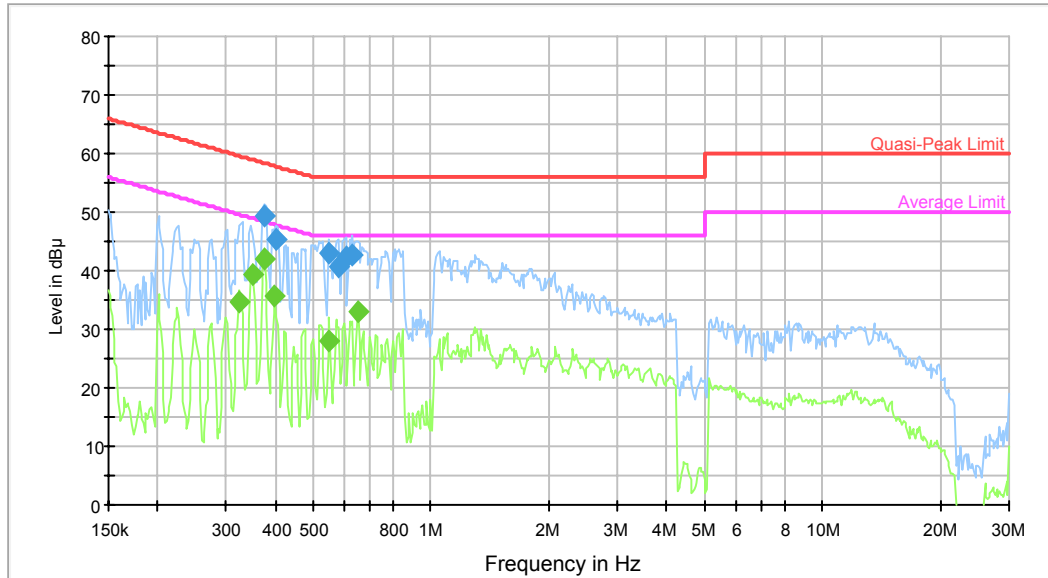

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.375019	49.3	9.000	N	9.8	9.1	58.4	Compliance
0.402900	45.3	9.000	N	9.8	12.5	57.8	Compliance
0.549741	43.0	9.000	N	9.8	13.0	56.0	Compliance
0.581275	40.8	9.000	N	9.8	15.2	56.0	Compliance
0.604902	42.5	9.000	N	9.8	13.5	56.0	Compliance
0.629488	42.6	9.000	N	9.8	13.4	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.324910	34.8	9.000	N	9.8	14.8	49.6	Compliance
0.349066	39.3	9.000	N	9.8	9.7	49.0	Compliance
0.375019	42.1	9.000	N	9.8	6.3	48.4	Compliance
0.399703	35.6	9.000	N	9.8	12.3	47.9	Compliance
0.549741	27.8	9.000	N	9.8	18.2	46.0	Compliance
0.649874	33.2	9.000	N	9.8	12.8	46.0	Compliance

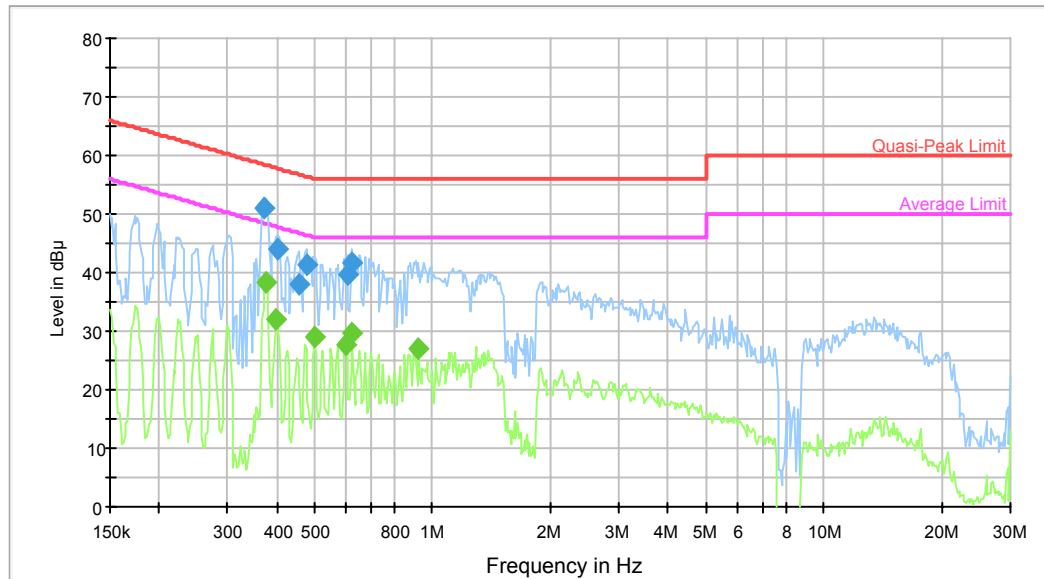AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.372042	51.1	9.000	L1	9.8	7.4	58.5	Compliance
0.402900	44.1	9.000	L1	9.8	13.7	57.8	Compliance
0.457684	38.0	9.000	L1	9.8	18.7	56.7	Compliance
0.476287	41.4	9.000	L1	9.8	15.0	56.4	Compliance
0.604902	39.6	9.000	L1	9.8	16.4	56.0	Compliance
0.624492	41.8	9.000	L1	9.8	14.2	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.375019	38.4	9.000	L1	9.8	10.0	48.4	Compliance
0.399703	32.0	9.000	L1	9.8	15.8	47.9	Compliance
0.499611	28.9	9.000	L1	9.8	17.2	46.0	Compliance
0.600101	27.8	9.000	L1	9.8	18.2	46.0	Compliance
0.624492	29.5	9.000	L1	9.8	16.5	46.0	Compliance
0.922769	27.1	9.000	L1	9.8	18.9	46.0	Compliance

*within uncertainty measurement!

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner :

If U_{lab} is less than or equal to U_{cisp} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cisp} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:

30M~200MHz: 5.0 dB

200M~1GHz: 6.2 dB

1G~6GHz: 4.45 dB


6G~18GHz: 5.23 dB


Table 2 – Values of U_{cisp}

Measurement	U_{cisp}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1GHz:

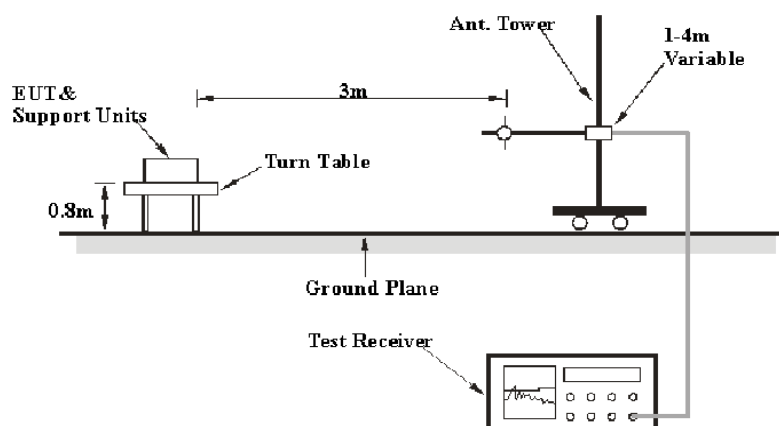

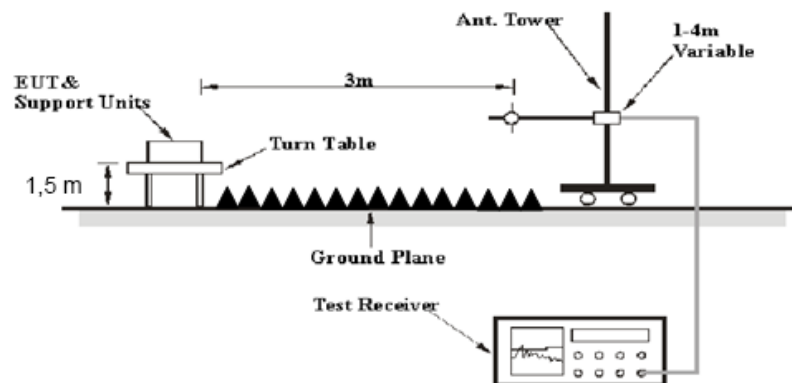Above 1GHz:

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits. The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2015-08-03	2016-08-02
Sunol Sciences	Antenna	JB3	A060611-3	2014-11-06	2017-11-05
HP	Amplifier	8447E	2434A02181	2015-09-01	2016-09-01
Agilent	Spectrum Analyzer	E4440A	SG43360054	2014-12-04	2015-12-04
ETS-Lindgren	Horn Antenna	3115	9808-5557	2015-09-06	2018-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2015-02-19	2016-02-19
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2014-06-16	2017-06-15
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2015-09-06	2016-09-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Section 15.205, 15.209 and 15.247, with the worst margin reading of:

0.97 dB at 2483.5 MHz in the Vertical polarization

Test Data

Environmental Conditions

Temperature:	26.9 °C
Relative Humidity:	52 %
ATM Pressure:	100.5 kPa

* The testing was performed by Allen Qiao on 2015-10-09.

Test Mode: Transmitting

802.11b Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	61.33	PK	H	28.49	3.68	0.00	93.50	N/A	N/A
2412	58.12	AV	H	28.49	3.68	0.00	90.29	N/A	N/A
2412	66	PK	V	28.49	3.68	0.00	98.17	N/A	N/A
2412	62.8	AV	V	28.49	3.68	0.00	94.97	N/A	N/A
2390	27.15	PK	V	28.44	3.63	0.00	59.22	74.00	14.78
2390	15.26	AV	V	28.44	3.63	0.00	47.33	54.00	6.67
4824	43.26	PK	V	33.20	5.03	27.41	54.08	74.00	19.92
4824	40.52	AV	V	33.20	5.03	27.41	51.34	54.00	2.66*
7236	36.53	PK	V	36.42	6.65	25.90	53.70	74.00	20.30
7236	29.42	AV	V	36.42	6.65	25.90	46.59	54.00	7.41
9648	36.51	PK	V	38.37	8.55	27.46	55.97	74.00	18.03
9648	31.88	AV	V	38.37	8.55	27.46	51.34	54.00	2.66 *
3220	33.07	PK	V	31.64	6.17	27.35	43.53	74.00	30.47
3220	20.55	AV	V	31.64	6.17	27.35	31.01	54.00	22.99
275.35	40.37	QP	V	13.75	2.00	21.51	34.61	46.00	11.39
Middle Channel: 2437 MHz									
2437	61.91	PK	H	28.55	3.75	0.00	94.21	N/A	N/A
2437	58.81	AV	H	28.55	3.75	0.00	91.11	N/A	N/A
2437	66.26	PK	V	28.55	3.75	0.00	98.56	N/A	N/A
2437	62.74	AV	V	28.55	3.75	0.00	95.04	N/A	N/A
4874	43.5	PK	V	33.37	5.14	27.42	54.59	74.00	19.41
4874	40.86	AV	V	33.37	5.14	27.42	51.95	54.00	2.05*
7311	36.97	PK	V	36.56	6.74	25.88	54.39	74.00	19.61
7311	29.81	AV	V	36.56	6.74	25.88	47.23	54.00	6.77
9748	36.94	PK	V	38.35	8.61	27.24	56.66	74.00	17.34
9748	32.2	AV	V	38.35	8.61	27.24	51.92	54.00	2.08 *
3220	33.49	PK	V	31.64	6.17	27.35	43.95	74.00	30.05
3220	21.02	AV	V	31.64	6.17	27.35	31.48	54.00	22.52
3190	33.86	PK	V	31.52	6.26	27.38	44.26	74.00	29.74
3190	21.37	AV	V	31.52	6.26	27.38	31.77	54.00	22.23
275.35	40.55	QP	V	13.75	2.00	21.51	34.79	46.00	11.21
High Channel: 2462 MHz									
2462	62.07	PK	H	28.61	3.75	0.00	94.43	N/A	N/A
2462	58.21	AV	H	28.61	3.75	0.00	90.57	N/A	N/A
2462	66.62	PK	V	28.61	3.75	0.00	98.98	N/A	N/A
2462	63.31	AV	V	28.61	3.75	0.00	95.67	N/A	N/A
2483.5	29.34	PK	V	28.66	3.67	0.00	61.67	74.00	12.33
2483.5	20.7	AV	V	28.66	3.67	0.00	53.03	54.00	0.97 *
4924	43.9	PK	V	33.54	5.34	27.43	55.35	74.00	18.65
4924	41.16	AV	V	33.54	5.34	27.43	52.61	54.00	1.39*
7386	37.08	PK	V	36.69	6.83	25.86	54.74	74.00	19.26
7386	30.01	AV	V	36.69	6.83	25.86	47.67	54.00	6.33
9848	37.18	PK	V	38.33	8.66	26.94	57.23	74.00	16.77
9848	32.31	AV	V	38.33	8.66	26.94	52.36	54.00	1.64
3220	33.78	PK	V	31.64	6.17	27.35	44.24	74.00	29.76
3220	21.29	AV	V	31.64	6.17	27.35	31.75	54.00	22.25
275.35	41.32	QP	V	13.75	2.00	21.51	35.56	46.00	10.44

*within uncertainty measurement!

802.11g Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	63.52	PK	H	28.49	3.68	0.00	95.69	N/A	N/A
2412	54.47	AV	H	28.49	3.68	0.00	86.64	N/A	N/A
2412	67.6	PK	V	28.49	3.68	0.00	99.77	N/A	N/A
2412	58.13	AV	V	28.49	3.68	0.00	90.30	N/A	N/A
2390	31.76	PK	V	28.44	3.63	0.00	63.83	74.00	10.17
2390	14.97	AV	V	28.44	3.63	0.00	47.04	54.00	6.96
4824	36.93	PK	V	33.20	5.03	27.41	47.75	74.00	26.25
4824	23.65	AV	V	33.20	5.03	27.41	34.47	54.00	19.53
7236	34.65	PK	V	36.42	6.65	25.90	51.82	74.00	22.18
7236	21.11	AV	V	36.42	6.65	25.90	38.28	54.00	15.72
9648	30.22	PK	V	38.37	8.55	27.46	49.68	74.00	24.32
9648	17.07	AV	V	38.37	8.55	27.46	36.53	54.00	17.47
3220	33.9	PK	V	31.64	6.17	27.35	44.36	74.00	29.64
3220	21.3	AV	V	31.64	6.17	27.35	31.76	54.00	22.24
275.35	40.29	QP	V	13.75	2.00	21.51	34.53	46.00	11.47
Middle Channel: 2437 MHz									
2437	64.16	PK	H	28.55	3.75	0.00	96.46	N/A	N/A
2437	54.95	AV	H	28.55	3.75	0.00	87.25	N/A	N/A
2437	67.99	PK	V	28.55	3.75	0.00	100.29	N/A	N/A
2437	58.62	AV	V	28.55	3.75	0.00	90.92	N/A	N/A
4874	37.19	PK	V	33.37	5.14	27.42	48.28	74.00	25.72
4874	24.09	AV	V	33.37	5.14	27.42	35.18	54.00	18.82
7311	35.01	PK	V	36.56	6.74	25.88	52.43	74.00	21.57
7311	21.54	AV	V	36.56	6.74	25.88	38.96	54.00	15.04
9748	30.53	PK	V	38.35	8.61	27.24	50.25	74.00	23.75
9748	17.43	AV	V	38.35	8.61	27.24	37.15	54.00	16.85
3220	34.34	PK	V	31.64	6.17	27.35	44.80	74.00	29.20
3220	21.76	AV	V	31.64	6.17	27.35	32.22	54.00	21.78
3190	33.68	PK	V	31.52	6.26	27.38	44.08	74.00	29.92
3190	21.23	AV	V	31.52	6.26	27.38	31.63	54.00	22.37
275.35	40.73	QP	V	13.75	2.00	21.51	34.97	46.00	11.03
High Channel: 2462 MHz									
2462	64.56	PK	H	28.61	3.75	0.00	96.92	N/A	N/A
2462	55.48	AV	H	28.61	3.75	0.00	87.84	N/A	N/A
2462	68.76	PK	V	28.61	3.75	0.00	101.12	N/A	N/A
2462	59.86	AV	V	28.61	3.75	0.00	92.22	N/A	N/A
2483.5	39.37	PK	V	28.66	3.67	0.00	71.70	74.00	2.30 *
2483.5	20.14	AV	V	28.66	3.67	0.00	52.47	54.00	1.53 *
4924	37.58	PK	V	33.54	5.34	27.43	49.03	74.00	24.97
4924	24.38	AV	V	33.54	5.34	27.43	35.83	54.00	18.17
7386	35.2	PK	V	36.69	6.83	25.86	52.86	74.00	21.14
7386	21.65	AV	V	36.69	6.83	25.86	39.31	54.00	14.69
9848	30.77	PK	V	38.33	8.66	26.94	50.82	74.00	23.18
9848	17.72	AV	V	38.33	8.66	26.94	37.77	54.00	16.23
3220	34.6	PK	V	31.64	6.17	27.35	45.06	74.00	28.94
3220	22.03	AV	V	31.64	6.17	27.35	32.49	54.00	21.51
275.35	40.02	QP	V	13.75	2.00	21.51	34.26	46.00	11.74

*within uncertainty measurement!

802.11 n ht20 Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	62.95	PK	H	28.49	3.68	0.00	95.12	N/A	N/A
2412	53.42	AV	H	28.49	3.68	0.00	85.59	N/A	N/A
2412	67.24	PK	V	28.49	3.68	0.00	99.41	N/A	N/A
2412	57.68	AV	V	28.49	3.68	0.00	89.85	N/A	N/A
2390	35.84	PK	V	28.44	3.63	0.00	67.91	74.00	6.09
2390	16.48	AV	V	28.44	3.63	0.00	48.55	54.00	5.45
4824	36.6	PK	V	33.20	5.03	27.41	47.42	74.00	26.58
4824	23.08	AV	V	33.20	5.03	27.41	33.90	54.00	20.10
7236	34.97	PK	V	36.42	6.65	25.90	52.14	74.00	21.86
7236	20.77	AV	V	36.42	6.65	25.90	37.94	54.00	16.06
9648	31.77	PK	V	38.37	8.55	27.46	51.23	74.00	22.77
9648	16.75	AV	V	38.37	8.55	27.46	36.21	54.00	17.79
3220	33.56	PK	V	31.64	6.17	27.35	44.02	74.00	29.98
3220	21.27	AV	V	31.64	6.17	27.35	31.73	54.00	22.27
275.35	39.52	QP	V	13.75	2.00	21.51	33.76	46.00	12.24
Middle Channel: 2437 MHz									
2437	63.27	PK	H	28.55	3.75	0.00	95.57	N/A	N/A
2437	53.62	AV	H	28.55	3.75	0.00	85.92	N/A	N/A
2437	67.7	PK	V	28.55	3.75	0.00	100.00	N/A	N/A
2437	58.06	AV	V	28.55	3.75	0.00	90.36	N/A	N/A
4874	36.83	PK	V	33.37	5.14	27.42	47.92	74.00	26.08
4874	23.45	AV	V	33.37	5.14	27.42	34.54	54.00	19.46
7311	35.3	PK	V	36.56	6.74	25.88	52.72	74.00	21.28
7311	21.25	AV	V	36.56	6.74	25.88	38.67	54.00	15.33
9748	32.07	PK	V	38.35	8.61	27.24	51.79	74.00	22.21
9748	17.17	AV	V	38.35	8.61	27.24	36.89	54.00	17.11
3220	33.94	PK	V	31.64	6.17	27.35	44.40	74.00	29.60
3220	21.59	AV	V	31.64	6.17	27.35	32.05	54.00	21.95
3190	33.72	PK	V	31.52	6.26	27.38	44.12	74.00	29.88
3190	21.31	AV	V	31.52	6.26	27.38	31.71	54.00	22.29
275.35	41.27	QP	V	13.75	2.00	21.51	35.51	46.00	10.49
High Channel: 2462 MHz									
2462	63.44	PK	H	28.61	3.75	0.00	95.80	N/A	N/A
2462	54.04	AV	H	28.61	3.75	0.00	86.40	N/A	N/A
2462	68.18	PK	V	28.61	3.75	0.00	100.54	N/A	N/A
2462	58.76	AV	V	28.61	3.75	0.00	91.12	N/A	N/A
2483.5	40.22	PK	V	28.66	3.67	0.00	72.55	74.00	1.45*
2483.5	19.23	AV	V	28.66	3.67	0.00	51.56	54.00	2.44 *
4924	37.33	PK	V	33.54	5.34	27.43	48.78	74.00	25.22
4924	23.63	AV	V	33.54	5.34	27.43	35.08	54.00	18.92
7386	35.44	PK	V	36.69	6.83	25.86	53.10	74.00	20.90
7386	21.38	AV	V	36.69	6.83	25.86	39.04	54.00	14.96
9848	32.26	PK	V	38.33	8.66	26.94	52.31	74.00	21.69
9848	17.46	AV	V	38.33	8.66	26.94	37.51	54.00	16.49
3220	34.2	PK	V	31.64	6.17	27.35	44.66	74.00	29.34
3220	21.76	AV	V	31.64	6.17	27.35	32.22	54.00	21.78
275.35	39.86	QP	H	13.75	2.00	21.51	34.10	46.00	11.90

*within uncertainty measurement!

802.11 n ht40 Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2422 MHz									
2422	59.39	PK	H	28.51	3.71	0.00	91.61	N/A	N/A
2422	49.07	AV	H	28.51	3.71	0.00	81.29	N/A	N/A
2422	62.51	PK	V	28.51	3.71	0.00	94.73	N/A	N/A
2422	52.65	AV	V	28.51	3.71	0.00	84.87	N/A	N/A
2390	32.82	PK	V	28.44	3.63	0.00	64.89	74.00	9.11
2390	17.59	AV	V	28.44	3.63	0.00	49.66	54.00	4.34*
4844	33.32	PK	V	33.27	4.99	27.42	44.16	74.00	29.84
4844	21.02	AV	V	33.27	4.99	27.42	31.86	54.00	22.14
7266	33.02	PK	V	36.48	6.68	25.89	50.29	74.00	23.71
7266	19.7	AV	V	36.48	6.68	25.89	36.97	54.00	17.03
9688	30.09	PK	V	38.36	8.58	27.37	49.66	74.00	24.34
9688	16.53	AV	V	38.36	8.58	27.37	36.10	54.00	17.90
3220	33.38	PK	V	31.64	6.17	27.35	43.84	74.00	30.16
3220	20.85	AV	V	31.64	6.17	27.35	31.31	54.00	22.69
275.35	40.52	QP	V	13.75	2.00	21.51	34.76	46.00	11.24
Middle Channel: 2437 MHz									
2437	60.08	PK	H	28.55	3.75	0.00	92.38	N/A	N/A
2437	49.68	AV	H	28.55	3.75	0.00	81.98	N/A	N/A
2437	62.95	PK	V	28.55	3.75	0.00	95.25	N/A	N/A
2437	52.99	AV	V	28.55	3.75	0.00	85.29	N/A	N/A
4874	33.48	PK	V	33.37	5.14	27.42	44.57	74.00	29.43
4874	21.45	AV	V	33.37	5.14	27.42	32.54	54.00	21.46
7311	33.38	PK	V	36.56	6.74	25.88	50.80	74.00	23.20
7311	20.04	AV	V	36.56	6.74	25.88	37.46	54.00	16.54
9748	30.43	PK	V	38.35	8.61	27.24	50.15	74.00	23.85
9748	16.96	AV	V	38.35	8.61	27.24	36.68	54.00	17.32
3220	33.71	PK	V	31.64	6.17	27.35	44.17	74.00	29.83
3220	21.22	AV	V	31.64	6.17	27.35	31.68	54.00	22.32
3190	33.41	PK	V	31.52	6.26	27.38	43.81	74.00	30.19
3190	21.01	AV	V	31.52	6.26	27.38	31.41	54.00	22.59
275.35	40.33	QP	V	13.75	2.00	21.51	34.57	46.00	11.43
High Channel: 2452 MHz									
2452	60.33	PK	H	28.58	3.78	0.00	92.69	N/A	N/A
2452	51.05	AV	H	28.58	3.78	0.00	83.41	N/A	N/A
2452	63.86	PK	V	28.58	3.78	0.00	96.22	N/A	N/A
2452	53.58	AV	V	28.58	3.78	0.00	85.94	N/A	N/A
2483.5	36.68	PK	V	28.66	3.67	0.00	69.01	74.00	4.99
2483.5	20.25	AV	V	28.66	3.67	0.00	52.58	54.00	1.42*
4904	33.87	PK	V	33.47	5.31	27.43	45.22	74.00	28.78
4904	21.69	AV	V	33.47	5.31	27.43	33.04	54.00	20.96
7356	33.64	PK	V	36.64	6.79	25.87	51.20	74.00	22.80
7356	20.26	AV	V	36.64	6.79	25.87	37.82	54.00	16.18
9808	30.64	PK	V	38.34	8.64	27.09	50.53	74.00	23.47
9808	17.14	AV	V	38.34	8.64	27.09	37.03	54.00	16.97
3220	33.94	PK	V	31.64	6.17	27.35	44.40	74.00	29.60
3220	21.5	AV	V	31.64	6.17	27.35	31.96	54.00	22.04
275.35	41.25	QP	V	13.75	2.00	21.51	35.49	46.00	10.51


*within uncertainty measurement!

BLE Mode


Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2402 MHz									
2402	47.62	PK	H	28.46	3.66	0.00	79.74	N/A	N/A
2402	42.07	AV	H	28.46	3.66	0.00	74.19	N/A	N/A
2402	51.15	PK	V	28.46	3.66	0.00	83.27	N/A	N/A
2402	45.86	AV	V	28.46	3.66	0.00	77.98	N/A	N/A
2390	26.45	PK	V	28.44	3.63	0.00	58.52	74.00	15.48
2390	13.41	AV	V	28.44	3.63	0.00	45.48	54.00	8.52
4804	31.58	PK	V	33.13	5.06	27.41	42.36	74.00	31.64
4804	18.22	AV	V	33.13	5.06	27.41	29.00	54.00	25.00
7206	31.85	PK	V	36.37	6.61	25.91	48.92	74.00	25.08
7206	18.36	AV	V	36.37	6.61	25.91	35.43	54.00	18.57
9608	29.37	PK	V	38.38	8.53	27.55	48.73	74.00	25.27
9608	16.83	AV	V	38.38	8.53	27.55	36.19	54.00	17.81
3085	33.07	PK	V	31.12	6.78	27.46	43.51	74.00	30.49
3085	20.39	AV	V	31.12	6.78	27.46	30.83	54.00	23.17
275.35	40.3	QP	V	13.75	2.00	21.51	34.54	46.00	11.46
Middle Channel: 2440 MHz									
2440	48.12	PK	H	28.56	3.76	0.00	80.44	N/A	N/A
2440	42.47	AV	H	28.56	3.76	0.00	74.79	N/A	N/A
2440	51.29	PK	V	28.56	3.76	0.00	83.61	N/A	N/A
2440	45.92	AV	V	28.56	3.76	0.00	78.24	N/A	N/A
4880	31.53	PK	V	33.39	5.18	27.42	42.68	74.00	31.32
4880	18.17	AV	V	33.39	5.18	27.42	29.32	54.00	24.68
7320	31.79	PK	V	36.58	6.75	25.88	49.24	74.00	24.76
7320	18.49	AV	V	36.58	6.75	25.88	35.94	54.00	18.06
9760	29.28	PK	V	38.35	8.62	27.21	49.04	74.00	24.96
9760	16.69	AV	V	38.35	8.62	27.21	36.45	54.00	17.55
3085	33.25	PK	V	31.12	6.78	27.46	43.69	74.00	30.31
3085	20.42	AV	V	31.12	6.78	27.46	30.86	54.00	23.14
3805	32.67	PK	V	32.33	4.66	27.38	42.28	74.00	31.72
3805	20.11	AV	V	32.33	4.66	27.38	29.72	54.00	24.28
275.35	40.49	QP	V	13.75	2.00	21.51	34.73	46.00	11.27
High Channel: 2480 MHz									
2480	48.21	PK	H	28.65	3.68	0.00	80.54	N/A	N/A
2480	43.07	AV	H	28.65	3.68	0.00	75.40	N/A	N/A
2480	51.83	PK	V	28.65	3.68	0.00	84.16	N/A	N/A
2480	46.88	AV	V	28.65	3.68	0.00	79.21	N/A	N/A
2483.5	25.85	PK	V	28.66	3.67	0.00	58.18	74.00	15.82
2483.5	13.93	AV	V	28.66	3.67	0.00	46.26	54.00	7.74
4960	31.76	PK	V	33.66	5.34	27.43	43.33	74.00	30.67
4960	18.65	AV	V	33.66	5.34	27.43	30.22	54.00	23.78
7440	32.19	PK	V	36.79	6.89	25.97	49.90	74.00	24.10
7440	18.82	AV	V	36.79	6.89	25.97	36.53	54.00	17.47
9920	29.71	PK	V	38.32	8.71	26.66	50.08	74.00	23.92
9920	17.15	AV	V	38.32	8.71	26.66	37.52	54.00	16.48
3085	33.56	PK	V	31.12	6.78	27.46	44.00	74.00	30.00
3085	20.84	AV	V	31.12	6.78	27.46	31.28	54.00	22.72
275.35	40.65	QP	V	13.75	2.00	21.51	34.89	46.00	11.11

Conducted Spurious Emissions at Antenna Port


802.11b Low Channel

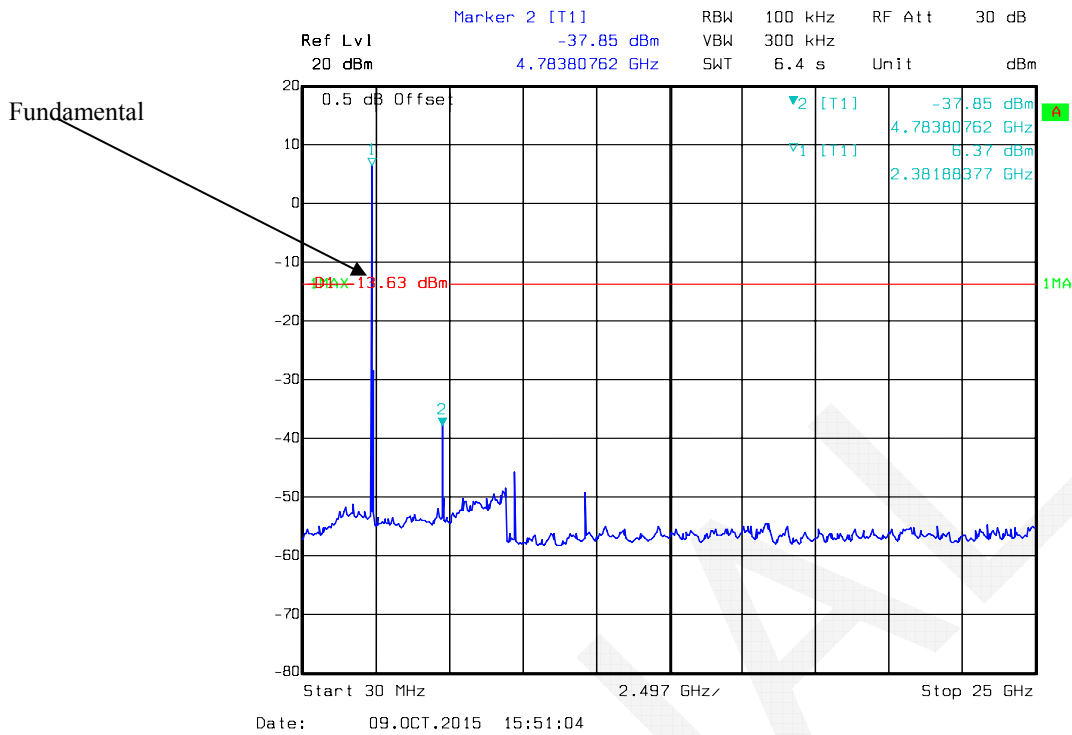


802.11b Middle Channel

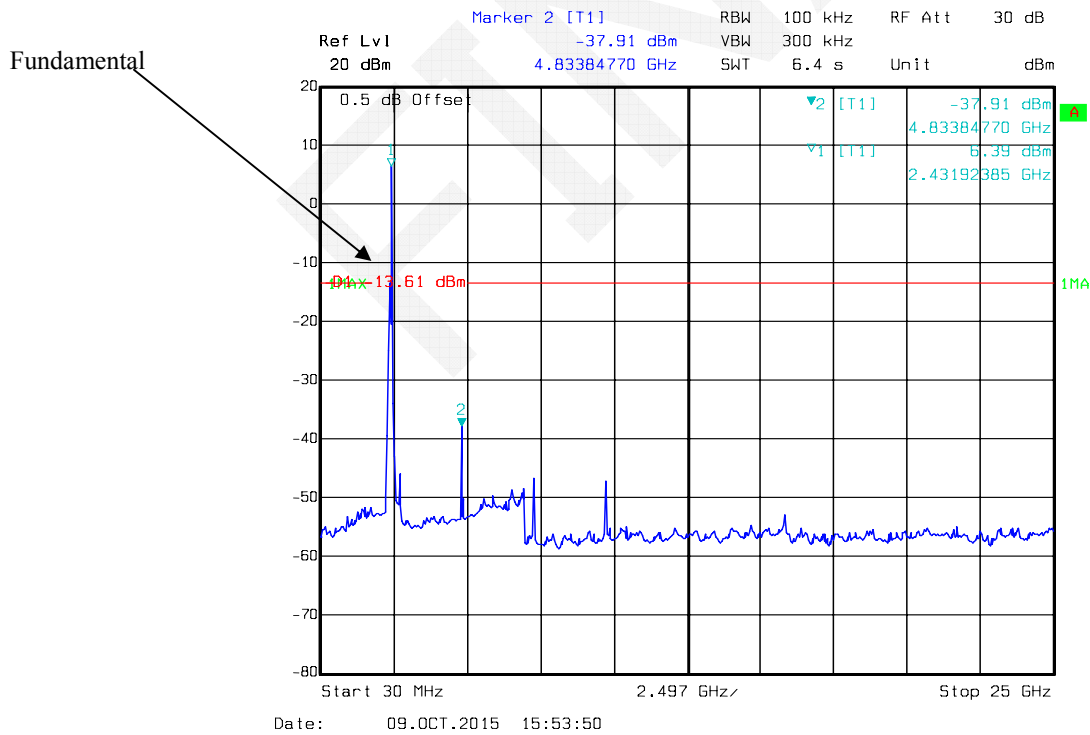


802.11b High Channel

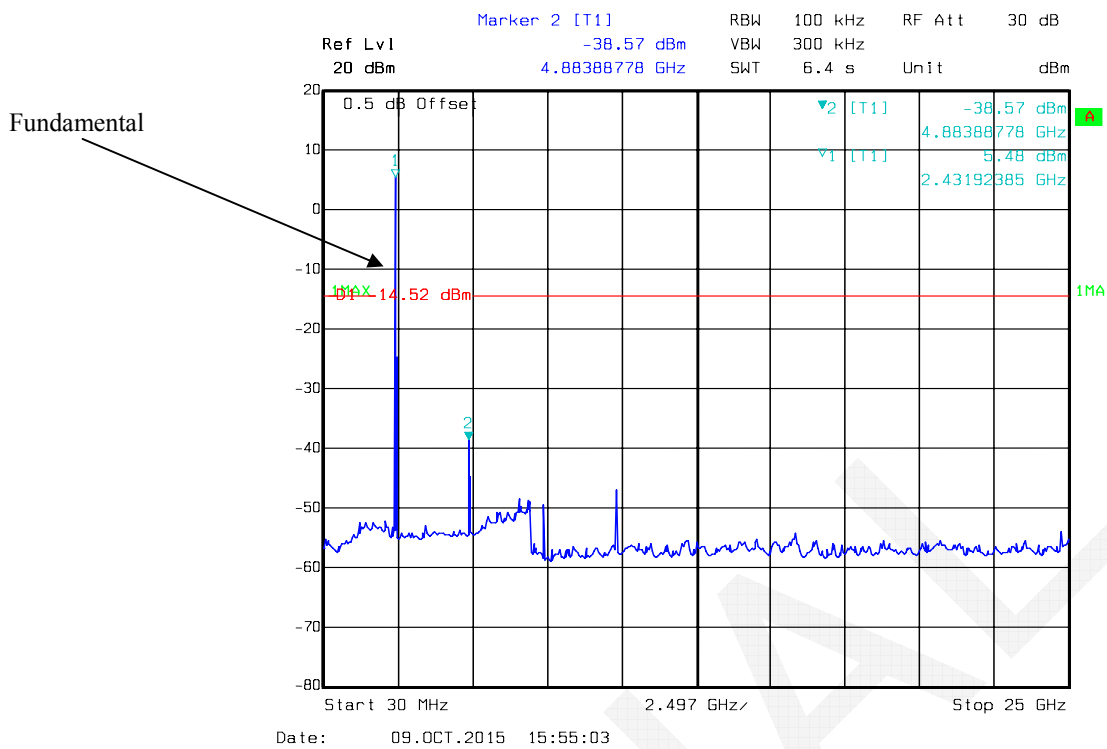


802.11g Low Channel

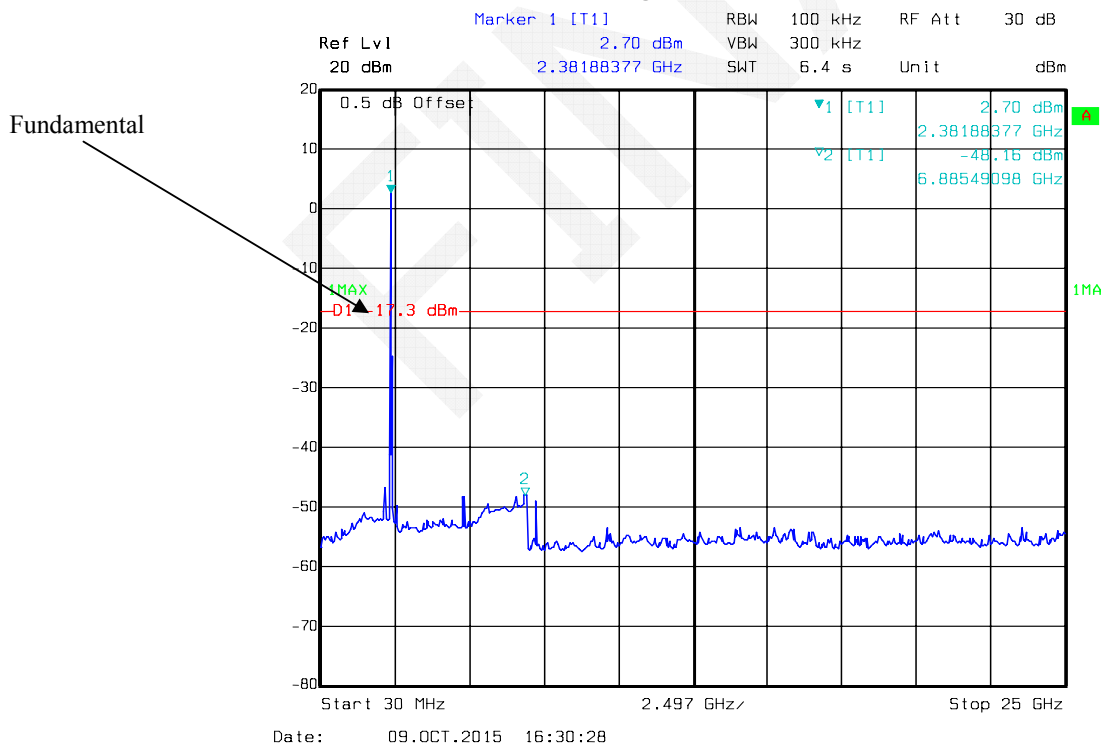

802.11g Middle Channel

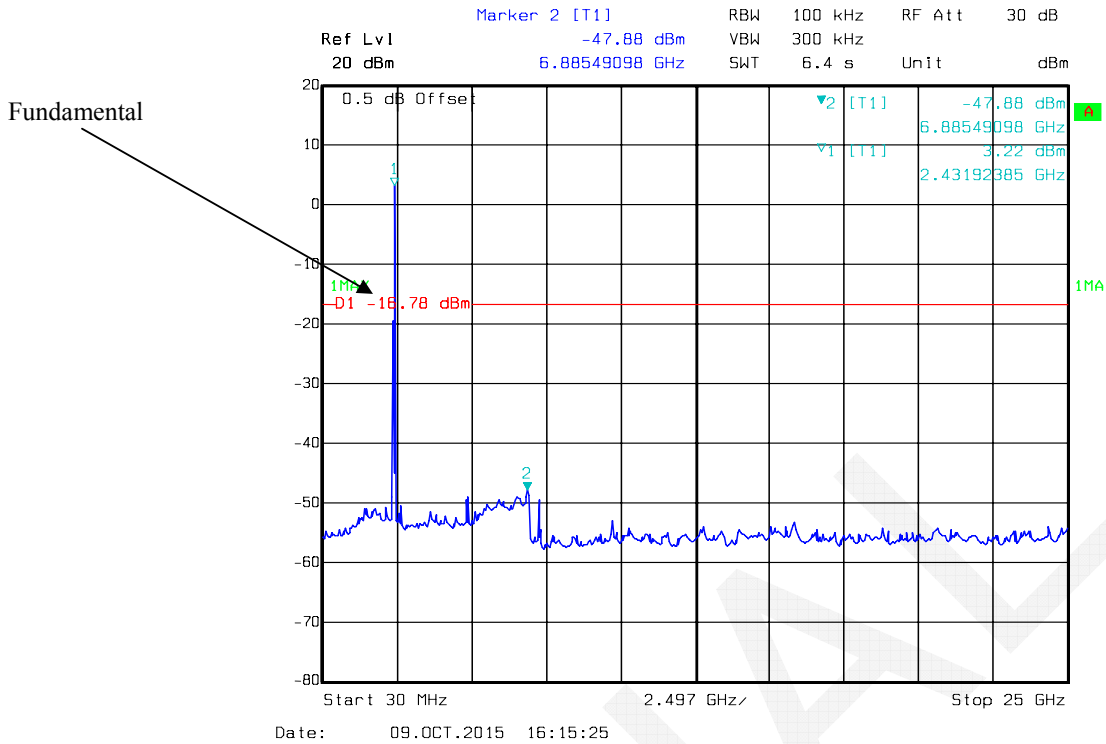


802.11g High Channel

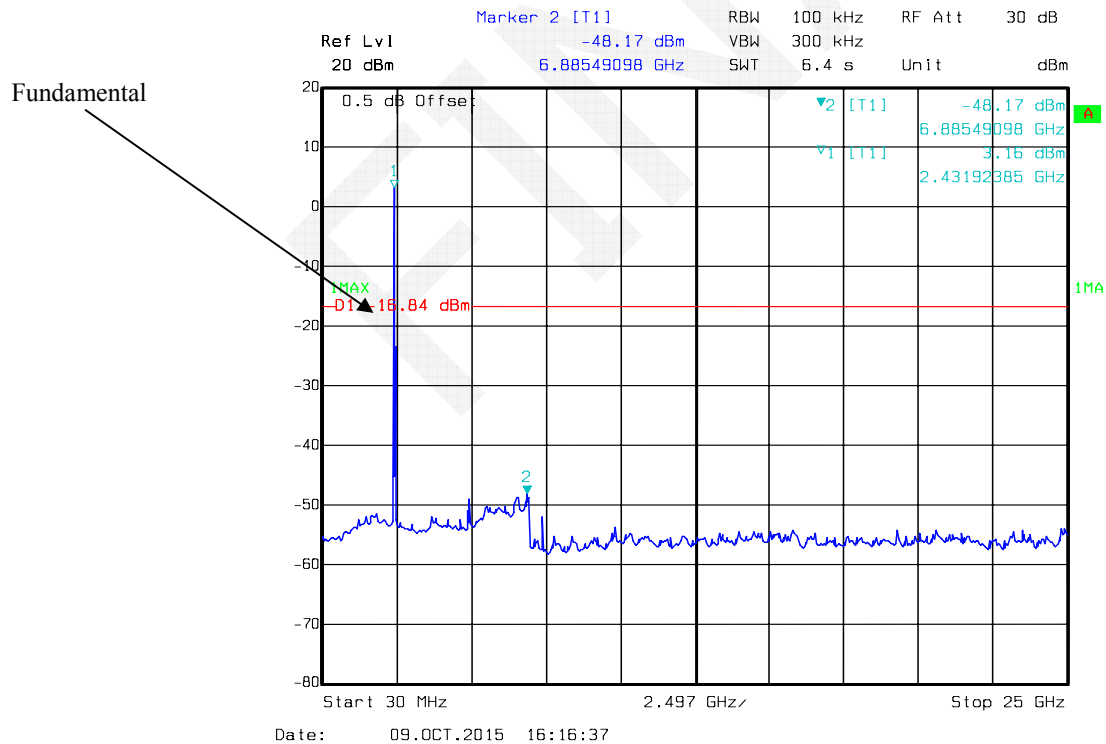


802.11n ht20 Low Channel

Fundamental

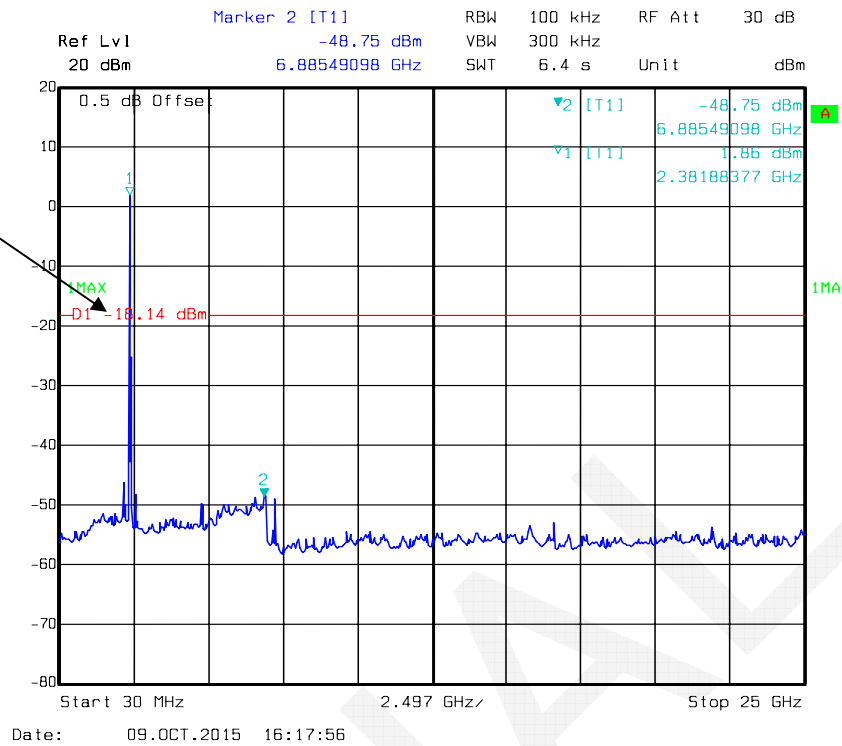


802.11n ht20 Middle Channel


Fundamental

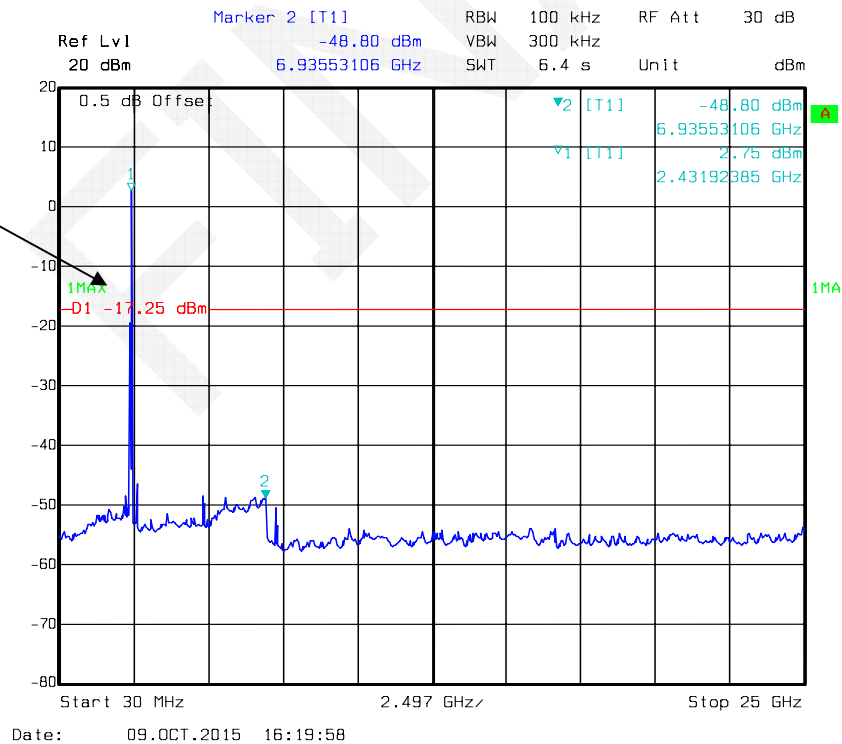

802.11n ht20 High Channel

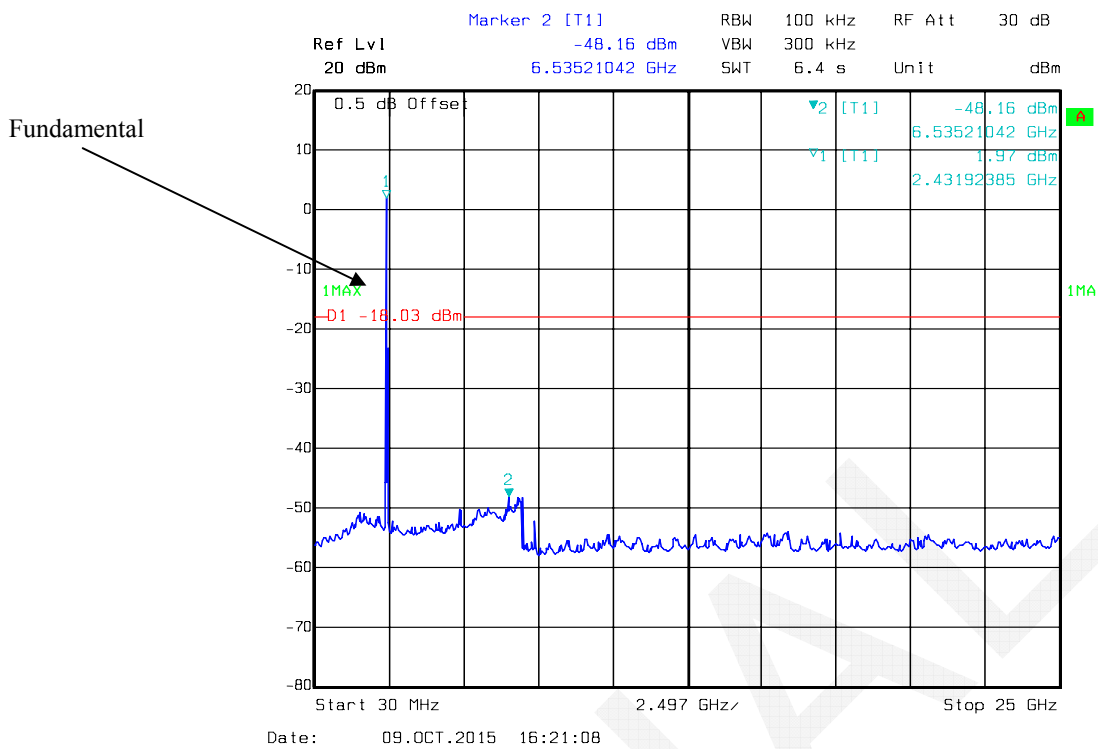


802.11n ht40 Low Channel

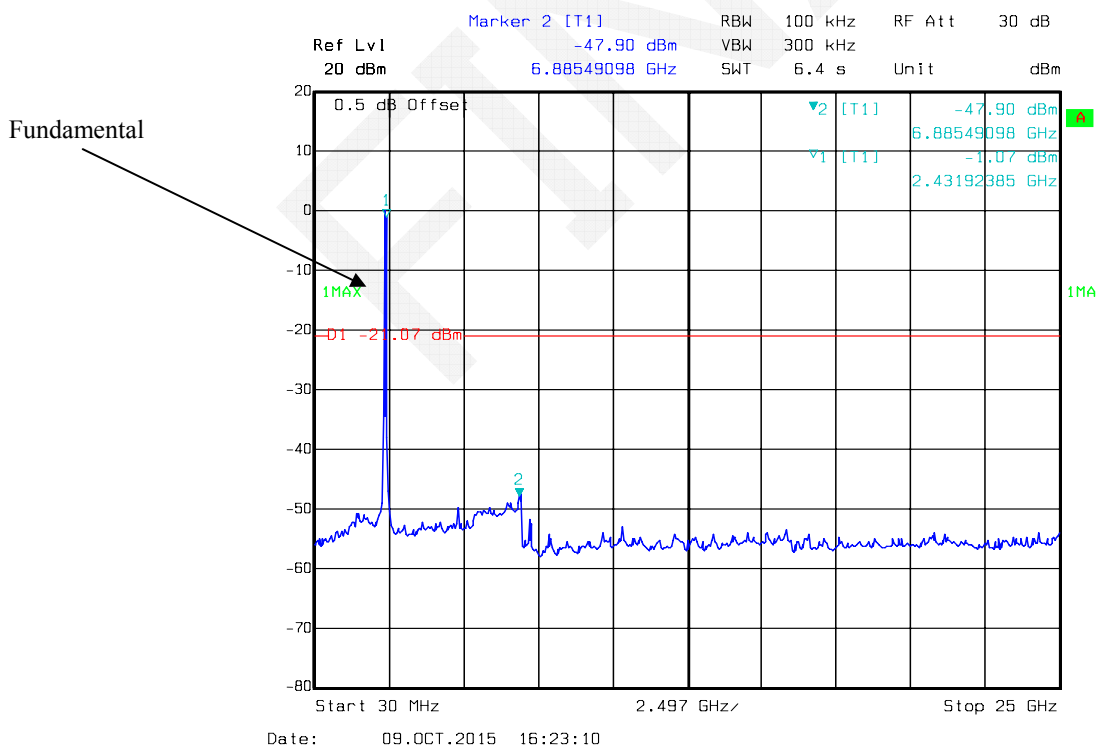


802.11n ht40 Middle Channel

Fundamental

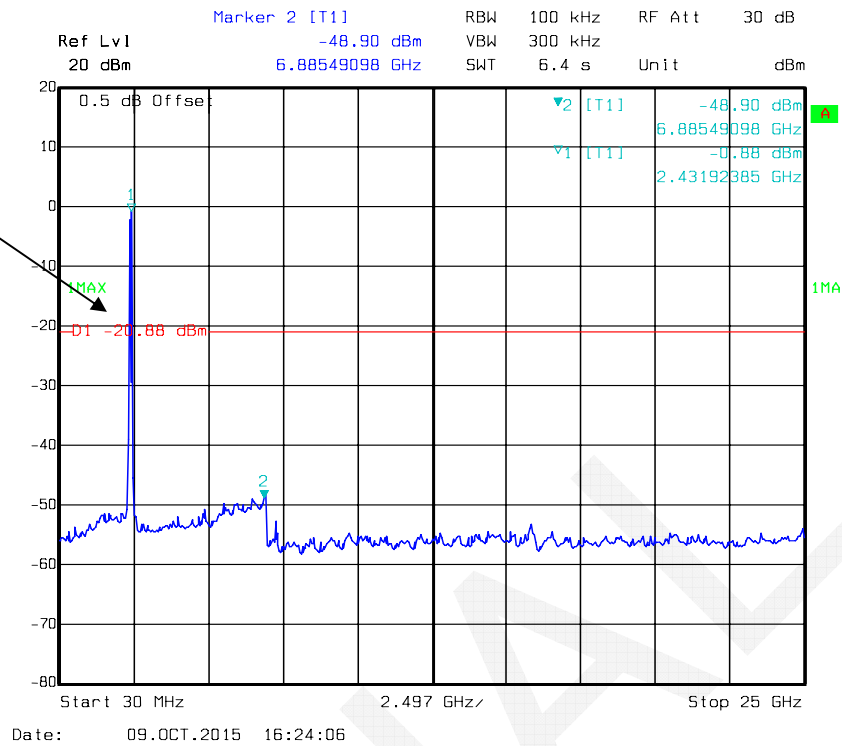


802.11n ht40 High Channel

Fundamental

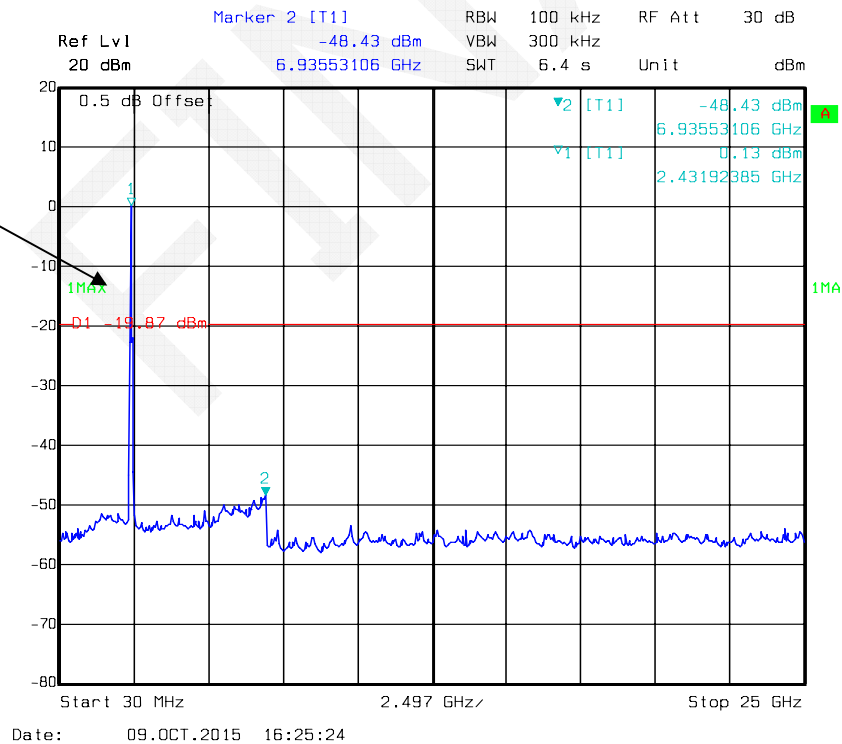


BLE Low Channel

Fundamental

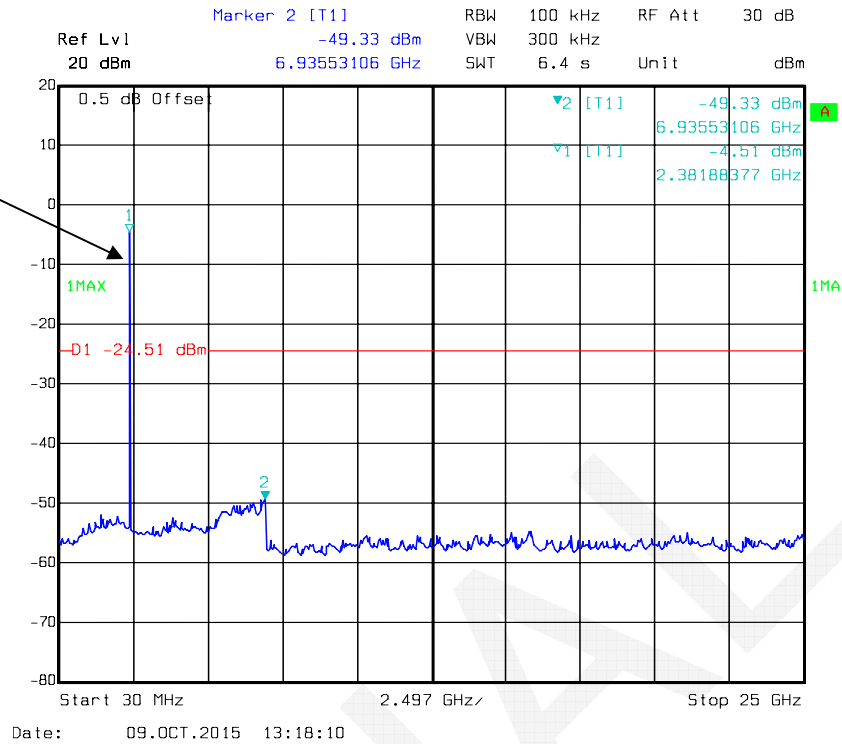


BLE Middle Channel

Fundamental

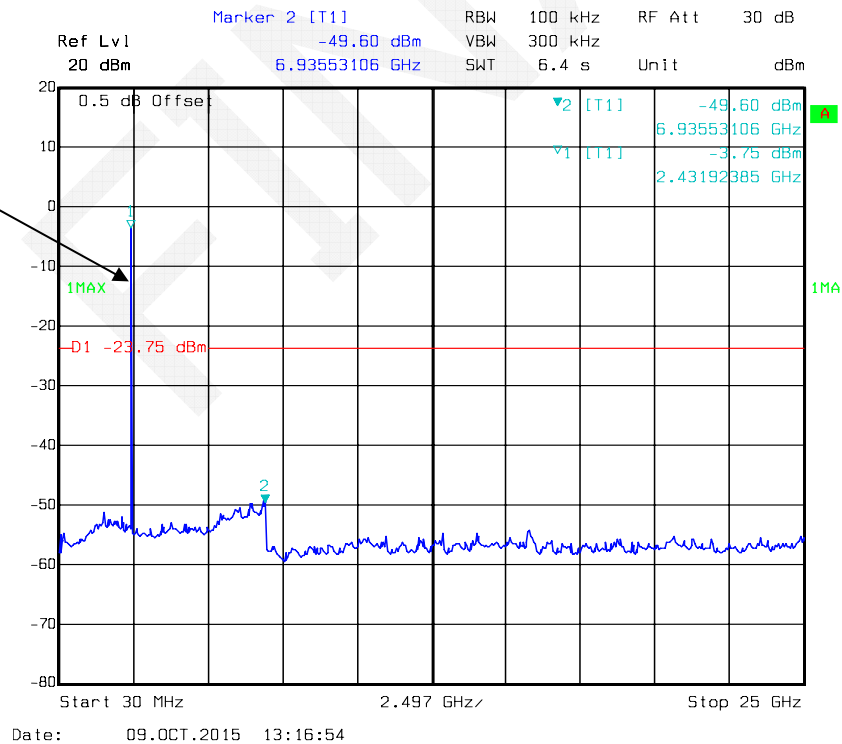

BLE High Channel

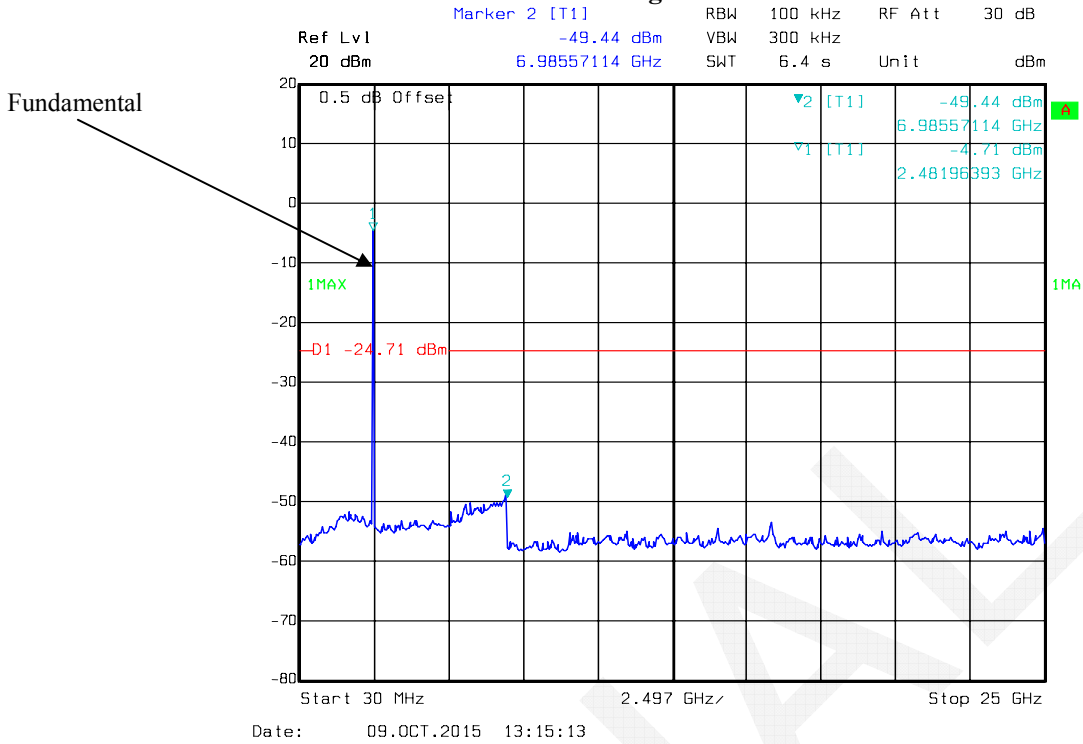

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r03

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24.7~26.9 °C
Relative Humidity:	44~51 %
ATM Pressure:	100.4~101.3 kPa


* The testing was performed by Allen Qiao from 2015-10-09 to 2015-10-12.

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plots.


Test mode	Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
802.11b	Low	2412	9.92	≥ 0.5
	Middle	2437	9.92	≥ 0.5
	High	2462	9.92	≥ 0.5
802.11g	Low	2412	16.48	≥ 0.5
	Middle	2437	16.48	≥ 0.5
	High	2462	16.56	≥ 0.5
802.11n20	Low	2412	17.68	≥ 0.5
	Middle	2437	17.76	≥ 0.5
	High	2462	17.76	≥ 0.5
802.11n40	Low	2422	36.48	≥ 0.5
	Middle	2437	36.48	≥ 0.5
	High	2452	36.48	≥ 0.5
BLE	Low	2402	0.741	≥ 0.5
	Middle	2440	0.741	≥ 0.5
	High	2480	0.731	≥ 0.5

802.11b Low Channel

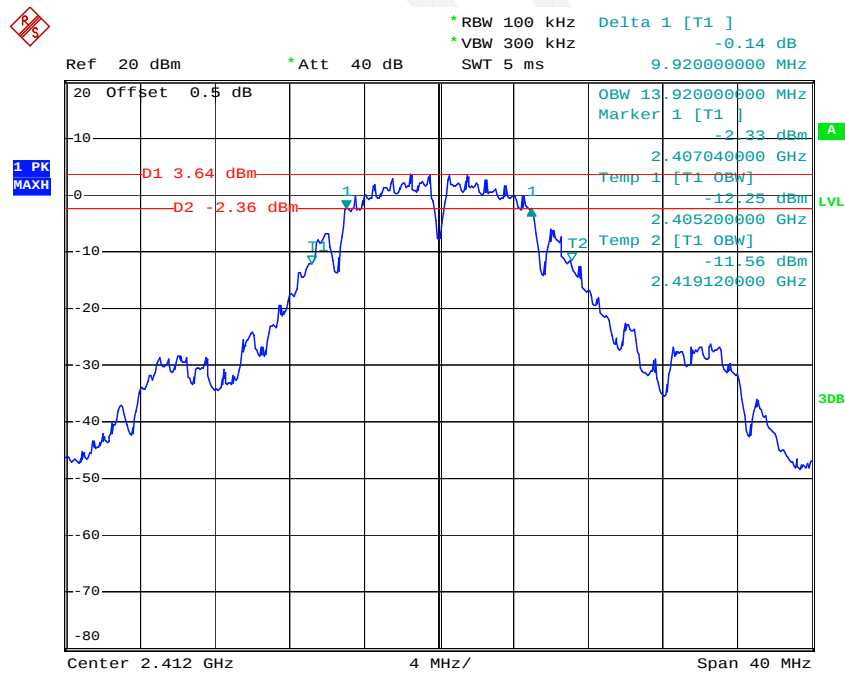


Date: 12.OCT.2015 15:06:06

802.11b Middle Channel

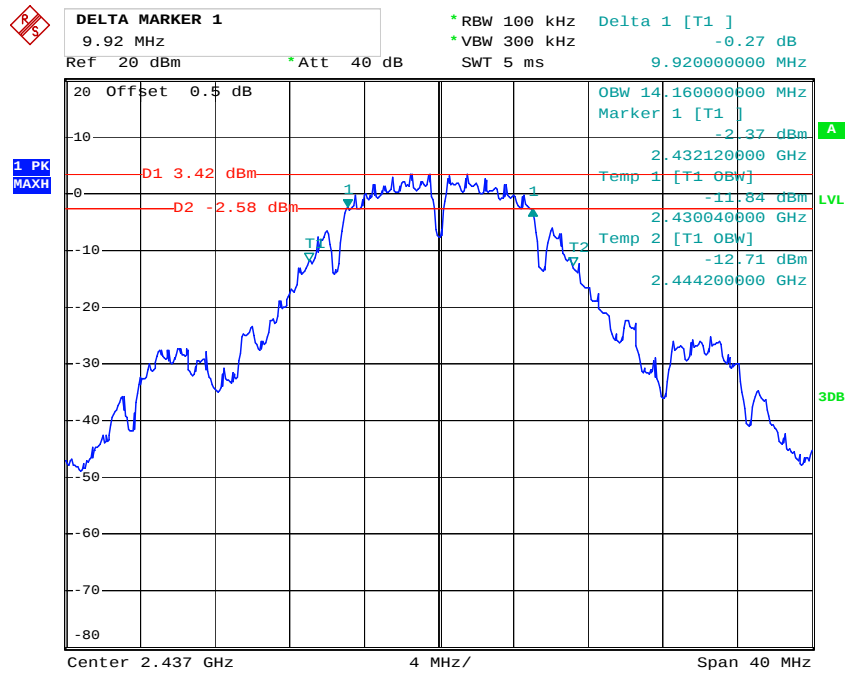


Date: 12.OCT.2015 15:08:25

802.11b High Channel

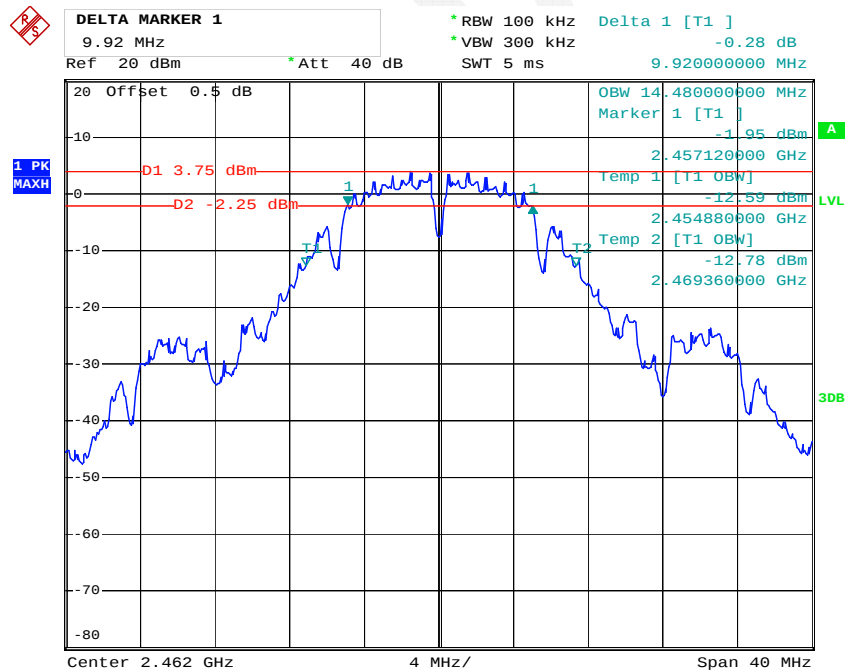


Date: 12.OCT.2015 15:09:48

802.11g Low Channel

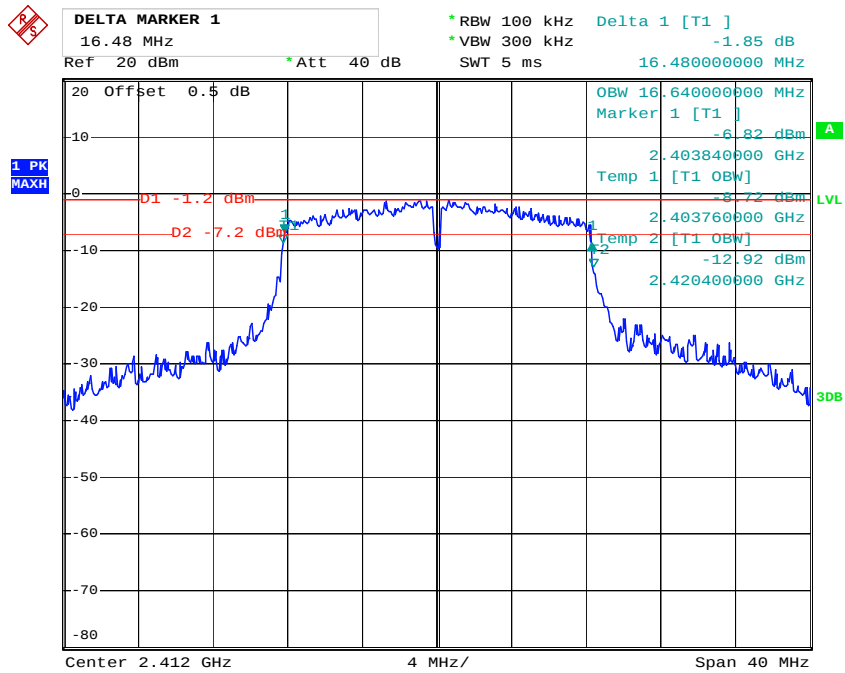


Date: 12.OCT.2015 15:12:34

802.11g Middle Channel

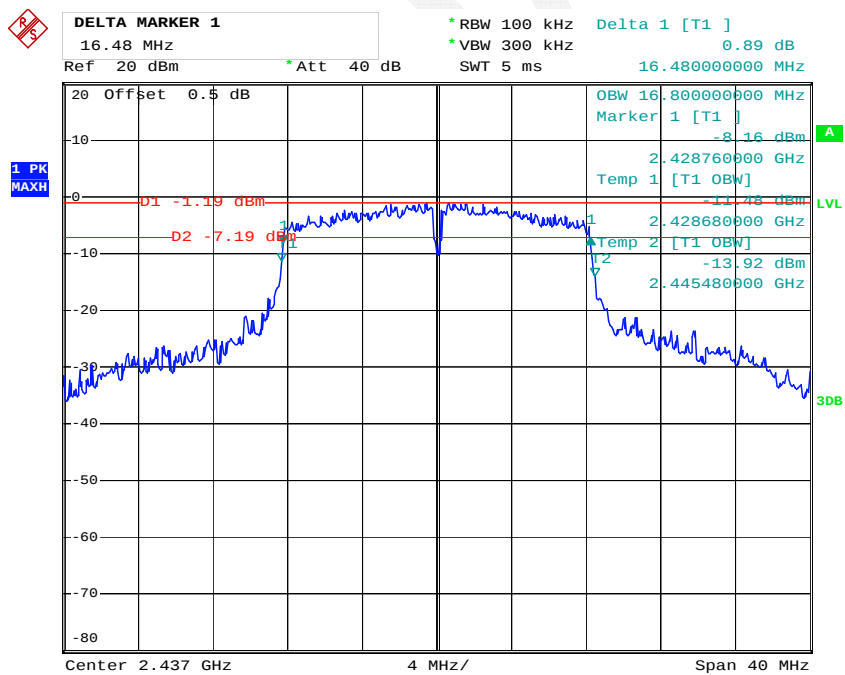


Date: 12.OCT.2015 15:14:00

802.11g High Channel

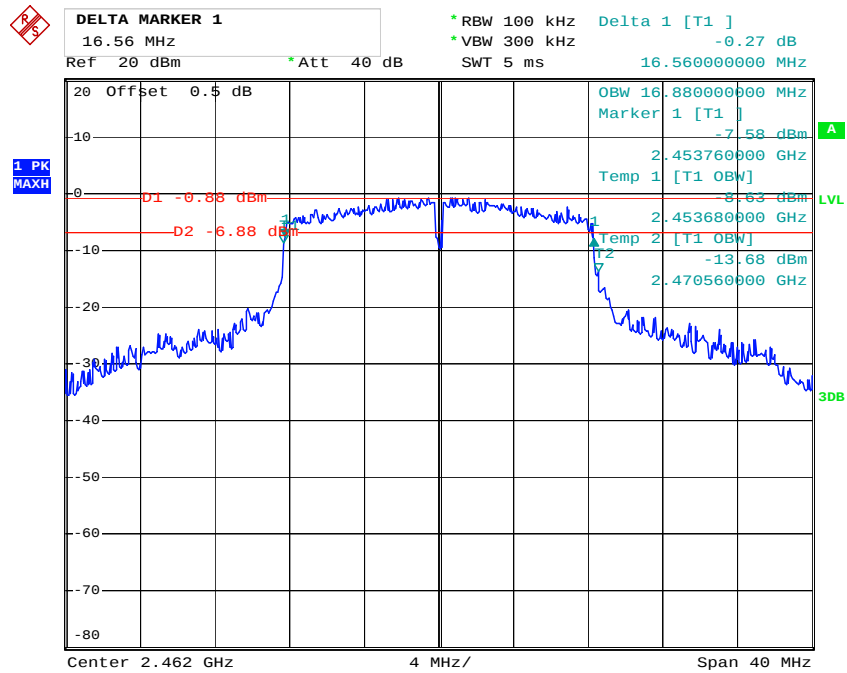


Date: 12.OCT.2015 15:15:28

802.11n ht20 Low Channel

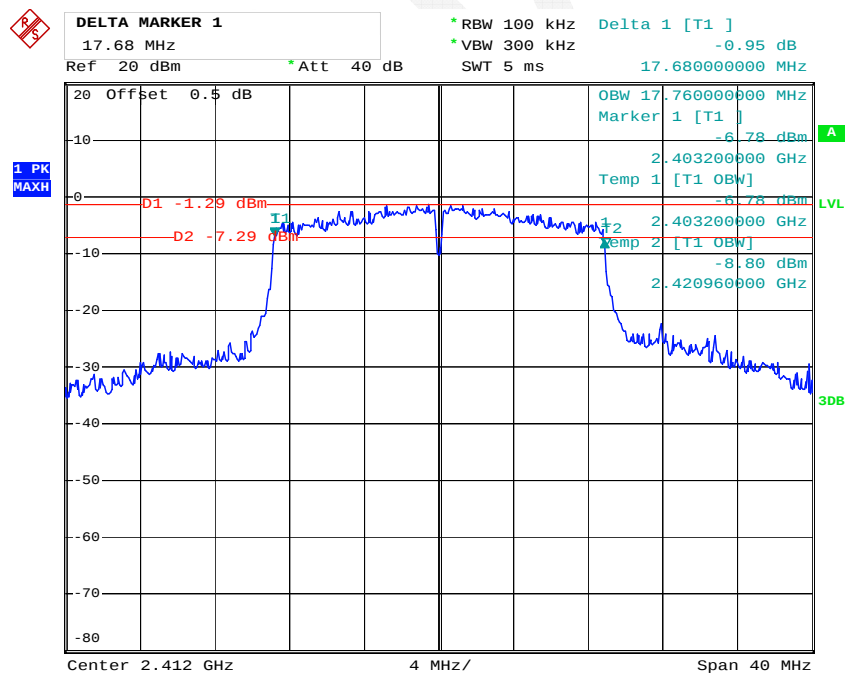


Date: 12.OCT.2015 15:17:01

802.11n ht20 Middle Channel

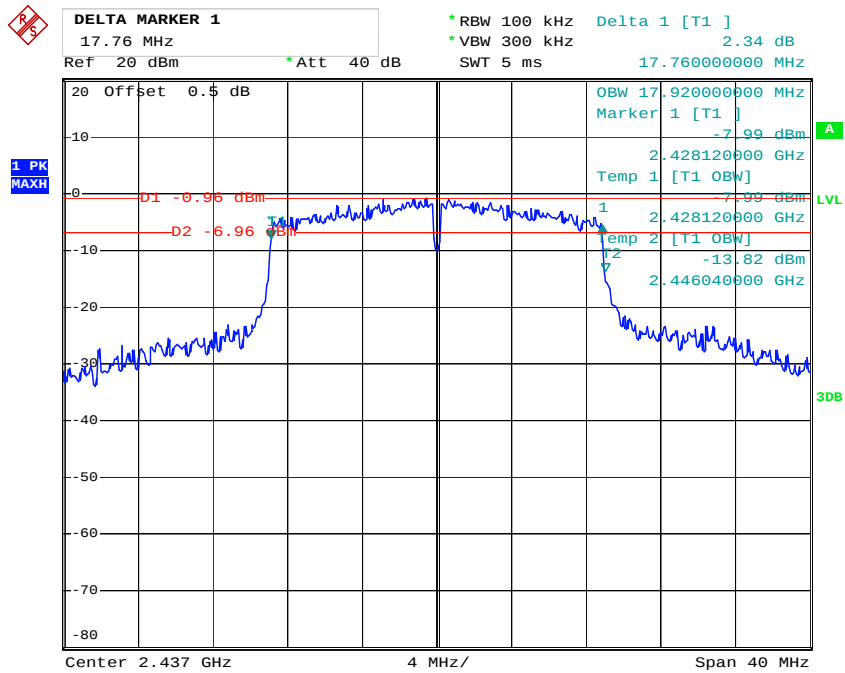


Date: 12.OCT.2015 15:18:39

802.11n ht20 High Channel

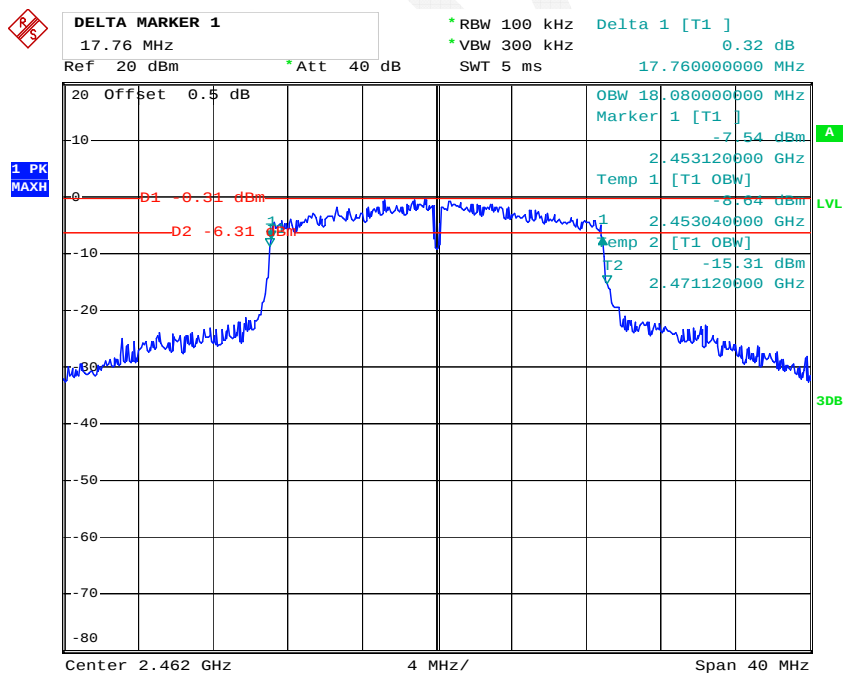


Date: 12.OCT.2015 15:19:57

802.11n ht40 Low Channel

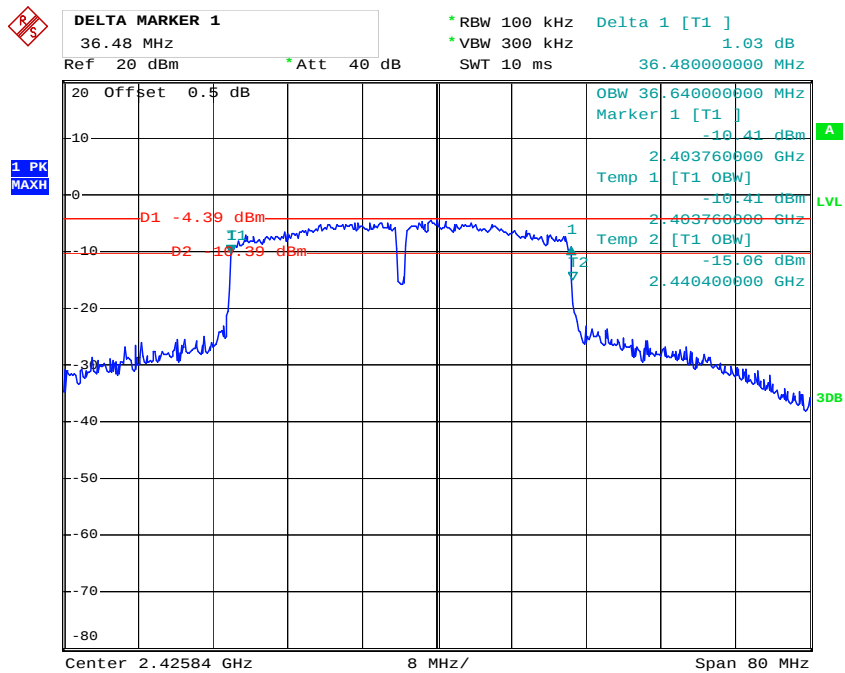


Date: 12.OCT.2015 15:25:56

802.11n ht40 Middle Channel

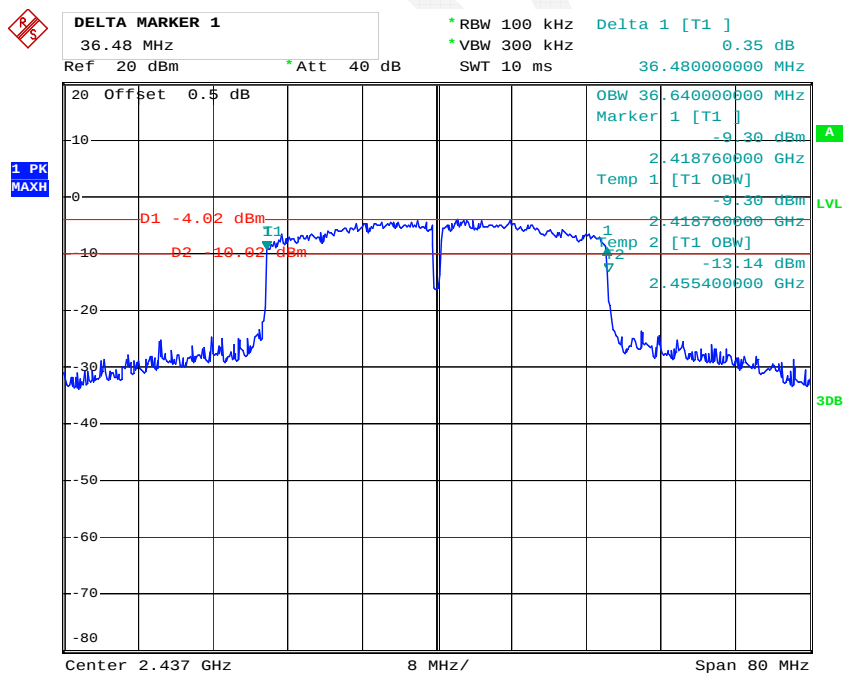


Date: 12.OCT.2015 15:27:33

802.11n ht40 High Channel

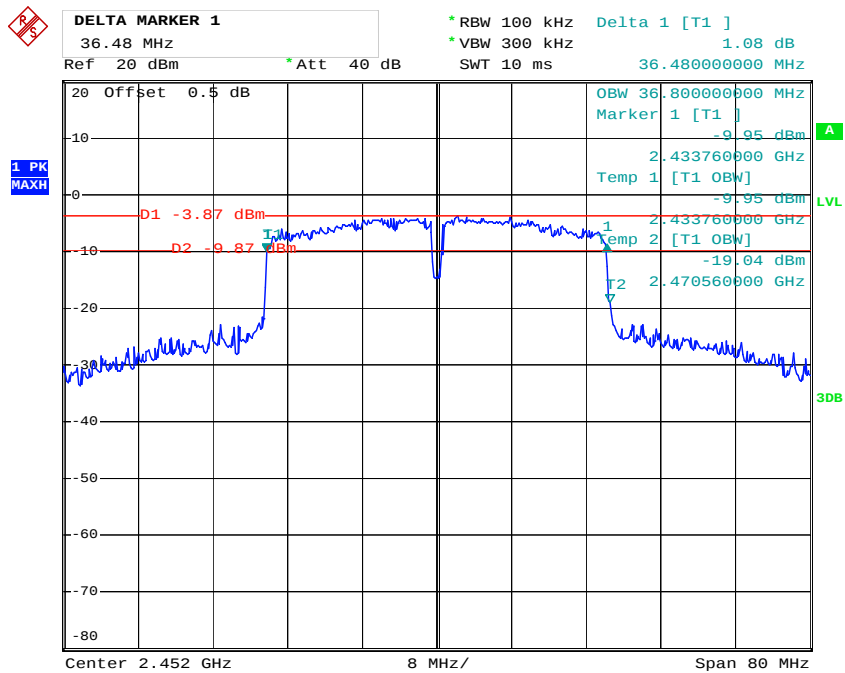


Date: 12.OCT.2015 15:28:54

BLE Low Channel

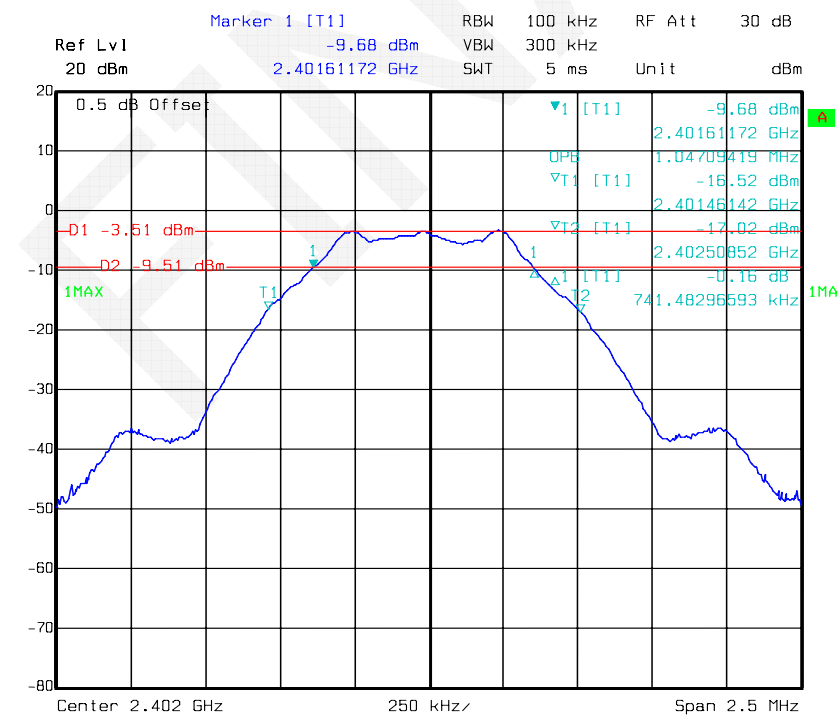


Date: 09.OCT.2015 13:07:59

BLE Middle Channel

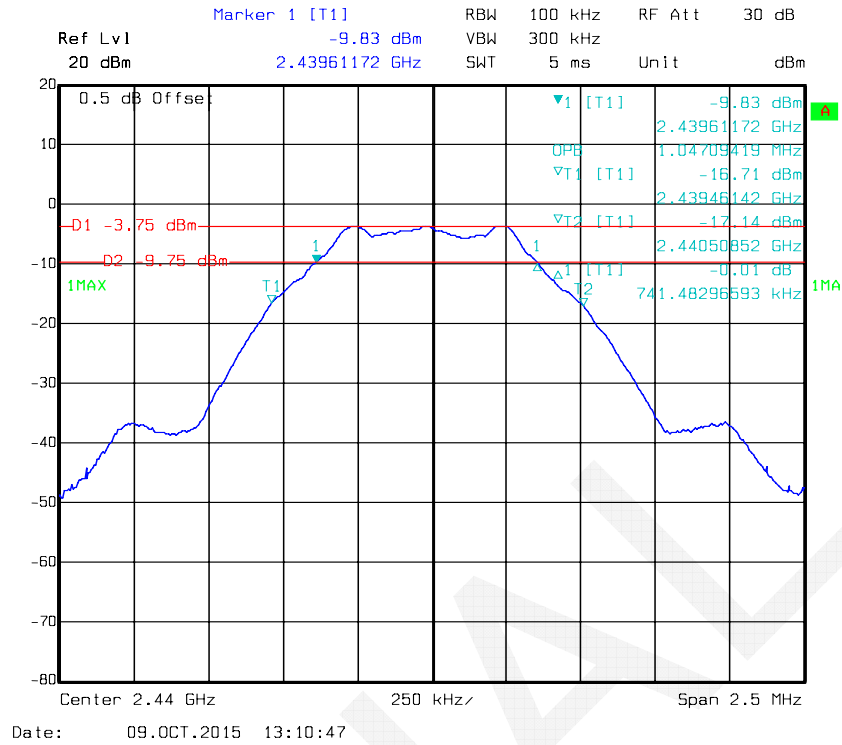

BLE High Channel

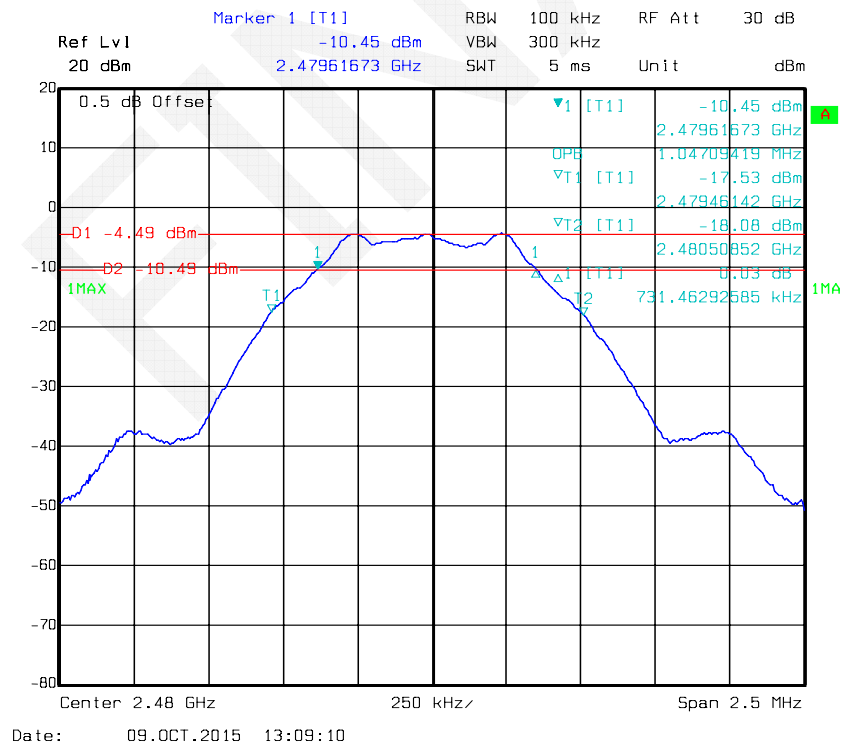

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r03

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Wideband Power Sensor	N1921A	MY54210016	2014-11-03	2015-11-03
Agilent	Wideband Power Sensor	N1921A	MY54170013	2014-11-03	2015-11-03
Agilent	P-Series Power Meter	N1912A	MY5000448	2014-11-03	2015-11-03

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26.8 °C
Relative Humidity:	51 %
ATM Pressure:	101.4 kPa

* The testing was performed by Allen Qiao on 2015-10-11.

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table.

Test mode	Channel	Frequency	Max Peak Conducted Output Power	Max Conducted Average Output Power	Limit
		(MHz)	(dBm)	(dBm)	(dBm)
802.11b	Low	2412	15.51	14.49	30
	Middle	2437	16.12	15.17	30
	High	2462	16.30	15.33	30
802.11g	Low	2412	18.49	14.99	30
	Middle	2437	18.39	15.01	30
	High	2462	18.45	15.00	30
802.11n20	Low	2412	18.66	15.11	30
	Middle	2437	19.11	15.54	30
	High	2462	19.19	15.67	30
802.11n40	Low	2422	21.16	14.94	30
	Middle	2437	21.42	15.17	30
	High	2452	21.59	15.42	30
BLE	Low	2402	-3.03	/	30
	Middle	2440	-3.16	/	30
	High	2480	-4.04	/	30

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26.9 °C
Relative Humidity:	51 %
ATM Pressure:	100.5 kPa

* The testing was performed by Allen Qiao on 2015-10-09 .

Test mode: Transmitting

802.11b: Band Edge, Left Side



MARKER 4
2.3954 GHz
Ref 20 dBm *Att 30 dB *RBW 100 kHz *VBW 300 kHz SWT 5 ms
Marker 4 [T1] -25.80 dBm
2.395400000 GHz

1 PK MAXH

20 Offset 0.5 dB

D1 0.13 dBm

D2 -19.87 dBm

Marker 1 [T1] 0.13 dBm
2.413610000 GHz

Marker 2 [T1] -36.05 dBm
2.390000000 GHz

Marker 3 [T1] -26.48 dBm
2.400000000 GHz

F1 F2

Start 2.38 GHz 4.4 MHz/ Stop 2.424 GHz

LVL 30dB

Date: 9.OCT.2015 15:31:52

MARKER 4
2.4835 GHz
Ref 20 dBm * Att 30 dB
* RBW 100 kHz
* VBW 300 kHz
SWT 10 ms
Marker 4 [T1]
-35.29 dBm
2.483500000 GHz

1 PK
MAXH

1 0.94 dBm
2 459300000 GHz
-35.29 dBm
2.483500000 GHz
Marker 3 [T1]
-47.26 dBm
2.500000000 GHz

D2 -19.06 dBm

F1 F2

Start 2.452 GHz 5.8 MHz/ Stop 2.51 GHz

Date: 9.OCT.2015 15:42:17

[illegible]

Date: 9.OCT.2015 15:48:42

MARKER 4
2.4835 GHz
Ref 20 dBm
* Att 30 dB

* RBW 100 kHz
* VBW 300 kHz
SWT 10 ms

Marker 4 [T1]
-31.24 dBm
2.48350000 GHz

20 Offset 0.5 dB
1 PK MAXH
D1 -1.16 dBm
D2 -18.84 dBm

Marker 1 [T1]
1.16 dBm
2.48350000 GHz


Marker 2 [T1]
-31.24 dBm
2.48350000 GHz

Marker 3 [T1]
-46.06 dBm
2.50000000 GHz

Start 2.452 GHz
5.8 MHz/
Stop 2.51 GHz


Date: 9.OCT.2015 15:40:42

802.11n ht40 Band Edge, Left Side

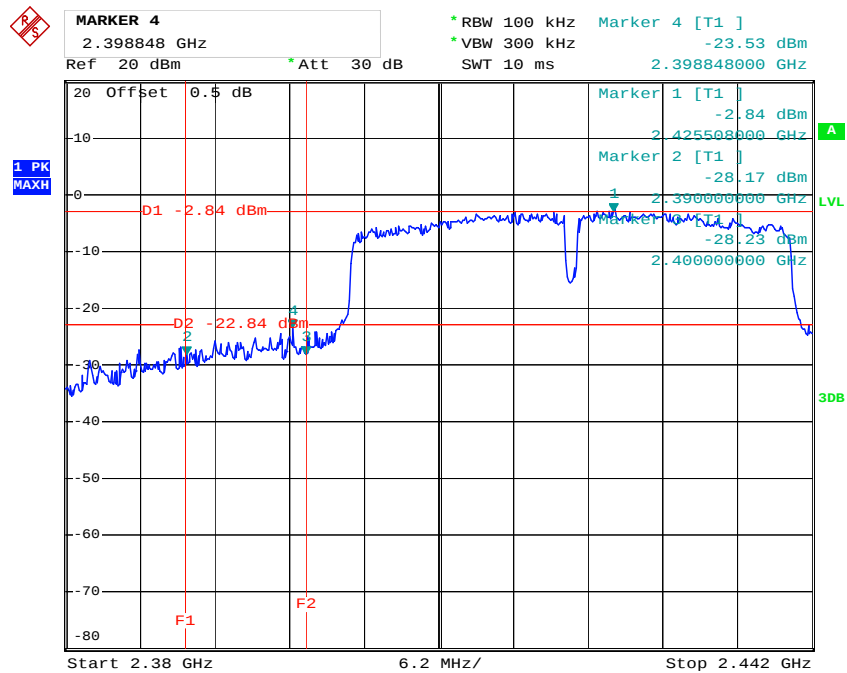


Date: 9.OCT.2015 15:35:43

802.11n ht40 Band Edge, Right Side

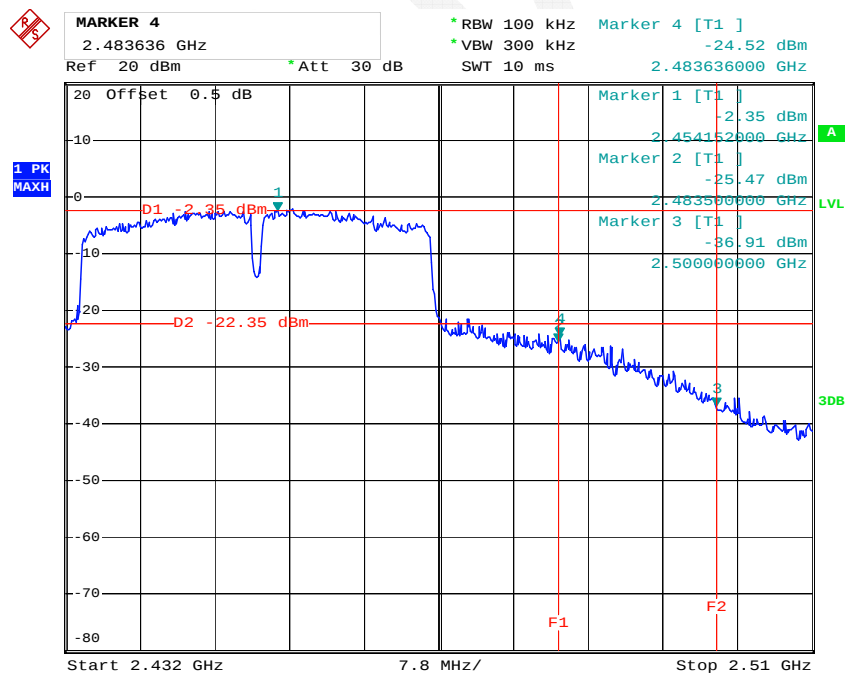


Date: 9.OCT.2015 15:38:29

BLE Band Edge , Left Side

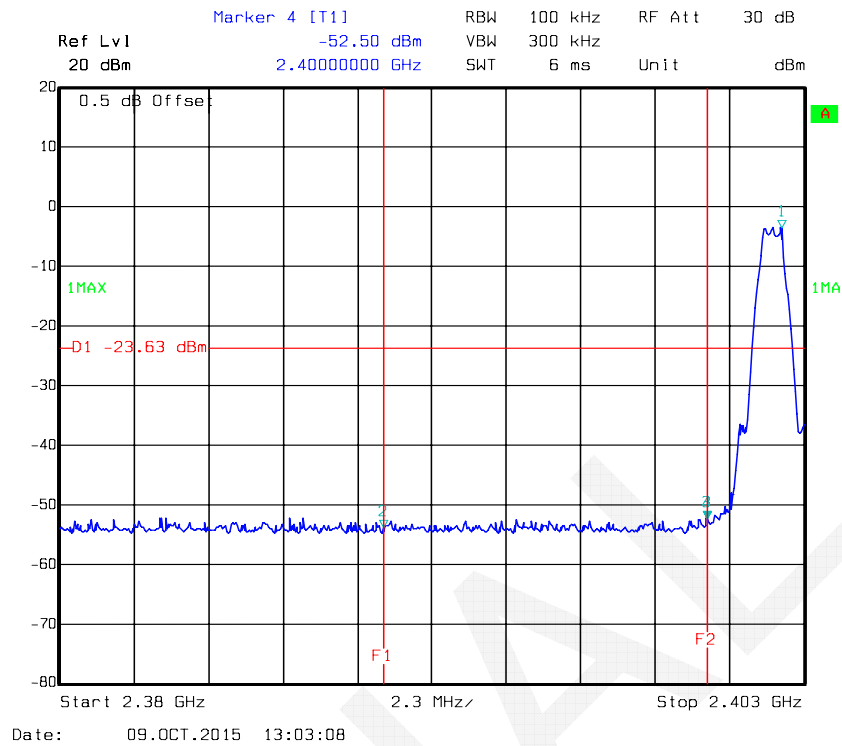

BLE Band Edge, Right Side

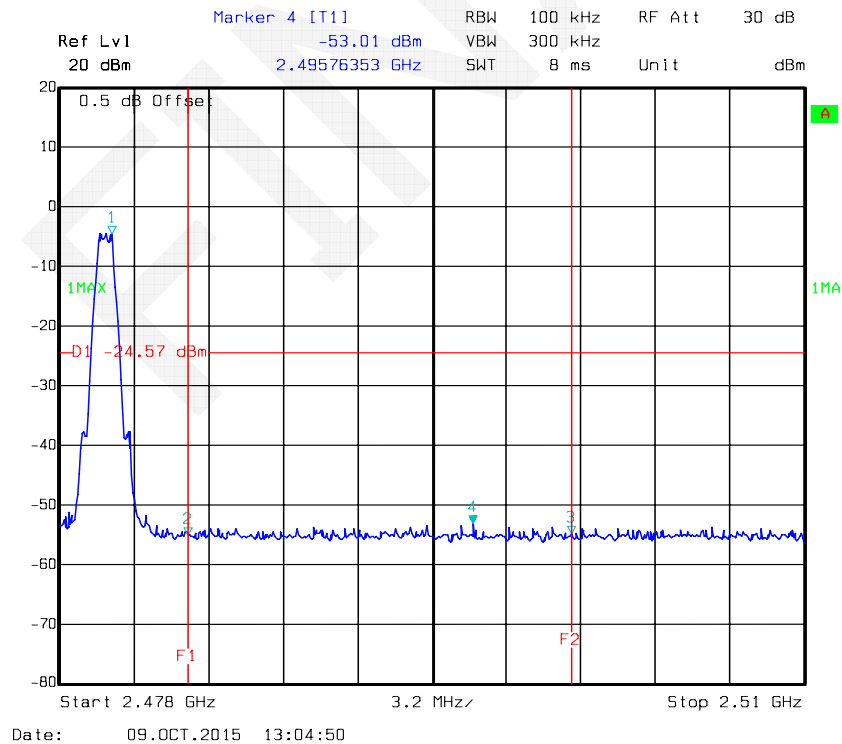

FCC §15.247(e) - POWER SPECTRAL DENSITY**Applicable Standard**

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r03

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24.7~26.9 °C
Relative Humidity:	44~51 %
ATM Pressure:	100.4~101.3 kPa


* The testing was performed by Allen Qiao from 2015-10-09 to 2015-10-12.

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plots


Test mode	Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
802.11b	Low	2412	-14.93	≤ 8
	Middle	2437	-14.81	≤ 8
	High	2462	-14.96	≤ 8
802.11g	Low	2412	-15.29	≤ 8
	Middle	2437	-14.81	≤ 8
	High	2462	-14.96	≤ 8
802.11n20	Low	2412	-15.68	≤ 8
	Middle	2437	-15.23	≤ 8
	High	2462	-15.10	≤ 8
802.11n40	Low	2422	-17.19	≤ 8
	Middle	2437	-16.76	≤ 8
	High	2452	-16.67	≤ 8
BLE	Low	2402	-18.49	≤ 8
	Middle	2440	-18.53	≤ 8
	High	2480	-19.42	≤ 8

Power Spectral Density, 802.11b Low Channel

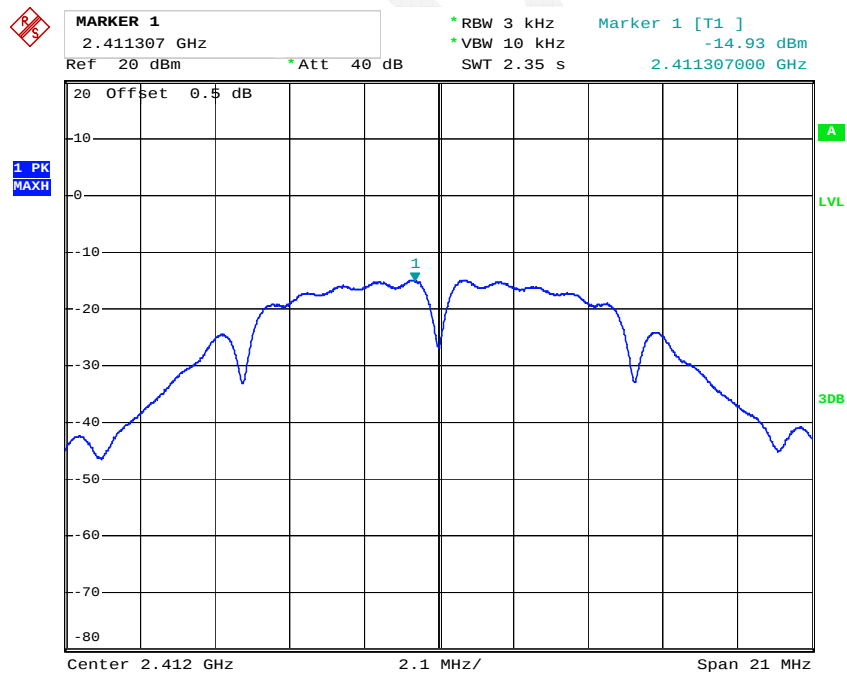


Date: 12.OCT.2015 15:38:01

Power Spectral Density, 802.11b Middle Channel

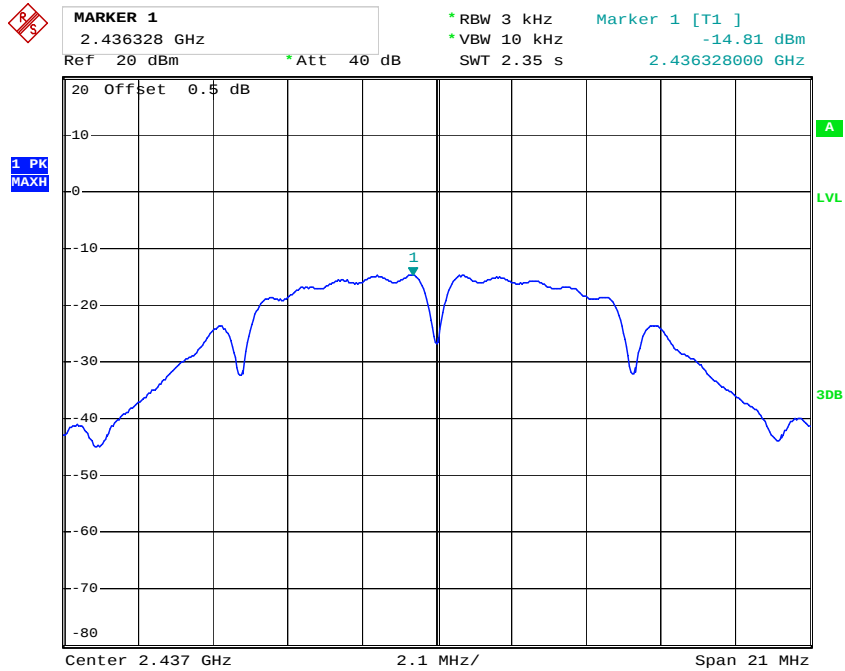


Date: 12.OCT.2015 15:40:14

Power Spectral Density, 802.11b High Channel

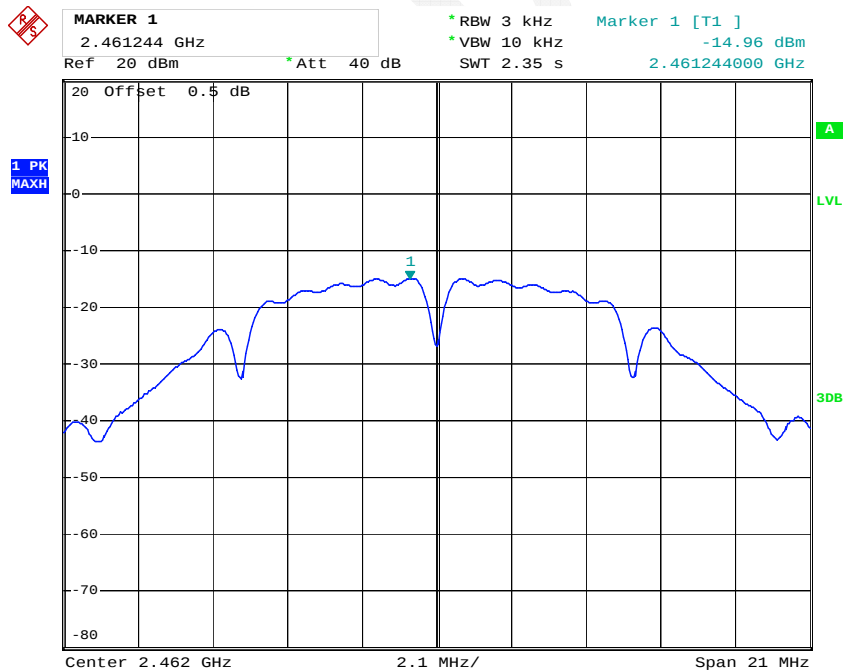


Date: 12.OCT.2015 15:40:54

Power Spectral Density, 802.11g Low Channel

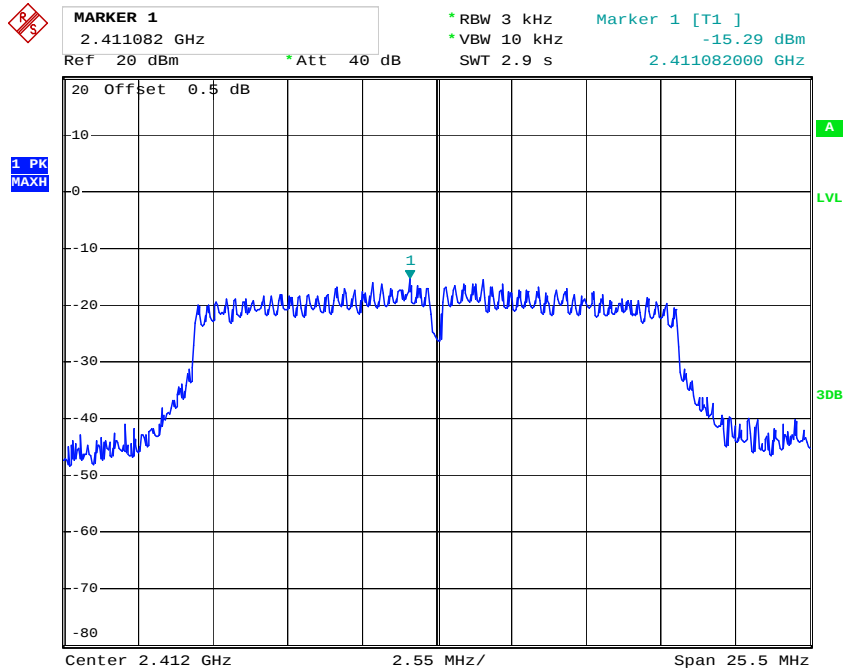


Date: 12.OCT.2015 15:41:48

Power Spectral Density, 802.11g Middle Channel

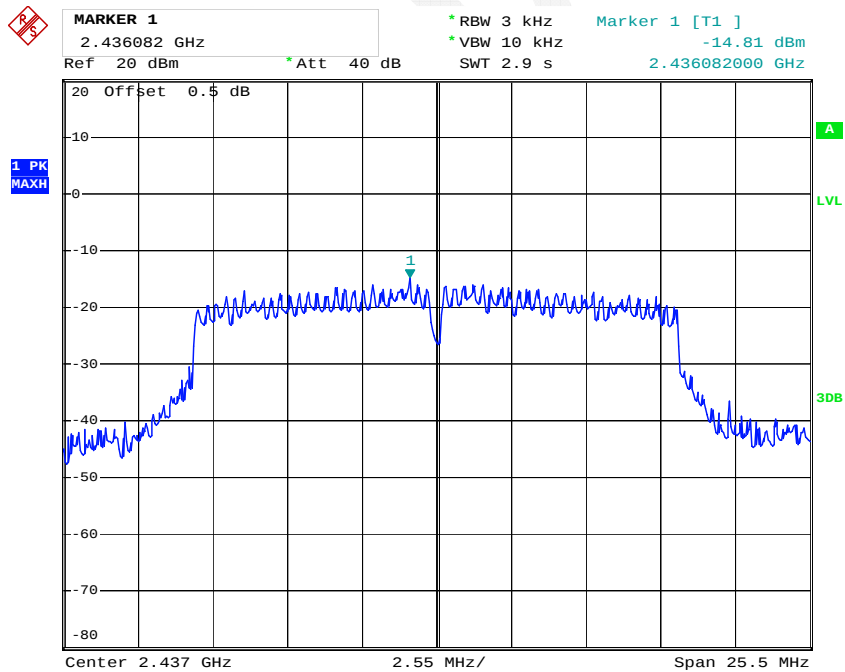


Date: 12.OCT.2015 15:42:15

Power Spectral Density, 802.11g High Channel

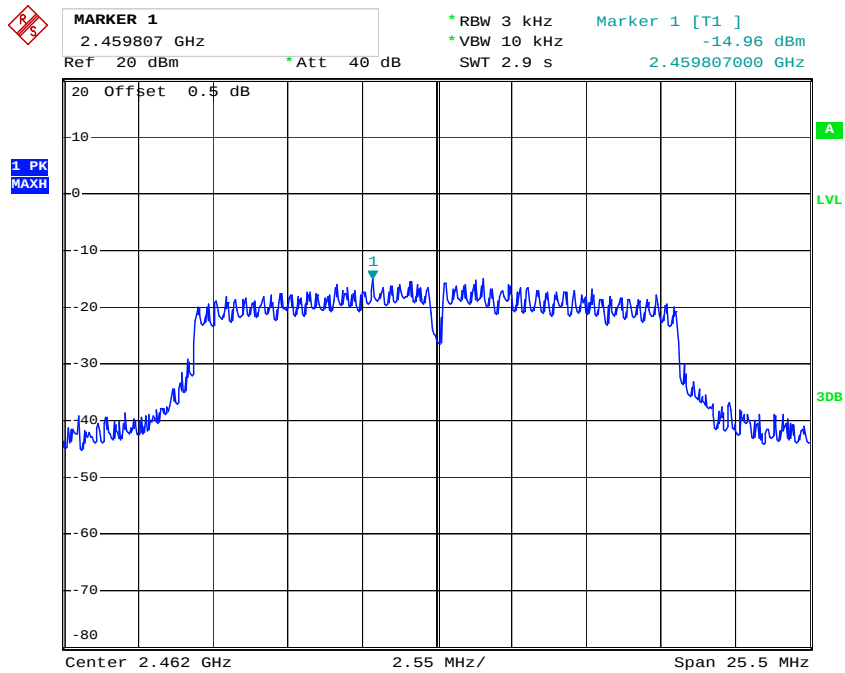


Date: 12.OCT.2015 15:42:48

Power Spectral Density, 802.11n ht20 Low Channel

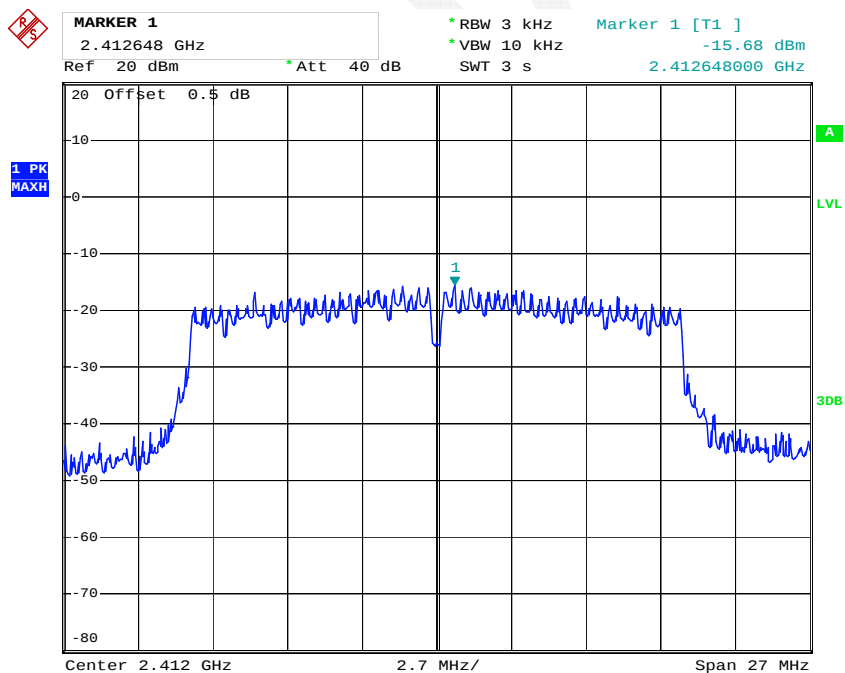


Date: 12.OCT.2015 15:43:59

Power Spectral Density, 802.11n ht20 Middle Channel

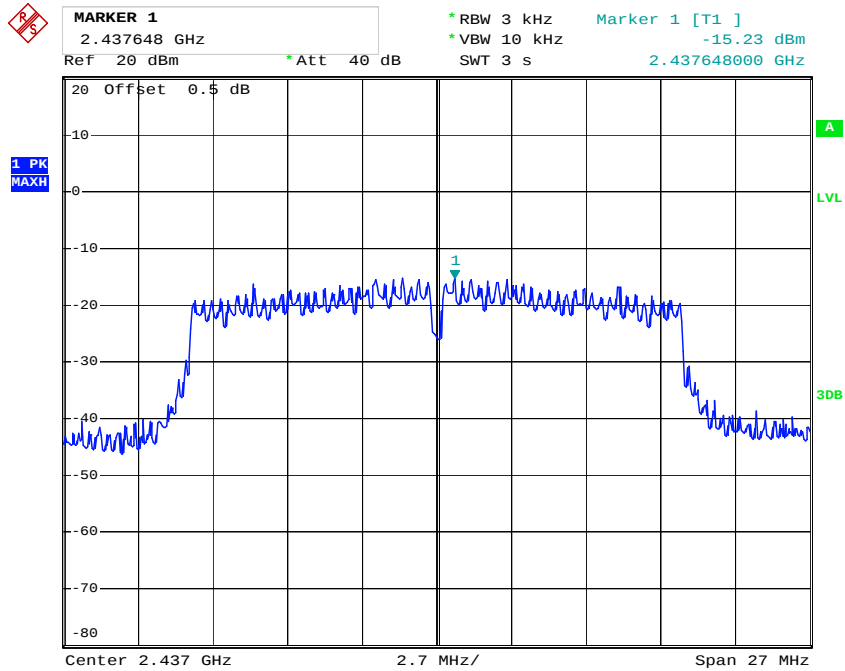


Date: 12.OCT.2015 15:44:49

Power Spectral Density, 802.11n ht20 High Channel

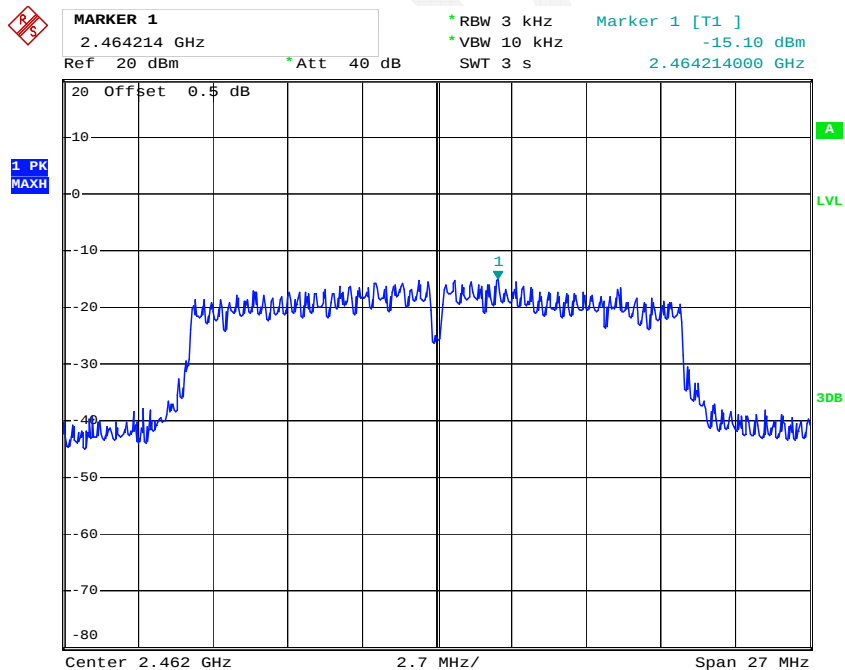


Date: 12.OCT.2015 15:46:18

Power Spectral Density, 802.11n ht40 Low Channel

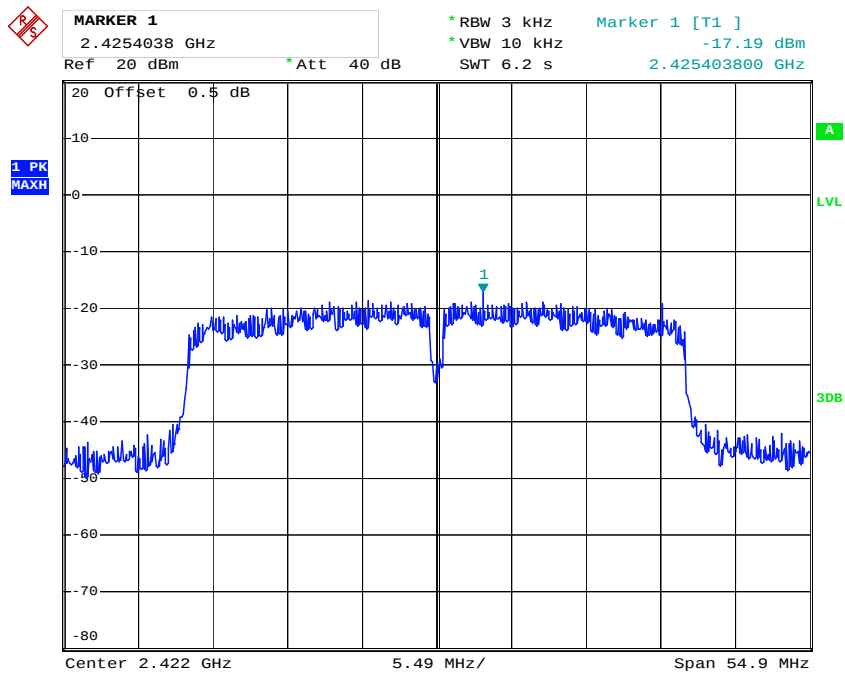


Date: 12.OCT.2015 15:47:30

Power Spectral Density, 802.11n ht40 Middle Channel

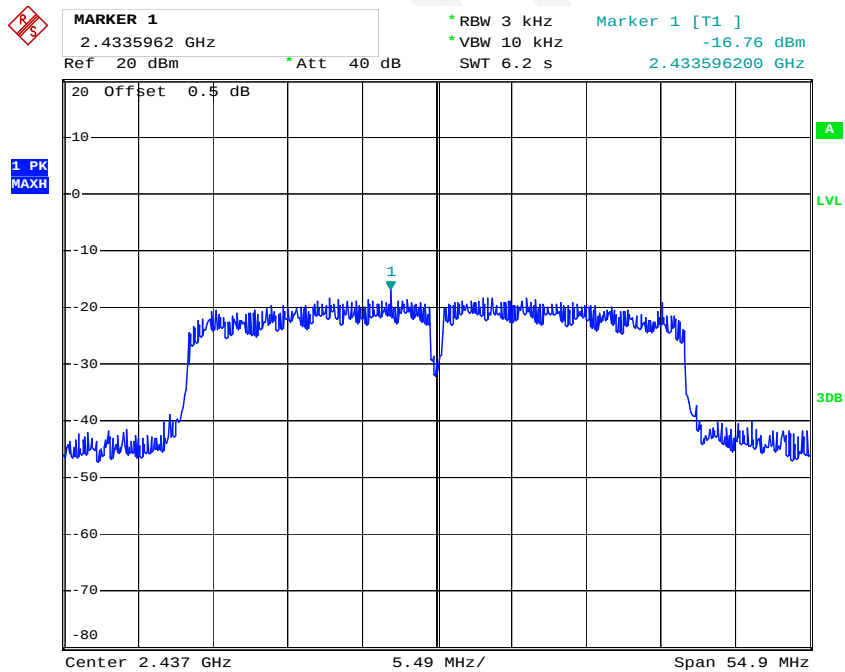


Date: 12.OCT.2015 15:48:10

Power Spectral Density, 802.11n ht40 High Channel

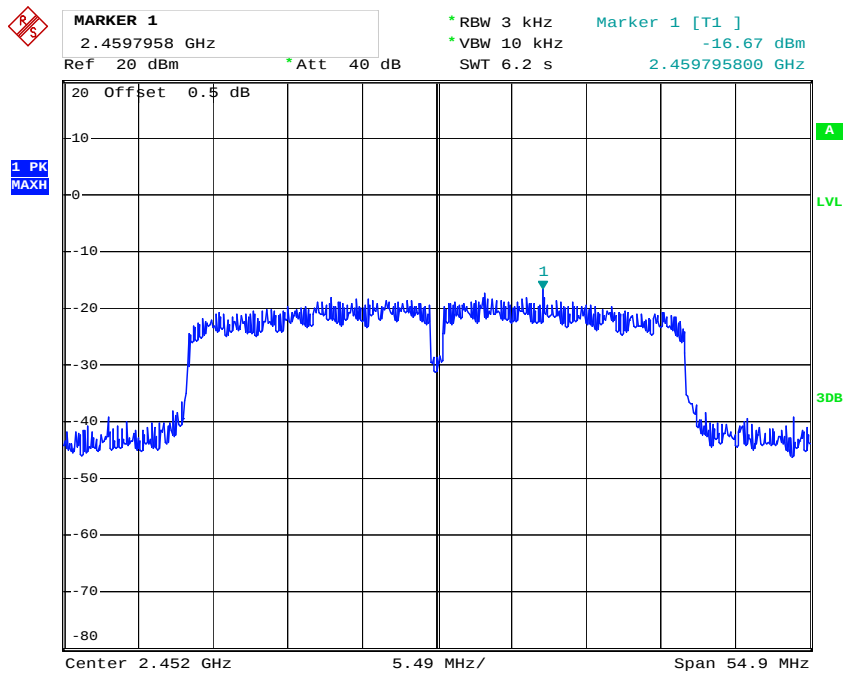


Date: 12.OCT.2015 15:48:45

Power Spectral Density, BLE Low Channel

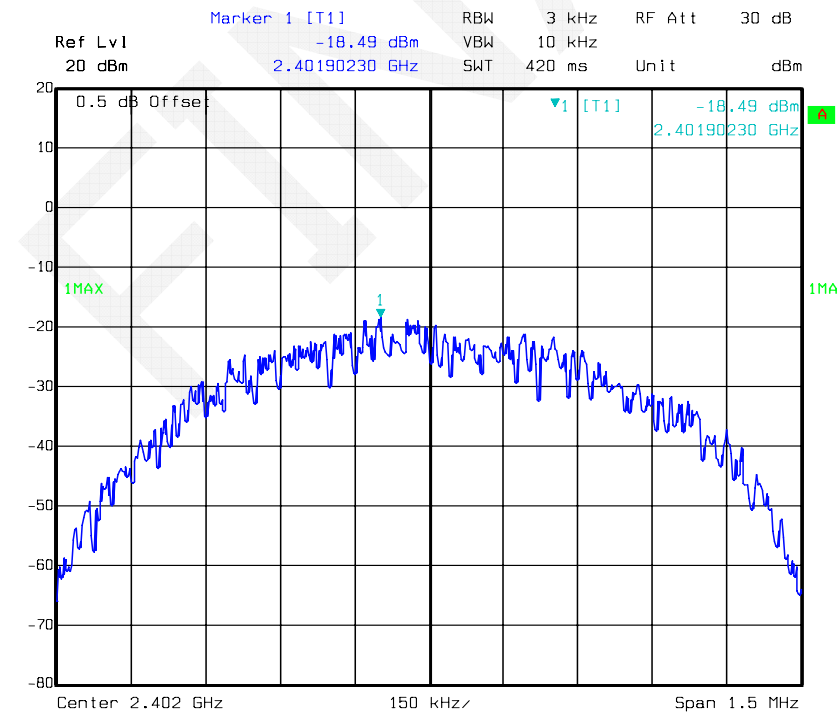


Date: 09.OCT.2015 13:12:11

Power Spectral Density, BLE Middle Channel

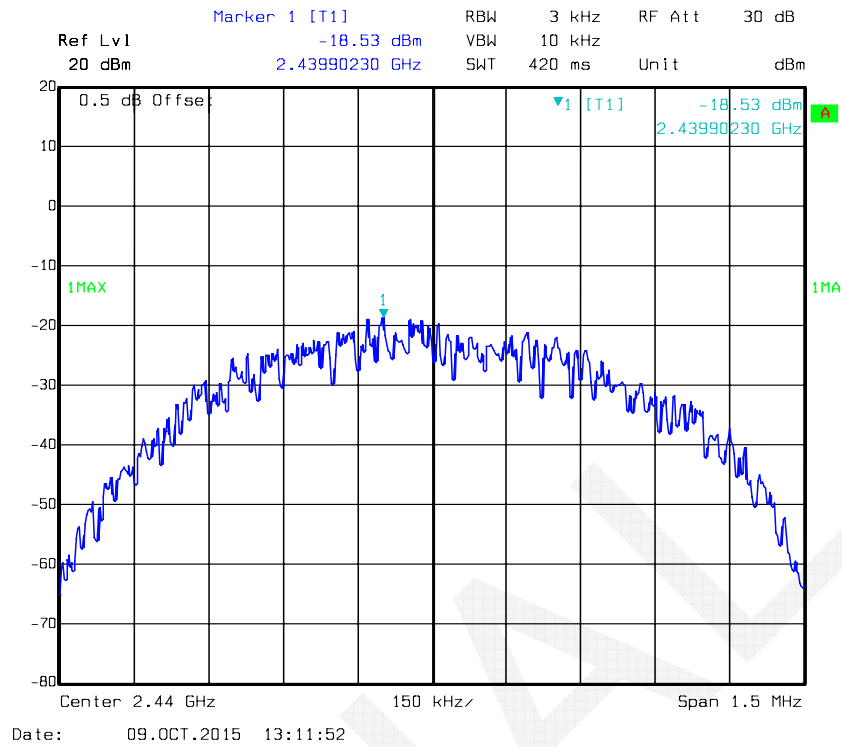

Power Spectral Density, BLE High Channel

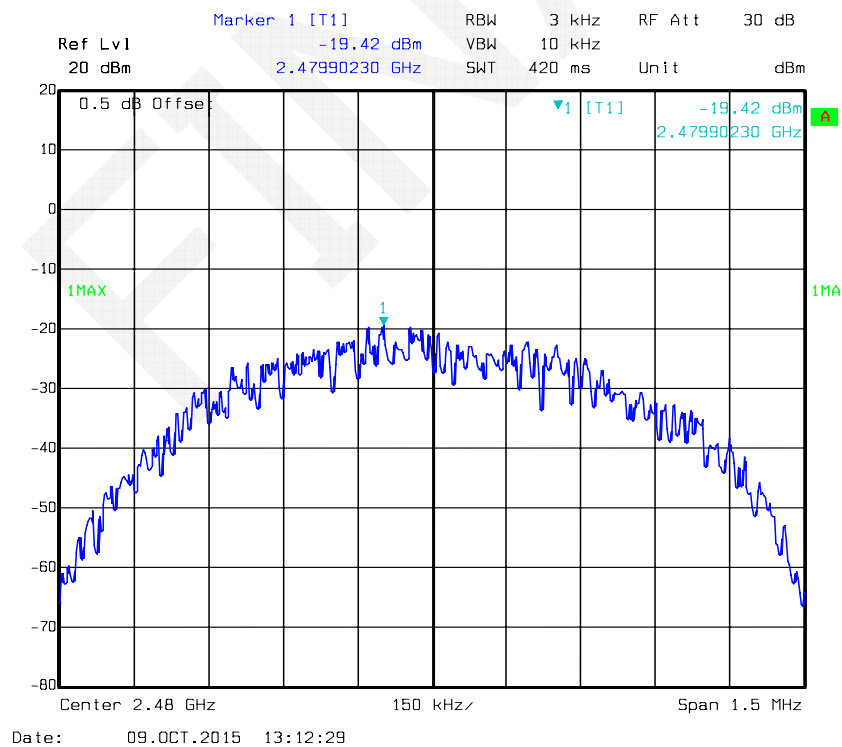

DECLARATION LETTER

Telecell Mobile (H.K) Ltd.
RM 801 Metro Ctr II, 21 Lam Hing Street. Kln Bay. HK
Tel: (852) 2759 9963 Fax: (852) 2759 9711

2015-11-2

Product Similarity Declaration

To Whom It May Concern,

We, Telecell Mobile (H.K) Ltd., hereby declare that we have a product named as 3G Smartphone (Model number: VIRTURE 4.0) was tested by BACL, meanwhile, for our marketing purpose, we would like to list a series models (M405B) on reports and certificate, only the model name are difference. No other changes are made to them.

We confirm that all information above is true, and we'll be responsible for all the consequences. Please contact me if you have any question.

Signature:

Regina Wong



Manager

***** END OF REPORT *****