


Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2402MHz
Remark:	/	Test_Date	2026/6/3


Test Graph

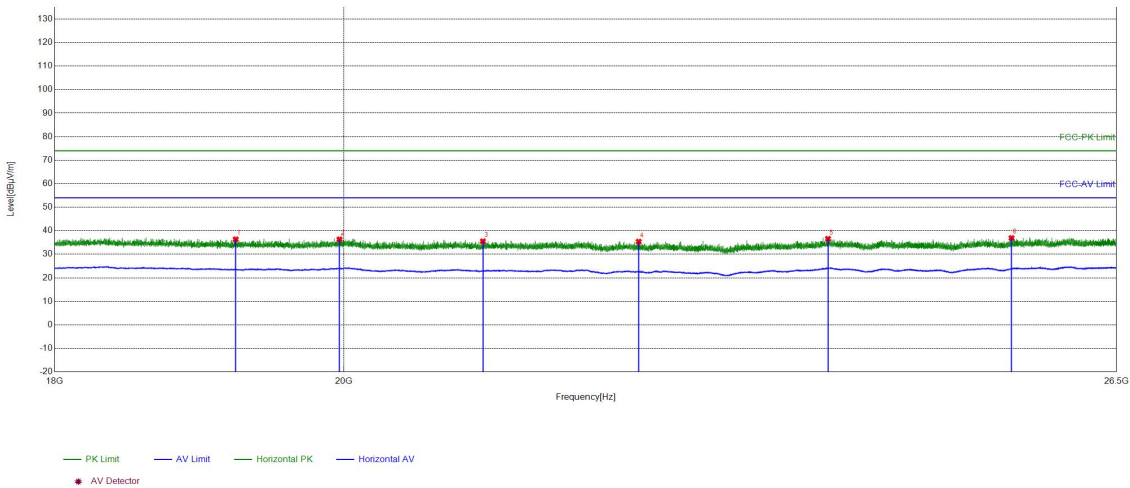

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	19226.089	-26.00	62.35	36.35	74.00	37.65	PASS	Horizontal	PK
2	19967.3187	-24.72	61.06	36.34	74.00	37.66	PASS	Horizontal	PK
3	21038.0215	-25.95	61.47	35.52	74.00	38.48	PASS	Horizontal	PK
4	22266.8307	-25.30	60.68	35.38	74.00	38.62	PASS	Horizontal	PK
5	23856.7343	-22.22	58.79	36.57	74.00	37.43	PASS	Horizontal	PK
6	25506.4803	-21.05	57.96	36.91	74.00	37.09	PASS	Horizontal	PK

Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2402MHz
Remark:	/	Test_Date	2026/6/3


Test Graph

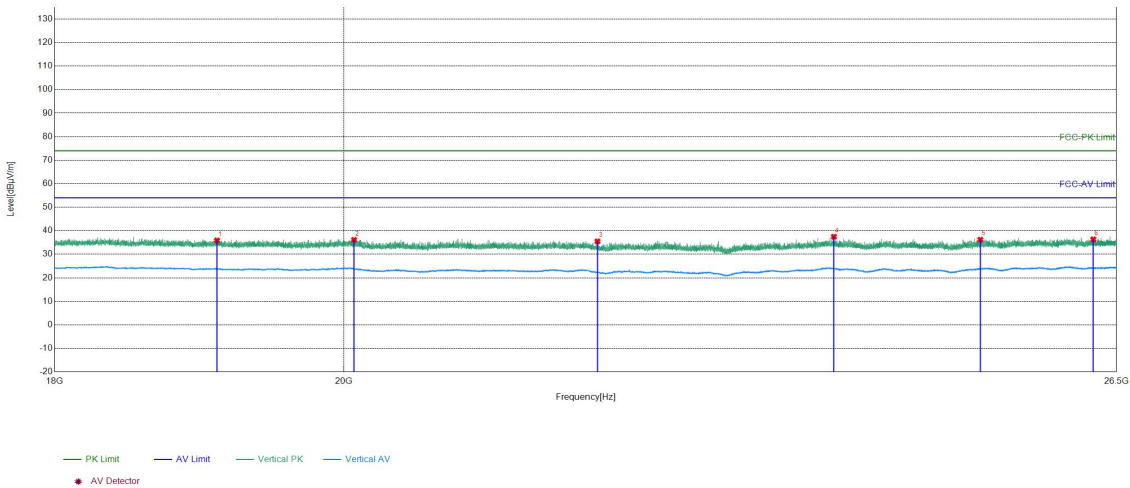

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	19095.8638	-26.17	62.06	35.89	74.00	38.11	PASS	Vertical	PK
2	20073.4029	-24.95	61.06	36.11	74.00	37.89	PASS	Vertical	PK
3	21934.9774	-25.72	61.21	35.49	74.00	38.51	PASS	Vertical	PK
4	23908.0763	-22.12	59.58	37.46	74.00	36.54	PASS	Vertical	PK
5	25218.1487	-21.08	57.27	36.19	74.00	37.81	PASS	Vertical	PK
6	26277.9711	-21.29	57.63	36.34	74.00	37.66	PASS	Vertical	PK

Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2440MHz
Remark:	/	Test_Date	2026/6/3


Test Graph

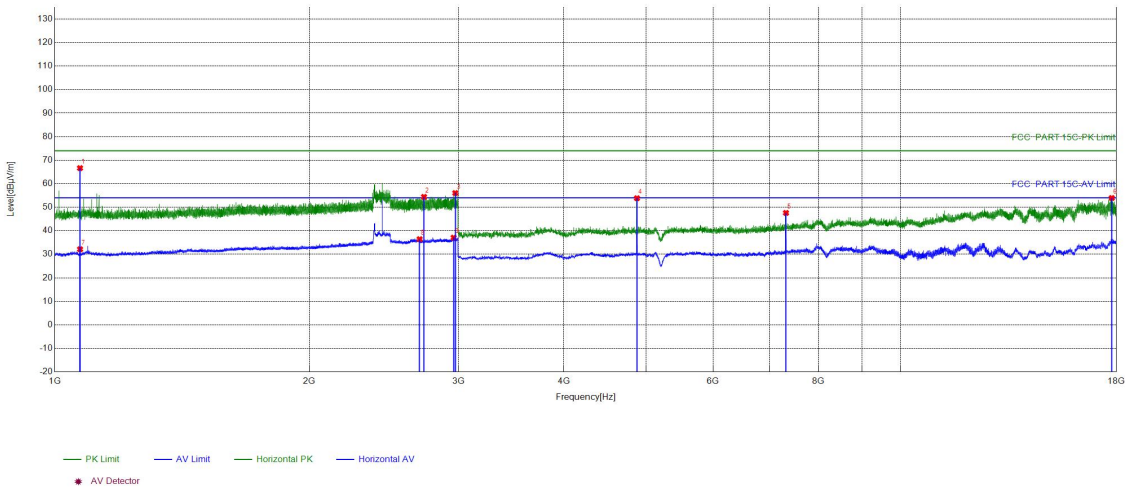

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1071.0714	12.63	54.00	66.63	74.00	7.37	PASS	Horizontal	PK
2	2732.5155	18.14	36.27	54.41	74.00	19.59	PASS	Horizontal	PK
3	2975.3317	18.85	37.17	56.02	74.00	17.98	PASS	Horizontal	PK
4	4879.1253	-7.83	61.65	53.82	74.00	20.18	PASS	Horizontal	PK
5	7320.288	-2.58	50.16	47.58	74.00	26.42	PASS	Horizontal	PK
6	17772.9849	17.45	36.48	53.93	74.00	20.07	PASS	Horizontal	PK
7	1071.2047	12.63	19.51	32.14	54.00	21.86	PASS	Horizontal	AV
8	2700.1133	18.36	18.06	36.42	54.00	17.58	PASS	Horizontal	AV
9	2961.8641	19.16	17.92	37.08	54.00	16.92	PASS	Horizontal	AV

Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2440MHz
Remark:	/	Test_Date	2026/6/3


Test Graph

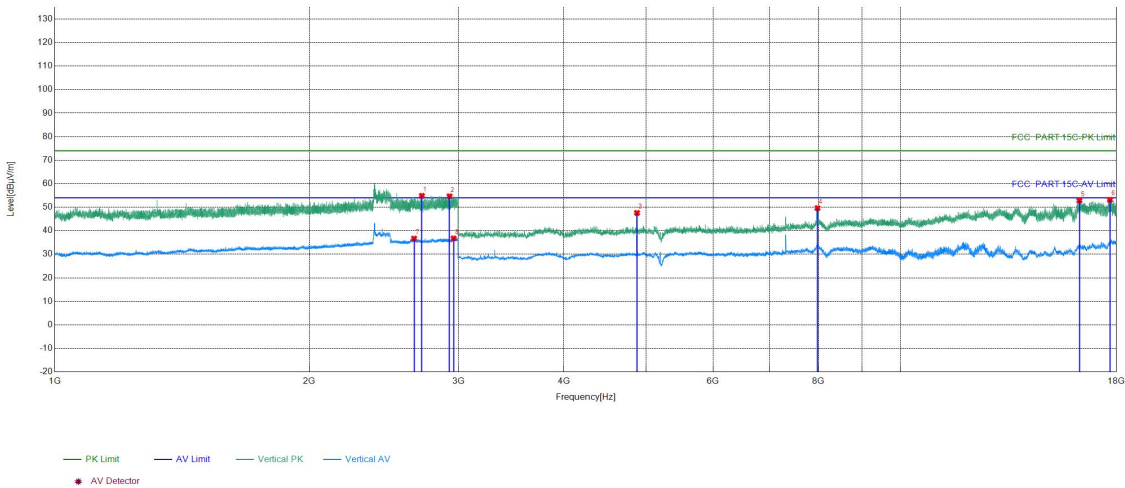

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2716.9145	18.12	36.74	54.86	74.00	19.14	PASS	Vertical	PK
2	2929.0619	18.59	36.07	54.66	74.00	19.34	PASS	Vertical	PK
3	4880.1253	-7.82	55.41	47.59	74.00	26.41	PASS	Vertical	PK
4	7976.3318	0.23	49.40	49.63	74.00	24.37	PASS	Vertical	PK
5	16272.8849	10.89	41.95	52.84	74.00	21.16	PASS	Vertical	PK
6	17684.979	16.56	36.58	53.14	74.00	20.86	PASS	Vertical	PK
7	2659.5773	18.37	18.33	36.70	54.00	17.30	PASS	Vertical	AV
8	2961.7308	19.16	17.61	36.77	54.00	17.23	PASS	Vertical	AV

Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2440MHz
Remark:	/	Test_Date	2026/6/3


Test Graph

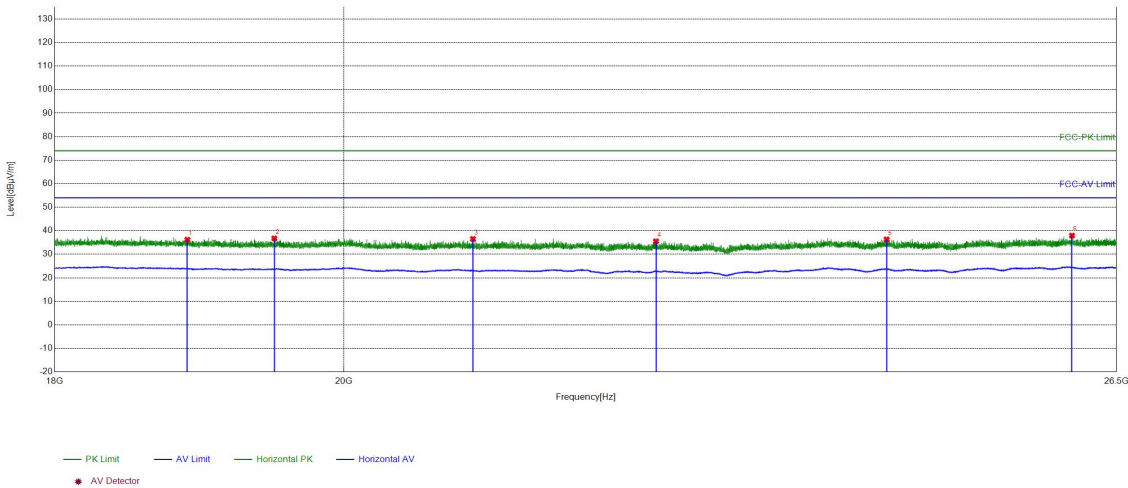

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18890.4956	-26.28	62.49	36.21	74.00	37.79	PASS	Horizontal	PK
2	19498.78	-25.60	62.35	36.75	74.00	37.25	PASS	Horizontal	PK
3	20961.8585	-25.93	62.45	36.52	74.00	37.48	PASS	Horizontal	PK
4	22407.5963	-25.10	60.63	35.53	74.00	38.47	PASS	Horizontal	PK
5	24372.1949	-21.81	58.14	36.33	74.00	37.67	PASS	Horizontal	PK
6	26074.643	-21.07	59.02	37.95	74.00	36.05	PASS	Horizontal	PK

Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2440MHz
Remark:	/	Test_Date	2026/6/3


Test Graph

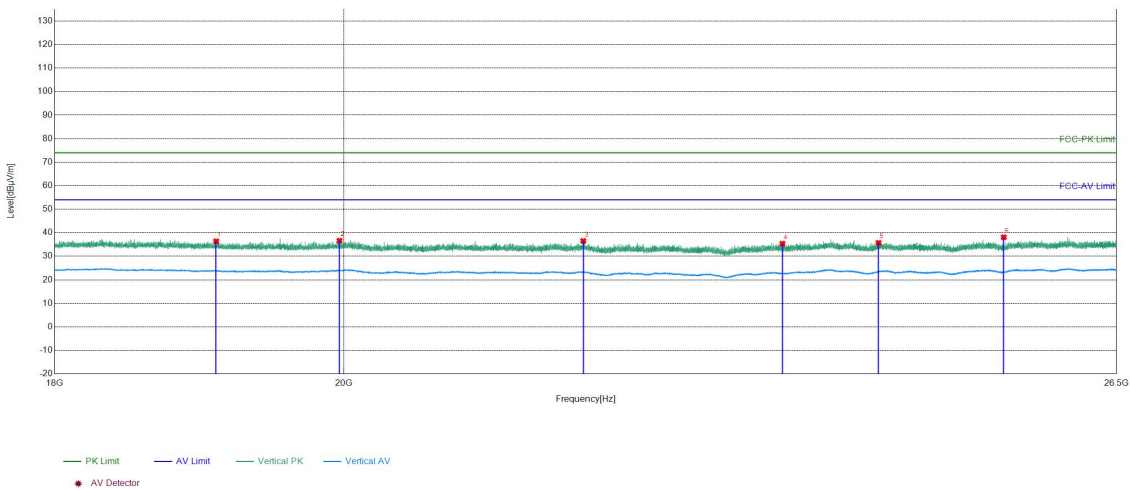

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	19089.7436	-26.17	62.55	36.38	74.00	37.62	PASS	Vertical	PK
2	19967.3187	-24.72	61.33	36.61	74.00	37.39	PASS	Vertical	PK
3	21821.7529	-25.56	62.07	36.51	74.00	37.49	PASS	Vertical	PK
4	23464.0186	-23.40	58.77	35.37	74.00	38.63	PASS	Vertical	PK
5	24300.112	-22.16	57.88	35.72	74.00	38.28	PASS	Vertical	PK
6	25434.3974	-21.31	59.40	38.09	74.00	35.91	PASS	Vertical	PK

Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2480MHz
Remark:	/	Test_Date	2026/6/3


Test Graph

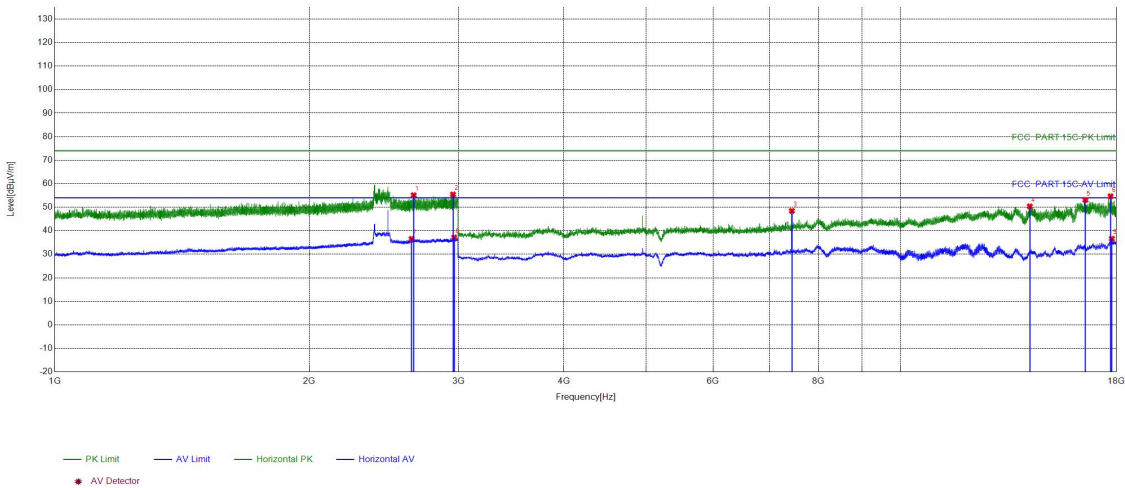

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2656.6438	18.29	36.83	55.12	74.00	18.88	PASS	Horizontal	PK
2	2956.9305	19.08	36.35	55.43	74.00	18.57	PASS	Horizontal	PK
3	7439.296	-2.18	50.63	48.45	74.00	25.55	PASS	Horizontal	PK
4	14218.7479	8.54	41.83	50.37	74.00	23.63	PASS	Horizontal	PK
5	16542.9029	12.65	40.45	53.10	74.00	20.90	PASS	Horizontal	PK
6	17712.9809	16.80	37.86	54.66	74.00	19.34	PASS	Horizontal	PK
7	2641.8428	18.61	17.94	36.55	54.00	17.45	PASS	Horizontal	AV
8	2966.6644	18.98	18.18	37.16	54.00	16.84	PASS	Horizontal	AV
9	17775.9851	17.51	19.11	36.62	54.00	17.38	PASS	Horizontal	AV

Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2480MHz
Remark:	/	Test_Date	2026/6/3


Test Graph

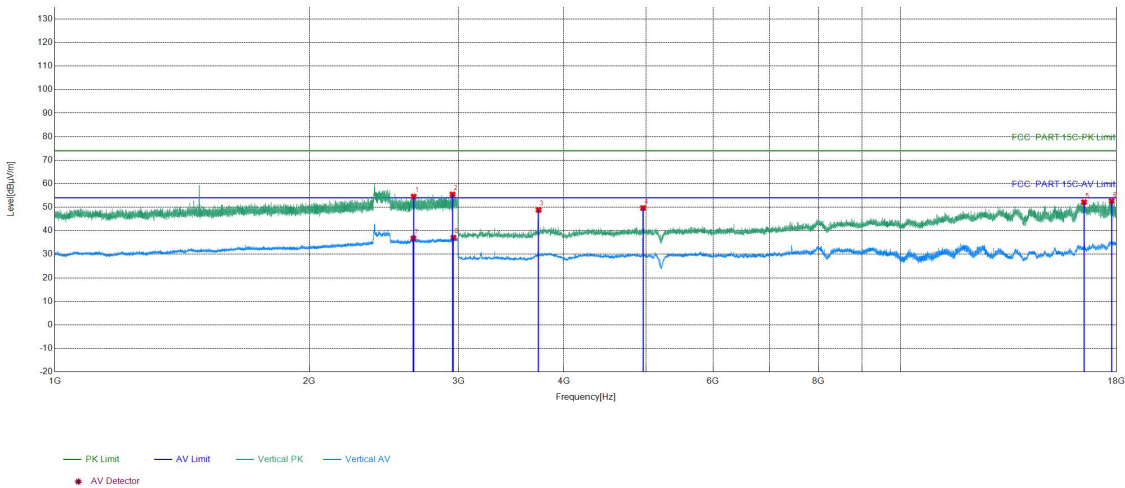

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2656.3771	18.29	36.27	54.56	74.00	19.44	PASS	Vertical	PK
2	2953.4636	18.92	36.54	55.46	74.00	18.54	PASS	Vertical	PK
3	3733.0489	-12.04	60.87	48.83	74.00	25.17	PASS	Vertical	PK
4	4960.1307	-7.38	57.06	49.68	74.00	24.32	PASS	Vertical	PK
5	16481.8988	12.27	39.89	52.16	74.00	21.84	PASS	Vertical	PK
6	17766.9845	17.46	35.18	52.64	74.00	21.36	PASS	Vertical	PK
7	2655.177	18.26	18.53	36.79	54.00	17.21	PASS	Vertical	AV
8	2960.9307	19.19	17.88	37.07	54.00	16.93	PASS	Vertical	AV

Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2480MHz
Remark:	/	Test_Date	2026/6/3


Test Graph

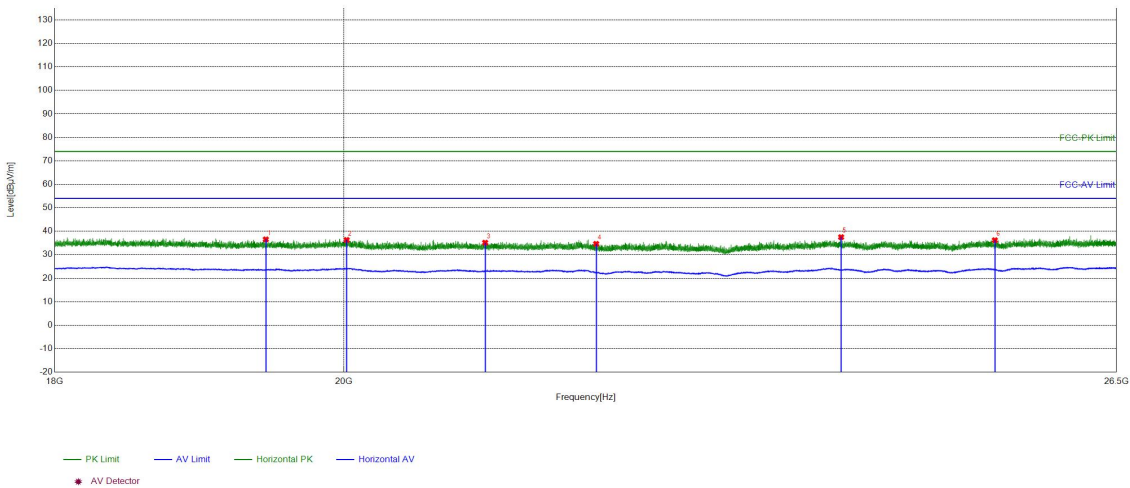

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	19438.2575	-25.61	62.15	36.54	74.00	37.46	PASS	Horizontal	PK
2	20019.3408	-24.71	61.02	36.31	74.00	37.69	PASS	Horizontal	PK
3	21055.3622	-25.93	61.07	35.14	74.00	38.86	PASS	Horizontal	PK
4	21924.437	-25.71	60.35	34.64	74.00	39.36	PASS	Horizontal	PK
5	23970.9788	-21.99	59.49	37.50	74.00	36.50	PASS	Horizontal	PK
6	25352.1141	-21.34	57.53	36.19	74.00	37.81	PASS	Horizontal	PK

Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2480MHz
Remark:	/	Test_Date	2026/6/3

Test Graph

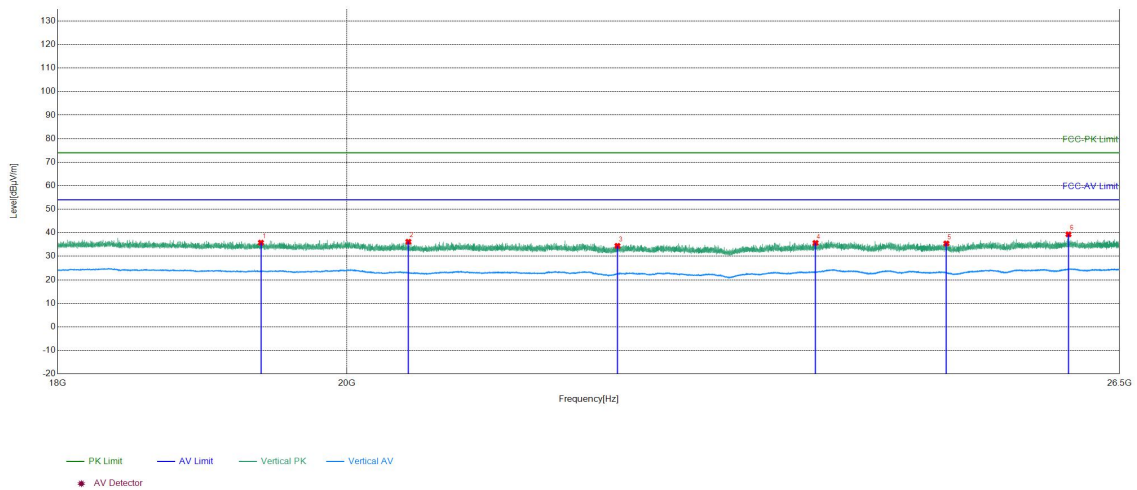

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	19382.4953	-25.66	61.45	35.79	74.00	38.21	PASS	Vertical	PK
2	20452.1781	-25.63	61.79	36.16	74.00	37.84	PASS	Vertical	PK
3	22070.9828	-25.67	60.10	34.43	74.00	39.57	PASS	Vertical	PK
4	23722.7689	-22.61	58.27	35.66	74.00	38.34	PASS	Vertical	PK
5	24881.1952	-22.04	57.47	35.43	74.00	38.57	PASS	Vertical	PK
6	26012.4205	-20.93	60.26	39.33	74.00	34.67	PASS	Vertical	PK


Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. The report records the lowest Peak value. If the Peak value is greater than 54dBμV/m, then the Average value at that time is recorded.

Restricted bands:
Test plot as follows:

Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2402MHz
Remark:	/	Test_Date	2026/6/3


Test Graph

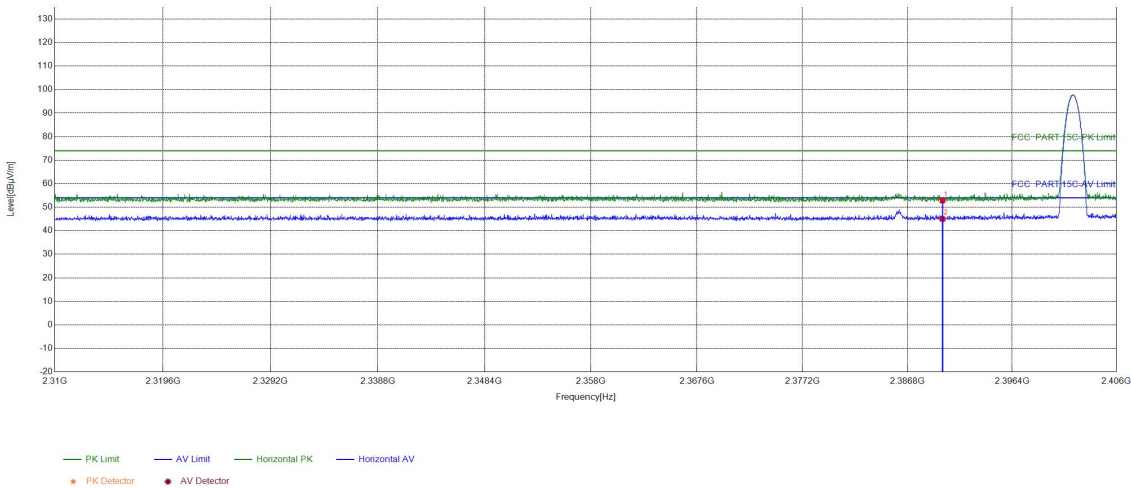

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	17.20	35.61	52.81	74.00	21.19	PASS	Horizontal	PK
2	2390	17.20	27.81	45.01	54.00	8.99	PASS	Horizontal	AV

Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2402MHz
Remark:	/	Test_Date	2026/6/3


Test Graph

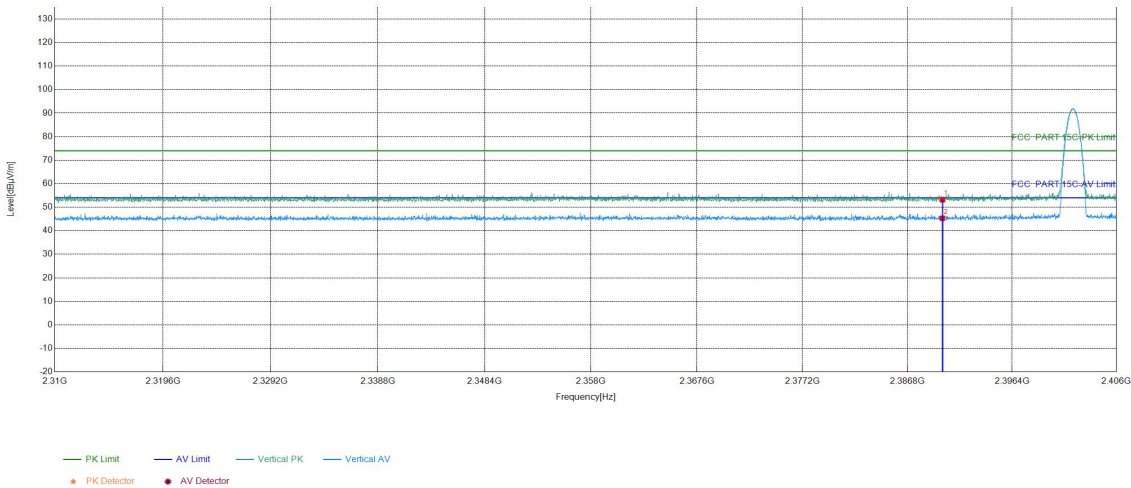

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	17.20	35.98	53.18	74.00	20.82	PASS	Vertical	PK
2	2390	17.20	28.11	45.31	54.00	8.69	PASS	Vertical	AV

Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2480MHz
Remark:	/	Test_Date	2026/6/3


Test Graph

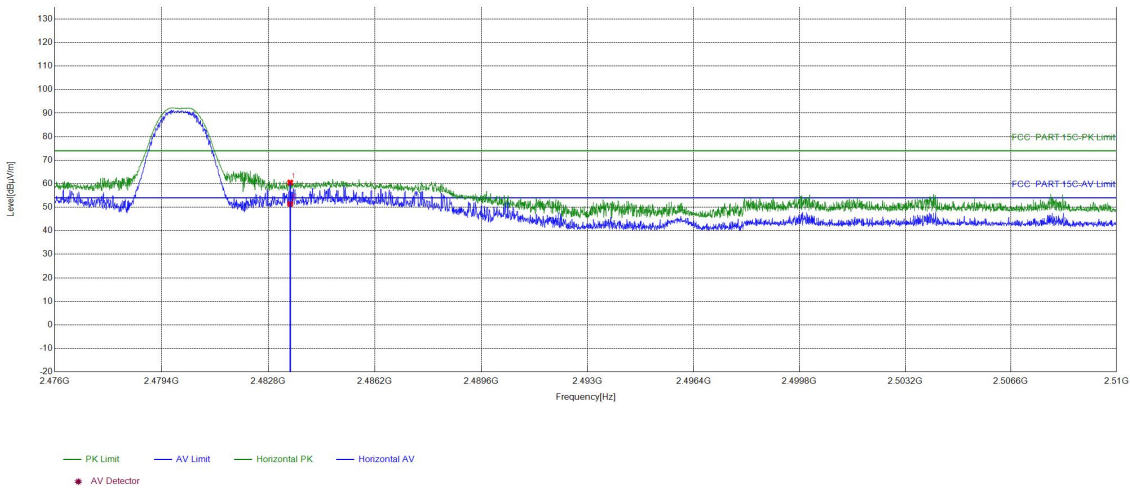

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	17.95	42.56	60.51	74.00	9.49	PASS	Horizont	PK
2	2483.5	17.95	33.44	51.39	54.00	2.61	PASS	Horizont	AV

Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2480MHz
Remark:	/	Test_Date	2026/6/3

Test Graph

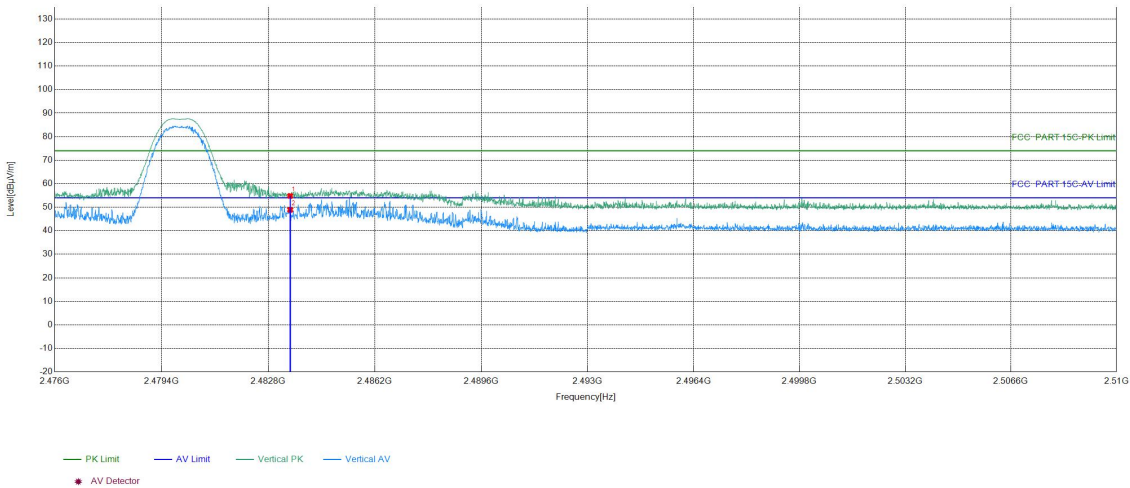

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	17.95	36.85	54.80	74.00	16.20	PASS	Vertical	PK
2	2483.5	17.95	30.94	48.89	54.00	5.11	PASS	Vertical	AV

Note:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading -Correct Factor
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

6 Appendix A

Refer to Appendix: Bluetooth LE of EED32S80441201

7 PHOTOGRAPHS

Refer to Appendix Photographs of Report No. EED32S80441201.