

**Test Plot112#: LTE Band 12\_Head Right Cheek\_50%RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.871$  S/m;  $\epsilon_r = 42.961$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @707.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.342 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.98 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.457 W/kg

**SAR(1 g) = 0.282 W/kg; SAR(10 g) = 0.176 W/kg**

Maximum value of SAR (measured) = 0.291 W/kg

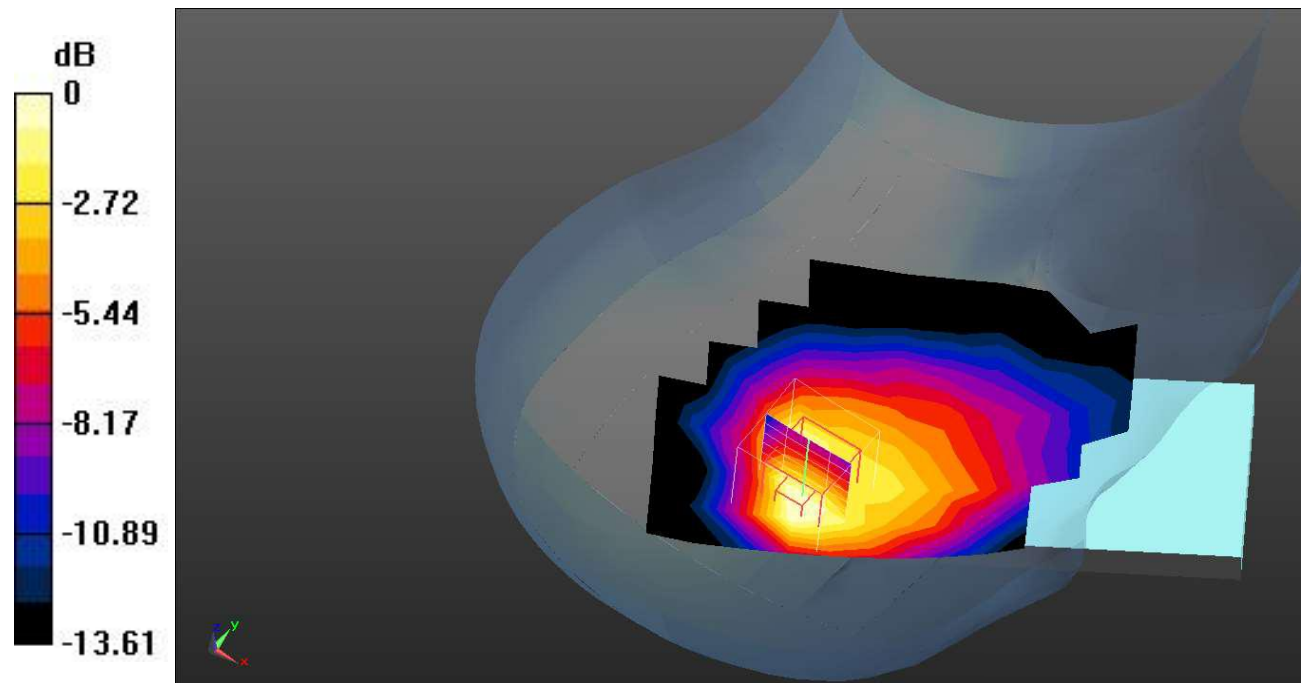

0 dB = 0.291 W/kg = -5.36 dB dBW/kg

**Test Plot113#: LTE Band 12\_Head Right Tilt\_1RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.871$  S/m;  $\epsilon_r = 42.961$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @707.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.416 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.78 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.611 W/kg

**SAR(1 g) = 0.349 W/kg; SAR(10 g) = 0.201 W/kg**

Maximum value of SAR (measured) = 0.388 W/kg

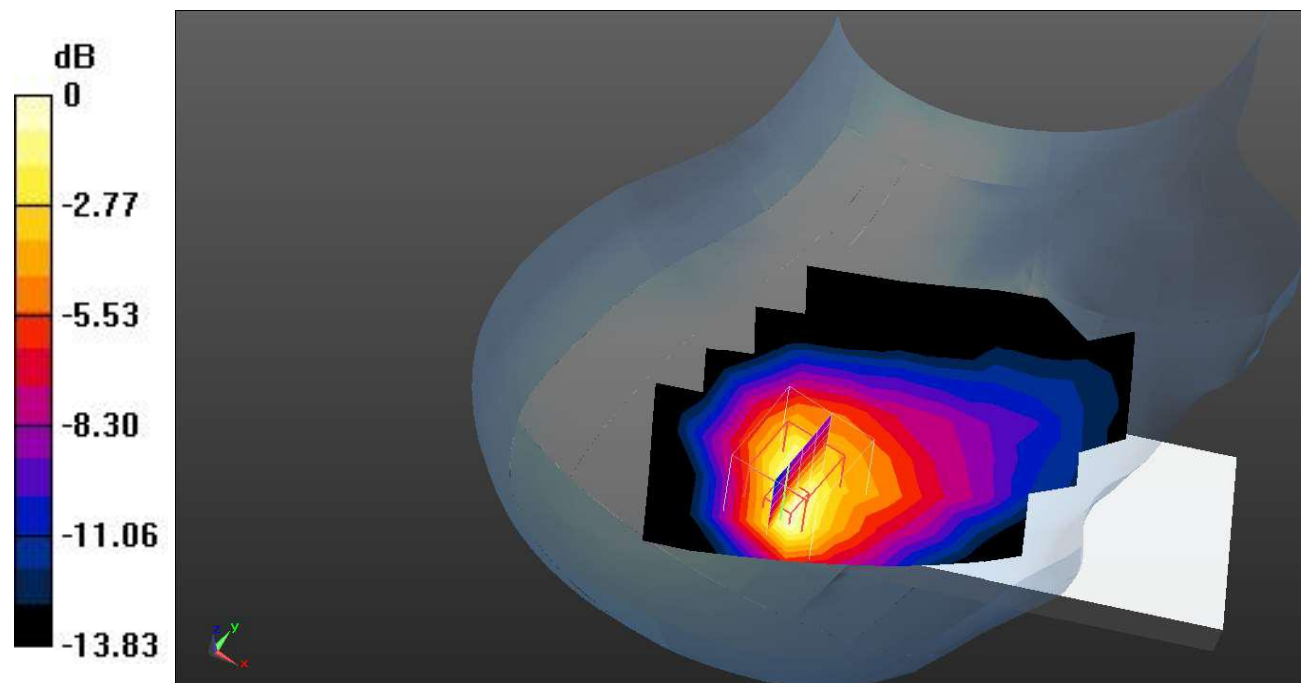

0 dB = 0.388 W/kg = -4.11 dB dBW/kg

**Test Plot114#: LTE Band 12\_Head Right Tilt\_50%RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.871$  S/m;  $\epsilon_r = 42.961$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @707.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.330 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.19 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.484 W/kg

**SAR(1 g) = 0.278 W/kg; SAR(10 g) = 0.160 W/kg**

Maximum value of SAR (measured) = 0.309 W/kg

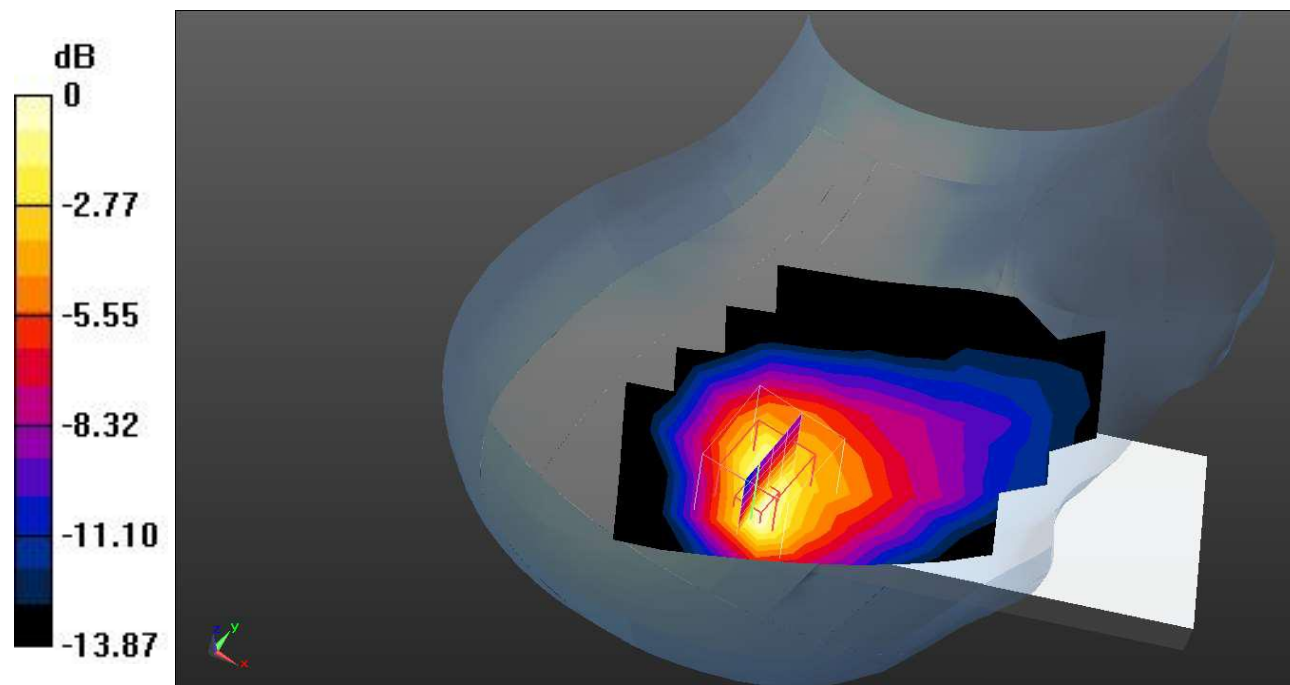

0 dB = 0.309 W/kg = -5.10 dB dBW/kg

**Test Plot115#: LTE Band 12\_Body Front\_1RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.871$  S/m;  $\epsilon_r = 42.961$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @707.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.124 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.04 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.121 W/kg

**SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.093 W/kg**

Maximum value of SAR (measured) = 0.115 W/kg

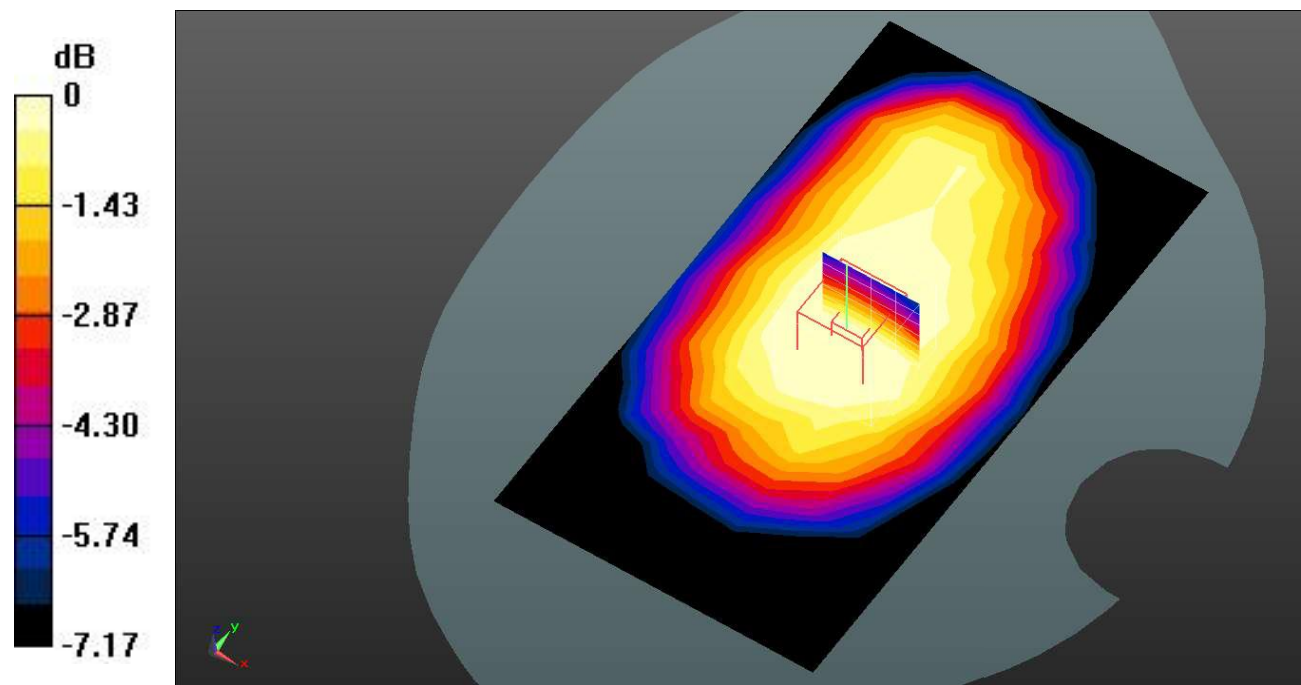

0 dB = 0.115 W/kg = -9.39 dB dBW/kg

**Test Plot116#: LTE Band 12\_Body Front\_50%RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.871$  S/m;  $\epsilon_r = 42.961$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @707.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.101 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.34 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.0960 W/kg

**SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.074 W/kg**

Maximum value of SAR (measured) = 0.0914 W/kg

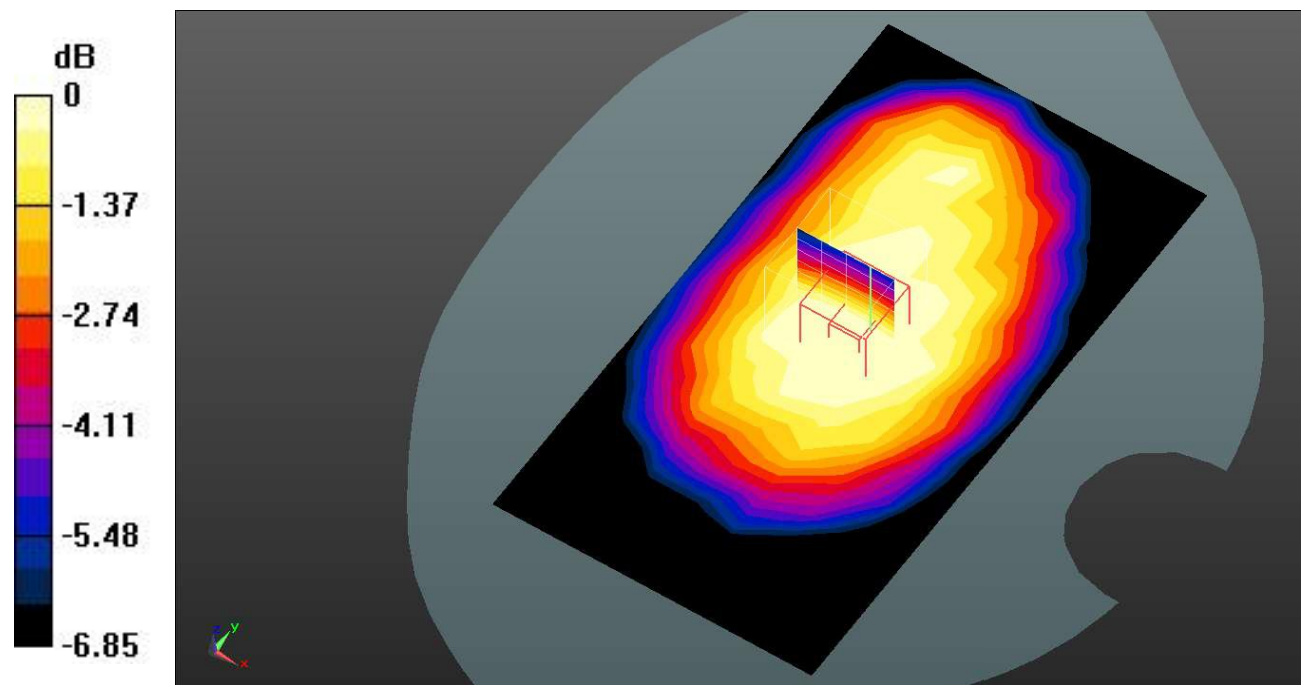

0 dB = 0.0914 W/kg = -10.39 dB dBW/kg

**Test Plot117#: LTE Band 12\_Body Back\_1RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.871$  S/m;  $\epsilon_r = 42.961$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @707.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.147 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.49 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.148 W/kg

**SAR(1 g) = 0.133 W/kg; SAR(10 g) = 0.108 W/kg**

Maximum value of SAR (measured) = 0.140 W/kg

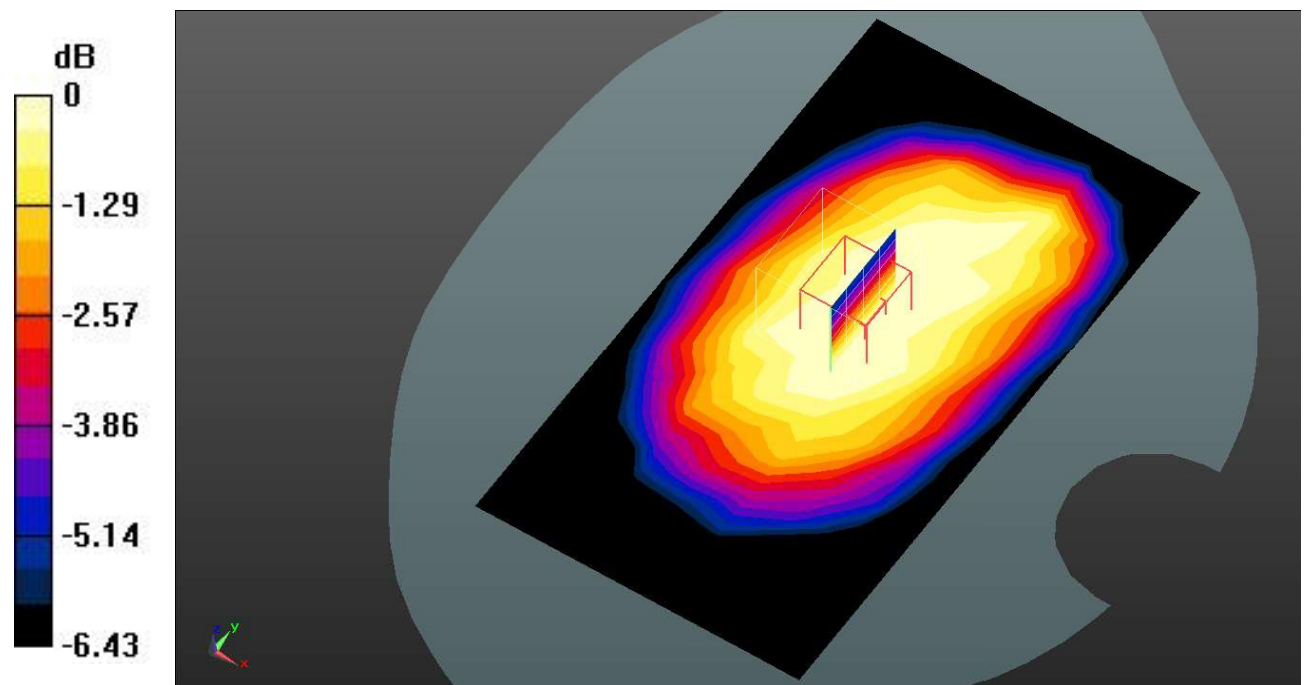

0 dB = 0.140 W/kg = -8.54 dB dBW/kg

**Test Plot118#: LTE Band 12\_Body Back\_50%RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.871$  S/m;  $\epsilon_r = 42.961$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @707.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.119 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.30 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.131 W/kg

**SAR(1 g) = 0.110 W/kg; SAR(10 g) = 0.088 W/kg**

Maximum value of SAR (measured) = 0.119 W/kg

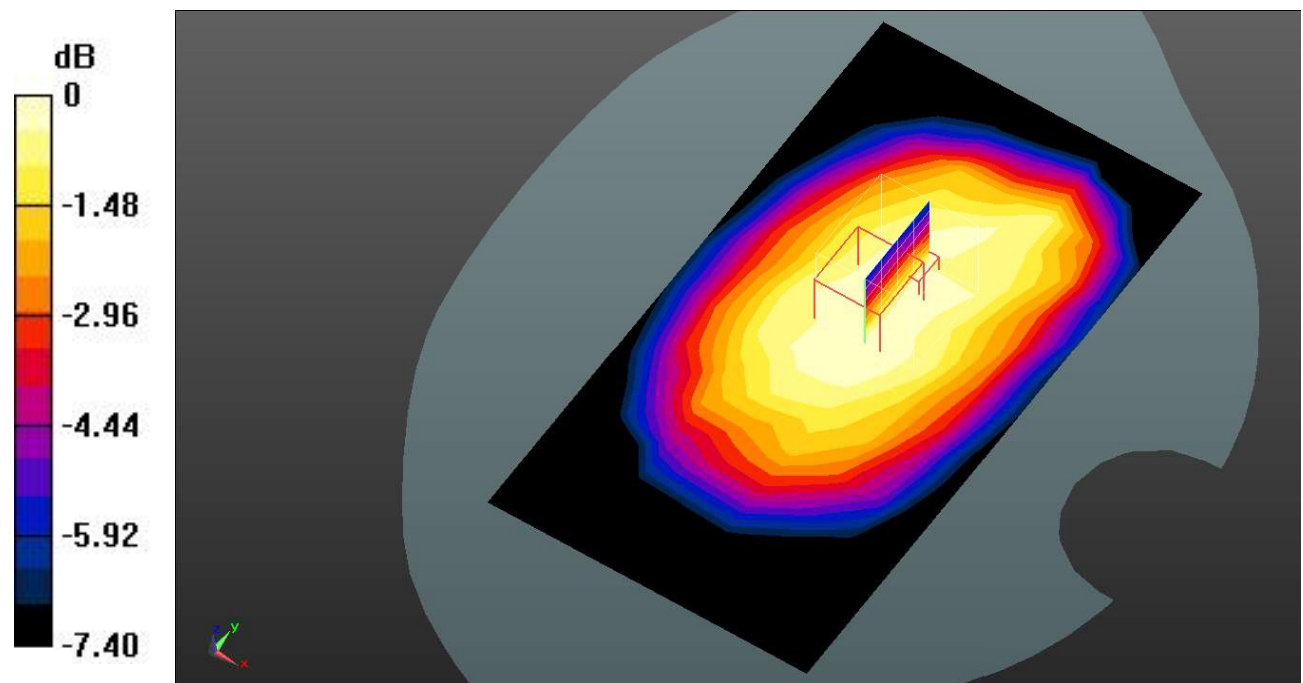

0 dB = 0.119 W/kg = -9.24 dB dBW/kg

**Test Plot119#: LTE Band 12\_Body Left\_1RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.871$  S/m;  $\epsilon_r = 42.961$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @707.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.198 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.84 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.207 W/kg

**SAR(1 g) = 0.176 W/kg; SAR(10 g) = 0.130 W/kg**

Maximum value of SAR (measured) = 0.183 W/kg

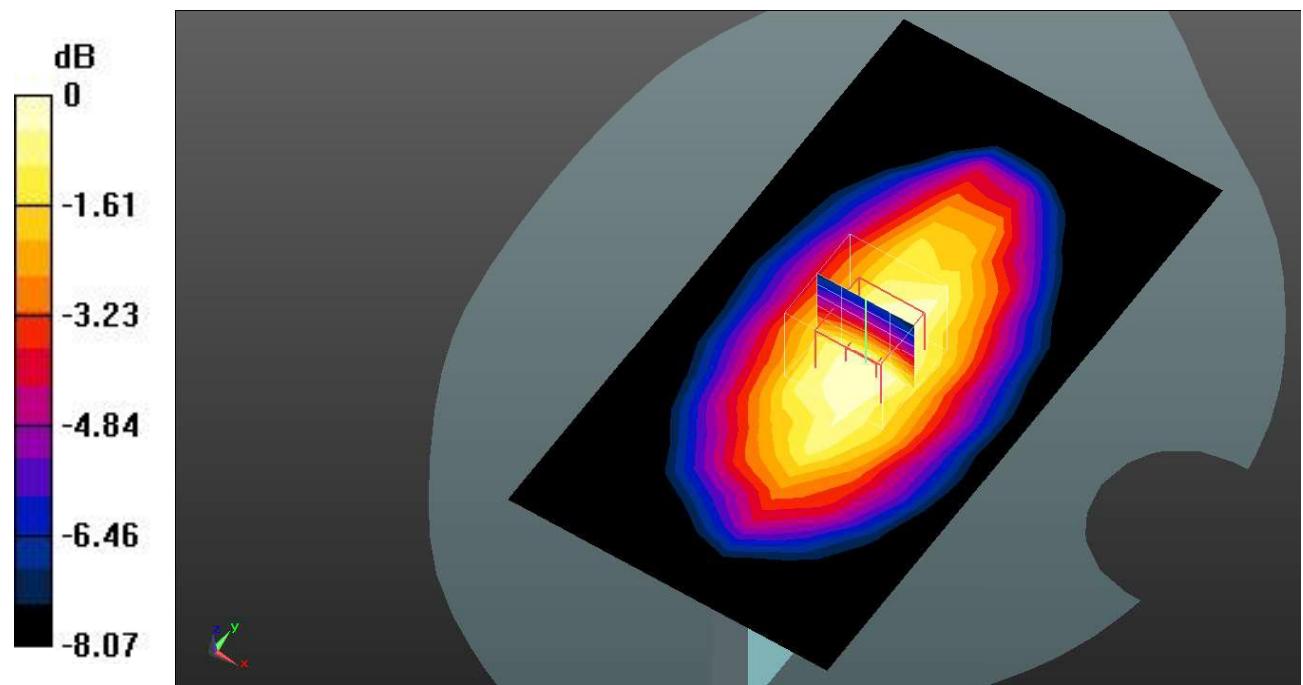

0 dB = 0.183 W/kg = -7.38 dB dBW/kg

**Test Plot120#: LTE Band 12\_Body Left\_50%RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.871$  S/m;  $\epsilon_r = 42.961$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @707.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.155 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.09 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.163 W/kg

**SAR(1 g) = 0.139 W/kg; SAR(10 g) = 0.102 W/kg**

Maximum value of SAR (measured) = 0.144 W/kg

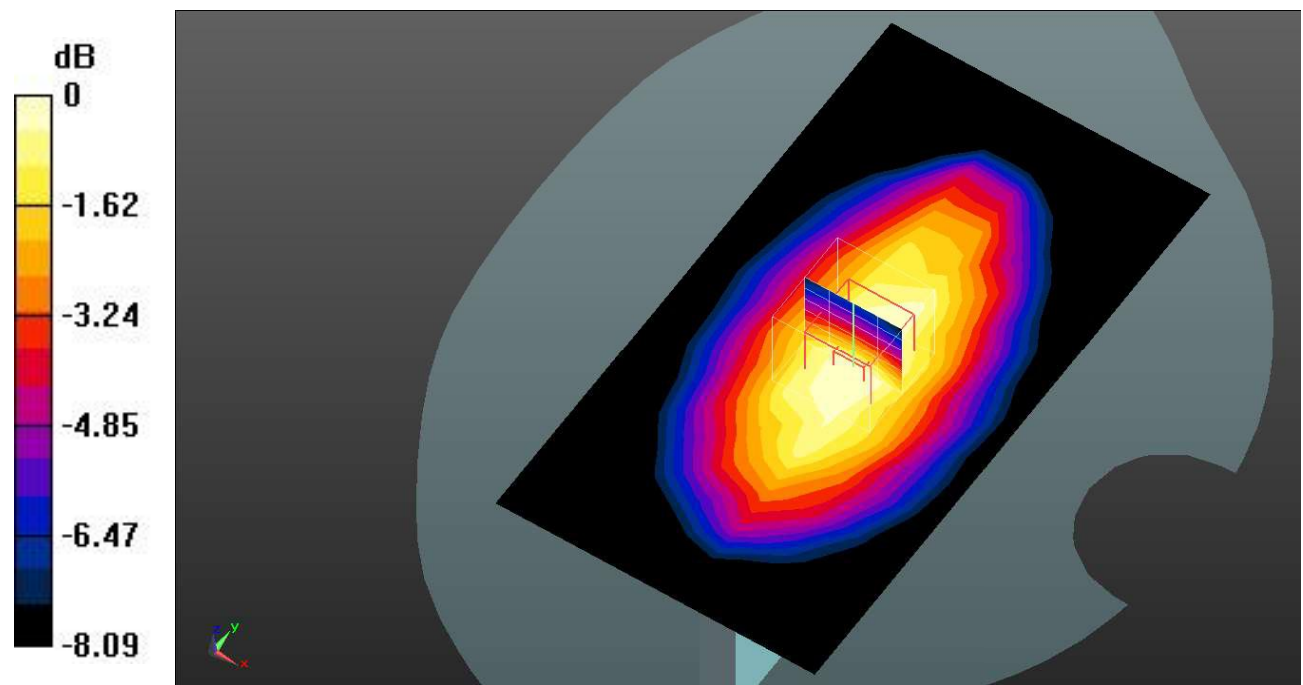

0 dB = 0.144 W/kg = -8.42 dB dBW/kg

**Test Plot121#: LTE Band 12\_Body Top\_1RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.871$  S/m;  $\epsilon_r = 42.961$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @707.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0773 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.003 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0910 W/kg

**SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.045 W/kg**

Maximum value of SAR (measured) = 0.0729 W/kg

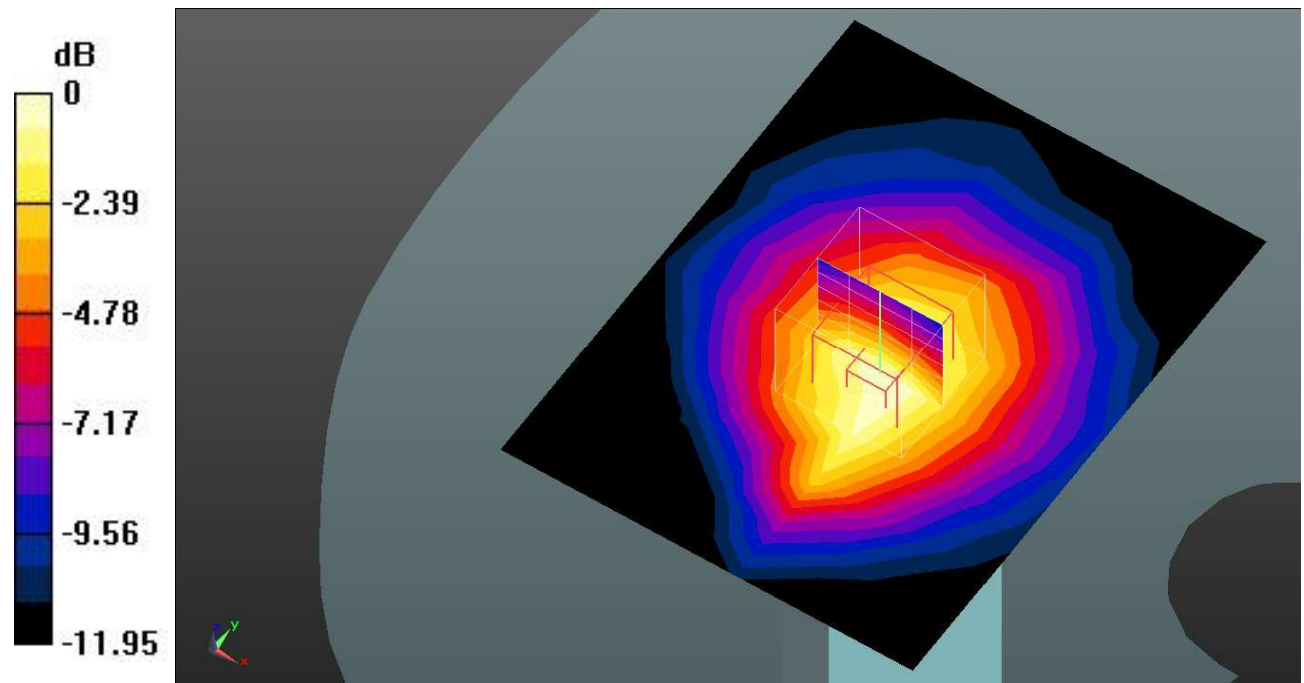

0 dB = 0.0729 W/kg = -11.37 dB dBW/kg

**Test Plot122#: LTE Band 12\_Body Top\_50%RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.871$  S/m;  $\epsilon_r = 42.961$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @707.5 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0595 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.933 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0700 W/kg

**SAR(1 g) = 0.053 W/kg; SAR(10 g) = 0.035 W/kg**

Maximum value of SAR (measured) = 0.0560 W/kg

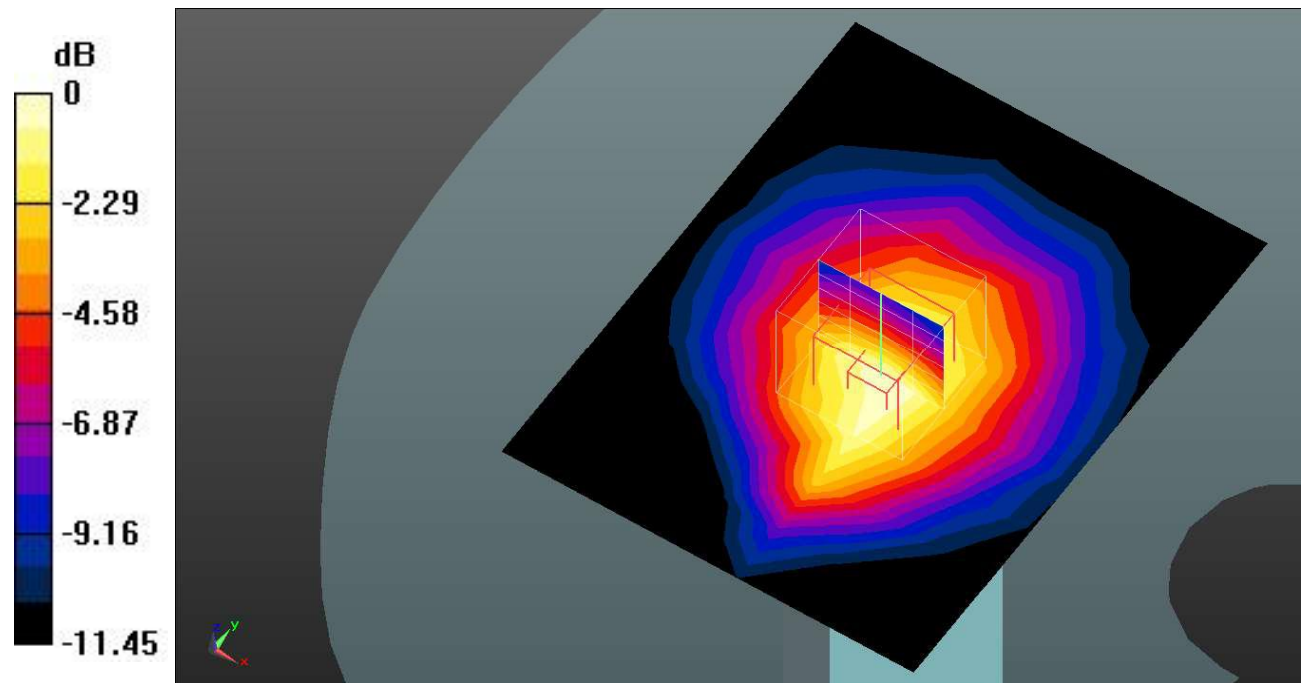

0 dB = 0.0560 W/kg = -12.52 dB dBW/kg

**Test Plot123#: LTE Band 13\_Head Left Cheek\_1RB\_Low****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 782$  MHz;  $\sigma = 0.91$  S/m;  $\epsilon_r = 42.789$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @782 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.255 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.29 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.291 W/kg

**SAR(1 g) = 0.208 W/kg; SAR(10 g) = 0.141 W/kg**

Maximum value of SAR (measured) = 0.228 W/kg

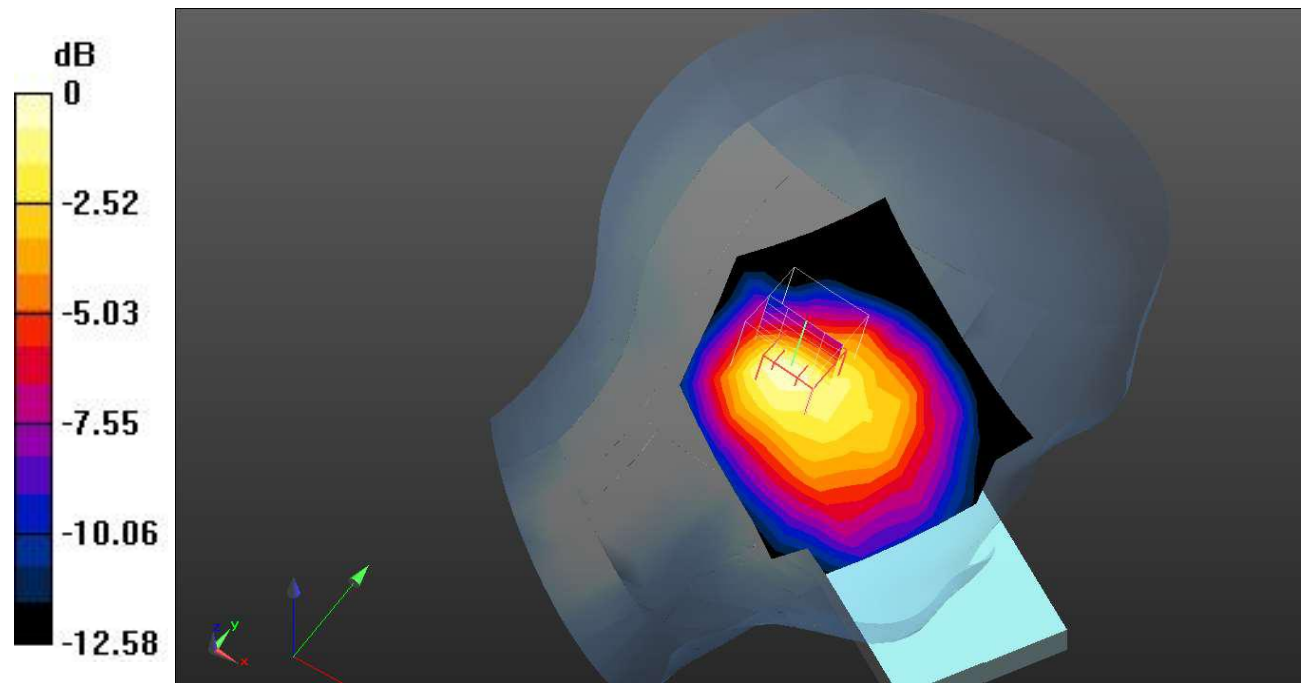

0 dB = 0.228 W/kg = -6.42 dB dBW/kg

**Test Plot124#: LTE Band 13\_Head Left Cheek\_50%RB\_Low****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.91 \text{ S/m}$ ;  $\epsilon_r = 42.789$ ;  $\rho = 1000 \text{ kg/m}^3$ ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @782 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x10x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 

Maximum value of SAR (measured) = 0.205 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 13.50 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.229 W/kg

**SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.113 W/kg**

Maximum value of SAR (measured) = 0.182 W/kg

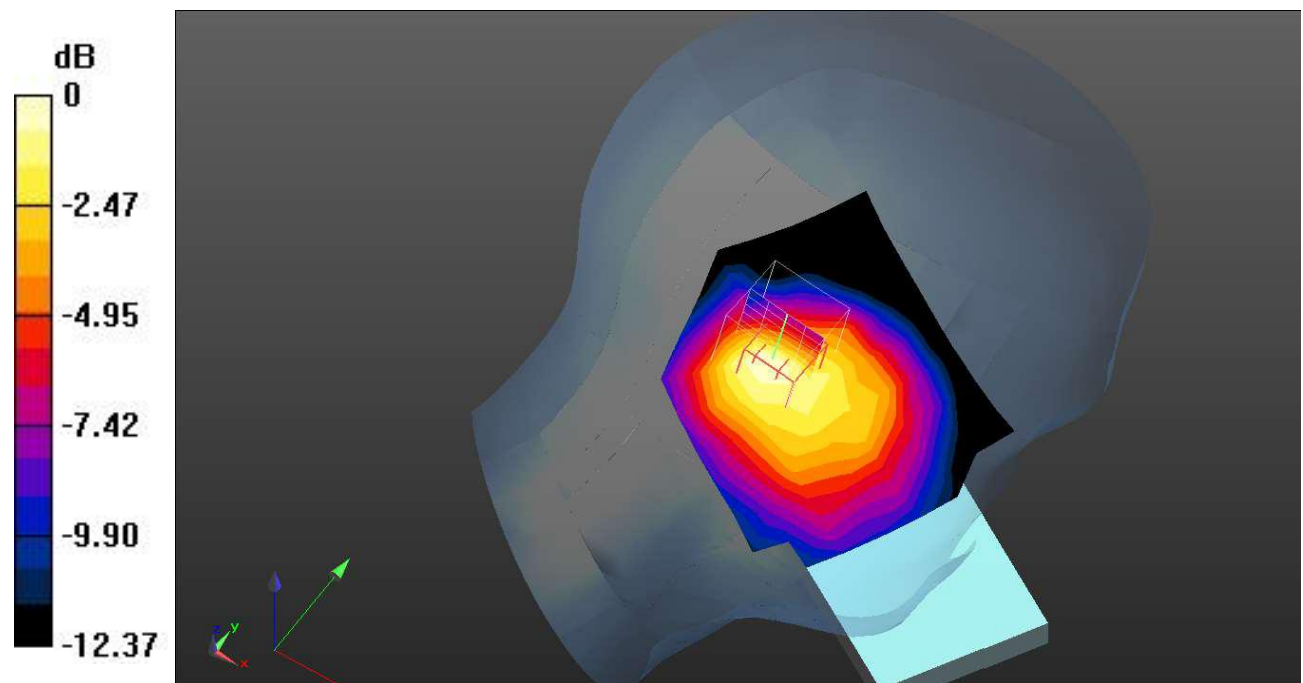

0 dB = 0.182 W/kg = -7.40 dB dBW/kg

**Test Plot125#: LTE Band 13\_Head Left Tilt\_1RB\_Low****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 782$  MHz;  $\sigma = 0.91$  S/m;  $\epsilon_r = 42.789$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @782 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.247 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.28 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.273 W/kg

**SAR(1 g) = 0.191 W/kg; SAR(10 g) = 0.122 W/kg**

Maximum value of SAR (measured) = 0.214 W/kg

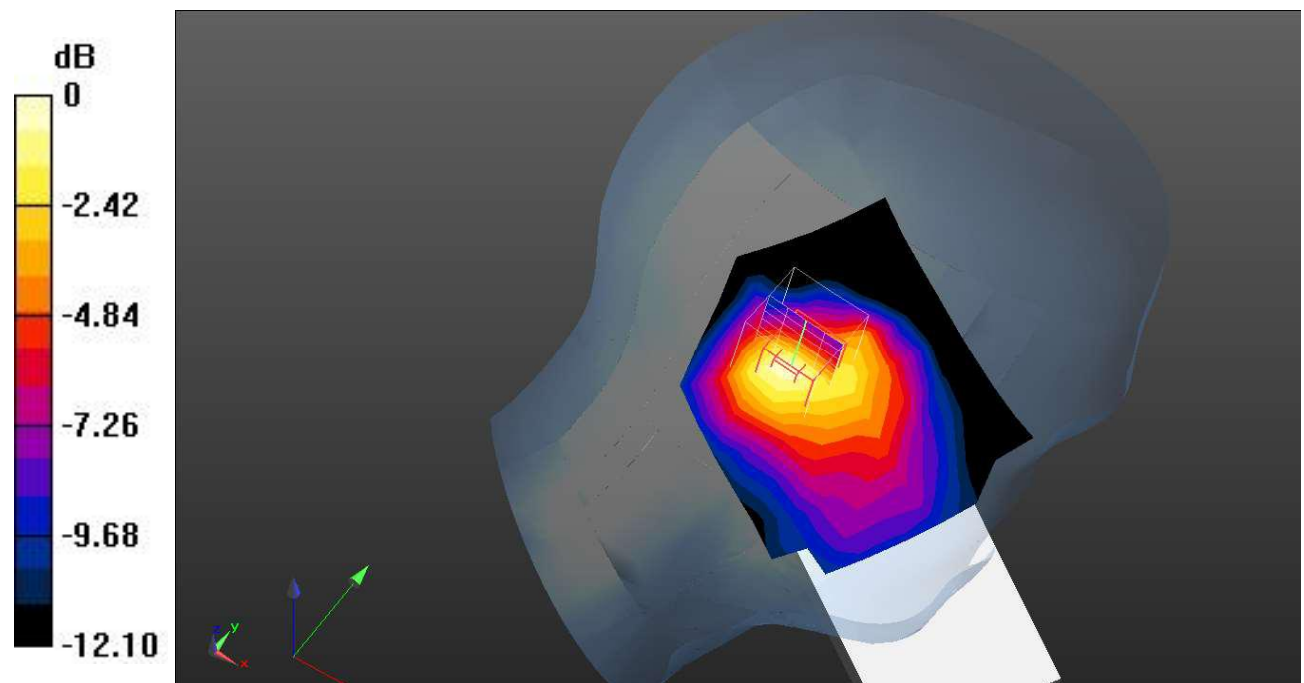 $0 \text{ dB} = 0.214 \text{ W/kg} = -6.70 \text{ dB dBW/kg}$

**Test Plot126#: LTE Band 13\_Head Left Tilt\_50%RB\_Low****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 782$  MHz;  $\sigma = 0.91$  S/m;  $\epsilon_r = 42.789$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @782 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.174 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.49 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.216 W/kg

**SAR(1 g) = 0.152 W/kg; SAR(10 g) = 0.097 W/kg**

Maximum value of SAR (measured) = 0.171 W/kg

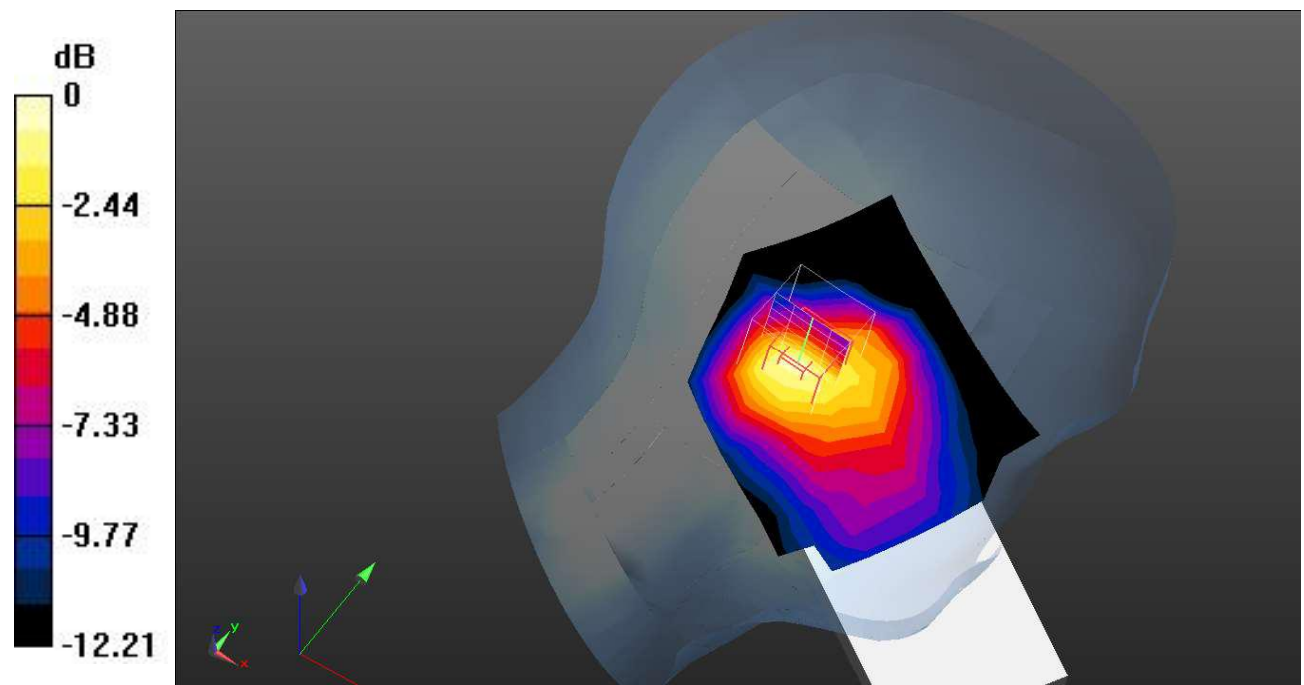

0 dB = 0.171 W/kg = -7.67 dB dBW/kg

**Test Plot127#: LTE Band 13\_Head Right Cheek\_1RB\_Low****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.91 \text{ S/m}$ ;  $\epsilon_r = 42.789$ ;  $\rho = 1000 \text{ kg/m}^3$ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @782 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x10x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 

Maximum value of SAR (measured) = 0.357 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 13.79 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.512 W/kg

**SAR(1 g) = 0.327 W/kg; SAR(10 g) = 0.207 W/kg**

Maximum value of SAR (measured) = 0.361 W/kg

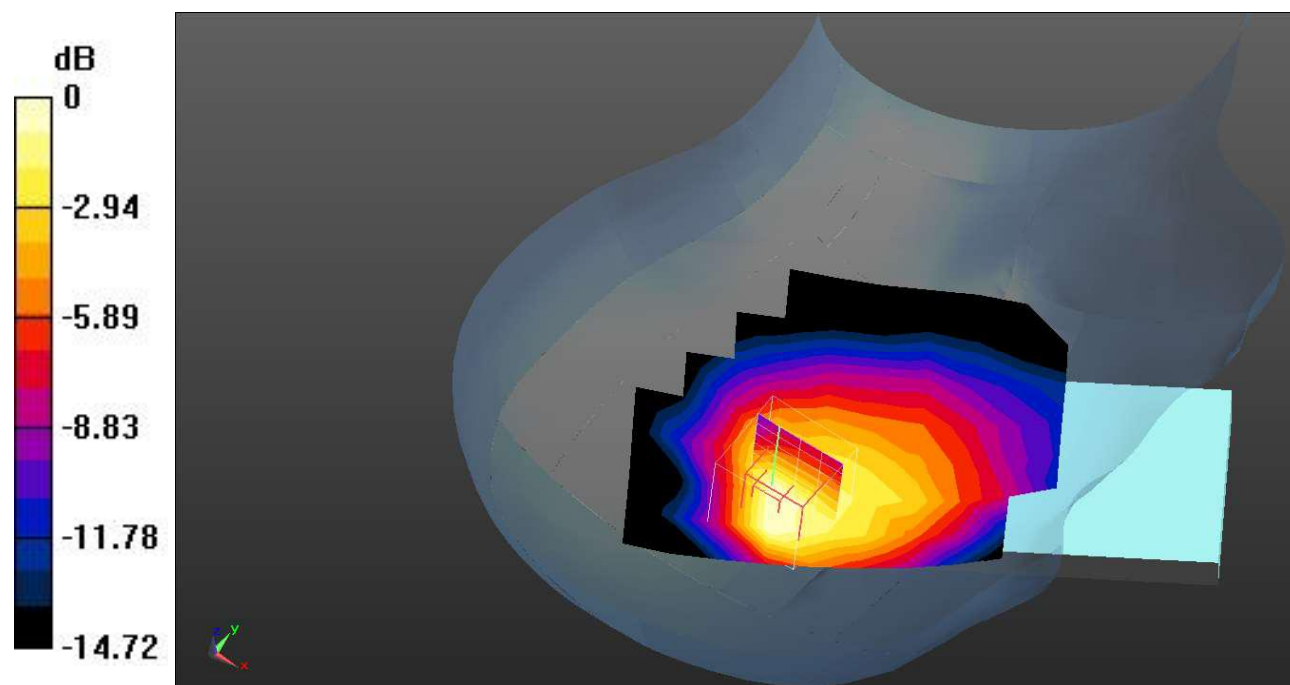

0 dB = 0.361 W/kg = -4.42 dB dBW/kg

**Test Plot128#: LTE Band 13\_Head Right Cheek\_50%RB\_Low****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.91 \text{ S/m}$ ;  $\epsilon_r = 42.789$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @782 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x10x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 

Maximum value of SAR (measured) = 0.281 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 13.16 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.431 W/kg

**SAR(1 g) = 0.272 W/kg; SAR(10 g) = 0.176 W/kg**

Maximum value of SAR (measured) = 0.292 W/kg

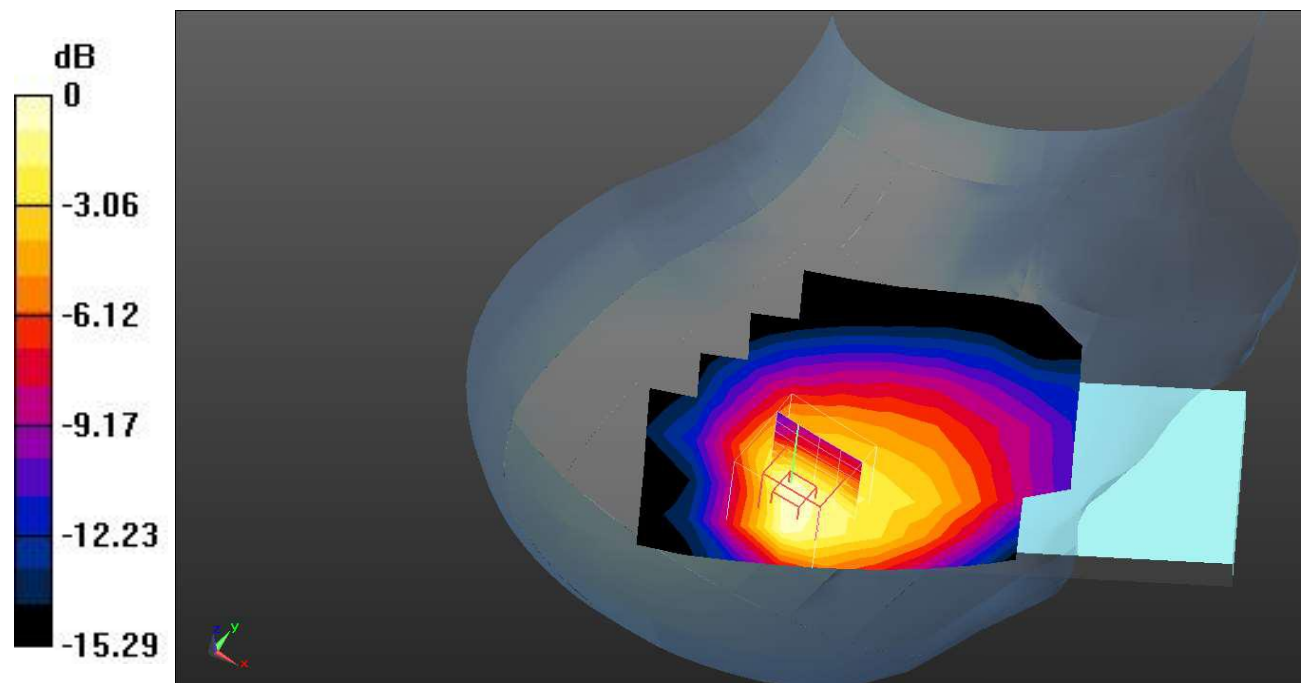

0 dB = 0.292 W/kg = -5.35 dB dBW/kg

**Test Plot129#: LTE Band 13\_Head Right Tilt\_1RB\_Low****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.91 \text{ S/m}$ ;  $\epsilon_r = 42.789$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Right Section

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @782 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x10x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 

Maximum value of SAR (measured) = 0.323 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 17.48 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.701 W/kg

**SAR(1 g) = 0.394 W/kg; SAR(10 g) = 0.230 W/kg**

Maximum value of SAR (measured) = 0.459 W/kg

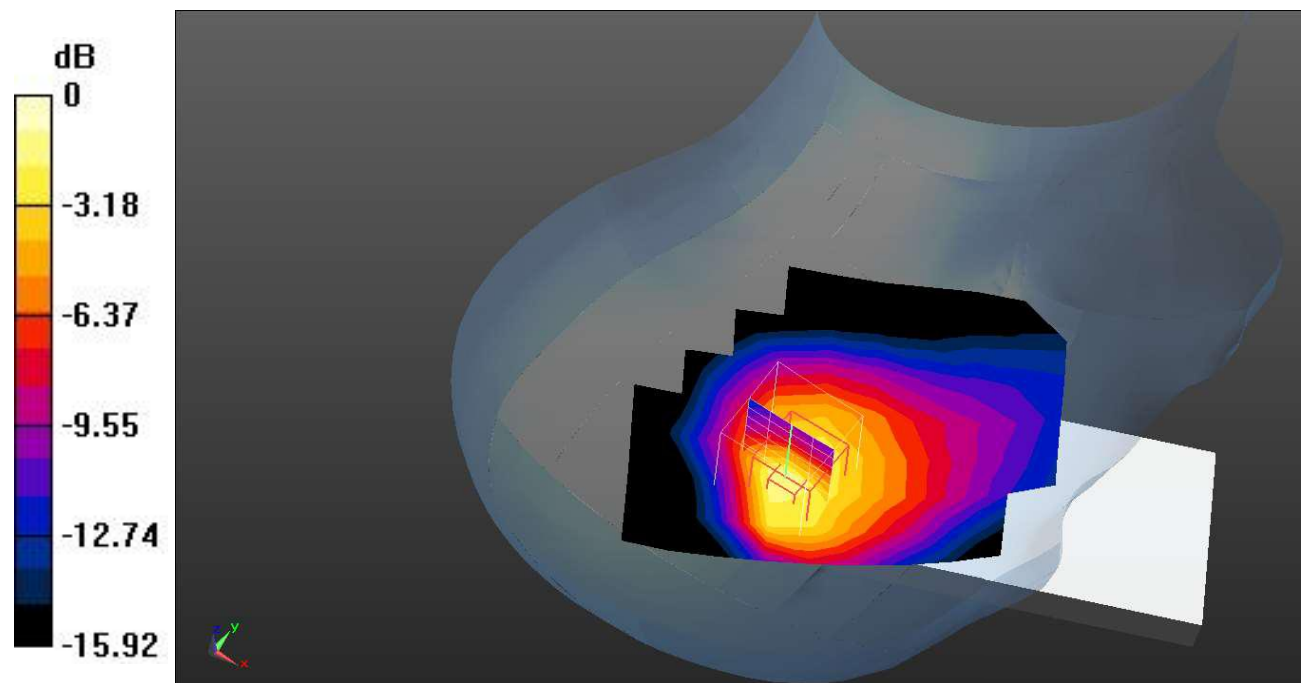


0 dB = 0.459 W/kg = -3.38 dB dBW/kg

**Test Plot130#: LTE Band 13\_Head Right Tilt\_50%RB\_Low****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.91 \text{ S/m}$ ;  $\epsilon_r = 42.789$ ;  $\rho = 1000 \text{ kg/m}^3$ ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @782 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

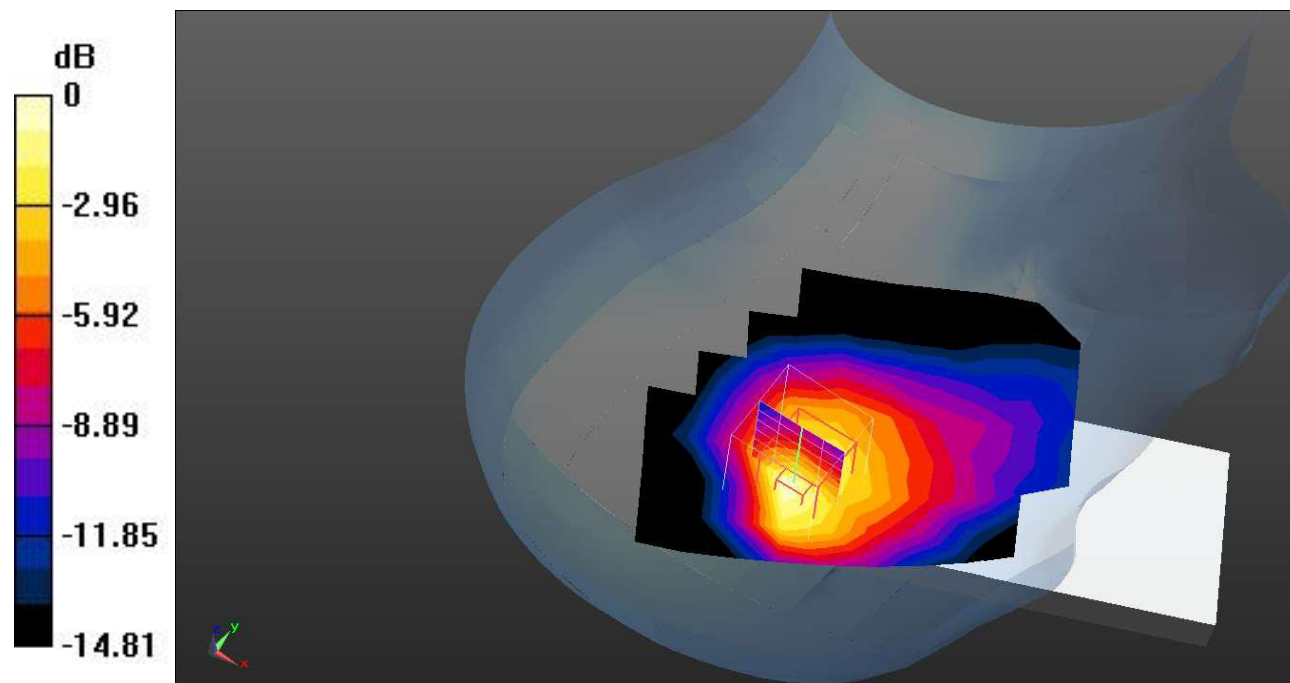
**Area Scan (8x10x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ Maximum value of SAR (measured) =  $0.307 \text{ W/kg}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ Reference Value =  $14.59 \text{ V/m}$ ; Power Drift =  $0.13 \text{ dB}$ Peak SAR (extrapolated) =  $0.458 \text{ W/kg}$ **SAR(1 g) =  $0.274 \text{ W/kg}$ ; SAR(10 g) =  $0.163 \text{ W/kg}$** Maximum value of SAR (measured) =  $0.326 \text{ W/kg}$  $0 \text{ dB} = 0.326 \text{ W/kg} = -4.87 \text{ dB dBW/kg}$

**Test Plot131#: LTE Band 13\_Body Front\_1RB\_Low****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.91 \text{ S/m}$ ;  $\epsilon_r = 42.789$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @782 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

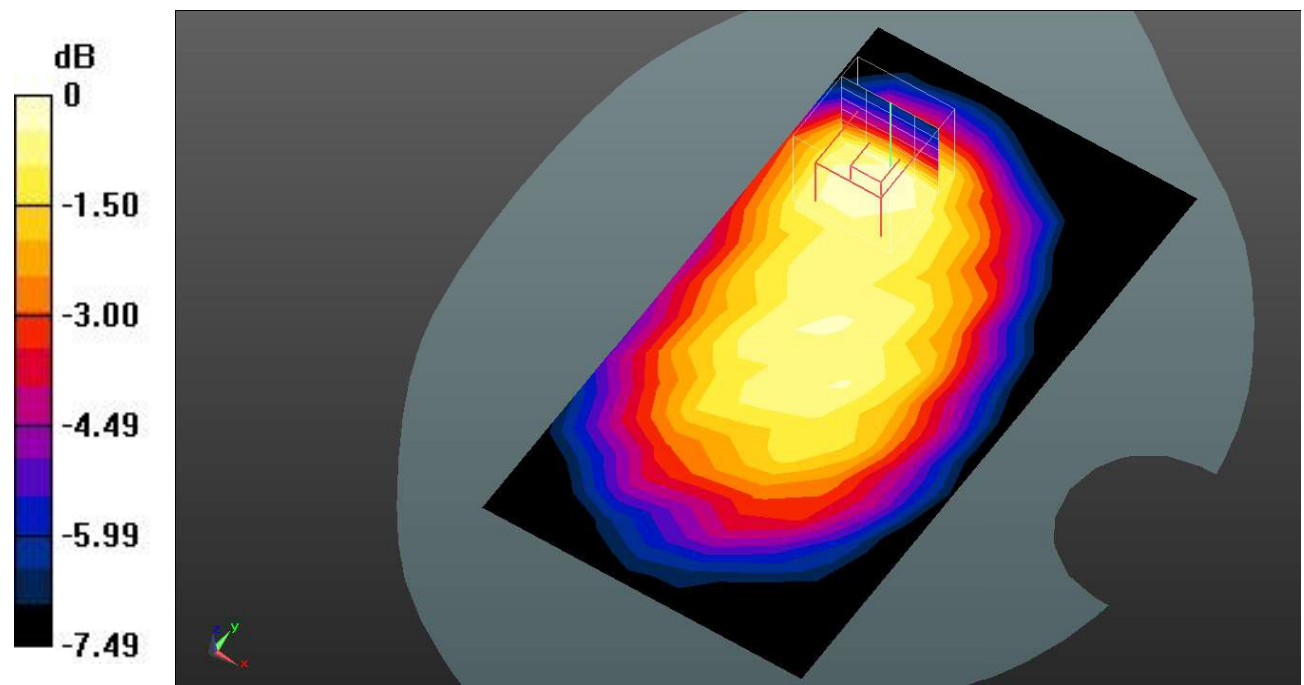**Area Scan (8x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ Maximum value of SAR (measured) =  $0.127 \text{ W/kg}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ Reference Value =  $10.56 \text{ V/m}$ ; Power Drift =  $0.01 \text{ dB}$ Peak SAR (extrapolated) =  $0.142 \text{ W/kg}$ **SAR(1 g) =  $0.113 \text{ W/kg}$ ; SAR(10 g) =  $0.083 \text{ W/kg}$** Maximum value of SAR (measured) =  $0.117 \text{ W/kg}$  $0 \text{ dB} = 0.117 \text{ W/kg} = -9.32 \text{ dB dBW/kg}$

**Test Plot132#: LTE Band 13\_Body Front\_50%RB\_Low****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.91 \text{ S/m}$ ;  $\epsilon_r = 42.789$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @782 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 

Maximum value of SAR (measured) = 0.103 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 9.452 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.113 W/kg

**SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.066 W/kg**

Maximum value of SAR (measured) = 0.0927 W/kg

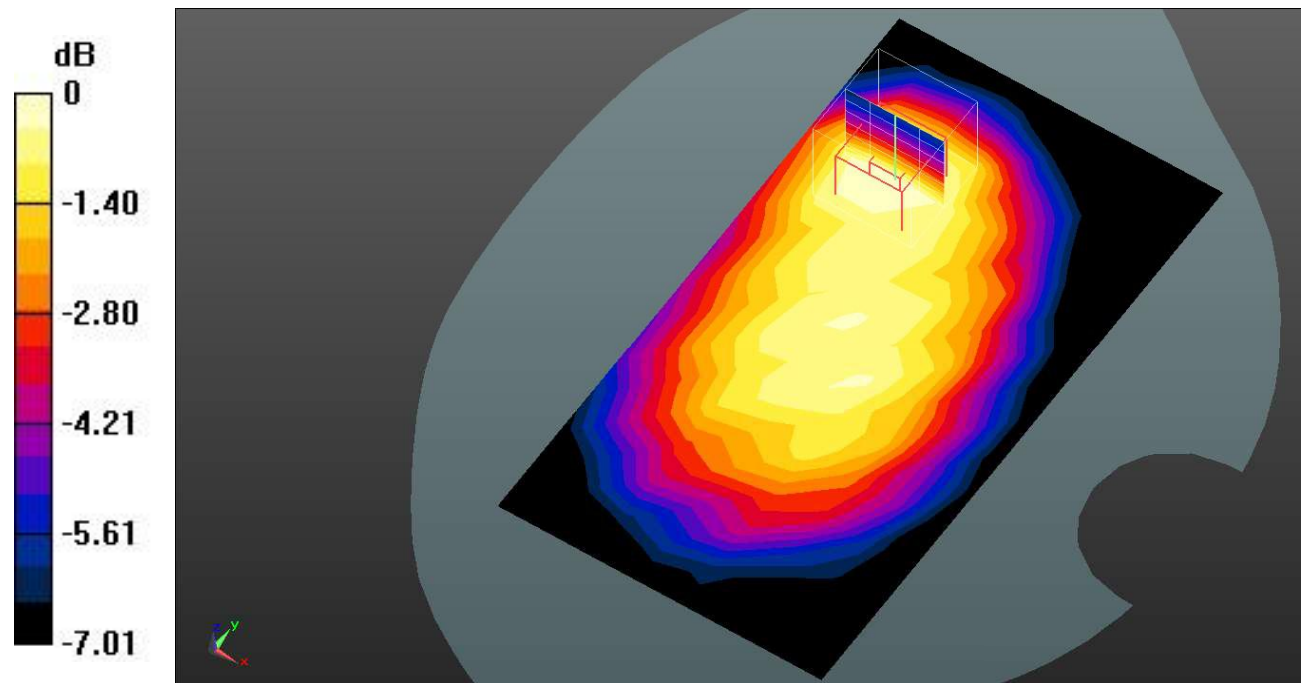

0 dB = 0.0927 W/kg = -10.33 dB dBW/kg

**Test Plot133#: LTE Band 13\_Body Back\_1RB\_Low****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.91 \text{ S/m}$ ;  $\epsilon_r = 42.789$ ;  $\rho = 1000 \text{ kg/m}^3$ ;  
Phantom section: Flat Section

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @782 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 

Maximum value of SAR (measured) = 0.185 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 12.79 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.177 W/kg

**SAR(1 g) = 0.164 W/kg; SAR(10 g) = 0.134 W/kg**

Maximum value of SAR (measured) = 0.168 W/kg

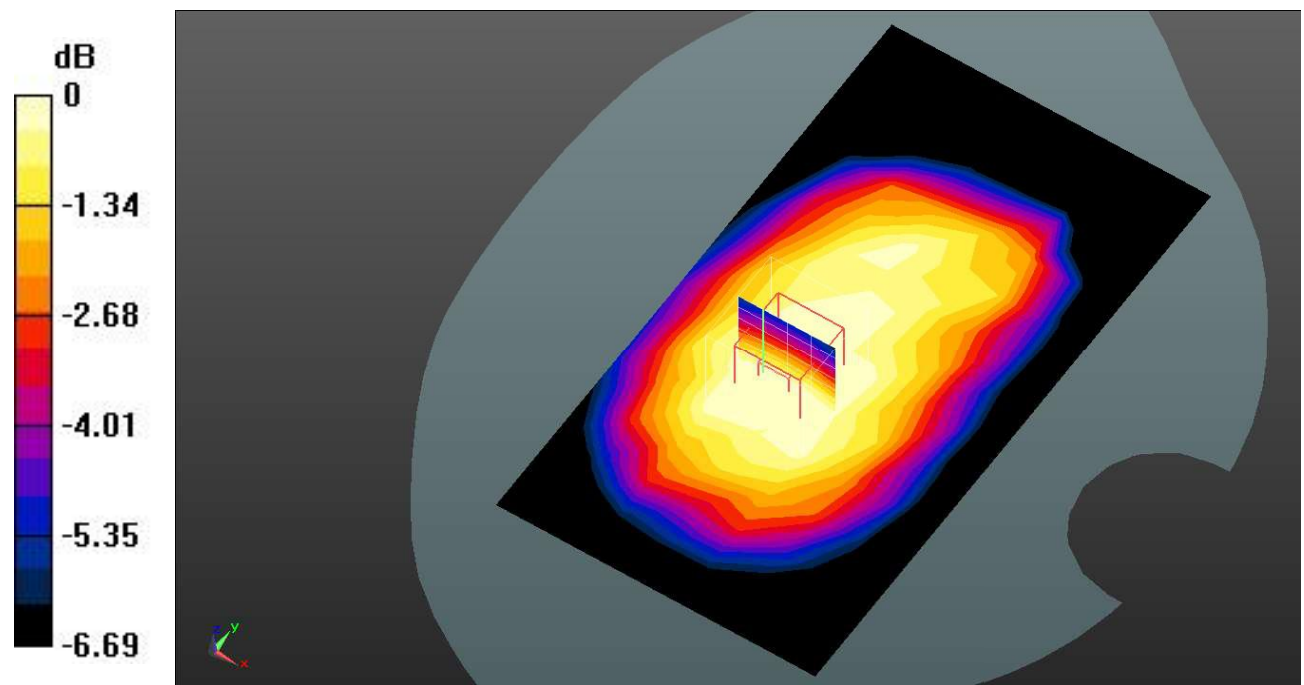

0 dB = 0.168 W/kg = -7.75 dB dBW/kg

**Test Plot134#: LTE Band 13\_Body Back\_50%RB\_Low****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.91 \text{ S/m}$ ;  $\epsilon_r = 42.789$ ;  $\rho = 1000 \text{ kg/m}^3$ ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @782 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 

Maximum value of SAR (measured) = 0.146 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 11.73 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.138 W/kg

**SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.104 W/kg**

Maximum value of SAR (measured) = 0.131 W/kg

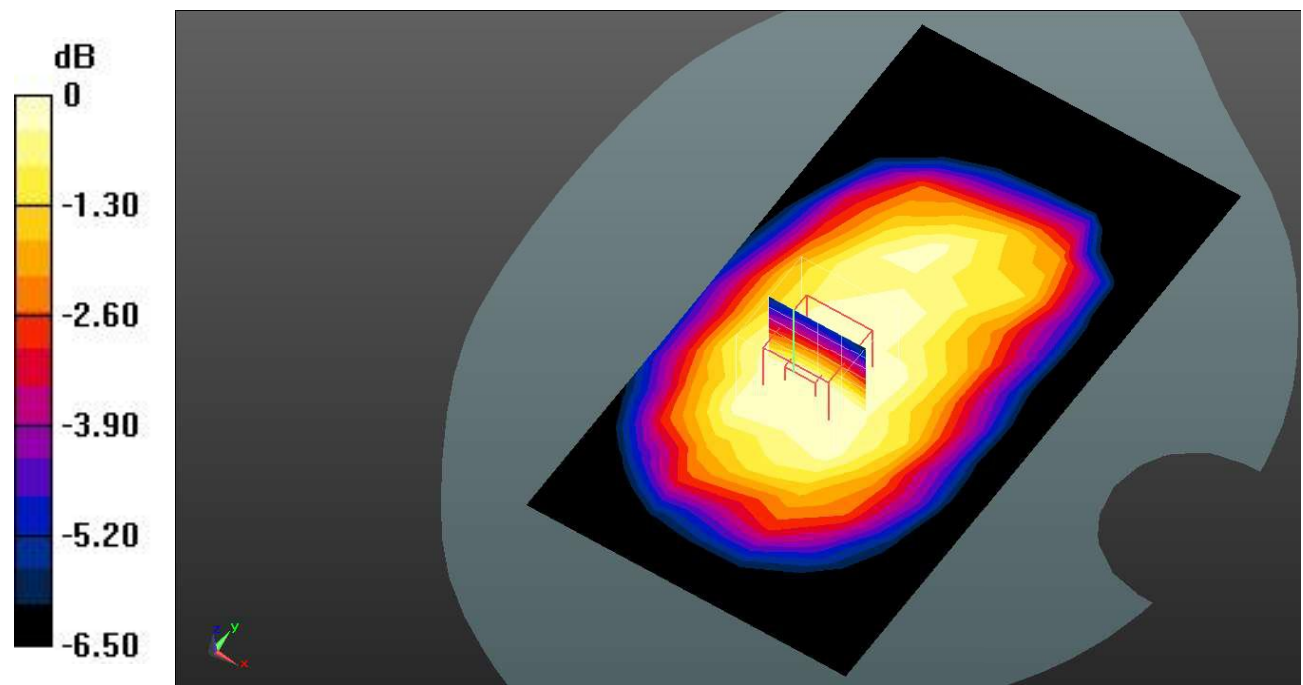

0 dB = 0.131 W/kg = -8.83 dB dBW/kg

**Test Plot135#: LTE Band 13\_Body Left\_1RB\_Low****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.91 \text{ S/m}$ ;  $\epsilon_r = 42.789$ ;  $\rho = 1000 \text{ kg/m}^3$ ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @782 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 

Maximum value of SAR (measured) = 0.166 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 13.21 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.185 W/kg

**SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.115 W/kg**

Maximum value of SAR (measured) = 0.162 W/kg

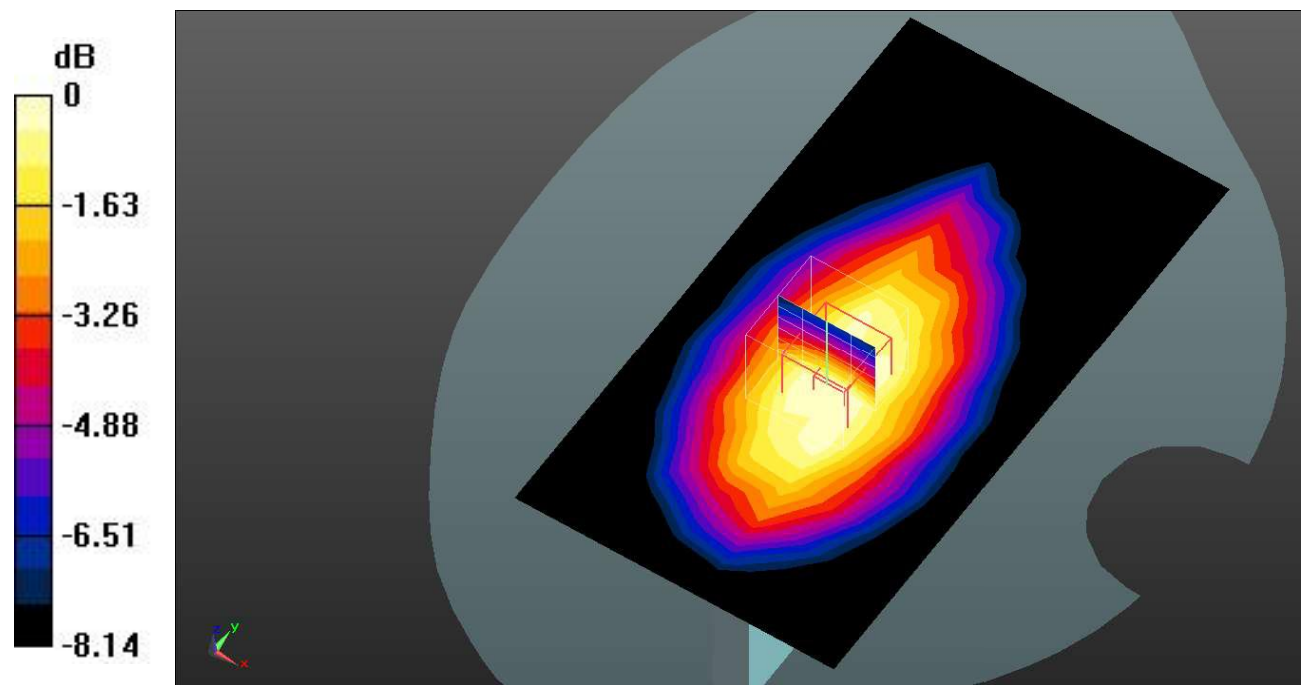

0 dB = 0.162 W/kg = -7.90 dB dBW/kg

**Test Plot136#: LTE Band 13\_Body Left\_50%RB\_Low****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 782$  MHz;  $\sigma = 0.91$  S/m;  $\epsilon_r = 42.789$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @782 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.124 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.63 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.139 W/kg

**SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.086 W/kg**

Maximum value of SAR (measured) = 0.121 W/kg

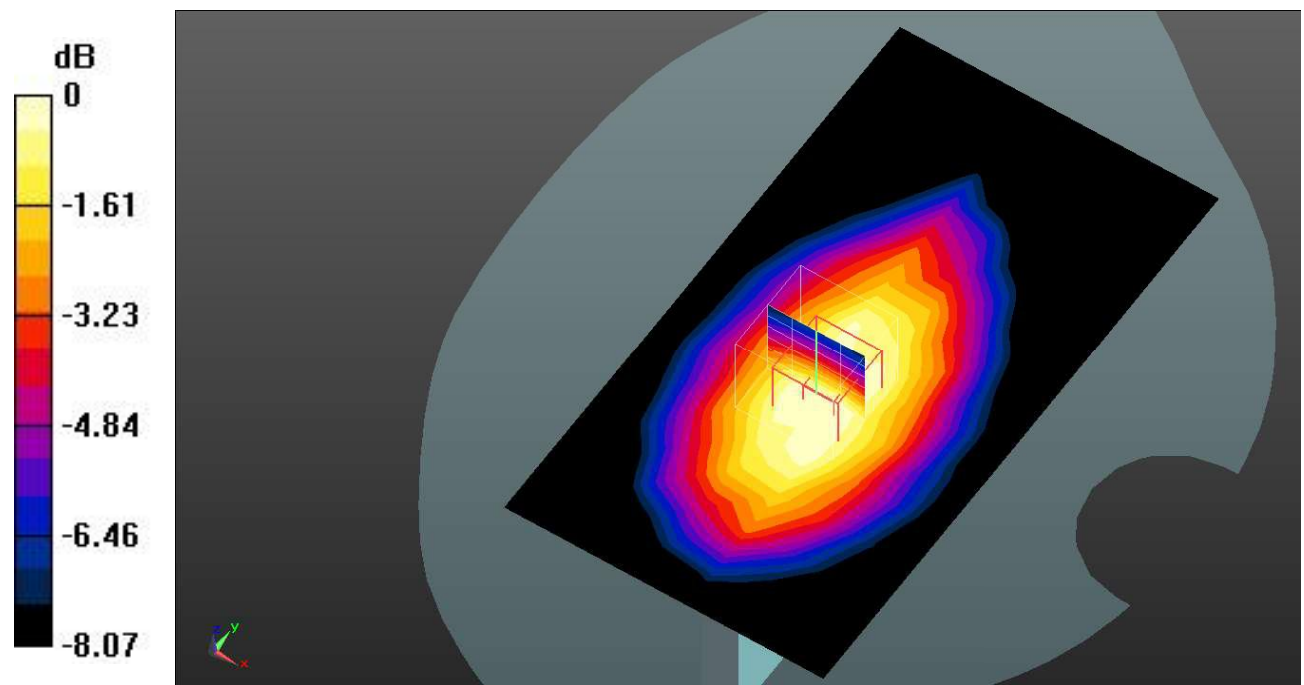

0 dB = 0.121 W/kg = -9.17 dB dBW/kg

**Test Plot137#: LTE Band 13\_Body Top\_1RB\_Low****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.91 \text{ S/m}$ ;  $\epsilon_r = 42.789$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @782 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x10x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 

Maximum value of SAR (measured) = 0.116 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 11.02 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.132 W/kg

**SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.066 W/kg**

Maximum value of SAR (measured) = 0.108 W/kg

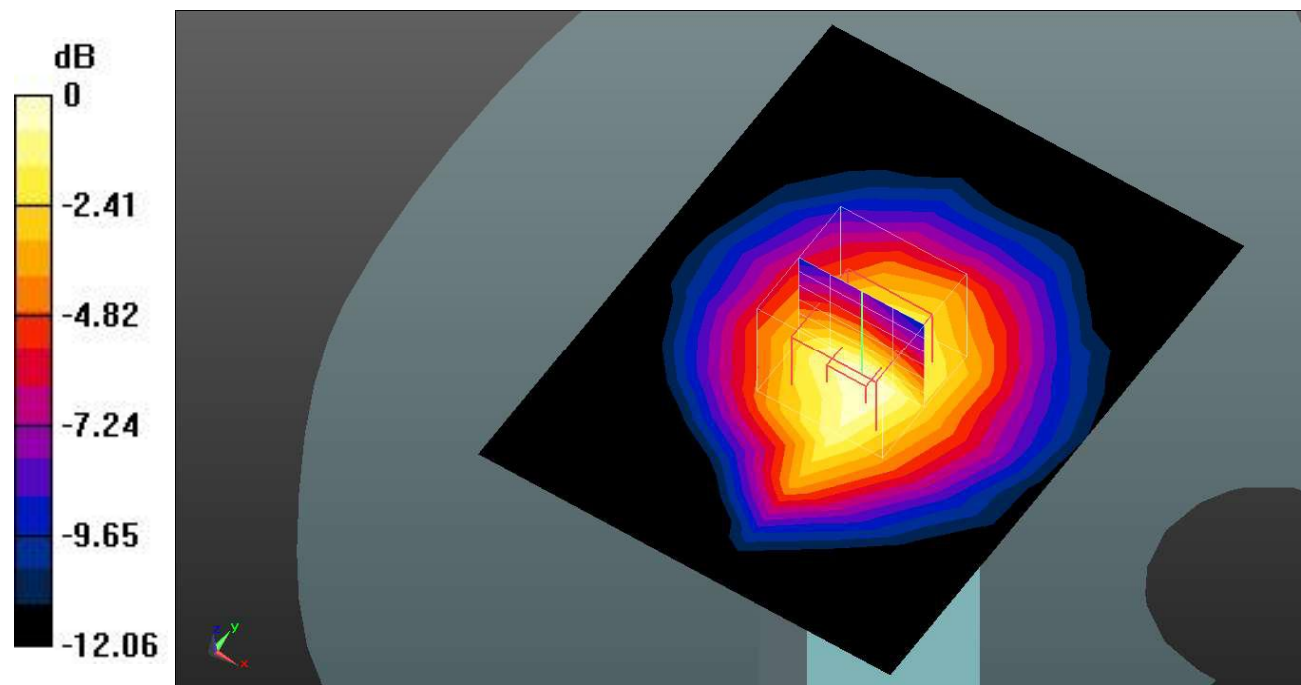

0 dB = 0.108 W/kg = -9.67 dB dBW/kg

**Test Plot138#: LTE Band 13\_Body Top\_50%RB\_Low****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.91 \text{ S/m}$ ;  $\epsilon_r = 42.789$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.04, 10.04, 10.04) @782 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x10x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 

Maximum value of SAR (measured) = 0.0885 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 9.700 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.102 W/kg

**SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.051 W/kg**

Maximum value of SAR (measured) = 0.0833 W/kg

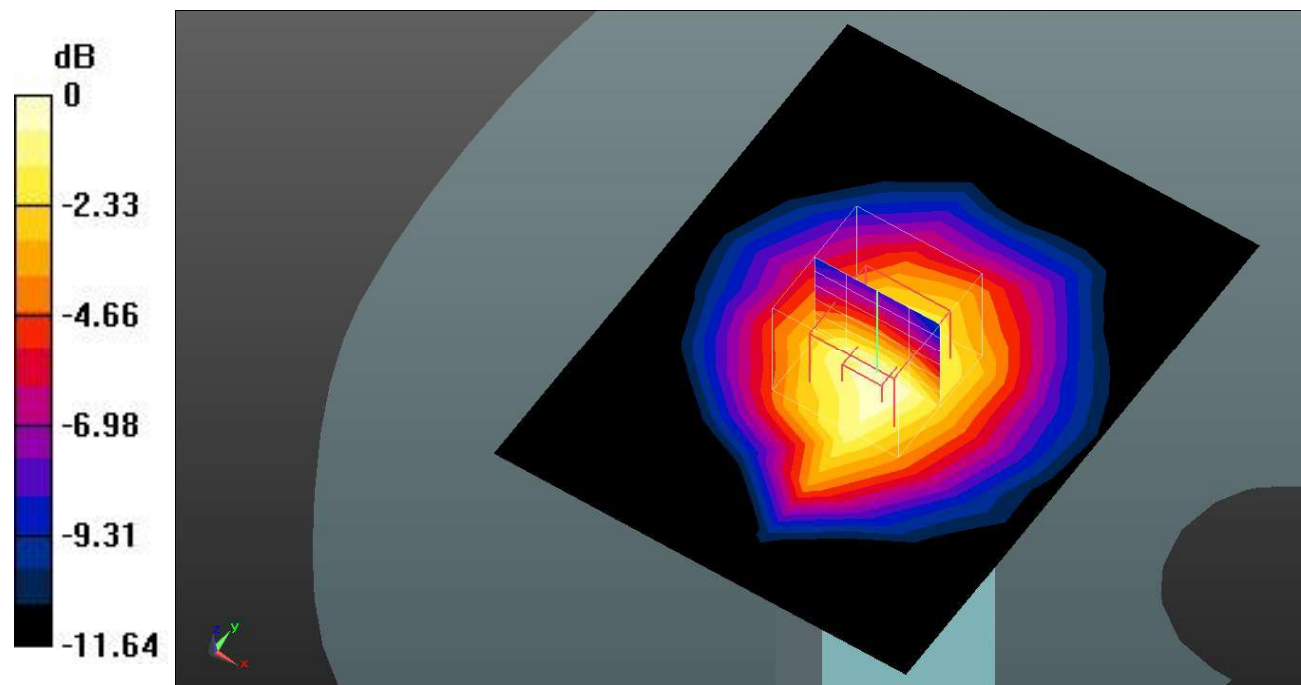

0 dB = 0.0833 W/kg = -10.79 dB dBW/kg

**Test Plot139#: LTE Band 41\_Head Left Cheek\_1RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.57903  
Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.976$  S/m;  $\epsilon_r = 38.88$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.3, 7.3, 7.3) @2595 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x14x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.150 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.001 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.214 W/kg

**SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.083 W/kg**

Maximum value of SAR (measured) = 0.143 W/kg

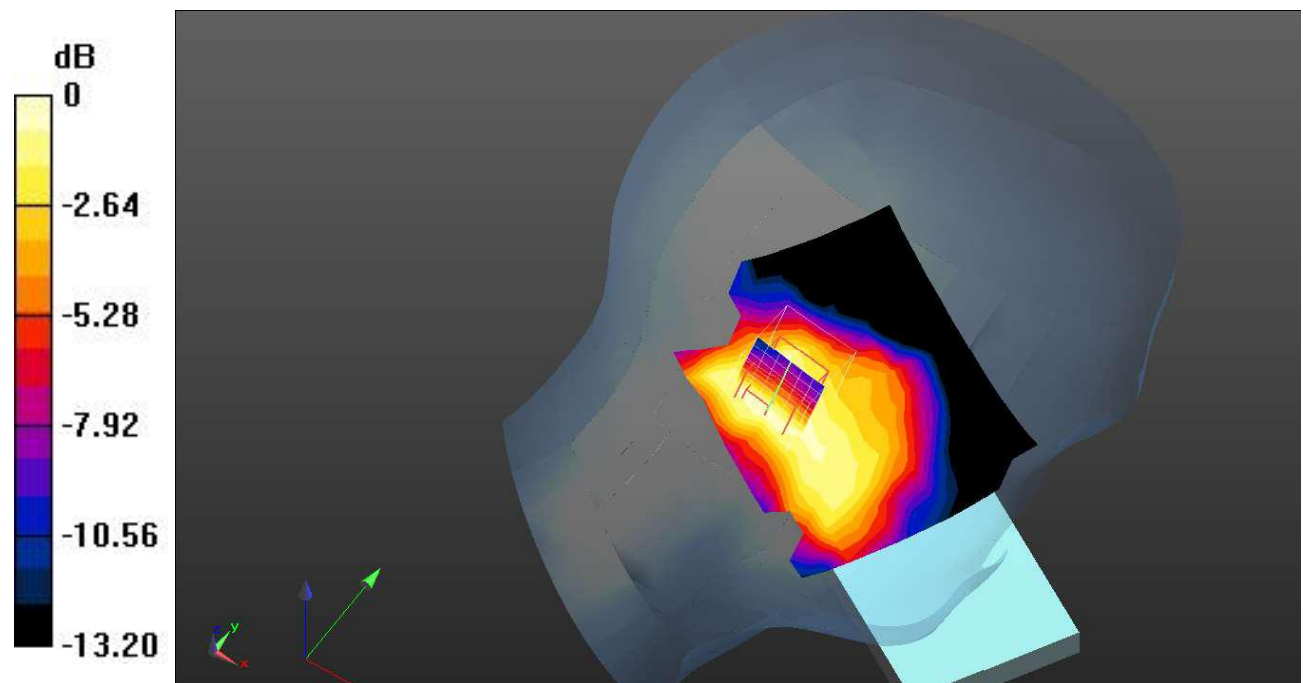

0 dB = 0.143 W/kg = -8.45 dB dBW/kg

**Test Plot140#: LTE Band 41\_Head Left Cheek\_50%RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.57903  
Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.976$  S/m;  $\epsilon_r = 38.88$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.3, 7.3, 7.3) @2595 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x14x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.124 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.368 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.174 W/kg

**SAR(1 g) = 0.110 W/kg; SAR(10 g) = 0.068 W/kg**

Maximum value of SAR (measured) = 0.118 W/kg

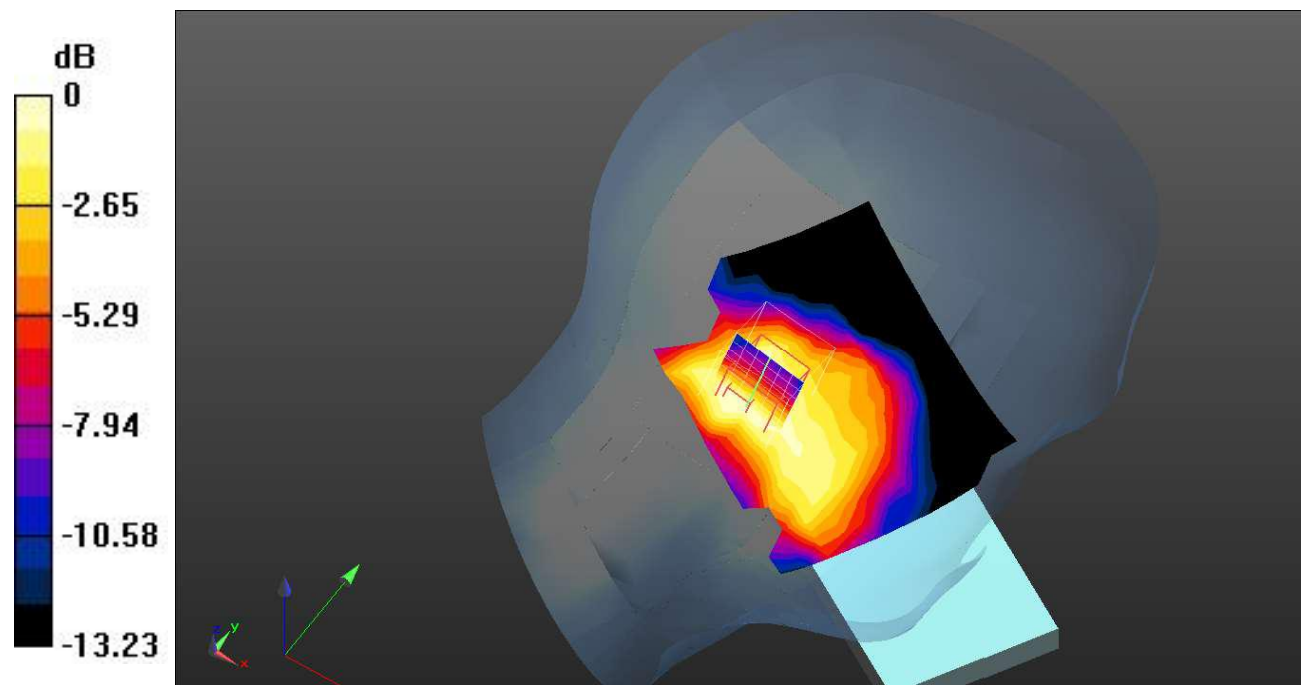

0 dB = 0.118 W/kg = -9.28 dB dBW/kg

**Test Plot141#: LTE Band 41\_Head Left Tilt\_1RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.57903  
Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.976$  S/m;  $\epsilon_r = 38.88$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.3, 7.3, 7.3) @2595 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x14x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.163 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.459 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.237 W/kg

**SAR(1 g) = 0.138 W/kg; SAR(10 g) = 0.082 W/kg**

Maximum value of SAR (measured) = 0.151 W/kg

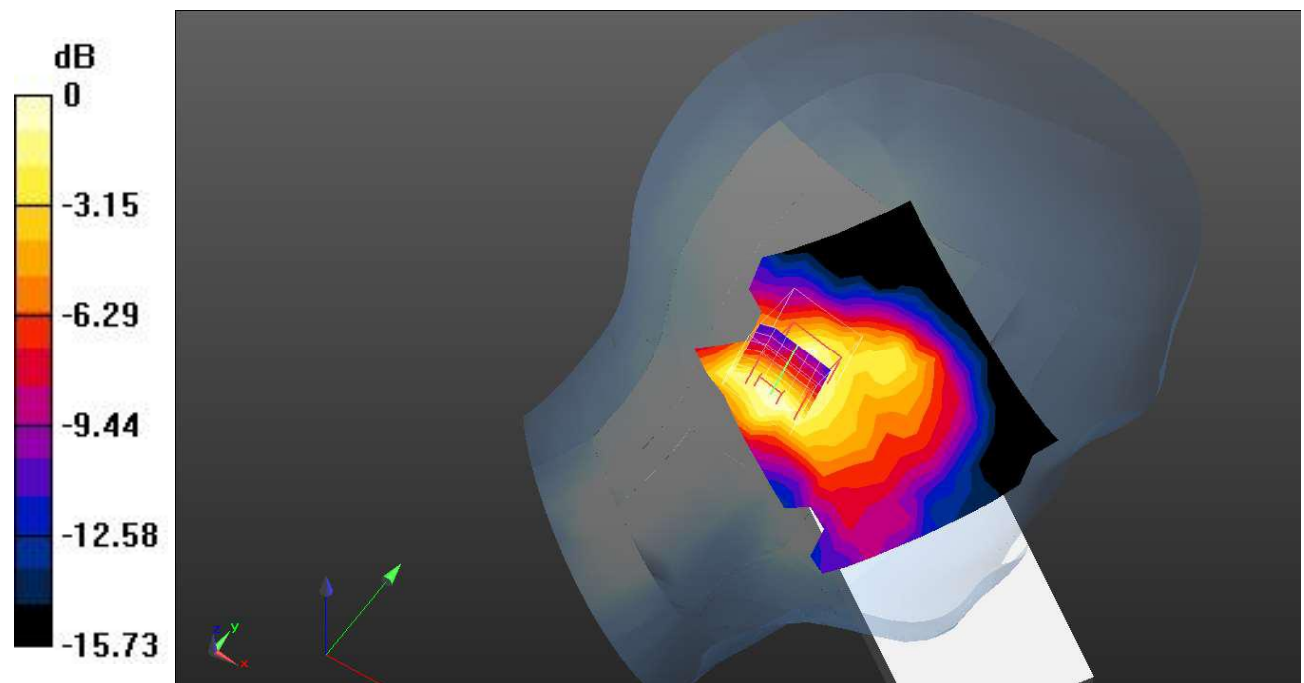

0 dB = 0.151 W/kg = -8.21 dB dBW/kg

**Test Plot142#: LTE Band 41\_Head Left Tilt\_50%RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.57903  
Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.976$  S/m;  $\epsilon_r = 38.88$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.3, 7.3, 7.3) @2595 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x14x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.133 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.889 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.192 W/kg

**SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.067 W/kg**

Maximum value of SAR (measured) = 0.121 W/kg

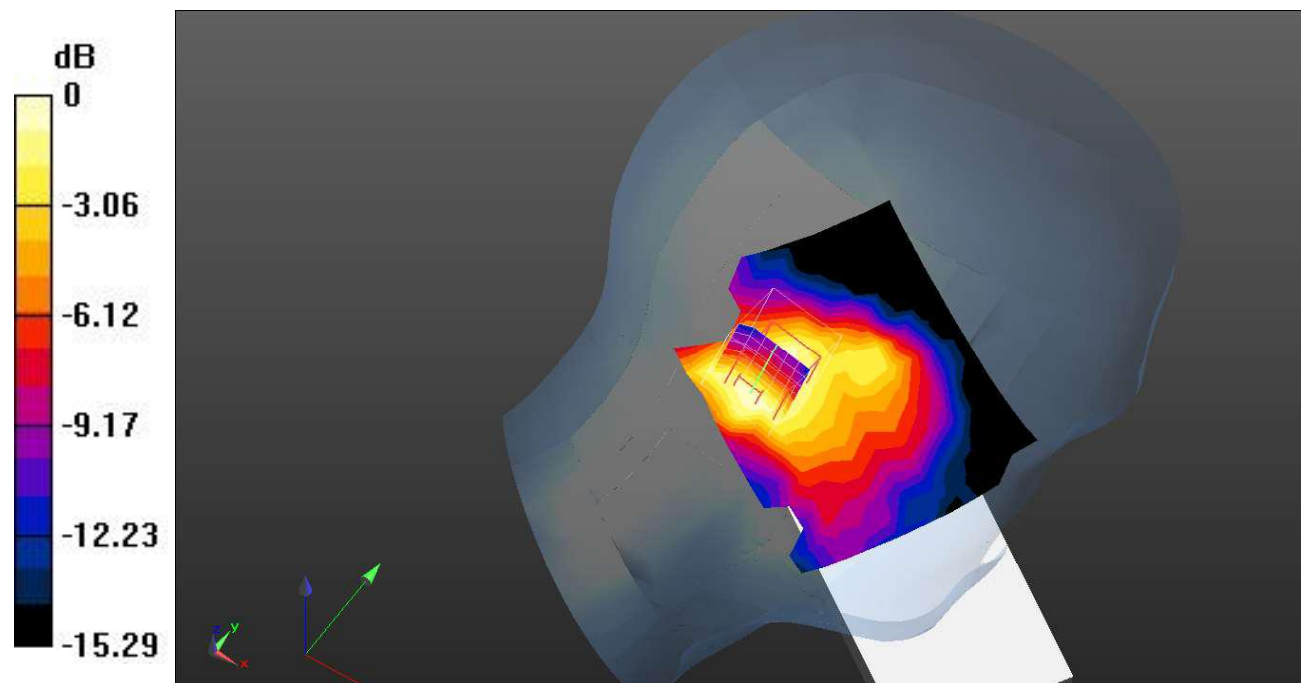

0 dB = 0.121 W/kg = -9.17 dB dBW/kg

**Test Plot143#: LTE Band 41\_Head Right Cheek\_1RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.57903

Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.976$  S/m;  $\epsilon_r = 38.88$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.3, 7.3, 7.3) @2595 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x14x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.582 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.340 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.04 W/kg

**SAR(1 g) = 0.556 W/kg; SAR(10 g) = 0.301 W/kg**

Maximum value of SAR (measured) = 0.637 W/kg

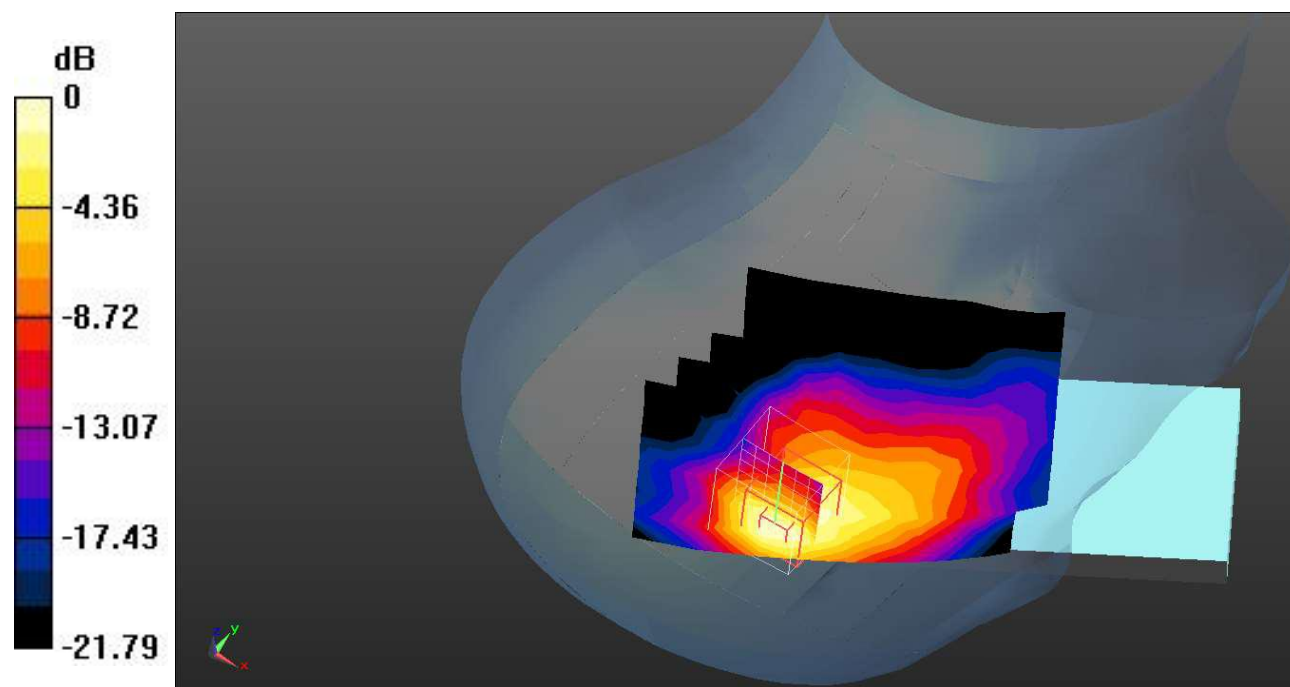

0 dB = 0.637 W/kg = -1.96 dB dBW/kg

**Test Plot144#: LTE Band 41\_Head Right Cheek\_50%RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.57903  
Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.976$  S/m;  $\epsilon_r = 38.88$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.3, 7.3, 7.3) @2595 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x14x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.525 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.032 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.964 W/kg

**SAR(1 g) = 0.492 W/kg; SAR(10 g) = 0.264 W/kg**

Maximum value of SAR (measured) = 0.546 W/kg

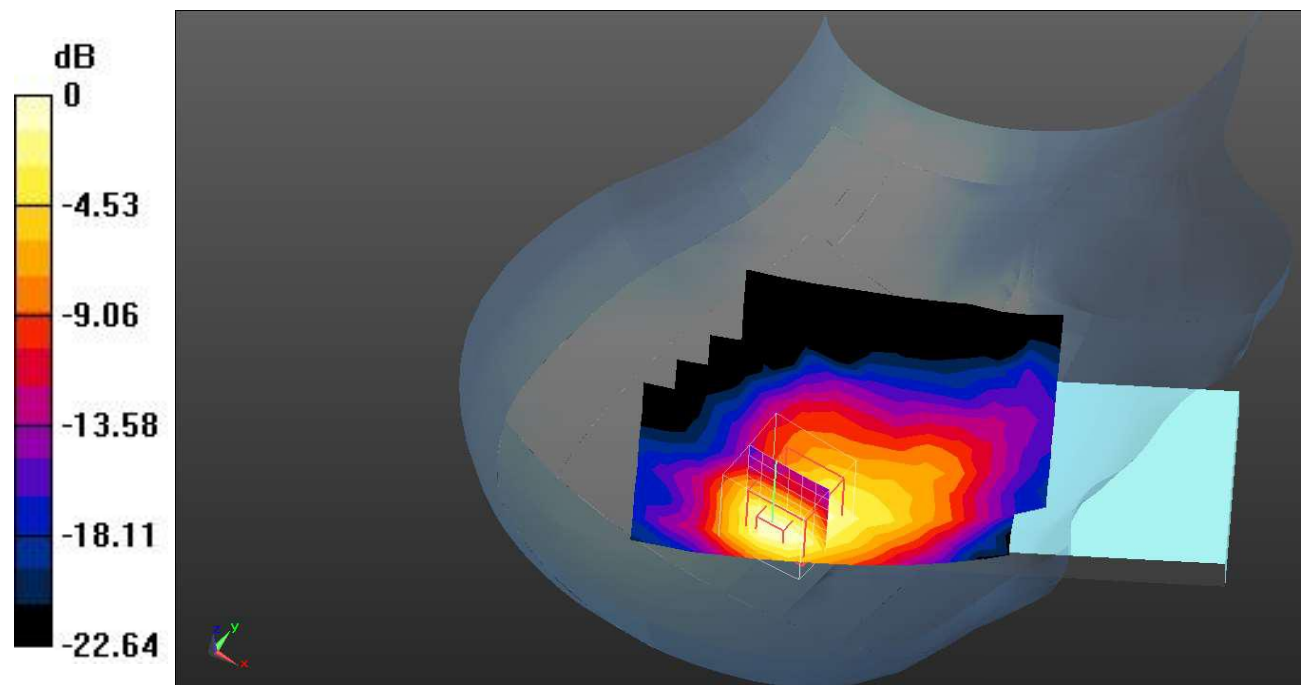

0 dB = 0.546 W/kg = -2.63 dB dBW/kg

**Test Plot145#: LTE Band 41\_Head Right Tilt\_1RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.57903  
Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.976$  S/m;  $\epsilon_r = 38.88$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.3, 7.3, 7.3) @2595 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.647 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.179 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 1.15 W/kg

**SAR(1 g) = 0.571 W/kg; SAR(10 g) = 0.280 W/kg**

Maximum value of SAR (measured) = 0.655 W/kg

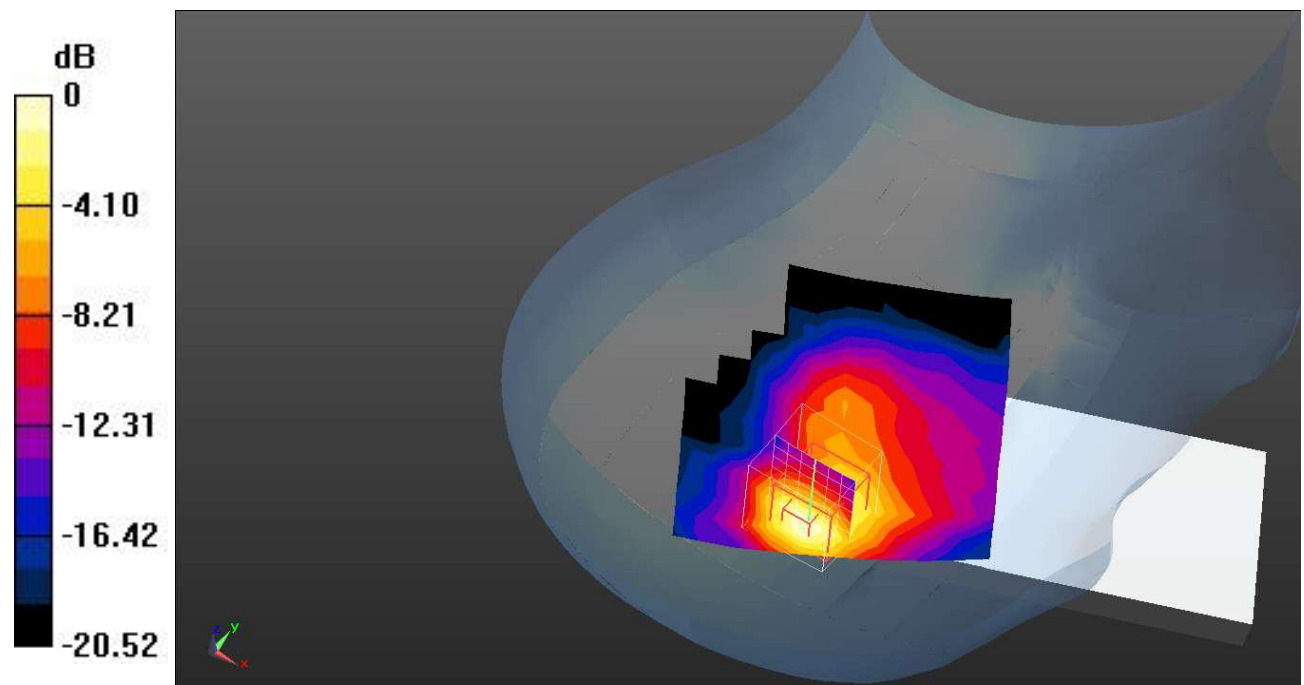

0 dB = 0.655 W/kg = -1.84 dB dBW/kg

**Test Plot146#: LTE Band 41\_Head Right Tilt\_50%RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.57903  
Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.976$  S/m;  $\epsilon_r = 38.88$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.3, 7.3, 7.3) @2595 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.526 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.656 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.944 W/kg

**SAR(1 g) = 0.465 W/kg; SAR(10 g) = 0.227 W/kg**

Maximum value of SAR (measured) = 0.534 W/kg

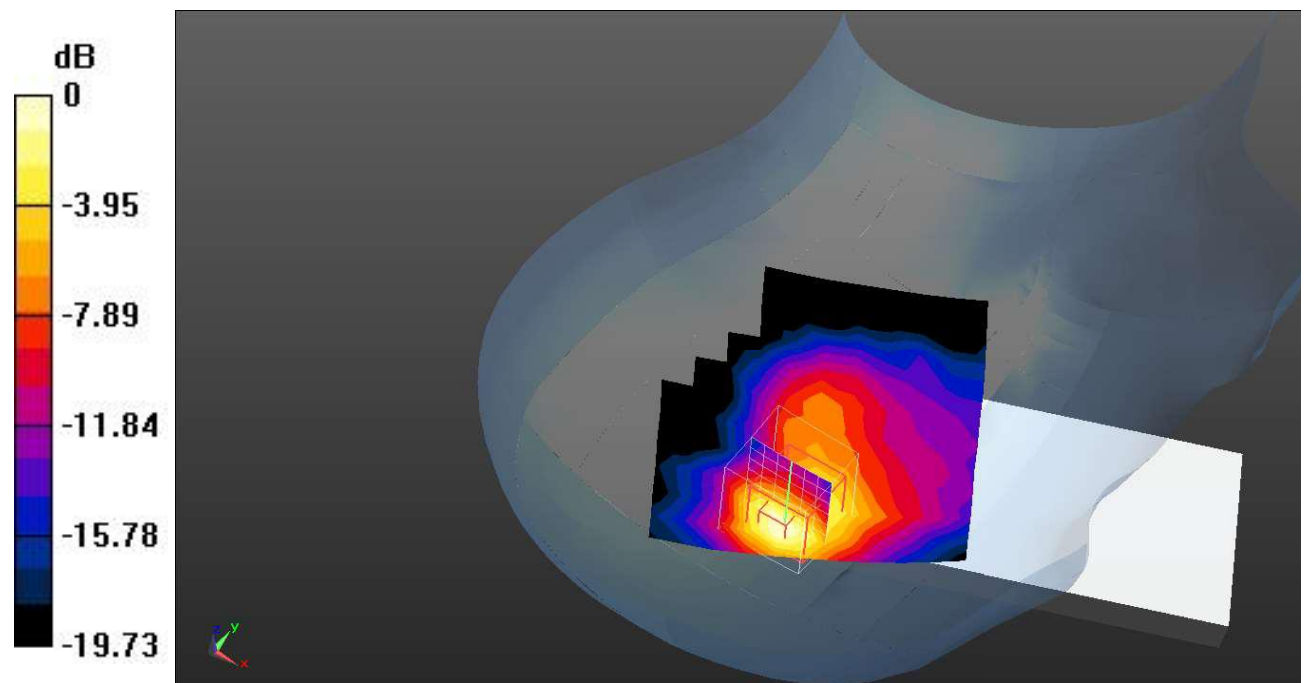

0 dB = 0.534 W/kg = -2.72 dB dBW/kg

**Test Plot147#: LTE Band 41\_Body Front\_1RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.57903  
Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.976$  S/m;  $\epsilon_r = 38.88$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7441; ConvF(7.3, 7.3, 7.3) @2595 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x14x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.261 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.306 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.344 W/kg

**SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.132 W/kg**

Maximum value of SAR (measured) = 0.244 W/kg

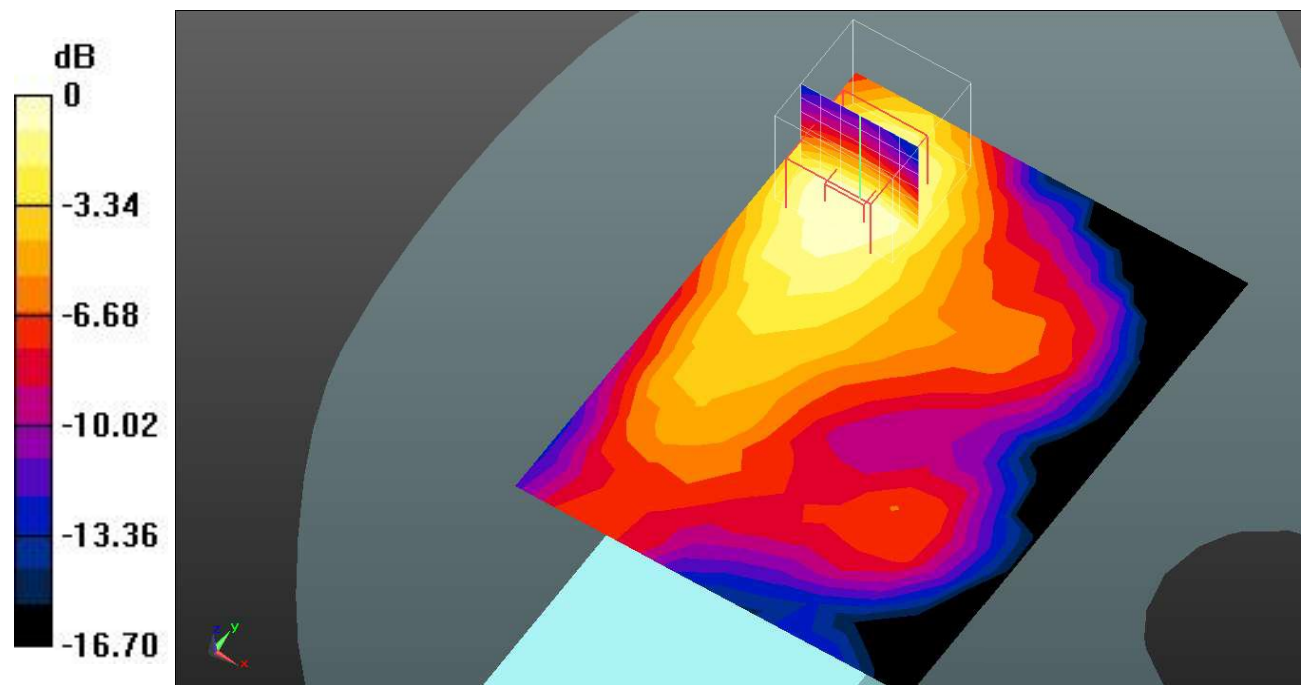

0 dB = 0.244 W/kg = -6.13 dB dBW/kg

**Test Plot148#: LTE Band 41\_Body Front\_50%RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.57903  
Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.976$  S/m;  $\epsilon_r = 38.88$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.3, 7.3, 7.3) @2595 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x14x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.217 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.857 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.283 W/kg

**SAR(1 g) = 0.186 W/kg; SAR(10 g) = 0.109 W/kg**

Maximum value of SAR (measured) = 0.201 W/kg

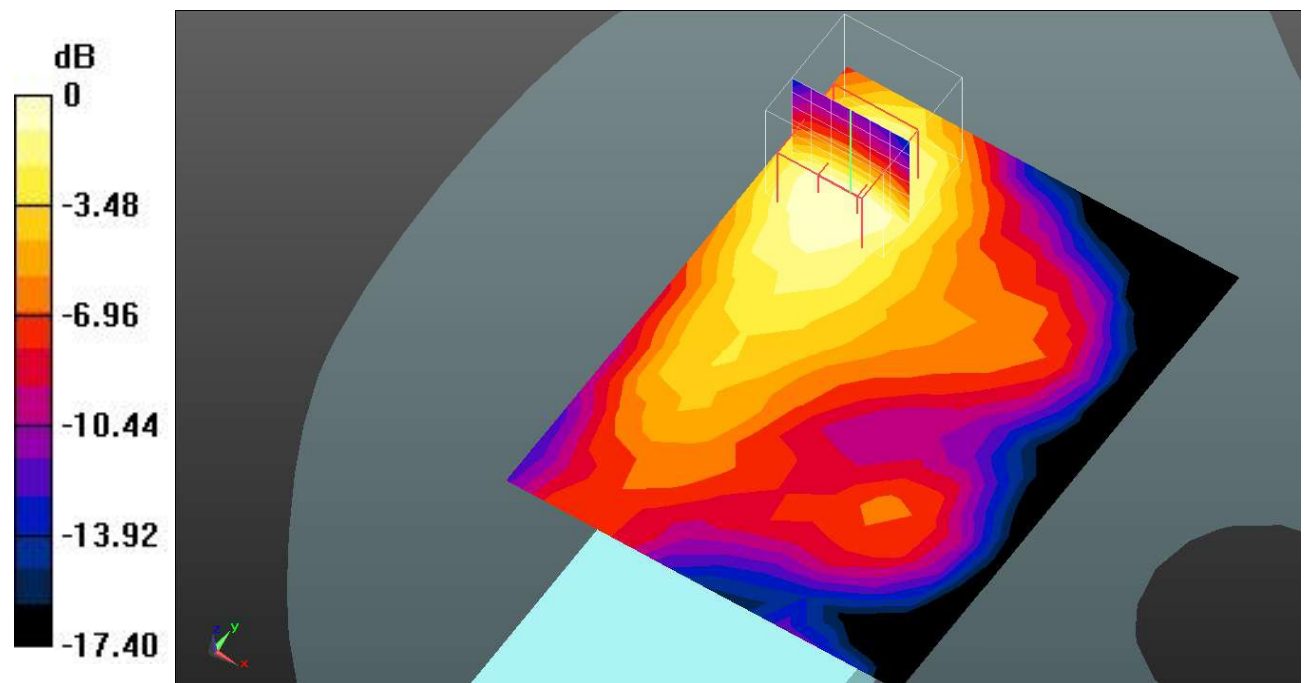

0 dB = 0.201 W/kg = -6.97 dB dBW/kg

**Test Plot149#: LTE Band 41\_Body Back\_1RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.57903  
Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.976$  S/m;  $\epsilon_r = 38.88$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7441; ConvF(7.3, 7.3, 7.3) @2595 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.185 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.064 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.193 W/kg

**SAR(1 g) = 0.130 W/kg; SAR(10 g) = 0.084 W/kg**

Maximum value of SAR (measured) = 0.144 W/kg

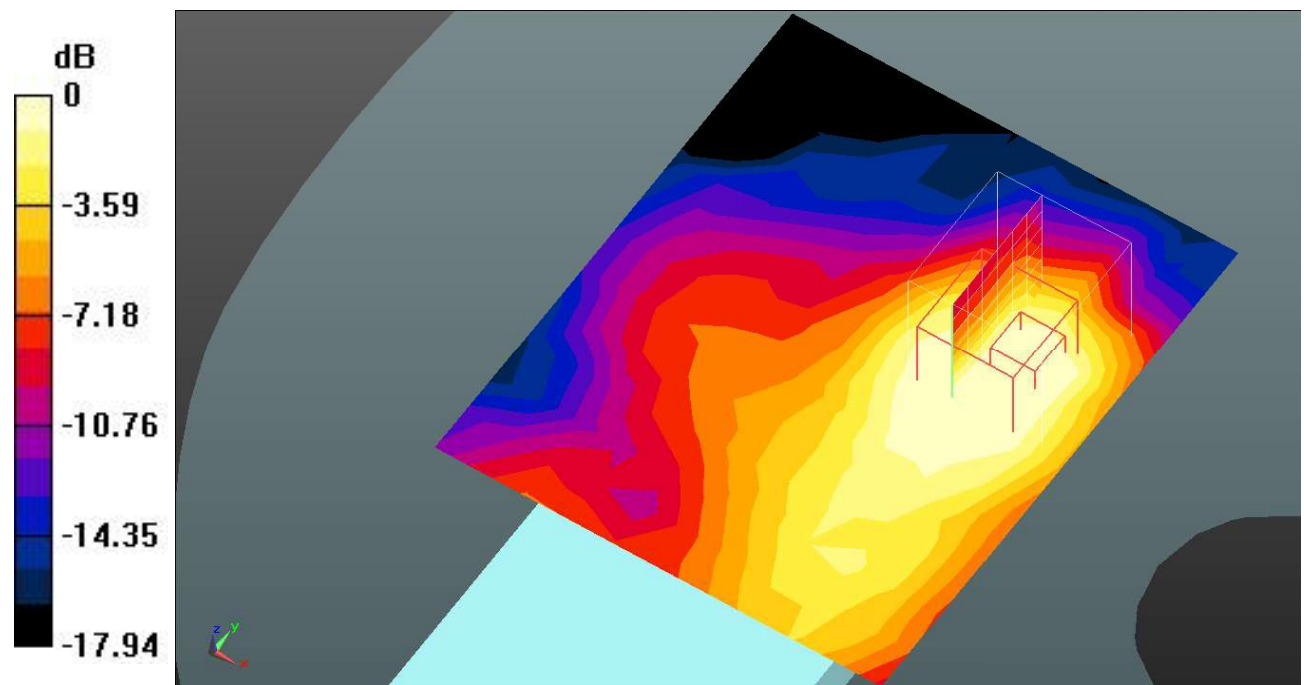

0 dB = 0.144 W/kg = -8.42 dB dBW/kg

**Test Plot150#: LTE Band 41\_Body Back\_50%RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.57903

Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.976$  S/m;  $\epsilon_r = 38.88$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.3, 7.3, 7.3) @2595 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.161 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.874 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.173 W/kg

**SAR(1 g) = 0.123 W/kg; SAR(10 g) = 0.078 W/kg**

Maximum value of SAR (measured) = 0.134 W/kg

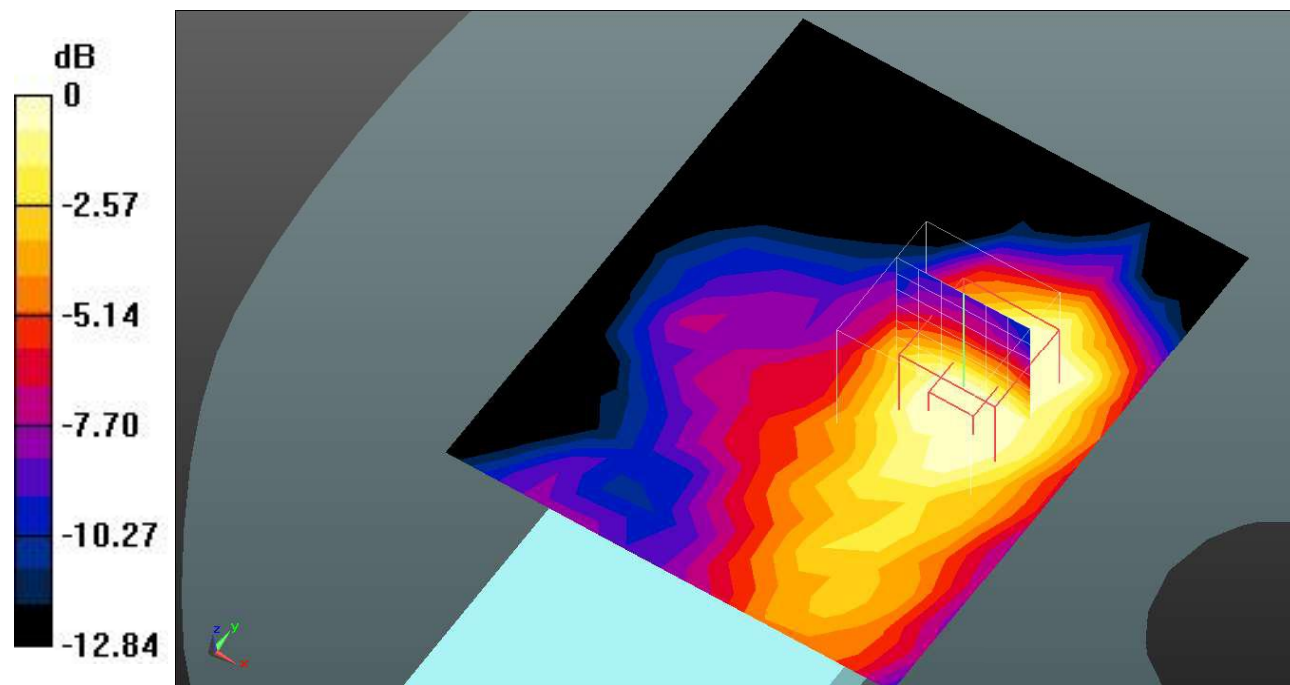

0 dB = 0.134 W/kg = -8.73 dB dBW/kg

**Test Plot151#: LTE Band 41\_Body Left\_1RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.57903  
Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.976$  S/m;  $\epsilon_r = 38.88$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7441; ConvF(7.3, 7.3, 7.3) @2595 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x14x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.279 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.816 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.342 W/kg

**SAR(1 g) = 0.242 W/kg; SAR(10 g) = 0.142 W/kg**

Maximum value of SAR (measured) = 0.263 W/kg

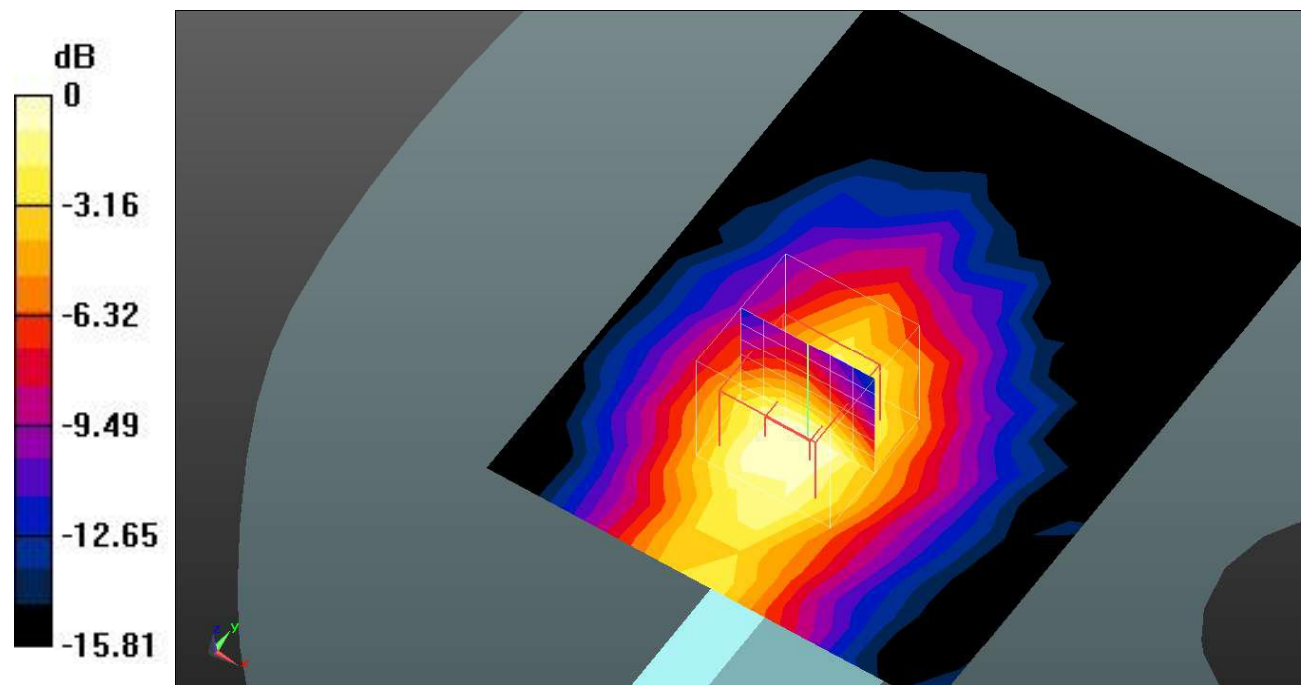

0 dB = 0.263 W/kg = -5.80 dB dBW/kg

**Test Plot152#: LTE Band 41\_Body Left\_50%RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.57903  
Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.976$  S/m;  $\epsilon_r = 38.88$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.3, 7.3, 7.3) @2595 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x14x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.229 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.140 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.281 W/kg

**SAR(1 g) = 0.199 W/kg; SAR(10 g) = 0.116 W/kg**

Maximum value of SAR (measured) = 0.217 W/kg

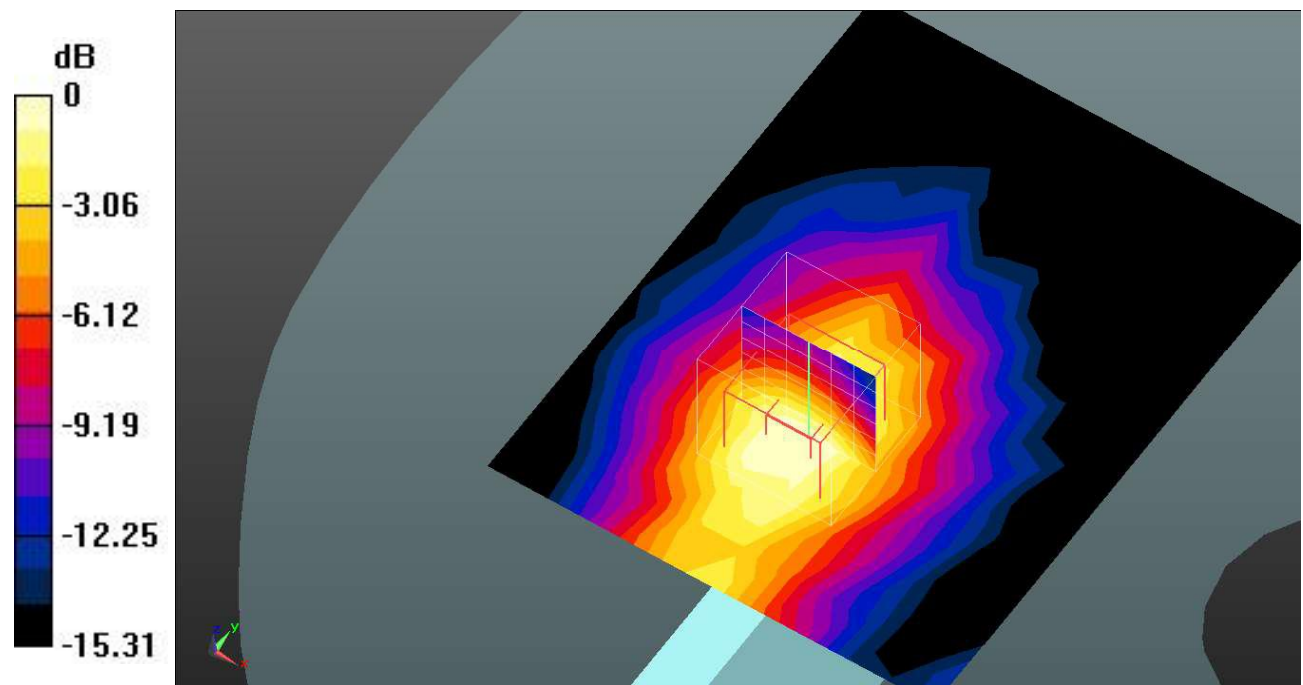

0 dB = 0.217 W/kg = -6.64 dB dBW/kg

**Test Plot153#: LTE Band 41\_Body Top\_1RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.57903  
Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.976$  S/m;  $\epsilon_r = 38.88$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.3, 7.3, 7.3) @2595 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.116 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.736 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.172 W/kg

**SAR(1 g) = 0.108 W/kg; SAR(10 g) = 0.055 W/kg**

Maximum value of SAR (measured) = 0.126 W/kg

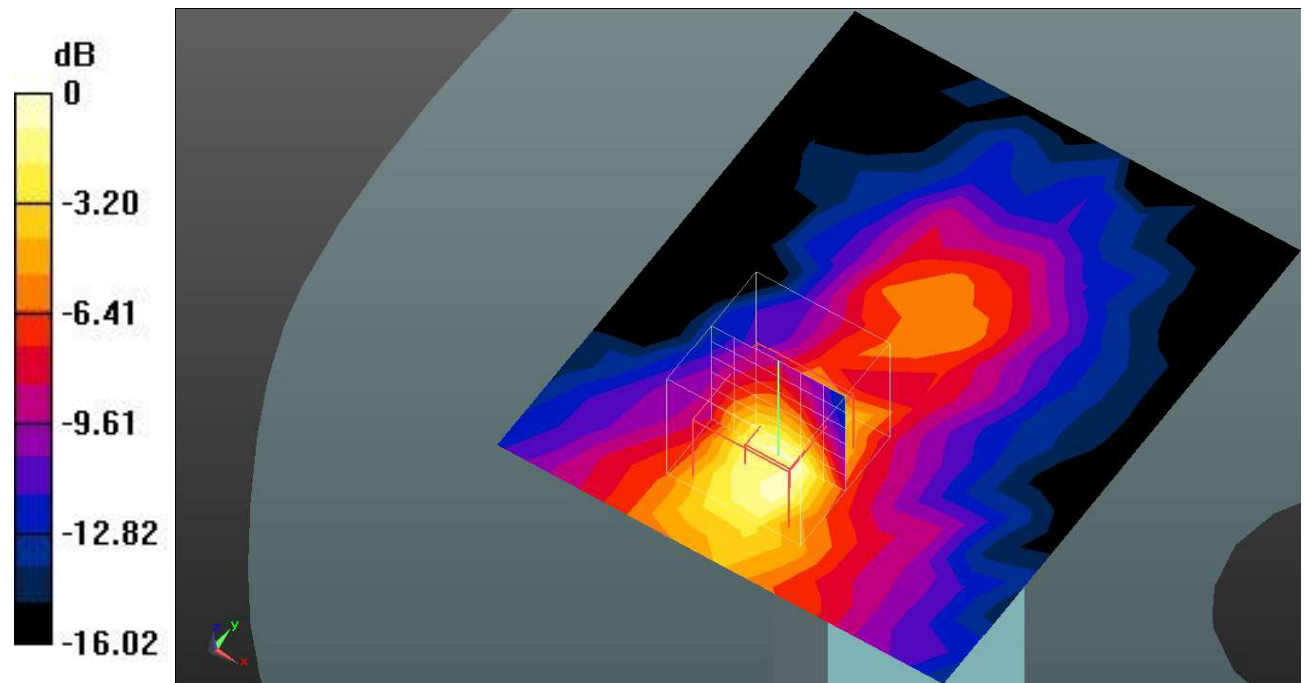

0 dB = 0.126 W/kg = -9.00 dB dBW/kg

**Test Plot154#: LTE Band 41\_Body Top\_50%RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.57903  
Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.976$  S/m;  $\epsilon_r = 38.88$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.3, 7.3, 7.3) @2595 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0878 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.518 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.137 W/kg

**SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.046 W/kg**

Maximum value of SAR (measured) = 0.106 W/kg

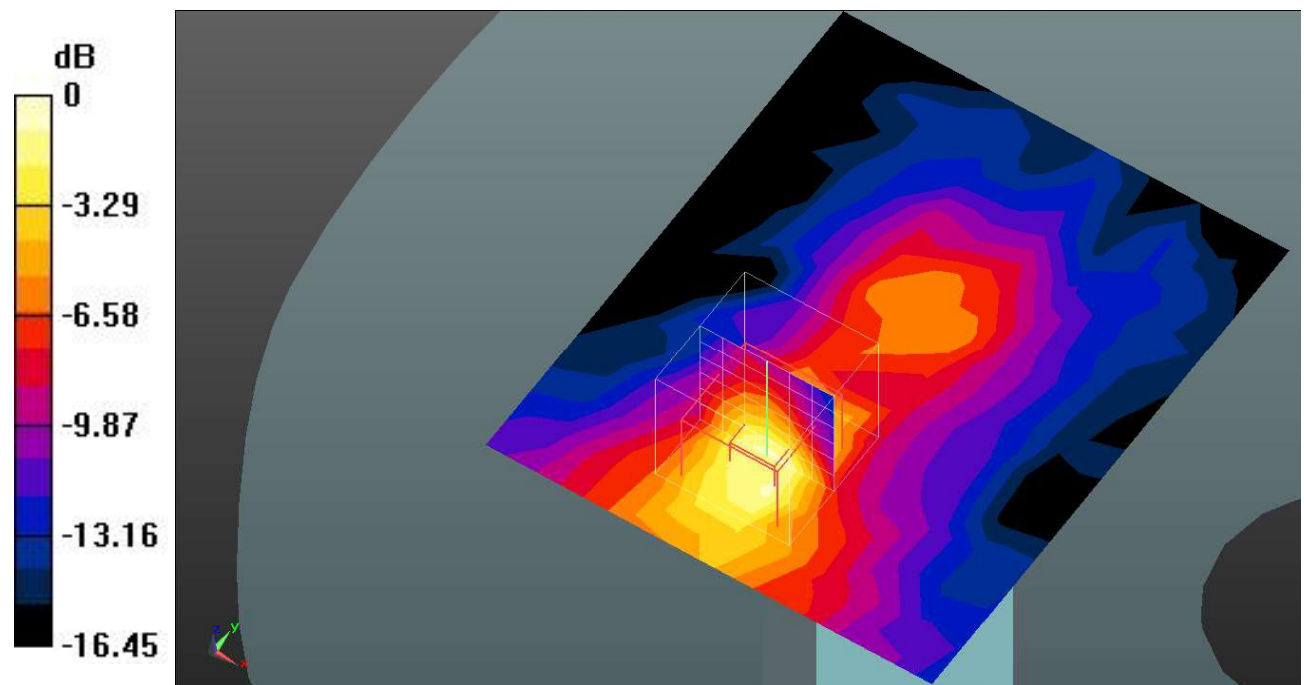

0 dB = 0.106 W/kg = -9.75 dB dBW/kg

**Test Plot155#: LTE Band 66\_Head Left Cheek\_1RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.379$  S/m;  $\epsilon_r = 39.996$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1745 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.458 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.05 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.828 W/kg

**SAR(1 g) = 0.566 W/kg; SAR(10 g) = 0.306 W/kg**

Maximum value of SAR (measured) = 0.626 W/kg

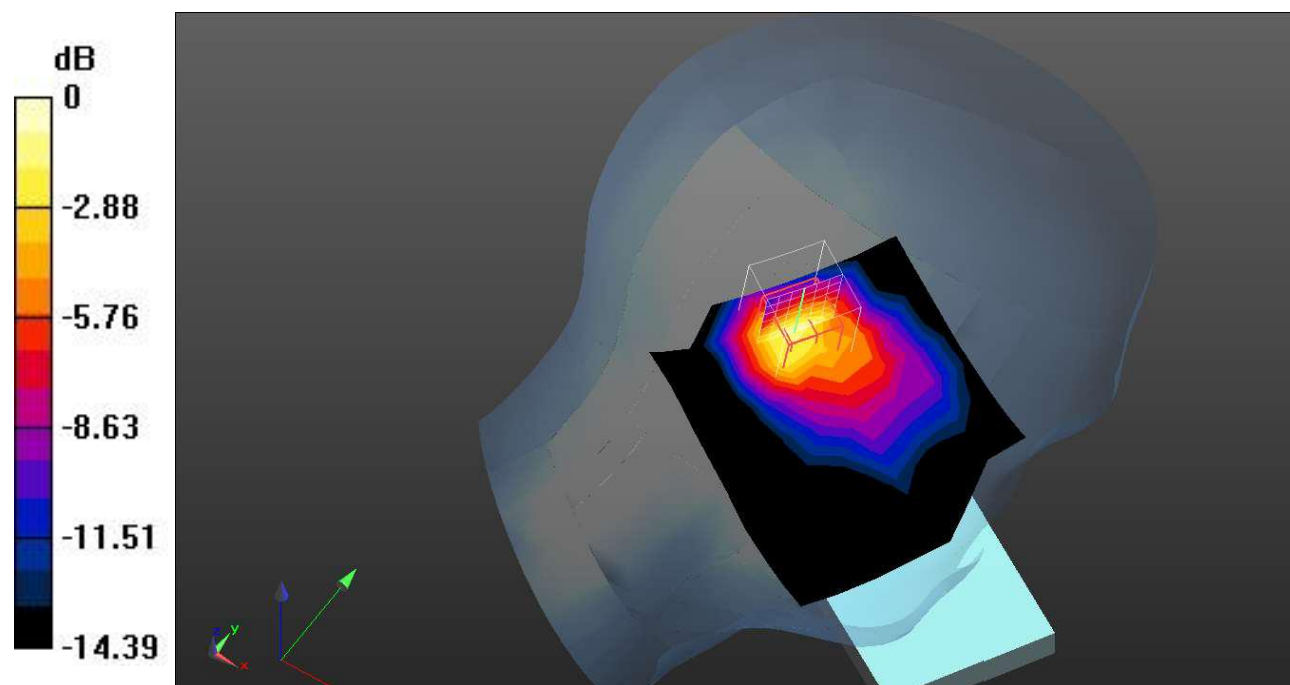

0 dB = 0.626 W/kg = -2.03 dB dBW/kg

**Test Plot156#: LTE Band 66\_Head Left Cheek\_50%RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.379$  S/m;  $\epsilon_r = 39.996$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1745 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.406 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.49 V/m; Power Drift = 0 dB

Peak SAR (extrapolated) = 0.719 W/kg

**SAR(1 g) = 0.497 W/kg; SAR(10 g) = 0.271 W/kg**

Maximum value of SAR (measured) = 0.540 W/kg

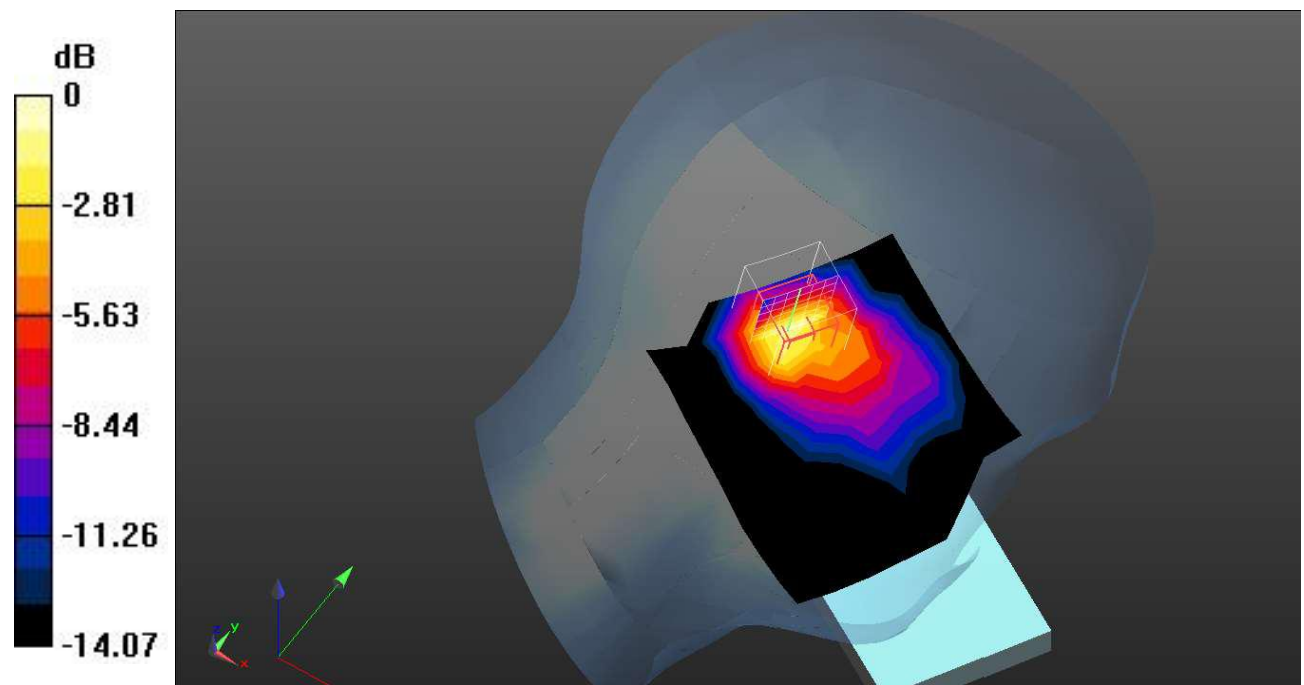

0 dB = 0.540 W/kg = -2.68 dB dBW/kg

**Test Plot157#: LTE Band 66\_Head Left Tilt\_1RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.379$  S/m;  $\epsilon_r = 39.996$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1745 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.482 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.17 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.936 W/kg

**SAR(1 g) = 0.657 W/kg; SAR(10 g) = 0.360 W/kg**

Maximum value of SAR (measured) = 0.758 W/kg

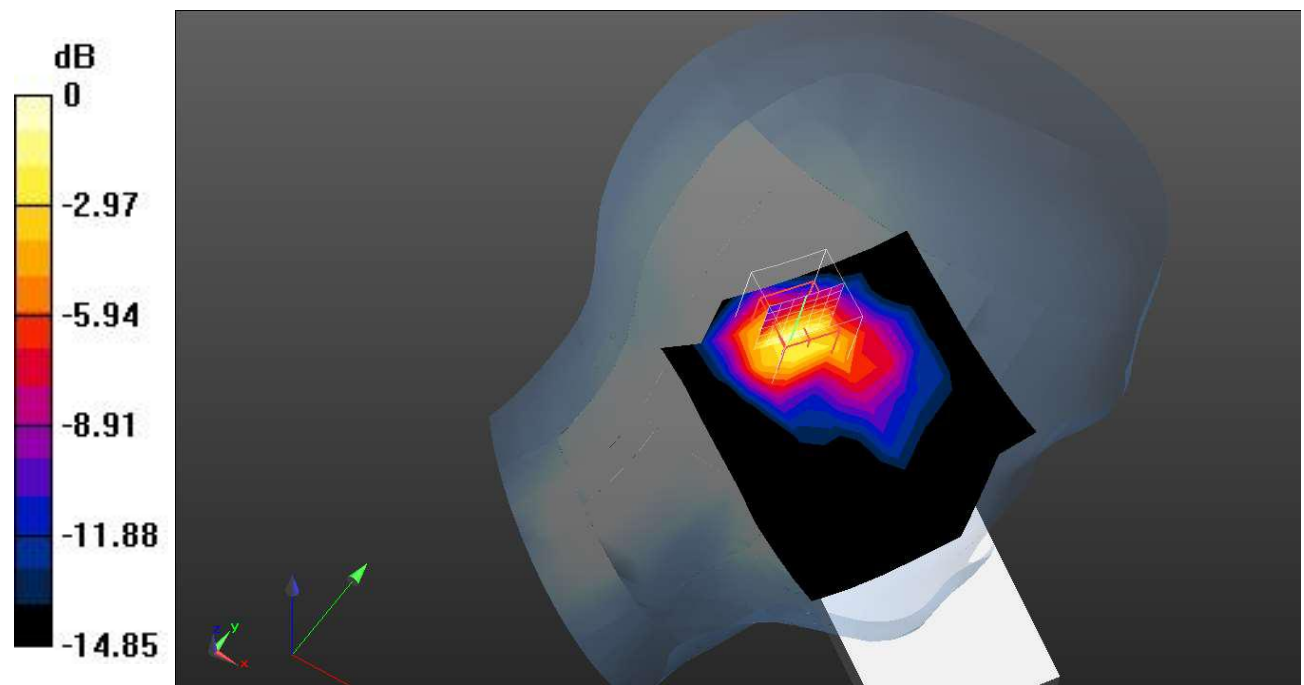

0 dB = 0.758 W/kg = -1.20 dB dBW/kg

**Test Plot158#: LTE Band 66\_Head Left Tilt\_50%RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.379$  S/m;  $\epsilon_r = 39.996$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1745 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.429 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.595 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.825 W/kg

**SAR(1 g) = 0.584 W/kg; SAR(10 g) = 0.320 W/kg**

Maximum value of SAR (measured) = 0.672 W/kg

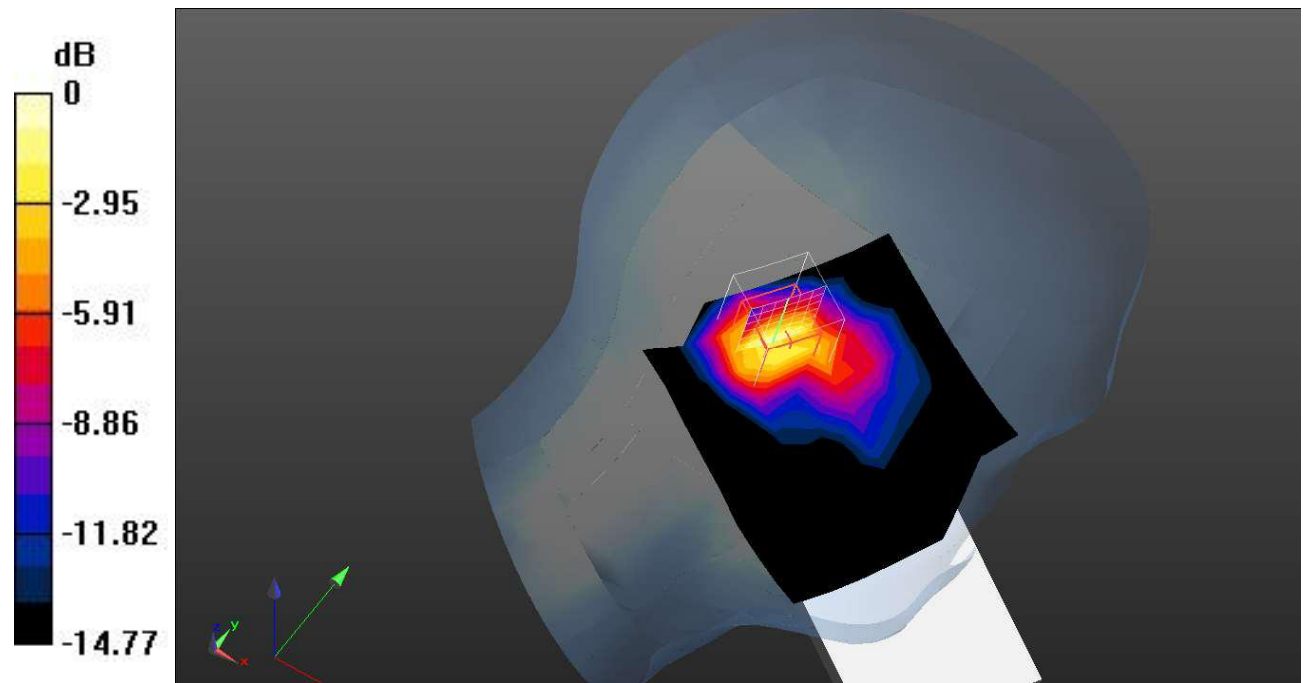

0 dB = 0.672 W/kg = -1.73 dB dBW/kg

**Test Plot159#: LTE Band 66\_Head Right Cheek\_1RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.379$  S/m;  $\epsilon_r = 39.996$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1745 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.784 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.38 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.12 W/kg

**SAR(1 g) = 0.718 W/kg; SAR(10 g) = 0.366 W/kg**

Maximum value of SAR (measured) = 0.829 W/kg

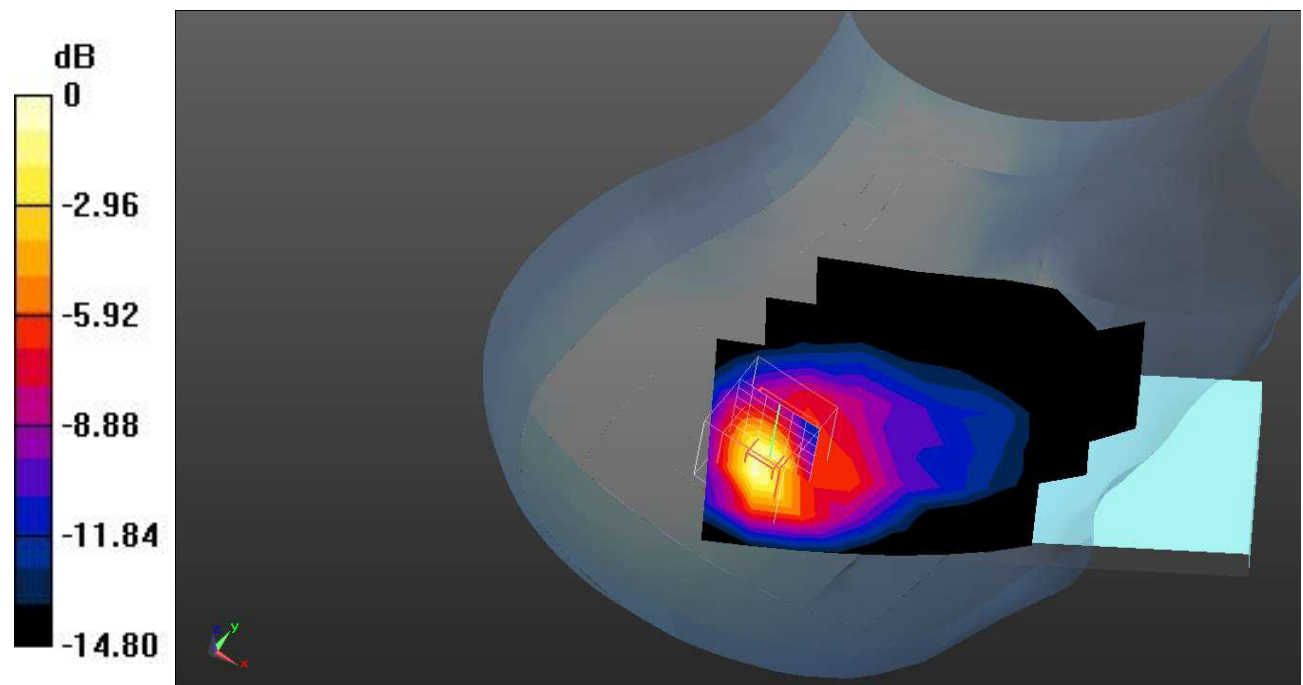

0 dB = 0.829 W/kg = -0.81 dB dBW/kg

**Test Plot160#: LTE Band 66\_Head Right Cheek\_50%RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.379$  S/m;  $\epsilon_r = 39.996$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1745 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.660 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.444 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.00 W/kg

**SAR(1 g) = 0.642 W/kg; SAR(10 g) = 0.327 W/kg**

Maximum value of SAR (measured) = 0.745 W/kg

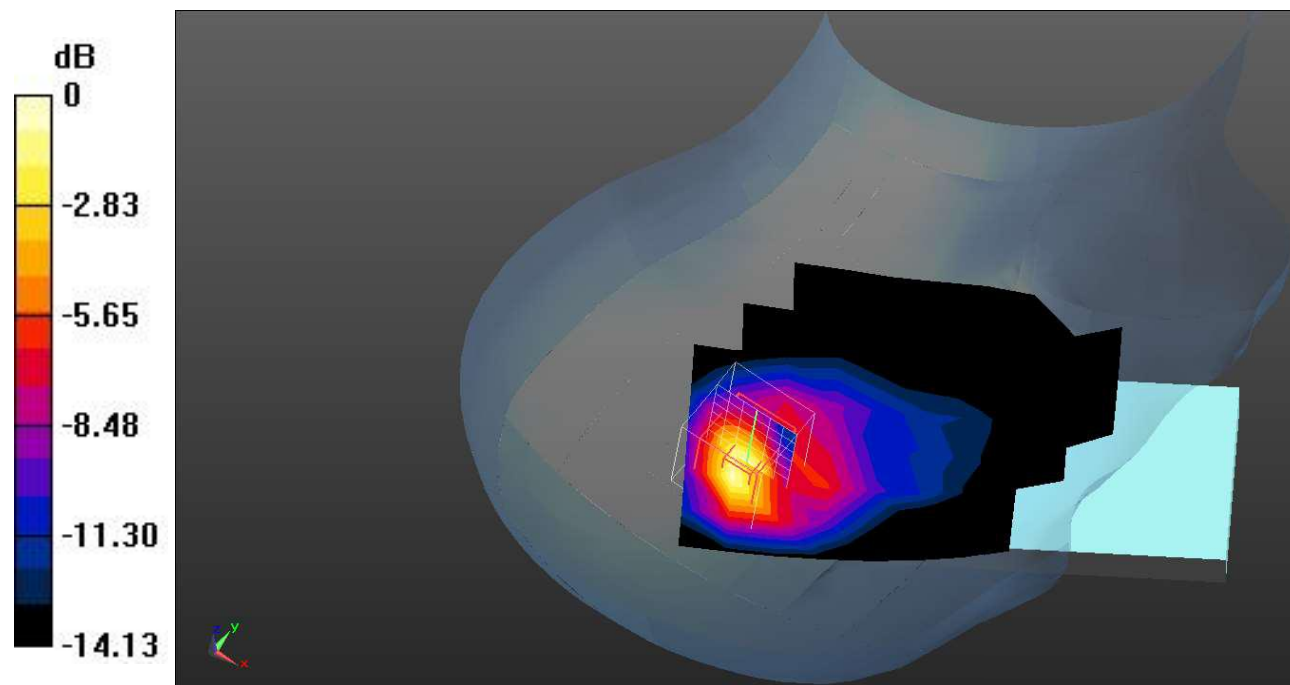

0 dB = 0.745 W/kg = -1.28 dB dBW/kg

**Test Plot161#: LTE Band 66\_Head Right Tilt\_1RB\_Low****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1720$  MHz;  $\sigma = 1.358$  S/m;  $\epsilon_r = 40.821$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1720 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.762 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.26 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.48 W/kg

**SAR(1 g) = 0.894 W/kg; SAR(10 g) = 0.435 W/kg**

Maximum value of SAR (measured) = 1.02 W/kg

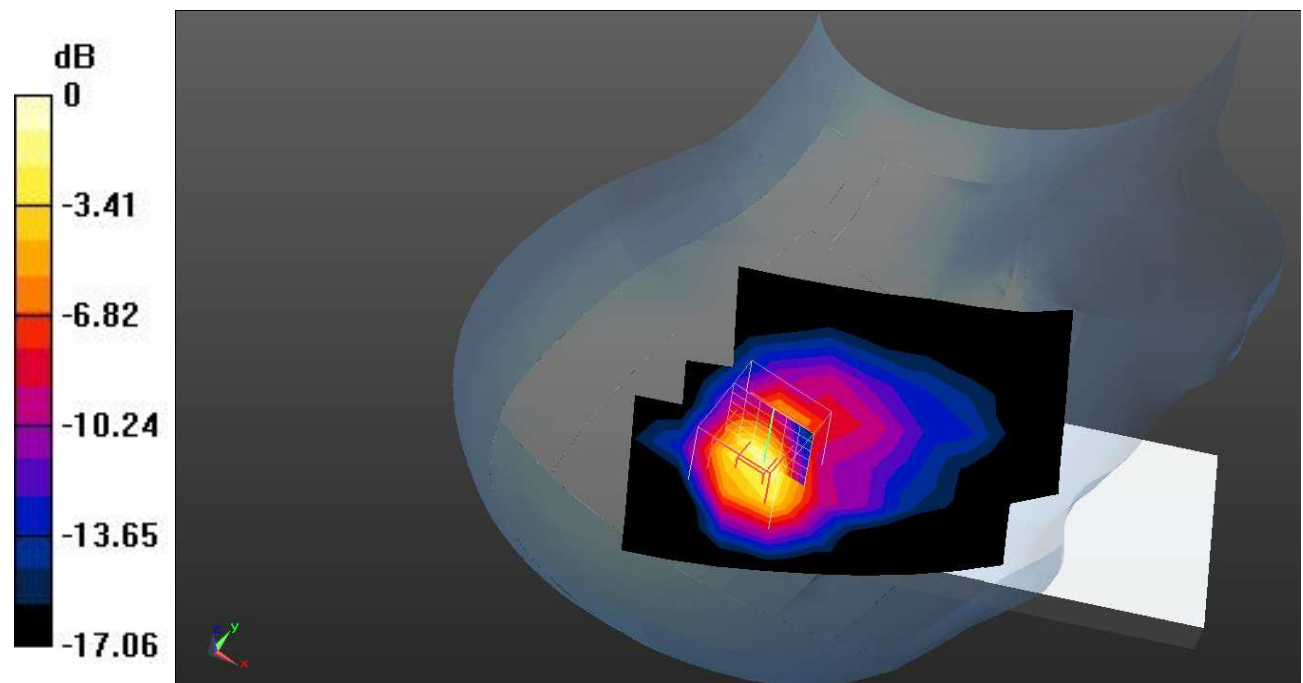

0 dB = 1.02 W/kg = 0.09 dB dBW/kg

**Test Plot162#: LTE Band 66\_Head Right Tilt\_1RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.379$  S/m;  $\epsilon_r = 39.996$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1745 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.797 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.55 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.53 W/kg

**SAR(1 g) = 0.927 W/kg; SAR(10 g) = 0.452 W/kg**

Maximum value of SAR (measured) = 1.06 W/kg

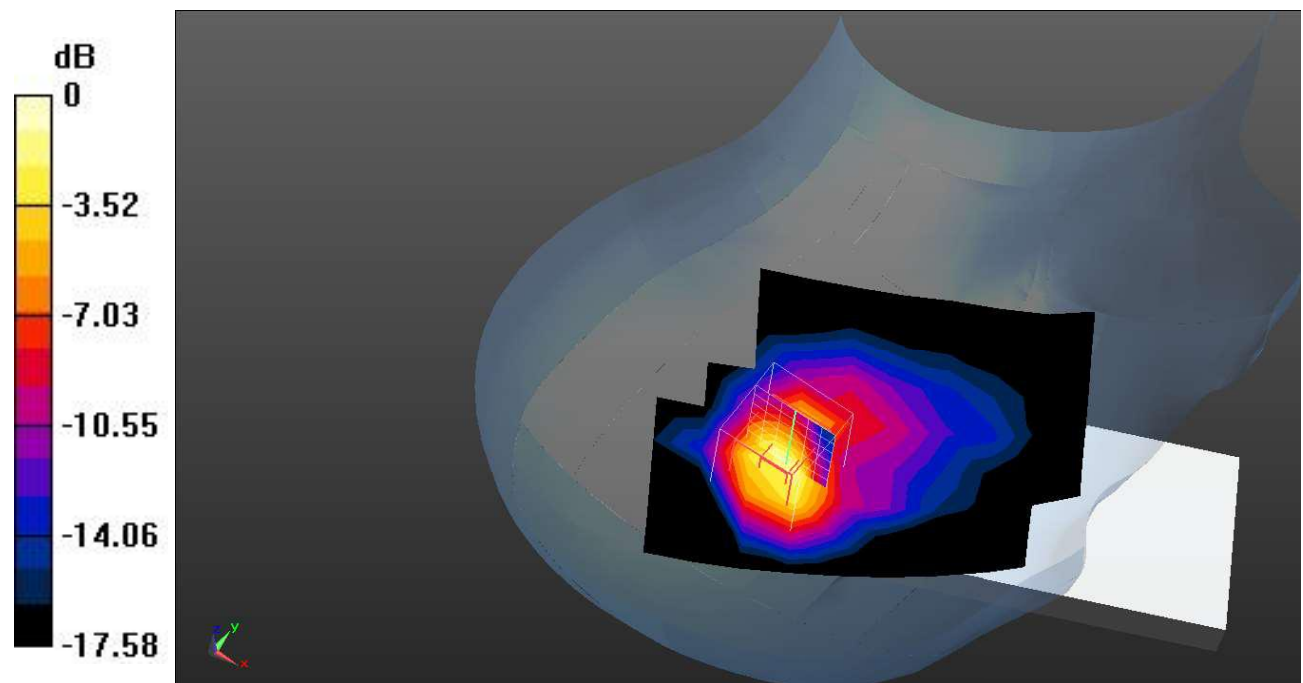

0 dB = 1.06 W/kg = 0.25 dB dBW/kg

**Test Plot163#: LTE Band 66\_Head Right Tilt\_1RB\_High****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 1770 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=1770$  MHz;  $\sigma = 1.395$  S/m;  $\epsilon_r = 41.071$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1770 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.859 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.05 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 1.62 W/kg

**SAR(1 g) = 0.993 W/kg; SAR(10 g) = 0.485 W/kg**

Maximum value of SAR (measured) = 1.13 W/kg

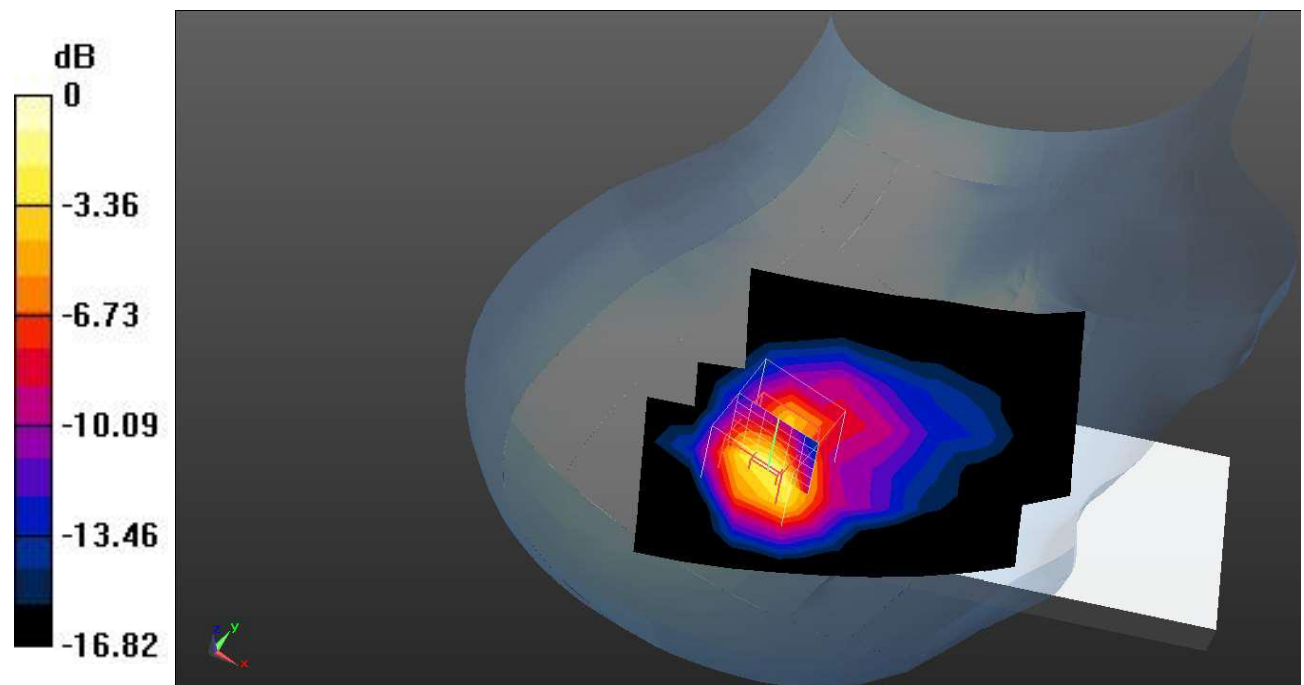

0 dB = 1.13 W/kg = 0.53 dB dBW/kg

**Test Plot164#: LTE Band 66\_Head Right Tilt\_50%RB\_Low****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1720$  MHz;  $\sigma = 1.358$  S/m;  $\epsilon_r = 40.821$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1720 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.530 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.85 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.26 W/kg

**SAR(1 g) = 0.779 W/kg; SAR(10 g) = 0.378 W/kg**

Maximum value of SAR (measured) = 0.915 W/kg

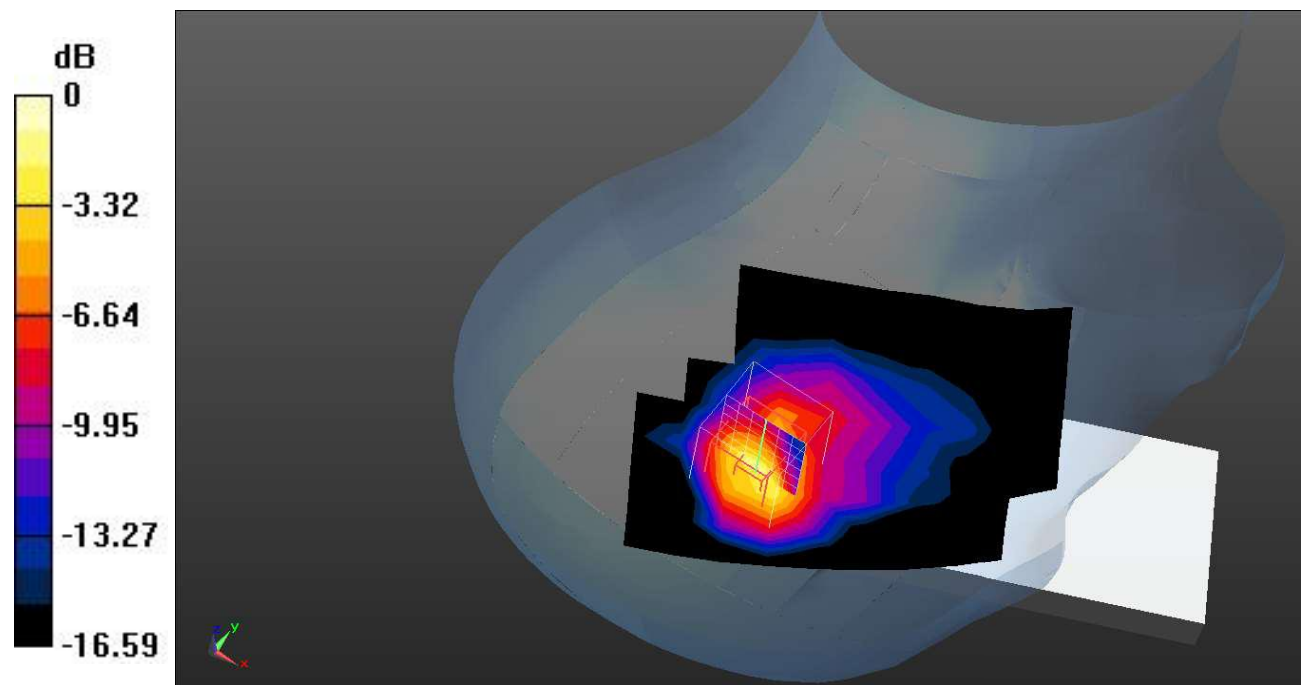

0 dB = 0.915 W/kg = -0.39 dB dBW/kg

**Test Plot165#: LTE Band 66\_Head Right Tilt\_50%RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.379$  S/m;  $\epsilon_r = 39.996$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1745 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.534 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.84 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.39 W/kg

**SAR(1 g) = 0.842 W/kg; SAR(10 g) = 0.406 W/kg**

Maximum value of SAR (measured) = 0.994 W/kg

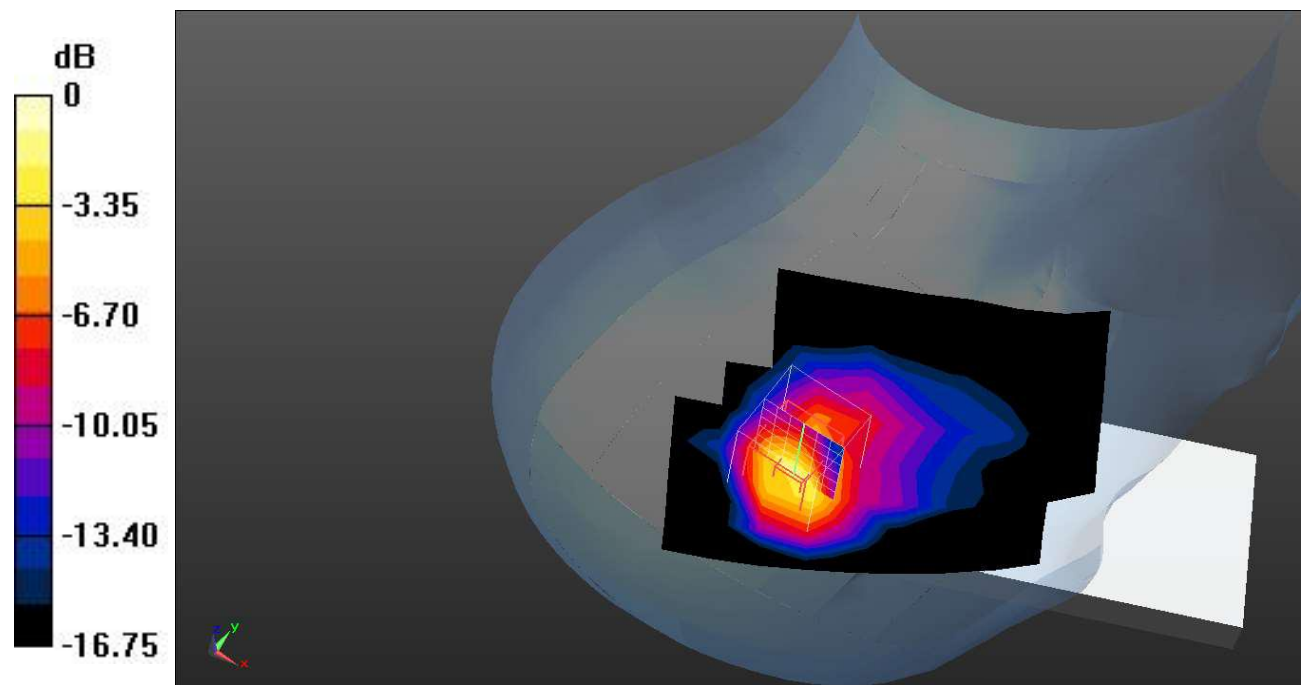

0 dB = 0.994 W/kg = -0.03 dB dBW/kg

**Test Plot166#: LTE Band 66\_Head Right Tilt\_50%RB\_High****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 1770 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=1770$  MHz;  $\sigma = 1.395$  S/m;  $\epsilon_r = 41.071$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1770 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.591 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.68 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.36 W/kg

**SAR(1 g) = 0.841 W/kg; SAR(10 g) = 0.408 W/kg**

Maximum value of SAR (measured) = 0.983 W/kg

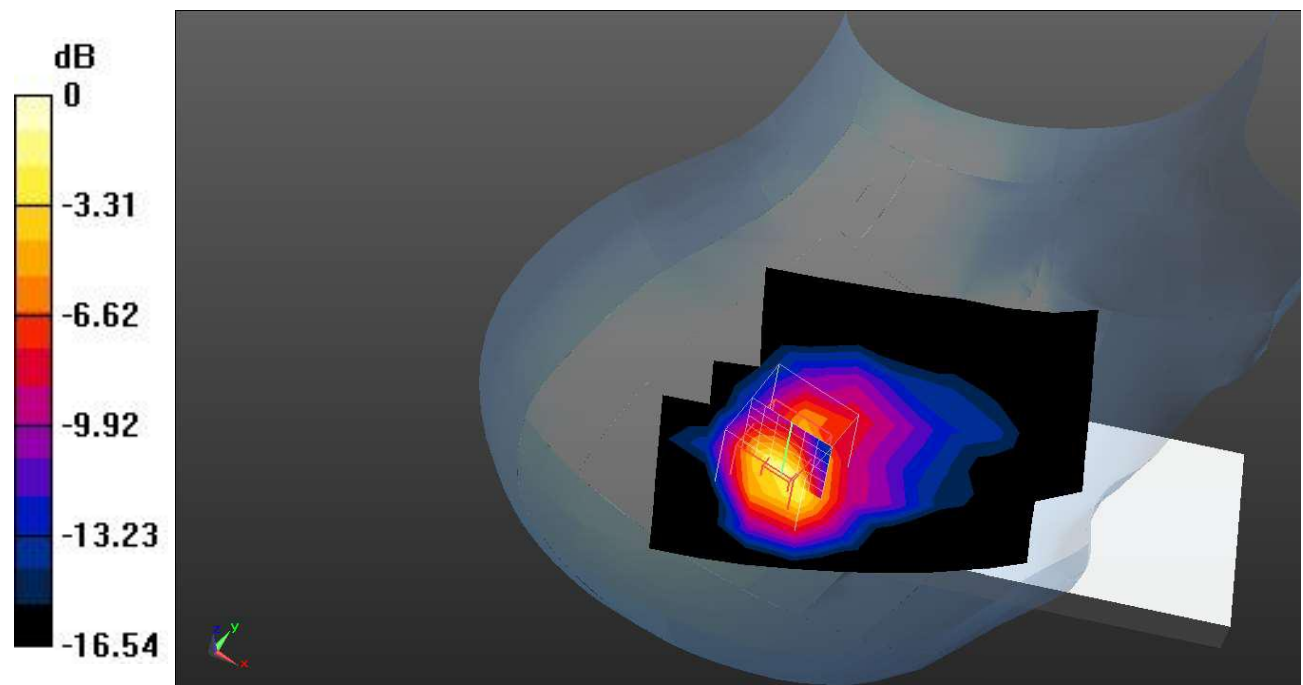

0 dB = 0.983 W/kg = -0.07 dB dBW/kg

**Test Plot167#: LTE Band 66\_Head Right Tilt\_100%RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.379$  S/m;  $\epsilon_r = 39.996$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1745 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.498 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.49 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.29 W/kg

**SAR(1 g) = 0.796 W/kg; SAR(10 g) = 0.386 W/kg**

Maximum value of SAR (measured) = 0.890 W/kg

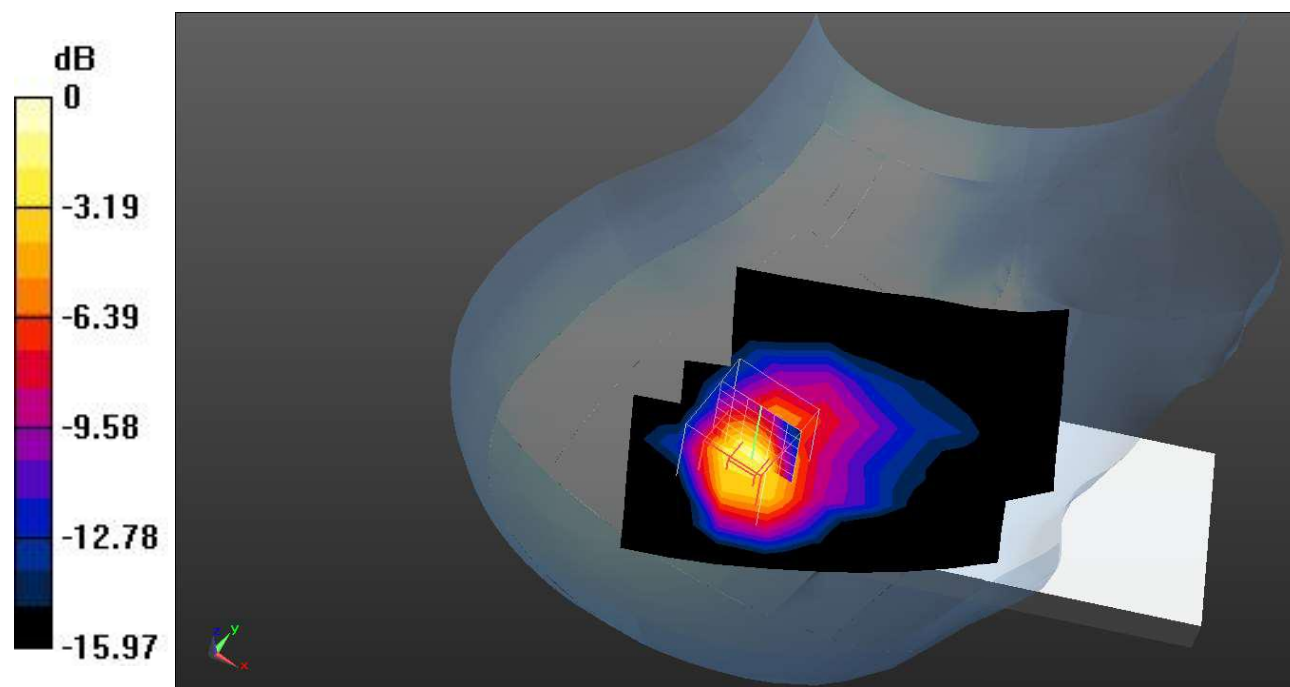

0 dB = 0.890 W/kg = -0.51 dB dBW/kg

**Test Plot168#: LTE Band 66\_Body Front\_1RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.379$  S/m;  $\epsilon_r = 39.996$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1745 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.133 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.439 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.146 W/kg

**SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.071 W/kg**

Maximum value of SAR (measured) = 0.123 W/kg

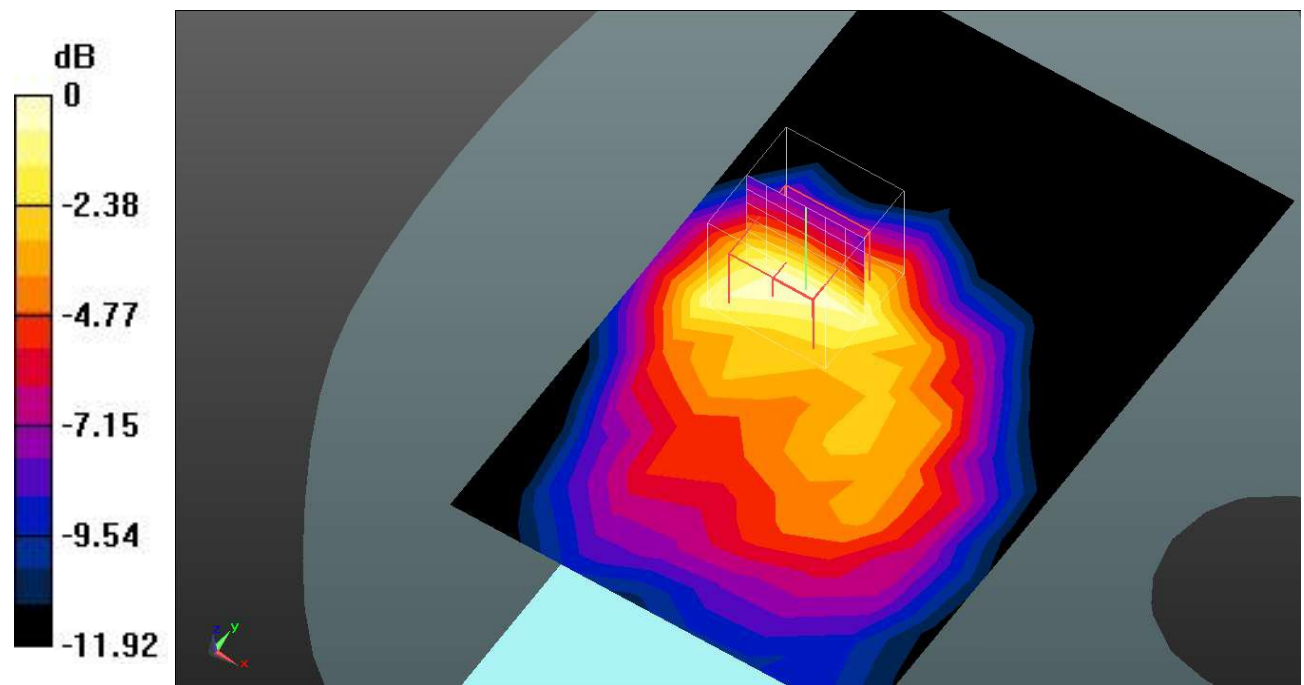

0 dB = 0.123 W/kg = -9.10 dB dBW/kg

**Test Plot169#: LTE Band 66\_Body Front\_50%RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.379$  S/m;  $\epsilon_r = 39.996$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1745 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.119 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.007 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.129 W/kg

**SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.063 W/kg**

Maximum value of SAR (measured) = 0.108 W/kg

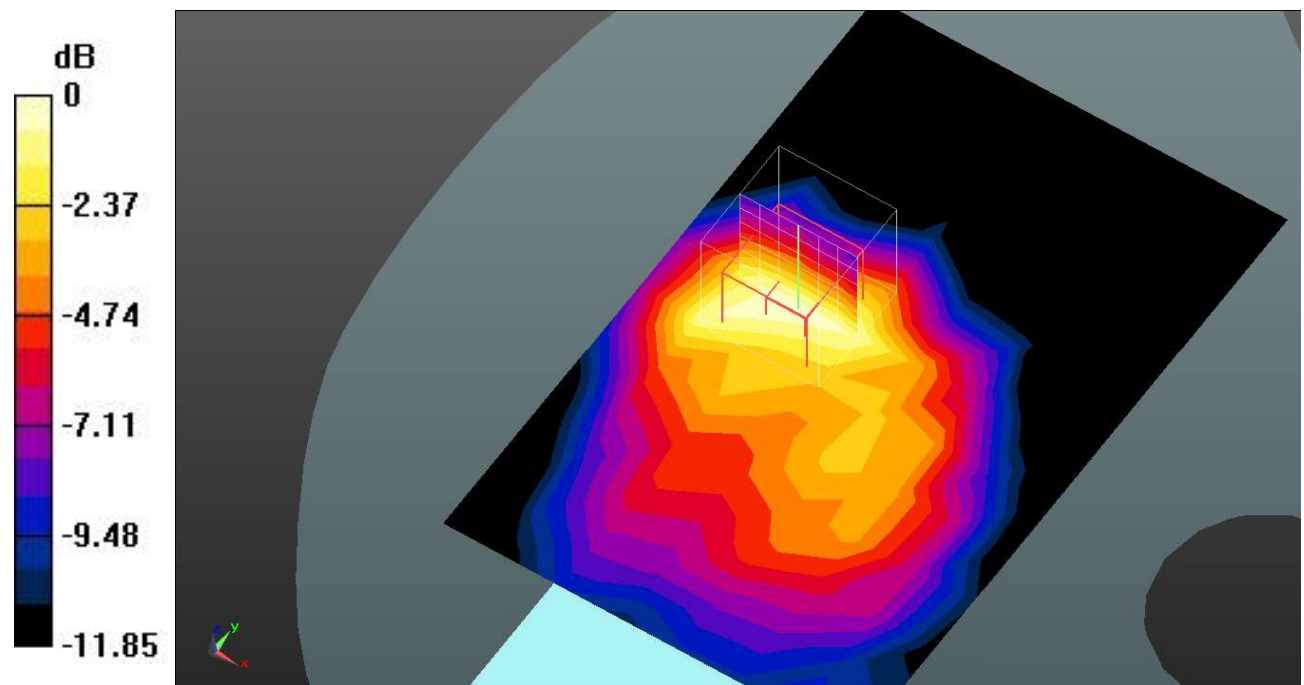

0 dB = 0.108 W/kg = -9.67 dB dBW/kg

**Test Plot170#: LTE Band 66\_Body Back\_1RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.379$  S/m;  $\epsilon_r = 39.996$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1745 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.165 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.325 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.218 W/kg

**SAR(1 g) = 0.161 W/kg; SAR(10 g) = 0.098 W/kg**

Maximum value of SAR (measured) = 0.178 W/kg

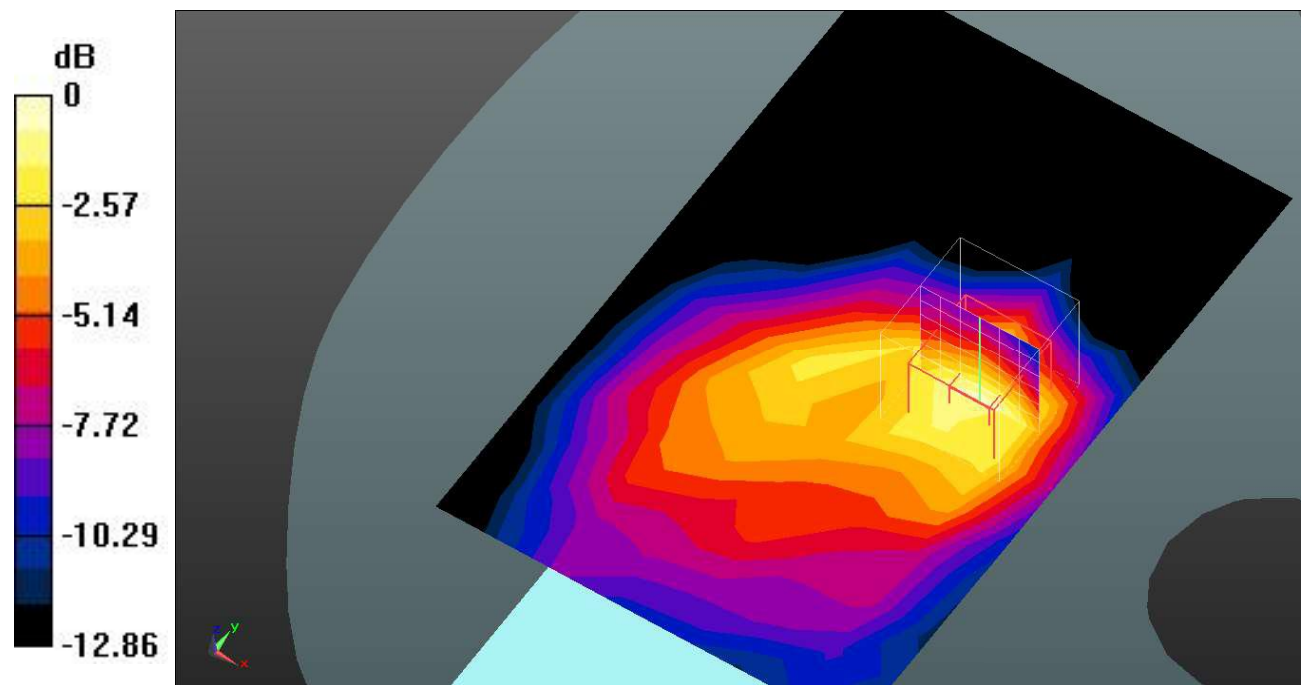

0 dB = 0.178 W/kg = -7.50 dB dBW/kg

**Test Plot171#: LTE Band 66\_Body Back\_50%RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.379$  S/m;  $\epsilon_r = 39.996$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1745 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.145 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.886 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.190 W/kg

**SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.087 W/kg**

Maximum value of SAR (measured) = 0.156 W/kg

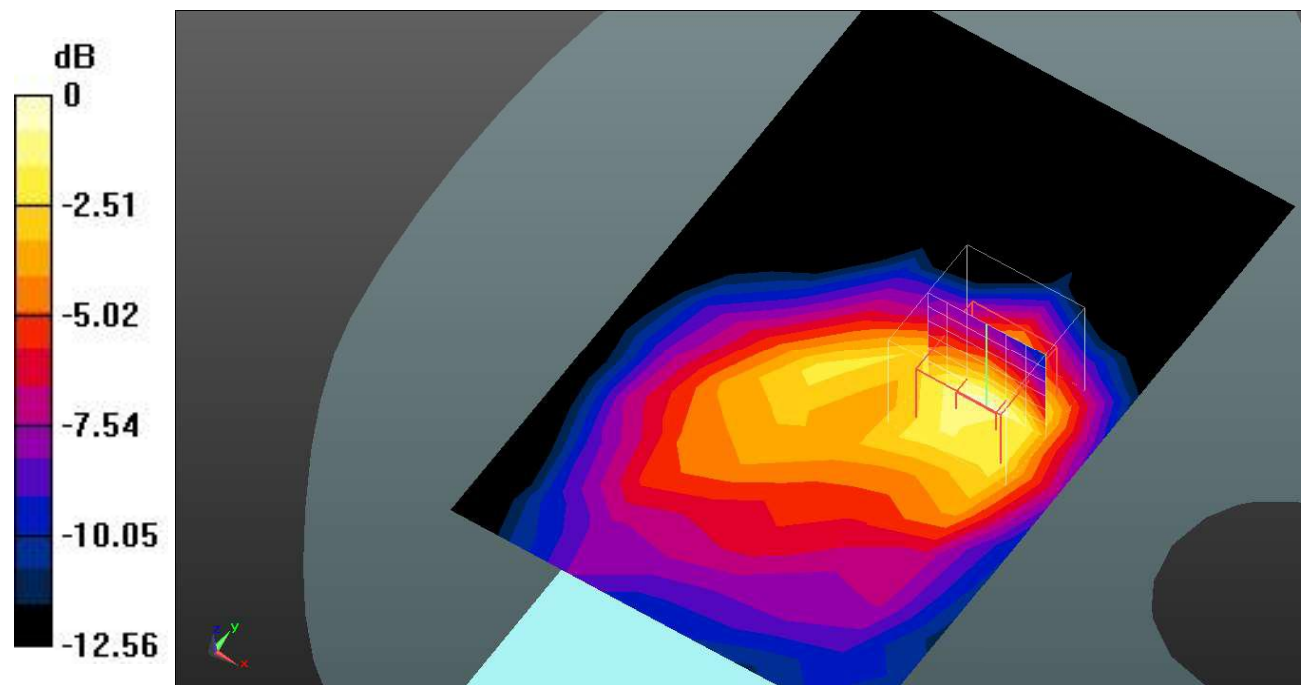

0 dB = 0.156 W/kg = -8.07 dB dBW/kg

**Test Plot172#: LTE Band 66\_Body Left\_1RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.379$  S/m;  $\epsilon_r = 39.996$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1745 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0442 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.021 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0640 W/kg

**SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.030 W/kg**

Maximum value of SAR (measured) = 0.0539 W/kg

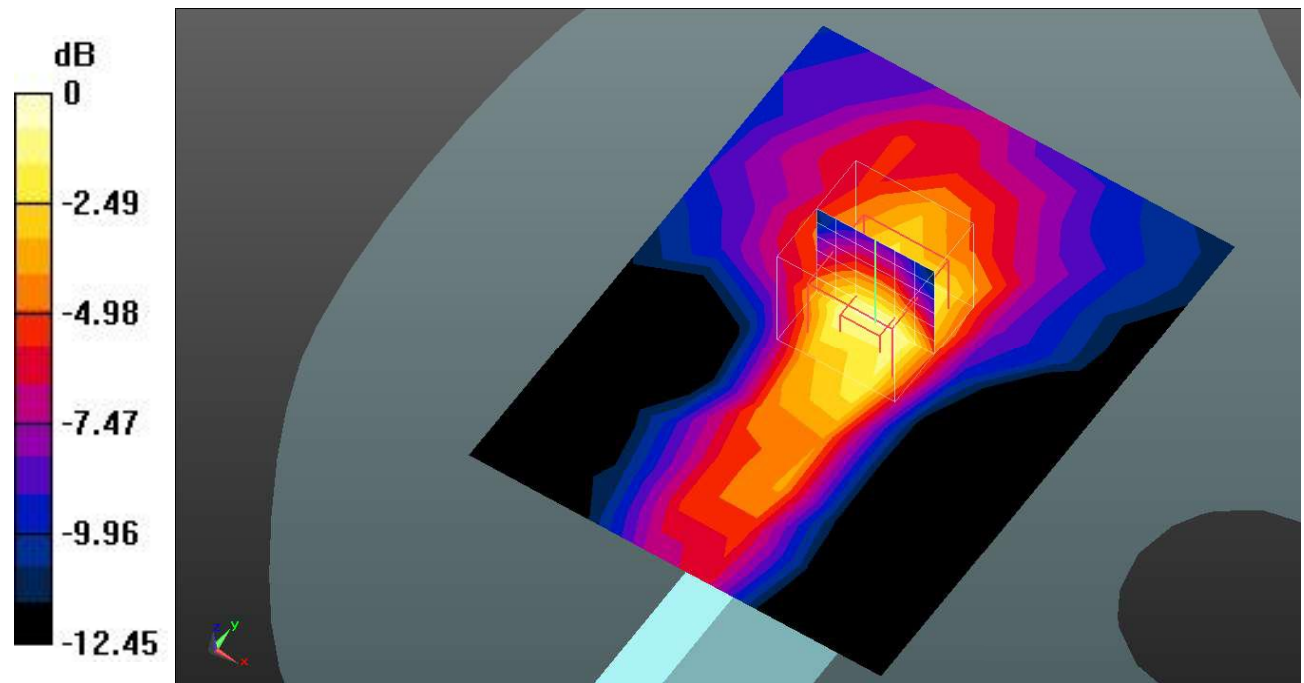

0 dB = 0.0539 W/kg = -12.68 dB dBW/kg

**Test Plot173#: LTE Band 66\_Body Left\_50%RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.379$  S/m;  $\epsilon_r = 39.996$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1745 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0383 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.927 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0570 W/kg

**SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.026 W/kg**

Maximum value of SAR (measured) = 0.0473 W/kg

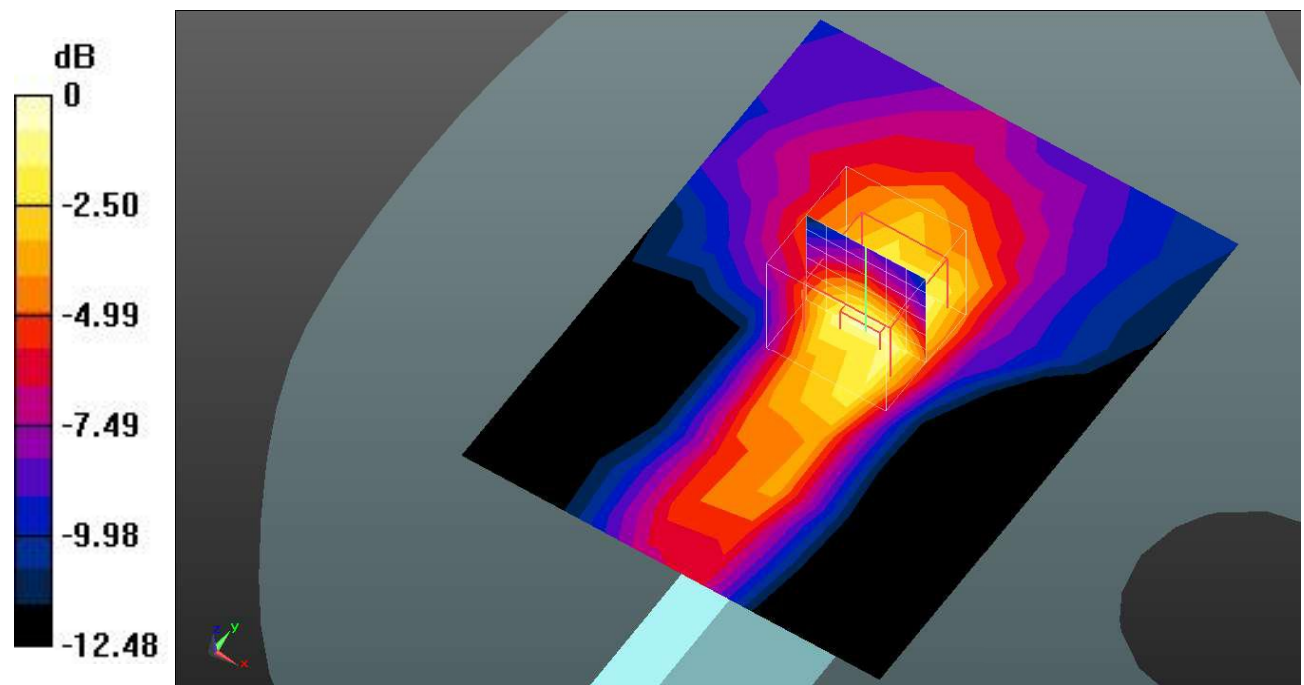

0 dB = 0.0473 W/kg = -13.25 dB dBW/kg

**Test Plot174#: LTE Band 66\_Body Top\_1RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.379$  S/m;  $\epsilon_r = 39.996$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1745 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.224 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.29 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.320 W/kg

**SAR(1 g) = 0.240 W/kg; SAR(10 g) = 0.137 W/kg**

Maximum value of SAR (measured) = 0.271 W/kg

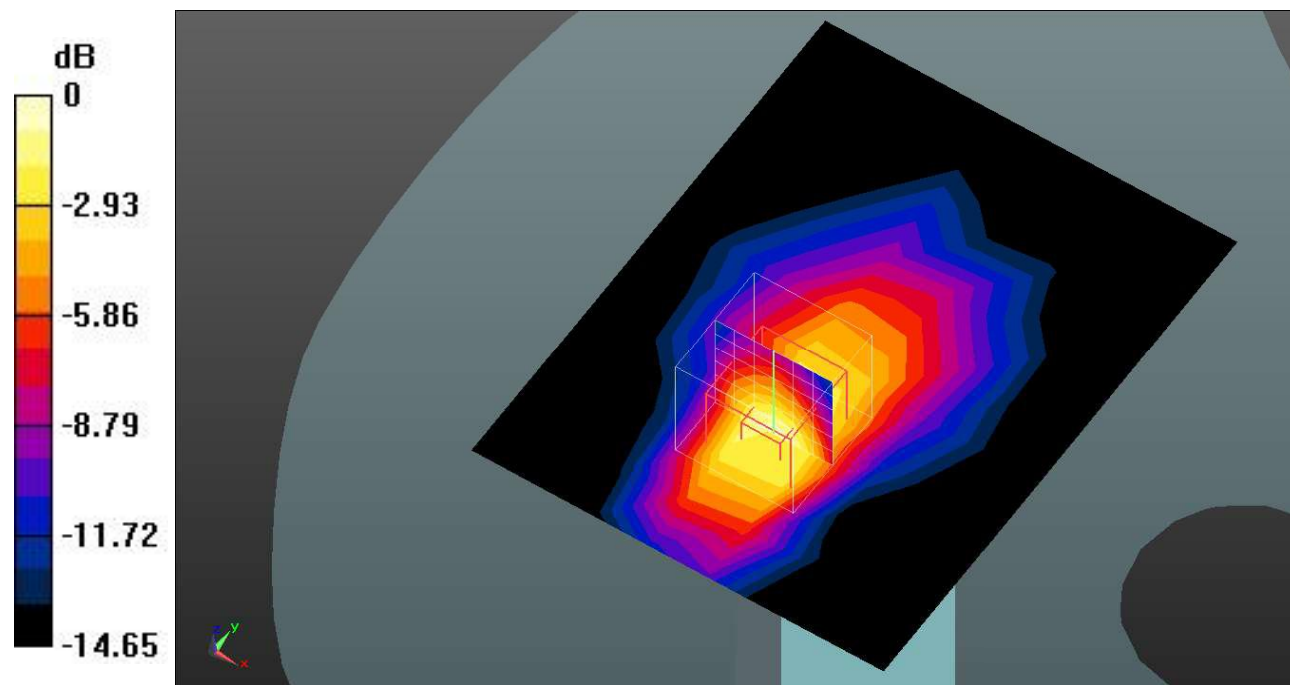

0 dB = 0.271 W/kg = -5.67 dB dBW/kg

**Test Plot175#: LTE Band 66\_Body Top\_50%RB\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1  
Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.379$  S/m;  $\epsilon_r = 39.996$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.32, 8.32, 8.32) @1745 MHz; Calibrated: 2022/5/16;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325;Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.182 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.318 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.244 W/kg

**SAR(1 g) = 0.187 W/kg; SAR(10 g) = 0.109 W/kg**

Maximum value of SAR (measured) = 0.210 W/kg

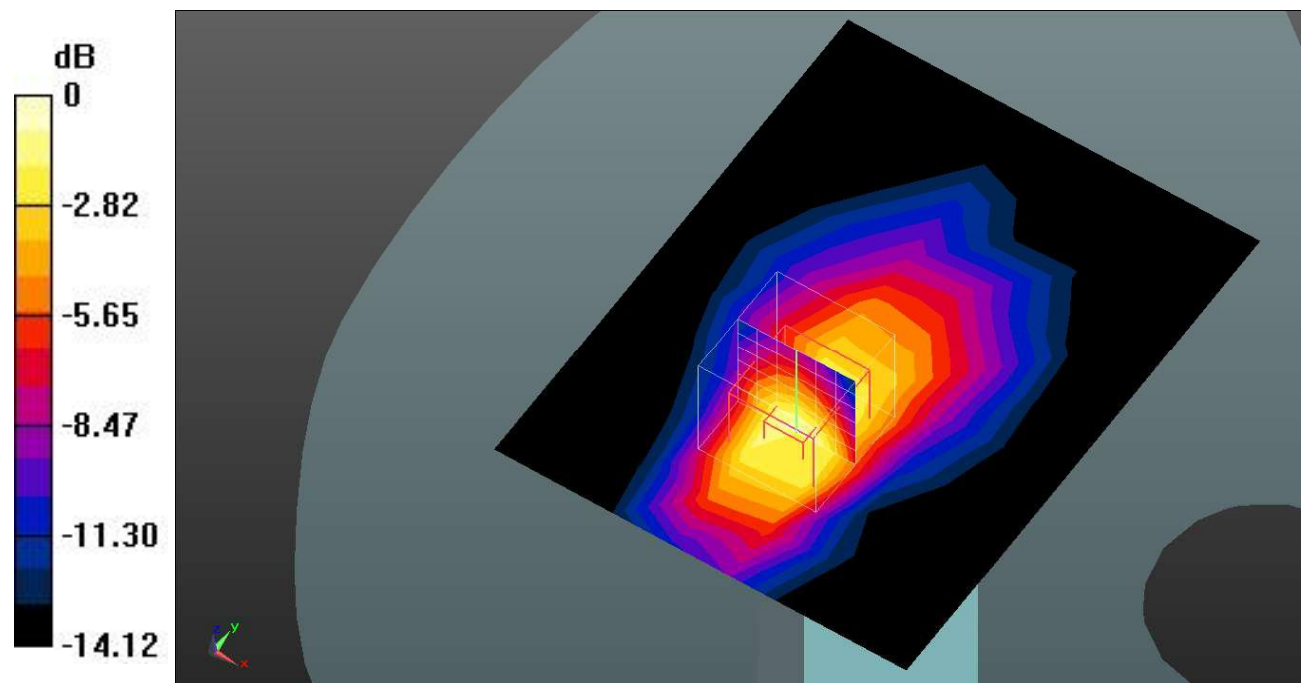

0 dB = 0.210 W/kg = -6.78 dB dBW/kg

**Test Plot176#: ANT MAINWLAN2.4G\_Head Left Cheek\_High****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**


Communication System: UID 0, 2.4G DTS (0); Frequency: 2472 MHz; Duty Cycle: 1:1.00472

Medium parameters used:  $f = 2472 \text{ MHz}$ ;  $\sigma = 1.858 \text{ S/m}$ ;  $\epsilon_r = 38.474$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2472 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

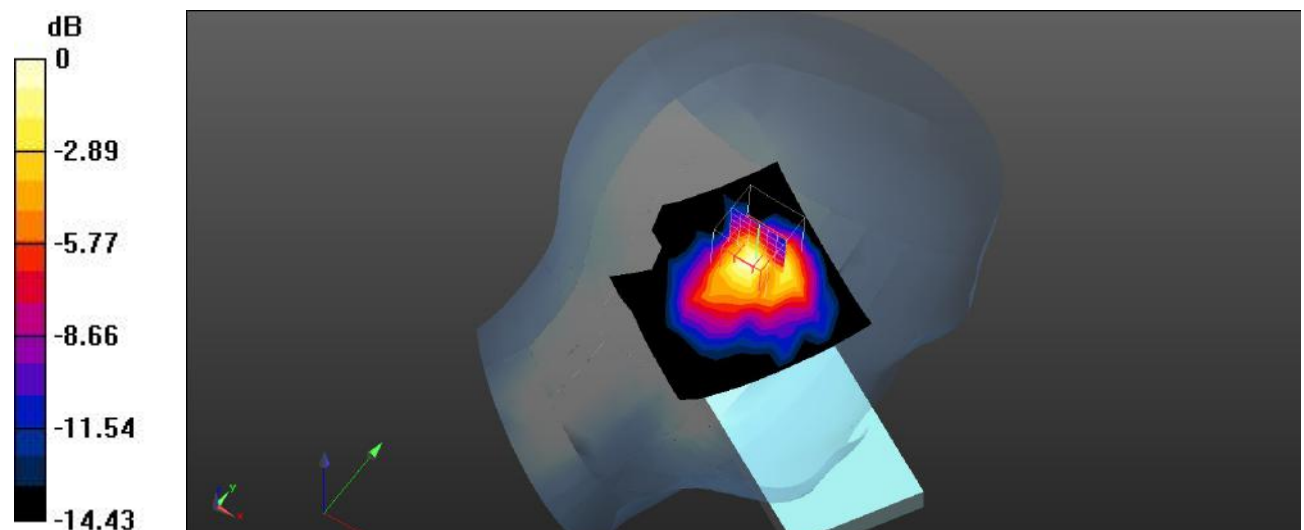**Area Scan (11x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ Maximum value of SAR (measured) =  $0.234 \text{ W/kg}$ **Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ Reference Value =  $6.451 \text{ V/m}$ ; Power Drift =  $-0.03 \text{ dB}$ Peak SAR (extrapolated) =  $0.274 \text{ W/kg}$ **SAR(1 g) =  $0.170 \text{ W/kg}$ ; SAR(10 g) =  $0.087 \text{ W/kg}$** Maximum value of SAR (measured) =  $0.203 \text{ W/kg}$  $0 \text{ dB} = 0.203 \text{ W/kg} = -6.93 \text{ dBW/kg}$

**Test Plot177#: ANT MAINWLAN2.4G\_Head Left Tilt\_High****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2472 MHz;Duty Cycle: 1:1.00472

Medium parameters used:  $f = 2472 \text{ MHz}$ ;  $\sigma = 1.858 \text{ S/m}$ ;  $\epsilon_r = 38.474$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2472 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325;Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.271 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 7.621 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.349 W/kg

**SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.103 W/kg**

Maximum value of SAR (measured) = 0.261 W/kg

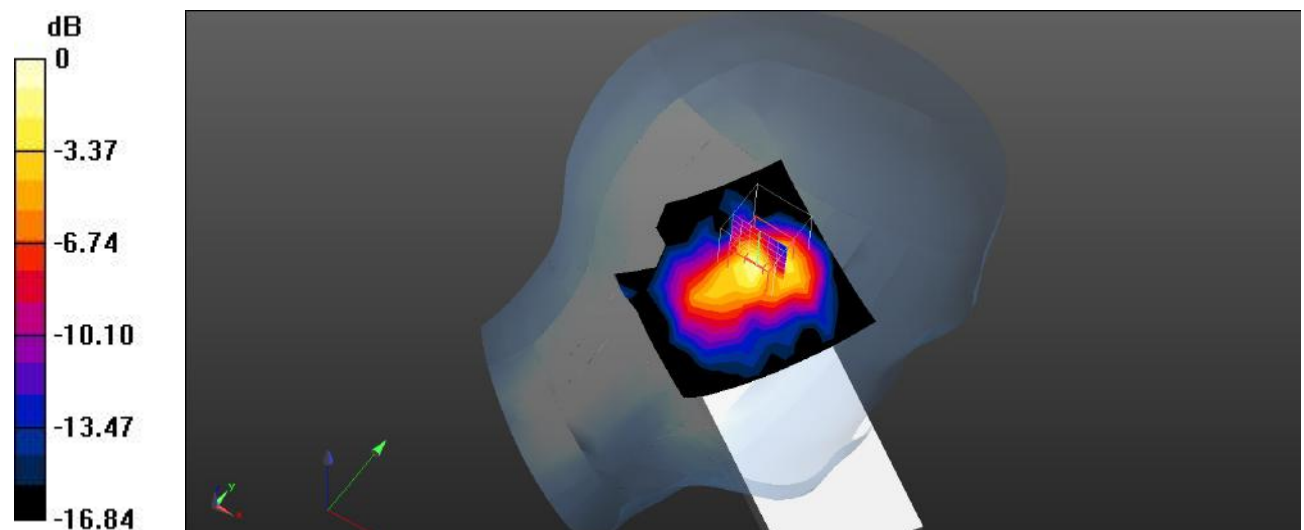

0 dB = 0.261 W/kg = -5.83 dBW/kg

**Test Plot178#: ANT MAINWLAN2.4G\_Head Right Cheek\_High****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2472 MHz; Duty Cycle: 1:1.00472

Medium parameters used:  $f = 2472 \text{ MHz}$ ;  $\sigma = 1.858 \text{ S/m}$ ;  $\epsilon_r = 38.474$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2472 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.131 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 6.429 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.161 W/kg

**SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.057 W/kg**

Maximum value of SAR (measured) = 0.121 W/kg

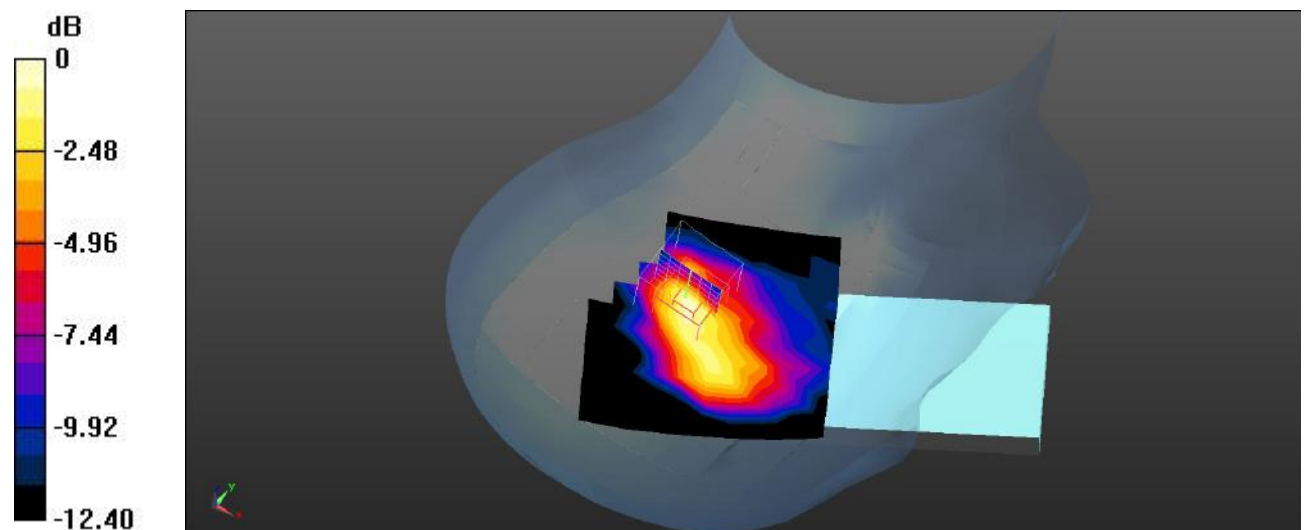

0 dB = 0.121 W/kg = -9.17 dBW/kg

**Test Plot179#: ANT MAINWLAN2.4G\_Head Right Tilt\_High****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**


Communication System: UID 0, 2.4G DTS (0); Frequency: 2472 MHz; Duty Cycle: 1:1.00472

Medium parameters used:  $f = 2472 \text{ MHz}$ ;  $\sigma = 1.858 \text{ S/m}$ ;  $\epsilon_r = 38.474$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2472 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

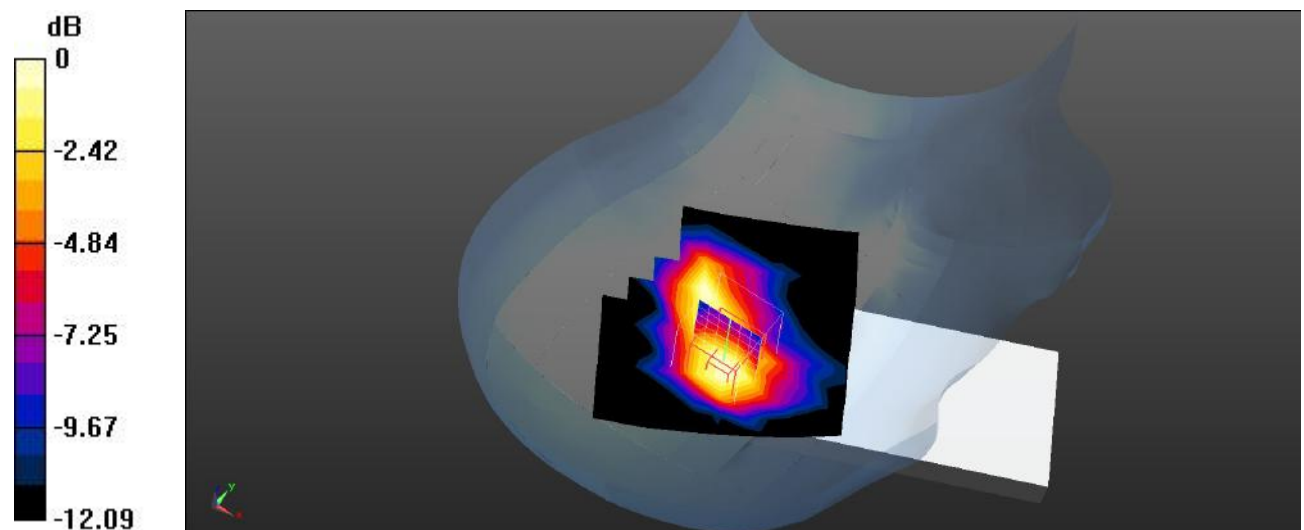**Area Scan (11x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ Maximum value of SAR (measured) =  $0.156 \text{ W/kg}$ **Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ Reference Value =  $7.180 \text{ V/m}$ ; Power Drift =  $-0.03 \text{ dB}$ Peak SAR (extrapolated) =  $0.161 \text{ W/kg}$ **SAR(1 g) =  $0.118 \text{ W/kg}$ ; SAR(10 g) =  $0.070 \text{ W/kg}$** Maximum value of SAR (measured) =  $0.131 \text{ W/kg}$  $0 \text{ dB} = 0.131 \text{ W/kg} = -8.83 \text{ dBW/kg}$

**Test Plot180#: ANT MAINWLAN2.4G\_Body Front\_High****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2472 MHz; Duty Cycle: 1:1.00472

Medium parameters used:  $f = 2472 \text{ MHz}$ ;  $\sigma = 1.858 \text{ S/m}$ ;  $\epsilon_r = 38.474$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2472 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x14x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.0479 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 2.954 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.0570 W/kg

**SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.021 W/kg**

Maximum value of SAR (measured) = 0.0435 W/kg

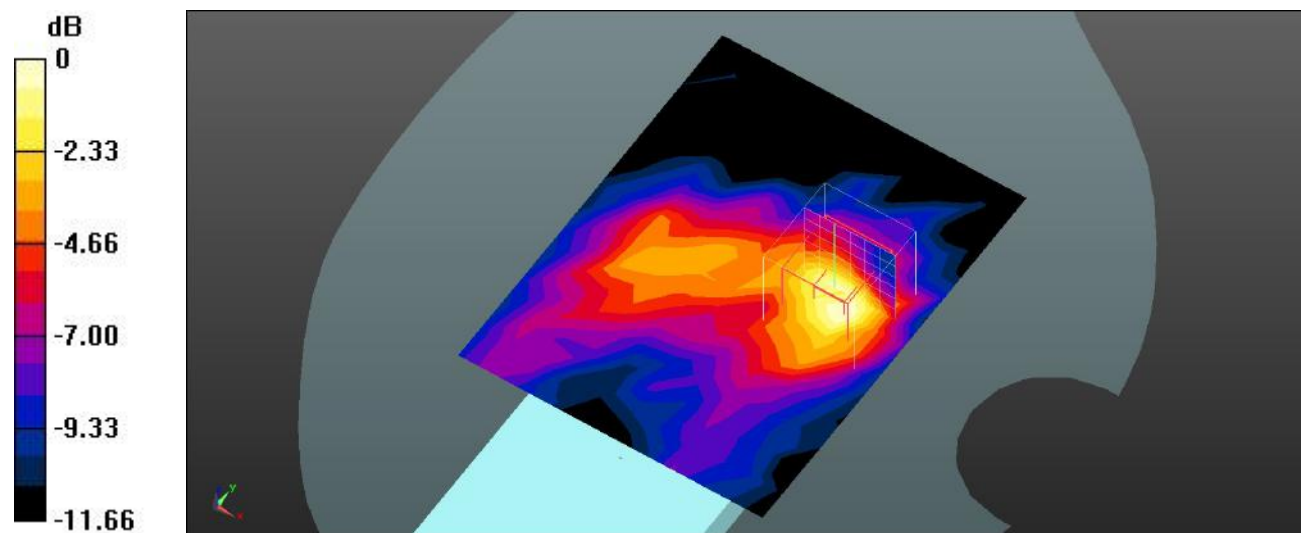

0 dB = 0.0435 W/kg = -13.62 dBW/kg

**Test Plot181#: ANT MAINWLAN2.4G\_Body Back\_High****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2472 MHz; Duty Cycle: 1:1.00472

Medium parameters used:  $f = 2472 \text{ MHz}$ ;  $\sigma = 1.858 \text{ S/m}$ ;  $\epsilon_r = 38.474$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2472 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x14x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.119 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 6.848 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.136 W/kg

**SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.056 W/kg**

Maximum value of SAR (measured) = 0.105 W/kg

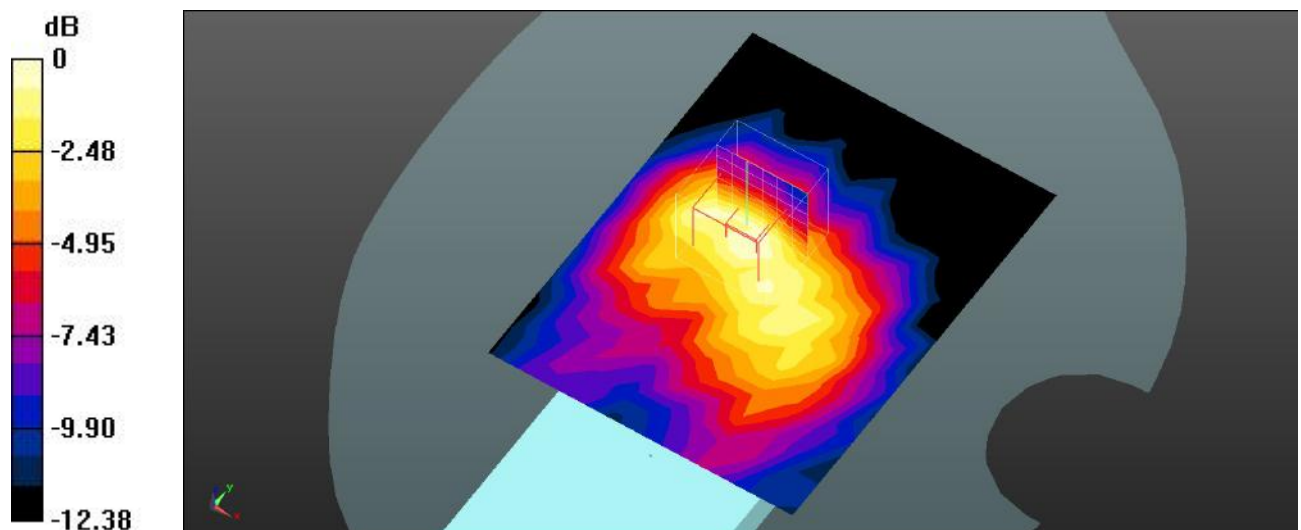

0 dB = 0.105 W/kg = -9.79 dBW/kg

**Test Plot182#: ANT MAINWLAN2.4G\_Body Right\_High****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2472 MHz; Duty Cycle: 1:1.00472

Medium parameters used:  $f = 2472 \text{ MHz}$ ;  $\sigma = 1.858 \text{ S/m}$ ;  $\epsilon_r = 38.474$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2472 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (10x12x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.0165 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 2.111 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.0160 W/kg

**SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00966 W/kg**

Maximum value of SAR (measured) = 0.0136 W/kg

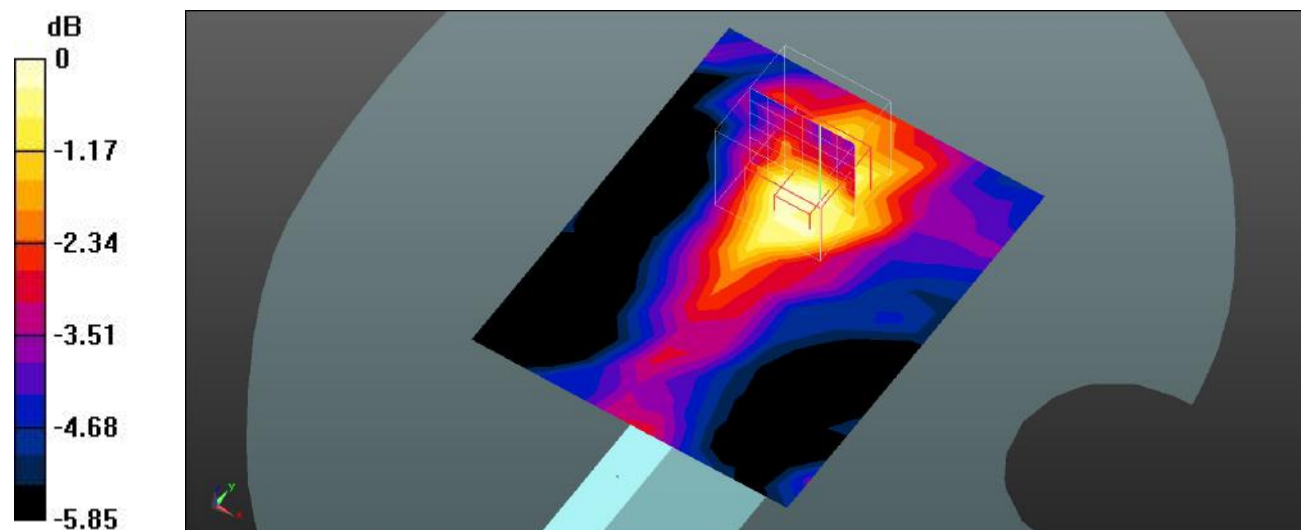

0 dB = 0.0136 W/kg = -18.66 dBW/kg

**Test Plot183#: ANT MAINWLAN2.4G\_Body Top\_High****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2472 MHz; Duty Cycle: 1:1.00472

Medium parameters used:  $f = 2472 \text{ MHz}$ ;  $\sigma = 1.858 \text{ S/m}$ ;  $\epsilon_r = 38.474$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2472 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (9x12x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.111 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 5.968 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.107 W/kg

**SAR(1 g) = 0.076 W/kg; SAR(10 g) = 0.041 W/kg**

Maximum value of SAR (measured) = 0.0886 W/kg

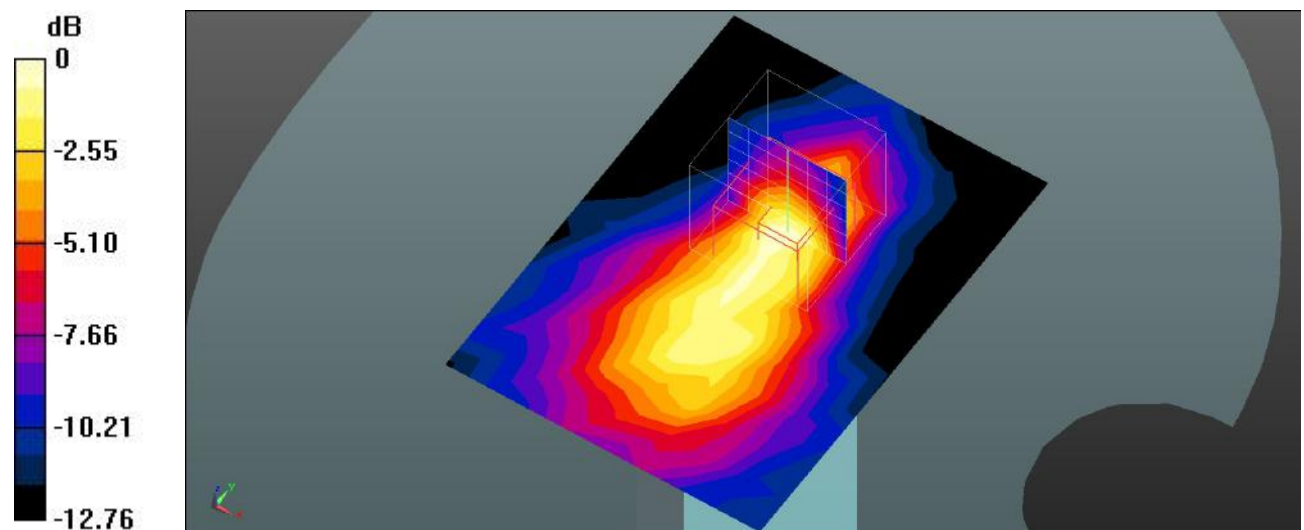 $0 \text{ dB} = 0.0886 \text{ W/kg} = -10.53 \text{ dBW/kg}$

**Test Plot184#: ANT AUXWLAN2.4G\_Head Left Cheek\_High****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2472 MHz; Duty Cycle: 1:1.00472

Medium parameters used:  $f = 2472 \text{ MHz}$ ;  $\sigma = 1.858 \text{ S/m}$ ;  $\epsilon_r = 38.474$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2472 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.119 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 2.796 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.124 W/kg

**SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.045 W/kg**

Maximum value of SAR (measured) = 0.0959 W/kg

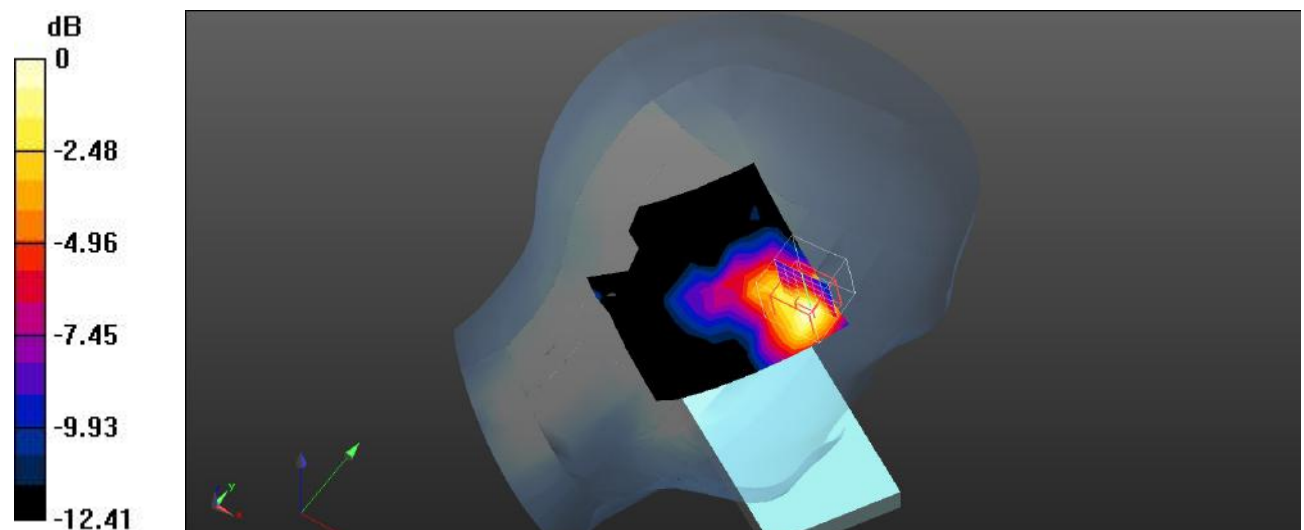 $0 \text{ dB} = 0.0959 \text{ W/kg} = -10.18 \text{ dBW/kg}$

**Test Plot185#: ANT AUXWLAN2.4G\_Head Left Tilt\_High****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2472 MHz; Duty Cycle: 1:1.00472

Medium parameters used:  $f = 2472 \text{ MHz}$ ;  $\sigma = 1.858 \text{ S/m}$ ;  $\epsilon_r = 38.474$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2472 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.0338 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 3.403 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0410 W/kg

**SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.020 W/kg**

Maximum value of SAR (measured) = 0.0337 W/kg

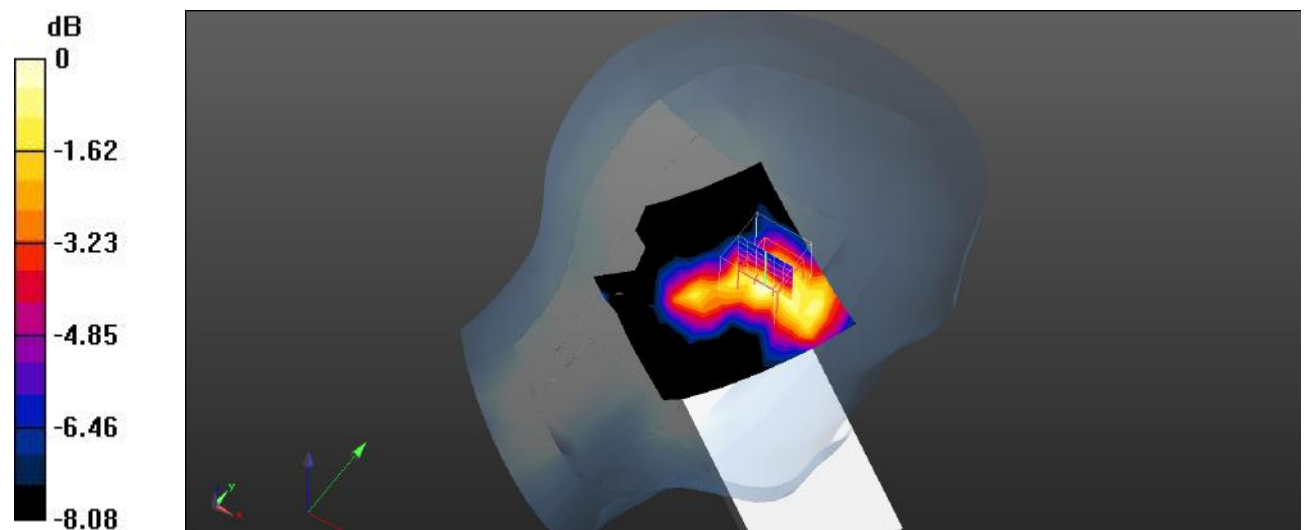

0 dB = 0.0337 W/kg = -14.72 dBW/kg

**Test Plot186#: ANT AUXWLAN2.4G\_Head Right Cheek\_High****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**


Communication System: UID 0, 2.4G DTS (0); Frequency: 2472 MHz; Duty Cycle: 1:1.00472

Medium parameters used:  $f = 2472 \text{ MHz}$ ;  $\sigma = 1.858 \text{ S/m}$ ;  $\epsilon_r = 38.474$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2472 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

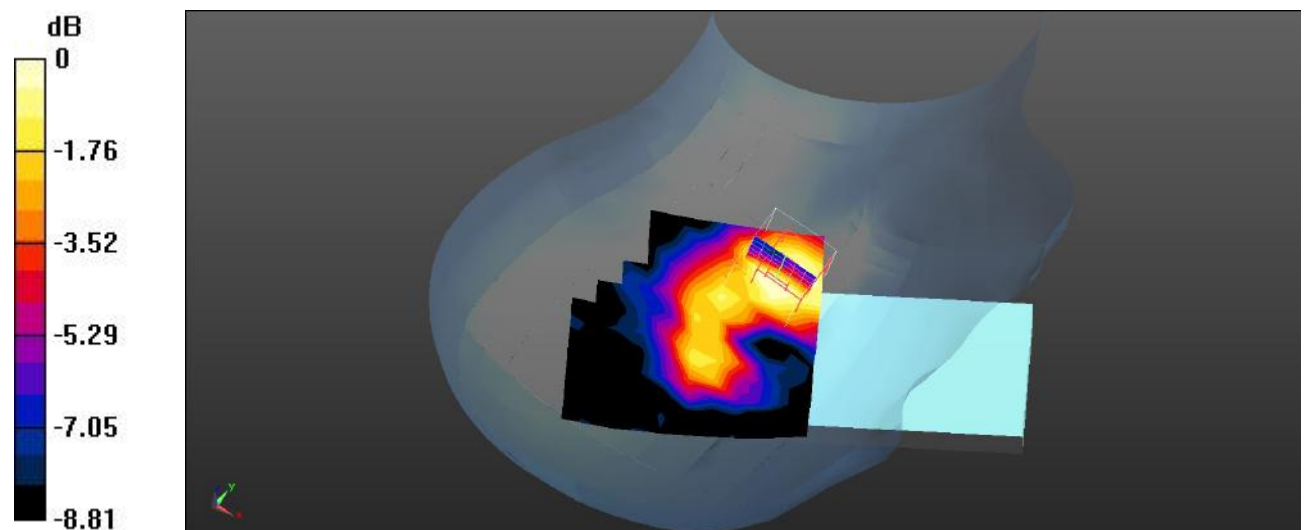**Area Scan (11x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ Maximum value of SAR (measured) =  $0.0418 \text{ W/kg}$ **Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ Reference Value =  $3.404 \text{ V/m}$ ; Power Drift =  $-0.12 \text{ dB}$ Peak SAR (extrapolated) =  $0.0410 \text{ W/kg}$ **SAR(1 g) =  $0.031 \text{ W/kg}$ ; SAR(10 g) =  $0.021 \text{ W/kg}$** Maximum value of SAR (measured) =  $0.0339 \text{ W/kg}$  $0 \text{ dB} = 0.0339 \text{ W/kg} = -14.70 \text{ dBW/kg}$

**Test Plot187#: ANT AUXWLAN2.4G\_Head Right Tilt\_High****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2472 MHz; Duty Cycle: 1:1.00472

Medium parameters used:  $f = 2472 \text{ MHz}$ ;  $\sigma = 1.858 \text{ S/m}$ ;  $\epsilon_r = 38.474$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2472 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.0373 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 3.614 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.0380 W/kg

**SAR(1 g) = 0.028 W/kg; SAR(10 g) = 0.017 W/kg**

Maximum value of SAR (measured) = 0.0322 W/kg

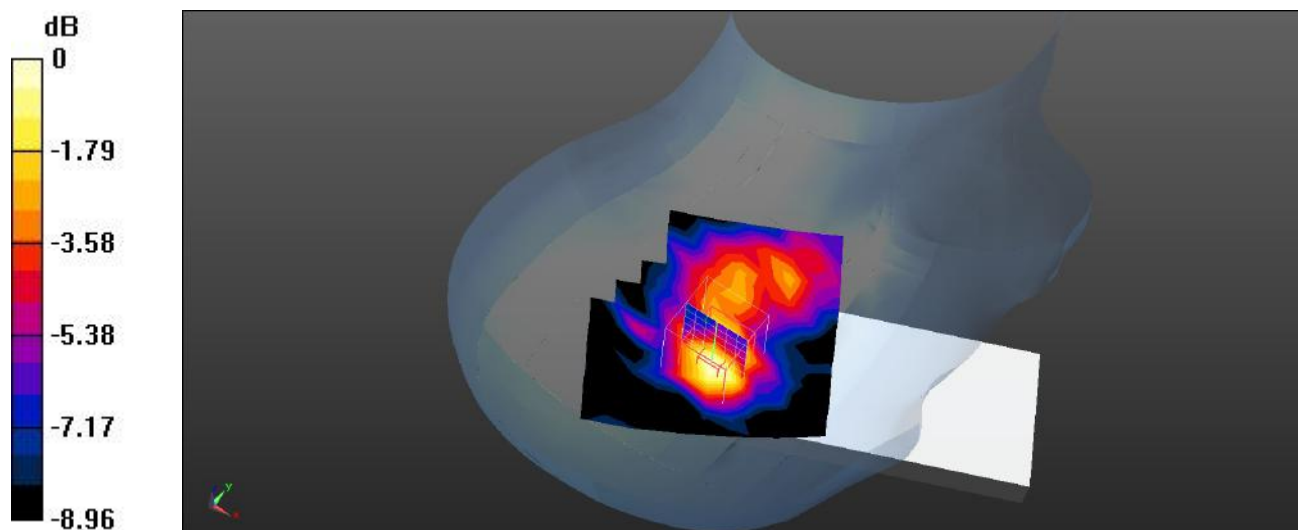

0 dB = 0.0322 W/kg = -14.92 dBW/kg

**Test Plot188#: ANT AUXWLAN2.4G\_Body Front\_High****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2472 MHz; Duty Cycle: 1:1.00472

Medium parameters used:  $f = 2472 \text{ MHz}$ ;  $\sigma = 1.858 \text{ S/m}$ ;  $\epsilon_r = 38.474$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2472 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x14x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.0250 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 2.398 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.0300 W/kg

**SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.013 W/kg**

Maximum value of SAR (measured) = 0.0224 W/kg

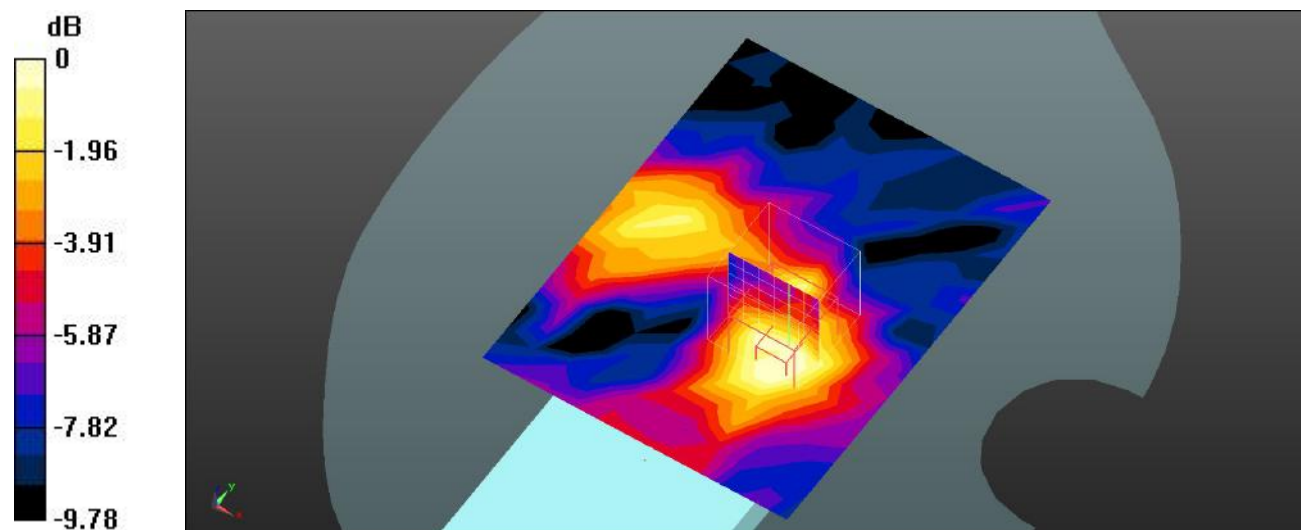

0 dB = 0.0224 W/kg = -16.50 dBW/kg

**Test Plot189#: ANT AUXWLAN2.4G\_Body Back\_High****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2472 MHz; Duty Cycle: 1:1.00472

Medium parameters used:  $f = 2472 \text{ MHz}$ ;  $\sigma = 1.858 \text{ S/m}$ ;  $\epsilon_r = 38.474$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2472 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x14x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.0556 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 3.415 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.0700 W/kg

**SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.028 W/kg**

Maximum value of SAR (measured) = 0.0556 W/kg

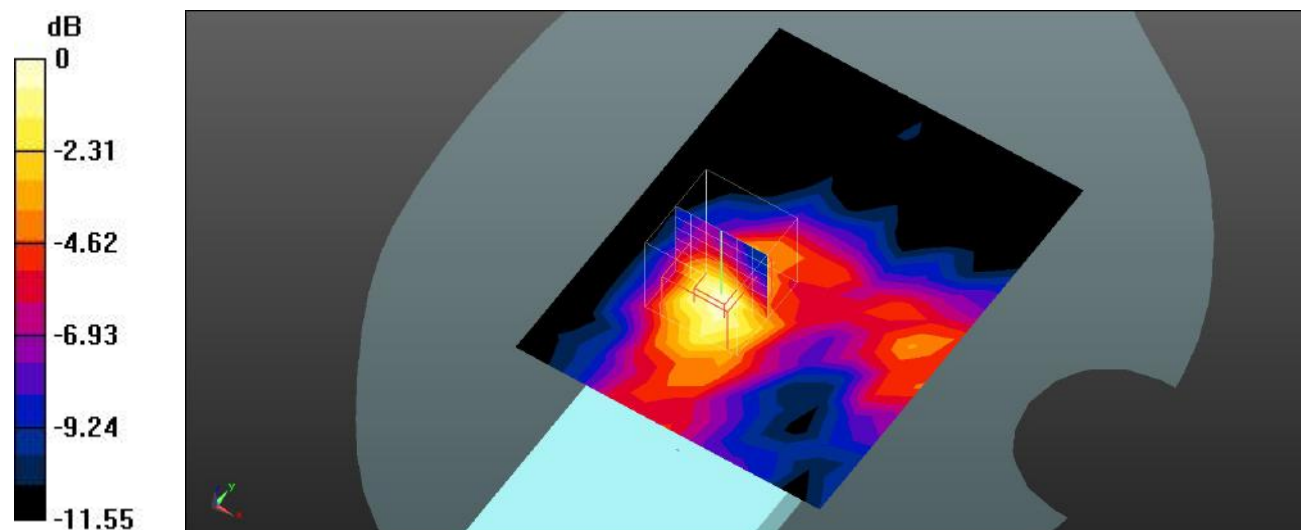

**Test Plot190#: ANT AUXWLAN2.4G\_Body Right\_High****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2472 MHz; Duty Cycle: 1:1.00472

Medium parameters used:  $f = 2472 \text{ MHz}$ ;  $\sigma = 1.858 \text{ S/m}$ ;  $\epsilon_r = 38.474$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2472 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (10x12x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.0540 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 4.129 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0610 W/kg

**SAR(1 g) = 0.046 W/kg; SAR(10 g) = 0.028 W/kg**

Maximum value of SAR (measured) = 0.0525 W/kg

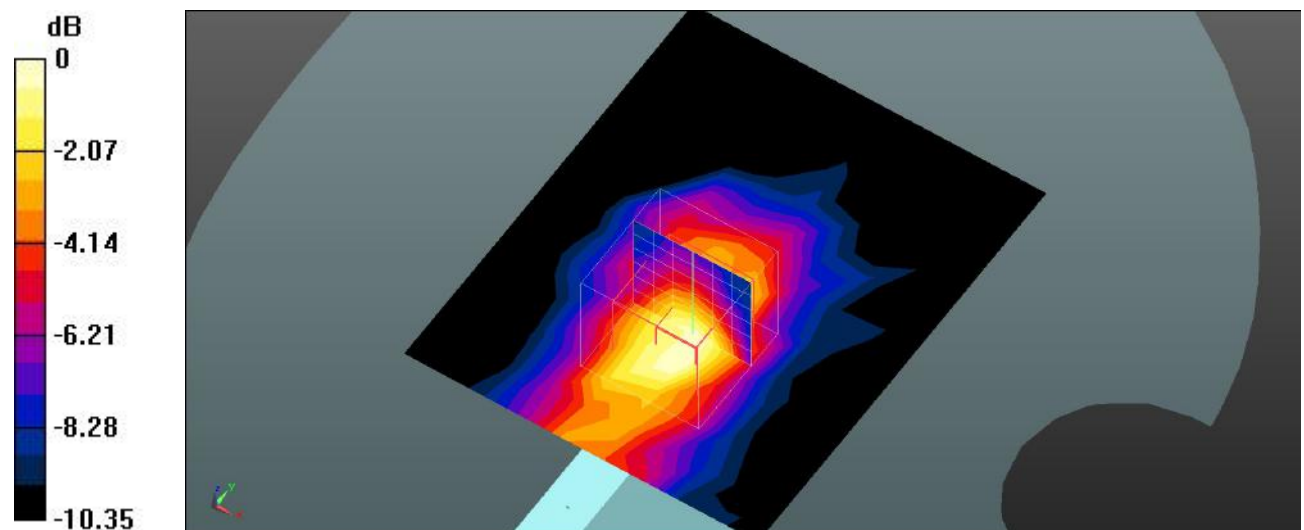

0 dB = 0.0525 W/kg = -12.80 dBW/kg

**Test Plot191#: ANT AUXWLAN2.4G\_Body Top\_High****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2472 MHz; Duty Cycle: 1:1.00472

Medium parameters used:  $f = 2472 \text{ MHz}$ ;  $\sigma = 1.858 \text{ S/m}$ ;  $\epsilon_r = 38.474$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2472 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (9x12x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.0256 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 3.109 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0280 W/kg

**SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.015 W/kg**

Maximum value of SAR (measured) = 0.0242 W/kg

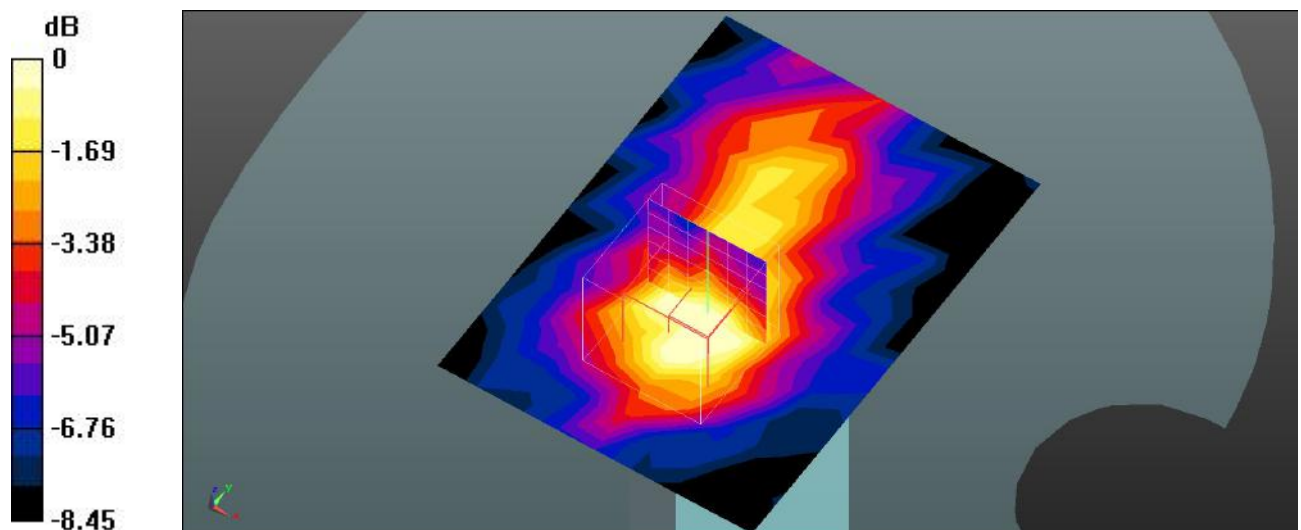

0 dB = 0.0242 W/kg = -16.16 dBW/kg

**Test Plot192#: WLAN5.2G\_Head Left Cheek\_High****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5240 MHz; Duty Cycle: 1:1.03594

Medium parameters used:  $f = 5240 \text{ MHz}$ ;  $\sigma = 4.656 \text{ S/m}$ ;  $\epsilon_r = 35.281$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.35, 5.35, 5.35) @ 5240 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.266 W/kg


**Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ 

Reference Value = 2.618 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.388 W/kg

**SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.058 W/kg**

Maximum value of SAR (measured) = 0.306 W/kg

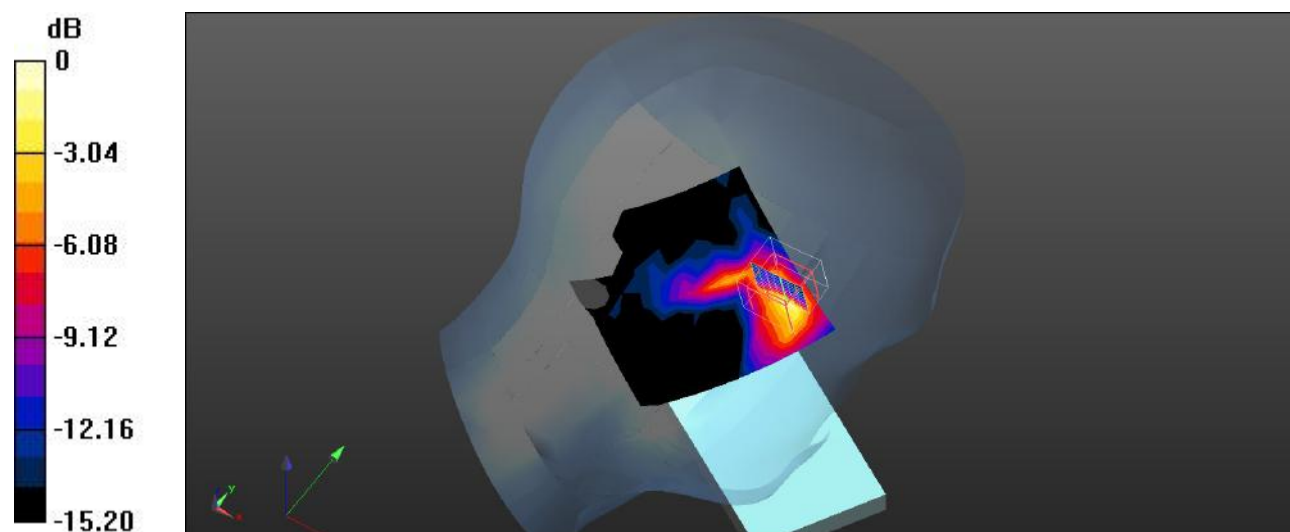

0 dB = 0.306 W/kg = -5.14 dBW/kg

**Test Plot193#: WLAN5.2G\_Head Left Tilt\_High****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5240 MHz; Duty Cycle: 1:1.03594

Medium parameters used:  $f = 5240 \text{ MHz}$ ;  $\sigma = 4.656 \text{ S/m}$ ;  $\epsilon_r = 35.281$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.35, 5.35, 5.35) @ 5240 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.0736 W/kg


**Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ 

Reference Value = 2.476 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.116 W/kg

**SAR(1 g) = 0.052 W/kg; SAR(10 g) = 0.027 W/kg**

Maximum value of SAR (measured) = 0.0915 W/kg

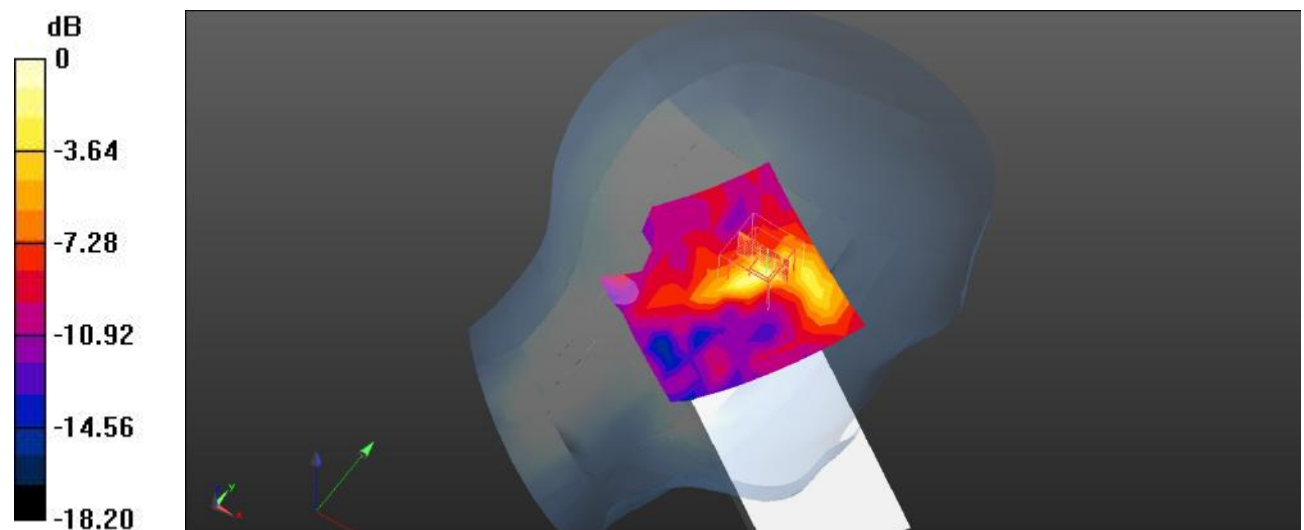

0 dB = 0.0915 W/kg = -10.39 dBW/kg

**Test Plot194#: WLAN5.2G\_Head Right Cheek\_High****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5240 MHz;Duty Cycle: 1:1.03594

Medium parameters used:  $f = 5240 \text{ MHz}$ ;  $\sigma = 4.656 \text{ S/m}$ ;  $\epsilon_r = 35.281$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.35, 5.35, 5.35) @ 5240 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325;Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.0502 W/kg


**Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ 

Reference Value = 2.342 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0660 W/kg

**SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.030 W/kg**

Maximum value of SAR (measured) = 0.0602 W/kg

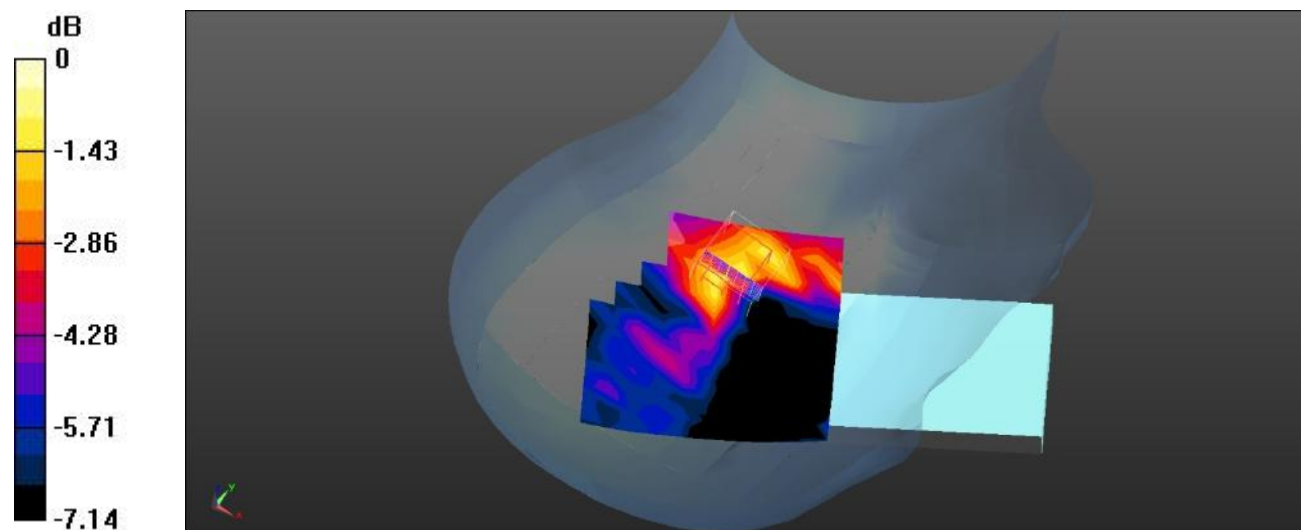

0 dB = 0.0602 W/kg = -12.20 dBW/kg

**Test Plot195#: WLAN5.2G\_Head Right Tilt\_High****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5240 MHz; Duty Cycle: 1:1.03594

Medium parameters used:  $f = 5240$  MHz;  $\sigma = 4.656$  S/m;  $\epsilon_r = 35.281$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.35, 5.35, 5.35) @ 5240 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0520 W/kg


**Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.091 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0660 W/kg

**SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.032 W/kg**

Maximum value of SAR (measured) = 0.0621 W/kg

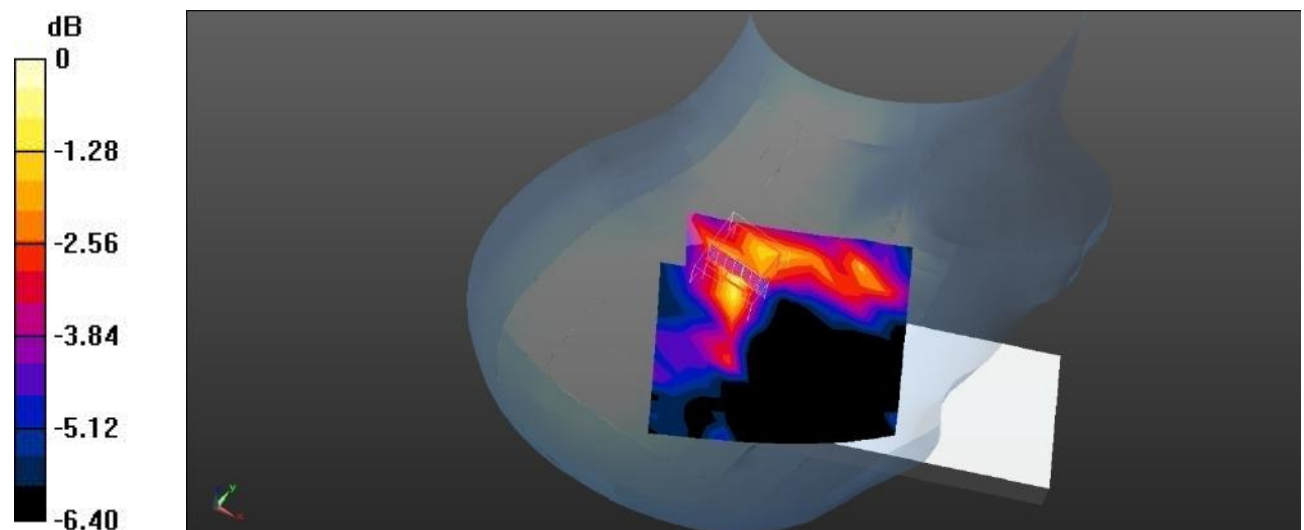

0 dB = 0.0621 W/kg = -12.07 dBW/kg

**Test Plot196#: WLAN5.2G\_Body Front\_High****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5240 MHz; Duty Cycle: 1:1.03594

Medium parameters used:  $f = 5240 \text{ MHz}$ ;  $\sigma = 4.656 \text{ S/m}$ ;  $\epsilon_r = 35.281$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.35, 5.35, 5.35) @ 5240 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x13x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.00978 W/kg


**Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ 

Reference Value = 1.050 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0450 W/kg

**SAR(1 g) = 0.00615 W/kg; SAR(10 g) = 0.0025 W/kg**

Maximum value of SAR (measured) = 0.0183 W/kg

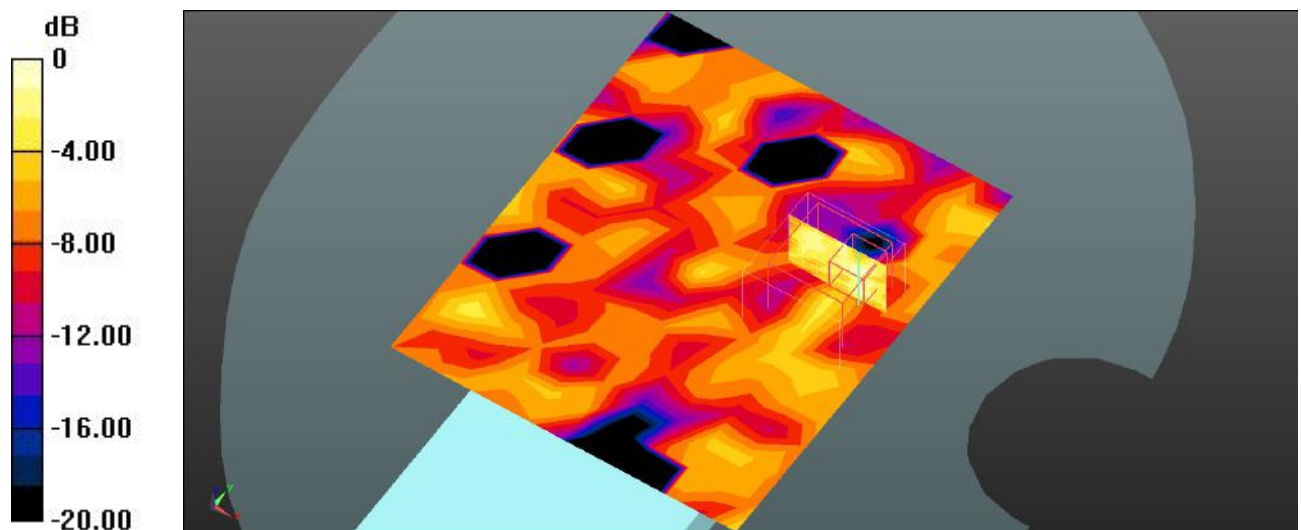

0 dB = 0.0183 W/kg = -17.38 dBW/kg

**Test Plot197#: WLAN5.2G\_Body Back\_High****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5240 MHz; Duty Cycle: 1:1.03594

Medium parameters used:  $f = 5240$  MHz;  $\sigma = 4.656$  S/m;  $\epsilon_r = 35.281$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.35, 5.35, 5.35) @ 5240 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0216 W/kg


**Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.336 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.0720 W/kg

**SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.00969 W/kg**

Maximum value of SAR (measured) = 0.0269 W/kg

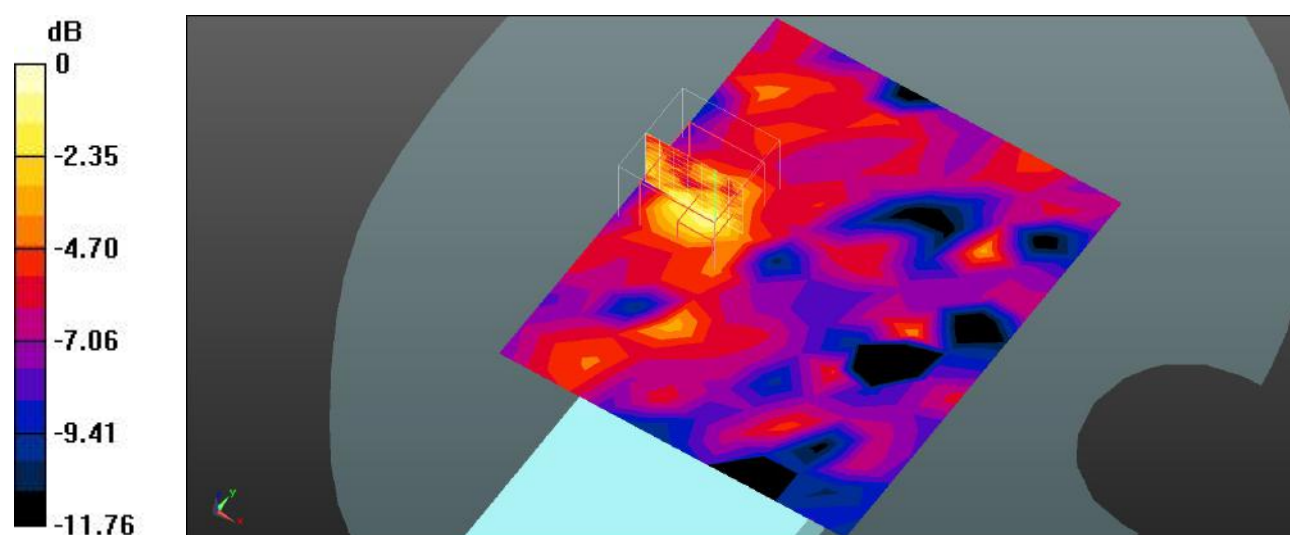

0 dB = 0.0269 W/kg = -15.70 dBW/kg

**Test Plot198#: WLAN5.2G\_Body Right\_High****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5240 MHz; Duty Cycle: 1:1.03594

Medium parameters used:  $f = 5240$  MHz;  $\sigma = 4.656$  S/m;  $\epsilon_r = 35.281$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.35, 5.35, 5.35) @ 5240 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (7x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.359 W/kg


**Zoom Scan (8x8x16)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.616 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.355 W/kg

**SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.082 W/kg**

Maximum value of SAR (measured) = 0.303 W/kg

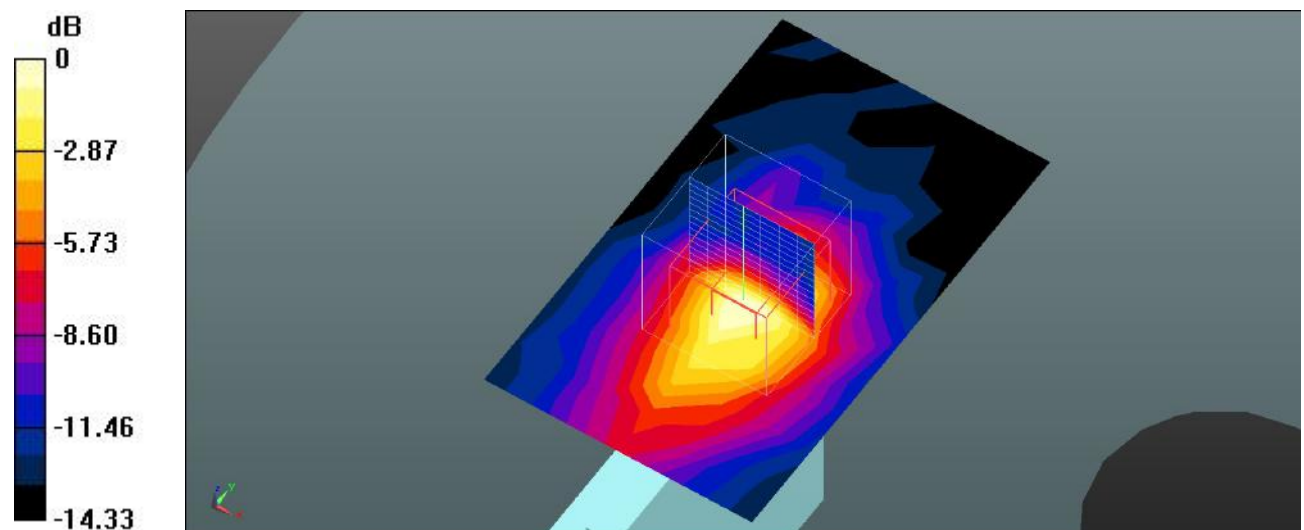

0 dB = 0.303 W/kg = -5.19 dBW/kg

**Test Plot199#: WLAN5.2G\_Body Top\_High****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5240 MHz; Duty Cycle: 1:1.03594

Medium parameters used:  $f = 5240 \text{ MHz}$ ;  $\sigma = 4.656 \text{ S/m}$ ;  $\epsilon_r = 35.281$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.35, 5.35, 5.35) @ 5240 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (9x13x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.0354 W/kg


**Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ 

Reference Value = 1.970 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.0690 W/kg

**SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.021 W/kg**

Maximum value of SAR (measured) = 0.0370 W/kg

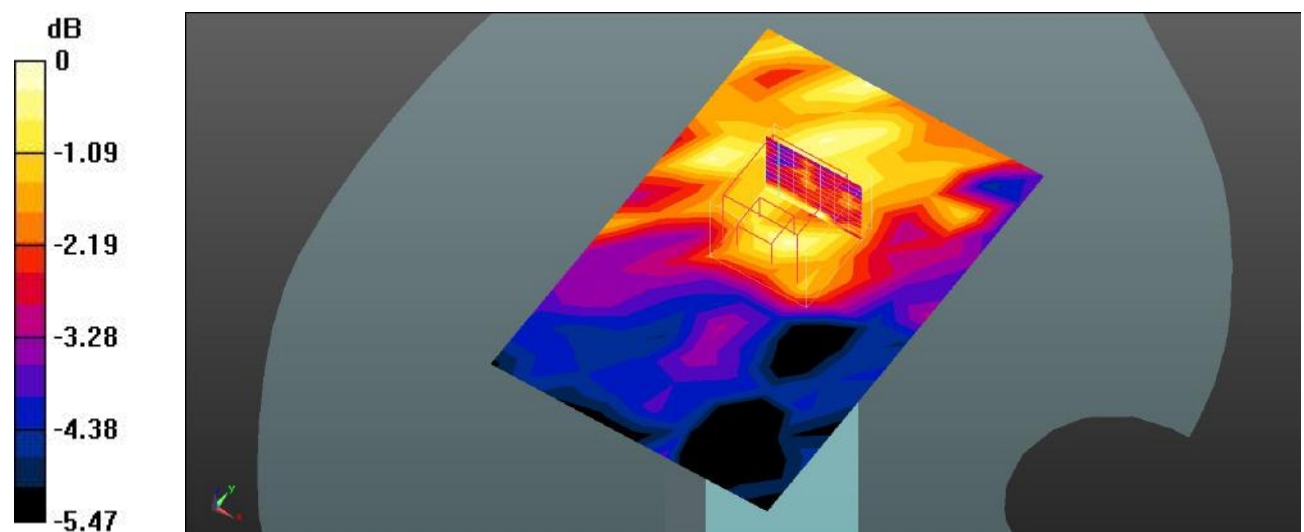

0 dB = 0.0370 W/kg = -14.32 dBW/kg

**Test Plot200#: WLAN5.8G\_Head Left Cheek\_High****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5825 MHz;Duty Cycle: 1:1.03594

Medium parameters used:  $f = 5825 \text{ MHz}$ ;  $\sigma = 5.267 \text{ S/m}$ ;  $\epsilon_r = 34.876$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.83, 4.83, 4.83) @ 5825 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325;Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.411 W/kg


**Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ 

Reference Value = 3.088 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.649 W/kg

**SAR(1 g) = 0.245 W/kg; SAR(10 g) = 0.102 W/kg**

Maximum value of SAR (measured) = 0.472 W/kg

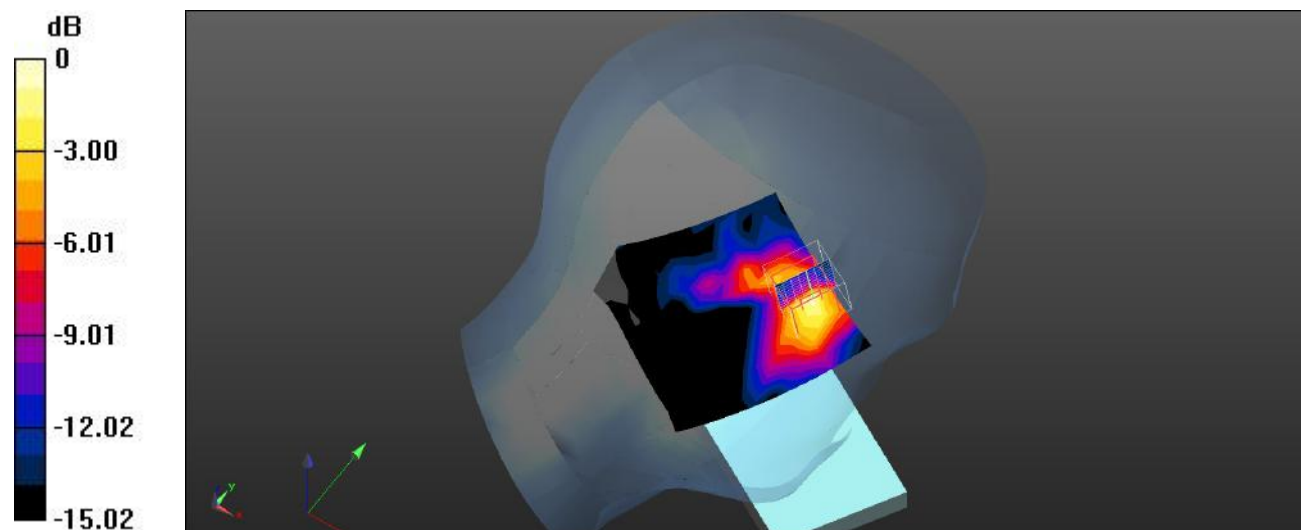

0 dB = 0.472 W/kg = -3.26 dBW/kg

**Test Plot201#: WLAN5.8G\_Head Left Tilt\_High****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**


Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5825 MHz;Duty Cycle: 1:1.03594

Medium parameters used:  $f = 5825 \text{ MHz}$ ;  $\sigma = 5.267 \text{ S/m}$ ;  $\epsilon_r = 34.876$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.83, 4.83, 4.83) @ 5825 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325;Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

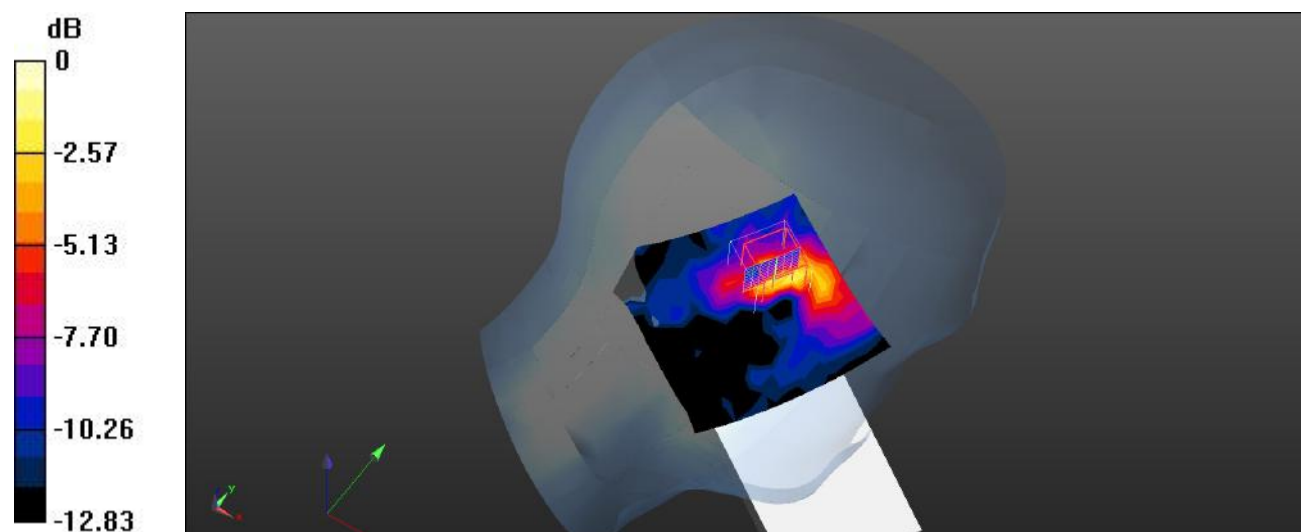**Area Scan (11x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ Maximum value of SAR (measured) =  $0.160 \text{ W/kg}$ **Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ Reference Value =  $2.861 \text{ V/m}$ ; Power Drift =  $0.08 \text{ dB}$ Peak SAR (extrapolated) =  $0.278 \text{ W/kg}$ **SAR(1 g) =  $0.121 \text{ W/kg}$ ; SAR(10 g) =  $0.052 \text{ W/kg}$** Maximum value of SAR (measured) =  $0.223 \text{ W/kg}$  $0 \text{ dB} = 0.223 \text{ W/kg} = -6.52 \text{ dBW/kg}$

**Test Plot202#: WLAN5.8G\_Head Right Cheek\_High****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5825 MHz;Duty Cycle: 1:1.03594

Medium parameters used:  $f = 5825$  MHz;  $\sigma = 5.267$  S/m;  $\epsilon_r = 34.876$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.83, 4.83, 4.83) @ 5825 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325;Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.110 W/kg


**Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.668 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.150 W/kg

**SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.050 W/kg**

Maximum value of SAR (measured) = 0.124 W/kg

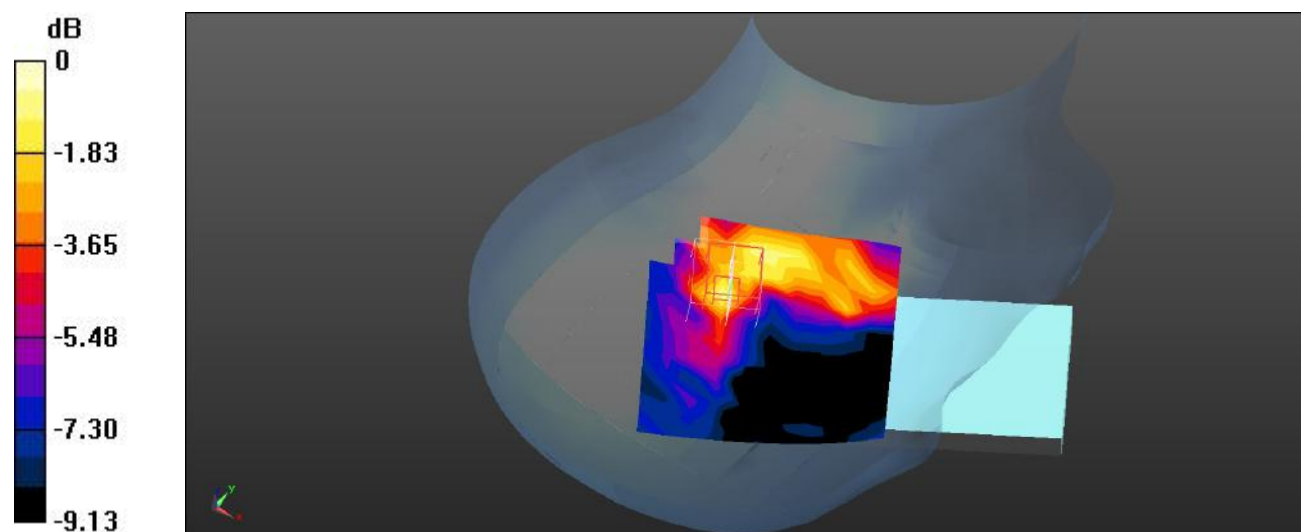

0 dB = 0.124 W/kg = -9.07 dBW/kg

**Test Plot203#: WLAN5.8G\_Head Right Tilt\_High****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5825 MHz;Duty Cycle: 1:1.03594

Medium parameters used:  $f = 5825$  MHz;  $\sigma = 5.267$  S/m;  $\epsilon_r = 34.876$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.83, 4.83, 4.83) @ 5825 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325;Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.103 W/kg


**Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.410 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.156 W/kg

**SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.051 W/kg**

Maximum value of SAR (measured) = 0.144 W/kg

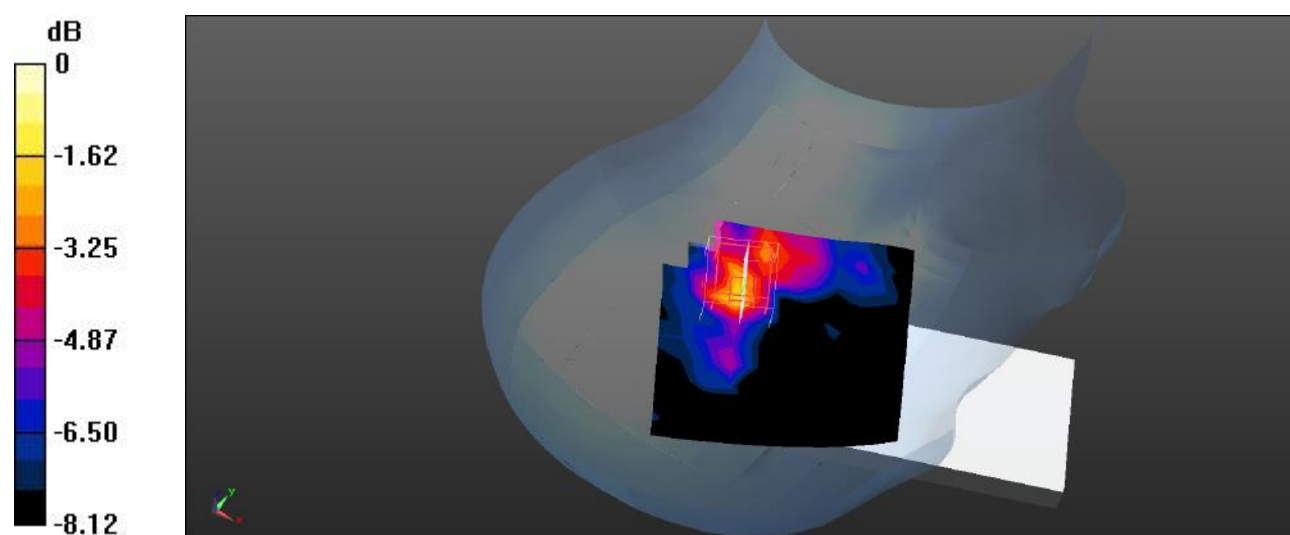

0 dB = 0.144 W/kg = -8.42 dBW/kg

**Test Plot204#: WLAN5.8G\_Body Front\_High****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5825 MHz;Duty Cycle: 1:1.03594

Medium parameters used:  $f = 5825 \text{ MHz}$ ;  $\sigma = 5.267 \text{ S/m}$ ;  $\epsilon_r = 34.876$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.83, 4.83, 4.83) @ 5825 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325;Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.0129 W/kg


**Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ 

Reference Value = 0.8440 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.0310 W/kg

**SAR(1 g) = 0.00893 W/kg; SAR(10 g) = 0.00522 W/kg**

Maximum value of SAR (measured) = 0.0248 W/kg

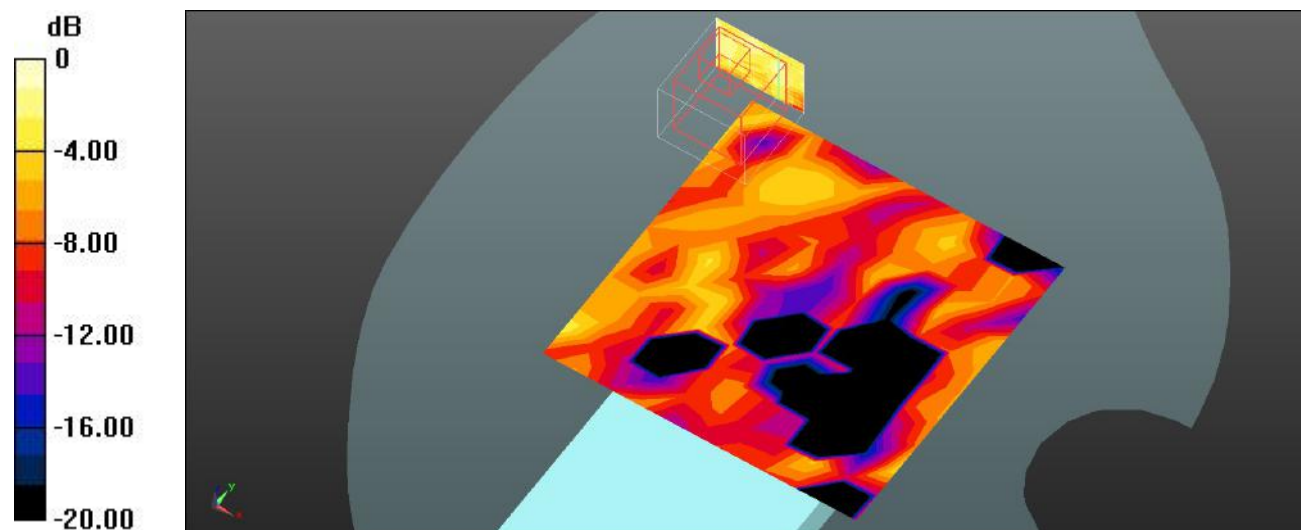

0 dB = 0.0248 W/kg = -16.06 dBW/kg

**Test Plot205#: WLAN5.8G\_Body Back\_High****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5825 MHz;Duty Cycle: 1:1.03594

Medium parameters used:  $f = 5825$  MHz;  $\sigma = 5.267$  S/m;  $\epsilon_r = 34.876$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.83, 4.83, 4.83) @ 5825 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325;Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0119 W/kg


**Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.388 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0410 W/kg

**SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00681 W/kg**

Maximum value of SAR (measured) = 0.0308 W/kg

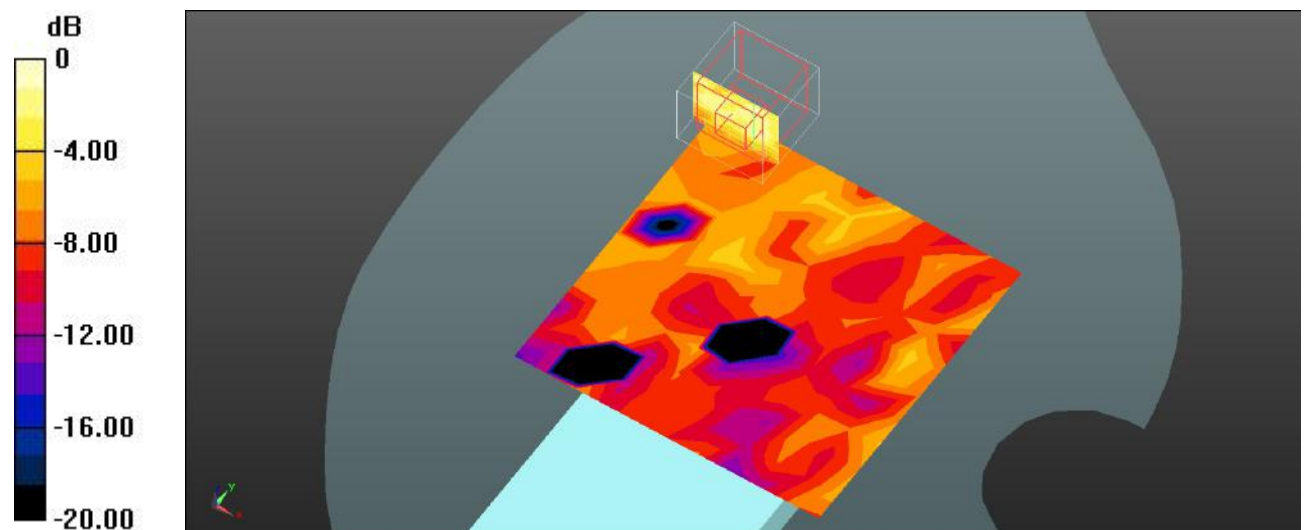

**Test Plot206#: WLAN5.8G\_Body Right\_High****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**


Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5825 MHz;Duty Cycle: 1:1.03594

Medium parameters used:  $f = 5825 \text{ MHz}$ ;  $\sigma = 5.267 \text{ S/m}$ ;  $\epsilon_r = 34.876$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.83, 4.83, 4.83) @ 5825 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325;Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

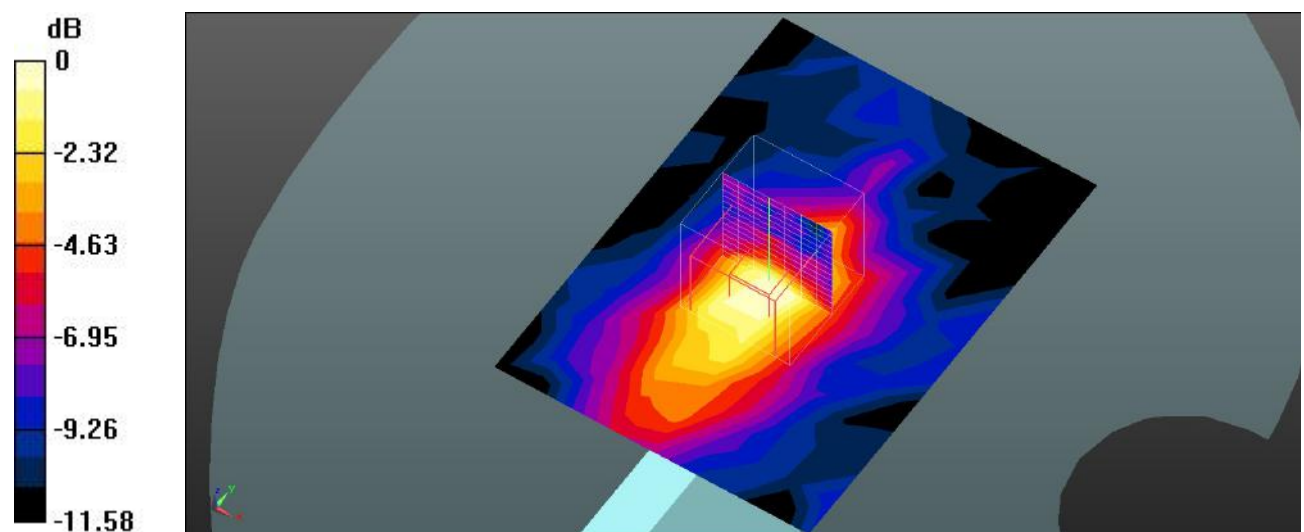**Area Scan (9x12x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ Maximum value of SAR (measured) =  $0.173 \text{ W/kg}$ **Zoom Scan (8x8x16)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ Reference Value =  $4.133 \text{ V/m}$ ; Power Drift =  $-0.03 \text{ dB}$ Peak SAR (extrapolated) =  $0.187 \text{ W/kg}$ **SAR(1 g) =  $0.093 \text{ W/kg}$ ; SAR(10 g) =  $0.048 \text{ W/kg}$** Maximum value of SAR (measured) =  $0.146 \text{ W/kg}$  $0 \text{ dB} = 0.146 \text{ W/kg} = -8.36 \text{ dBW/kg}$

**Test Plot207#: WLAN5.8G\_Body Top\_High****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5825 MHz; Duty Cycle: 1:1.03594

Medium parameters used:  $f = 5825$  MHz;  $\sigma = 5.267$  S/m;  $\epsilon_r = 34.876$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.83, 4.83, 4.83) @ 5825 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (9x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0310 W/kg


**Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.699 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.0720 W/kg

**SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.00985 W/kg**

Maximum value of SAR (measured) = 0.0306 W/kg

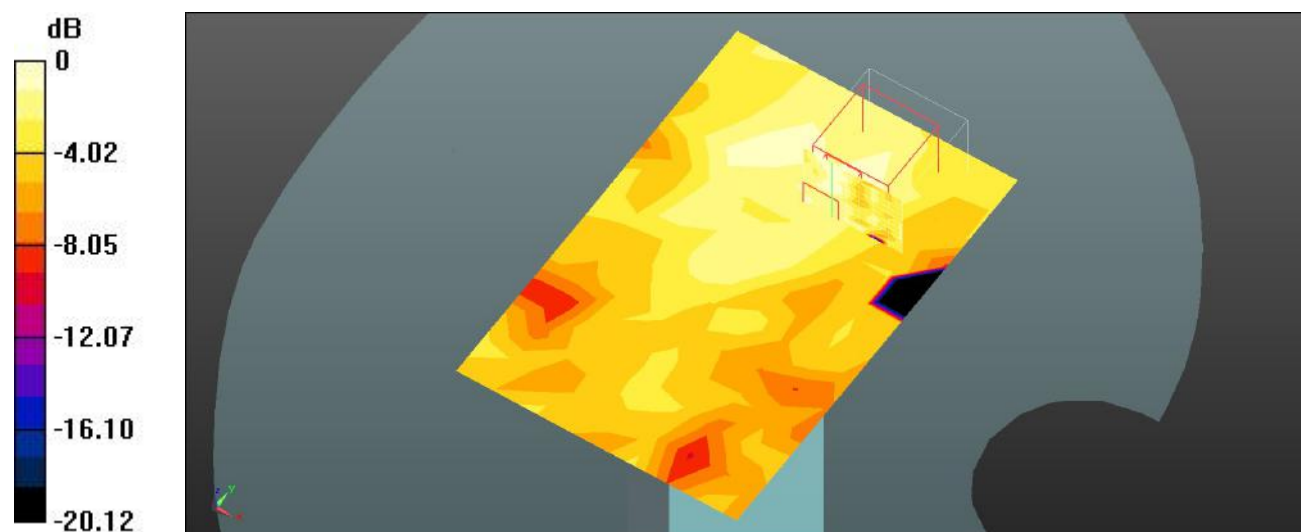

0 dB = 0.0306 W/kg = -15.14 dBW/kg

**Test Plot208#: ANT MAINBluetooth \_Head Left Cheek \_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2449 MHz;Duty Cycle: 1:1.30317

Medium parameters used:  $f = 2449 \text{ MHz}$ ;  $\sigma = 1.829 \text{ S/m}$ ;  $\epsilon_r = 37.789$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2449 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325;Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.0124 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 1.454 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0160 W/kg

**SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.00671 W/kg**

Maximum value of SAR (measured) = 0.0139 W/kg

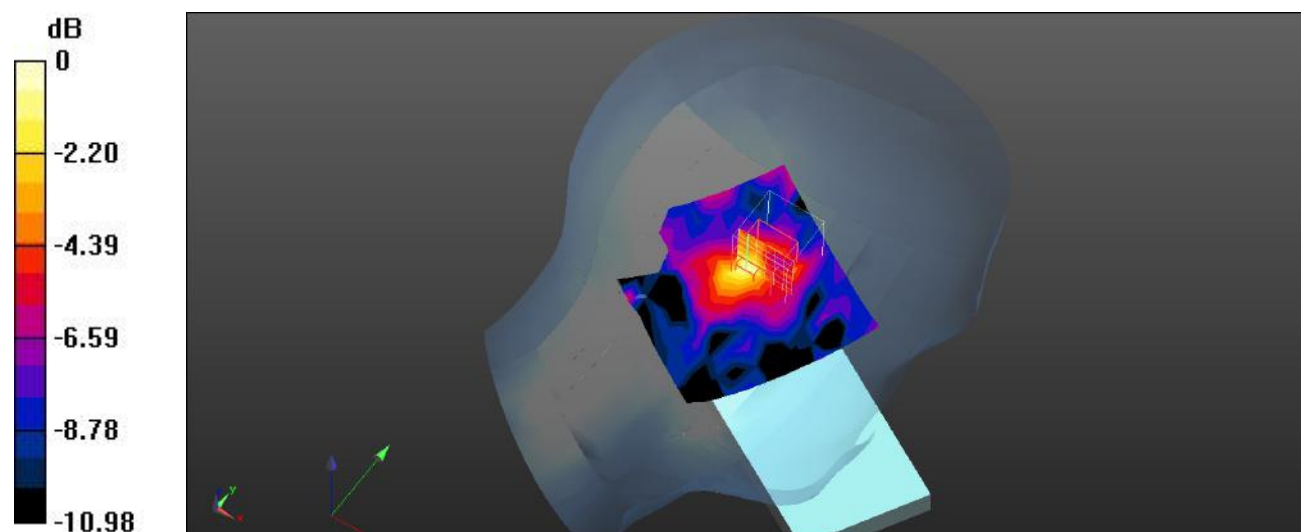

0 dB = 0.0139 W/kg = -18.57 dBW/kg

**Test Plot209#: ANT MAINBluetooth \_Head Left Tilt \_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2449 MHz;Duty Cycle: 1:1.30317

Medium parameters used:  $f = 2449 \text{ MHz}$ ;  $\sigma = 1.829 \text{ S/m}$ ;  $\epsilon_r = 37.789$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2449 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325;Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.0153 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 1.893 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.0180 W/kg

**SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00781 W/kg**

Maximum value of SAR (measured) = 0.0150 W/kg

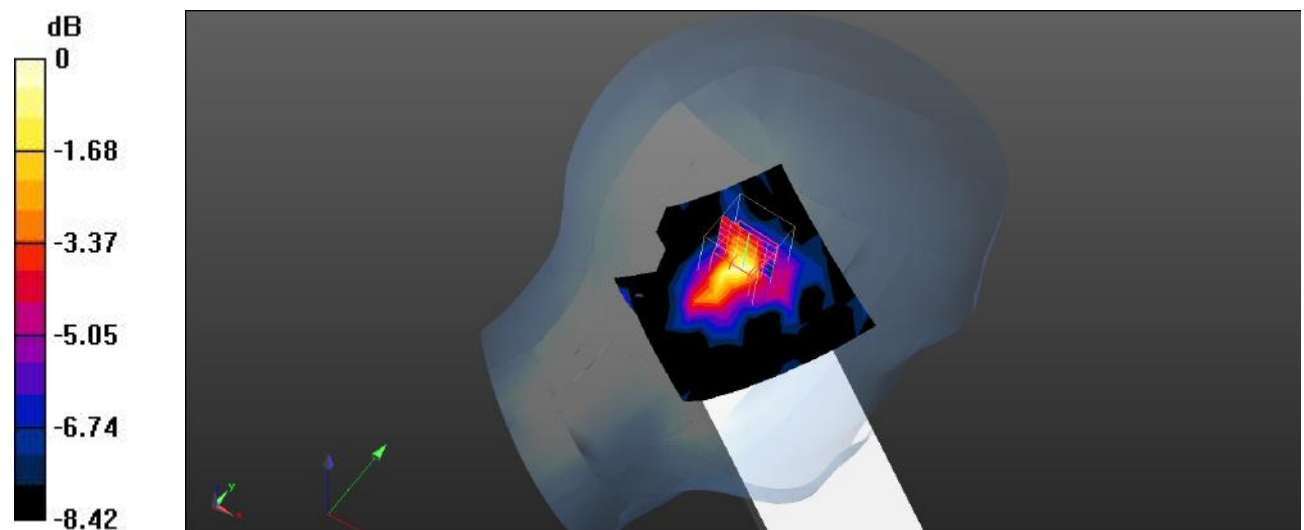

0 dB = 0.0150 W/kg = -18.24 dBW/kg

**Test Plot210#: ANT MAINBluetooth \_Head Right Cheek \_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2449 MHz;Duty Cycle: 1:1.30317

Medium parameters used:  $f = 2449$  MHz;  $\sigma = 1.829$  S/m;  $\epsilon_r = 37.789$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2449 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325;Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.00764 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.462 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.0160 W/kg

**SAR(1 g) = 0.0077 W/kg; SAR(10 g) = 0.00566 W/kg**

Maximum value of SAR (measured) = 0.0113 W/kg

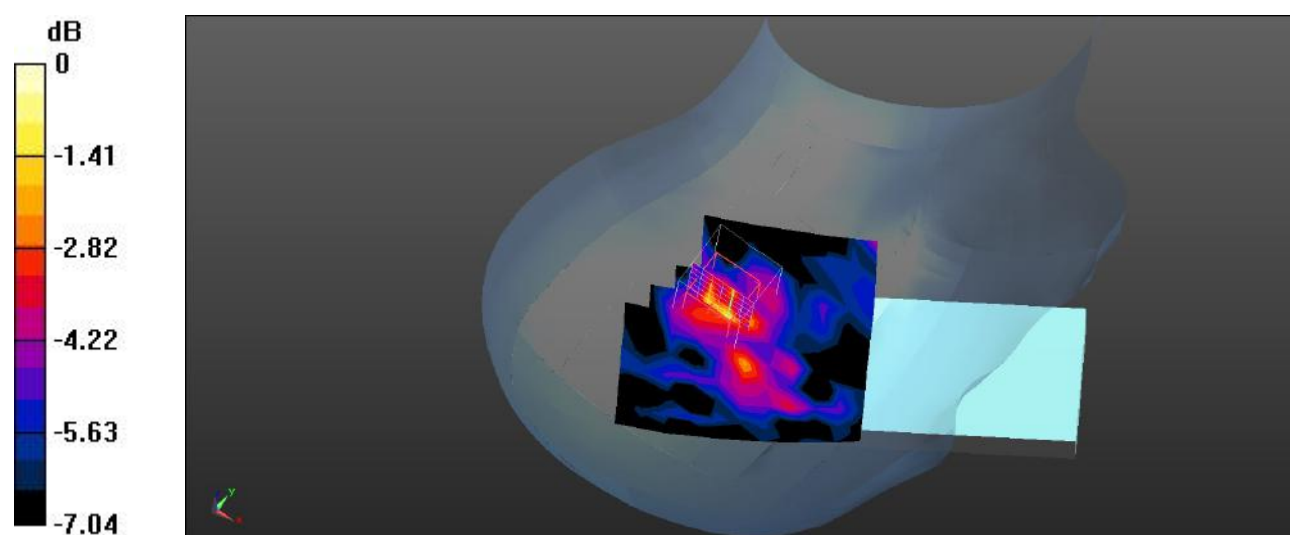

0 dB = 0.0113 W/kg = -19.47 dBW/kg

**Test Plot211#: ANT MAINBluetooth \_Head Right Tilt \_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2449 MHz;Duty Cycle: 1:1.30317

Medium parameters used:  $f = 2449 \text{ MHz}$ ;  $\sigma = 1.829 \text{ S/m}$ ;  $\epsilon_r = 37.789$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2449 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325;Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.0107 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 1.771 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.0120 W/kg

**SAR(1 g) = 0.00869 W/kg; SAR(10 g) = 0.00588 W/kg**

Maximum value of SAR (measured) = 0.0105 W/kg

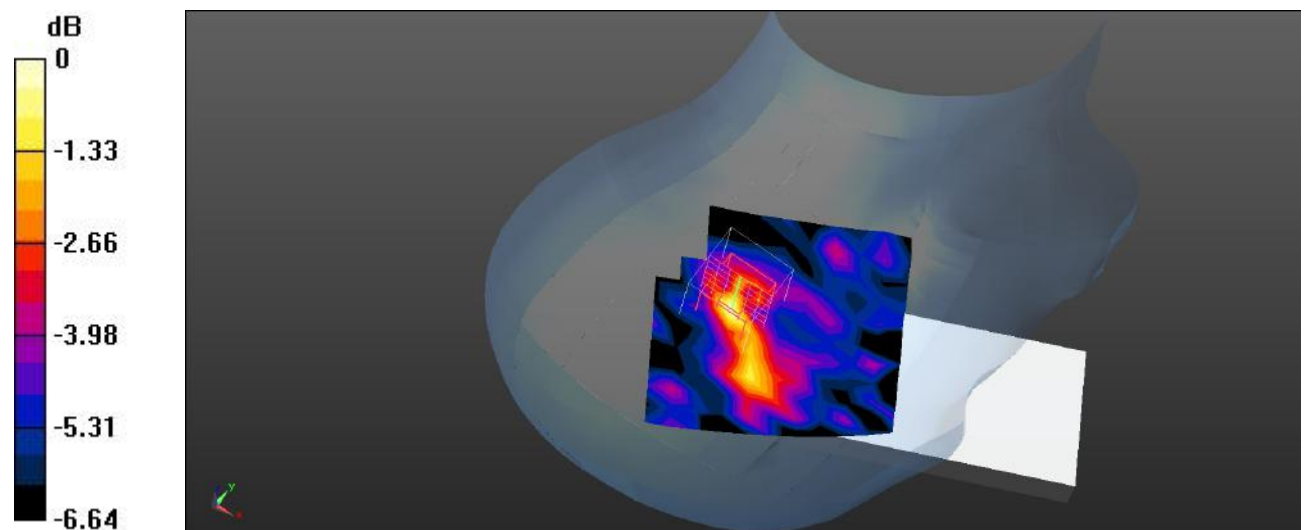

0 dB = 0.0105 W/kg = -19.79 dBW/kg

**Test Plot212#: ANT MAINBluetooth \_Body Front \_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2449 MHz;Duty Cycle: 1:1.30317

Medium parameters used:  $f = 2449 \text{ MHz}$ ;  $\sigma = 1.829 \text{ S/m}$ ;  $\epsilon_r = 37.789$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2449 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325;Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.00421 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 1.441 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0110 W/kg

**SAR(1 g) = 0.00434 W/kg; SAR(10 g) = 0.00266 W/kg**

Maximum value of SAR (measured) = 0.00626 W/kg

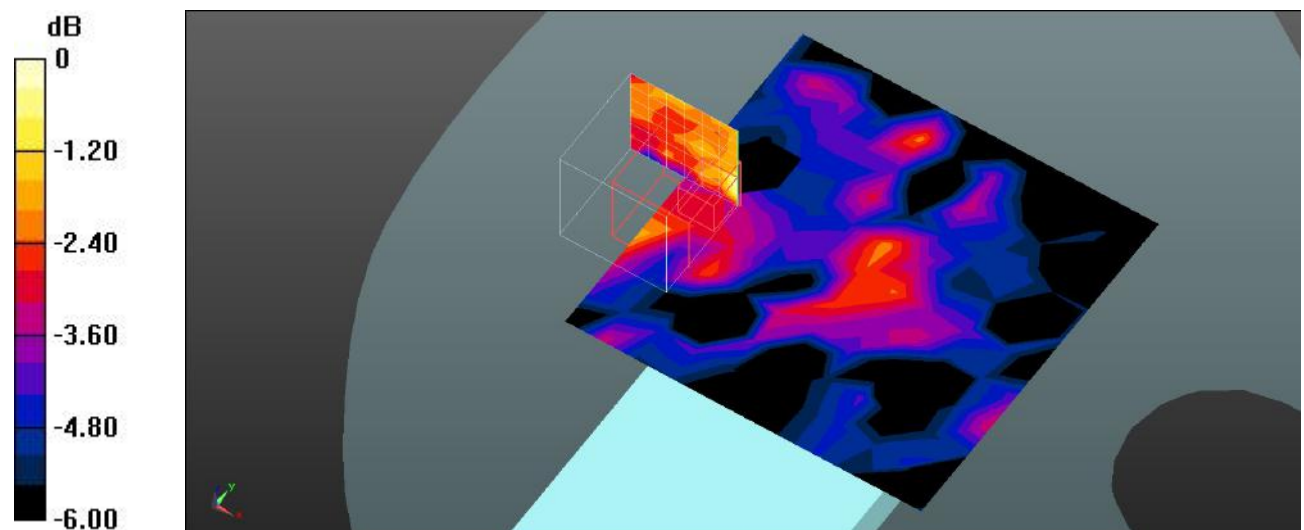

0 dB = 0.00626 W/kg = -22.03 dBW/kg

**Test Plot213#: ANT MAINBluetooth \_Body Back \_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2449 MHz;Duty Cycle: 1:1.30317

Medium parameters used:  $f = 2449$  MHz;  $\sigma = 1.829$  S/m;  $\epsilon_r = 37.789$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2449 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325;Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.00521 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.075 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.00623 W/kg

**SAR(1 g) = 0.00432 W/kg; SAR(10 g) = 0.00347 W/kg**

Maximum value of SAR (measured) = 0.00623 W/kg

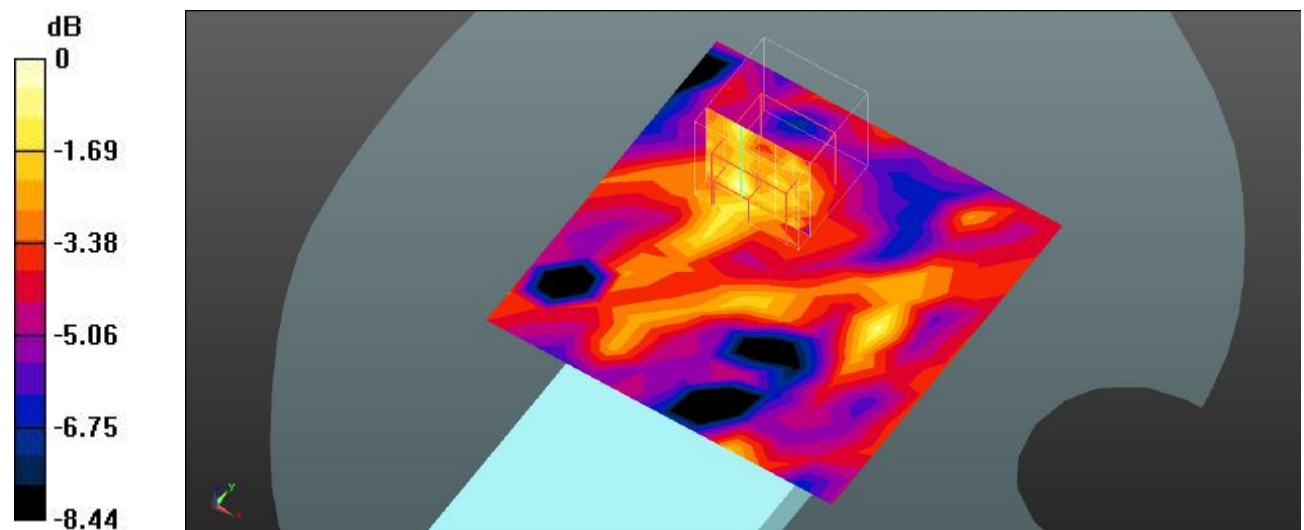

0 dB = 0.00623 W/kg = -22.06 dBW/kg

**Test Plot214#: ANT MAINBluetooth \_Body Right \_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2449 MHz;Duty Cycle: 1:1.30317

Medium parameters used:  $f = 2449 \text{ MHz}$ ;  $\sigma = 1.829 \text{ S/m}$ ;  $\epsilon_r = 37.789$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2449 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325;Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.0116 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 1.914 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.00958 W/kg

**SAR(1 g) = 0.00868 W/kg; SAR(10 g) = 0.00685 W/kg**

Maximum value of SAR (measured) = 0.00940 W/kg

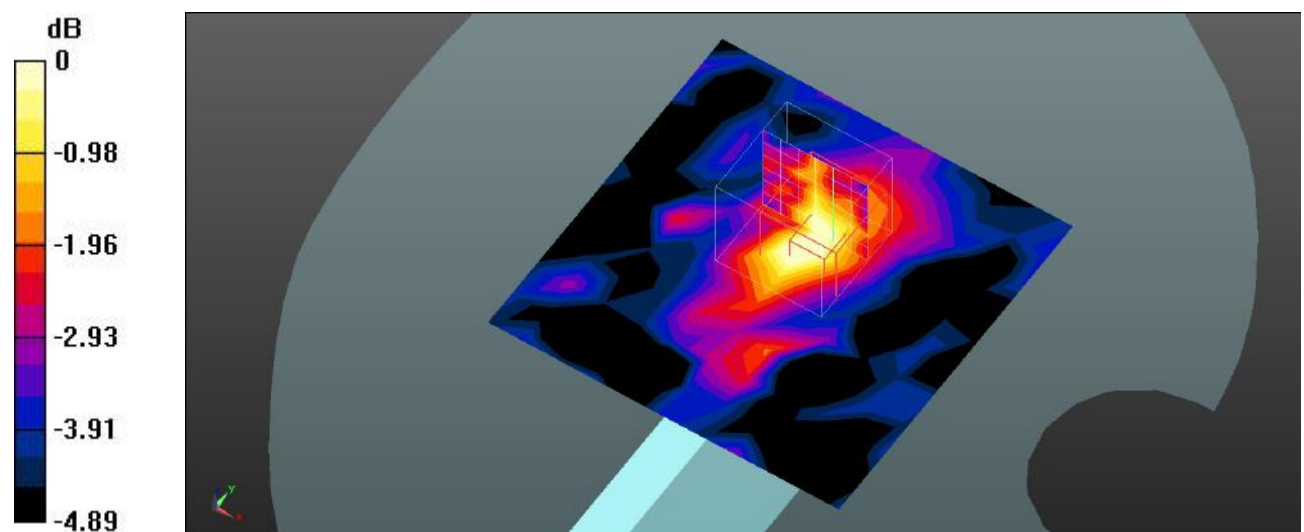

0 dB = 0.00940 W/kg = -20.27 dBW/kg

**Test Plot215#: ANT MAINBluetooth \_Body Top\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2449 MHz;Duty Cycle: 1:1.30317

Medium parameters used:  $f = 2449 \text{ MHz}$ ;  $\sigma = 1.829 \text{ S/m}$ ;  $\epsilon_r = 37.789$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2449 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325;Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (9x12x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.0318 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 2.663 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0410 W/kg

**SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.015 W/kg**

Maximum value of SAR (measured) = 0.0315 W/kg

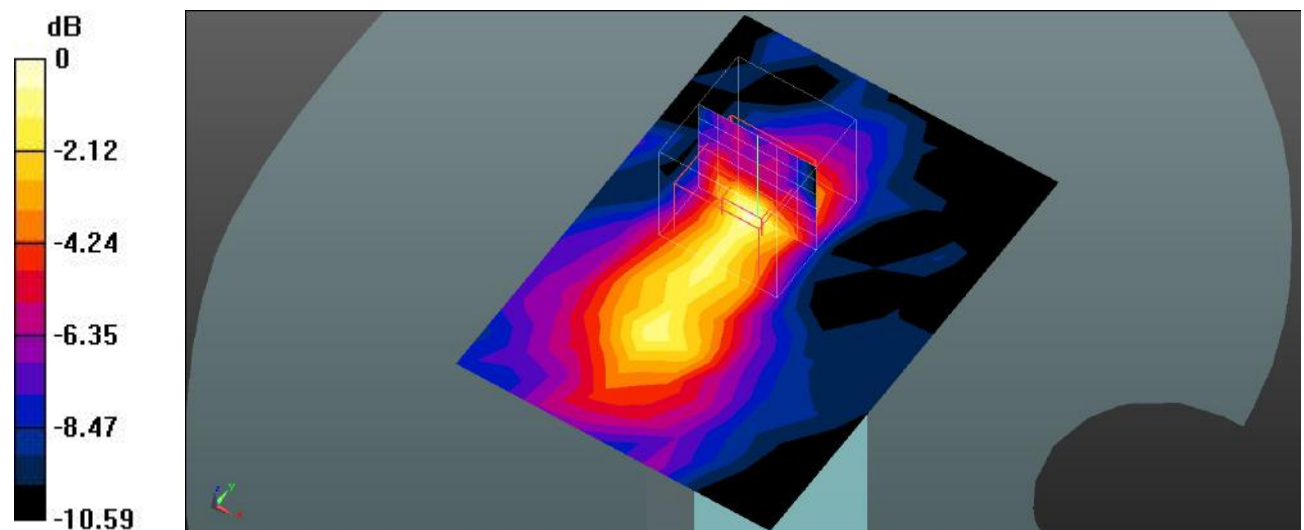

0 dB = 0.0315 W/kg = -15.02 dBW/kg

**Test Plot216#: ANT AUXBluetooth \_Head Left Cheek \_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2441 MHz;Duty Cycle: 1:1.30317

Medium parameters used:  $f = 2441 \text{ MHz}$ ;  $\sigma = 1.829 \text{ S/m}$ ;  $\epsilon_r = 37.789$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2441 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325;Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.0173 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 1.408 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.0250 W/kg

**SAR(1 g) = 0.016 W/kg; SAR(10 g) = 0.00958 W/kg**

Maximum value of SAR (measured) = 0.0185 W/kg

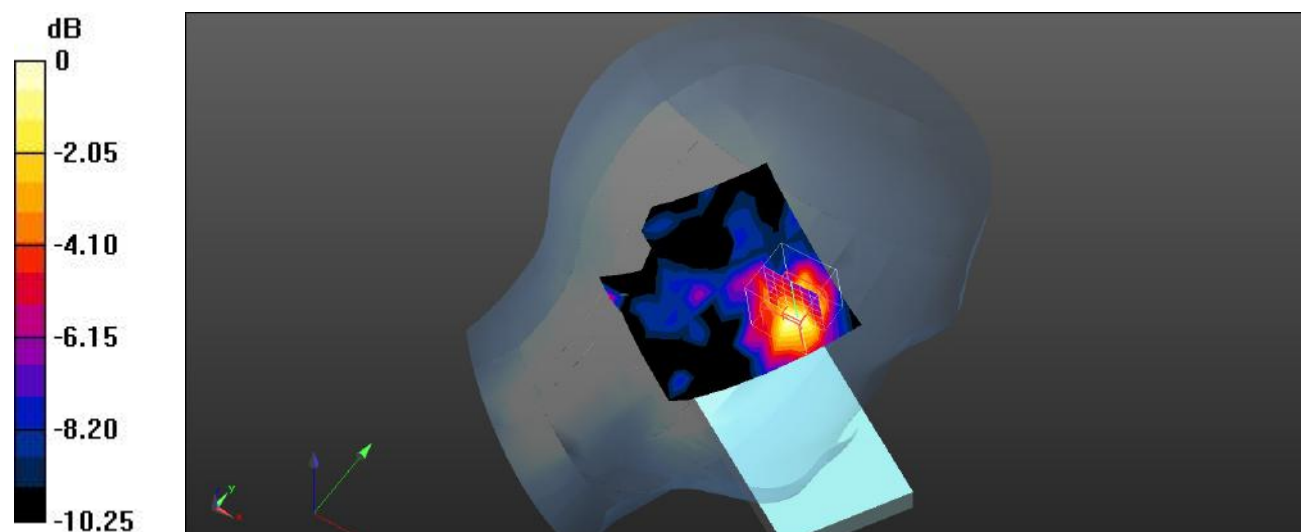

0 dB = 0.0185 W/kg = -17.33 dBW/kg

**Test Plot217#: ANT AUXBluetooth \_Head Left Tilt \_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**


Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2441 MHz;Duty Cycle: 1:1.30317

Medium parameters used:  $f = 2441 \text{ MHz}$ ;  $\sigma = 1.829 \text{ S/m}$ ;  $\epsilon_r = 37.789$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2441 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325;Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

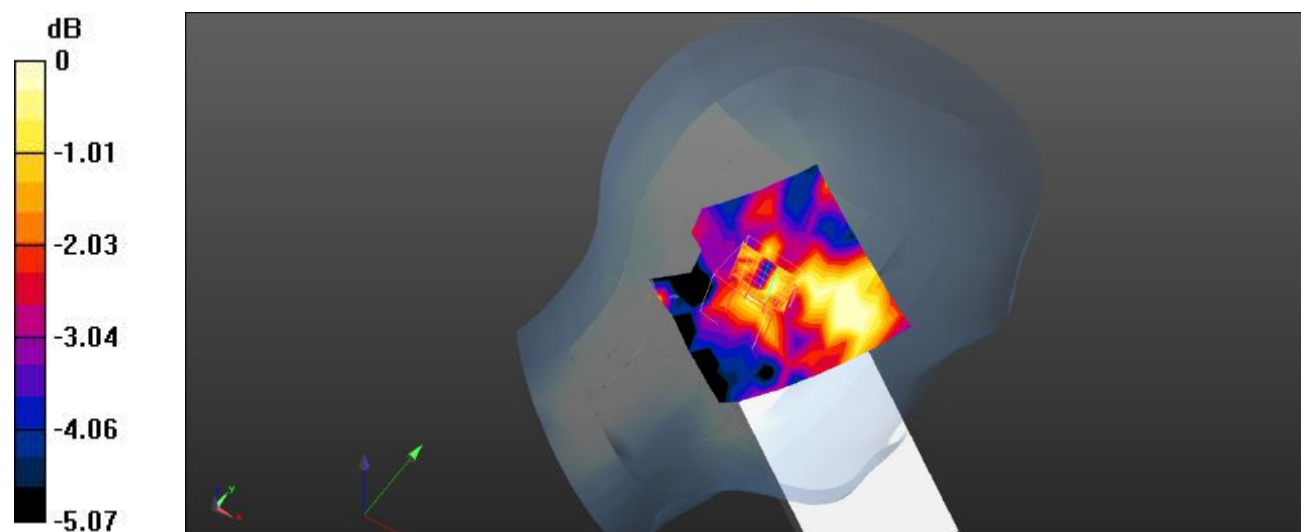**Area Scan (11x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ Maximum value of SAR (measured) =  $0.00740 \text{ W/kg}$ **Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ Reference Value =  $1.675 \text{ V/m}$ ; Power Drift =  $0.03 \text{ dB}$ Peak SAR (extrapolated) =  $0.00847 \text{ W/kg}$ **SAR(1 g) =  $0.0047 \text{ W/kg}$ ; SAR(10 g) =  $0.00229 \text{ W/kg}$** Maximum value of SAR (measured) =  $0.00640 \text{ W/kg}$  $0 \text{ dB} = 0.00640 \text{ W/kg} = -21.94 \text{ dBW/kg}$

**Test Plot218#: ANT AUXBluetooth \_Head Right Cheek \_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2441 MHz;Duty Cycle: 1:1.30317

Medium parameters used:  $f = 2441 \text{ MHz}$ ;  $\sigma = 1.829 \text{ S/m}$ ;  $\epsilon_r = 37.789$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2441 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325;Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.00641 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 1.794 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.0120 W/kg

**SAR(1 g) = 0.00443 W/kg; SAR(10 g) = 0.00167 W/kg**

Maximum value of SAR (measured) = 0.00646 W/kg

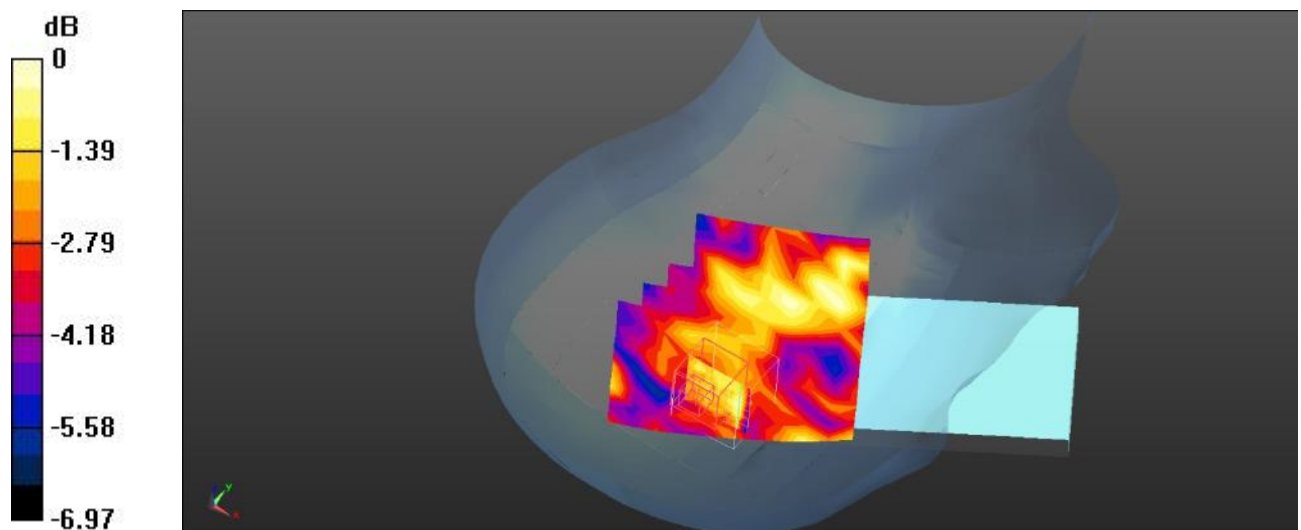

0 dB = 0.00646 W/kg = -21.90 dBW/kg

**Test Plot219#: ANT AUXBluetooth \_Head Right Tilt \_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2441 MHz;Duty Cycle: 1:1.30317

Medium parameters used:  $f = 2441 \text{ MHz}$ ;  $\sigma = 1.829 \text{ S/m}$ ;  $\epsilon_r = 37.789$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2441 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325;Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.00515 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 1.549 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.0180 W/kg

**SAR(1 g) = 0.00343 W/kg; SAR(10 g) = 0.00153 W/kg**

Maximum value of SAR (measured) = 0.00606 W/kg

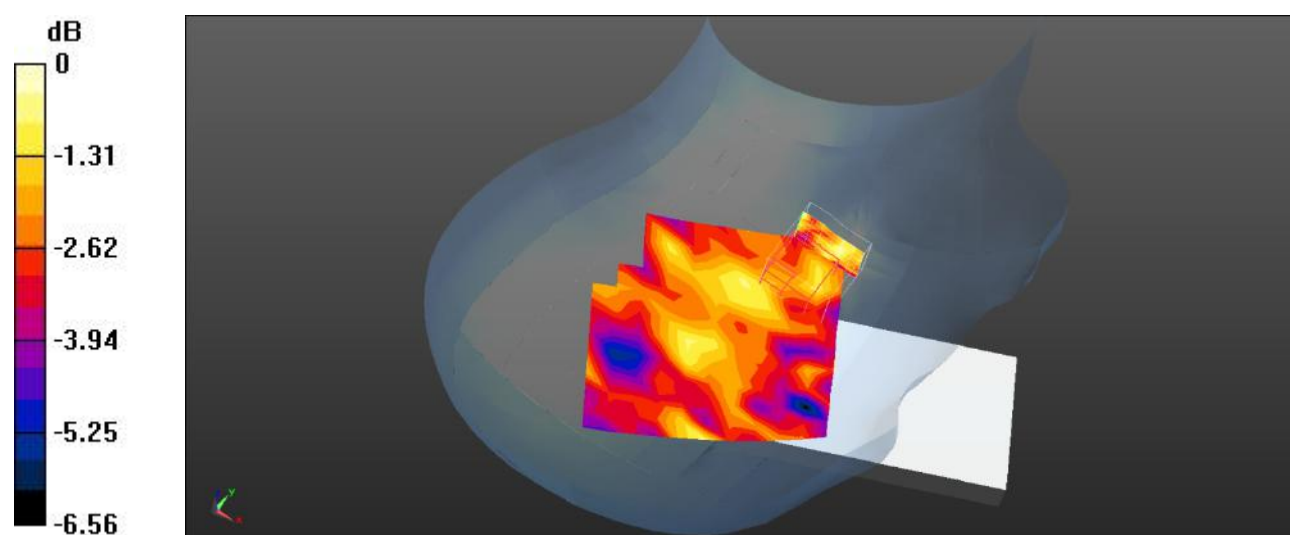

0 dB = 0.00606 W/kg = -22.18 dBW/kg

**Test Plot220#: ANT AUXBluetooth \_Body Front \_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2441 MHz;Duty Cycle: 1:1.30317

Medium parameters used:  $f = 2441 \text{ MHz}$ ;  $\sigma = 1.829 \text{ S/m}$ ;  $\epsilon_r = 37.789$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2441 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325;Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.0135 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 1.885 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.0220 W/kg

**SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.00771 W/kg**

Maximum value of SAR (measured) = 0.0135 W/kg

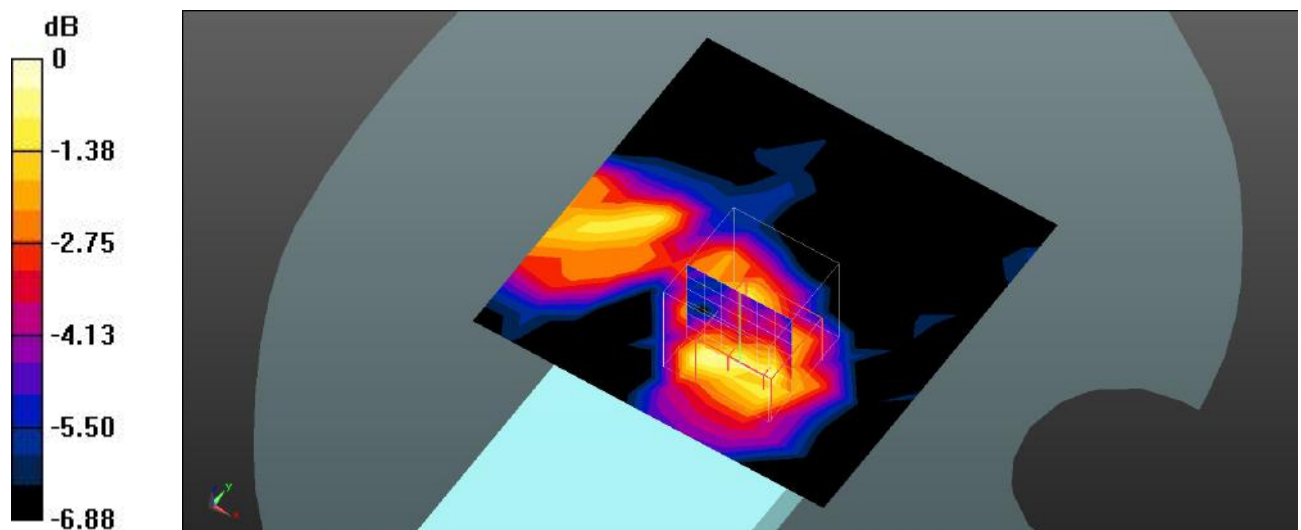

0 dB = 0.0135 W/kg = -18.70 dBW/kg

**Test Plot221#: ANT AUXBluetooth \_Body Back\_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2441 MHz;Duty Cycle: 1:1.30317

Medium parameters used:  $f = 2441 \text{ MHz}$ ;  $\sigma = 1.829 \text{ S/m}$ ;  $\epsilon_r = 37.789$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2441 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325;Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.0224 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 1.752 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0420 W/kg

**SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.014 W/kg**

Maximum value of SAR (measured) = 0.0311 W/kg

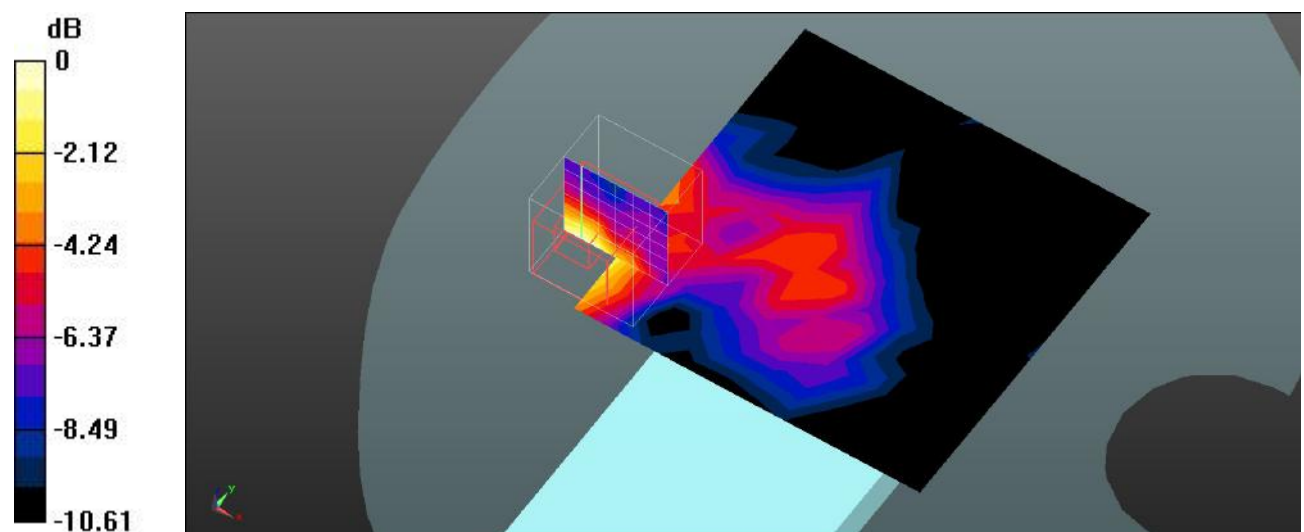

0 dB = 0.0311 W/kg = -15.07 dBW/kg

**Test Plot222#: ANT AUXBluetooth \_Body Right \_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2441 MHz;Duty Cycle: 1:1.30317

Medium parameters used:  $f = 2441 \text{ MHz}$ ;  $\sigma = 1.829 \text{ S/m}$ ;  $\epsilon_r = 37.789$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2441 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325;Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.0127 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 2.457 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0120 W/kg

**SAR(1 g) = 0.00922 W/kg; SAR(10 g) = 0.00714 W/kg**

Maximum value of SAR (measured) = 0.0112 W/kg

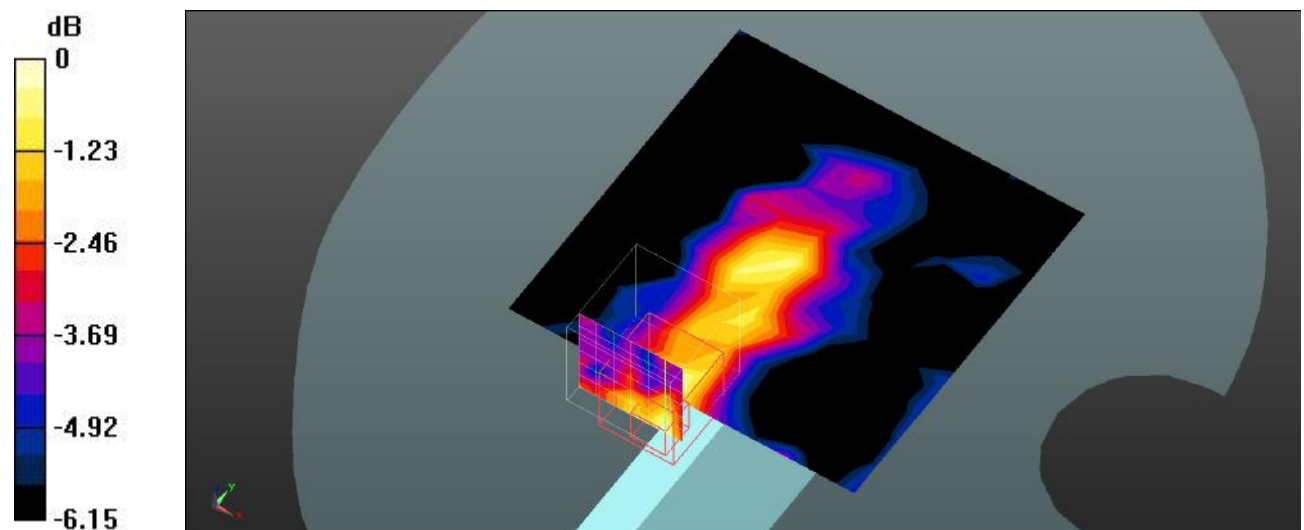

0 dB = 0.0112 W/kg = -19.51 dBW/kg

**Test Plot223#: ANT AUXBluetooth \_Body Top \_Middle****DUT: Mobile Phone; Type: CK6ns; Serial: 23MJ\_2;**

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2441 MHz;Duty Cycle: 1:1.30317

Medium parameters used:  $f = 2441 \text{ MHz}$ ;  $\sigma = 1.829 \text{ S/m}$ ;  $\epsilon_r = 37.789$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54) @ 2441 MHz; Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325;Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.14 (7501)

**Area Scan (11x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.0126 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 2.105 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.0130 W/kg

**SAR(1 g) = 0.010 W/kg; SAR(10 g) = 0.00734 W/kg**

Maximum value of SAR (measured) = 0.0108 W/kg

