

TEST REPORT

FCC ID: 2ADYY-CN5C

Product: Mobile Phone

Model No.: CN5c

Trade Mark: TECNO

Report No.: WSCT-ANAB-R&E251100089A-15B

Issued Date: 15 December 2025

Issued for:

TECNO MOBILE LIMITED

FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI
STREET FOTAN NT HONGKONG

Issued By:

World Standardization Certification & Testing Group(Shenzhen) Co.,Ltd.
Building A-B,Baoli'an Industrial Park,No.58 and 60,Tangtou Avenue, Shiyan
Street, Bao'an District, Shenzhen City, Guangdong Province, China

TEL: +86-755-26996192

FAX: +86-755-86376605



Note: This report shall not be reproduced except in full, without the written approval of World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. This document may be altered or revised by World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.



TABLE OF CONTENTS

1. Test Certification	3
2. GENERAL DESCRIPTION OF EUT	4
3. Test Result Summary	5
4. TEST METHODOLOGY	6
4.1. CONFIGURATION OF SYSTEM UNDER TEST	7
4.2. DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)	8
5. MEASUREMENT INSTRUMENTS	9
6. Facilities and Accreditations	10
6.1. FACILITIES	10
6.2. ACCREDITATIONS	10
6.3. MEASUREMENT UNCERTAINTY	11
7. EMC EMISSION TEST	12
7.1. CONDUCTED EMISSION MEASUREMENT	12
7.2. TEST RESULTS	14
7.3. RADIATED EMISSION MEASUREMENT	16
8. Test Setup Photographs	23

1. Test Certification

Product:	Mobile Phone
Model No.:	CN5c
Trade Mark:	TECNO
Applicant:	TECNO MOBILE LIMITED FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Manufacturer:	TECNO MOBILE LIMITED FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Date of receipt:	23 September 2025
Date of Test:	24 September 2025 to 15 December 2025
Applicable Standards:	FCC CFR Title 47 Part 15 Subpart B

The above equipment has been tested by World Standardization Certification & Testing Group(Shenzhen) Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:

Jiang Guanliang
(Jiang Guanliang)

Checked By:

Qin Shuiquan
(Qin Shuiquan)

Approved By:

Li Huaibi
(Li Huaibi)

Date:

15 December 2025



2. GENERAL DESCRIPTION OF EUT

Product Name:	Mobile Phone
Model:	CN5c
Software number	CN5c-16.1.0
Hardware number	V1.3
Trade Mark:	TECNO
Operating Voltage:	Adapter 1: U450TSB(AH) Input: 100-240V~50/60Hz 1.8A Output: 5.0V~3.0A 15.0W or 5.0-10.0V~4.5A or 11.0V~4.1A 45.0W Max Adapter 2: U450TSB(KX) Input: 100-240V~50/60Hz 1.8A Output: 5.0V~3.0A 15.0W or 5.0-10.0V~4.5A or 11.0V~4.1A 45.0W Max Rechargeable Li-ion Polymer Battery: BL-60AT(Zhejiang Sunwoda Electronic Co.,Ltd.) Nominal Voltage: 3.92V Rated Capacity: 5990mAh/23.49Wh Typical Capacity: 6150mAh/24.11Wh Limited Charge Voltage: 4.53V Rechargeable Li-ion Polymer Battery: BL-60AT(Dongguan Ampere Technology Limited) Nominal Voltage: 3.92V Rated Capacity: 5990mAh/23.49Wh Typical Capacity: 6150mAh/24.11Wh Limited Charge Voltage: 4.53V
Test Voltage:	120Vac,60Hz
Remark:	N/A.

Note: 1. N/A stands for no applicable.

3. Test Result Summary

Requirement	CFR 47 Section	Result
CONDUCTED EMISSION	§15.107	PASS
RADIATED EMISSION	§15.109	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.


4. TEST METHODOLOGY

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Video Recording
Model 2	Video Playing
Mode 3	Exchange data with computer
Mode 4	FM

4.1. CONFIGURATION OF SYSTEM UNDER TEST

Mode 1&2&4

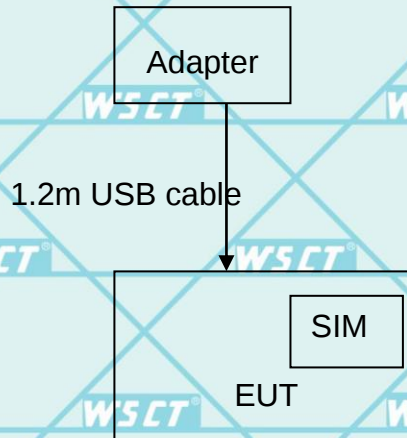

Mode 3:



(EUT: Mobile Phone)

I/O Port of EUT			
I/O Port Type	Q'TY	Cable	Tested with
Power	1	1.2m USB cable, unshielded	1

4.2. DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Adapter	/	Adapter1-2	/	/
2	PC	Lenovo	TP00067A	PF-OGT3MS	/

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

5. MEASUREMENT INSTRUMENTS

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibrated	Calibrated until
Test software	--	EZ-EMC	CON-03A	--	--
ESCI Test Receiver	R&S	ESCI	100005	2025-11-05	2026-11-04
LISN	AFJ	LS16	16010222119	2025-11-05	2026-11-04
LISN(EUT)	Mestec	AN3016	04/10040	2025-11-05	2026-11-04
pre-amplifier	CDSI	PAP-1G18-38	--	2025-11-05	2026-11-04
System Controller	CT	SC100	-	2025-11-05	2026-11-04
Bi-log Antenna	Chase	CBL6111C	2576	2025-11-05	2026-11-04
Spectrum analyzer	R&S	FSU26	200409	2025-11-05	2026-11-04
Horn Antenna	SCHWARZBECK	9120D	1141	2025-11-05	2026-11-04
Bi-log Antenna	SCHWARZBECK	VULB9168	01488	2025-07-29	2026-07-28
Pre Amplifier	H.P.	HP8447E	2945A02715	2025-11-05	2026-11-04
9*6*6 Anechoic	--	--	--	2025-11-05	2026-11-04

6. Facilities and Accreditations

6.1. Facilities

All measurement facilities used to collect the measurement data are located at **World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. Building A-B, Baoli'an Industrial Park, No.58 and 60, Tangtou Avenue, Shiyan Street, Bao'an District, Shenzhen City, Guangdong Province, China**

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 32. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:2017.

USA	ANAB - Certificate Number: AT-3951
China	CNAS (Registration Number: L3732)
Canada	ISED (CAB identifier: CN0178)

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.wsct-cert.com>

6.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission Test	$\pm 3.2\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(<1GHz)	$\pm 3.3\text{dB}$
5	All emissions, radiated(>1GHz)	$\pm 4.7\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2.0\%$

7. EMC EMISSION TEST

7.1. CONDUCTED EMISSION MEASUREMENT

7.1.1. POWER LINE CONDUCTED EMISSION LIMITS

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.


TEST SETUP

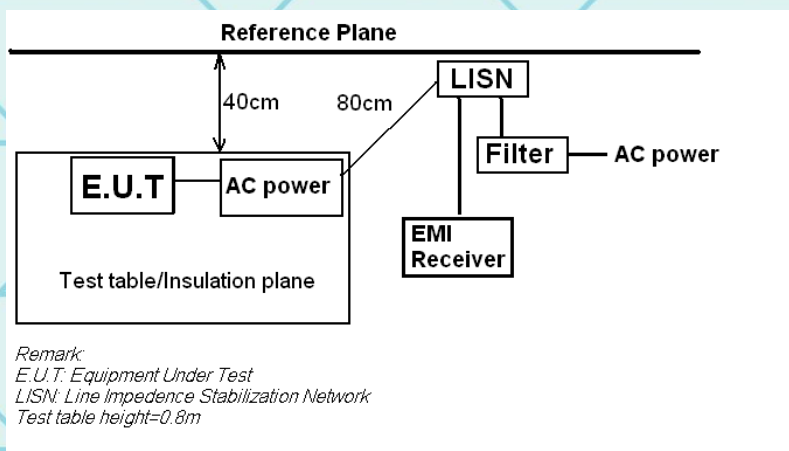

7.2. Test Results


Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 2(the worst case)
Test Voltage:	120Vac,60Hz		

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

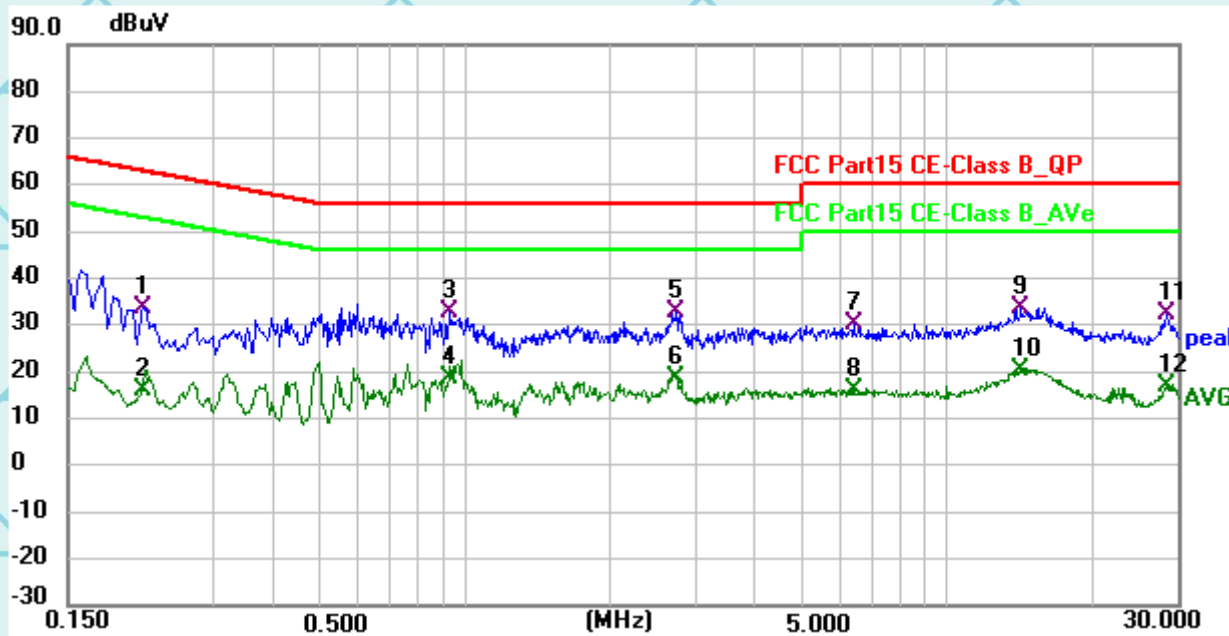

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2130	13.10	20.68	33.78	63.09	-29.31	QP
2	0.2130	-4.75	20.68	15.93	53.09	-37.16	AVG
3	0.9240	12.18	20.64	32.82	56.00	-23.18	QP
4	0.9240	-1.91	20.64	18.73	46.00	-27.27	AVG
5 *	2.7375	12.27	20.60	32.87	56.00	-23.13	QP
6	2.7375	-2.01	20.60	18.59	46.00	-27.41	AVG
7	6.4005	9.68	20.53	30.21	60.00	-29.79	QP
8	6.4005	-4.51	20.53	16.02	50.00	-33.98	AVG
9	14.2170	13.54	20.21	33.75	60.00	-26.25	QP
10	14.2170	-0.05	20.21	20.16	50.00	-29.84	AVG
11	28.5900	11.15	21.01	32.16	60.00	-27.84	QP
12	28.5900	-4.10	21.01	16.91	50.00	-33.09	AVG

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

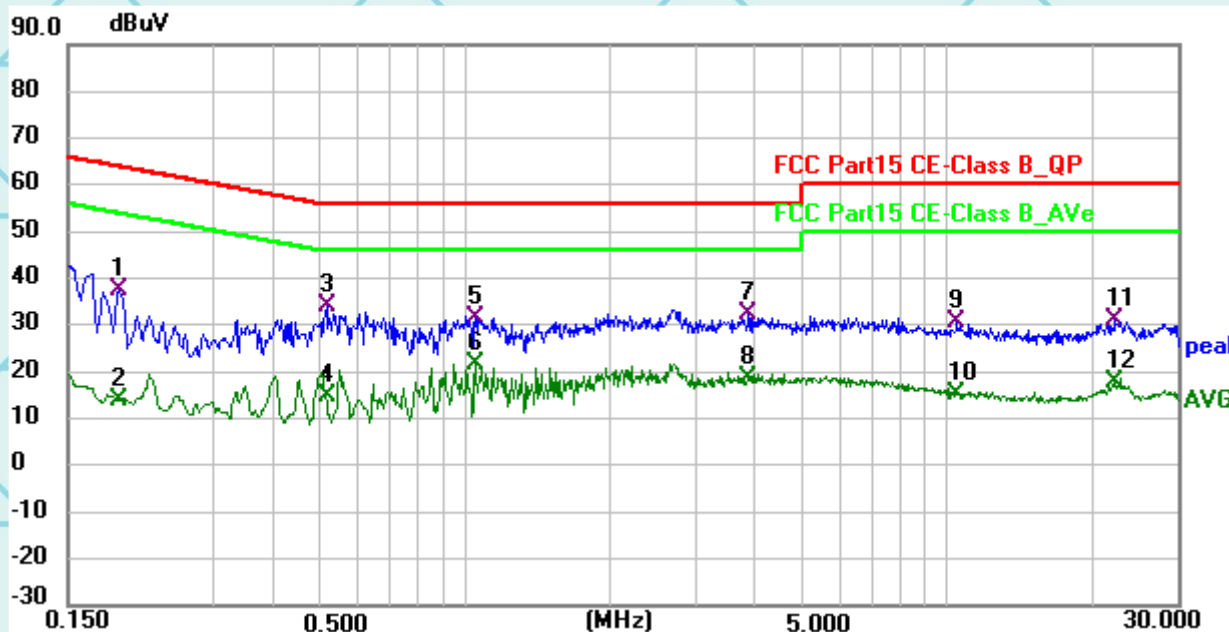

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1905	16.65	20.70	37.35	64.01	-26.66	QP
2	0.1905	-6.77	20.70	13.93	54.01	-40.08	AVG
3 *	0.5144	13.35	20.51	33.86	56.00	-22.14	QP
4	0.5144	-5.53	20.51	14.98	46.00	-31.02	AVG
5	1.0500	11.02	20.67	31.69	56.00	-24.31	QP
6	1.0500	0.98	20.67	21.65	46.00	-24.35	AVG
7	3.8805	11.92	20.58	32.50	56.00	-23.50	QP
8	3.8805	-1.83	20.58	18.75	46.00	-27.25	AVG
9	10.4550	10.06	20.42	30.48	60.00	-29.52	QP
10	10.4550	-5.07	20.42	15.35	50.00	-34.65	AVG
11	22.3080	10.55	20.42	30.97	60.00	-29.03	QP
12	22.3080	-2.50	20.42	17.92	50.00	-32.08	AVG

Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = LISN Factor + Cable loss

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) – Limits (dBuV)

Q.P. =Quasi-Peak AVG =average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

7.3. RADIATED EMISSION MEASUREMENT

7.3.1. Radiated Emission Limits

The field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 1Hz for Average


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

TEST SETUP

(A) Radiated Emission Test-Up Frequency 30MHz~1GHz

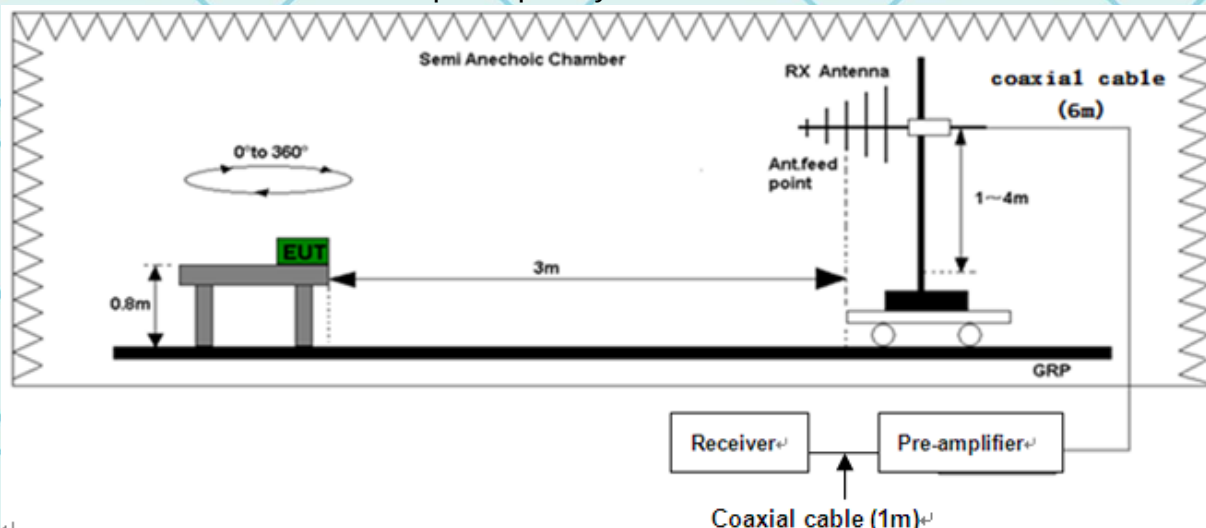

(B) Radiated Emission Test-Up Frequency Above 1GHz

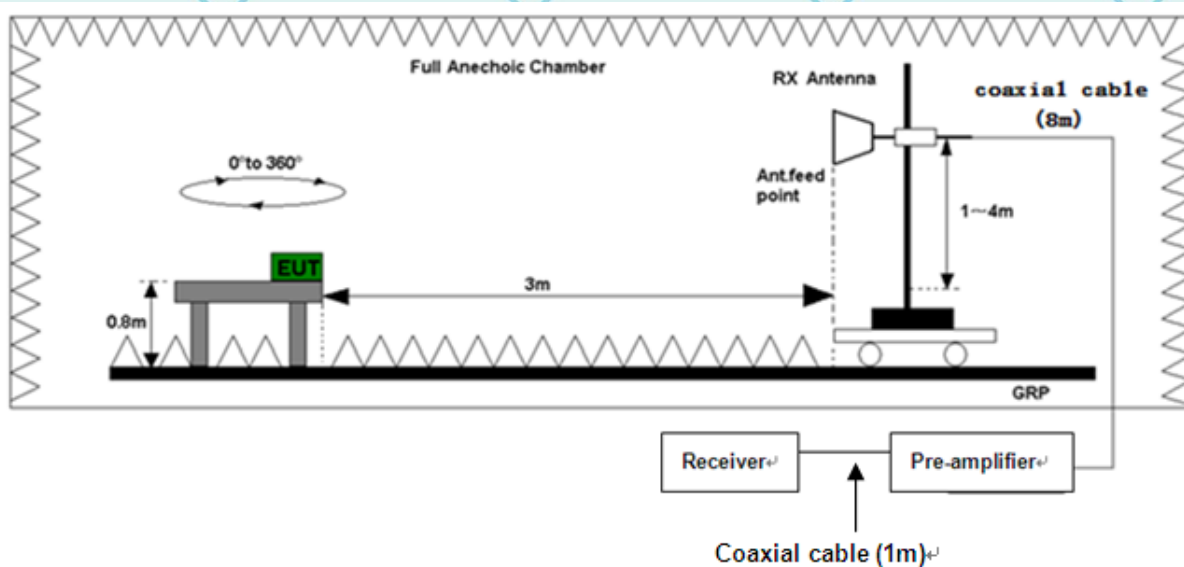


7.3.2. Test Results

Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 2(the worst case)
Test Voltage:	120Vac,60Hz		

Please refer to following diagram for individual


Below 1GHz

Horizontal:

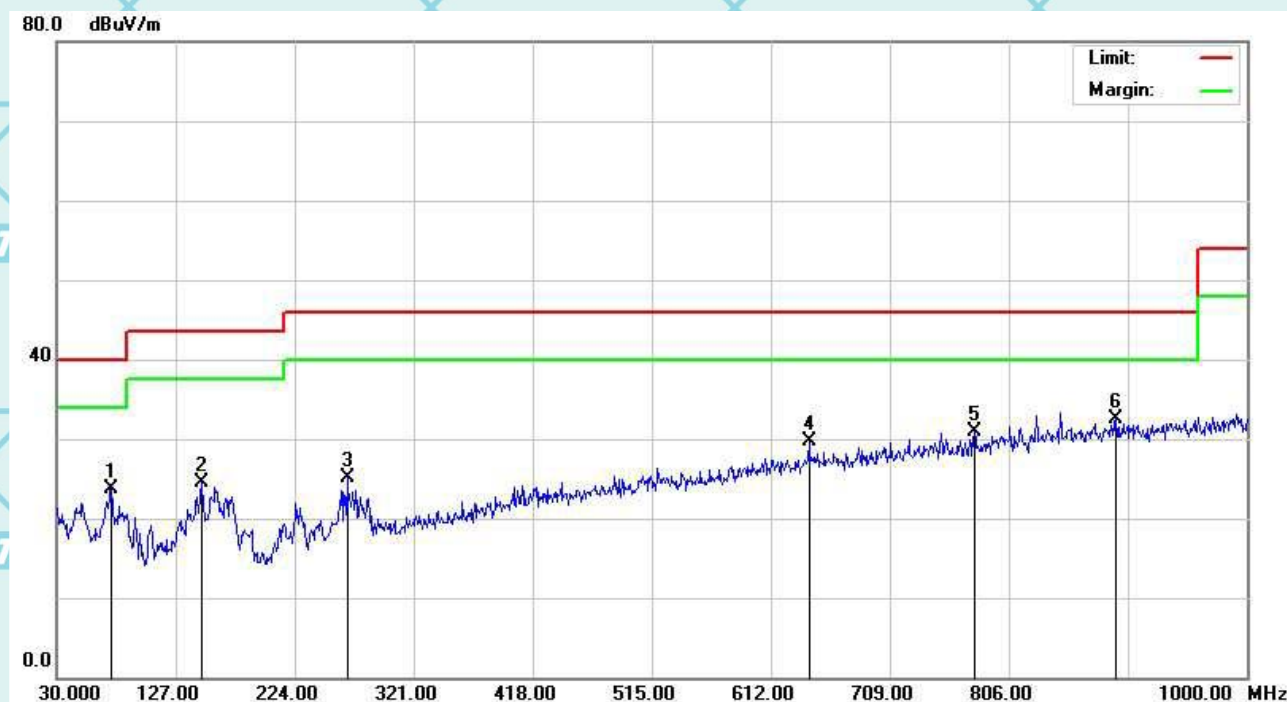

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		74.6200	35.14	-11.34	23.80	40.00	-16.20	QP
2		148.3400	31.17	-6.61	24.56	43.50	-18.94	QP
3		266.6800	33.14	-7.97	25.17	46.00	-20.83	QP
4		643.0400	27.59	2.16	29.75	46.00	-16.25	QP
5		777.8700	26.49	4.32	30.81	46.00	-15.19	QP
6	*	893.3000	25.84	6.59	32.43	46.00	-13.57	QP

Vertical:

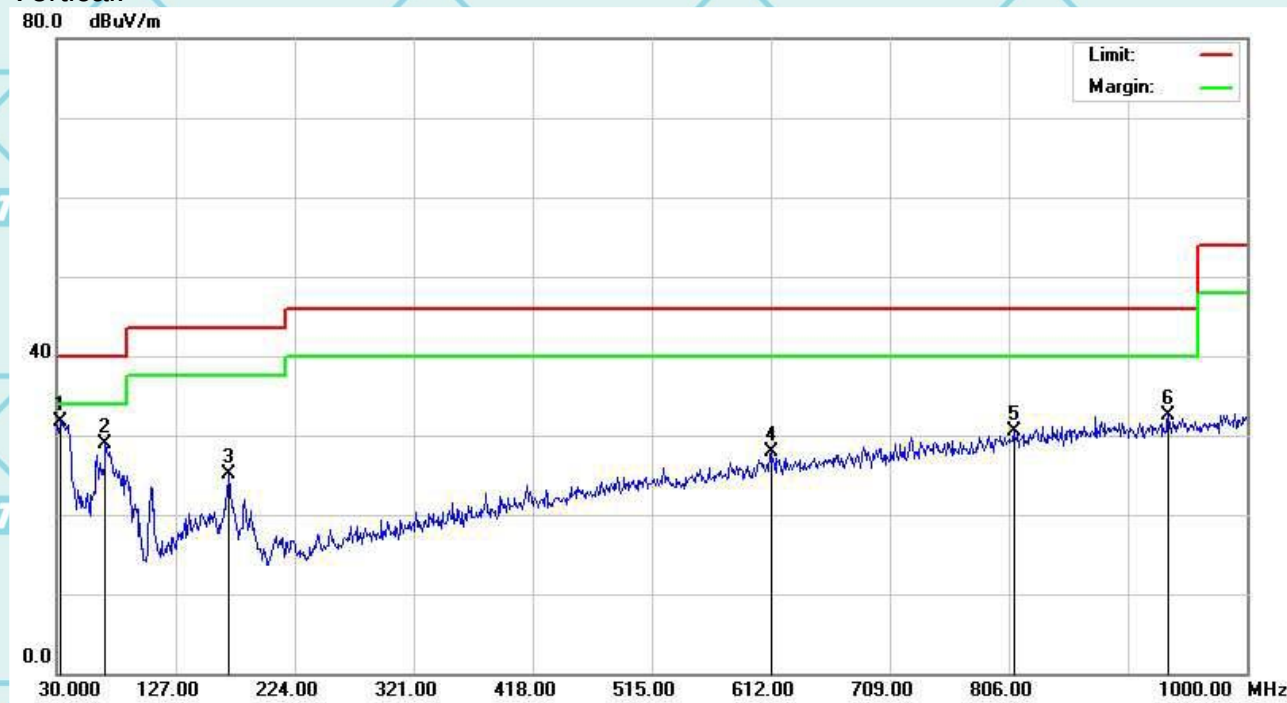

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	32.9100	52.27	-20.52	31.75	40.00	-8.25	QP
2		69.7699	49.18	-20.29	28.89	40.00	-11.11	QP
3		170.6500	44.91	-19.83	25.08	43.50	-18.42	QP
4		612.0000	45.59	-17.66	27.93	46.00	-18.07	QP
5		809.8800	47.10	-16.60	30.50	46.00	-15.50	QP
6		935.9800	48.23	-15.72	32.51	46.00	-13.49	QP

Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss - Amplifier factor.

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard


Margin (dB) = Measurement (dBuV) – Limits (dBuV)

TEST RESULTS

Above 1GHz(1~6GHz) :(Mode 2—worst case)


Note: The spurious above 6G is noise only, do not show on the report.

Horizontal:

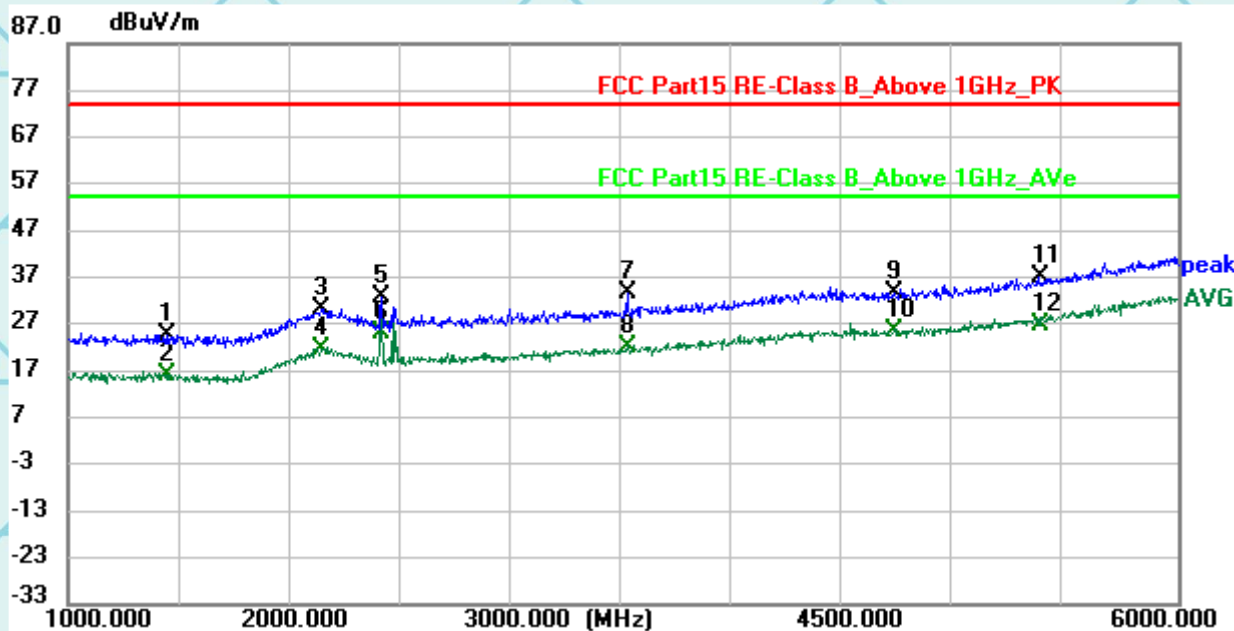

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1446.875	32.13	-7.42	24.71	74.00	-49.29	peak
2	1446.875	23.34	-7.42	15.92	54.00	-38.08	AVG
3	2145.000	31.34	-1.26	30.08	74.00	-43.92	peak
4	2145.000	22.85	-1.26	21.59	54.00	-32.41	AVG
5	2414.375	36.65	-4.02	32.63	74.00	-41.37	peak
6	2414.375	29.24	-4.02	25.22	54.00	-28.78	AVG
7	3524.375	34.84	-1.02	33.82	74.00	-40.18	peak
8	3524.375	22.88	-1.02	21.86	54.00	-32.14	AVG
9	4721.875	29.81	3.98	33.79	74.00	-40.21	peak
10	4721.875	21.37	3.98	25.35	54.00	-28.65	AVG
11	5375.625	30.72	6.48	37.20	74.00	-36.80	peak
12 *	5375.625	20.45	6.48	26.93	54.00	-27.07	AVG

Vertical:

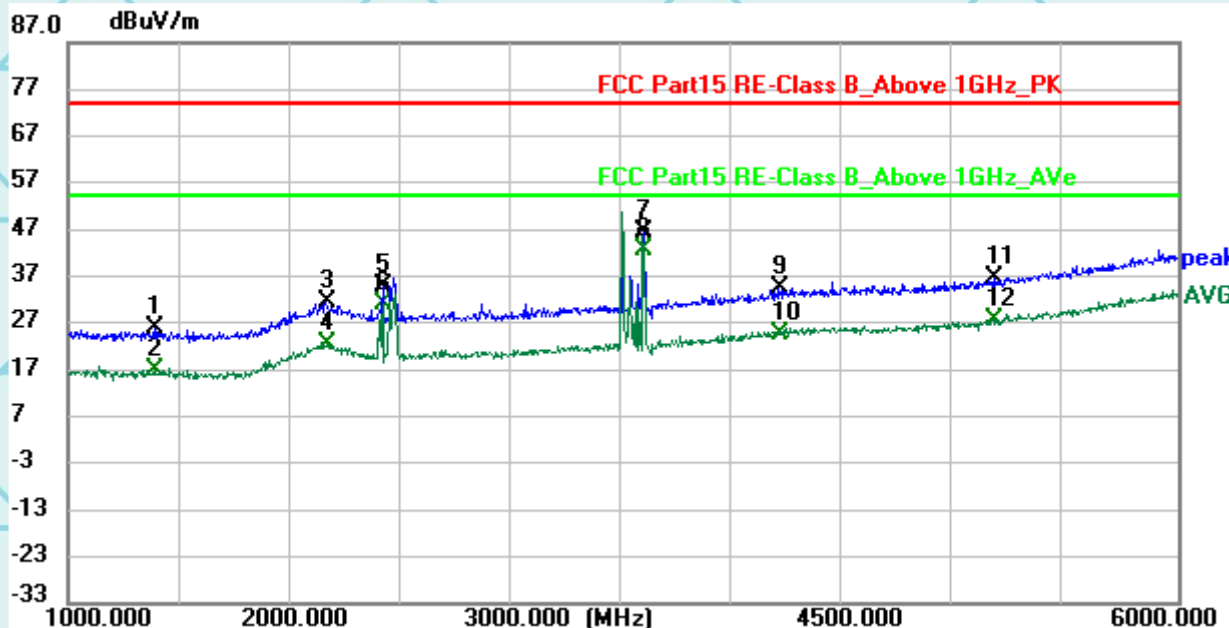

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1391.875	33.20	-7.45	25.75	74.00	-48.25	peak
2	1391.875	24.28	-7.45	16.83	54.00	-37.17	AVG
3	2165.625	32.71	-1.34	31.37	74.00	-42.63	peak
4	2165.625	23.86	-1.34	22.52	54.00	-31.48	AVG
5	2421.875	39.03	-3.99	35.04	74.00	-38.96	peak
6	2421.875	34.94	-3.99	30.95	54.00	-23.05	AVG
7	3597.500	47.27	-0.72	46.55	74.00	-27.45	peak
8 *	3597.500	43.32	-0.72	42.60	54.00	-11.40	AVG
9	4207.500	32.63	1.81	34.44	74.00	-39.56	peak
10	4207.500	22.82	1.81	24.63	54.00	-29.37	AVG
11	5175.000	30.65	5.82	36.47	74.00	-37.53	peak
12	5175.000	21.92	5.82	27.74	54.00	-26.26	AVG

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Freq. = Emission frequency in MHz

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Over= Emission Level - Limit.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

8. Test Setup Photographs

Please refer to Annex "Set Up Photos-15B" for test setup photos

*******END OF REPORT*******