

Appendix B: Plots of SAR Test Data

Test Laboratory: JYTSZ

Date: 2026/3/25

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, GSM (0); Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.883$ S/m; $\epsilon_r = 42.898$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(9.8, 9.21, 9.31) @ 824.2 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

GSM 850 Left Cheek/Low Channel/Area Scan (51x61x1): Interpolated grid:

$dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.598 W/kg

GSM 850 Left Cheek/Low Channel/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

$dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.181 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.534 W/kg; SAR(10 g) = 0.279 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 60.2%

Maximum value of SAR (measured) = 0.723 W/kg

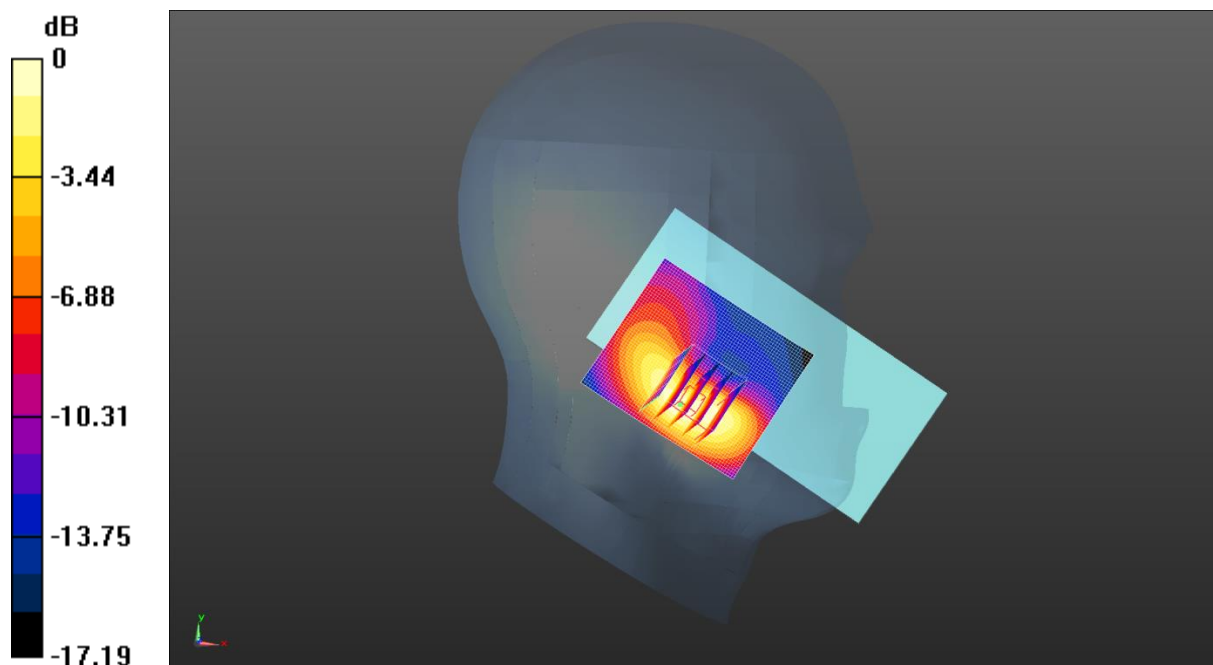

0 dB = 0.598 W/kg = -2.23 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/30

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, GSM (0); Frequency: 1909.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.424$ S/m; $\epsilon_r = 40.554$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(7.88, 7.4, 7.49) @ 1909.8 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

GSM 1900 Right Tilted/High Channel/Area Scan (51x61x1): Interpolated grid:

$dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.827 W/kg

GSM 1900 Right Tilted/High Channel/Zoom Scan (5x5x7)/Cube 0: Measurement

grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 18.87 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.466 W/kg; SAR(10 g) = 0.243 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 44.5%

Maximum value of SAR (measured) = 0.740 W/kg

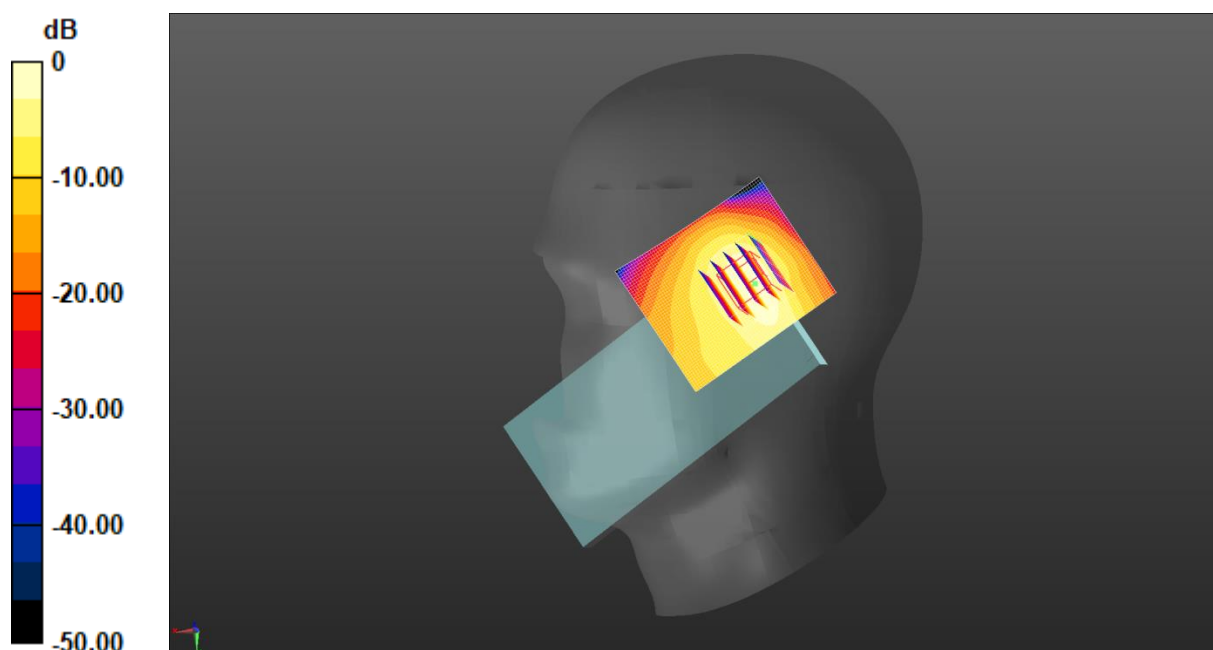

$$0 \text{ dB} = 0.827 \text{ W/kg} = -0.82 \text{ dBW/kg}$$

Test Laboratory: JYTSZ

Date: 2026/3/30

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.248$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(7.88, 7.4, 7.49) @ 1852.4 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

WCDMA 1900 Right Tilted/Low Channel/Area Scan (51x61x1): Interpolated grid:

$dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.98 W/kg

WCDMA 1900 Right Tilted/Low Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 27.50 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 2.18 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.522 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 50.2%

Maximum value of SAR (measured) = 1.54 W/kg

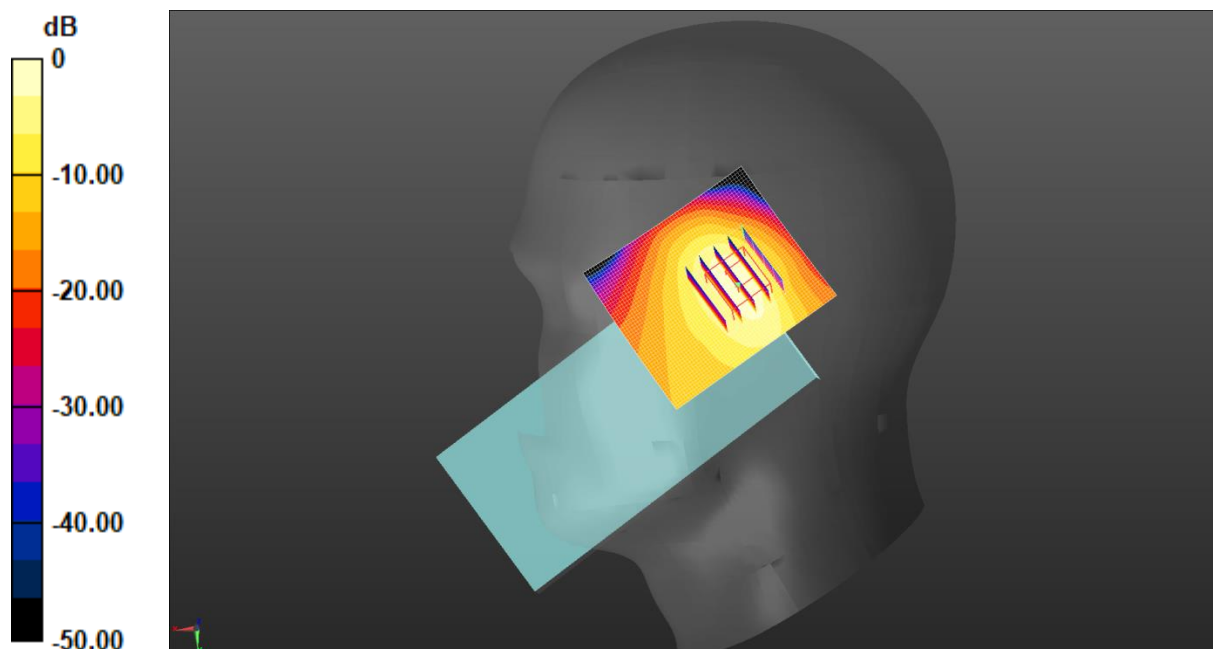

0 dB = 1.98 W/kg = 2.98 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/27

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 40.56$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(8.34, 7.83, 7.92) @ 1732.6 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

WCDMA 1700 Right Cheek/Middle Channel/Area Scan (51x61x1): Interpolated

grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.12 W/kg

WCDMA 1700 Right Cheek/Middle Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.57 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.643 W/kg; SAR(10 g) = 0.370 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 61.2%

Maximum value of SAR (measured) = 0.902 W/kg

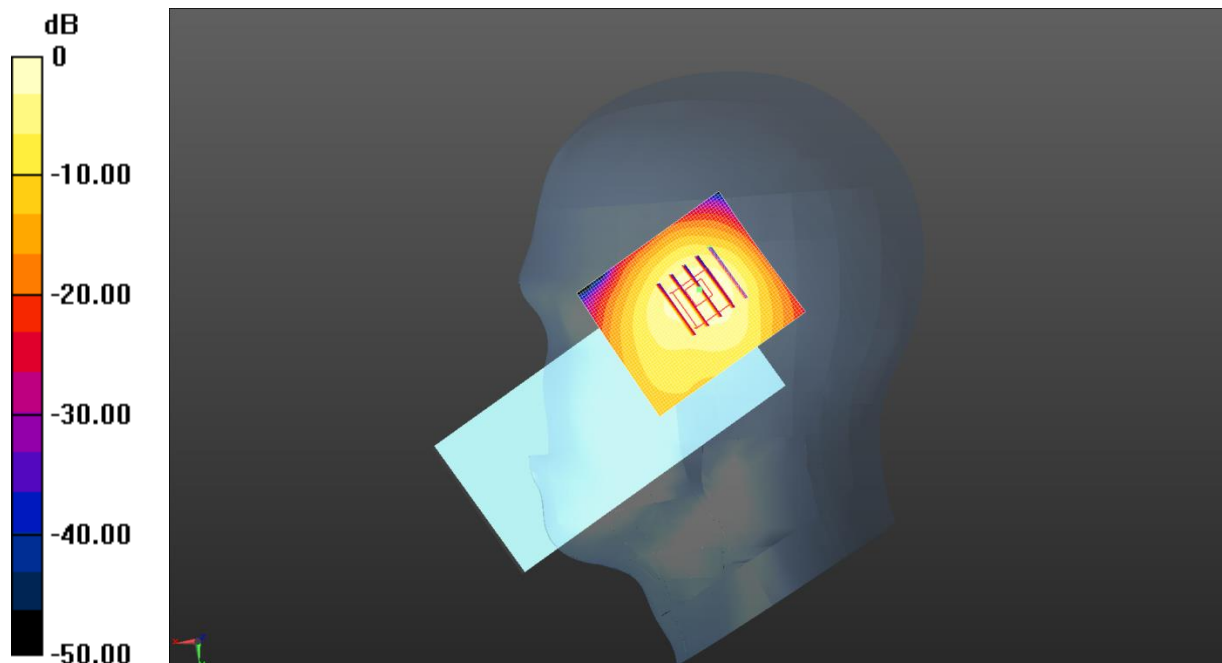

$$0 \text{ dB} = 1.12 \text{ W/kg} = 0.51 \text{ dBW/kg}$$

Test Laboratory: JYTSZ

Date: 2026/3/25

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 42.889$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(9.8, 9.21, 9.31) @ 826.4 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

WCDMA 850 Left Cheek/Low Channel/Area Scan (51x61x1): Interpolated grid:

$dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.338 W/kg

WCDMA 850 Left Cheek/Low Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.707 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.567 W/kg

SAR(1 g) = 0.271 W/kg; SAR(10 g) = 0.145 W/kg

Smallest distance from peaks to all points 3 dB below = 4.7 mm

Ratio of SAR at M2 to SAR at M1 = 58.1%

Maximum value of SAR (measured) = 0.377 W/kg

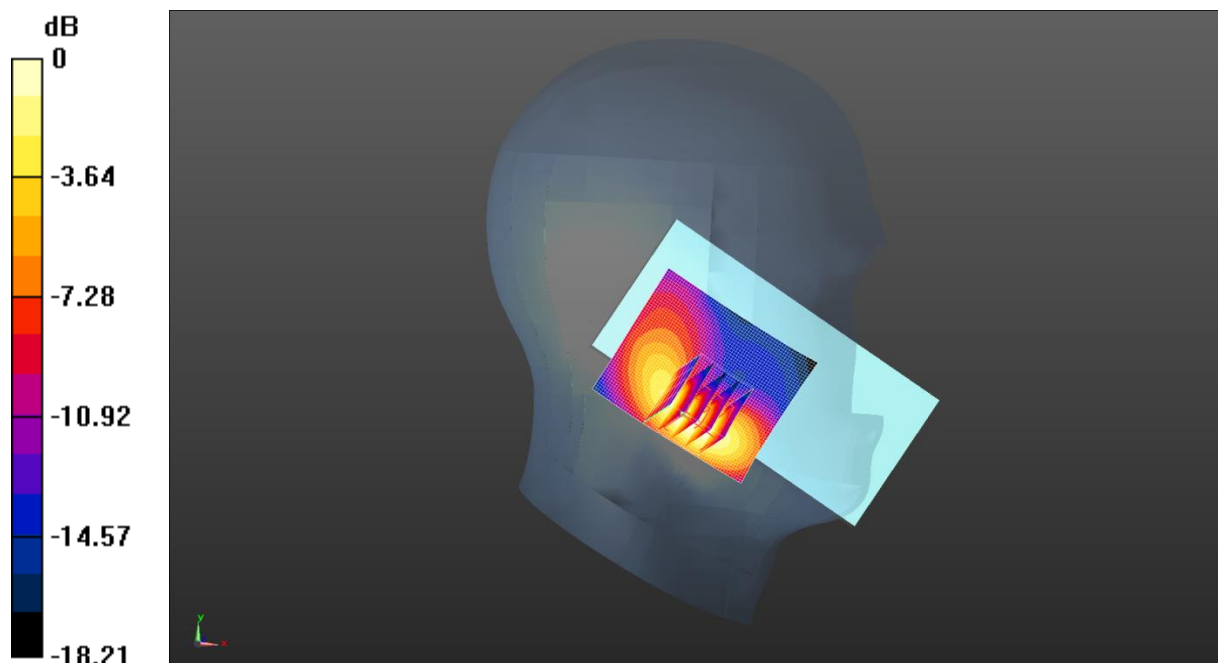

$$0 \text{ dB} = 0.338 \text{ W/kg} = -4.72 \text{ dBW/kg}$$

Test Laboratory: JYTSZ

Date: 2026/3/30

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, LTE-Fdd(USA) 1RB QPSK (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.411$ S/m; $\epsilon_r = 40.187$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(7.88, 7.4, 7.49) @ 1880 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

LTE Band 2 1RB(20MHz) Right Tilted/Middle Channel/Area Scan (51x61x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.980 W/kg

LTE Band 2 1RB(20MHz) Right Tilted/Middle Channel/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 20.29 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.532 W/kg; SAR(10 g) = 0.279 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 47.9%

Maximum value of SAR (measured) = 0.831 W/kg

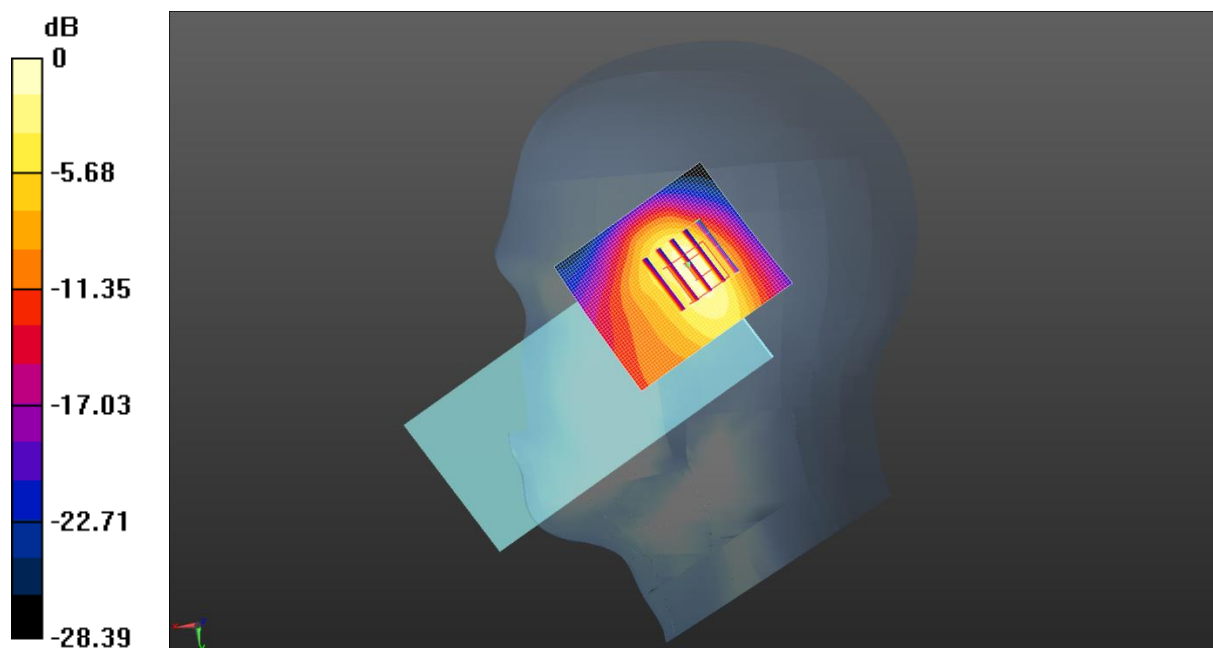

0 dB = 0.980 W/kg = -0.09 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/27

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, LTE-Fdd(USA) 1RB QPSK (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1720 \text{ MHz}$; $\sigma = 1.366 \text{ S/m}$; $\epsilon_r = 40.588$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(8.34, 7.83, 7.92) @ 1720 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

LTE Band 4 1RB(20MHz) Right Cheek/Low Channel/Area Scan (51x61x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.19 W/kg

LTE Band 4 1RB(20MHz) Right Cheek/Low Channel/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.01 V/m ; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.839 W/kg

SAR(1 g) = 0.475 W/kg ; SAR(10 g) = 0.271 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 52.6%

Maximum value of SAR (measured) = 0.644 W/kg

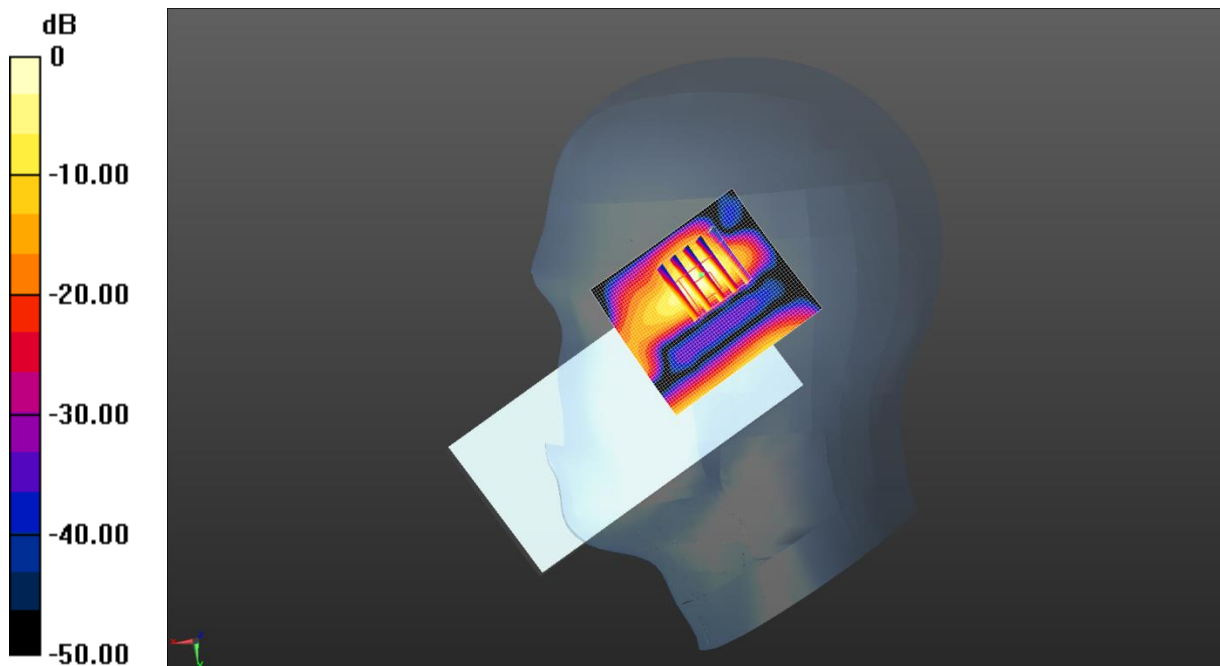

0 dB = 1.19 W/kg = 0.74 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/25

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, LTE-Fdd(USA) 1RB QPSK (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 844 \text{ MHz}$; $\sigma = 0.892 \text{ S/m}$; $\epsilon_r = 42.822$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(9.8, 9.21, 9.31) @ 844 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

LTE Band 5 1RB(10MHz) Left Cheek/High Channel/Area Scan (51x61x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.564 W/kg

LTE Band 5 1RB(10MHz) Left Cheek/High Channel/Zoom Scan (5x5x7)/Cube

0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.730 V/m ; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.514 W/kg ; SAR(10 g) = 0.265 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 57.5%

Maximum value of SAR (measured) = 0.692 W/kg

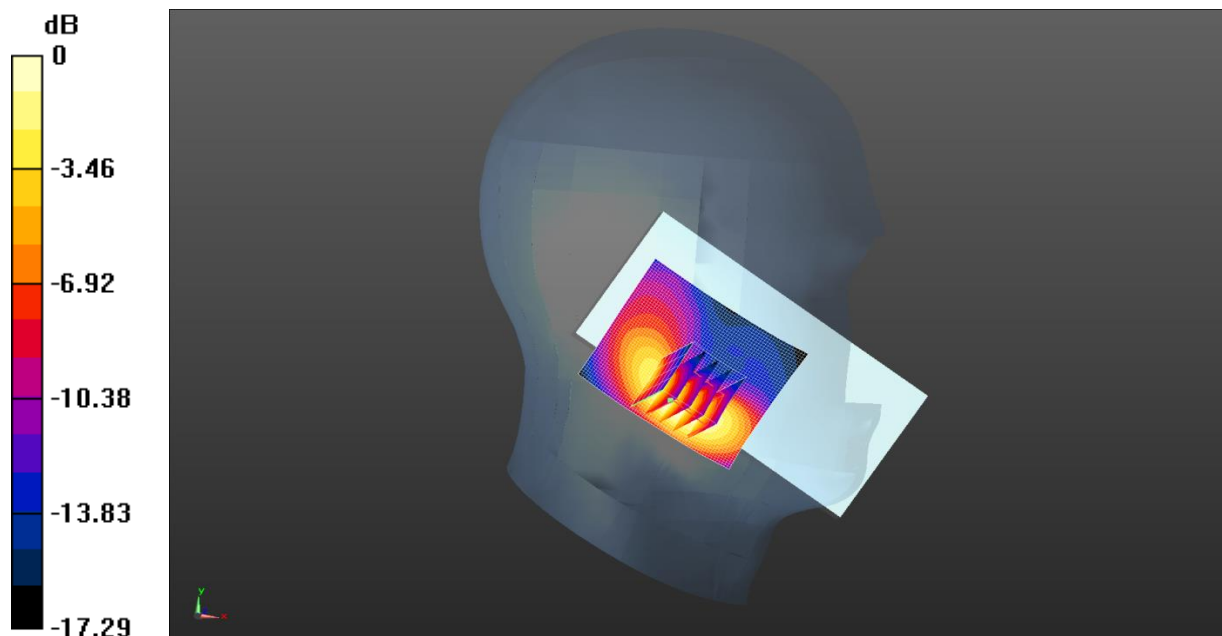

$0 \text{ dB} = 0.564 \text{ W/kg} = -2.49 \text{ dBW/kg}$

Test Laboratory: JYTSZ

Date: 2026/4/1

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, LTE-FDD(USA) 20MHz 50%RB QPSK (0); Frequency: 2560 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.953$ S/m; $\epsilon_r = 39.558$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(7.2, 6.77, 6.85) @ 2560 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

LTE Band 7 50%RB(20MHz) Right Cheek/High Channel/Area Scan (51x61x1):

Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.654 W/kg

LTE Band 7 50%RB(20MHz) Right Cheek/High Channel/Zoom Scan

(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.704 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 0.570 W/kg

SAR(1 g) = 0.258 W/kg; SAR(10 g) = 0.115 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 44.8%

Maximum value of SAR (measured) = 0.436 W/kg

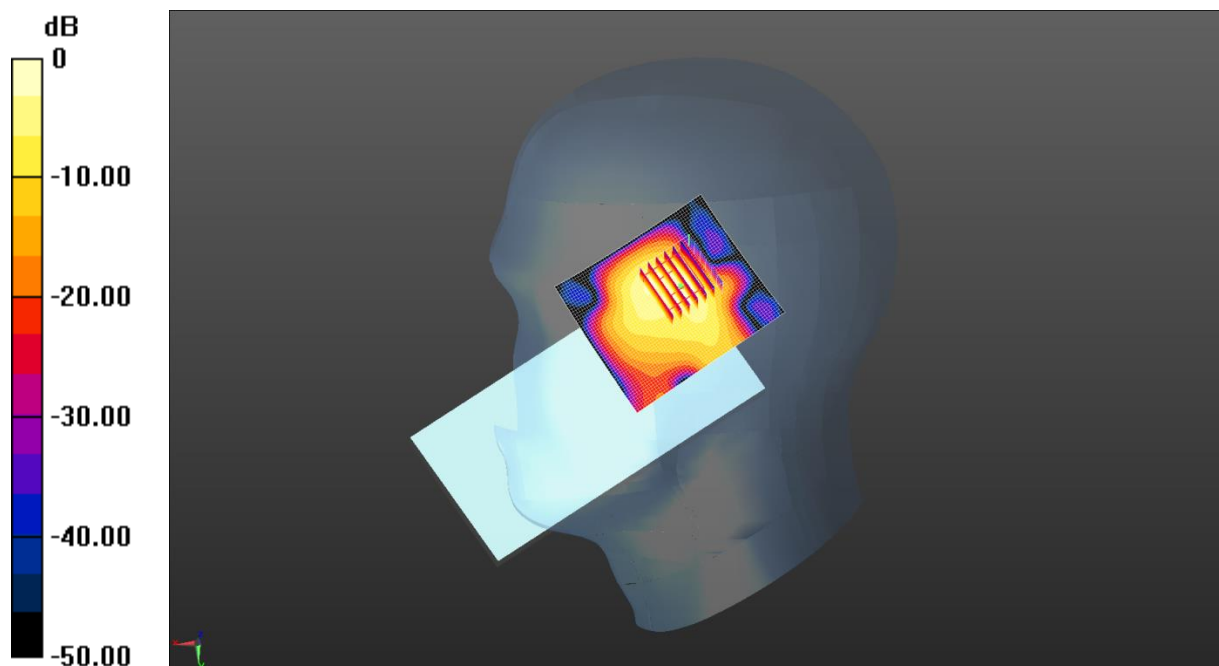

0 dB = 0.654 W/kg = -1.84 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/23

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, LTE-Fdd(USA) 1RB QPSK (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 43.538$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(10, 9.39, 9.5) @ 707.5 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

LTE Band 12 1RB(10MHz) Right Cheek/Middle Channel/Area Scan (51x61x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.468 W/kg

LTE Band 12 1RB(10MHz) Right Cheek/Middle Channel/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.467 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.703 W/kg

SAR(1 g) = 0.286 W/kg; SAR(10 g) = 0.151 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 48%

Maximum value of SAR (measured) = 0.454 W/kg

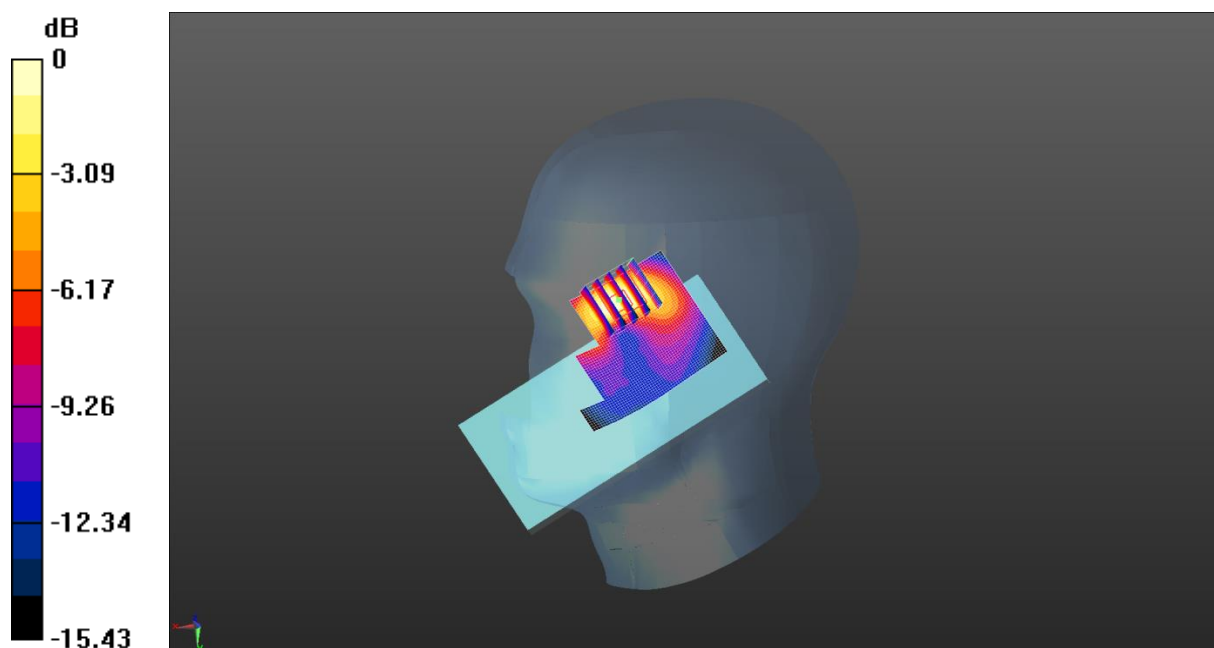

0 dB = 0.454 W/kg = -3.43 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/23

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, LTE-Fdd(USA) 1RB QPSK (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 782 \text{ MHz}$; $\sigma = 0.876 \text{ S/m}$; $\epsilon_r = 43.221$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(10, 9.39, 9.5) @ 782 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

LTE Band 13 1RB(10MHz) Right Cheek/Middle Channel/Area Scan (51x61x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.614 W/kg

LTE Band 13 1RB(10MHz) Right Cheek/Middle Channel/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.226 V/m ; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.513 W/kg ; SAR(10 g) = 0.260 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 47.4%

Maximum value of SAR (measured) = 0.759 W/kg

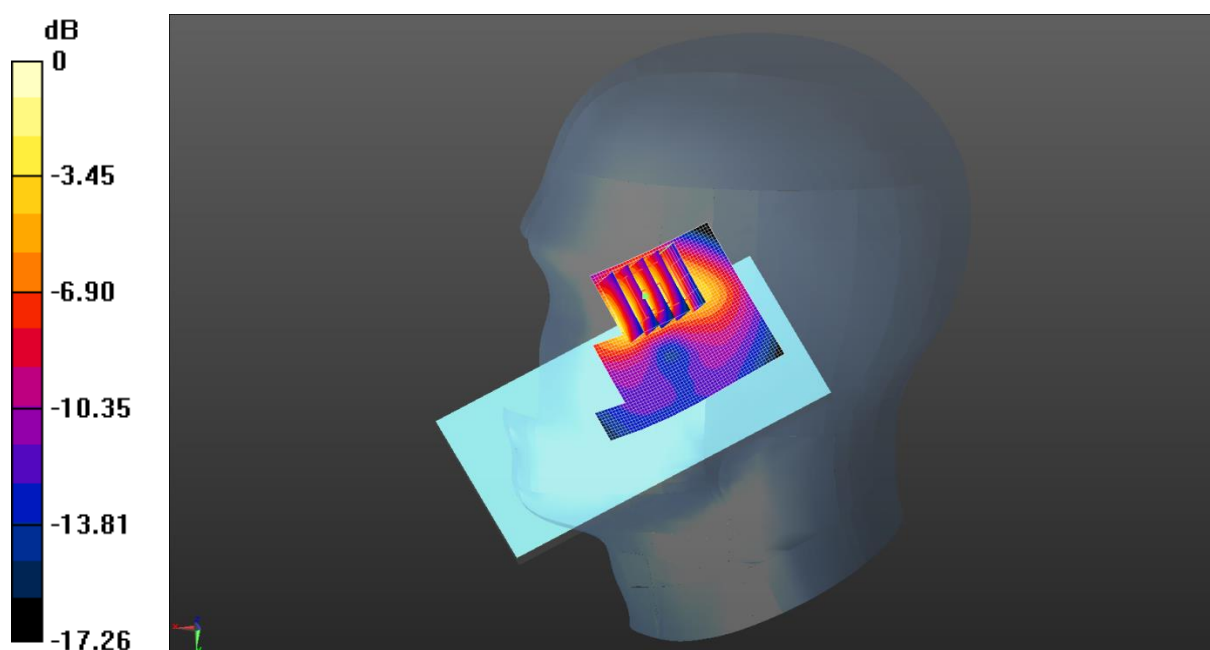

0 dB = 0.759 W/kg = -1.20 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/23

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, LTE-Fdd(USA) 1RB QPSK (0); Frequency: 709 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 709 \text{ MHz}$; $\sigma = 0.882 \text{ S/m}$; $\epsilon_r = 43.531$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(10, 9.39, 9.5) @ 709 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

LTE Band 17 1RB(10MHz) Right Cheek/Low Channel/Area Scan (51x61x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.553 W/kg

LTE Band 17 1RB(10MHz) Right Cheek/Low Channel/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.010 V/m ; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.453 W/kg ; SAR(10 g) = 0.231 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 46%

Maximum value of SAR (measured) = 0.685 W/kg

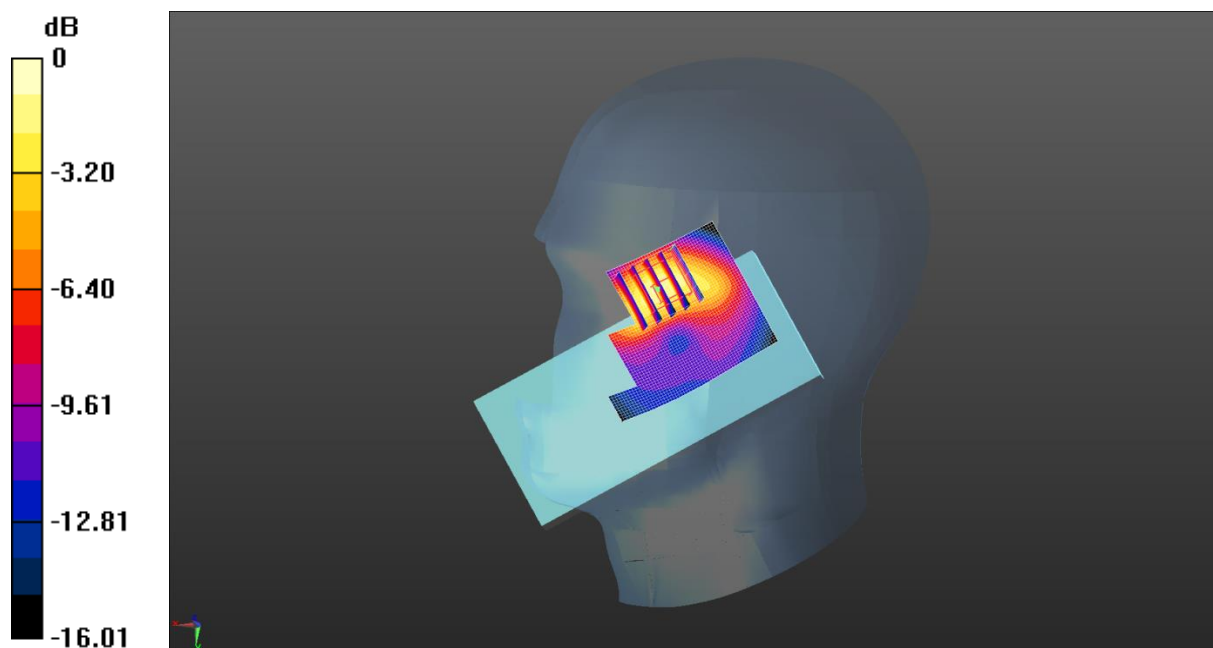

$0 \text{ dB} = 0.685 \text{ W/kg} = -1.64 \text{ dBW/kg}$

Test Laboratory: JYTSZ

Date: 2026/4/6

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, LTE-TDD(USA) 20MHz 1RB QPSK (0); Frequency: 2580 MHz; Duty Cycle: 1:1.59956

Medium parameters used: $f = 2580$ MHz; $\sigma = 1.98$ S/m; $\epsilon_r = 39.998$ $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(7.2, 6.77, 6.85) @ 2580 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

LTE Band 38 1RB(20MHz) Right Cheek/Low Channel/Area Scan (51x61x1):

Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.686 W/kg

LTE Band 38 1RB(20MHz) Right Cheek/Low Channel/Zoom Scan

(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.991 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 0.702 W/kg

SAR(1 g) = 0.317 W/kg; SAR(10 g) = 0.137 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 45%

Maximum value of SAR (measured) = 0.543 W/kg

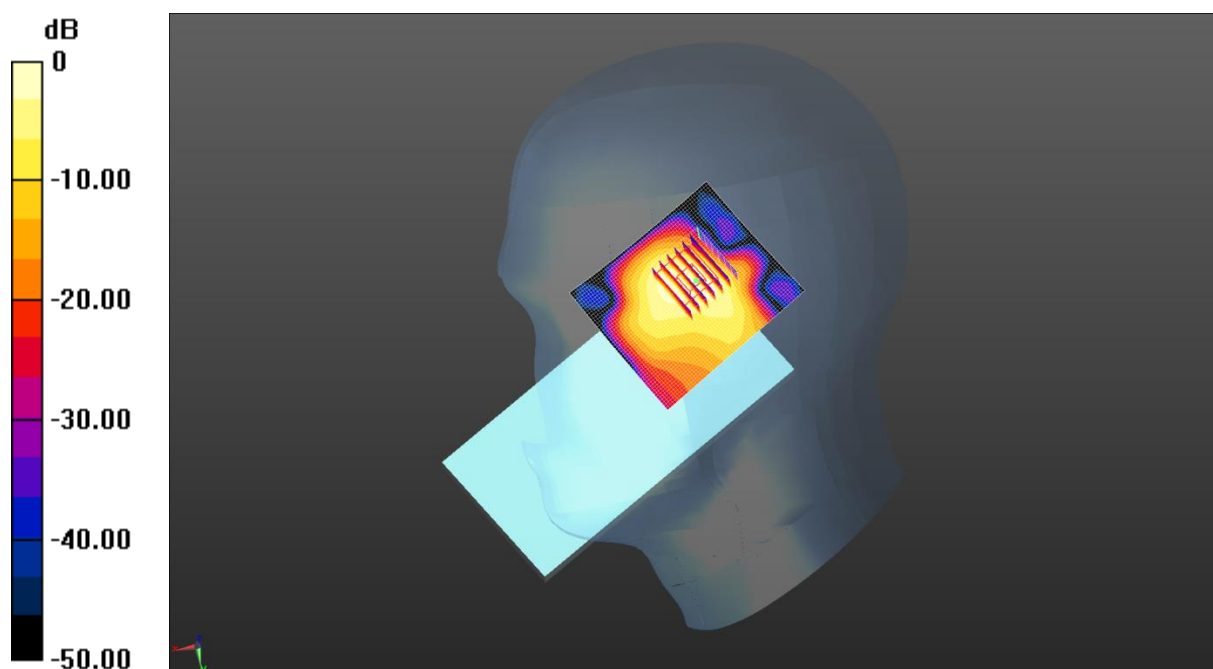

0 dB = 0.686 W/kg = -1.64 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/4/6

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, LTE-TDD(USA) 20MHz 1RB QPSK (0); Frequency: 2593 MHz; Duty Cycle: 1:1.59956

Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 1.99$ S/m; $\epsilon_r = 39.979$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(7.2, 6.77, 6.85) @ 2593 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

LTE Band 41 1RB(20MHz) Right Cheek/Middle Channel/Area Scan (51x61x1):

Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.587 W/kg

LTE Band 41 1RB(20MHz) Right Cheek/Middle Channel/Zoom Scan

(7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.443 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.624 W/kg

SAR(1 g) = 0.276 W/kg; SAR(10 g) = 0.120 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 46%

Maximum value of SAR (measured) = 0.479 W/kg

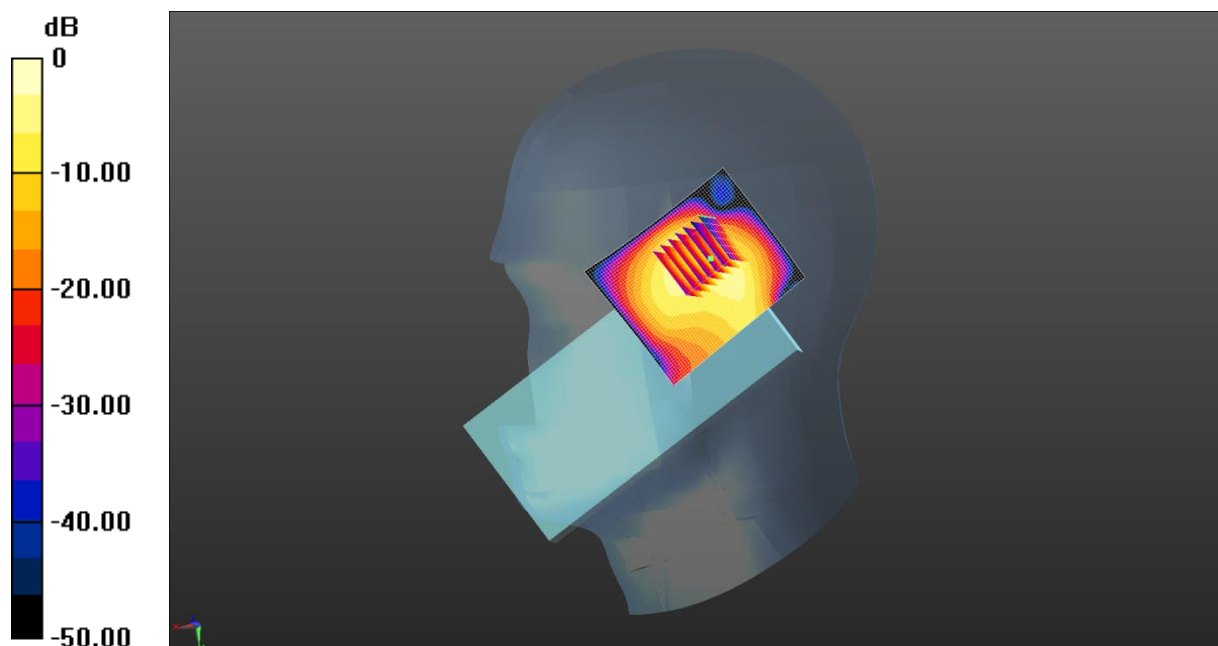

0 dB = 0.587 W/kg = -2.31 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/4/14

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, LTE-TDD(USA) 20MHz 1RB QPSK (0); Frequency: 3460 MHz; Duty Cycle: 1:1.59956

Medium parameters used: $f = 3460$ MHz; $\sigma = 2.768$ S/m; $\epsilon_r = 38.048$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(6.44, 6.46, 7.1) @ 3460 MHz; Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 2025/5/2
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

LTE Band 42 1RB(20MHz) Right Cheek/Low Channel/Area Scan (51x61x1):

Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.42 W/kg

LTE Band 42 1RB(20MHz) Right Cheek/Low Channel/Zoom Scan

(7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 10.87 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.73 W/kg

SAR(1 g) = 0.598 W/kg; SAR(10 g) = 0.212 W/kg

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 42.9%

Maximum value of SAR (measured) = 1.15 W/kg

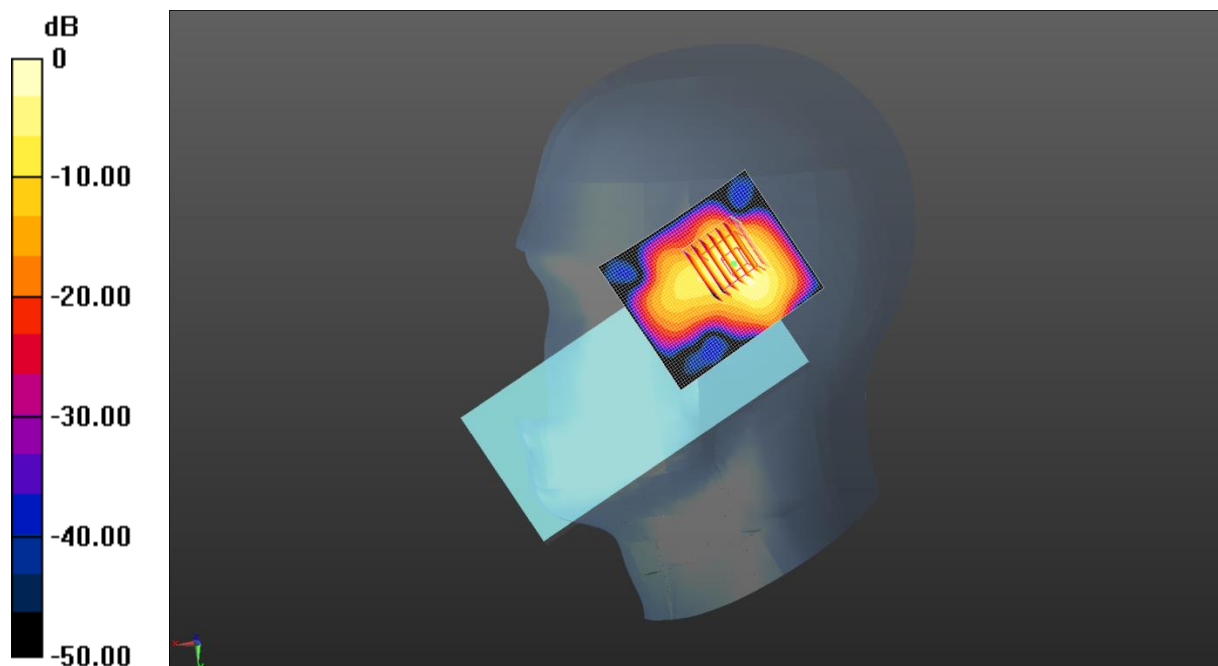

0 dB = 1.42 W/kg = 1.51 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/27

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, LTE-FDD(USA) 20MHz 50%RB QPSK (0); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1770$ MHz; $\sigma = 1.396$ S/m; $\epsilon_r = 40.467$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(8.34, 7.83, 7.92) @ 1770 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

LTE Band 66 50%RB(20MHz) Right Cheek/High Channel/Area Scan

(51x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.01 W/kg

LTE Band 66 50%RB(20MHz) Right Cheek/High Channel/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.77 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 0.926 W/kg

SAR(1 g) = 0.524 W/kg; SAR(10 g) = 0.302 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 52.4%

Maximum value of SAR (measured) = 0.732 W/kg

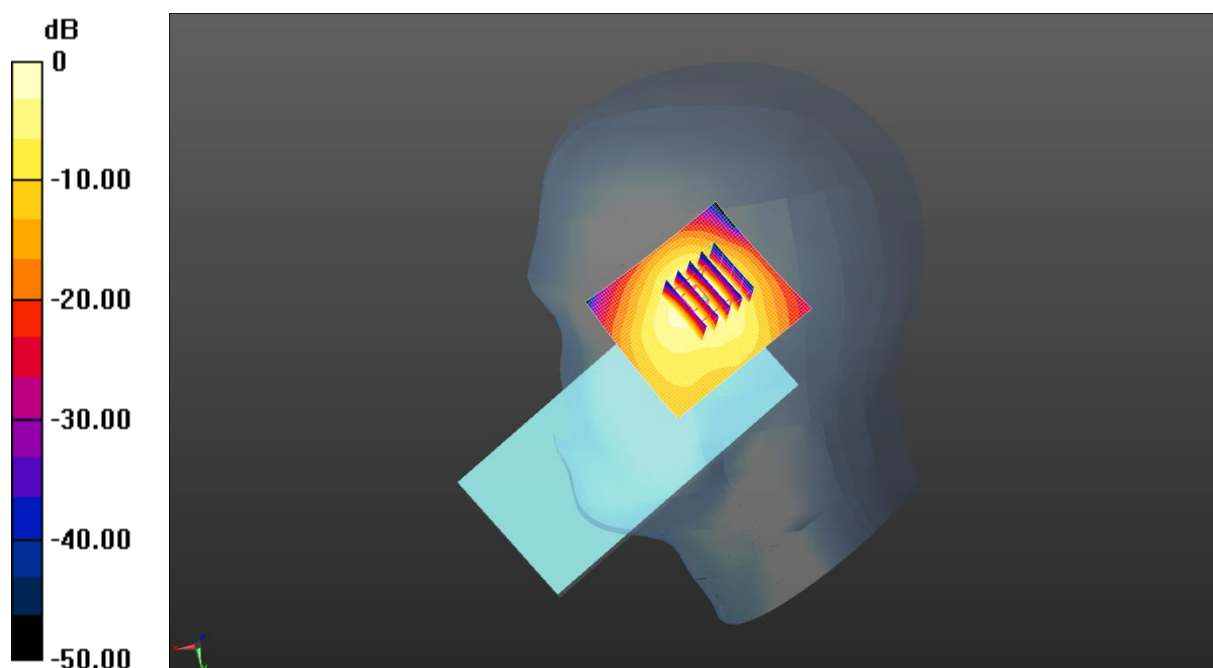

0 dB = 1.01 W/kg = 0.03 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/25

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, NR (0); Frequency: 839 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 839$ MHz; $\sigma = 0.889$ S/m; $\epsilon_r = 42.841$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(9.8, 9.21, 9.31) @ 839 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)


NR n5 50%RB(20MHz) Left Cheek/High Channel/Area Scan (51x61x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.75 W/kg

NR n5 50%RB(20MHz) Left Cheek/High Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.31 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 1.86 W/kg
SAR(1 g) = 0.972 W/kg; SAR(10 g) = 0.536 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 51.8%

Maximum value of SAR (measured) = 1.50 W/kg

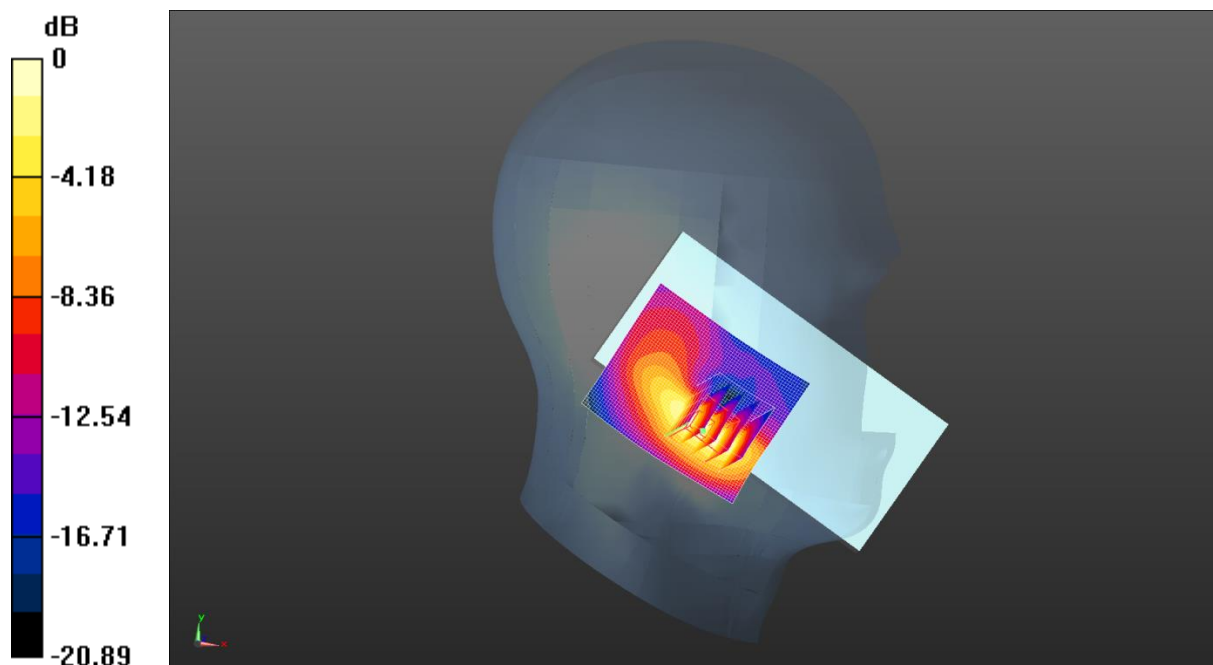

$$0 \text{ dB} = 1.75 \text{ W/kg} = 2.43 \text{ dBW/kg}$$

Test Laboratory: JYTSZ

Date: 2026/4/1

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, NR (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.932$ S/m; $\epsilon_r = 39.604$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3924; ConvF(7.2, 6.77, 6.85) @ 2535 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

NR n7 1RB(20MHz) Right Tilted/Middle Channel/Area Scan (51x61x1):

Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.835 W/kg

NR n7 1RB(20MHz) Right Tilted/Middle Channel/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 15.64 V/m; Power Drift = 0.19 dB
Peak SAR (extrapolated) = 1.15 W/kg
SAR(1 g) = 0.482 W/kg; SAR(10 g) = 0.209 W/kg
Smallest distance from peaks to all points 3 dB below = 7.3 mm
Ratio of SAR at M2 to SAR at M1 = 42.4%
Maximum value of SAR (measured) = 0.905 W/kg

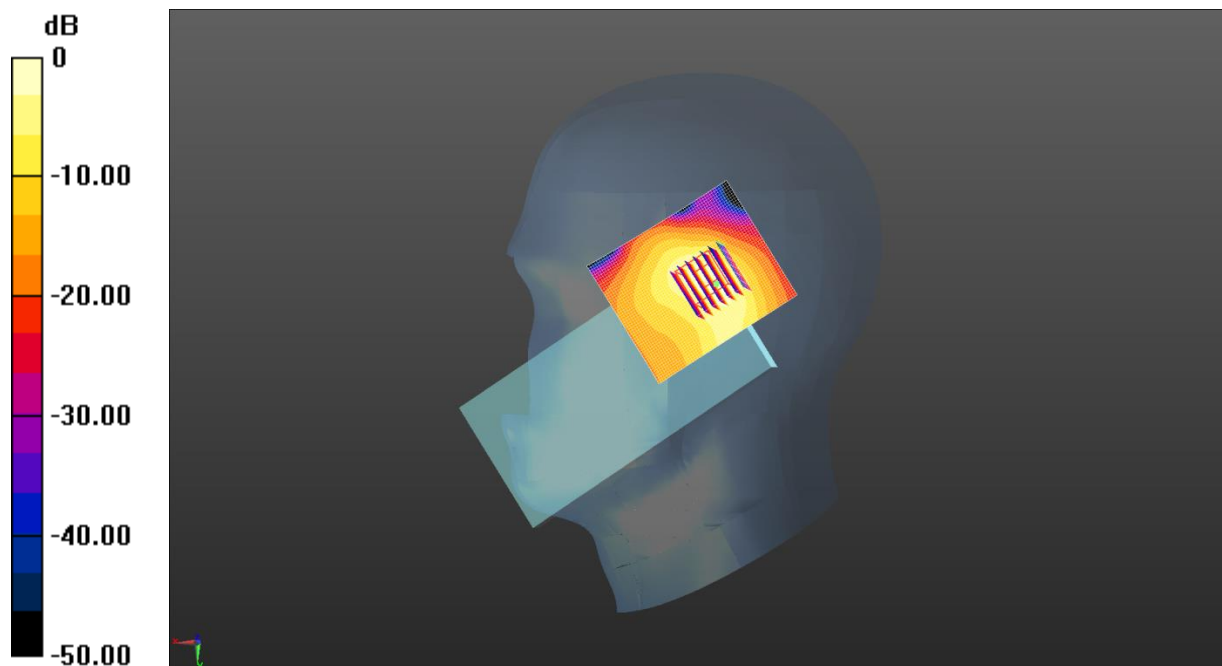

0 dB = 0.835 W/kg = -0.78 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/23

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, NR (0); Frequency: 706.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 706.5$ MHz; $\sigma = 0.881$ S/m; $\epsilon_r = 43.542$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3924; ConvF(10, 9.39, 9.5) @ 706.5 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

NR n12 1RB(15MHz) Right Cheek/Low Channel/Area Scan (51x61x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.451 W/kg

NR n12 1RB(15MHz) Right Cheek/Low Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.752 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 0.579 W/kg
SAR(1 g) = 0.278 W/kg; SAR(10 g) = 0.148 W/kg
Smallest distance from peaks to all points 3 dB below = 5.1 mm
Ratio of SAR at M2 to SAR at M1 = 46.8%
Maximum value of SAR (measured) = 0.456 W/kg

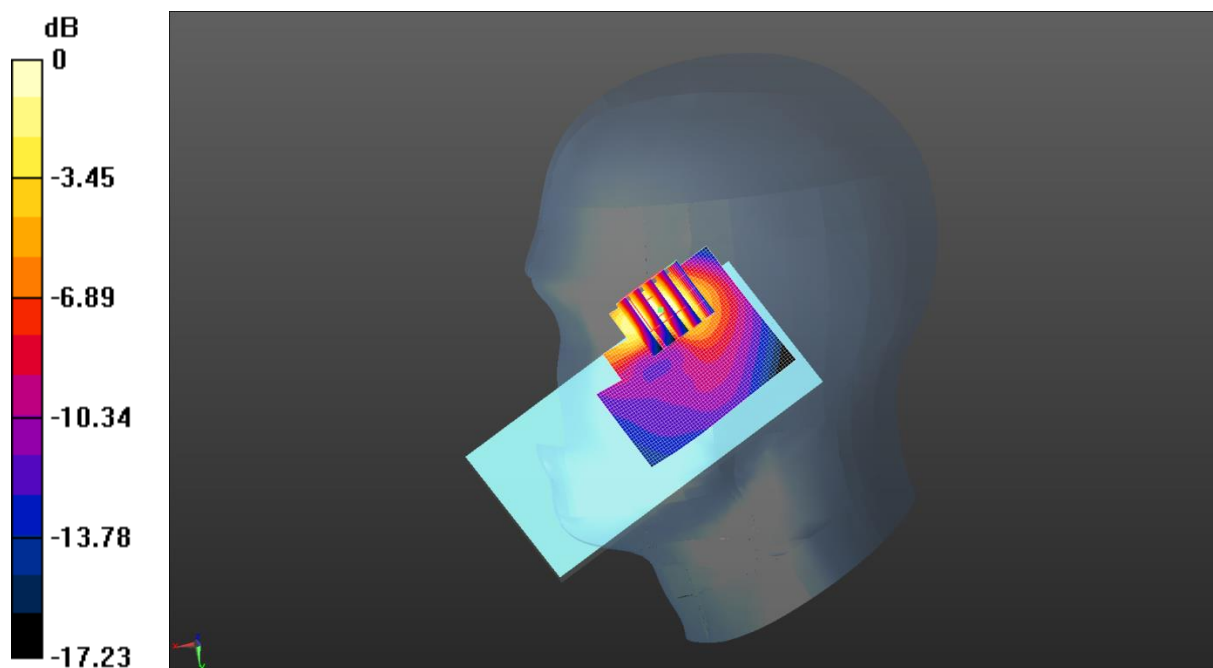

0 dB = 0.456 W/kg = -3.41 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/4/6

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, NR (0); Frequency: 2600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2600$ MHz; $\sigma = 2.001$ S/m; $\epsilon_r = 39.955$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3924; ConvF(7.2, 6.77, 6.85) @ 2600 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

NR n38 50%RB(40MHz) Right Tilted/High Channel/Area Scan (51x61x1):

Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.556 W/kg

NR n38 50%RB(40MHz) Right Tilted/High Channel/Zoom Scan (7x7x7)/Cube

0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 11.90 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.752 W/kg
SAR(1 g) = 0.313 W/kg; SAR(10 g) = 0.134 W/kg
Smallest distance from peaks to all points 3 dB below = 7.2 mm
Ratio of SAR at M2 to SAR at M1 = 40.6%
Maximum value of SAR (measured) = 0.547 W/kg

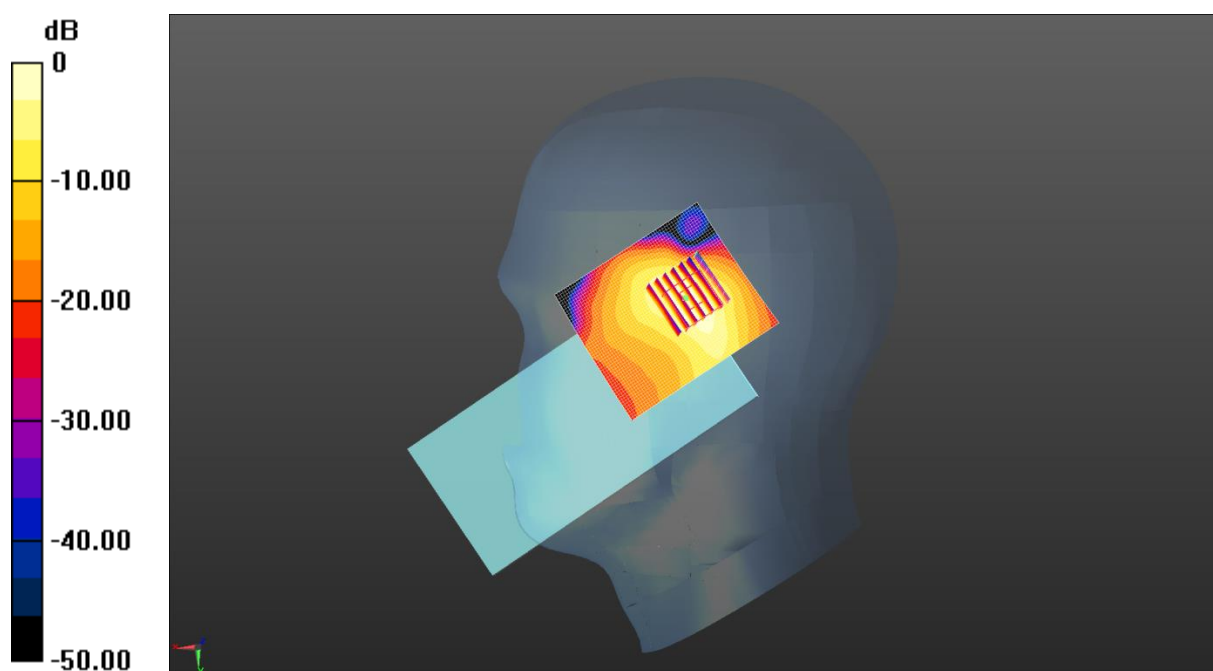

0 dB = 0.556 W/kg = -2.55 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/4/6

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, NR (0); Frequency: 2640 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2640$ MHz; $\sigma = 1.999$ S/m; $\epsilon_r = 39.44$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3924; ConvF(7.2, 6.77, 6.85) @ 2640 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

NR n41 1RB(100MHz) Right Tilted/High Channel/Area Scan (51x61x1):

Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.561 W/kg

NR n41 1RB(100MHz) Right Tilted/High Channel/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 11.73 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 0.756 W/kg
SAR(1 g) = 0.315 W/kg; SAR(10 g) = 0.134 W/kg
Smallest distance from peaks to all points 3 dB below = 6.7 mm
Ratio of SAR at M2 to SAR at M1 = 41.7%
Maximum value of SAR (measured) = 0.547 W/kg

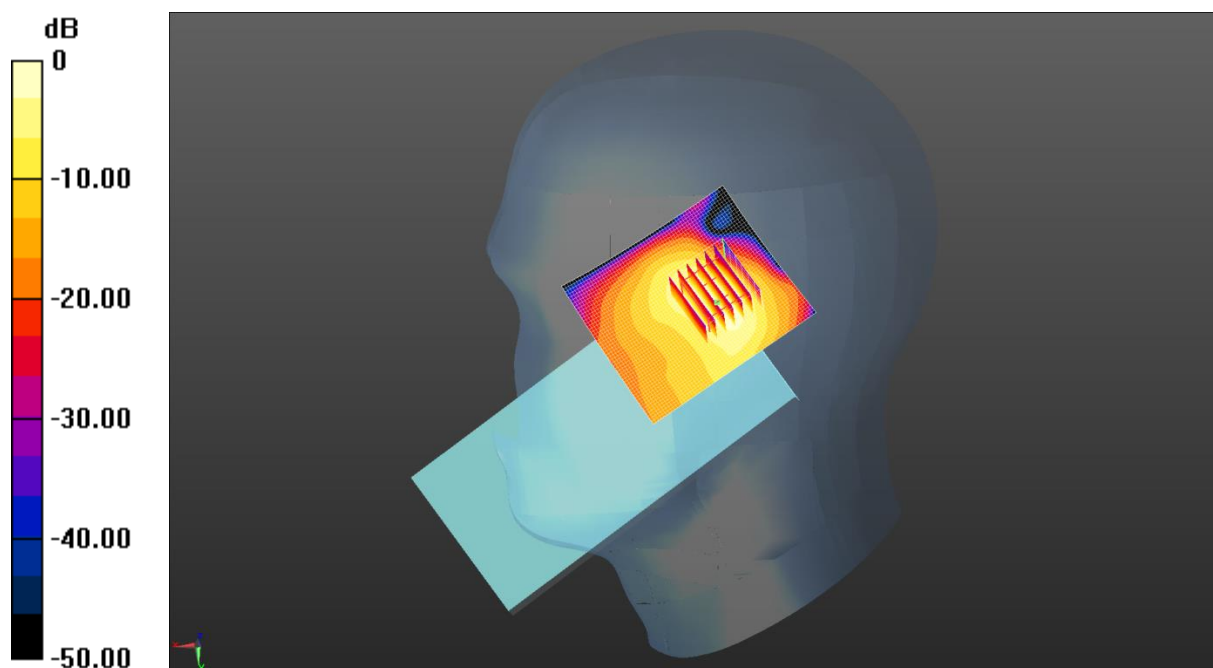

0 dB = 0.561 W/kg = -2.51 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/27

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, NR (0); Frequency: 1730 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1730 \text{ MHz}$; $\sigma = 1.373 \text{ S/m}$; $\epsilon_r = 40.566$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3924; ConvF(8.34, 7.83, 7.92) @ 1730 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

NR n66 50%RB(20MHz) Right Tilted/Low Channel/Area Scan (51x61x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 1.18 W/kg

NR n66 50%RB(20MHz) Right Tilted/Low Channel/Zoom Scan (5x5x7)/Cube

0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 21.74 V/m ; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 1.28 W/kg
SAR(1 g) = 0.638 W/kg ; SAR(10 g) = 0.330 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 49.2%
Maximum value of SAR (measured) = 1.06 W/kg

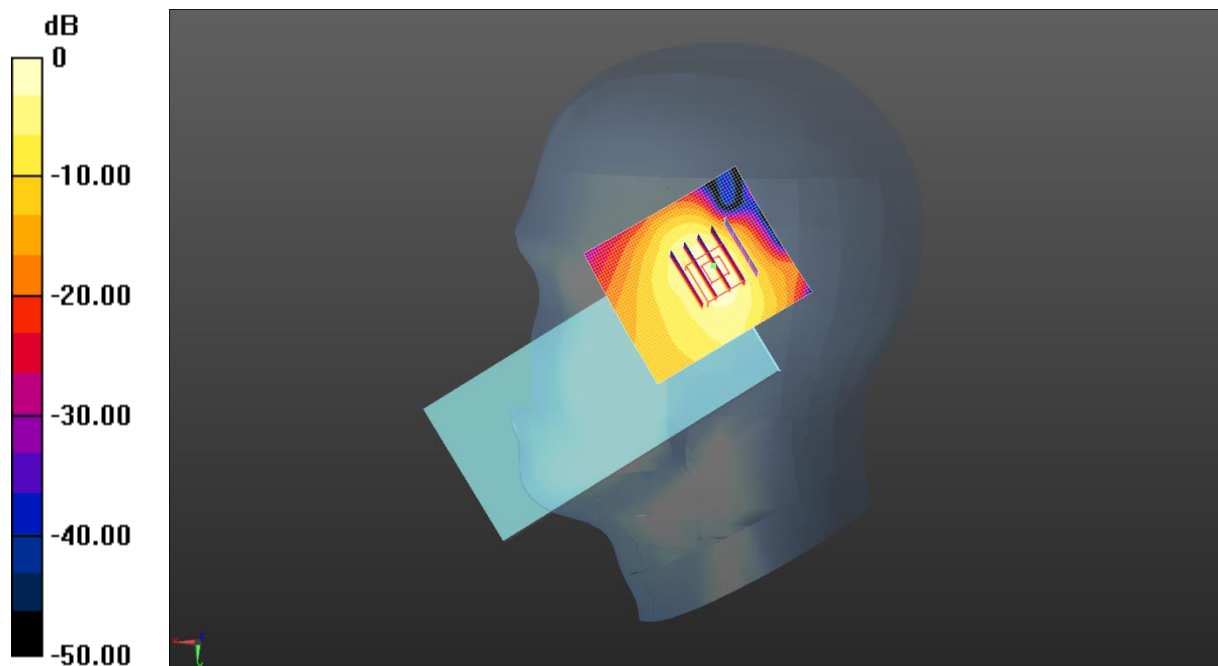

0 dB = 1.18 W/kg = 0.71 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/4/14

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, NR (0); Frequency: 3500.01 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 3500.01$ MHz; $\sigma = 2.804$ S/m; $\epsilon_r = 37.964$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(6.44, 6.46, 7.1) @ 3500.01 MHz; Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 2025/5/2
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)


NR n77 1RB(100MHz) Right Tilted/Middle Channel/Area Scan (51x61x1):

Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.688 W/kg

NR n77 1RB(100MHz) Right Tilted/Middle Channel/Zoom Scan (7x7x8)/Cube

0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=4$ mm
Reference Value = 10.11 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 1.25 W/kg
SAR(1 g) = 0.417 W/kg; SAR(10 g) = 0.146 W/kg
Smallest distance from peaks to all points 3 dB below = 6.3 mm
Ratio of SAR at M2 to SAR at M1 = 42.1%

Maximum value of SAR (measured) = 0.875 W/kg

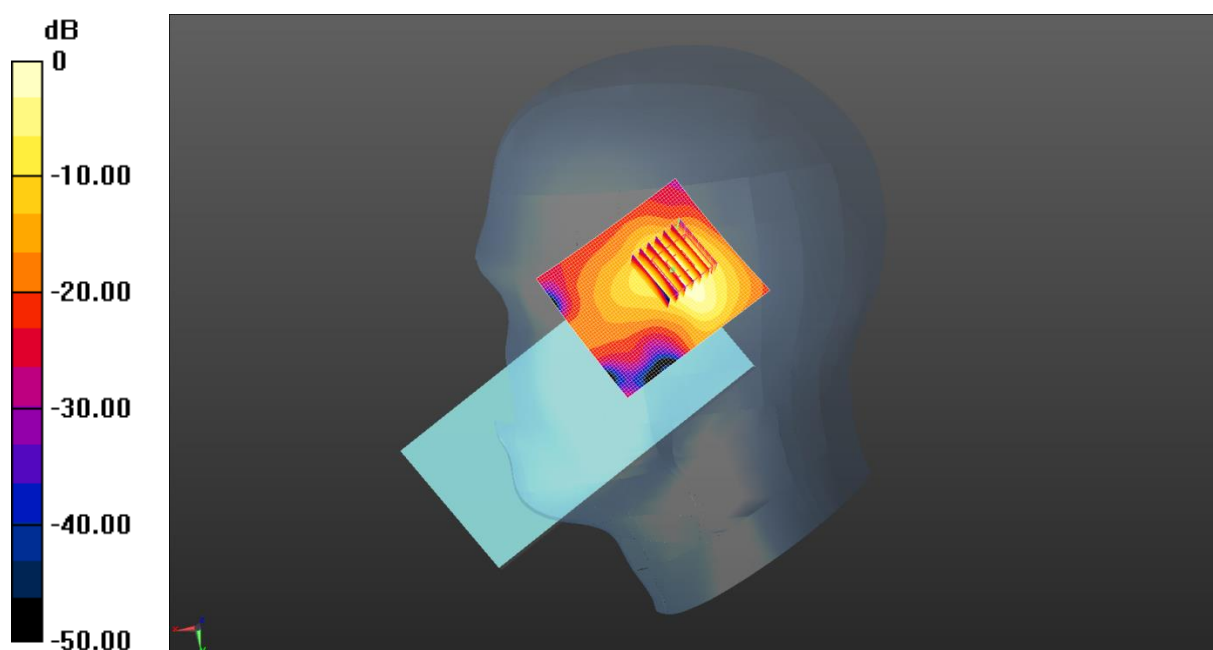

0 dB = 0.688 W/kg = -1.62 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/4/15

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 3750$ MHz; $\sigma = 3.057$ S/m; $\epsilon_r = 37.471$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7351; ConvF(6.4, 6.42, 7.06) @ 3750 MHz; Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 2025/5/2
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

NR n77 1RB(100MHz) Left Cheek/Low Channel/Area Scan (51x61x1):

Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 2.04 W/kg

NR n77 1RB(100MHz) Left Cheek/Low Channel/Zoom Scan (7x7x8)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=4$ mm
Reference Value = 7.049 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 2.53 W/kg
SAR(1 g) = 0.885 W/kg; SAR(10 g) = 0.350 W/kg
Smallest distance from peaks to all points 3 dB below = 5.4 mm
Ratio of SAR at M2 to SAR at M1 = 42.1%
Maximum value of SAR (measured) = 1.74 W/kg

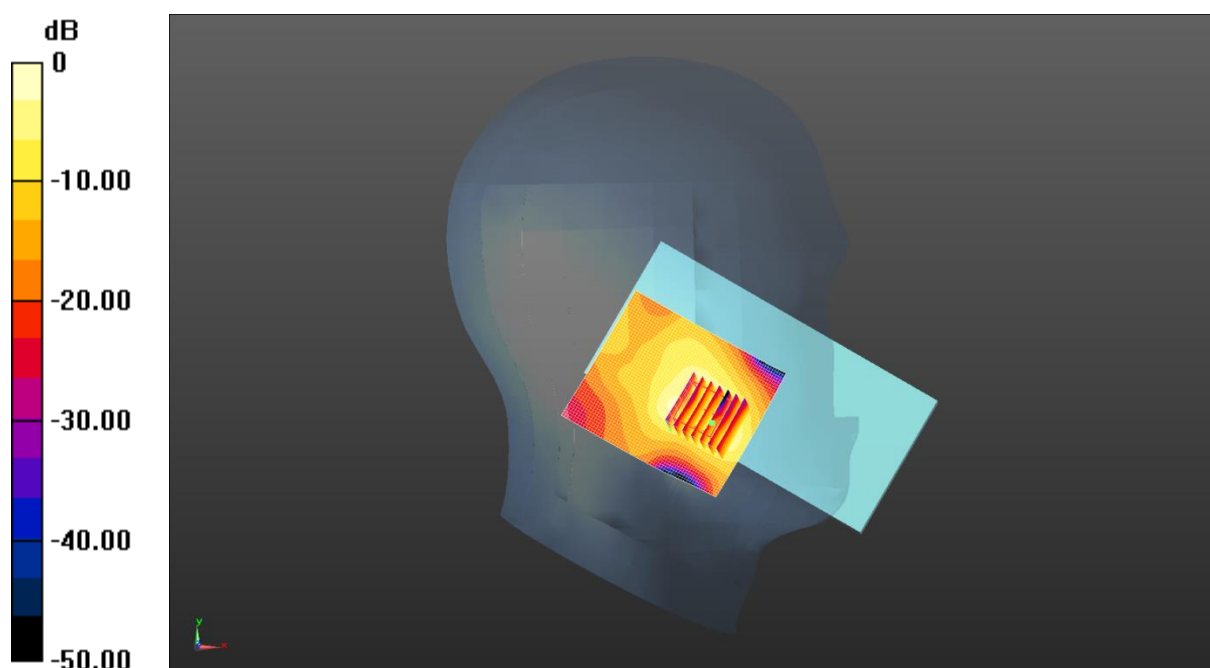

0 dB = 2.04 W/kg = 3.09 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/4/1

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.805$ S/m; $\epsilon_r = 39.865$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(7.3, 6.86, 6.94) @ 2412 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

2.4G WiFi Left Tilted/Low Channel/Area Scan (61x71x1): Interpolated grid:

$dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.566 W/kg

2.4G WiFi Left Tilted/Low Channel/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.47 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.664 W/kg

SAR(1 g) = 0.272 W/kg; SAR(10 g) = 0.117 W/kg

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 42.6%

Maximum value of SAR (measured) = 0.480 W/kg

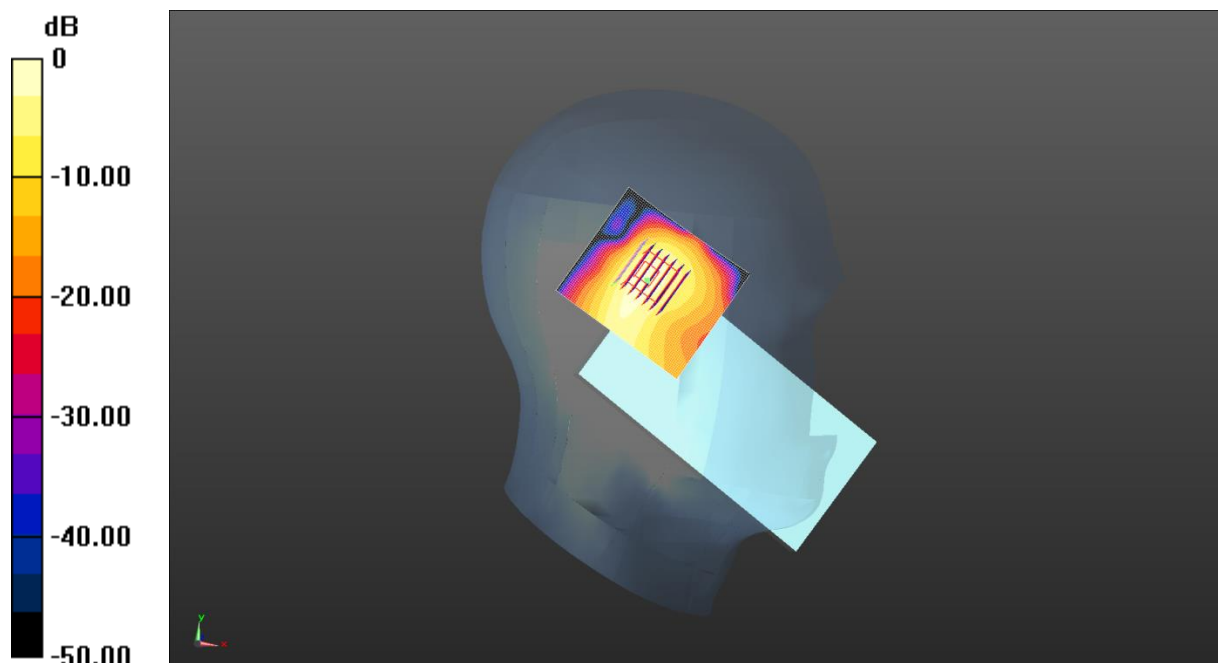

$$0 \text{ dB} = 0.566 \text{ W/kg} = -2.47 \text{ dBW/kg}$$

Test Laboratory: JYTSZ

Date: 2026/4/8

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, IEEE 802.11a WiFi 5GHz (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.666 \text{ S/m}$; $\epsilon_r = 34.808$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(5.48, 5.15, 5.21) @ 5200 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

5.2G WiFi Left Tilted/Middle Channel/Area Scan (61x71x1): Interpolated grid:

$dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.548 W/kg

5.2G WiFi Left Tilted/Middle Channel/Zoom Scan (7x7x7)/Cube 0: Measurement

grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 7.302 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.931 W/kg

SAR(1 g) = 0.186 W/kg; SAR(10 g) = 0.054 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 45.6%

Maximum value of SAR (measured) = 0.543 W/kg

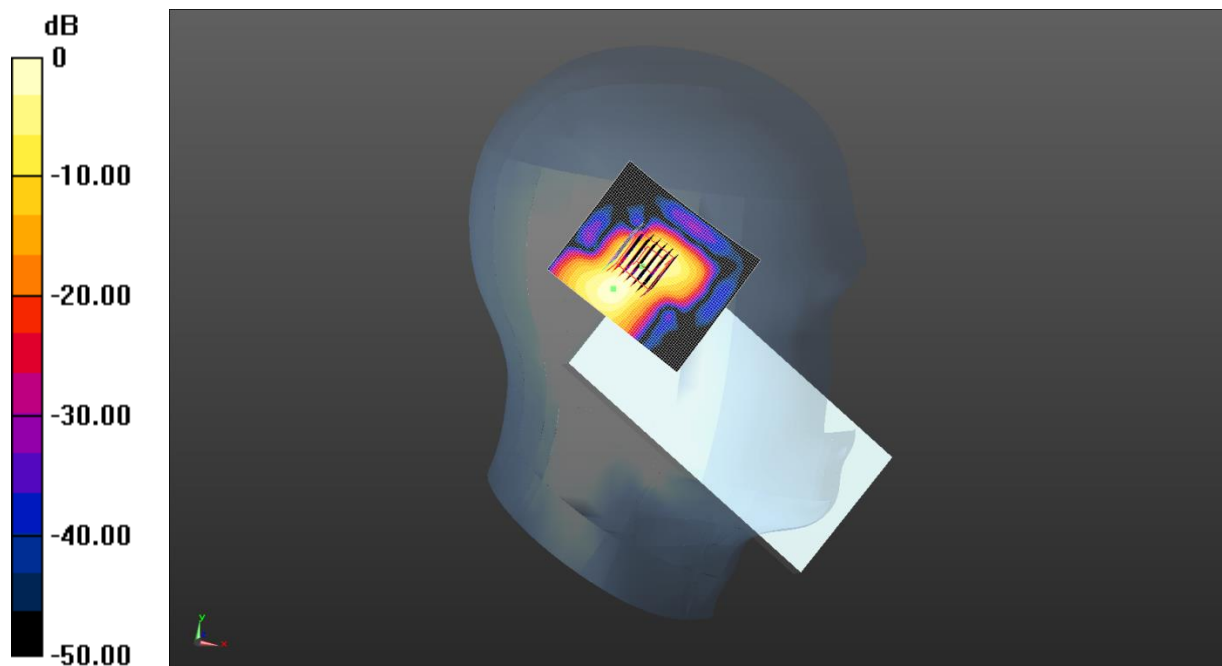

0 dB = 0.548 W/kg = -2.62 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/4/8

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, IEEE 802.11a WiFi 5GHz (0); Frequency: 5260 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.731$ S/m; $\epsilon_r = 34.644$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(5.48, 5.15, 5.21) @ 5260 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

5.3G WiFi Left Tilted/Low Channel/Area Scan (61x71x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.657 W/kg

5.3G WiFi Left Tilted/Low Channel/Zoom Scan (7x7x7)/Cube 0: Measurement

grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 3.697 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.653 W/kg

SAR(1 g) = 0.204 W/kg; SAR(10 g) = 0.059 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 48.3%

Maximum value of SAR (measured) = 0.549 W/kg

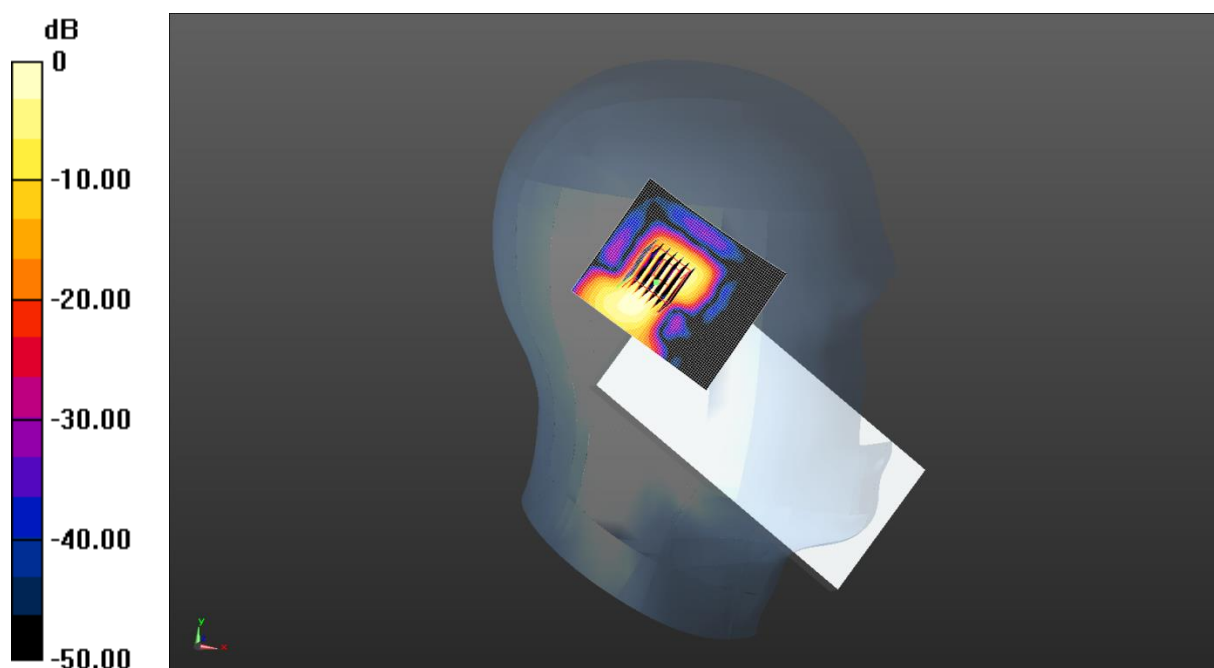

0 dB = 0.657 W/kg = -1.83 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/4/9

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, IEEE 802.11a WiFi 5GHz (0); Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500$ MHz; $\sigma = 4.973$ S/m; $\epsilon_r = 34.601$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(5.06, 4.76, 4.81) @ 5500 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

5.6G WiFi Left Tilted/Low Channel/Area Scan (61x71x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.662 W/kg

5.6G WiFi Left Tilted/Low Channel/Zoom Scan (7x7x7)/Cube 0: Measurement

grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 6.462 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.213 W/kg; SAR(10 g) = 0.060 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 46.1%

Maximum value of SAR (measured) = 0.587 W/kg

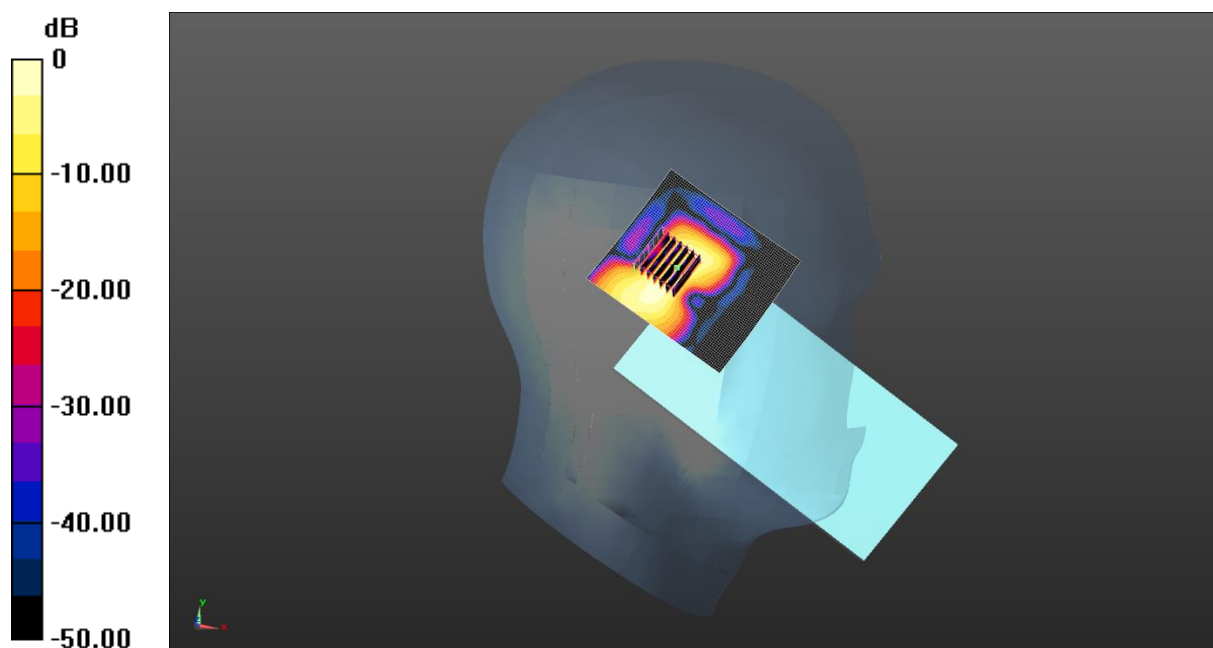

0 dB = 0.662 W/kg = -1.79 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/4/9

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, IEEE 802.11a WiFi 5GHz (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.284$ S/m; $\epsilon_r = 34.06$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(5.1, 4.79, 4.85) @ 5785 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

5.8G WiFi Left Tilted/Middle Channel/Area Scan (61x71x1): Interpolated grid:

$dx=1.00$ mm, $dy=1.00$ mm

Maximum value of SAR (interpolated) = 0.783 W/kg

5.8G WiFi Left Tilted/Middle Channel/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 6.557 V/m; Power Drift = -0.20 dB


Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.234 W/kg; SAR(10 g) = 0.072 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 11.5%

Maximum value of SAR (measured) = 0.675 W/kg

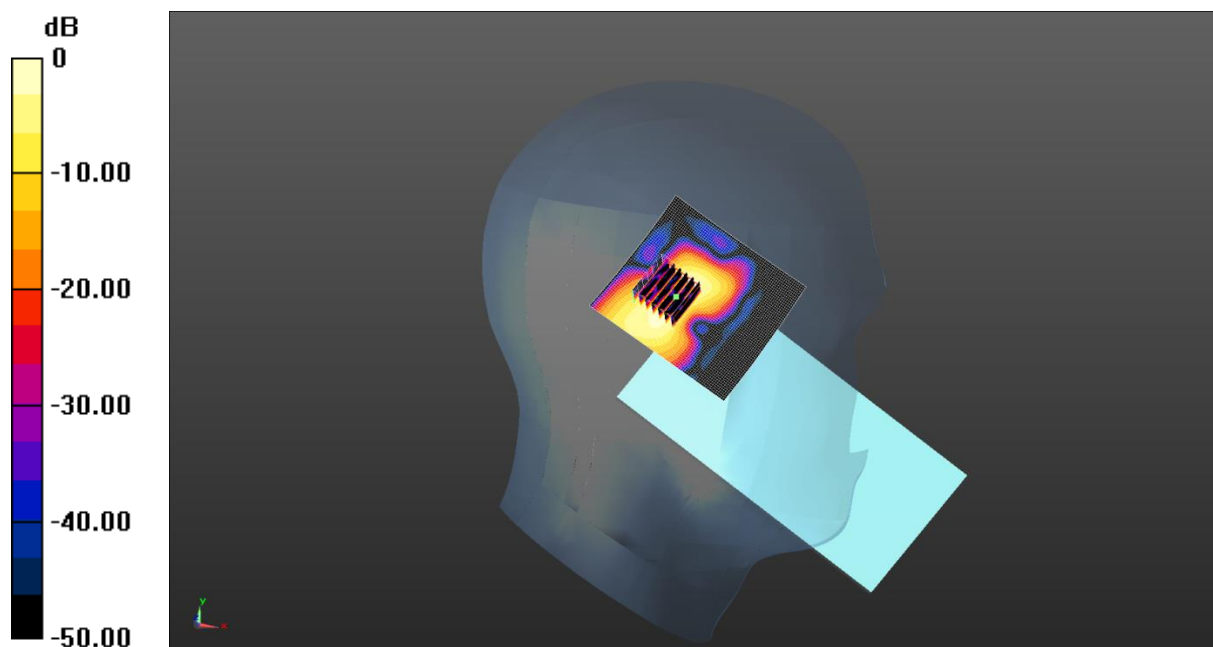

0 dB = 0.783 W/kg = -1.06 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/4/1

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2480$ MHz; $\sigma = 1.874$ S/m; $\epsilon_r = 39.718$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(7.3, 6.86, 6.94) @ 2480 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Bluetooth Left Tilted/High Channel/Area Scan (61x71x1): Interpolated grid:
dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.242 W/kg

Bluetooth Left Tilted/High Channel/Zoom Scan (7x7x7)/Cube 0: Measurement
grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.556 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.322 W/kg

SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.057 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 42.6%

Maximum value of SAR (measured) = 0.250 W/kg

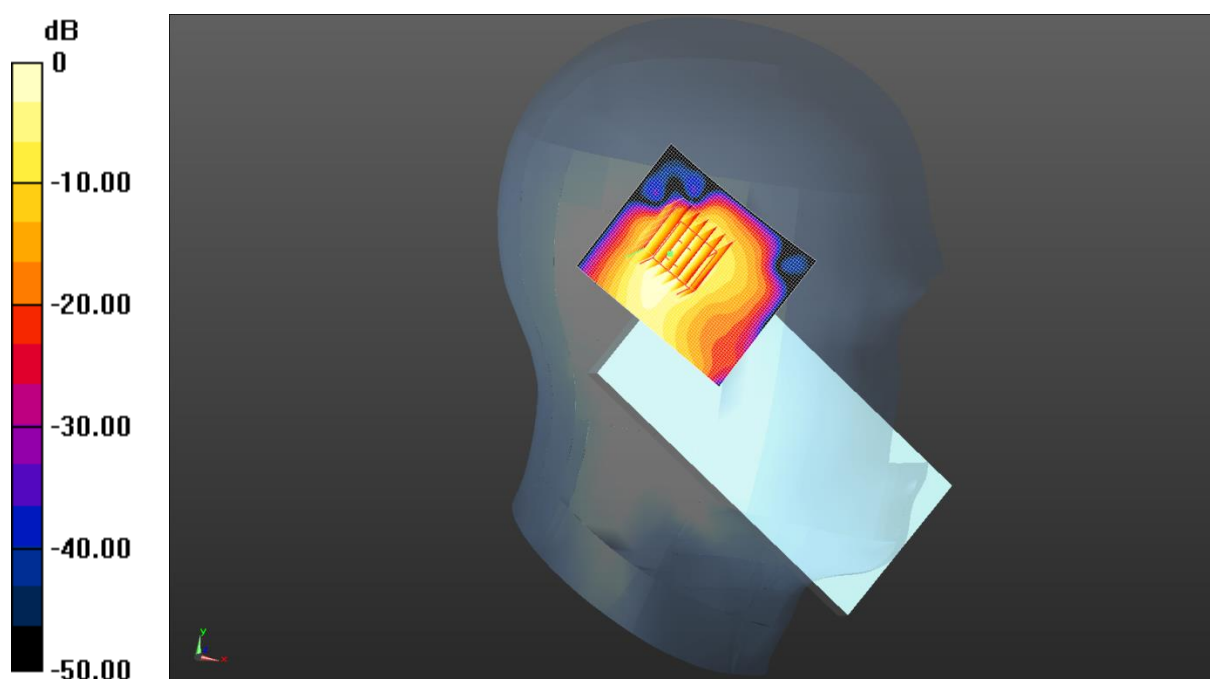

0 dB = 0.242 W/kg = -6.17 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/25

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, GPRS(2 Slots) (0); Frequency: 824.2 MHz; Duty Cycle: 1:4.10015

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.883$ S/m; $\epsilon_r = 42.898$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(9.8, 9.21, 9.31) @ 824.2 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

GSM 850 2Slots Body Back/Low Channel/Area Scan (51x61x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.653 W/kg

GSM 850 2Slots Body Back/Low Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.799 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.641 W/kg

SAR(1 g) = 0.392 W/kg; SAR(10 g) = 0.237 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 64.1%

Maximum value of SAR (measured) = 0.536 W/kg

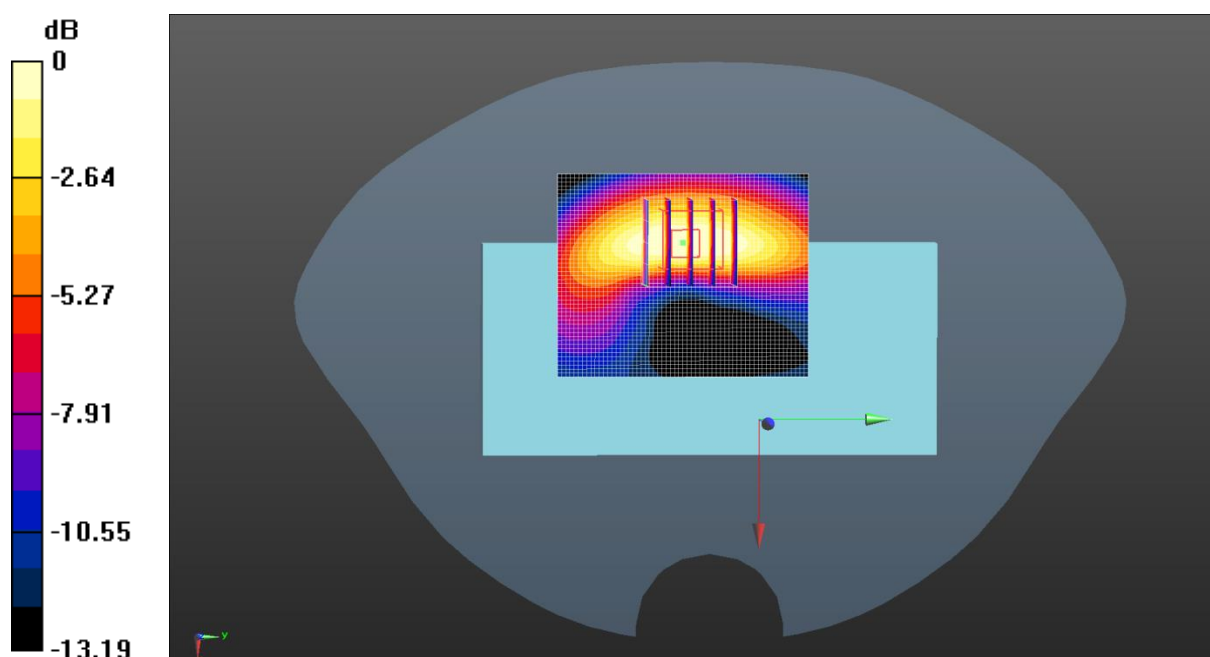

0 dB = 0.536 W/kg = -2.71 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/30

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, GPRS(4 Slots) (0); Frequency: 1909.8 MHz; Duty Cycle: 1:1.99986

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.424$ S/m; $\epsilon_r = 40.554$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(7.88, 7.4, 7.49) @ 1909.8 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

GPRS 1900 4Slots Body Back/High Channel/Area Scan (51x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.361 W/kg

GPRS 1900 4Slots Body Back/High Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.576 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.412 W/kg

SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.127 W/kg

Smallest distance from peaks to all points 3 dB below = 11.5 mm

Ratio of SAR at M2 to SAR at M1 = 55.8%

Maximum value of SAR (measured) = 0.326 W/kg

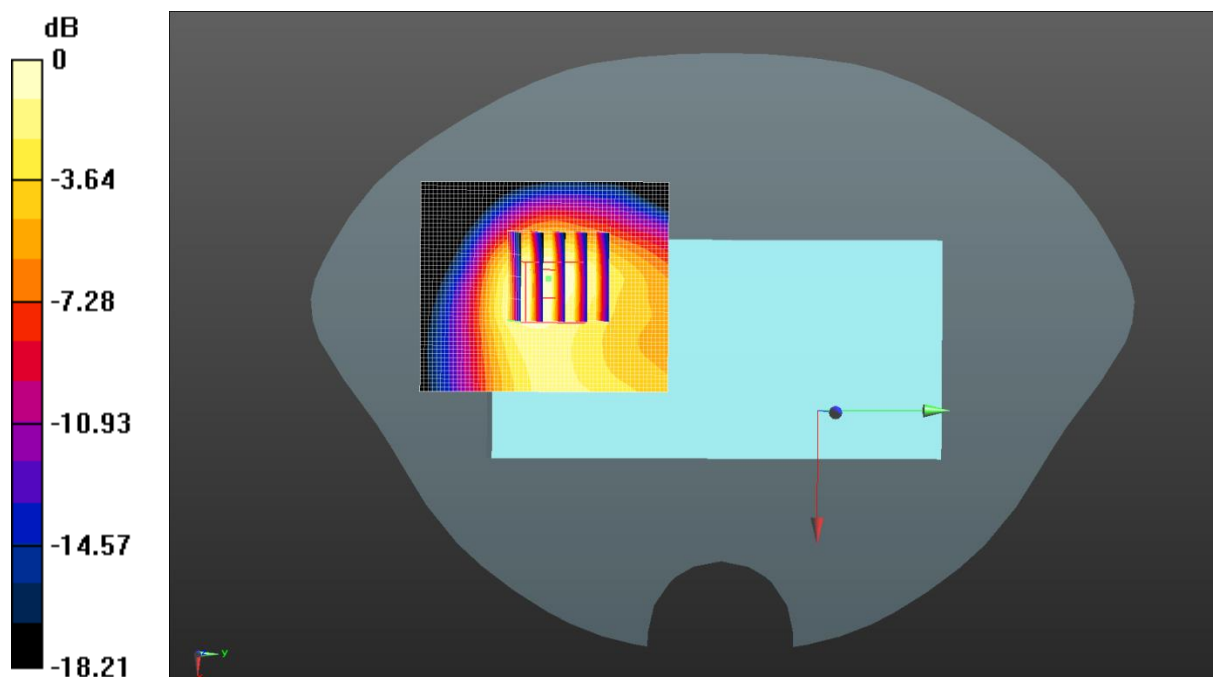

0 dB = 0.326 W/kg = -4.87 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/30

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.424$ S/m; $\epsilon_r = 40.455$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(7.88, 7.4, 7.49) @ 1907.6 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

WCDMA 1900 Body Back/High Channel/Area Scan (51x51x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.561 W/kg

WCDMA 1900 Body Back/High Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.71 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.948 W/kg

SAR(1 g) = 0.499 W/kg; SAR(10 g) = 0.238 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 54.4%

Maximum value of SAR (measured) = 0.792 W/kg

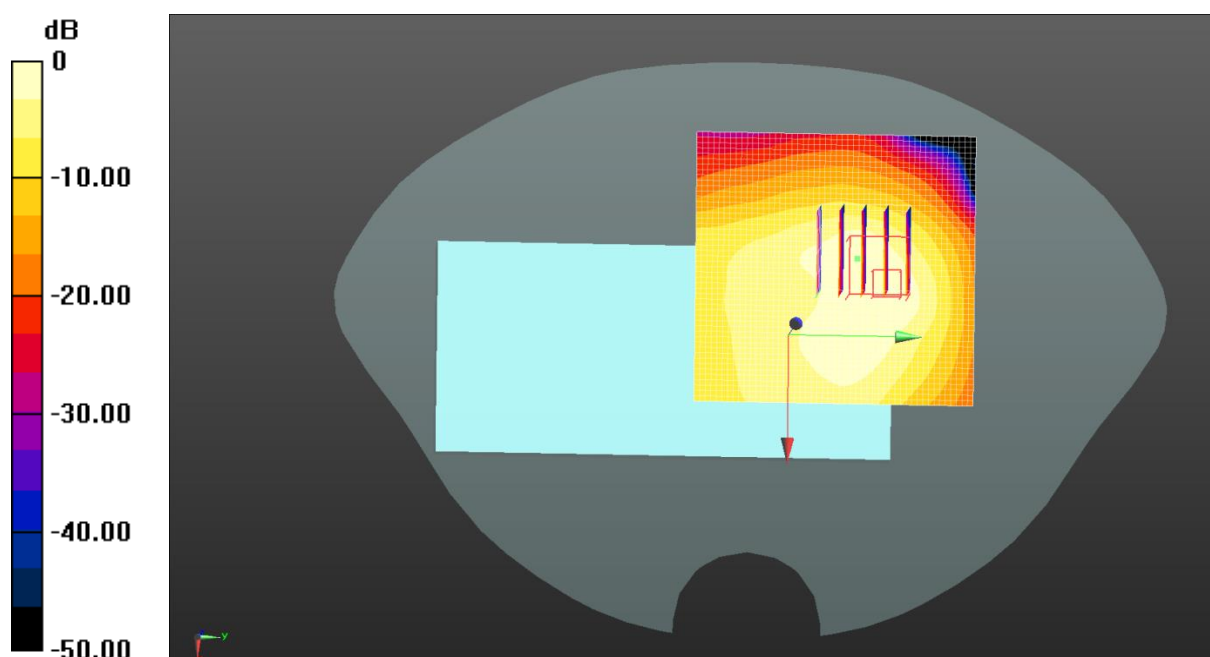

0 dB = 0.561 W/kg = -2.51 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/27

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 40.56$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(8.34, 7.83, 7.92) @ 1732.6 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

WCDMA 1750 Body Back/Middle Channel/Area Scan (51x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.09 W/kg

WCDMA 1750 Body Back/Middle Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.89 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.80 W/kg

SAR(1 g) = 0.972 W/kg; SAR(10 g) = 0.469 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 56.4%

Maximum value of SAR (measured) = 1.50 W/kg

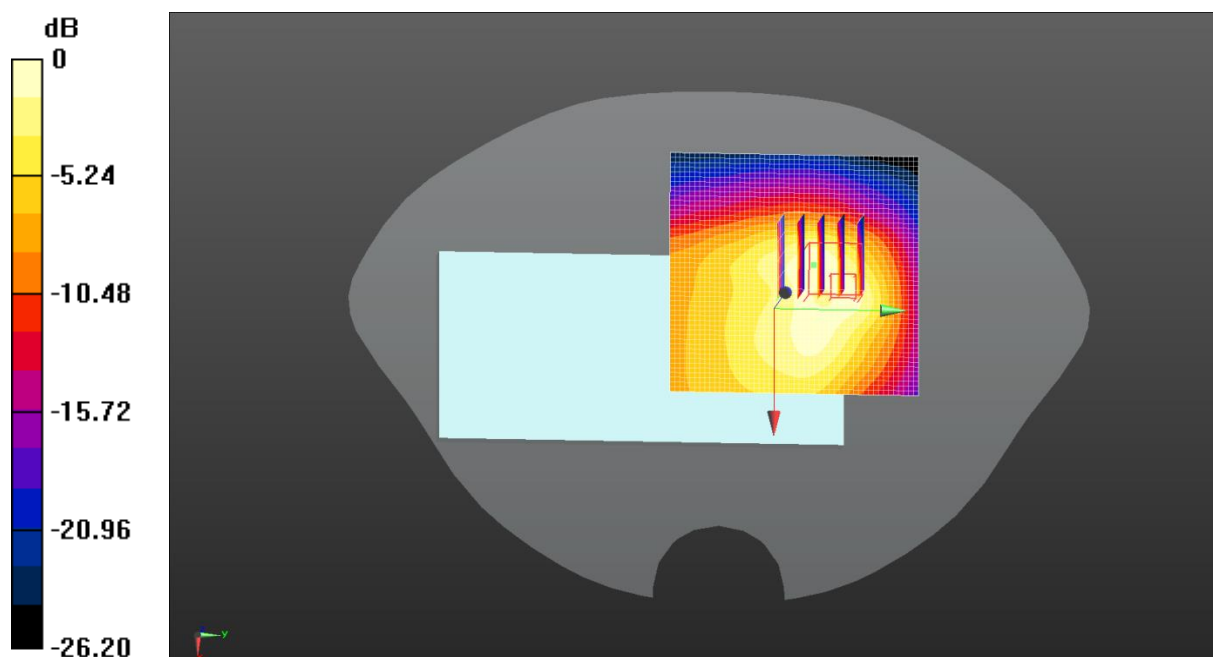

0 dB = 1.09 W/kg = 0.37 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/25

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 42.889$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(9.8, 9.21, 9.31) @ 826.4 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

WCDMA 850 Body Back/Low Channel/Area Scan (51x61x1): Interpolated grid:

$dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.409 W/kg

WCDMA 850 Body Back/Low Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.983 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.414 W/kg

SAR(1 g) = 0.248 W/kg; SAR(10 g) = 0.149 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 64%

Maximum value of SAR (measured) = 0.335 W/kg

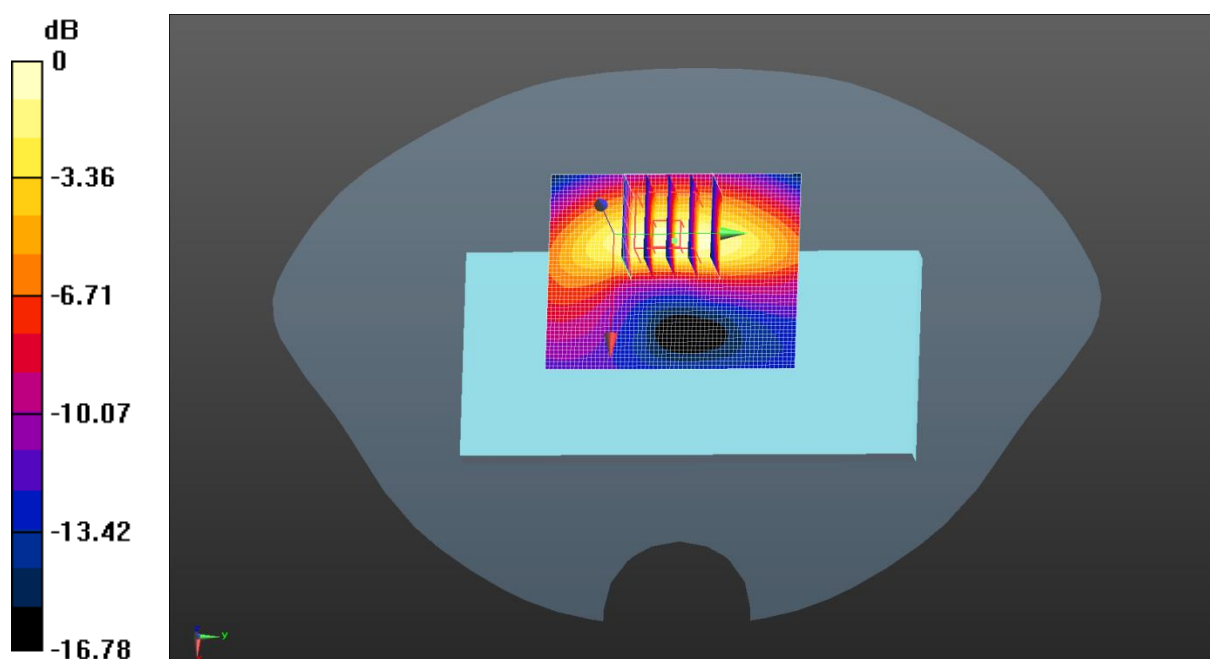

0 dB = 0.409 W/kg = -3.88 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/30

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, LTE-FDD(USA) 1RB QPSK (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.419$ S/m; $\epsilon_r = 40.23$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(7.88, 7.4, 7.49) @ 1860 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

LTE Band 2 1RB(20MHz) Body Back/Low Channel/Area Scan (51x61x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.982 W/kg

LTE Band 2 1RB(20MHz) Body Back/Low Channel/Zoom Scan (5x5x7)/Cube

0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.858 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.608 W/kg; SAR(10 g) = 0.328 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 56.1%

Maximum value of SAR (measured) = 0.917 W/kg

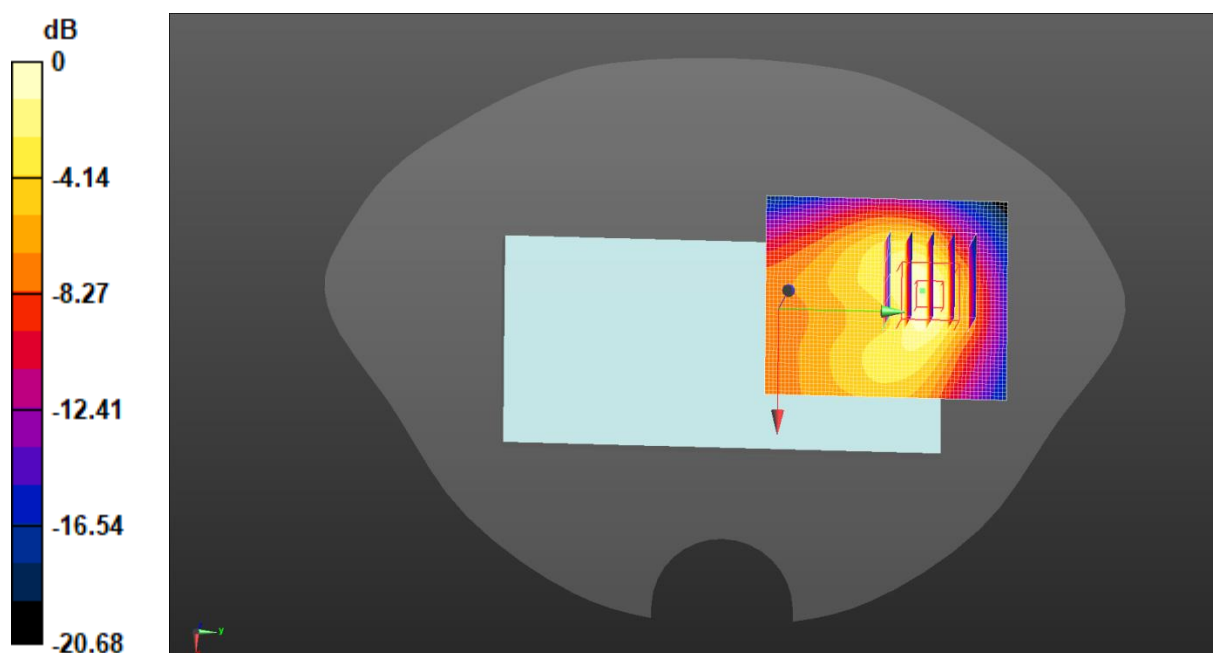

0 dB = 0.982 W/kg = -0.08 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/27

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, LTE-FDD(USA) 1RB QPSK (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 40.53$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(8.34, 7.83, 7.92) @ 1745 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

LTE Band 4 1RB(20MHz) Body Back/High Channel/Area Scan (51x61x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.26 W/kg

LTE Band 4 1RB(20MHz) Body Back/High Channel/Zoom Scan (5x5x7)/Cube

0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.678 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 0.877 W/kg; SAR(10 g) = 0.464 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 54.9%

Maximum value of SAR (measured) = 1.24 W/kg

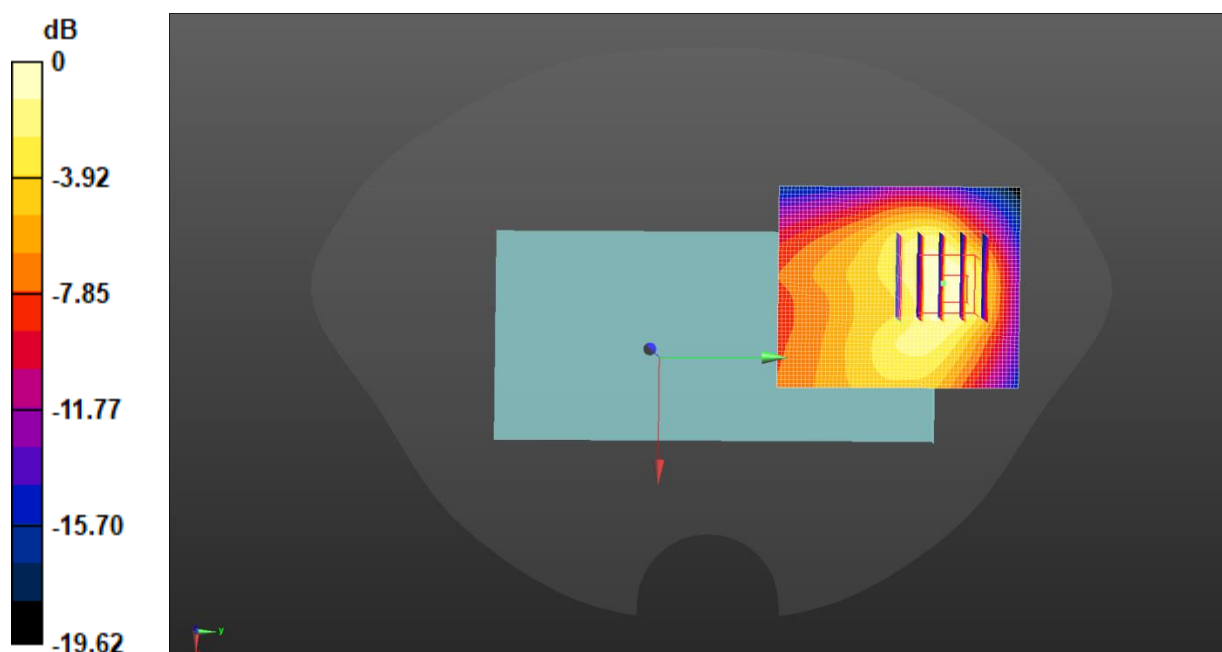

0 dB = 1.26 W/kg = 1.00 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/25

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, LTE-Fdd(USA) 1RB QPSK (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 844 \text{ MHz}$; $\sigma = 0.892 \text{ S/m}$; $\epsilon_r = 42.822$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(9.8, 9.21, 9.31) @ 844 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

LTE Band 5 1RB(10MHz) Body Back/High Channel/Area Scan (51x81x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.944 W/kg

LTE Band 5 1RB(10MHz) Body Back/High Channel/Zoom Scan (5x5x7)/Cube

0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.679 V/m ; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.646 W/kg ; SAR(10 g) = 0.385 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 57.3%

Maximum value of SAR (measured) = 0.898 W/kg

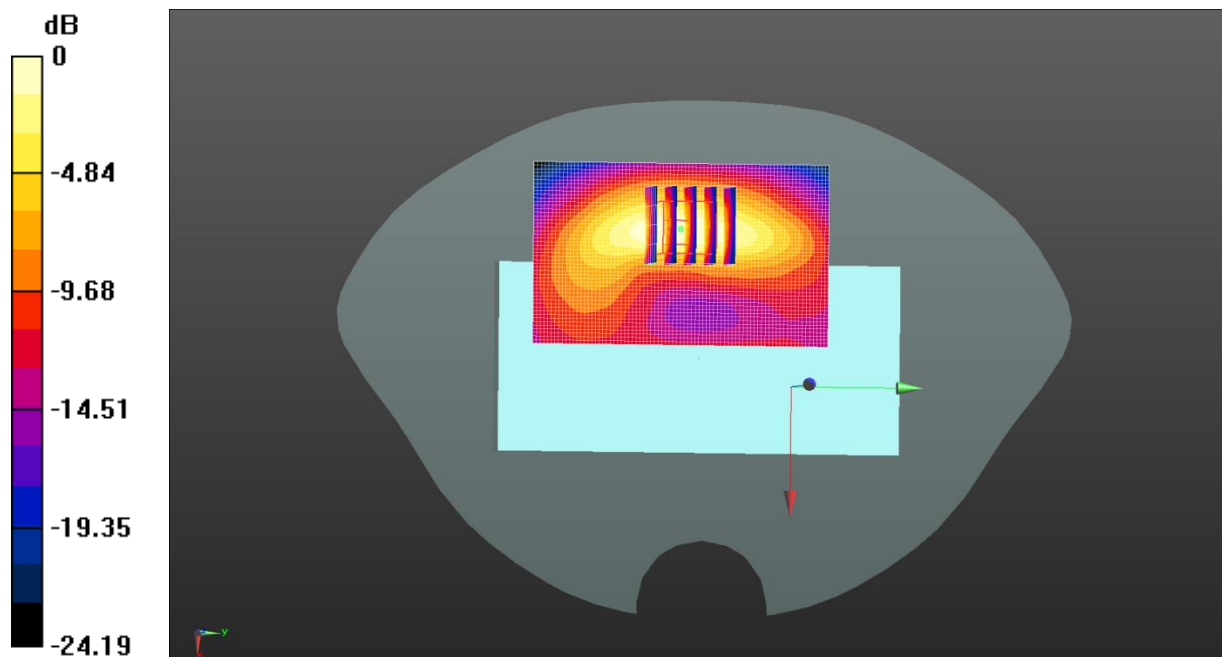

0 dB = 0.944 W/kg = -0.25 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/4/1

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, LTE-Fdd(USA) 1RB QPSK (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 1.911$ S/m; $\epsilon_r = 39.656$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(7.2, 6.77, 6.85) @ 2510 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

LTE Band 7 1RB(20MHz) Body Back/Low Channel/Area Scan (61x61x1):

Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.224 W/kg

LTE Band 7 1RB(20MHz) Body Back/Low Channel/Zoom Scan (7x7x7)/Cube

0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.122 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.273 W/kg

SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.060 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 47.6%

Maximum value of SAR (measured) = 0.211 W/kg

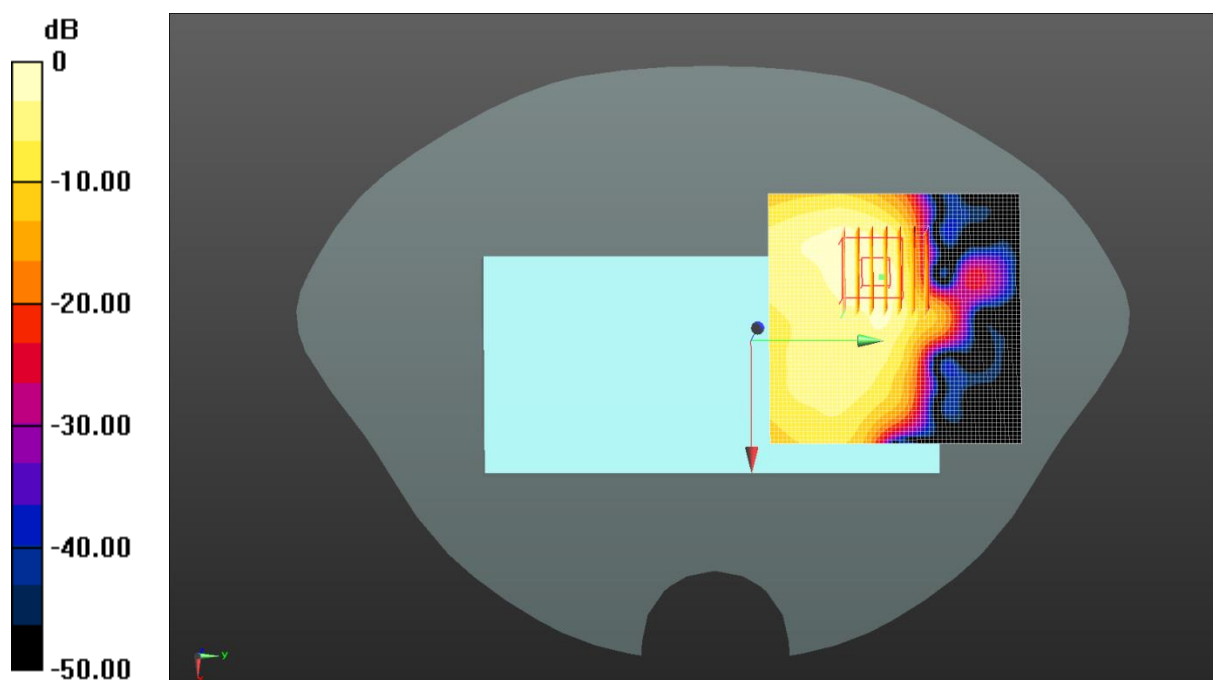

0 dB = 0.224 W/kg = -6.49 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/23

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, LTE-Fdd(USA) 1RB QPSK (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 43.538$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(10, 9.39, 9.5) @ 707.5 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

LTE Band 12 1RB(10MHz) Body Back/Middle Channel/Area Scan (51x81x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.302 W/kg

LTE Band 12 1RB(10MHz) Body Back/Middle Channel/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.179 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.421 W/kg

SAR(1 g) = 0.221 W/kg; SAR(10 g) = 0.130 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 60.3%

Maximum value of SAR (measured) = 0.300 W/kg

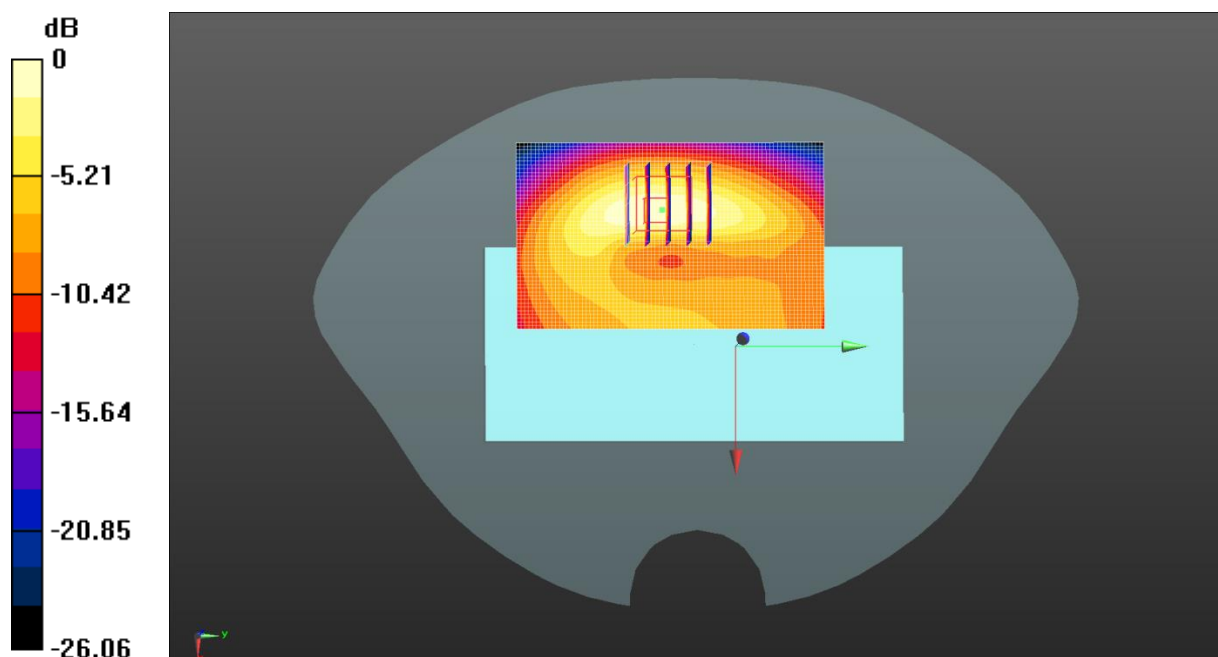

0 dB = 0.302 W/kg = -5.20 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/23

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, LTE-Fdd(USA) 1RB QPSK (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 782 \text{ MHz}$; $\sigma = 0.876 \text{ S/m}$; $\epsilon_r = 43.221$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(10, 9.39, 9.5) @ 782 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

LTE Band 13 1RB(10MHz) Body Back/Middle Channel/Area Scan (51x61x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.722 W/kg

LTE Band 13 1RB(10MHz) Body Back/Middle Channel/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.150 V/m ; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.924 W/kg

SAR(1 g) = 0.443 W/kg ; SAR(10 g) = 0.247 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 48.9%

Maximum value of SAR (measured) = 0.700 W/kg

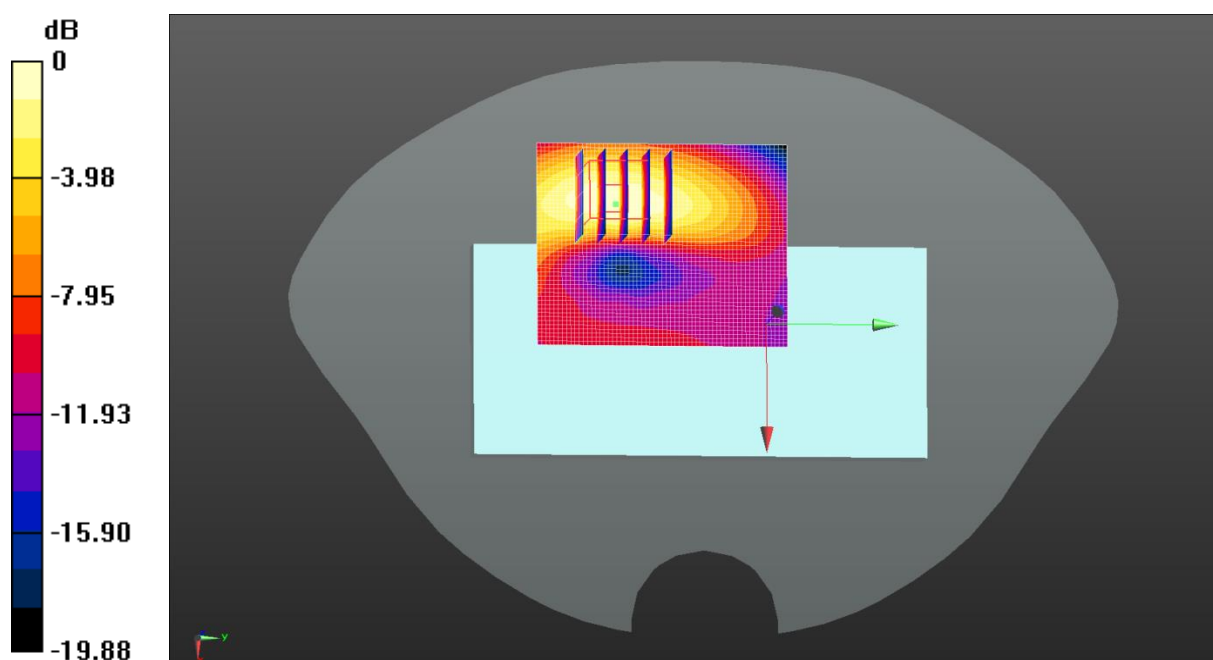

0 dB = 0.722 W/kg = -1.41 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/23

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, LTE-Fdd(USA) 1RB QPSK (0); Frequency: 709 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 709$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 43.531$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(10, 9.39, 9.5) @ 709 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

LTE Band 17 1RB(10MHz) Body Back/Low Channel/Area Scan (51x81x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.300 W/kg

LTE Band 17 1RB(10MHz) Body Back/Low Channel/Zoom Scan (5x5x7)/Cube

0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.825 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.447 W/kg

SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.141 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 60.9%

Maximum value of SAR (measured) = 0.328 W/kg

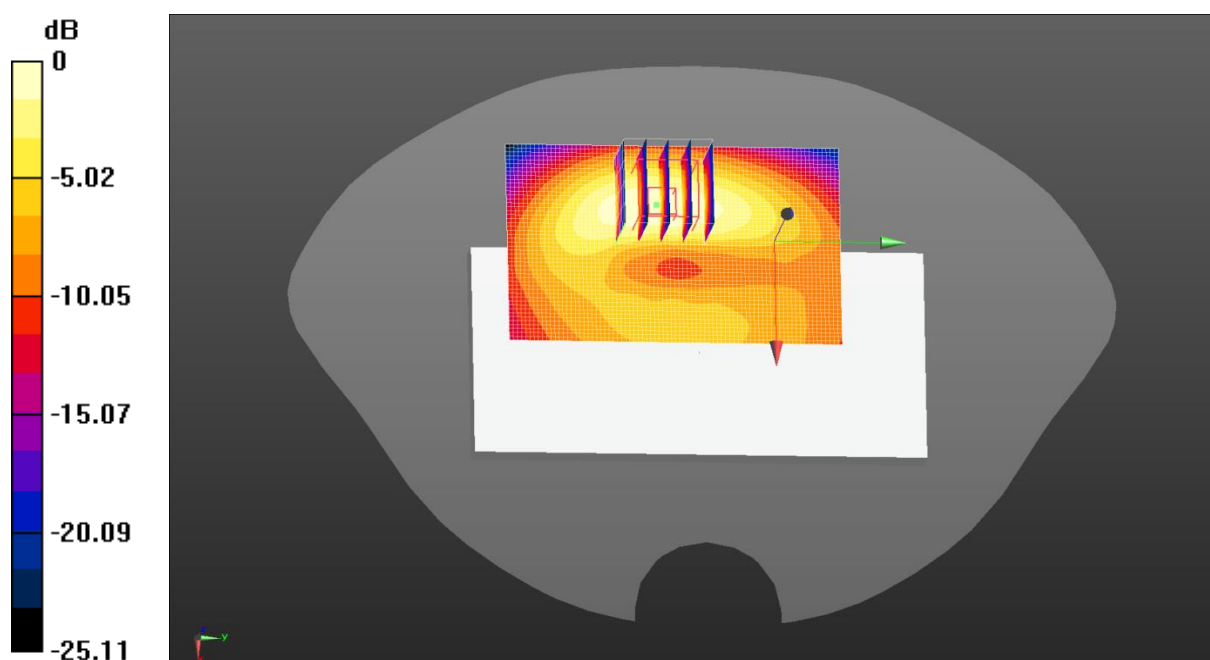

0 dB = 0.300 W/kg = -5.23 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/4/6

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, LTE-TDD(USA) 20MHz 1RB QPSK (0); Frequency: 2580 MHz; Duty Cycle: 1:1.59956

Medium parameters used: $f = 2580$ MHz; $\sigma = 1.98$ S/m; $\epsilon_r = 39.998$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(7.2, 6.77, 6.85) @ 2580 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

LTE Band 38 1RB(20MHz) Body Back/Low Channel/Area Scan (51x61x1):

Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.08 W/kg

LTE Band 38 1RB(20MHz) Body Back/Low Channel/Zoom Scan (7x7x7)/Cube

0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.042 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.685 W/kg; SAR(10 g) = 0.315 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 46.7%

Maximum value of SAR (measured) = 1.14 W/kg

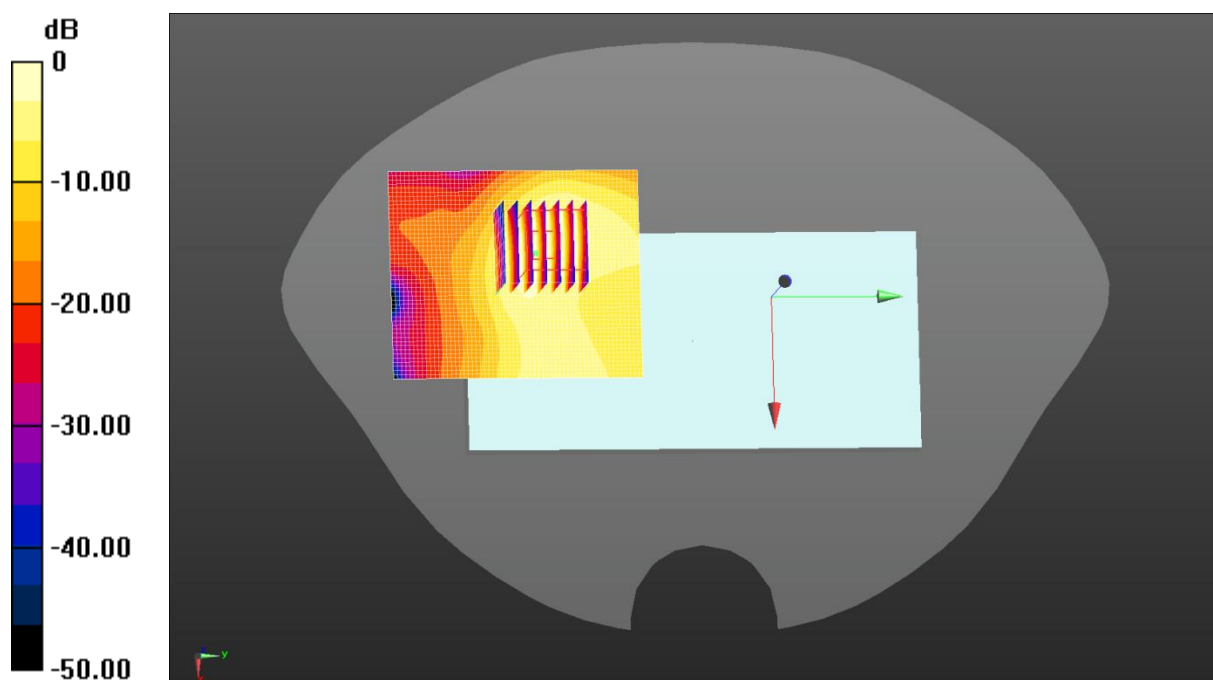

0 dB = 1.08 W/kg = 0.32 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/4/6

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, LTE-TDD(USA) 20MHz 1RB QPSK (0); Frequency: 2593 MHz; Duty Cycle: 1:1.59956

Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 1.99$ S/m; $\epsilon_r = 39.979$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(7.2, 6.77, 6.85) @ 2593 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

LTE Band 41 1RB(20MHz) Body Back/Middle Channel/Area Scan (51x61x1):

Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.09 W/kg

LTE Band 41 1RB(20MHz) Body Back/Middle Channel/Zoom Scan

(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.634 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.689 W/kg; SAR(10 g) = 0.317 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 46.7%

Maximum value of SAR (measured) = 1.15 W/kg

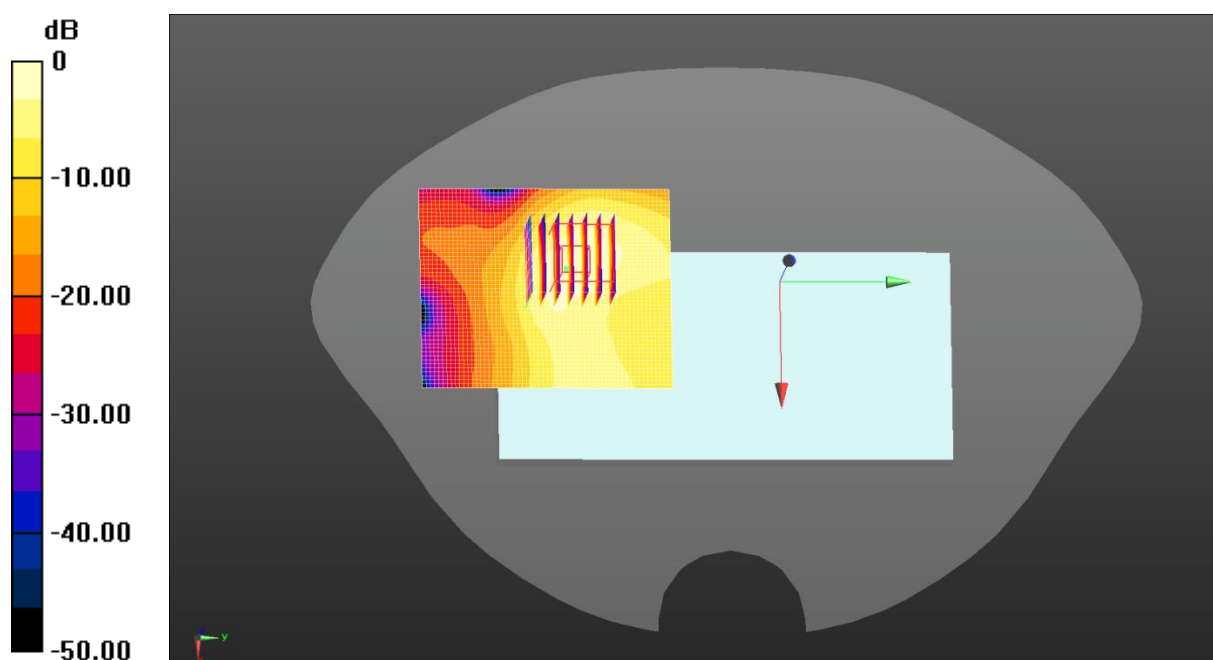

0 dB = 1.09 W/kg = 0.36 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/4/14

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, LTE-TDD(USA) 20MHz 1RB QPSK (0); Frequency: 3460 MHz; Duty Cycle: 1:1.59956

Medium parameters used: $f = 3460$ MHz; $\sigma = 2.768$ S/m; $\epsilon_r = 38.048$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(6.44, 6.46, 7.1) @ 3460 MHz; Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 2025/5/2
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

LTE Band 42 1RB(20MHz) Body Back/Low Channel/Area Scan (51x61x1):

Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.475 W/kg

LTE Band 42 1RB(20MHz) Body Back/Low Channel/Zoom Scan (7x7x8)/Cube

0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 1.323 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.720 W/kg

SAR(1 g) = 0.271 W/kg; SAR(10 g) = 0.106 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 45.1%

Maximum value of SAR (measured) = 0.522 W/kg

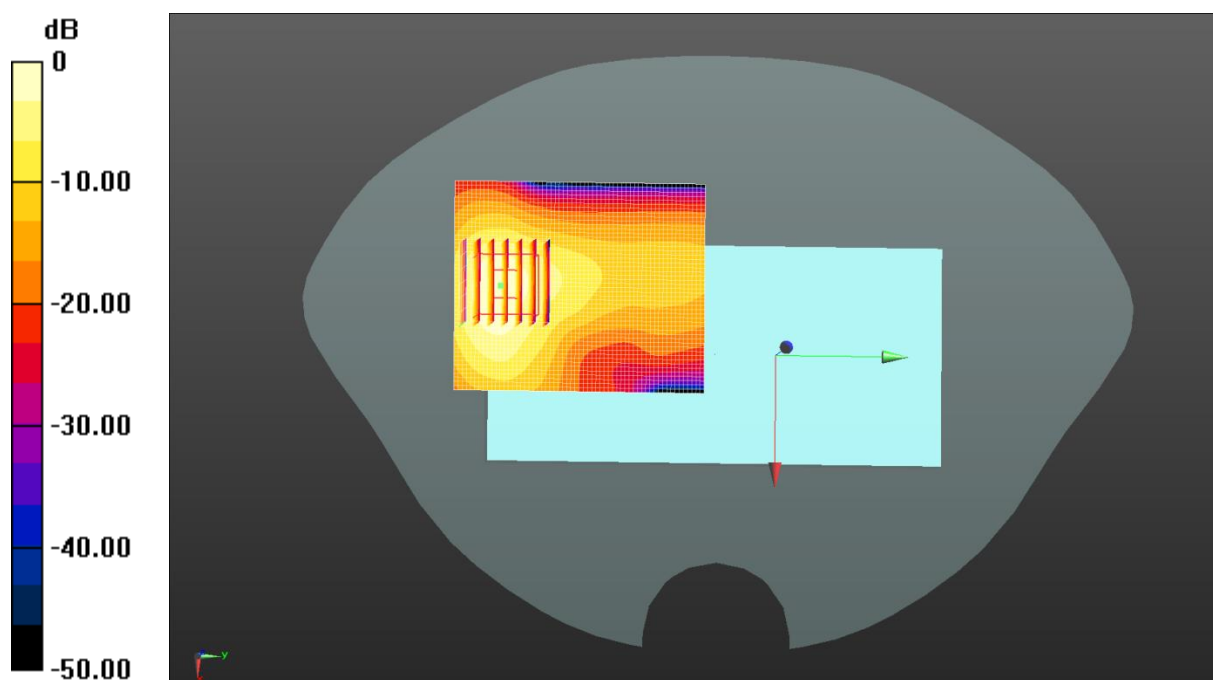

0 dB = 0.475 W/kg = -3.23 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/27

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, LTE-FDD(USA) 20MHz 50%RB QPSK (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1745 \text{ MHz}$; $\sigma = 1.384 \text{ S/m}$; $\epsilon_r = 40.53$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(8.34, 7.83, 7.92) @ 1745 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

LTE Band 66 1RB(20MHz) Body Back/Middle Channel/Area Scan (51x61x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.41 W/kg

LTE Band 66 1RB(20MHz) Body Back/Middle Channel/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.34 V/m ; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 0.890 W/kg ; SAR(10 g) = 0.481 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 58.6%

Maximum value of SAR (measured) = 1.35 W/kg

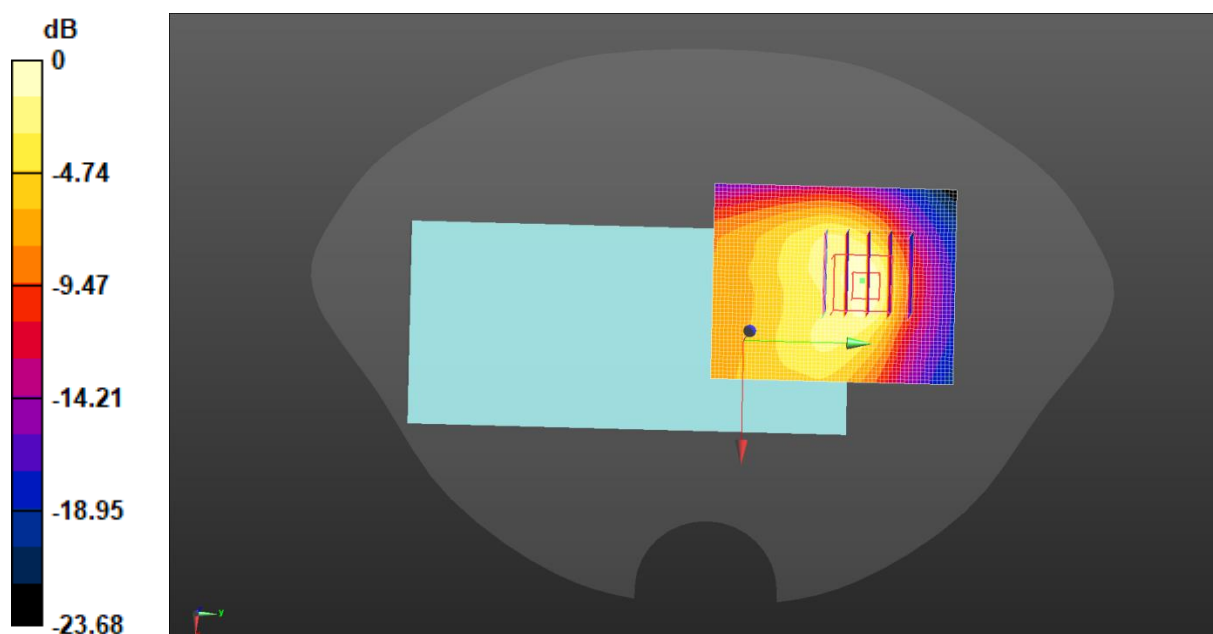

0 dB = 1.41 W/kg = 1.50 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/25

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, NR (0); Frequency: 834 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 834$ MHz; $\sigma = 0.887$ S/m; $\epsilon_r = 42.86$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3924; ConvF(9.8, 9.21, 9.31) @ 834 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

NR n5 50%RB(20MHz) Body Back/Low Channel/Area Scan (61x61x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.07 W/kg

NR n5 50%RB(20MHz) Body Back/Low Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.156 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 1.24 W/kg
SAR(1 g) = 0.743 W/kg; SAR(10 g) = 0.444 W/kg
Smallest distance from peaks to all points 3 dB below = 8 mm
Ratio of SAR at M2 to SAR at M1 = 62.7%
Maximum value of SAR (measured) = 1.02 W/kg

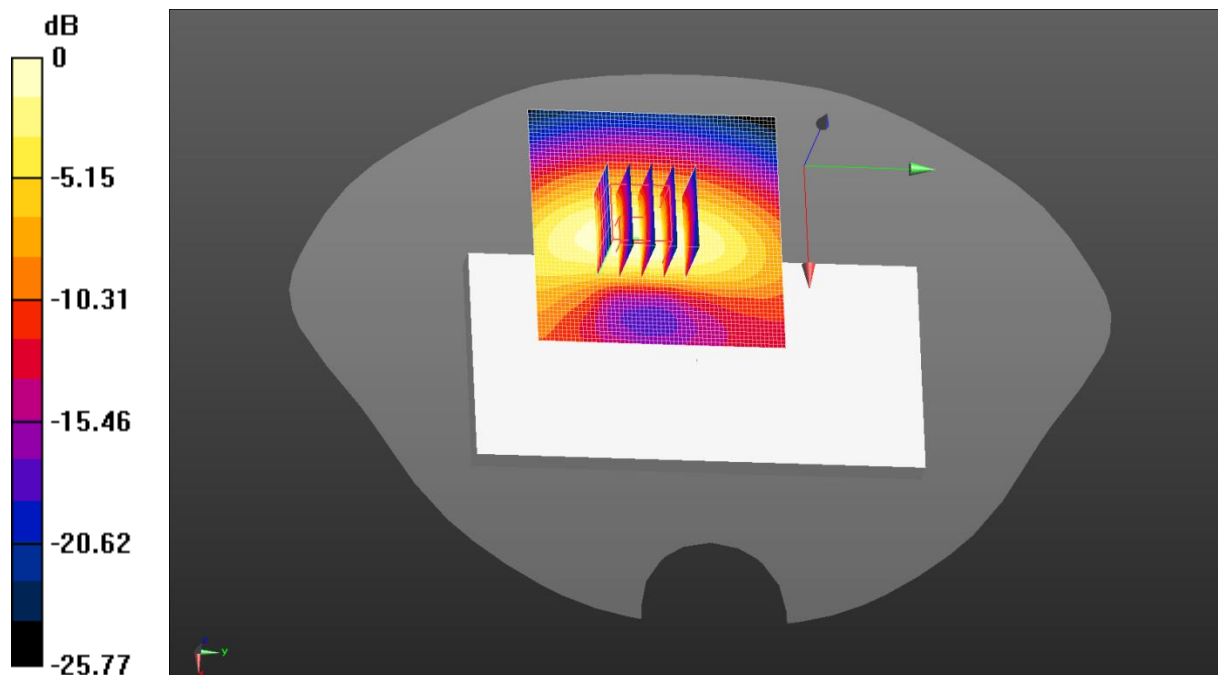

0 dB = 1.07 W/kg = 0.30 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/4/1

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, NR (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.932$ S/m; $\epsilon_r = 39.604$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(7.2, 6.77, 6.85) @ 2535 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

NR n7 50%RB(20MHz) Body Back/Middle Channel/Area Scan (61x61x1):

Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.440 W/kg

NR n7 50%RB(20MHz) Body Back/Middle Channel/Zoom Scan (7x7x7)/Cube

0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.638 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.548 W/kg

SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.123 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 48%

Maximum value of SAR (measured) = 0.433 W/kg

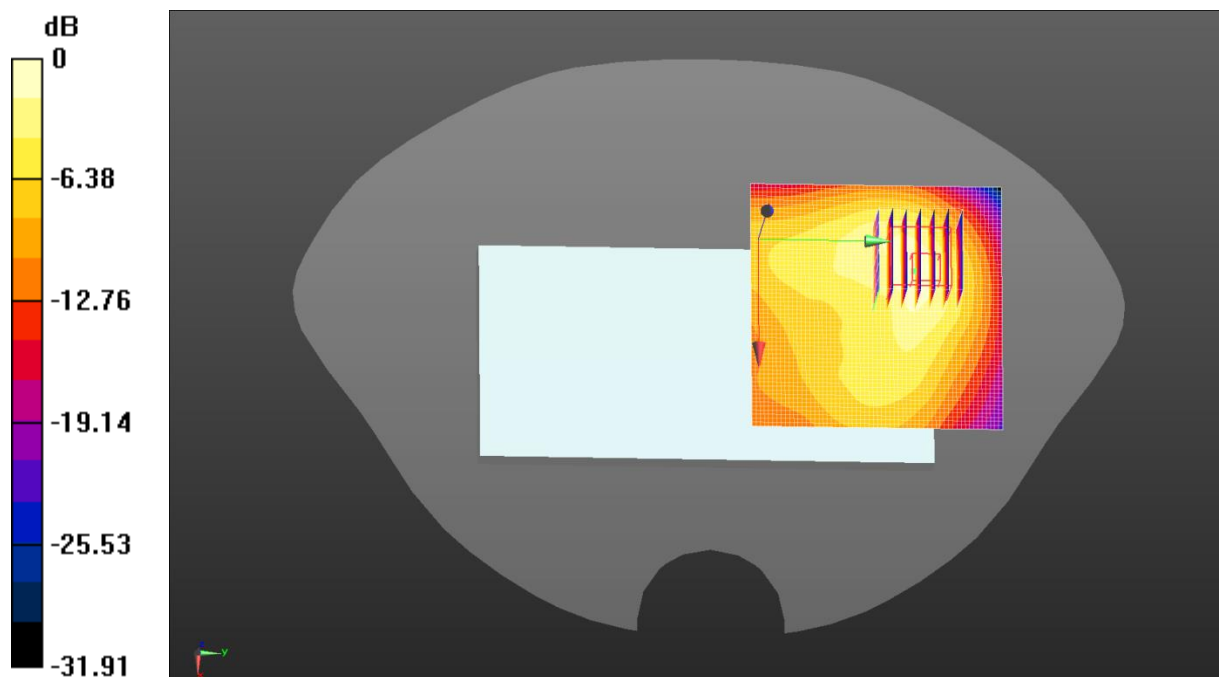

0 dB = 0.440 W/kg = -3.57 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/23

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, NR (0); Frequency: 708.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 708.5$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 43.534$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3924; ConvF(10, 9.39, 9.5) @ 708.5 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

NR n12 50%RB(15MHz) Body Back/High Channel/Area Scan (61x61x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.499 W/kg

NR n12 50%RB(15MHz) Body Back/High Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 8.085 V/m; Power Drift = -0.18 dB
Peak SAR (extrapolated) = 0.595 W/kg
SAR(1 g) = 0.348 W/kg; SAR(10 g) = 0.207 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 61%
Maximum value of SAR (measured) = 0.489 W/kg

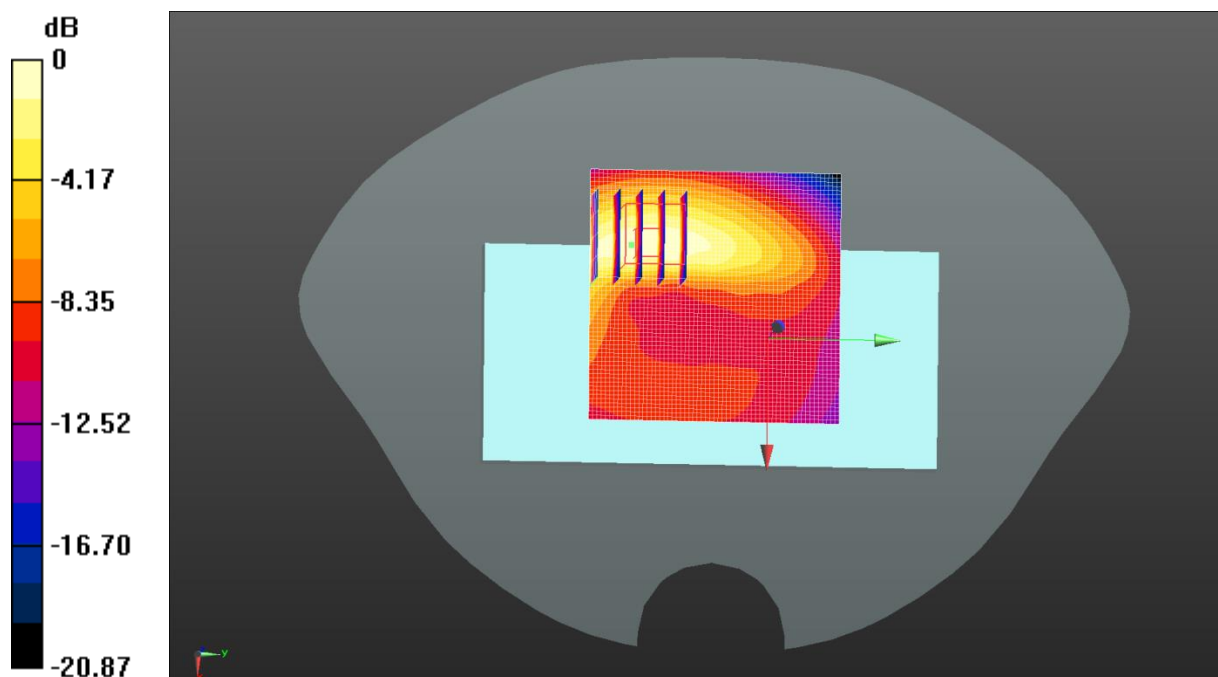

0 dB = 0.499 W/kg = -3.02 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/4/6

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, NR (0); Frequency: 2600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2600$ MHz; $\sigma = 2.001$ S/m; $\epsilon_r = 39.955$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3924; ConvF(7.2, 6.77, 6.85) @ 2600 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

NR n38 1RB(40MHz) Body Back/Low Channel/Area Scan (61x51x1):

Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.293 W/kg

NR n38 1RB(40MHz) Body Back/Low Channel/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 3.272 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.347 W/kg
SAR(1 g) = 0.132 W/kg; SAR(10 g) = 0.067 W/kg
Smallest distance from peaks to all points 3 dB below = 8.5 mm
Ratio of SAR at M2 to SAR at M1 = 46.8%
Maximum value of SAR (measured) = 0.274 W/kg

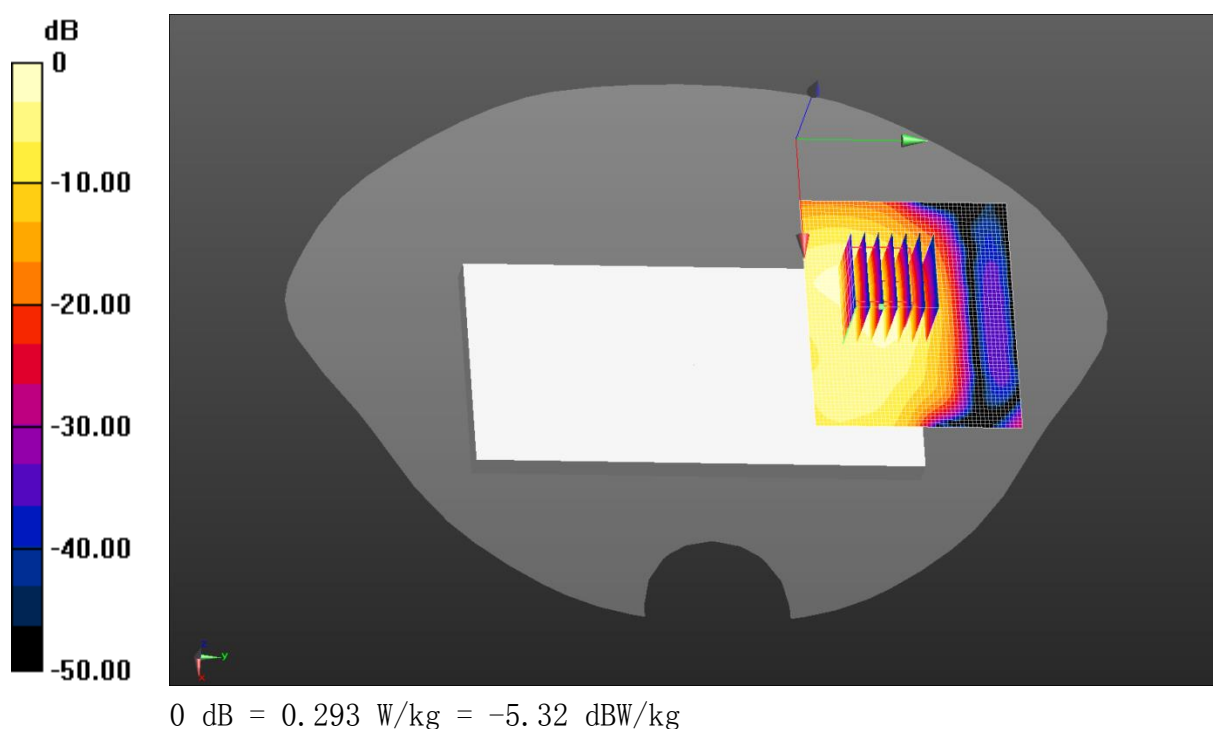

Test Laboratory: JYTSZ

Date: 2026/4/6

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2592.99$ MHz; $\sigma = 1.99$ S/m; $\epsilon_r = 39.979$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(7.2, 6.77, 6.85) @ 2592.99 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

NR n41 50%RB(100MHz) Body Back/Middle Channel/Area Scan (61x61x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.197 W/kg

NR n41 50%RB(100MHz) Body Back/Middle Channel/Zoom Scan

(7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.096 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.247 W/kg

SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.055 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 47.8%

Maximum value of SAR (measured) = 0.194 W/kg

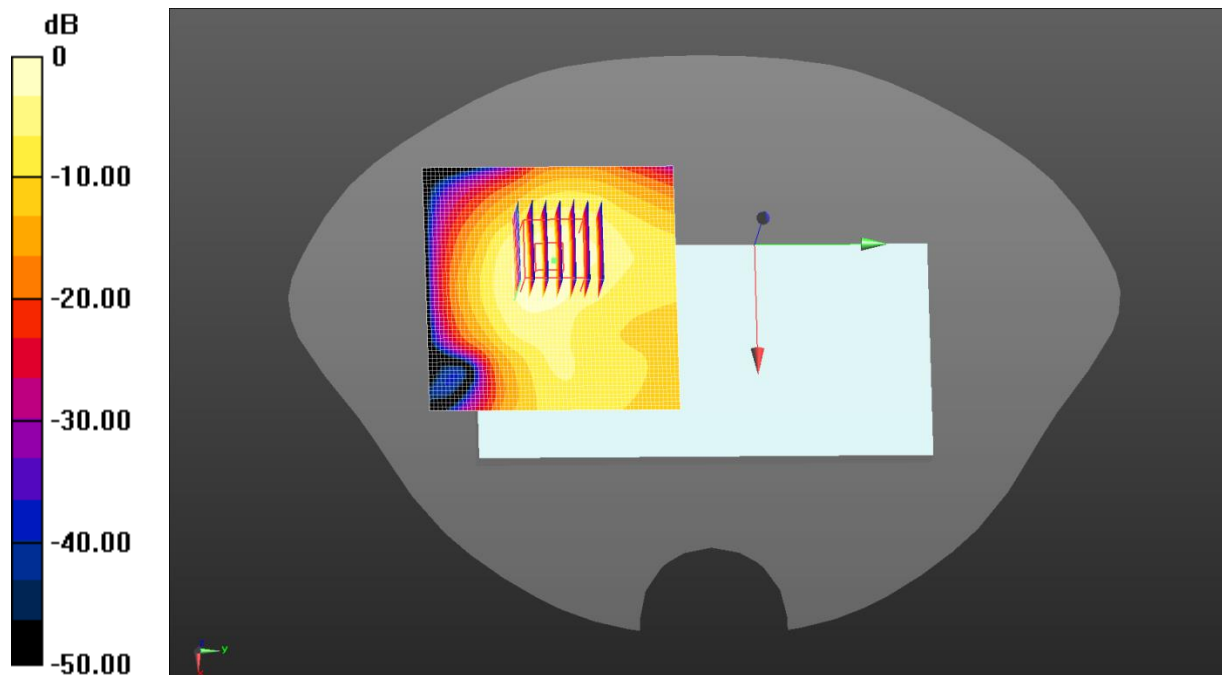

0 dB = 0.197 W/kg = -7.05 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/27

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, NR (0); Frequency: 1730 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1730$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 40.566$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3924; ConvF(8.34, 7.83, 7.92) @ 1730 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

NR n66 50%RB(40MHz) Body Back/Low Channel/Area Scan (61x51x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.452 W/kg

NR n66 50%RB(40MHz) Body Back/Low Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 4.886 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 0.558 W/kg
SAR(1 g) = 0.319 W/kg; SAR(10 g) = 0.170 W/kg
Smallest distance from peaks to all points 3 dB below = 8.6 mm
Ratio of SAR at M2 to SAR at M1 = 57.3%
Maximum value of SAR (measured) = 0.438 W/kg

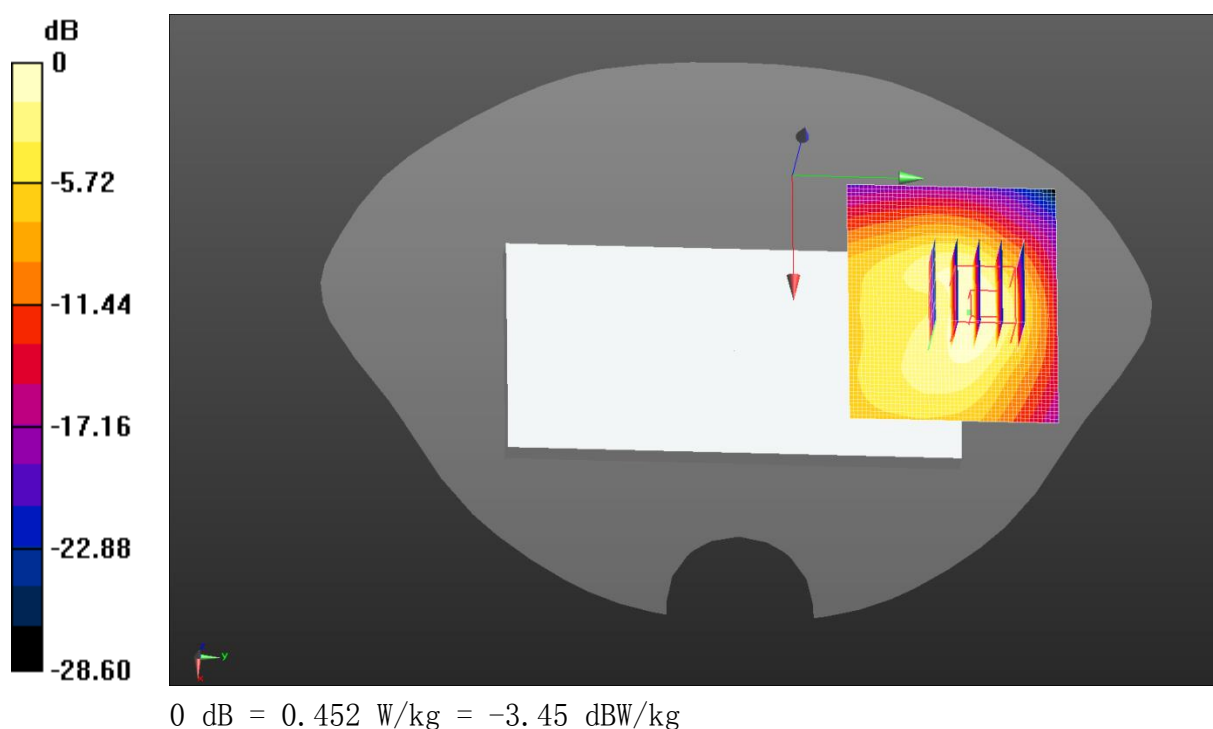

Test Laboratory: JYTSZ

Date: 2026/4/14

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, NR (0); Frequency: 3500.01 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 3500.01$ MHz; $\sigma = 2.804$ S/m; $\epsilon_r = 37.964$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7351; ConvF(6.44, 6.46, 7.1) @ 3500.01 MHz; Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 2025/5/2
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

NR n77 1RB(100MHz) Body Back/Middle Channel/Area Scan (61x51x1):

Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.324 W/kg

NR n77 1RB(100MHz) Body Back/Middle Channel/Zoom Scan (7x7x8)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=4$ mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.452 W/kg
SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.065 W/kg
Smallest distance from peaks to all points 3 dB below = 9 mm
Ratio of SAR at M2 to SAR at M1 = 44.1%
Maximum value of SAR (measured) = 0.326 W/kg

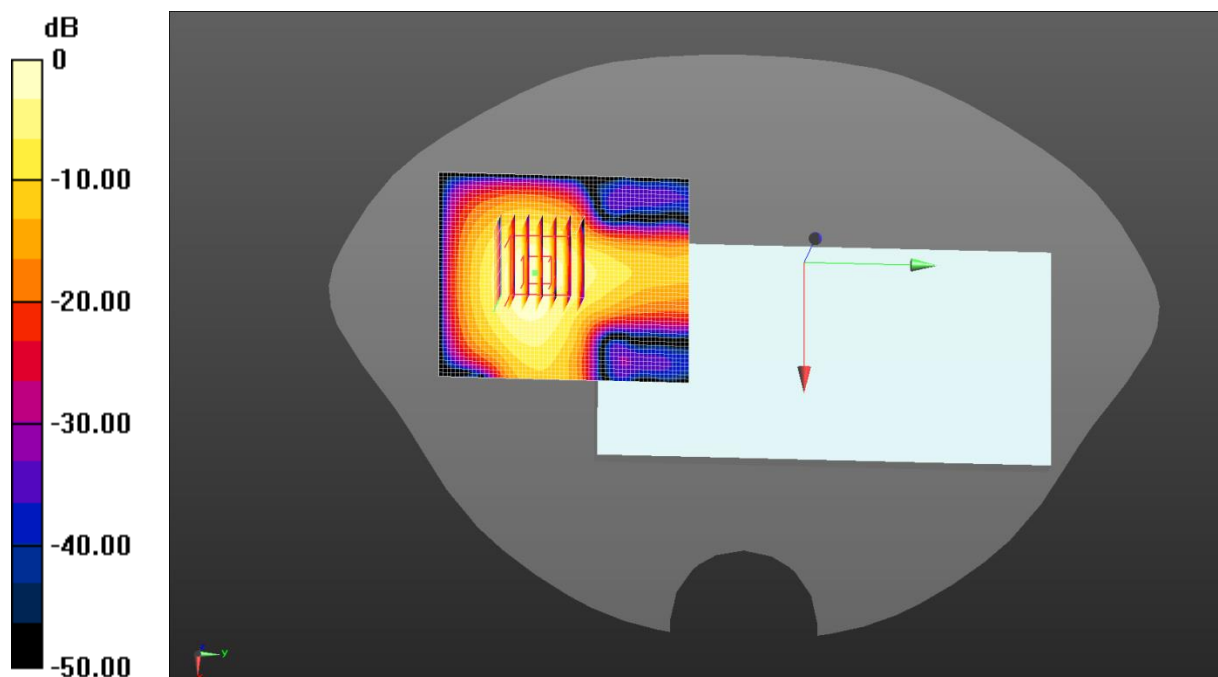

0 dB = 0.324 W/kg = -4.89 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/4/15

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 3750$ MHz; $\sigma = 3.057$ S/m; $\epsilon_r = 37.471$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(6.4, 6.42, 7.06) @ 3750 MHz; Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 2025/5/2
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

NR n77 50%RB(100MHz) Body Back/Middle Channel/Area Scan (61x51x1):

Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.316 W/kg

NR n77 50%RB(100MHz) Body Back/Middle Channel/Zoom Scan

(7x7x8)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=4$ mm

Reference Value = 1.352 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.413 W/kg

SAR(1 g) = 0.137 W/kg; SAR(10 g) = 0.049 W/kg Slots

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 40.7%

Maximum value of SAR (measured) = 0.282 W/kg

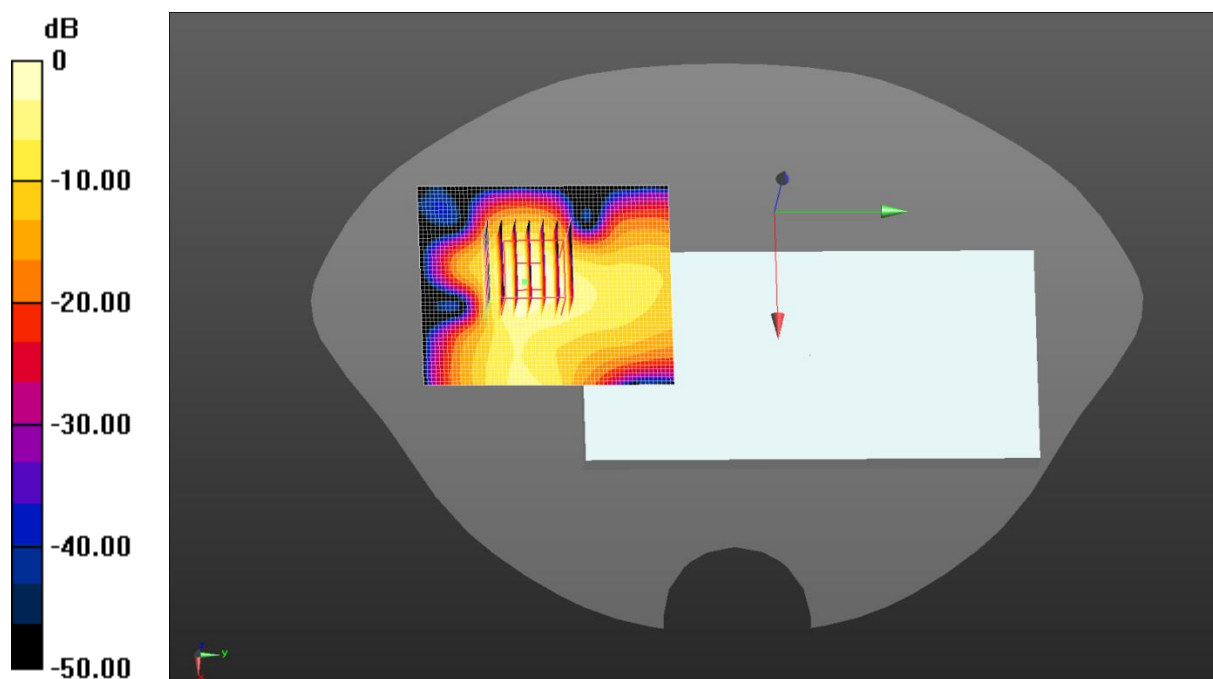

0 dB = 0.316 W/kg = -5.00 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/4/1

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.805$ S/m; $\epsilon_r = 39.865$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(7.3, 6.86, 6.94) @ 2412 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

2.4G WIFI Body Back/Low Channel/Area Scan (51x61x1): Interpolated grid:

$dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.0664 W/kg

2.4G WIFI Body Back/Low Channel/Zoom Scan (7x7x7)/Cube 0: Measurement

grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.438 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.0850 W/kg

SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.021 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 50%

Maximum value of SAR (measured) = 0.0680 W/kg

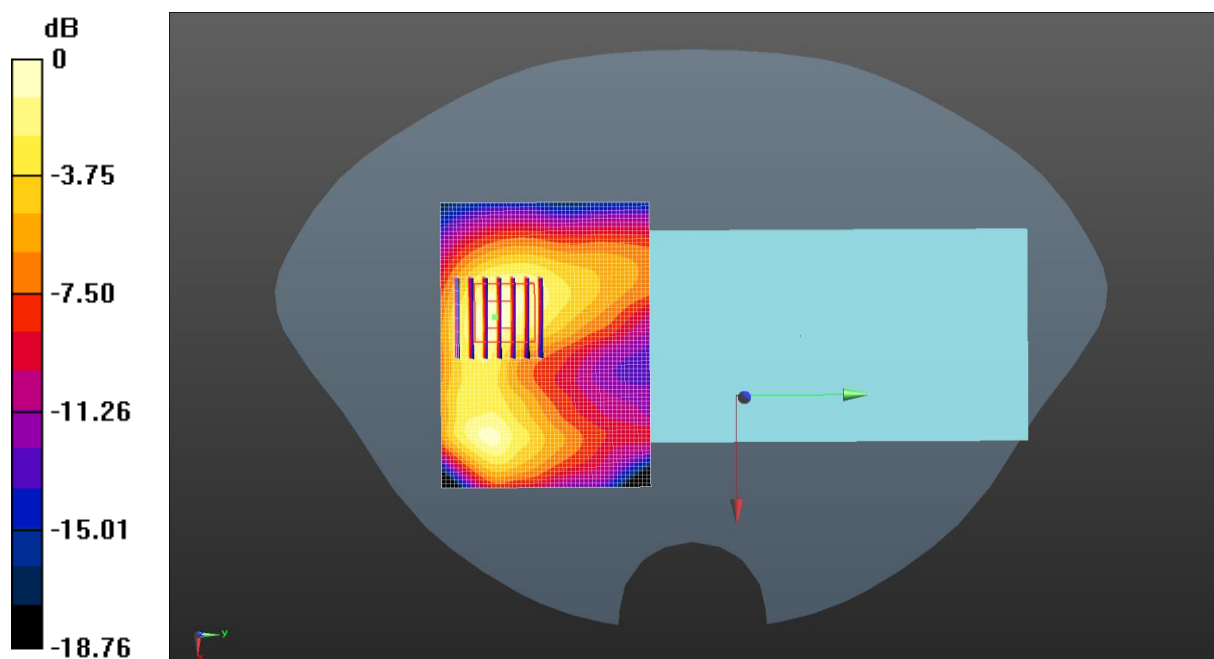

0 dB = 0.0664 W/kg = -11.78 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/4/8

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, IEEE 802.11a WiFi 5GHz (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.666 \text{ S/m}$; $\epsilon_r = 34.808$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(5.48, 5.15, 5.21) @ 5200 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

5.2G WiFi Body Back/Middle Channel/Area Scan (61x71x1): Interpolated grid:

$dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.109 W/kg

5.2G WiFi Body Back/Middle Channel/Zoom Scan (7x7x7)/Cube 0: Measurement

grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.236 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.00574 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 46.5%

Maximum value of SAR (measured) = 0.115 W/kg

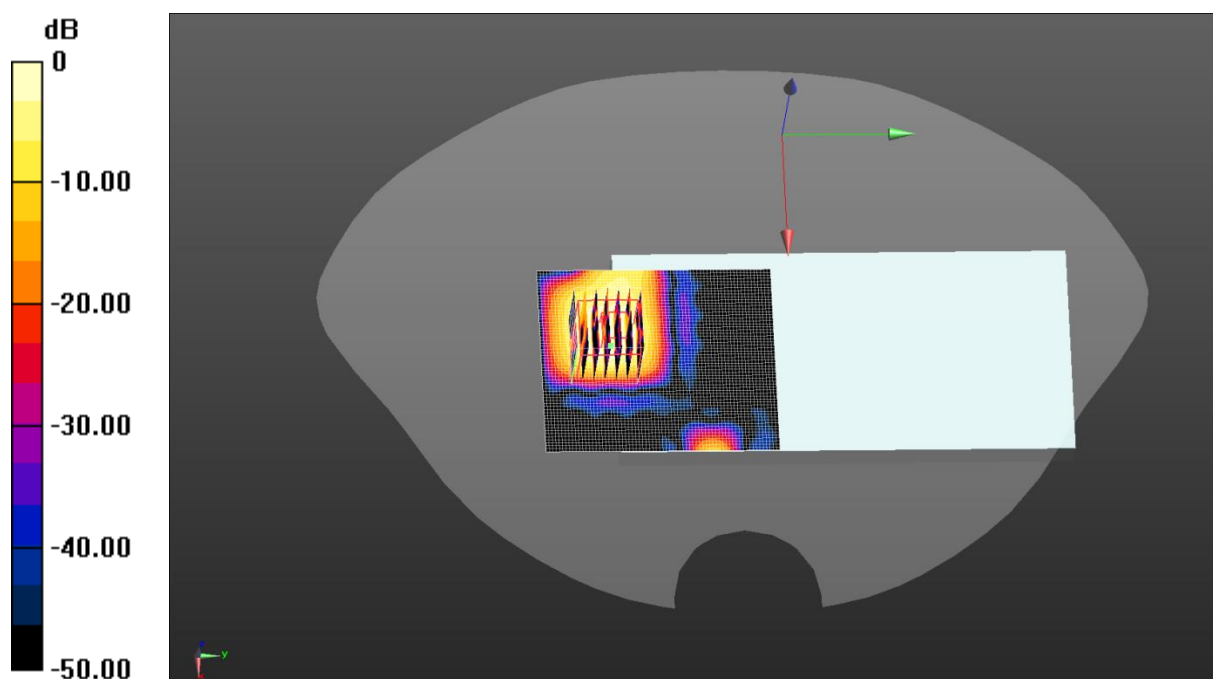

0 dB = 0.109 W/kg = -9.61 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/4/8

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, IEEE 802.11a WiFi 5GHz (0); Frequency: 5260 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.731$ S/m; $\epsilon_r = 34.644$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(5.48, 5.15, 5.21) @ 5260 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

5.3G WiFi Body Back/Low Channel/Area Scan (61x71x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.189 W/kg

5.3G WiFi Body Back/Low Channel/Zoom Scan (7x7x7)/Cube 0: Measurement

grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0.6300 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.195 W/kg

SAR(1 g) = 0.052 W/kg; SAR(10 g) = 0.013 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 44%

Maximum value of SAR (measured) = 0.132 W/kg

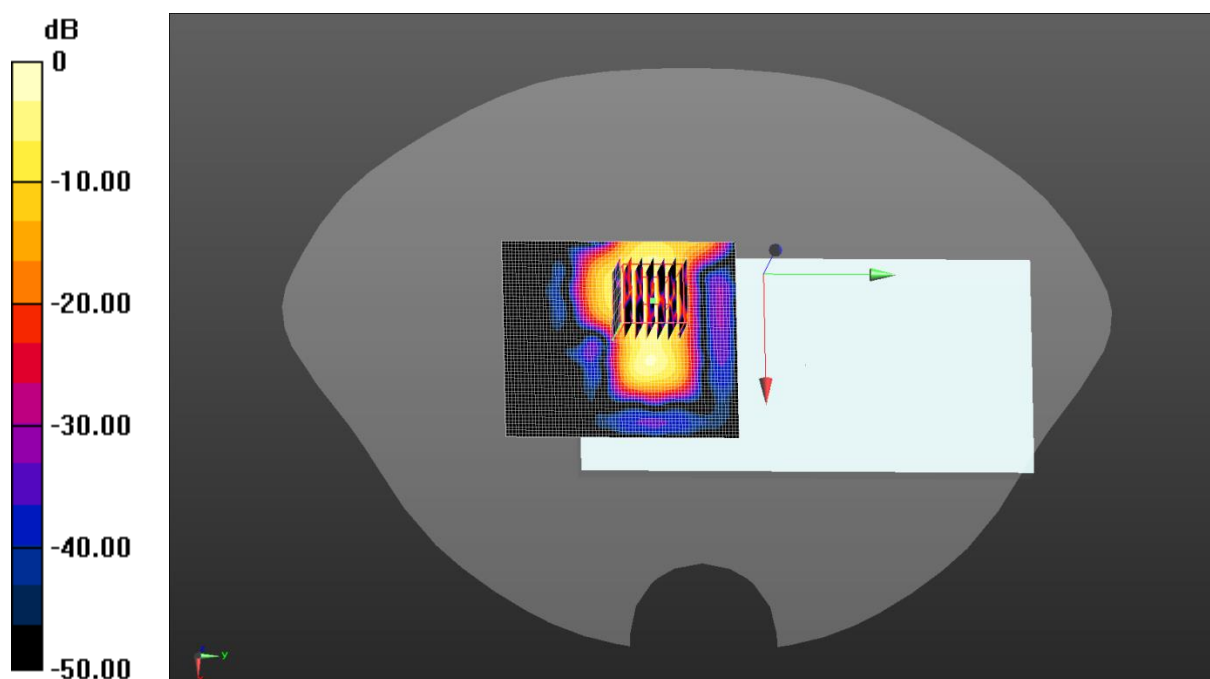

0 dB = 0.189 W/kg = -7.24 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/4/9

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, IEEE 802.11a WiFi 5GHz (0); Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 4.973 \text{ S/m}$; $\epsilon_r = 34.601$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(5.06, 4.76, 4.81) @ 5500 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

5.6G WiFi Body Back/Low Channel/Area Scan (61x71x1): Interpolated grid:

$dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.149 W/kg

5.6G WiFi Body Back/Low Channel/Zoom Scan (7x7x7)/Cube 0: Measurement

grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.214 W/kg

SAR(1 g) = 0.047 W/kg; SAR(10 g) = 0.012 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 40.9%

Maximum value of SAR (measured) = 0.135 W/kg

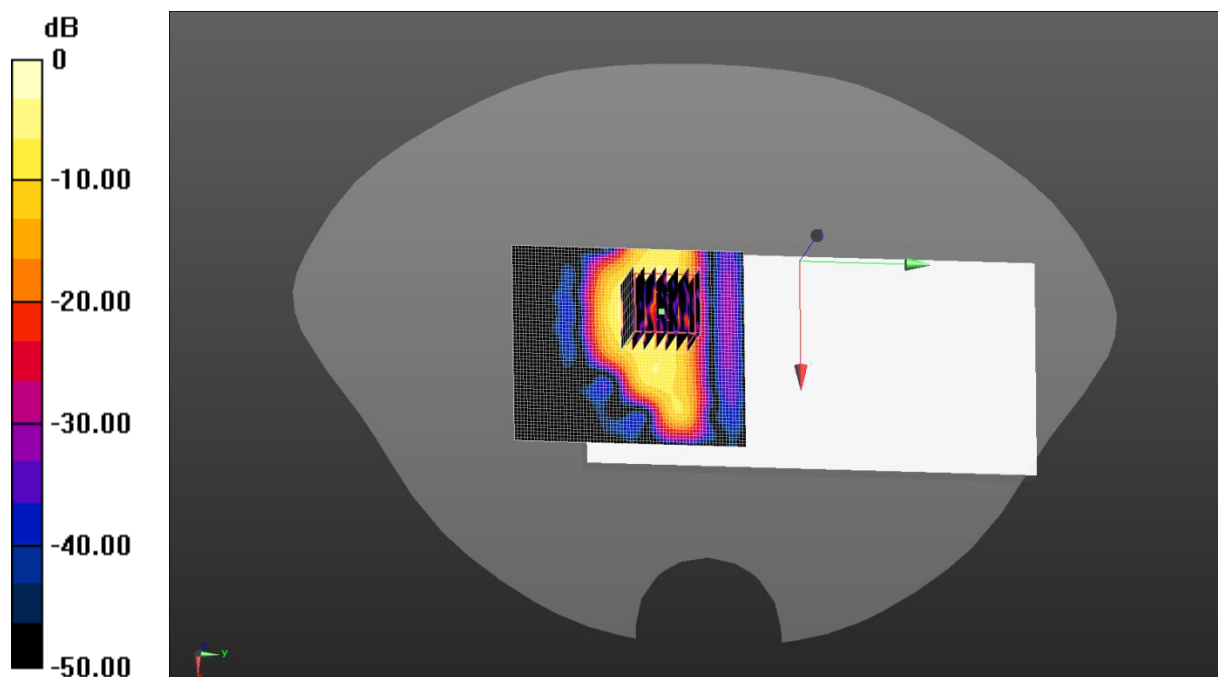

0 dB = 0.149 W/kg = -8.28 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/4/9

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, IEEE 802.11a WiFi 5GHz (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.284$ S/m; $\epsilon_r = 34.06$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(5.1, 4.79, 4.85) @ 5785 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

5.8G WiFi Body Back/Low Channel/Area Scan (61x71x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.201 W/kg

5.8G WiFi Body Back/Low Channel/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.492 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.289 W/kg

SAR(1 g) = 0.067 W/kg; SAR(10 g) = 0.018 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 42.9%

Maximum value of SAR (measured) = 0.192 W/kg

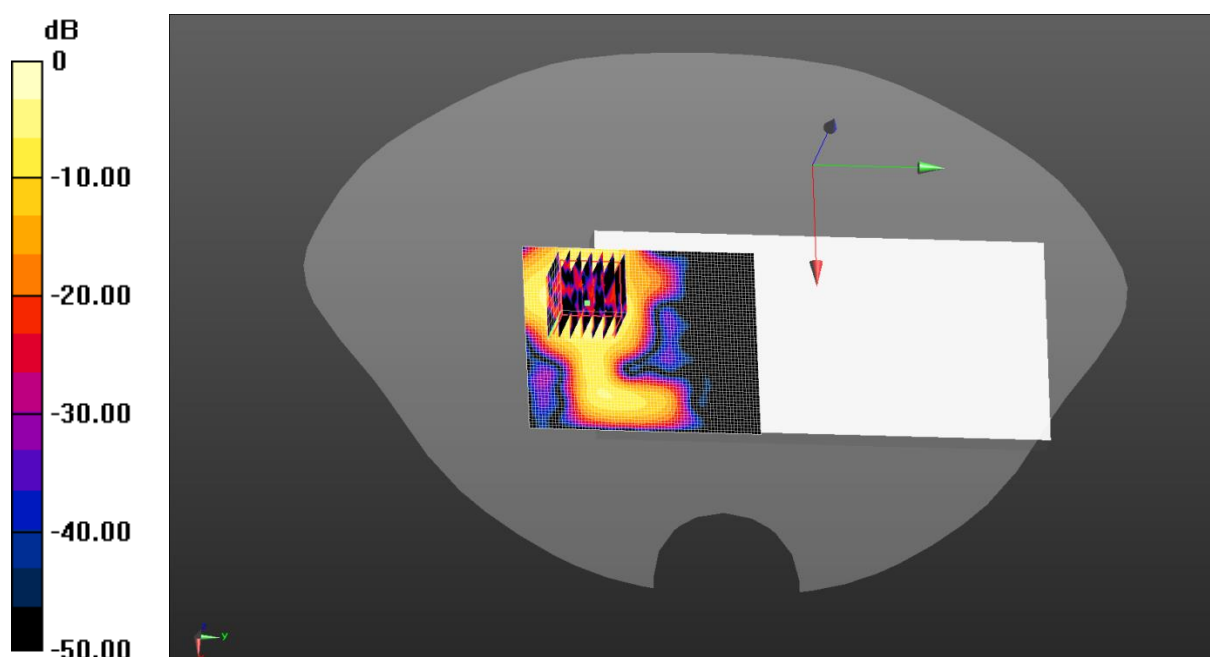

0 dB = 0.201 W/kg = -6.96 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/4/1

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2480$ MHz; $\sigma = 1.874$ S/m; $\epsilon_r = 39.718$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(7.3, 6.86, 6.94) @ 2480 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Bluetooth Body Back/High Channel/Area Scan (51x61x1): Interpolated grid:
dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0350 W/kg

Bluetooth Body Back/High Channel/Zoom Scan (7x7x7)/Cube 0: Measurement
grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.186 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.0780 W/kg

SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.00371 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 48.5%

Maximum value of SAR (measured) = 0.0354 W/kg

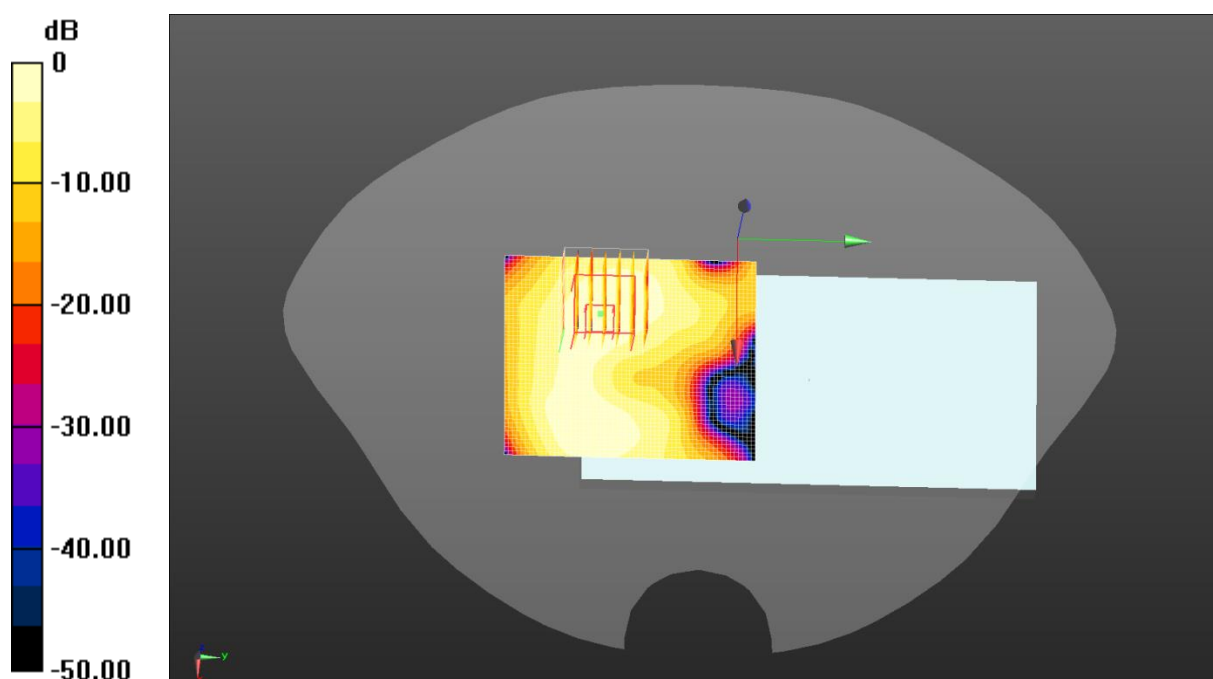

0 dB = 0.0350 W/kg = -14.56 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/25

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, GPRS(2 Slots) (0); Frequency: 824.2 MHz; Duty Cycle: 1:4.10015

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.883$ S/m; $\epsilon_r = 42.898$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(9.8, 9.21, 9.31) @ 824.2 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

GSM 850 2Slots Body Left/Low Channel/Area Scan (51x61x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.687 W/kg

GSM 850 2Slots Body Left/Low Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.89 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.790 W/kg

SAR(1 g) = 0.466 W/kg; SAR(10 g) = 0.274 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 59.6%

Maximum value of SAR (measured) = 0.674 W/kg

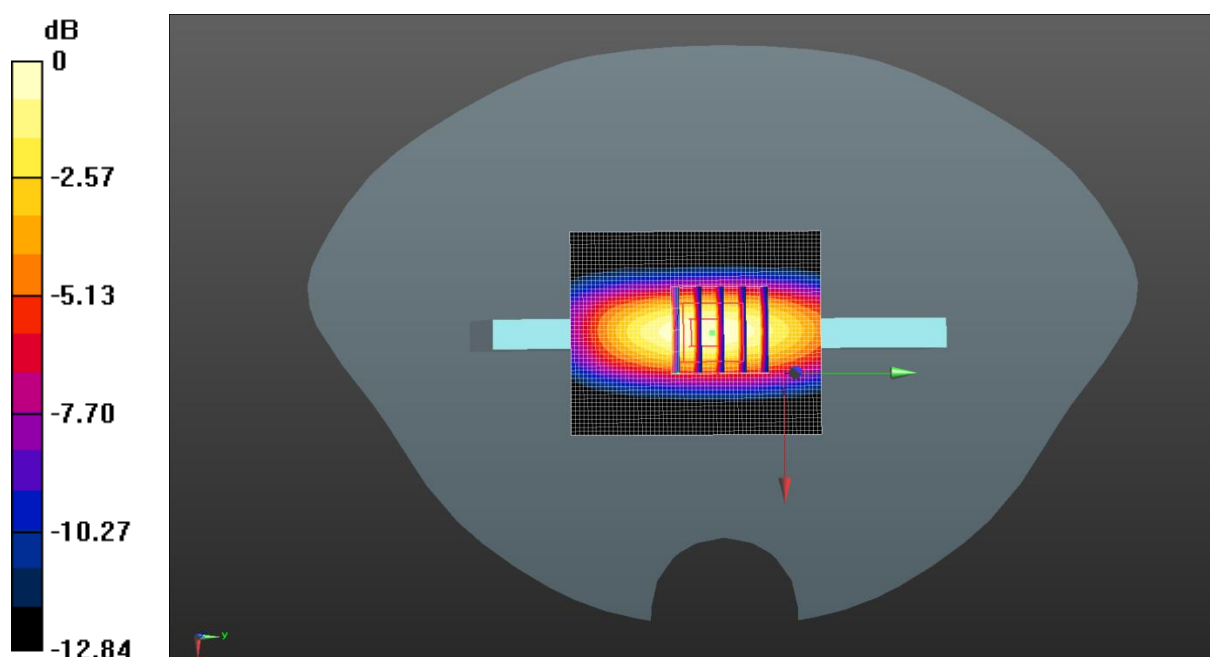

0 dB = 0.674 W/kg = -1.72 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/25

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 42.889$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(9.8, 9.21, 9.31) @ 826.4 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

WCDMA 850 Body Left/Low Channel/Area Scan (51x61x1): Interpolated grid:

$dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.566 W/kg

WCDMA 850 Body Left/Low Channel/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 26.26 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.657 W/kg

SAR(1 g) = 0.382 W/kg; SAR(10 g) = 0.225 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 59.1%

Maximum value of SAR (measured) = 0.548 W/kg

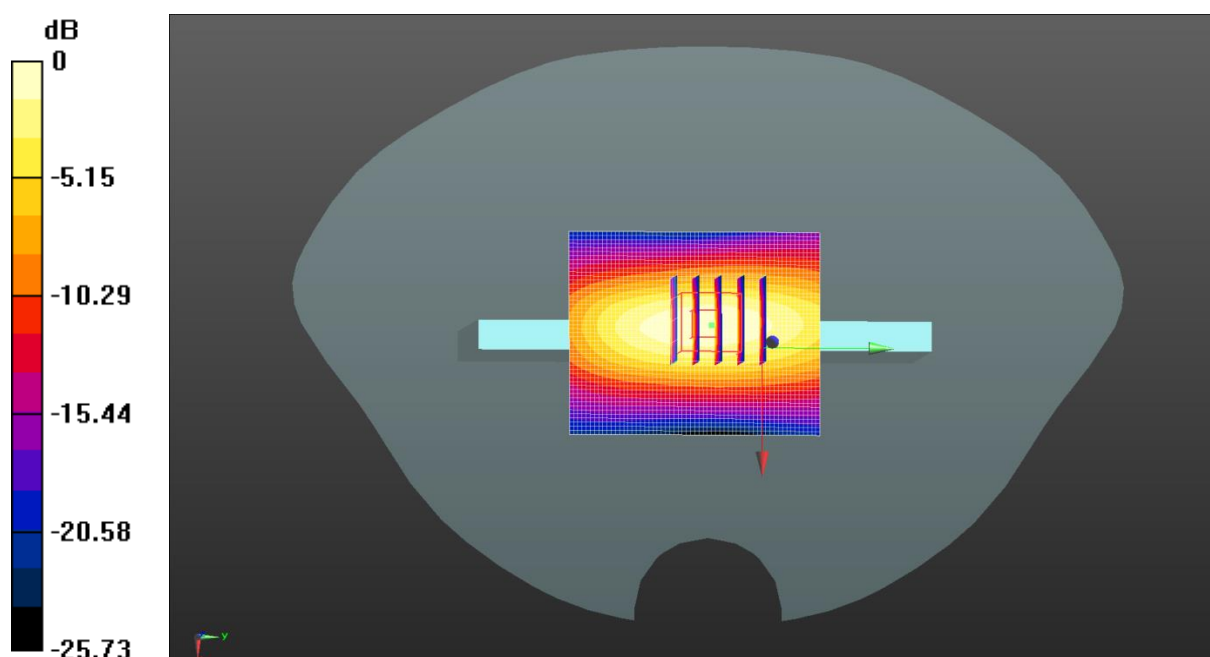

0 dB = 0.566 W/kg = -2.47 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/30

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, LTE-FDD(USA) 1RB QPSK (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.419$ S/m; $\epsilon_r = 40.23$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(7.88, 7.4, 7.49) @ 1860 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

LTE Band 2 1RB(20MHz) Body Bottom/Low Channel/Area Scan (51x61x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.987 W/kg

LTE Band 2 1RB(20MHz) Body Bottom/Low Channel/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.29 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.674 W/kg; SAR(10 g) = 0.367 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 60.3%

Maximum value of SAR (measured) = 0.961 W/kg

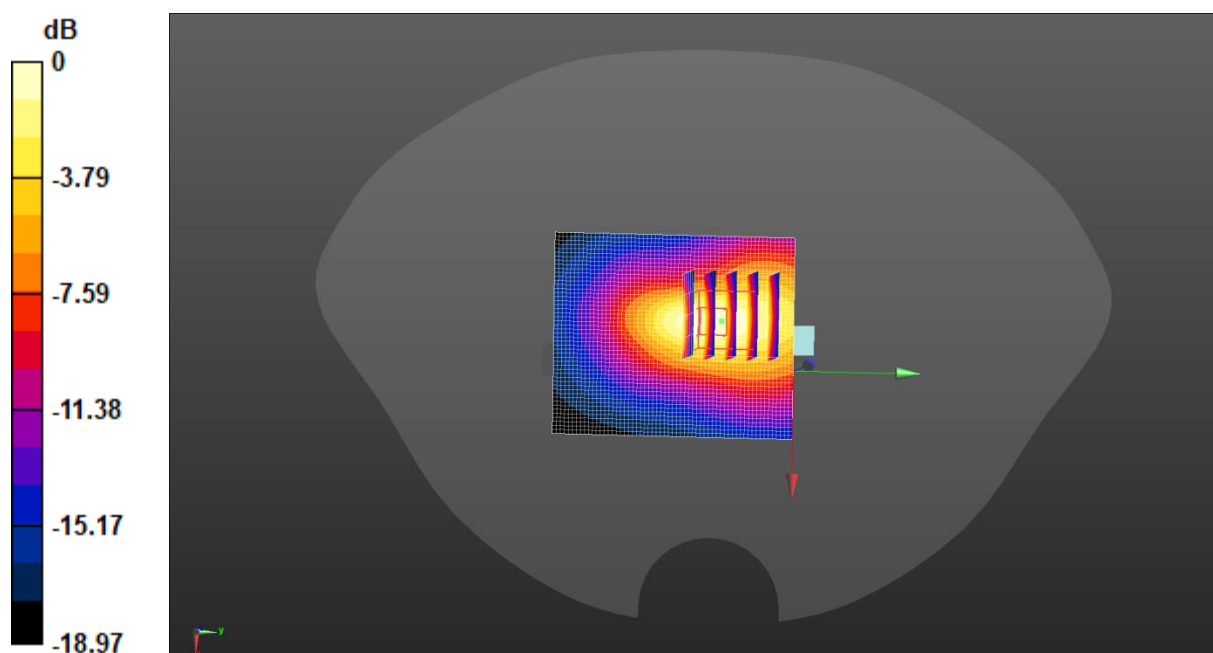

0 dB = 0.987 W/kg = -0.06 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/27

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, LTE-FDD(USA) 1RB QPSK (0); Frequency: 1745

MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 40.53$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(8.34, 7.83, 7.92) @ 1745 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

LTE Band 4 1RB(20MHz) Body Bottom/Middle Channel/Area Scan (51x61x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.32 W/kg

LTE Band 4 1RB(20MHz) Body Bottom/Middle Channel/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.74 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.917 W/kg; SAR(10 g) = 0.505 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 60%

Maximum value of SAR (measured) = 1.32 W/kg

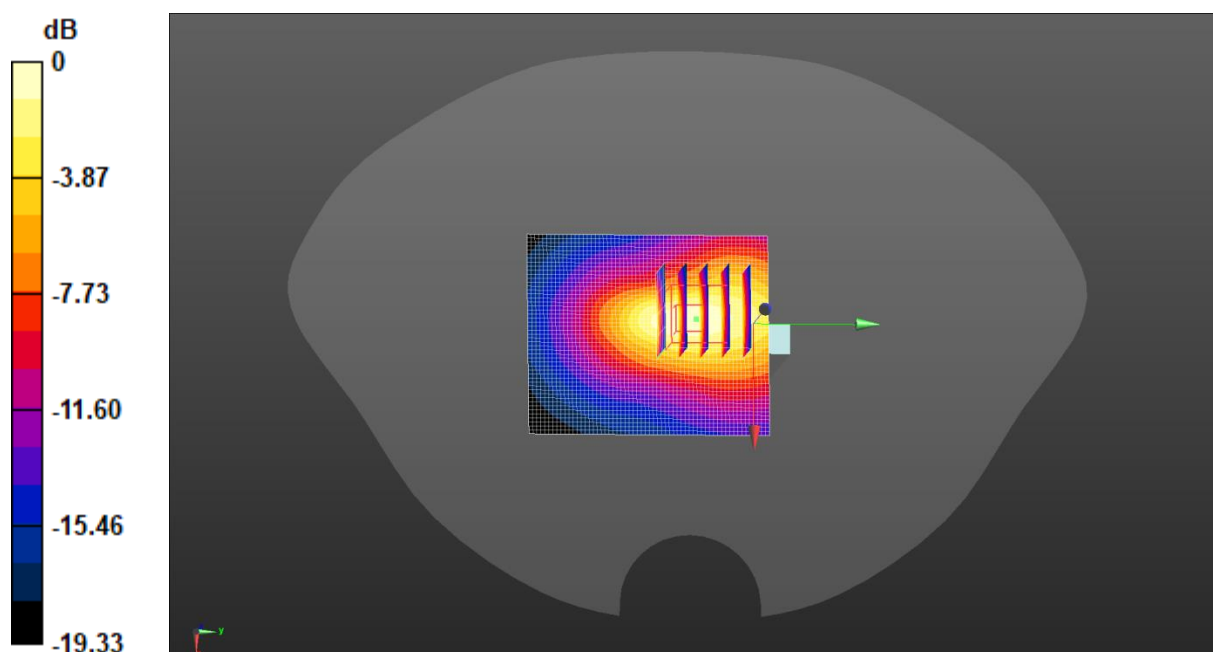

0 dB = 1.32 W/kg = 1.20 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/23

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, LTE-FDD (USA) 10MHz 50%RB QPSK (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 704$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 43.553$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(10, 9.39, 9.5) @ 704 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

LTE Band 12 50%RB(10MHz) Body Left/Low Channel/Area Scan (41x81x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.525 W/kg

LTE Band 12 50%RB(10MHz) Body Left/Low Channel/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.27 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.621 W/kg

SAR(1 g) = 0.352 W/kg; SAR(10 g) = 0.205 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.5%

Maximum value of SAR (measured) = 0.517 W/kg

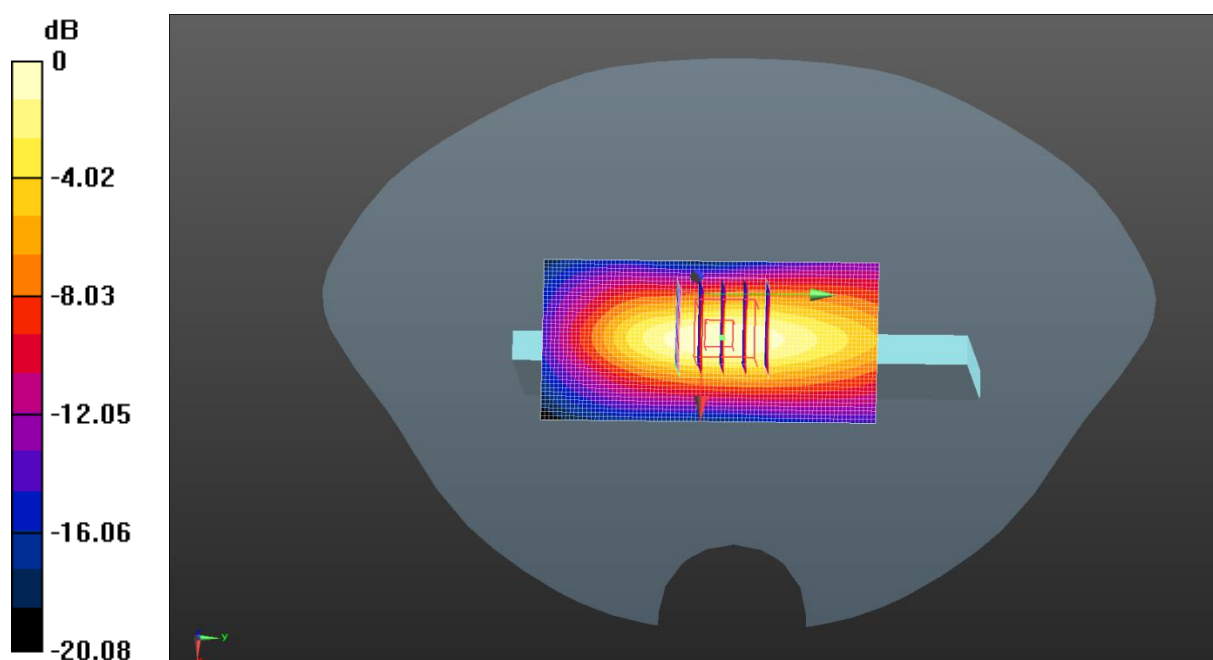

0 dB = 0.525 W/kg = -2.79 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/23

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, LTE-Fdd(USA) 1RB QPSK (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 782 \text{ MHz}$; $\sigma = 0.876 \text{ S/m}$; $\epsilon_r = 43.221$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(10, 9.39, 9.5) @ 782 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

LTE Band 13 1RB(10MHz) Body Left/Middle Channel/Area Scan (41x81x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.767 W/kg

LTE Band 13 1RB(10MHz) Body Left/Middle Channel/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 30.72 V/m ; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.899 W/kg

SAR(1 g) = 0.509 W/kg ; SAR(10 g) = 0.292 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 57.3%

Maximum value of SAR (measured) = 0.762 W/kg

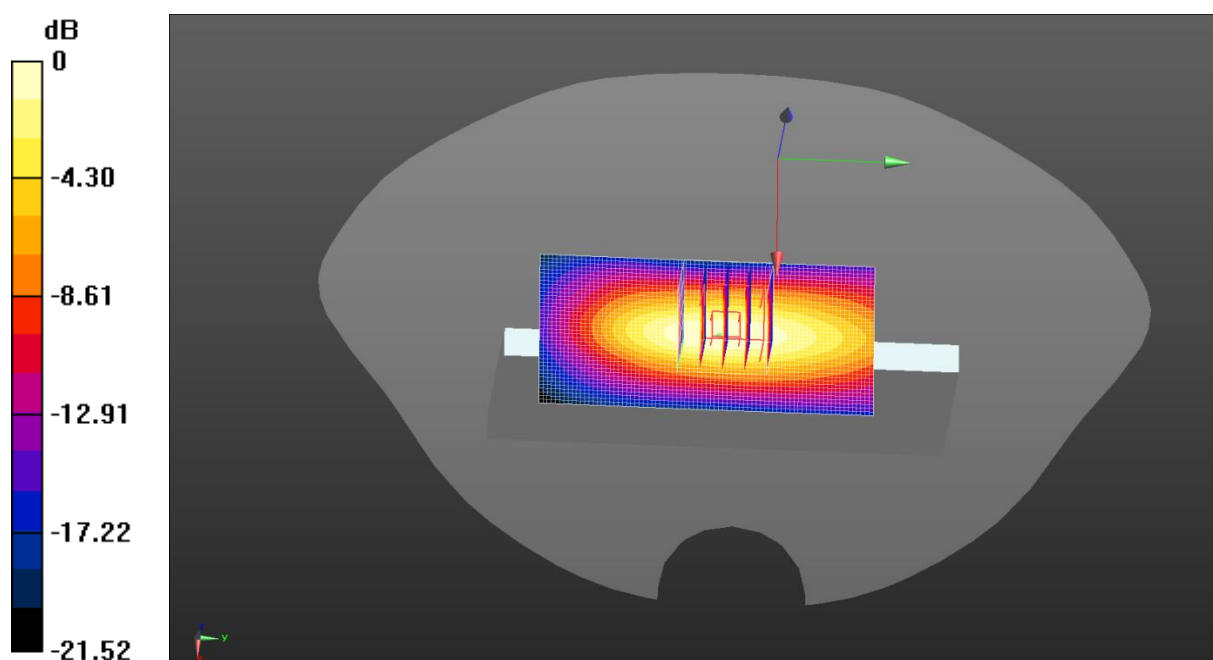

0 dB = 0.767 W/kg = -1.15 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/23

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, LTE-FDD (USA) 10MHz 50%RB QPSK (0); Frequency: 709 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 709$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 43.531$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(10, 9.39, 9.5) @ 709 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

LTE Band 17 50%RB(10MHz) Body Left/Low Channel/Area Scan (41x81x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.646 W/kg

LTE Band 17 50%RB(10MHz) Body Left/Low Channel/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.06 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.767 W/kg

SAR(1 g) = 0.436 W/kg; SAR(10 g) = 0.253 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 57.7%

Maximum value of SAR (measured) = 0.648 W/kg

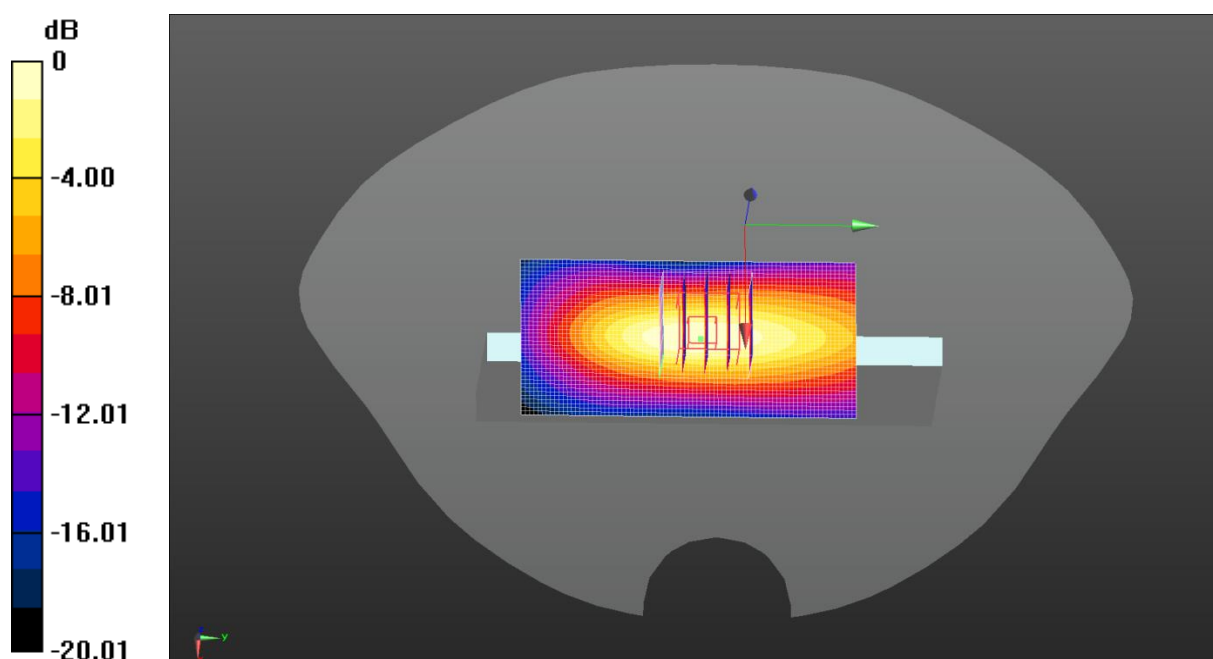

0 dB = 0.646 W/kg = -1.90 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/4/14

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, LTE-TDD(USA) 20MHz 1RB QPSK (0); Frequency: 3460 MHz; Duty Cycle: 1:1.59956

Medium parameters used: $f = 3460$ MHz; $\sigma = 2.768$ S/m; $\epsilon_r = 38.048$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(6.44, 6.46, 7.1) @ 3460 MHz; Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 2025/5/2
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

LTE Band 42 1RB(20MHz) Body Left/Low Channel/Area Scan (51x101x1):

Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.05 W/kg

LTE Band 42 1RB(20MHz) Body Left/Low Channel/Zoom Scan (7x7x8)/Cube

0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 15.83 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 2.25 W/kg

SAR(1 g) = 0.772 W/kg; SAR(10 g) = 0.250 W/kg

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 45.1%

Maximum value of SAR (measured) = 1.50 W/kg

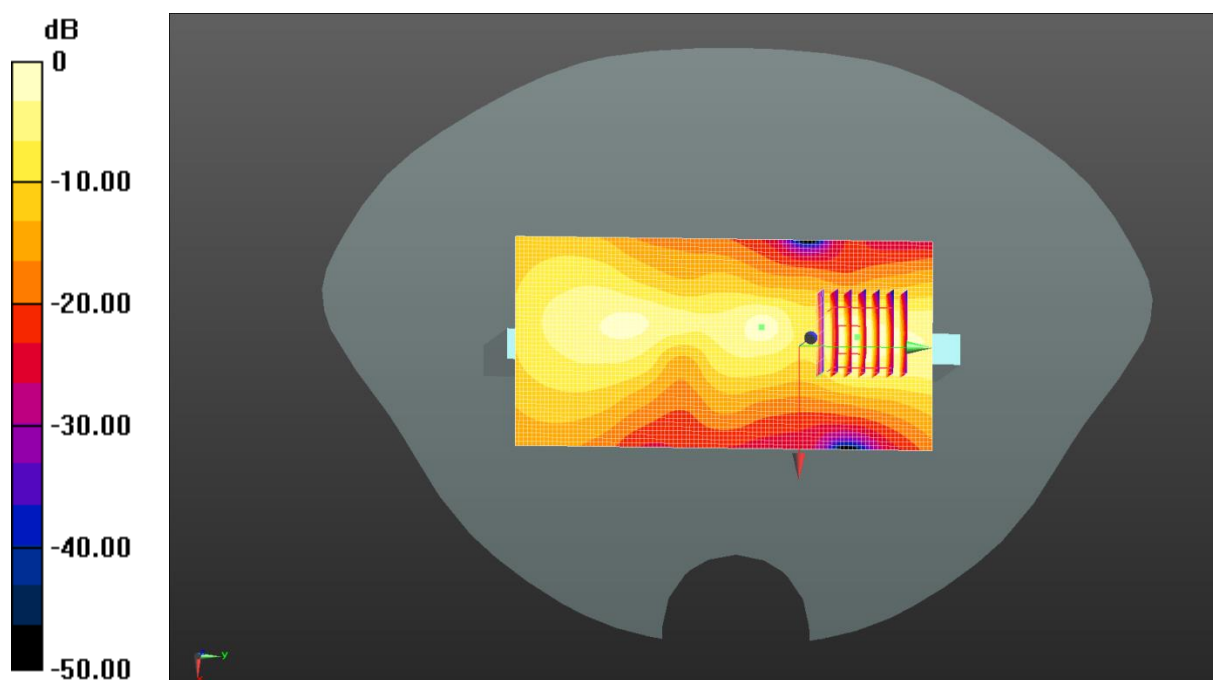

0 dB = 1.05 W/kg = 0.21 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/27

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, LTE-FDD(USA) 1RB QPSK (0); Frequency: 1745

MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 40.53$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(8.34, 7.83, 7.92) @ 1745 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM-Twin; Type: QD 000 P40 CD; Serial: 1885
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

LTE Band 66 1RB(20MHz) Body Bottom/Middle Channel/Area Scan

(51x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.31 W/kg

LTE Band 66 1RB(20MHz) Body Bottom/Middle Channel/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.65 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.921 W/kg; SAR(10 g) = 0.512 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 61.9%

Maximum value of SAR (measured) = 1.29 W/kg

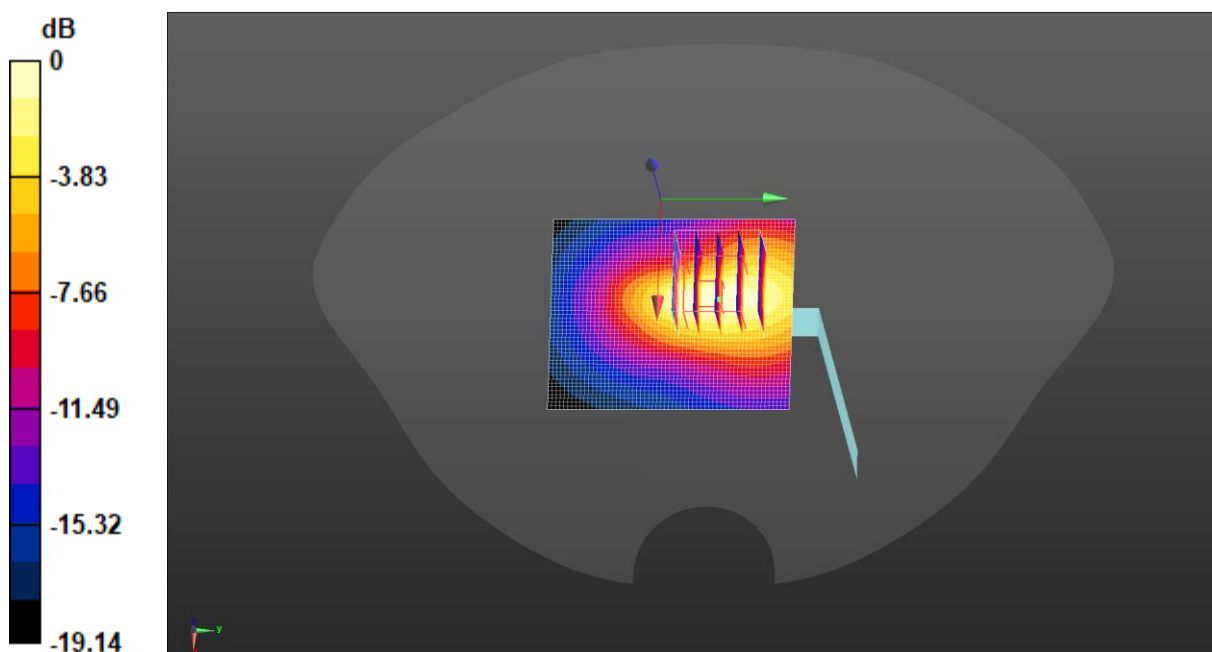

0 dB = 1.31 W/kg = 1.16 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/25

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, NR (0); Frequency: 839 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 839$ MHz; $\sigma = 0.889$ S/m; $\epsilon_r = 42.841$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3924; ConvF(9.8, 9.21, 9.31) @ 839 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

NR n5 50%RB(20MHz) Body Left/High Channel/Area Scan (61x61x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.54 W/kg

NR n5 50%RB(20MHz) Body Left/High Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 39.49 V/m; Power Drift = 0.17 dB
Peak SAR (extrapolated) = 1.78 W/kg
SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.592 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 58.3%
Maximum value of SAR (measured) = 1.51 W/kg

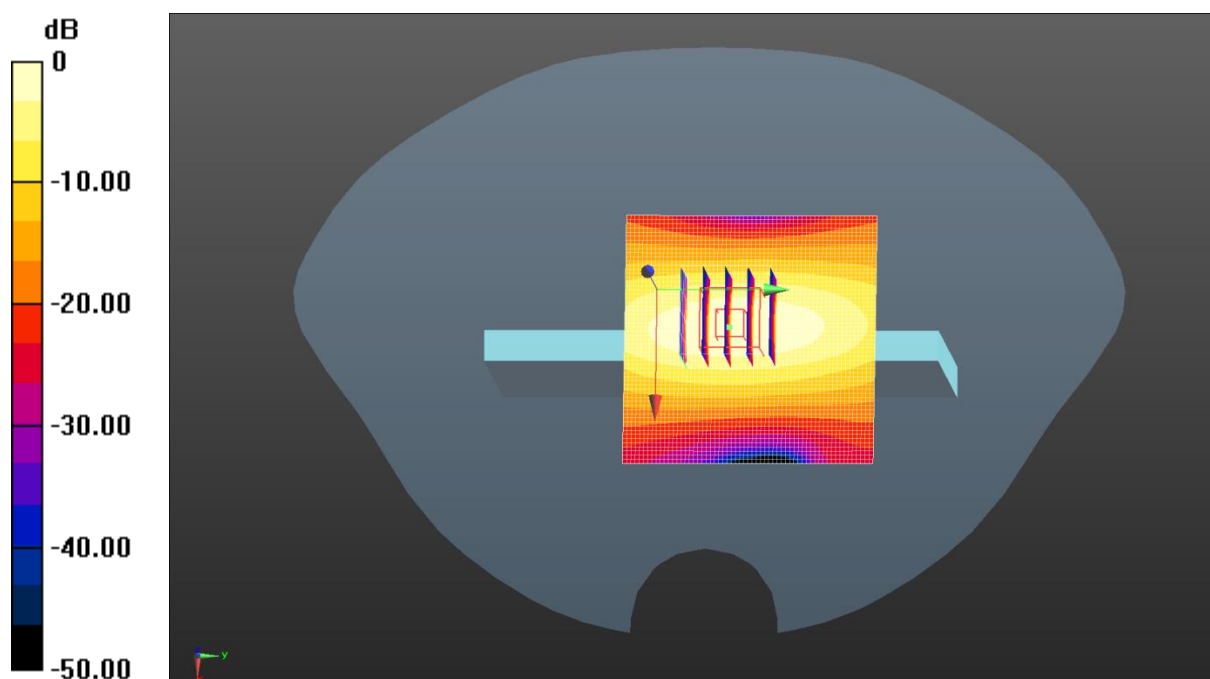

0 dB = 1.54 W/kg = 1.87 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/23

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, NR (0); Frequency: 708.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 708.5$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 43.534$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3924; ConvF(10, 9.39, 9.5) @ 708.5 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

NR n12 50%RB(15MHz) Body Left/High Channel/Area Scan (61x61x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.531 W/kg

NR n12 50%RB(15MHz) Body Left/High Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 23.20 V/m; Power Drift = 0.17 dB
Peak SAR (extrapolated) = 0.618 W/kg
SAR(1 g) = 0.368 W/kg; SAR(10 g) = 0.221 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 60.3%
Maximum value of SAR (measured) = 0.529 W/kg

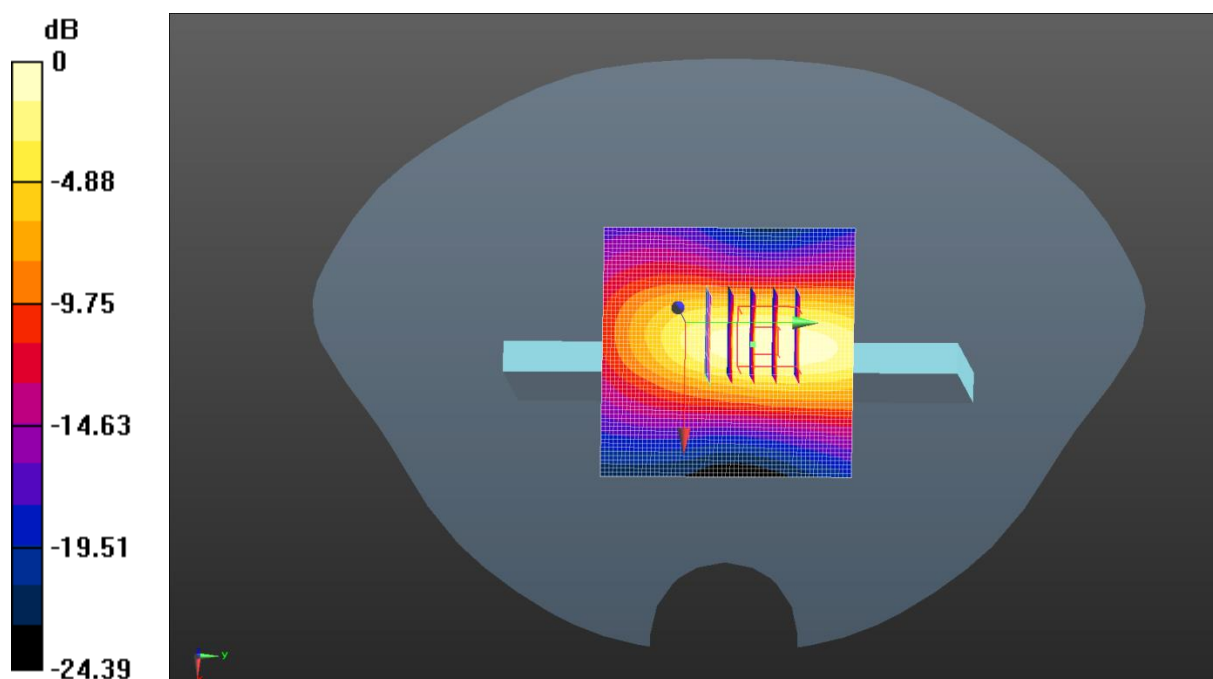

0 dB = 0.531 W/kg = -2.75 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/4/6

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, NR (0); Frequency: 2600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2600$ MHz; $\sigma = 2.001$ S/m; $\epsilon_r = 39.955$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(7.2, 6.77, 6.85) @ 2600 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

NR n38 50%RB(40MHz) Body Bottom/High Channel/Area Scan (51x61x1):

Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.228 W/kg

NR n38 50%RB(40MHz) Body Bottom/High Channel/Zoom Scan

(7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.67 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 0.309 W/kg

SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.066 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 46.3%

Maximum value of SAR (measured) = 0.238 W/kg

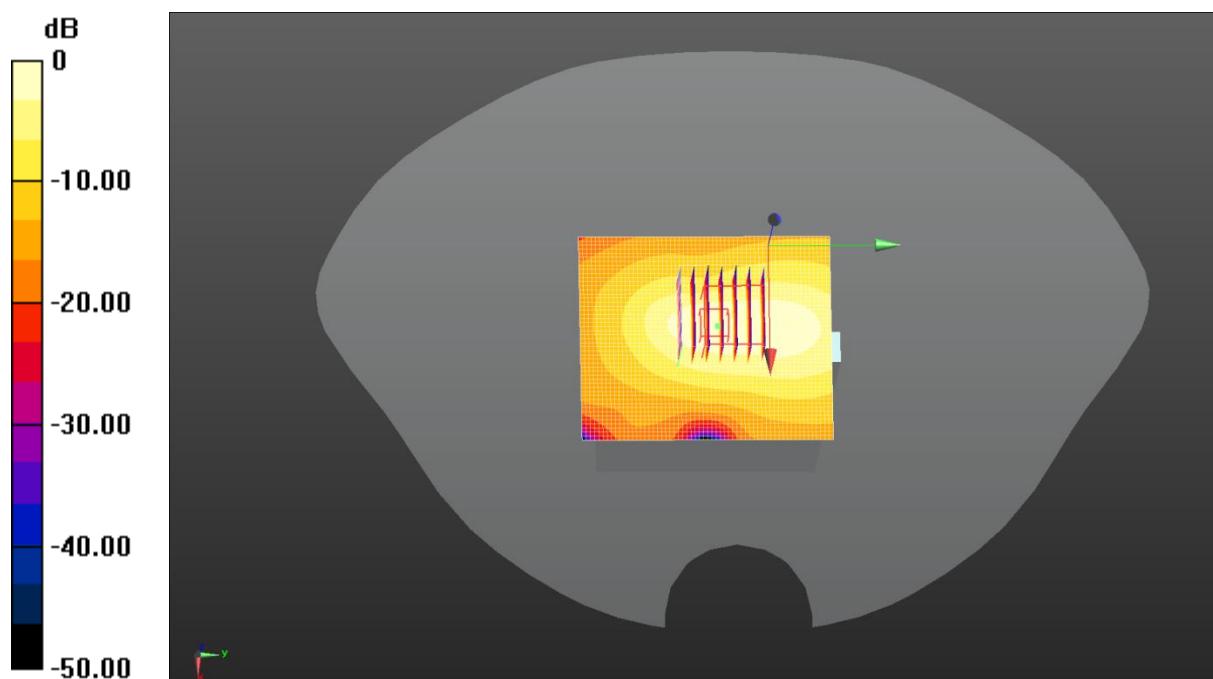

0 dB = 0.228 W/kg = -6.42 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/4/6

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2592.99$ MHz; $\sigma = 1.99$ S/m; $\epsilon_r = 39.979$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(7.2, 6.77, 6.85) @ 2592.99 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

NR n41 50%RB(100MHz) Body Top/Middle Channel/Area Scan (51x61x1):

Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.213 W/kg

NR n41 50%RB(100MHz) Body Top/Middle Channel/Zoom Scan

(7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.046 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 0.297 W/kg

SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.059 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 45.5%

Maximum value of SAR (measured) = 0.235 W/kg

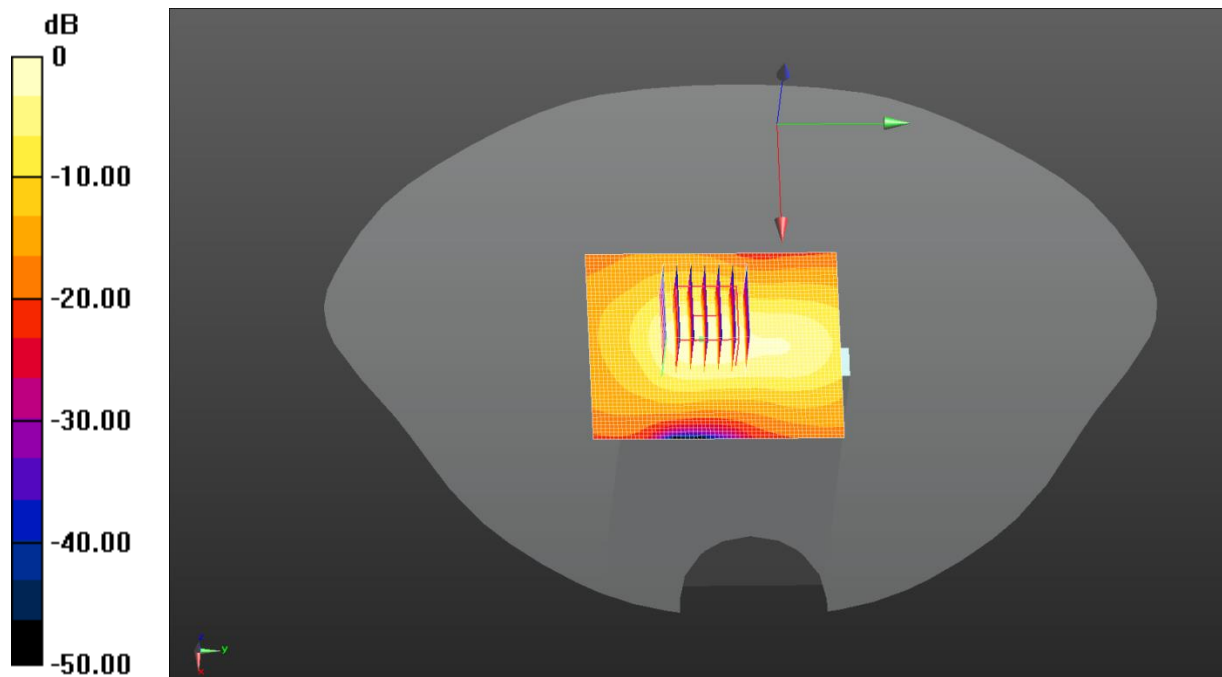

0 dB = 0.213 W/kg = -6.72 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/3/27

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, NR (0); Frequency: 1730 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1730$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 40.566$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3924; ConvF(8.34, 7.83, 7.92) @ 1730 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

NR n66 50%RB(40MHz) Body Bottom/Low Channel/Area Scan (61x61x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.565 W/kg

NR n66 50%RB(40MHz) Body Bottom/Low Channel/Zoom Scan (5x5x7)/Cube

0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 20.49 V/m; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 0.673 W/kg
SAR(1 g) = 0.366 W/kg; SAR(10 g) = 0.192 W/kg
Smallest distance from peaks to all points 3 dB below = 8.6 mm
Ratio of SAR at M2 to SAR at M1 = 55.9%
Maximum value of SAR (measured) = 0.570 W/kg

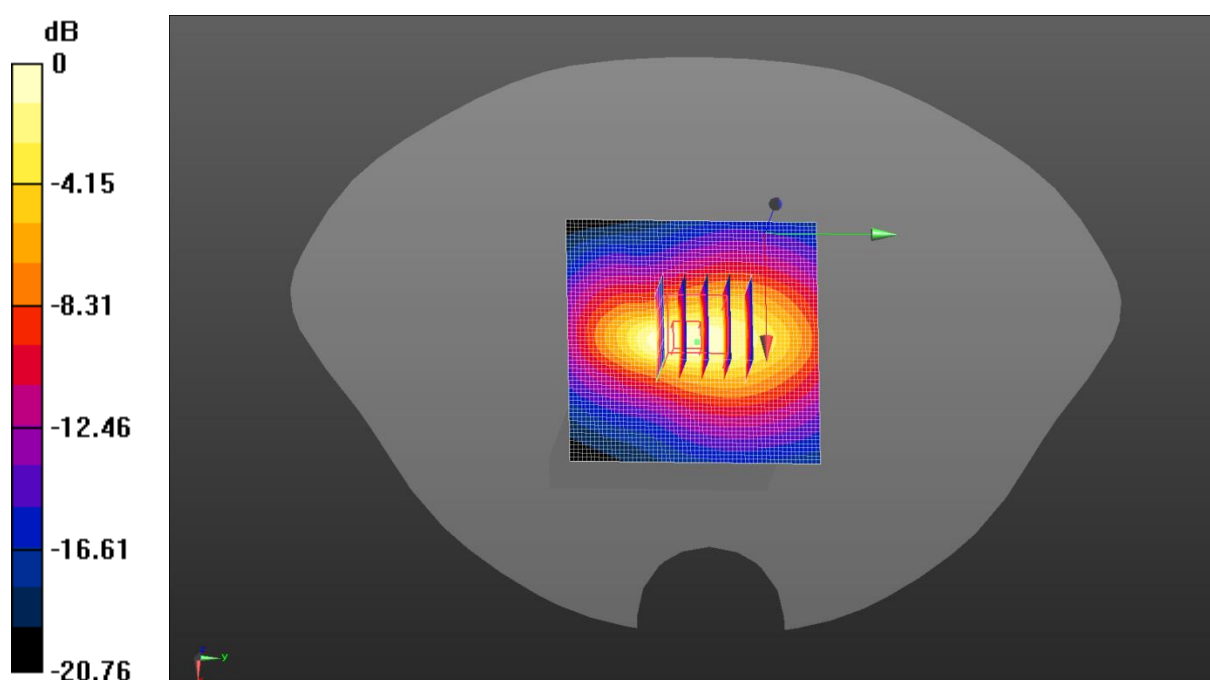

0 dB = 0.565 W/kg = -2.48 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/4/14

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, NR (0); Frequency: 3500.01 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 3500.01$ MHz; $\sigma = 2.804$ S/m; $\epsilon_r = 37.964$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7351; ConvF(6.44, 6.46, 7.1) @ 3500.01 MHz; Calibrated: 2025/6/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 2025/5/2
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

NR n77 1RB(100MHz) Body Top/Middle Channel/Area Scan (61x51x1):

Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.302 W/kg

NR n77 1RB(100MHz) Body Top/Middle Channel/Zoom Scan (7x7x8)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=4$ mm
Reference Value = 6.927 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 0.456 W/kg
SAR(1 g) = 0.173 W/kg; SAR(10 g) = 0.069 W/kg
Smallest distance from peaks to all points 3 dB below = 9 mm
Ratio of SAR at M2 to SAR at M1 = 44.5%
Maximum value of SAR (measured) = 0.331 W/kg

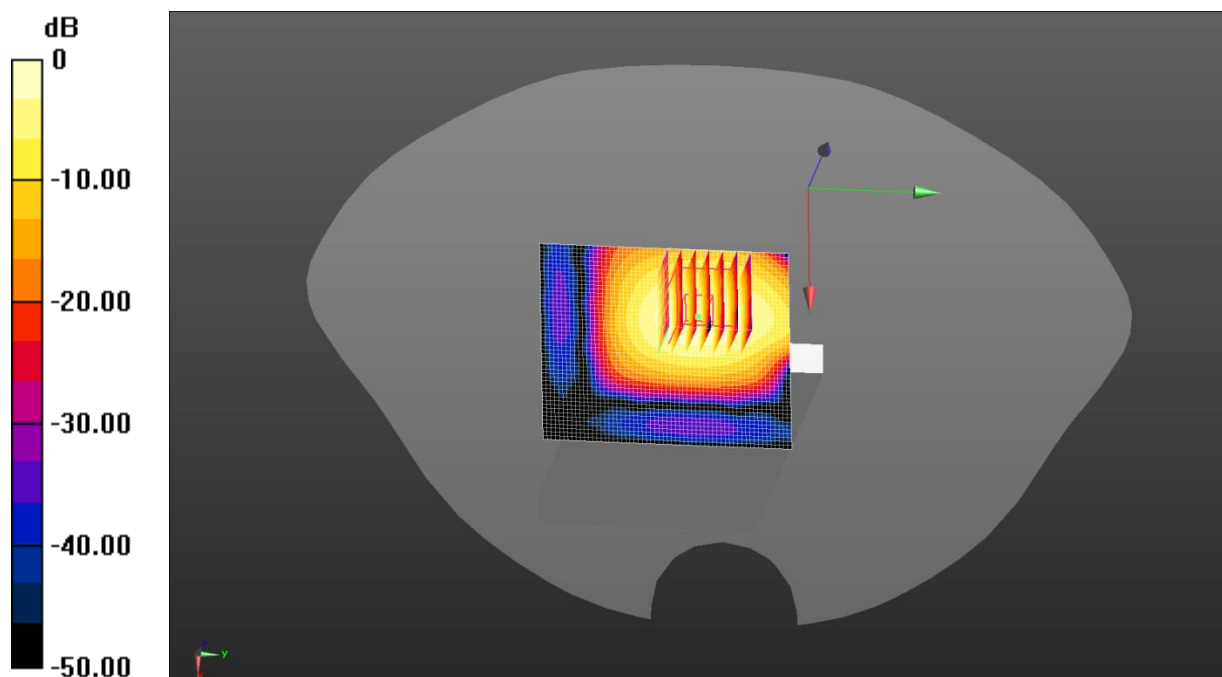

0 dB = 0.302 W/kg = -5.19 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/4/1

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.824$ S/m; $\epsilon_r = 39.804$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(7.3, 6.86, 6.94) @ 2437 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

2.4G WiFi Body Right/Middle Channel/Area Scan (61x71x1): Interpolated grid:

$dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.172 W/kg

2.4G WiFi Body Right/Middle Channel/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.237 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.212 W/kg

SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.040 W/kg

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 44.6%

Maximum value of SAR (measured) = 0.167 W/kg

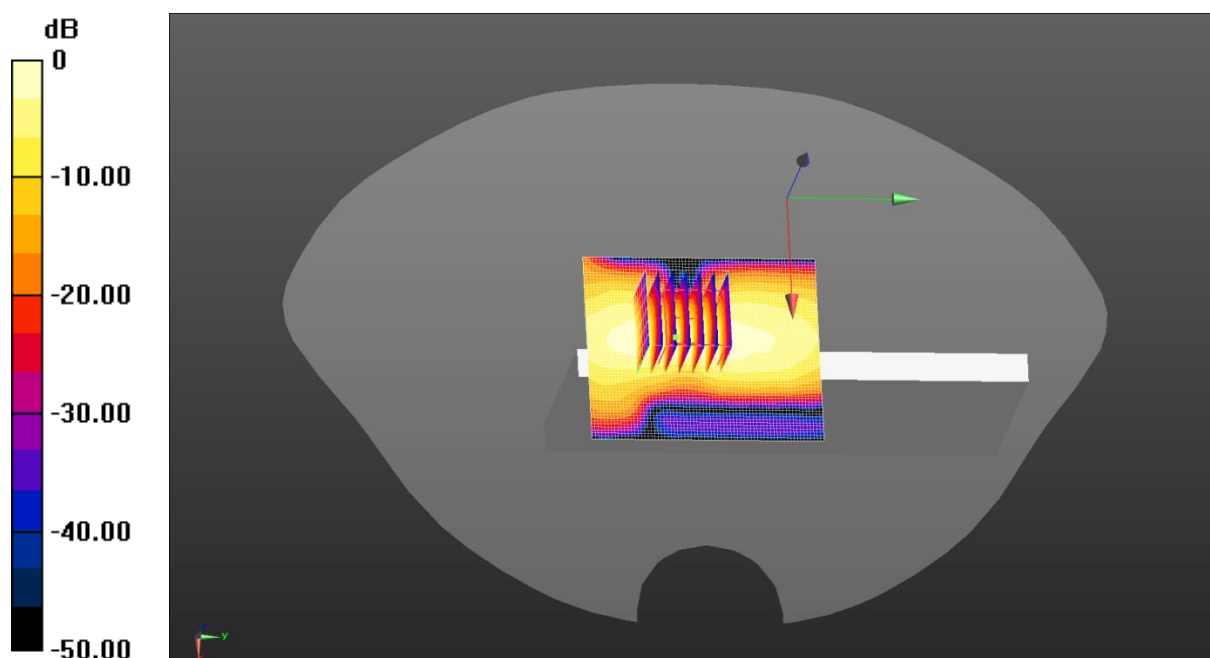

0 dB = 0.172 W/kg = -7.64 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/4/8

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, IEEE 802.11a WiFi 5GHz (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.666 \text{ S/m}$; $\epsilon_r = 34.808$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(5.48, 5.15, 5.21) @ 5200 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

5.2G WiFi Body Top/Middle Channel/Area Scan (61x71x1): Interpolated grid:

$dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.248 W/kg

5.2G WiFi Body Top/Middle Channel/Zoom Scan (7x7x7)/Cube 0: Measurement

grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.875 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.371 W/kg

SAR(1 g) = 0.088 W/kg; SAR(10 g) = 0.024 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 49.4%

Maximum value of SAR (measured) = 0.217 W/kg

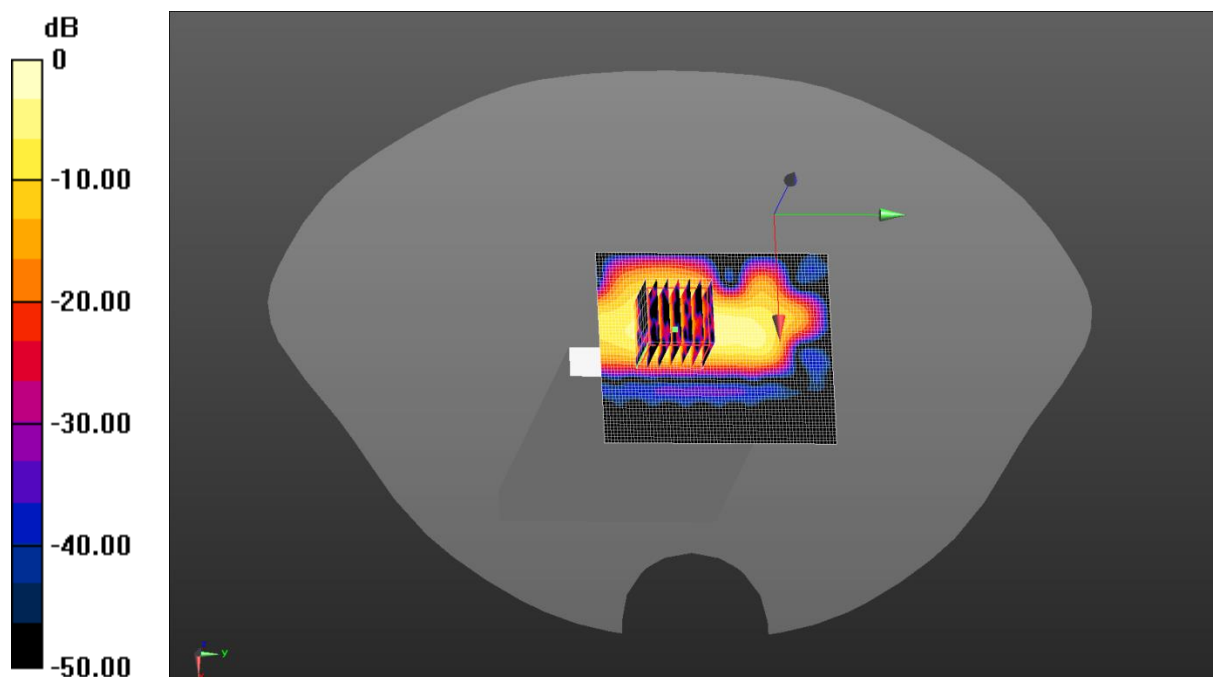

0 dB = 0.248 W/kg = -6.05 dBW/kg

Test Laboratory: JYTSZ

Date: 2026/4/9

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, IEEE 802.11a WiFi 5GHz (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.284$ S/m; $\epsilon_r = 34.06$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(5.1, 4.79, 4.85) @ 5785 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

5.8G WiFi Body Top/Middle Channel/Area Scan (61x71x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.376 W/kg

5.8G WiFi Body Top/Middle Channel/Zoom Scan (7x7x7)/Cube 0: Measurement

grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 3.831 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.657 W/kg

SAR(1 g) = 0.143 W/kg; SAR(10 g) = 0.042 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 48.5%

Maximum value of SAR (measured) = 0.358 W/kg

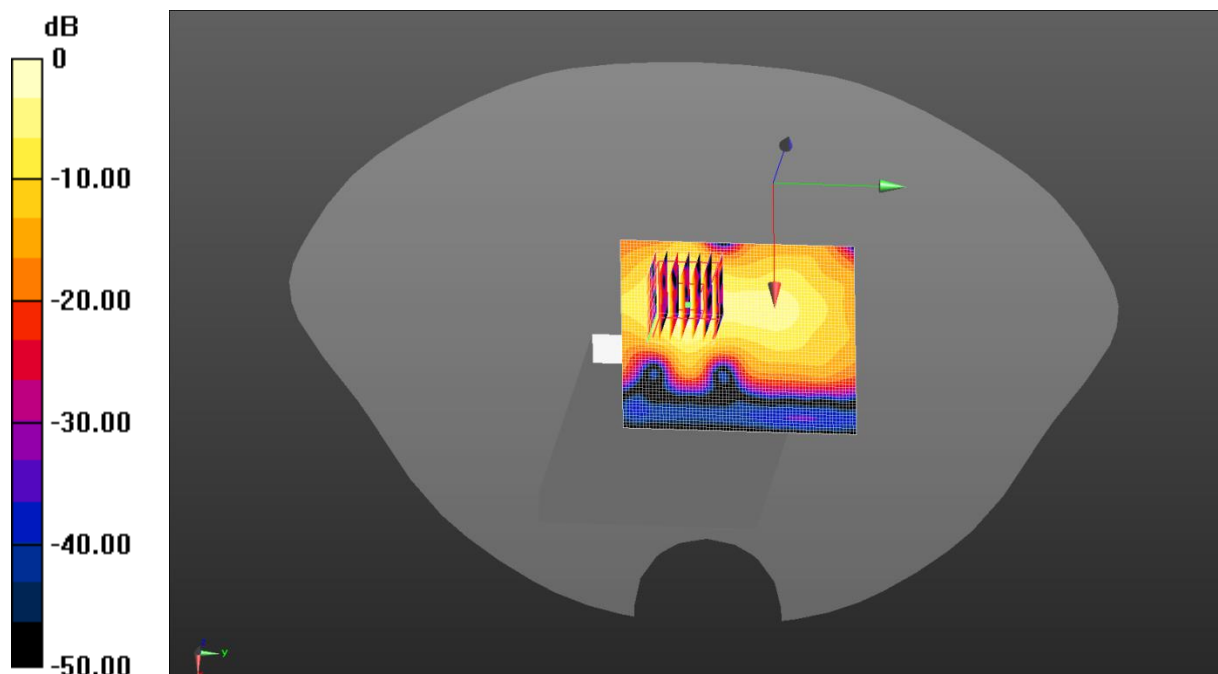

$$0 \text{ dB} = 0.376 \text{ W/kg} = -4.24 \text{ dBW/kg}$$

Test Laboratory: JYTSZ

Date: 2026/4/1

DUT: Mobile Phone; Type: CN6; Serial: SZR012600059-2

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2480$ MHz; $\sigma = 1.874$ S/m; $\epsilon_r = 39.718$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(7.3, 6.86, 6.94) @ 2480 MHz; Calibrated: 2025/10/8
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1452; Calibrated: 2025/4/10
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Bluetooth Body Top/High Channel/Area Scan (61x71x1): Interpolated grid:
dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0524 W/kg

Bluetooth Body Top/High Channel/Zoom Scan (7x7x7)/Cube 0: Measurement grid:
dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.452 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.0710 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.013 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 41.6%

Maximum value of SAR (measured) = 0.0554 W/kg

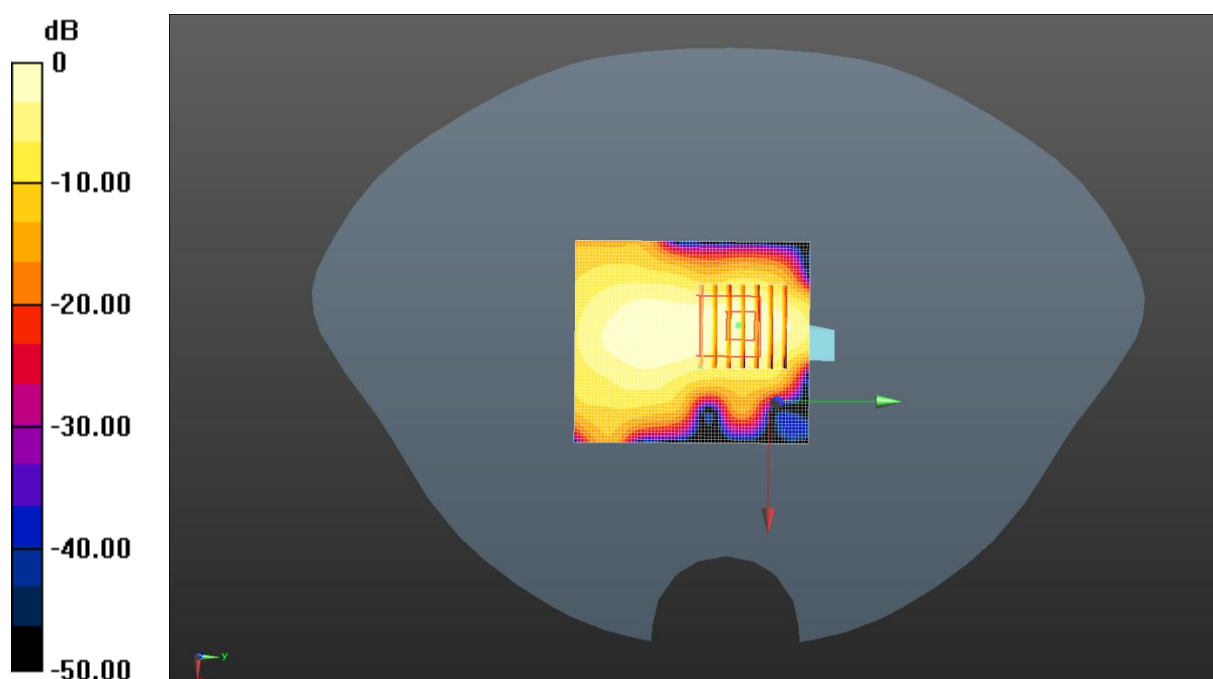

0 dB = 0.0524 W/kg = -12.81 dBW/kg

-----End of Report-----