


Report No.: WSCT-ANAB-R&E260200024A-LE Issued Date: 09 April 2026

Vertical:

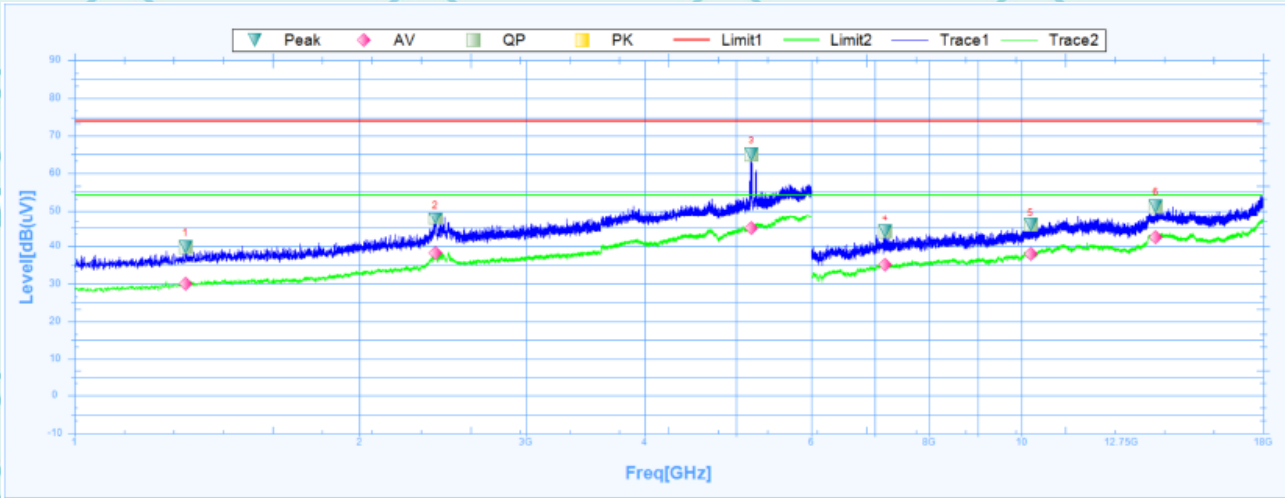


Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1309.3750	39.61	24.78	14.83	74	-34.39	4.7	Vertical	PK	Pass
1	1309.3750	29.98	24.78	5.2	54	-24.02	4.7	Vertical	AV	Pass
2	2405.6250	47.68	27.28	20.4	74	-26.32	249.4	Vertical	PK	Pass
2	2405.6250	38.26	27.28	10.98	54	-15.74	249.4	Vertical	AV	Pass
3	5192.5000	64.91	31.75	33.16	74	-9.09	277	Vertical	PK	Pass
3	5192.5000	44.84	31.75	13.09	54	-9.16	277	Vertical	AV	Pass
4	7186.5000	43.82	7.02	36.8	74	-30.18	255	Vertical	PK	Pass
4	7186.5000	35.07	7.02	28.05	54	-18.93	255	Vertical	AV	Pass
5	10233.0000	45.63	13.09	32.54	74	-28.37	299.2	Vertical	PK	Pass
5	10233.0000	37.97	13.09	24.88	54	-16.03	299.2	Vertical	AV	Pass
6	13870.5000	51.21	18.74	32.47	74	-22.79	190.5	Vertical	PK	Pass
6	13870.5000	42.46	18.74	23.72	54	-11.54	190.5	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E260200024A-LE Issued Date: 09 April 2026

Middle channel: 2440MHz
Horizontal:

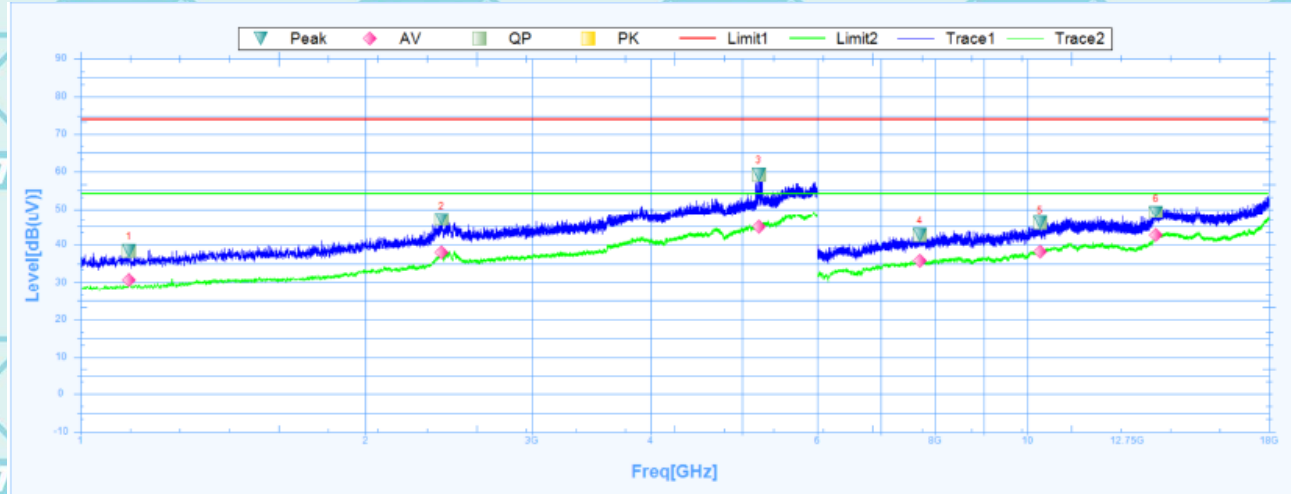


Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1125.0000	38.46	24.36	14.1	74	-35.54	57	Horizontal	PK	Pass
1	1125.0000	30.63	24.36	6.27	54	-23.37	57	Horizontal	AV	Pass
2	2406.8750	46.96	27.28	19.68	74	-27.04	280.6	Horizontal	PK	Pass
2	2406.8750	37.84	27.28	10.56	54	-16.16	280.6	Horizontal	AV	Pass
3	5205.6250	59.21	31.76	27.45	74	-14.79	359.6	Horizontal	PK	Pass
3	5205.6250	44.77	31.76	13.01	54	-9.23	359.6	Horizontal	AV	Pass
4	7702.5000	42.61	7.96	34.65	74	-31.39	149.9	Horizontal	PK	Pass
4	7702.5000	35.68	7.96	27.72	54	-18.32	149.9	Horizontal	AV	Pass
5	10318.5000	45.8	13.35	32.45	74	-28.2	354.4	Horizontal	PK	Pass
5	10318.5000	38.16	13.35	24.81	54	-15.84	354.4	Horizontal	AV	Pass
6	13672.5000	48.99	18.18	30.81	74	-25.01	354.4	Horizontal	PK	Pass
6	13672.5000	42.53	18.18	24.35	54	-11.47	354.4	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260200024A-LE Issued Date: 09 April 2026

Vertical:

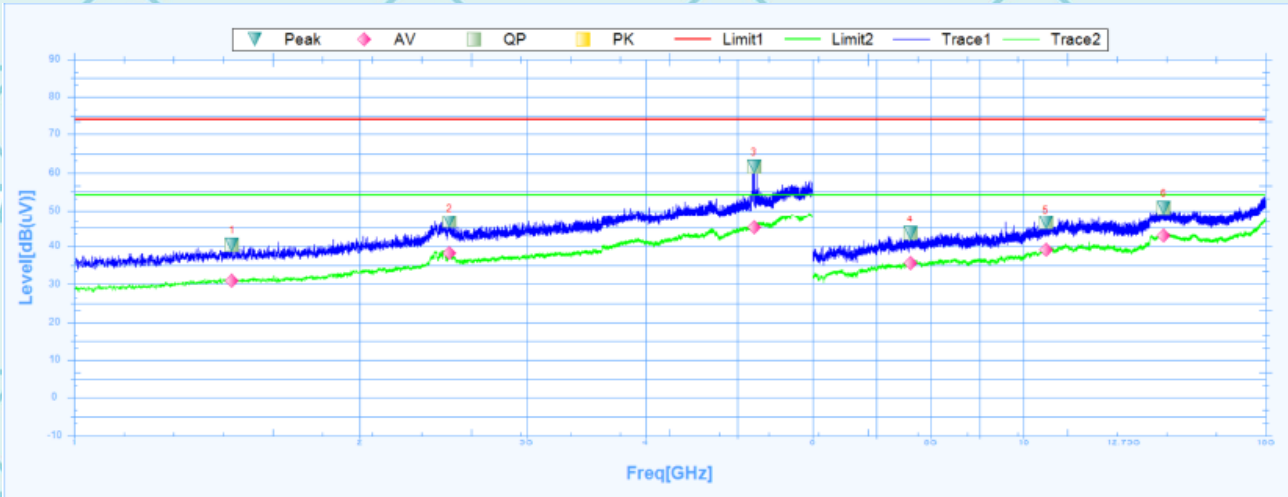


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1467.5000	40.4	25.03	15.37	74	-33.6	359.4	Vertical	PK	Pass
1	1467.5000	30.83	25.03	5.8	54	-23.17	359.4	Vertical	AV	Pass
2	2486.2500	46.71	27.55	19.16	74	-27.29	0	Vertical	PK	Pass
2	2486.2500	38.07	27.55	10.52	54	-15.93	0	Vertical	AV	Pass
3	5204.3750	61.63	31.76	29.87	74	-12.37	271	Vertical	PK	Pass
3	5204.3750	45.1	31.76	13.34	54	-8.9	271	Vertical	AV	Pass
4	7603.5000	43.5	7.94	35.56	74	-30.5	83	Vertical	PK	Pass
4	7603.5000	35.46	7.94	27.52	54	-18.54	83	Vertical	AV	Pass
5	10564.5000	46.38	14.18	32.2	74	-27.62	241.9	Vertical	PK	Pass
5	10564.5000	38.98	14.18	24.8	54	-15.02	241.9	Vertical	AV	Pass
6	14061.0000	50.68	19.06	31.62	74	-23.32	244.3	Vertical	PK	Pass
6	14061.0000	42.73	19.06	23.67	54	-11.27	244.3	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E260200024A-LE Issued Date: 09 April 2026

High channel: 2480MHz

Horizontal:

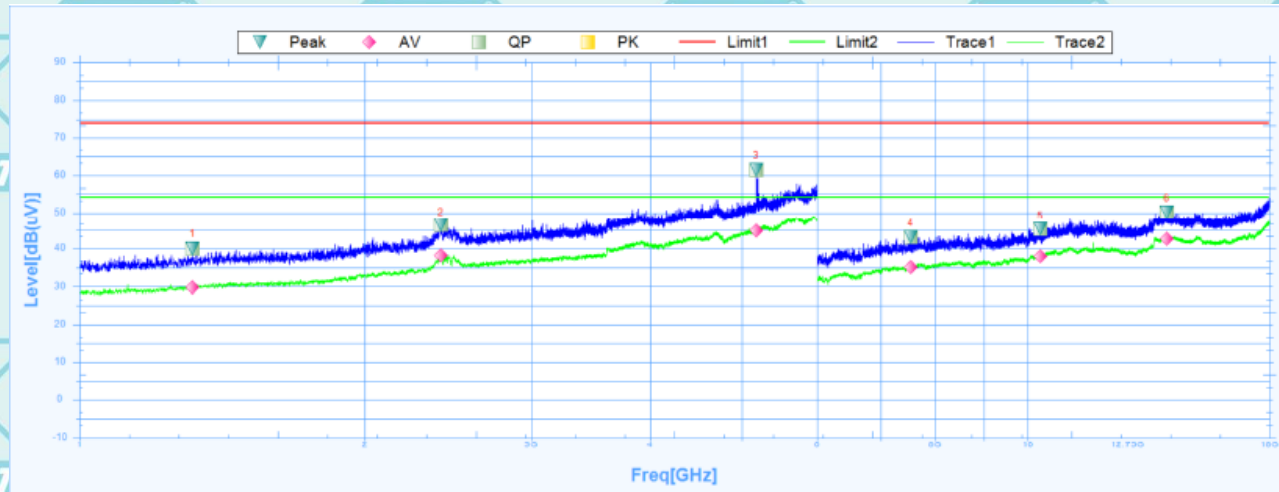


Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1315.6250	40.04	24.8	15.24	74	-33.96	331.9	Horizontal	PK	Pass
1	1315.6250	29.69	24.8	4.89	54	-24.31	331.9	Horizontal	AV	Pass
2	2406.2500	46.24	27.28	18.96	74	-27.76	214.8	Horizontal	PK	Pass
2	2406.2500	38.16	27.28	10.88	54	-15.84	214.8	Horizontal	AV	Pass
3	5176.8750	61.33	31.74	29.59	74	-12.67	155	Horizontal	PK	Pass
3	5176.8750	44.87	31.74	13.13	54	-9.13	155	Horizontal	AV	Pass
4	7530.0000	43.04	7.65	35.39	74	-30.96	360.1	Horizontal	PK	Pass
4	7530.0000	35.15	7.65	27.5	54	-18.85	360.1	Horizontal	AV	Pass
5	10321.5000	45.34	13.35	31.99	74	-28.66	267.1	Horizontal	PK	Pass
5	10321.5000	37.9	13.35	24.55	54	-16.1	267.1	Horizontal	AV	Pass
6	14025.0000	50.02	19.1	30.92	74	-23.98	132.1	Horizontal	PK	Pass
6	14025.0000	42.6	19.1	23.5	54	-11.4	132.1	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260200024A-LE Issued Date: 09 April 2026

Vertical:

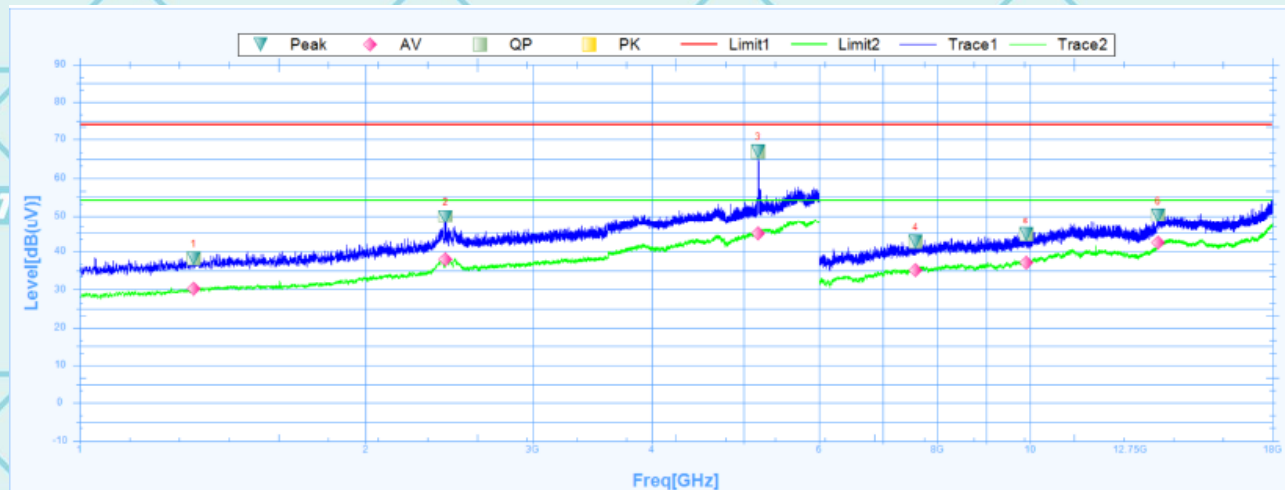

Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1318.1250	38.23	24.81	13.42	74	-35.77	358.8	Vertical	PK	Pass
1	1318.1250	30.25	24.81	5.44	54	-23.75	358.8	Vertical	AV	Pass
2	2428.1250	49.76	27.36	22.4	74	-24.24	303.4	Vertical	PK	Pass
2	2428.1250	37.84	27.36	10.48	54	-16.16	303.4	Vertical	AV	Pass
3	5178.7500	66.97	31.74	35.23	74	-7.03	207.8	Vertical	PK	Pass
3	5178.7500	44.78	31.74	13.04	54	-9.22	207.8	Vertical	AV	Pass
4	7582.5000	42.54	7.84	34.7	74	-31.46	42.4	Vertical	PK	Pass
4	7582.5000	35.06	7.84	27.22	54	-18.94	42.4	Vertical	AV	Pass
5	9909.0000	44.66	12.16	32.5	74	-29.34	145.2	Vertical	PK	Pass
5	9909.0000	37.17	12.16	25.01	54	-16.83	145.2	Vertical	AV	Pass
6	13642.5000	50.08	18.09	31.99	74	-23.92	19.1	Vertical	PK	Pass
6	13642.5000	42.38	18.09	24.29	54	-11.62	19.1	Vertical	AV	Pass

Note:

1. All emissions not reported were more than 20dB below the specified limit or in the noise floor.
2. Emission Level= Reading Level + Probe Factor +Cable Loss.
3. Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. EUT has been tested in unfolded states, and the report only reflects data in the unfolded state (worst-case scenario)

Note: Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Attenuation factor + Cable loss

Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard

Margin (dB) = Level (dBμV) - Limits (dBμV)

6.7.3. Restricted Bands Requirements

Test result for ANT1 GFSK Mode (the worst case)

Frequency	Reading	Correct Factor	Emission Level	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel							
2390	62.06	-8.76	53.30	74	20.70	H	PK
2390	55.51	-8.76	46.75	54	7.25	H	AV
2390	64.43	-8.73	55.70	74	18.30	V	PK
2390	52.26	-8.73	43.53	54	10.47	V	AV
High Channel							
2483.5	65.32	-8.17	57.15	74	16.85	H	PK
2483.5	53.53	-8.17	45.36	54	8.64	H	AV
2483.5	61.24	-8.17	53.07	74	20.93	V	PK
2483.5	51.67	-8.17	43.50	54	10.50	V	AV

Note: Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Attenuation factor + Cable loss

Level (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Level (dBuV) - Limits (dBuV)

7. Test Setup Photographs

Please refer to Annex "Set Up Photos-15C" for test setup photos

*******END OF REPORT*******