

Test Plot 1#: GSM 850 Mid ANT1 Head Right Cheek**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic GPRS-4 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 41.948$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.4, 8.36, 8.26) @836.6 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0895 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.031 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.0910 W/kg

SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.061 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 83.4%

Maximum value of SAR (measured) = 0.0824 W/kg

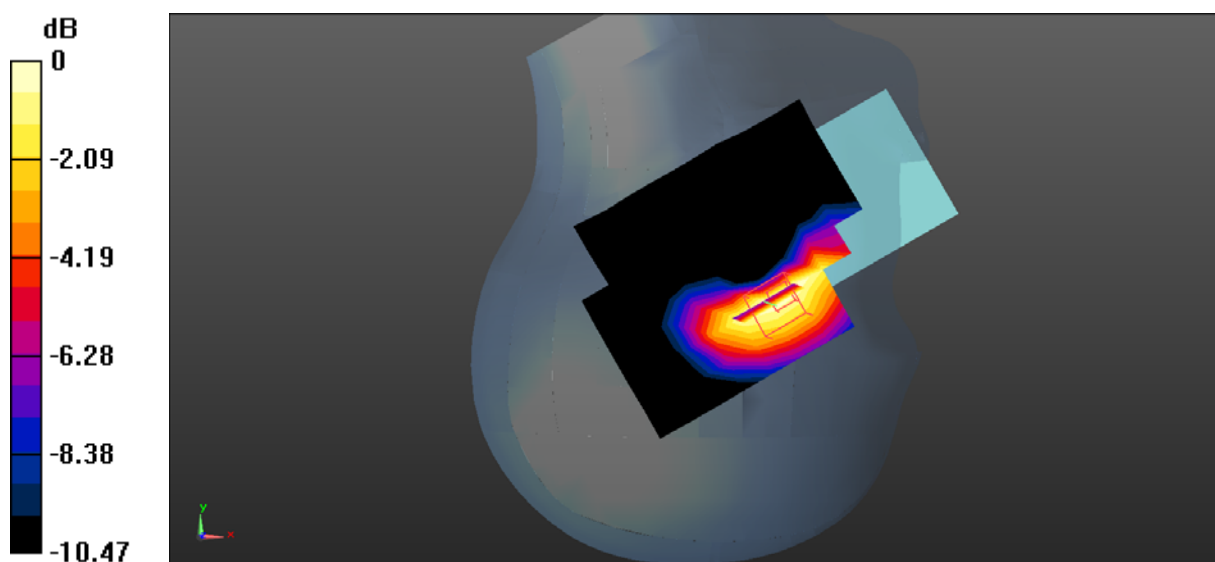

Test Plot 2#: GSM 850 Mid ANT1 Body Right**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic GPRS-4 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 41.948$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.4, 8.36, 8.26) @836.6 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.386 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.24 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.590 W/kg

SAR(1 g) = 0.348 W/kg; SAR(10 g) = 0.206 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 61.2%

Maximum value of SAR (measured) = 0.398 W/kg

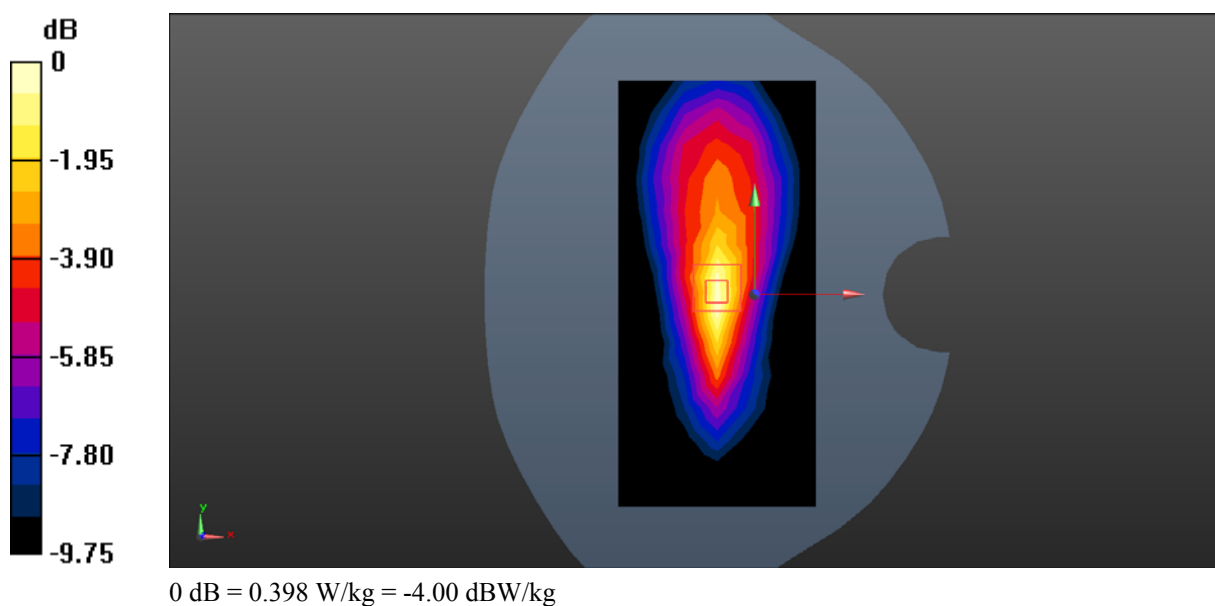

Test Plot 3#: GSM 850 Mid ANT3 Head Left Cheek**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 41.948$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.4, 8.36, 8.26) @836.6 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.202 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.325 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.243 W/kg

SAR(1 g) = 0.206 W/kg; SAR(10 g) = 0.160 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 85%

Maximum value of SAR (measured) = 0.208 W/kg

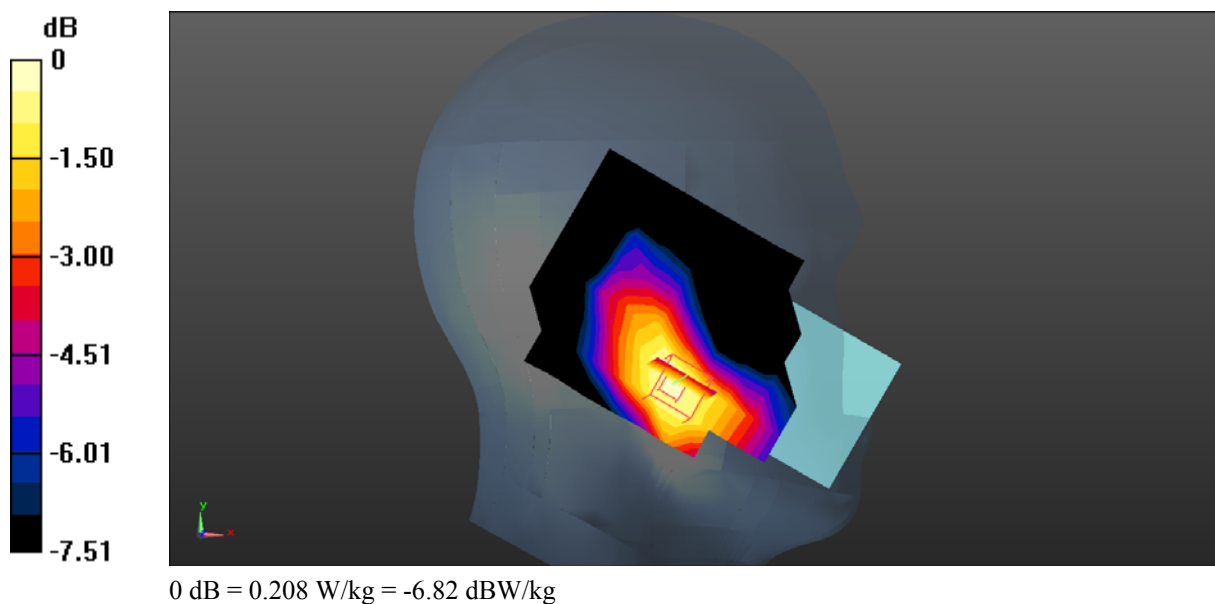

Test Plot 4#: GSM 850 Mid ANT3 Body Back**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic GPRS-4 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 41.948$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.4, 8.36, 8.26) @836.6 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.547 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.221 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.640 W/kg

SAR(1 g) = 0.538 W/kg; SAR(10 g) = 0.397 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 81.9%

Maximum value of SAR (measured) = 0.556 W/kg

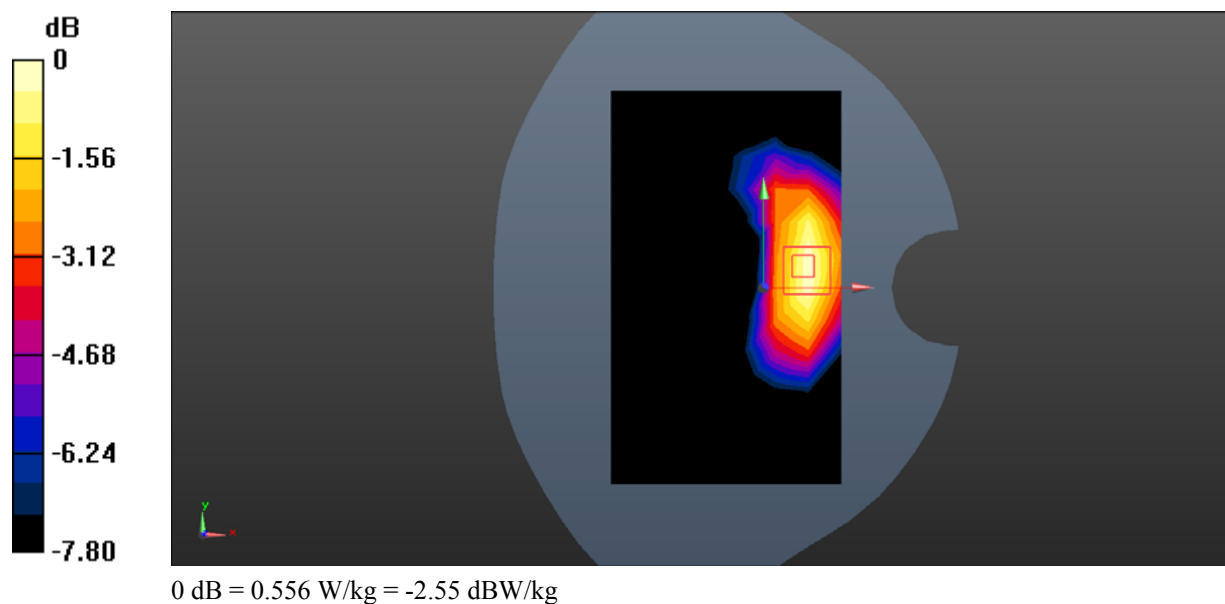

Test Plot 5#: GSM 1900 Mid ANT2 Head Left Cheek**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic GPRS-2 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:4
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.435$ S/m; $\epsilon_r = 41.017$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.94, 6.91, 6.83) @1880 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0872 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.901 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.0970 W/kg

SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.065 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 86.1%

Maximum value of SAR (measured) = 0.0913 W/kg

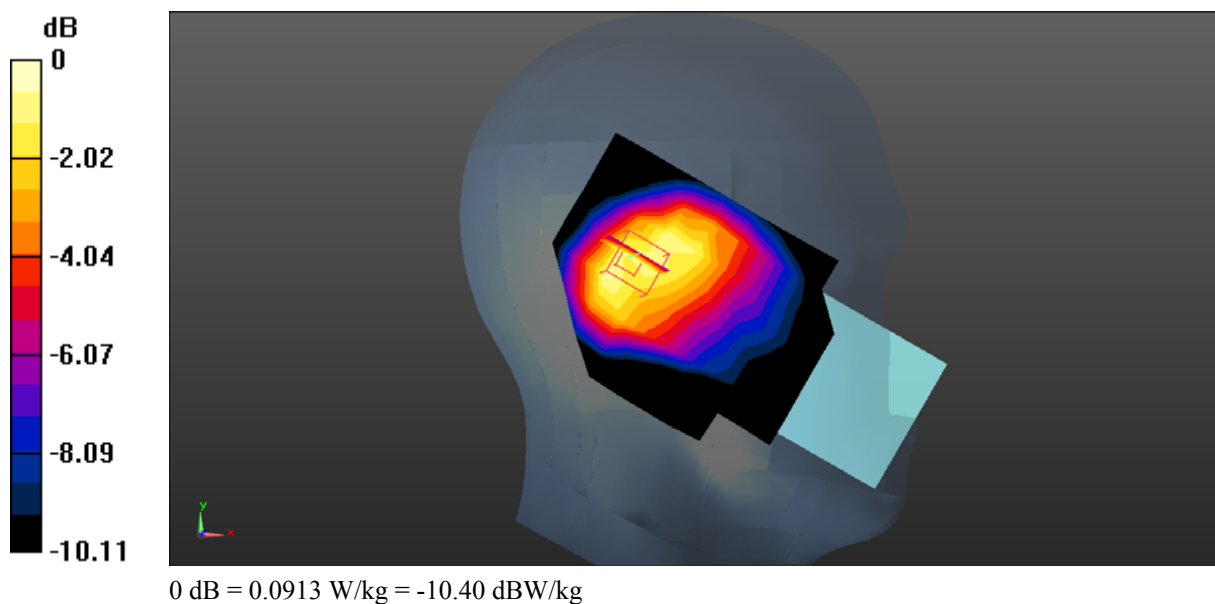

Test Plot 6#: GSM 1900 Mid ANT2 Body Bottom**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic GPRS-2 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:4
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.435$ S/m; $\epsilon_r = 41.017$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.94, 6.91, 6.83) @1880 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.435 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.17 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.589 W/kg

SAR(1 g) = 0.465 W/kg; SAR(10 g) = 0.324 W/kg

Smallest distance from peaks to all points 3 dB below = 13.2 mm

Ratio of SAR at M2 to SAR at M1 = 75.9%

Maximum value of SAR (measured) = 0.509 W/kg

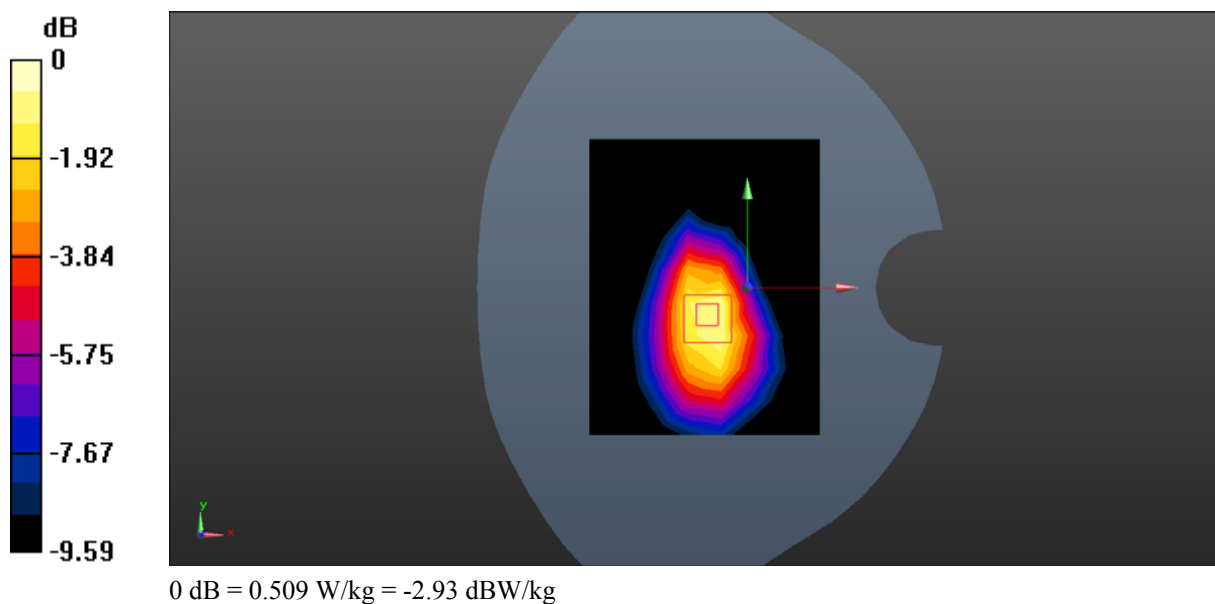

Test Plot 7#: GSM 1900 Mid ANT5 Head Left Tilt**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.435$ S/m; $\epsilon_r = 41.017$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.94, 6.91, 6.83) @1880 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.591 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.10 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 0.767 W/kg

SAR(1 g) = 0.646 W/kg; SAR(10 g) = 0.446 W/kg

Smallest distance from peaks to all points 3 dB below = 11.5 mm

Ratio of SAR at M2 to SAR at M1 = 82.7%

Maximum value of SAR (measured) = 0.714 W/kg

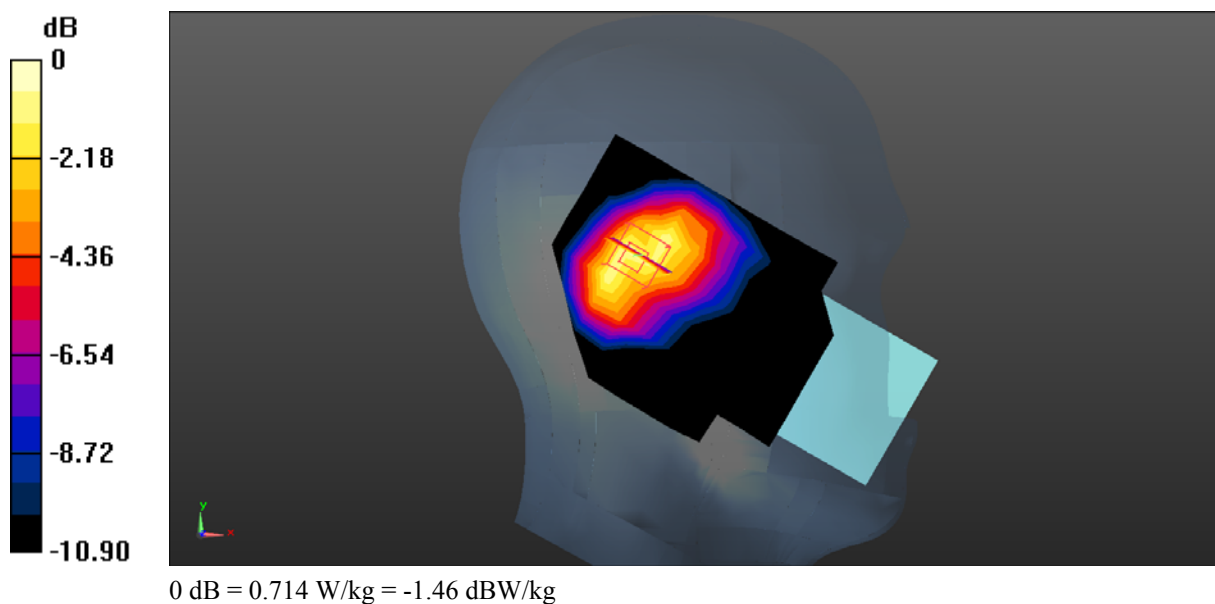

Test Plot 8#: GSM 1900 Mid ANT5 Body Top**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.435$ S/m; $\epsilon_r = 41.017$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.94, 6.91, 6.83) @1880 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.623 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.94 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.908 W/kg

SAR(1 g) = 0.667 W/kg; SAR(10 g) = 0.467 W/kg

Smallest distance from peaks to all points 3 dB below = 11.6 mm

Ratio of SAR at M2 to SAR at M1 = 76.5%

Maximum value of SAR (measured) = 0.727 W/kg

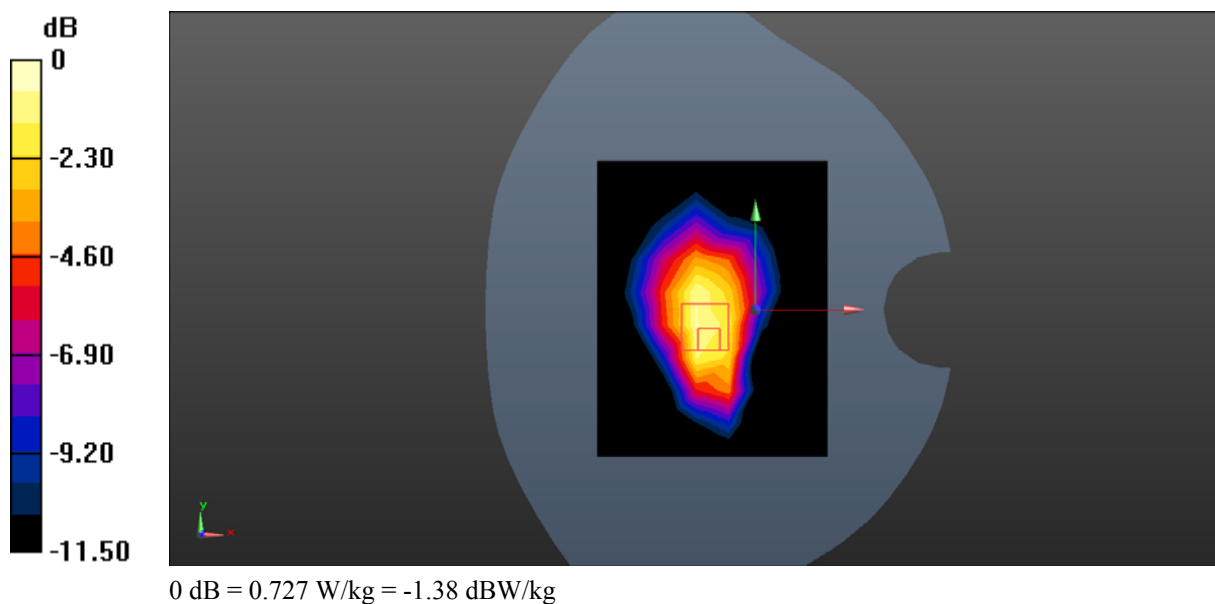

Test Plot 9#: WCDMA Band 2 Mid ANT2 Head Right Cheek**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.435$ S/m; $\epsilon_r = 41.017$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.94, 6.91, 6.83) @1880 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.167 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.435 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 0.185 W/kg

SAR(1 g) = 0.161 W/kg; SAR(10 g) = 0.128 W/kg

Smallest distance from peaks to all points 3 dB below = 20.5 mm

Ratio of SAR at M2 to SAR at M1 = 85.6%

Maximum value of SAR (measured) = 0.171 W/kg

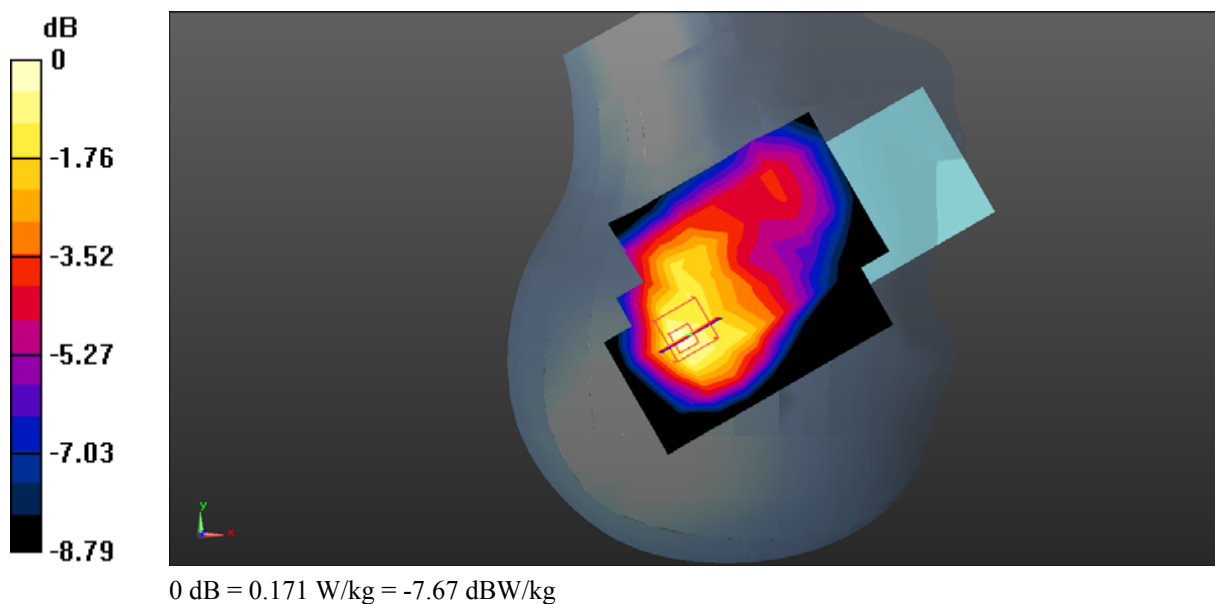

Test Plot 10#: WCDMA Band 2 Mid ANT2 2 Body Bottom**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.435$ S/m; $\epsilon_r = 41.017$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.94, 6.91, 6.83) @1880 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.633 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.97 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 0.953 W/kg

SAR(1 g) = 0.717 W/kg; SAR(10 g) = 0.446 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 74.9%

Maximum value of SAR (measured) = 0.748 W/kg

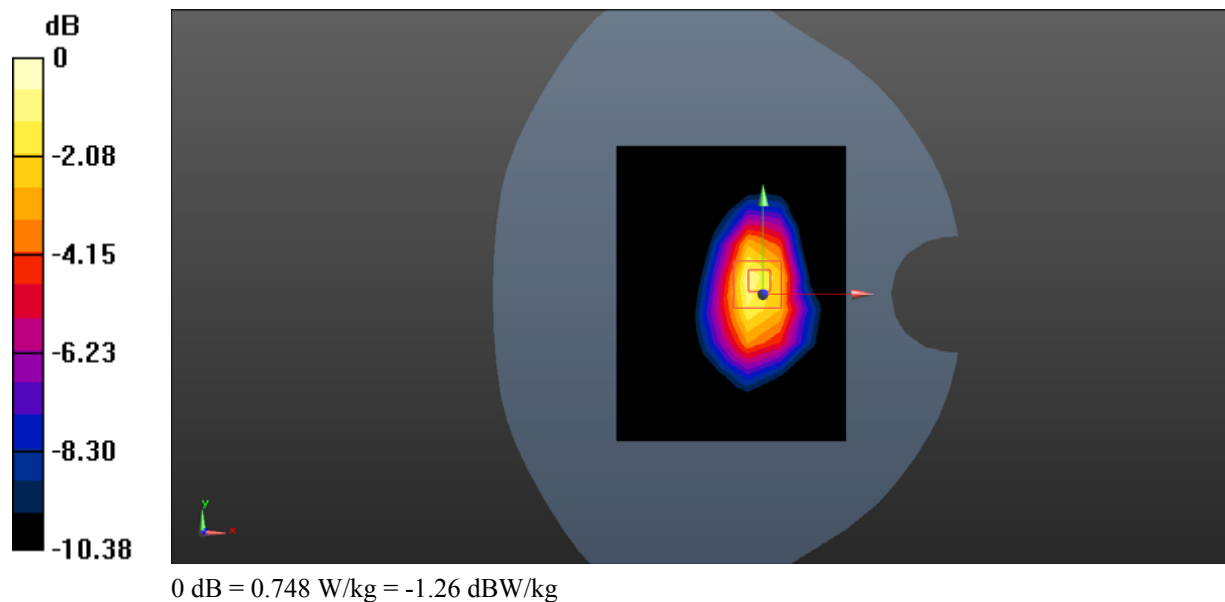

Test Plot 11#: WCDMA Band 2 Mid ANT5 Head Left Tilt**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.435$ S/m; $\epsilon_r = 41.017$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.94, 6.91, 6.83) @1880 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.551 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.99 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.617 W/kg

SAR(1 g) = 0.555 W/kg; SAR(10 g) = 0.423 W/kg

Smallest distance from peaks to all points 3 dB below = 16.7 mm

Ratio of SAR at M2 to SAR at M1 = 86.4%

Maximum value of SAR (measured) = 0.594 W/kg

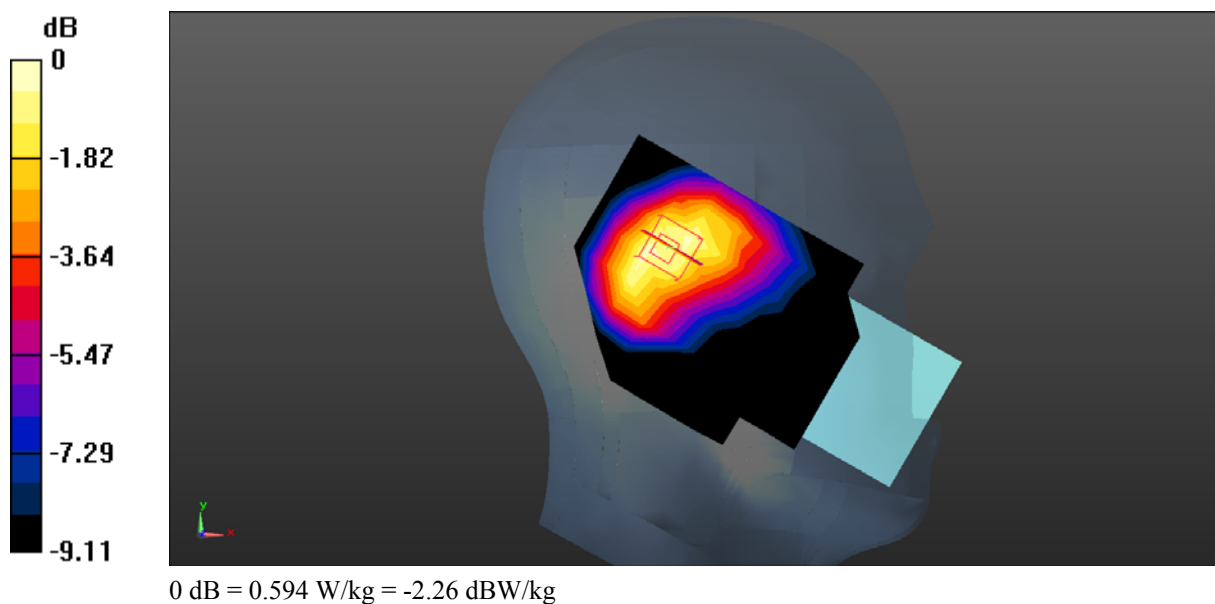

Test Plot 12#: WCDMA Band 2 Mid ANT5 Body Top**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.435$ S/m; $\epsilon_r = 41.017$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.94, 6.91, 6.83) @1880 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.410 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.37 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.490 W/kg

SAR(1 g) = 0.412 W/kg; SAR(10 g) = 0.306 W/kg

Smallest distance from peaks to all points 3 dB below = 21.5 mm

Ratio of SAR at M2 to SAR at M1 = 81.6%

Maximum value of SAR (measured) = 0.435 W/kg

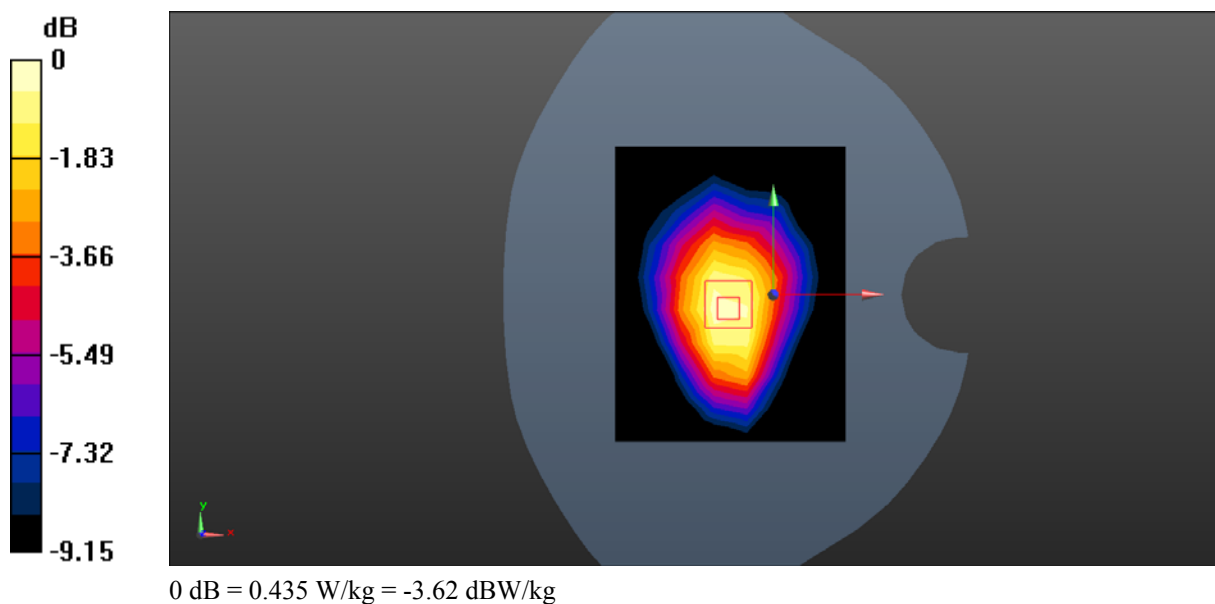

Test Plot 13#: WCDMA Band 4 Mid ANT2 Head Right Cheek**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.393$ S/m; $\epsilon_r = 41.063$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.13, 7.09, 7) @1732.6 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.230 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.742 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.256 W/kg

SAR(1 g) = 0.222 W/kg; SAR(10 g) = 0.172 W/kg

Smallest distance from peaks to all points 3 dB below = 16 mm

Ratio of SAR at M2 to SAR at M1 = 87%

Maximum value of SAR (measured) = 0.237 W/kg

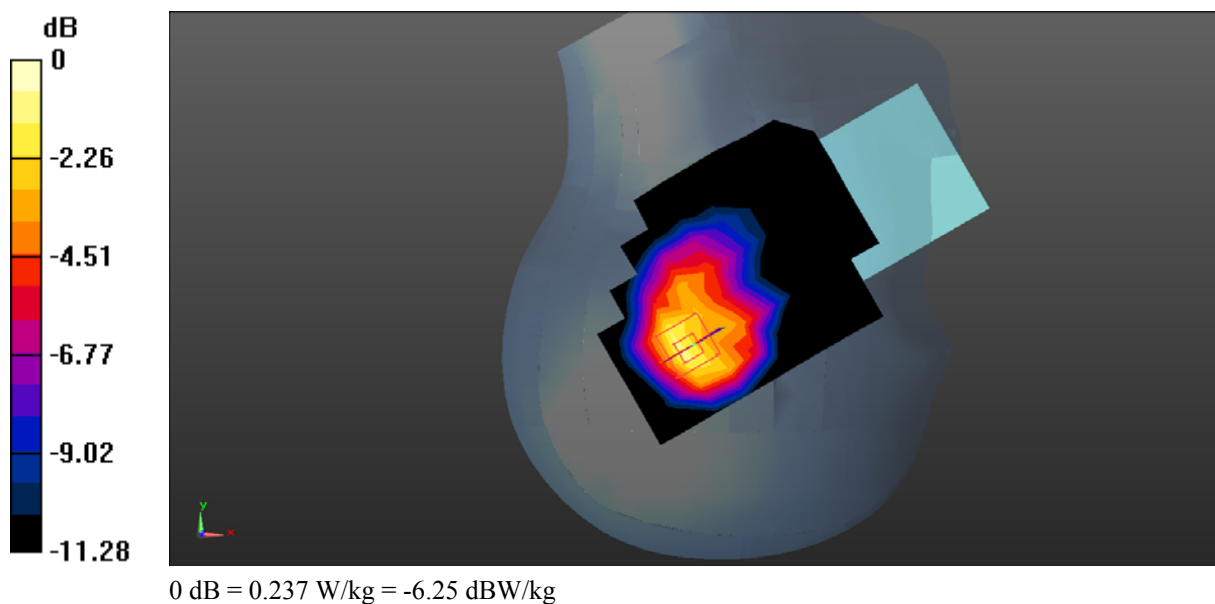

Test Plot 14#: WCDMA Band 4 Mid ANT2 Body Bottom**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.393$ S/m; $\epsilon_r = 41.063$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.13, 7.09, 7) @1732.6 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.640 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.41 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 0.776 W/kg

SAR(1 g) = 0.610 W/kg; SAR(10 g) = 0.428 W/kg

Smallest distance from peaks to all points 3 dB below = 13.7 mm

Ratio of SAR at M2 to SAR at M1 = 78.6%

Maximum value of SAR (measured) = 0.659 W/kg

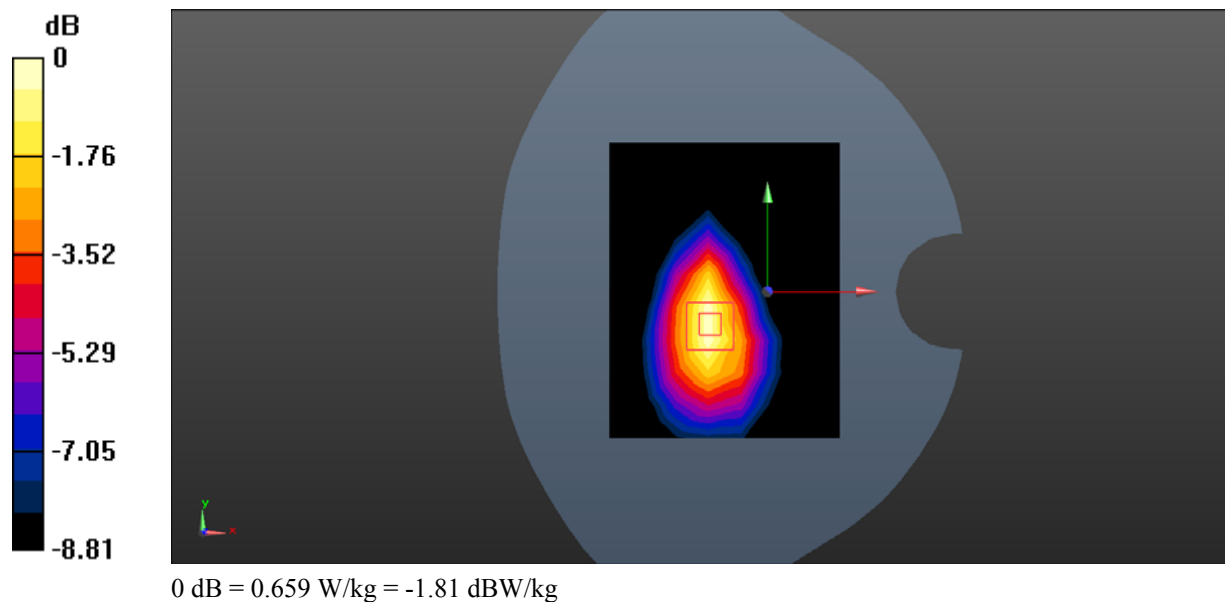

Test Plot 15#: WCDMA Band 4 Mid ANT5 Head Right Tilt**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.393$ S/m; $\epsilon_r = 41.063$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.13, 7.09, 7) @1732.6 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.558 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.02 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 0.982 W/kg

SAR(1 g) = 0.667 W/kg; SAR(10 g) = 0.393 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 66%

Maximum value of SAR (measured) = 0.753 W/kg

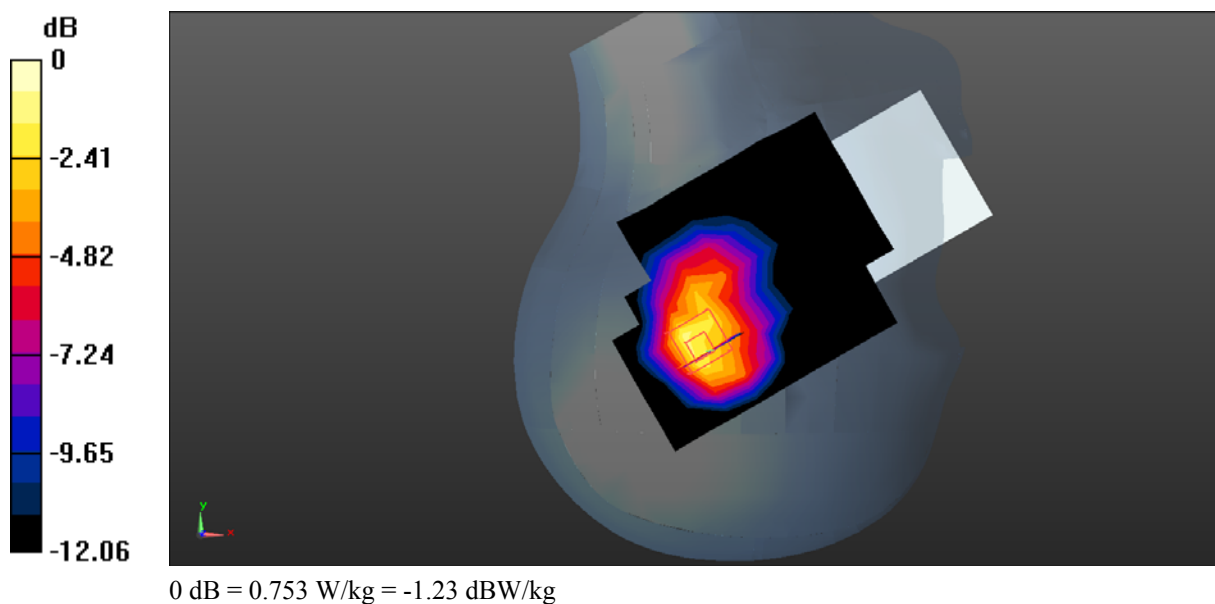

Test Plot 16#: WCDMA Band 4 Mid ANT5 Body Top**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.393$ S/m; $\epsilon_r = 41.063$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.13, 7.09, 7) @1732.6 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.404 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.40 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.587 W/kg

SAR(1 g) = 0.435 W/kg; SAR(10 g) = 0.286 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 77.8%

Maximum value of SAR (measured) = 0.467 W/kg

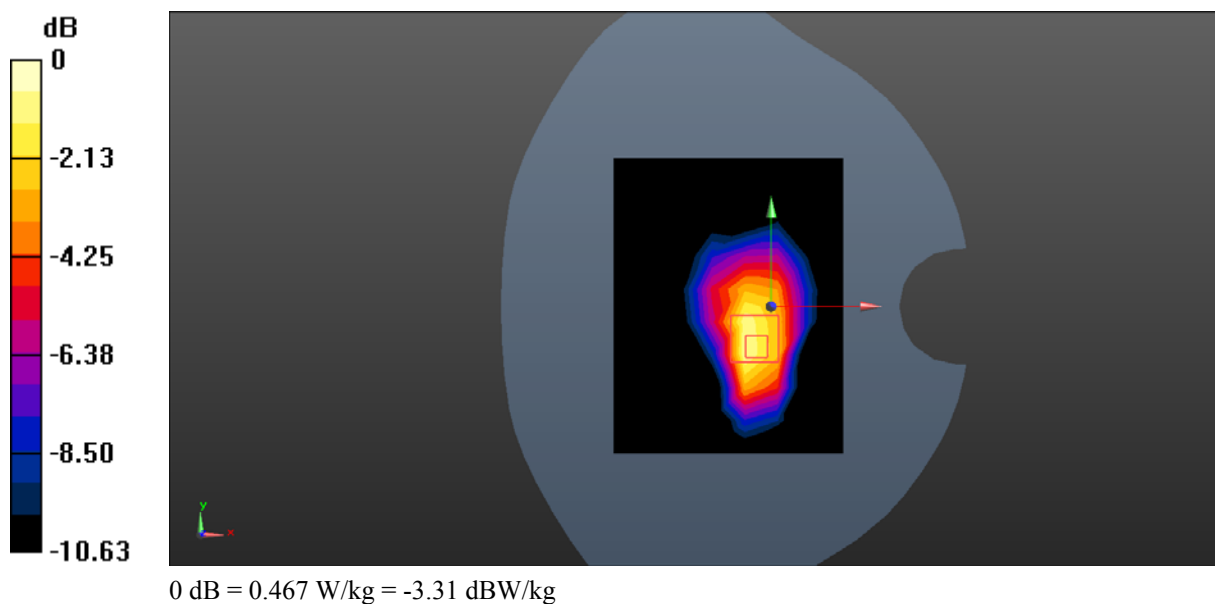

Test Plot 17#: WCDMA Band 5 Mid ANT1 Head Right Cheek**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 41.948$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.4, 8.36, 8.26) @836.6 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.453 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.341 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.661 W/kg

SAR(1 g) = 0.396 W/kg; SAR(10 g) = 0.238 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 65.8%

Maximum value of SAR (measured) = 0.447 W/kg

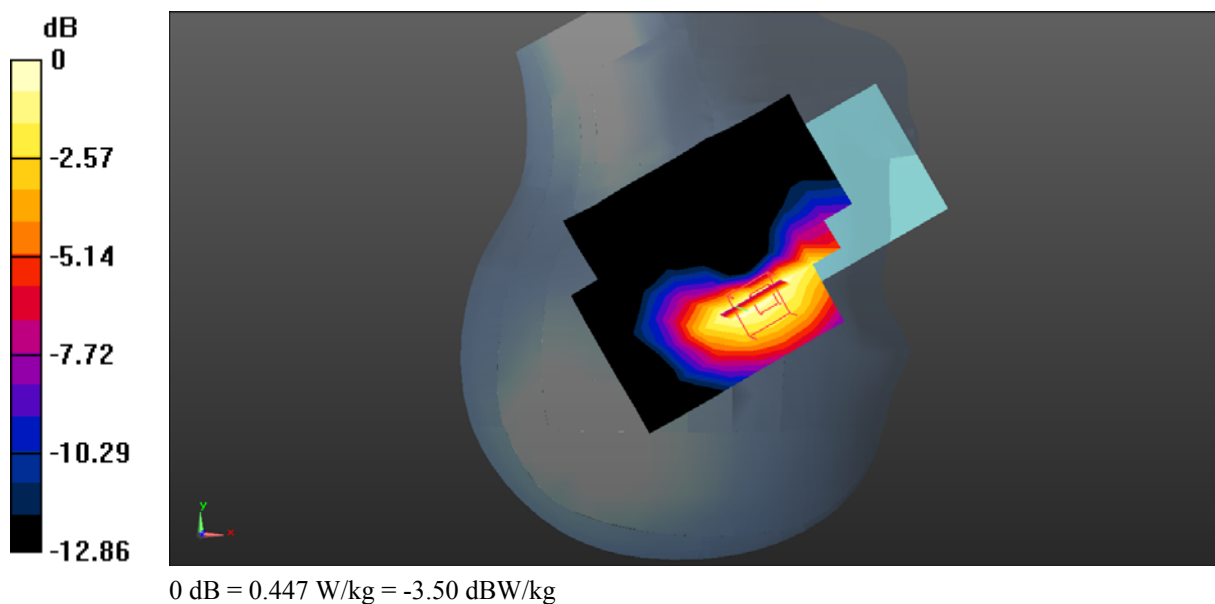

Test Plot 18#: WCDMA Band 5 Mid ANT1 Body Right**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 41.948$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.4, 8.36, 8.26) @836.6 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.259 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.14 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.508 W/kg

SAR(1 g) = 0.319 W/kg; SAR(10 g) = 0.199 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 65.9%

Maximum value of SAR (measured) = 0.356 W/kg

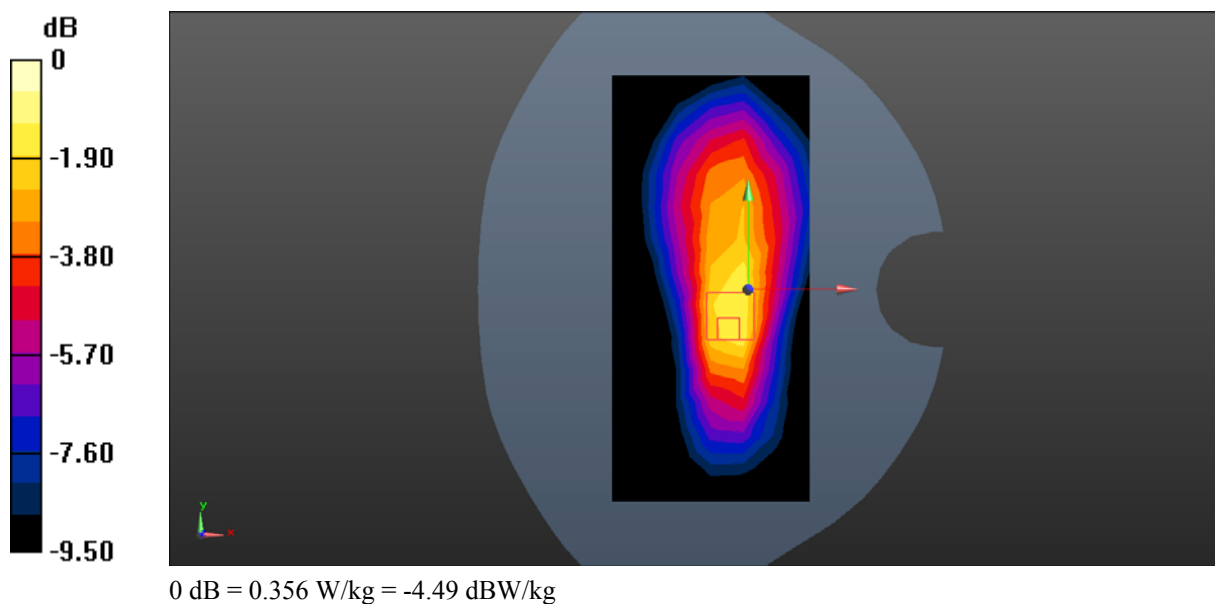

Test Plot 19#: WCDMA Band 5 Mid ANT3 Head Left Cheek**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 41.948$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.4, 8.36, 8.26) @836.6 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.559 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.572 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 1.00 W/kg

SAR(1 g) = 0.620 W/kg; SAR(10 g) = 0.393 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 64.2%

Maximum value of SAR (measured) = 0.648 W/kg

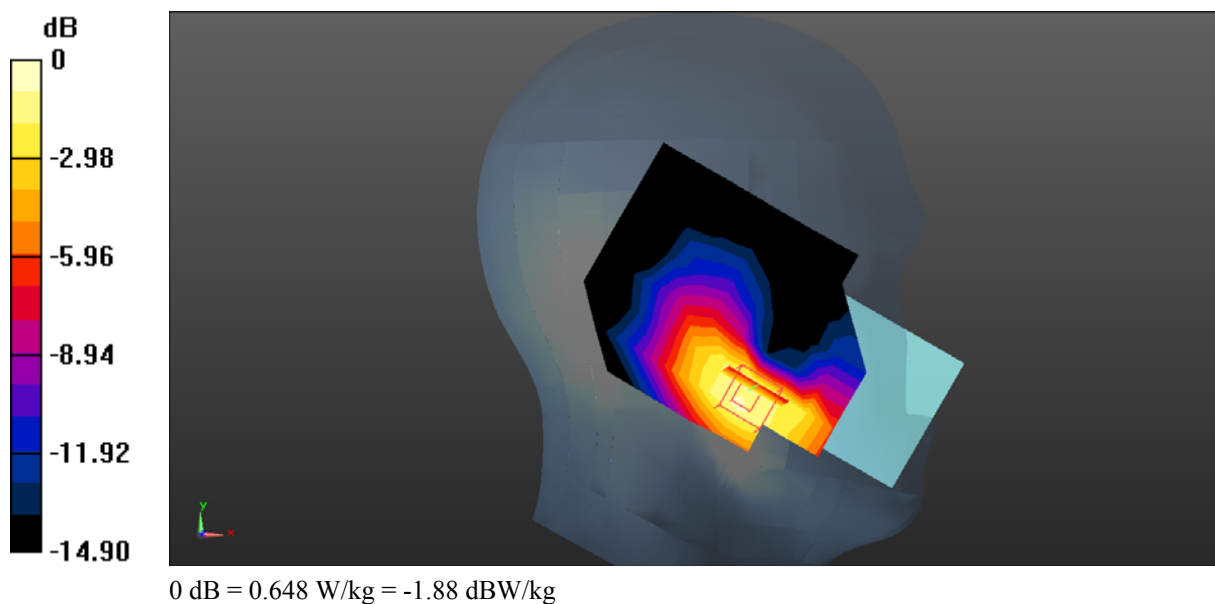

Test Plot 20#: WCDMA Band 5 Mid ANT3 Body Left**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 41.948$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.4, 8.36, 8.26) @836.6 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (6x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.803 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.86 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.713 W/kg

SAR(1 g) = 0.608 W/kg; SAR(10 g) = 0.463 W/kg

Smallest distance from peaks to all points 3 dB below = 17.9 mm

Ratio of SAR at M2 to SAR at M1 = 83.4%

Maximum value of SAR (measured) = 0.630 W/kg

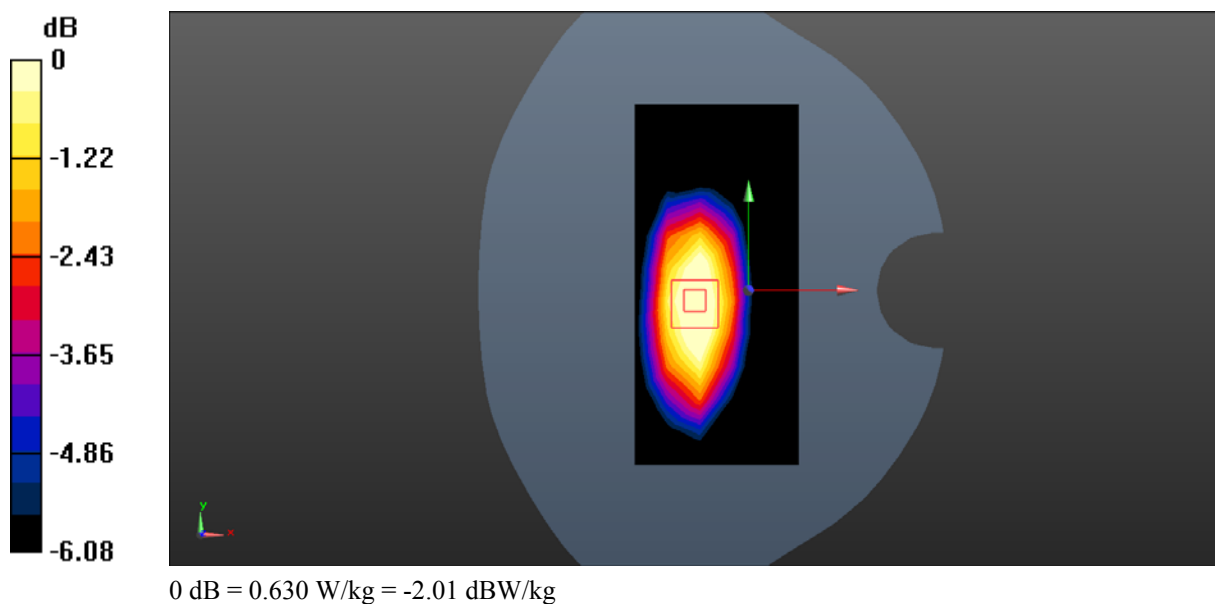

Test Plot 21#: LTE Band 2 1RB Mid ANT2 Head Left Cheek**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.435$ S/m; $\epsilon_r = 41.017$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.94, 6.91, 6.83) @1880 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.208 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 0.242 W/kg

SAR(1 g) = 0.207 W/kg; SAR(10 g) = 0.155 W/kg

Smallest distance from peaks to all points 3 dB below = 14.5 mm

Ratio of SAR at M2 to SAR at M1 = 85.5%

Maximum value of SAR (measured) = 0.223 W/kg

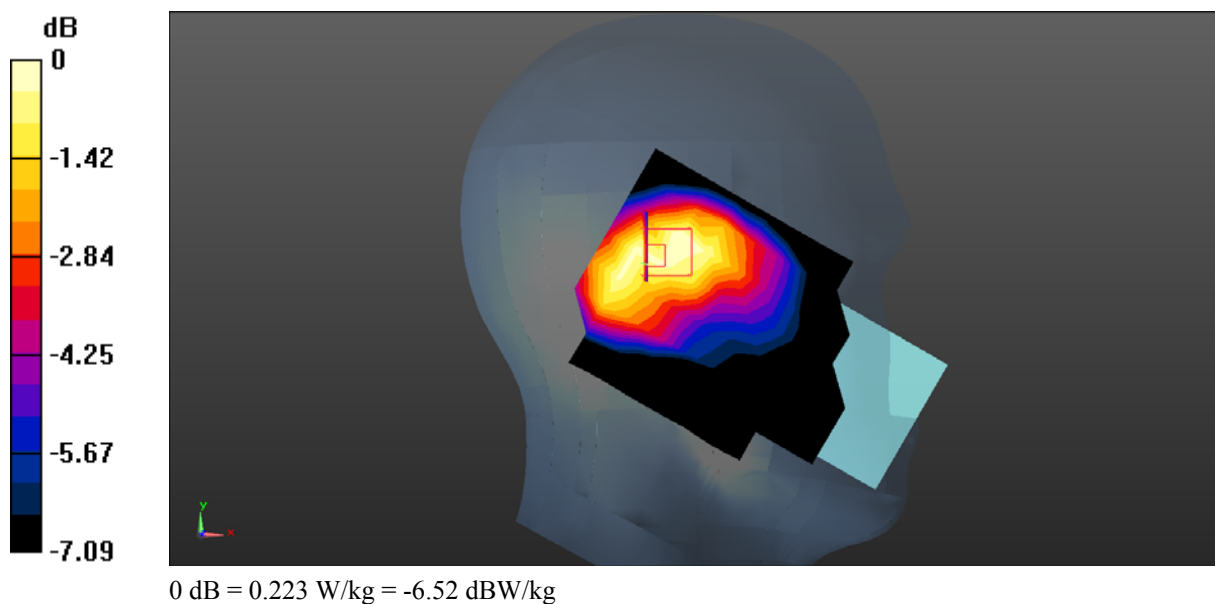

Test Plot 22#: LTE Band 2 1RB Mid ANT2 Body Back**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.435$ S/m; $\epsilon_r = 41.017$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.94, 6.91, 6.83) @1880 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.631 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.66 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 0.836 W/kg

SAR(1 g) = 0.645 W/kg; SAR(10 g) = 0.447 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 75.4%

Maximum value of SAR (measured) = 0.709 W/kg

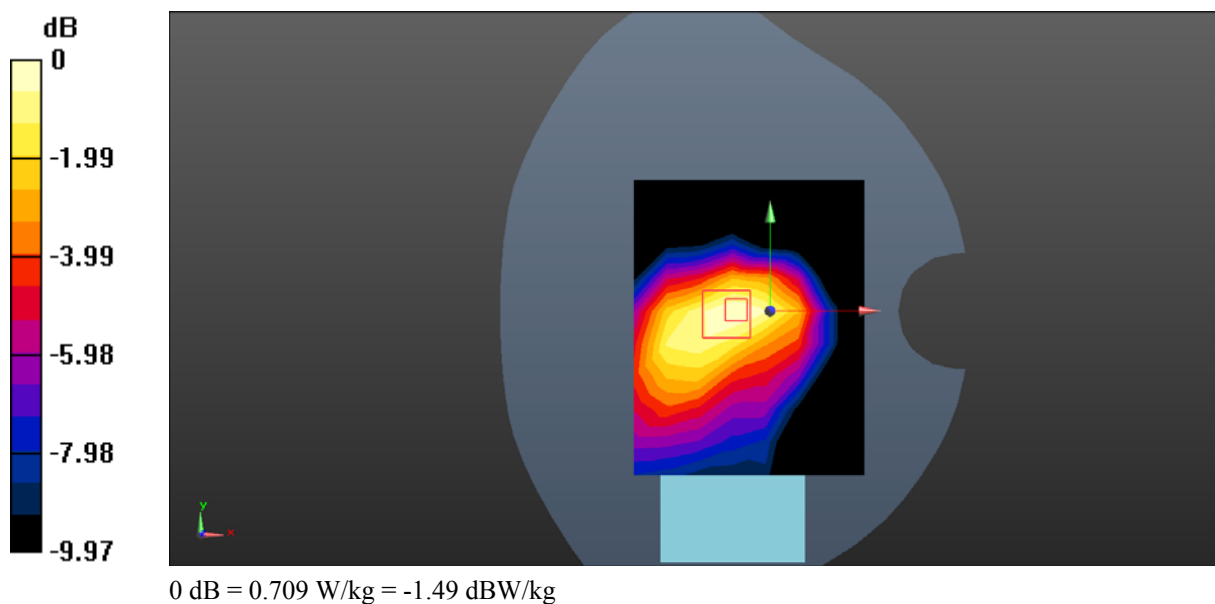

Test Plot 23#: LTE Band 2 1RB Mid ANT5 Head Left Tilt**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.435$ S/m; $\epsilon_r = 41.017$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.94, 6.91, 6.83) @1880 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.538 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.01 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 0.623 W/kg

SAR(1 g) = 0.572 W/kg; SAR(10 g) = 0.434 W/kg

Smallest distance from peaks to all points 3 dB below = 17.6 mm

Ratio of SAR at M2 to SAR at M1 = 89.3%

Maximum value of SAR (measured) = 0.611 W/kg

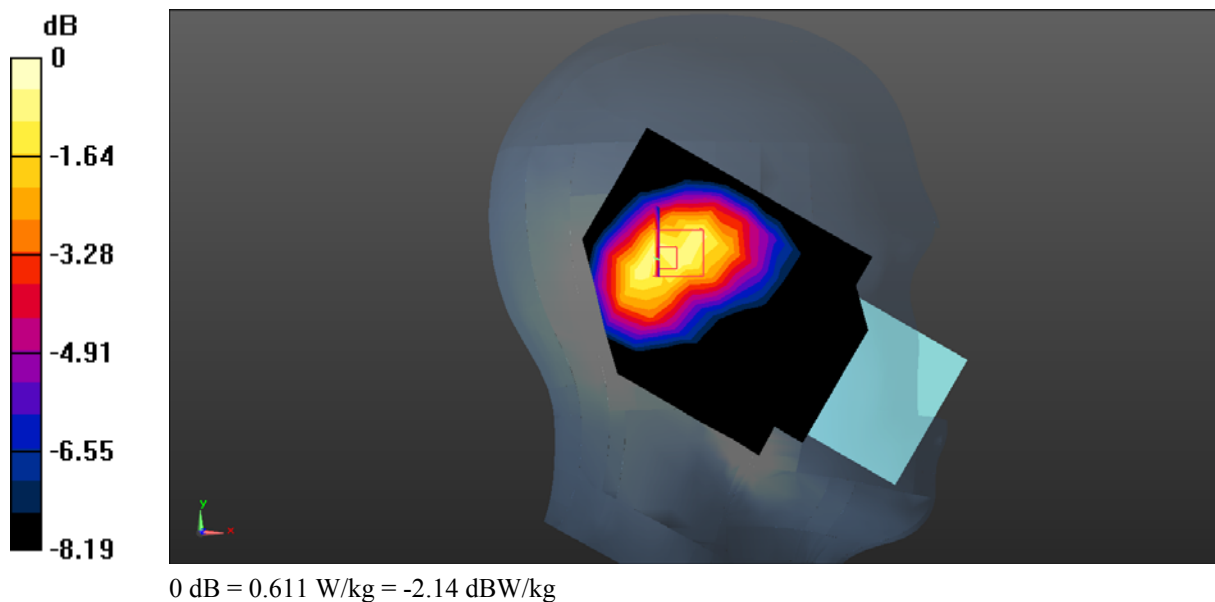

Test Plot 24#: LTE Band 2 1RB Mid ANT5 Body Top**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.435$ S/m; $\epsilon_r = 41.017$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.94, 6.91, 6.83) @1880 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.609 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.56 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 0.808 W/kg

SAR(1 g) = 0.649 W/kg; SAR(10 g) = 0.471 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 80.6%

Maximum value of SAR (measured) = 0.690 W/kg

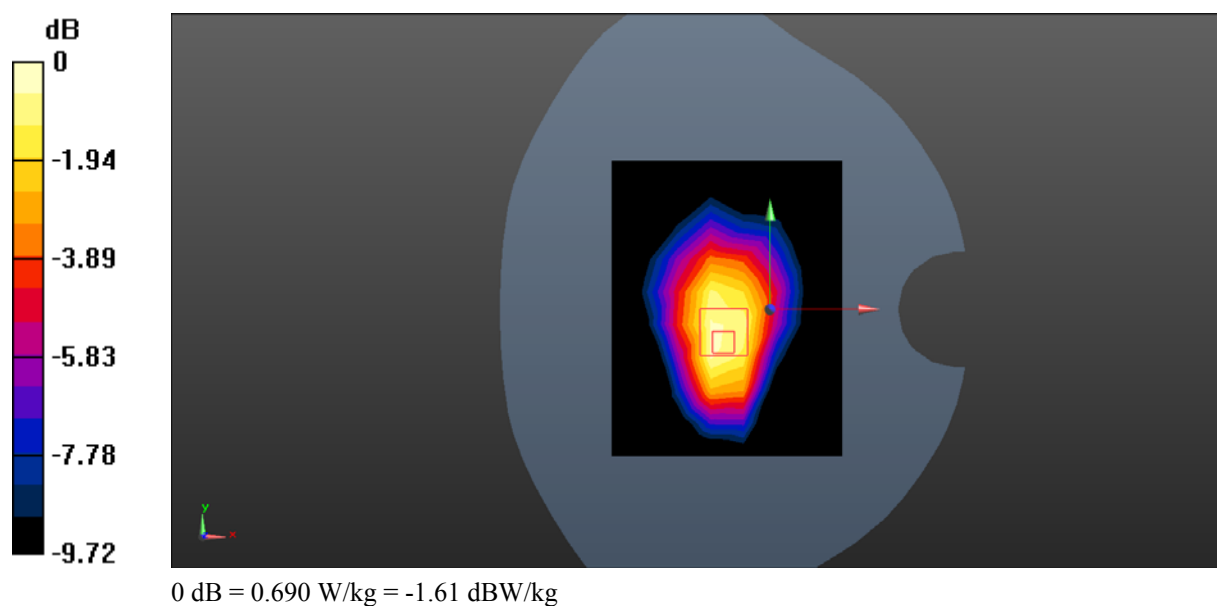

Test Plot 25#: LTE Band 5 1RB Mid ANT1 Head Right Cheek**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 41.949$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.4, 8.36, 8.26) @836.5 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.112 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.208 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 0.149 W/kg

SAR(1 g) = 0.116 W/kg; SAR(10 g) = 0.086 W/kg

Smallest distance from peaks to all points 3 dB below = 13.8 mm

Ratio of SAR at M2 to SAR at M1 = 77.8%

Maximum value of SAR (measured) = 0.123 W/kg

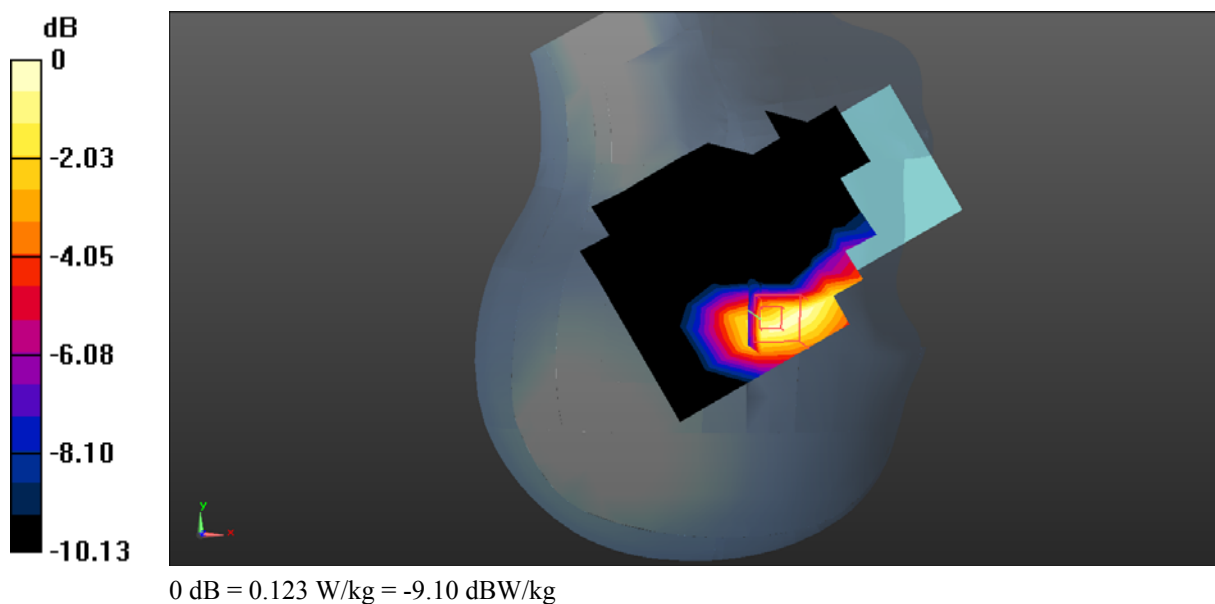

Test Plot 26#: LTE Band 5 1RB Mid ANT1 Body Right**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 41.949$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.4, 8.36, 8.26) @836.5 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.309 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.47 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 0.380 W/kg

SAR(1 g) = 0.283 W/kg; SAR(10 g) = 0.197 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 74.4%

Maximum value of SAR (measured) = 0.299 W/kg

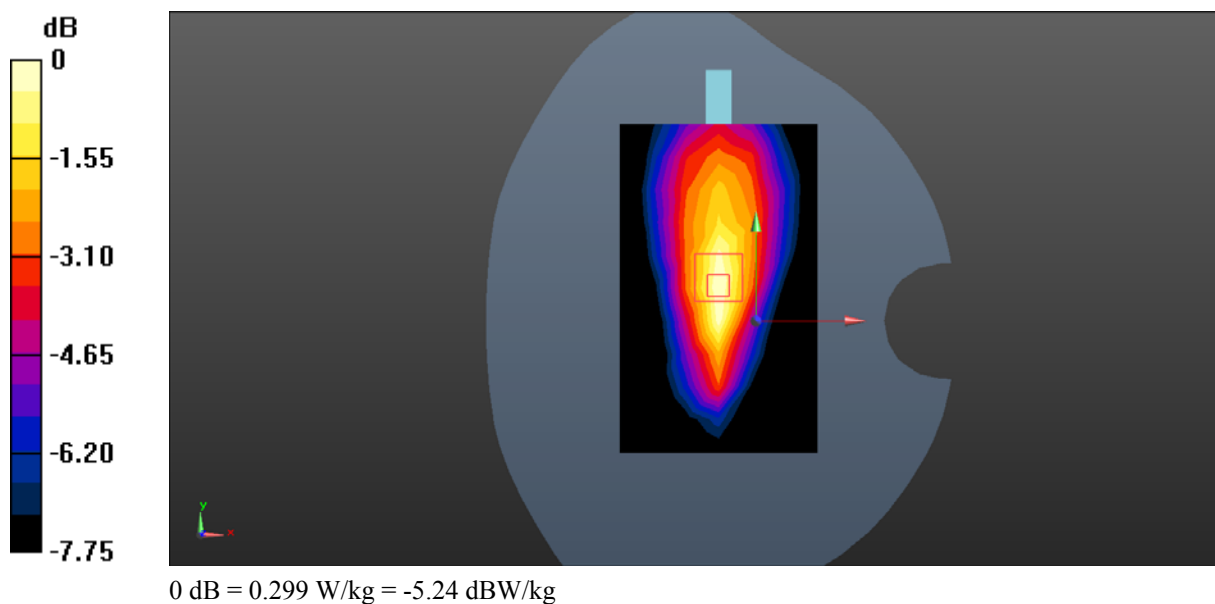

Test Plot 27#: LTE Band 5 1RB Mid ANT3 Head Left Cheek**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 41.949$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.4, 8.36, 8.26) @836.5 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.609 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.600 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.603 W/kg; SAR(10 g) = 0.375 W/kg

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 65.2%

Maximum value of SAR (measured) = 0.614 W/kg

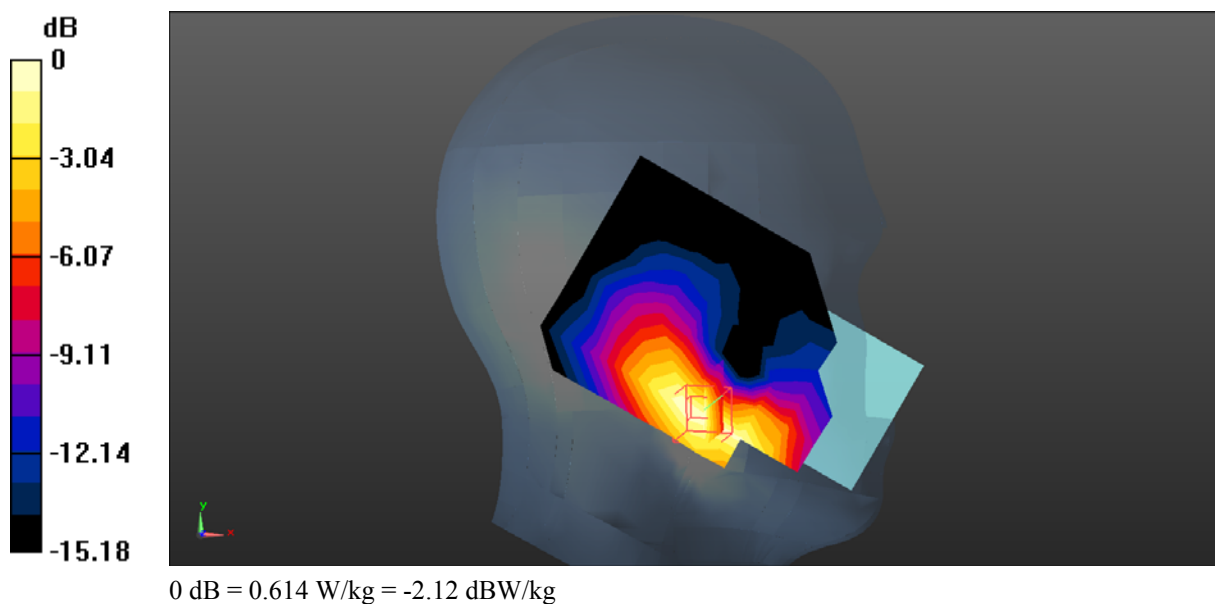

Test Plot 28#: LTE Band 5 50%RB Mid ANT3 Body Left**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 41.949$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.4, 8.36, 8.26) @836.5 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.545 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.85 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.659 W/kg

SAR(1 g) = 0.493 W/kg; SAR(10 g) = 0.340 W/kg

Smallest distance from peaks to all points 3 dB below = 13.2 mm

Ratio of SAR at M2 to SAR at M1 = 76.4%

Maximum value of SAR (measured) = 0.523 W/kg

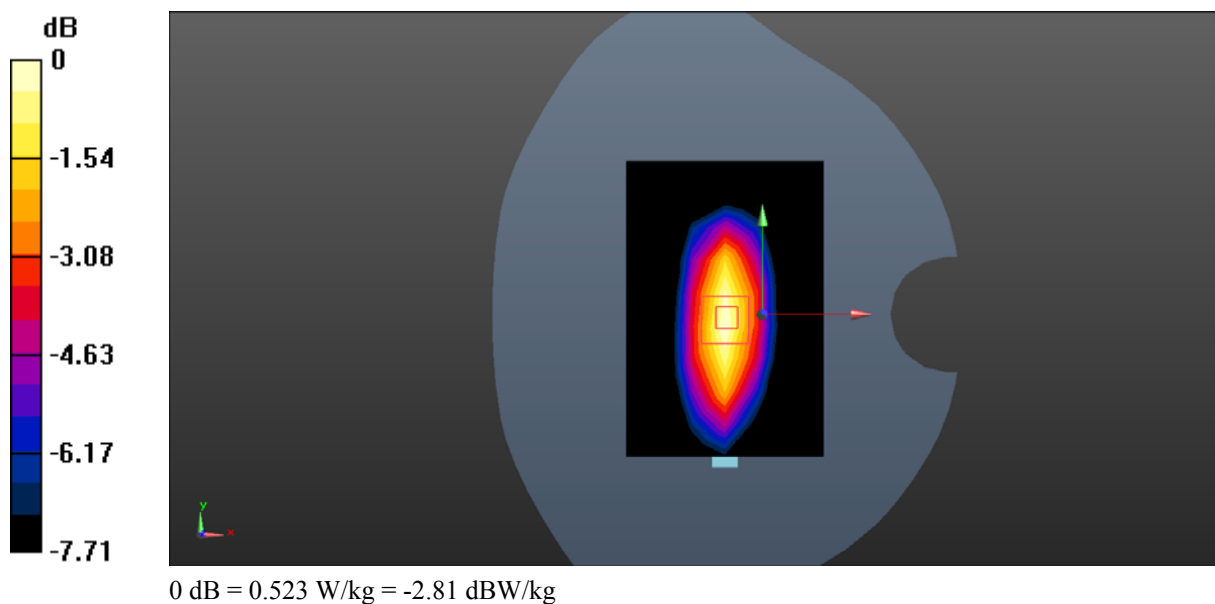

Test Plot 29#: LTE Band 7 1RB Mid ANT2 Head Right Cheek**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.818$ S/m; $\epsilon_r = 40.139$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.32, 6.29, 6.21) @2535 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.368 W/kg

Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.454 W/kg

SAR(1 g) = 0.347 W/kg; SAR(10 g) = 0.228 W/kg

Smallest distance from peaks to all points 3 dB below = 12.1 mm

Ratio of SAR at M2 to SAR at M1 = 77.5%

Maximum value of SAR (measured) = 0.372 W/kg

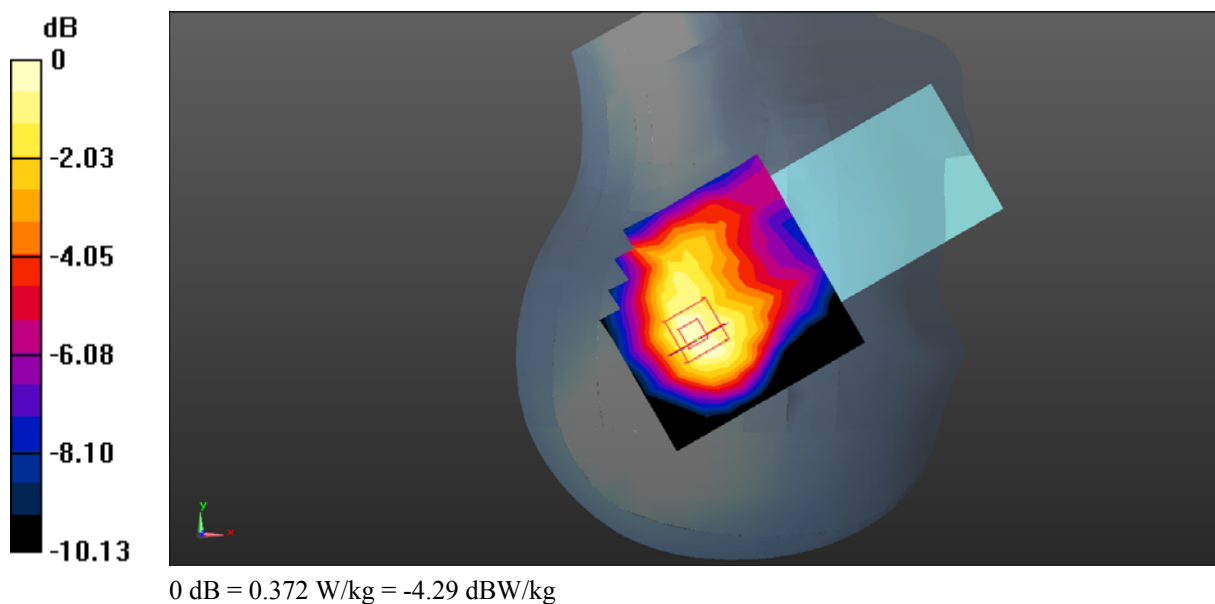

Test Plot 30#: LTE Band 7 1RB Mid ANT2 Body Back**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.818$ S/m; $\epsilon_r = 40.139$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.32, 6.29, 6.21) @2535 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (12x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.759 W/kg

Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.545 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.664 W/kg; SAR(10 g) = 0.427 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 69.2%

Maximum value of SAR (measured) = 0.790 W/kg

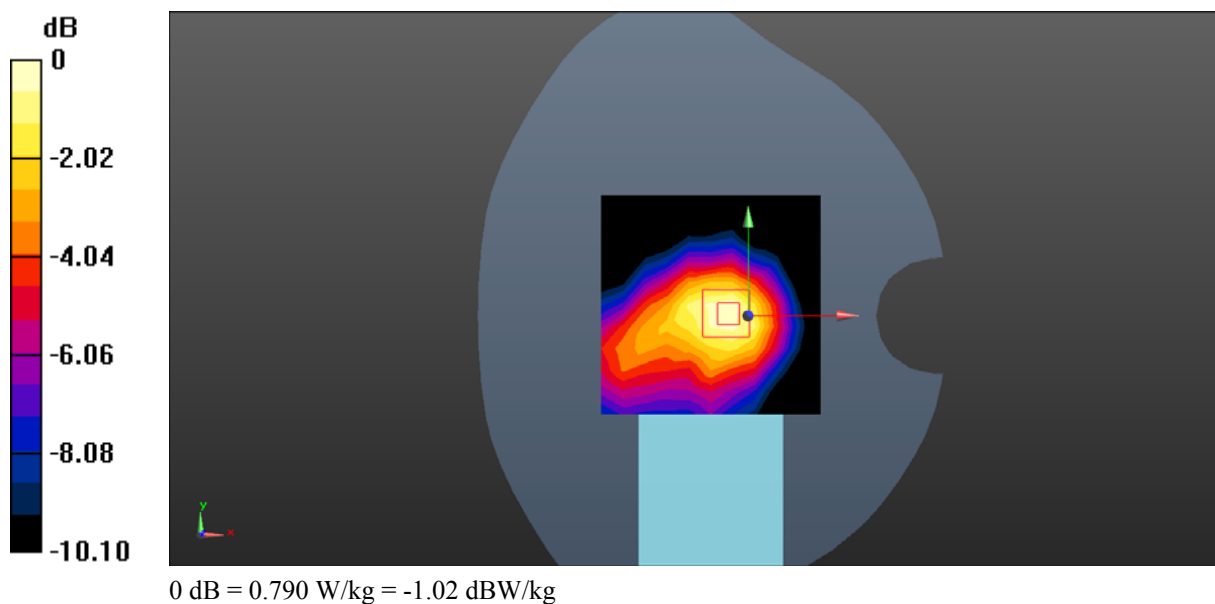

Test Plot 31#: LTE Band 7 1RB Mid ANT5 Head Left Tilt**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.818$ S/m; $\epsilon_r = 40.139$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.32, 6.29, 6.21) @2535 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.590 W/kg

Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.51 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.650 W/kg

SAR(1 g) = 0.561 W/kg; SAR(10 g) = 0.382 W/kg

Smallest distance from peaks to all points 3 dB below = 13.6 mm

Ratio of SAR at M2 to SAR at M1 = 82.6%

Maximum value of SAR (measured) = 0.593 W/kg

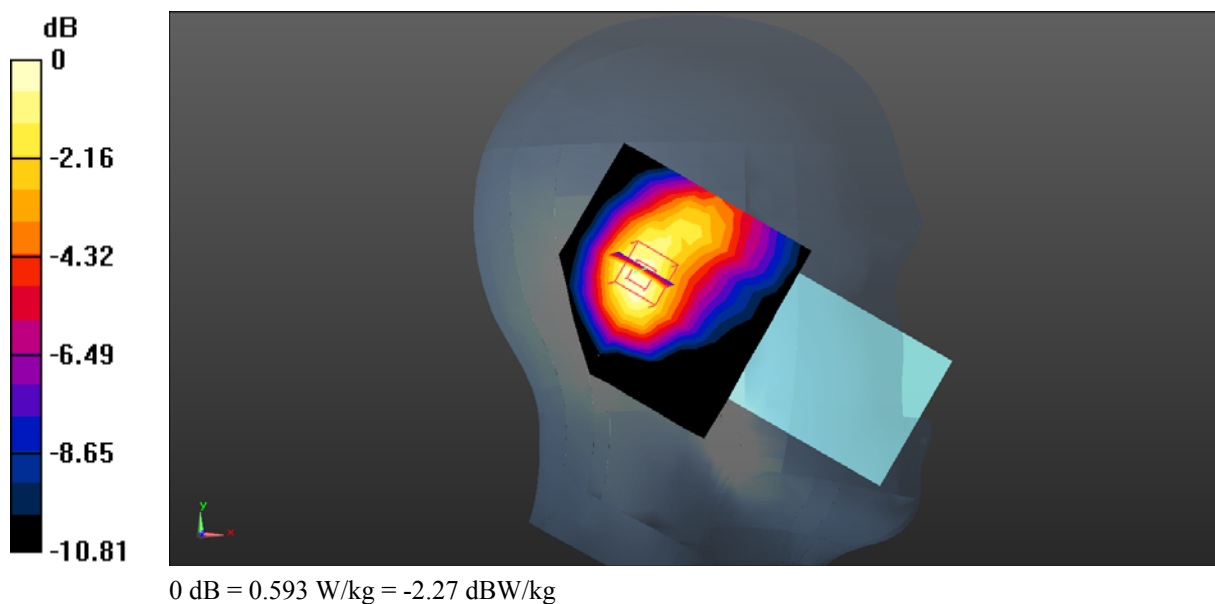

Test Plot 32#: LTE Band 7 1RB Mid ANT5 Body Top**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.818$ S/m; $\epsilon_r = 40.139$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.32, 6.29, 6.21) @2535 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (7x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.657 W/kg

Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.18 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.776 W/kg

SAR(1 g) = 0.600 W/kg; SAR(10 g) = 0.402 W/kg

Smallest distance from peaks to all points 3 dB below = 15.3 mm

Ratio of SAR at M2 to SAR at M1 = 76.9%

Maximum value of SAR (measured) = 0.628 W/kg

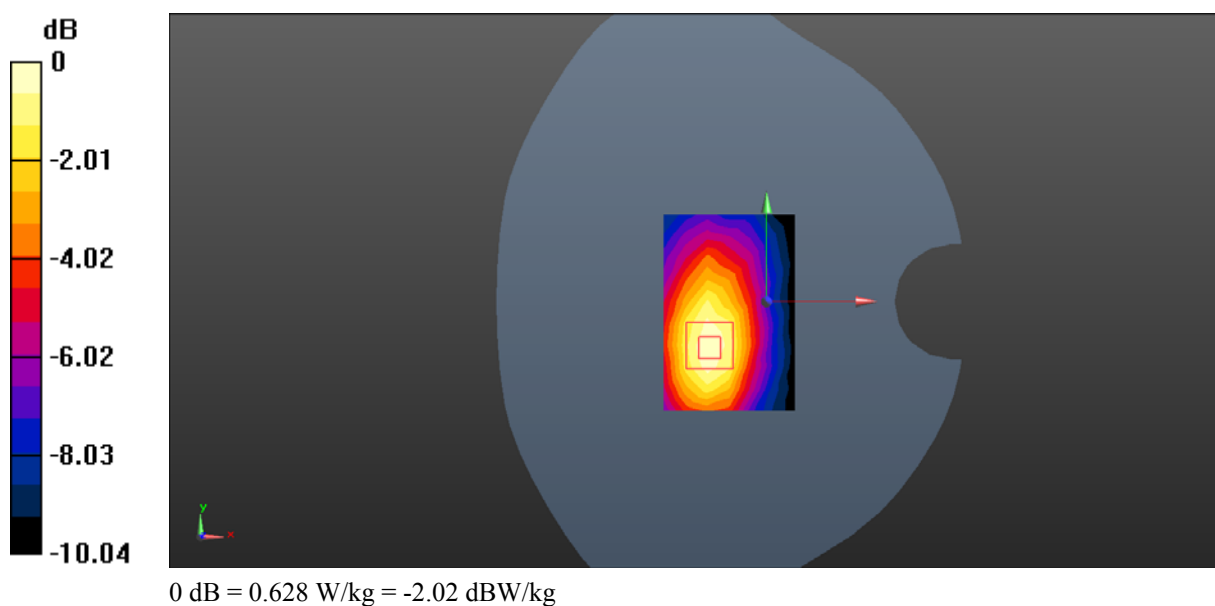

Test Plot 33#: LTE Band 12 1RB Mid ANT1 Head Right Cheek**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.899$ S/m; $\epsilon_r = 43.148$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.76, 8.73, 8.61) @707.5 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.130 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.197 V/m; Power Drift = -0.20 dB


Peak SAR (extrapolated) = 0.140 W/kg

SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.107 W/kg

Smallest distance from peaks to all points 3 dB below = 20.4 mm

Ratio of SAR at M2 to SAR at M1 = 89.6%

Maximum value of SAR (measured) = 0.128 W/kg

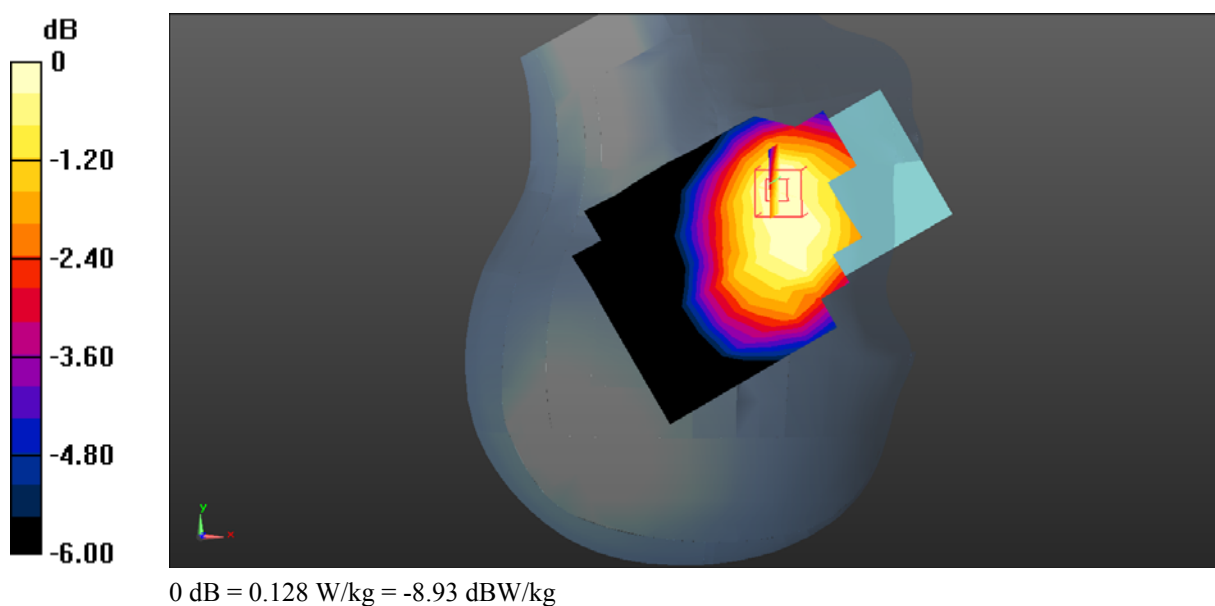

Test Plot 34#: LTE Band 12 1RB Mid ANT1 Body Bottom**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.899$ S/m; $\epsilon_r = 43.148$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.76, 8.73, 8.61) @707.5 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.311 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.60 V/m; Power Drift = -0.20 dB


Peak SAR (extrapolated) = 0.567 W/kg

SAR(1 g) = 0.277 W/kg; SAR(10 g) = 0.153 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 57.7%

Maximum value of SAR (measured) = 0.312 W/kg

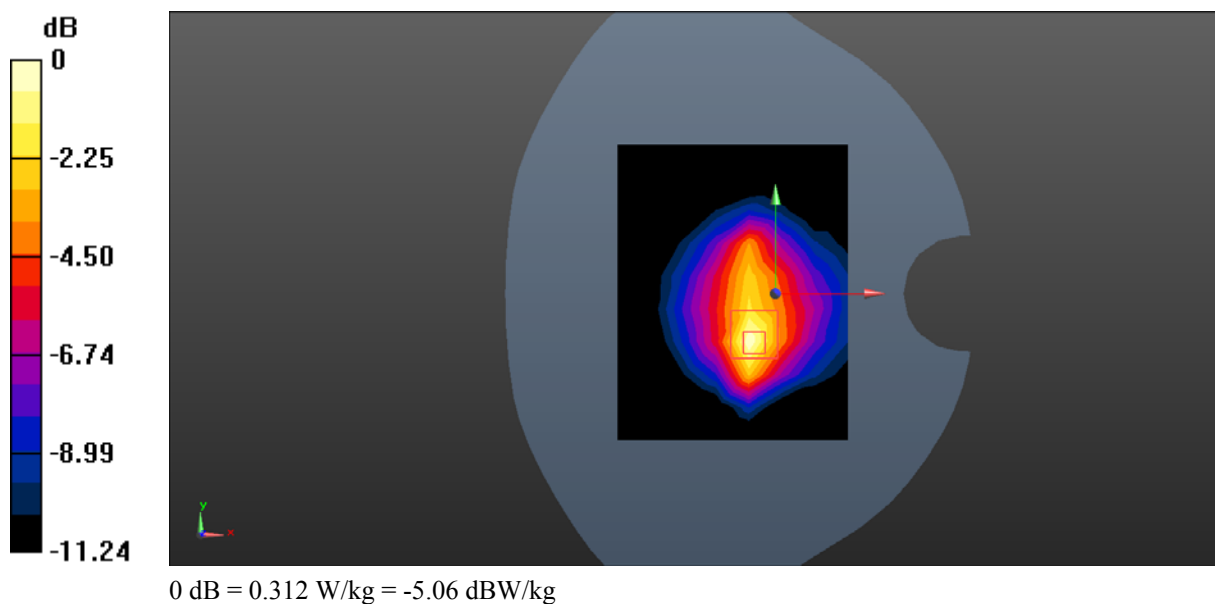

Test Plot 35#: LTE Band 12 1RB Mid ANT3 Head Left Cheek**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.899$ S/m; $\epsilon_r = 43.148$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.76, 8.73, 8.61) @707.5 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.109 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.023 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.210 W/kg

SAR(1 g) = 0.118 W/kg; SAR(10 g) = 0.074 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 66.7%

Maximum value of SAR (measured) = 0.122 W/kg

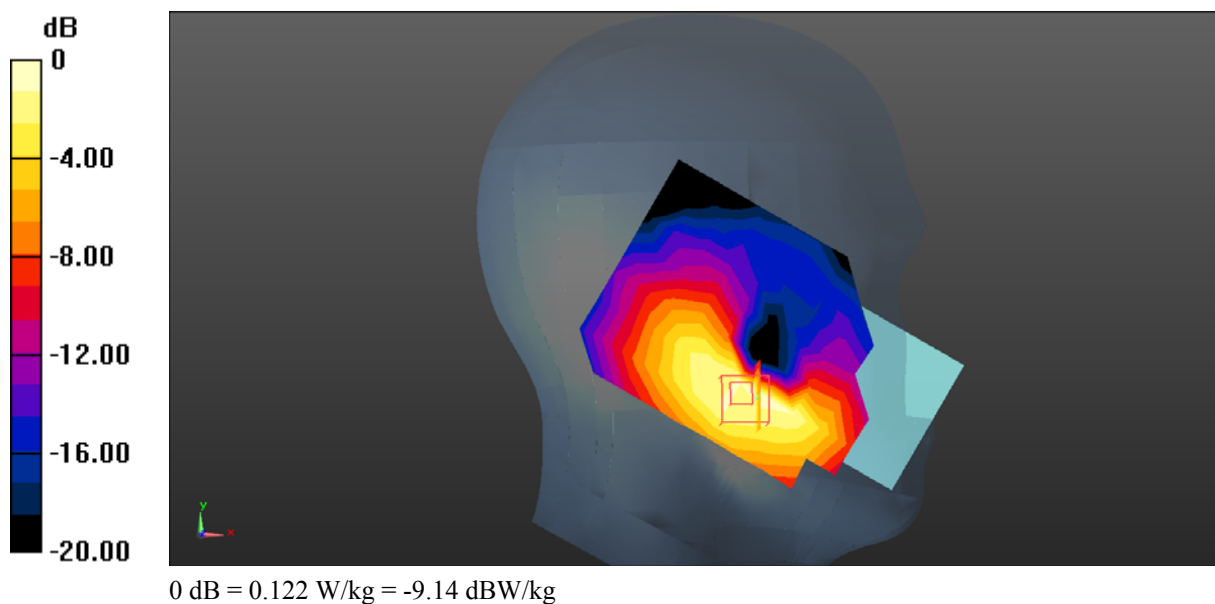

Test Plot 36#: LTE Band 12 1RB Mid ANT3 Body Left**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.899$ S/m; $\epsilon_r = 43.148$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.76, 8.73, 8.61) @707.5 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.123 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.84 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.142 W/kg

SAR(1 g) = 0.115 W/kg; SAR(10 g) = 0.084 W/kg

Smallest distance from peaks to all points 3 dB below = 14.4 mm

Ratio of SAR at M2 to SAR at M1 = 81.1%

Maximum value of SAR (measured) = 0.123 W/kg

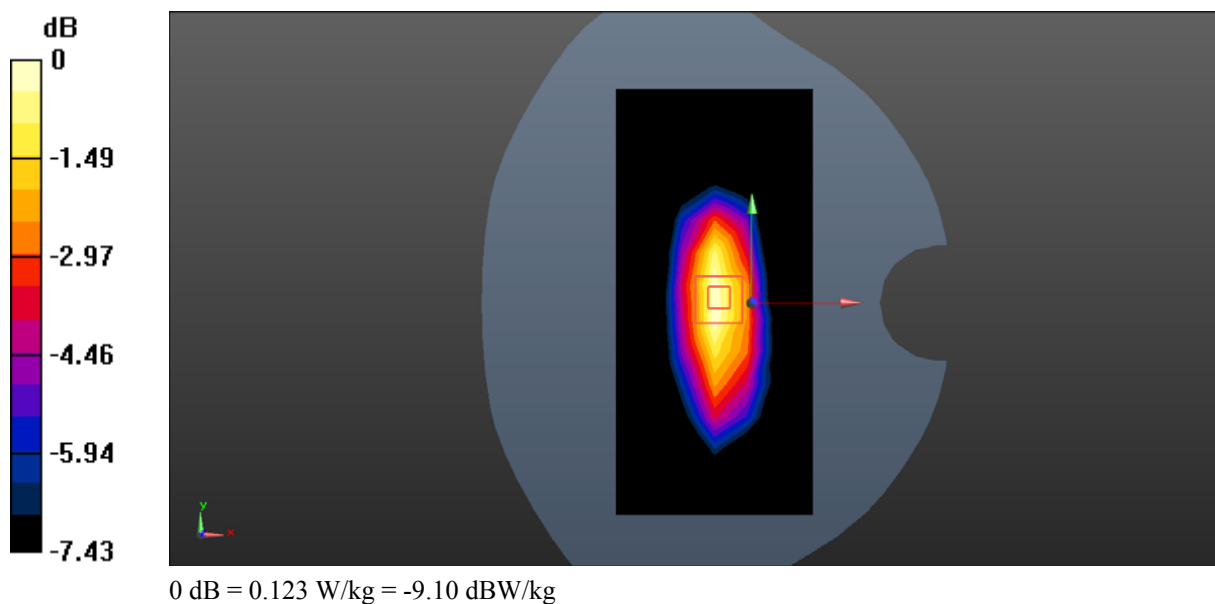


Test Plot 37#: LTE Band 13 1RB Mid ANT1 Head Left Cheek**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.89 \text{ S/m}$; $\epsilon_r = 42.541$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.76, 8.73, 8.61) @782 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

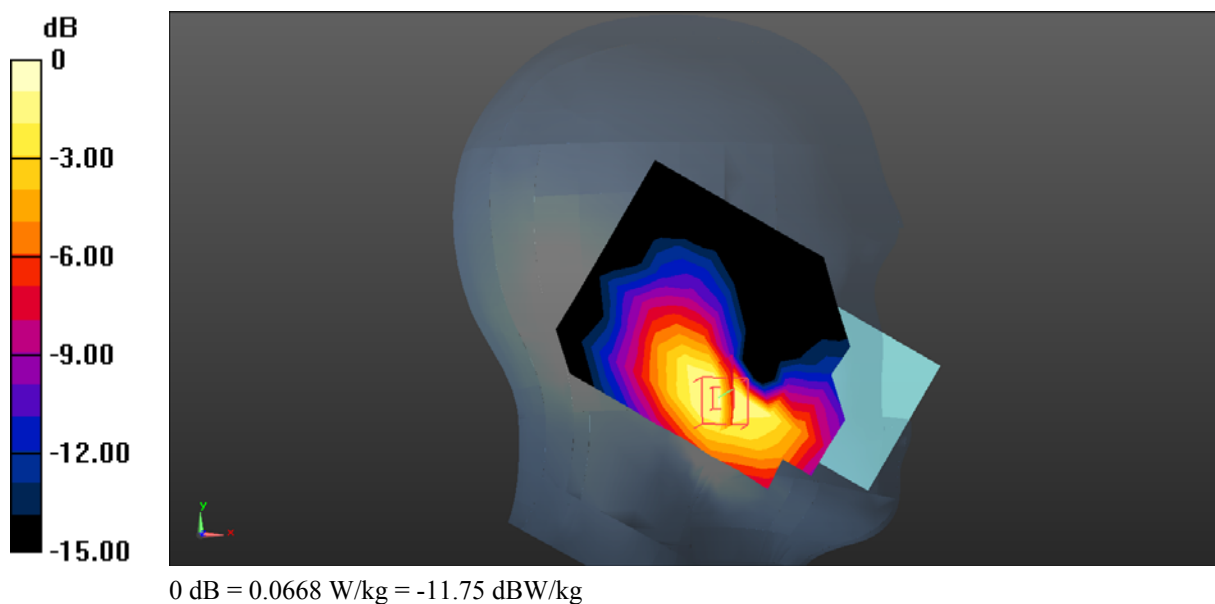Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0714 W/kg **Zoom Scan (5x5x7) /Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 4.196 V/m ; Power Drift = 0.03 dB Peak SAR (extrapolated) = 0.0670 W/kg **SAR(1 g) = 0.066 W/kg ; SAR(10 g) = 0.061 W/kg** Smallest distance from peaks to all points 3 dB below: Larger than measurement grid ($> 16 \text{ mm}$)Ratio of SAR at M2 to SAR at M1 = 96% Maximum value of SAR (measured) = 0.0668 W/kg 

Test Plot 38#: LTE Band 13 1RB Mid ANT1 Body Right**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.89 \text{ S/m}$; $\epsilon_r = 42.541$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.76, 8.73, 8.61) @782 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.144 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.19 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.179 W/kg

SAR(1 g) = 0.146 W/kg; SAR(10 g) = 0.112 W/kg

Smallest distance from peaks to all points 3 dB below = 18.2 mm

Ratio of SAR at M2 to SAR at M1 = 80%

Maximum value of SAR (measured) = 0.154 W/kg

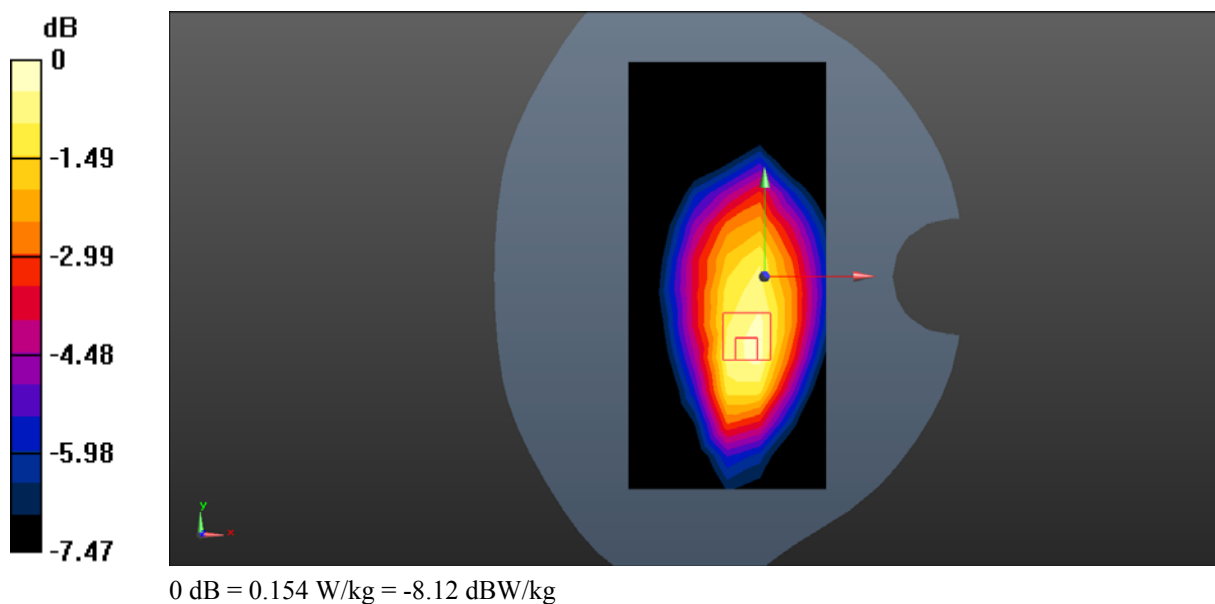

Test Plot 39#: LTE Band 13 1RB Mid ANT3 Head Left Cheek**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 782$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 42.541$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.76, 8.73, 8.61) @782 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.246 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.692 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.481 W/kg

SAR(1 g) = 0.296 W/kg; SAR(10 g) = 0.191 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 68.3%

Maximum value of SAR (measured) = 0.314 W/kg

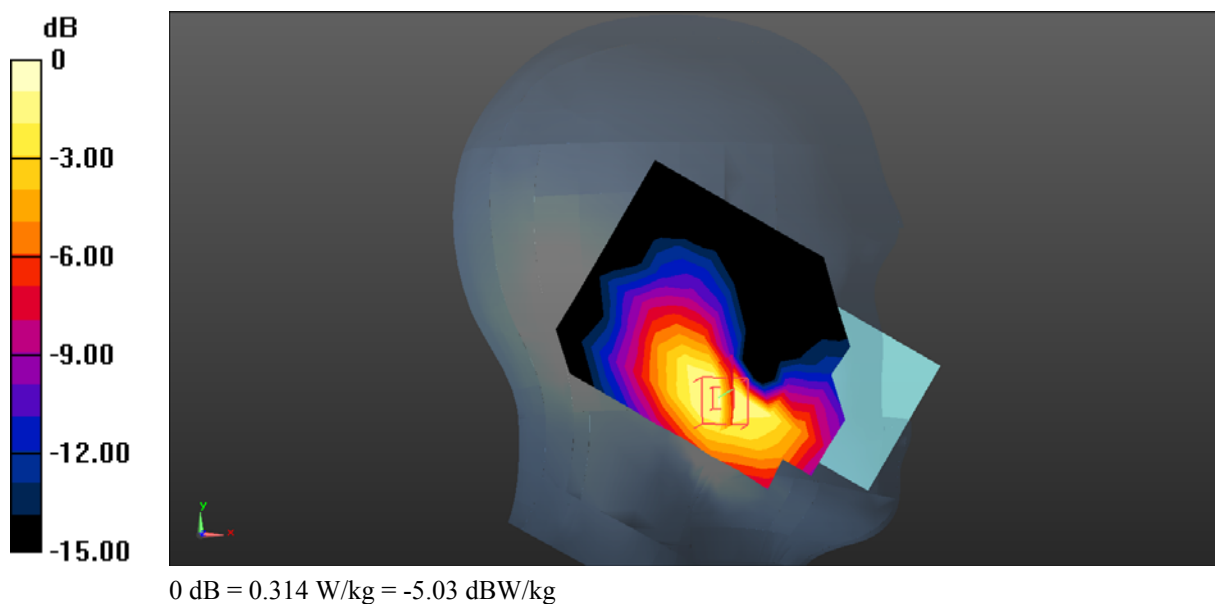


Test Plot 40#: LTE Band 13 1RB Mid ANT3 Body Left**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.89 \text{ S/m}$; $\epsilon_r = 42.541$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.76, 8.73, 8.61) @782 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

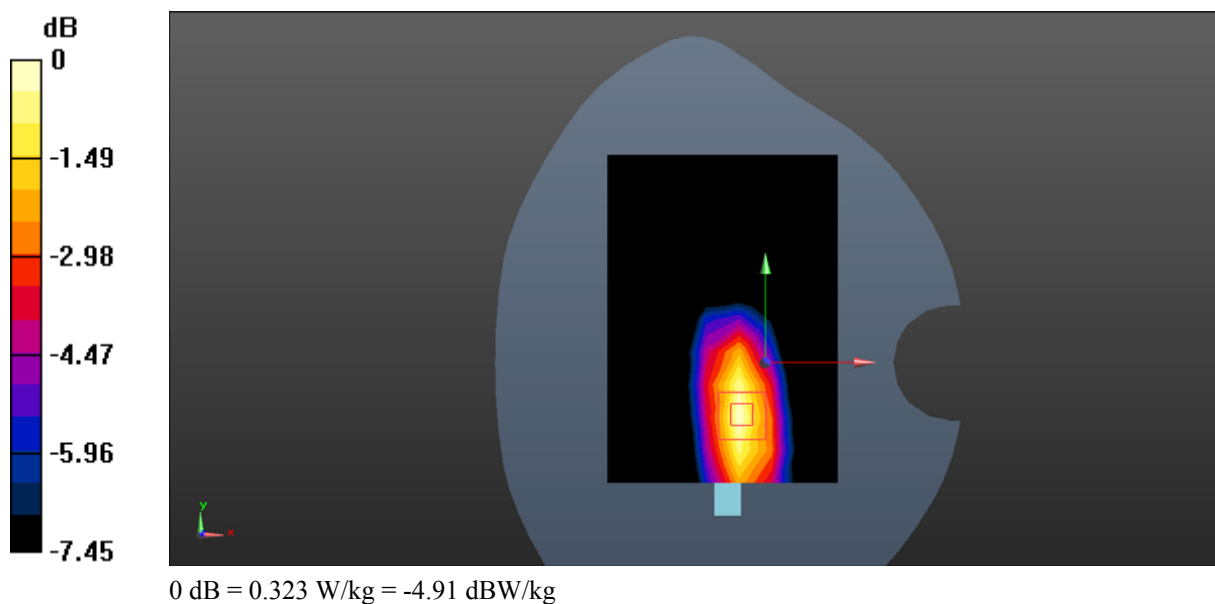Area Scan (8x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.320 W/kg **Zoom Scan (5x5x7) /Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 16.09 V/m ; Power Drift = 0.00 dB Peak SAR (extrapolated) = 0.401 W/kg **SAR(1 g) = 0.302 W/kg ; SAR(10 g) = 0.216 W/kg** Smallest distance from peaks to all points 3 dB below = 13.2 mm Ratio of SAR at M2 to SAR at M1 = 78.5% Maximum value of SAR (measured) = 0.323 W/kg 

Test Plot 41#: LTE Band 41 1RB Mid ANT2 Head Left Cheek**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used: $f = 2593$ MHz; $\sigma = 1.894$ S/m; $\epsilon_r = 39.574$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.32, 6.29, 6.21) @2593 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.196 W/kg

Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.240 W/kg

SAR(1 g) = 0.185 W/kg; SAR(10 g) = 0.124 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 79.5%

Maximum value of SAR (measured) = 0.197 W/kg

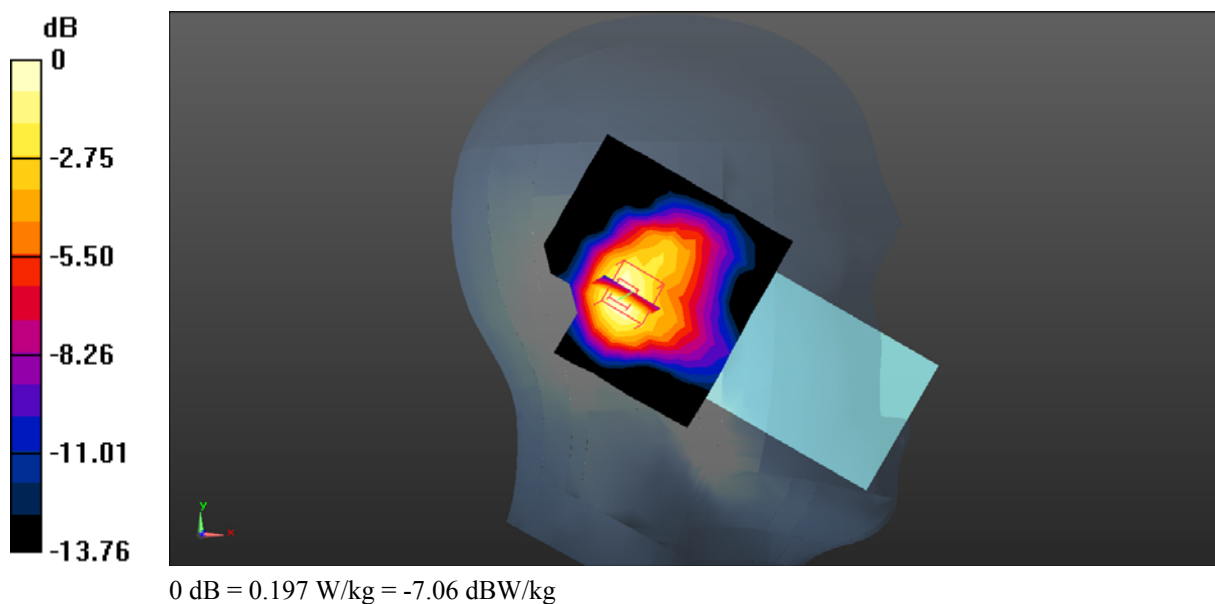

Test Plot 42#: LTE Band 41 1RB Mid ANT2 Body Bottom**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
 Medium parameters used: $f = 2593$ MHz; $\sigma = 1.894$ S/m; $\epsilon_r = 39.574$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.32, 6.29, 6.21) @2593 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (9x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.796 W/kg

Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.28 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.943 W/kg

SAR(1 g) = 0.690 W/kg; SAR(10 g) = 0.425 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 74.2%

Maximum value of SAR (measured) = 0.756 W/kg

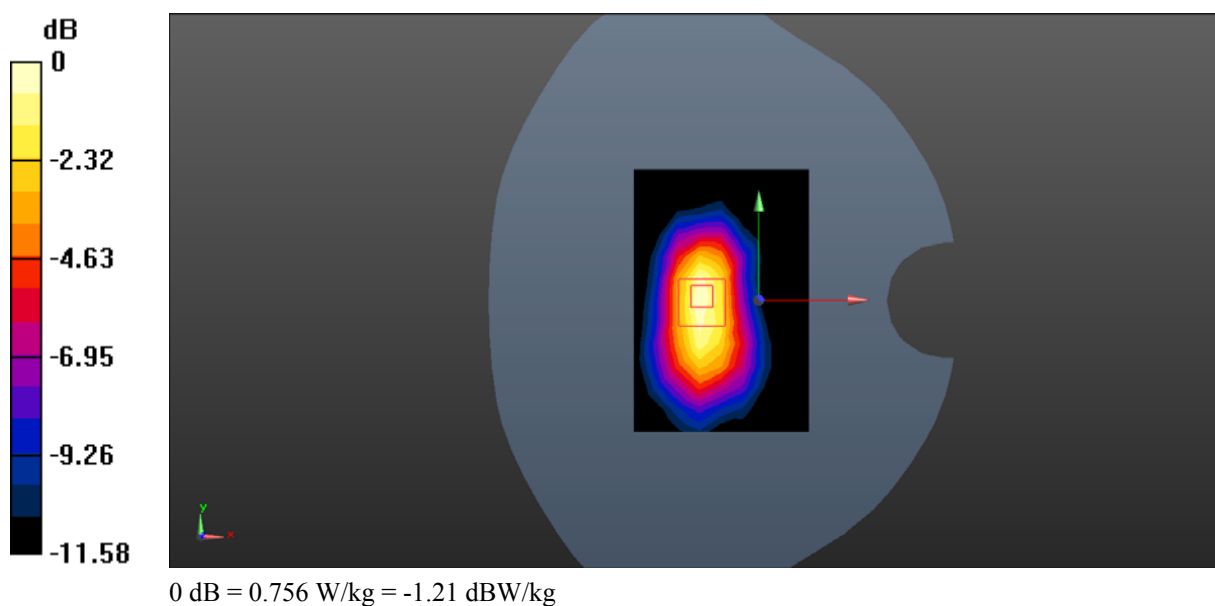

Test Plot 43#: LTE Band 41 1RB Mid ANT5 Head Right Tilt**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2593$ MHz; $\sigma = 1.894$ S/m; $\epsilon_r = 39.574$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.32, 6.29, 6.21) @2593 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.193 W/kg

Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.024 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 0.314 W/kg

SAR(1 g) = 0.181 W/kg; SAR(10 g) = 0.099 W/kg

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 63.4%

Maximum value of SAR (measured) = 0.212 W/kg

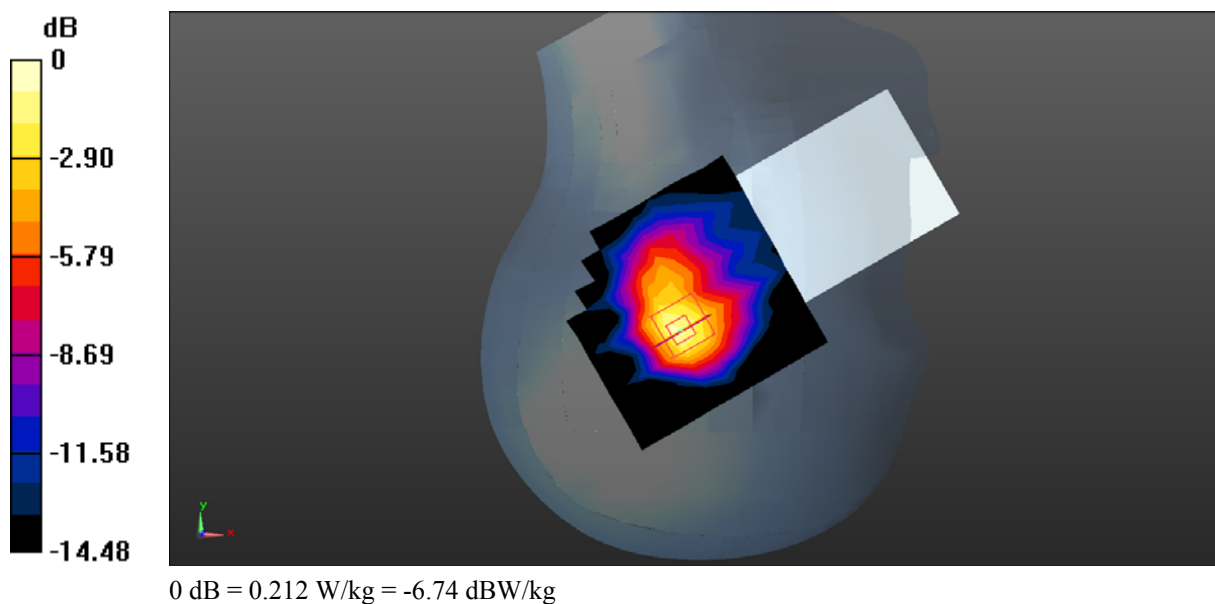

Test Plot 44#: LTE Band 41 1RB Mid ANT5 Body Top**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
 Medium parameters used: $f = 2593$ MHz; $\sigma = 1.898$ S/m; $\epsilon_r = 39.531$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.32, 6.29, 6.21) @2593 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (9x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.105 W/kg

Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.361 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 0.154 W/kg

SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.060 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 68.4%

Maximum value of SAR (measured) = 0.115 W/kg

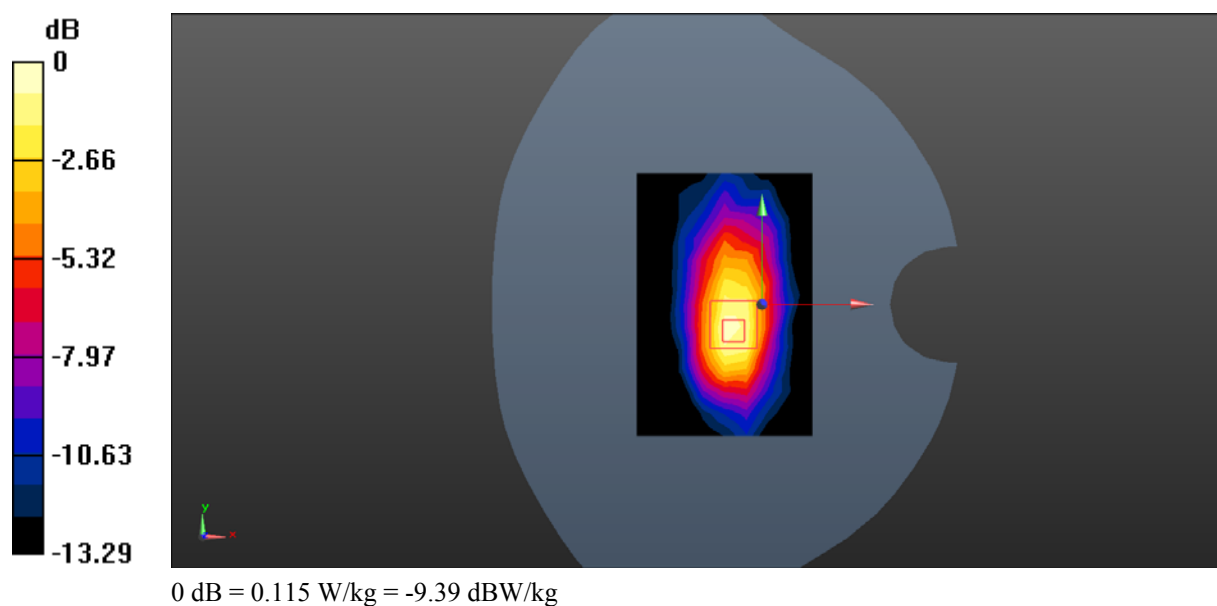

Test Plot 45#: LTE Band 66 1RB Mid ANT2 Head Left Cheek**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.959$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.13, 7.09, 7) @1745 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.266 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.320 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.308 W/kg

SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.194 W/kg

Smallest distance from peaks to all points 3 dB below = 15.2 mm

Ratio of SAR at M2 to SAR at M1 = 83%

Maximum value of SAR (measured) = 0.267 W/kg

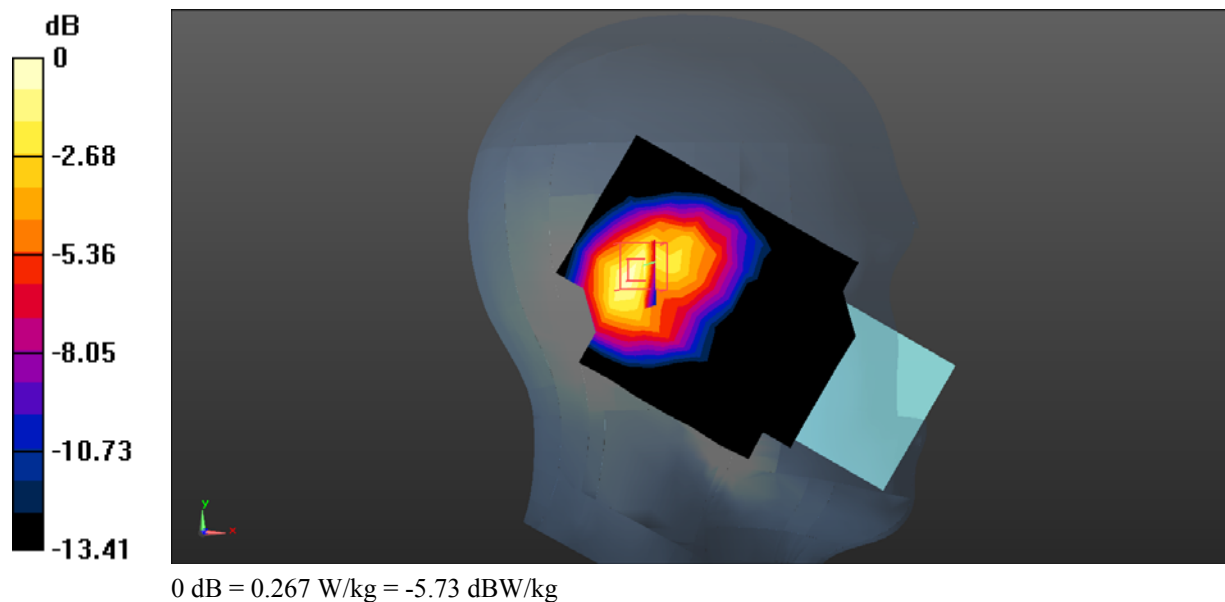

Test Plot 46#: LTE Band 66 1RB Mid ANT2 Body Bottom**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.959$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.13, 7.09, 7) @1745 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.571 W/kg

Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.14 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.795 W/kg

SAR(1 g) = 0.571 W/kg; SAR(10 g) = 0.380 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 74%

Maximum value of SAR (measured) = 0.633 W/kg

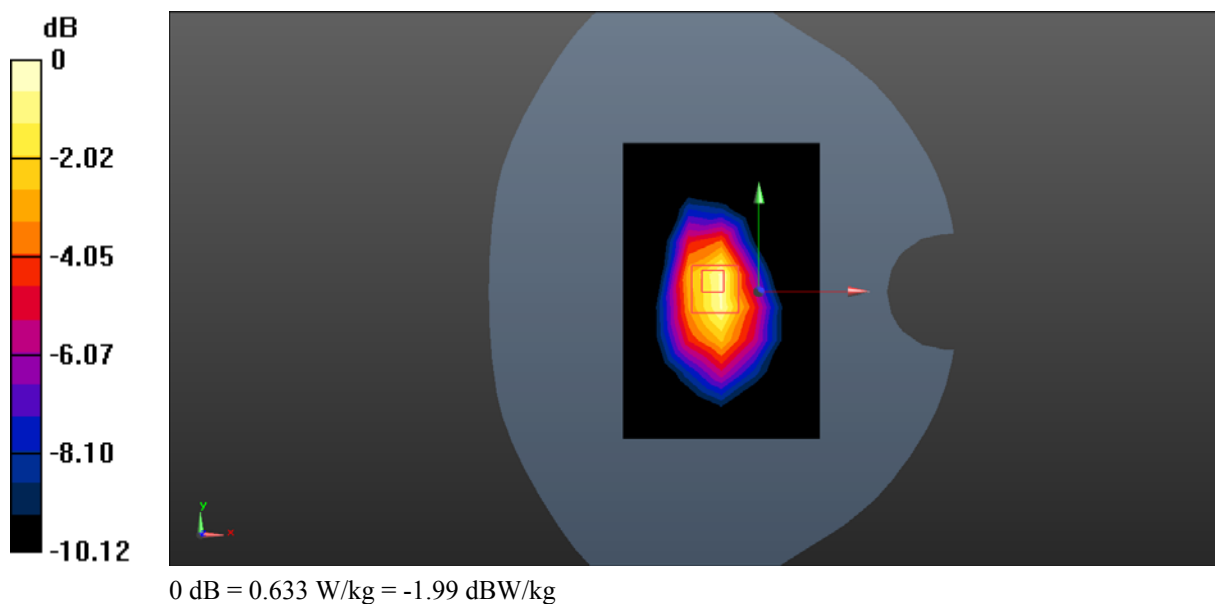

Test Plot 47#: LTE Band 66 1RB Mid ANT5 Head Right Tilt**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.959$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.13, 7.09, 7) @1745 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.300 W/kg

Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.02 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.495 W/kg

SAR(1 g) = 0.290 W/kg; SAR(10 g) = 0.167 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 64.6%

Maximum value of SAR (measured) = 0.339 W/kg

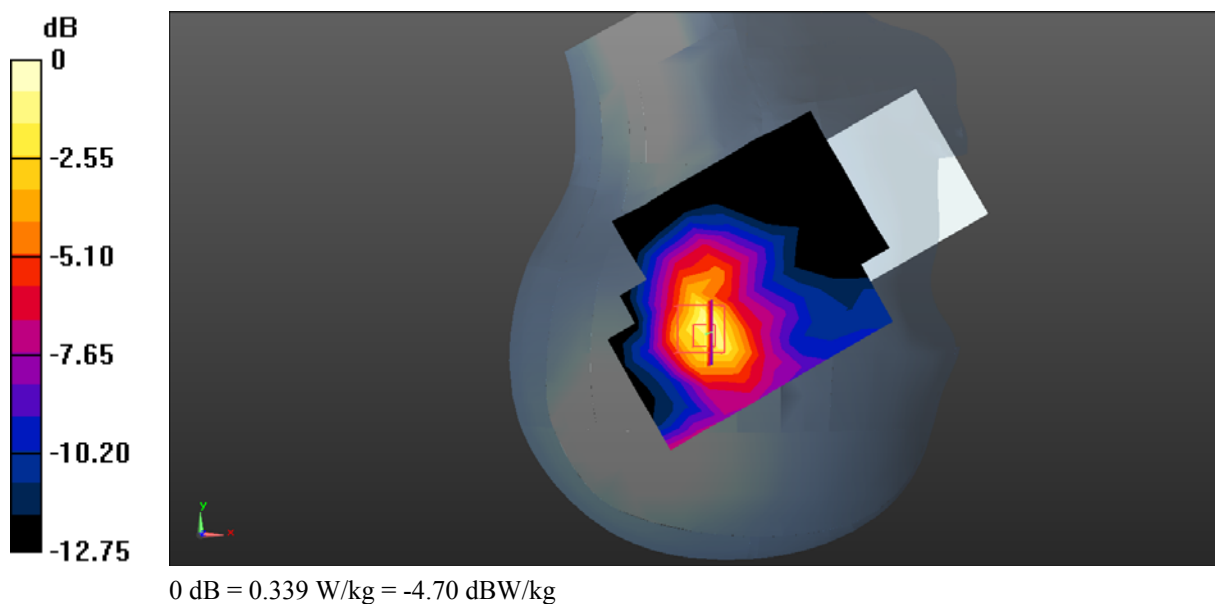

Test Plot 48#: LTE Band 66 1RB Mid ANT5 Body Top**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.959$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.13, 7.09, 7) @1745 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.212 W/kg

Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.380 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.274 W/kg

SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.121 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 73.1%

Maximum value of SAR (measured) = 0.216 W/kg

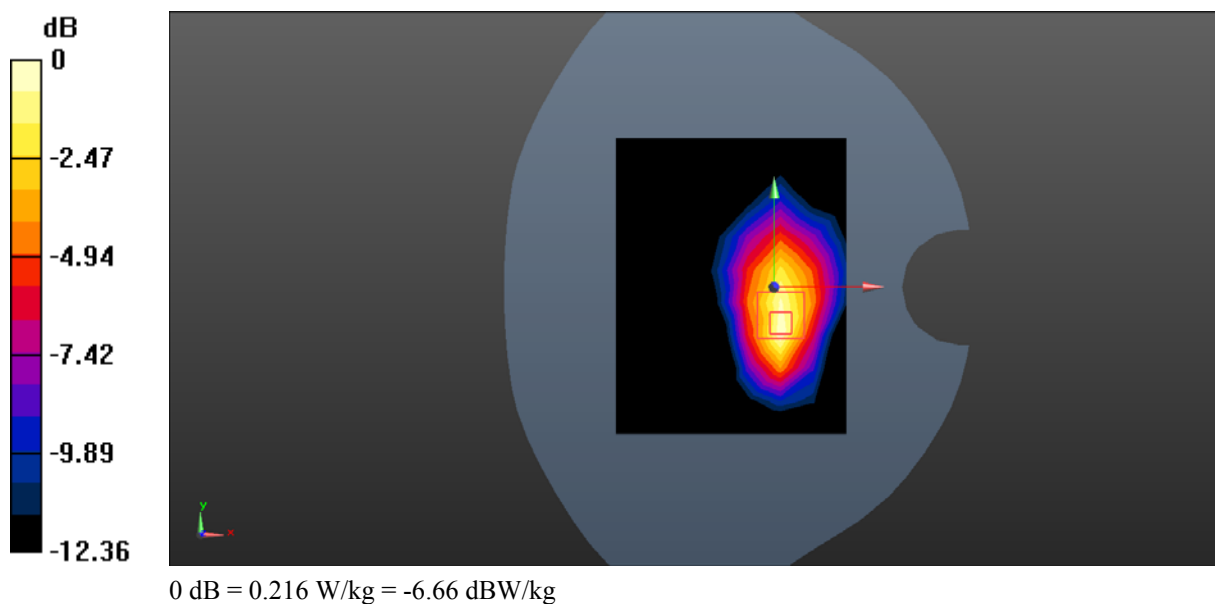

Test Plot 49#: WLAN 802.11b Mid ANT6 Head Left Tilt**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: 2.4G DTS (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.805$ S/m; $\epsilon_r = 40.17$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.49, 6.46, 6.38) @2437 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.331 W/kg

Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.956 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.528 W/kg

SAR(1 g) = 0.309 W/kg; SAR(10 g) = 0.168 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 62.5%

Maximum value of SAR (measured) = 0.357 W/kg

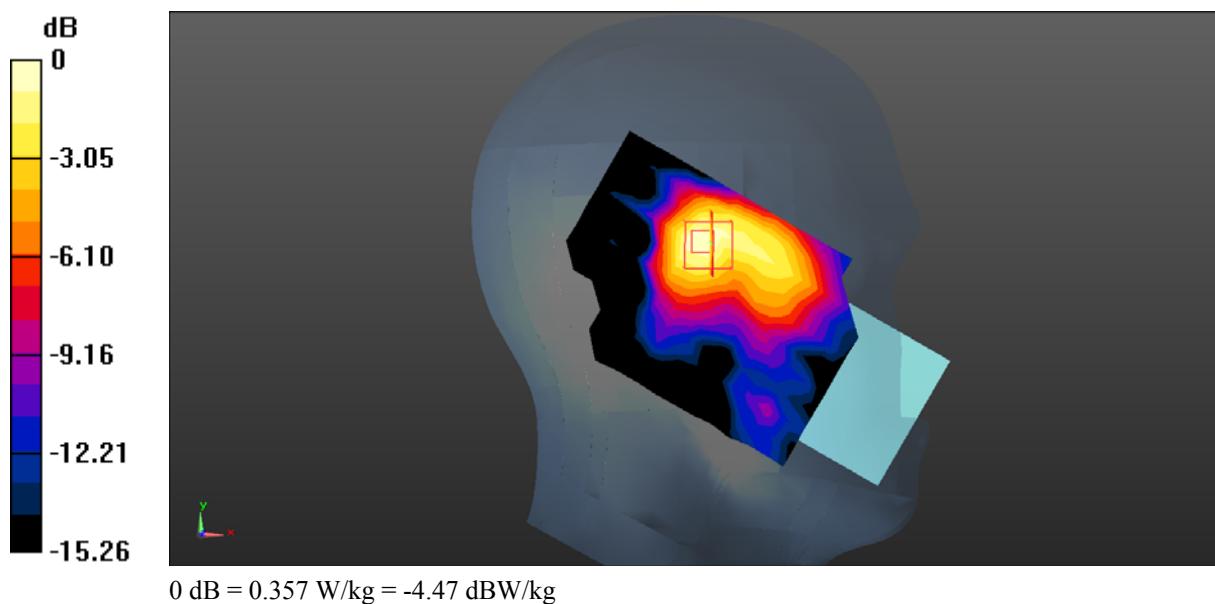

Test Plot 50#: WLAN 802.11b Mid ANT6 Body Top**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: 2.4G DTS (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.805$ S/m; $\epsilon_r = 40.17$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.49, 6.46, 6.38) @2437 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (9x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.101 W/kg

Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.432 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.124 W/kg

SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.059 W/kg

Smallest distance from peaks to all points 3 dB below = 11 mm

Ratio of SAR at M2 to SAR at M1 = 74.6%

Maximum value of SAR (measured) = 0.103 W/kg

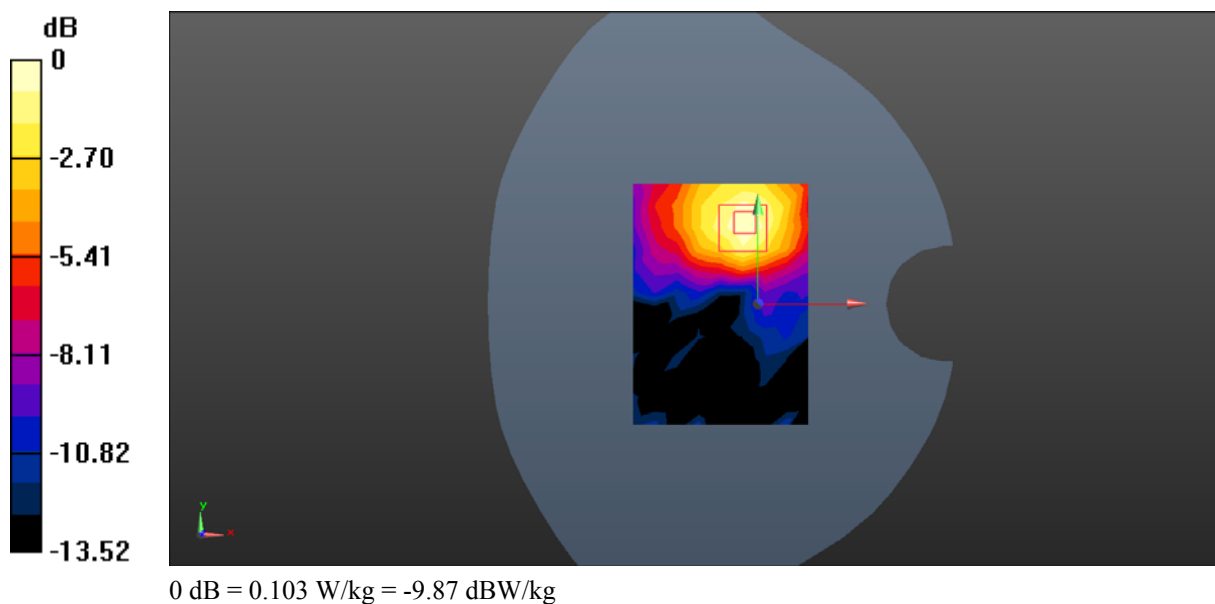

Test Plot 51#: WLAN 802.11b Mid ANT13 Head Right Tilt**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: 2.4G DTS (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.816$ S/m; $\epsilon_r = 40.065$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.49, 6.46, 6.38) @2437 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.383 W/kg

Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.874 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 0.614 W/kg

SAR(1 g) = 0.342 W/kg; SAR(10 g) = 0.184 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 59.2%

Maximum value of SAR (measured) = 0.393 W/kg

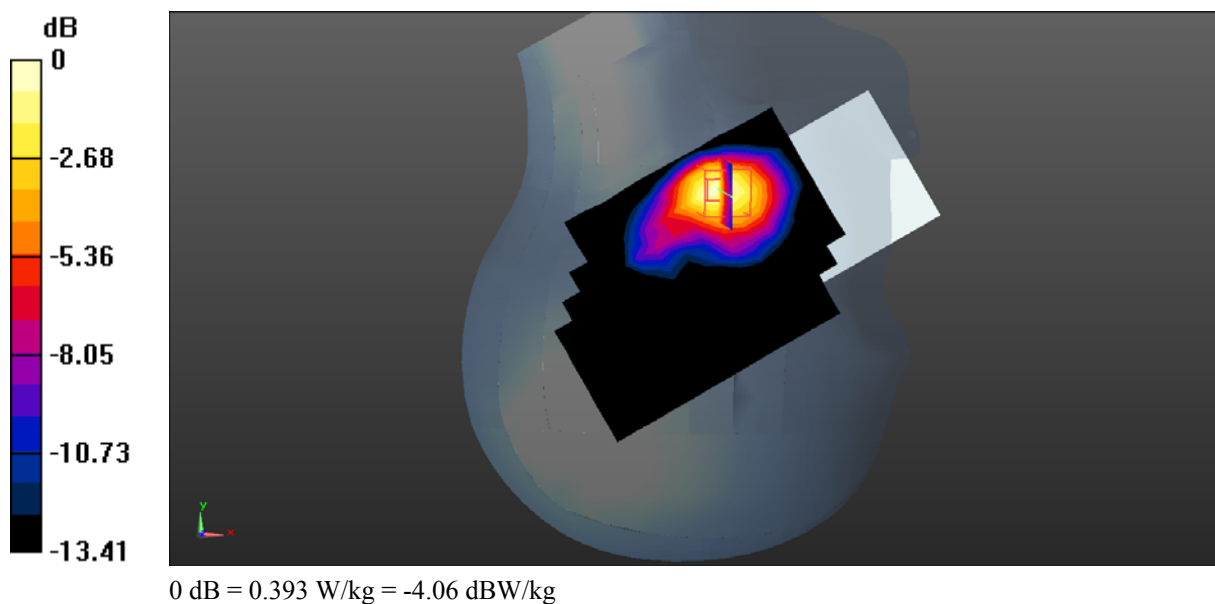

Test Plot 52#: WLAN 802.11b Mid ANT13 Body Right**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: 2.4G DTS (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.816$ S/m; $\epsilon_r = 40.065$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.49, 6.46, 6.38) @2437 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (9x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.174 W/kg

Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.902 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 0.236 W/kg

SAR(1 g) = 0.157 W/kg; SAR(10 g) = 0.097 W/kg

Smallest distance from peaks to all points 3 dB below = 10.4 mm

Ratio of SAR at M2 to SAR at M1 = 73.1%

Maximum value of SAR (measured) = 0.173 W/kg

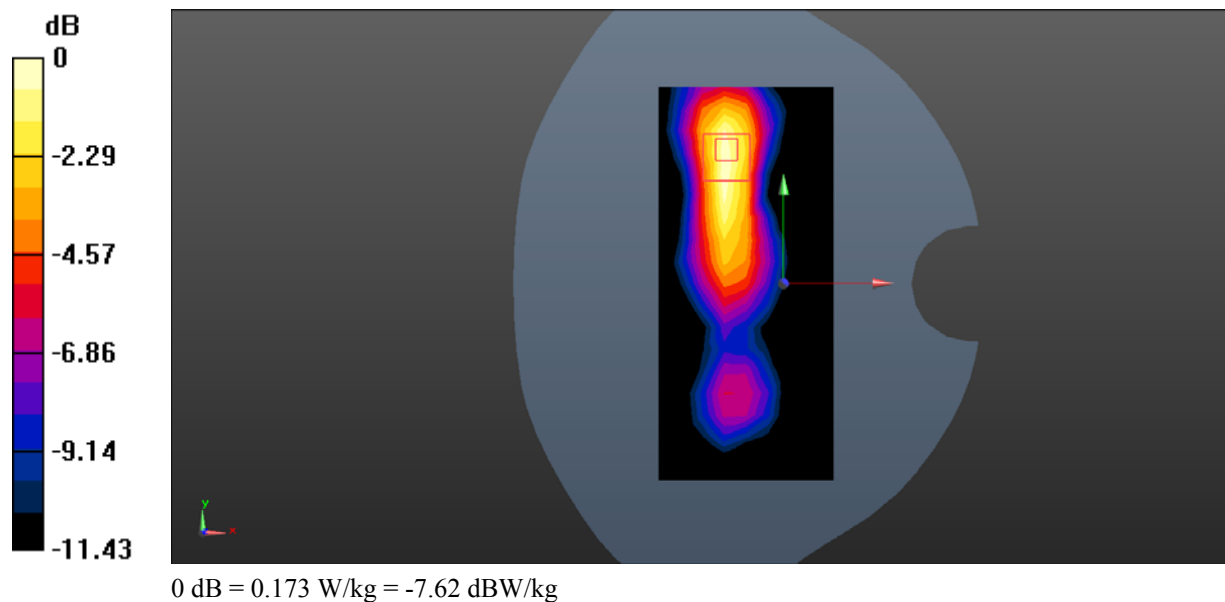

Test Plot 53#: WLAN 5.2G 802.11a Mid ANT6 Head Left Tilt**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.693$ S/m; $\epsilon_r = 37.487$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.11, 5.08, 5.02) @ 5200 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.327 W/kg

Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.495 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.787 W/kg

SAR(1 g) = 0.320 W/kg; SAR(10 g) = 0.121 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 73.2%

Maximum value of SAR (measured) = 0.410 W/kg

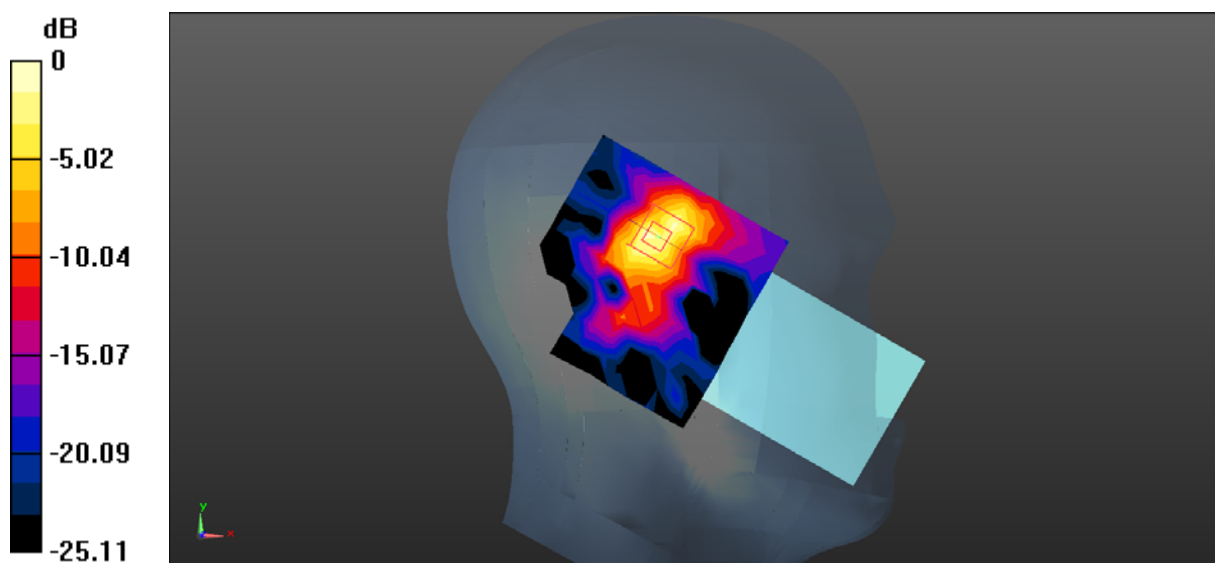

0 dB = 0.410 W/kg = -3.87 dBW/kg

Test Plot 54#: WLAN 5.2G 802.11a Mid ANT6 Body Top**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.693$ S/m; $\epsilon_r = 37.487$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.11, 5.08, 5.02) @ 5200 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (10x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0809 W/kg

Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.069 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 0.224 W/kg

SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.039 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 71.9%

Maximum value of SAR (measured) = 0.113 W/kg

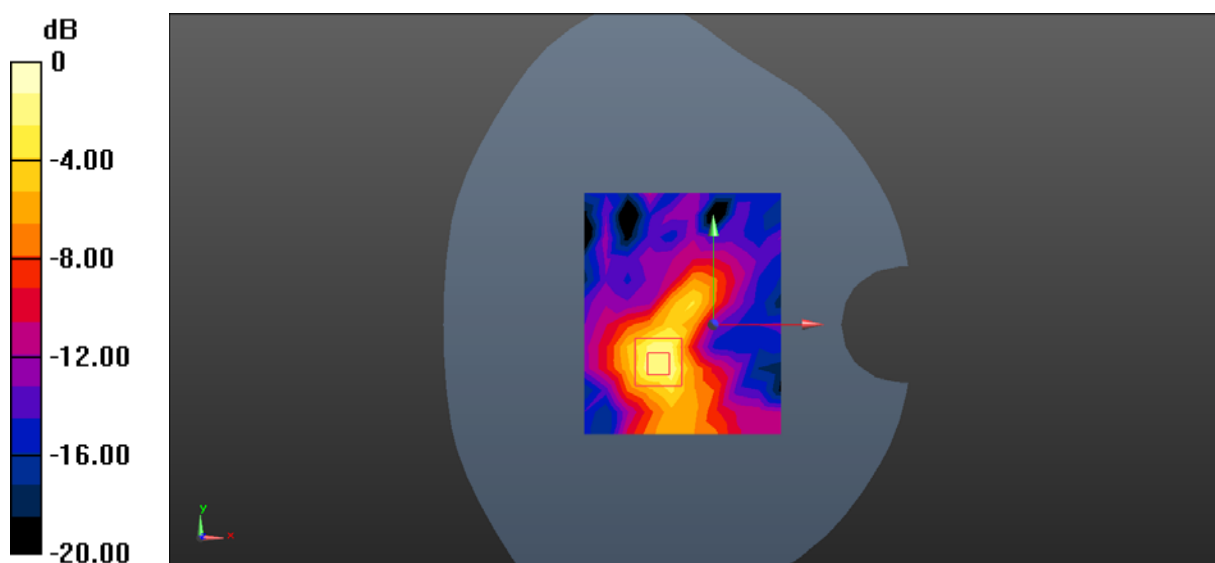

0 dB = 0.113 W/kg = -9.47 dBW/kg

Test Plot 55#: WLAN 5.3G 802.11a Mid ANT6 Head Left Tilt**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5300$ MHz; $\sigma = 4.907$ S/m; $\epsilon_r = 36.532$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.11, 5.08, 5.02) @ 5300 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.303 W/kg

Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.822 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.715 W/kg

SAR(1 g) = 0.281 W/kg; SAR(10 g) = 0.113 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 71.6%

Maximum value of SAR (measured) = 0.371 W/kg

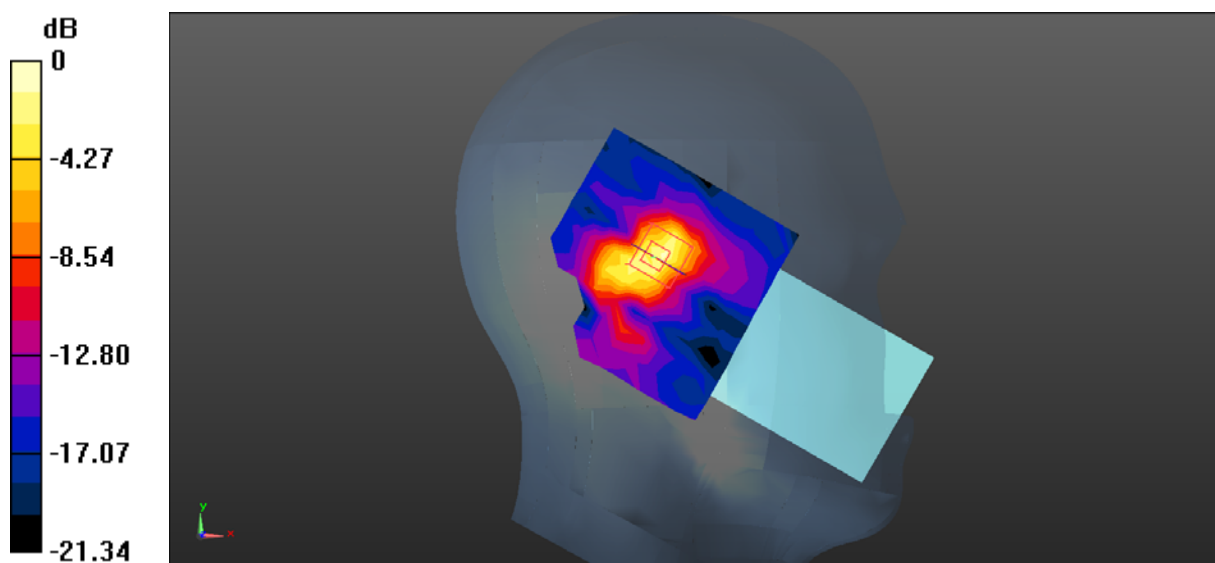

0 dB = 0.371 W/kg = -4.31 dBW/kg

Test Plot 56#: WLAN 5.3G 802.11a Mid ANT6 Body Top**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5300$ MHz; $\sigma = 4.907$ S/m; $\epsilon_r = 36.532$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.11, 5.08, 5.02) @ 5300 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (9x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.106 W/kg

Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.926 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.238 W/kg

SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.046 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 91.8%

Maximum value of SAR (measured) = 0.130 W/kg

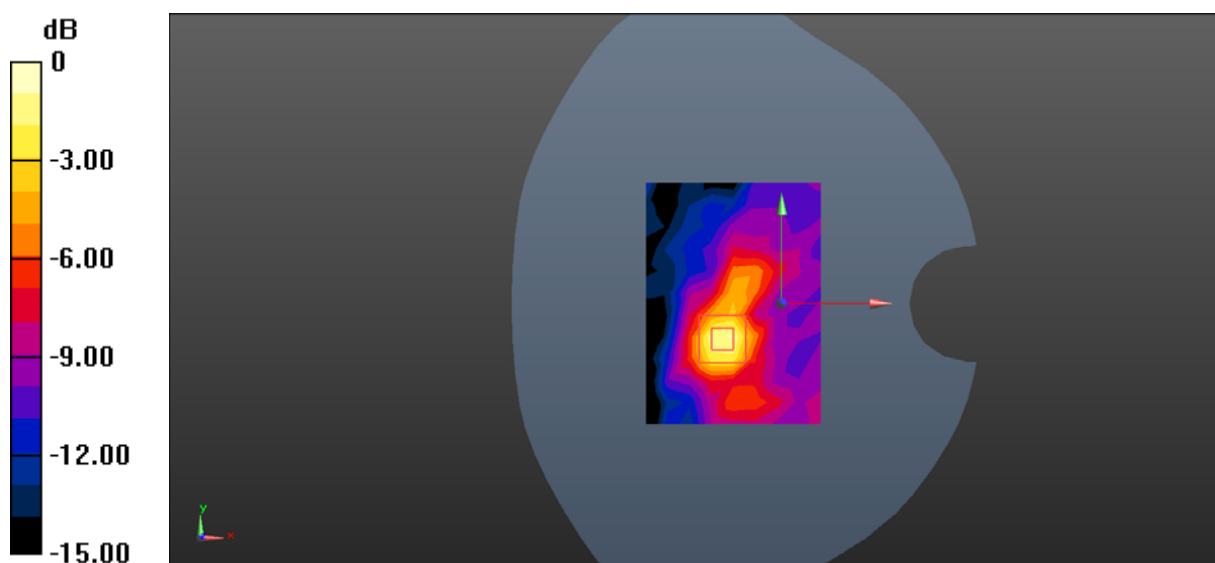

0 dB = 0.130 W/kg = -8.86 dBW/kg

Test Plot 57#: WLAN 5.6G 802.11a Mid ANT6 Head Left Tilt**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 5580$ MHz; $\sigma = 5.018$ S/m; $\epsilon_r = 35.999$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.73, 4.71, 4.65) @ 5580 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.697 W/kg

Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.474 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.393 W/kg; SAR(10 g) = 0.154 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 67.7%

Maximum value of SAR (measured) = 0.659 W/kg

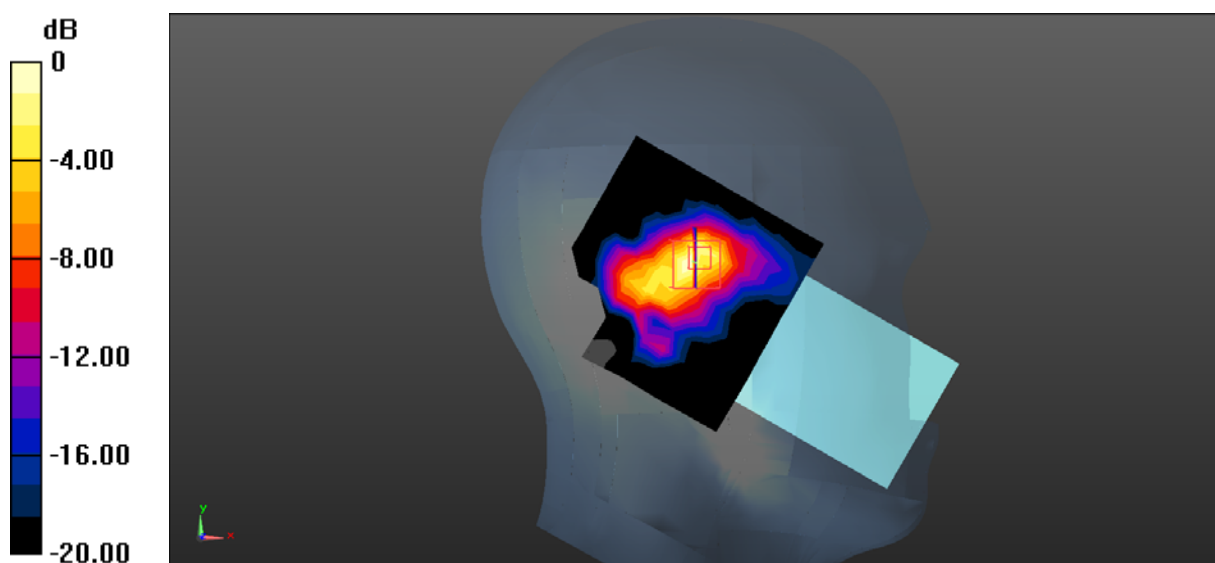

0 dB = 0.659 W/kg = -1.81 dBW/kg

Test Plot 58#: WLAN 5.6G 802.11a Mid ANT6 Body Top**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 5580$ MHz; $\sigma = 5.018$ S/m; $\epsilon_r = 35.999$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.73, 4.71, 4.65) @ 5580 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.209 W/kg

Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.723 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.966 W/kg

SAR(1 g) = 0.199 W/kg; SAR(10 g) = 0.082 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 74.9%

Maximum value of SAR (measured) = 0.237 W/kg

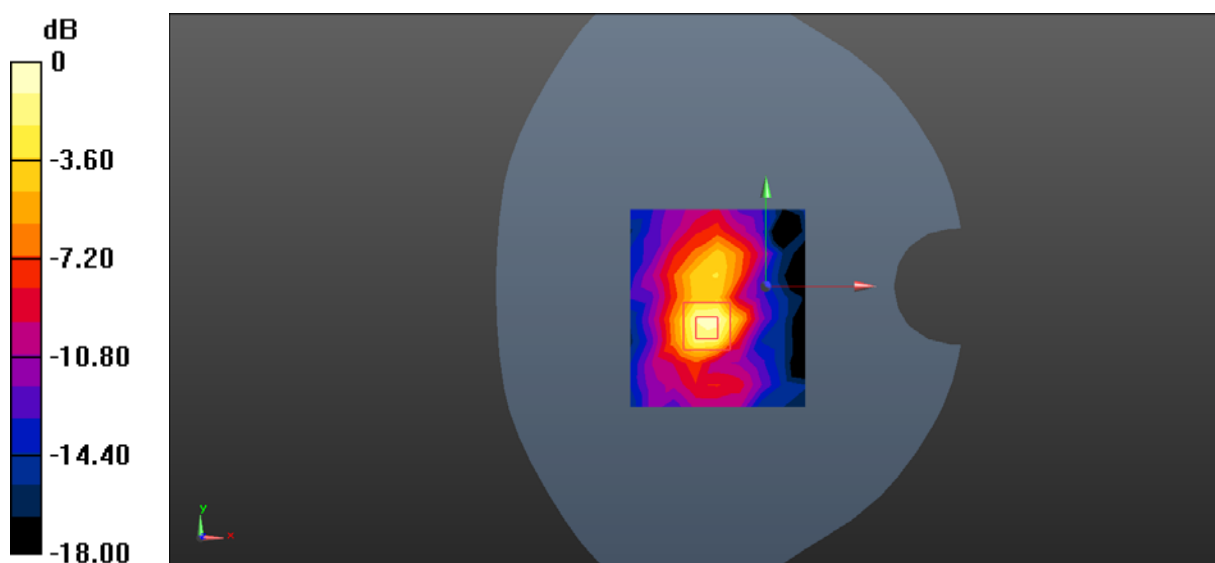

0 dB = 0.237 W/kg = -6.25 dBW/kg

Test Plot 59#: WLAN 5.8G 802.11a Mid ANT6 Head Left Tilt**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 5785 \text{ MHz}$; $\sigma = 5.231 \text{ S/m}$; $\epsilon_r = 36.001$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.78, 4.76, 4.7) @ 5785 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.333 W/kg

Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.393 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.761 W/kg

SAR(1 g) = 0.310 W/kg; SAR(10 g) = 0.120 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 68.2%

Maximum value of SAR (measured) = 0.372 W/kg

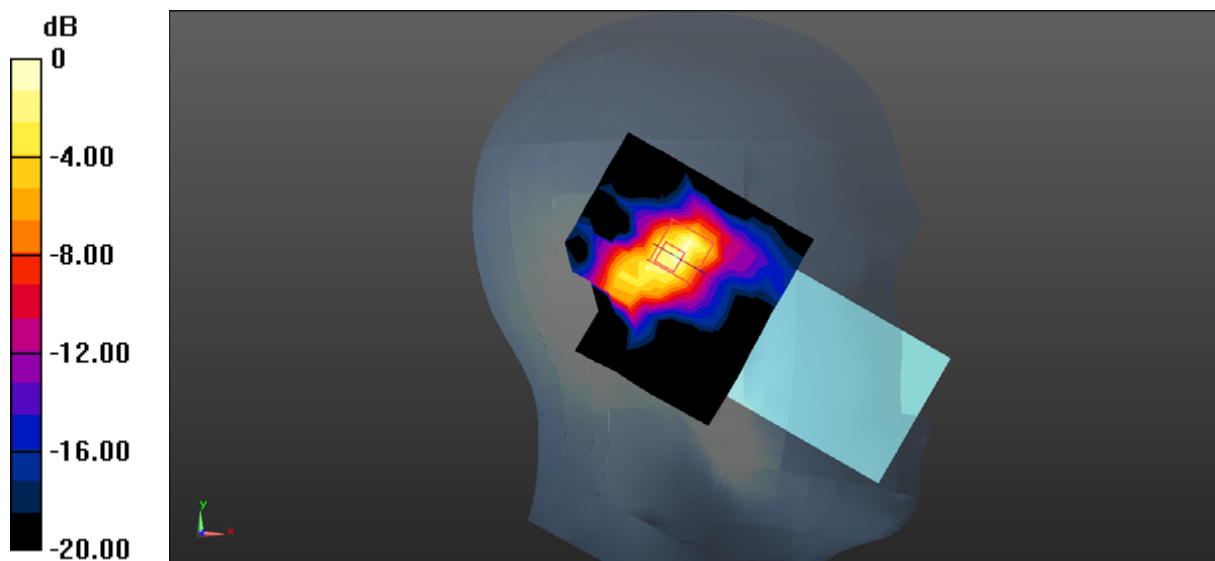

0 dB = 0.372 W/kg = -4.29 dBW/kg

Test Plot 60#: WLAN 5.8G 802.11a Mid ANT6 Body Top**DUT: Mobile Phone; Type: CN7c; Serial: 3DEP-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 5785$ MHz; $\sigma = 5.231$ S/m; $\epsilon_r = 36.001$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.78, 4.76, 4.7) @ 5785 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (10x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.217 W/kg

Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.878 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 0.512 W/kg

SAR(1 g) = 0.196 W/kg; SAR(10 g) = 0.076 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 73.4%

Maximum value of SAR (measured) = 0.234 W/kg

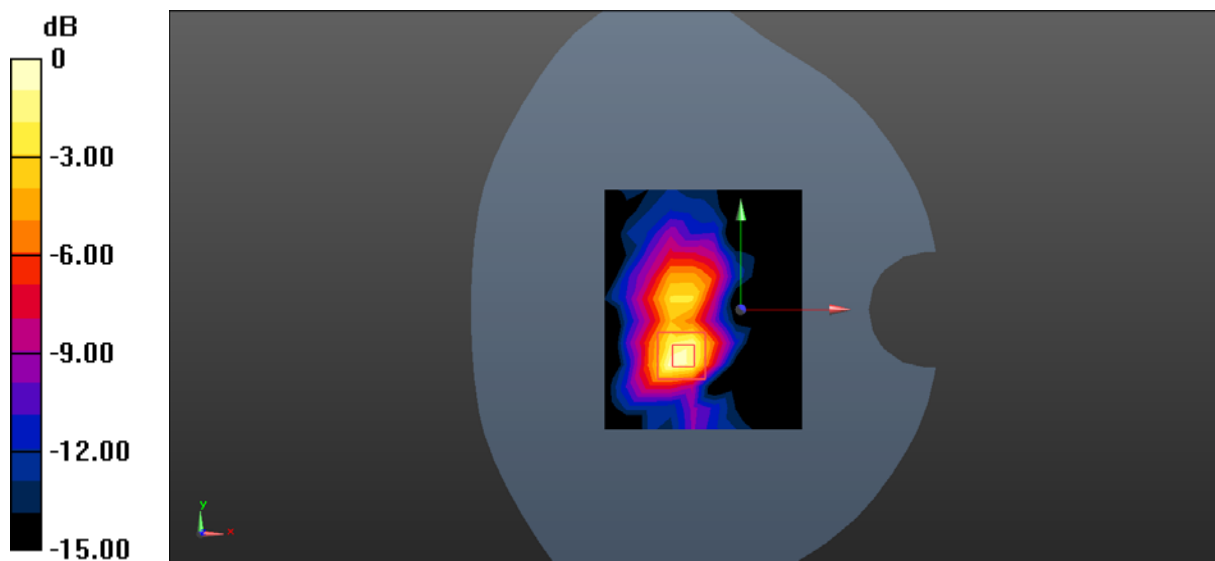

0 dB = 0.234 W/kg = -6.31 dBW/kg