

Plot: 51#

DUT: Mobile Phone; Type: CN7c; Serial: 3DFP-2

Communication System: UID 0, TDD-5G NR (0); Frequency: 3840 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3840$ MHz; $\sigma = 3.36$ S/m; $\epsilon_r = 36.74$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.18, 6.18, 6.18) @ 3840 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Head Left Tilt/Ant6 FR1 n77 Upper 1RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.337 W/kg

Head Left Tilt/Ant6 FR1 n77 Upper 1RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.218 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.557 W/kg

SAR(1 g) = 0.187 W/kg; SAR(10 g) = 0.050 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 69.8%

Maximum value of SAR (measured) = 0.431 W/kg

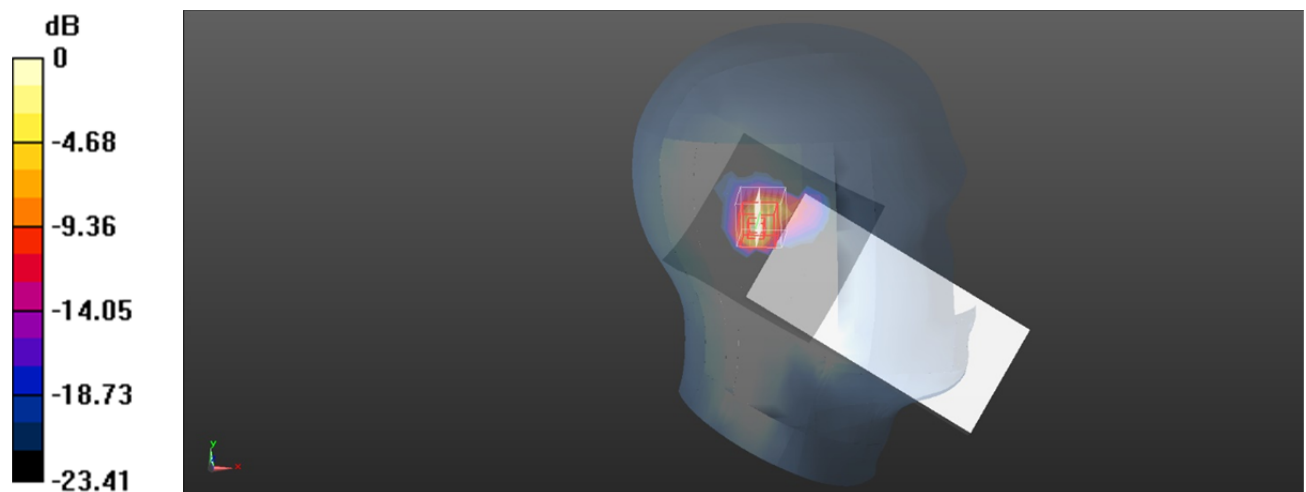

0 dB = 0.431 W/kg = -3.66 dBW/kg

Plot: 52#

DUT: Mobile Phone; Type: CN7c; Serial: 3DFP-2

Communication System: UID 0, TDD-5G NR (0); Frequency: 3840 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3840$ MHz; $\sigma = 3.36$ S/m; $\epsilon_r = 36.74$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.18, 6.18, 6.18) @ 3840 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Top/Ant6 FR1 n77 Upper 1RB Mid/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.162 W/kg

Body Top/Ant6 FR1 n77 Upper 1RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.882 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 0.325 W/kg

SAR(1 g) = 0.075 W/kg; SAR(10 g) = 0.022 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 71%

Maximum value of SAR (measured) = 0.153 W/kg

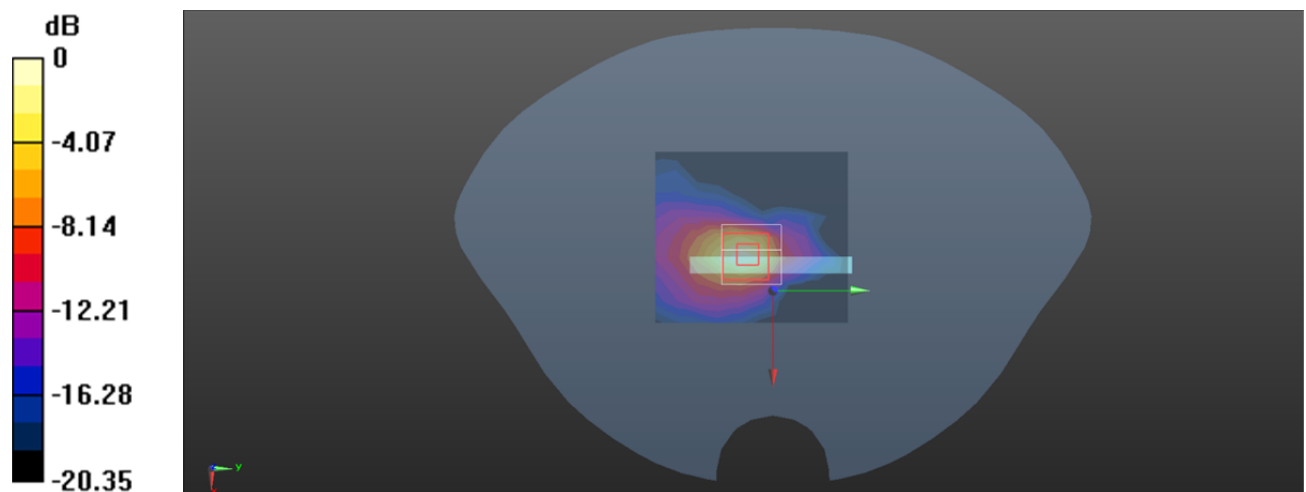

Plot: 53#

DUT: Mobile Phone; Type: CN7c; Serial: 3DFP-2

Communication System: UID 0, TDD-5G NR (0); Frequency: 3840 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3840$ MHz; $\sigma = 3.324$ S/m; $\epsilon_r = 37.211$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.18, 6.18, 6.18) @ 3840 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Head Left Cheek/Ant3 FR1 n77 Upper 1RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.569 W/kg

Head Left Cheek/Ant3 FR1 n77 Upper 1RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.378 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.397 W/kg; SAR(10 g) = 0.138 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 73%

Maximum value of SAR (measured) = 0.796 W/kg

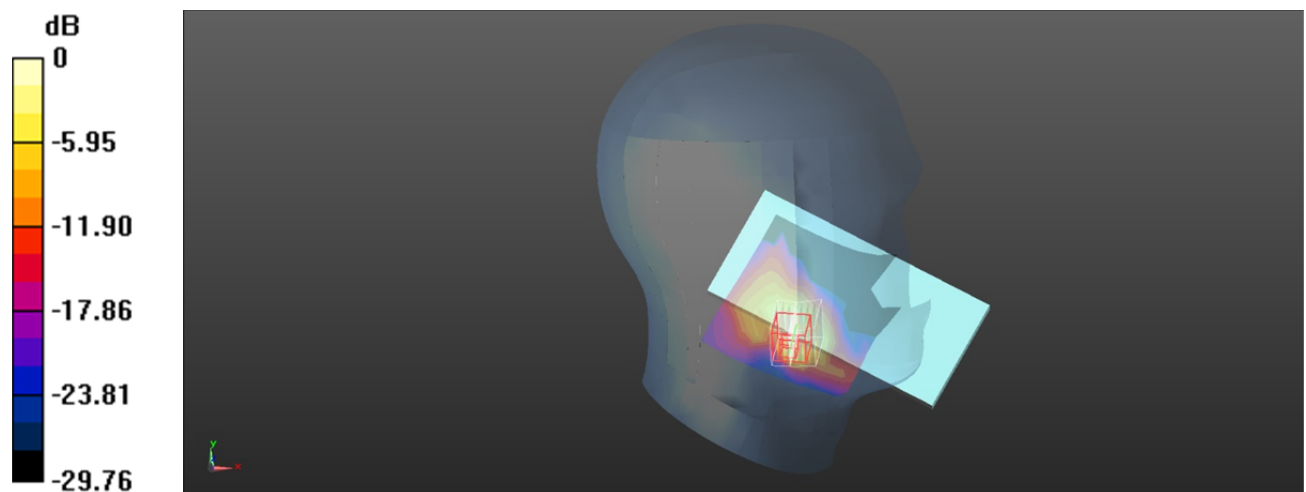

0 dB = 0.796 W/kg = -0.99 dBW/kg

Plot: 54#

DUT: Mobile Phone; Type: CN7c; Serial: 3DFP-2

Communication System: UID 0, TDD-5G NR (0); Frequency: 3840 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3840$ MHz; $\sigma = 3.324$ S/m; $\epsilon_r = 37.211$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.18, 6.18, 6.18) @ 3840 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Left/Ant3 FR1 n77 Upper 1RB Mid/Area Scan (9x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.336 W/kg

Body Left/Ant3 FR1 n77 Upper 1RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.209 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.418 W/kg

SAR(1 g) = 0.178 W/kg; SAR(10 g) = 0.056 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 72.7%

Maximum value of SAR (measured) = 0.351 W/kg

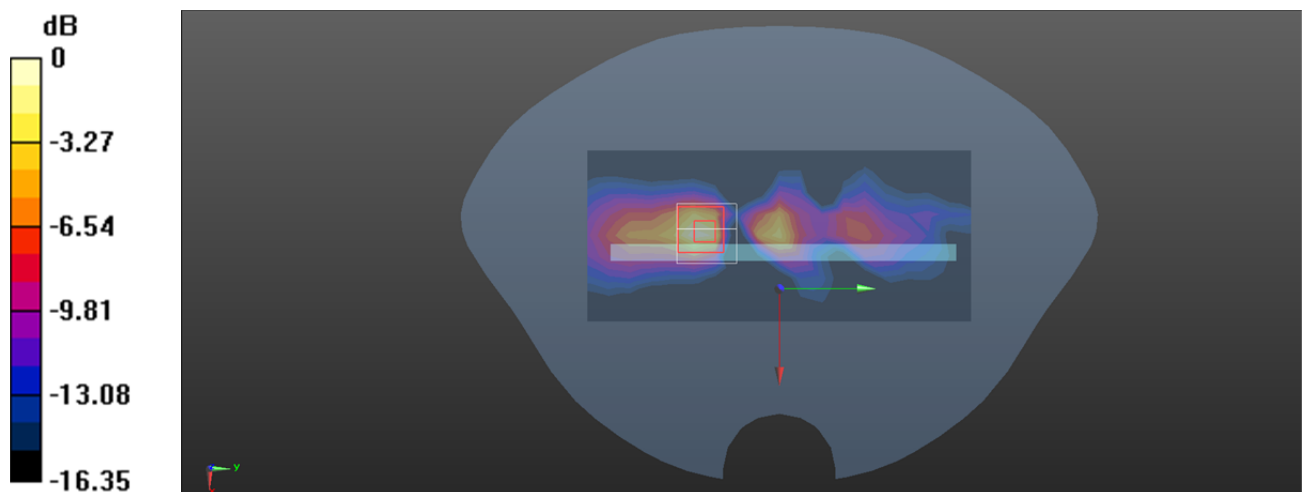

0 dB = 0.351 W/kg = -4.55 dBW/kg

Plot: 55#

DUT: Mobile Phone; Type: CN7c; Serial: 3DFP-2

Communication System: UID 0, TDD-5G NR (0); Frequency: 3840 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3840$ MHz; $\sigma = 3.324$ S/m; $\epsilon_r = 37.211$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.18, 6.18, 6.18) @ 3840 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Head Left Cheek/Ant0 FR1 n77 Upper 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.574 W/kg

Head Left Cheek/Ant0 FR1 n77 Upper 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.675 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.677 W/kg

SAR(1 g) = 0.280 W/kg; SAR(10 g) = 0.078 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 69.8%

Maximum value of SAR (measured) = 0.583 W/kg

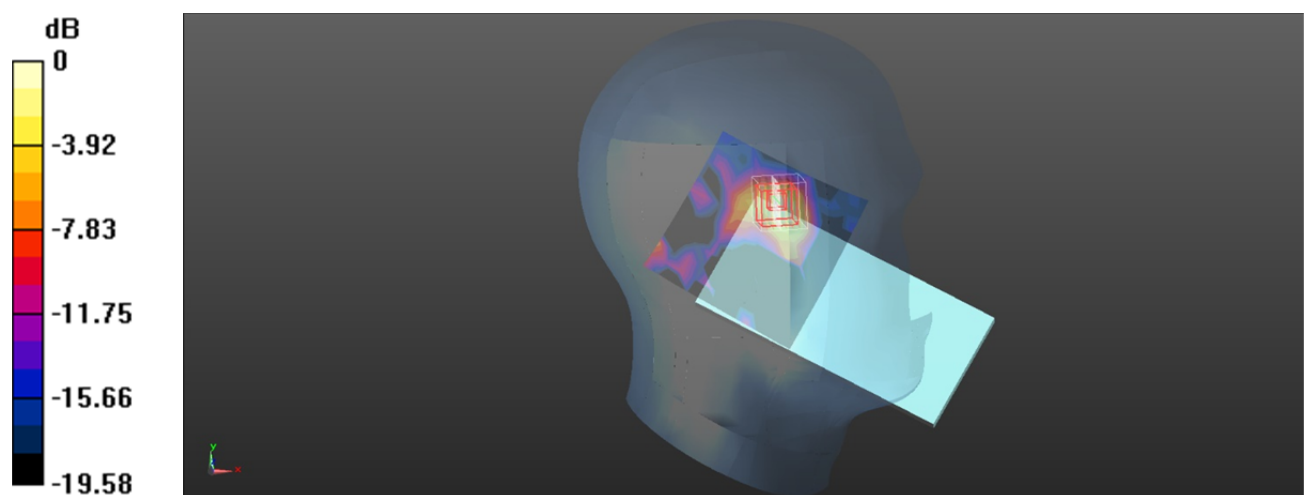

0 dB = 0.583 W/kg = -2.34 dBW/kg

Plot: 56#

DUT: Mobile Phone; Type: CN7c; Serial: 3DFP-2

Communication System: UID 0, TDD-5G NR (0); Frequency: 3840 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3840$ MHz; $\sigma = 3.324$ S/m; $\epsilon_r = 37.211$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.18, 6.18, 6.18) @ 3840 MHz; Calibrated: 12/11/2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/28/2025
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Front/Ant0 FR1 n77 Upper 1RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0851 W/kg

Body Front/Ant0 FR1 n77 Upper 1RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.559 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.261 W/kg

SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.00907 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 14 mm)

Ratio of SAR at M2 to SAR at M1 = 67.5%

Maximum value of SAR (measured) = 0.0834 W/kg

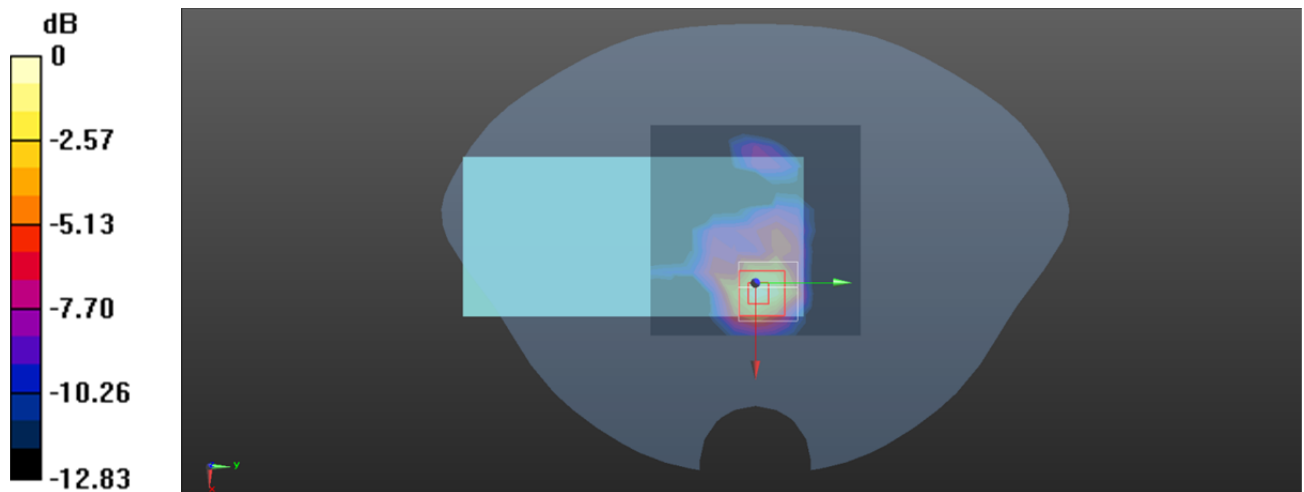

0 dB = 0.0834 W/kg = -10.79 dBW/kg