

TEST REPORT

Applicant: TECNO MOBILITY LIMITED

Address: FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE
19-25 SHAN MEI STREET FOTAN NT HONGKONG

Product Name: Mobile Phone

FCC ID: 2ADYY-CN7C

Standard(s): 47 CFR Part 15, Subpart C(15.247)
ANSI C63.10-2020
KDB 558074 D01 15.247 Meas Guidance v05r02

Report Number: 2502Z01325E-RF-00B

Report Date: 2025/12/27

The above device has been tested and found compliant with the requirement of the relevant standards by Bay Area Compliance Laboratories Corp. (Dongguan).

Alice Tan

Pedro Yun

Reviewed By: Alice Tan

Title: RF Engineer

Approved By: Pedro Yun

Title: RF Supervisor

Bay Area Compliance Laboratories Corp. (Dongguan)
No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China

Tel: +86-769-86858888

Fax: +86-769-86858891

www.baclcorp.com.cn

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. Each test item follows the test standard(s) without deviation.

CONTENTS

DOCUMENT REVISION HISTORY	4
1. GENERAL INFORMATION	5
1.1 GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST.....	5
1.2 ACCESSORY INFORMATION	5
1.3 ANTENNA INFORMATION DETAIL ▲	5
1.4 EQUIPMENT MODIFICATIONS	5
2. SUMMARY OF TEST RESULTS	6
3. DESCRIPTION OF TEST CONFIGURATION	7
3.1 OPERATION FREQUENCY DETAIL	7
3.2 EUT OPERATION CONDITION	7
3.3 SUPPORT EQUIPMENT LIST AND DETAILS	7
3.4 SUPPORT CABLE LIST AND DETAILS	7
3.5 BLOCK DIAGRAM OF TEST SETUP.....	8
3.6 TEST FACILITY	10
3.7 MEASUREMENT UNCERTAINTY	10
4. REQUIREMENTS AND TEST PROCEDURES	11
4.1 AC LINE CONDUCTED EMISSIONS	11
4.1.1 Applicable Standard	11
4.1.2 EUT Setup.....	12
4.1.3 EMI Test Receiver Setup	12
4.1.4 Test Procedure.....	13
4.1.5 Corrected Amplitude & Margin Calculation.....	13
4.1.6 Test Result.....	13
4.2 RADIATED SPURIOUS EMISSIONS	14
4.2.1 Applicable Standard	14
4.2.2 EUT Setup.....	14
4.2.3 EMI Test Receiver & Spectrum Analyzer Setup.....	16
4.2.4 Test Procedure.....	17
4.2.5 Corrected Result & Margin Calculation.....	17
4.2.6 Test Result.....	17
4.3 20 dB EMISSION BANDWIDTH.....	18
4.3.1 Applicable Standard	18
4.3.2 EUT Setup.....	18
4.3.3 Test Procedure.....	18
4.3.4 Test Result.....	19
4.4 CHANNEL SEPARATION.....	20
4.4.1 Applicable Standard	20
4.4.2 EUT Setup.....	20
4.4.3 Test Procedure.....	20
4.4.4 Test Result.....	20
4.5 NUMBER OF HOPPING FREQUENCY.....	21
4.5.1 Applicable Standard	21

4.5.2 EUT Setup.....	21
4.5.3 Test Procedure.....	21
4.5.4 Test Result.....	21
4.6 TIME OF OCCUPANCY(DWELL TIME)	22
4.6.1 Applicable Standard	22
4.6.2 EUT Setup.....	22
4.6.3 Test Procedure.....	22
4.6.4 Test Result.....	23
4.7 MAXIMUM CONDUCTED OUTPUT POWER	24
4.7.1 Applicable Standard	24
4.7.2 EUT Setup.....	24
4.7.3 Test Procedure.....	24
4.7.4 Test Result.....	24
4.8 CONDUCTED SPURIOUS EMISSION	25
4.8.1 Applicable Standard	25
4.8.2 EUT Setup.....	25
4.8.3 Test Procedure.....	25
4.8.4 Test Result.....	26
4.9 ANTENNA REQUIREMENT	27
4.9.1 Applicable Standard	27
4.9.2 Judgment	27
5. TEST DATA AND RESULTS	28
5.1 AC LINE CONDUCTED EMISSIONS	28
5.2 RADIATED SPURIOUS EMISSIONS	33
5.3 20 dB EMISSION BANDWIDTH.....	56
5.4 CHANNEL SEPARATION.....	59
5.5 NUMBER OF HOPPING FREQUENCY	61
5.6 TIME OF OCCUPANCY (DWELL TIME)	63
5.7 MAXIMUM CONDUCTED OUTPUT POWER	67
5.8 CONDUCTED SPURIOUS EMISSION	72
EXHIBIT A - EUT PHOTOGRAPHS	78
EXHIBIT B - TEST SETUP PHOTOGRAPHS	79
EXHIBIT C - RF EXPOSURE EVALUATION	80
APPLICABLE STANDARD	80
MEASUREMENT RESULT	80

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2502Z01325E-RF-00B	Original Report	2025/12/27

1. GENERAL INFORMATION

1.1 General Description of Equipment under Test

EUT Name:	Mobile Phone
EUT Model:	CN7c
Operation Frequency:	2402-2480 MHz
Maximum Peak Output Power (Conducted):	4.09dBm
Modulation Type:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Rated Input Voltage:	3.92Vdc from battery or 5-10V/11Vdc from adapter
Serial Number:	For AC Line Conducted Emissions and Radiated Spurious Emission test: 3DDN-1 For RF Conducted test: 3DDN-3
EUT Received Date:	2025.11.25
EUT Received Status:	Good

1.2 Accessory Information

Accessory Description	Manufacturer	Model	Parameters
Adapter	TECNO MOBILITY LIMITED	U450TSB	Input: 100-240Vac 50/60Hz 1.8A Output: 5.0Vdc 3A 15W or 5-10Vdc 4.5A or 11Vdc 4.1A 45W MAX

1.3 Antenna Information Detail ▲

Antenna	Antenna Type	input impedance (Ohm)	Frequency Range (MHz)	Antenna Gain (dBi)
ANT12(Chain 0)	IFA	50	2400-2483.5	-3.08
ANT13(Chain 1)	IFA	50	2400-2483.5	-0.52
The design of compliance with §15.203:				
☒ Unit uses a permanently attached antenna. ☐ Unit uses a unique coupling to the intentional radiator. ☐ Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.				

1.4 Equipment Modifications

No modifications are made to the EUT during all test items.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.207(a)	AC Line Conducted Emissions	Compliant
FCC §15.205, §15.209, §15.247(d)	Radiated Spurious Emissions	Compliant
FCC §15.247(a)(1)	20 dB Emission Bandwidth	Compliant
FCC §15.247(a)(1)	Channel Separation	Compliant
FCC §15.247(a)(1)(iii)	Number Of Hopping Frequency	Compliant
FCC §15.247(a)(1)(iii)	Time Of Occupancy (dwell time)	Compliant
FCC §15.247(b)(1)	Maximum Conducted Output Power	Compliant
FCC §15.247(d)	Conducted Spurious Emission	Compliant
FCC §15.203	Antenna Requirement	Compliant
§15.247 (i) & §1.1310 & §2.1093	SAR Evaluation	Compliant

3. DESCRIPTION OF TEST CONFIGURATION

3.1 Operation Frequency Detail

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	40	2442
1	2403	41	2443
...	...	...	...
...	...	...	...
...	...	78	2480
39	2441	/	/

Note: The above frequencies in bold were performed the test.

3.2 EUT Operation Condition

The EUT was configured for testing in Engineering Mode, which was provided by the manufacturer. The EUT configuration as below:

EUT Exercise Software: Engineering mode			
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer ▲:			
Test Modes	Power Level Setting Chain 0&Chain 1		
	Lowest Channel	Middle Channel	Highest Channel
GFSK(BDR)	6	6	6
$\pi/4$ -DQPSK(2EDR)	6	6	6
8DPSK(3EDR)	6	6	6

Note 1: For AC line conducted emissions, the maximum output power mode and channel was tested.

Note 2: For Radiated Spurious Emissions 9kHz~1GHz and 18~25GHz, the maximum output power mode and channel was tested.

Note 3: The device have two antennas for Bluetooth transmission, but only one output chain from the RF chip, all RF conducted tested at the maximum antenna, except power test at the both chains.

3.3 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

3.4 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	no	no	1	Adapter	EUT

3.5 Block Diagram of Test Setup


AC line conducted emissions:

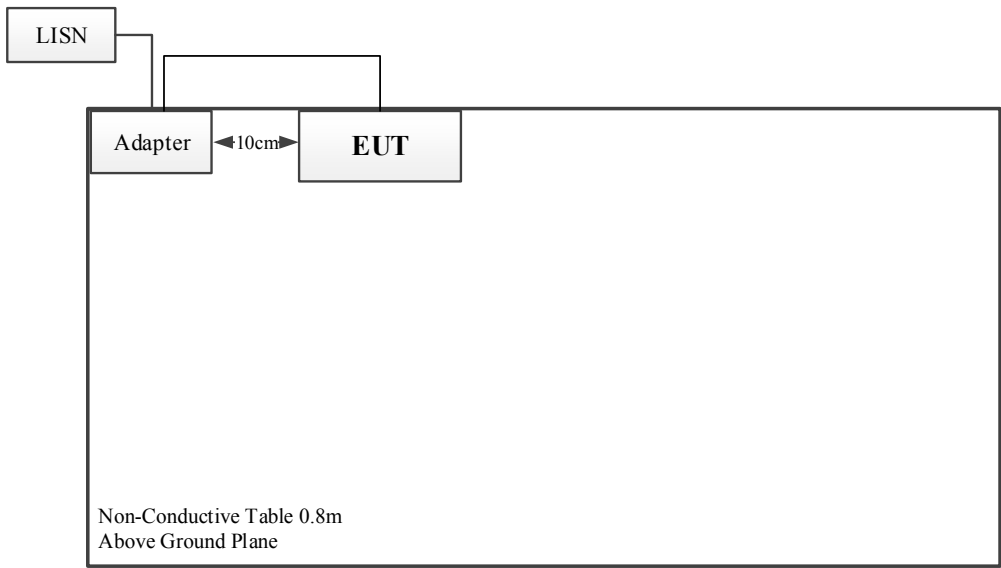

Spurious Emissions:
Below 1GHz:

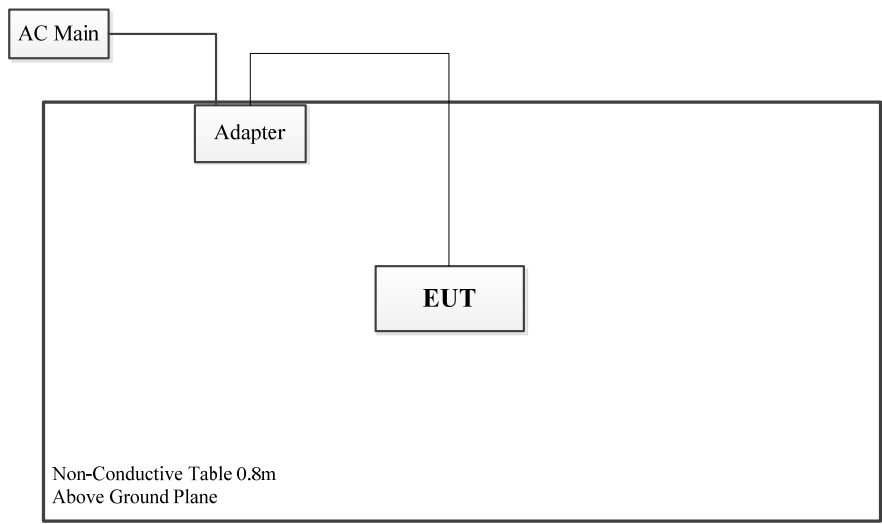

Above 1GHz:

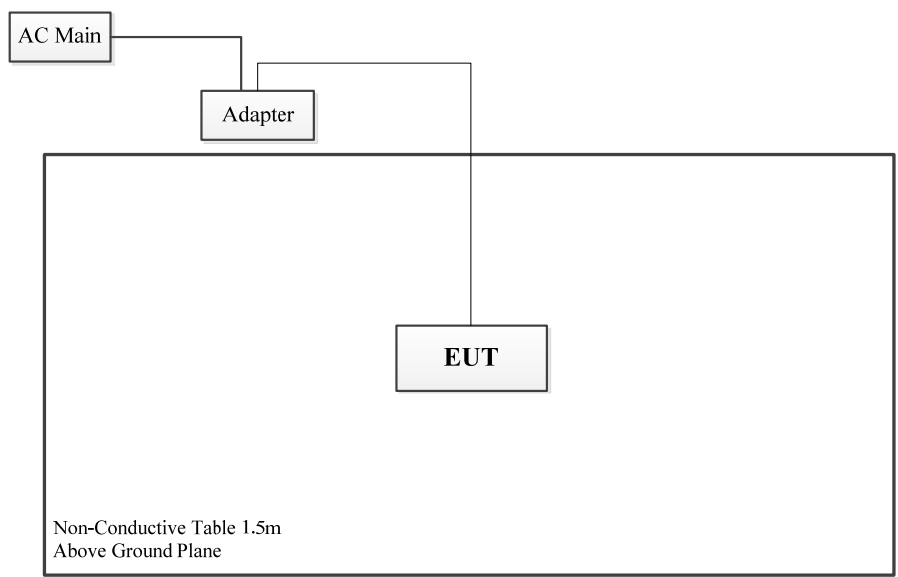

3.6 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 829273, the FCC Designation No. : CN5044.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

3.7 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.55 dB
Power Spectral Density, conducted	±0.55 dB
Unwanted Emissions, radiated	9kHz~30MHz: 3.06dB, 30MHz~1GHz: 6.13 dB, 1GHz~6GHz: 4.79 dB, 6GHz~18GHz: 4.63 dB, 18GHz~26.5GHz: 4.79 dB, 26.5GHz~40GHz: 4.63 dB
Unwanted Emissions, conducted	±2.47 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.83 dB (150 kHz to 30 MHz)

4. REQUIREMENTS AND TEST PROCEDURES

4.1 AC Line Conducted Emissions

4.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:


(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

4.1.2 EUT Setup

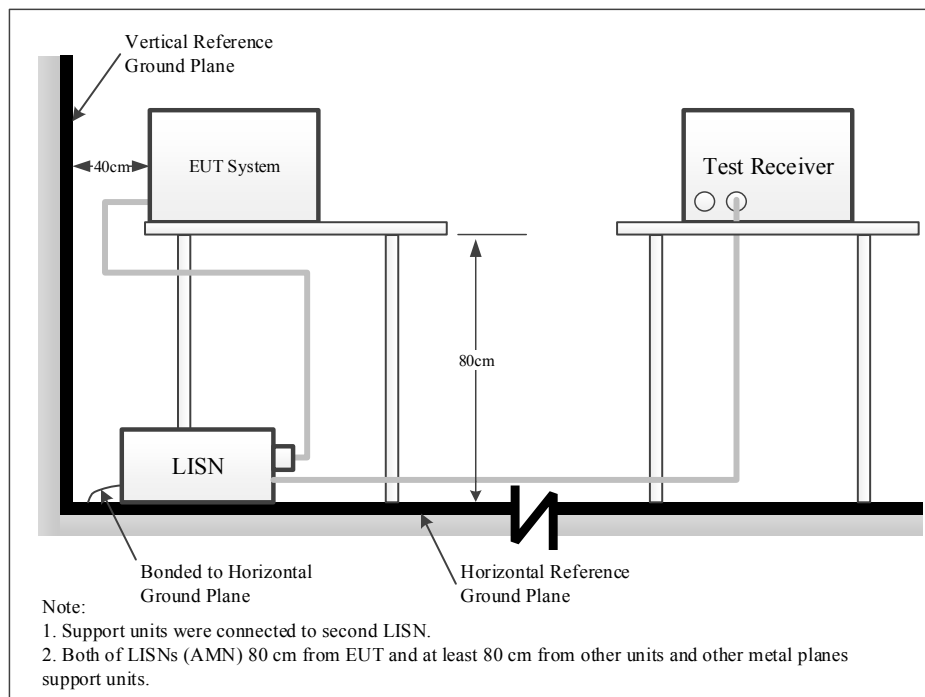

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

4.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

4.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

4.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4.1.6 Test Result

Please refer to section 5.1.

4.2 Radiated Spurious Emissions


4.2.1 Applicable Standard

FCC §15.247 (d);


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

4.2.2 EUT Setup


9kHz~30MHz:

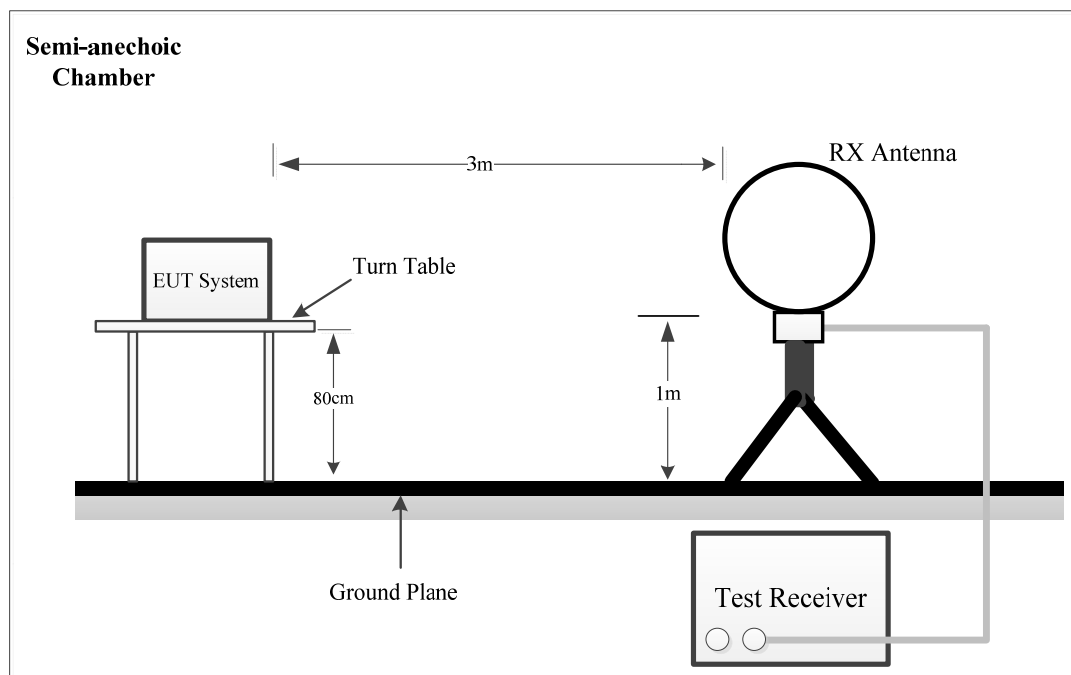


30MHz~1GHz:

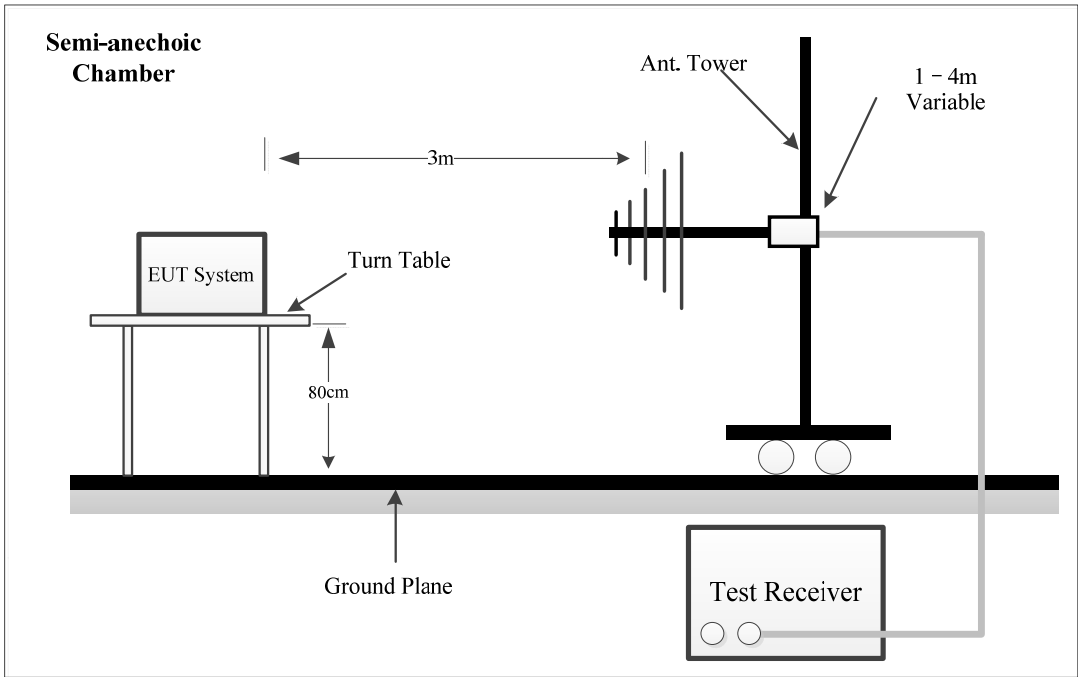

1-18GHz:

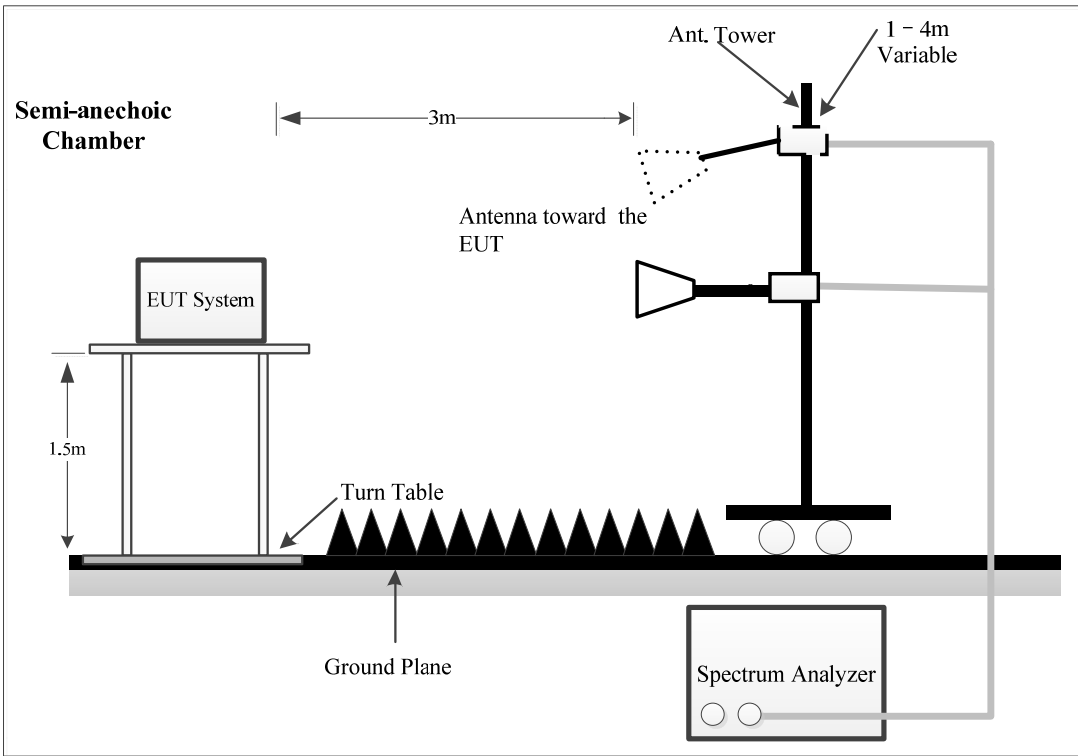

18-25GHz:

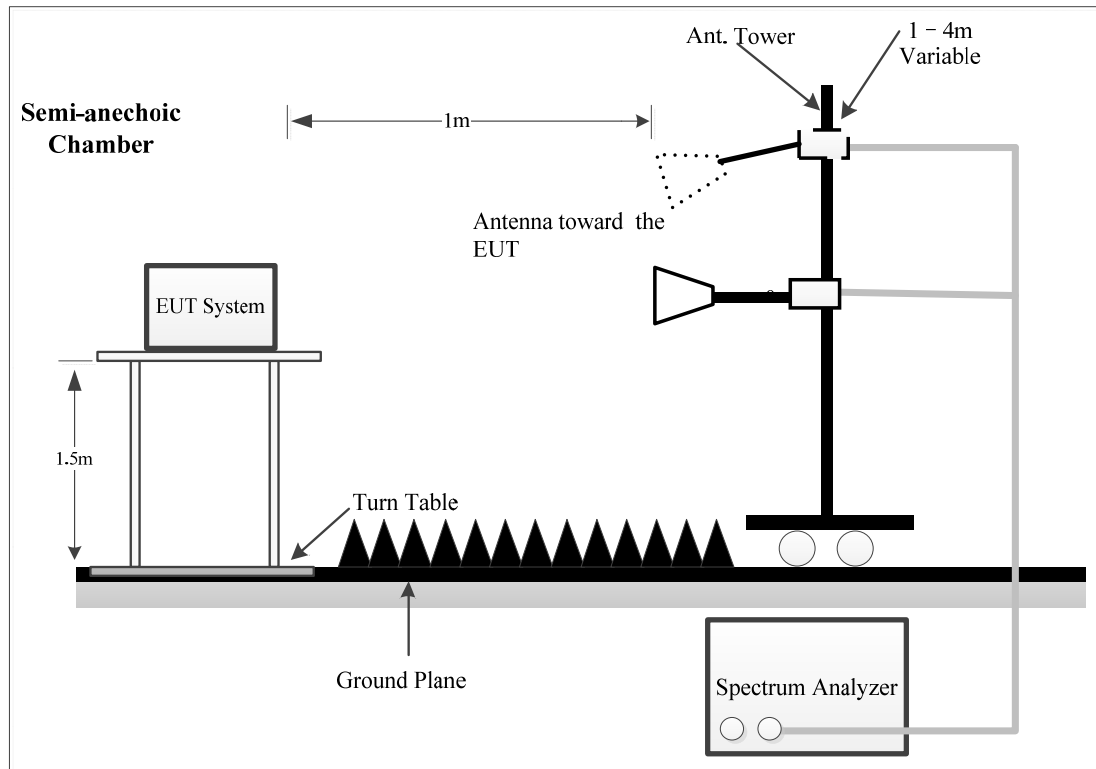

The radiated emissions were performed in the Semi-anechoic Chamber, using the setup accordance with the ANSI C63.10-2020. The specification used was the FCC 15.209, and FCC 15.247 limits.

For 9kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

4.2.3 EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9kHz-1000MHz:

Frequency Range	Measurement	RBW	Video B/W	IF B/W	Detector
9 kHz – 150 kHz	QP/AV	200 Hz	1 kHz	200 Hz	QP/AV
150 kHz – 30 MHz	QP/AV	9 kHz	30 kHz	9 kHz	QP/AV
30 MHz – 1000 MHz	PK	120 kHz	500 kHz	/	PK
	QP	/	/	120 kHz	QP

1GHz- 25GHz:

Pre-scan:

Measurement	RBW	Video B/W	Detector
PK	1MHz	3 MHz	PK
Ave.	1MHz	5kHz	PK

Final measurement for emission identified during the pre-scan:

Measurement	RBW	Video B/W	Detector
PK	1MHz	3 MHz	PK
Ave.	1MHz	10 Hz	PK

4.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 9 kHz-1 GHz except 9-90 kHz, 110-490 kHz, employing an average detector, peak and Average detection modes for frequencies above 1 GHz.

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

All emissions under the average limit and under the noise floor have not recorded in the report.

For Radiated 18-25GHz test, which was performed at 1.0 m distance, according to C63.10, the test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.0m
Distance extrapolation Factor = $20 \log (\text{specific distance [3m]}/\text{test distance [1.0m]})$ dB = 9.54 dB

4.2.5 Corrected Result & Margin Calculation

$$E_{Log} = 20 \times \log_{10}(E_{Linear})$$

E_{Linear} is the field strength of the emission, in μ V/m

E_{Log} is the field strength of the emission, in dB μ V/m

For 9kHz-30MHz test, test distance is 3m, extrapolation limit shall be calculated using Equation:

$$E_{\text{limit-measure}} = E_{\text{limit-Standard}} + 40 \times \log_{10} (d_{\text{standard}}/d_{\text{measure}})$$

The basic equation except 18-25GHz test is as follows:

Factor = Antenna Factor + Cable Loss- Amplifier Gain

For Radiated 18-25GHz test:

Factor = Antenna Factor + Cable Loss- Distance extrapolation Factor

Result = Reading + Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4.2.6 Test Result

Please refer to section 5.2.


4.3 20 dB Emission Bandwidth

4.3.1 Applicable Standard

FCC §15.247 (a)(1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

4.3.2 EUT Setup

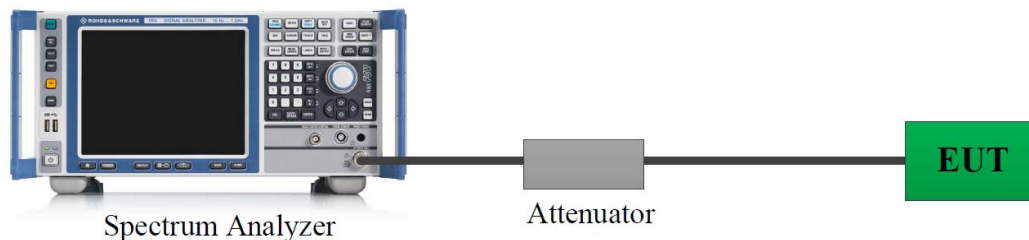

4.3.3 Test Procedure

According to ANSI C63.10-2020 Section 6.9.2

- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
- The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.
- Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in 4.1.6.2
- Steps a) through c) might require iteration to adjust within the specified tolerances.
- The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.
- Set detection mode to peak and trace mode to max hold.
- Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- Determine the “-xx dB down amplitude” using $[(\text{reference value}) - \text{xx}]$. Alternatively, this calculation may be made by using the marker-delta function of the instrument.
- If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).

- j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.
- k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

4.3.4 Test Result

Please refer to section 5.3.


4.4 Channel Separation

4.4.1 Applicable Standard

FCC §15.247 (a)(1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

4.4.2 EUT Setup

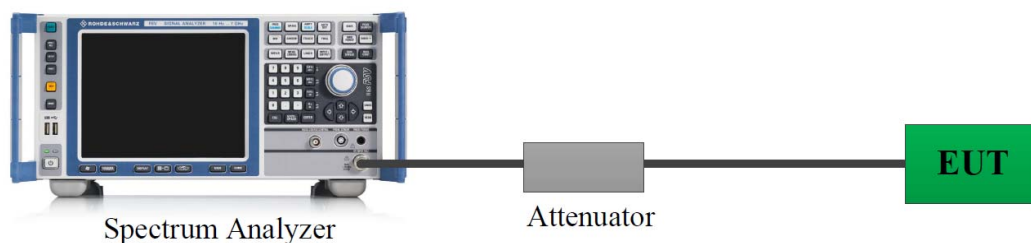

4.4.3 Test Procedure

According to ANSI C63.10-2020 Section 7.8.2

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: Wide enough to capture the peaks of two adjacent channels.
- b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c) Video (or average) bandwidth (VBW) $\geq$ RBW.
- d) Sweep: No faster than coupled (auto) time.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.

4.4.4 Test Result

Please refer to section 5.4.


4.5 Number Of Hopping Frequency

4.5.1 Applicable Standard

FCC §15.247 (a)(1)(iii)

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

4.5.2 EUT Setup

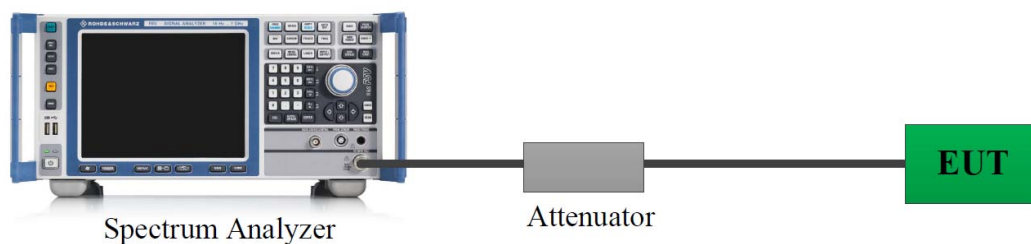

4.5.3 Test Procedure

According to ANSI C63.10-2020 Section 7.8.3

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c) VBW $\geq$ RBW.
- d) Sweep: No faster than coupled (auto) time.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A spectral plot of the data shall be included in the test report.

4.5.4 Test Result


Please refer to section 5.5.

4.6 Time Of Occupancy(Dwell Time)

4.6.1 Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

4.6.2 EUT Setup

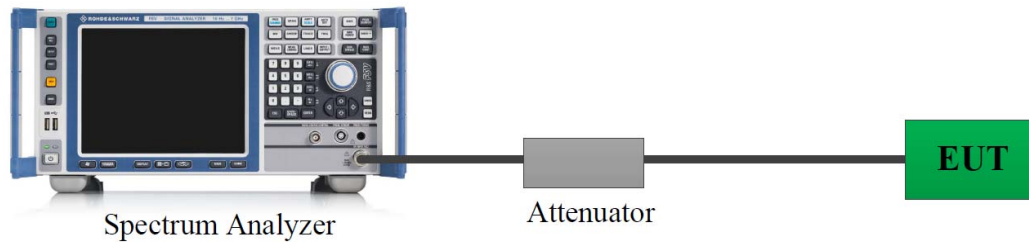

4.6.3 Test Procedure

According to ANSI C63.10-2020 Section 7.8.4

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: Zero span, centered on a hopping channel.
- b) RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected transmission time per hop.
- c) Sweep time: Set so that the start of the first transmission and end of the last transmission for the hop are clearly captured. Setting the sweep time to be slightly longer than the hopping period per channel (hopping period = $1/\text{hopping rate}$) should achieve this.
- d) Use a video trigger, where possible with a trigger delay, so that the start of the transmission is clearly observed. The trigger level might need adjustment to reduce the chance of triggering when the system hops on an adjacent channel.
- e) Detector function: Peak.
- f) Trace: Clear-write, single sweep.
- g) Place markers at the start of the first transmission on the channel and at the end of the last transmission. The dwell time per hop is the time between these two markers.

To determine the number of hops on a channel in the regulatory observation period repeat the measurement using a longer sweep time. When the device uses a single hopping sequence the period of measurement should be sufficient to capture at least 2 hops. When the device uses a dynamic hopping sequence, or the sequence varies, the period of measurement may need to capture multiple hops to better determine the average time of occupancy. Count the number of hops on the channel across the sweep time.

The average number of hops on the same channel within the regulatory observation period is calculated from the number of hops on the channel divided by the spectrum analyzer sweep time multiplied by the regulatory observation period. For example, if three hops are counted with an analyzer sweep time of 500 ms and the regulatory observation period is 10 s, then the number of hops in that ten seconds is $3 / 0.5 \times 10$, or 60 hops.

The average time of occupancy is calculated by multiplying the dwell time per hop by the number of hops in the observation period.

Where the device shares the same hopping algorithms (dwell time, channel selection) across multiple data rates or modulation schemes then the time of occupancy need only be measured for one of those modulation schemes or data rates. If the dwell time value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in dwell time.

Spectral plots of the channel occupancy shall be included in the report.

4.6.4 Test Result

Please refer to section 5.6.


4.7 Maximum Conducted Output Power

4.7.1 Applicable Standard

FCC §15.247 (b)(1)

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

4.7.2 EUT Setup

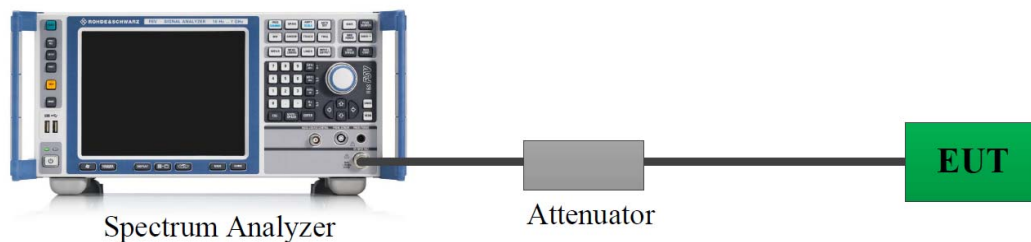

A short RF cable with low cable loss connected to the EUT antenna port. The insert loss of this RF cable/attenuator was offset into the setting of test equipment:

Offset=Insert loss of RF cable+ Insert loss of attenuator

4.7.3 Test Procedure

According to ANSI C63.10-2020 Section 7.8.5

This is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation.

Frequency hopping shall be disabled for this test. Use the following spectrum analyzer settings:

- a) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- b) RBW > 20 dB bandwidth of the emission being measured.
- c) VBW $\geq$ RBW.
- d) Sweep: No faster than coupled (auto) time.
- e) Detector function: Peak.
- f) Trace: Max-hold.
- g) Allow trace to stabilize.
- h) Use the marker-to-peak function to set the marker to the peak of the emission.
- i) The indicated level is the peak output power, after any corrections for external attenuators and cables.
- j) A spectral plot of the test results and setup description shall be included in the test report.

NOTE—A peak responding power meter may be used, where the power meter and sensor system video bandwidth is greater than the occupied bandwidth of the unlicensed wireless device, rather than a spectrum analyzer.

4.7.4 Test Result

Please refer to section 5.7.


4.8 Conducted Spurious Emission

4.8.1 Applicable Standard

FCC §15.247 (d);

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

4.8.2 EUT Setup

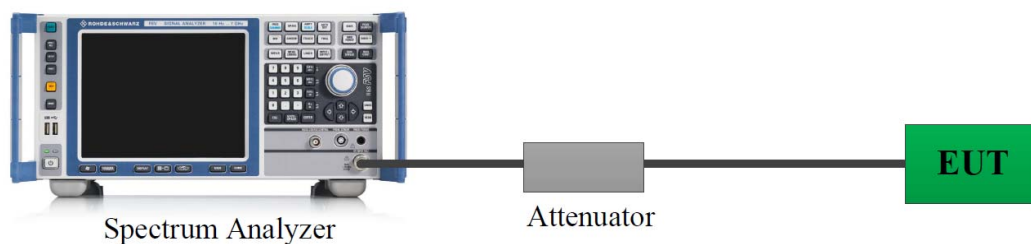

A short RF cable with low cable loss connected to the EUT antenna port. The insert loss of this RF cable/attenuator was offset into the setting of test equipment:

Offset=Insert loss of RF cable+ Insert loss of attenuator

4.8.3 Test Procedure

According to ANSI C63.10-2020 Section 7.8.7.2

Compliance with a relative limit at the band-edges (e.g., -20 dBc) shall be made on the lowest and on the highest channels with frequency hopping disabled and repeated with frequency hopping enabled. For the latter test the hopping sequence shall include the lowest and highest channels.

For measurements with the hopping disabled the analyzer screen shall clearly show compliance with the requirement within 10 MHz of the allocated band-edge.

For measurements with the hopping enabled the analyzer screen shall clearly show compliance with the requirement within 10 MHz of both of the allocated band-edges. This could require separate spectral plots for each band-edge.

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Sweep time = auto couple.

- f) Trace mode = max hold.
 - g) Allow trace to fully stabilize.
 - h) Use the peak marker function to determine the maximum amplitude level.
- Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements. Report the three highest emissions relative to the limit.

4.8.4 Test Result

Please refer to section 5.8.

4.9 Antenna Requirement

4.9.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.9.2 Judgment

Compliant. Please refer to the Antenna Information detail in Section 1.3.

5. TEST DATA AND RESULTS

5.1 AC Line Conducted Emissions

Serial Number:	3DDN-1	Test Date:	2025/12/1
Test Site:	CE	Test Mode:	Transmitting
Tester:	Leesin Xiang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.6	Relative Humidity: (%)	60	ATM Pressure: (kPa)	101
----------------------	------	---------------------------	----	------------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101614	2025/6/25	2026/6/24
Unknown	Coaxial Cable	RG 142	C-0200-05	2025/5/6	2026/5/5
R&S	EMI Test Receiver	ESCI	100224	2025/6/25	2026/6/24
Audix	Test Software	E3	191218 V9	N/A	N/A

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:


Please refer to the below plots.

Note: BDR Middle channel was tested.

Chain 0:

Project No.: 2502Z01325E-RF
Port: Line
Test Mode: Transmitting
IF B/W 9kHz PK/AV


Serial No.: 3DDN-1
Tester: Leesin Xiang
Note: BT

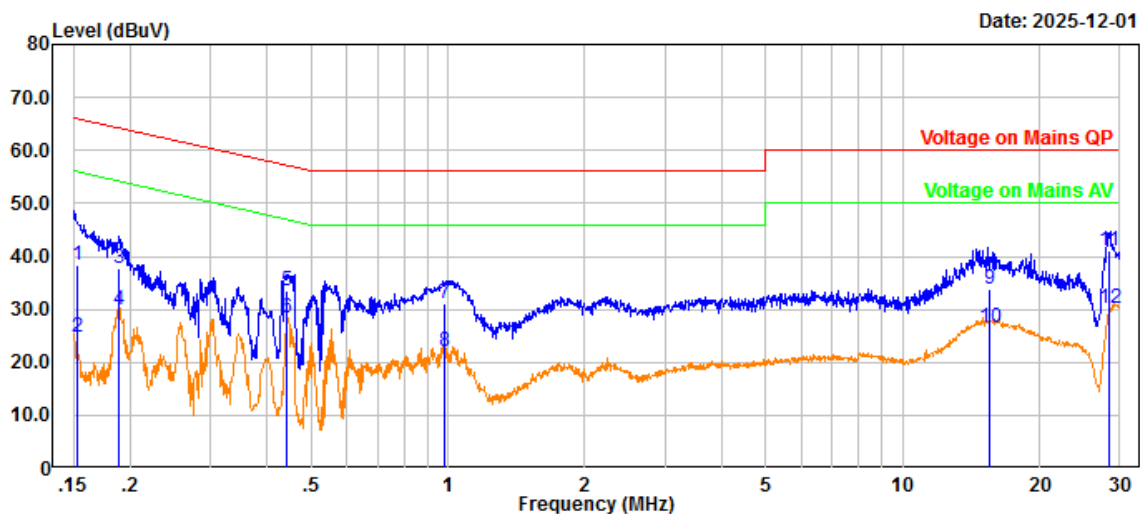

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Measurement
1	0.153	27.25	11.18	38.43	65.85	27.42	QP
2	0.153	13.69	11.18	24.87	55.85	30.98	Average
3	0.189	26.74	10.89	37.63	64.08	26.45	QP
4	0.189	18.91	10.89	29.80	54.08	24.28	Average
5	0.442	22.95	10.65	33.60	57.03	23.43	QP
6	0.442	17.65	10.65	28.30	47.03	18.73	Average
7	0.982	20.36	10.79	31.15	56.00	24.85	QP
8	0.982	11.39	10.79	22.18	46.00	23.82	Average
9	15.490	22.58	11.12	33.70	60.00	26.30	QP
10	15.490	15.57	11.12	26.69	50.00	23.31	Average
11	28.363	30.17	10.95	41.12	60.00	18.88	QP
12	28.363	19.10	10.95	30.05	50.00	19.95	Average

Project No.: 2502Z01325E-RF
Port: neutral
Test Mode: Transmitting
IF B/W 9kHz PK/AV

Serial No.: 3DDN-1
Tester: Leesin Xiang
Note: BT

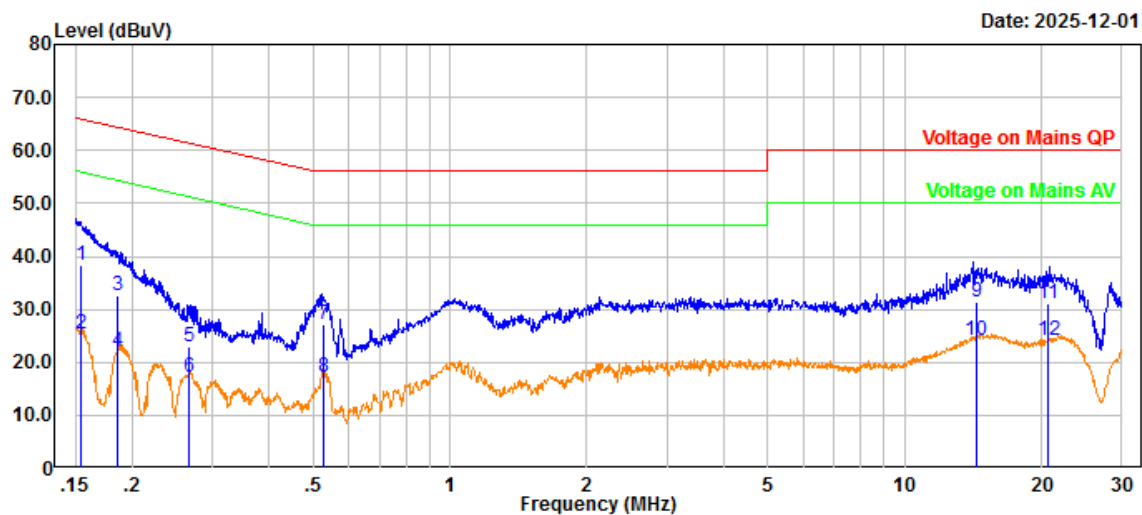


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Measurement
1	0.154	27.76	10.72	38.48	65.77	27.29	QP
2	0.154	14.62	10.72	25.34	55.77	30.43	Average
3	0.185	21.76	10.84	32.60	64.25	31.65	QP
4	0.185	11.26	10.84	22.10	54.25	32.15	Average
5	0.267	12.01	10.81	22.82	61.21	38.39	QP
6	0.267	6.32	10.81	17.13	51.21	34.08	Average
7	0.527	16.81	10.50	27.31	56.00	28.69	QP
8	0.527	6.56	10.50	17.06	46.00	28.94	Average
9	14.331	20.31	10.98	31.29	60.00	28.71	QP
10	14.331	13.29	10.98	24.27	50.00	25.73	Average
11	20.643	19.97	11.12	31.09	60.00	28.91	QP
12	20.643	12.93	11.12	24.05	50.00	25.95	Average

Chain 1:

Project No.: 2502Z01325E-RF
Port: Line
Test Mode: Transmitting
IF B/W 9kHz PK/AV


Serial No.: 3DDN-1
Tester: Leesin Xiang
Note: BT

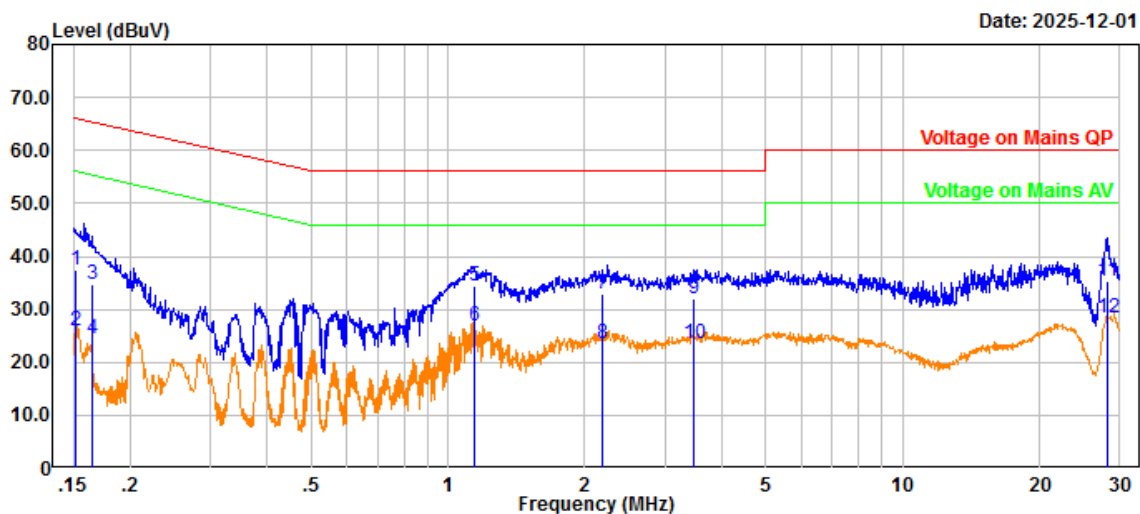

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Measurement
1	0.152	26.15	11.18	37.33	65.87	28.54	QP
2	0.152	14.91	11.18	26.09	55.87	29.78	Average
3	0.165	23.51	11.08	34.59	65.21	30.62	QP
4	0.165	13.35	11.08	24.43	55.21	30.78	Average
5	1.139	23.44	10.88	34.32	56.00	21.68	QP
6	1.139	16.02	10.88	26.90	46.00	19.10	Average
7	2.185	21.61	11.25	32.86	56.00	23.14	QP
8	2.185	12.42	11.25	23.67	46.00	22.33	Average
9	3.462	21.27	10.87	32.14	56.00	23.86	QP
10	3.462	12.72	10.87	23.59	46.00	22.41	Average
11	28.158	24.26	10.96	35.22	60.00	24.78	QP
12	28.158	17.34	10.96	28.30	50.00	21.70	Average

Project No.: 2502Z01325E-RF
 Port: neutral
 Test Mode: Transmitting
 IF B/W 9kHz PK/AV

Serial No.: 3DDN-1
 Tester: Leesin Xiang
 Note: BT

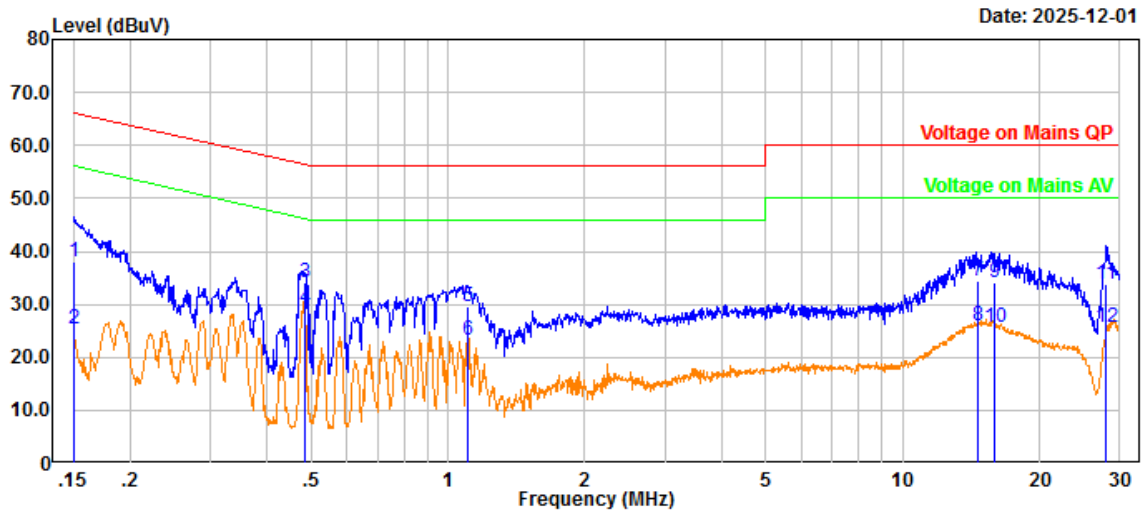

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Measurement
1	0.151	27.36	10.70	38.06	65.96	27.90	QP
2	0.151	14.69	10.70	25.39	55.96	30.57	Average
3	0.485	23.51	10.53	34.04	56.25	22.21	QP
4	0.485	18.71	10.53	29.24	46.25	17.01	Average
5	1.110	18.71	10.94	29.65	56.00	26.35	QP
6	1.110	12.26	10.94	23.20	46.00	22.80	Average
7	14.623	23.30	10.99	34.29	60.00	25.71	QP
8	14.623	14.84	10.99	25.83	50.00	24.17	Average
9	15.916	22.96	11.02	33.98	60.00	26.02	QP
10	15.916	14.58	11.02	25.60	50.00	24.40	Average
11	27.912	22.68	11.01	33.69	60.00	26.31	QP
12	27.912	14.56	11.01	25.57	50.00	24.43	Average

5.2 Radiated Spurious Emissions

1) 9kHz - 1GHz

Serial Number:	3DDN-1	Test Date:	2025/12/3~2025/12/4
Test Site:	Chamber 10m	Test Mode:	Transmitting
Tester:	Mikey Lin	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	24.2~24.4	Relative Humidity: (%)	53~54	ATM Pressure: (kPa)	101.3~101.6

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Hybrid Antenna	JB3	A060611-1	2025/6/23	2028/6/22
Narda	Coaxial Attenuator	779-6dB	04269	2025/6/23	2028/6/22
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2025/7/1	2026/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-04	2025/7/1	2026/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2025/7/1	2026/6/30
Sonoma	Amplifier	310N	185914	2025/8/25	2026/8/24
R&S	EMI Test Receiver	ESR3	102453	2025/6/25	2026/6/24
Audix	Test Software	E3	191218 V9	N/A	N/A
GLOBAL	Active Loop Antenna	1313-1A	4060411	2025/6/26	2028/6/25

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Please refer to the below plots.
After pre-scan in the X, Y and Z axes of orientation, the worst case is refer to plots.

Note: BDR Middle channel was tested.

9kHz~30MHz
Three antenna orientations (parallel, perpendicular, and ground-parallel) was measured, the worst orientations was below:
Chain 0:

Project No.: 2502Z01325E-RF

Serial No.: 3DDN-1


Polarization: Parallel

Tester: Mikey Lin

Test Mode: Charging & BT Transmitting

Note:


RBW:200Hz VBW:1kHz

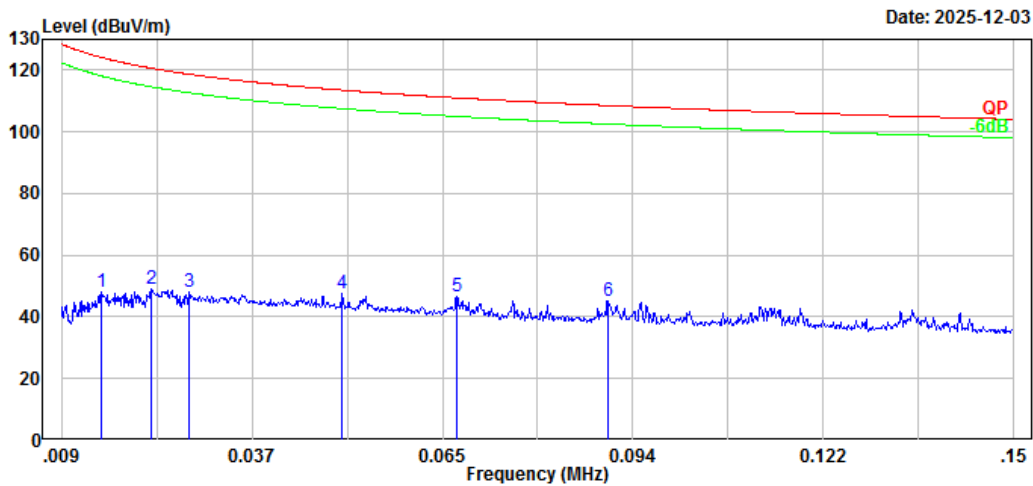

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	0.015	46.92	1.06	47.98	124.13	76.15	Peak
2	0.022	49.65	-0.67	48.98	120.60	71.62	Peak
3	0.028	49.69	-1.81	47.88	118.69	70.81	Peak
4	0.051	51.88	-4.32	47.56	113.52	65.96	Peak
5	0.068	52.77	-6.34	46.43	111.02	64.59	Peak
6	0.090	53.63	-8.31	45.32	108.53	63.21	Peak

Project No.: 2502Z01325E-RF
Polarization: Parallel
Test Mode: Charging & BT Transmitting
Note:
RBW:9kHz VBW:30kHz

Serial No.: 3DDN-1
Tester: Mikey Lin

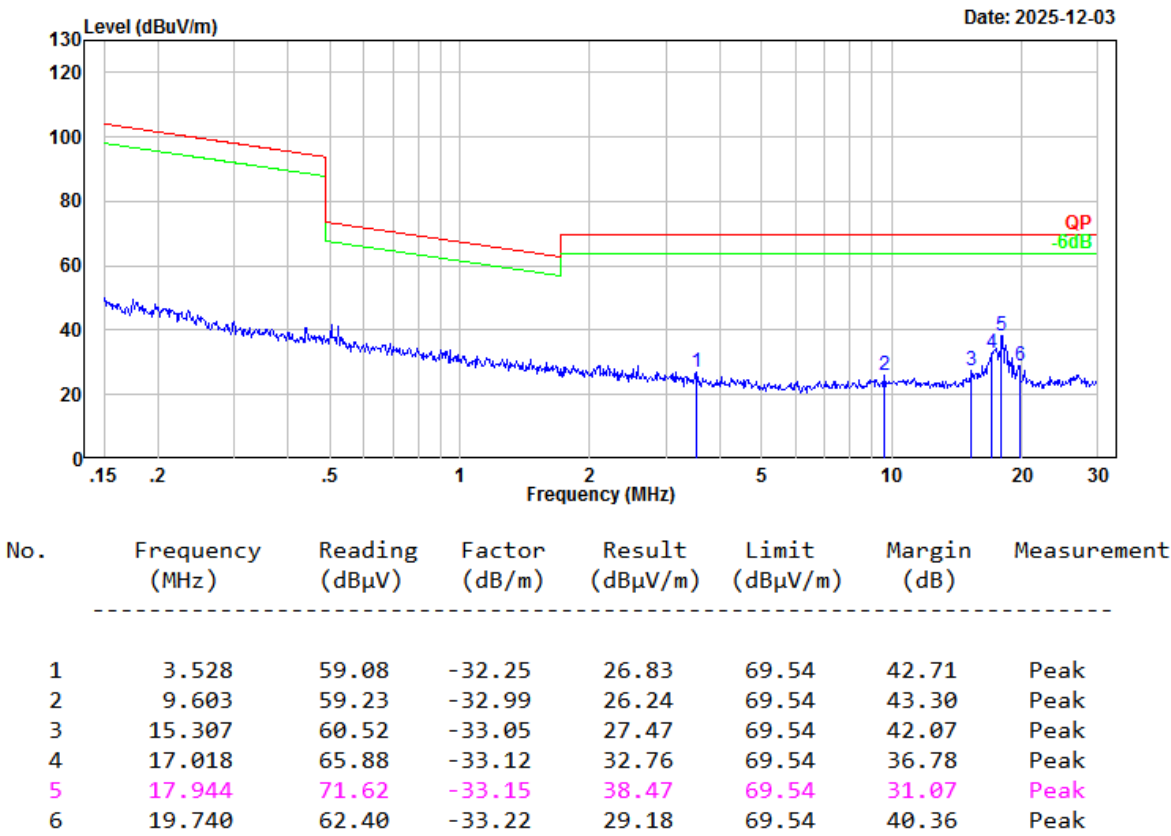

Chain 1:

Project No.: 2502Z01325E-RF

Serial No.: 3DDN-1

Polarization: Parallel


Tester: Mikey Lin

Test Mode: Charging & BT Transmitting

Note:

RBW:200Hz VBW:1kHz


Date: 2025-12-04

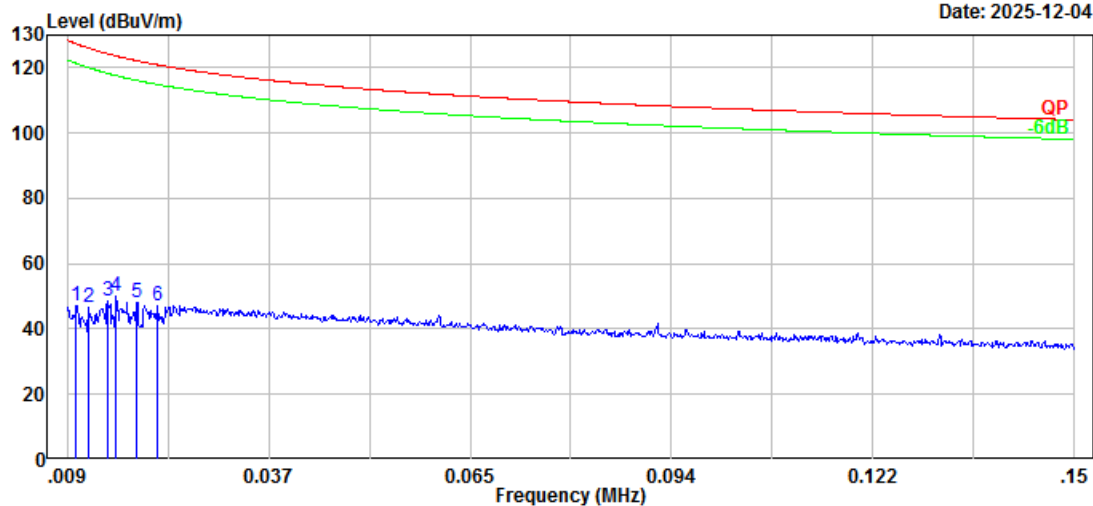

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	0.010	45.01	2.19	47.20	127.37	80.17	Peak
2	0.012	44.87	1.78	46.65	126.05	79.40	Peak
3	0.015	47.41	1.14	48.55	124.29	75.74	Peak
4	0.016	49.03	0.82	49.85	123.57	73.72	Peak
5	0.019	48.16	0.14	48.30	122.15	73.85	Peak
6	0.022	47.59	-0.51	47.08	120.88	73.80	Peak

Project No.: 2502Z01325E-RF
Polarization: Parallel
Test Mode: Charging & BT Transmitting
Note:
RBW:9kHz VBW:30kHz

Serial No.: 3DDN-1
Tester: Mikey Lin

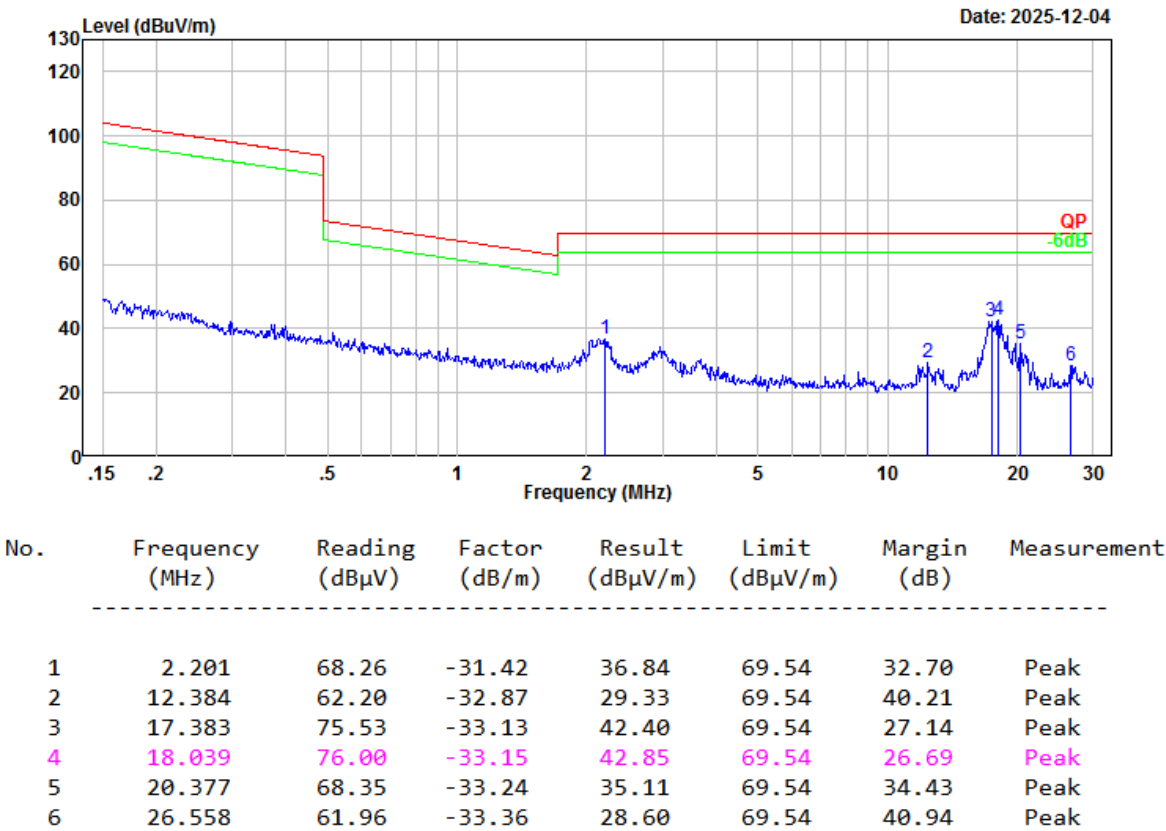

30MHz-1GHz

Chain 0:

Project No.: 2502Z01325E-RF

Serial No.: 3DDN-1


Polarization: horizontal

Tester: Mikey Lin

Test Mode: Charging & BT Transmitting

Note:


RBW:120kHz VBW:500kHz

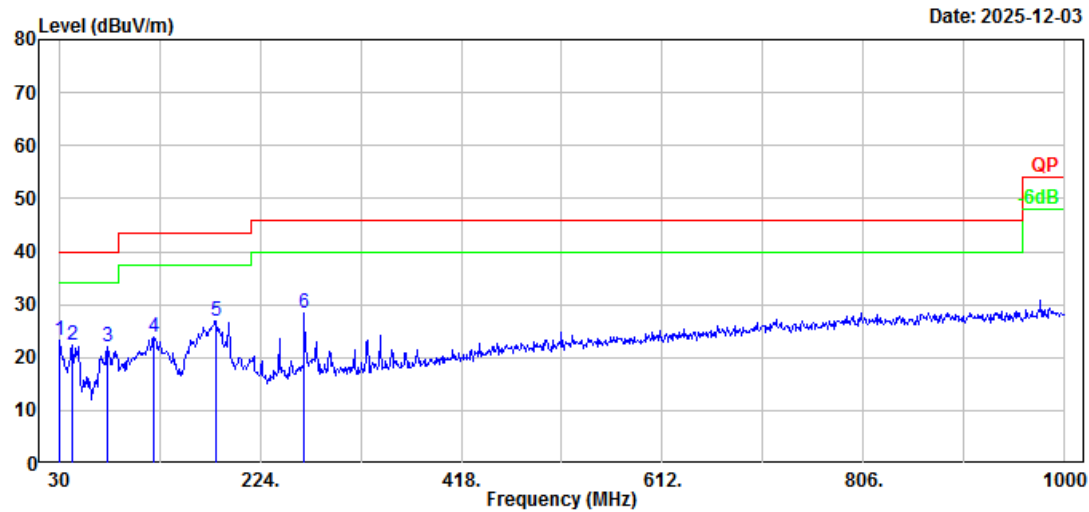

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	30.00	27.49	-4.10	23.39	40.00	16.61	Peak
2	43.58	35.17	-12.88	22.29	40.00	17.71	Peak
3	77.53	38.39	-16.34	22.05	40.00	17.95	Peak
4	121.18	34.00	-10.09	23.91	43.50	19.59	Peak
5	181.32	39.04	-12.25	26.79	43.50	16.71	Peak
6	266.68	38.75	-10.42	28.33	46.00	17.67	Peak

Project No.: 2502Z01325E-RF
Polarization: vertical
Test Mode: Charging & BT Transmitting
Note:
RBW:120kHz VBW:500kHz

Serial No.: 3DDN-1
Tester: Mikey Lin

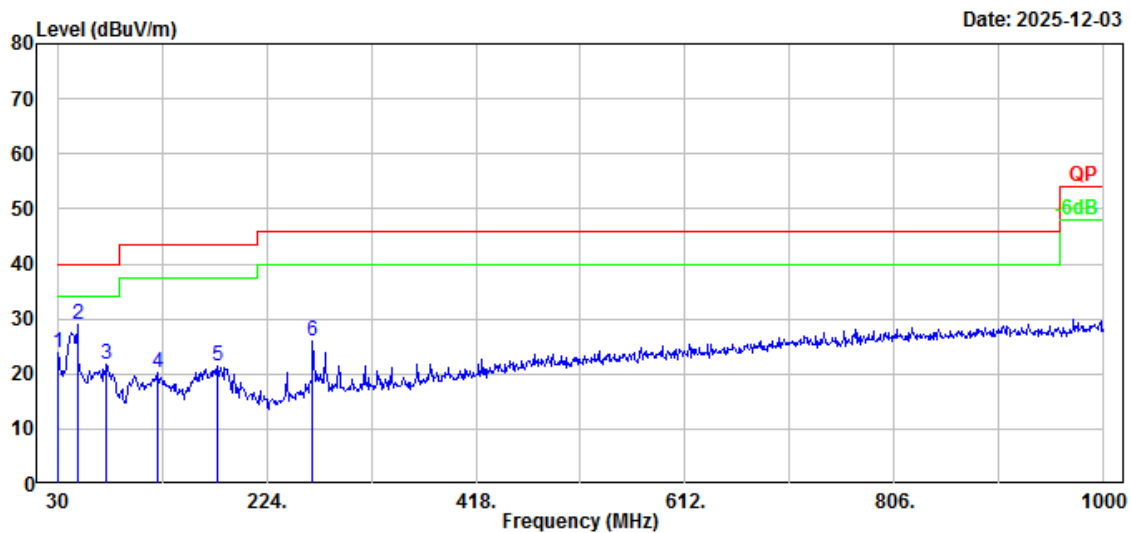

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	30.00	28.06	-4.10	23.96	40.00	16.04	Peak
2	48.43	44.49	-15.59	28.90	40.00	11.10	Peak
3	75.59	37.73	-16.14	21.59	40.00	18.41	Peak
4	123.12	30.08	-9.99	20.09	43.50	23.41	Peak
5	178.41	33.54	-12.17	21.37	43.50	22.13	Peak
6	266.68	36.53	-10.42	26.11	46.00	19.89	Peak

Chain 1:

Project No.: 2502Z01325E-RF

Serial No.: 3DDN-1


Polarization: horizontal

Tester: Mikey Lin

Test Mode: Charging & BT Transmitting

Note:


RBW:120kHz VBW:500kHz

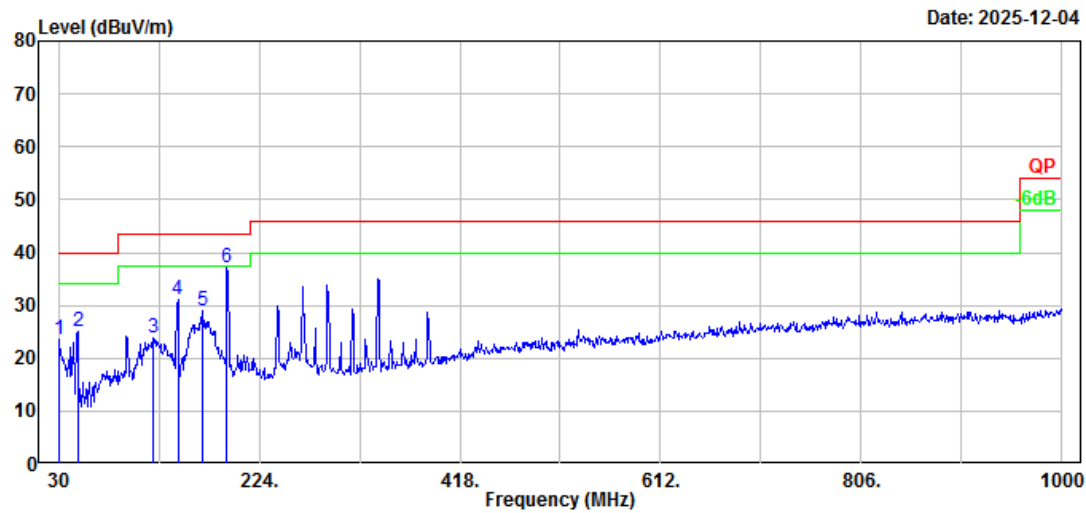

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	30.00	27.70	-4.10	23.60	40.00	16.40	Peak
2	48.43	40.55	-15.59	24.96	40.00	15.04	Peak
3	122.15	33.93	-10.04	23.89	43.50	19.61	Peak
4	145.43	41.98	-11.03	30.95	43.50	12.55	Peak
5	169.68	40.72	-11.65	29.07	43.50	14.43	Peak
6	192.96	49.16	-11.95	37.21	43.50	6.29	Peak

Project No.: 2502Z01325E-RF
Polarization: vertical
Test Mode: Charging & BT Transmitting
Note:
RBW:120kHz VBW:500kHz

Serial No.: 3DDN-1
Tester: Mikey Lin

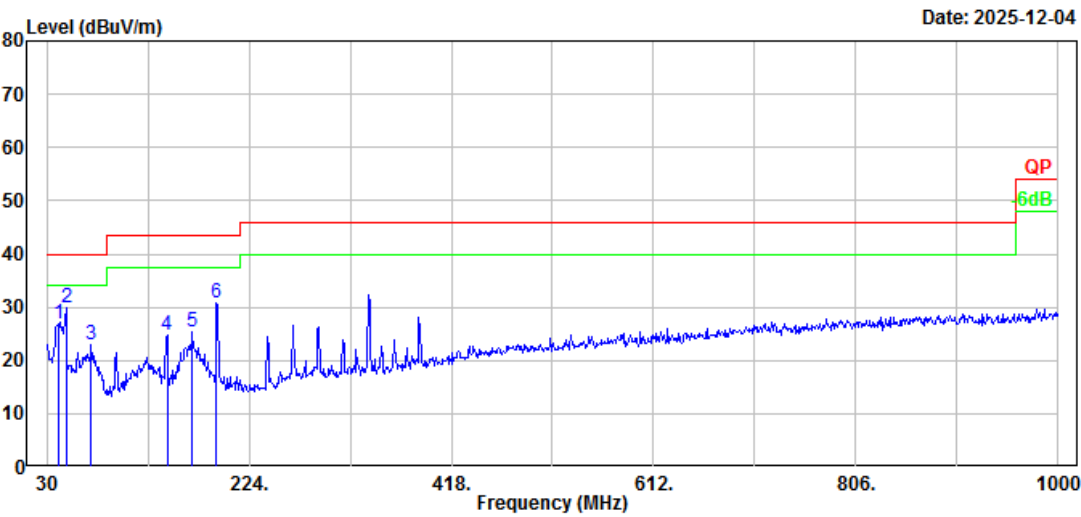

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBUV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	41.64	38.80	-11.82	26.98	40.00	13.02	Peak
2	48.43	45.39	-15.59	29.80	40.00	10.20	Peak
3	72.68	39.11	-16.08	23.03	40.00	16.97	Peak
4	145.43	35.74	-11.03	24.71	43.50	18.79	Peak
5	169.68	36.94	-11.65	25.29	43.50	18.21	Peak
6	192.96	42.79	-11.95	30.84	43.50	12.66	Peak

2) 1-25GHz:

Serial Number:	3DDN-1	Test Date:	2025/12/2
Test Site:	Chamber B	Test Mode:	Transmitting
Tester:	Leo Xiao	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	23.4	Relative Humidity: (%)	32	ATM Pressure: (kPa)	100.8

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
ETS-Lindgren	Horn Antenna	3115	000 527 35	2023/9/7	2026/9/6
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2023/2/22	2026/2/21
Xinhang Macrowave	Coaxial Cable	XH750A-N/J-SMA/J-10M	20231117004 #0001	2025/11/17	2026/11/16
Xinhang Macrowave	Coaxial Cable	XH360A-2.92/J-2.92/J-6M-A	20231208001 #0001	2024/12/9	2025/12/8
AH	Preamplifier	PAM-0118P	469	2025/4/11	2026/4/10
AH	Preamplifier	PAM-1840VH	191	2025/9/4	2026/9/3
R&S	Spectrum Analyzer	FSV40	101944	2025/8/8	2026/8/7
Audix	Test Software	E3	191218 V9	N/A	N/A
Decentest	Multiplex Switch Test Control Set & Filter Switch Unit	DT7220SCU & DT7220FCU	DC79902 & DC79905	2025/8/25	2026/8/24

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

Please refer to the below plots.
After pre-scan in the X, Y and Z axes of orientation, the worst case is refer to plots.




1-18GHz(Maximum output power mode was tested):

BDR Mode(DH5) low channel Chain0 Horizontal				BDR Mode(DH5) low channel Chain0 Vertical																																																																																			
Project No.: 2502Z01325E-RF Serial No.: 300N-1 Polarization: Horizontal Tester: Leo Xiao Test Mode: Transmitting Note: BDR Mode(DH5) low channel 2402MHz Chain0 Peak:RBW:1MHz,VBW:3MHz Level (dBuV/m) 100 90.0 80.0 70.0 60.0 50.0 40.0 30.0 20 Fundamental test with Filter Switch Unit Frequency (MHz) 1000 1600 2200 2800 3400 4000 Date: 2025-12-02 PK AV				Project No.: 2502Z01325E-RF Serial No.: 300N-1 Polarization: Vertical Tester: Leo Xiao Test Mode: Transmitting Note: BDR Mode(DH5) low channel 2402MHz Chain0 Peak:RBW:1MHz,VBW:3MHz Level (dBuV/m) 100 90.0 80.0 70.0 60.0 50.0 40.0 30.0 20 Fundamental test with Filter Switch Unit Frequency (MHz) 1000 1600 2200 2800 3400 4000 Date: 2025-12-02 PK AV																																																																																			
<table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>3826.00</td><td>48.98</td><td>-11.27</td><td>37.71</td><td>74.00</td><td>36.29</td><td>Peak</td></tr></table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	3826.00	48.98	-11.27	37.71	74.00	36.29	Peak	<table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>3923.20</td><td>48.82</td><td>-10.91</td><td>37.91</td><td>74.00</td><td>36.09</td><td>Peak</td></tr></table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	3923.20	48.82	-10.91	37.91	74.00	36.09	Peak																																																
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																																																																
1	3826.00	48.98	-11.27	37.71	74.00	36.29	Peak																																																																																
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																																																																
1	3923.20	48.82	-10.91	37.91	74.00	36.09	Peak																																																																																
Project No.: 2502Z01325E-RF Serial No.: 300N-1 Polarization: Horizontal Tester: Leo Xiao Test Mode: Transmitting Note: BDR Mode(DH5) low channel 2402MHz Chain0 Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz Level (dBuV/m) 100 90.0 80.0 70.0 60.0 50.0 40.0 30.0 20 Frequency (MHz) 4000 6800 9600 12400 15200 18000 Date: 2025-12-02 PK				Project No.: 2502Z01325E-RF Serial No.: 300N-1 Polarization: Vertical Tester: Leo Xiao Test Mode: Transmitting Note: BDR Mode(DH5) low channel 2402MHz Chain0 Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz Level (dBuV/m) 100 90.0 80.0 70.0 60.0 50.0 40.0 30.0 20 Frequency (MHz) 4000 6800 9600 12400 15200 18000 Date: 2025-12-02 PK																																																																																			
<table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>4804.00</td><td>54.82</td><td>-7.53</td><td>47.29</td><td>74.00</td><td>26.71</td><td>Peak</td></tr><tr><td>2</td><td>7206.00</td><td>47.57</td><td>-3.42</td><td>44.15</td><td>74.00</td><td>29.85</td><td>Peak</td></tr><tr><td>3</td><td>17988.80</td><td>47.81</td><td>11.11</td><td>58.92</td><td>74.00</td><td>15.08</td><td>Peak</td></tr><tr><td>4</td><td>17988.80</td><td>36.39</td><td>11.11</td><td>47.50</td><td>54.00</td><td>6.50</td><td>Average</td></tr></table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	4804.00	54.82	-7.53	47.29	74.00	26.71	Peak	2	7206.00	47.57	-3.42	44.15	74.00	29.85	Peak	3	17988.80	47.81	11.11	58.92	74.00	15.08	Peak	4	17988.80	36.39	11.11	47.50	54.00	6.50	Average	<table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>4804.00</td><td>54.44</td><td>-7.53</td><td>46.91</td><td>74.00</td><td>27.09</td><td>Peak</td></tr><tr><td>2</td><td>7206.00</td><td>47.08</td><td>-3.42</td><td>43.66</td><td>74.00</td><td>30.34</td><td>Peak</td></tr><tr><td>3</td><td>17966.40</td><td>48.18</td><td>10.98</td><td>59.16</td><td>74.00</td><td>14.84</td><td>Peak</td></tr><tr><td>4</td><td>17966.40</td><td>36.49</td><td>10.98</td><td>47.47</td><td>54.00</td><td>6.53</td><td>Average</td></tr></table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	4804.00	54.44	-7.53	46.91	74.00	27.09	Peak	2	7206.00	47.08	-3.42	43.66	74.00	30.34	Peak	3	17966.40	48.18	10.98	59.16	74.00	14.84	Peak	4	17966.40	36.49	10.98	47.47	54.00	6.53	Average
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																																																																
1	4804.00	54.82	-7.53	47.29	74.00	26.71	Peak																																																																																
2	7206.00	47.57	-3.42	44.15	74.00	29.85	Peak																																																																																
3	17988.80	47.81	11.11	58.92	74.00	15.08	Peak																																																																																
4	17988.80	36.39	11.11	47.50	54.00	6.50	Average																																																																																
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																																																																
1	4804.00	54.44	-7.53	46.91	74.00	27.09	Peak																																																																																
2	7206.00	47.08	-3.42	43.66	74.00	30.34	Peak																																																																																
3	17966.40	48.18	10.98	59.16	74.00	14.84	Peak																																																																																
4	17966.40	36.49	10.98	47.47	54.00	6.53	Average																																																																																


BDR Mode(DH5) low channel Chain1 Horizontal

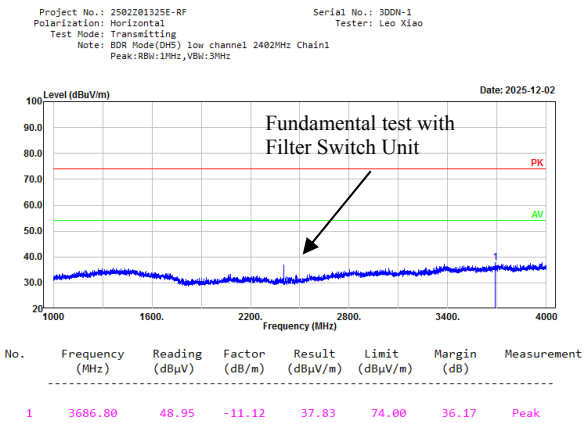




BDR Mode(DH5) low channel Chain1 Vertical

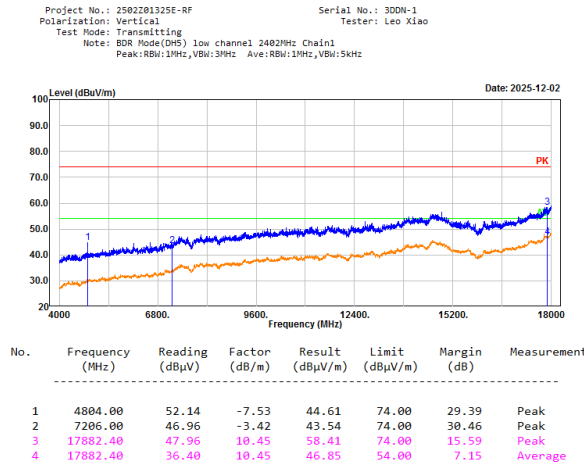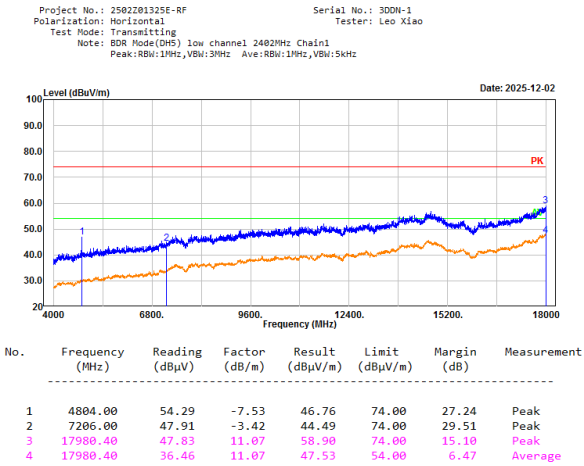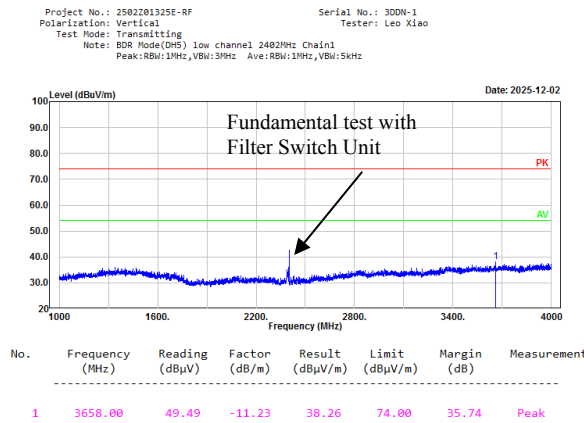

BDR Mode(DH5) middle channel Chain0 Horizontal

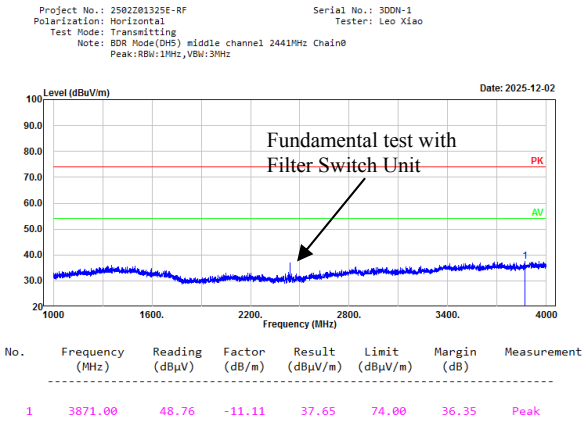

BDR Mode(DH5) middle channel Chain0 Vertical

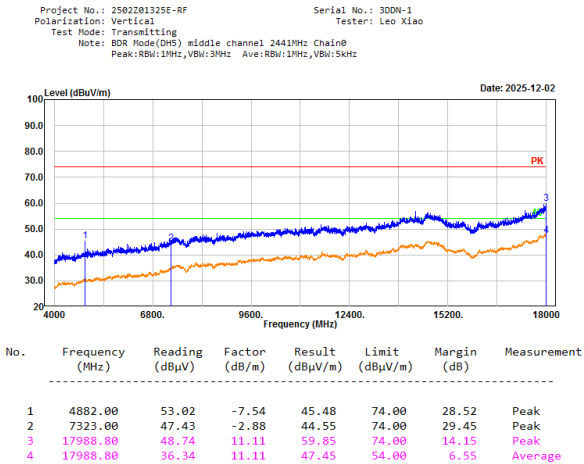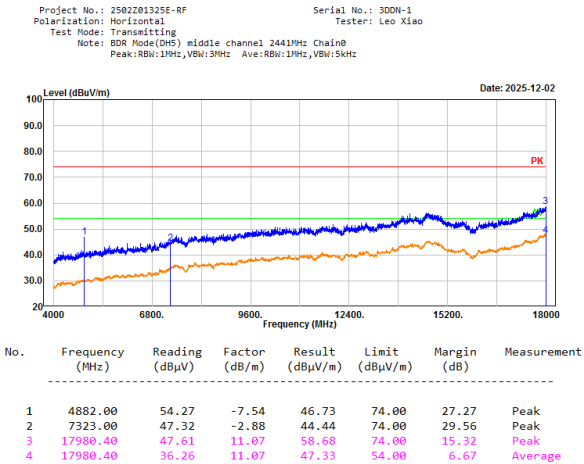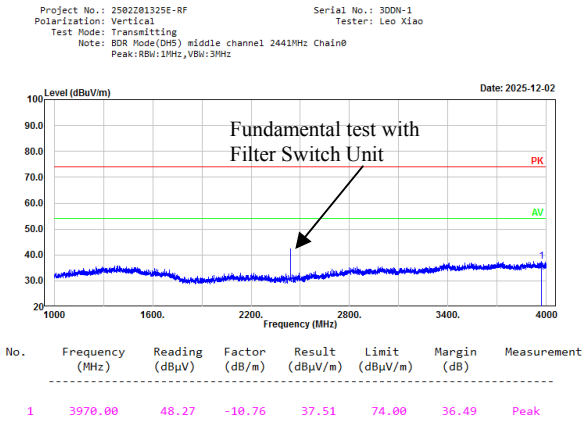

Project No.: 2502Z01325E-RF

Polarization: Horizontal

Test Mode: Transmitting

Note: BDR Mode(DH5) middle channel 2441MHz Chain1

Peak:RBW:1MHz,VBW:3MHz

Serial No.: 300N-1

Tester: Leo Xiao

Level (dBuV/m)

Frequency (MHz)

2025-12-02

Fundamental test with Filter Switch Unit

PK

AV

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	3946.60	48.61	-10.84	37.77	74.00	36.23	Peak

Project No.: 2502Z01325E-RF

Polarization: Vertical

Test Mode: Transmitting

Note: BDR Mode(DH5) middle channel 2441MHz Chain1

Peak:RBW:1MHz,VBW:3MHz

Serial No.: 300N-1

Tester: Leo Xiao

Level (dBuV/m)

Frequency (MHz)

2025-12-02

Fundamental test with Filter Switch Unit

PK

AV

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	3932.20	48.89	-10.89	38.00	74.00	36.00	Peak

Project No.: 2502Z01325E-RF

Polarization: Horizontal

Test Mode: Transmitting

Note: BDR Mode(DH5) middle channel 2441MHz Chain1

Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5KHz

Serial No.: 300N-1

Tester: Leo Xiao

Level (dBuV/m)

Frequency (MHz)

2025-12-02

PK

AV

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	4882.00	53.87	-7.54	46.33	74.00	27.67	Peak
2	7323.00	47.84	-2.88	44.96	74.00	29.04	Peak
3	17980.40	48.38	11.07	59.45	74.00	14.55	Peak
4	17980.40	36.34	11.07	47.41	54.00	6.59	Average

Project No.: 2502Z01325E-RF

Polarization: Vertical

Test Mode: Transmitting

Note: BDR Mode(DH5) middle channel 2441MHz Chain1

Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5KHz

Serial No.: 300N-1

Tester: Leo Xiao

Level (dBuV/m)

Frequency (MHz)

2025-12-02

PK

AV



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	4882.00	52.06	-7.54	44.52	74.00	29.48	Peak
2	7323.00	48.12	-2.88	45.24	74.00	28.76	Peak
3	17851.60	48.79	10.29	59.08	74.00	14.92	Peak
4	17851.60	36.27	10.29	46.56	54.00	7.44	Average

BDR Mode(DH5) high channel Chain0 Horizontal				BDR Mode(DH5) high channel Chain0 Vertical																																																																																			
Project No.: 2502Z01325E-RF Polarization: Horizontal Test Mode: Transmitting Note: BDR Mode(DH5) high channel 2480MHz Chain0 Peak:RBW:1MHz,VBW:3MHz Serial No.: 300N-1 Tester: Leo Xiao Level (dBuV/m) Date: 2025-12-02 Fundamental test with Filter Switch Unit				Project No.: 2502Z01325E-RF Polarization: Vertical Test Mode: Transmitting Note: BDR Mode(DH5) high channel 2480MHz Chain0 Peak:RBW:1MHz,VBW:3MHz Serial No.: 300N-1 Tester: Leo Xiao Level (dBuV/m) Date: 2025-12-02 Fundamental test with Filter Switch Unit																																																																																			
<table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>3727.00</td><td>48.86</td><td>-11.16</td><td>37.70</td><td>74.00</td><td>36.30</td><td>Peak</td></tr></table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	3727.00	48.86	-11.16	37.70	74.00	36.30	Peak	<table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>3931.60</td><td>48.55</td><td>-10.89</td><td>37.66</td><td>74.00</td><td>36.34</td><td>Peak</td></tr></table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	3931.60	48.55	-10.89	37.66	74.00	36.34	Peak																																																
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																																																																
1	3727.00	48.86	-11.16	37.70	74.00	36.30	Peak																																																																																
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																																																																
1	3931.60	48.55	-10.89	37.66	74.00	36.34	Peak																																																																																
Project No.: 2502Z01325E-RF Polarization: Horizontal Test Mode: Transmitting Note: BDR Mode(DH5) high channel 2480MHz Chain0 Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz Serial No.: 300N-1 Tester: Leo Xiao Level (dBuV/m) Date: 2025-12-02				Project No.: 2502Z01325E-RF Polarization: Vertical Test Mode: Transmitting Note: BDR Mode(DH5) high channel 2480MHz Chain0 Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz Serial No.: 300N-1 Tester: Leo Xiao Level (dBuV/m) Date: 2025-12-02																																																																																			
<table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>4960.00</td><td>48.40</td><td>-7.40</td><td>41.00</td><td>74.00</td><td>33.00</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>48.97</td><td>-2.39</td><td>46.58</td><td>74.00</td><td>27.42</td><td>Peak</td></tr><tr><td>3</td><td>17930.00</td><td>48.45</td><td>10.74</td><td>59.19</td><td>74.00</td><td>14.81</td><td>Peak</td></tr><tr><td>4</td><td>17930.00</td><td>36.22</td><td>10.74</td><td>46.96</td><td>54.00</td><td>7.04</td><td>Average</td></tr></table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	4960.00	48.40	-7.40	41.00	74.00	33.00	Peak	2	7440.00	48.97	-2.39	46.58	74.00	27.42	Peak	3	17930.00	48.45	10.74	59.19	74.00	14.81	Peak	4	17930.00	36.22	10.74	46.96	54.00	7.04	Average	<table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>4960.00</td><td>48.20</td><td>-7.40</td><td>40.80</td><td>74.00</td><td>33.20</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>48.87</td><td>-2.39</td><td>46.48</td><td>74.00</td><td>27.52</td><td>Peak</td></tr><tr><td>3</td><td>17988.80</td><td>48.05</td><td>11.11</td><td>59.16</td><td>74.00</td><td>14.84</td><td>Peak</td></tr><tr><td>4</td><td>17988.80</td><td>36.12</td><td>11.11</td><td>47.23</td><td>54.00</td><td>6.77</td><td>Average</td></tr></table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	4960.00	48.20	-7.40	40.80	74.00	33.20	Peak	2	7440.00	48.87	-2.39	46.48	74.00	27.52	Peak	3	17988.80	48.05	11.11	59.16	74.00	14.84	Peak	4	17988.80	36.12	11.11	47.23	54.00	6.77	Average
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																																																																
1	4960.00	48.40	-7.40	41.00	74.00	33.00	Peak																																																																																
2	7440.00	48.97	-2.39	46.58	74.00	27.42	Peak																																																																																
3	17930.00	48.45	10.74	59.19	74.00	14.81	Peak																																																																																
4	17930.00	36.22	10.74	46.96	54.00	7.04	Average																																																																																
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																																																																
1	4960.00	48.20	-7.40	40.80	74.00	33.20	Peak																																																																																
2	7440.00	48.87	-2.39	46.48	74.00	27.52	Peak																																																																																
3	17988.80	48.05	11.11	59.16	74.00	14.84	Peak																																																																																
4	17988.80	36.12	11.11	47.23	54.00	6.77	Average																																																																																

BDR Mode(DH5) high channel Chain1 Horizontal				BDR Mode(DH5) high channel Chain1 Vertical																																																																																			
Project No.: 2502Z01325E-RF Serial No.: 300N-1 Polarization: Horizontal Tester: Leo Xiao Test Mode: Transmitting Note: BDR Mode(DH5) high channel 2480MHz Chain1 Peak:RBW:1MHz,VBW:3MHz Level (dBuV/m) Fundamental test with Filter Switch Unit Frequency (MHz) 2025-12-02 <table><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr></thead><tbody><tr><td>1</td><td>3697.00</td><td>48.53</td><td>-11.09</td><td>37.44</td><td>74.00</td><td>36.56</td><td>Peak</td></tr></tbody></table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	3697.00	48.53	-11.09	37.44	74.00	36.56	Peak	Project No.: 2502Z01325E-RF Serial No.: 300N-1 Polarization: Vertical Tester: Leo Xiao Test Mode: Transmitting Note: BDR Mode(DH5) high channel 2480MHz Chain1 Peak:RBW:1MHz,VBW:3MHz Level (dBuV/m) Fundamental test with Filter Switch Unit Frequency (MHz) 2025-12-02 <table><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr></thead><tbody><tr><td>1</td><td>3887.20</td><td>48.50</td><td>-11.03</td><td>37.47</td><td>74.00</td><td>36.53</td><td>Peak</td></tr></tbody></table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	3887.20	48.50	-11.03	37.47	74.00	36.53	Peak																																																
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																																																																
1	3697.00	48.53	-11.09	37.44	74.00	36.56	Peak																																																																																
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																																																																
1	3887.20	48.50	-11.03	37.47	74.00	36.53	Peak																																																																																
Project No.: 2502Z01325E-RF Serial No.: 300N-1 Polarization: Horizontal Tester: Leo Xiao Test Mode: Transmitting Note: BDR Mode(DH5) high channel 2480MHz Chain1 Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz Level (dBuV/m) Frequency (MHz) 2025-12-02 <table><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>47.73</td><td>-7.40</td><td>40.33</td><td>74.00</td><td>33.67</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>49.23</td><td>-2.39</td><td>46.84</td><td>74.00</td><td>27.16</td><td>Peak</td></tr><tr><td>3</td><td>17865.60</td><td>48.56</td><td>10.37</td><td>58.93</td><td>74.00</td><td>15.07</td><td>Peak</td></tr><tr><td>4</td><td>17865.60</td><td>36.32</td><td>10.37</td><td>46.69</td><td>54.00</td><td>7.31</td><td>Average</td></tr></tbody></table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	4960.00	47.73	-7.40	40.33	74.00	33.67	Peak	2	7440.00	49.23	-2.39	46.84	74.00	27.16	Peak	3	17865.60	48.56	10.37	58.93	74.00	15.07	Peak	4	17865.60	36.32	10.37	46.69	54.00	7.31	Average	Project No.: 2502Z01325E-RF Serial No.: 300N-1 Polarization: Vertical Tester: Leo Xiao Test Mode: Transmitting Note: BDR Mode(DH5) high channel 2480MHz Chain1 Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz Level (dBuV/m) Frequency (MHz) 2025-12-02 <table><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>48.24</td><td>-7.40</td><td>40.84</td><td>74.00</td><td>33.16</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>48.35</td><td>-2.39</td><td>45.96</td><td>74.00</td><td>28.04</td><td>Peak</td></tr><tr><td>3</td><td>17991.60</td><td>47.75</td><td>11.13</td><td>58.88</td><td>74.00</td><td>15.12</td><td>Peak</td></tr><tr><td>4</td><td>17991.60</td><td>36.41</td><td>11.13</td><td>47.54</td><td>54.00</td><td>6.46</td><td>Average</td></tr></tbody></table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	4960.00	48.24	-7.40	40.84	74.00	33.16	Peak	2	7440.00	48.35	-2.39	45.96	74.00	28.04	Peak	3	17991.60	47.75	11.13	58.88	74.00	15.12	Peak	4	17991.60	36.41	11.13	47.54	54.00	6.46	Average
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																																																																
1	4960.00	47.73	-7.40	40.33	74.00	33.67	Peak																																																																																
2	7440.00	49.23	-2.39	46.84	74.00	27.16	Peak																																																																																
3	17865.60	48.56	10.37	58.93	74.00	15.07	Peak																																																																																
4	17865.60	36.32	10.37	46.69	54.00	7.31	Average																																																																																
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																																																																
1	4960.00	48.24	-7.40	40.84	74.00	33.16	Peak																																																																																
2	7440.00	48.35	-2.39	45.96	74.00	28.04	Peak																																																																																
3	17991.60	47.75	11.13	58.88	74.00	15.12	Peak																																																																																
4	17991.60	36.41	11.13	47.54	54.00	6.46	Average																																																																																

18-25GHz:

No Emission was detected in the range 18-25GHz, test was performed on the mode and channel which with the maximum power.

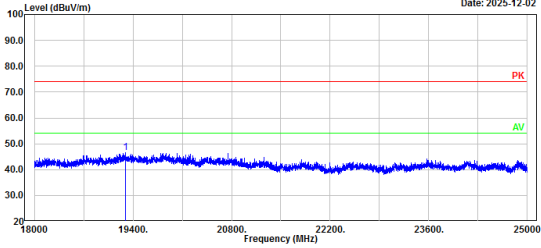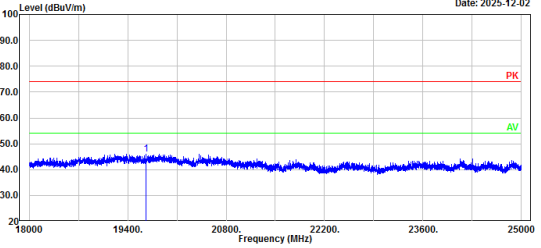BDR Middle channel, Chain 0, Horizontal				BDR Middle channel, Chain 0, Vertical			
Project No.: 2502Z01325E-RF Serial No.: 300N-1 Polarization: Horizontal Tester: Leo Xiao Test Mode: Transmitting Note: BT Peak: RBW: 1MHz, VBW: 3MHz Level (dBuV/m) Date: 2025-12-02 				Project No.: 2502Z01325E-RF Serial No.: 300N-1 Polarization: Vertical Tester: Leo Xiao Test Mode: Transmitting Note: BT Peak: RBW: 1MHz, VBW: 3MHz Level (dBuV/m) Date: 2025-12-02 			
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	19295.00	46.48	0.15	46.63	74.00	27.37	Peak


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	19664.60	45.83	0.25	46.08	74.00	27.92	Peak

Bandedge:


BDR Mode(DH5) low channel Chain0 Bandedge Horizontal				BDR Mode(DH5) low channel Chain0 Bandedge Vertical																																											
Project No.: 2502Z01325E-RF Polarization: Horizontal Test Mode: Transmitting Note: BDR Mode(DH5) low channel 2402MHz Chain0 Peak: RBW:1MHz, VBW:3MHz Serial No.: 300N-1 Tester: Leo Xiao Date: 2025-12-02				Project No.: 2502Z01325E-RF Polarization: Vertical Test Mode: Transmitting Note: BDR Mode(DH5) low channel 2402MHz Chain0 Peak: RBW:1MHz, VBW:3MHz Serial No.: 300N-1 Tester: Leo Xiao Date: 2025-12-02																																											
<table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>2390.00</td><td>47.51</td><td>-0.47</td><td>47.04</td><td>74.00</td><td>26.96</td><td>Peak</td></tr></table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	2390.00	47.51	-0.47	47.04	74.00	26.96	Peak	<table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>2390.00</td><td>47.36</td><td>-0.47</td><td>46.89</td><td>74.00</td><td>27.11</td><td>Peak</td></tr></table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	2390.00	47.36	-0.47	46.89	74.00	27.11	Peak								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																								
1	2390.00	47.51	-0.47	47.04	74.00	26.96	Peak																																								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																								
1	2390.00	47.36	-0.47	46.89	74.00	27.11	Peak																																								
BDR Mode(DH5) high channel Chain0 Bandedge Horizontal				BDR Mode(DH5) high channel Chain0 Bandedge Vertical																																											
Project No.: 2502Z01325E-RF Polarization: Horizontal Test Mode: Transmitting Note: BDR Mode(DH5) high channel 2480MHz Chain0 Peak: RBW:1MHz, VBW:3MHz Serial No.: 300N-1 Tester: Leo Xiao Date: 2025-12-02				Project No.: 2502Z01325E-RF Polarization: Vertical Test Mode: Transmitting Note: BDR Mode(DH5) high channel 2480MHz Chain0 Peak: RBW:1MHz, VBW:3MHz Serial No.: 300N-1 Tester: Leo Xiao Date: 2025-12-02																																											
<table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>2483.50</td><td>47.97</td><td>-0.30</td><td>47.67</td><td>74.00</td><td>26.33</td><td>Peak</td></tr></table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	2483.50	47.97	-0.30	47.67	74.00	26.33	Peak	<table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>2483.50</td><td>47.15</td><td>-0.30</td><td>46.85</td><td>74.00</td><td>27.15</td><td>Peak</td></tr><tr><td>2</td><td>2513.56</td><td>48.75</td><td>-0.20</td><td>48.55</td><td>74.00</td><td>25.45</td><td>Peak</td></tr></table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	2483.50	47.15	-0.30	46.85	74.00	27.15	Peak	2	2513.56	48.75	-0.20	48.55	74.00	25.45	Peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																								
1	2483.50	47.97	-0.30	47.67	74.00	26.33	Peak																																								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																								
1	2483.50	47.15	-0.30	46.85	74.00	27.15	Peak																																								
2	2513.56	48.75	-0.20	48.55	74.00	25.45	Peak																																								

BDR Mode(DH5) low channel Chain1 Bandedge Horizontal				BDR Mode(DH5) low channel Chain1 Bandedge Vertical																																											
Project No.: 2502Z01325E-RF Polarization: Horizontal Test Mode: Transmitting Note: BDR Mode(DH5) low channel 2402MHz Chain1 Peak: RBW:1MHz, VBW:3MHz Serial No.: 300W-1 Tester: Leo Xiao Date: 2025-12-02				Project No.: 2502Z01325E-RF Polarization: Vertical Test Mode: Transmitting Note: BDR Mode(DH5) low channel 2402MHz Chain1 Peak: RBW:1MHz, VBW:3MHz Serial No.: 300W-1 Tester: Leo Xiao Date: 2025-12-02																																											
<table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>2390.00</td><td>46.92</td><td>-0.47</td><td>46.45</td><td>74.00</td><td>27.55</td><td>Peak</td></tr></table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	2390.00	46.92	-0.47	46.45	74.00	27.55	Peak	<table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>2380.53</td><td>47.75</td><td>-0.47</td><td>47.28</td><td>74.00</td><td>26.72</td><td>Peak</td></tr><tr><td>2</td><td>2390.00</td><td>47.03</td><td>-0.47</td><td>46.56</td><td>74.00</td><td>27.44</td><td>Peak</td></tr></table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	2380.53	47.75	-0.47	47.28	74.00	26.72	Peak	2	2390.00	47.03	-0.47	46.56	74.00	27.44	Peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																								
1	2390.00	46.92	-0.47	46.45	74.00	27.55	Peak																																								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																								
1	2380.53	47.75	-0.47	47.28	74.00	26.72	Peak																																								
2	2390.00	47.03	-0.47	46.56	74.00	27.44	Peak																																								
BDR Mode(DH5) high channel Chain1 Bandedge Horizontal				BDR Mode(DH5) high channel Chain1 Bandedge Vertical																																											
Project No.: 2502Z01325E-RF Polarization: Horizontal Test Mode: Transmitting Note: BDR Mode(DH5) high channel 2480MHz Chain1 Peak: RBW:1MHz, VBW:3MHz Serial No.: 300W-1 Tester: Leo Xiao Date: 2025-12-02				Project No.: 2502Z01325E-RF Polarization: Vertical Test Mode: Transmitting Note: BDR Mode(DH5) high channel 2480MHz Chain1 Peak: RBW:1MHz, VBW:3MHz Serial No.: 300W-1 Tester: Leo Xiao Date: 2025-12-02																																											
<table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>2483.50</td><td>50.66</td><td>-0.30</td><td>50.36</td><td>74.00</td><td>23.64</td><td>Peak</td></tr></table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	2483.50	50.66	-0.30	50.36	74.00	23.64	Peak	<table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>2483.50</td><td>51.61</td><td>-0.30</td><td>51.31</td><td>74.00</td><td>22.69</td><td>Peak</td></tr></table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	2483.50	51.61	-0.30	51.31	74.00	22.69	Peak								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																								
1	2483.50	50.66	-0.30	50.36	74.00	23.64	Peak																																								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																								
1	2483.50	51.61	-0.30	51.31	74.00	22.69	Peak																																								


2EDR Mode(2DH5) low channel Chain0 Bandedge Horizontal

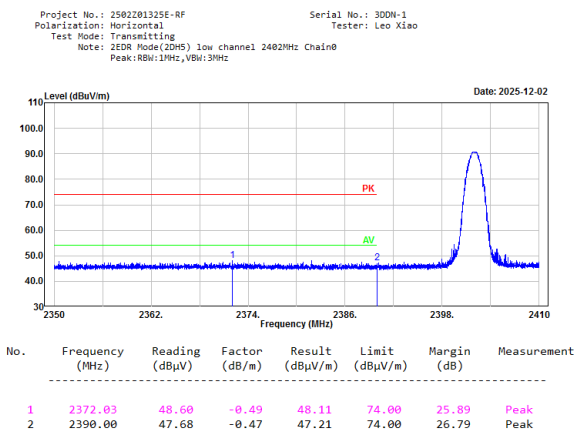


2EDR Mode(2DH5) low channel Chain0 Bandedge Vertical

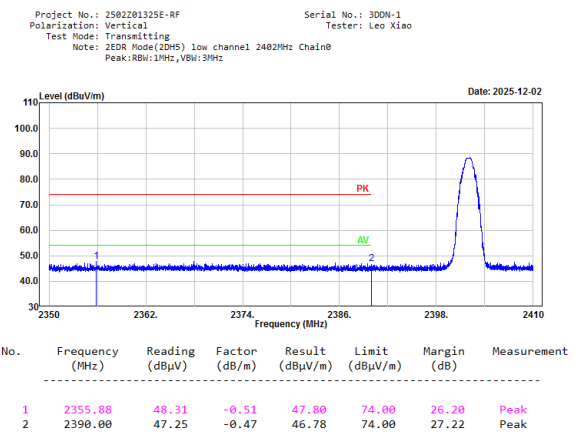

2EDR Mode(2DH5) high channel Chain0 Bandedge Horizontal

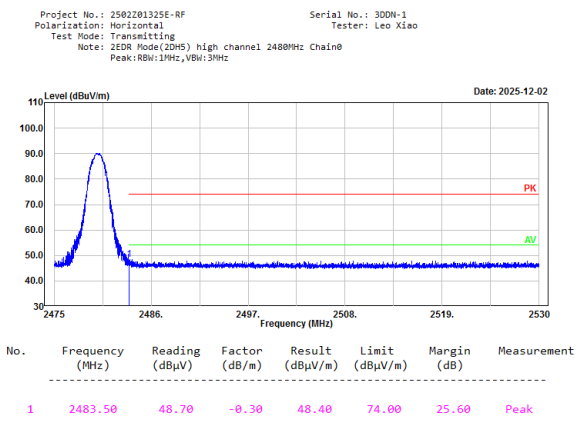


2EDR Mode(2DH5) high channel Chain0 Bandedge Vertical

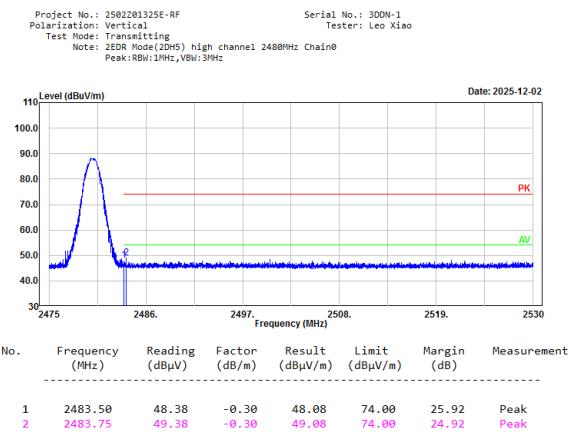


2EDR Mode(2DH5) low channel Chain1 Bandedge Horizontal				2EDR Mode(2DH5) low channel Chain1 Bandedge Vertical																																			
Project No.: 2502201325E-RF Polarization: Horizontal Test Mode: Transmitting Note: 2EDR Mode(2DH5) low channel 2402MHz Chain1 Peak: RBW:1MHz, VBW:3MHz Serial No.: 300N-1 Tester: Leo Xiao Date: 2025-12-02				Project No.: 2502201325E-RF Polarization: Vertical Test Mode: Transmitting Note: 2EDR Mode(2DH5) low channel 2402MHz Chain1 Peak: RBW:1MHz, VBW:3MHz Serial No.: 300N-1 Tester: Leo Xiao Date: 2025-12-02																																			
<table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBμV)</th><th>Factor (dB/m)</th><th>Result (dBμV/m)</th><th>Limit (dBμV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>2390.00</td><td>46.53</td><td>-0.47</td><td>46.06</td><td>74.00</td><td>27.94</td><td>Peak</td></tr></table>				No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement	1	2390.00	46.53	-0.47	46.06	74.00	27.94	Peak	<table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBμV)</th><th>Factor (dB/m)</th><th>Result (dBμV/m)</th><th>Limit (dBμV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>2390.00</td><td>47.18</td><td>-0.47</td><td>46.71</td><td>74.00</td><td>27.29</td><td>Peak</td></tr></table>				No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement	1	2390.00	47.18	-0.47	46.71	74.00	27.29	Peak
No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement																																
1	2390.00	46.53	-0.47	46.06	74.00	27.94	Peak																																
No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement																																
1	2390.00	47.18	-0.47	46.71	74.00	27.29	Peak																																

2EDR Mode(2DH5) high channel Chain1 Bandedge Horizontal				2EDR Mode(2DH5) high channel Chain1 Bandedge Vertical																																			
Project No.: 2502201325E-RF Polarization: Horizontal Test Mode: Transmitting Note: 2EDR Mode(2DH5) high channel 2480MHz Chain1 Peak: RBW:1MHz, VBW:3MHz Serial No.: 300N-1 Tester: Leo Xiao Date: 2025-12-02				Project No.: 2502201325E-RF Polarization: Vertical Test Mode: Transmitting Note: 2EDR Mode(2DH5) high channel 2480MHz Chain1 Peak: RBW:1MHz, VBW:3MHz Serial No.: 300N-1 Tester: Leo Xiao Date: 2025-12-02																																			
<table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBμV)</th><th>Factor (dB/m)</th><th>Result (dBμV/m)</th><th>Limit (dBμV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>2483.50</td><td>50.12</td><td>-0.30</td><td>49.82</td><td>74.00</td><td>24.18</td><td>Peak</td></tr></table>				No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement	1	2483.50	50.12	-0.30	49.82	74.00	24.18	Peak	<table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBμV)</th><th>Factor (dB/m)</th><th>Result (dBμV/m)</th><th>Limit (dBμV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>2483.50</td><td>50.68</td><td>-0.30</td><td>50.38</td><td>74.00</td><td>23.62</td><td>Peak</td></tr></table>				No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement	1	2483.50	50.68	-0.30	50.38	74.00	23.62	Peak
No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement																																
1	2483.50	50.12	-0.30	49.82	74.00	24.18	Peak																																
No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement																																
1	2483.50	50.68	-0.30	50.38	74.00	23.62	Peak																																


3EDR Mode(3DH5) low channel Chain0 Bandedge Horizontal

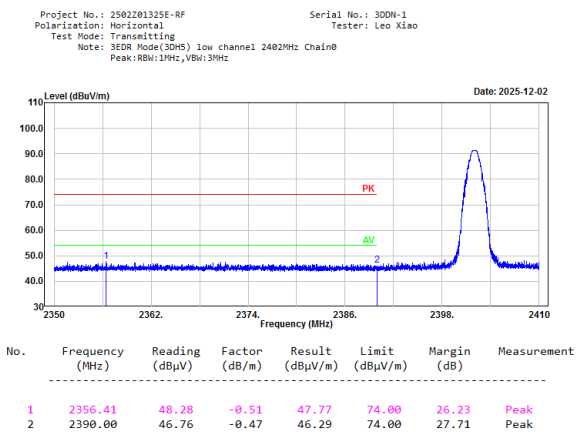


3EDR Mode(3DH5) low channel Chain0 Bandedge Vertical

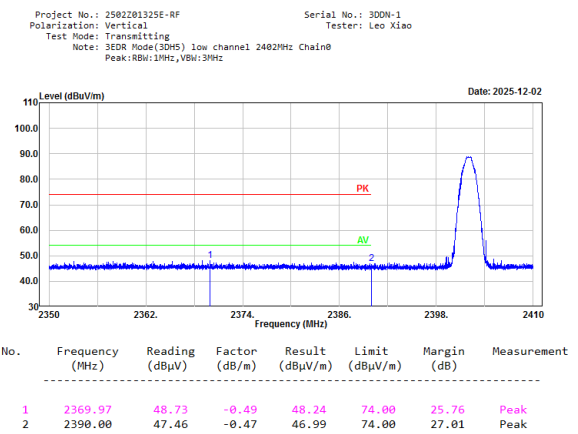


3EDR Mode(3DH5) high channel Chain0 Bandedge Horizontal

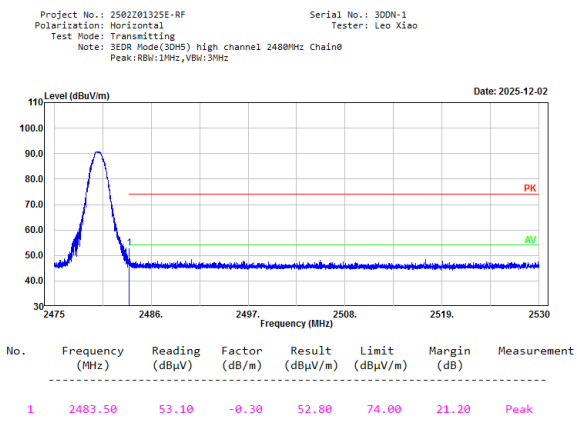


3EDR Mode(3DH5) high channel Chain0 Bandedge Vertical

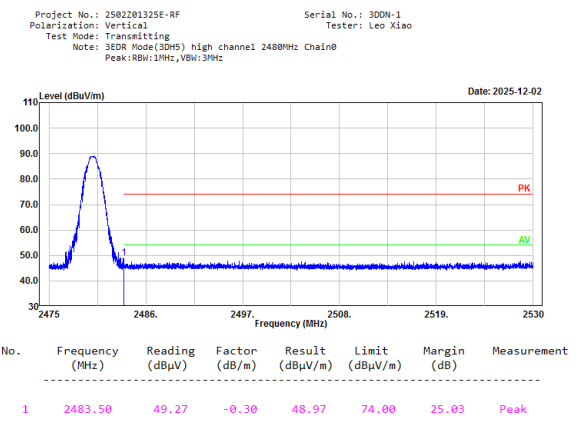


3EDR Mode(3DH5) low channel Chain1 Bandedge Horizontal

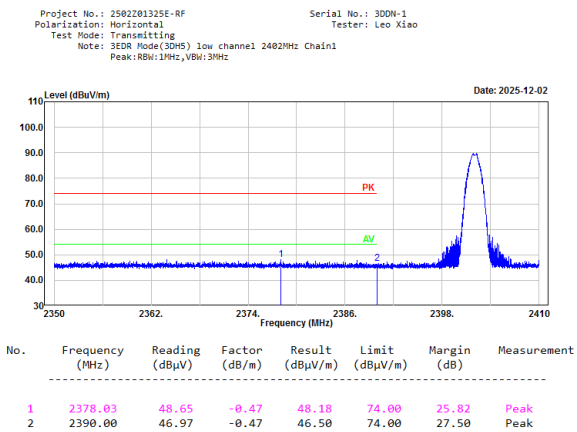


3EDR Mode(3DH5) low channel Chain1 Bandedge Vertical

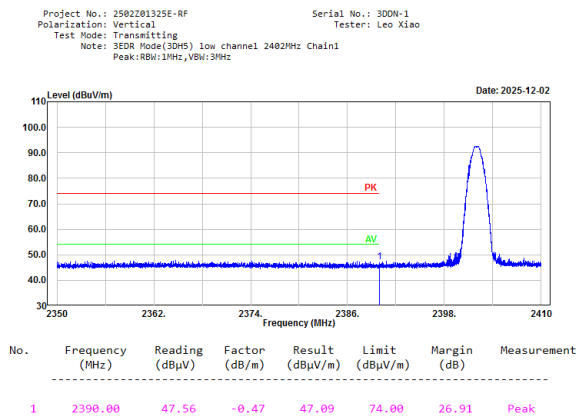

3EDR Mode(3DH5) high channel Chain1 Bandedge Horizontal

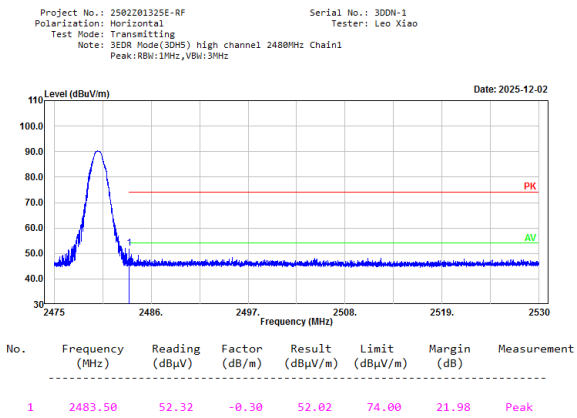

3EDR Mode(3DH5) high channel Chain1 Bandedge Vertical

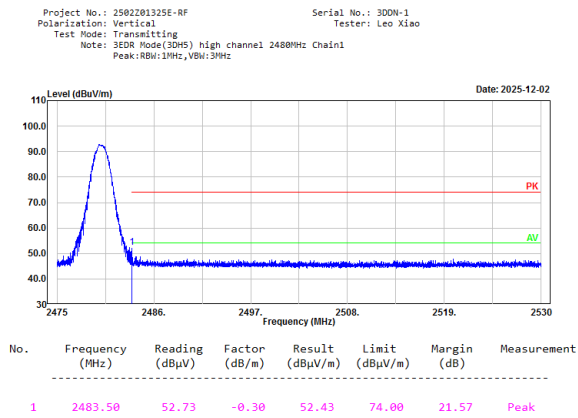

5.3 20 dB Emission Bandwidth

Serial No.:	3DDN-3	Test Date:	2025/12/05
Test Site:	RF	Test Mode:	Transmitting
Tester:	Conor Fu	Test Result:	N/A

Environmental Conditions:

Temperature: (°C)	25.4	Relative Humidity: (%)	38	ATM Pressure: (kPa)	101.7
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Coaxial Attenuator	10dB	F-08-EM512	2025/06/06	2026/06/05
R&S	Spectrum Analyzer	FSV40	101461	2025/08/03	2026/08/02


* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Note: Test only was performed at Chain 0.


Mode	Channel	Result (MHz)
BDR_DH1	Low	0.772
	Middle	0.775
	High	0.769
2EDR_DH1	Low	1.210
	Middle	1.213
	High	1.213
3EDR_DH1	Low	1.219
	Middle	1.219
	High	1.219

BDR_DH1_Low

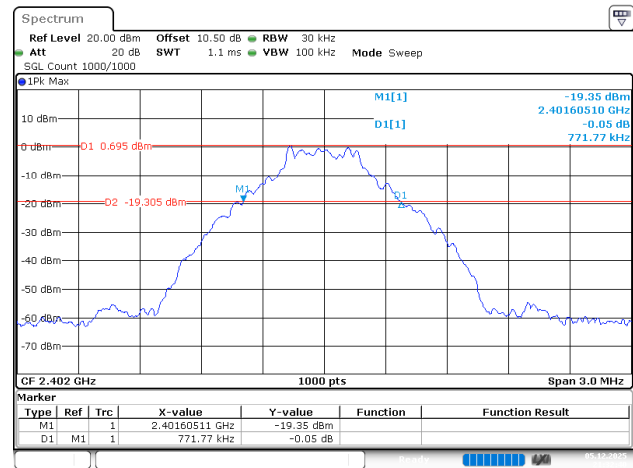


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:32:40

BDR_DH1_Middle

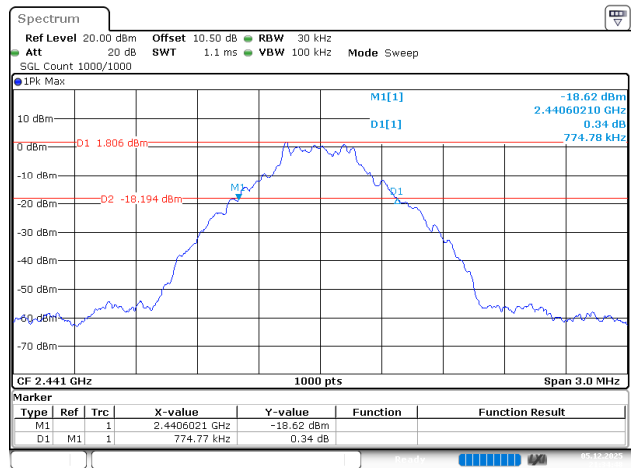


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:34:48

BDR_DH1_High

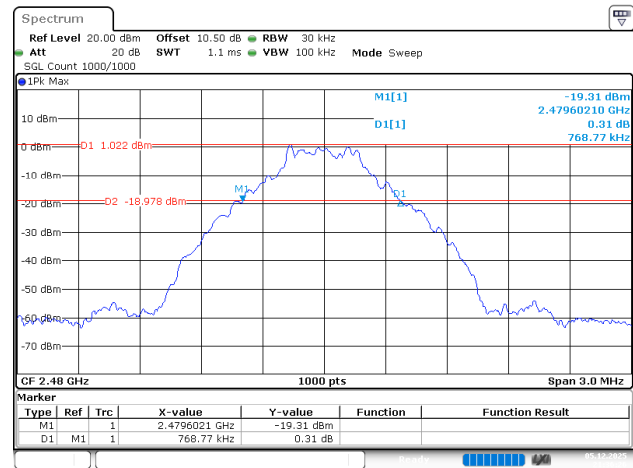


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:36:26

2EDR_DH1_Low

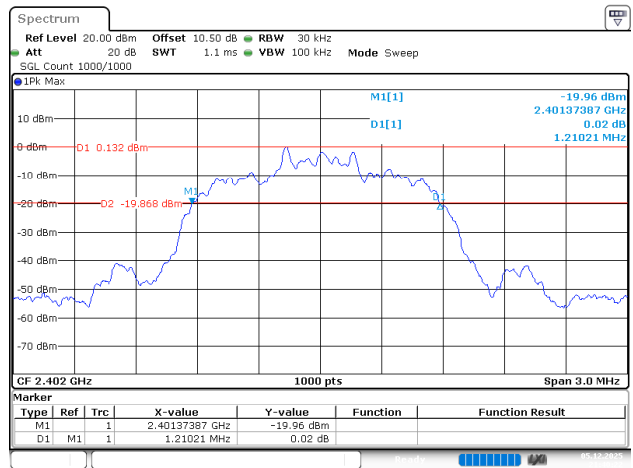


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:40:23

2EDR_DH1_Middle

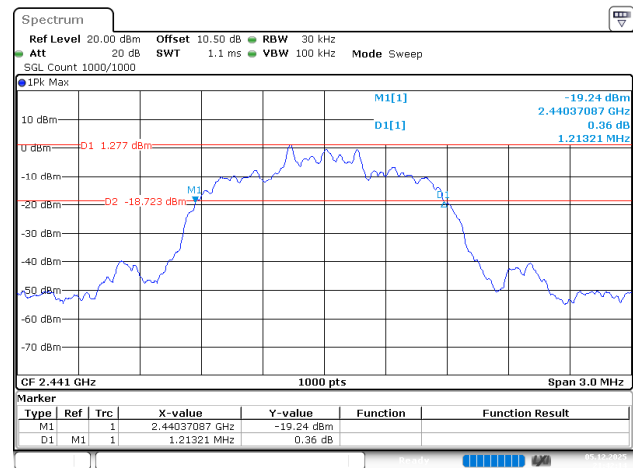


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:42:14

2EDR_DH1_High

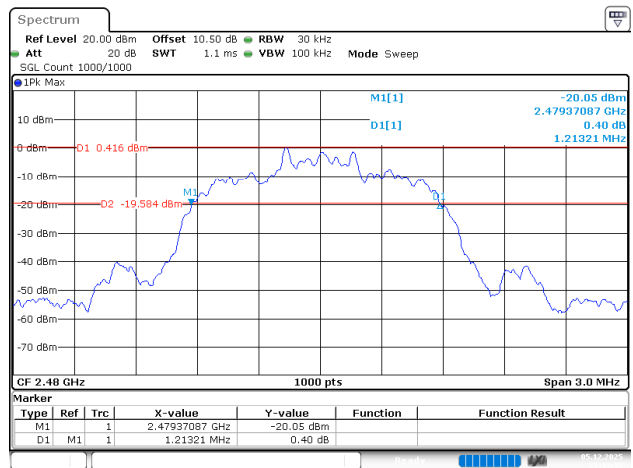


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:43:55

3EDR_DH1_Low

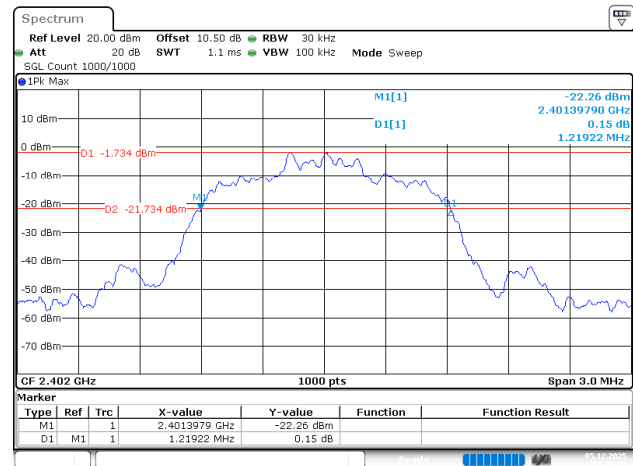


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:45:58

3EDR_DH1_Middle

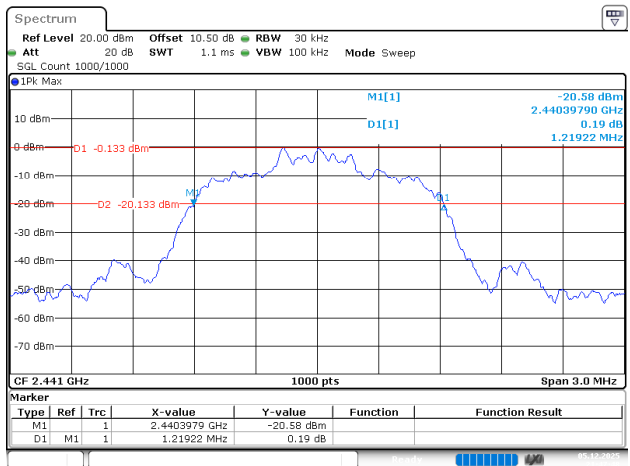

ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:47:49

3EDR_DH1_High

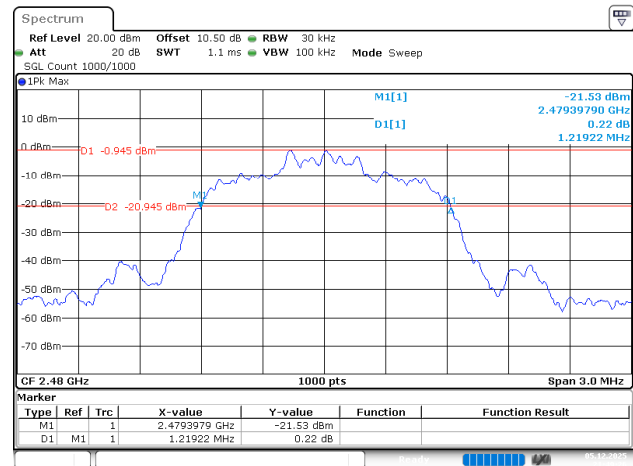

ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:49:27

5.4 Channel Separation

Test Information:

Serial No.:	3DDN-3	Test Date:	2025/12/05
Test Site:	RF	Test Mode:	Transmitting
Tester:	Conor Fu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.4	Relative Humidity: (%)	38	ATM Pressure: (kPa)	101.7
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Coaxial Attenuator	10dB	F-08-EM512	2025/06/06	2026/06/05
R&S	Spectrum Analyzer	FSV40	101461	2025/08/03	2026/08/02

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*


Test Data:

Note: Test only was performed at Chain 0.

Mode	Channel	Result (MHz)	Limit (MHz)	Verdict
BDR_DH1	Low	1.001	0.813	Pass
	Middle	1.001	0.813	Pass
	High	1.003	0.813	Pass


Note: Only the BDR (GFSK) mode result is reported since EDR ($\pi/4$ -DQPSK) and EDR (8DPSK) mode have the exact same channel plan, and the limit is the maximum 20dB bandwidth *2/3.

BDR_DH1_Low

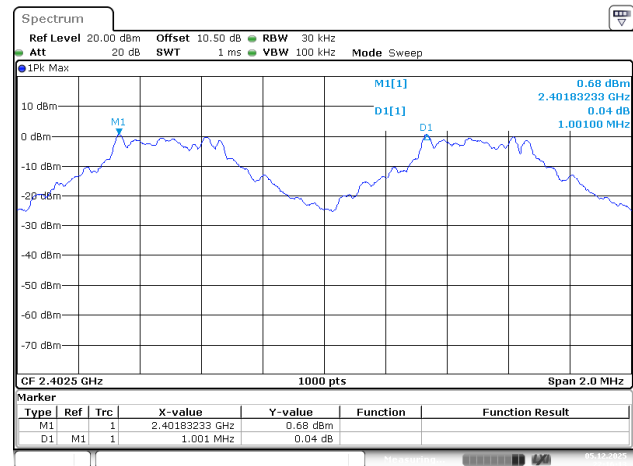


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 22:16:13

BDR_DH1_Middle

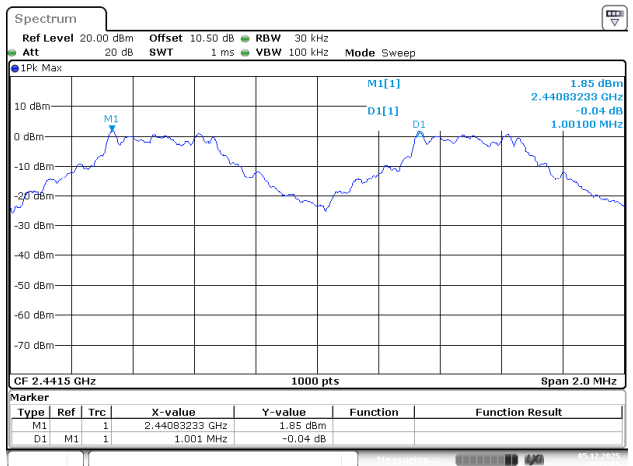

ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 22:17:26

BDR_DH1_High

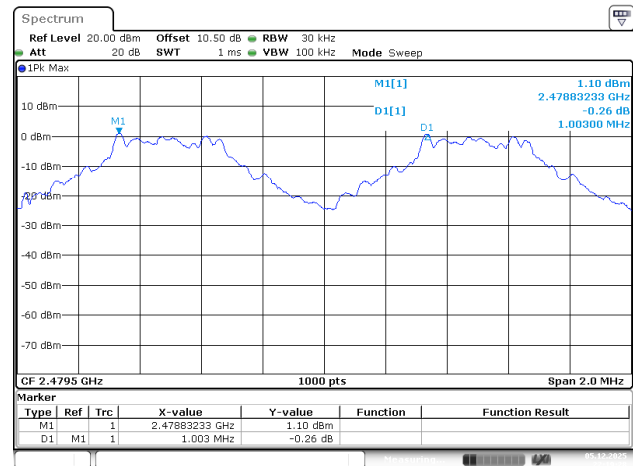

ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 22:19:28

5.5 Number of Hopping Frequency

Test Information:

Serial No.:	3DDN-3	Test Date:	2025/12/05
Test Site:	RF	Test Mode:	Transmitting
Tester:	Conor Fu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.4	Relative Humidity: (%)	38	ATM Pressure: (kPa)	101.7
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Coaxial Attenuator	10dB	F-08-EM512	2025/06/06	2026/06/05
R&S	Spectrum Analyzer	FSV40	101461	2025/08/03	2026/08/02


* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Note: Test only was performed at Chain 0.


Mode	Channel	Result	Limit	Verdict
BDR_DH1	Hopping	79	15	Pass
2EDR_DH1	Hopping	79	15	Pass
3EDR_DH1	Hopping	79	15	Pass

BDR_DH1_Hopping

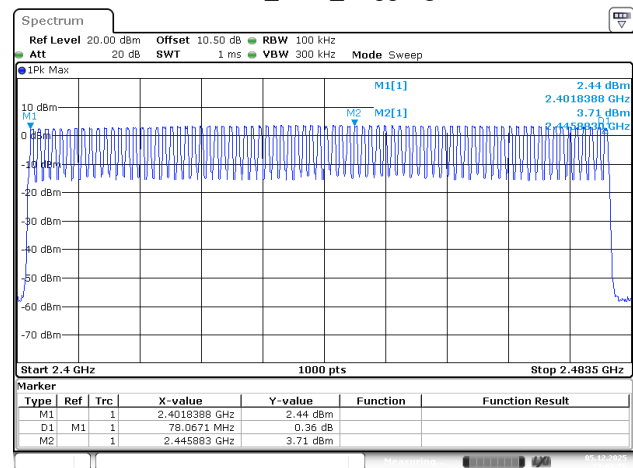


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 22:09:57

2EDR_DH1_Hopping

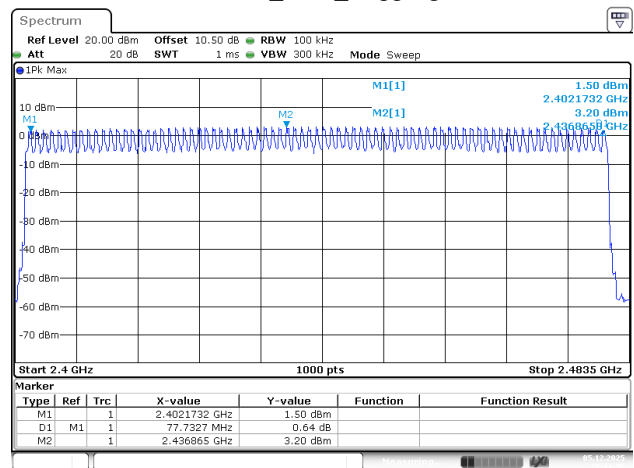

ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 22:11:37

3EDR_DH1_Hopping

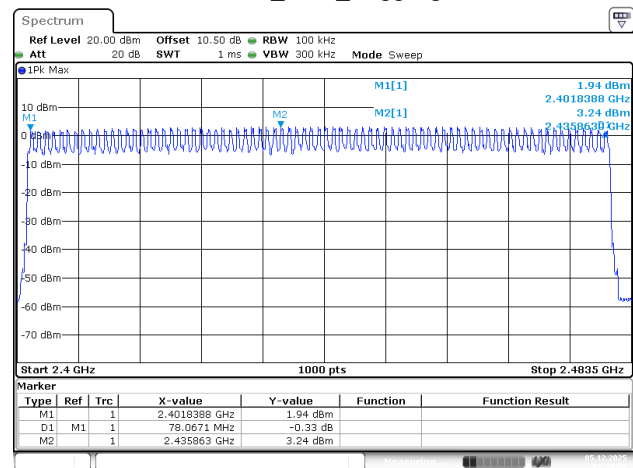

ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 22:13:57

5.6 Time of Occupancy (dwell time)**Test Information:**

Serial No.:	3DDN-3	Test Date:	2025/12/05
Test Site:	RF	Test Mode:	Transmitting
Tester:	Conor Fu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.4	Relative Humidity: (%)	38	ATM Pressure: (kPa)	101.7
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Coaxial Attenuator	10dB	F-08-EM512	2025/06/06	2026/06/05
R&S	Spectrum Analyzer	FSV40	101461	2025/08/03	2026/08/02

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Note: Test only was performed at Chain 0.


Test Mode	Channel	Burst Width (ms)	Total Hops (Num)	Result (s)	Limit (s)	Verdict
BDR_DH1	Hopping	0.380	320	0.122	≤ 0.4	Pass
BDR_DH3	Hopping	1.640	140	0.230	≤ 0.4	Pass
BDR_DH5	Hopping	2.898	130	0.377	≤ 0.4	Pass
2EDR_DH1	Hopping	0.388	320	0.124	≤ 0.4	Pass
2EDR_DH3	Hopping	1.643	140	0.230	≤ 0.4	Pass
2EDR_DH5	Hopping	2.898	90	0.261	≤ 0.4	Pass
3EDR_DH1	Hopping	0.388	320	0.124	≤ 0.4	Pass
3EDR_DH3	Hopping	1.643	150	0.246	≤ 0.4	Pass
3EDR_DH5	Hopping	2.898	100	0.290	≤ 0.4	Pass

Note 1: A period time = $0.4 \times 79 = 31.6(S)$, Result = Burst Width * Total hops

Note 2: Total hops = Hopping Number in $3.16s \times 10$

Note 3: Hopping Number in 3.16s = Total of highest signals in 3.16s(Second high signals were other channel)


BDR_DH1_Hopping

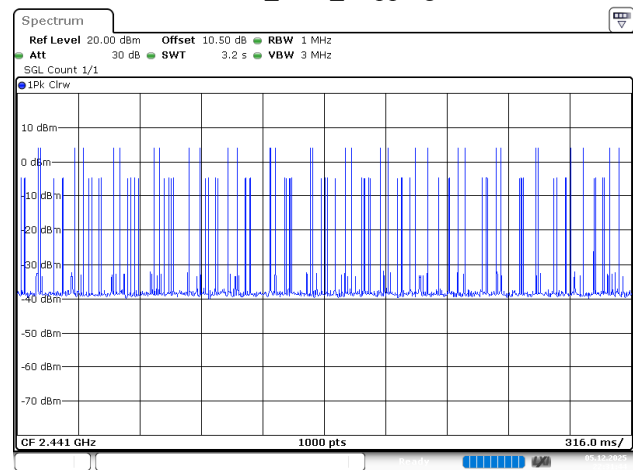

ProjectNo.:2502Z01325E-RF Tester:Conor Fu

Date: 5.DEC.2025 22:31:44


BDR_DH1_Hopping

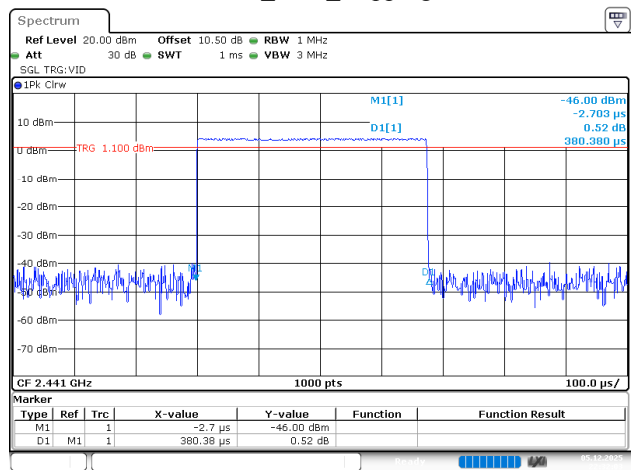

ProjectNo.:2502Z01325E-RF Tester:Conor Fu

Date: 5.DEC.2025 22:32:03


BDR_DH3_Hopping

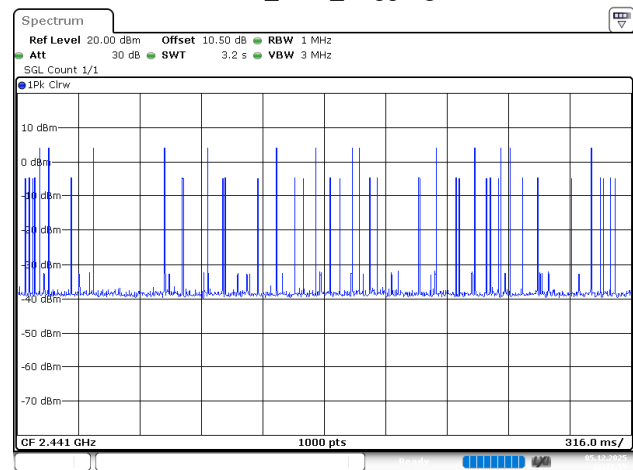

ProjectNo.:2502Z01325E-RF Tester:Conor Fu

Date: 5.DEC.2025 22:32:55


BDR_DH3_Hopping

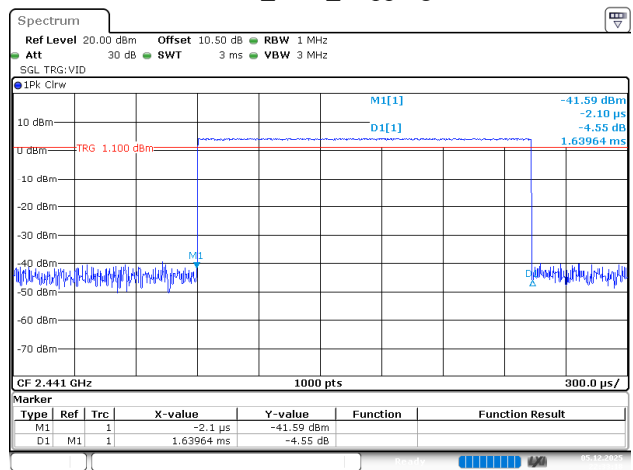

ProjectNo.:2502Z01325E-RF Tester:Conor Fu

Date: 5.DEC.2025 22:33:18


BDR_DH5_Hopping

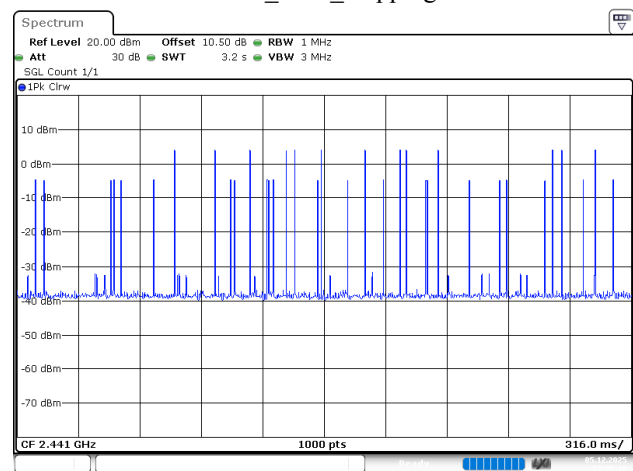

ProjectNo.:2502Z01325E-RF Tester:Conor Fu

Date: 5.DEC.2025 22:35:20


BDR_DH5_Hopping

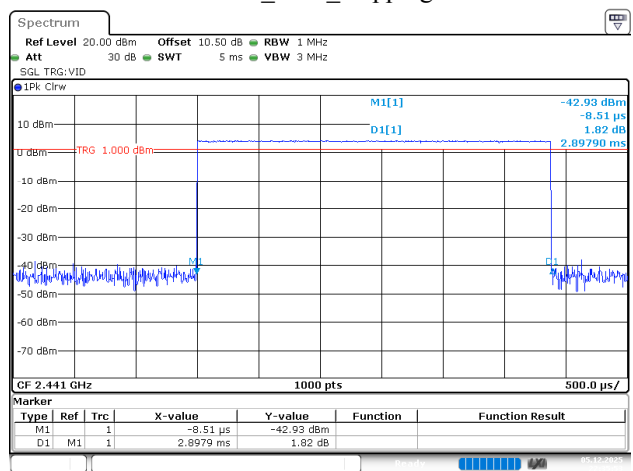

ProjectNo.:2502Z01325E-RF Tester:Conor Fu


Date: 5.DEC.2025 22:35:54

2EDR_DH1_Hopping

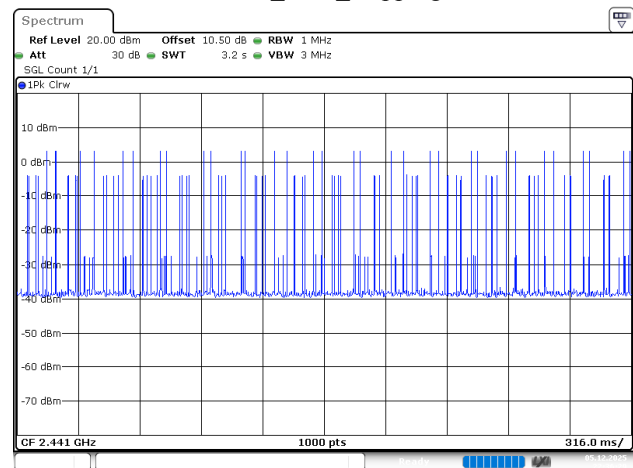


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 22:36:29

2EDR_DH1_Hopping

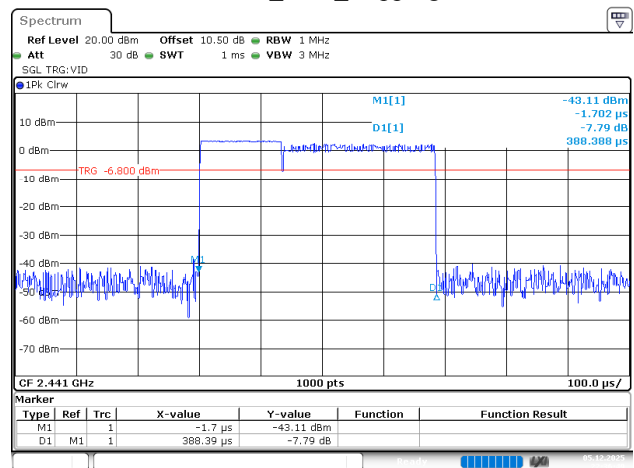


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 22:36:49

2EDR_DH3_Hopping

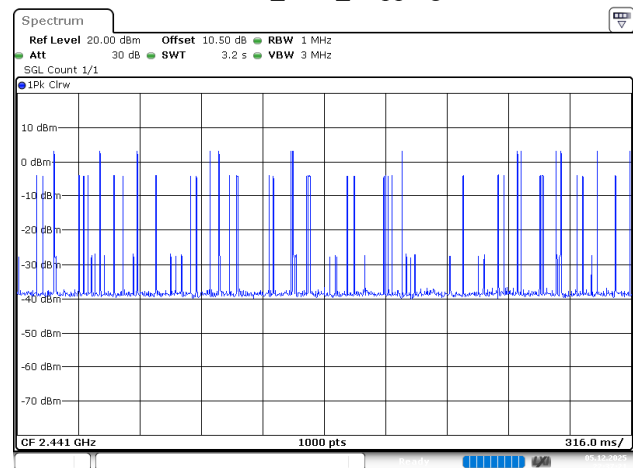


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 22:37:22

2EDR_DH3_Hopping

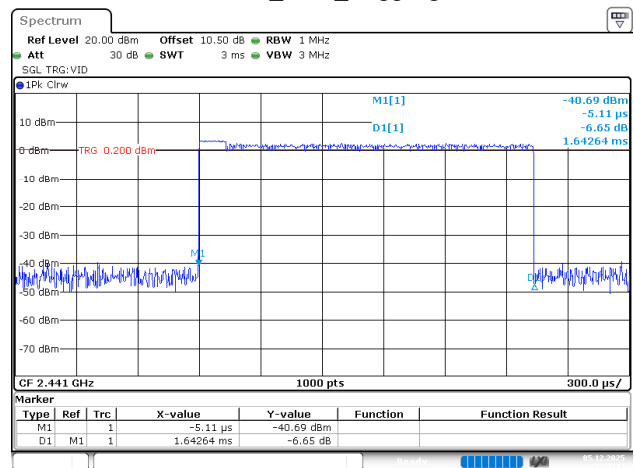


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 22:37:42

2EDR_DH5_Hopping

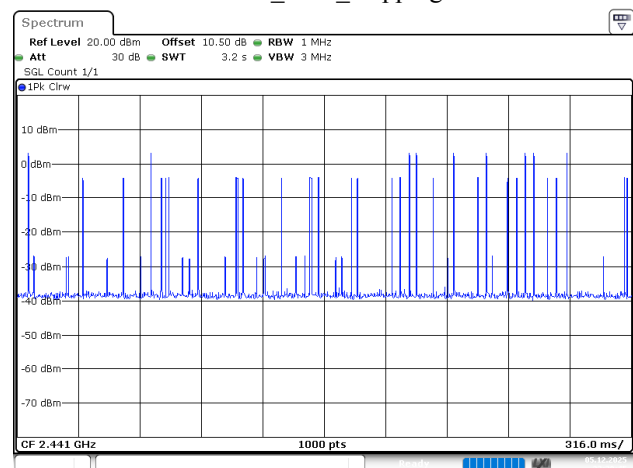


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 22:38:46

2EDR_DH5_Hopping

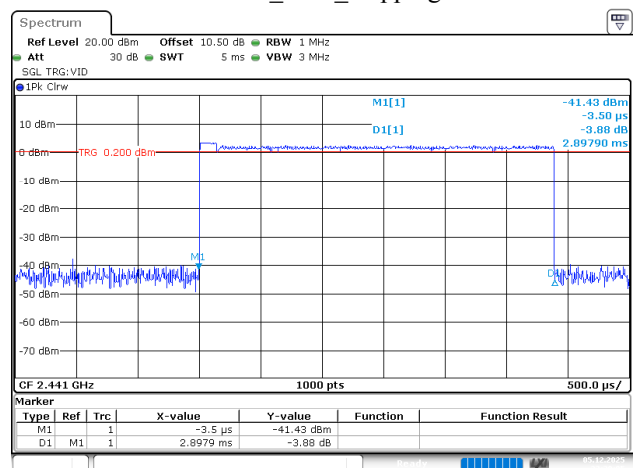


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 22:39:05

3EDR_DH1_Hopping

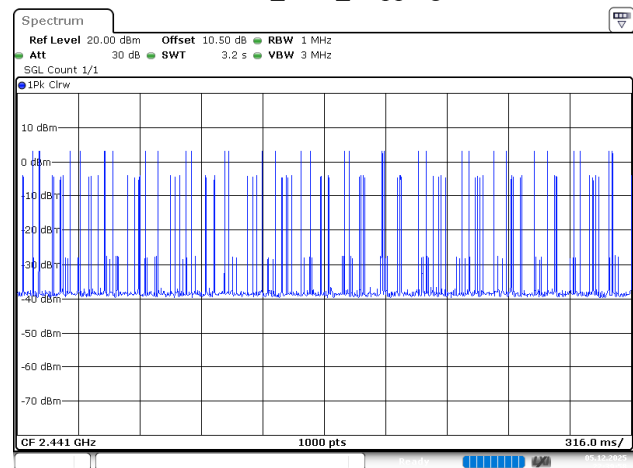


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 22:39:59

3EDR_DH1_Hopping

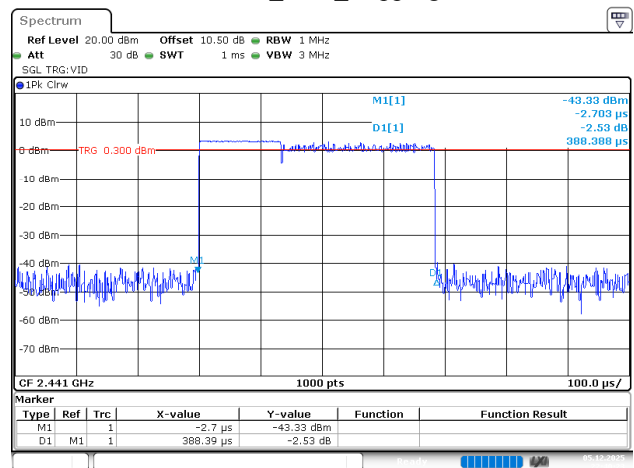


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 22:40:23

3EDR_DH3_Hopping

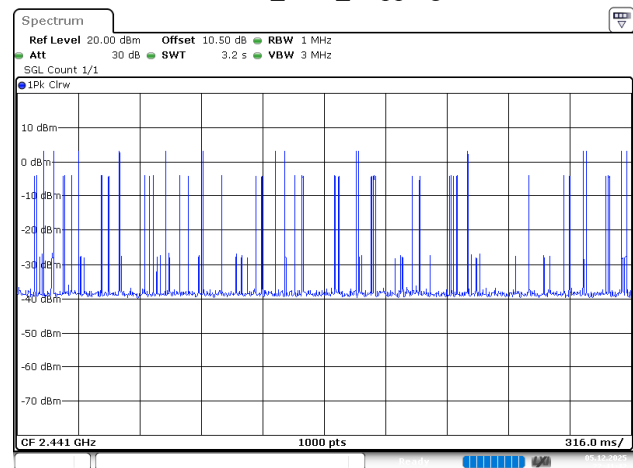


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 22:41:43

3EDR_DH3_Hopping

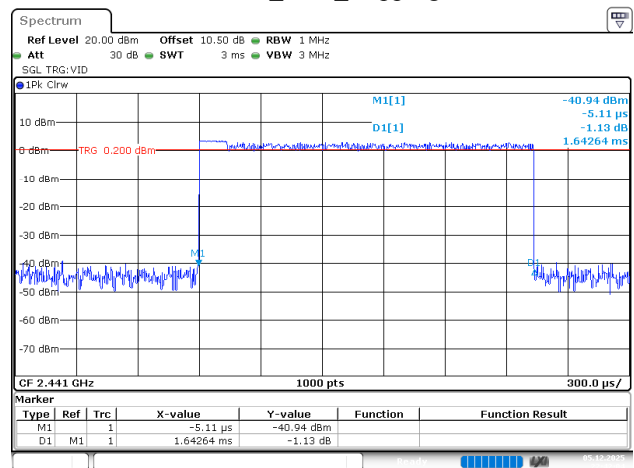


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 22:42:04

3EDR_DH5_Hopping

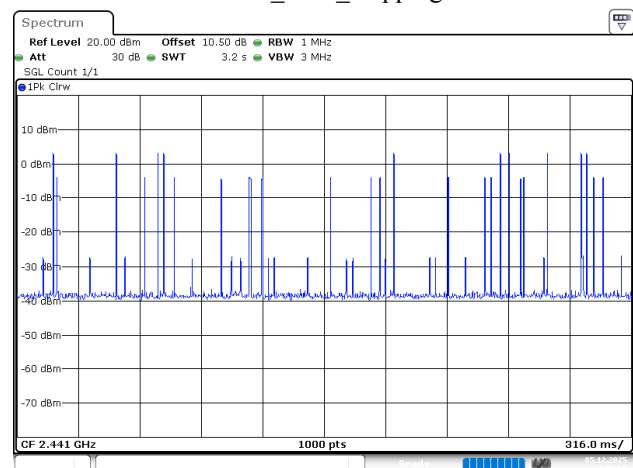

ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 22:43:59

3EDR_DH5_Hopping

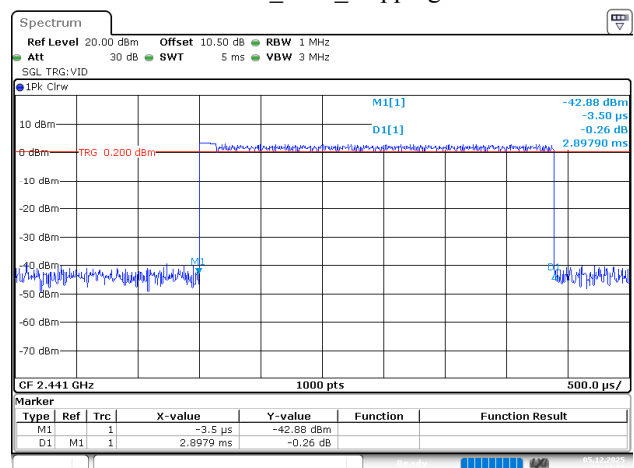

ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 22:44:17

5.7 Maximum Conducted Output Power

Test Information:

Serial No.:	3DDN-3	Test Date:	2025/12/05~2025/12/12
Test Site:	RF	Test Mode:	Transmitting
Tester:	Conor Fu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.4-25.8	Relative Humidity: (%)	38-39	ATM Pressure: (kPa)	101.1-101.7
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Coaxial Attenuator	10dB	F-08-EM512	2025/06/06	2026/06/05
R&S	Spectrum Analyzer	FSV40	101461	2025/08/03	2026/08/02

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:**Chain 0**


Mode	Test Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)	Verdict
BDR_DH1	2402	3.00	21.00	Pass
	2441	4.09	21.00	Pass
	2480	3.30	21.00	Pass
2EDR_DH1	2402	2.16	21.00	Pass
	2441	3.30	21.00	Pass
	2480	2.45	21.00	Pass
3EDR_DH1	2402	1.92	21.00	Pass
	2441	3.46	21.00	Pass
	2480	2.65	21.00	Pass

Chain 1

Mode	Test Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)	Verdict
BDR_DH1	2402	2.27	21.00	Pass
	2441	3.47	21.00	Pass
	2480	3.15	21.00	Pass
2EDR_DH1	2402	1.38	21.00	Pass
	2441	2.59	21.00	Pass
	2480	2.24	21.00	Pass
3EDR_DH1	2402	1.56	21.00	Pass
	2441	2.77	21.00	Pass
	2480	2.43	21.00	Pass


Chain 0

BDR_DH1_Low

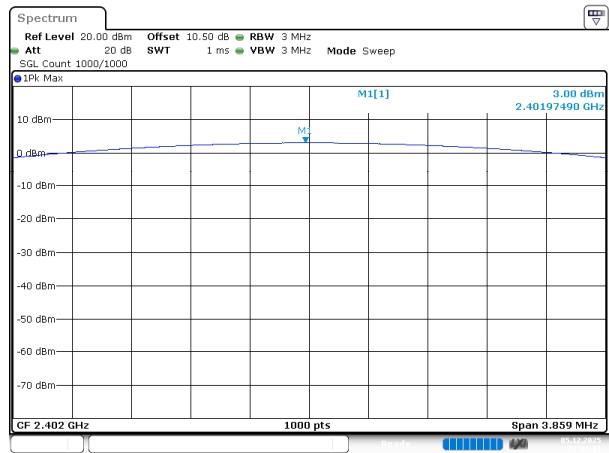


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:33:11

BDR_DH1_Middle

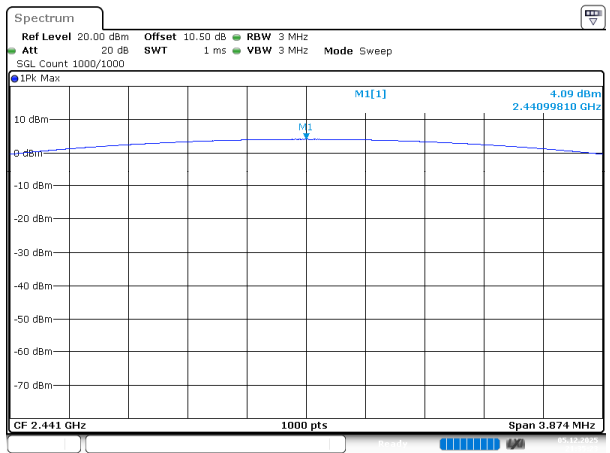


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:35:24

BDR_DH1_High

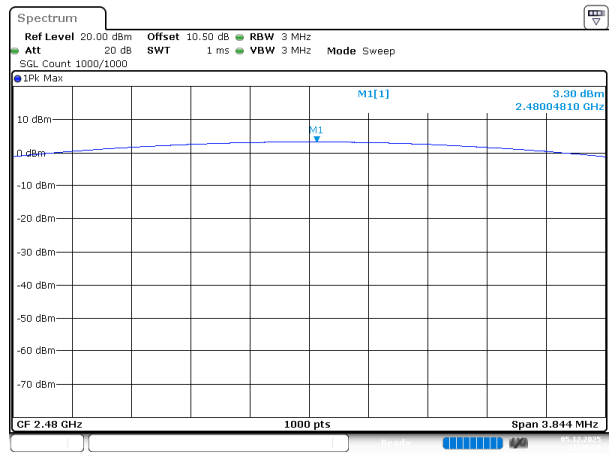


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:36:59

2EDR_DH1_Low

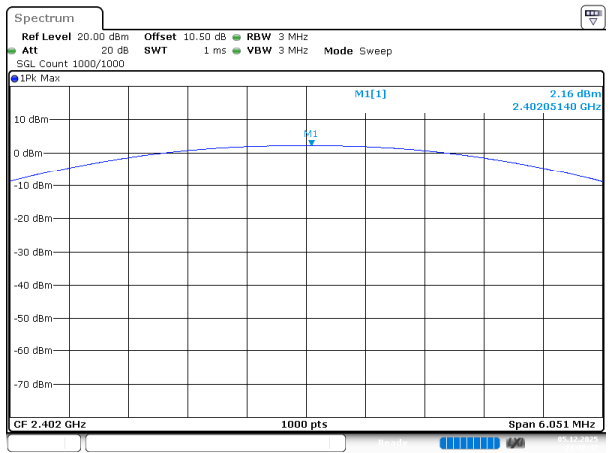


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:40:48

2EDR_DH1_Middle

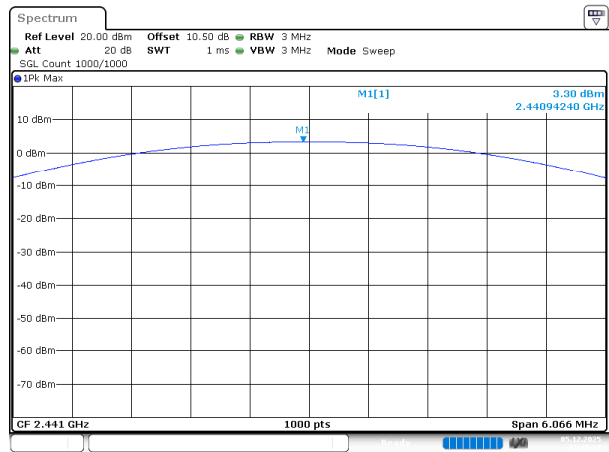


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:42:38

2EDR_DH1_High

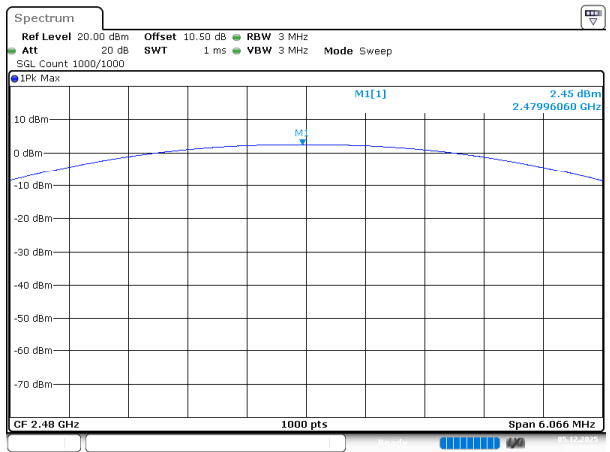


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:44:32

3EDR_DH1_Low

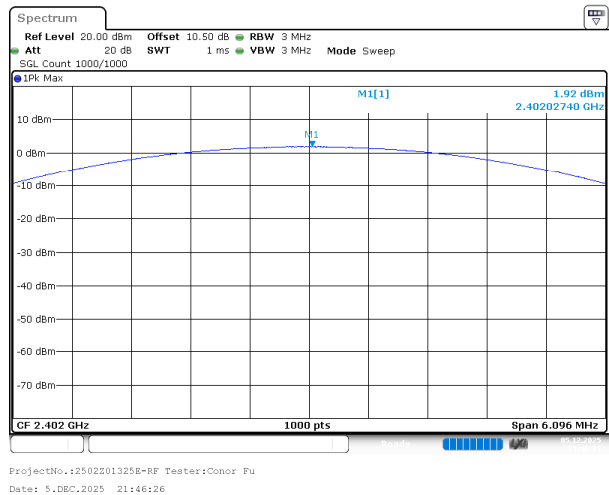


3EDR_DH1_Middle

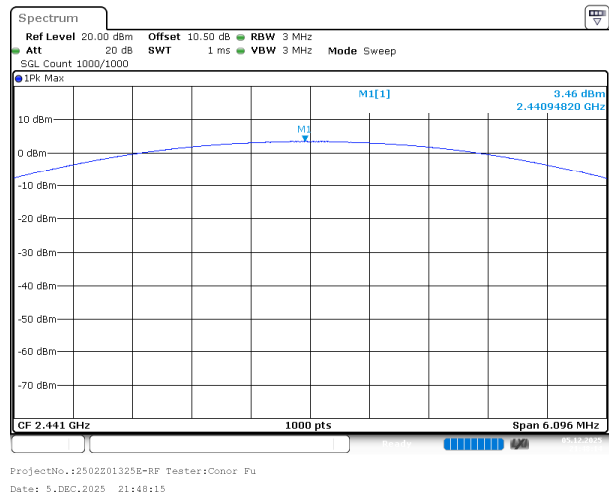


Chain 1


3EDR_DH1_High

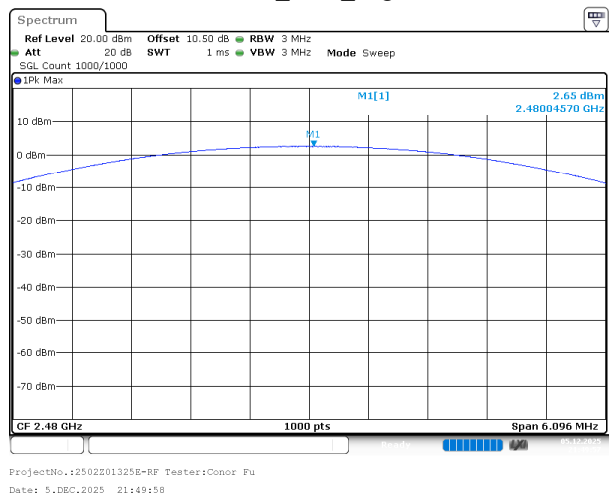


BDR_DH1_Low

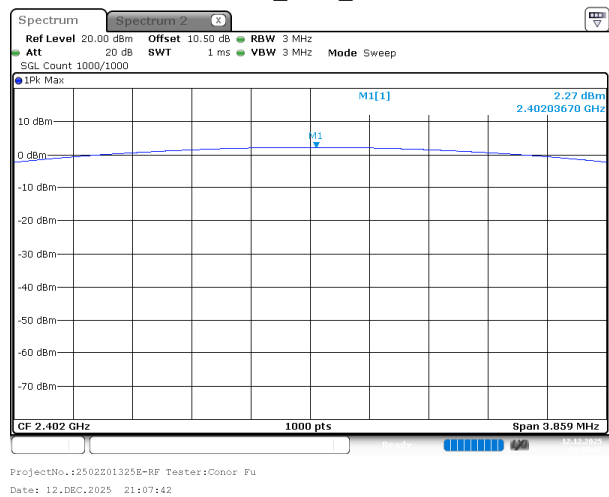


BDR_DH1_Middle

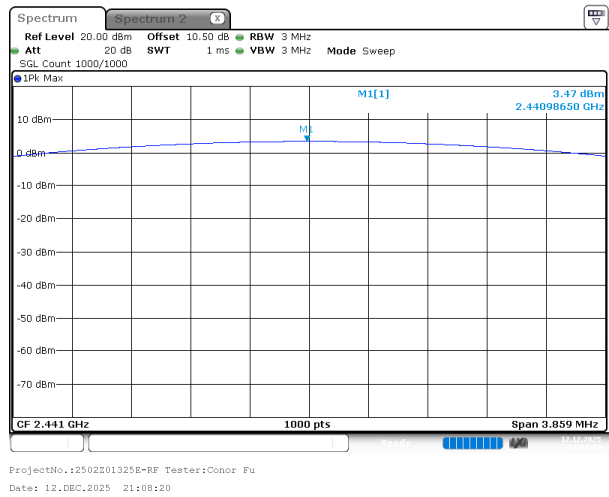

BDR_DH1_High

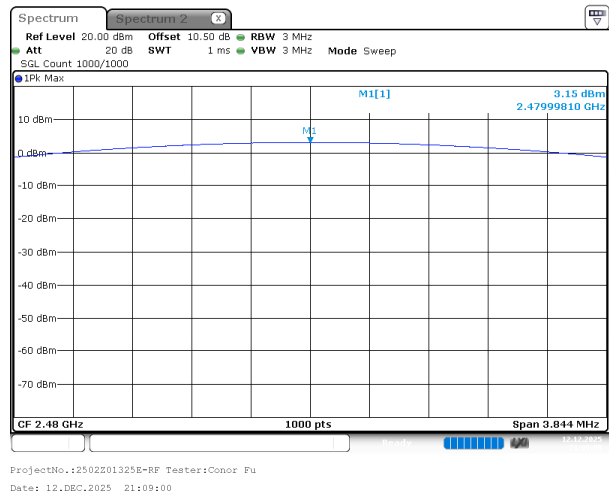


2EDR_DH1_Low

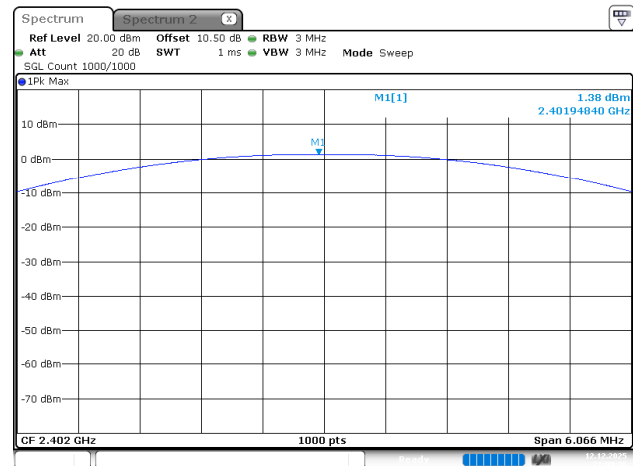


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 12.DEC.2025 21:09:36

2EDR_DH1_Middle

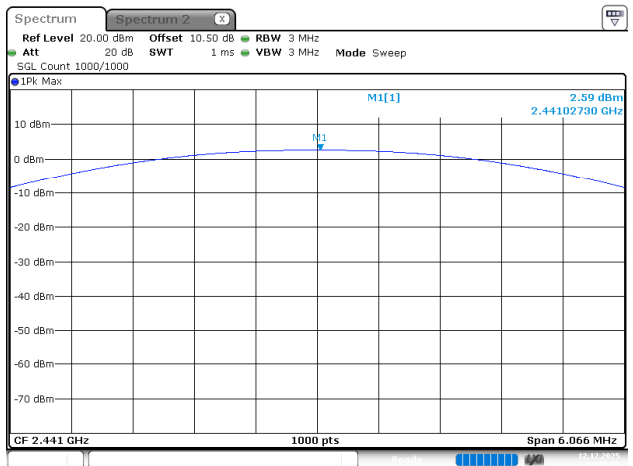


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 12.DEC.2025 21:10:06

2EDR_DH1_High

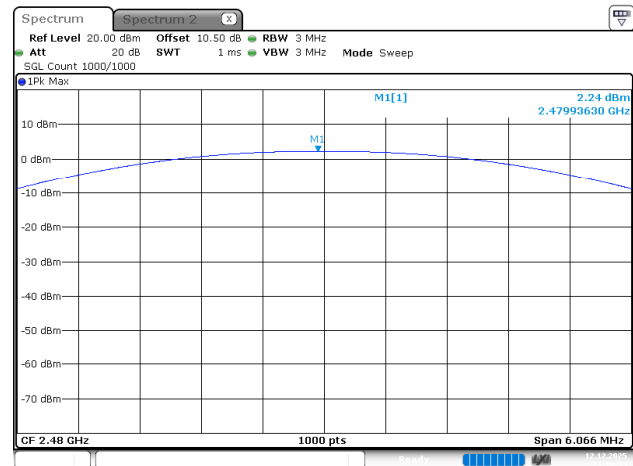


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 12.DEC.2025 21:10:36

3EDR_DH1_Low

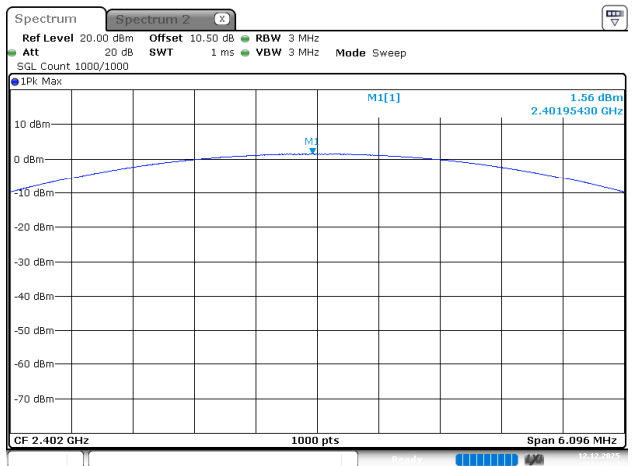


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 12.DEC.2025 21:11:14

3EDR_DH1_Middle

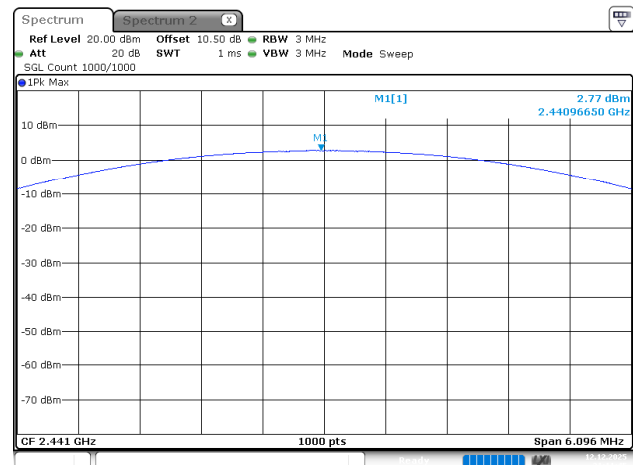

ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 12.DEC.2025 21:11:45

3EDR_DH1_High

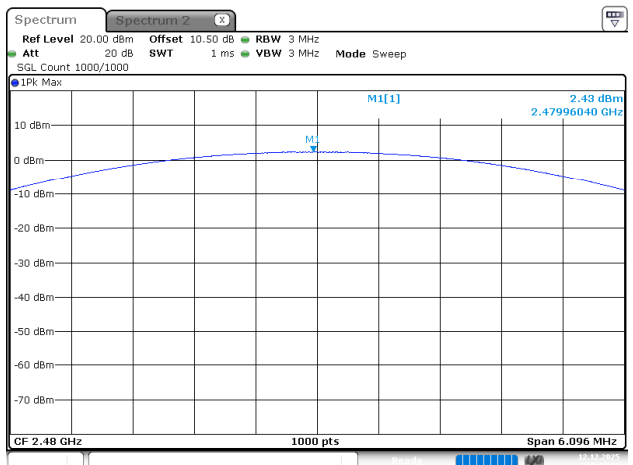

ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 12.DEC.2025 21:12:14

5.8 Conducted Spurious Emission

Test Information:

Serial No.:	3DDN-3	Test Date:	2025/12/05
Test Site:	RF	Test Mode:	Transmitting
Tester:	Conor Fu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.4	Relative Humidity: (%)	38	ATM Pressure: (kPa)	101.7
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HUBER+SUHNER	Coaxial Attenuator	6610_SMA-50-1	0064	2025/06/06	2026/06/05
R&S	Spectrum Analyzer	FSV40	101461	2025/08/03	2026/08/02

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*


Test Data:

- Note:
- 1.Test only was performed at Chain 0.
 - 2.The maximum path attenuation of 30MHz-25GHz was added into the offset.


BDR_DH1_Low

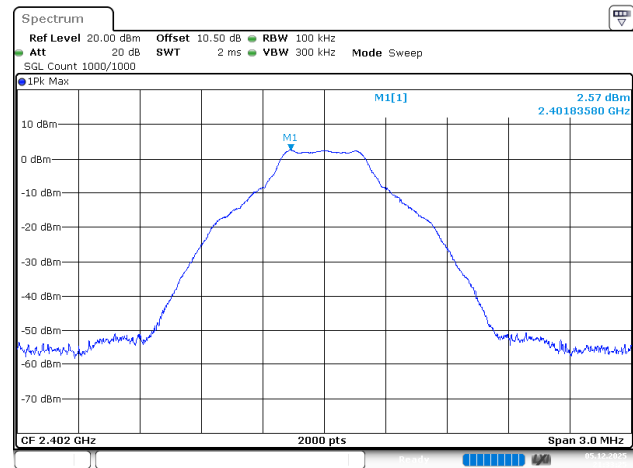


BDR_DH1_Low

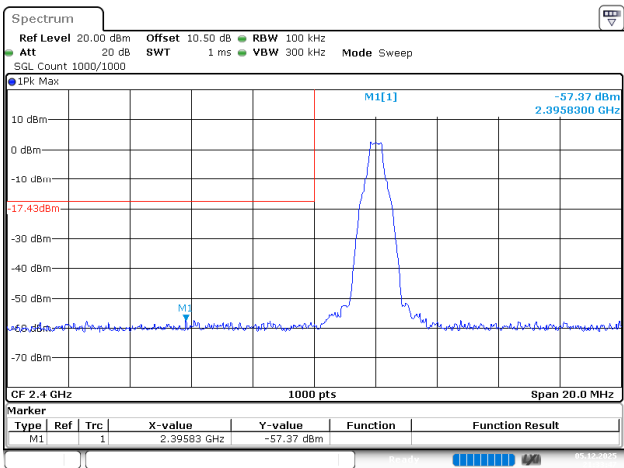


BDR_DH1_Low

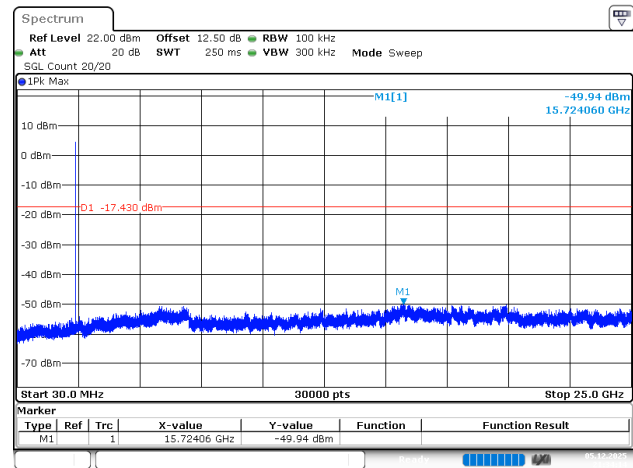


BDR_DH1_Middle

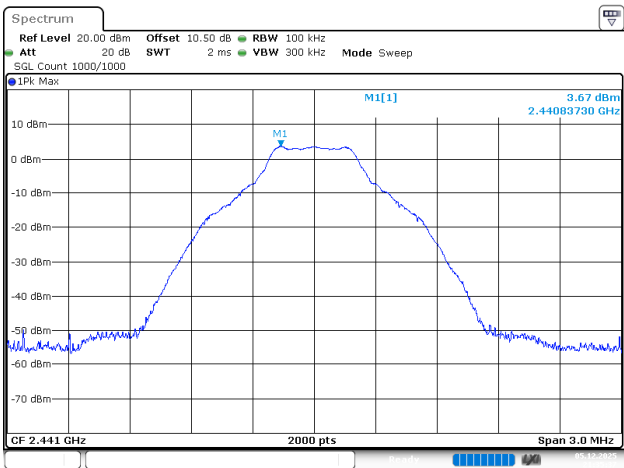


BDR_DH1_Middle

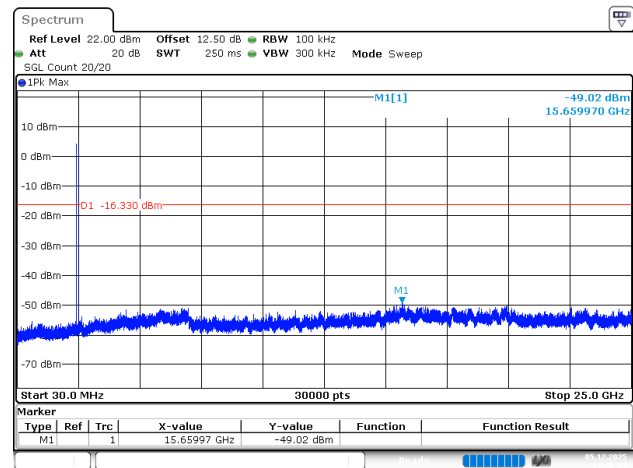

BDR_DH1_High

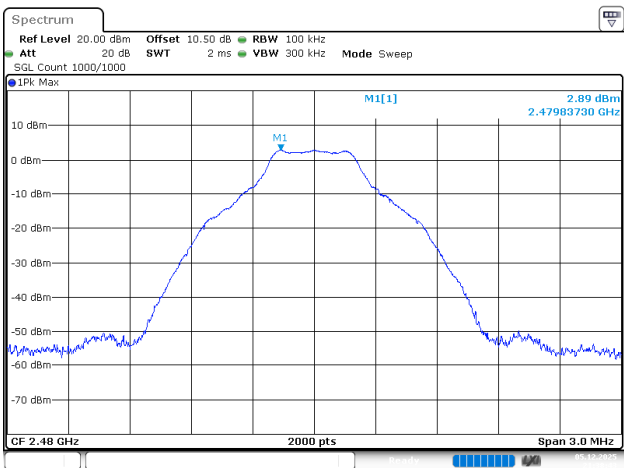


BDR_DH1_High

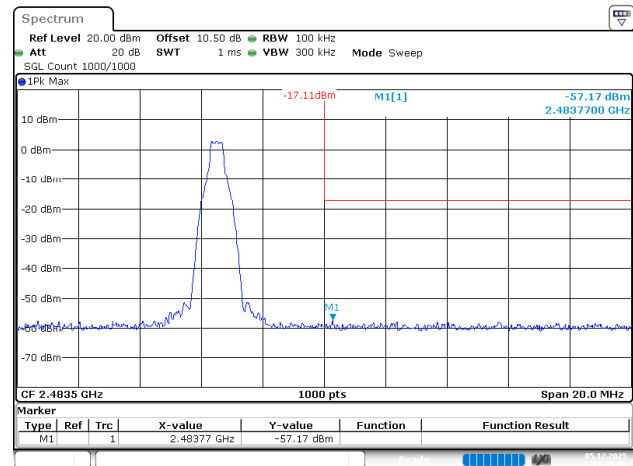


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:39:01

BDR_DH1_High

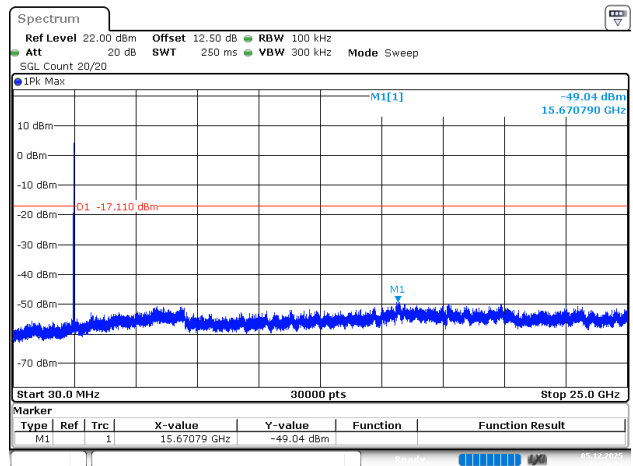


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:39:25

2EDR_DH1_Low

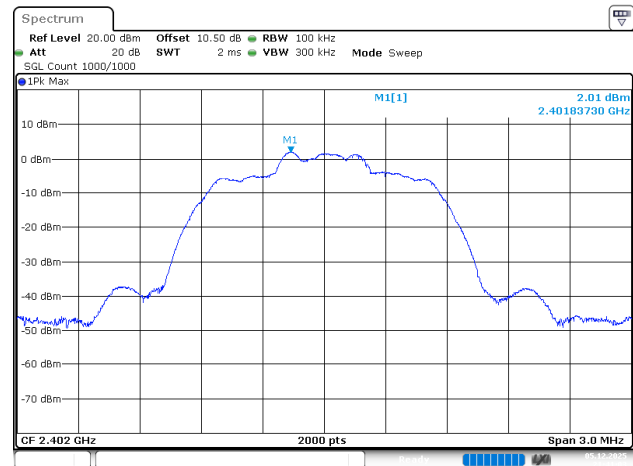


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:41:03

2EDR_DH1_Low

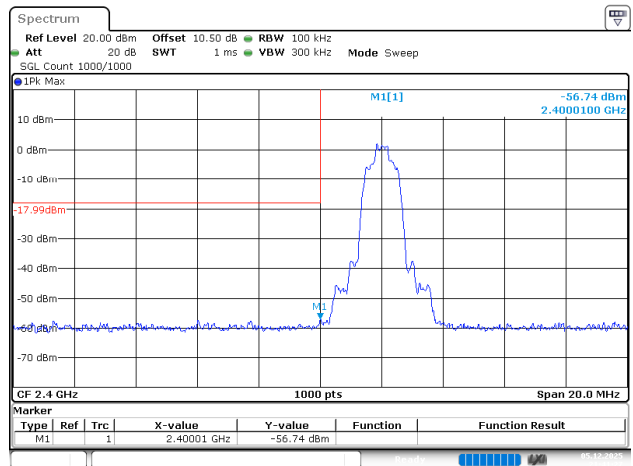


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:41:27

2EDR_DH1_Low

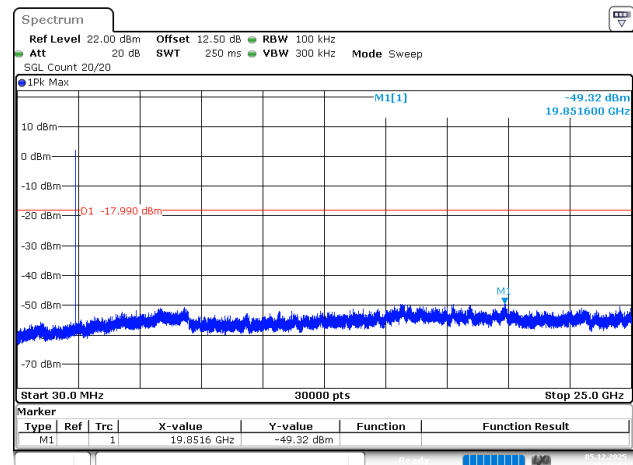


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:41:53

2EDR_DH1_Middle

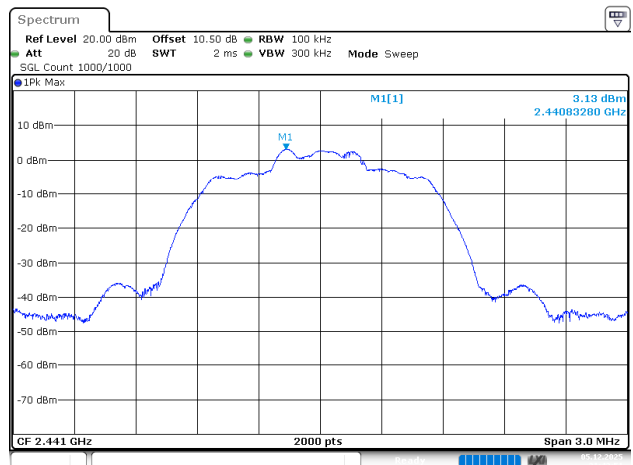


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:42:51

2EDR_DH1_Middle

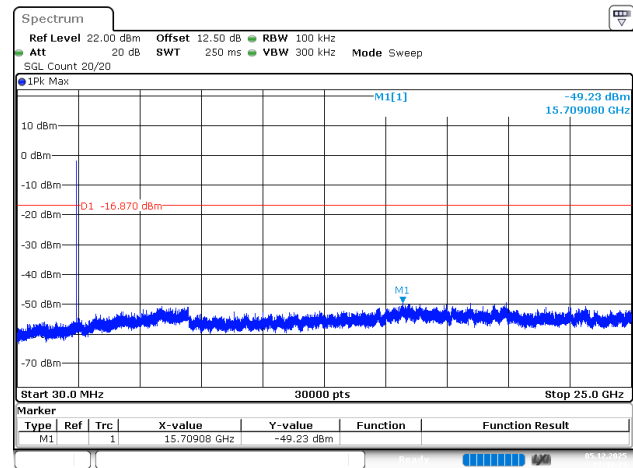


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:43:34

2EDR_DH1_High

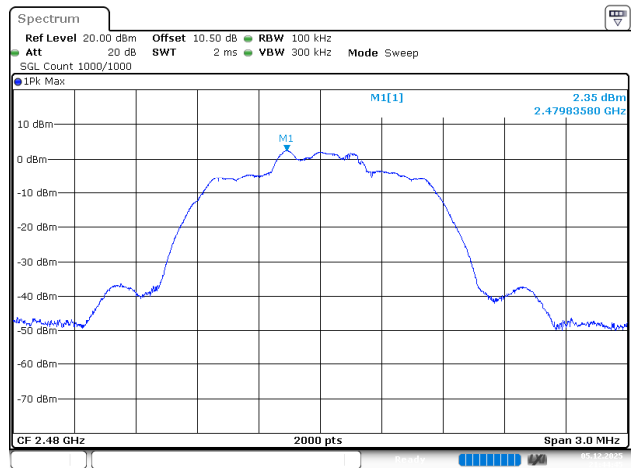


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:44:45

2EDR_DH1_High

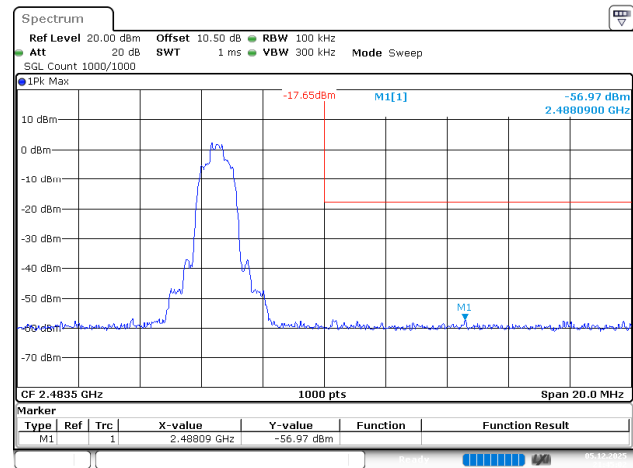


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:45:03

2EDR_DH1_High

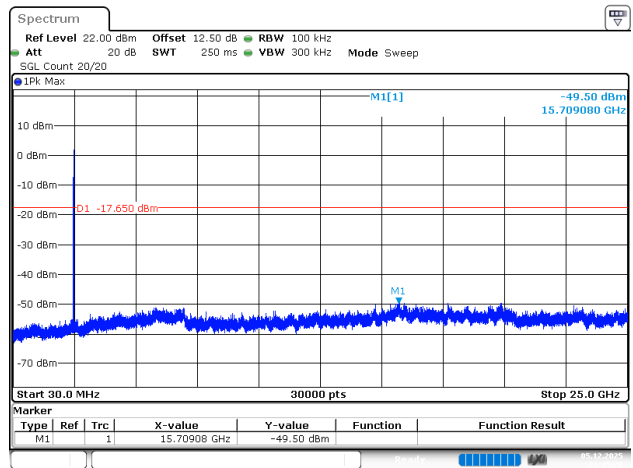


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:45:29

3EDR_DH1_Low

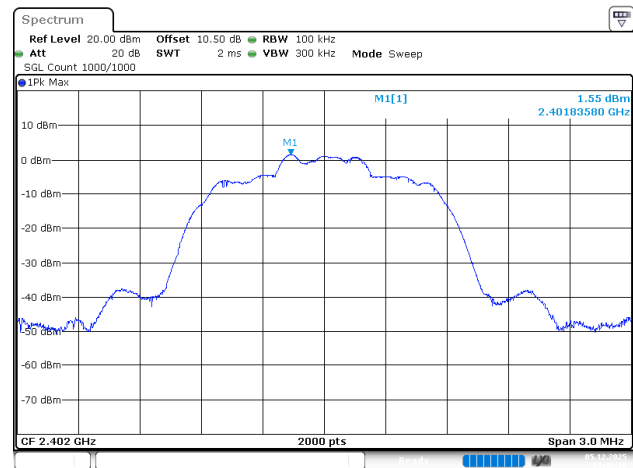


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:46:40

3EDR_DH1_Low

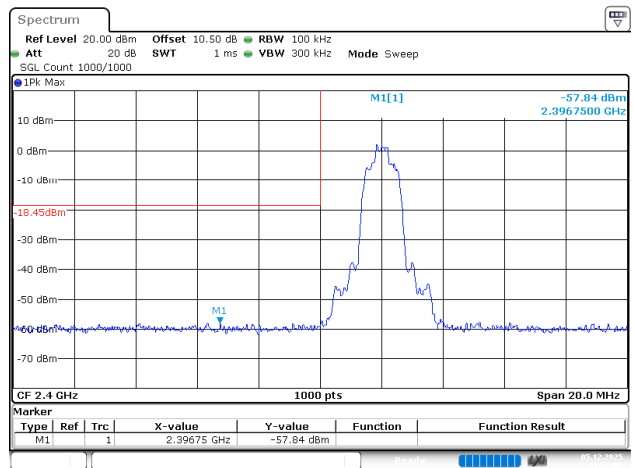


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:47:03

3EDR_DH1_Low

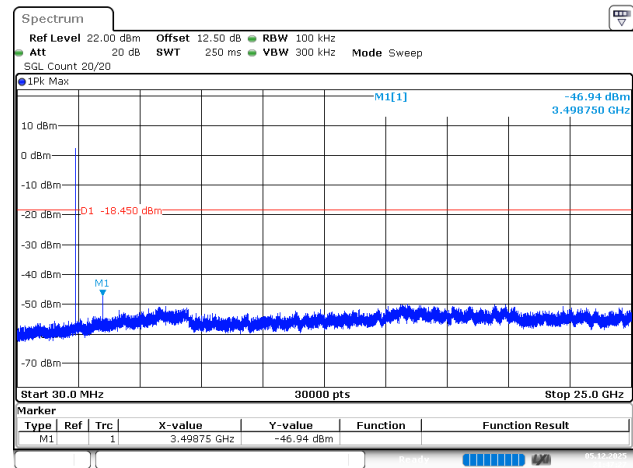


ProjectNo.:2502201325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:47:28

3EDR_DH1_Middle

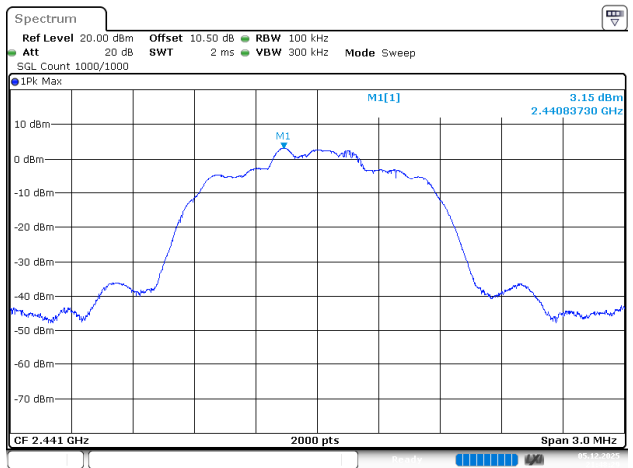

ProjectNo.:2502201325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:48:29

3EDR_DH1_Middle

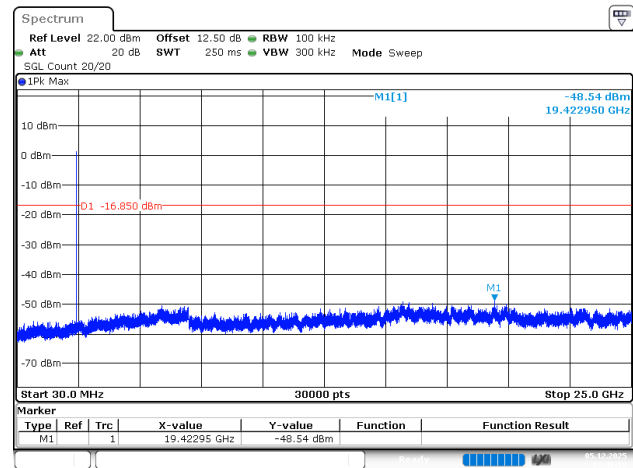


ProjectNo.:2502201325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:48:59

3EDR_DH1_High




ProjectNo.:2502201325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:50:13

3EDR_DH1_High

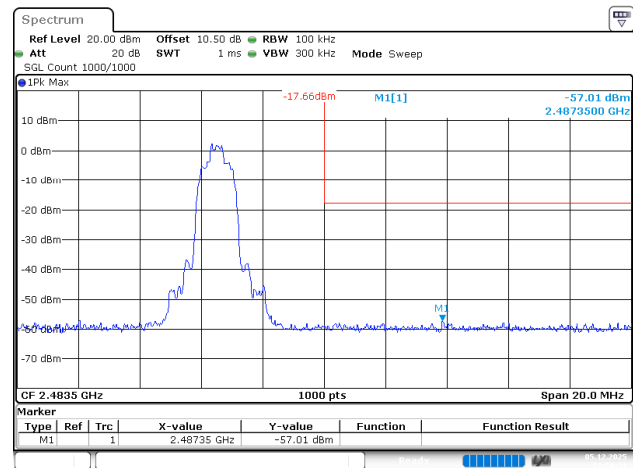


ProjectNo.:2502201325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:50:31

3EDR_DH1_High

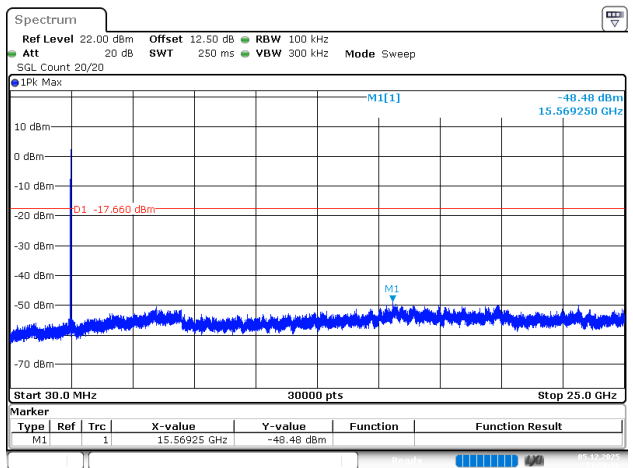


ProjectNo.:2502201325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:50:57

BDR_DH1_Hopping_Lower

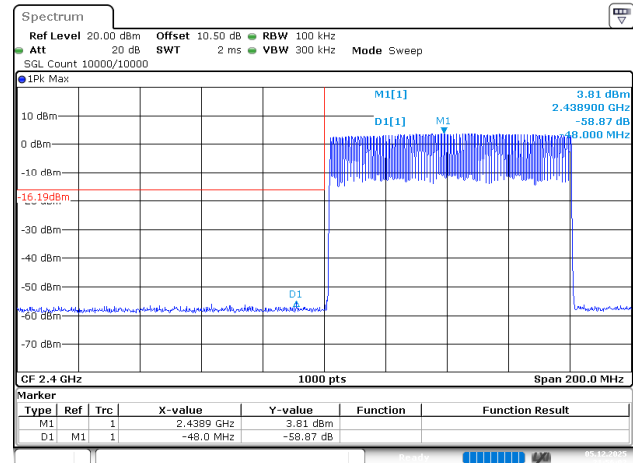


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:56:02

BDR_DH1_Hopping_Upper

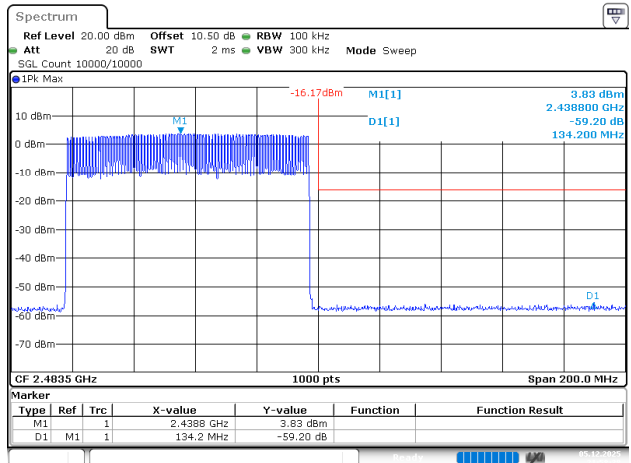


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 21:58:39

2EDR_DH1_Hopping_Lower

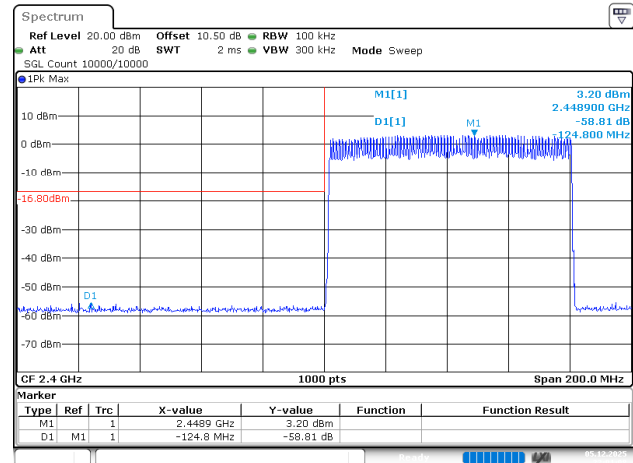


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 22:01:09

2EDR_DH1_Hopping_Upper

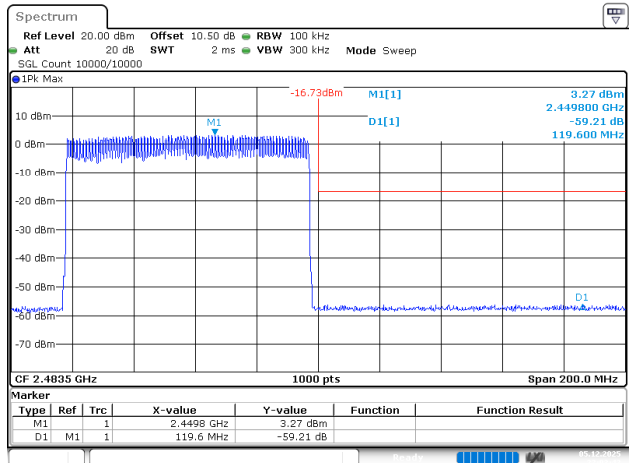


ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 22:03:43

3EDR_DH1_Hopping_Lower

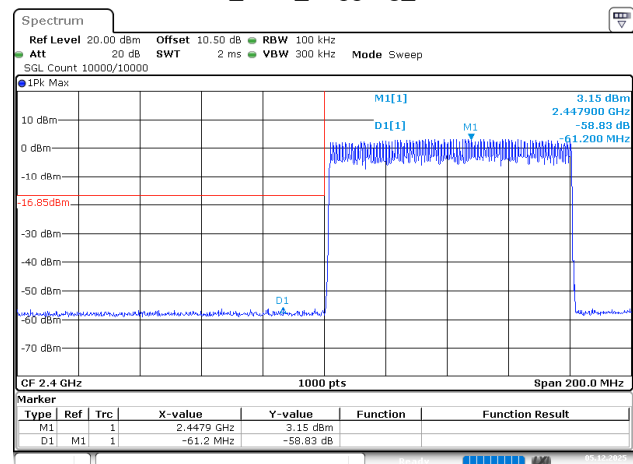

ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 22:06:13

3EDR_DH1_Hopping_Upper

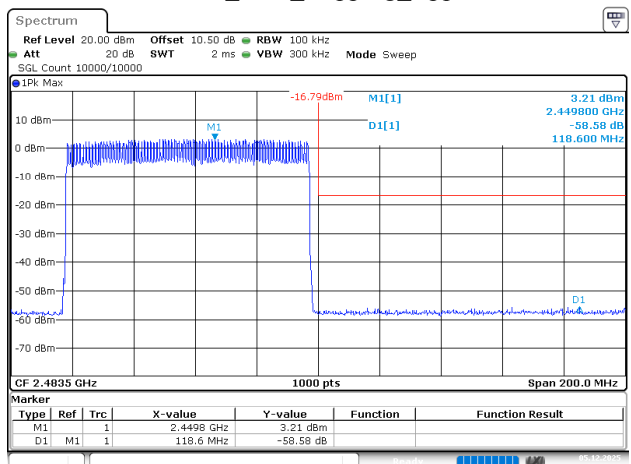

ProjectNo.:2502Z01325E-RF Tester:Conor Fu
Date: 5.DEC.2025 22:07:27

EXHIBIT A - EUT PHOTOGRAPHS

Please refer to the attachment 2502Z01325E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and 2502Z01325E-RF-INP EUT INTERNAL PHOTOGRAPHS.

EXHIBIT B - TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2502Z01325E-RF-00A-TSP TEST SETUP PHOTOGRAPHS.

EXHIBIT C - RF EXPOSURE EVALUATION

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Measurement Result

The max conducted power including tune-up tolerance is 4.5 dBm (2.82 mW).

$[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})][\sqrt{f(\text{GHz})}]$
 $= 2.82/5 \cdot (\sqrt{2.480}) = 0.9 < 3.0$

Note: the max conducted power including tune-up tolerance was declared by manufacturer.

Result: Compliant. The stand-alone SAR evaluation is not necessary.

******* END OF REPORT *******