




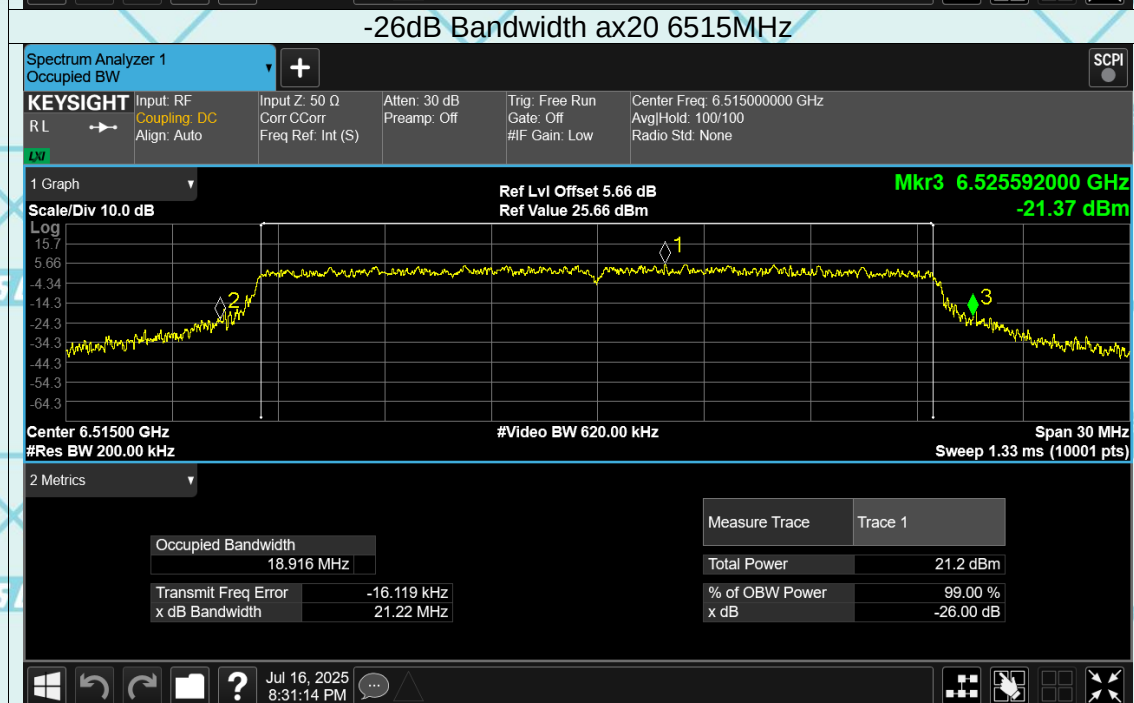
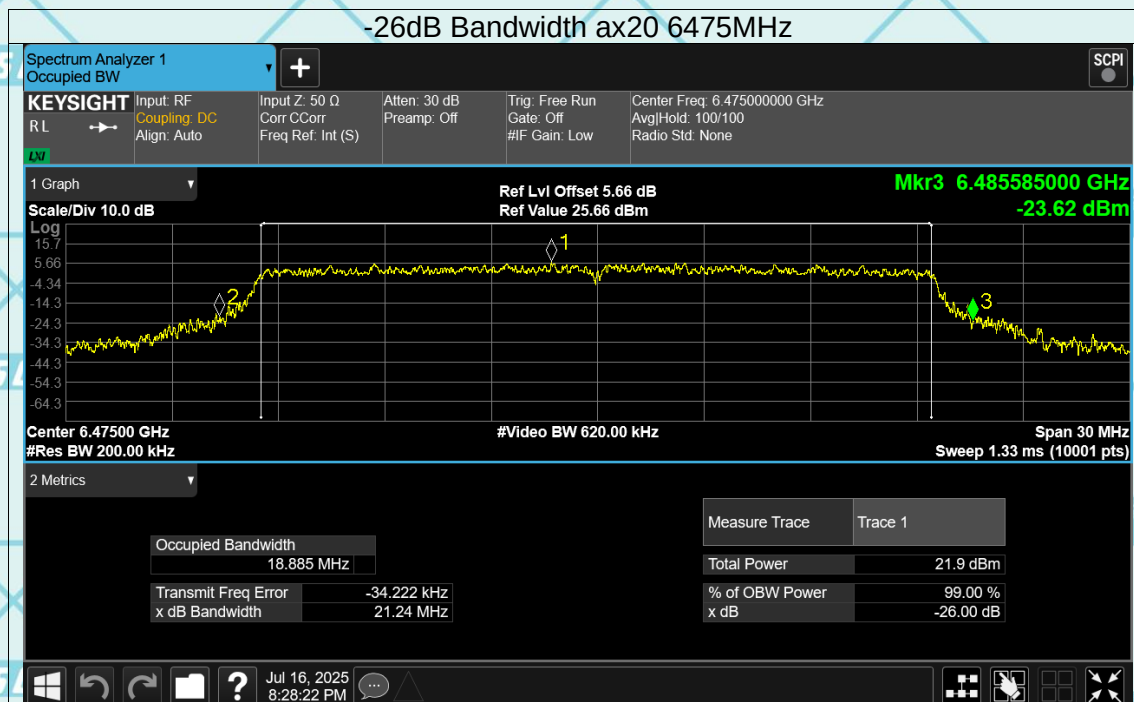
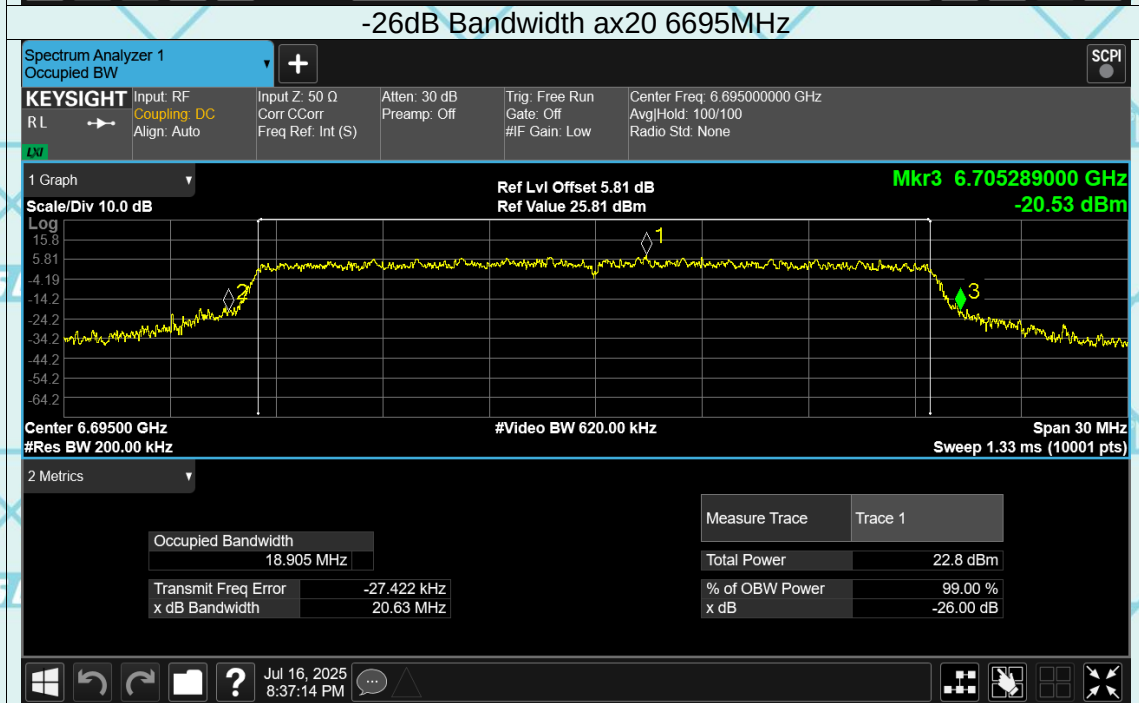
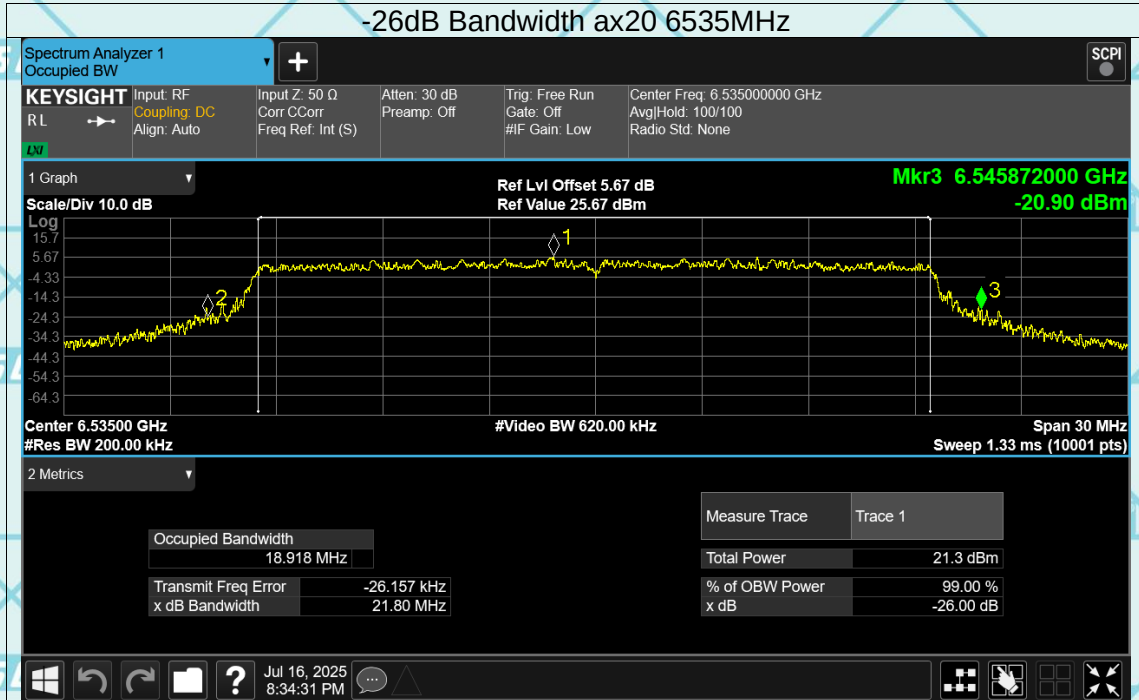
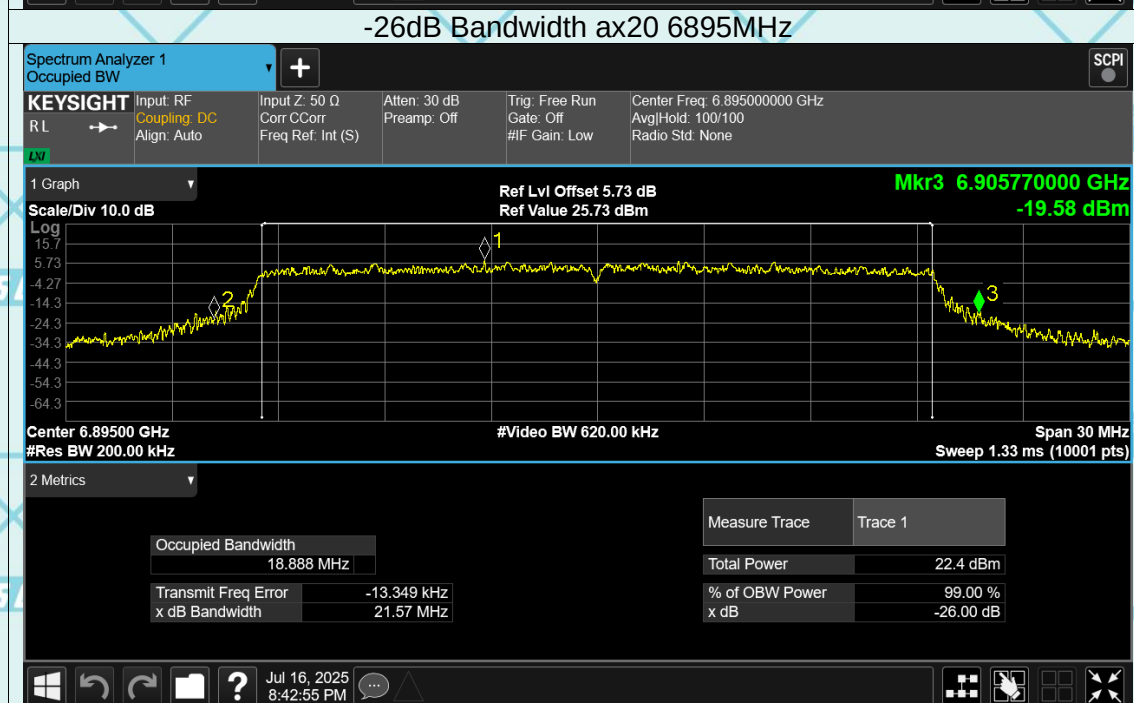



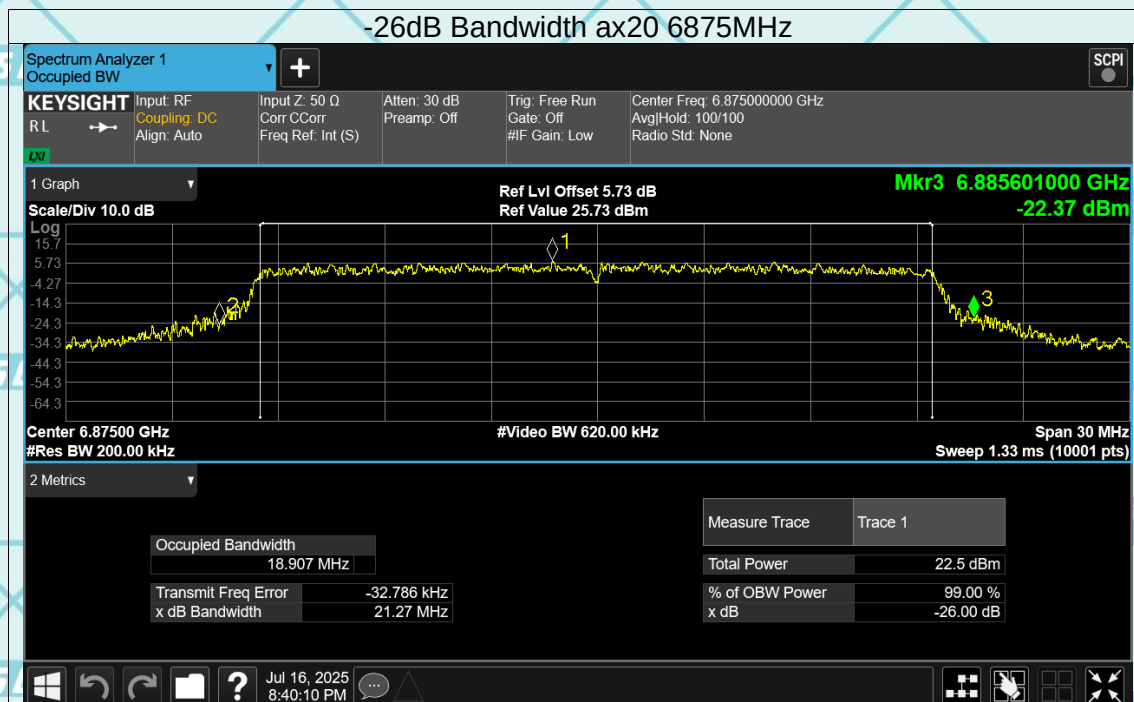



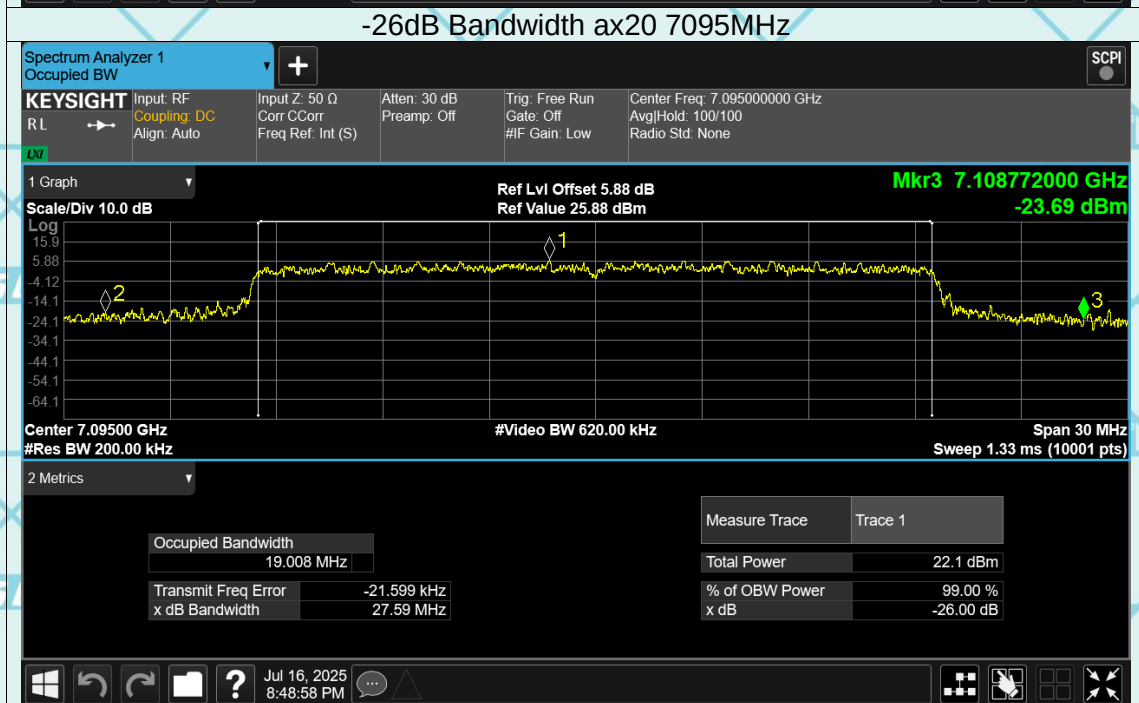



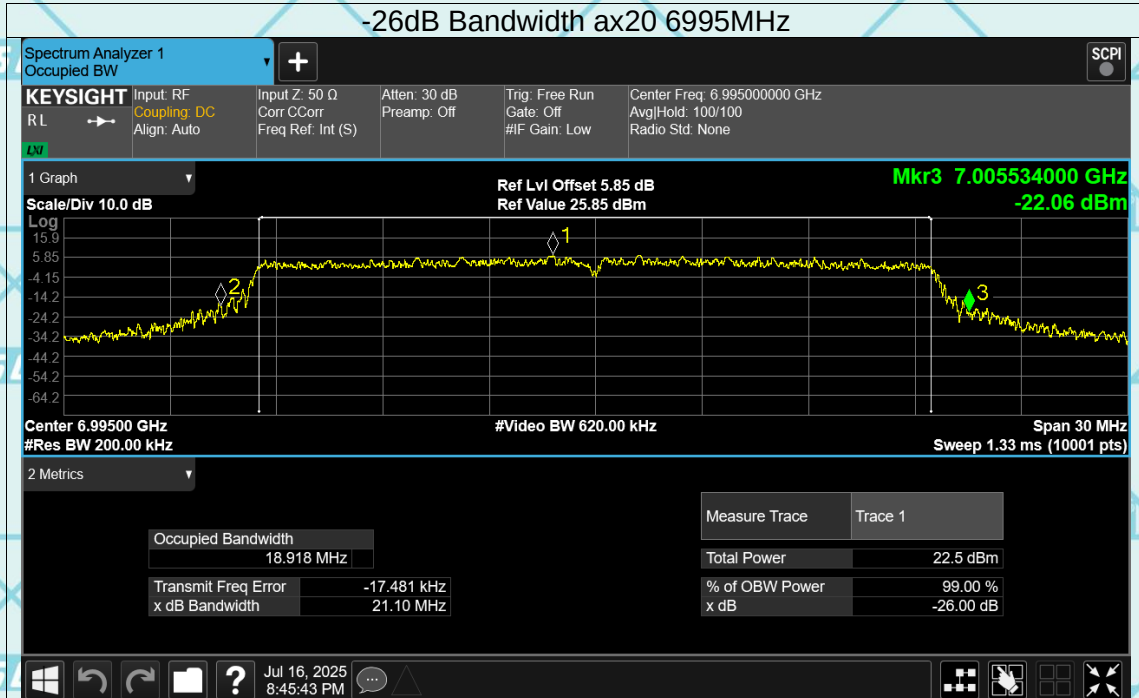



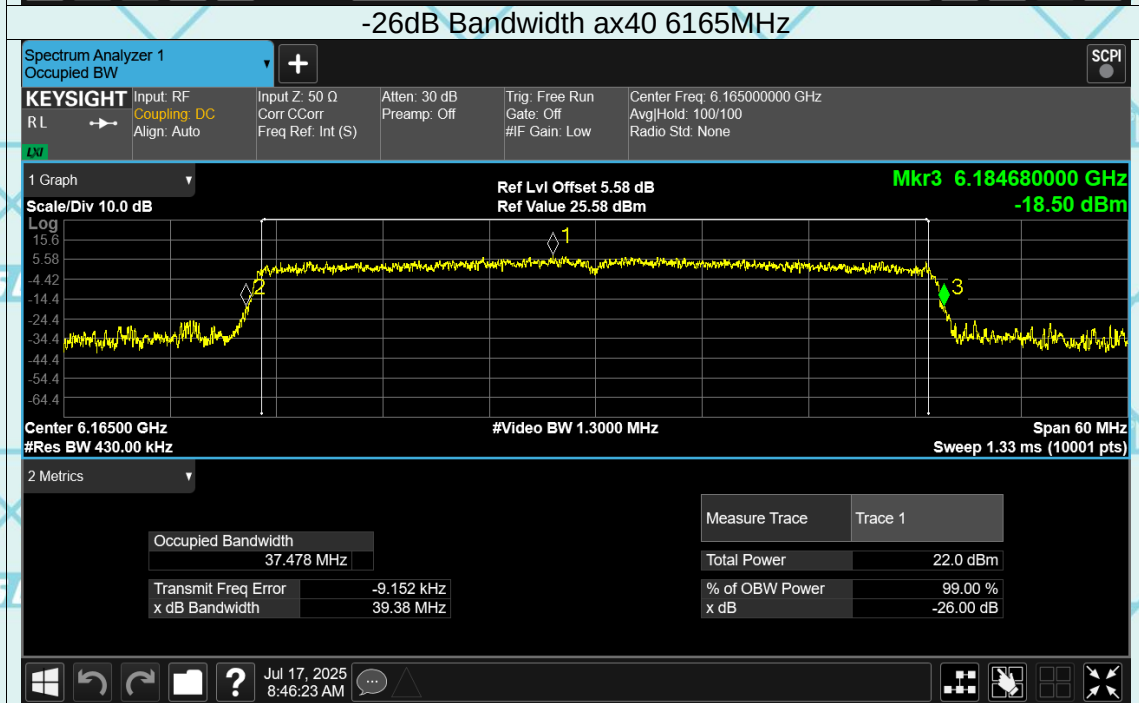



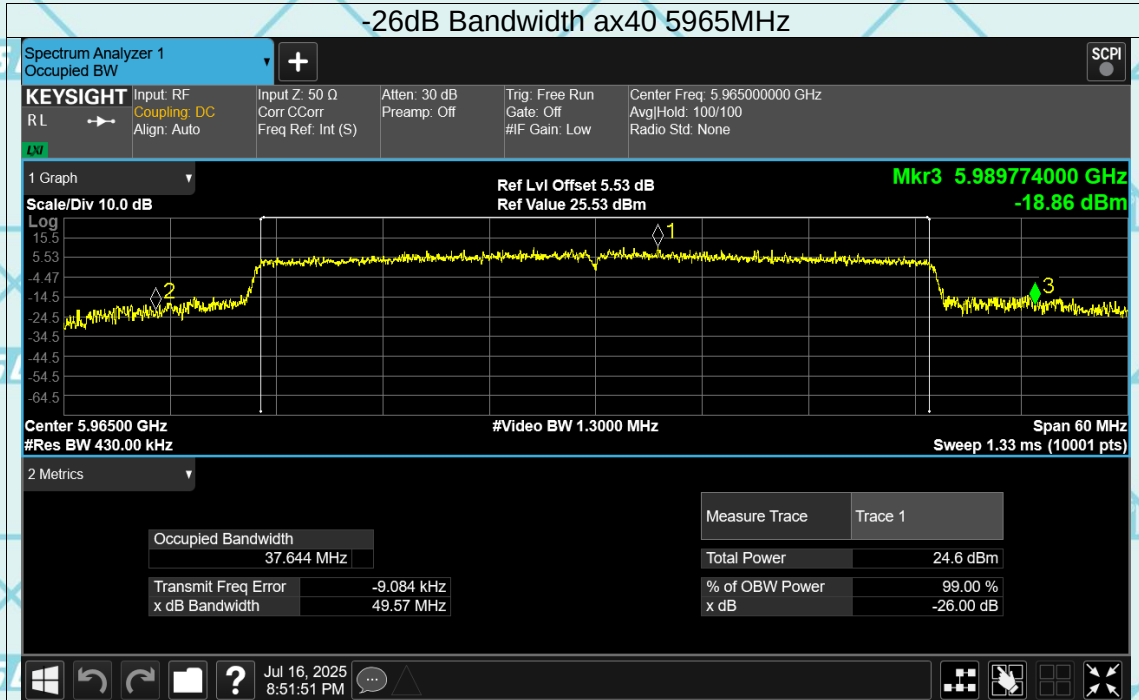


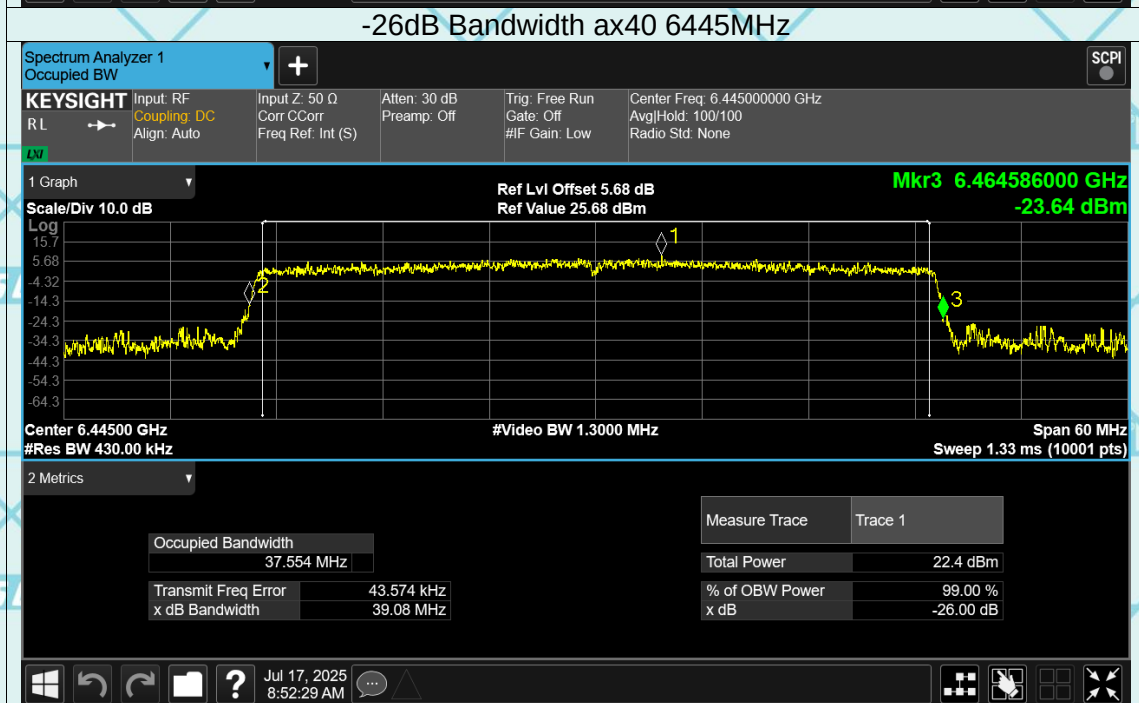
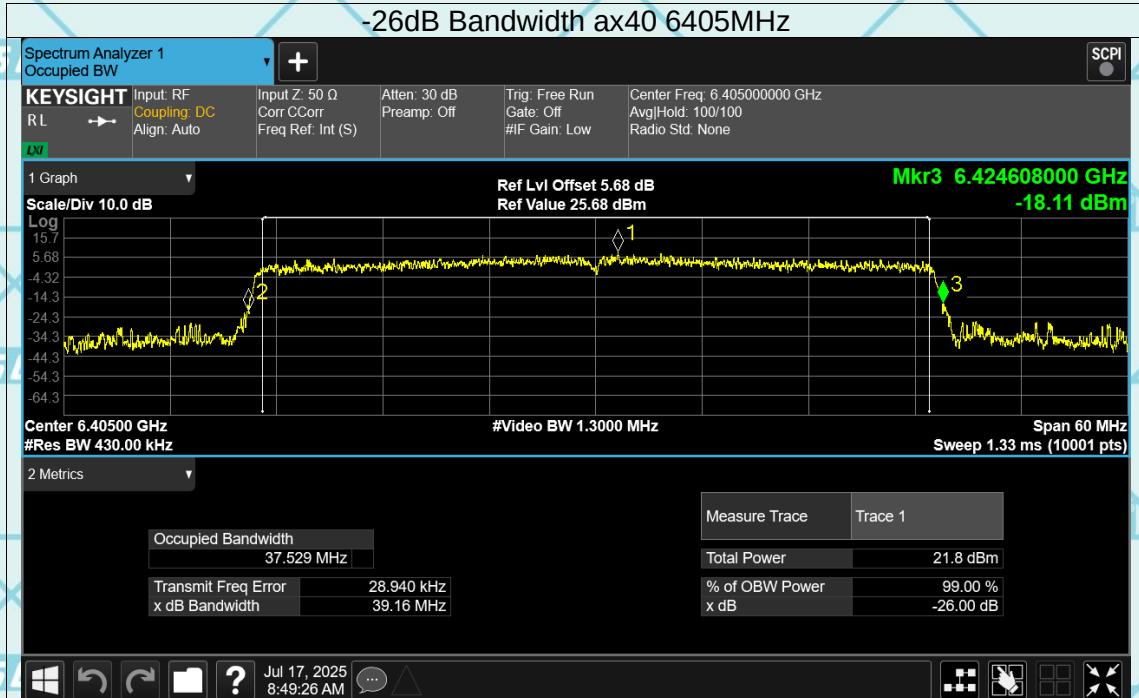


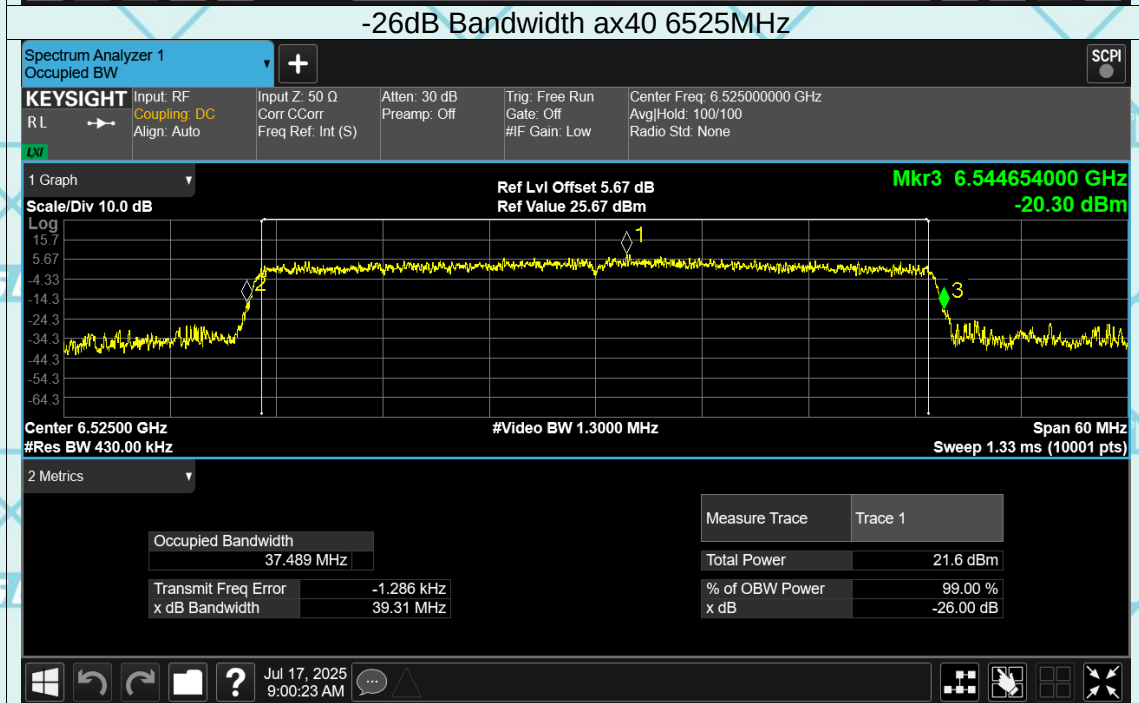
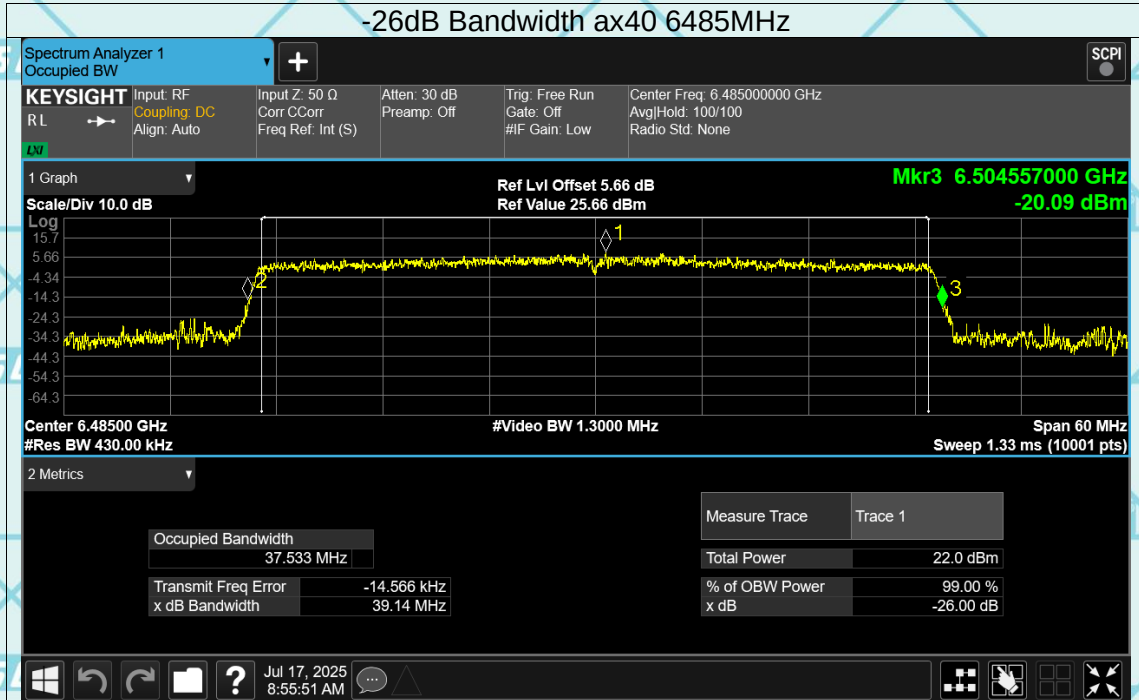


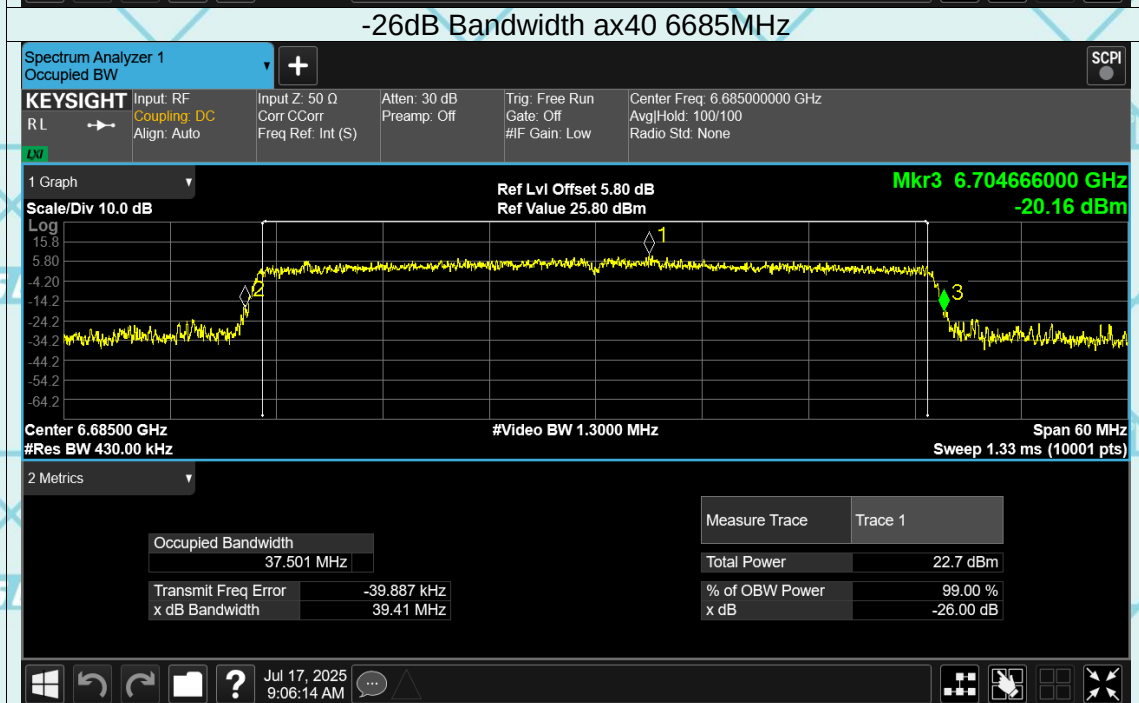
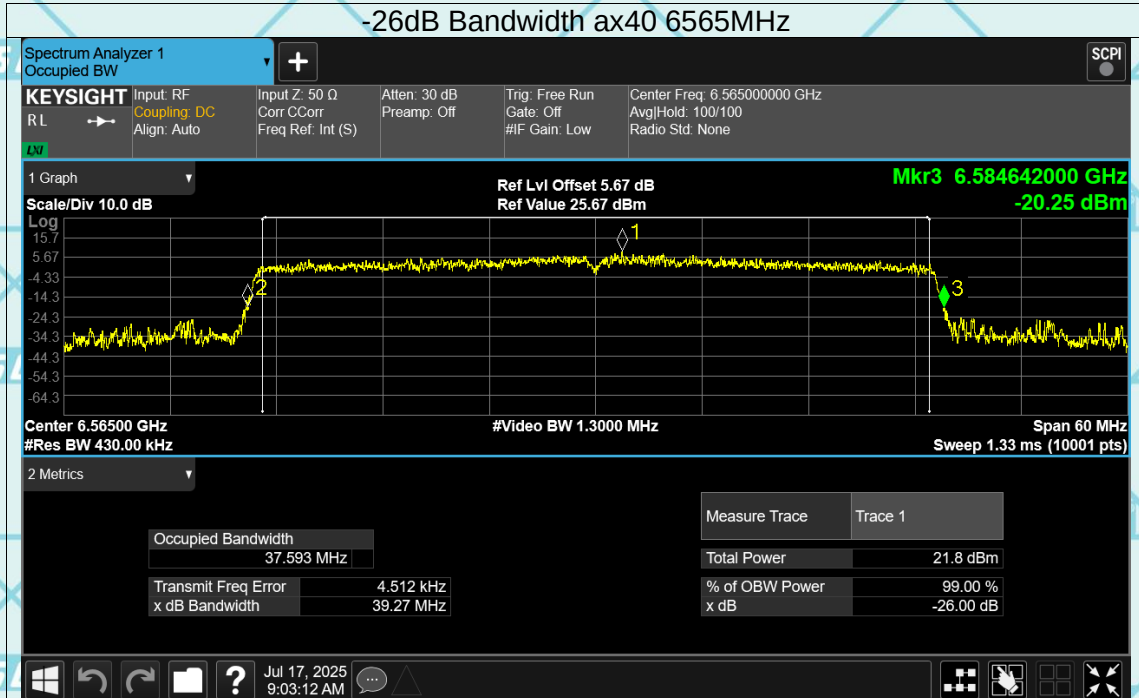


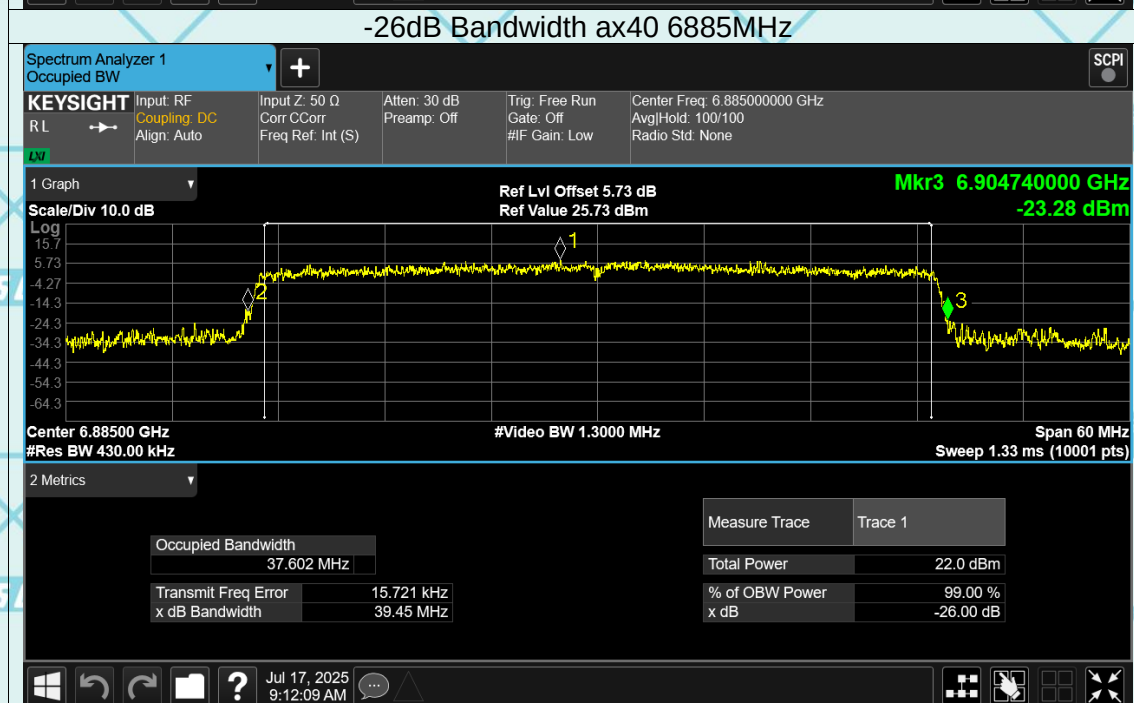
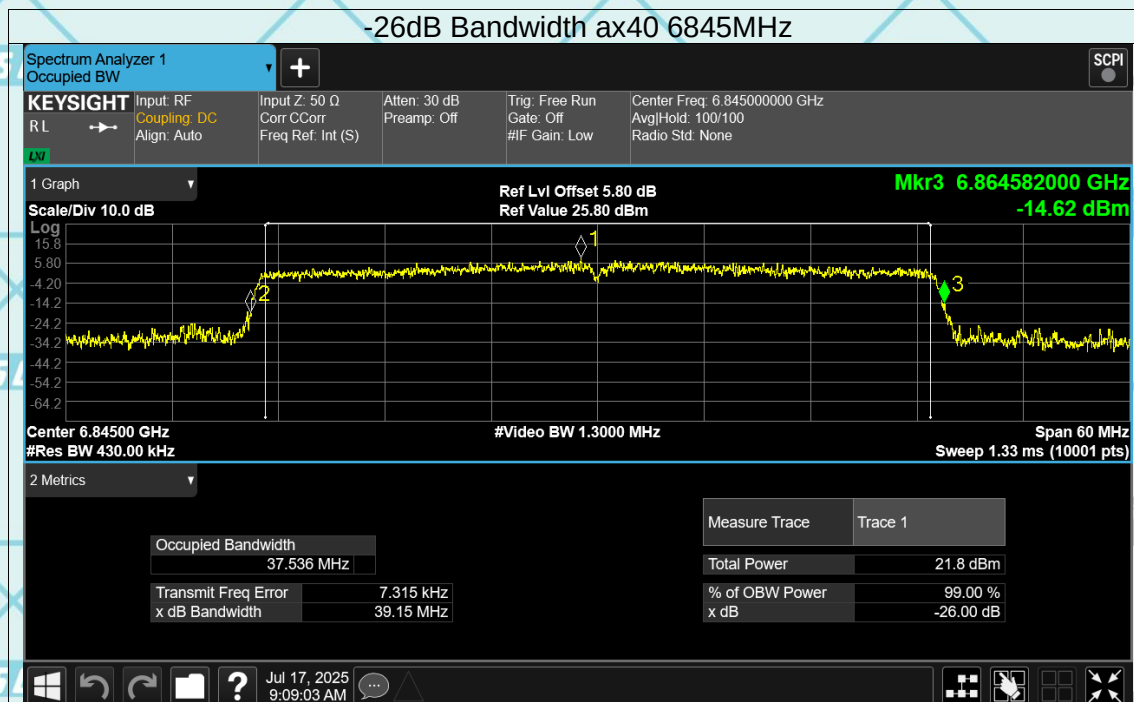


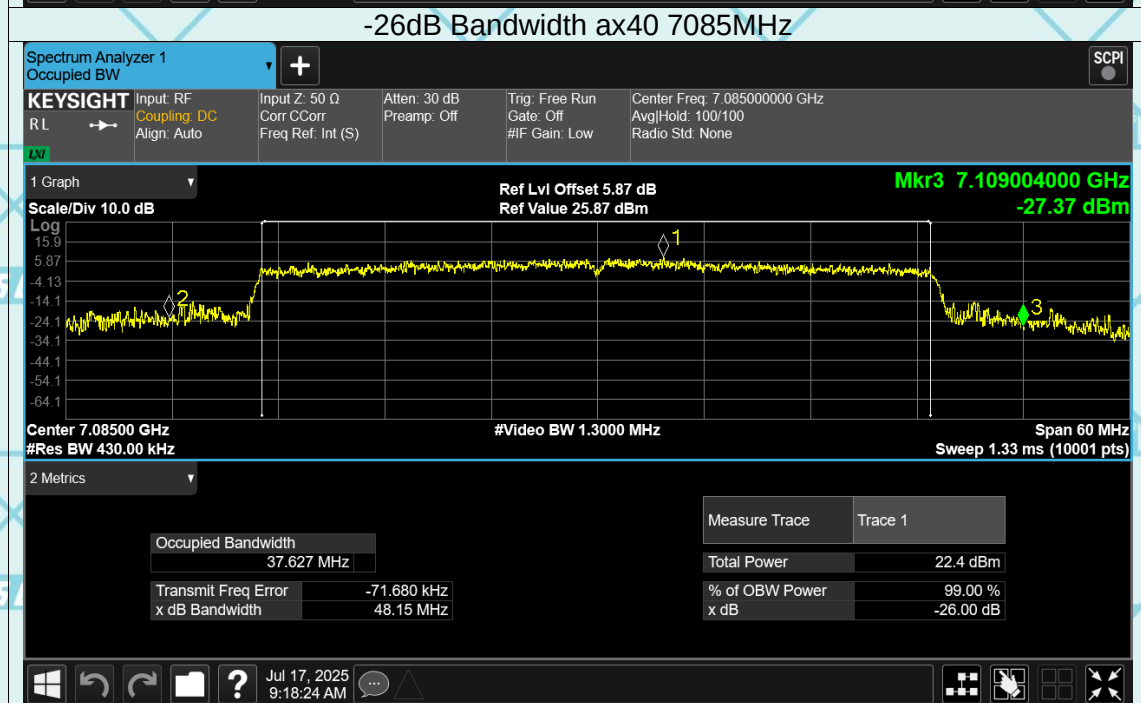
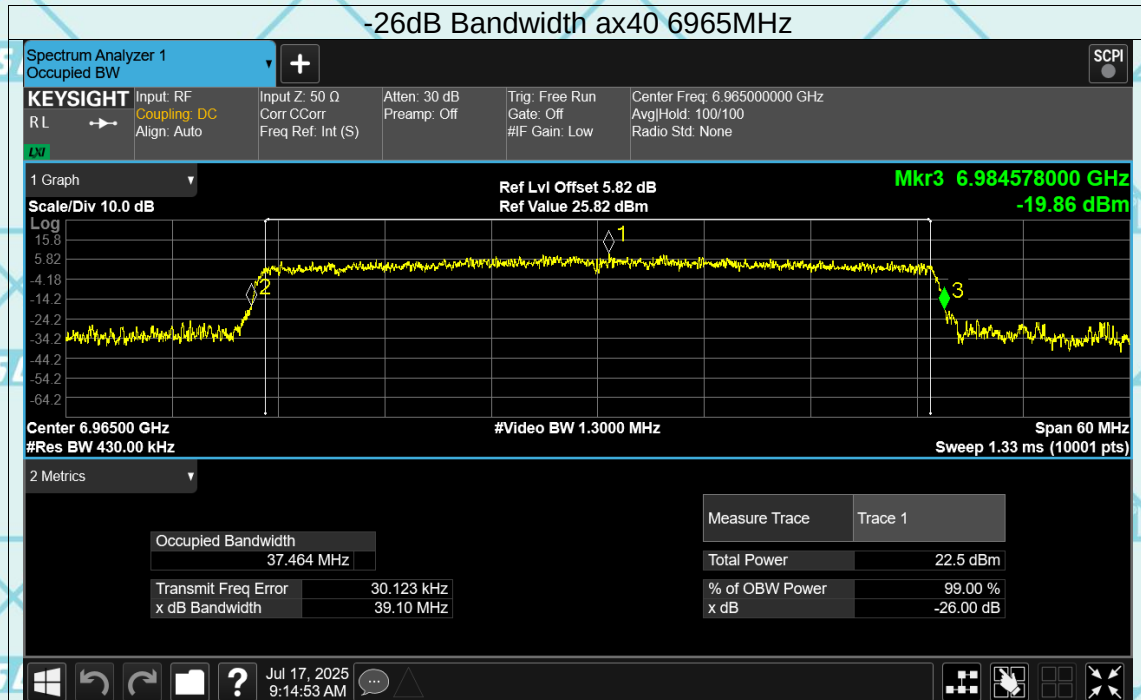


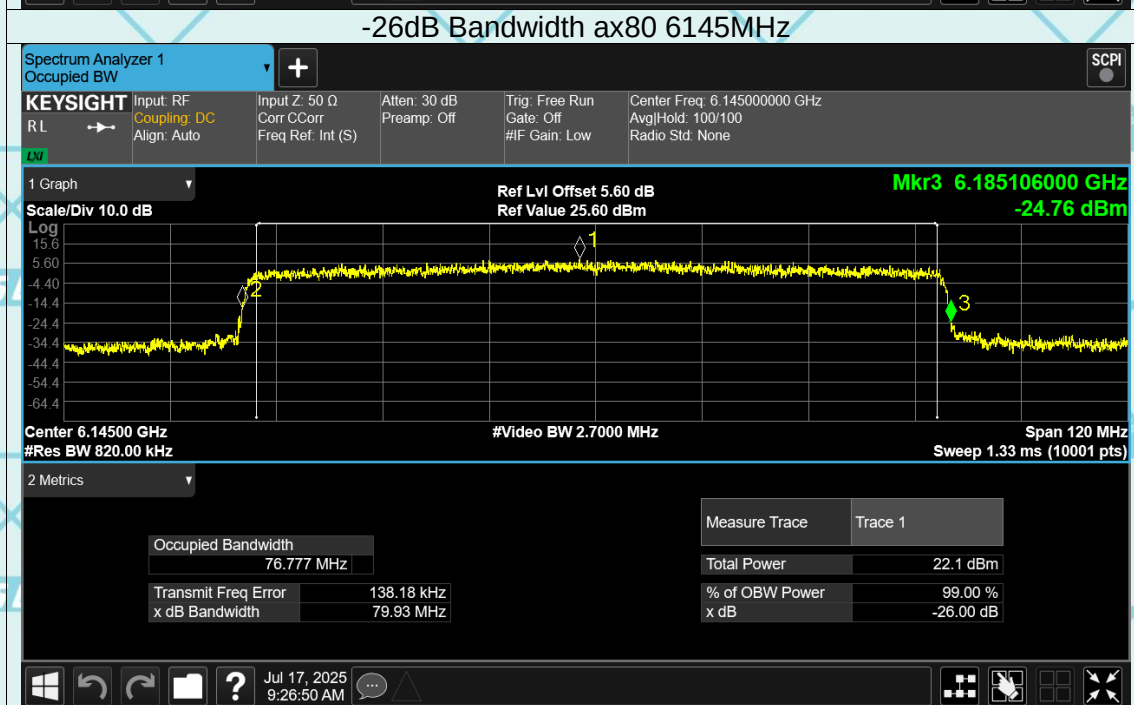
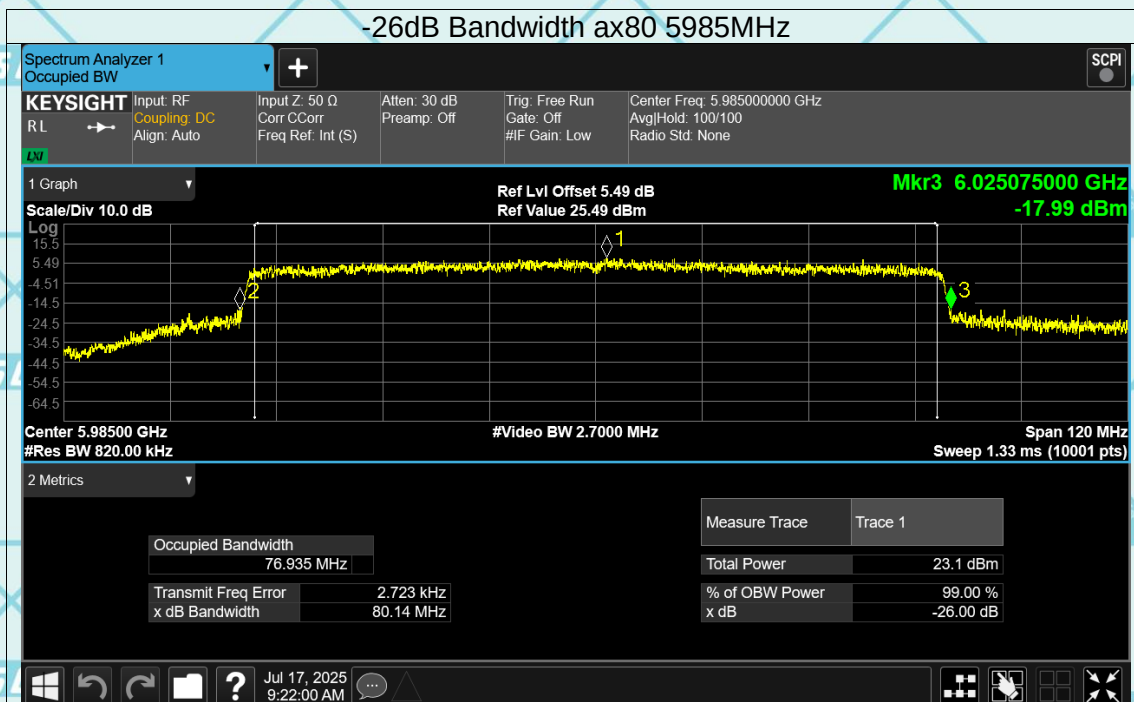


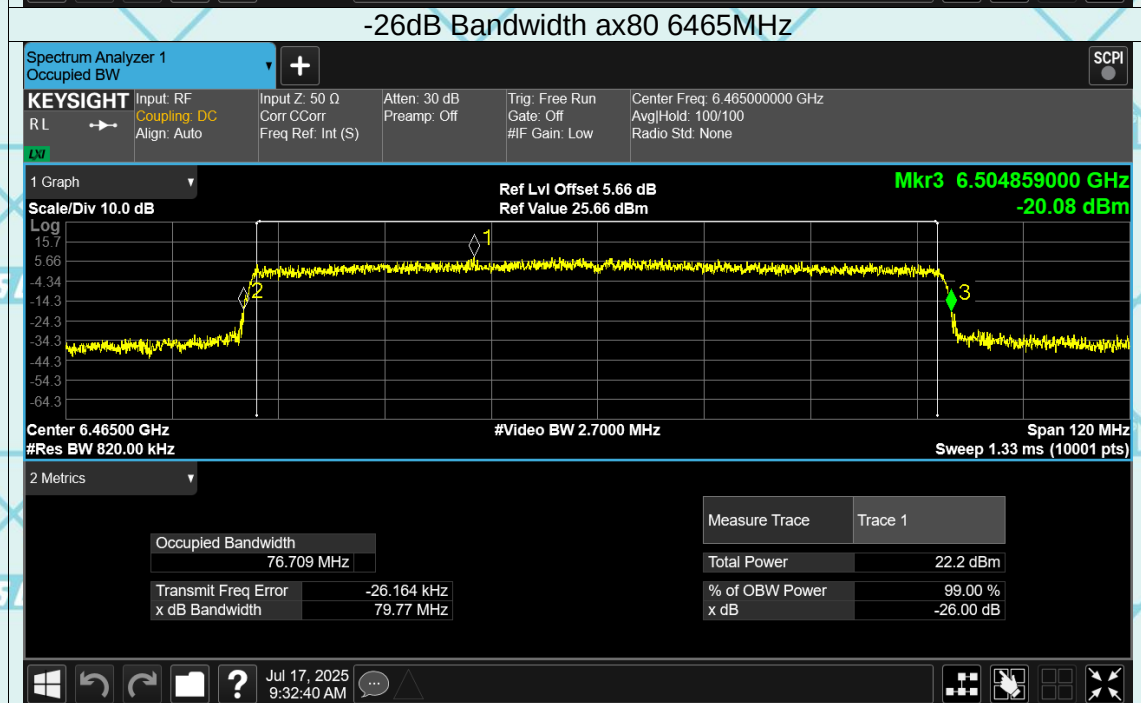
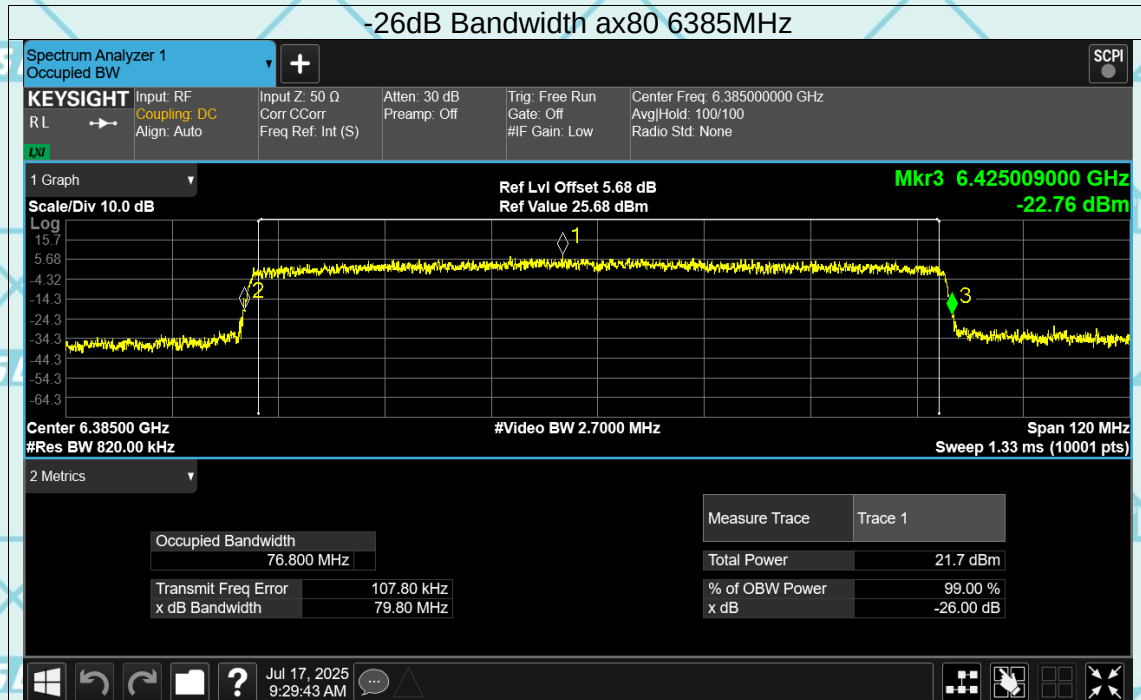


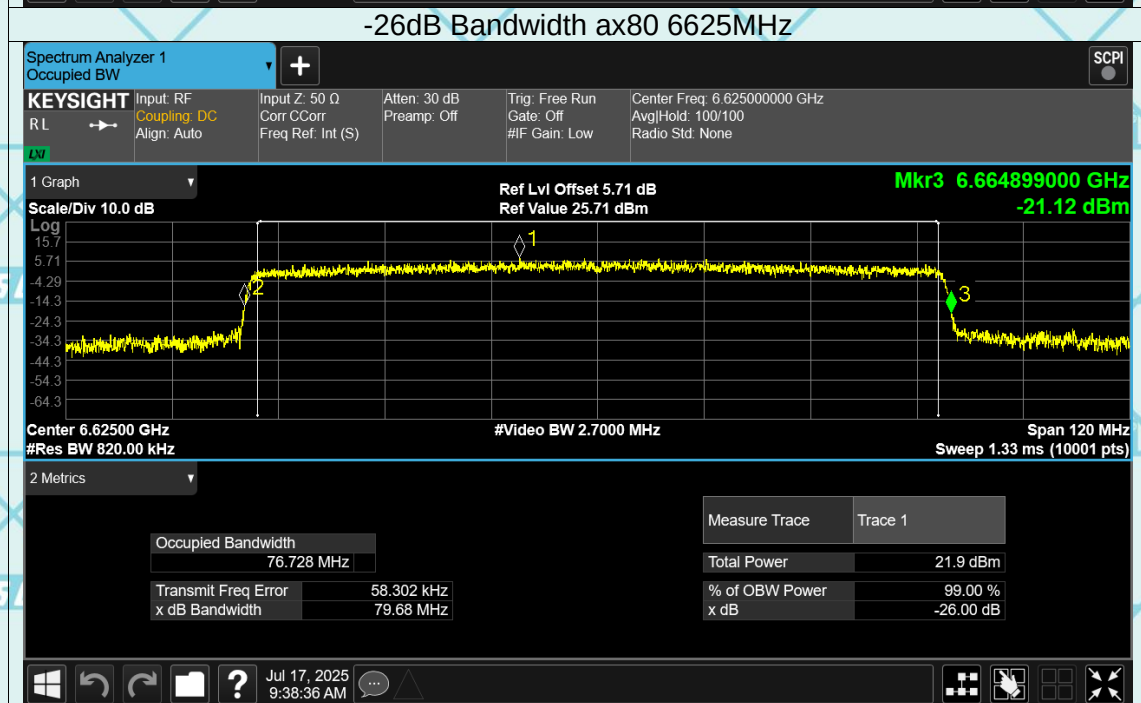
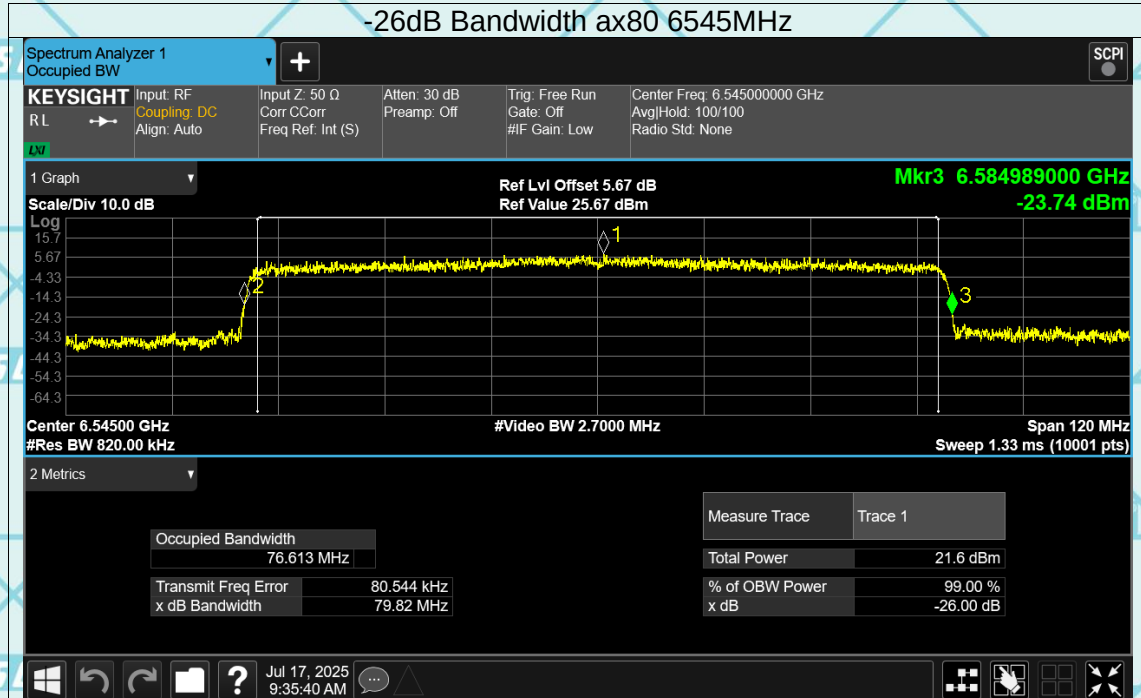


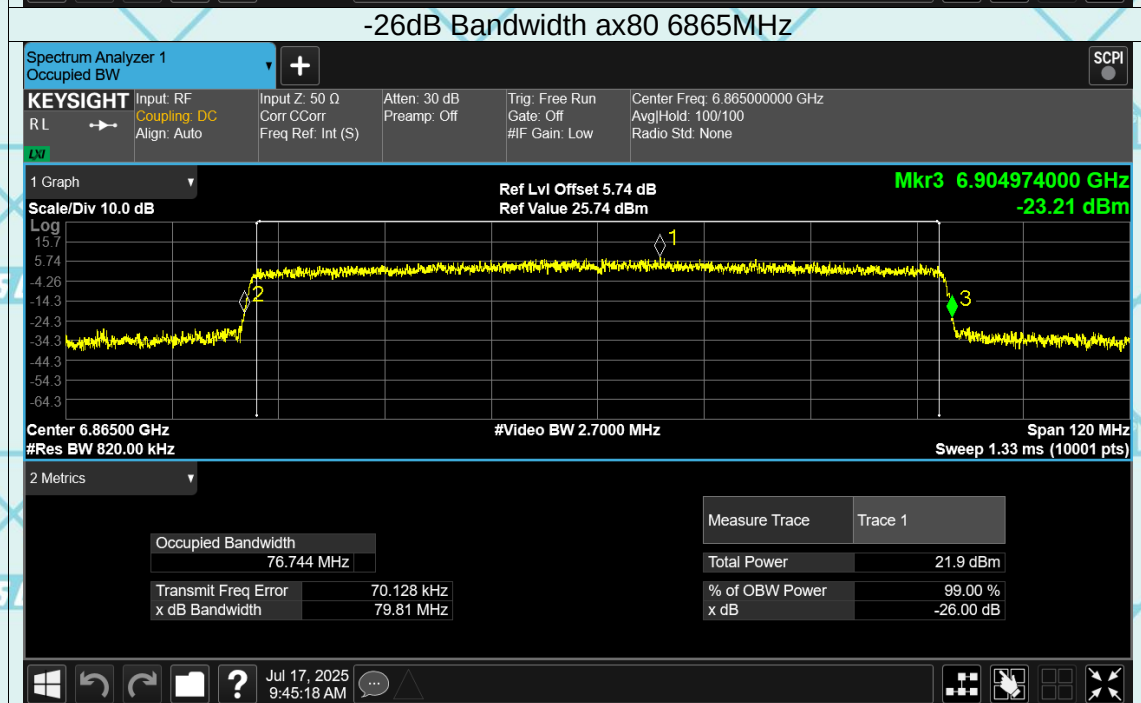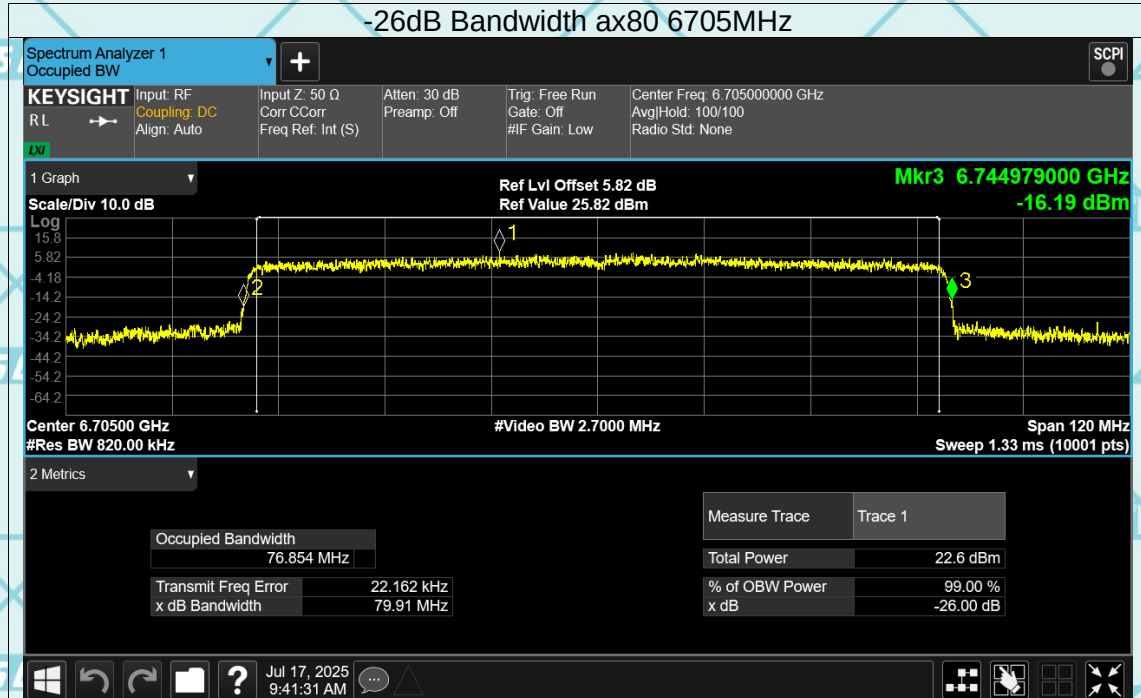


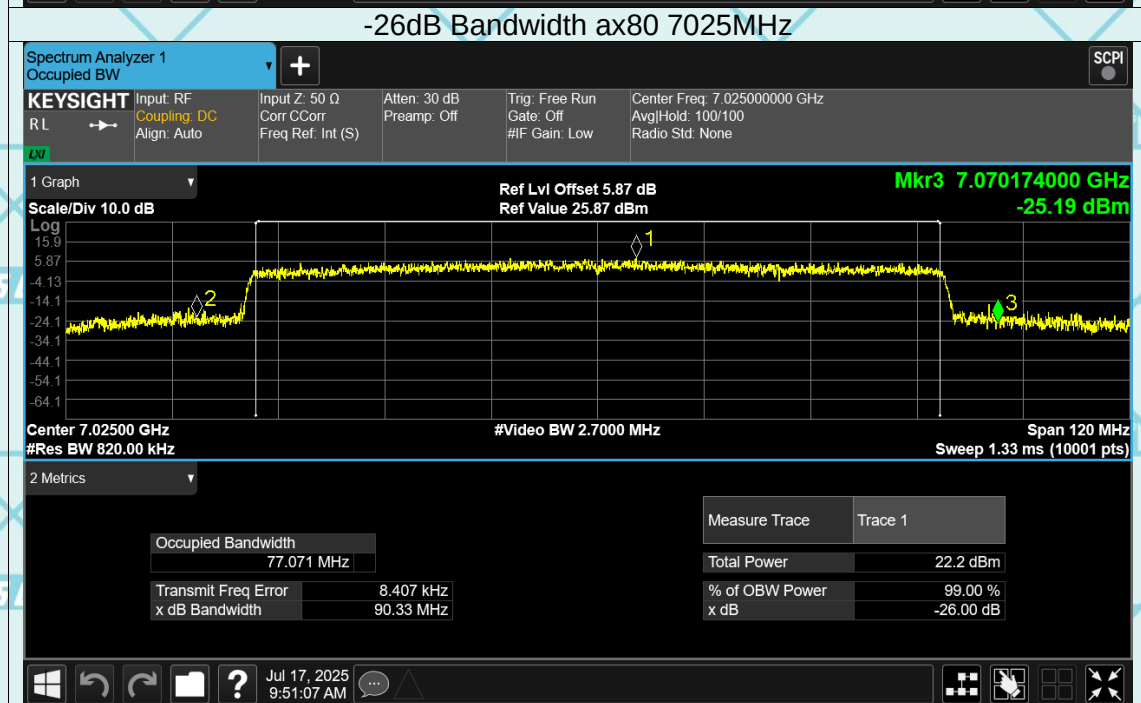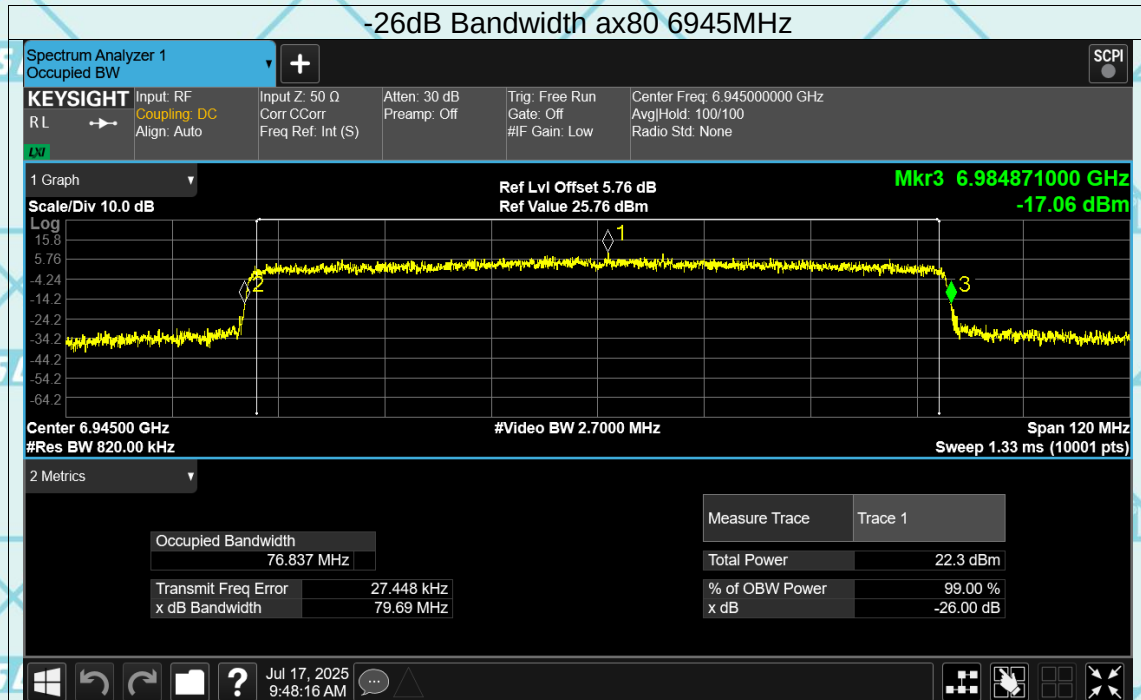

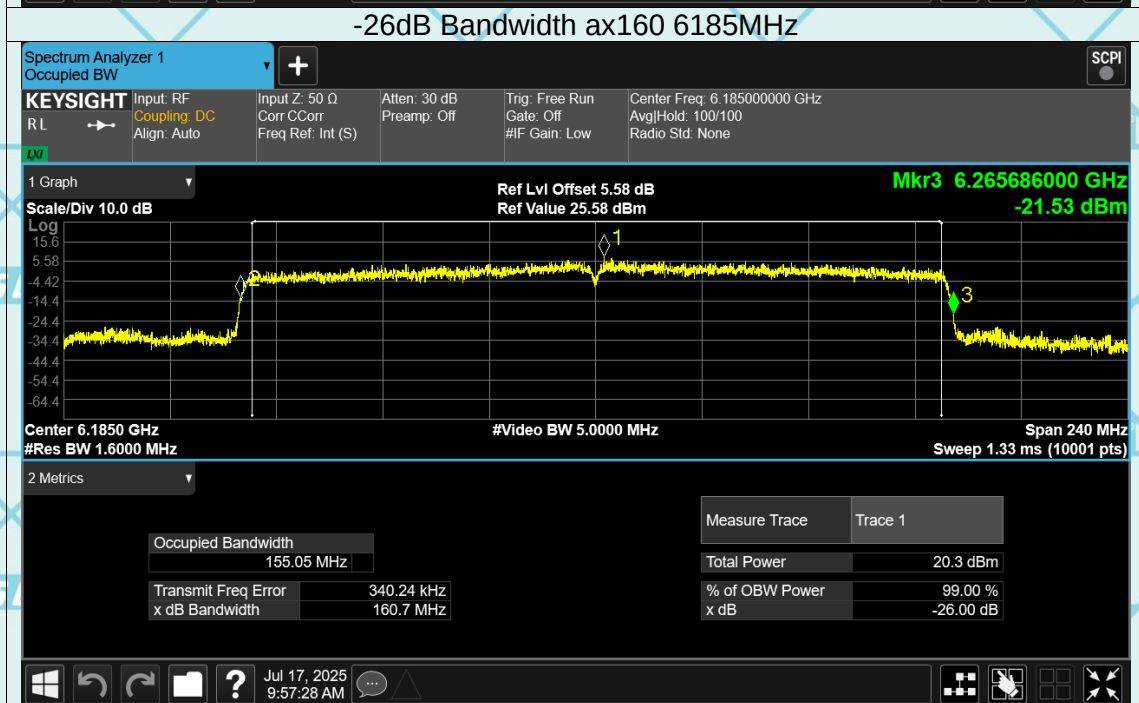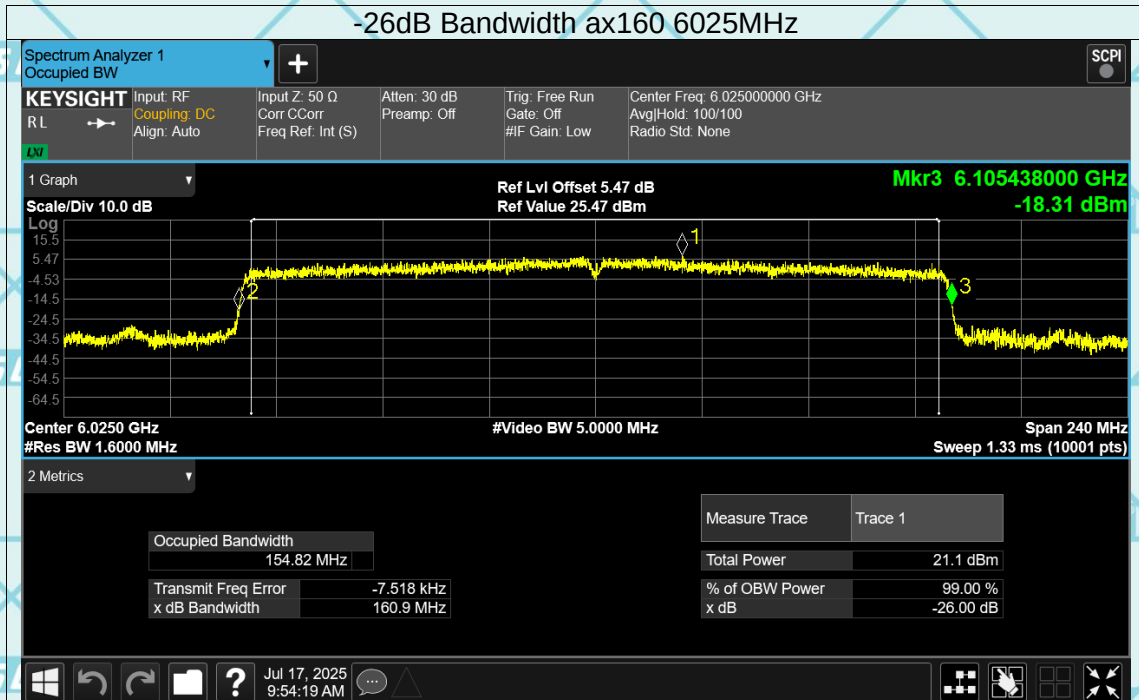

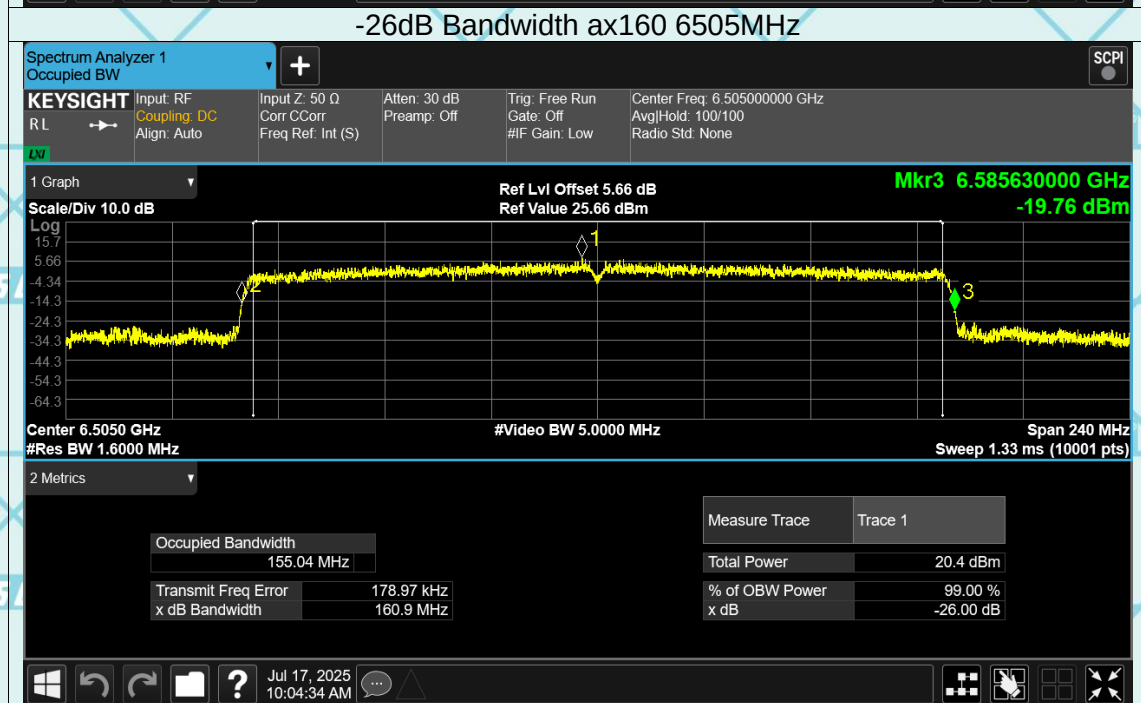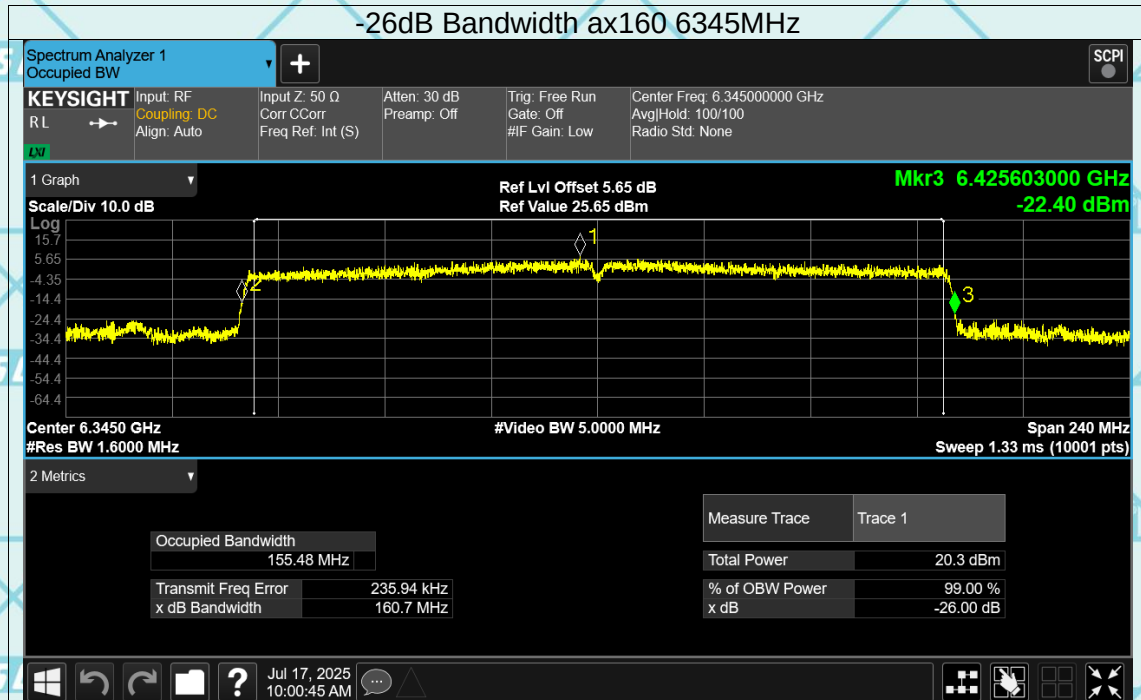

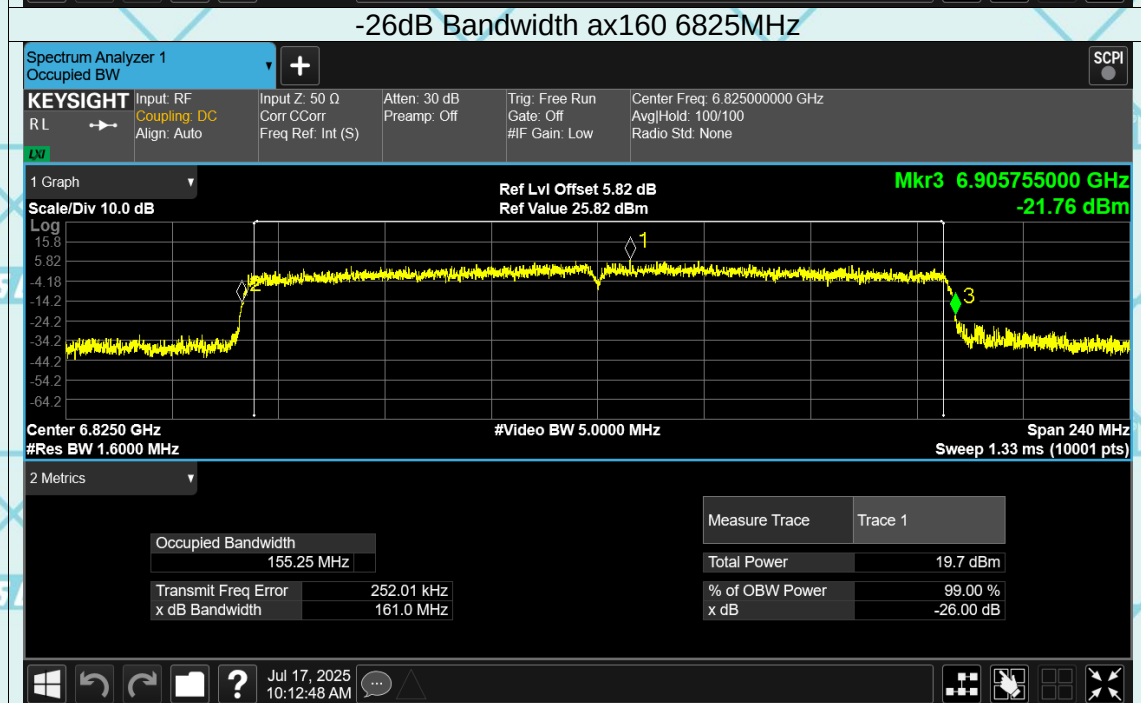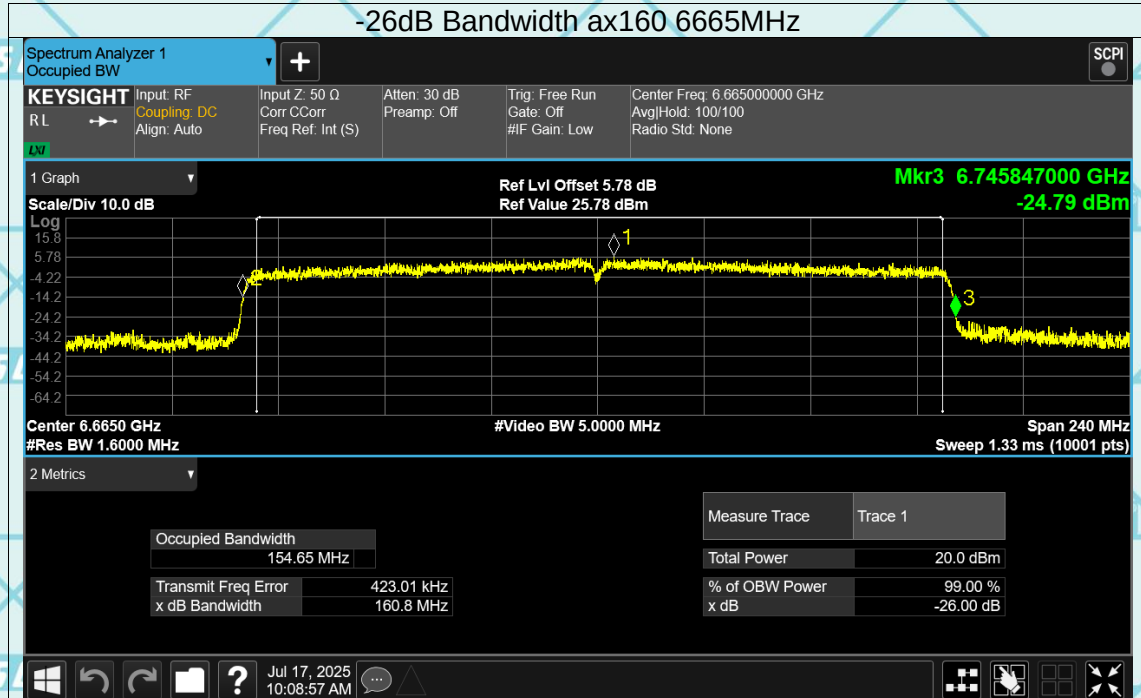

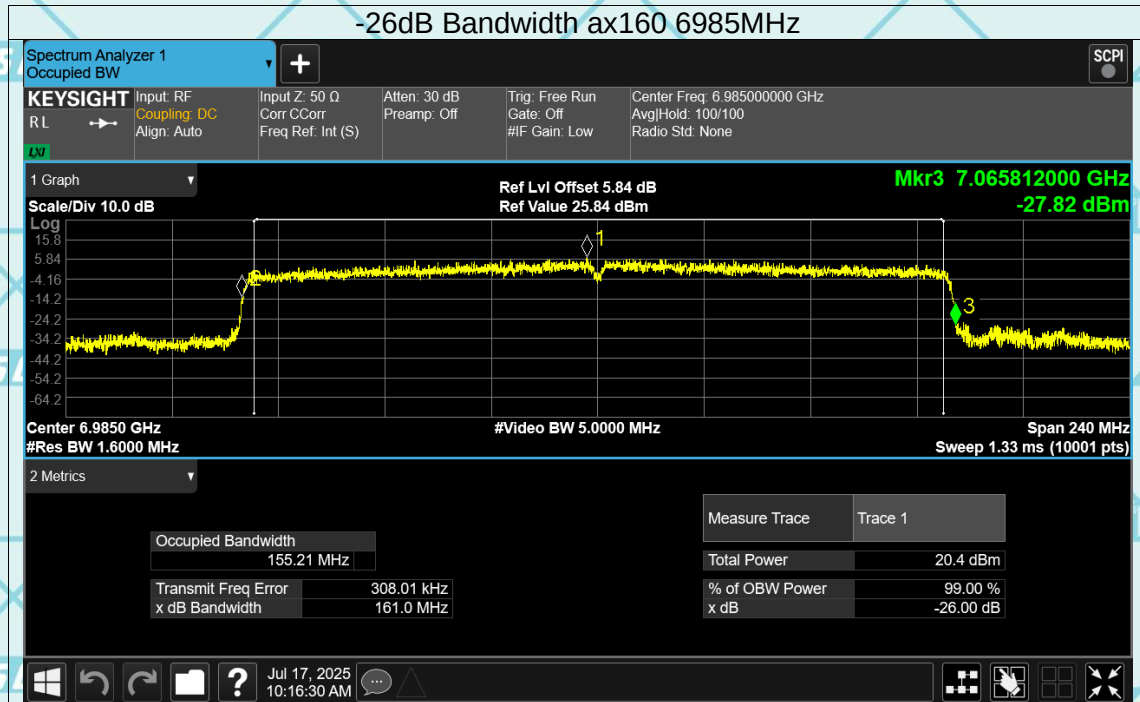

7.6 MAXIMUM CONDUCTED (AVERAGE) OUTPUT POWER**7.6.1 LIMIT OF FUNDAMENTAL MAXIMUM EIRP**

<FCC 14-30 CFR 15.407>


(a)(8) For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.

7.6.2 TEST PROCEDURES

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

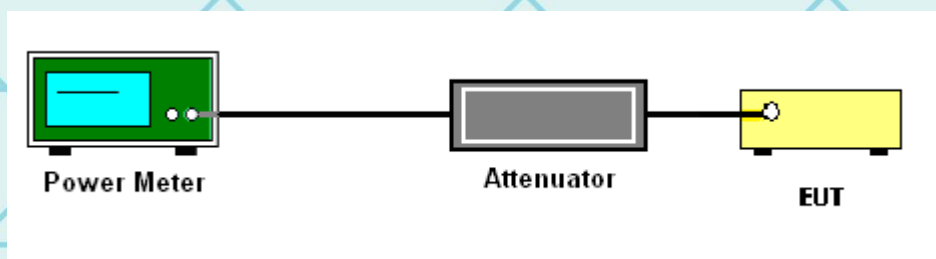7.6.3 TEST PROCEDURES

Test Result of Fundamental Maximum EIRP

eirp Power= Conducted Power+ Duty Factor+ Gain
ANT1

Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor	Gain (dBi)	eirp Power	Limit (dBm)	Verdict
ax20	5955	9.79	5.06	2.97	17.82	30	Pass
ax20	6175	10.4	5.06	2.97	18.43	30	Pass
ax20	6415	10.16	5.06	2.97	18.19	30	Pass
ax20	6435	10.27	5.05	2.97	18.29	30	Pass
ax20	6475	9.96	5.06	2.97	17.99	30	Pass
ax20	6515	9.56	5.03	2.97	17.56	30	Pass
ax20	6535	9.5	5.03	2.97	17.50	30	Pass
ax20	6695	10	5.06	2.97	18.03	30	Pass
ax20	6875	9.52	5.06	2.97	17.55	30	Pass
ax20	6895	9.44	5.06	2.97	17.47	30	Pass
ax20	6995	9.99	5.05	2.97	18.01	30	Pass
ax20	7095	9.99	5.06	2.97	18.02	30	Pass
ax40	5965	10.45	5.28	2.97	18.70	30	Pass
ax40	6165	10.58	5.28	2.97	18.83	30	Pass
ax40	6405	10.58	5.36	2.97	18.91	30	Pass
ax40	6445	10.69	5.33	2.97	18.99	30	Pass
ax40	6485	10.2	5.28	2.97	18.45	30	Pass
ax40	6525	9.77	5.28	2.97	18.02	30	Pass
ax40	6565	9.88	5.26	2.97	18.11	30	Pass
ax40	6685	9.76	5.28	2.97	18.01	30	Pass
ax40	6845	9.57	5.26	2.97	17.80	30	Pass
ax40	6885	9.53	5.33	2.97	17.83	30	Pass
ax40	6965	9.51	5.26	2.97	17.74	30	Pass
ax40	7085	10.32	5.28	2.97	18.57	30	Pass
ax80	5985	9.39	5.88	2.97	18.24	30	Pass
ax80	6145	9.91	5.83	2.97	18.71	30	Pass
ax80	6385	9.84	5.8	2.97	18.61	30	Pass
ax80	6465	9.63	5.9	2.97	18.50	30	Pass
ax80	6545	9.38	5.9	2.97	18.25	30	Pass
ax80	6625	9.33	5.9	2.97	18.20	30	Pass
ax80	6705	9.32	5.9	2.97	18.19	30	Pass
ax80	6865	8.99	5.9	2.97	17.86	30	Pass
ax80	6945	9.04	5.83	2.97	17.84	30	Pass
ax80	7025	9.3	5.87	2.97	18.14	30	Pass
ax160	6025	7.08	6.81	2.97	16.86	30	Pass
ax160	6185	7.59	6.86	2.97	17.42	30	Pass
ax160	6345	7.33	6.81	2.97	17.11	30	Pass
ax160	6505	7.31	6.81	2.97	17.09	30	Pass
ax160	6665	6.67	6.81	2.97	16.45	30	Pass
ax160	6825	6.58	6.78	2.97	16.33	30	Pass
ax160	6985	6.93	6.81	2.97	16.71	30	Pass

Report No.: WSCT-ANAB-R&E250700057A-Wi-Fi3

Issued Date: 14 August 2025

Revised: None

ANT2

Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor	Gain (dBi)	eirp Power	Limit (dBm)	Verdict
ax20	5955	13.81	4.09	2.73	20.63	30	Pass
ax20	6175	13.65	4.02	2.73	20.40	30	Pass
ax20	6415	12.86	4.02	2.73	19.61	30	Pass
ax20	6435	11.09	5.06	2.73	18.88	30	Pass
ax20	6475	11.2	5.06	2.73	18.99	30	Pass
ax20	6515	10.57	5.03	2.73	18.33	30	Pass
ax20	6535	12.26	4.07	2.73	19.06	30	Pass
ax20	6695	13.38	4.02	2.73	20.13	30	Pass
ax20	6875	13.31	4.02	2.73	20.06	30	Pass
ax20	6895	13.06	4.02	2.73	19.81	30	Pass
ax20	6995	12.17	5.06	2.73	19.96	30	Pass
ax20	7095	13.02	4.02	2.73	19.77	30	Pass
ax40	5965	14.81	4	2.73	21.54	30	Pass
ax40	6165	10.9	5.26	2.73	18.89	30	Pass
ax40	6405	10.73	3.45	2.73	16.91	30	Pass
ax40	6445	11.59	5.28	2.73	19.60	30	Pass
ax40	6485	10.96	5.26	2.73	18.95	30	Pass
ax40	6525	10.6	5.33	2.73	18.66	30	Pass
ax40	6565	10.89	5.33	2.73	18.95	30	Pass
ax40	6685	11.67	5.26	2.73	19.66	30	Pass
ax40	6845	10.88	5.33	2.73	18.94	30	Pass
ax40	6885	10.85	5.26	2.73	18.84	30	Pass
ax40	6965	11.55	5.28	2.73	19.56	30	Pass
ax40	7085	10.9	5.26	2.73	18.89	30	Pass
ax80	5985	11.59	5.8	2.73	20.12	30	Pass
ax80	6145	10.55	5.8	2.73	19.08	30	Pass
ax80	6385	10.1	5.9	2.73	18.73	30	Pass
ax80	6465	10.92	5.9	2.73	19.55	30	Pass
ax80	6545	9.69	5.8	2.73	18.22	30	Pass
ax80	6625	10.14	5.9	2.73	18.77	30	Pass
ax80	6705	11.01	5.83	2.73	19.57	30	Pass
ax80	6865	9.87	6.51	2.73	19.11	30	Pass
ax80	6945	10.91	5.86	2.73	19.50	30	Pass
ax80	7025	10.95	5.83	2.73	19.51	30	Pass
ax160	6025	8.72	6.81	2.73	18.26	30	Pass
ax160	6185	8.05	6.86	2.73	17.64	30	Pass
ax160	6345	7.96	6.86	2.73	17.55	30	Pass
ax160	6505	7.98	6.86	2.73	17.57	30	Pass
ax160	6665	7.57	6.86	2.73	17.16	30	Pass
ax160	6825	7.57	6.81	2.73	17.11	30	Pass
ax160	6985	7.39	6.8	2.73	16.92	30	Pass

MIMO mode

Mode	Frequency (MHz)	Conducted Power (dBm)	eirp Power	Limit (dBm)	Verdict
ax20	5955	15.26	22.46	30	Pass
ax20	6175	15.33	22.54	30	Pass
ax20	6415	14.73	21.97	30	Pass
ax20	6435	13.71	21.61	30	Pass
ax20	6475	13.63	21.53	30	Pass
ax20	6515	13.10	20.97	30	Pass
ax20	6535	14.11	21.36	30	Pass
ax20	6695	15.02	22.22	30	Pass
ax20	6875	14.83	21.99	30	Pass
ax20	6895	14.63	21.81	30	Pass
ax20	6995	14.23	22.10	30	Pass
ax20	7095	14.77	21.99	30	Pass
ax40	5965	16.17	23.36	30	Pass
ax40	6165	13.75	21.87	30	Pass
ax40	6405	13.67	21.03	30	Pass
ax40	6445	14.17	22.32	30	Pass
ax40	6485	13.61	21.72	30	Pass
ax40	6525	13.22	21.36	30	Pass
ax40	6565	13.42	21.56	30	Pass
ax40	6685	13.83	21.92	30	Pass
ax40	6845	13.28	21.42	30	Pass
ax40	6885	13.25	21.37	30	Pass
ax40	6965	13.66	21.75	30	Pass
ax40	7085	13.63	21.74	30	Pass
ax80	5985	13.64	22.29	30	Pass
ax80	6145	13.25	21.91	30	Pass
ax80	6385	12.98	21.68	30	Pass
ax80	6465	13.33	22.07	30	Pass
ax80	6545	12.55	21.25	30	Pass
ax80	6625	12.76	21.50	30	Pass
ax80	6705	13.26	21.94	30	Pass
ax80	6865	12.46	21.54	30	Pass
ax80	6945	13.09	21.76	30	Pass
ax80	7025	13.21	21.89	30	Pass
ax160	6025	10.99	20.63	30	Pass
ax160	6185	10.84	20.54	30	Pass
ax160	6345	10.67	20.35	30	Pass
ax160	6505	10.67	20.35	30	Pass
ax160	6665	10.15	19.83	30	Pass
ax160	6825	10.11	19.75	30	Pass
ax160	6985	10.18	19.83	30	Pass

ANT1



