

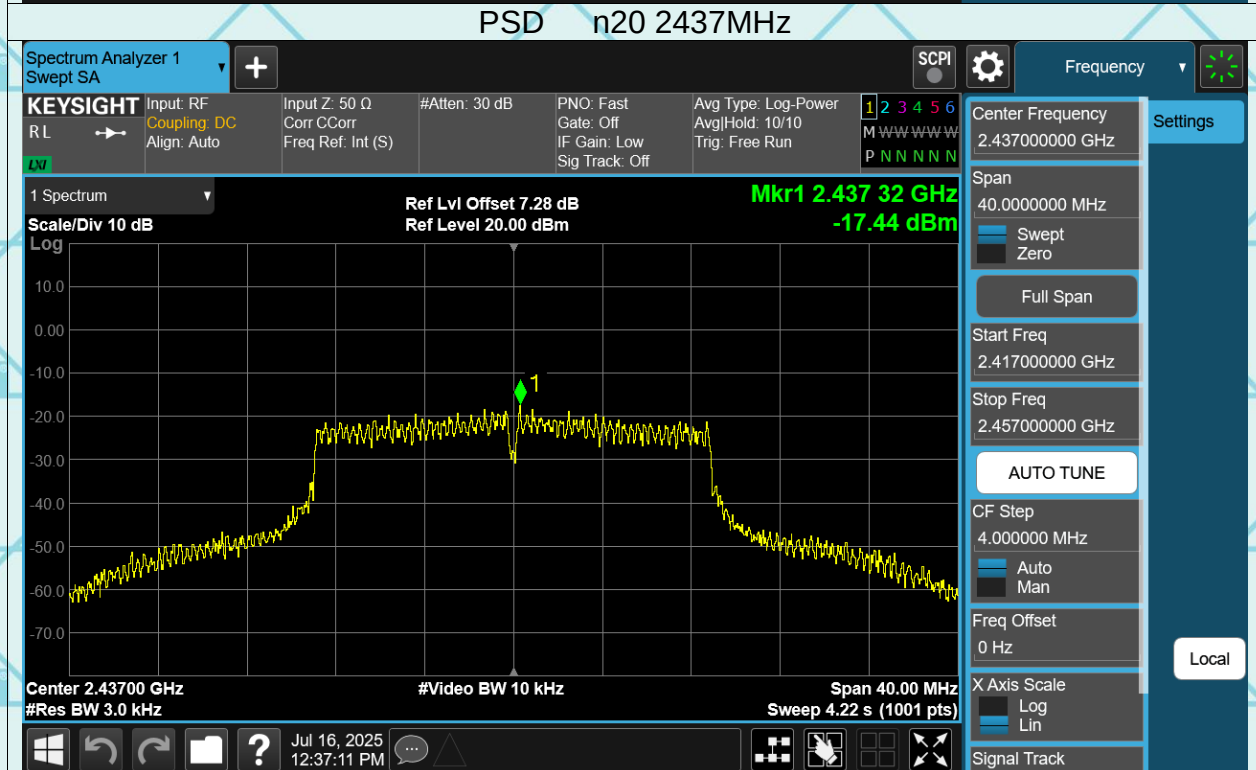
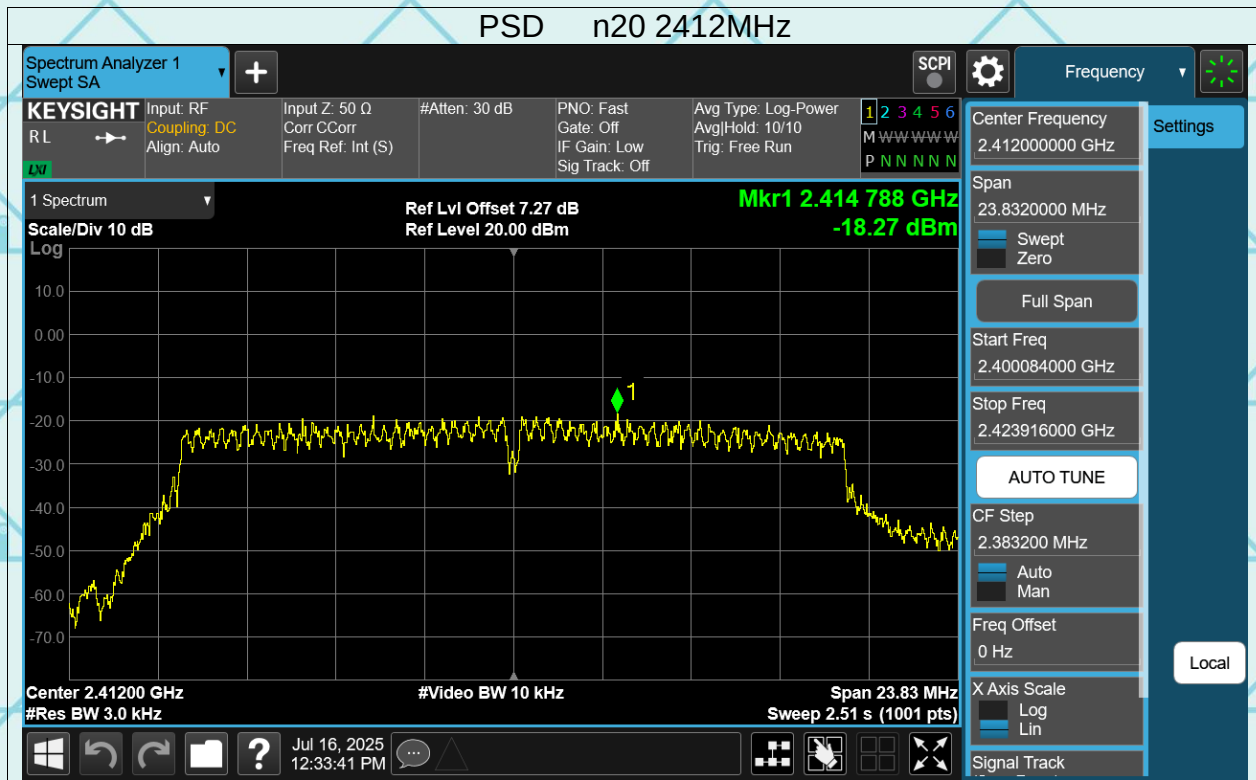




Report No.: WSCT-ANAB-R&E250600047A-Wi-Fi1

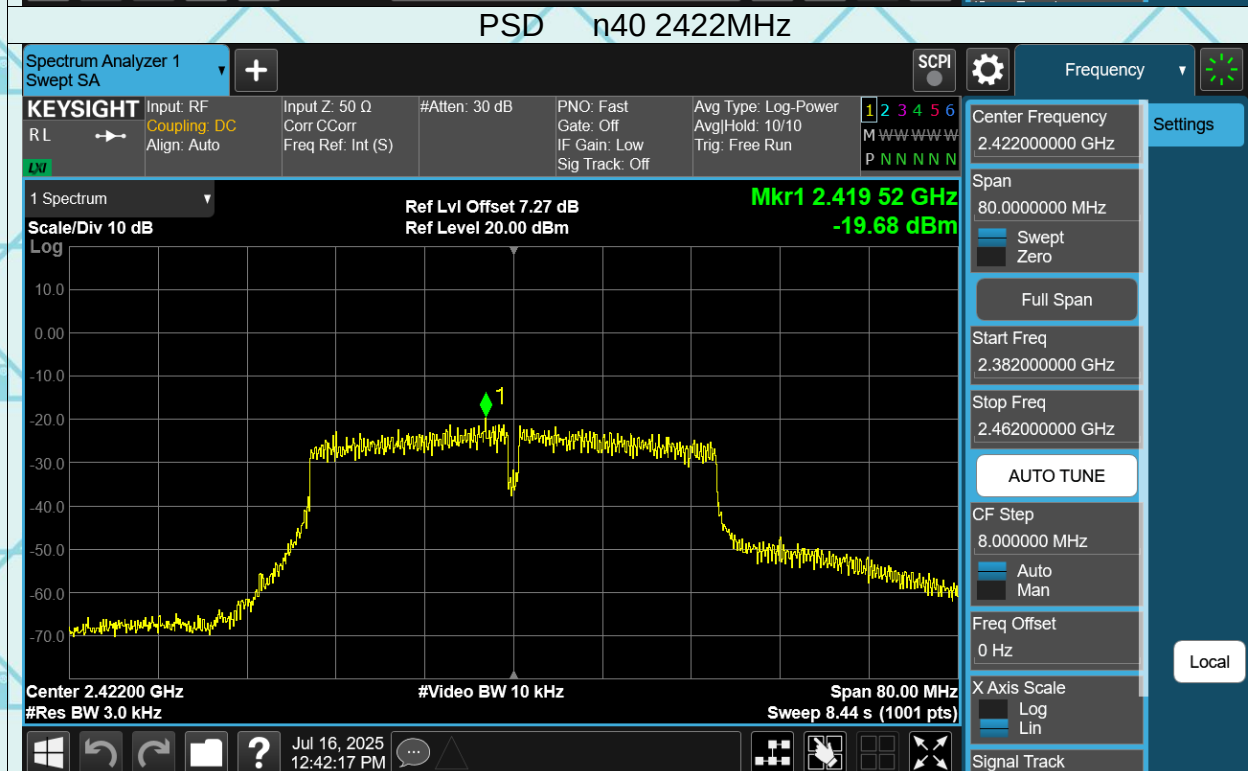



Report No.: WSCT-ANAB-R&E250600047A-Wi-Fi1

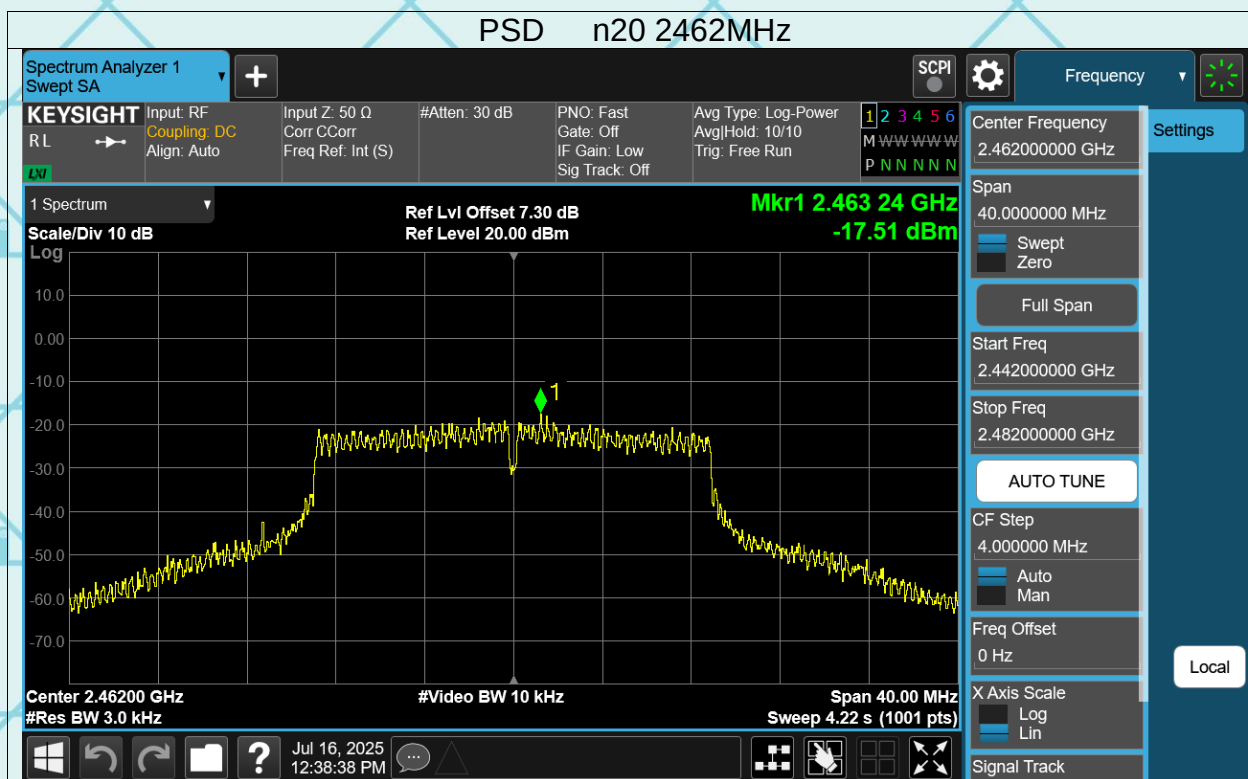



Report No.: WSCT-ANAB-R&E250600047A-Wi-Fi1

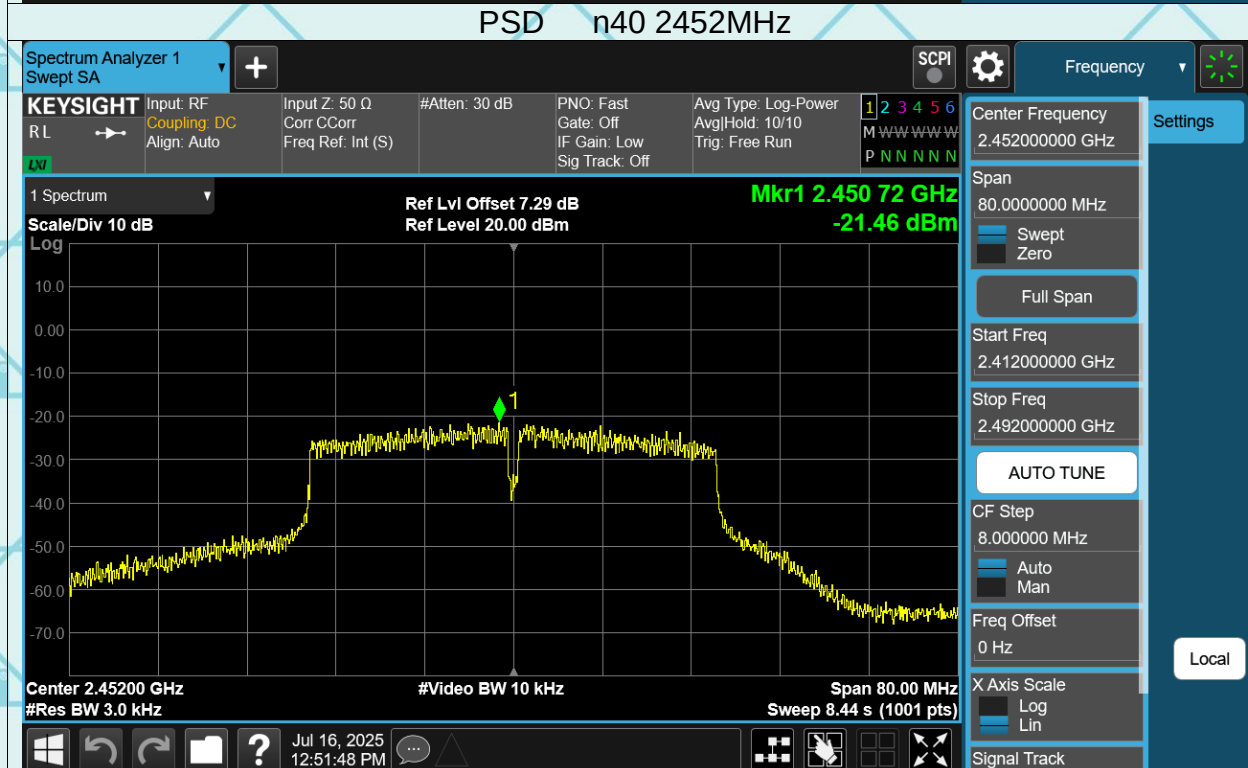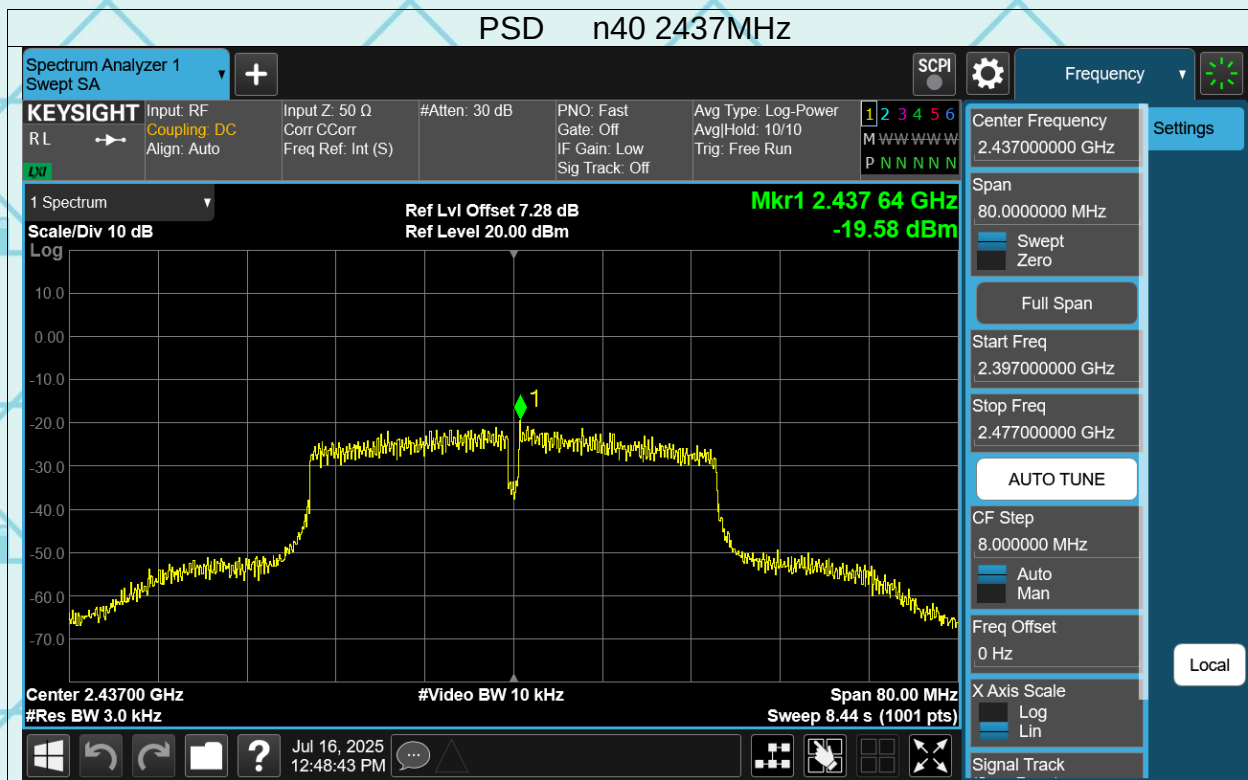



Report No.: WSCT-ANAB-R&E250600047A-Wi-Fi1

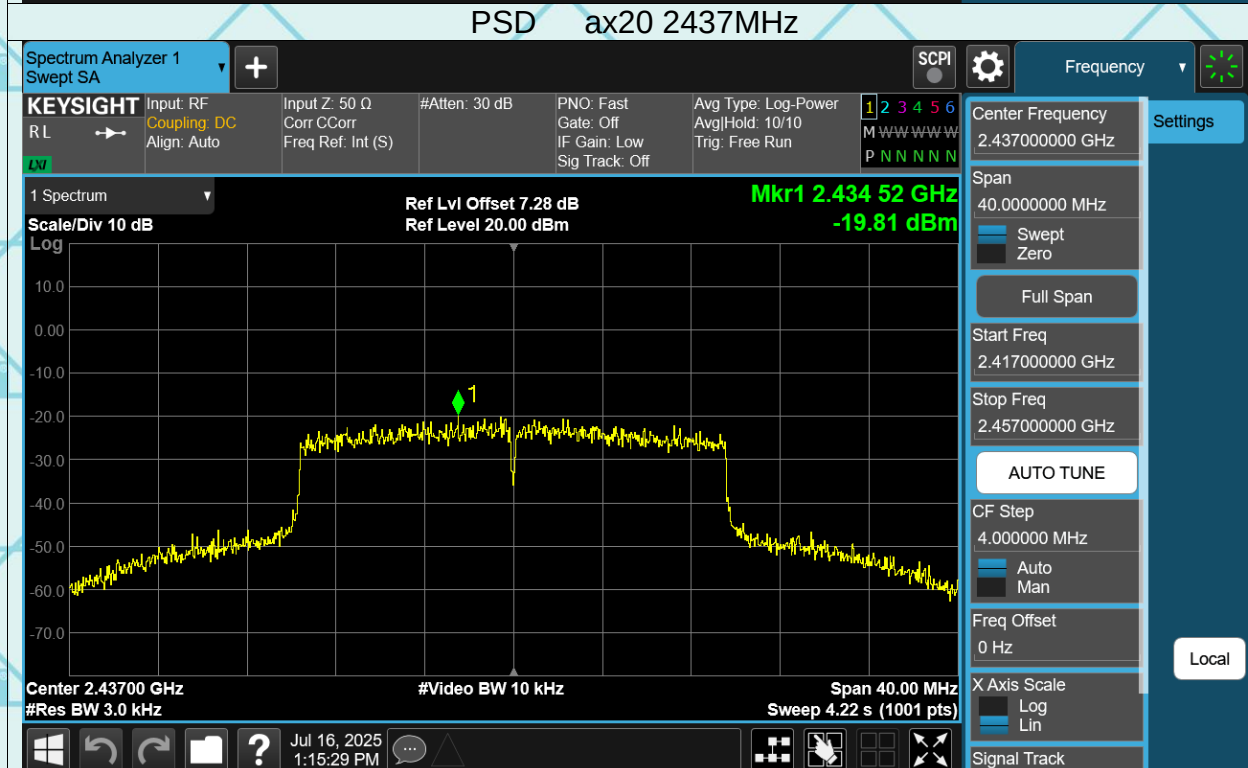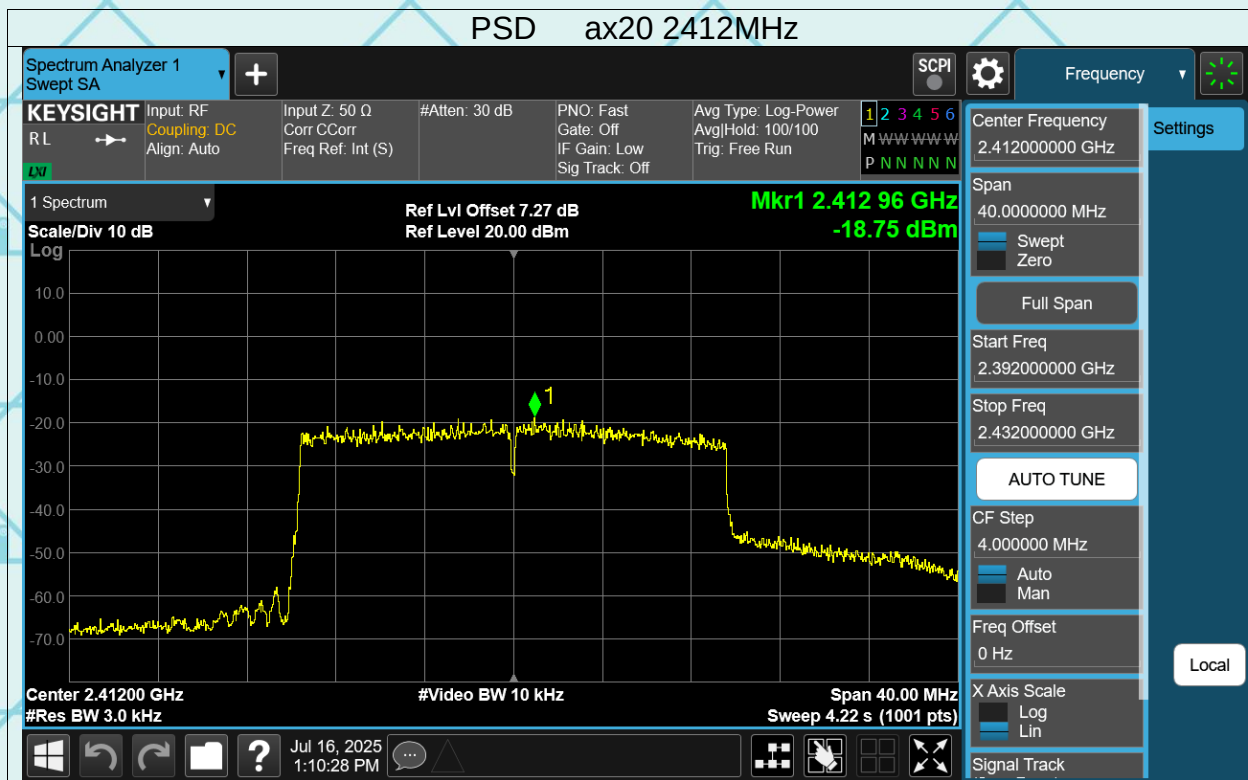

Report No.: WSCT-ANAB-R&E250600047A-Wi-Fi1

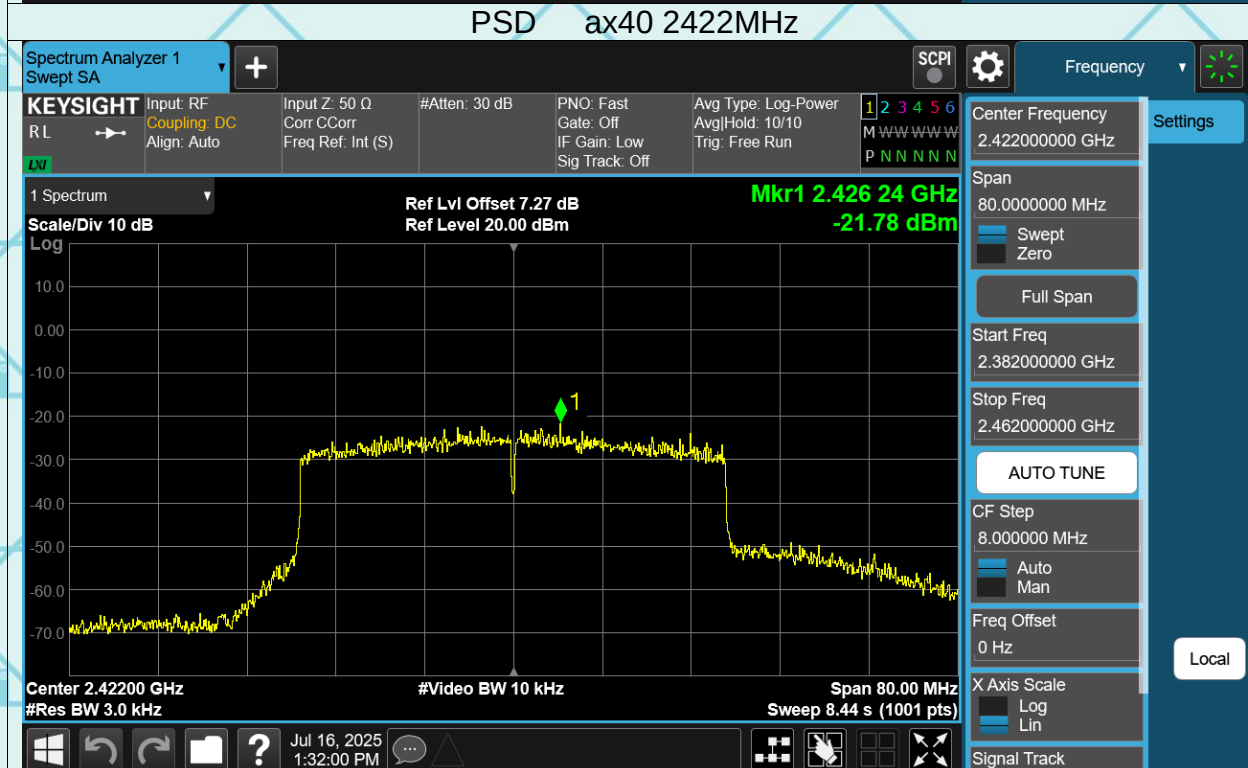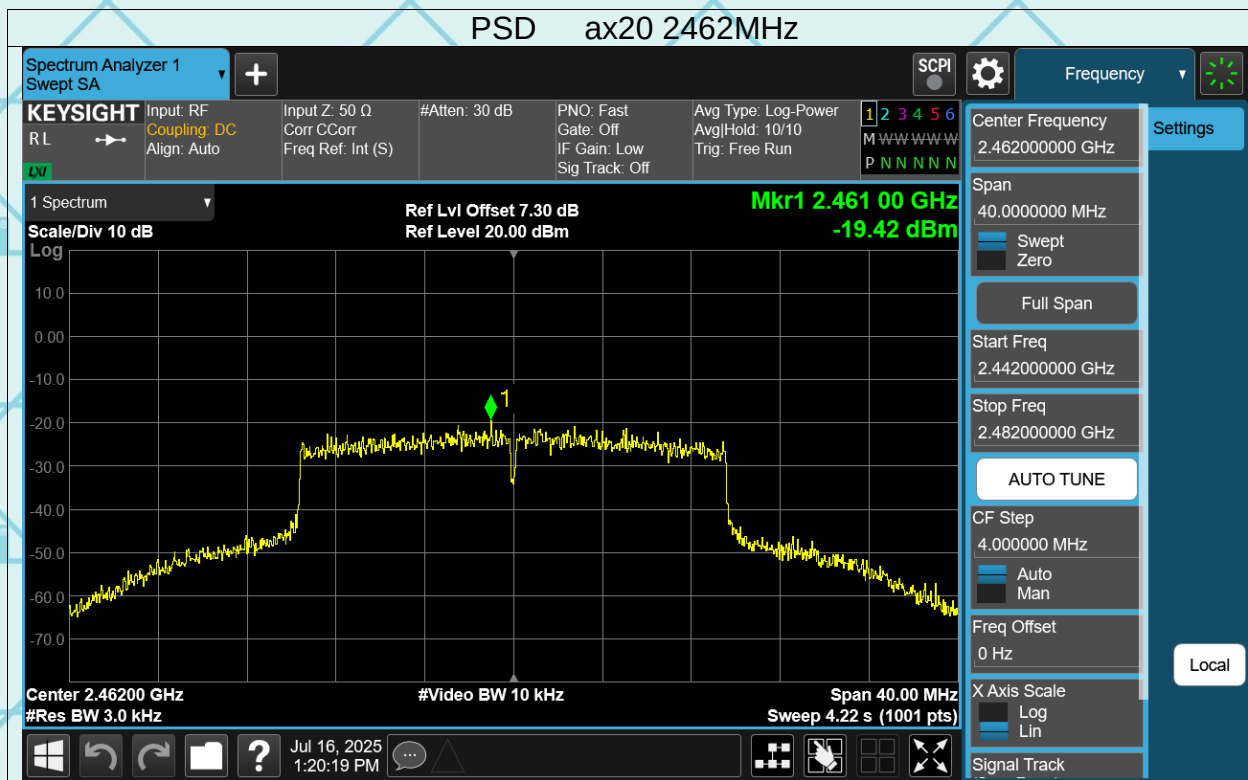


Report No.: WSCT-ANAB-R&E250600047A-Wi-Fi1

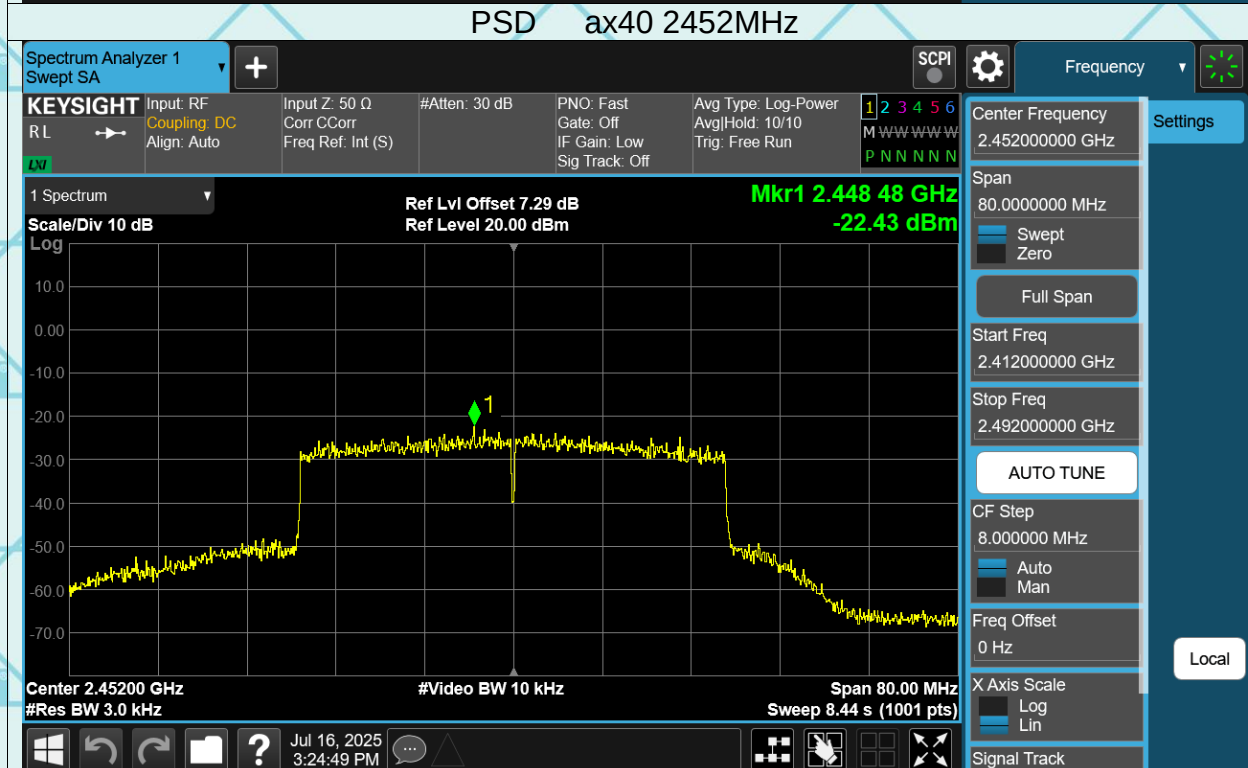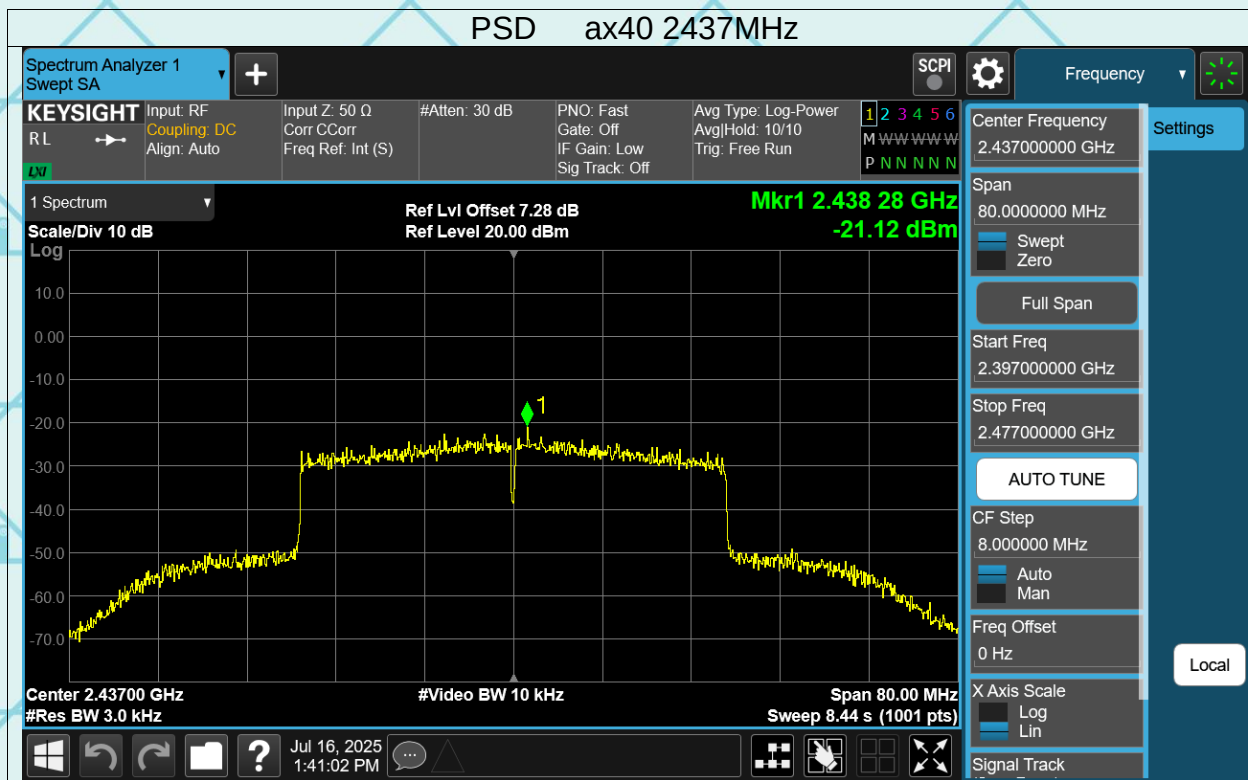

Report No.: WSCT-ANAB-R&E250600047A-Wi-Fi1
ANT2

Test Graphs



PSD b 2412MHz

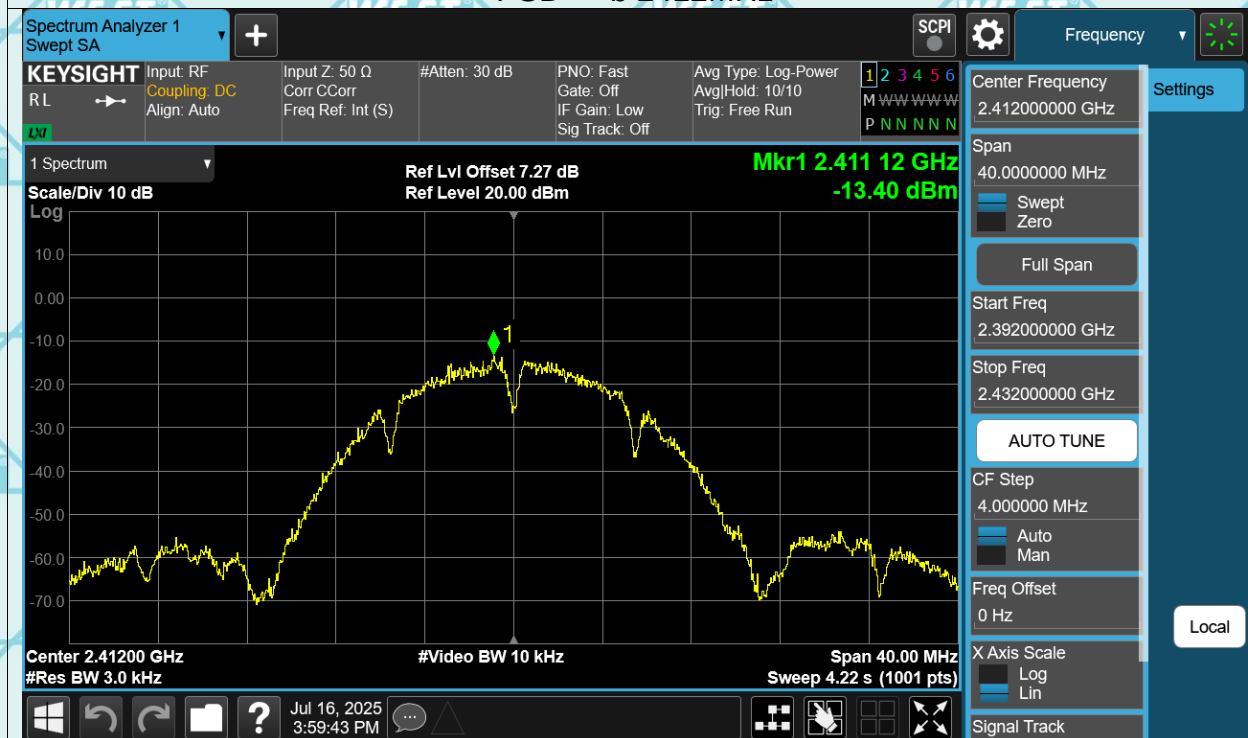



PSD b 2437MHz





Report No.: WSCT-ANAB-R&E250600047A-Wi-Fi1

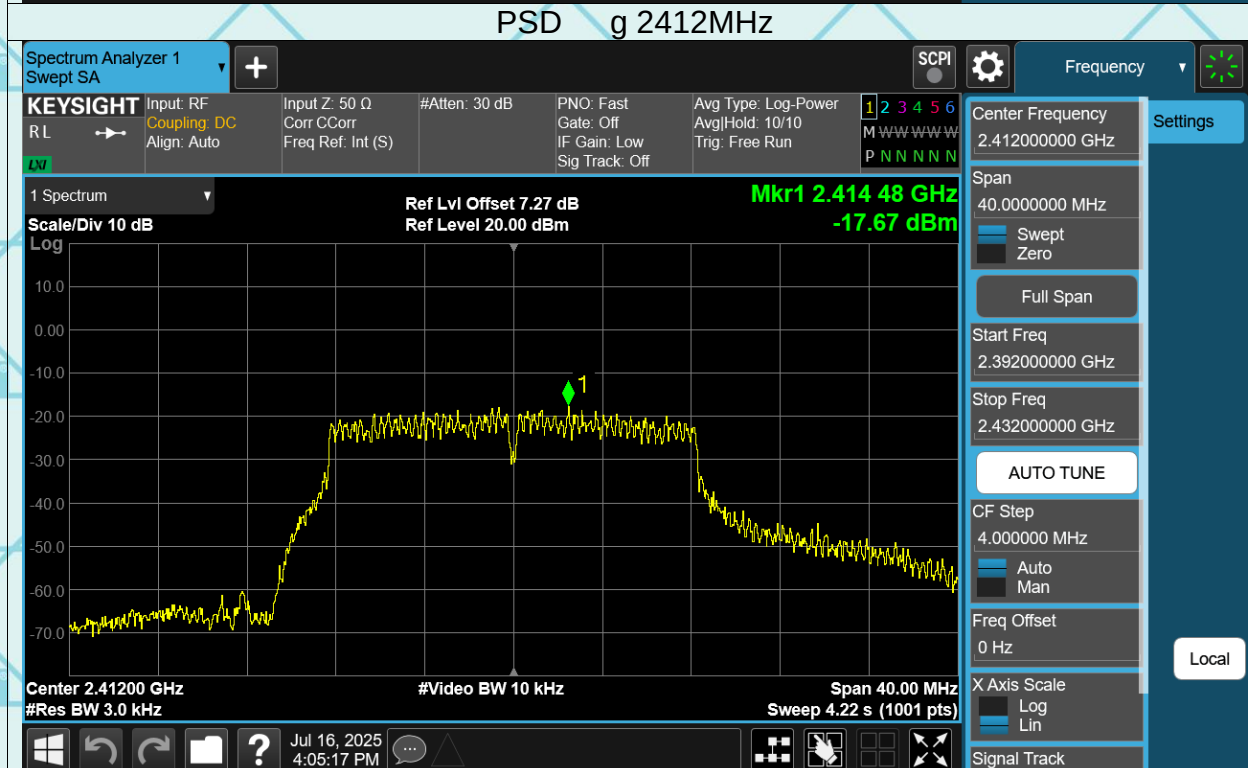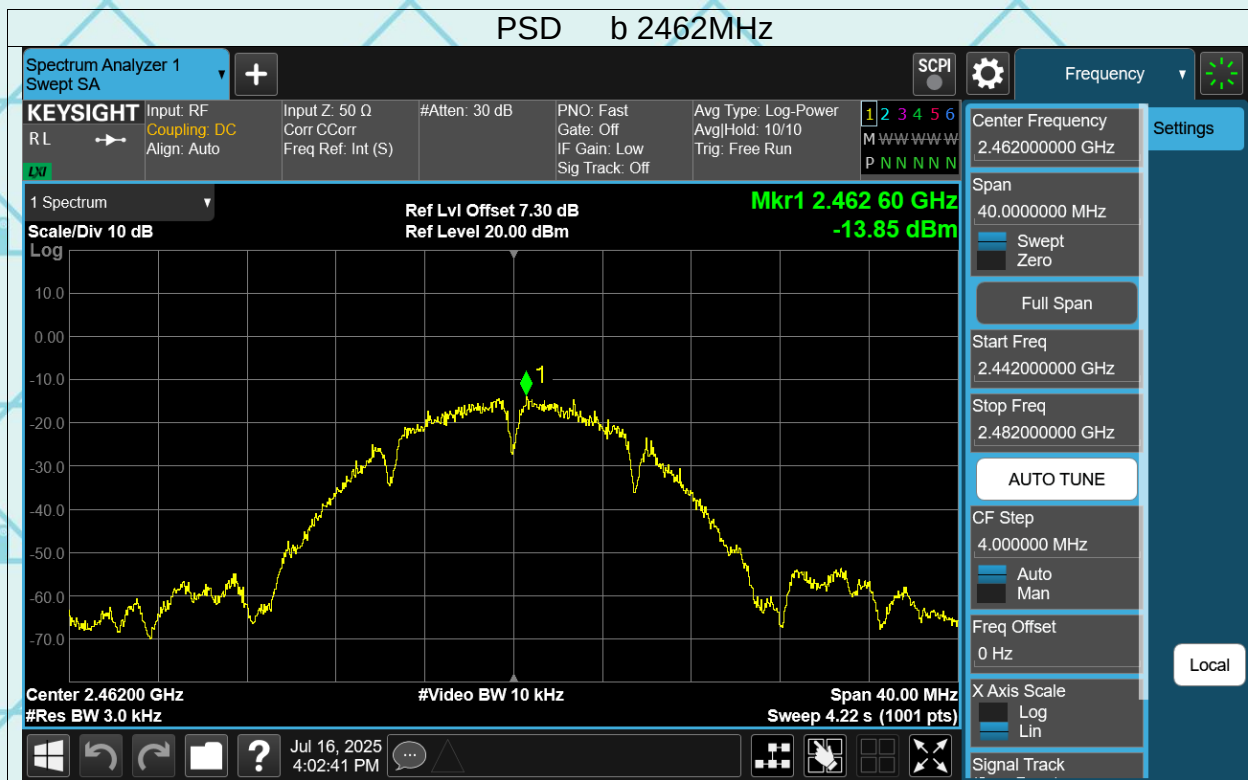



Report No.: WSCT-ANAB-R&E250600047A-Wi-Fi1

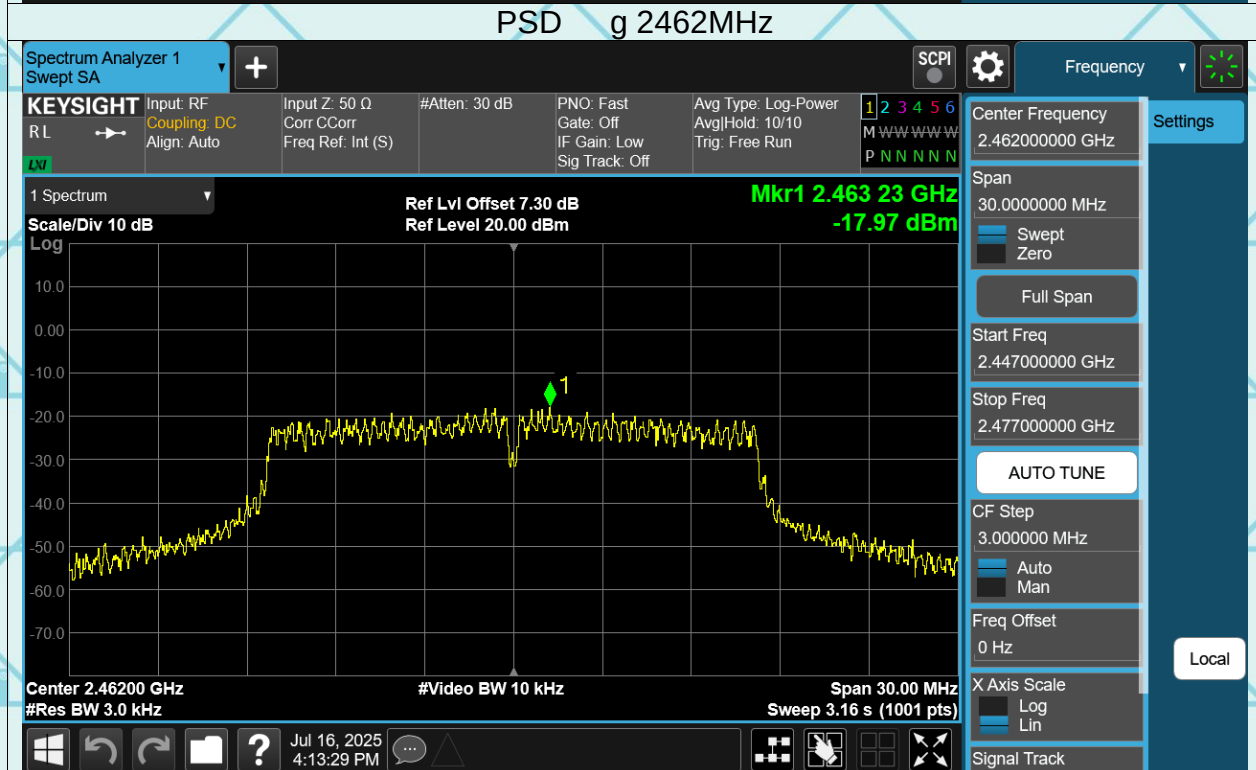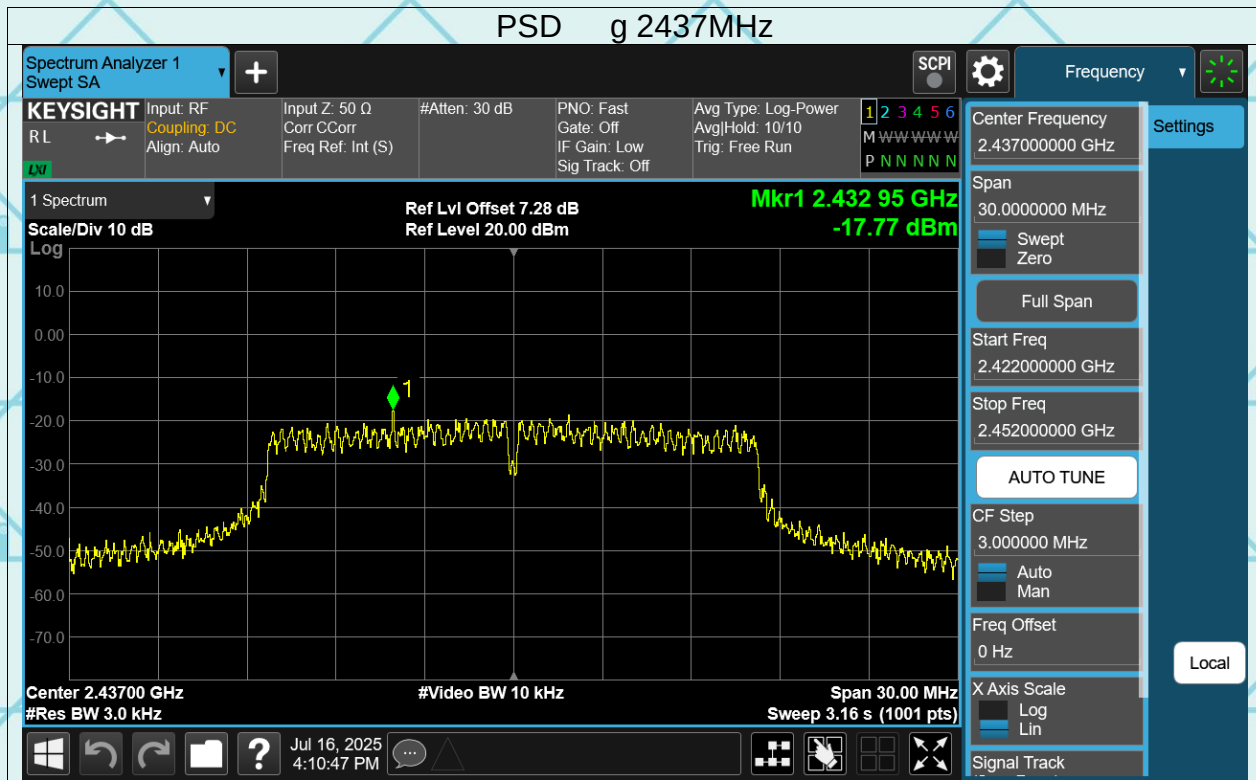



Report No.: WSCT-ANAB-R&E250600047A-Wi-Fi1

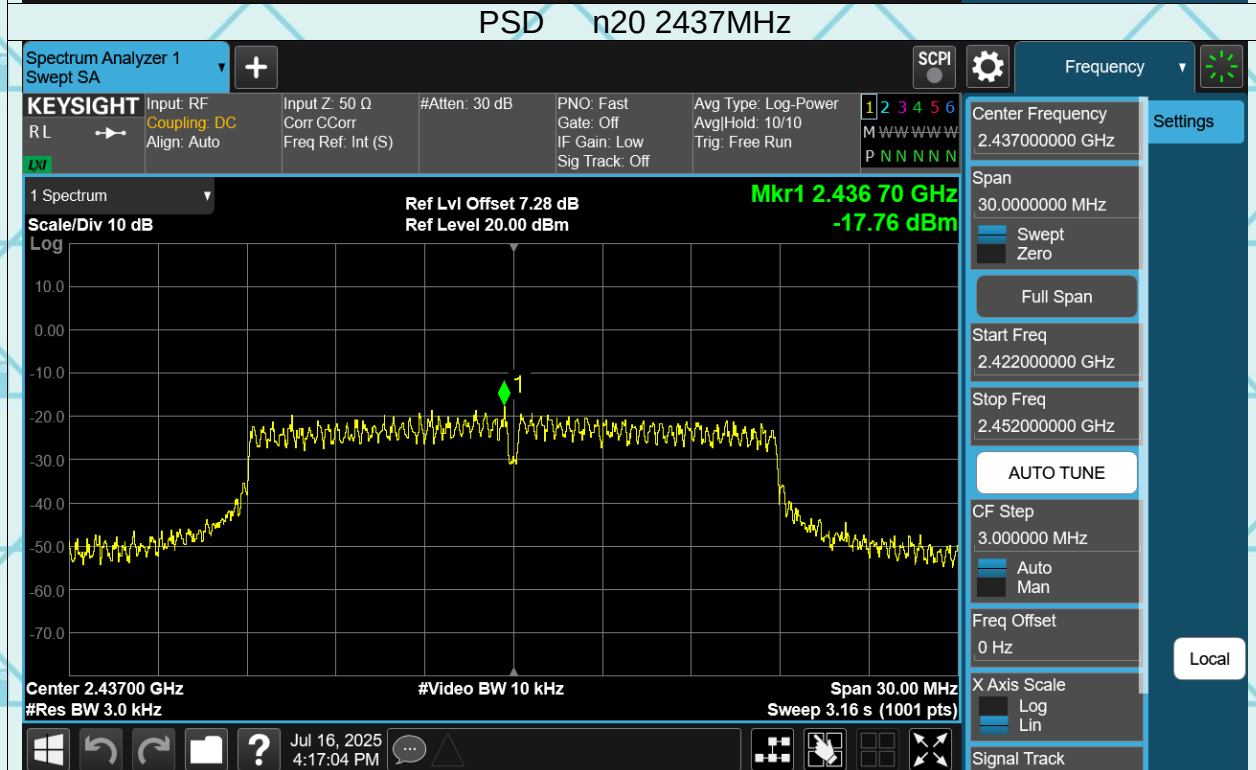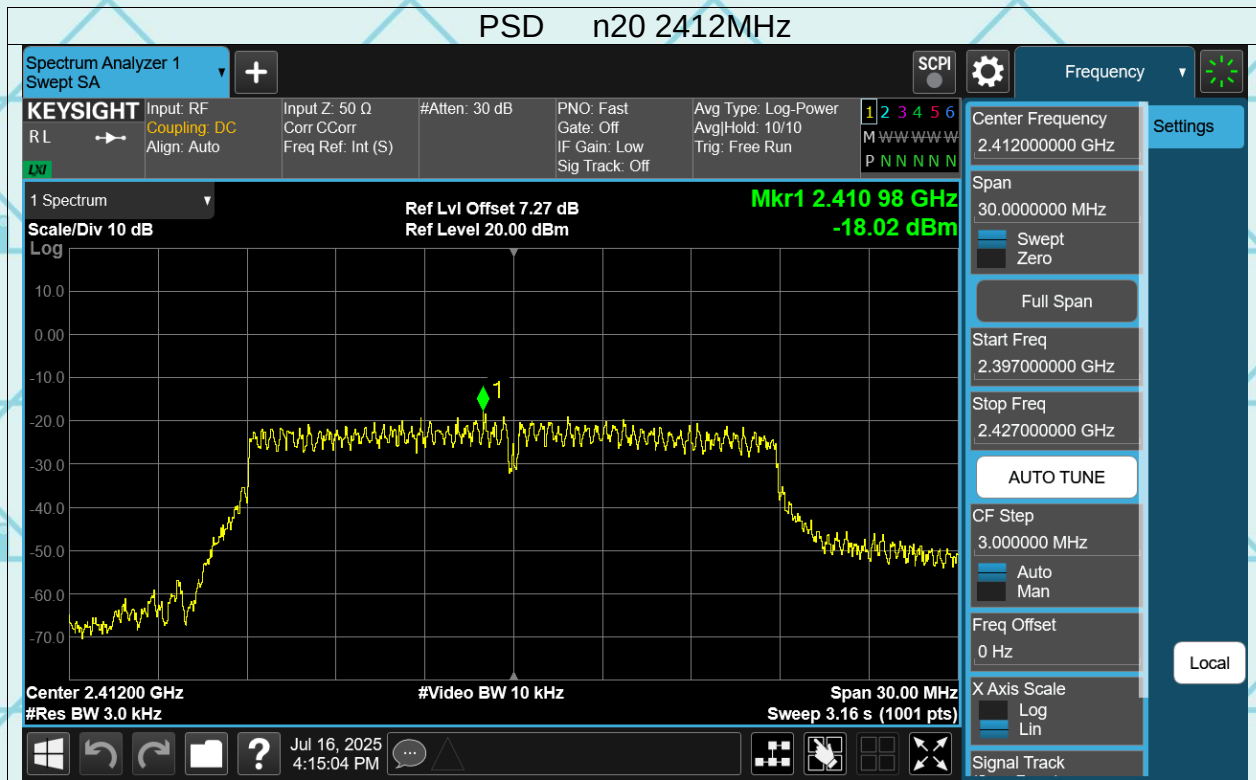



Report No.: WSCT-ANAB-R&E250600047A-Wi-Fi1

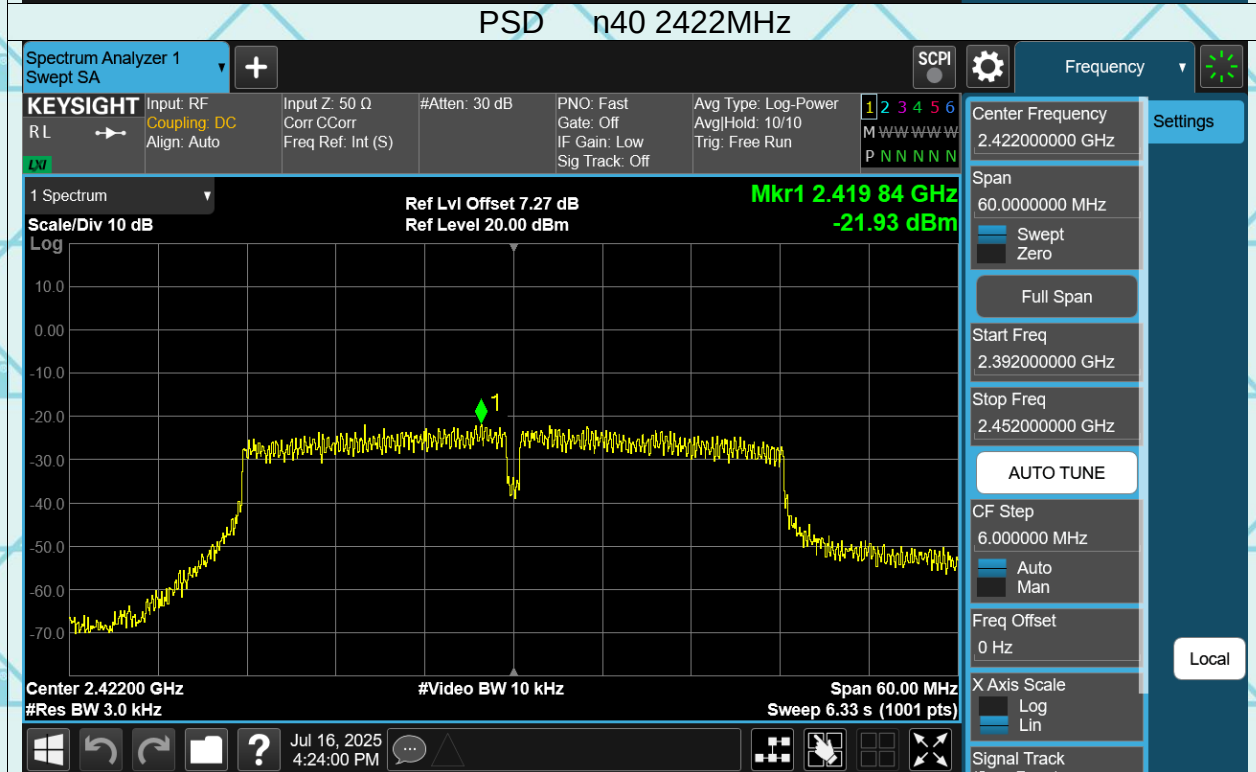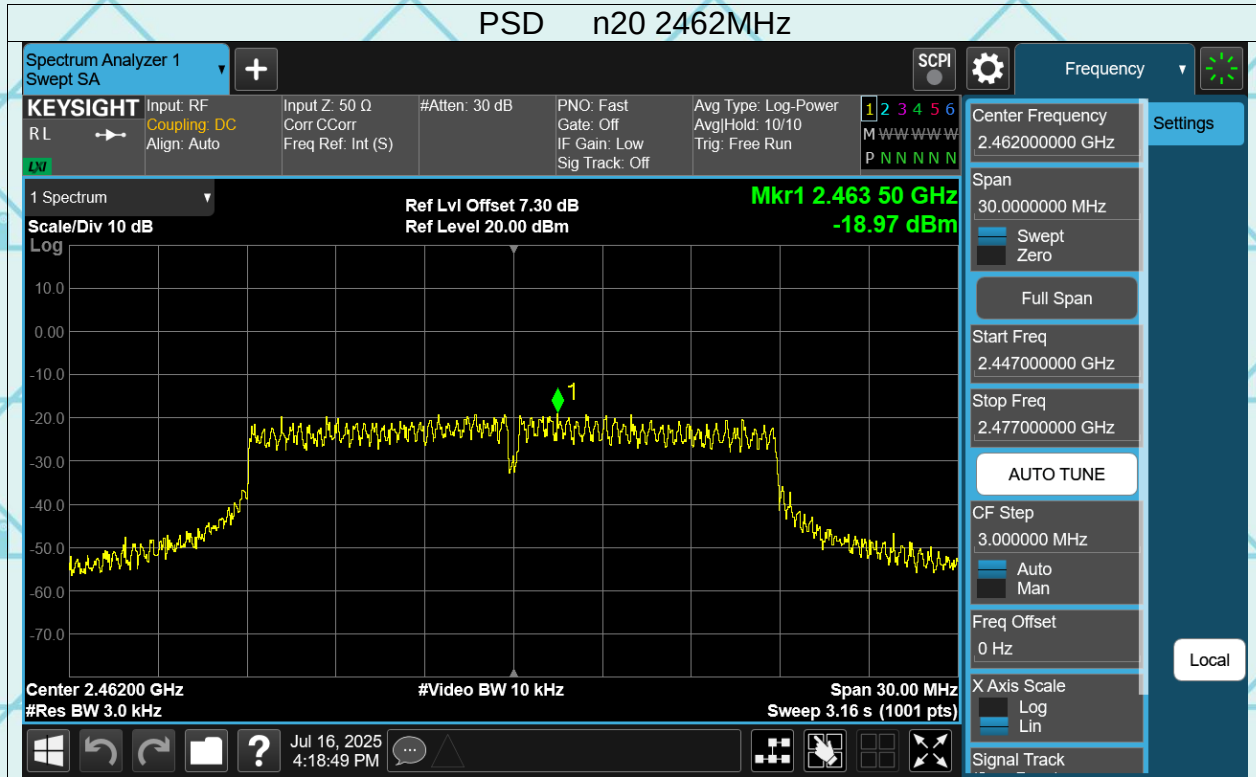



Report No.: WSCT-ANAB-R&E250600047A-Wi-Fi1

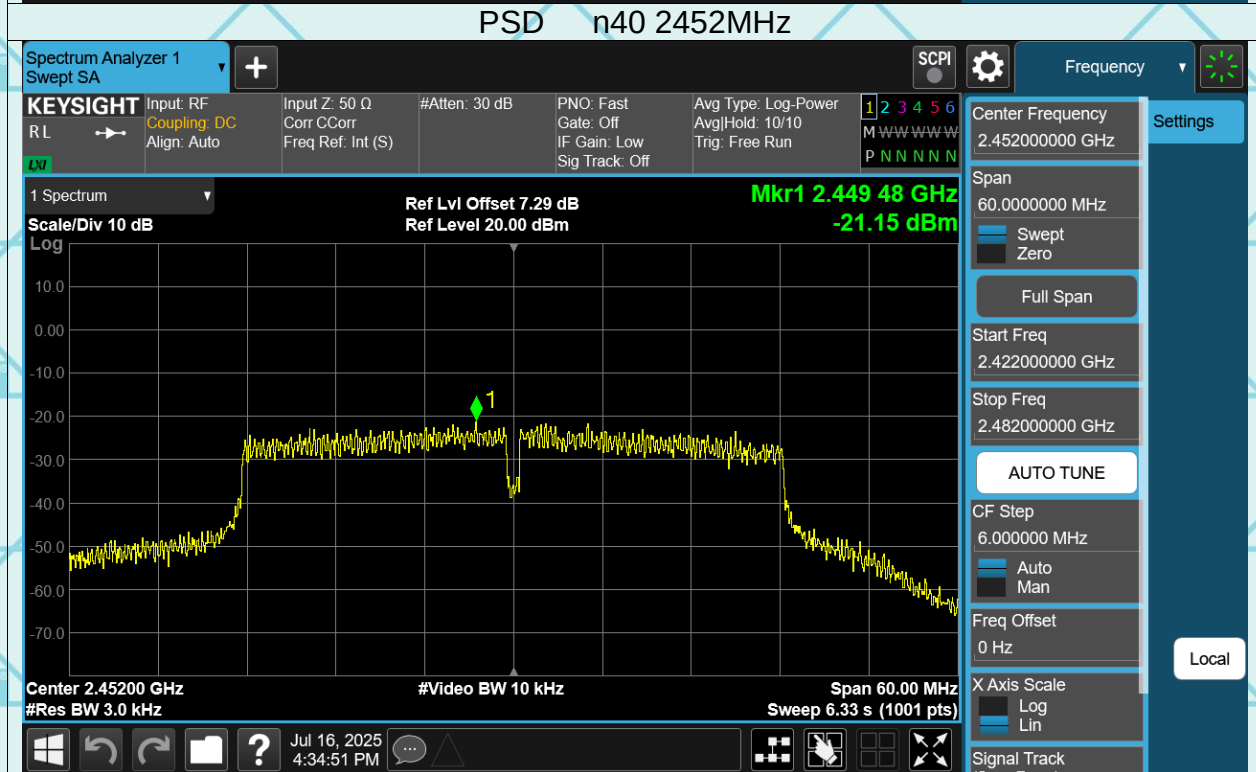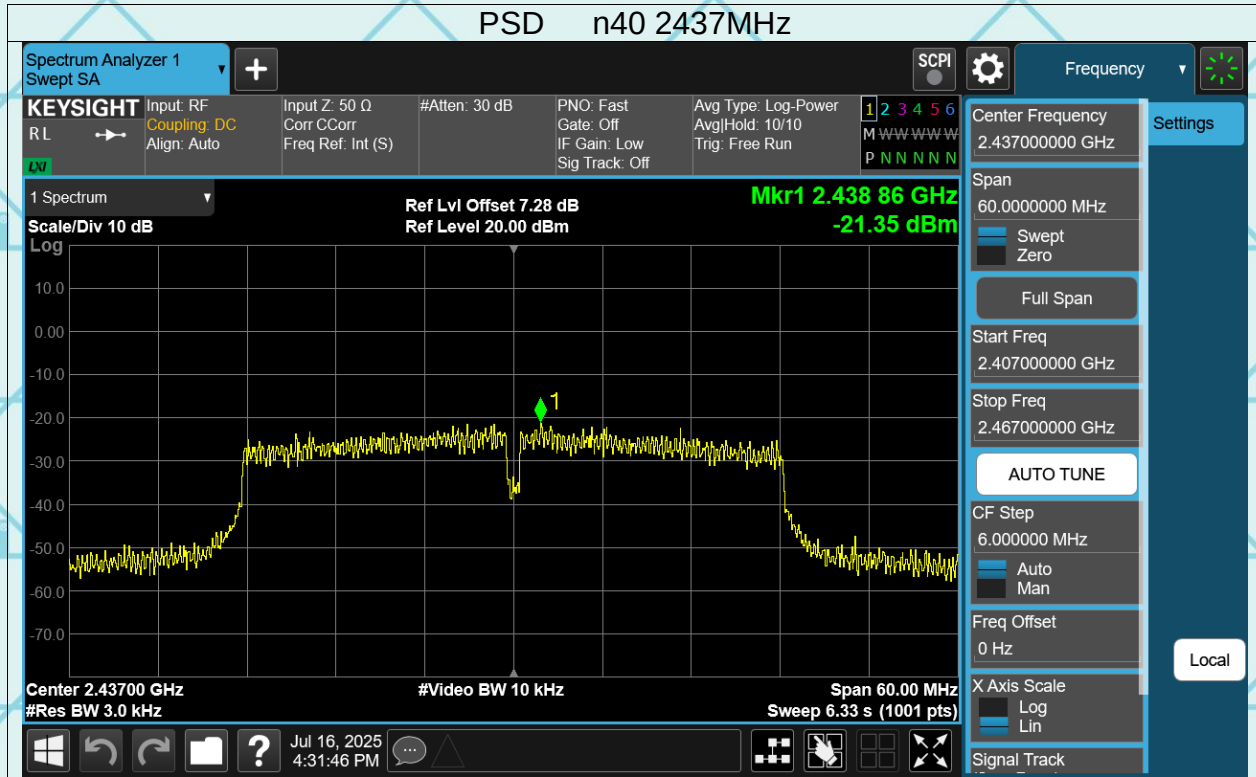



Report No.: WSCT-ANAB-R&E250600047A-Wi-Fi1

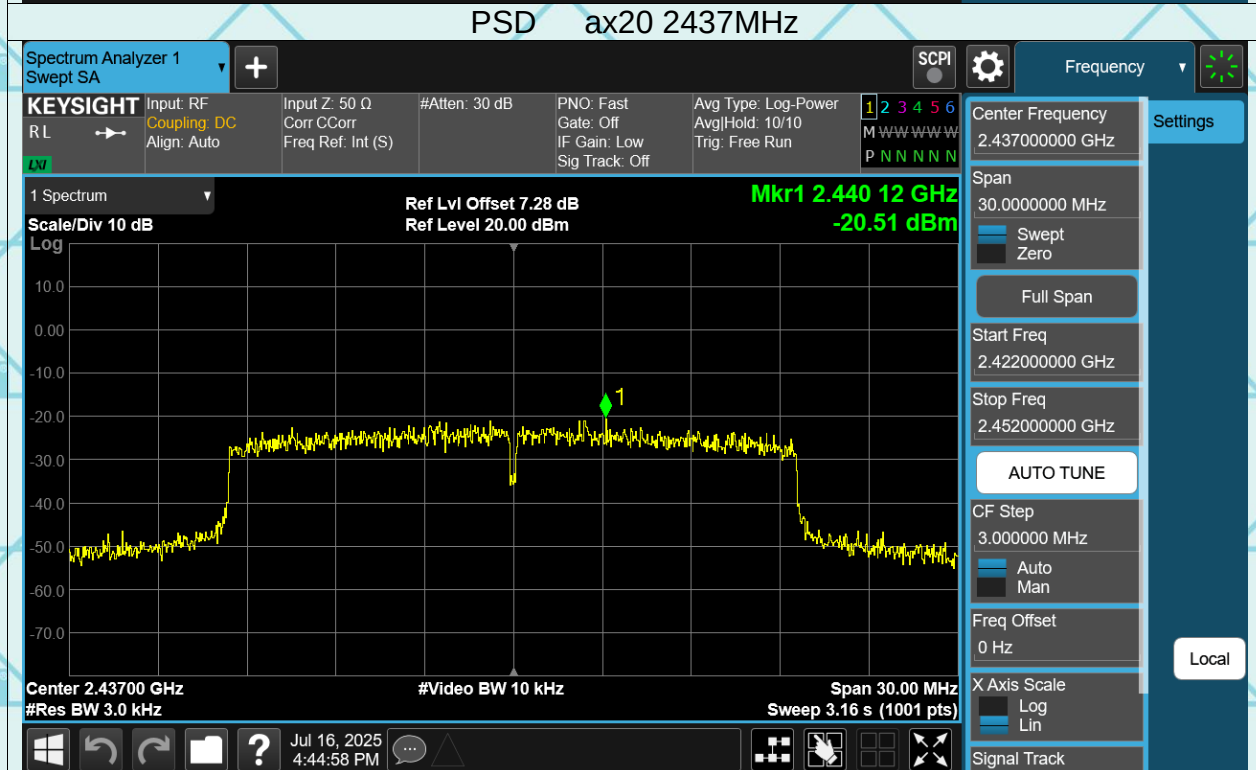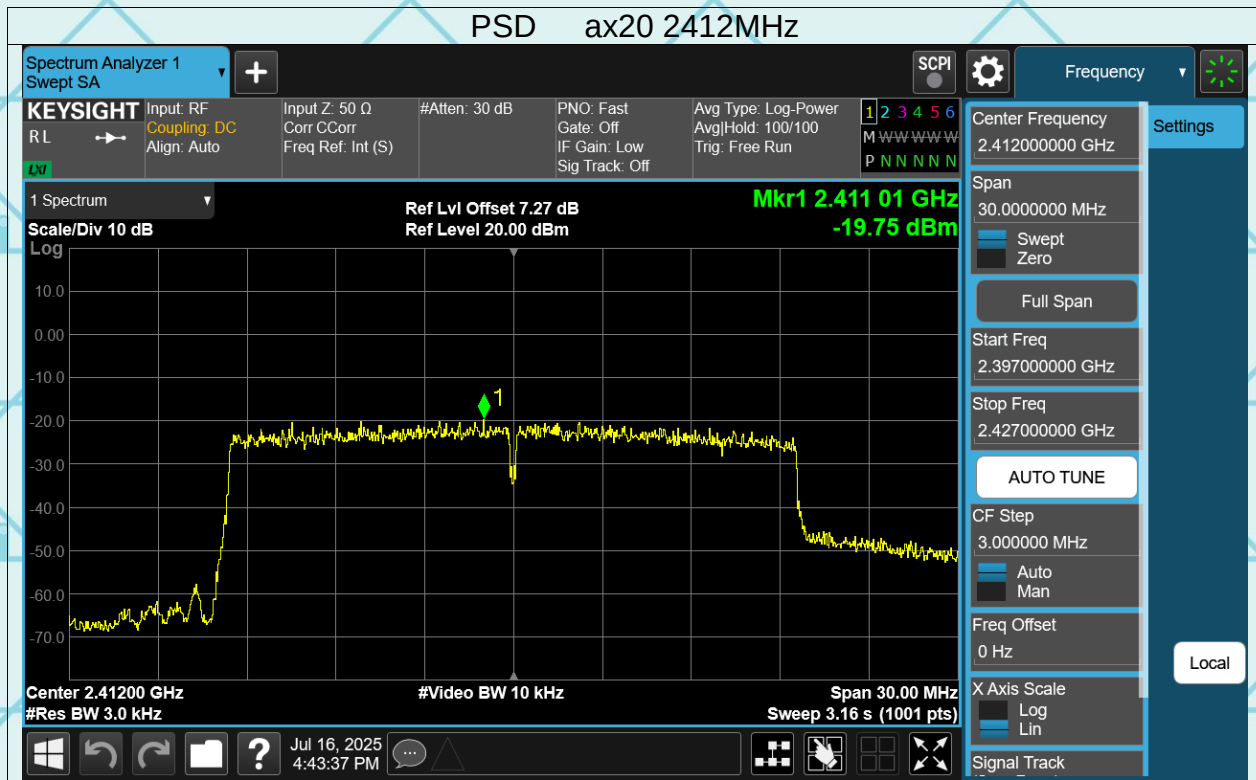

Report No.: WSCT-ANAB-R&E250600047A-Wi-Fi1

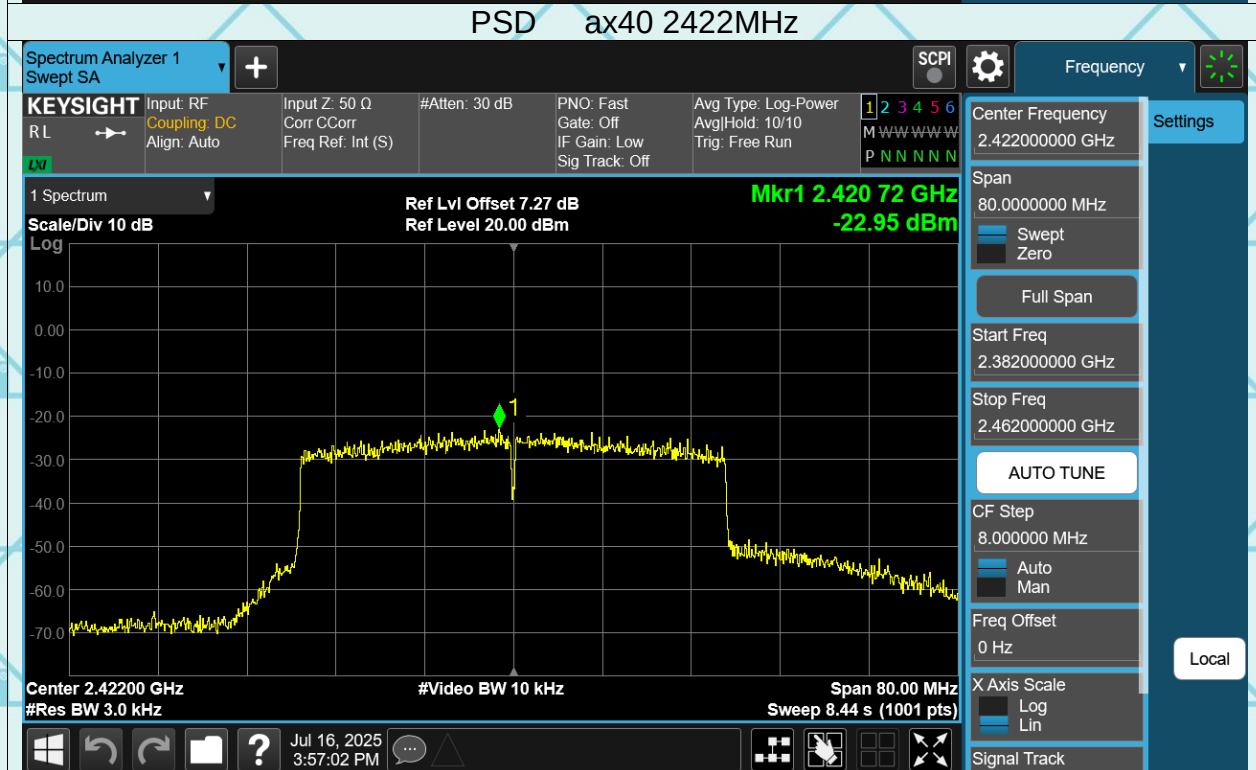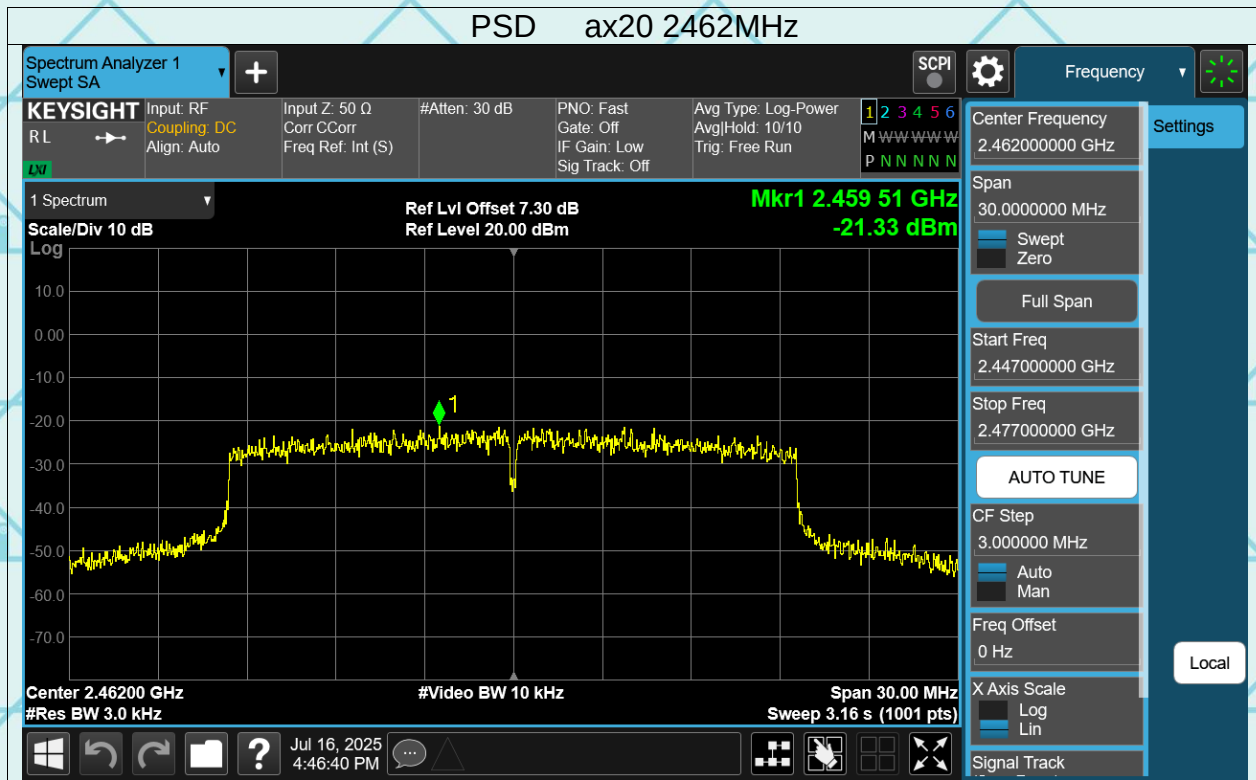


Report No.: WSCT-ANAB-R&E250600047A-Wi-Fi1

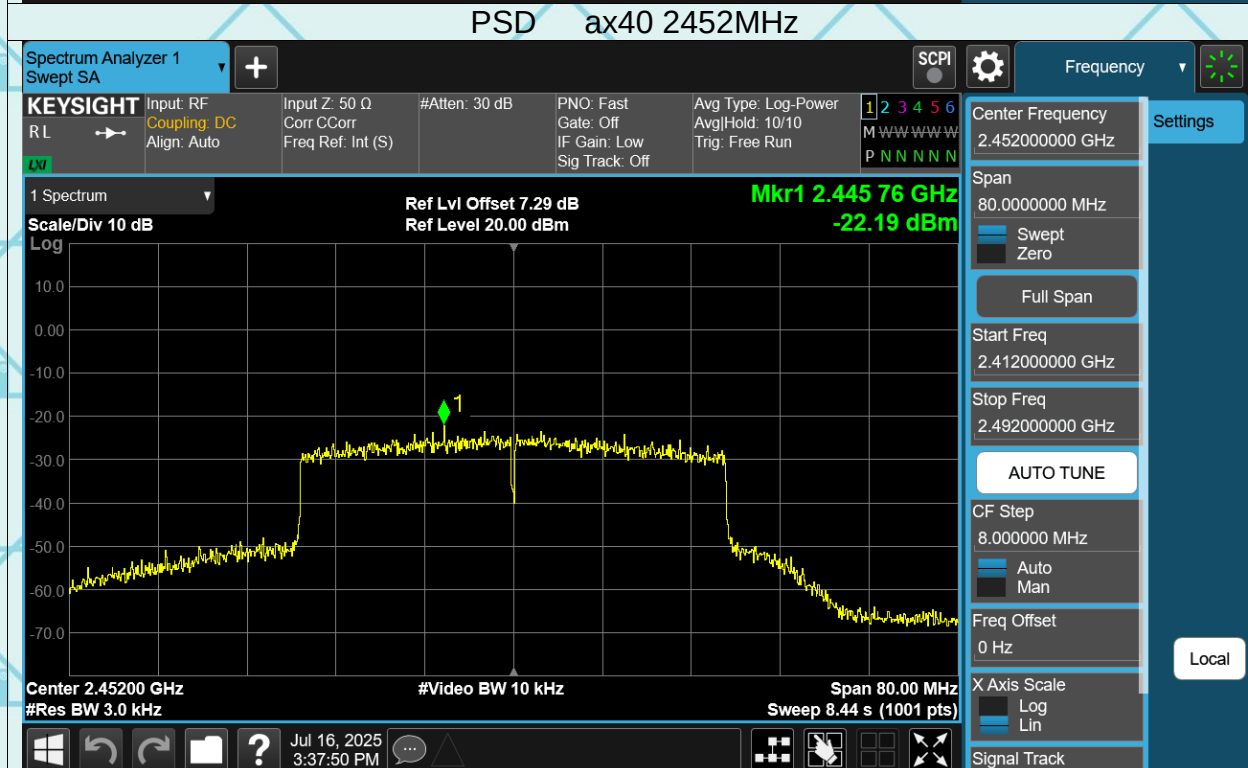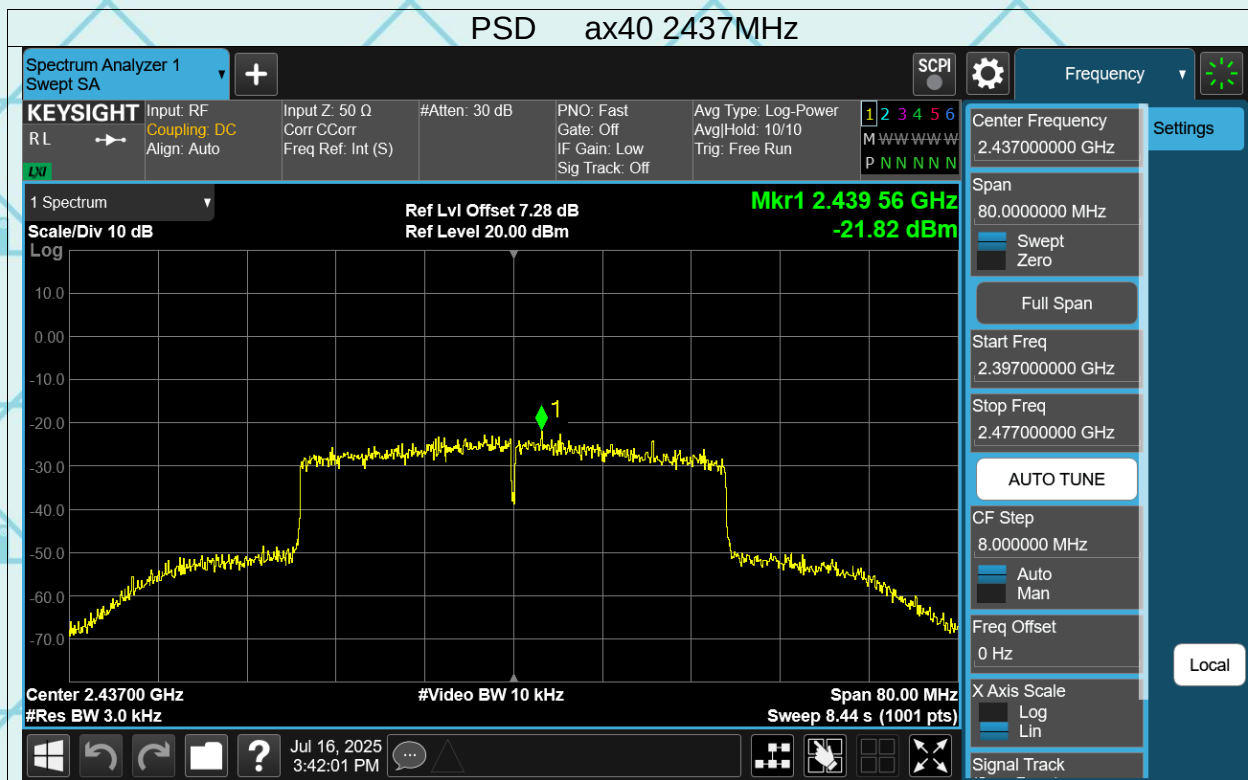

6.5. Conducted Band Edge and Spurious Emission Measurement



6.5.1 Test Specification

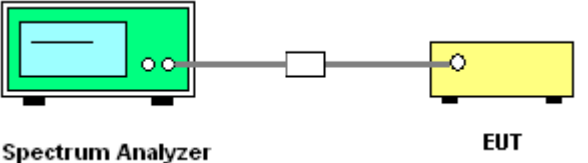Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074
Limit:	In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).
Test Setup:	 The diagram illustrates the test setup. On the left is a green box representing the 'Spectrum Analyzer'. A line connects it to a small white box representing an 'attenuator'. This line then connects to a yellow box representing the 'EUT' (Equipment Under Test).
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d). 5. Measure and record the results in the test report. 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Test Result:	PASS



Report No.: WSCT-ANAB-R&E250600047A-Wi-Fi1

Test Data



Band Edge

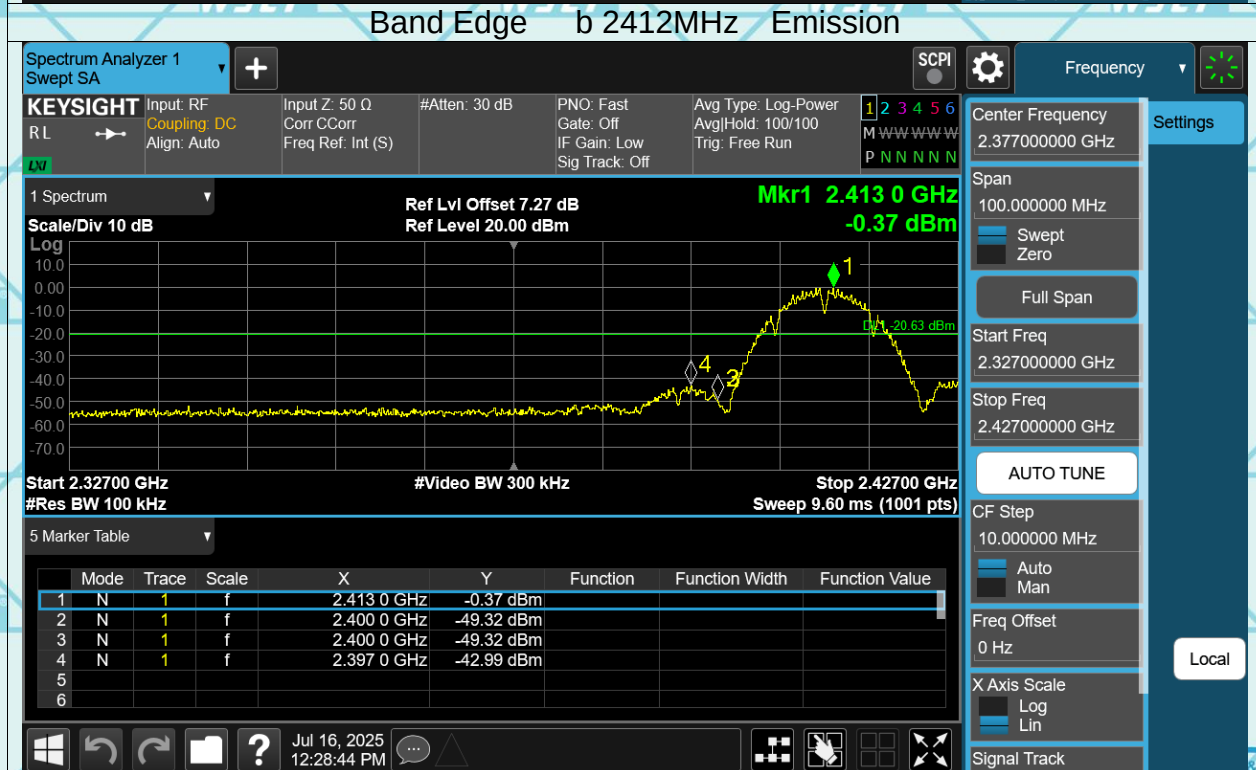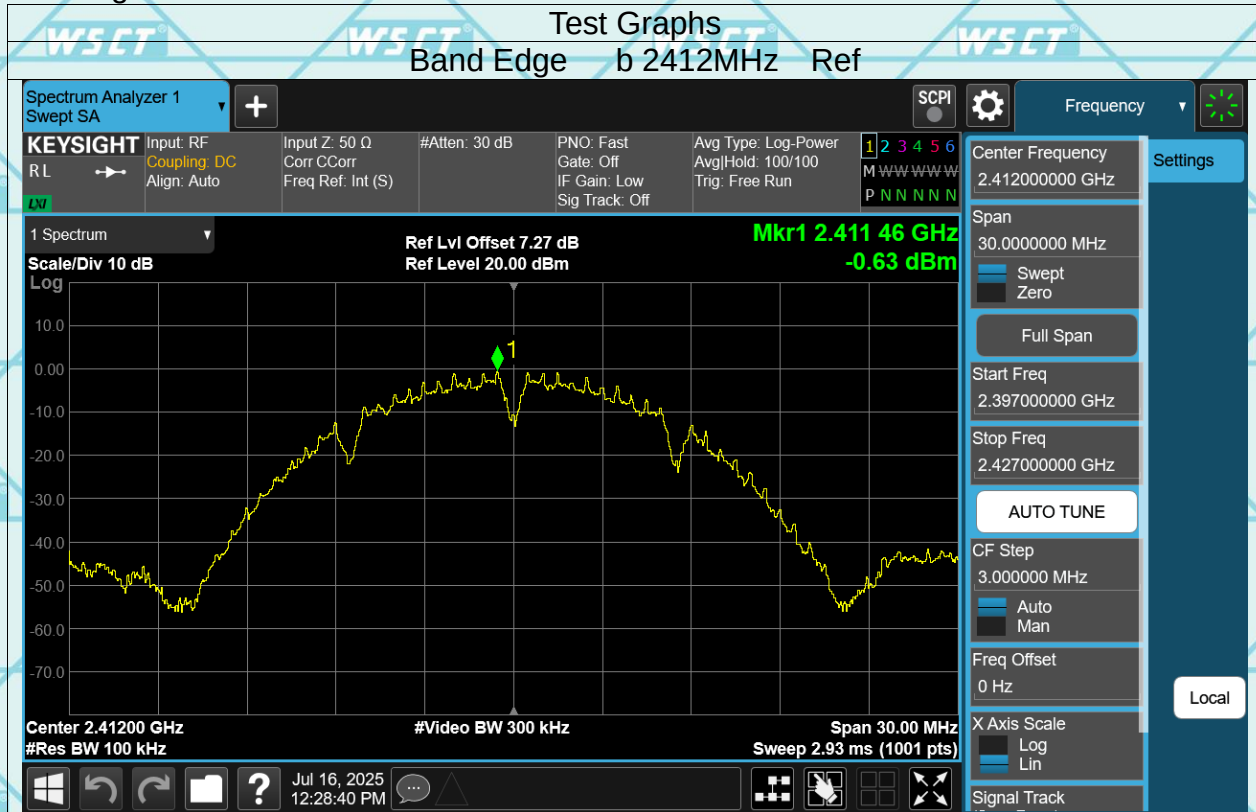



Report No.: WSCT-ANAB-R&E250600047A-Wi-Fi1

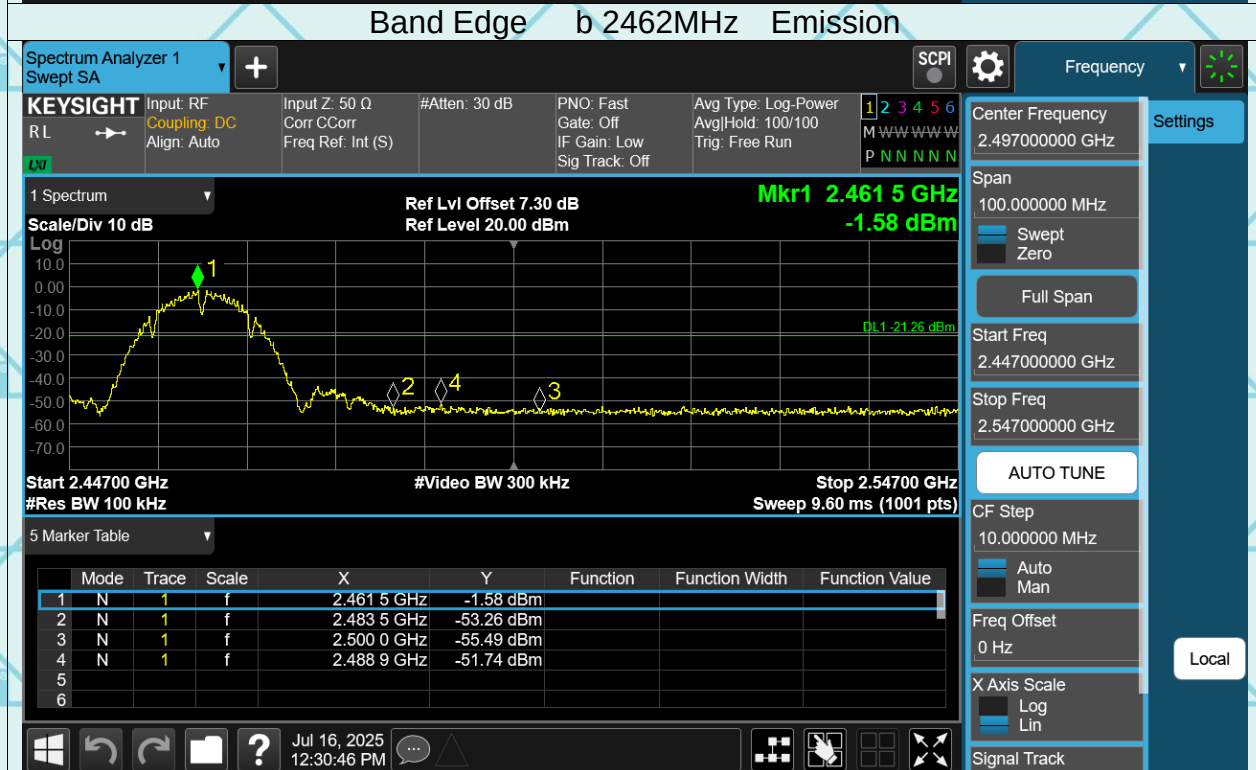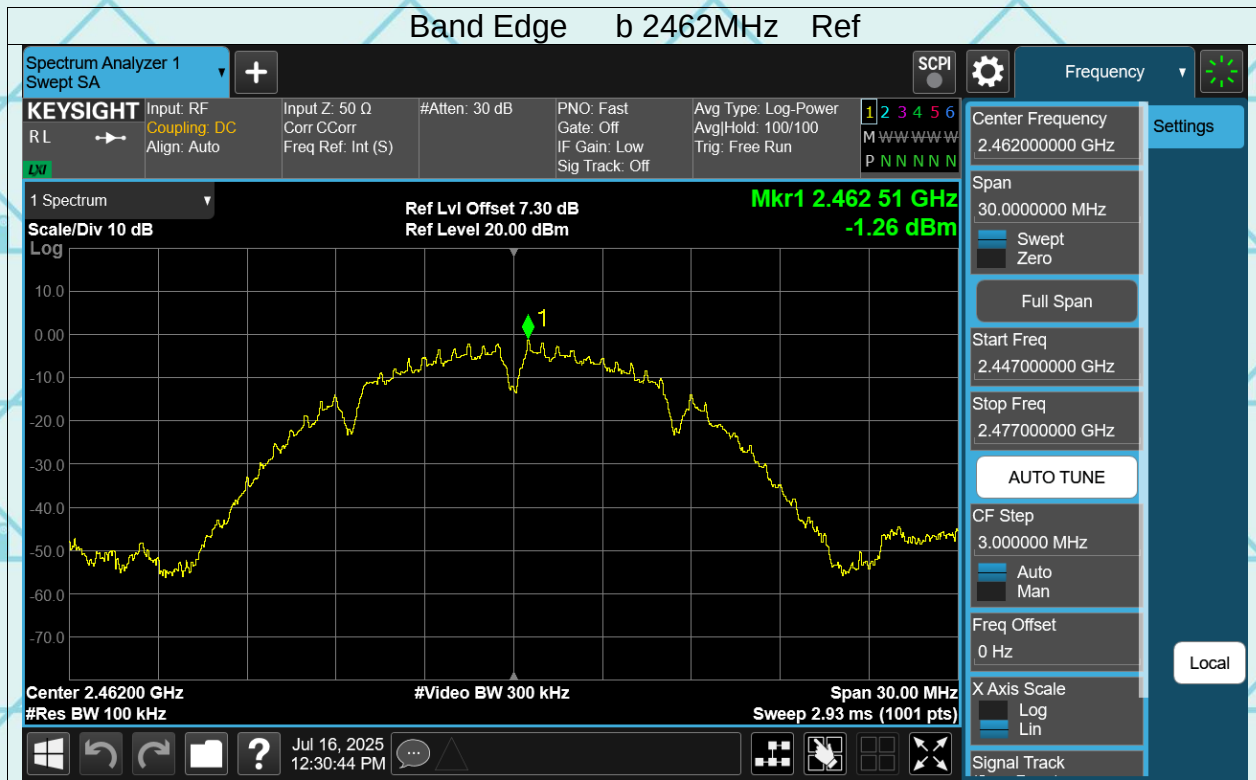



Report No.: WSCT-ANAB-R&E250600047A-Wi-Fi1

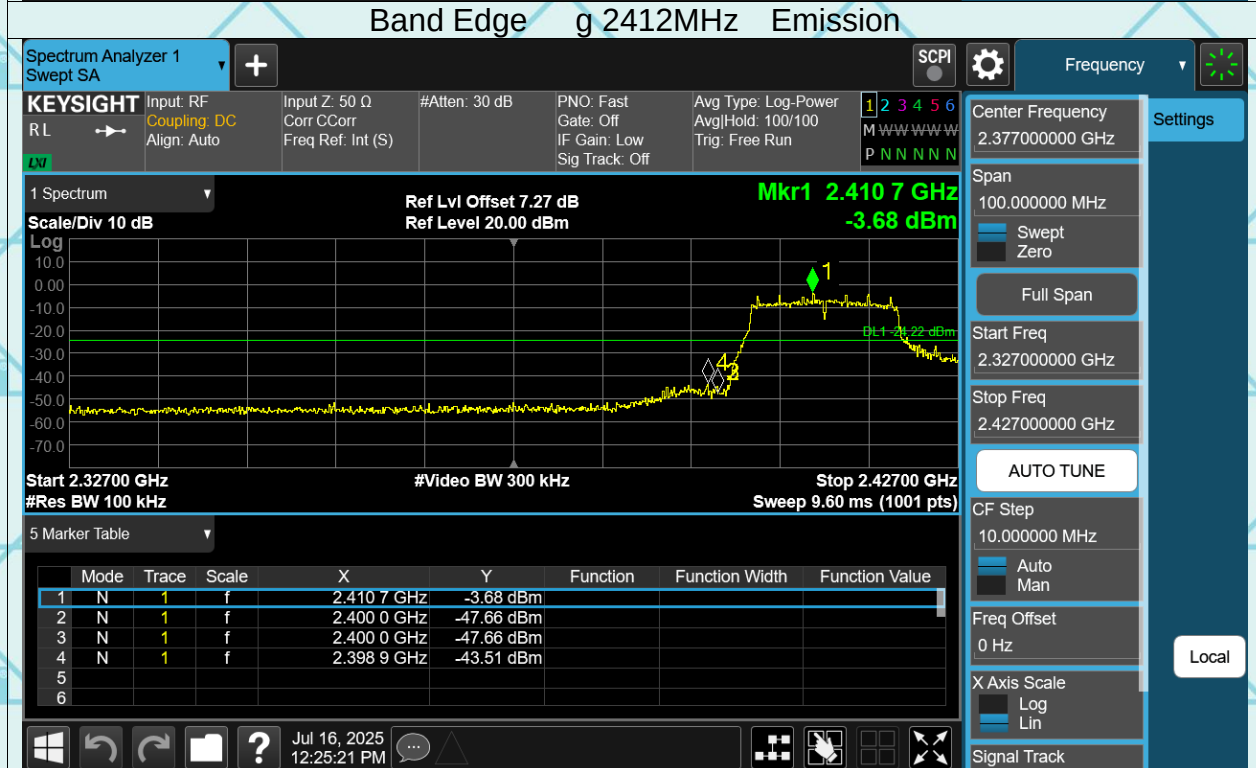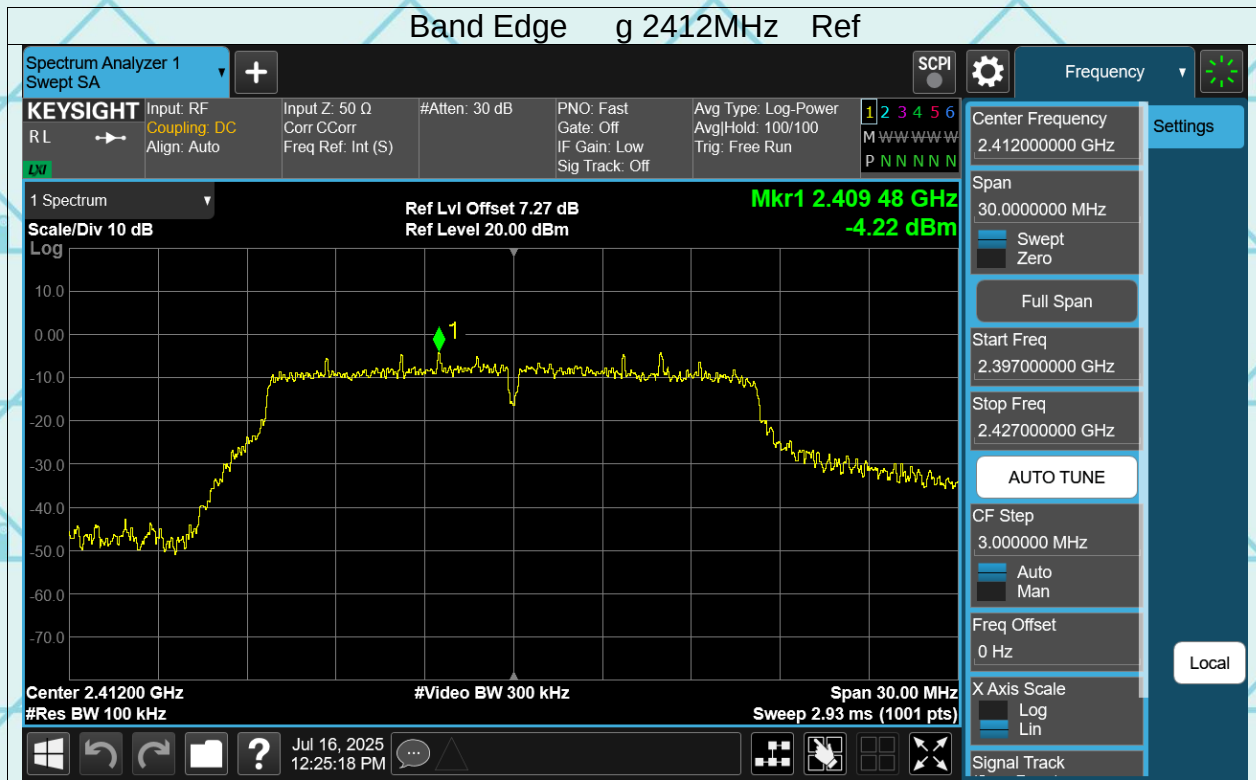



Report No.: WSCT-ANAB-R&E250600047A-Wi-Fi1

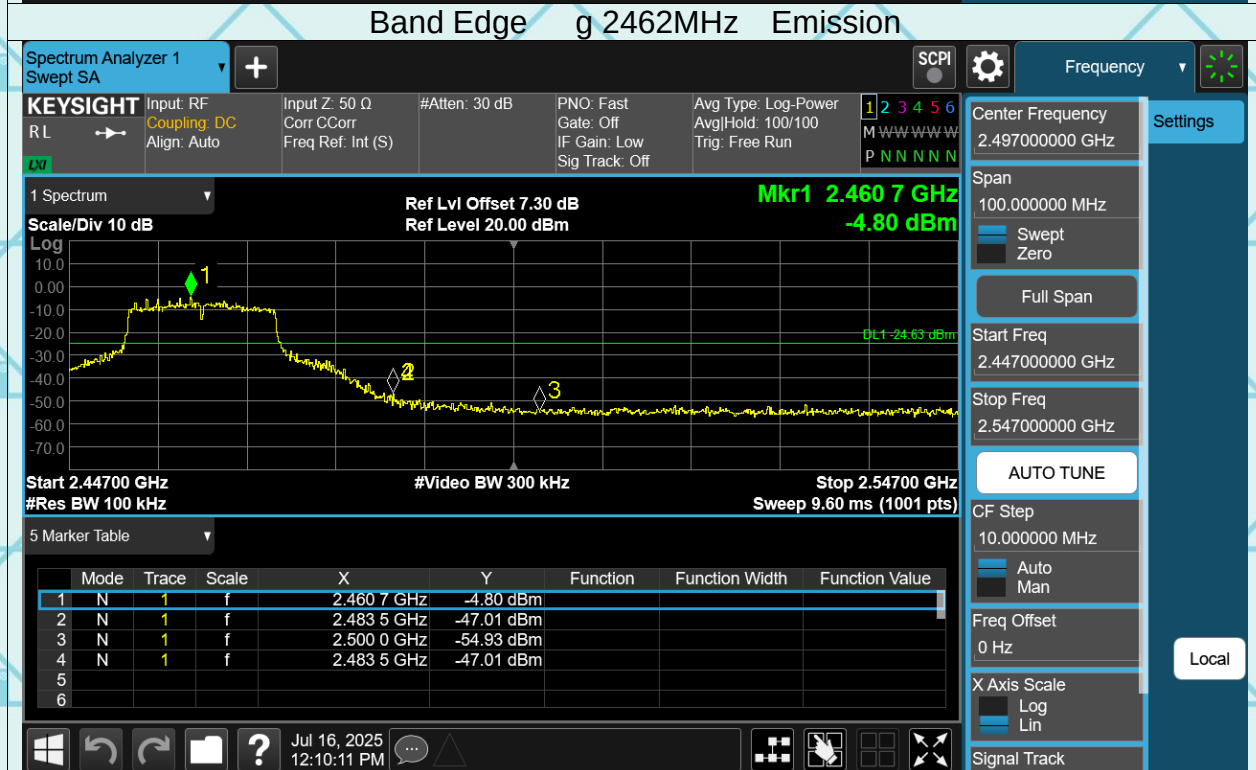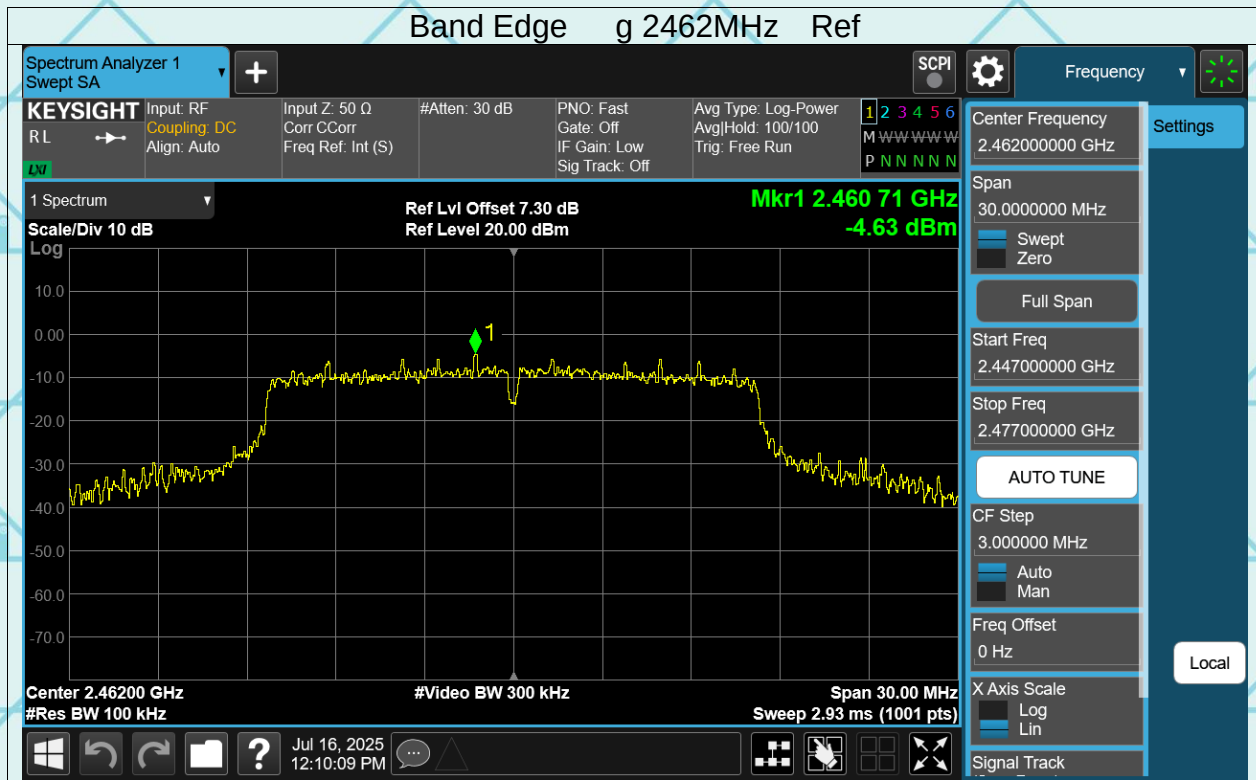



Report No.: WSCT-ANAB-R&E250600047A-Wi-Fi1

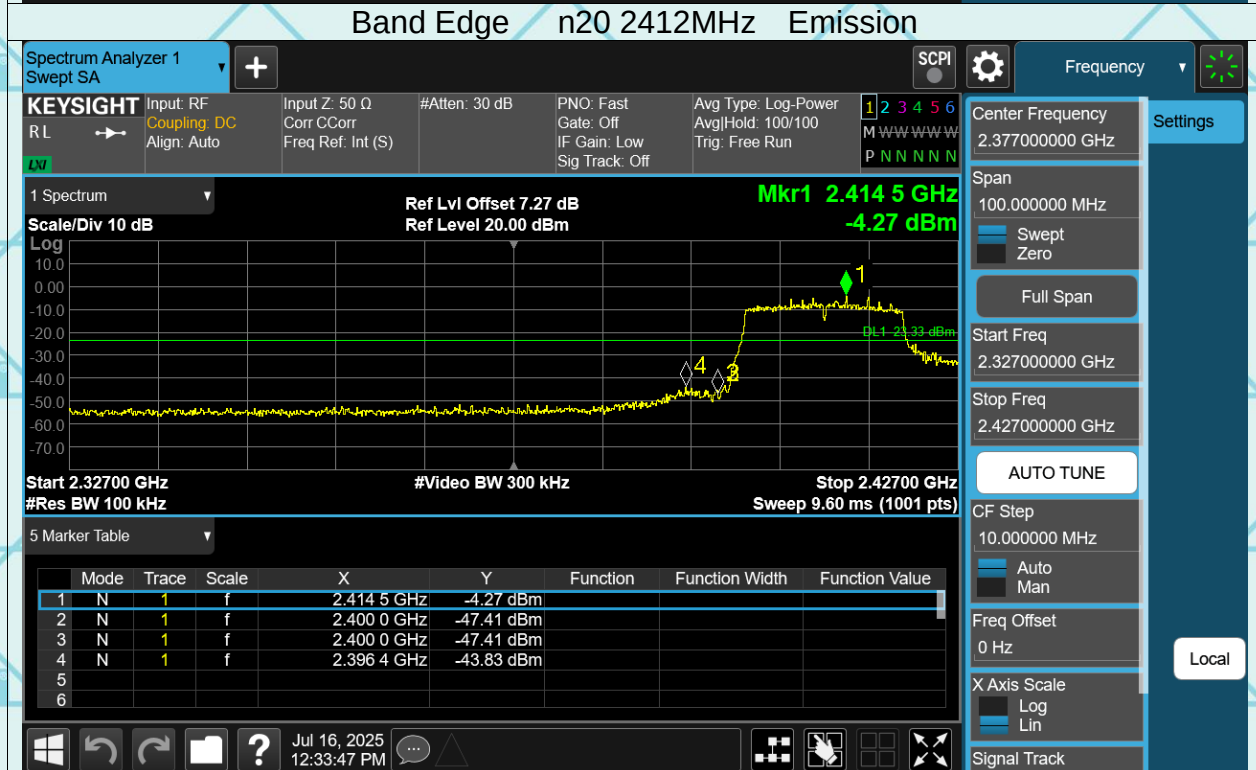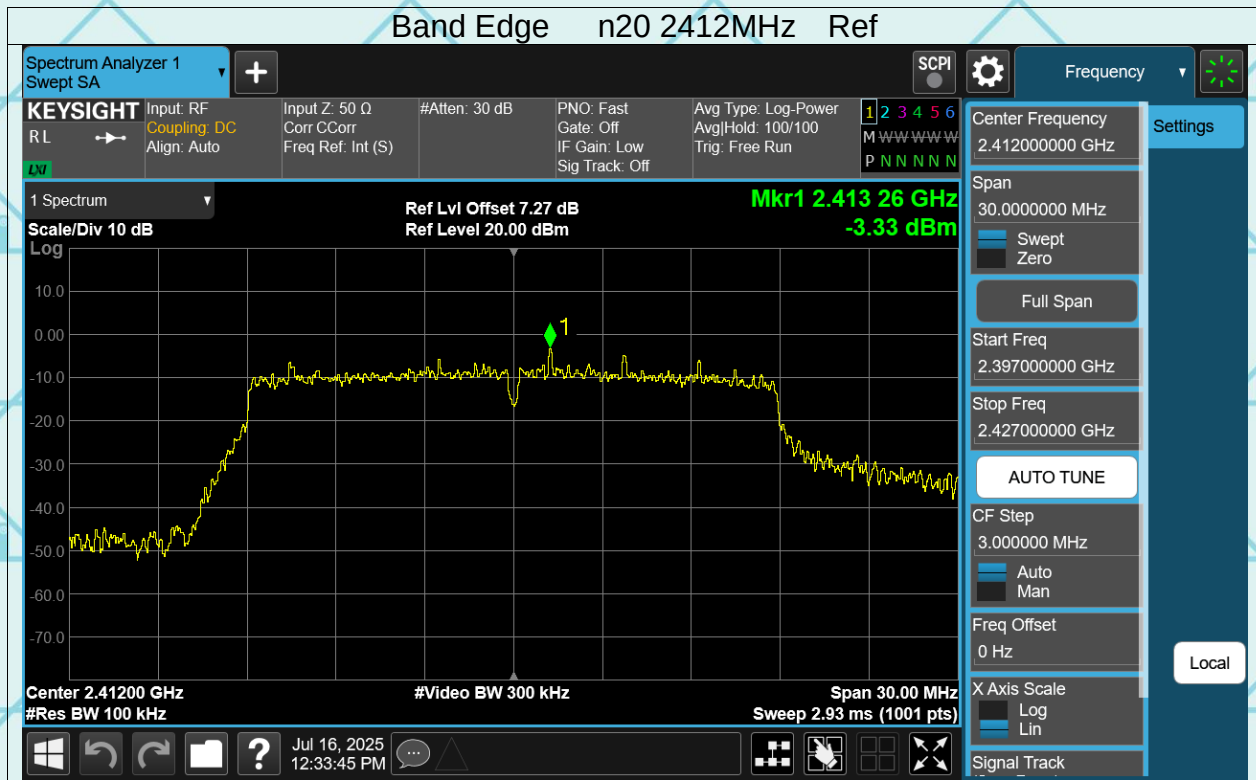



Report No.: WSCT-ANAB-R&E250600047A-Wi-Fi1

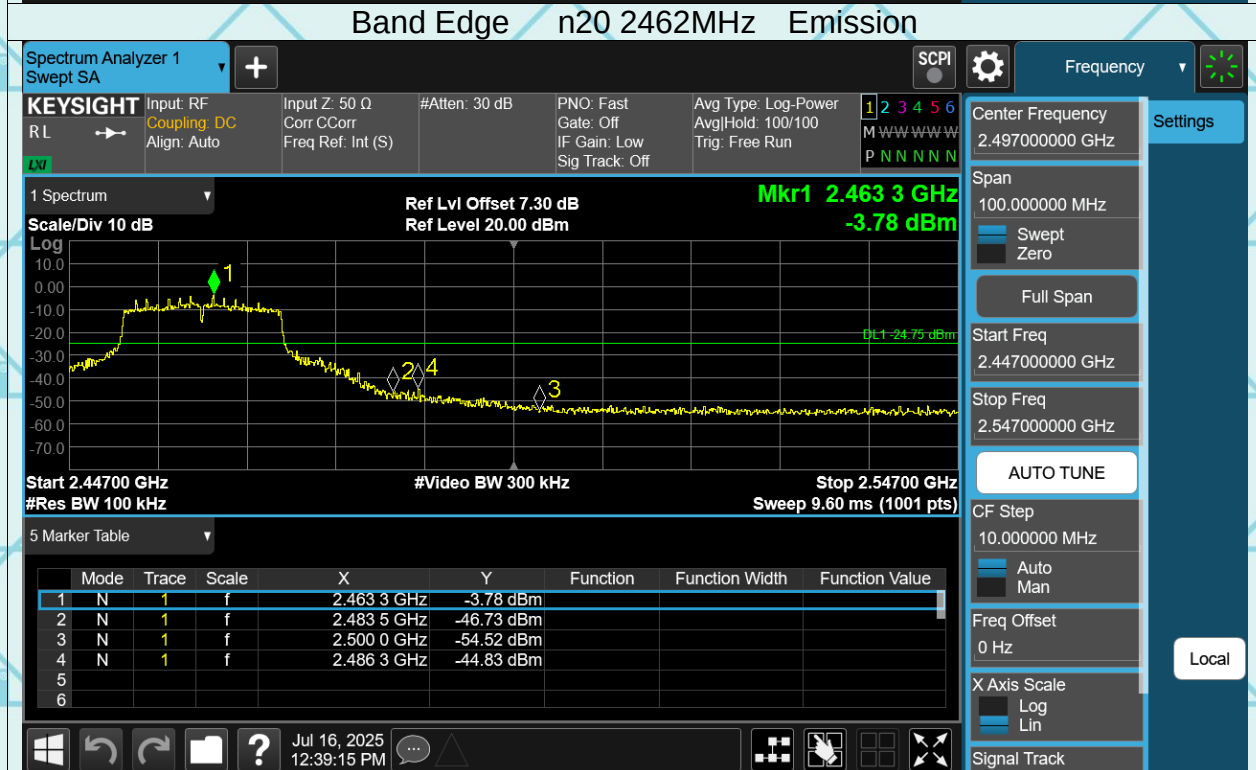
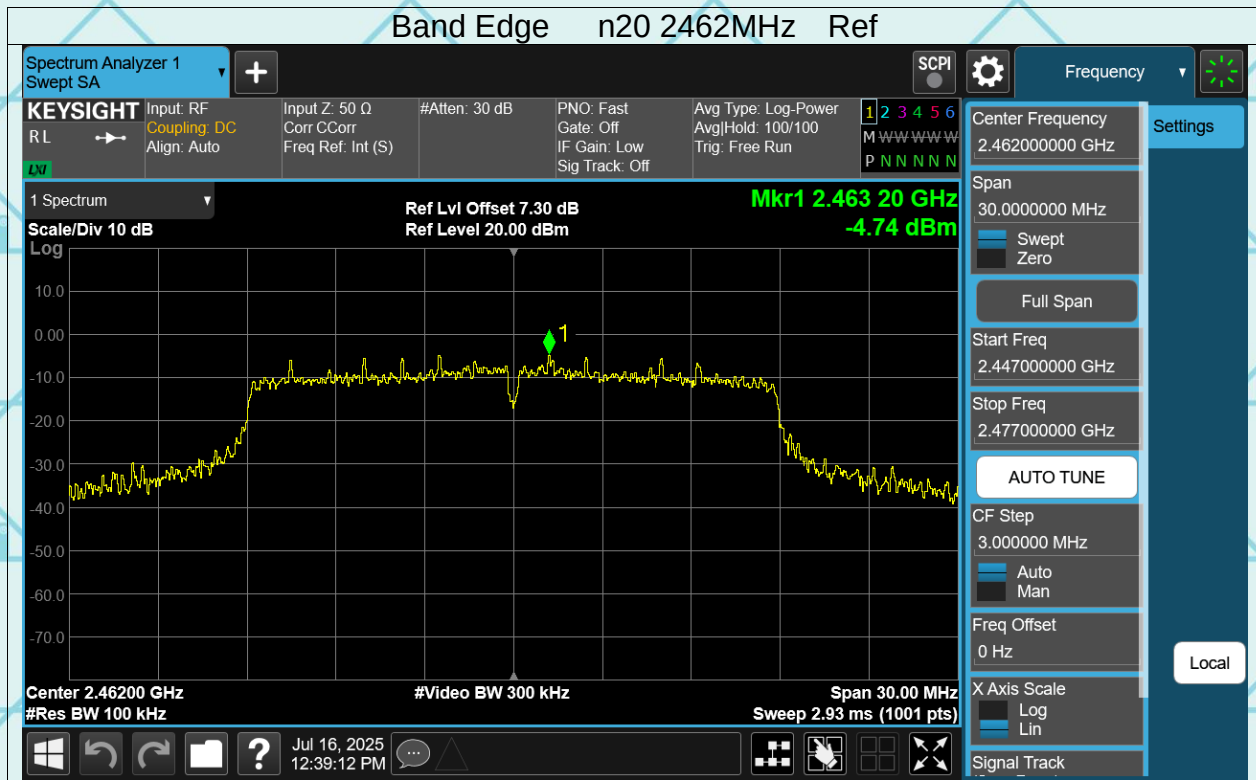


Report No.: WSCT-ANAB-R&E250600047A-Wi-Fi1

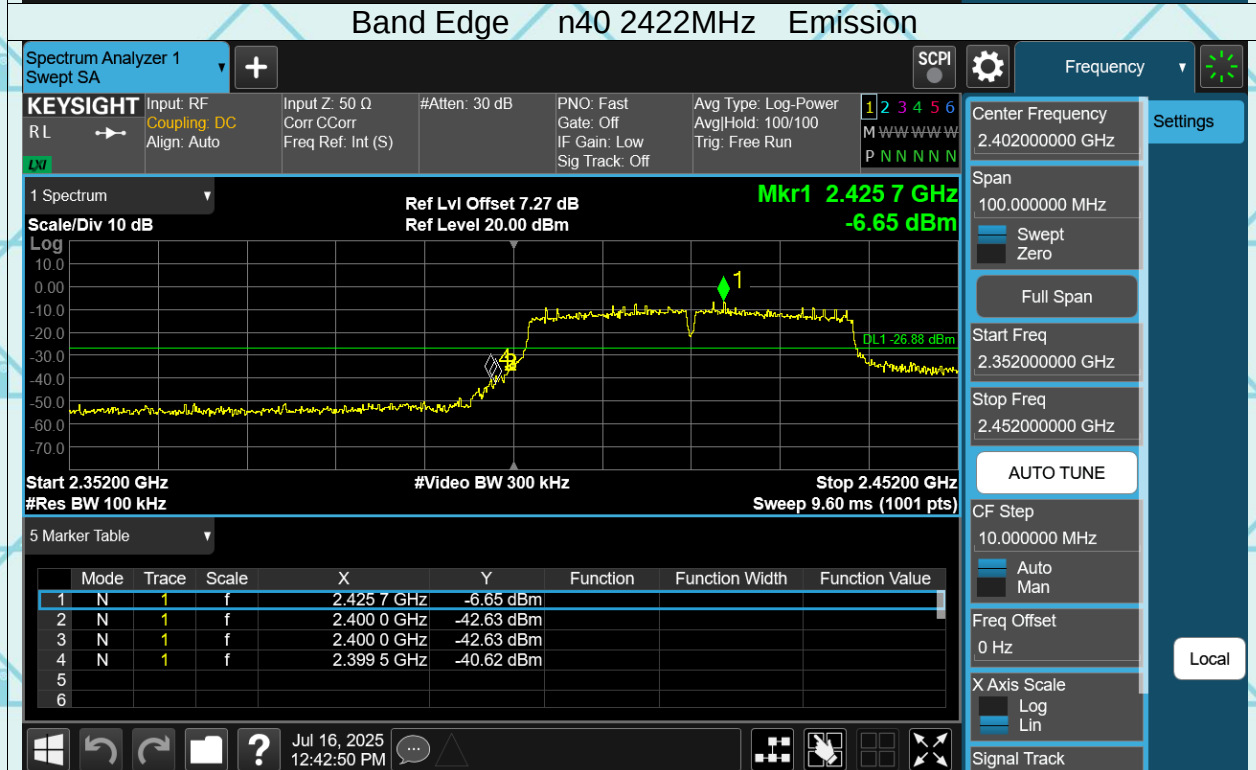
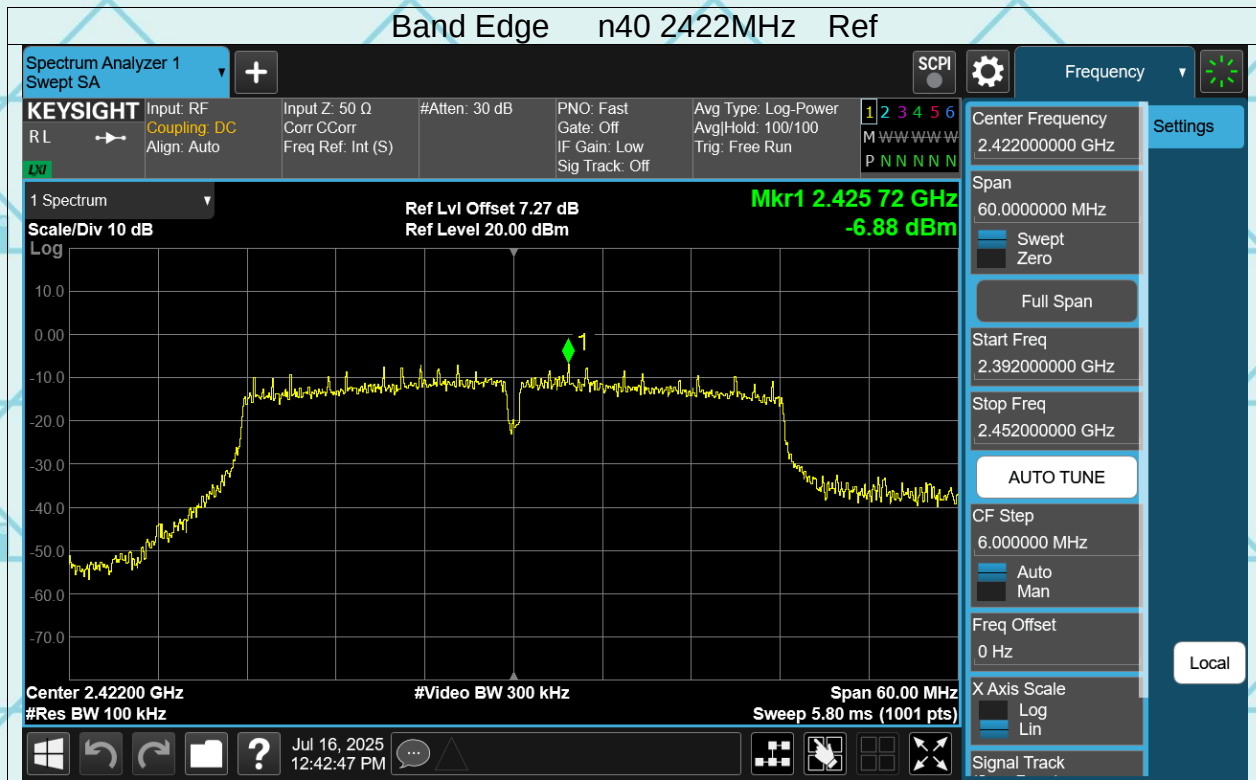


Report No.: WSCT-ANAB-R&E250600047A-Wi-Fi1

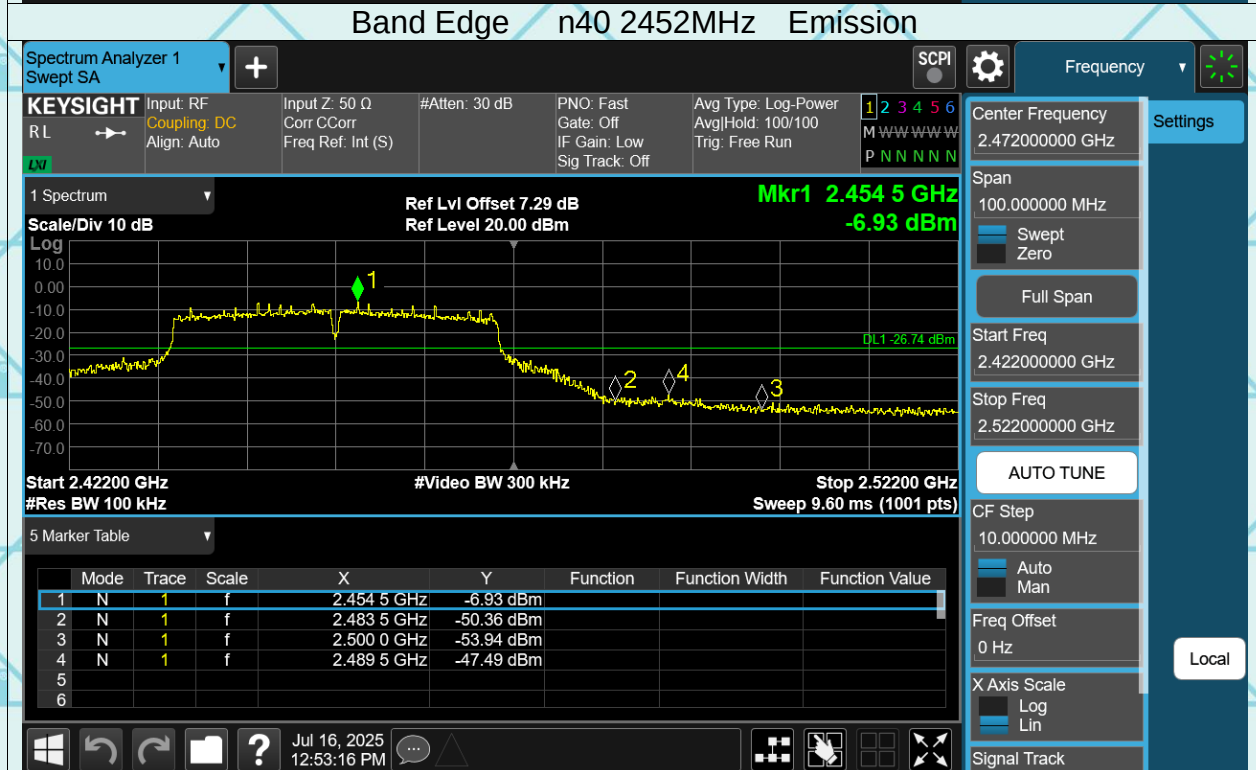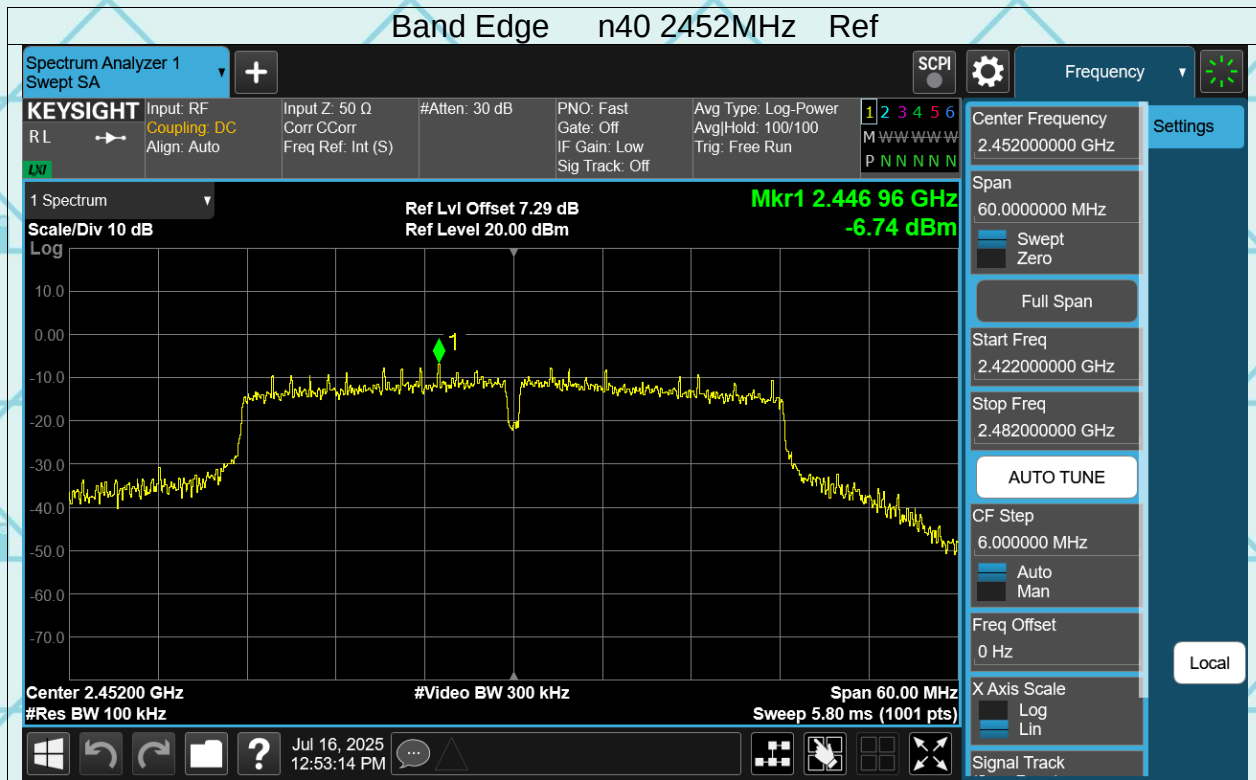

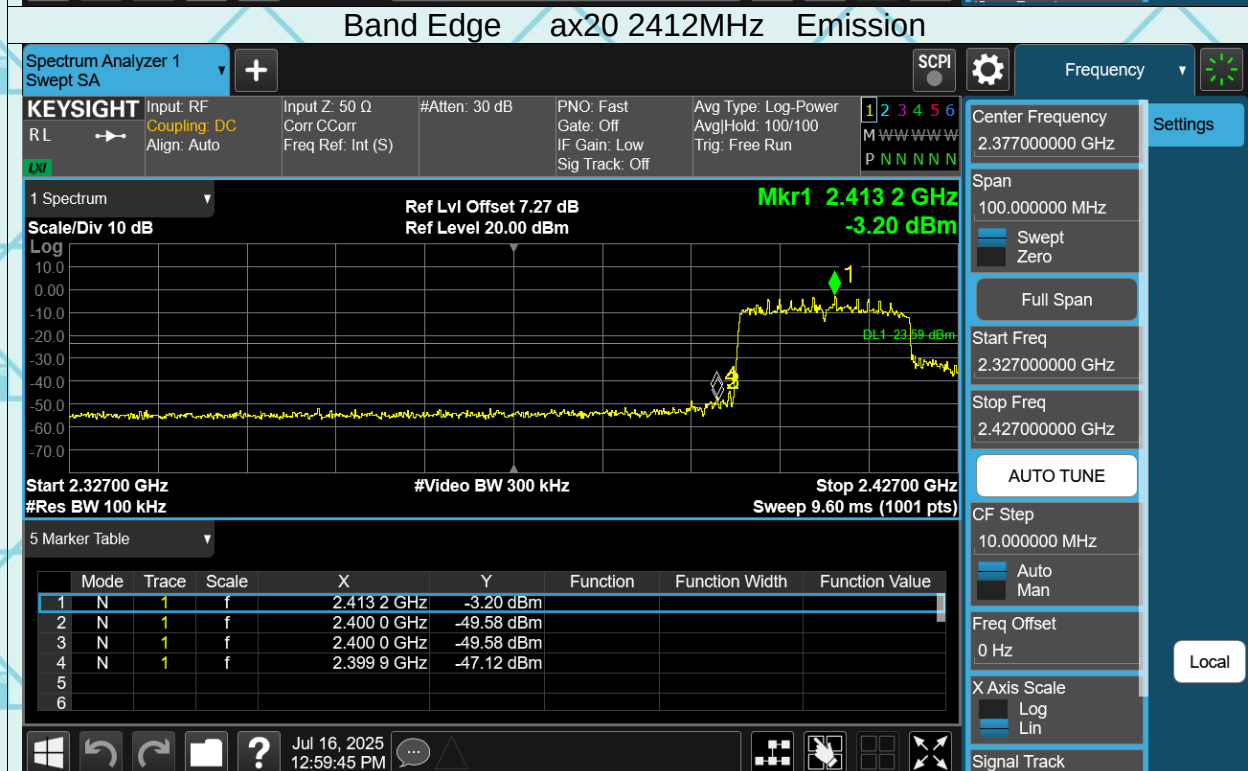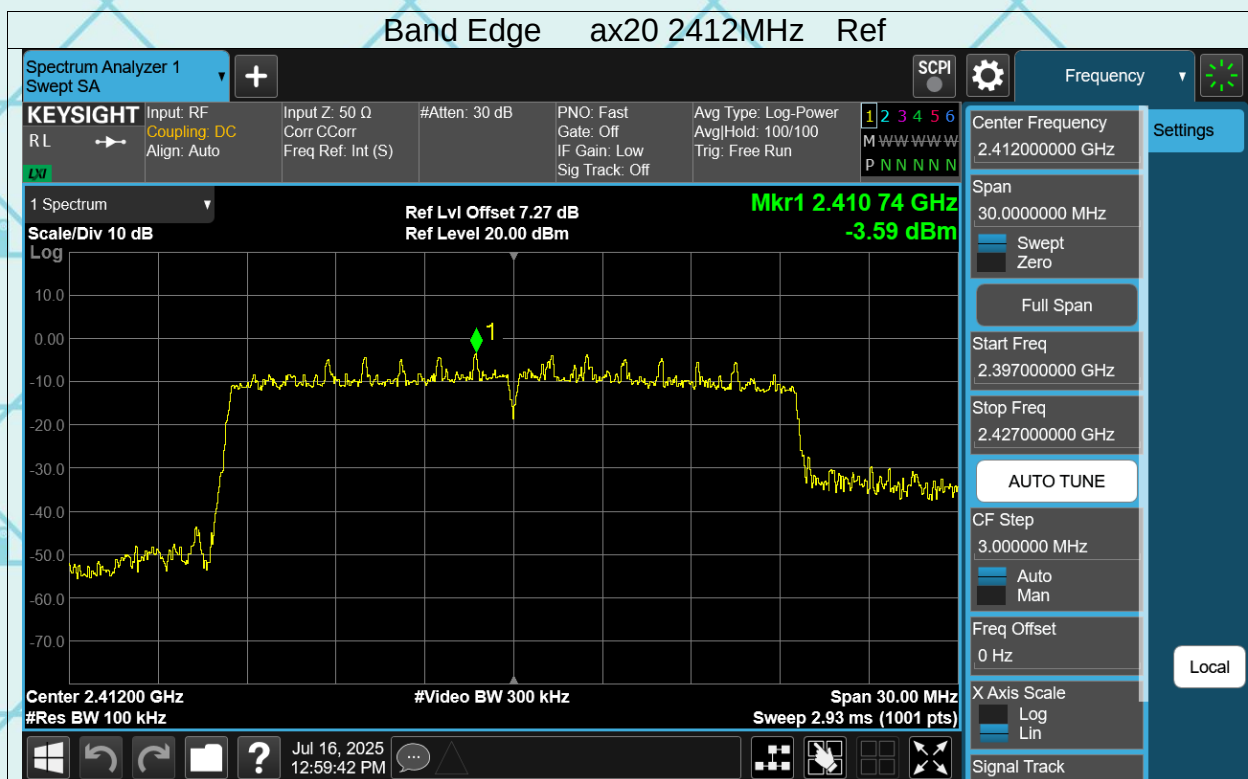

Report No.: WSCT-ANAB-R&E250600047A-Wi-Fi1

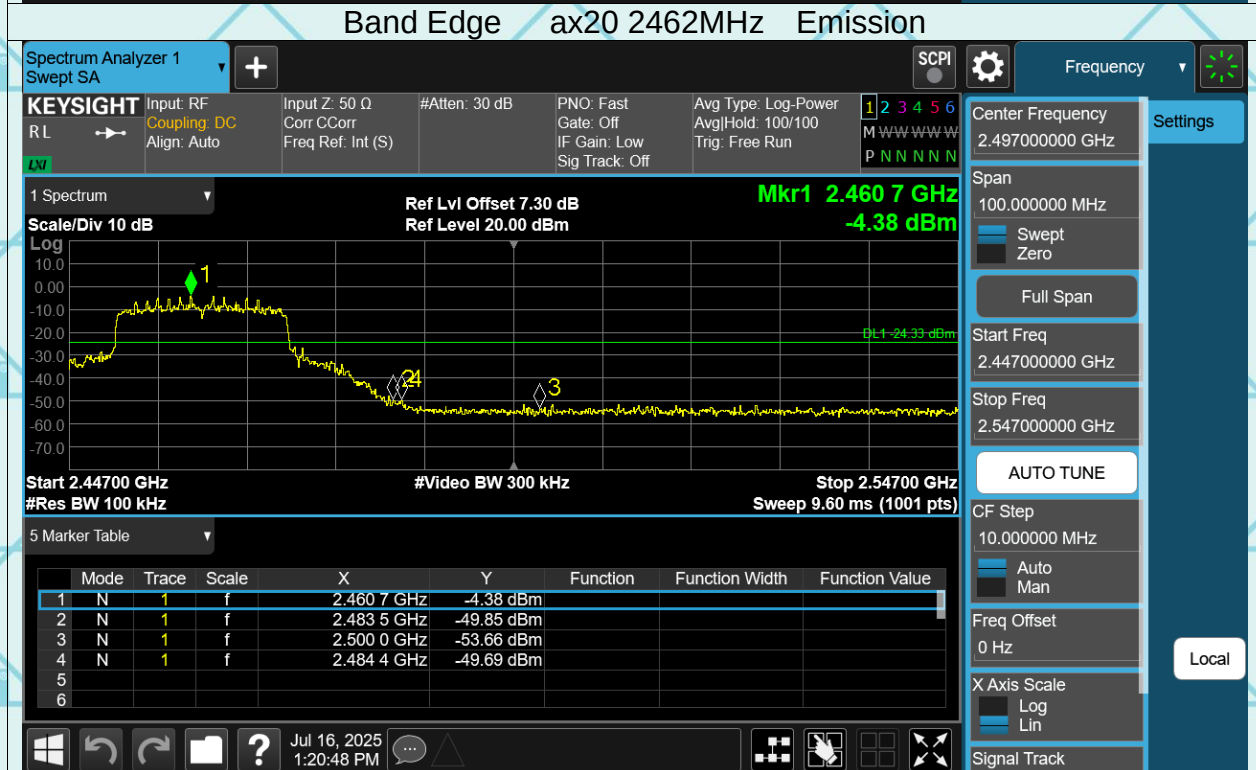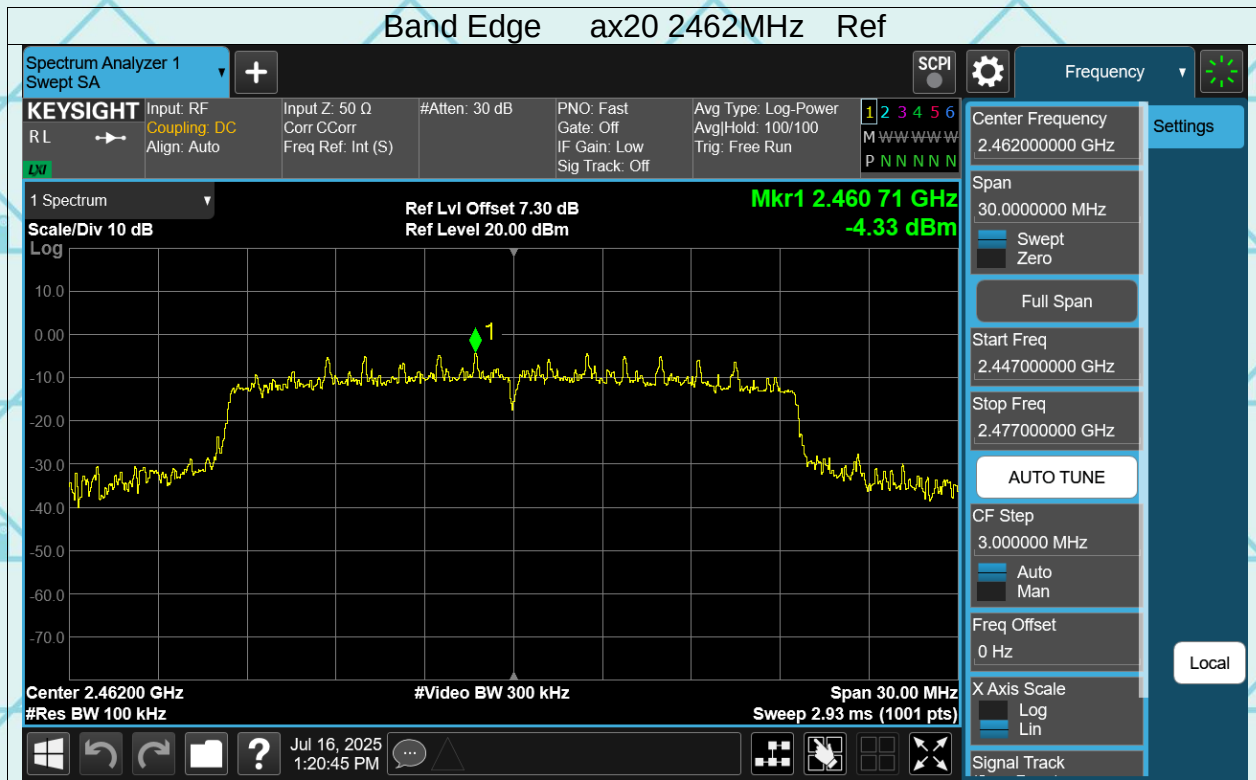

Report No.: WSCT-ANAB-R&E250600047A-Wi-Fi1

