




6.4. Conducted Band Edge and Spurious Emission Measurement

6.4.1 Test Specification


Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074
Limit:	In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d). 5. Measure and record the results in the test report. 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Test Result:	PASS

Test Data


Band Edge

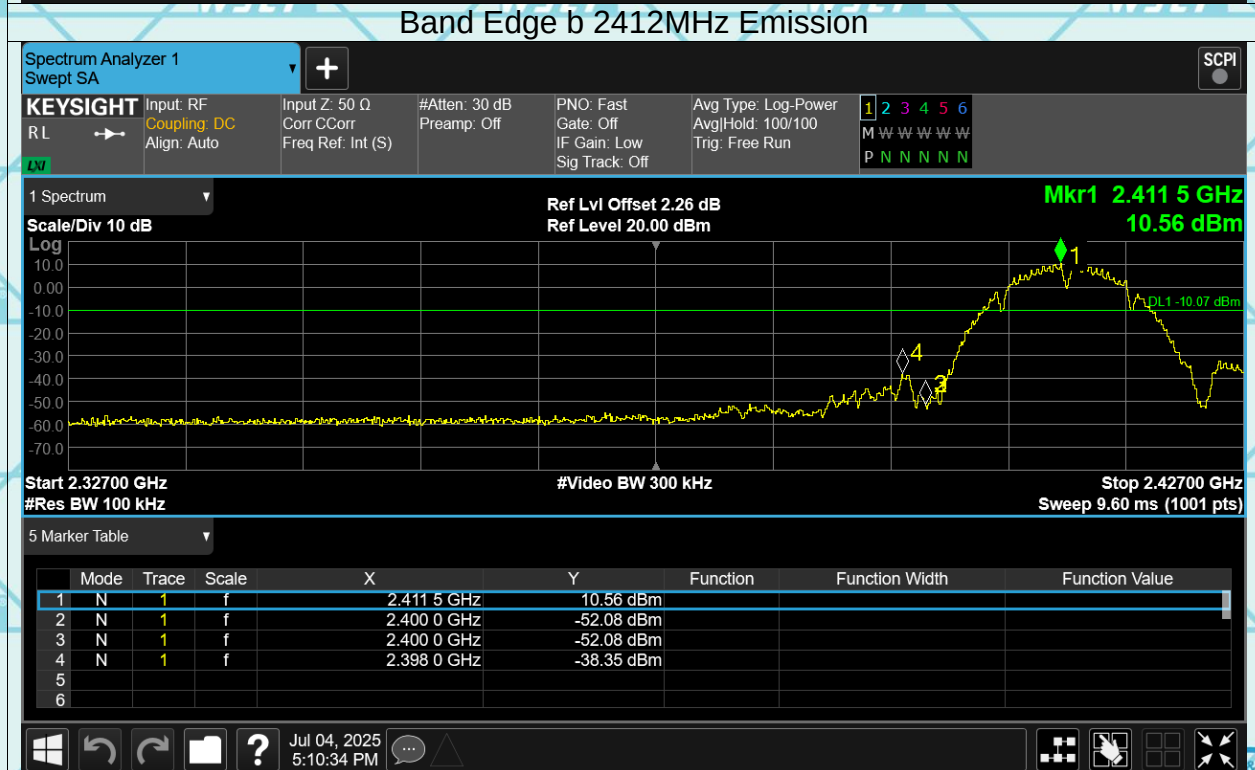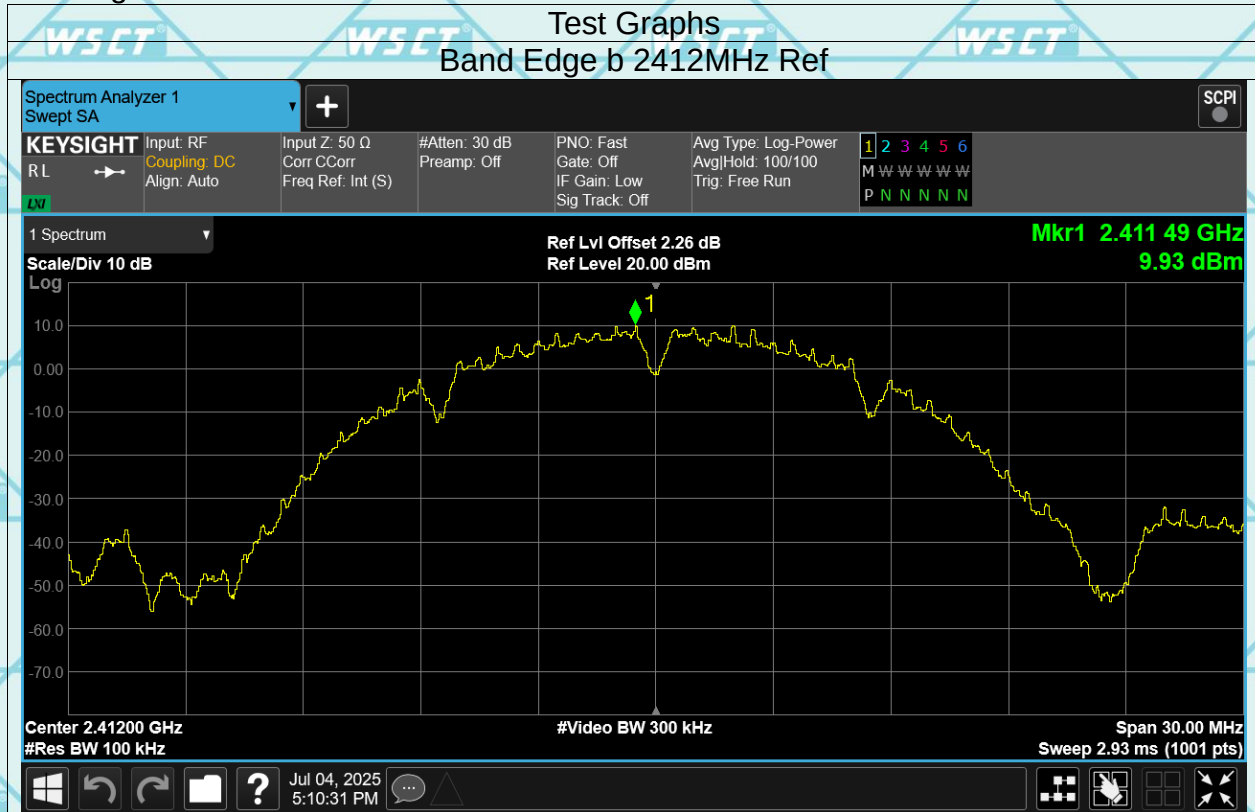


Band Edge b 2462MHz Ref

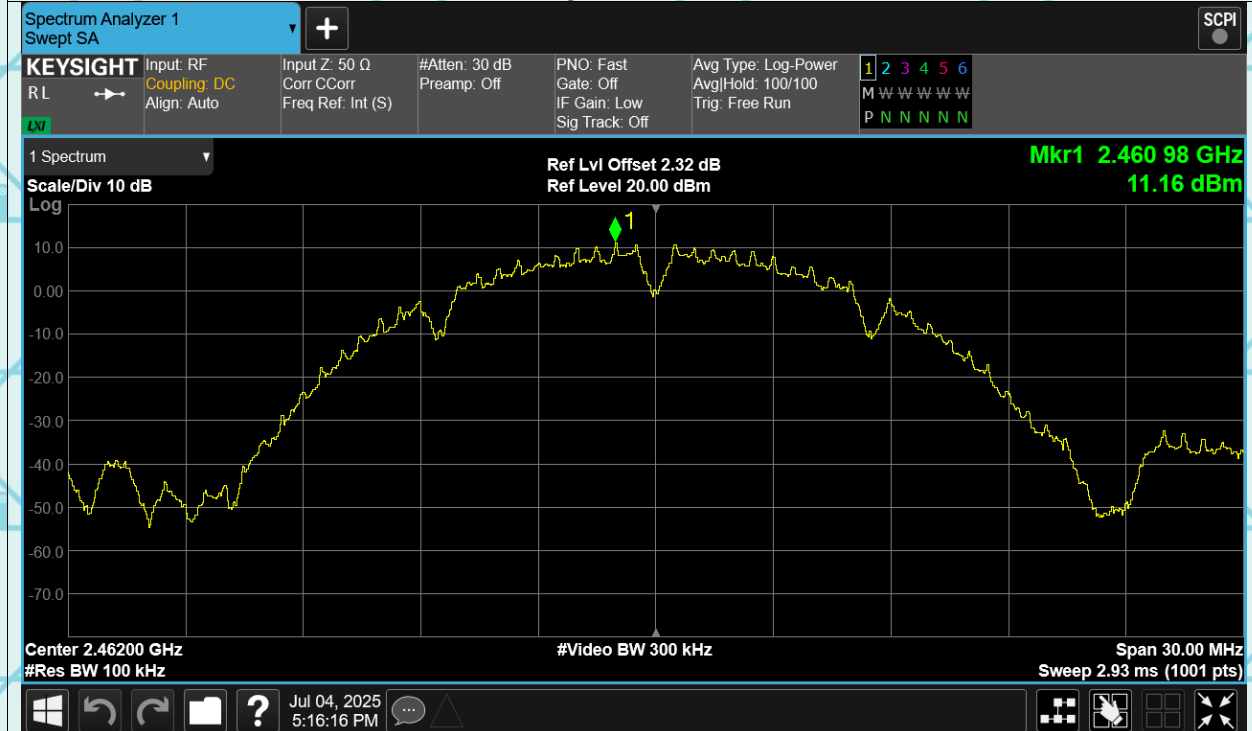


Band Edge b 2462MHz Emission

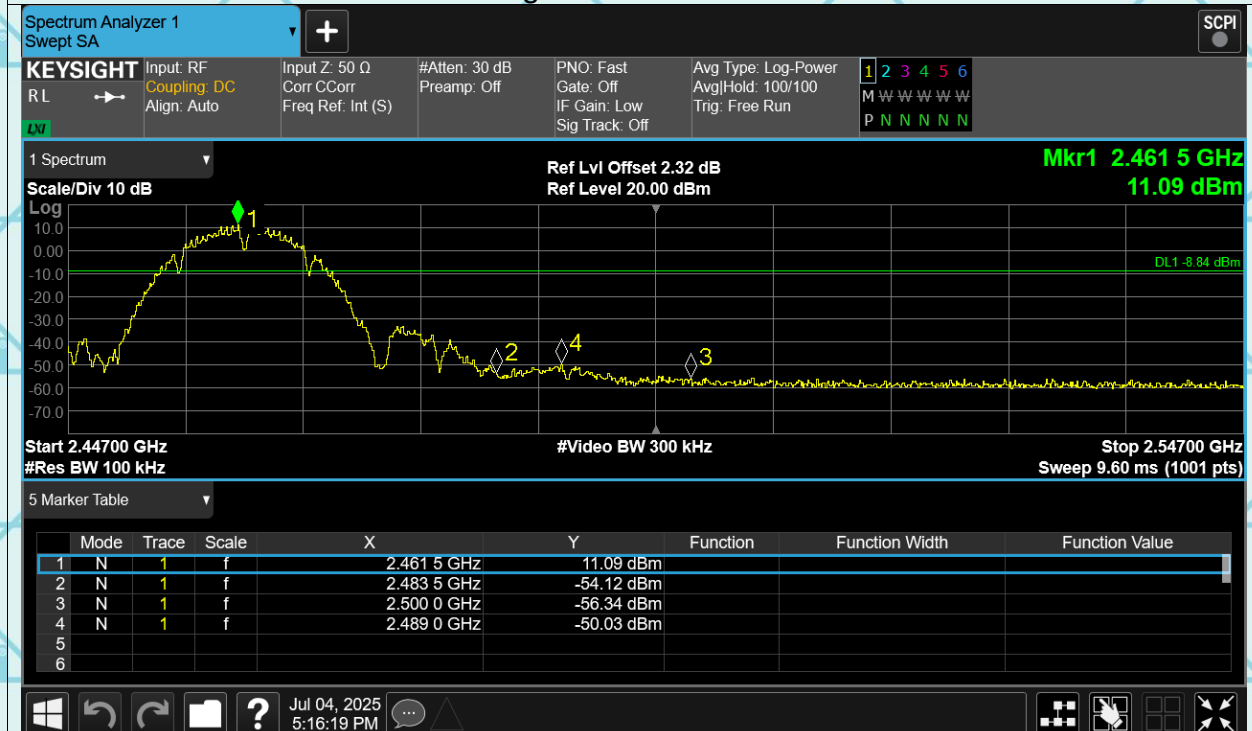


Band Edge g 2412MHz Ref

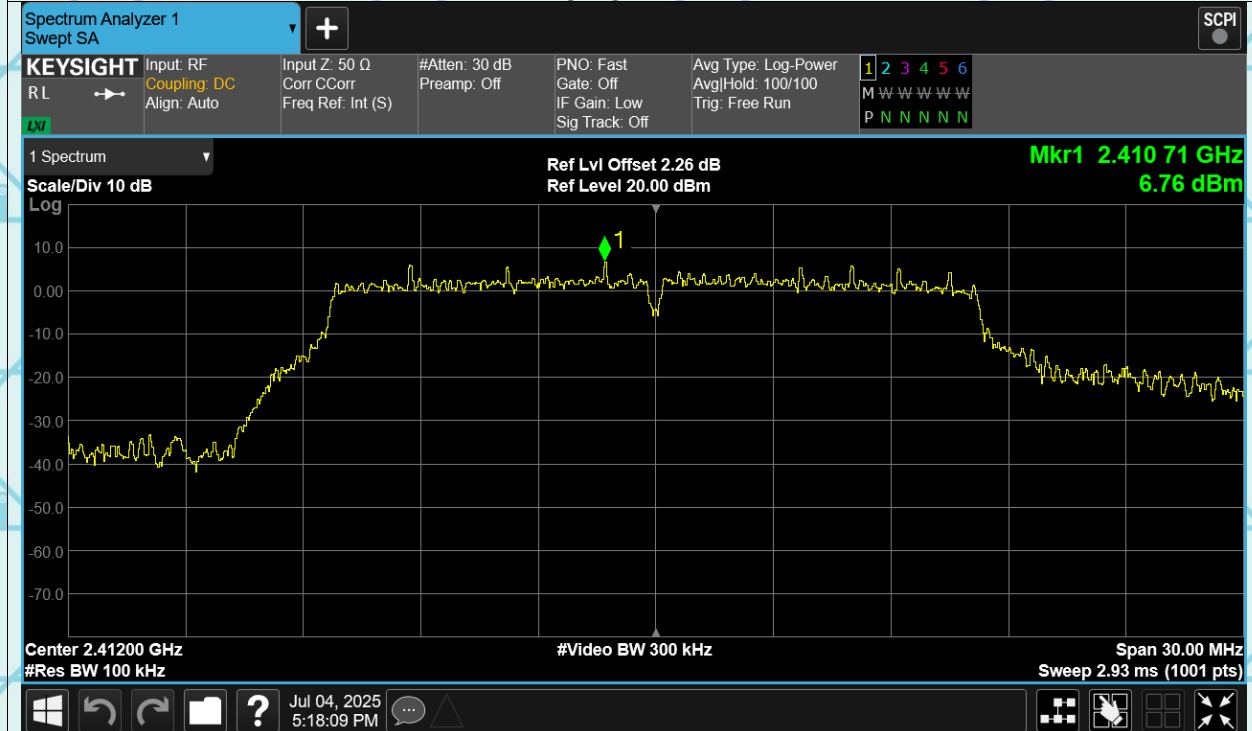

Band Edge g 2412MHz Emission

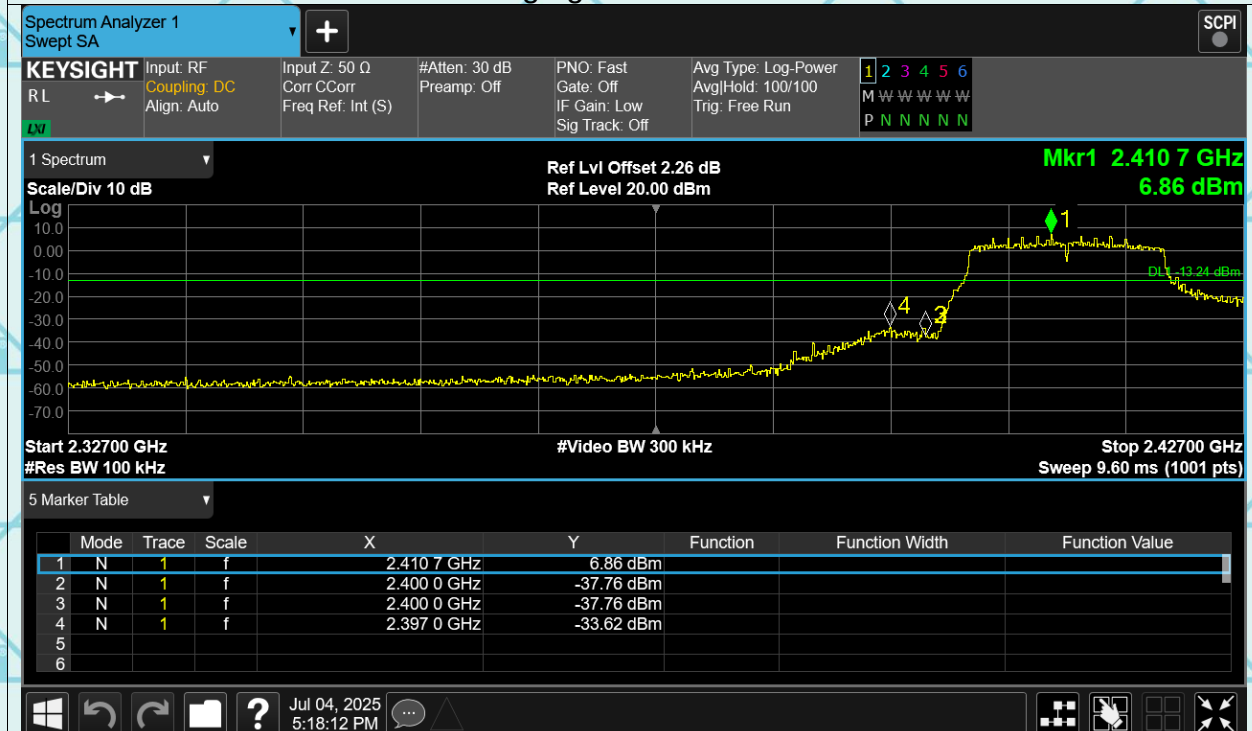


Band Edge g 2462MHz Ref

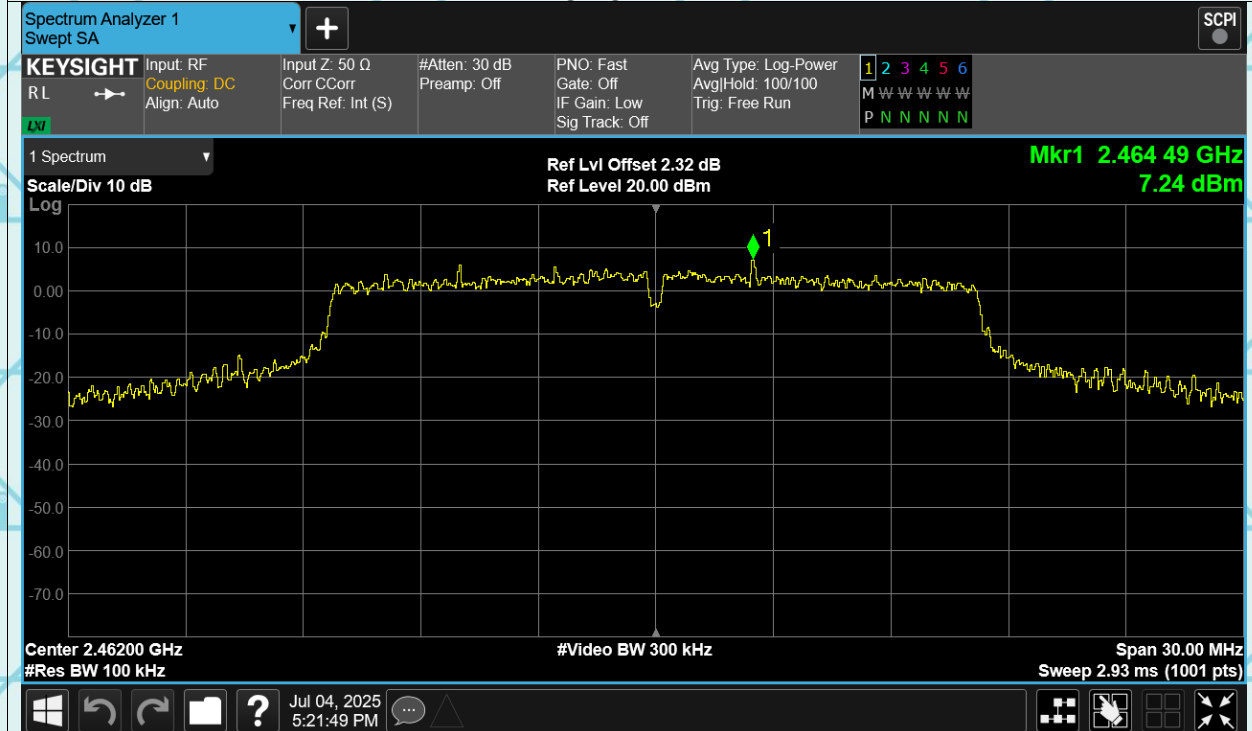


Band Edge g 2462MHz Emission




Band Edge n20 2412MHz Ref

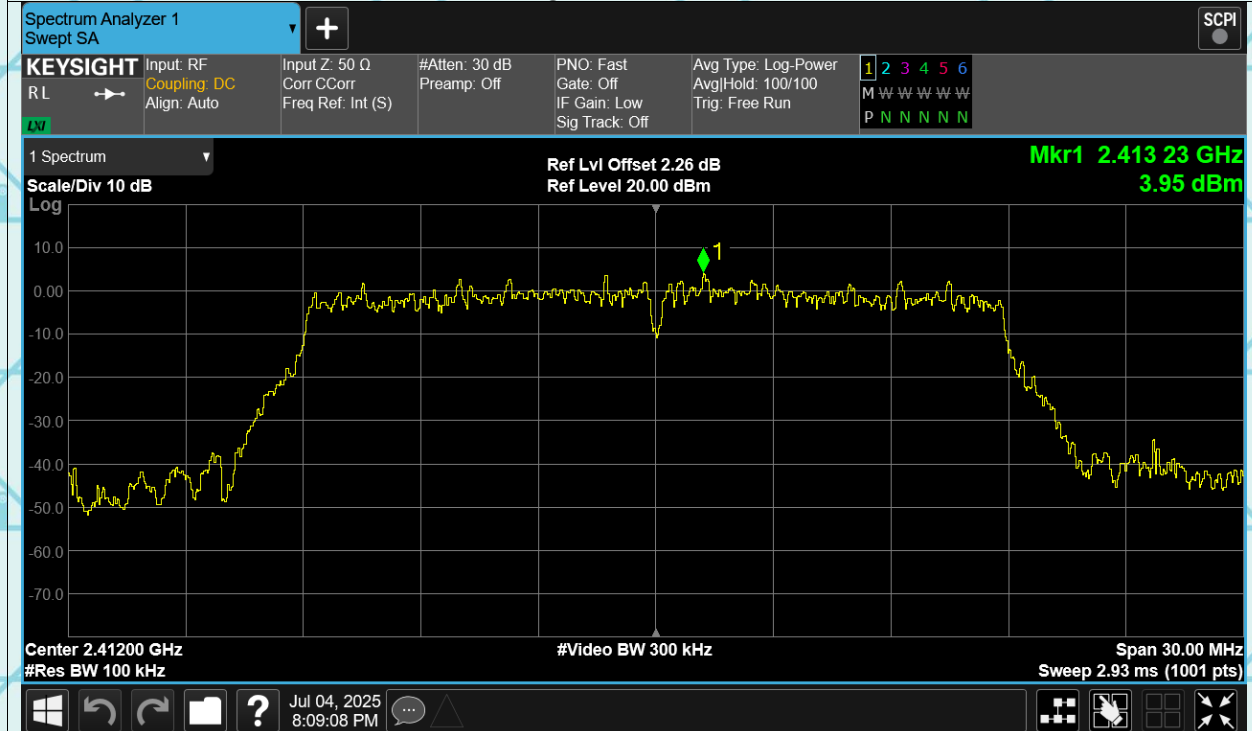

Band Edge n20 2412MHz Emission

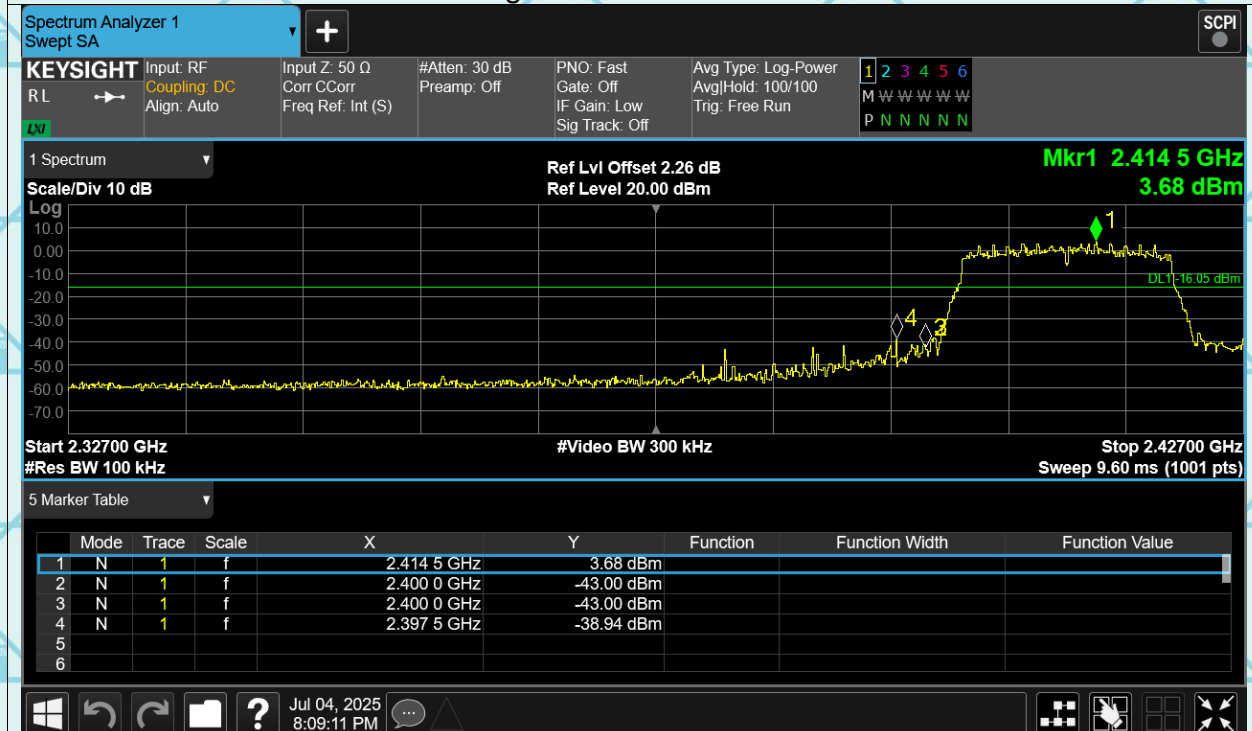


Band Edge n20 2462MHz Ref

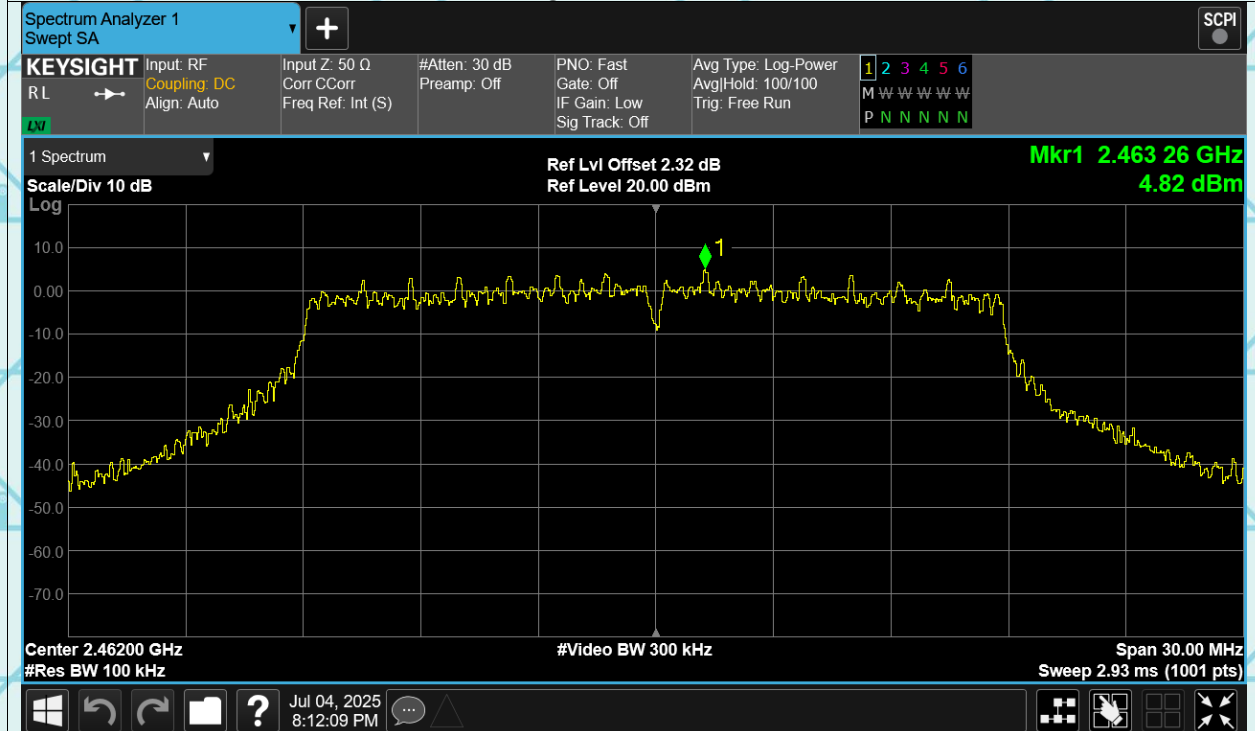


Band Edge n20 2462MHz Emission




Band Edge n40 2422MHz Ref

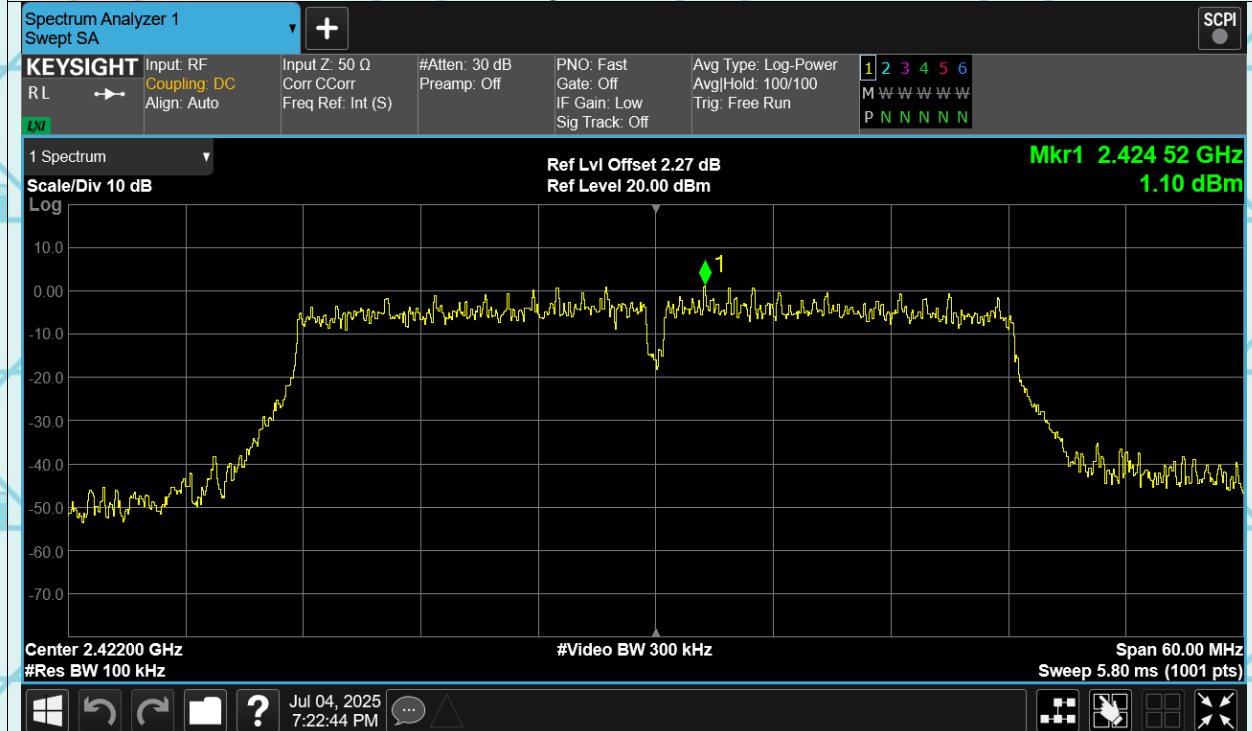


Band Edge n40 2422MHz Emission

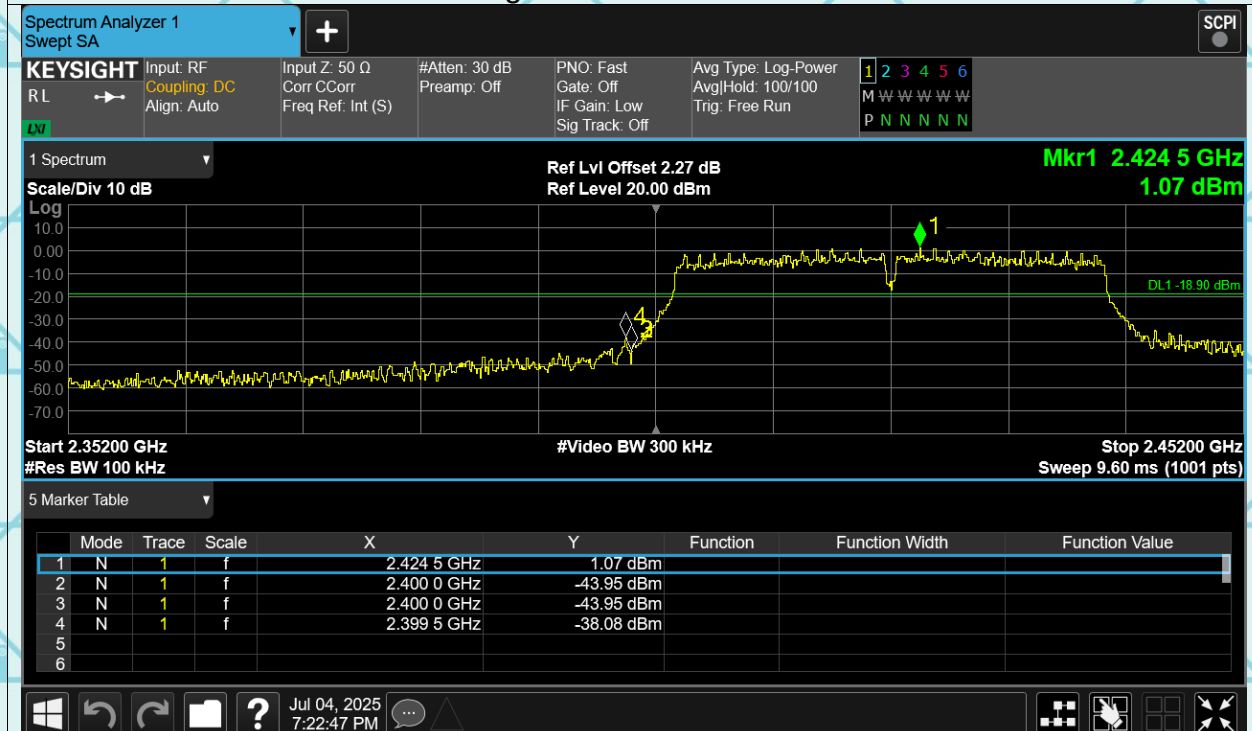


Band Edge n40 2452MHz Ref

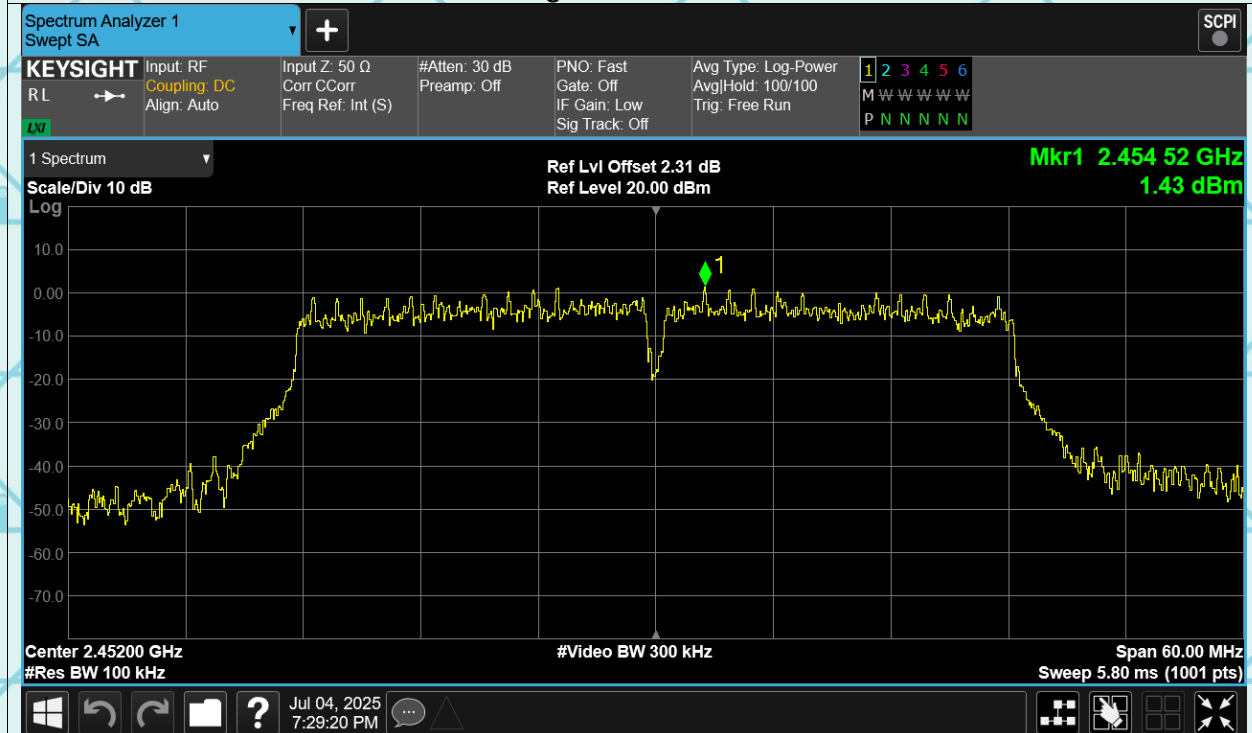


Band Edge n40 2452MHz Emission

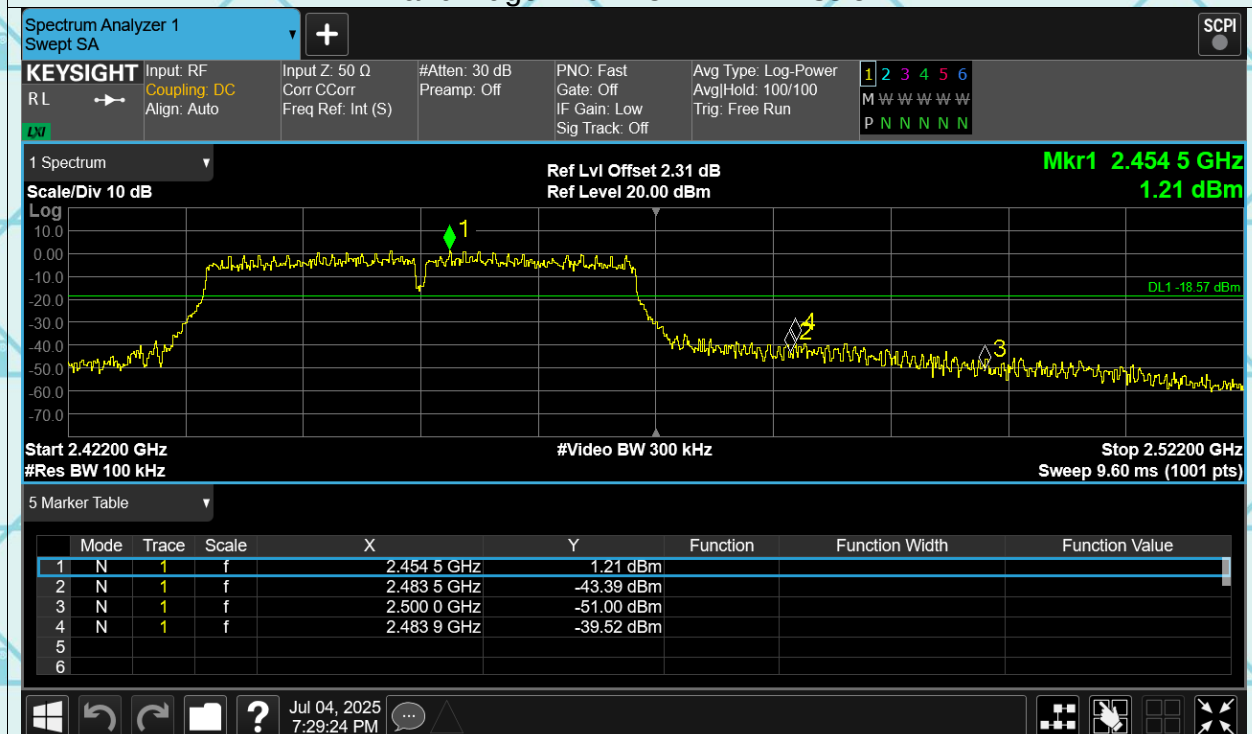


Band Edge ax20 2412MHz Ref

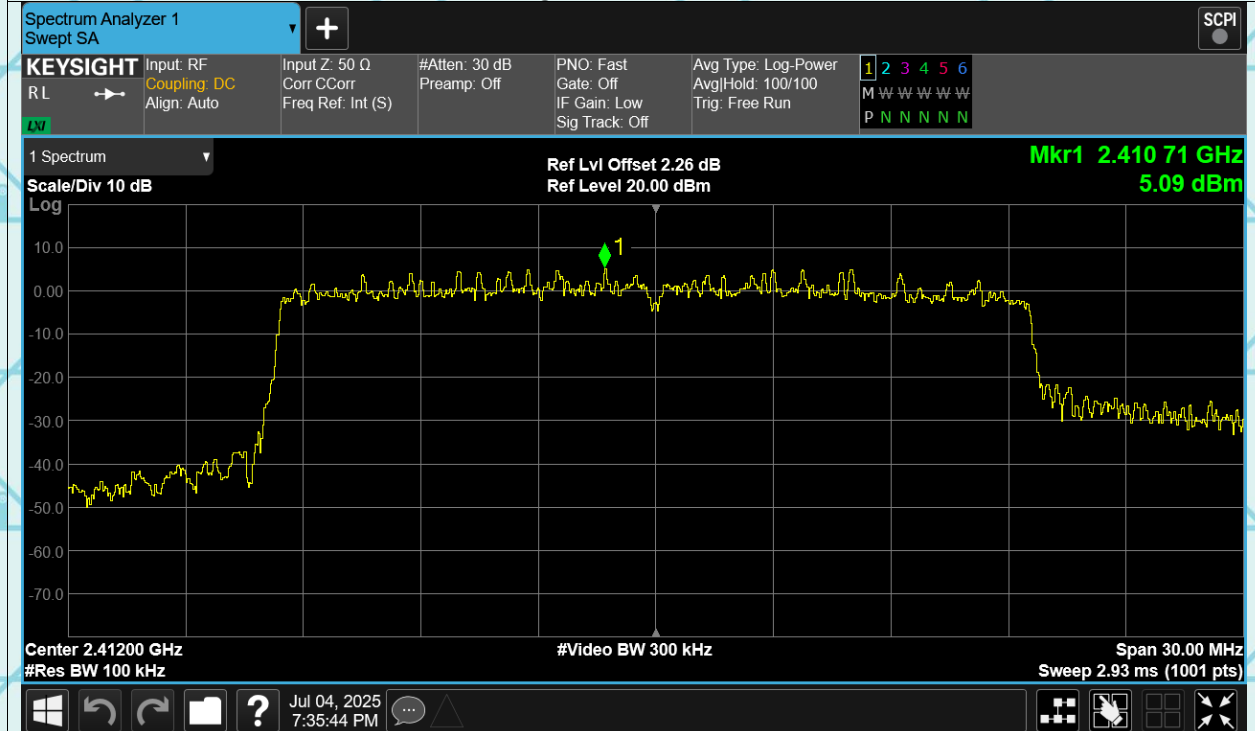


Band Edge ax20 2412MHz Emission

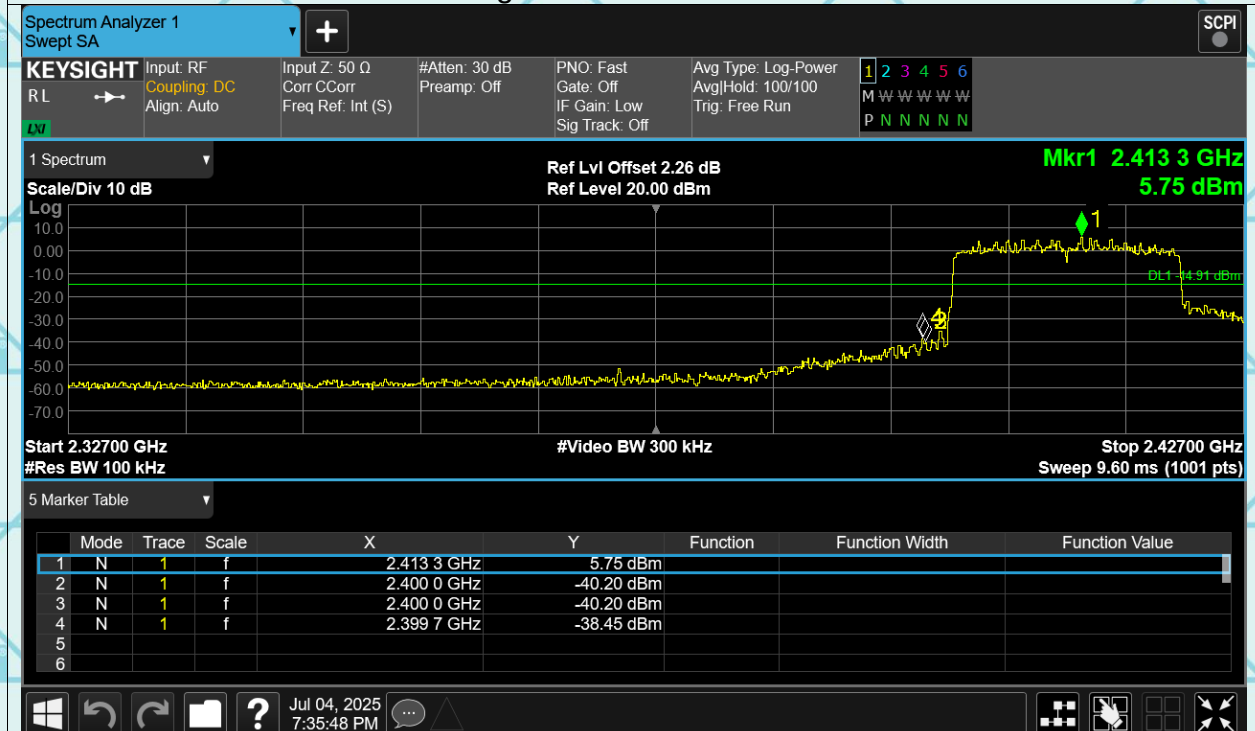


Band Edge ax20 2462MHz Ref

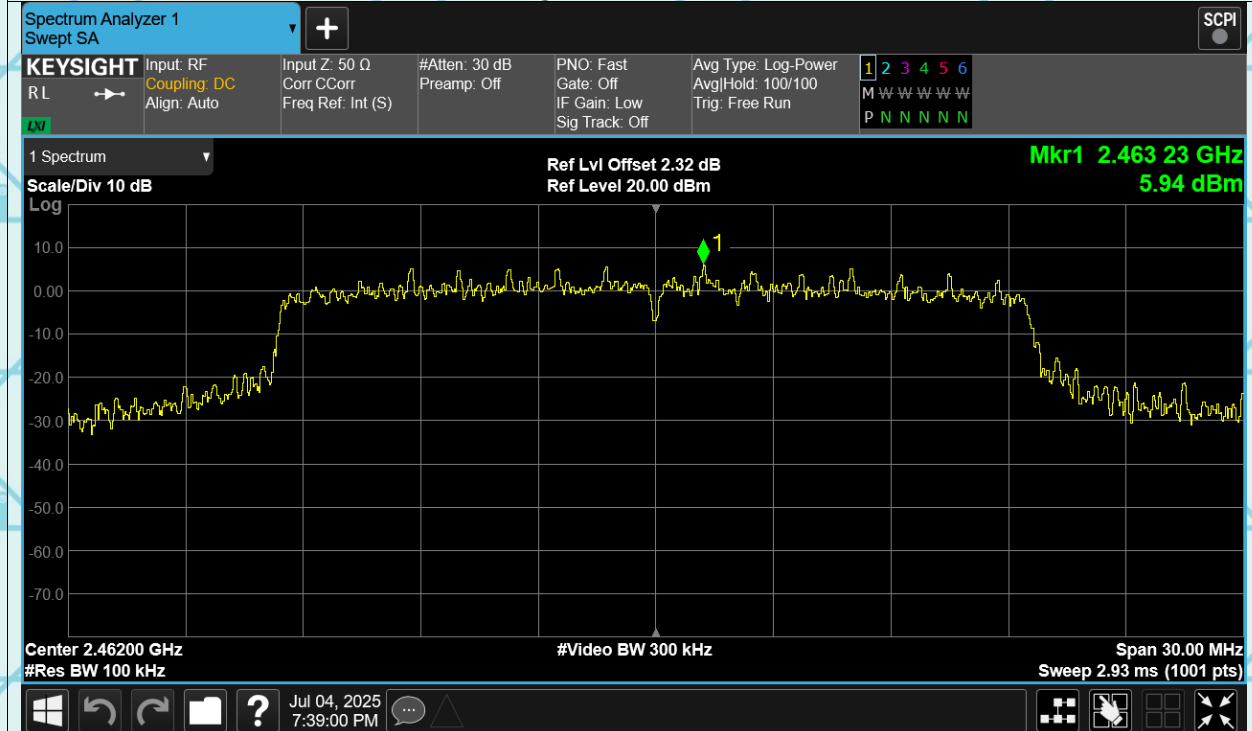


Band Edge ax20 2462MHz Emission

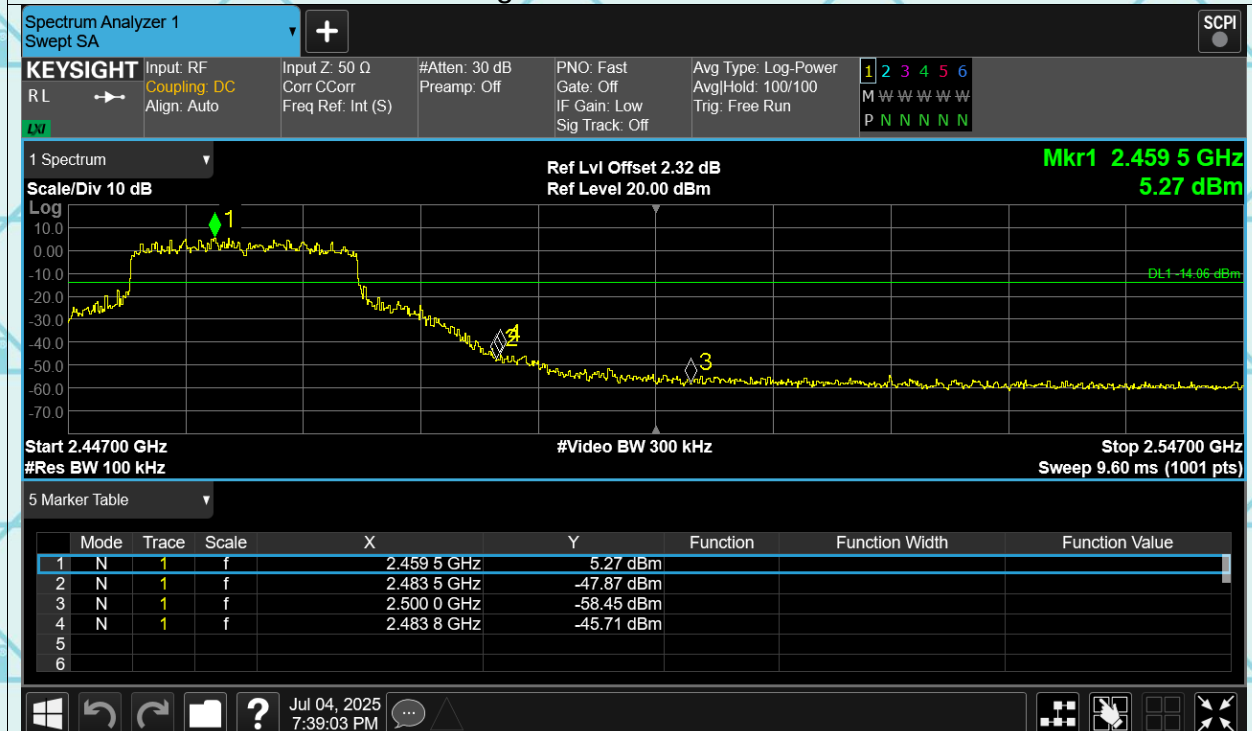


Band Edge ax40 2422MHz Ref

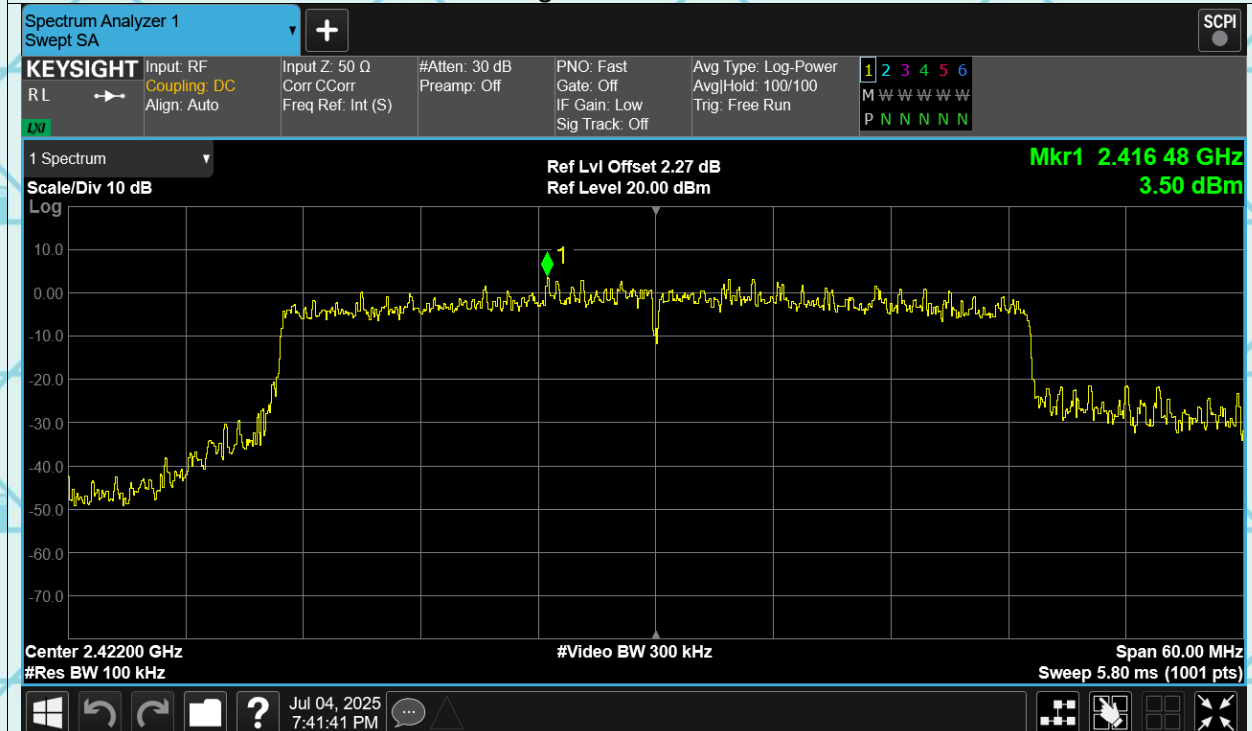


Band Edge ax40 2422MHz Emission

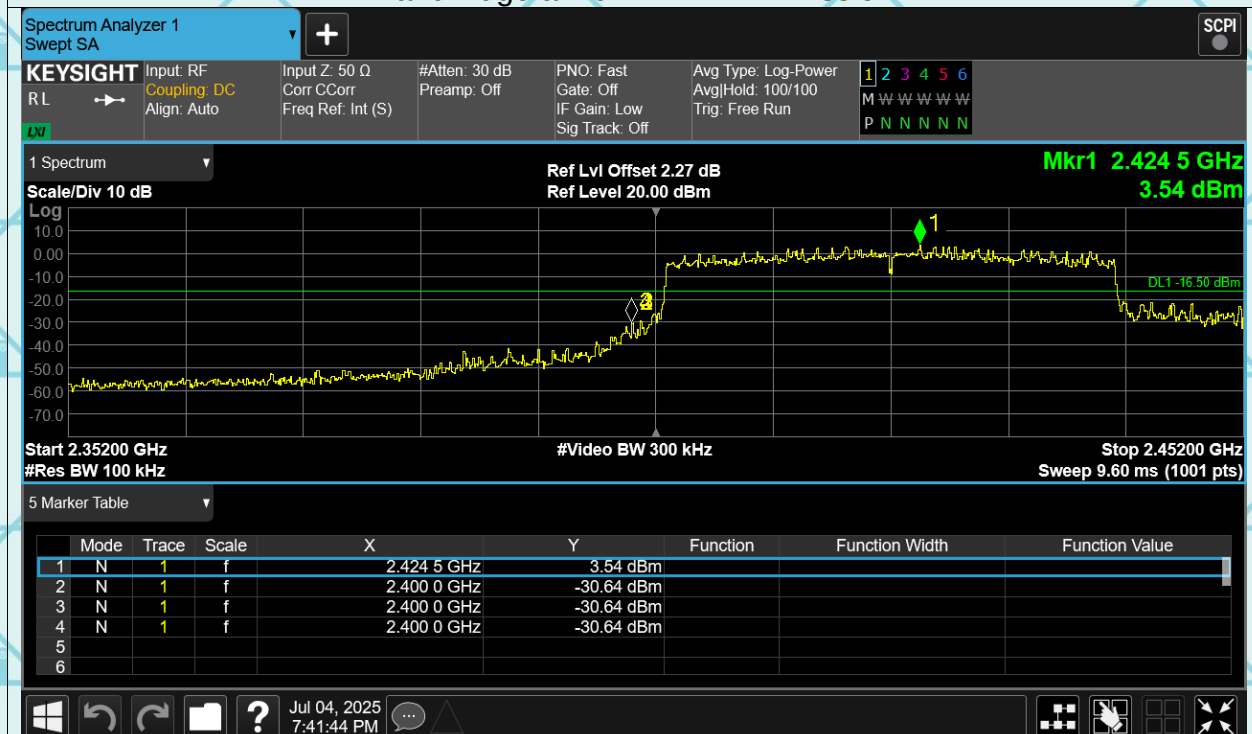

Band Edge ax40 2452MHz Ref

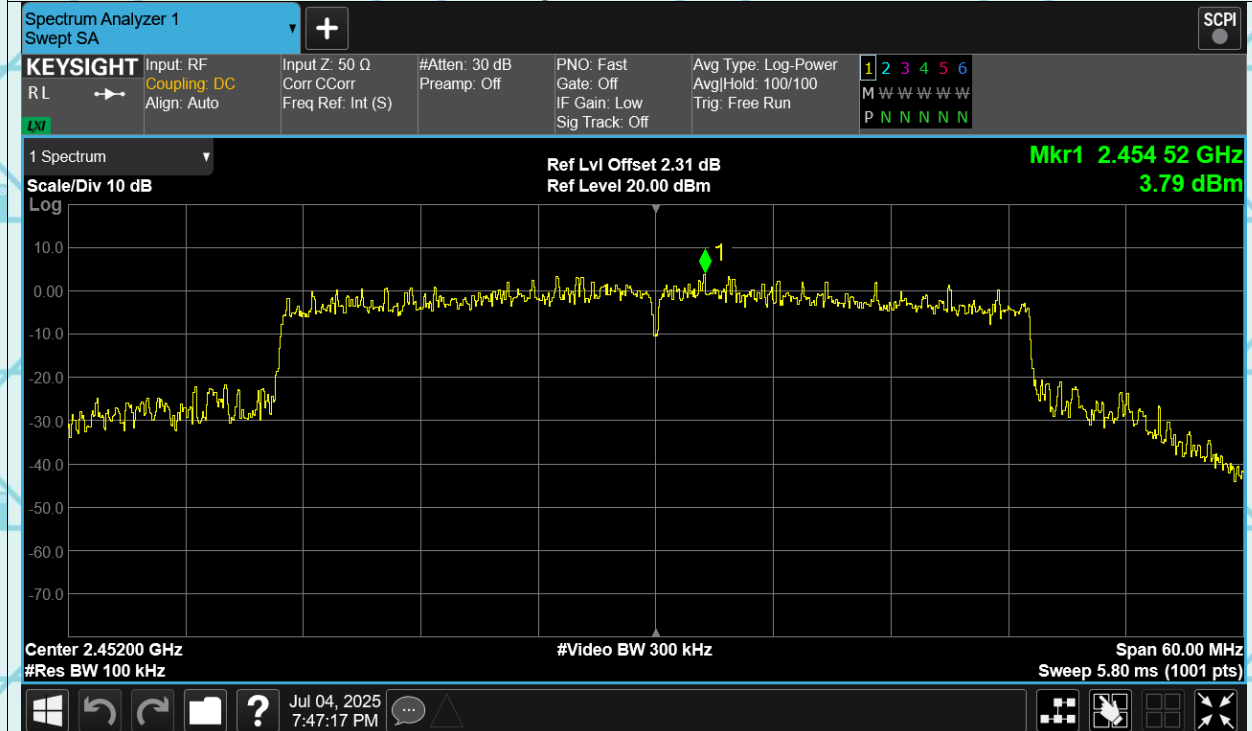


Band Edge ax40 2452MHz Emission

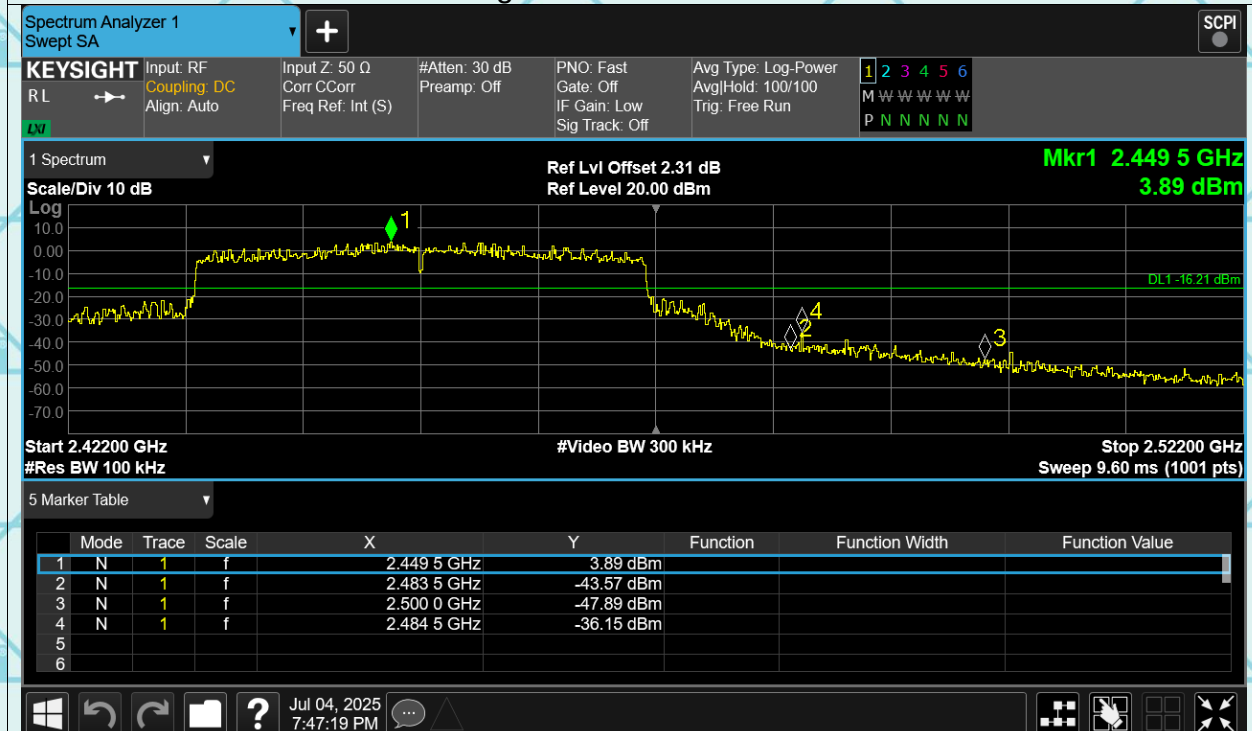


Conducted RF Spurious Emission

Test Graphs


Tx. Spurious b 2412MHz Ref

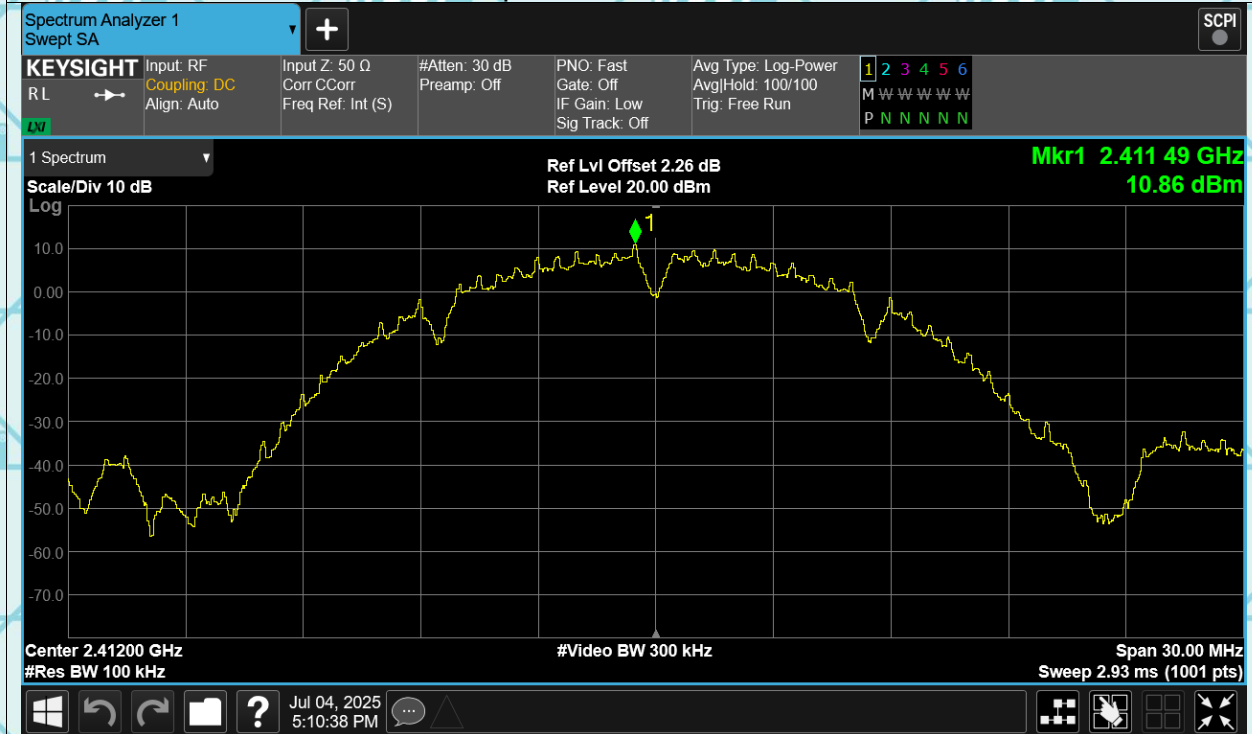


Tx. Spurious b 2412MHz Emission

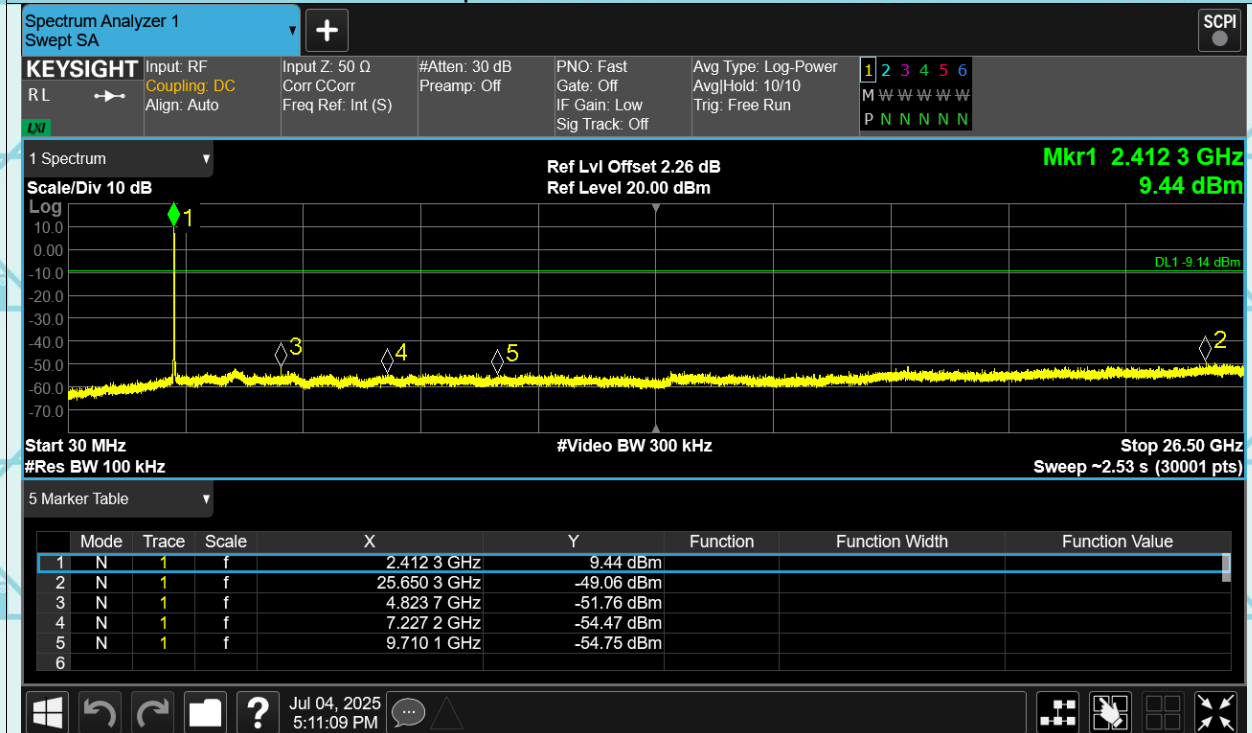


Tx. Spurious b 2437MHz Ref

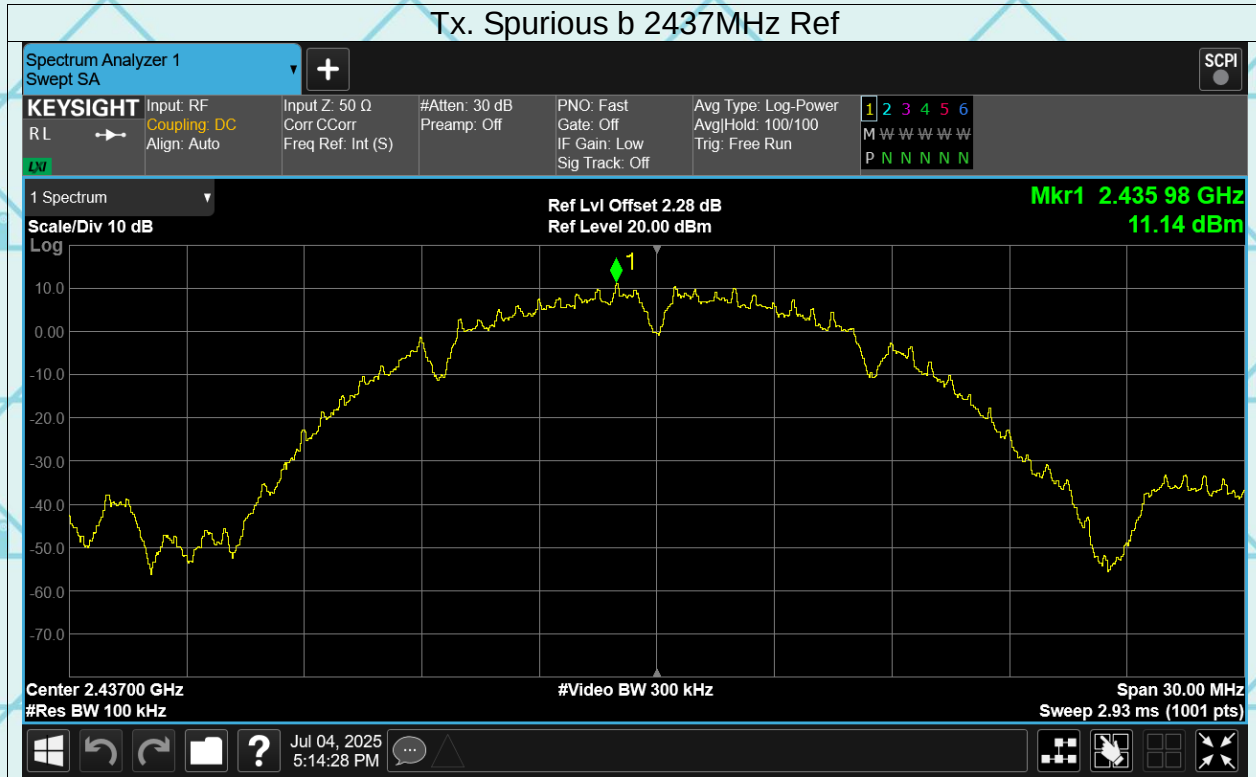


Tx. Spurious b 2437MHz Emission

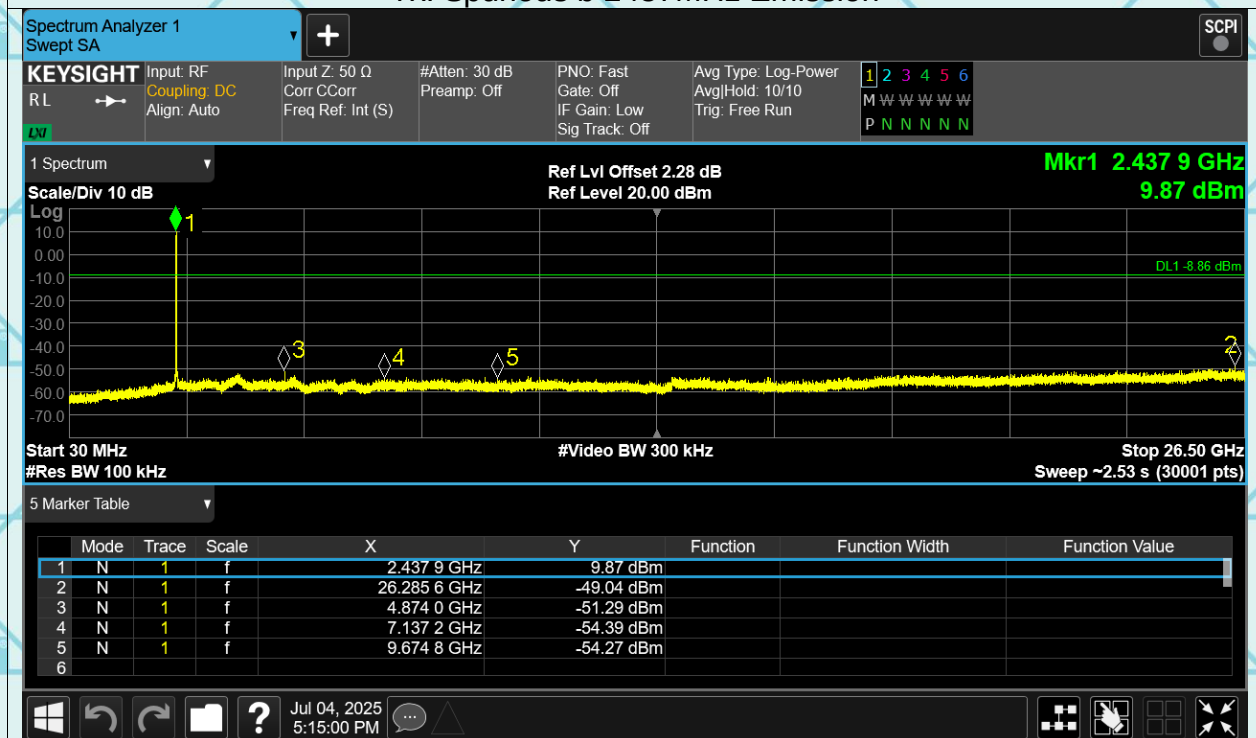


Tx. Spurious b 2462MHz Ref

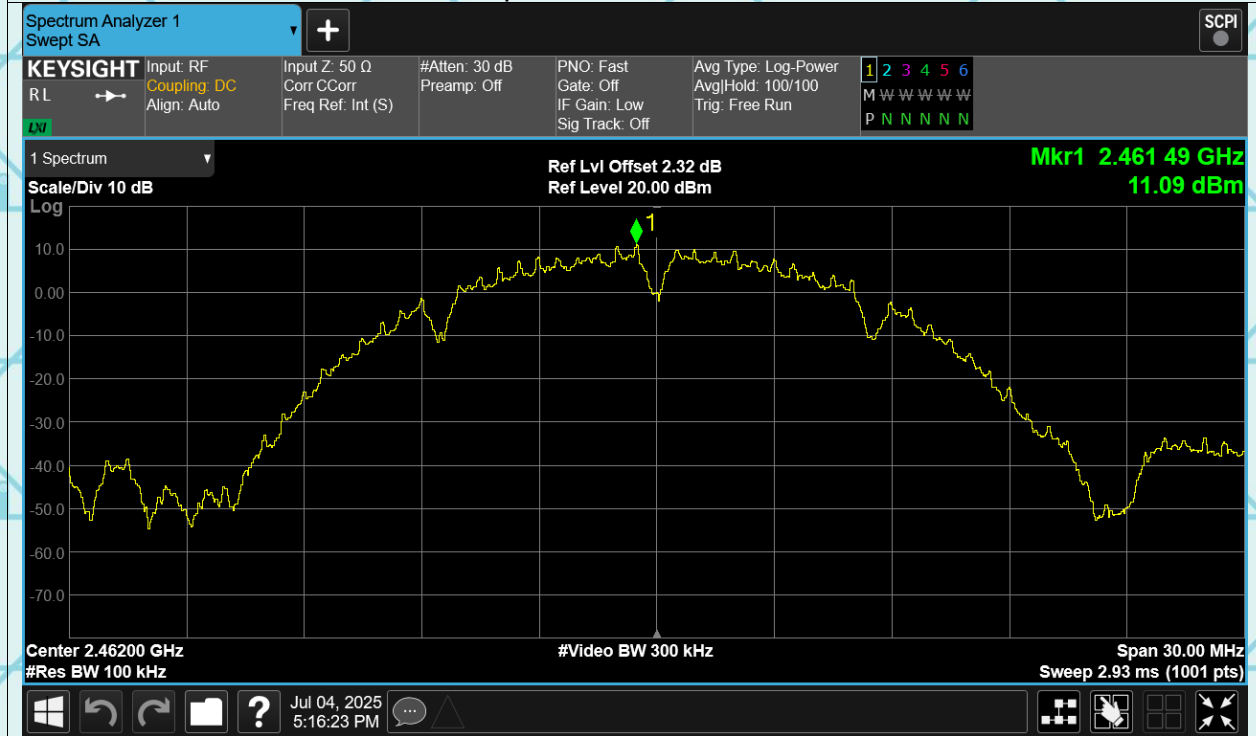


Tx. Spurious b 2462MHz Emission

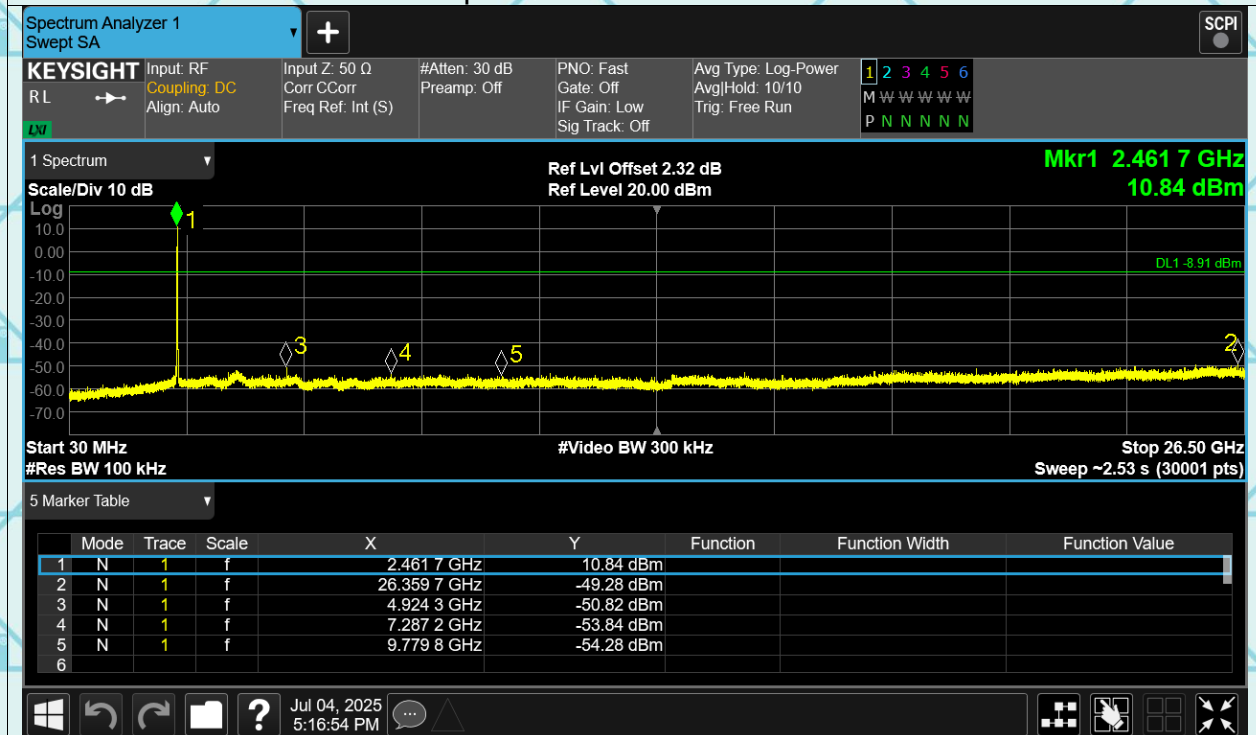


Tx. Spurious g 2412MHz Ref

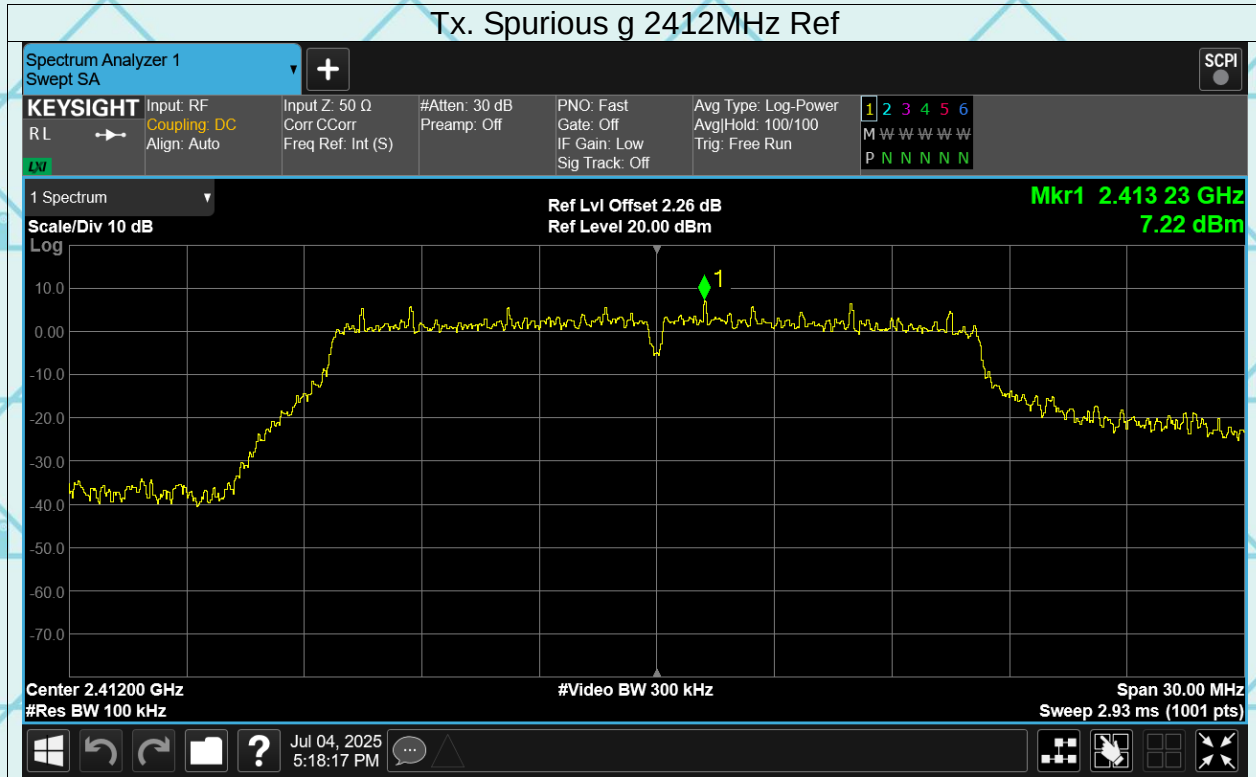


Tx. Spurious g 2412MHz Emission

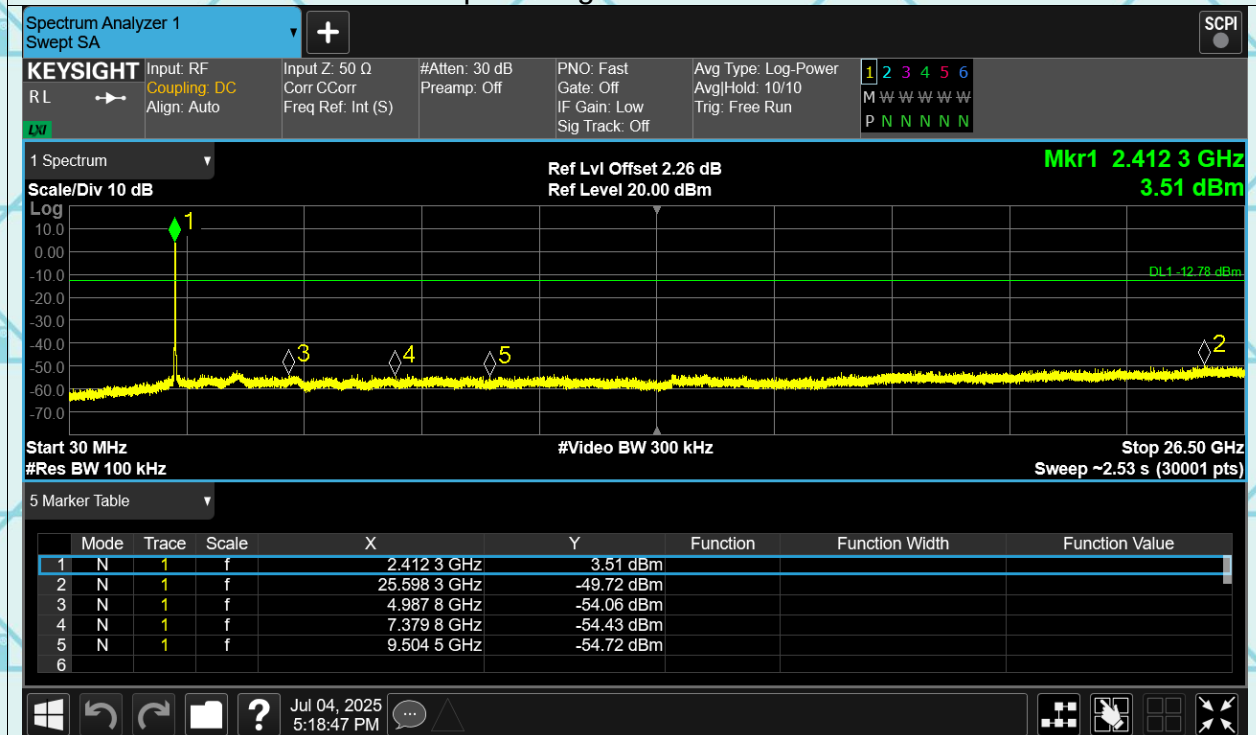


Tx. Spurious g 2437MHz Ref

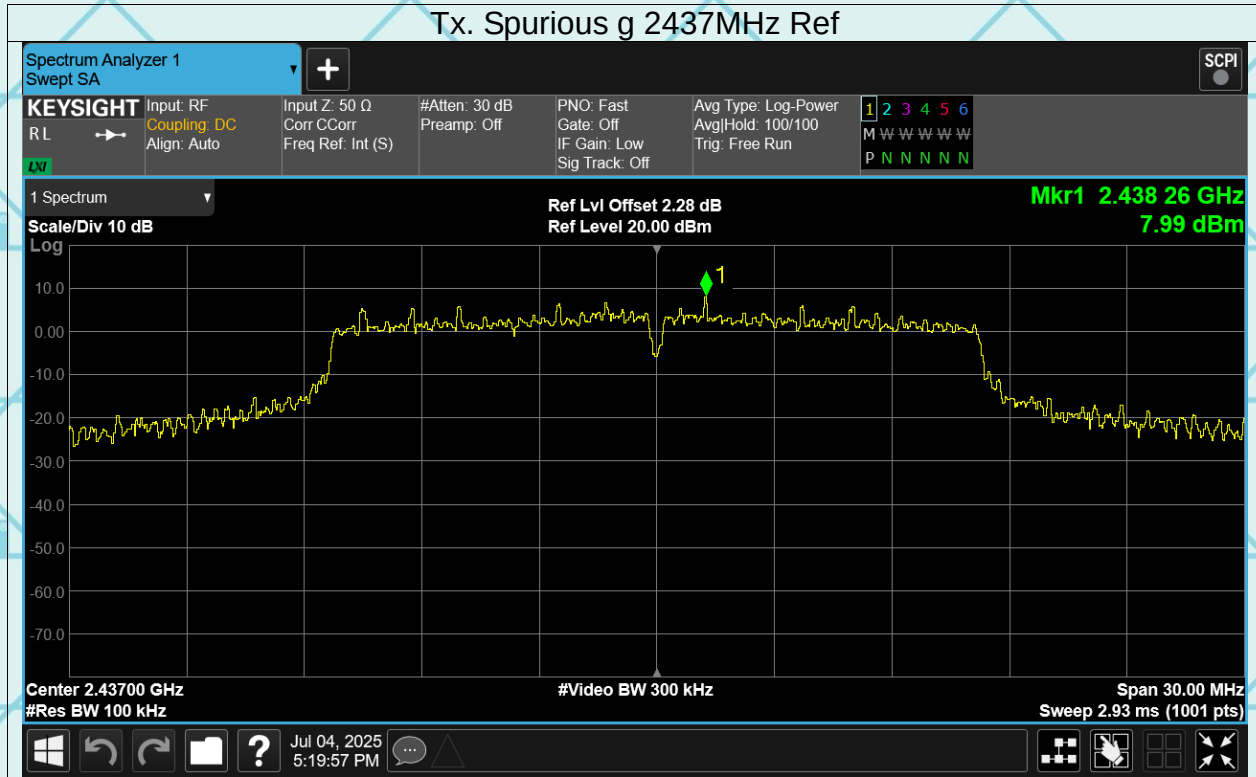


Tx. Spurious g 2437MHz Emission

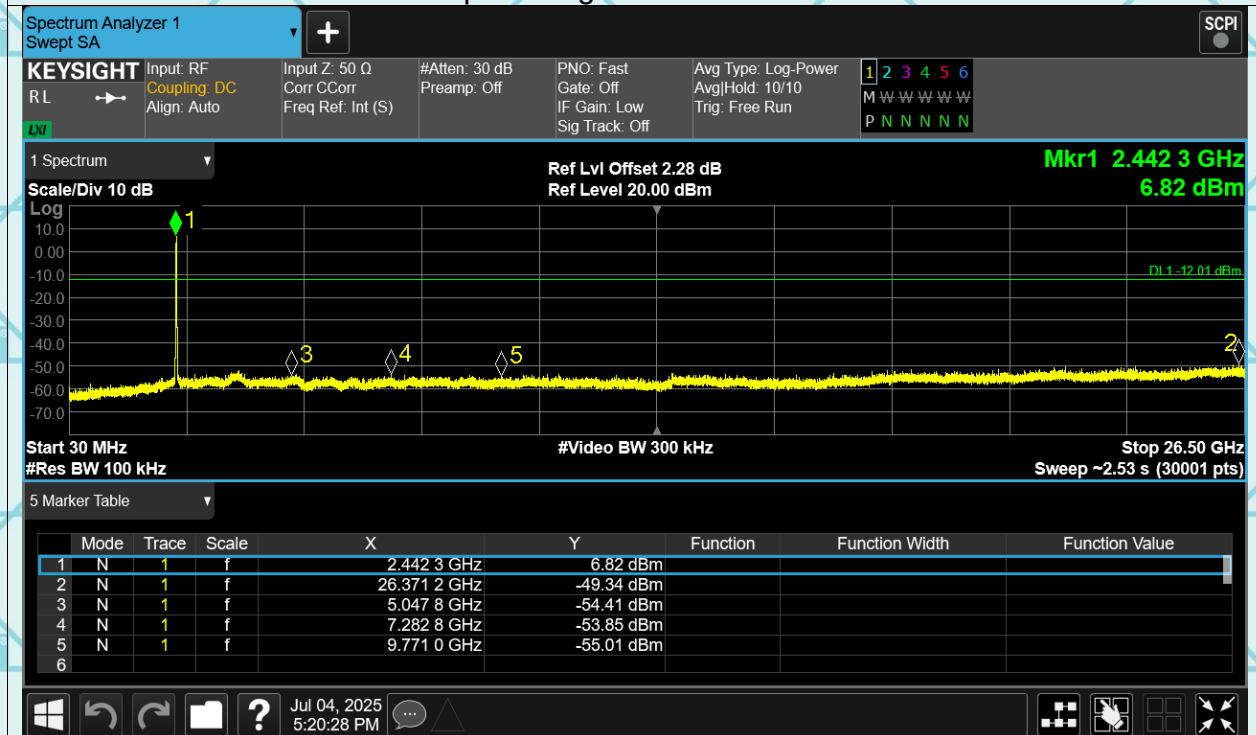


Tx. Spurious g 2462MHz Ref

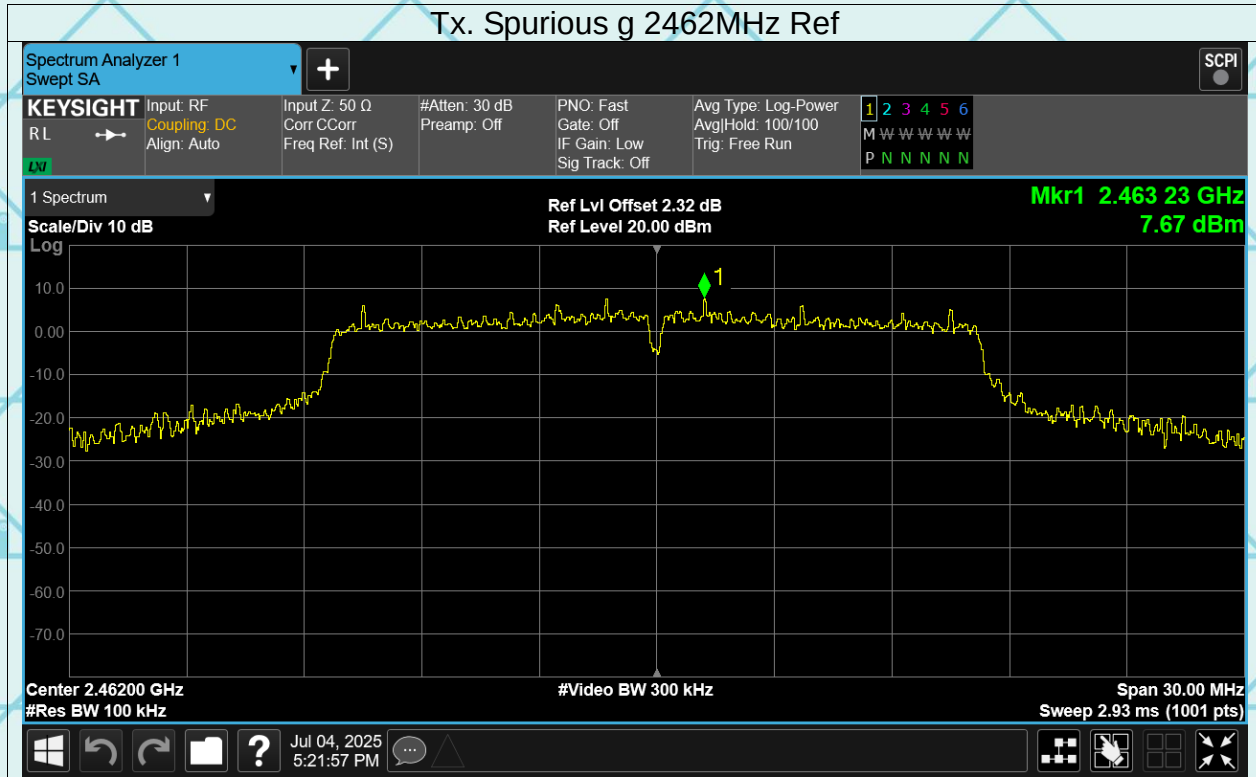


Tx. Spurious g 2462MHz Emission

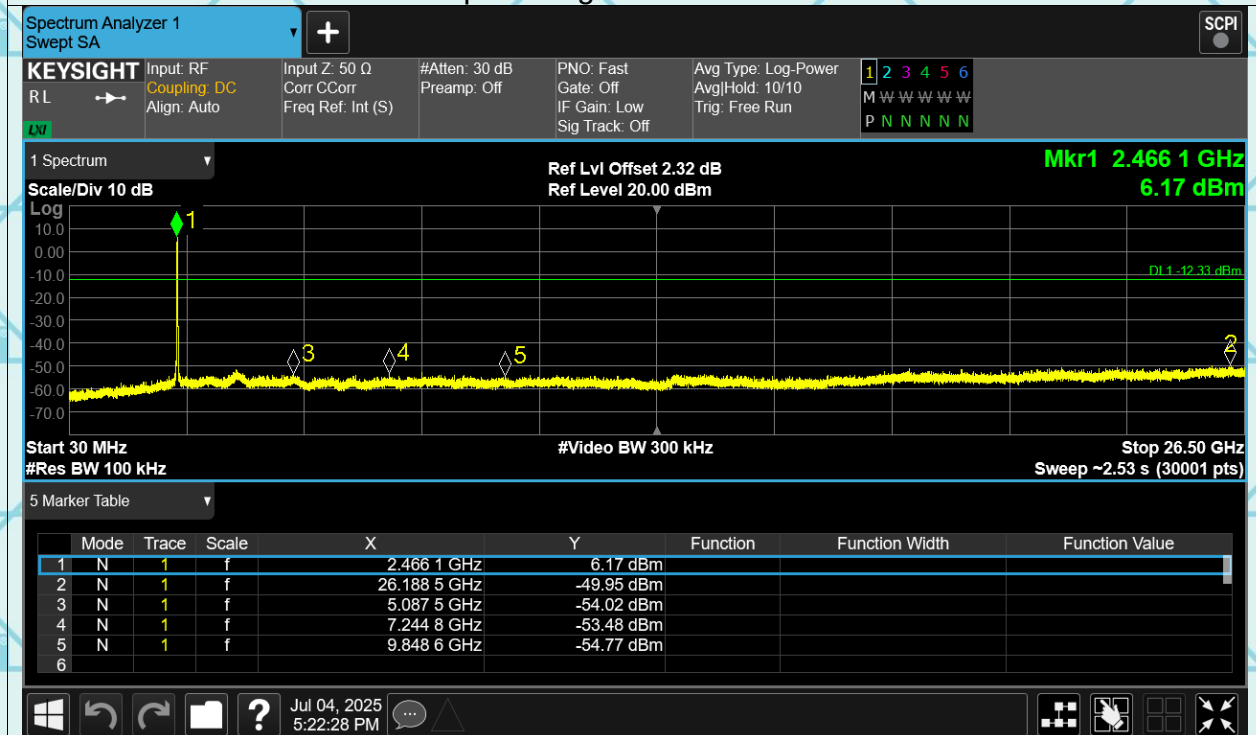


Tx. Spurious n20 2412MHz Ref

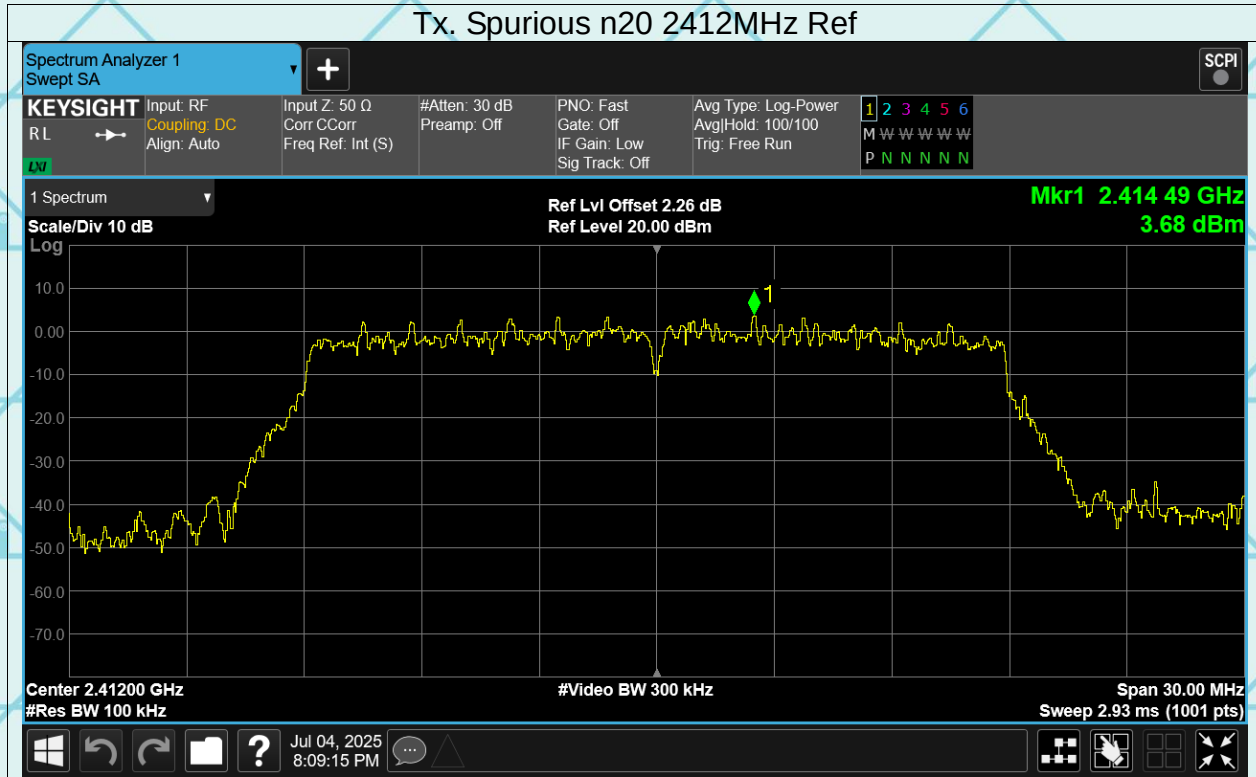


Tx. Spurious n20 2412MHz Emission

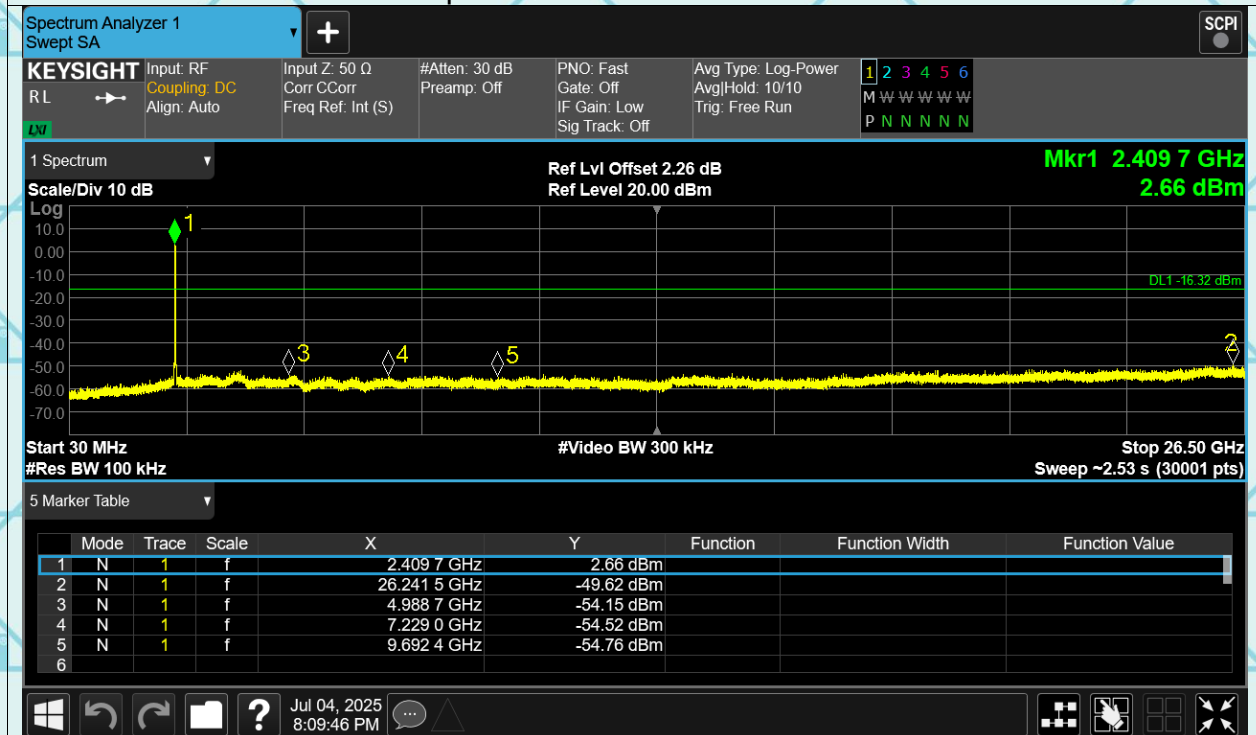


Tx. Spurious n20 2437MHz Ref

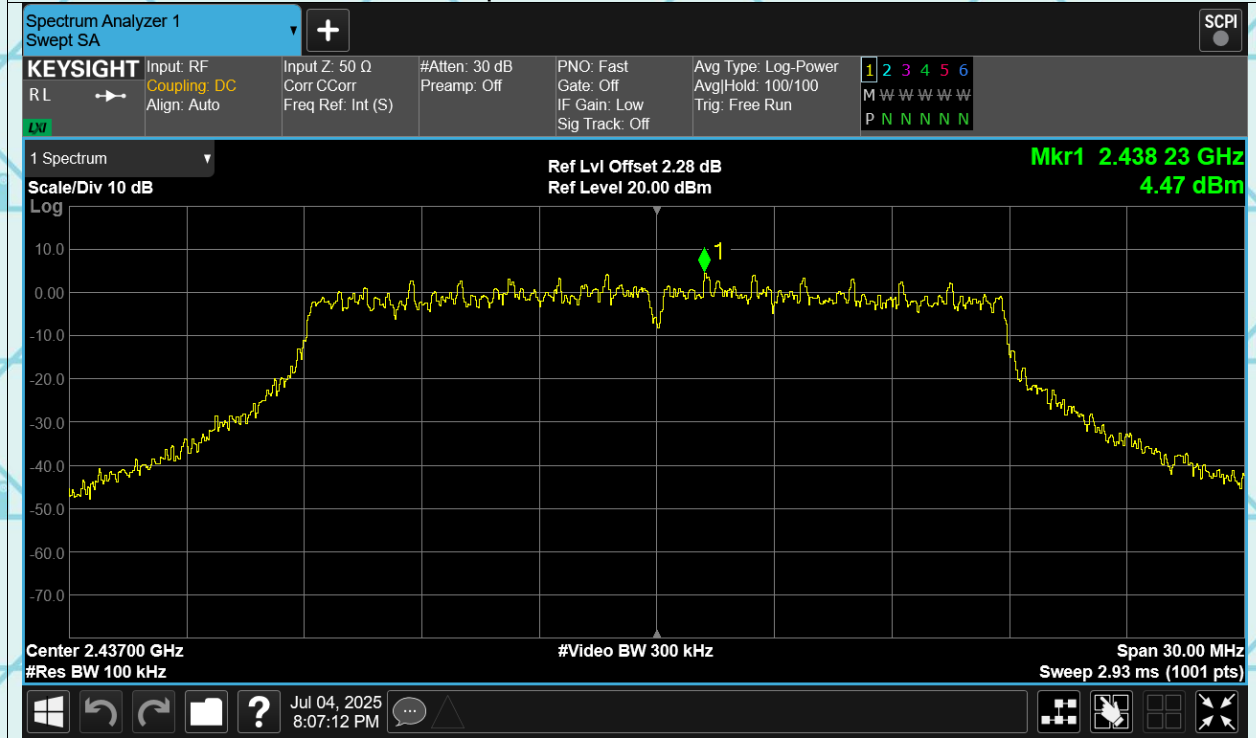


Tx. Spurious n20 2437MHz Emission

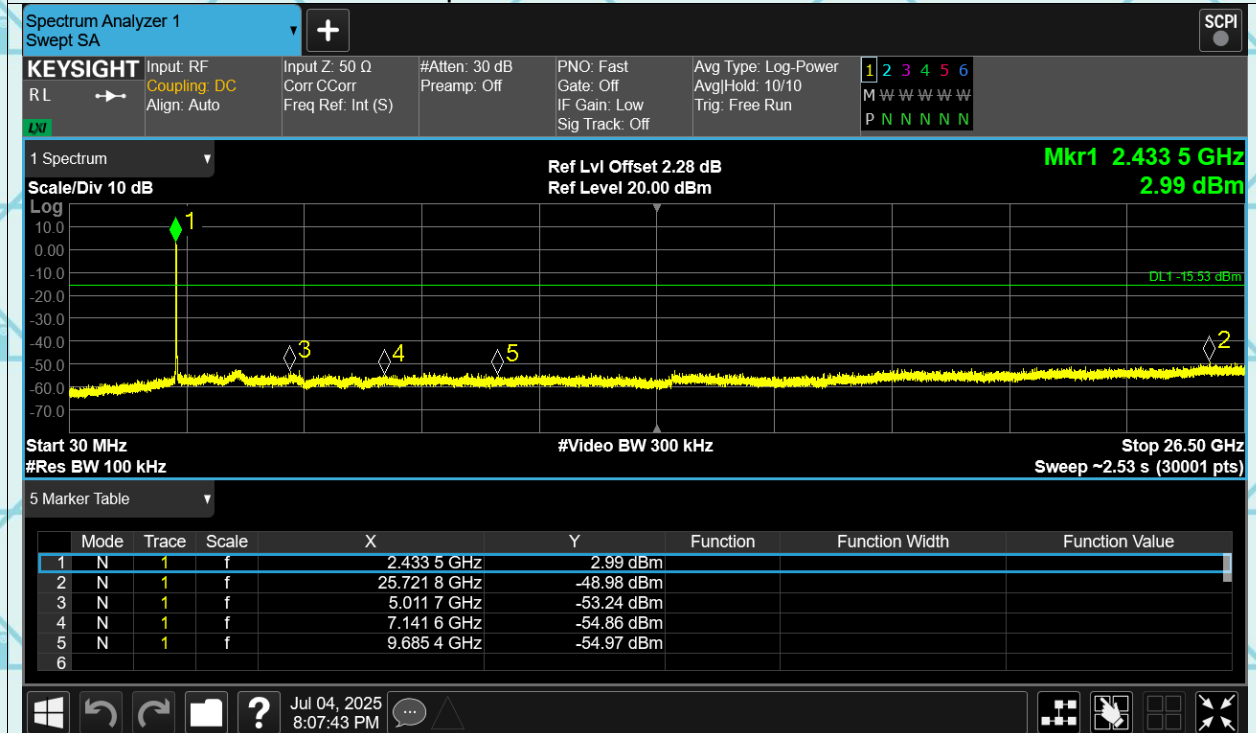


Tx. Spurious n20 2462MHz Ref

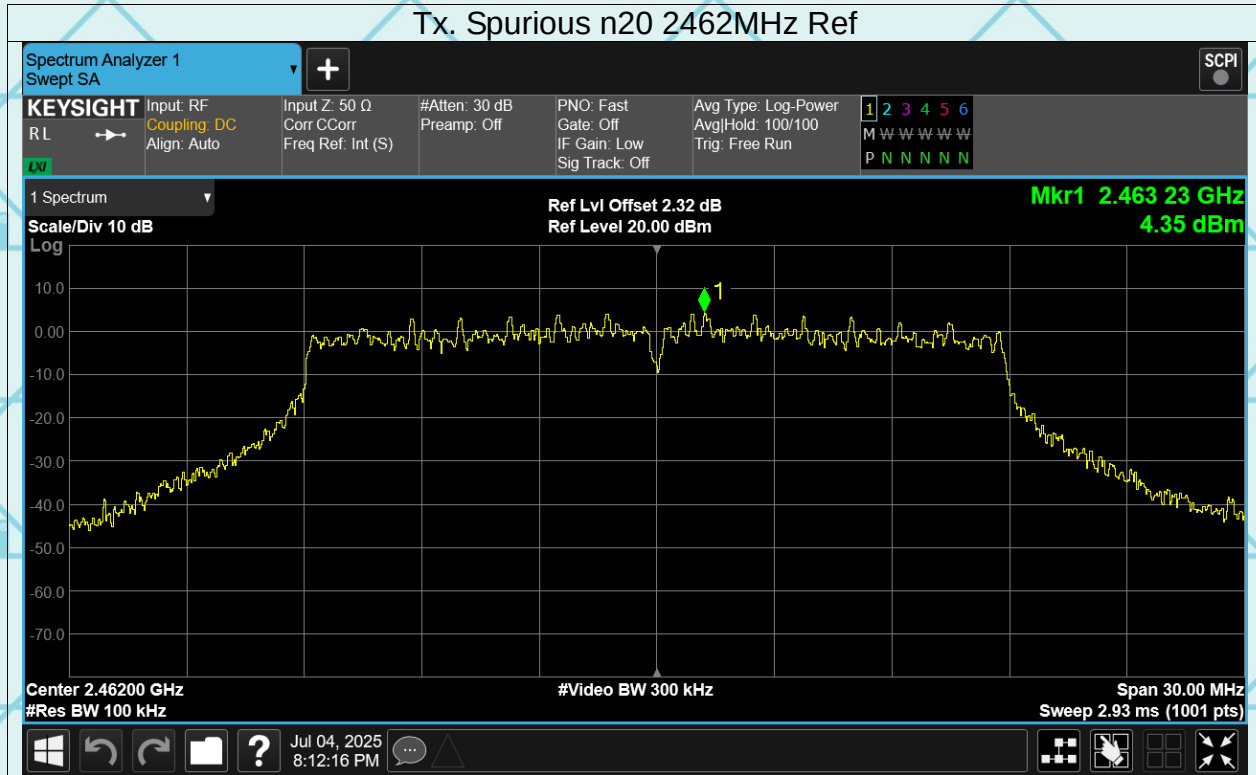


Tx. Spurious n20 2462MHz Emission

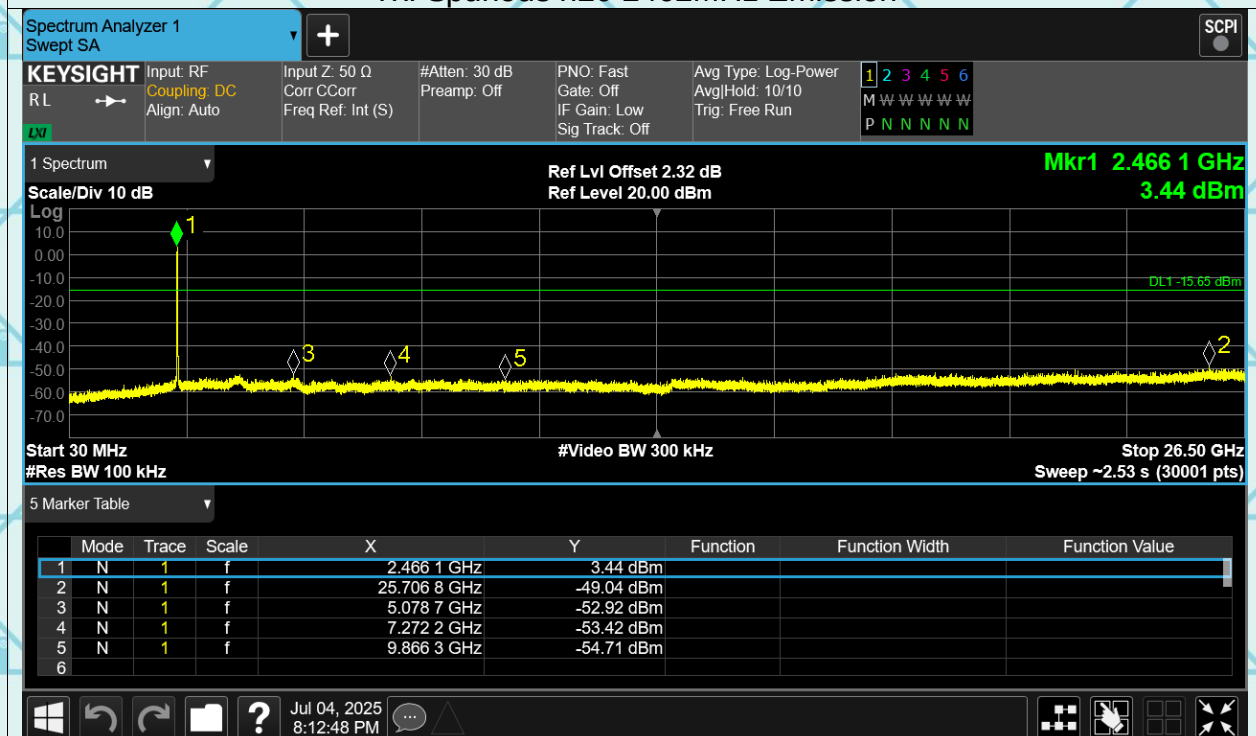


Tx. Spurious n40 2422MHz Ref

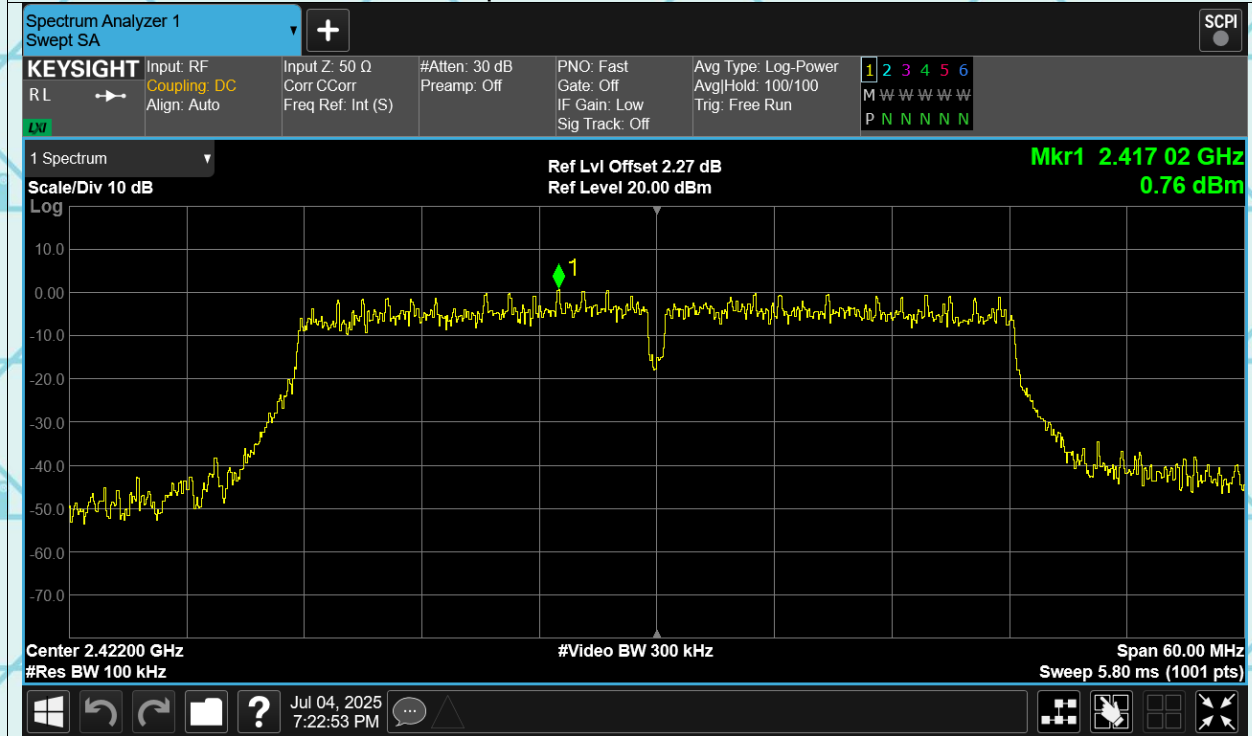


Tx. Spurious n40 2422MHz Emission

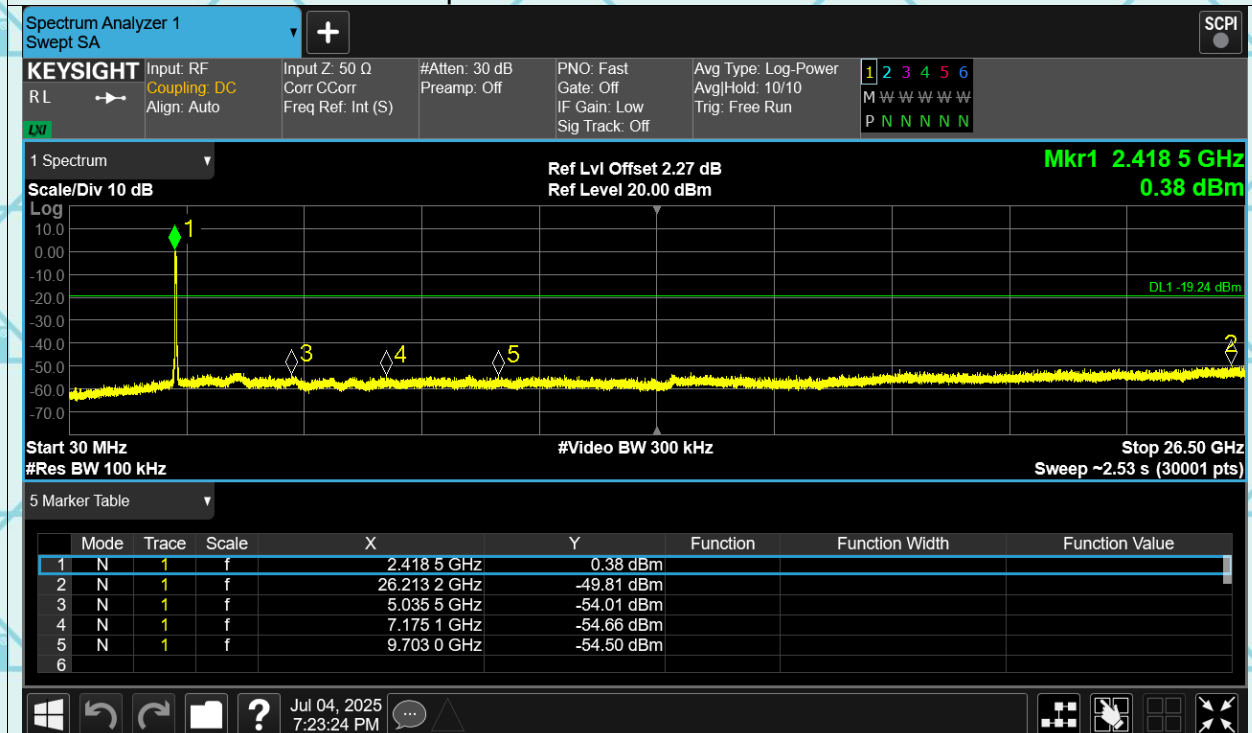


Tx. Spurious n40 2437MHz Ref

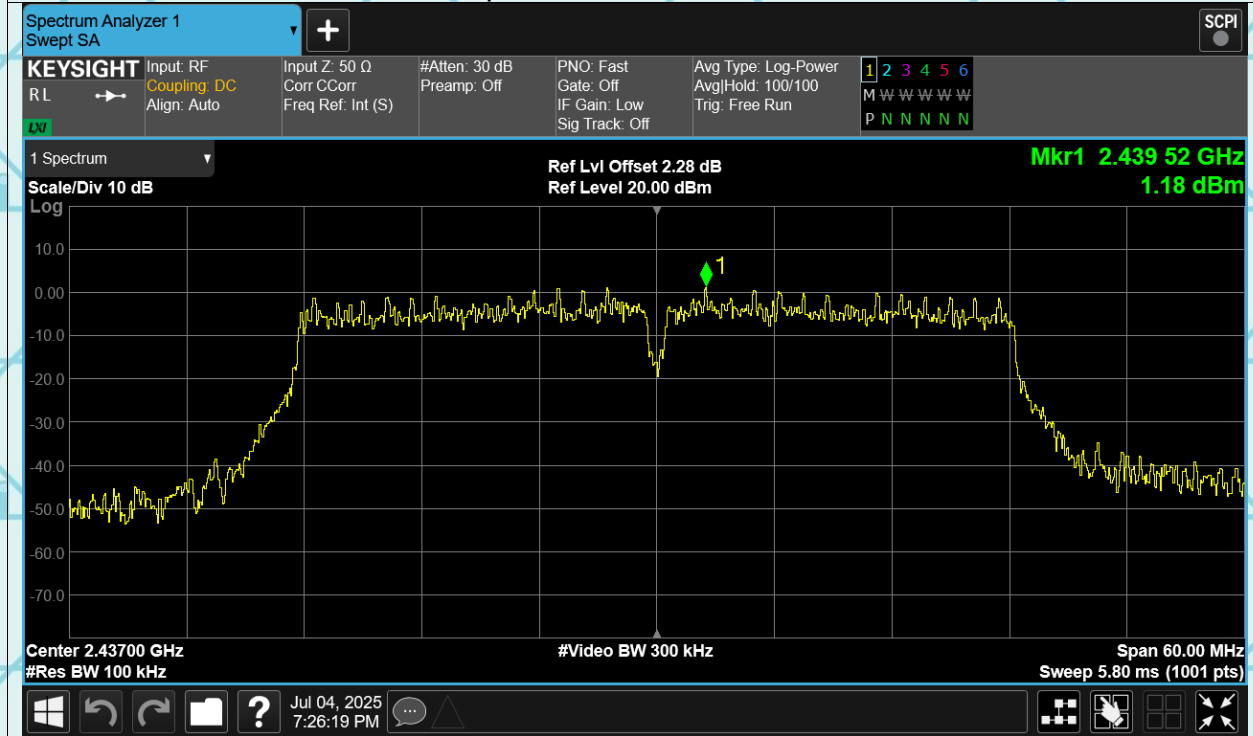


Tx. Spurious n40 2437MHz Emission

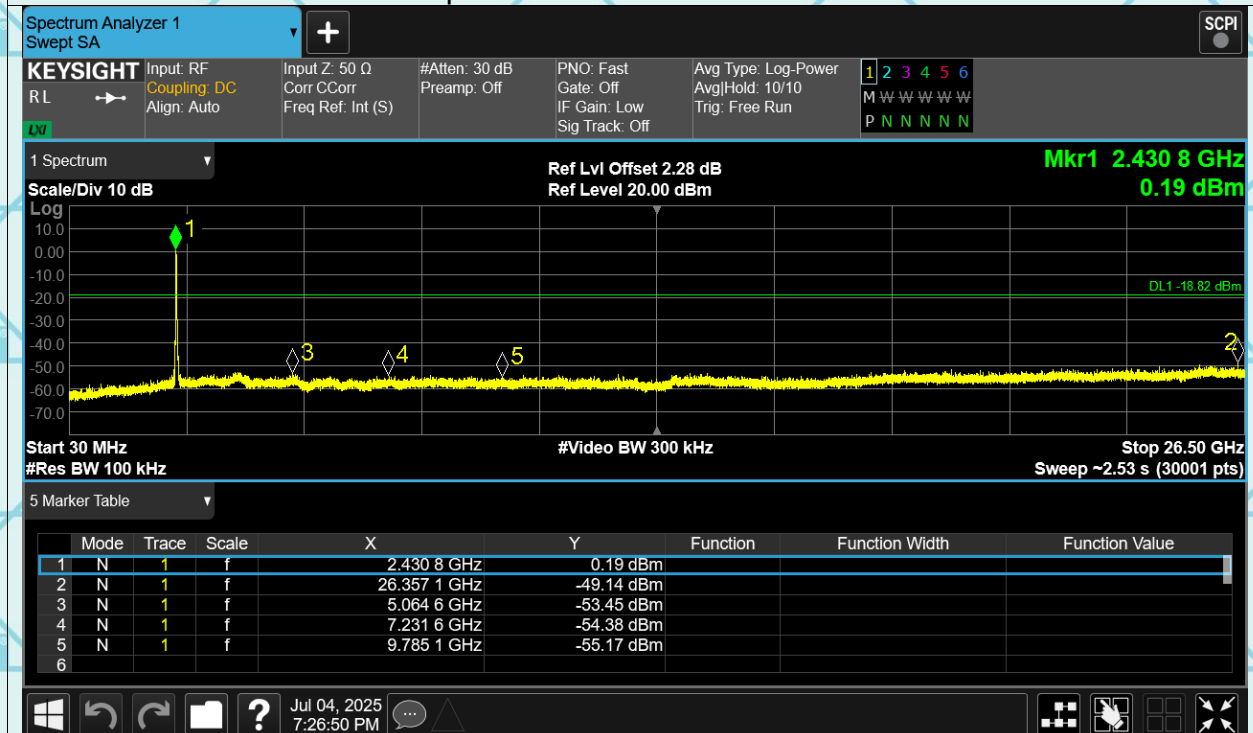


Tx. Spurious n40 2452MHz Ref

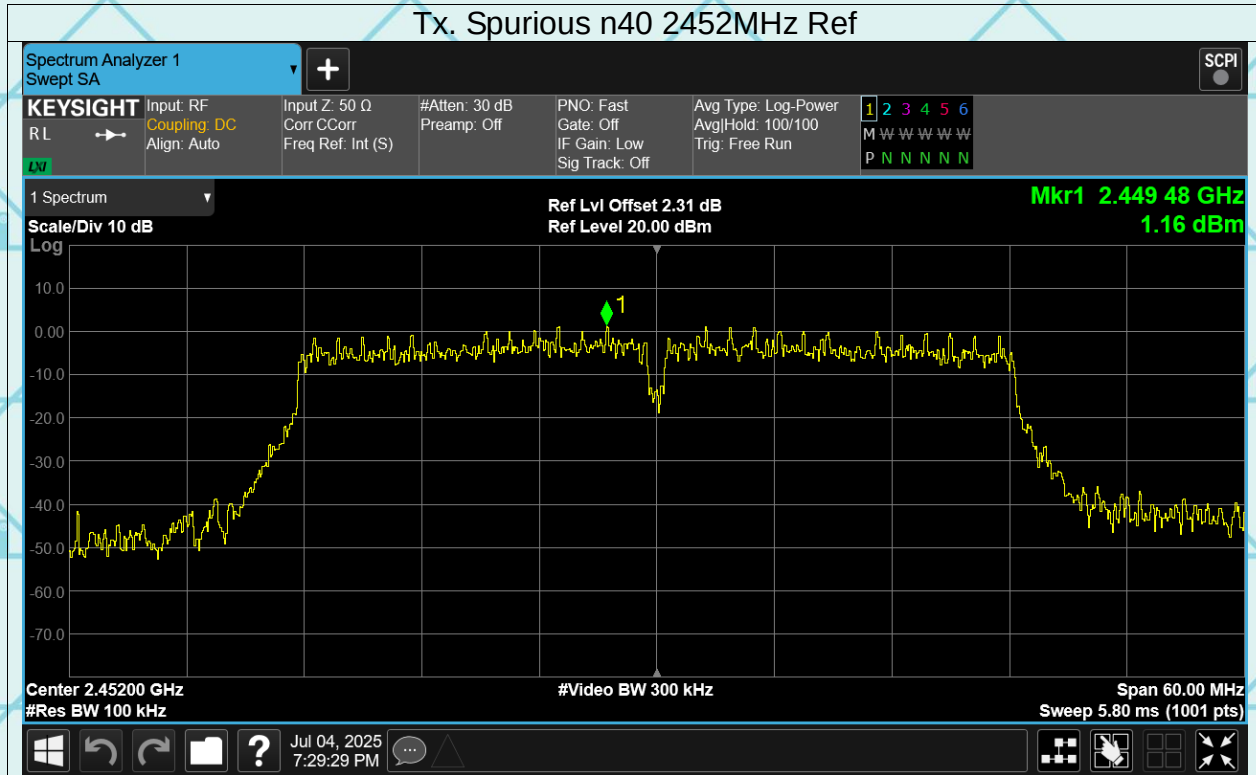


Tx. Spurious n40 2452MHz Emission

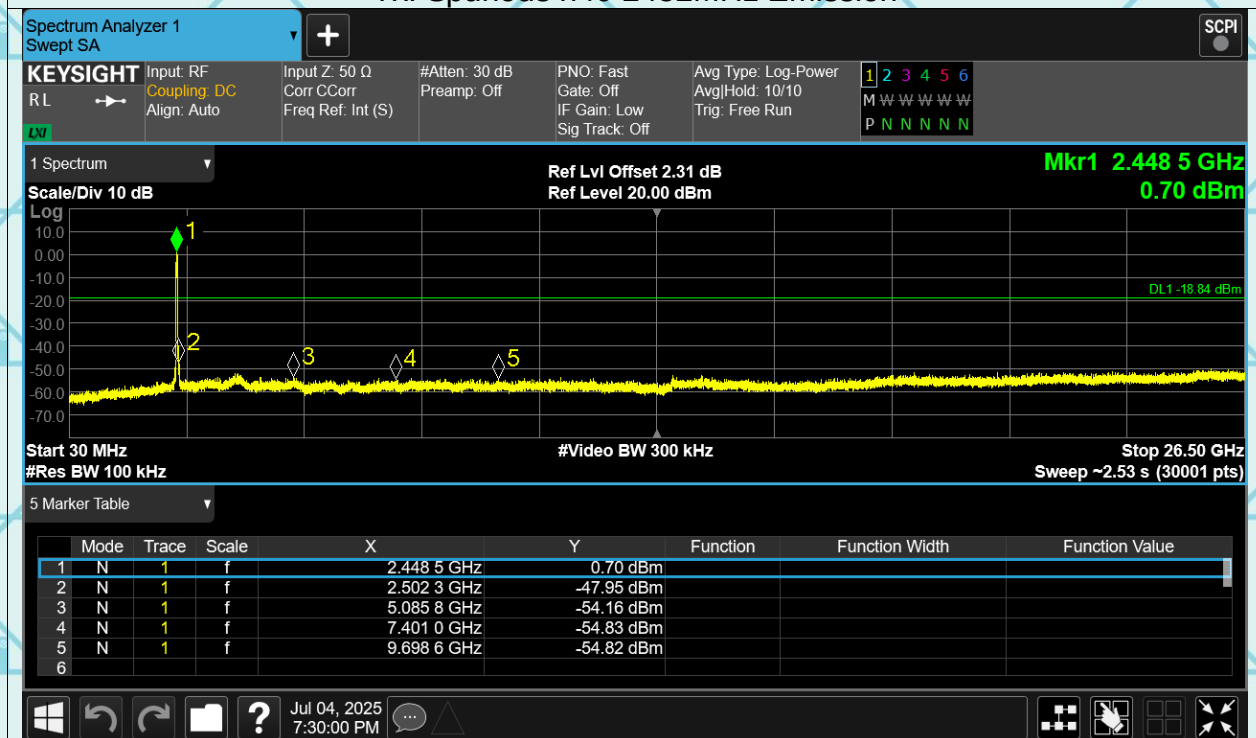


Tx. Spurious ax20 2412MHz Ref

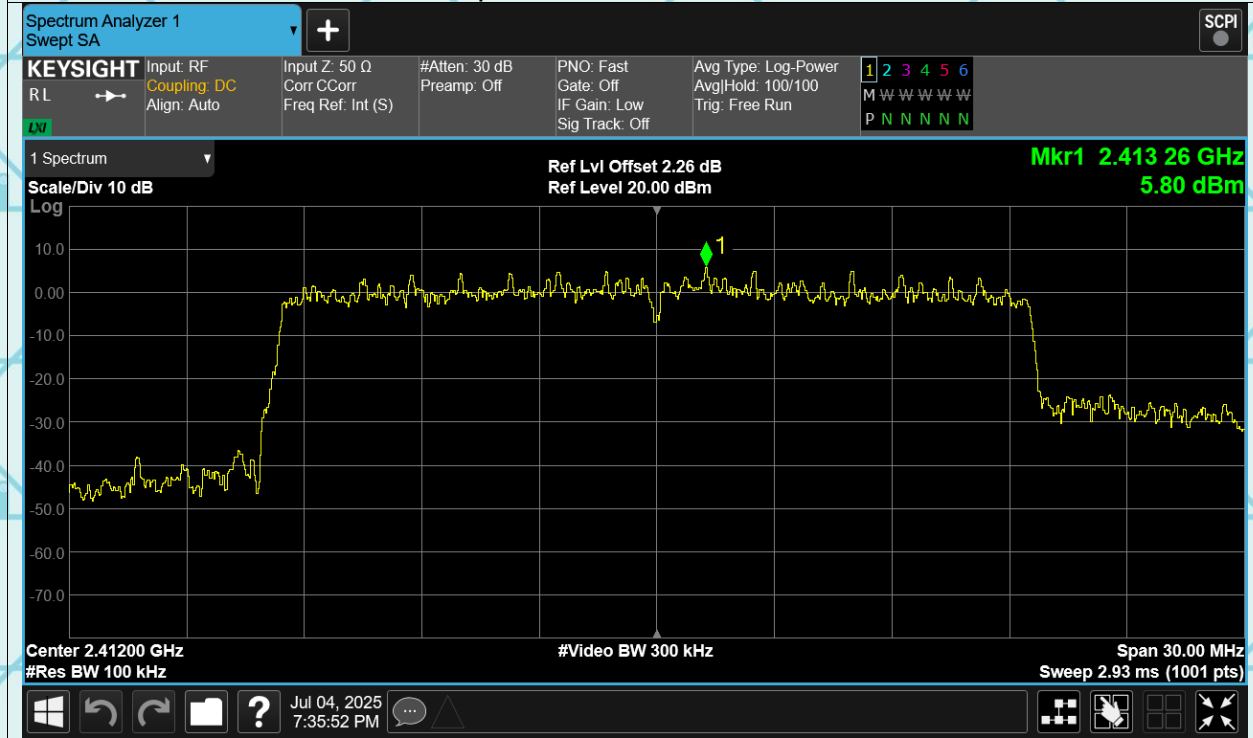


Tx. Spurious ax20 2412MHz Emission

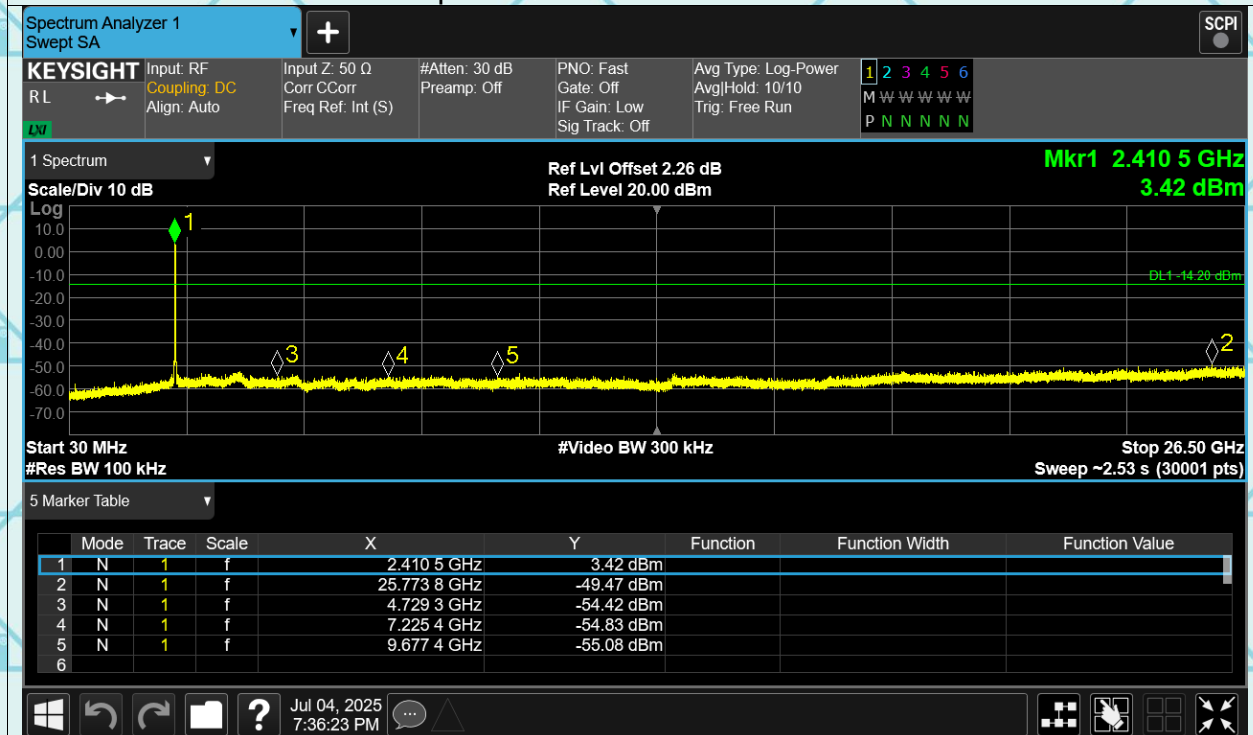


Tx. Spurious ax20 2437MHz Ref

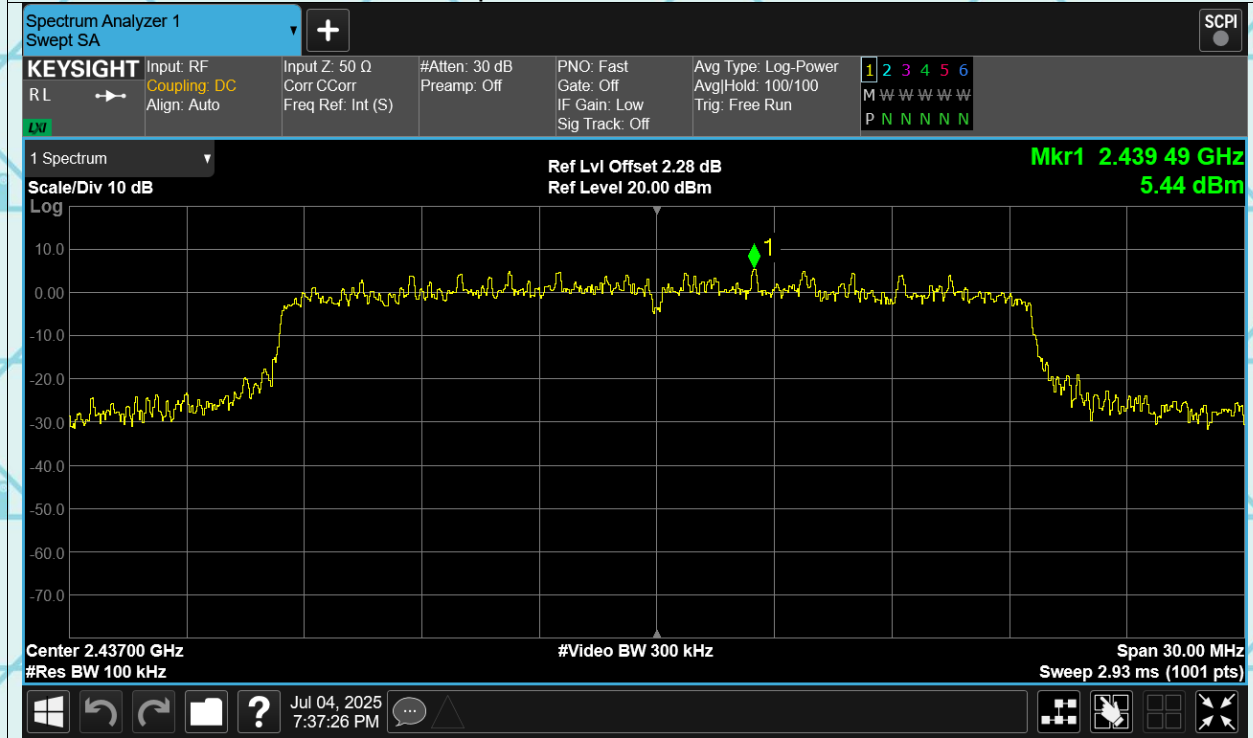


Tx. Spurious ax20 2437MHz Emission

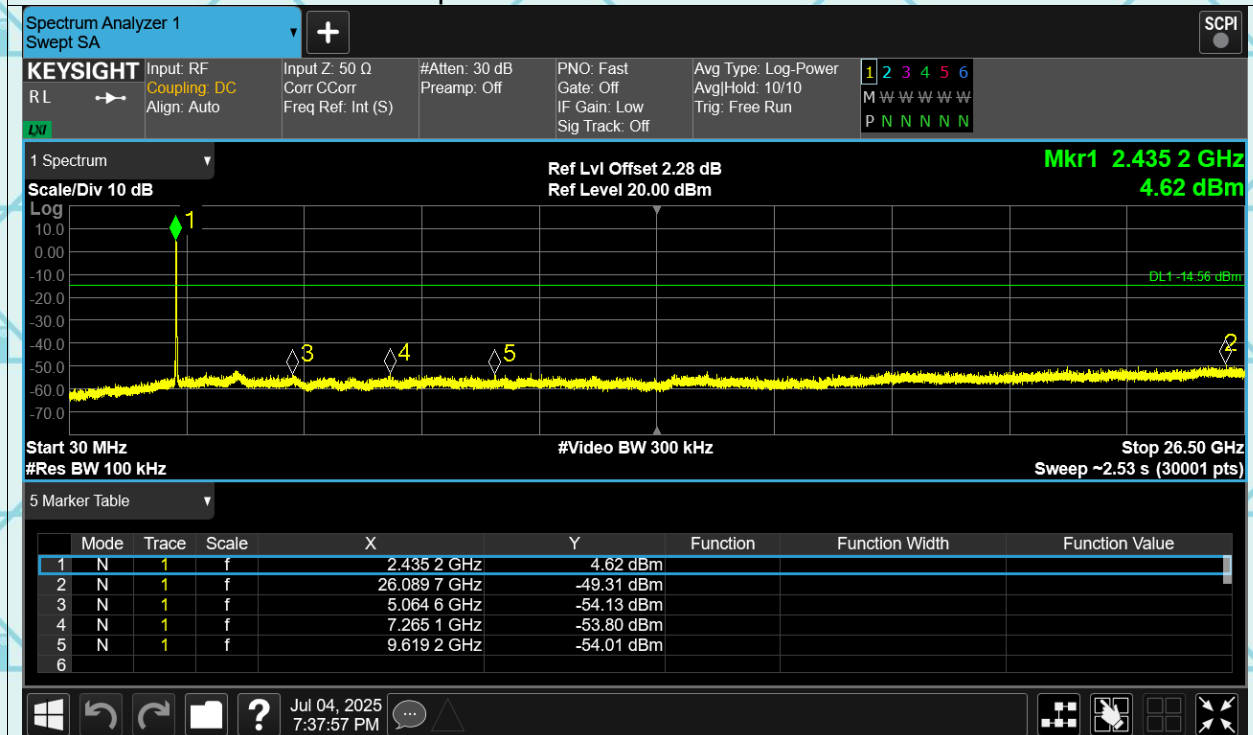


Tx. Spurious ax20 2462MHz Ref

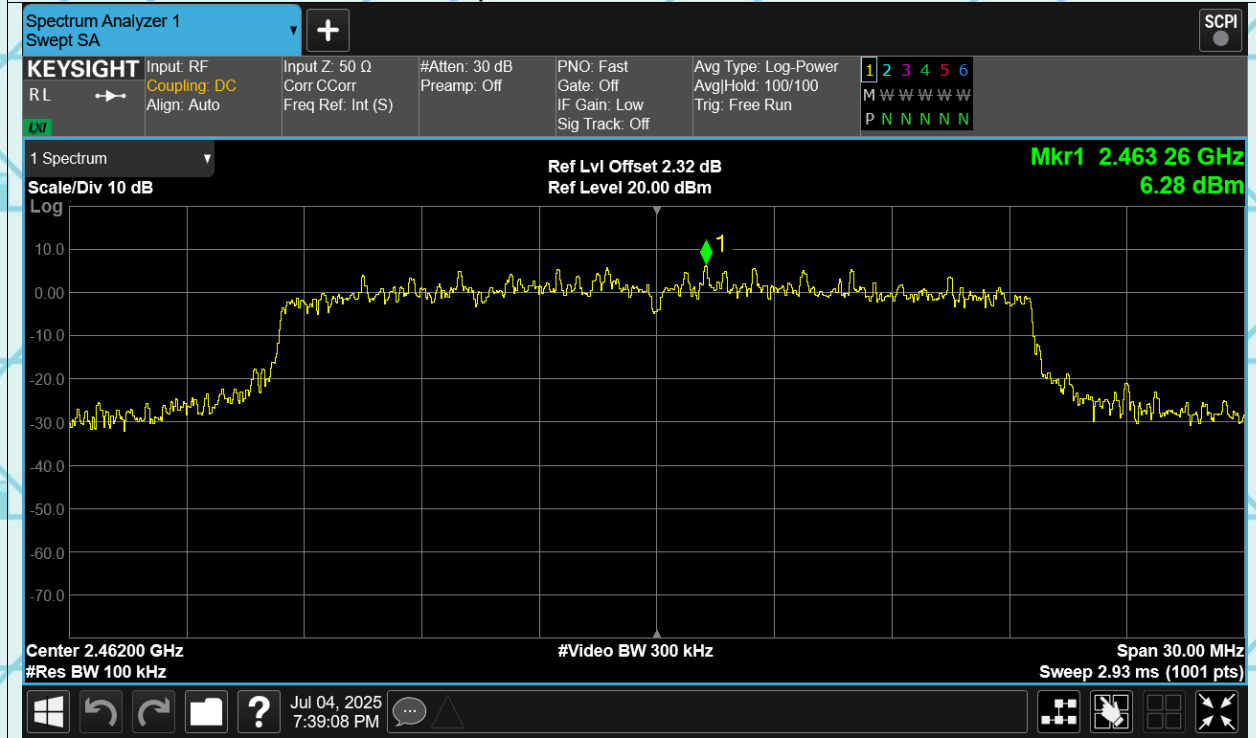


Tx. Spurious ax20 2462MHz Emission

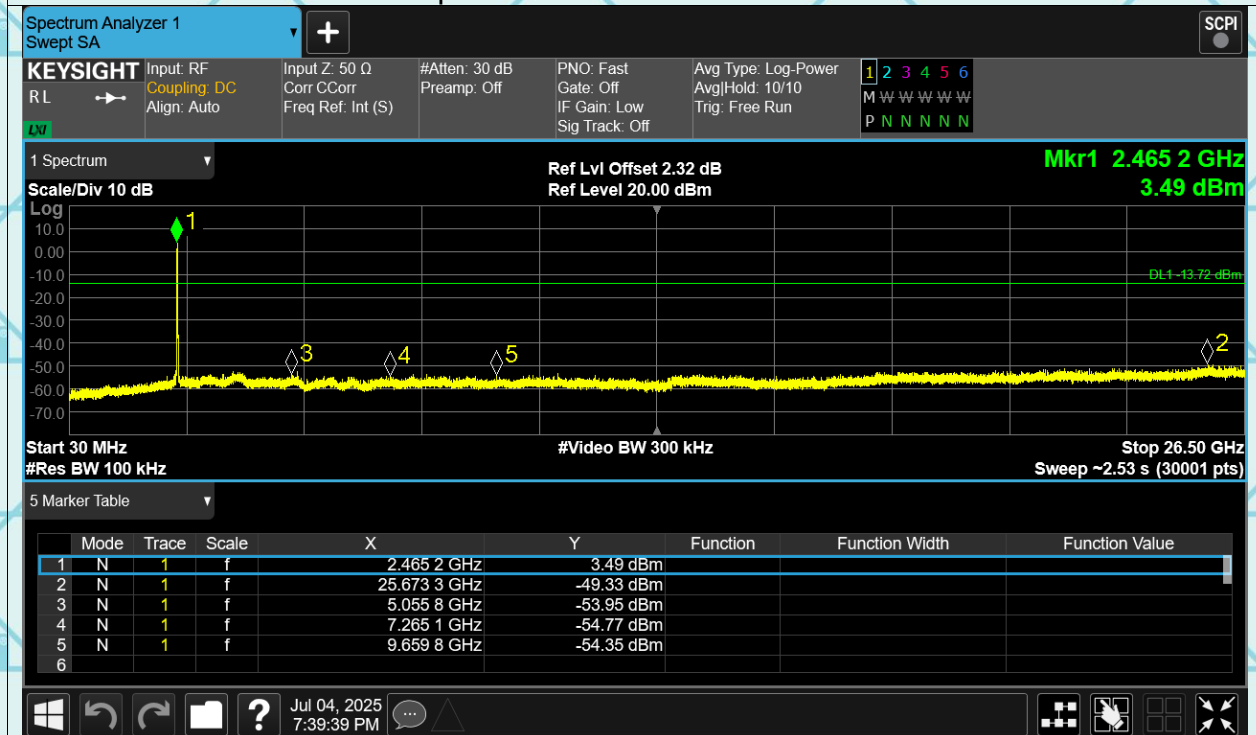


Tx. Spurious ax40 2422MHz Ref

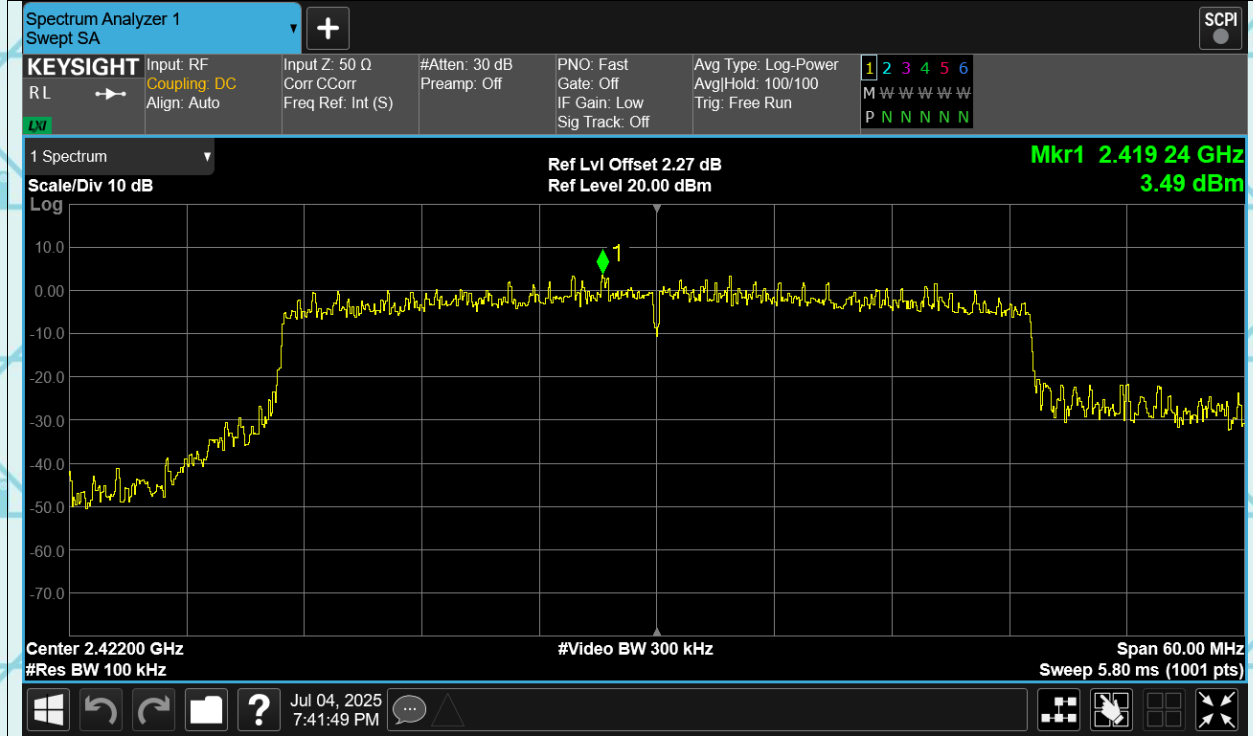


Tx. Spurious ax40 2422MHz Emission

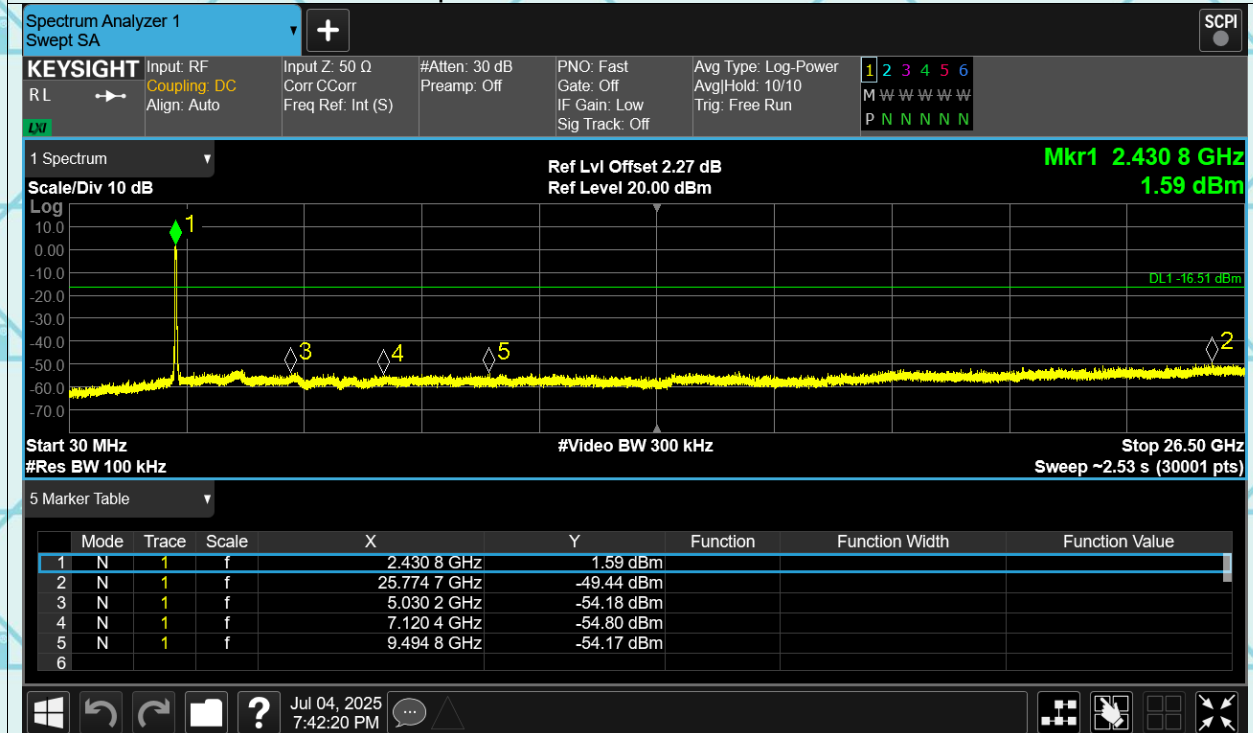


Tx. Spurious ax40 2437MHz Ref

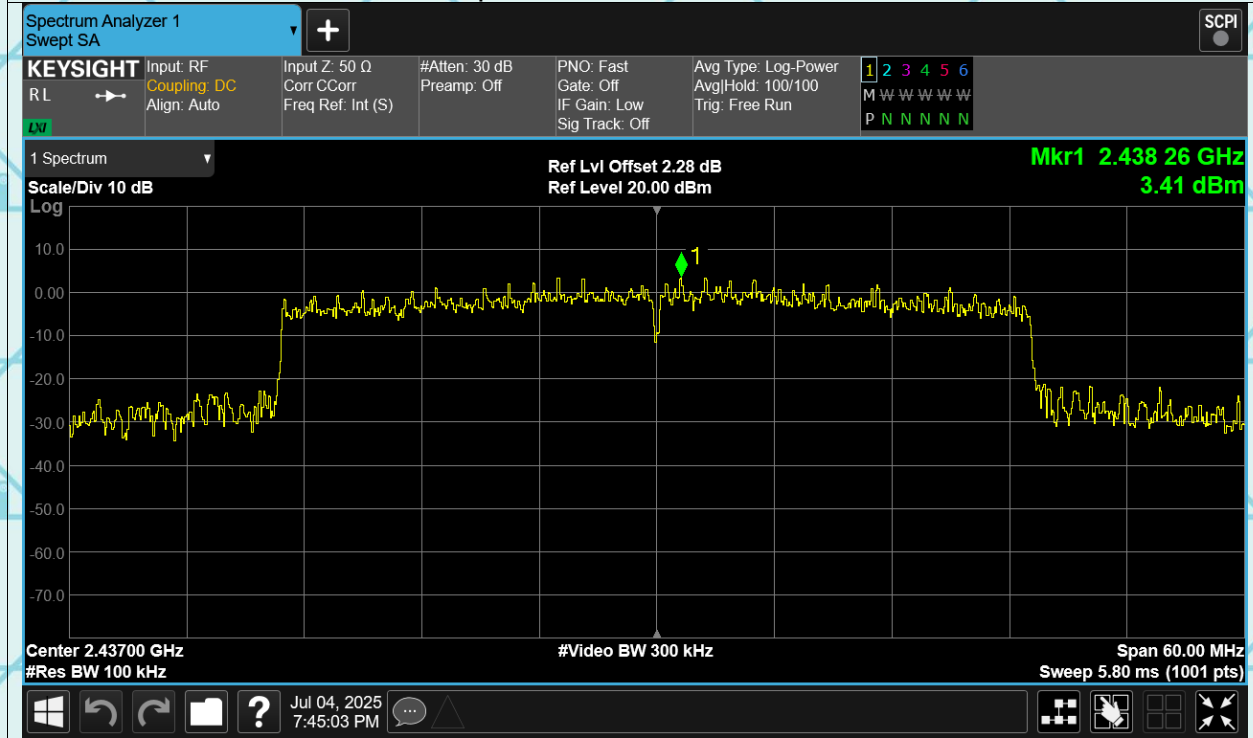


Tx. Spurious ax40 2437MHz Emission

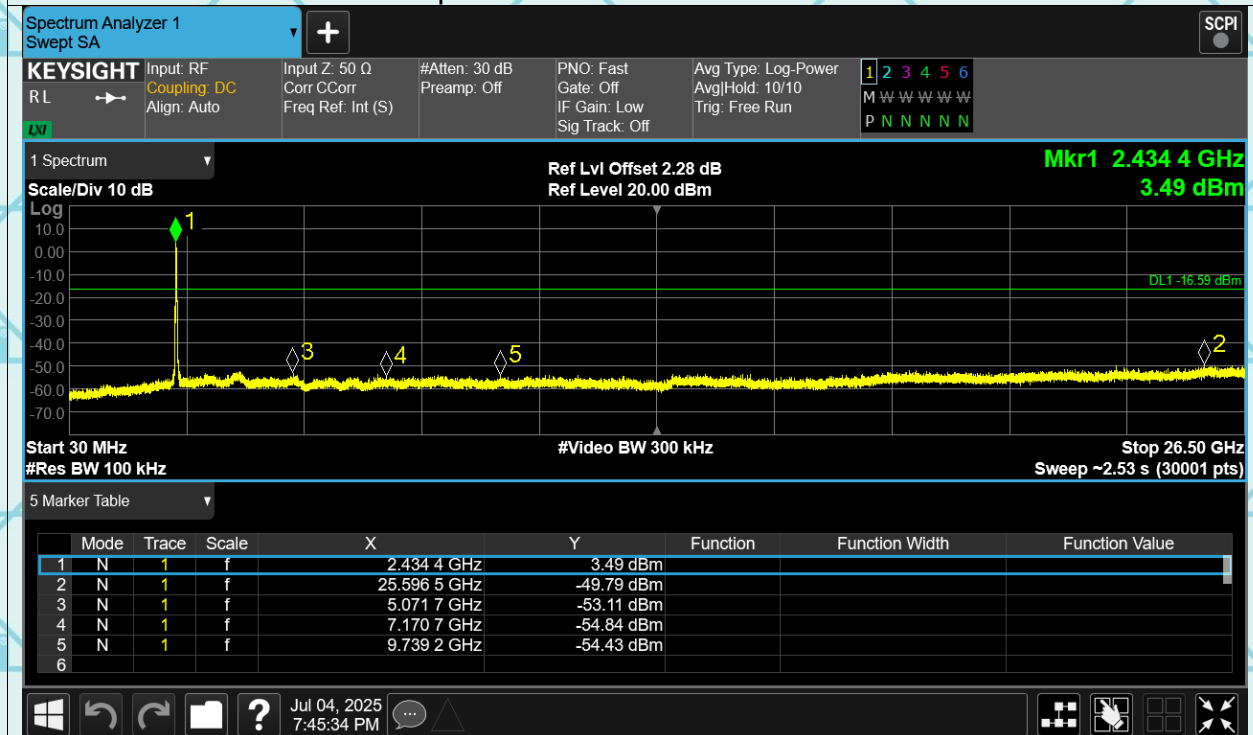

Tx. Spurious ax40 2452MHz Ref

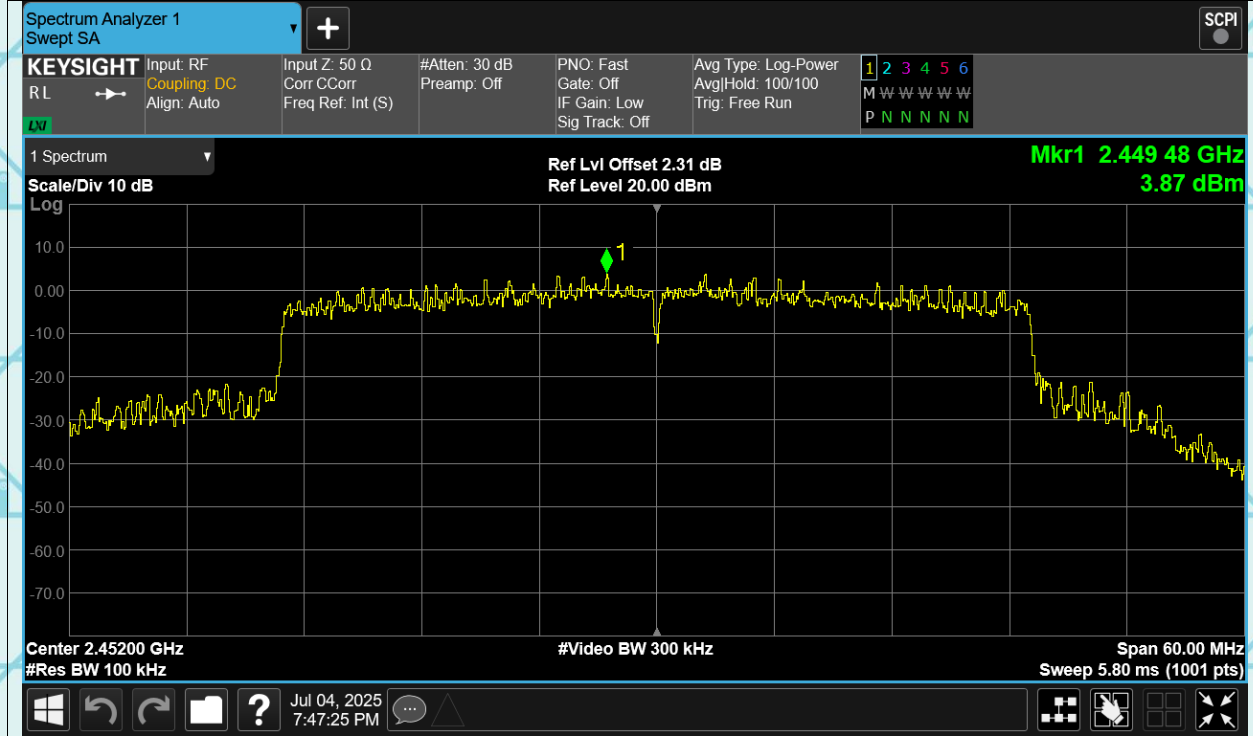



Tx. Spurious ax40 2452MHz Emission

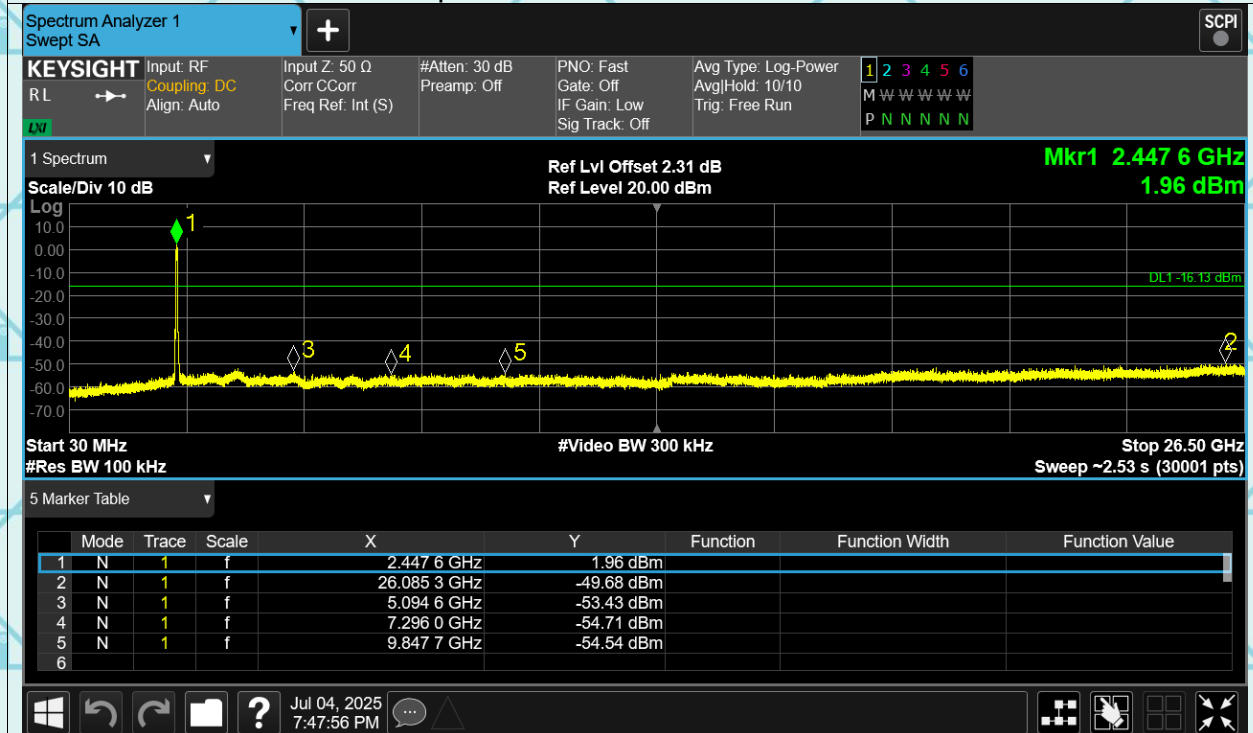


6.5. Radiated Spurious Emission Measurement

6.5.1. Test Specification

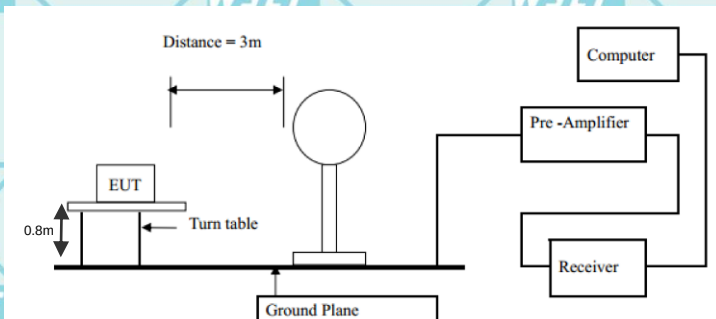Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10: 2014				
Frequency Range:	9 kHz to 25 GHz				
Measurement Distance:	3 m				
Antenna Polarization:	Horizontal & Vertical				
Operation mode:	Transmitting mode with modulation				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	Frequency		Field Strength (microvolts/meter)		Measurement Distance (meters)
	0.009-0.490		2400/F(KHz)		300
	0.490-1.705		24000/F(KHz)		30
	1.705-30		30		30
	30-88		100		3
	88-216		150		3
	216-960		200		3
	Above 960		500		3
	Frequency		Field Strength (microvolts/meter)		Measurement Distance (meters)
	Above 1GHz		500		3
		5000		3	
Test setup:	For radiated emissions below 30MHz				
					
	30MHz to 1GHz				

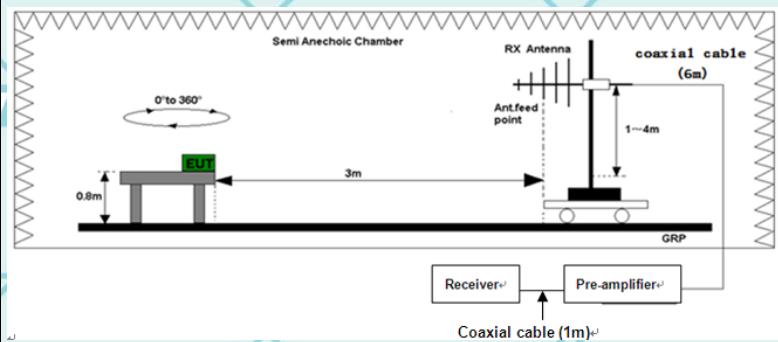

Above 1GHz

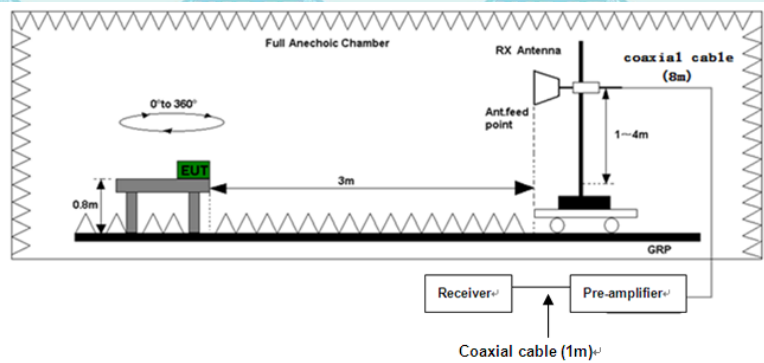

Test Procedure:

1. For the radiated emission test below 1GHz:
The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.
For the radiated emission test above 1GHz:
Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

	3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level 4. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported. 5. Use the following spectrum analyzer settings: (1) Span shall wide enough to fully capture the emission being measured; (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold; (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement. For average measurement: VBW = 10 Hz, when duty cycle is no less than 98 percent. VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Test results:	PASS

Note 1: The symbol of "--" in the table which means not application.

Note 2: For the test data above 1 GHz, According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note 4: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and normal link mode is worst.

6.5.2. Test Data(worst)

Please refer to following diagram for individual
Below 1GHz

Horizontal:




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		47.4600	37.59	-7.67	29.92	40.00	-10.08	QP
2		132.8200	40.63	-7.62	33.01	43.50	-10.49	QP
3		334.5799	34.60	-5.40	29.20	46.00	-16.80	QP
4		607.1500	26.30	1.50	27.80	46.00	-18.20	QP
5	*	800.1800	32.28	4.93	37.21	46.00	-8.79	QP
6		926.2800	25.75	6.91	32.66	46.00	-13.34	QP

Report No.: WSCT-ANAB-R&E250700063A-Wi-Fi1
Vertical:

Issued: 29 August 2025

Revised: None

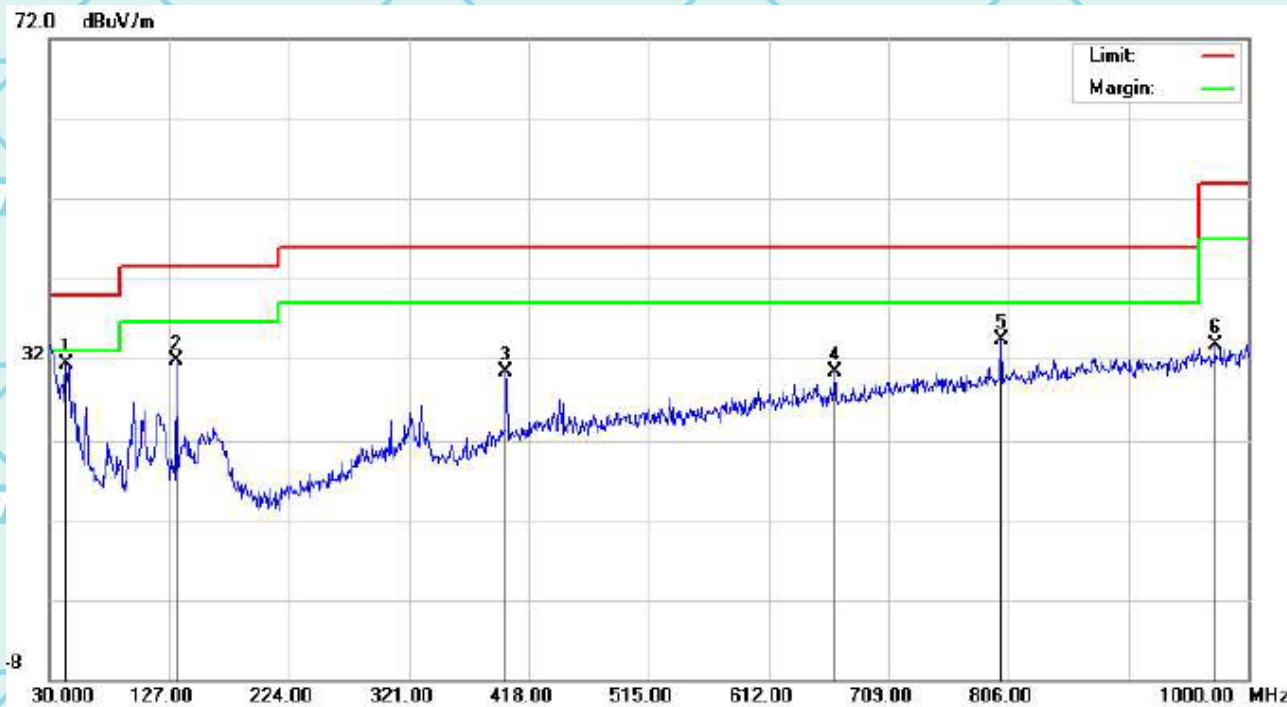

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	43.5800	51.79	-20.52	31.27	40.00	-8.73	QP
2		132.8200	51.68	-20.04	31.64	43.50	-11.86	QP
3		399.5700	49.15	-18.77	30.38	46.00	-15.62	QP
4		665.3500	47.73	-17.38	30.35	46.00	-15.65	QP
5		800.1800	50.97	-16.67	34.30	46.00	-11.70	QP
6		972.8400	49.07	-15.46	33.61	54.00	-20.39	QP

Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss - Amplifier factor.

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) – Limits (dBuV)

Report No.: WSCT-ANAB-R&E250700063A-Wi-Fi1

Issued: 29 August 2025

Revised: None

Above 1GHz

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 18G is noise only, do not show on the report.

Note 3: Report and only recorded the worst-case scenario 802.11b.

1 GHz to 18 GHz, ANT H 802.11b Low Channel


Horizontal:



Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1384.3750	39.12	25.05	14.07	74	-34.88	7	Horizontal	PK	Pass
1	1384.3750	29.94	25.05	4.89	54	-24.06	7	Horizontal	AV	Pass
2	2448.1250	45.76	27.42	18.34	74	-28.24	360.1	Horizontal	PK	Pass
2	2448.1250	37.75	27.42	10.33	54	-16.25	360.1	Horizontal	AV	Pass
3	5742.5000	59.6	32.39	27.21	74	-14.4	56.6	Horizontal	PK	Pass
3	5742.5000	47.98	32.39	15.59	54	-6.02	56.6	Horizontal	AV	Pass
4	7222.5000	42.41	6.97	35.44	74	-31.59	77.5	Horizontal	PK	Pass
4	7222.5000	33.29	6.97	26.32	54	-20.71	77.5	Horizontal	AV	Pass
5	11001.0000	45.47	15.62	29.85	74	-28.53	112.2	Horizontal	PK	Pass
5	11001.0000	38.81	15.62	23.19	54	-15.19	112.2	Horizontal	AV	Pass
6	16120.5000	49.13	18.65	30.48	74	-24.87	3.7	Horizontal	PK	Pass
6	16120.5000	41.36	18.65	22.71	54	-12.64	3.7	Horizontal	AV	Pass

Vertical :

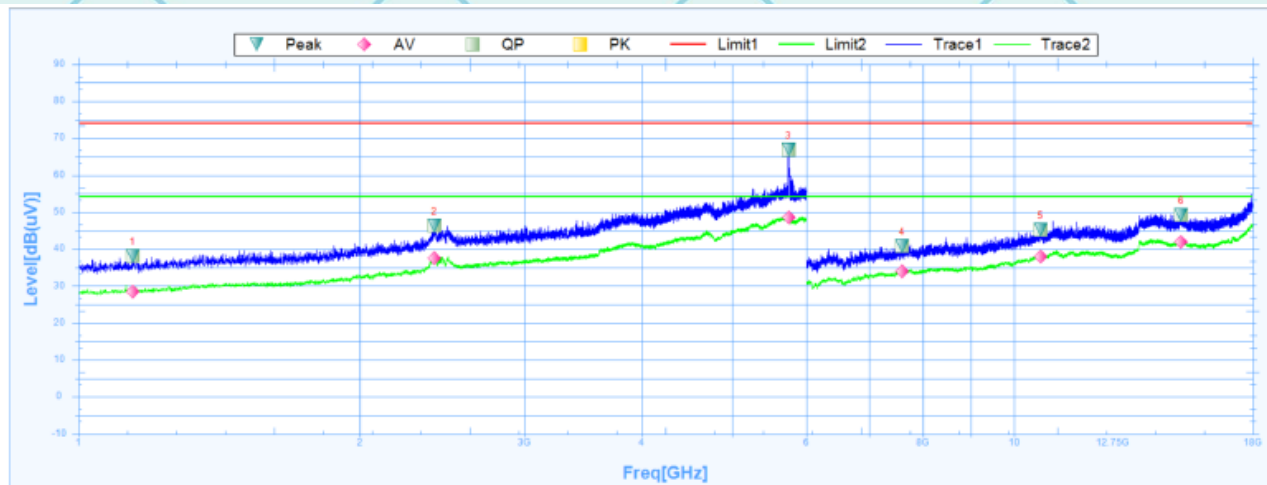

Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1142.5000	38.06	24.37	13.69	74	-35.94	181	Vertical	PK	Pass
1	1142.5000	28.54	24.37	4.17	54	-25.46	181	Vertical	AV	Pass
2	2401.8750	46.32	27.27	19.05	74	-27.68	110.5	Vertical	PK	Pass
2	2401.8750	37.61	27.27	10.34	54	-16.39	110.5	Vertical	AV	Pass
3	5742.5000	66.94	32.39	34.55	74	-7.06	360	Vertical	PK	Pass
3	5742.5000	48.61	32.39	16.22	54	-5.39	360	Vertical	AV	Pass
4	7591.5000	40.73	7.89	32.84	74	-33.27	358.2	Vertical	PK	Pass
4	7591.5000	34.01	7.89	26.12	54	-19.99	358.2	Vertical	AV	Pass
5	10672.5000	45.31	14.55	30.76	74	-28.69	359.6	Vertical	PK	Pass
5	10672.5000	37.85	14.55	23.3	54	-16.15	359.6	Vertical	AV	Pass
6	15094.5000	49.2	19.58	29.62	74	-24.8	228.1	Vertical	PK	Pass
6	15094.5000	41.97	19.58	22.39	54	-12.03	228.1	Vertical	AV	Pass


Report No.: WSCT-ANAB-R&E250700063A-Wi-Fi1

Issued: 29 August 2025

Revised: None

1 GHz to 18 GHz, ANT H 802.11b Middle Channel

Horizontal:

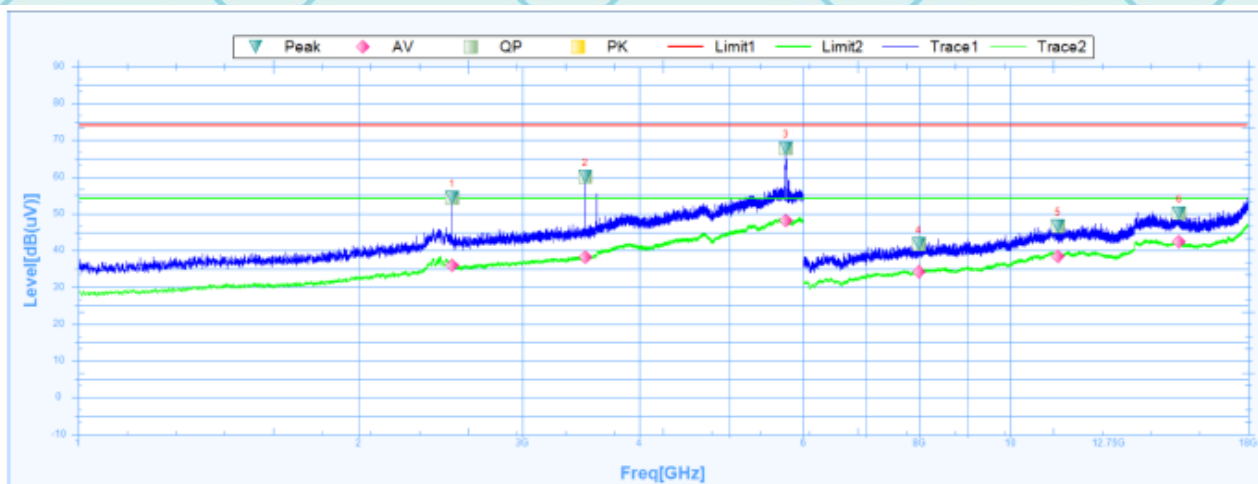

Suspected Data List


NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2520.0000	54.24	27.62	26.62	74	-19.76	-0.1	Horizontal	PK	Pass
1	2520.0000	35.93	27.62	8.31	54	-18.07	-0.1	Horizontal	AV	Pass
2	3501.2500	60.07	28.5	31.57	74	-13.93	00	Horizontal	PK	Pass
2	3501.2500	38.12	28.5	9.62	54	-15.88	00	Horizontal	AV	Pass
3	5751.2500	67.77	32.4	35.37	74	-8.23	358.6	Horizontal	PK	Pass
3	5751.2500	48.22	32.4	15.82	54	-5.78	358.6	Horizontal	AV	Pass
4	7977.0000	41.85	8.22	33.43	74	-32.35	360.2	Horizontal	PK	Pass
4	7977.0000	34.21	8.22	25.99	54	-19.79	360.2	Horizontal	AV	Pass
5	11253.0000	46.51	15.66	30.85	74	-27.49	249.2	Horizontal	PK	Pass
5	11253.0000	38.28	15.66	22.62	54	-15.72	249.2	Horizontal	AV	Pass
6	15184.5000	50.04	19.27	30.77	74	-23.96	360.2	Horizontal	PK	Pass
6	15184.5000	42.36	19.27	23.09	54	-11.64	360.2	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E250700063A-Wi-Fi1

Issued: 29 August 2025

Revised: None

Vertical :

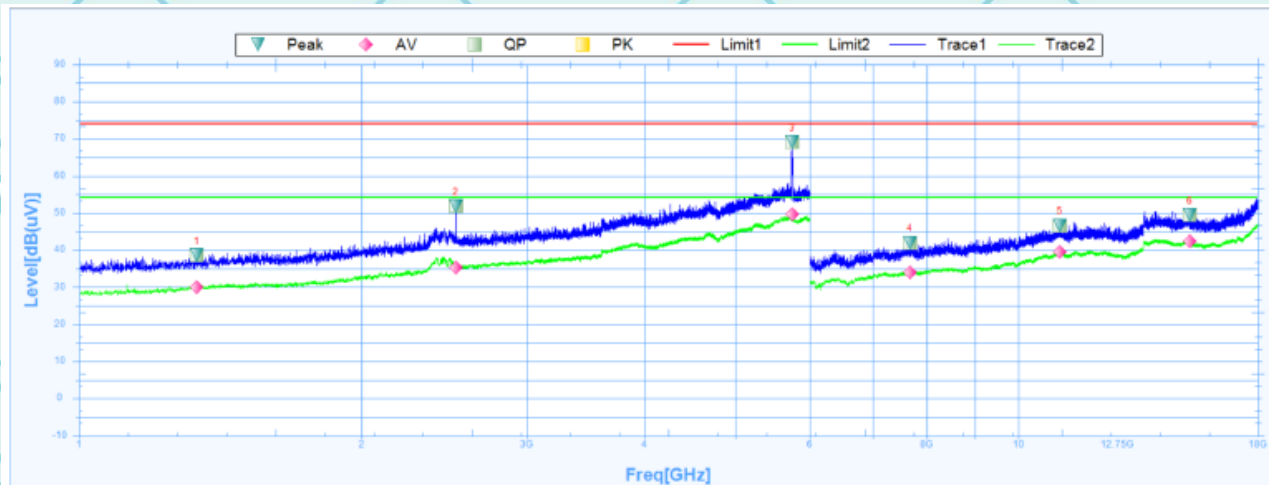

Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1335.0000	38.59	24.87	13.72	74	-35.41	2.5	Vertical	PK	Pass
1	1335.0000	29.96	24.87	5.09	54	-24.04	2.5	Vertical	AV	Pass
2	2518.7500	51.78	27.62	24.16	74	-22.22	91.8	Vertical	PK	Pass
2	2518.7500	35.34	27.62	7.72	54	-18.66	91.8	Vertical	AV	Pass
3	5748.7500	69.13	32.4	36.73	74	-4.87	152.7	Vertical	PK	Pass
3	5748.7500	49.73	32.4	17.33	54	-4.27	152.7	Vertical	AV	Pass
4	7663.5000	42.02	7.96	34.06	74	-31.98	360.1	Vertical	PK	Pass
4	7663.5000	34.07	7.96	26.11	54	-19.93	360.1	Vertical	AV	Pass
5	11073.0000	46.67	15.85	30.82	74	-27.33	0.6	Vertical	PK	Pass
5	11073.0000	39.41	15.85	23.56	54	-14.59	0.6	Vertical	AV	Pass
6	15225.0000	49.52	18.95	30.57	74	-24.48	110.6	Vertical	PK	Pass
6	15225.0000	42.34	18.95	23.39	54	-11.66	110.6	Vertical	AV	Pass


Report No.: WSCT-ANAB-R&E250700063A-Wi-Fi1

Issued: 29 August 2025

Revised: None

1 GHz to 18 GHz, ANT H 802.11b High Channel


Horizontal:

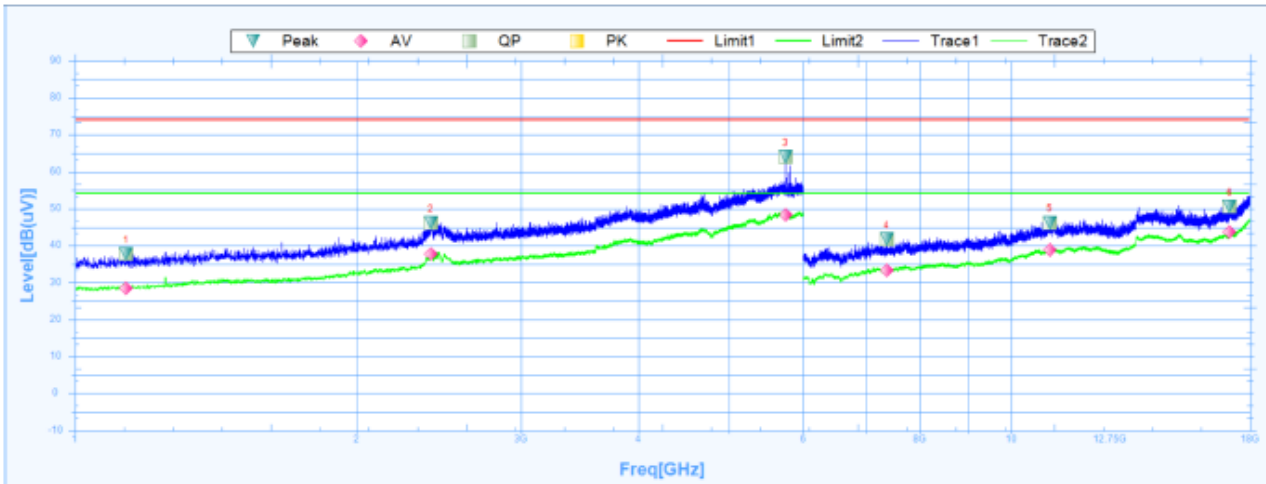

Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1134.3750	37.75	24.37	13.38	74	-36.25	360	Horizontal	PK	Pass
1	1134.3750	28.49	24.37	4.12	54	-25.51	360	Horizontal	AV	Pass
2	2400.6250	46.06	27.26	18.8	74	-27.94	12.2	Horizontal	PK	Pass
2	2400.6250	37.7	27.26	10.44	54	-16.3	12.2	Horizontal	AV	Pass
3	5747.5000	64.01	32.4	31.61	74	-9.99	18.2	Horizontal	PK	Pass
3	5747.5000	48.43	32.4	16.03	54	-5.57	18.2	Horizontal	AV	Pass
4	7365.0000	41.63	7.03	34.6	74	-32.37	330.8	Horizontal	PK	Pass
4	7365.0000	33.32	7.03	26.29	54	-20.68	330.8	Horizontal	AV	Pass
5	10999.5000	46.23	15.61	30.62	74	-27.77	131.2	Horizontal	PK	Pass
5	10999.5000	38.85	15.61	23.24	54	-15.15	131.2	Horizontal	AV	Pass
6	17125.5000	50.57	20	30.57	74	-23.43	359.5	Horizontal	PK	Pass
6	17125.5000	43.72	20	23.72	54	-10.28	359.5	Horizontal	AV	Pass

Vertical :

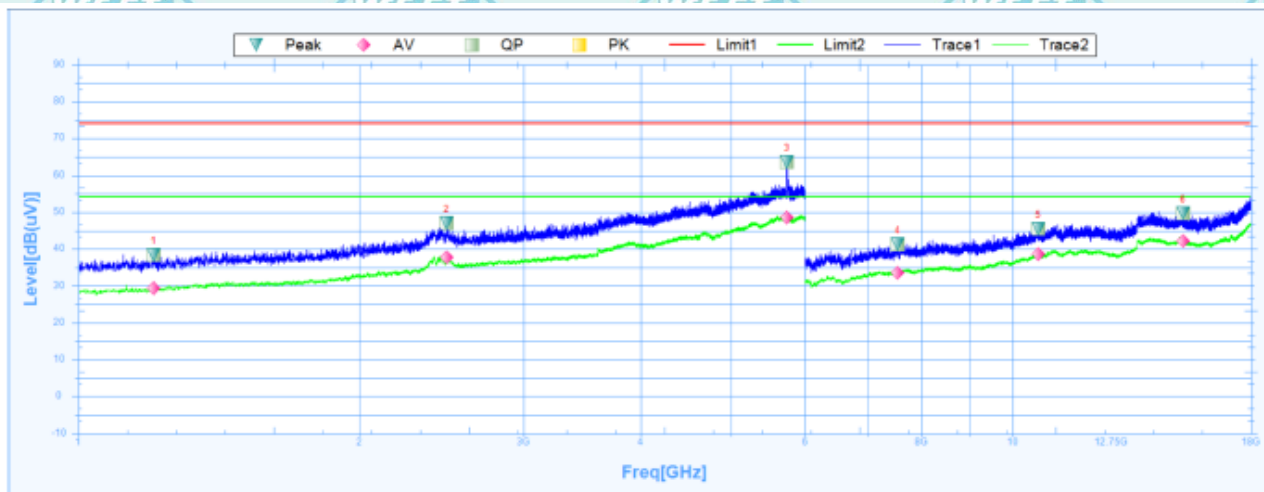

Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1203.7500	38.32	24.41	13.91	74	-35.68	25.6	Vertical	PK	Pass
1	1203.7500	29.26	24.41	4.85	54	-24.74	25.6	Vertical	AV	Pass
2	2480.6250	47.02	27.53	19.49	74	-26.98	8.6	Vertical	PK	Pass
2	2480.6250	37.71	27.53	10.18	54	-16.29	8.6	Vertical	AV	Pass
3	5740.6250	63.47	32.38	31.09	74	-10.53	360.1	Vertical	PK	Pass
3	5740.6250	48.54	32.38	16.16	54	-5.46	360.1	Vertical	AV	Pass
4	7539.0000	41.25	7.68	33.57	74	-32.75	304.6	Vertical	PK	Pass
4	7539.0000	33.61	7.68	25.93	54	-20.39	304.6	Vertical	AV	Pass
5	10662.0000	45.46	14.54	30.92	74	-28.54	359	Vertical	PK	Pass
5	10662.0000	38.52	14.54	23.98	54	-15.48	359	Vertical	AV	Pass
6	15228.0000	49.71	18.93	30.78	74	-24.29	67.8	Vertical	PK	Pass
6	15228.0000	42.21	18.93	23.28	54	-11.79	67.8	Vertical	AV	Pass

Note:

1. All emissions not reported were more than 20dB below the specified limit or in the noise floor.
2. Emission Level= Reading Level+ Probe Factor +Cable Loss.
3. Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Note: Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Attenuation factor + Cable loss

Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard

Margin (dB) = Level (dBμV) – Limits (dBμV)

6.5.3. Restricted Bands Requirements

Test result for 802.11b Mode (the worst case)

Frequency	Reading	Correct Factor	Emission Level	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel							
2390	68.70	-8.73	59.97	74	-14.03	H	PK
2390	48.22	-8.73	39.49	54	-14.51	H	AV
2390	66.12	-8.73	57.39	74	-16.61	V	PK
2390	47.35	-8.73	38.62	54	-15.38	V	AV
High Channel							
2483.5	67.86	-8.17	59.69	74	-14.31	H	PK
2483.5	49.47	-8.17	41.30	54	-12.70	H	AV
2483.5	66.67	-8.17	58.50	74	-15.50	V	PK
2483.5	47.61	-8.17	39.44	54	-14.56	V	AV

Note: Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Attenuation factor + Cable loss

Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard

Margin (dB) = Level (dBμV) – Limits (dBμV)

7. Test Setup Photographs

Please refer to Annex "Set Up Photos-15C" for test setup photos

*******END OF REPORT*******