




Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	5.221202
SAR 1g (W/Kg)	9.582560

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	11.2425	9.4123	8.0345	6.9125	6.3092	3.9460

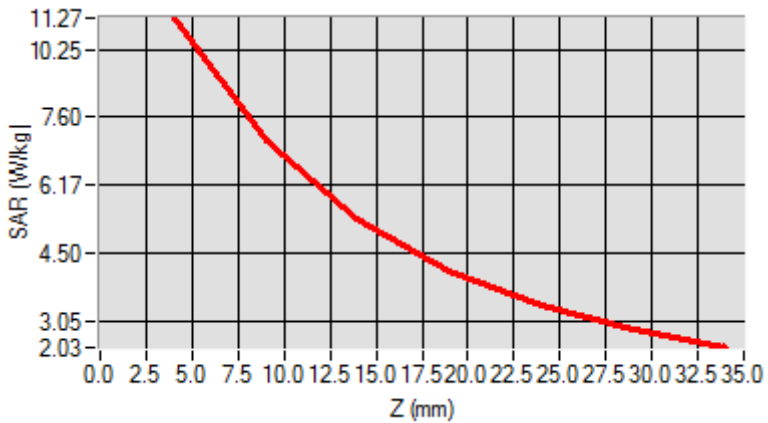

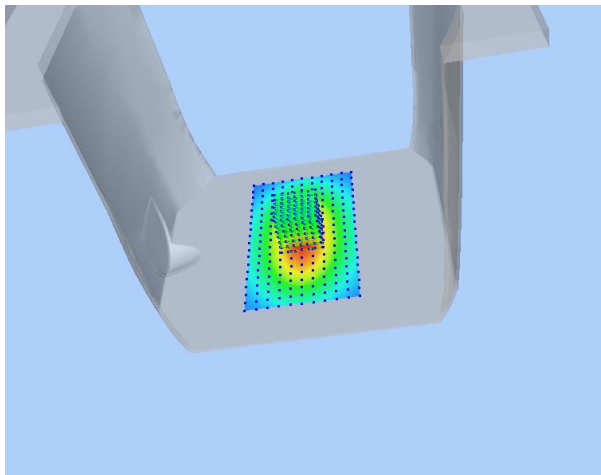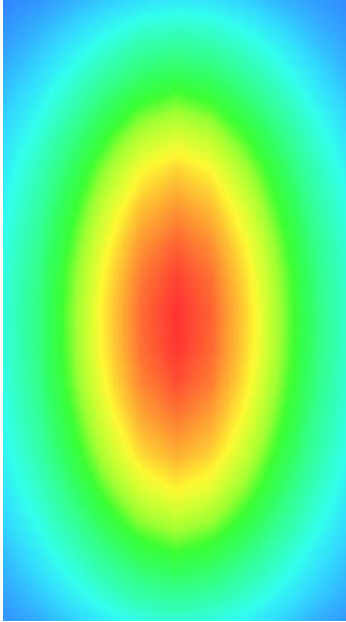3D screen shot	Hot spot position
	

MEASUREMENT 10

For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020/07/03

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	0.541872
Ambient Temperature	21.1
Liquid Temperature	21.3

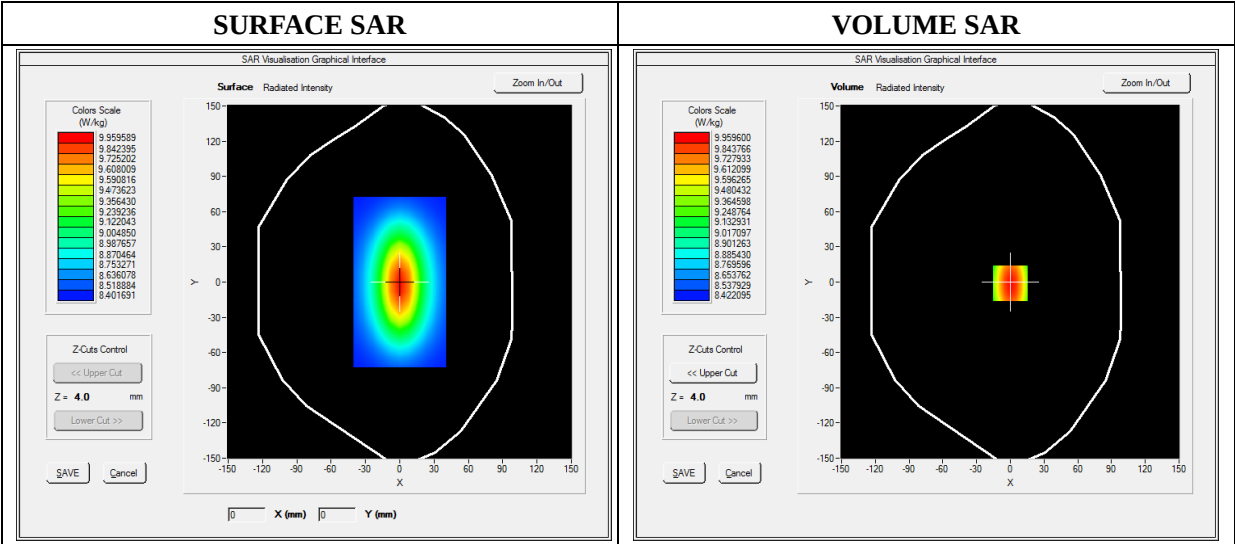




Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	5.134651
SAR 1g (W/Kg)	9.781550

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	10.2031	6.43001	4.9011	4.5325	3.1201	2.5024

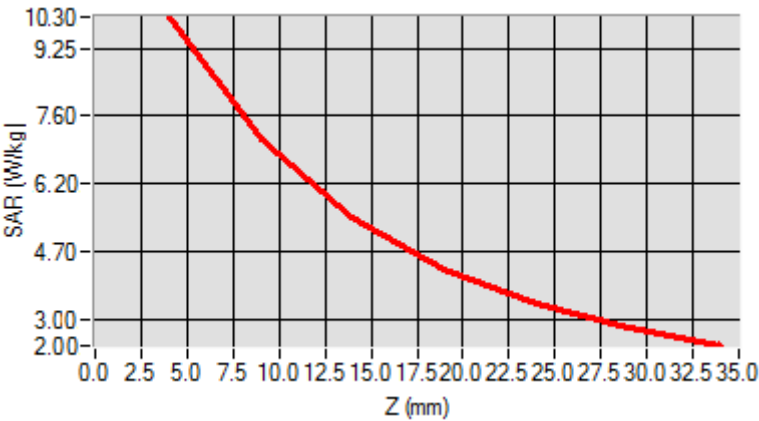

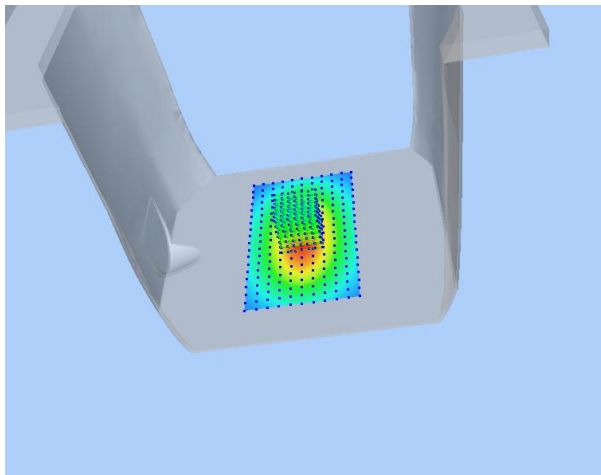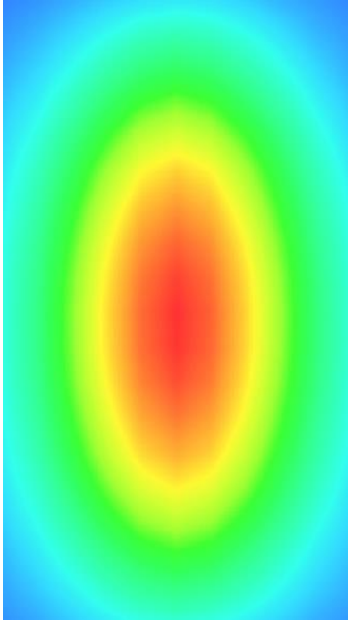3D screen shot	Hot spot position
	

MEASUREMENT 11

For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020/07/03

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2450.000000
Relative Permittivity (real part)	52.010212
Conductivity (S/m)	1.910255
Power Variation (%)	1.369745
Ambient Temperature	21.1
Liquid Temperature	21.2


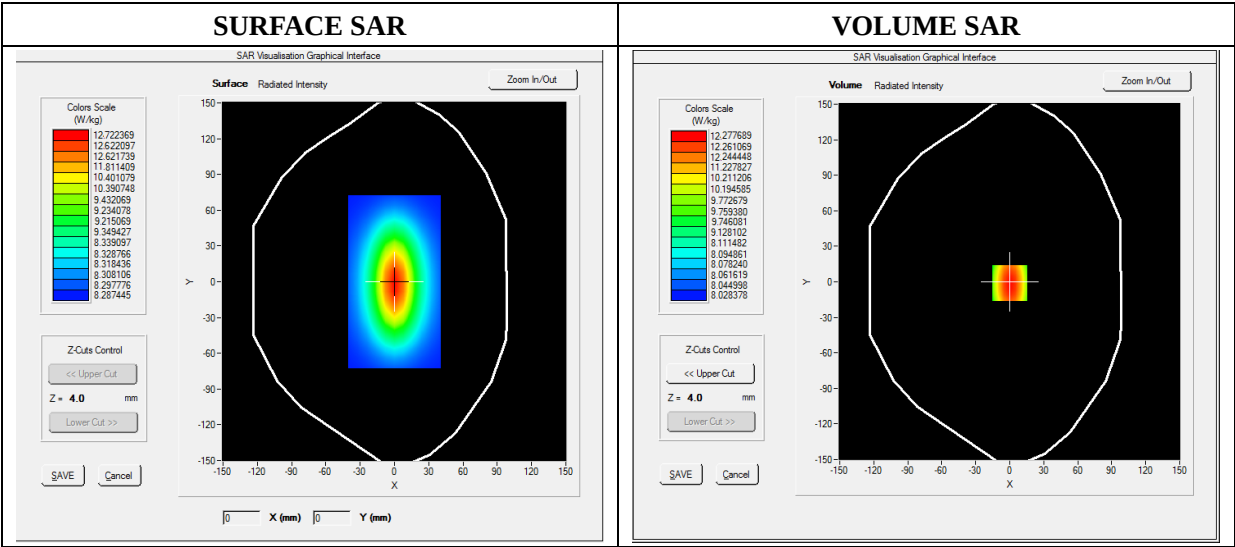


Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	7.119522
SAR 1g (W/Kg)	12.592360

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	13.1911	11.7951	9.2945	8.5400	6.3712	4.6225

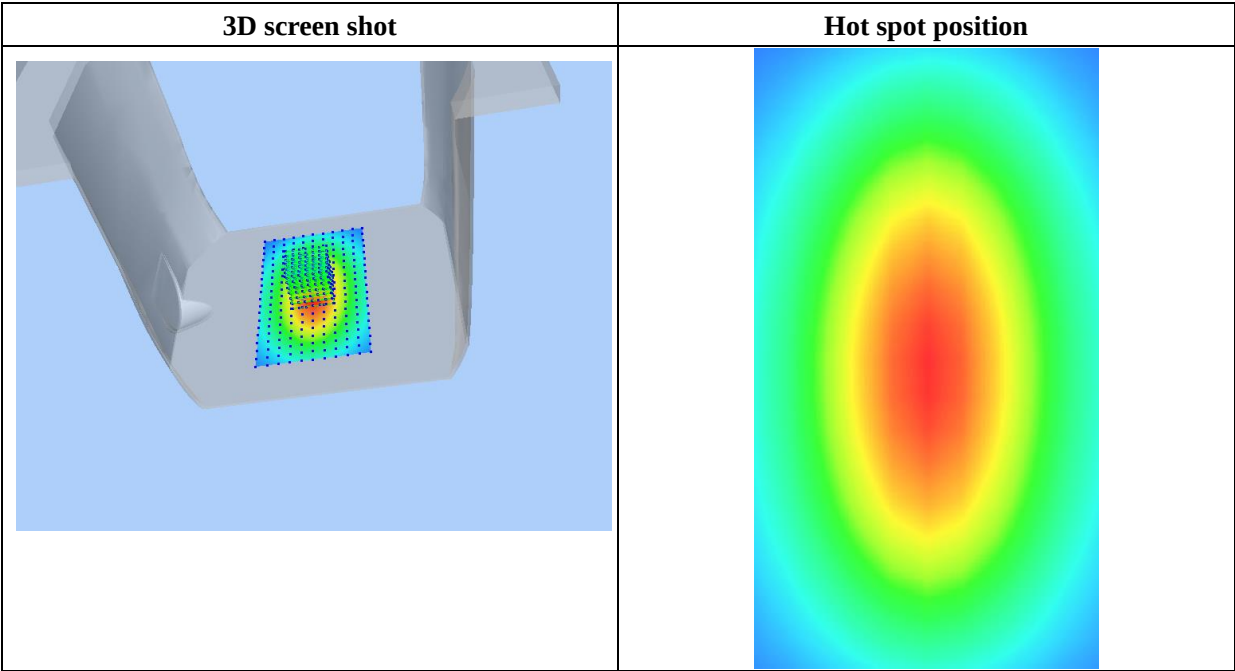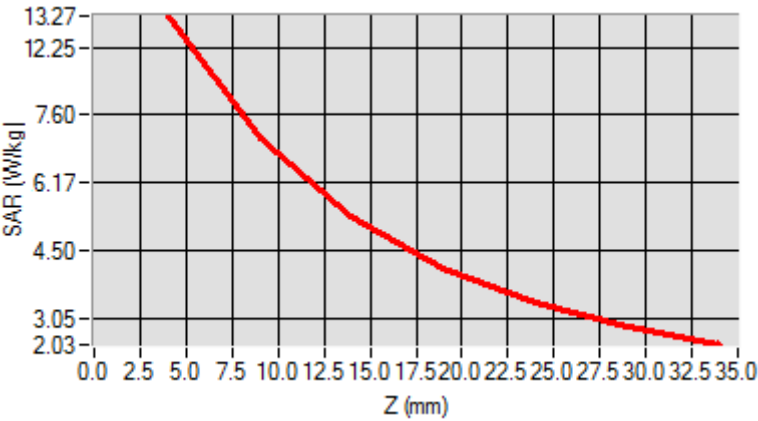

MEASUREMENT 12

For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020/07/03

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Validation plane
Device Position	Dipole
Band	CW2600
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2600.000000
Relative Permittivity (real part)	52.241202
Conductivity (S/m)	2.120943
Power Variation (%)	1.038832
Ambient Temperature	21.1
Liquid Temperature	21.2

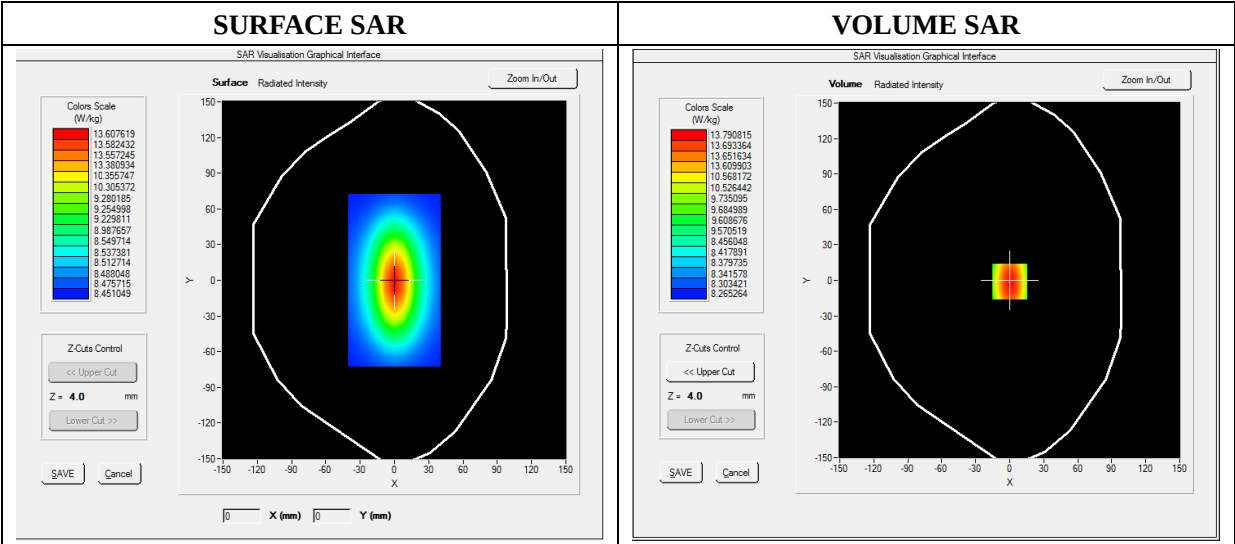




Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	6.083781
SAR 1g (W/Kg)	13.430481

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	13.6473	11.8441	9.3627	8.5782	6.4357	4.6342

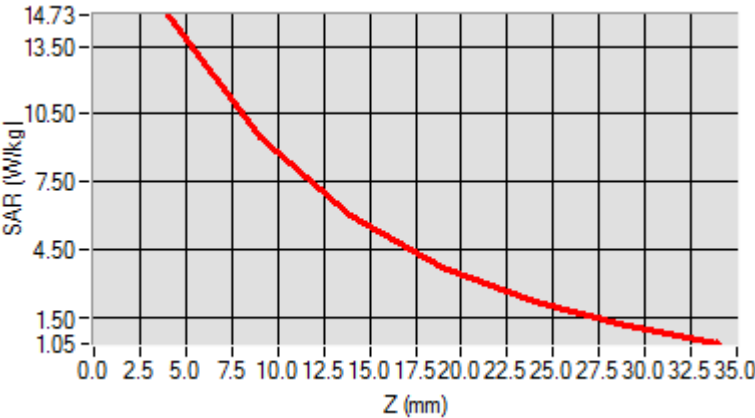

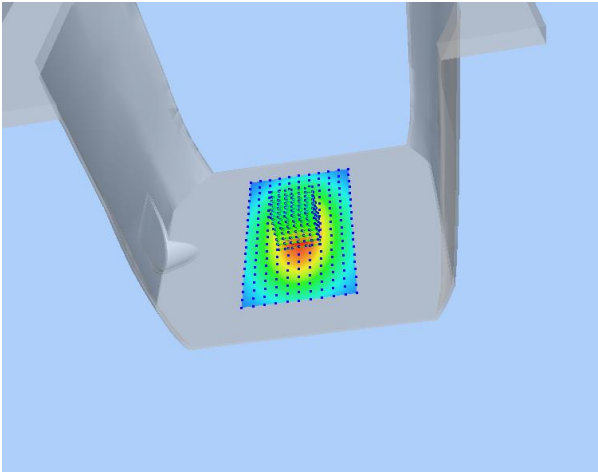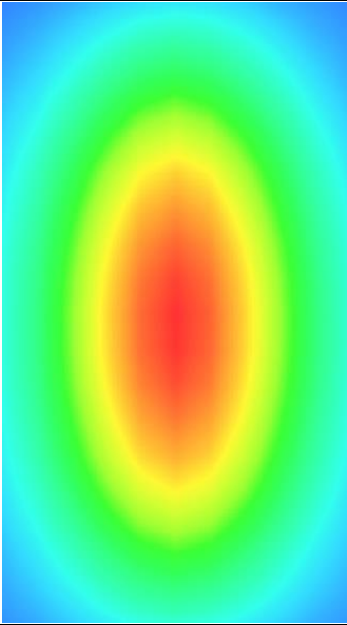3D screen shot	Hot spot position
	

Annex B. Plots of SAR Measurement

<u>TYPE</u>	<u>BAND</u>	<u>PARAMETERS</u>
Phone	GSM850	Measurement 1: Right Head with Cheek device position on Middle Channel in GSM mode
Phone	GSM1900	Measurement 5: Right Head with Cheek device position on Low Channel in GSM mode
Phone	GPRS850_2TX	Measurement 9: Right Head with Cheek device position on High Channel in GPRS mode
Phone	GPRS1900_2TX	Measurement 13: Right Head with Cheek device position on Low Channel in GPRS mode
Phone	WCDMA1900_RMC	Measurement 17: Right Head with Cheek device position on High Channel in WCDMA mode
Phone	WCDMA1700_RMC	Measurement 21: Right Head with Cheek device position on Low Channel in WCDMA mode
Phone	WCDMA850_RMC	Measurement 25: Right Head with Cheek device position on Middle Channel in WCDMA mode
Phone	LTE Band 2_RMC	Measurement 29: Right Head with Cheek device position on Low Channel in LTE mode
Phone	LTE Band 4_RMC	Measurement 37: Right Head with Cheek device position on High Channel in LTE mode
Phone	LTE Band 5_RMC	Measurement 45: Right Head with Cheek device position on Middle Channel in LTE mode
Phone	LTE Band 7_RMC	Measurement 53: Right Head with Cheek device position on Middle Channel in LTE mode
Phone	LTE Band 38_RMC	Measurement 61: Right Head with Cheek device position on Low Channel in LTE mode
Phone	LTE Band 41_RMC	Measurement 69: Right Head with Cheek device position on Low Channel in LTE mode
Phone	WiFi_802.11b	Measurement 79: Left Head with Cheek device position on Middle Channel in 802.11b mode
Phone	GSM850	Measurement 89: Flat Plane with Back device position on Middle Channel in GSM mode
Phone	GSM1900	Measurement 91: Flat Plane with Back device position on Low Channel in GSM mode
Phone	GPRS850_2TX	Measurement 120: Flat Plane with Back device position on High Channel in GPRS mode
Phone	GPRS1900_2TX	Measurement 133: Flat Plane with Back device position on Low Channel in GPRS mode
Phone	WCDMA1900_RMC	Measurement 140: Flat Plane with Back side device

		position on High Channel in WCDMA mode
Phone	WCDMA1700_RMC	<u>Measurement 144:</u> Flat Plane with Top side device position on Low Channel in WCDMA mode
Phone	WCDMA850_RMC	<u>Measurement 145:</u> Flat Plane with Back side device position on Middle Channel in WCDMA mode
Phone	LTE Band 2_RMC	<u>Measurement 152:</u> Flat Plane with Top device position on Low Channel in LTE mode
Phone	LTE Band 4_RMC	<u>Measurement 157:</u> Flat Plane with Back device position on High Channel in LTE mode
Phone	LTE Band 5_RMC	<u>Measurement 165:</u> Flat Plane with Back device position on Middle Channel in LTE mode
Phone	LTE Band 7_RMC	<u>Measurement 173:</u> Flat Plane with Back device position on Middle Channel in LTE mode
Phone	LTE Band 38_RMC	<u>Measurement 181:</u> Flat Plane with Back device position on Low Channel in LTE mode
Phone	LTE Band 41_RMC	<u>Measurement 189:</u> Flat Plane with Back device position on Low Channel in LTE mode
Phone	WiFi_802.11b	<u>Measurement 197:</u> Flat Plane with Back side device position on Middle Channel in 802.11b mode
<i>Remark: SAR plot is showed the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.</i>		

MEASUREMENT 1

Type: Phone measurement (Complete)

Date of measurement: 2020-08-11

Measurement duration: 11 minutes 48 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020/07/03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	GSM850
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

B. SAR Measurement Results

Frequency (MHz)	836.600000
Relative Permittivity (real part)	41.110245
Conductivity (S/m)	0.871245
Power Variation (%)	1.144536
Ambient Temperature	21.1
Liquid Temperature	21.3

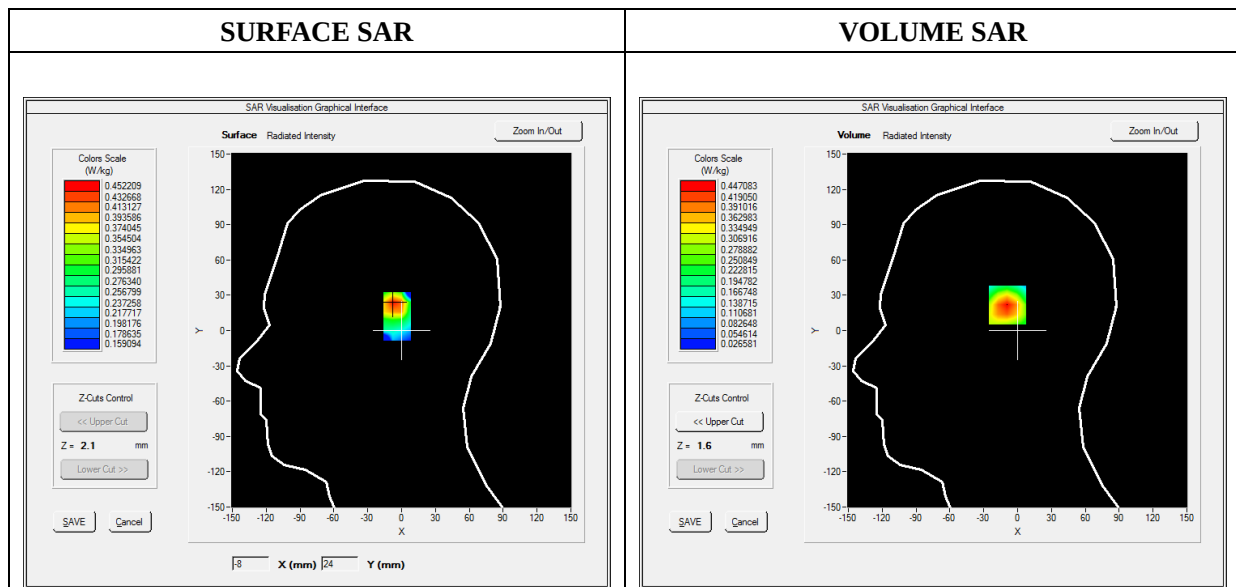




Maximum location: X=-7.00, Y=23.00

SAR Peak: 0.72 W/kg

SAR 10g (W/Kg)	0.254839
SAR 1g (W/Kg)	0.424743

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.7161	0.4471	0.2483	0.1502	0.1075

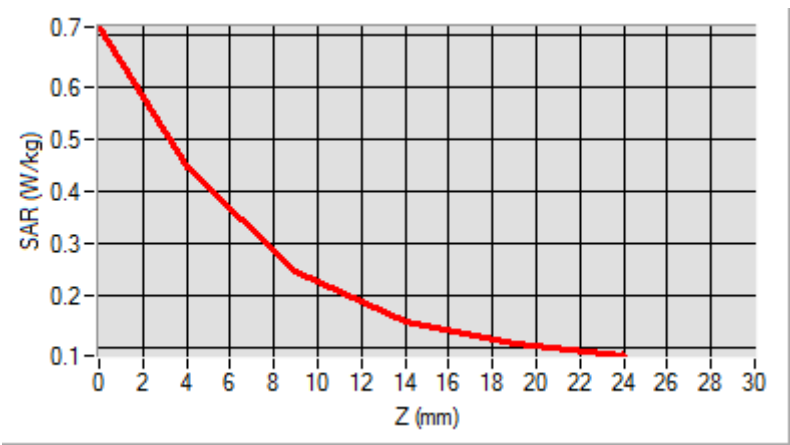

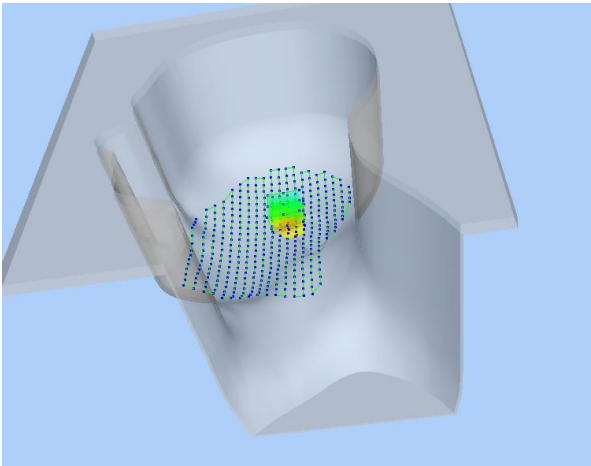3D screen shot	Hot spot position
	

MEASUREMENT 5

Type: Phone measurement (Complete)

Date of measurement: 2020-08-12

Measurement duration: 11 minutes 48 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020/07/03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	GSM1900
Channels	Low
Signal	TDMA (Crest factor: 8.0)

B. SAR Measurement Results



Frequency (MHz)	1850.200000
Relative Permittivity (real part)	38.560124
Conductivity (S/m)	1.380369
Power Variation (%)	1.442440
Ambient Temperature	21.1
Liquid Temperature	21.3

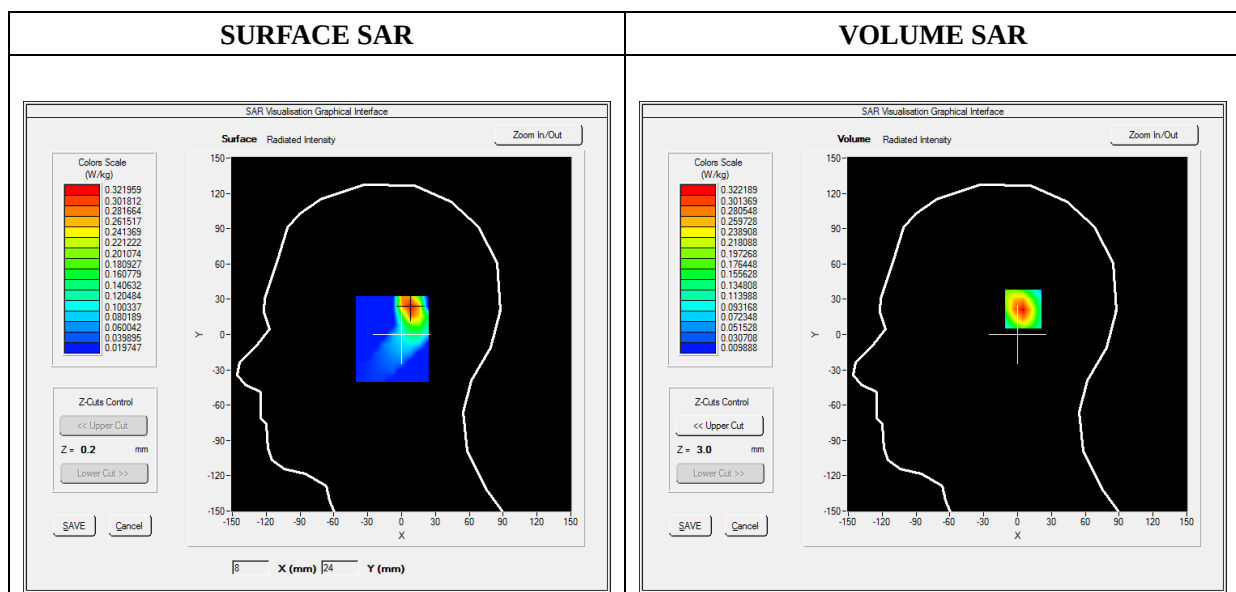

Maximum location: X=9.00, Y=22.00

SAR Peak: 0.57 W/kg

SAR 10g (W/Kg)	0.152256
SAR 1g (W/Kg)	0.303425

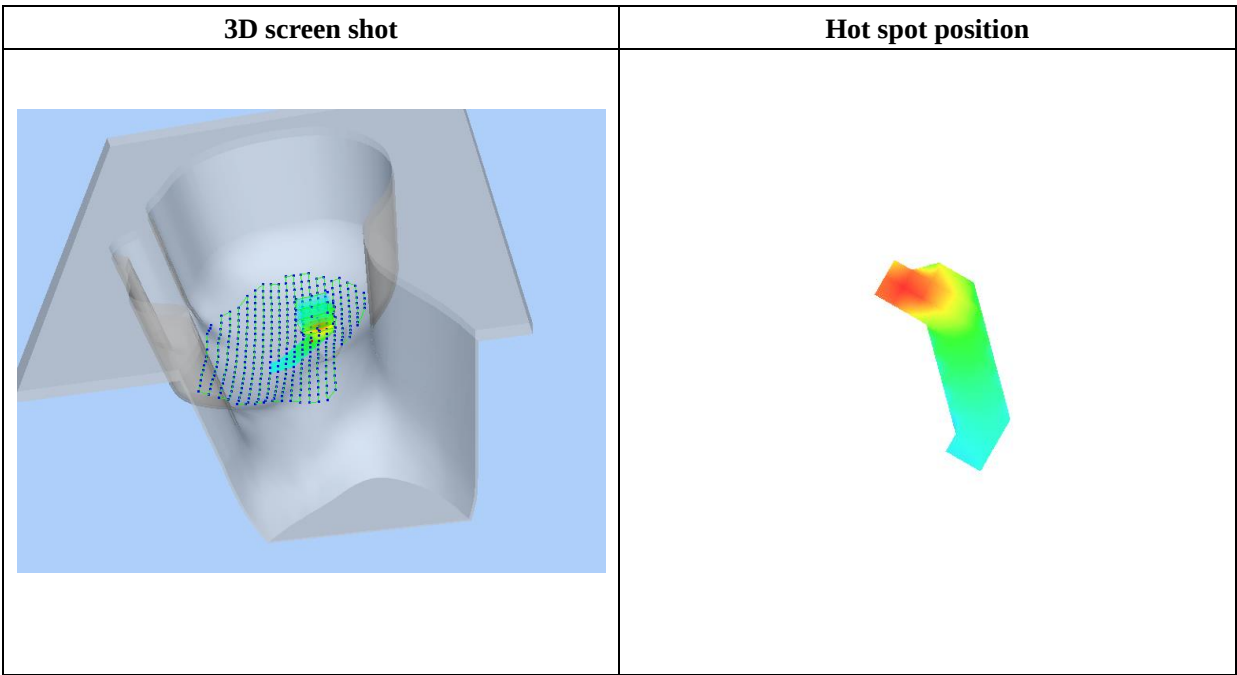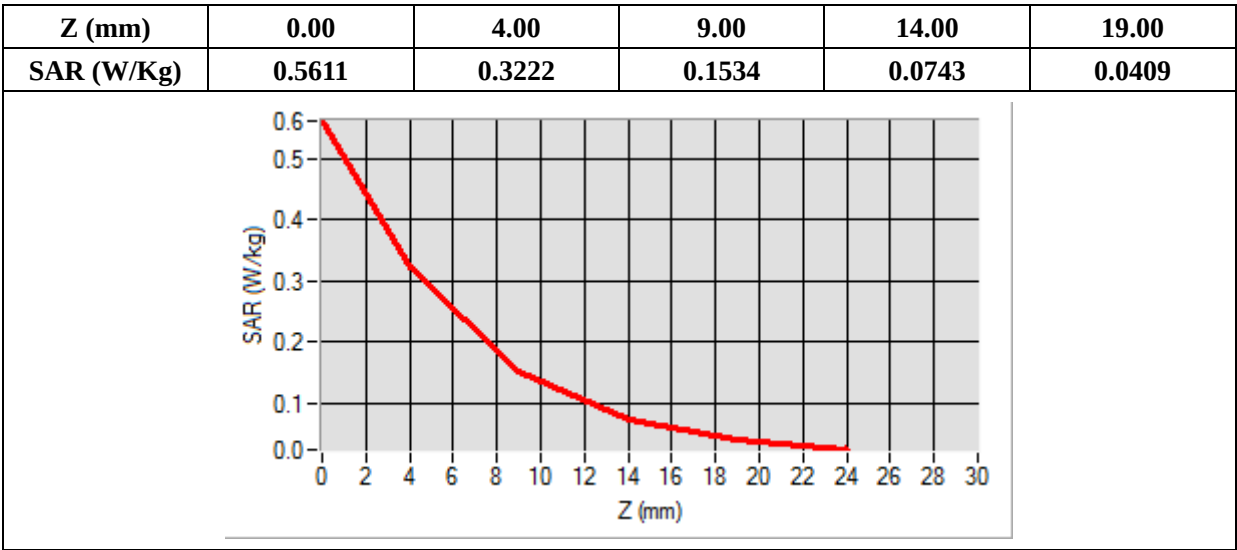

MEASUREMENT 9

Type: Phone measurement (Complete)

Date of measurement: 01/06/2020

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020/07/03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	GPRS850_2TX
Channels	High
Signal	Duty Cycle: 1:4

B. SAR Measurement Results


Frequency (MHz)	848.800000
Relative Permittivity (real part)	41.110245
Conductivity (S/m)	0.871245
Power Variation (%)	1.536272
Ambient Temperature	21.1
Liquid Temperature	21.3


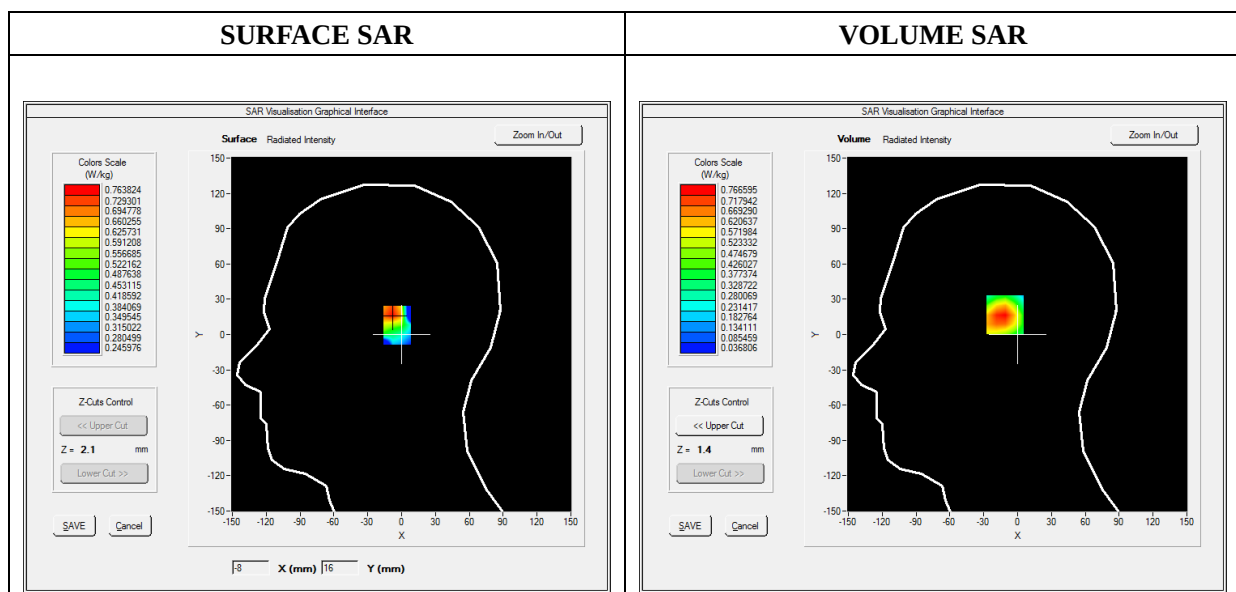


Maximum location: X=-9.00, Y=18.00

SAR Peak: 1.27 W/kg

SAR 10g (W/Kg)	0.423196
SAR 1g (W/Kg)	0.735725

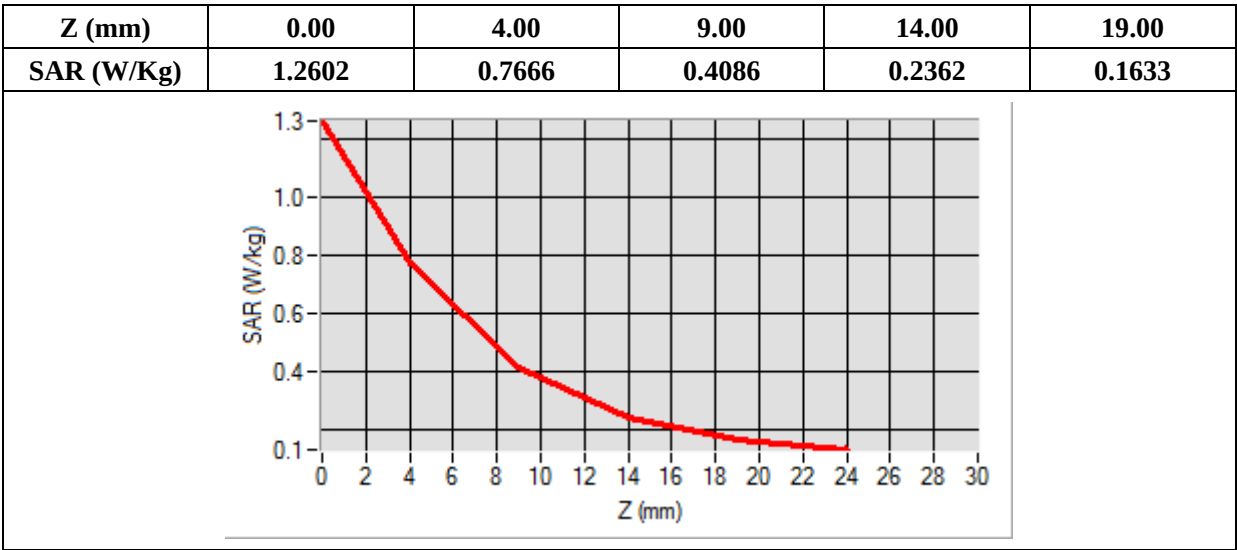

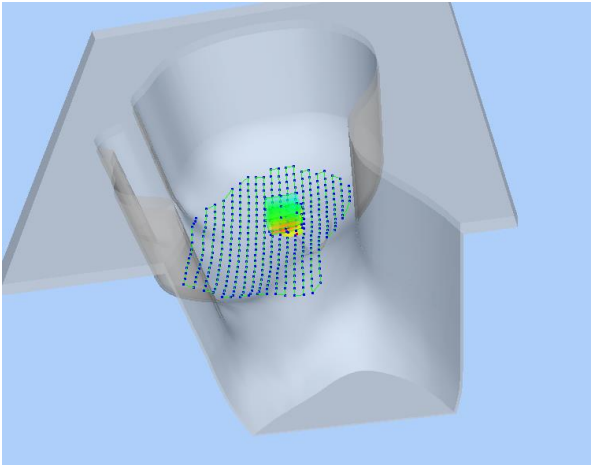3D screen shot	Hot spot position
	

MEASUREMENT 13

Type: Phone measurement (Complete)

Date of measurement: 2020-08-12

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020/07/03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	GPRS1900_2TX
Channels	Low
Signal	Duty Cycle: 1:4

B. SAR Measurement Results



Frequency (MHz)	1850.200000
Relative Permittivity (real part)	38.560124
Conductivity (S/m)	1.380369
Power Variation (%)	1.536272
Ambient Temperature	21.1
Liquid Temperature	21.3

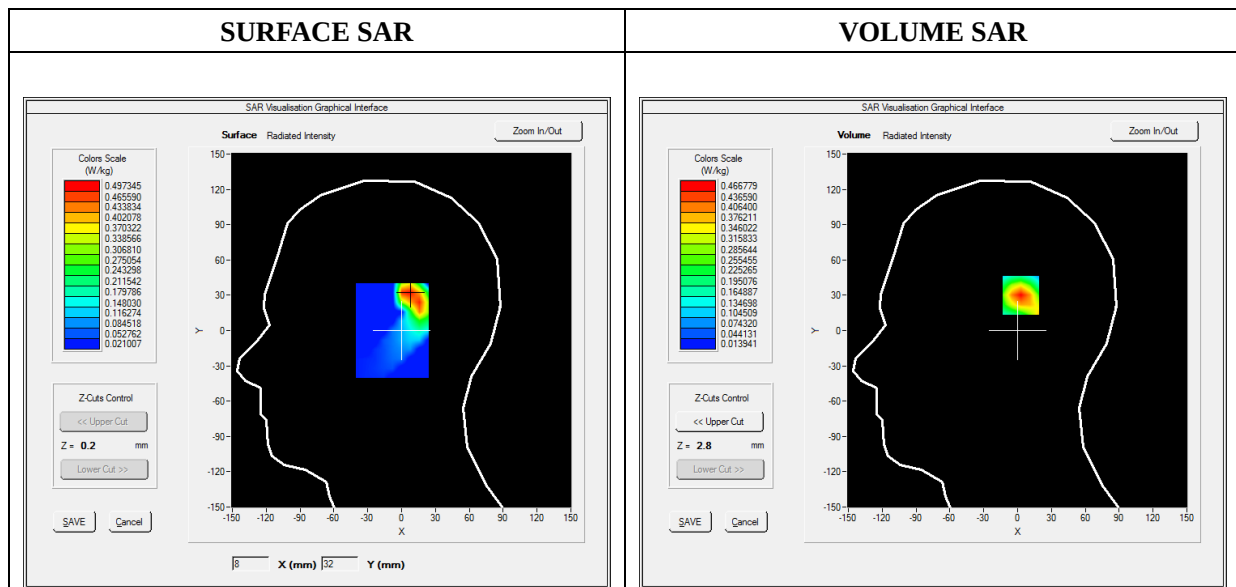

Maximum location: X=6.00, Y=32.00

SAR Peak: 0.83 W/kg

SAR 10g (W/Kg)	0.216060
SAR 1g (W/Kg)	0.435673

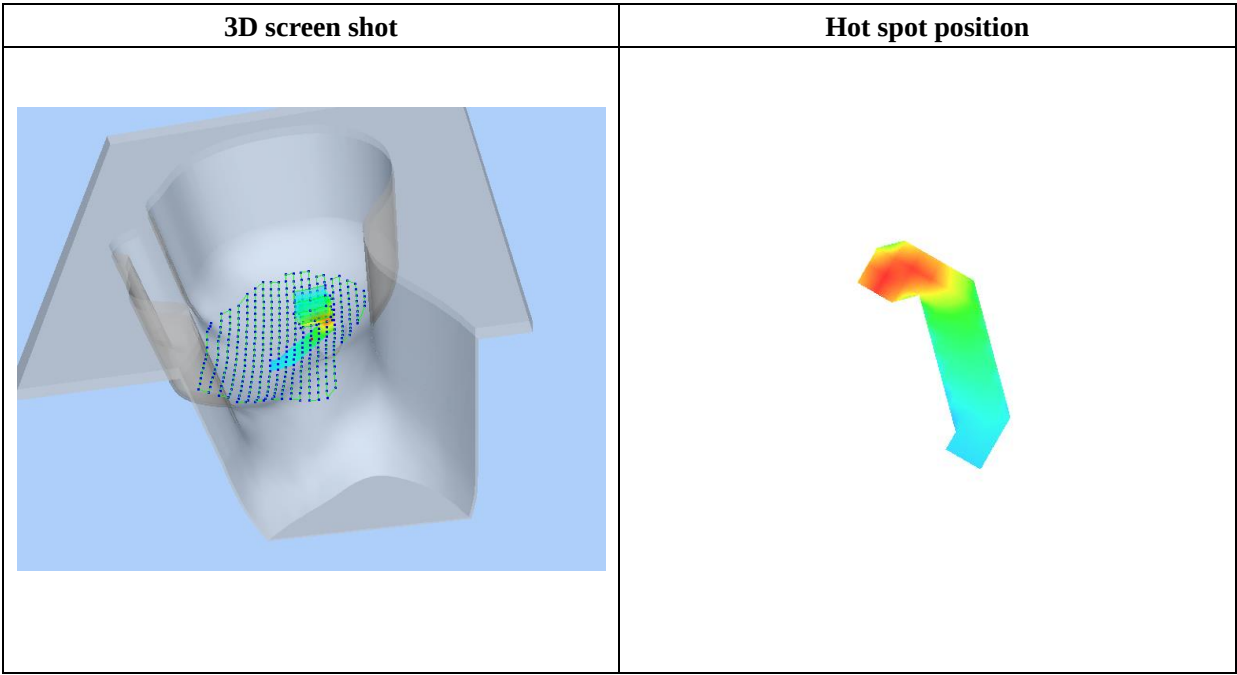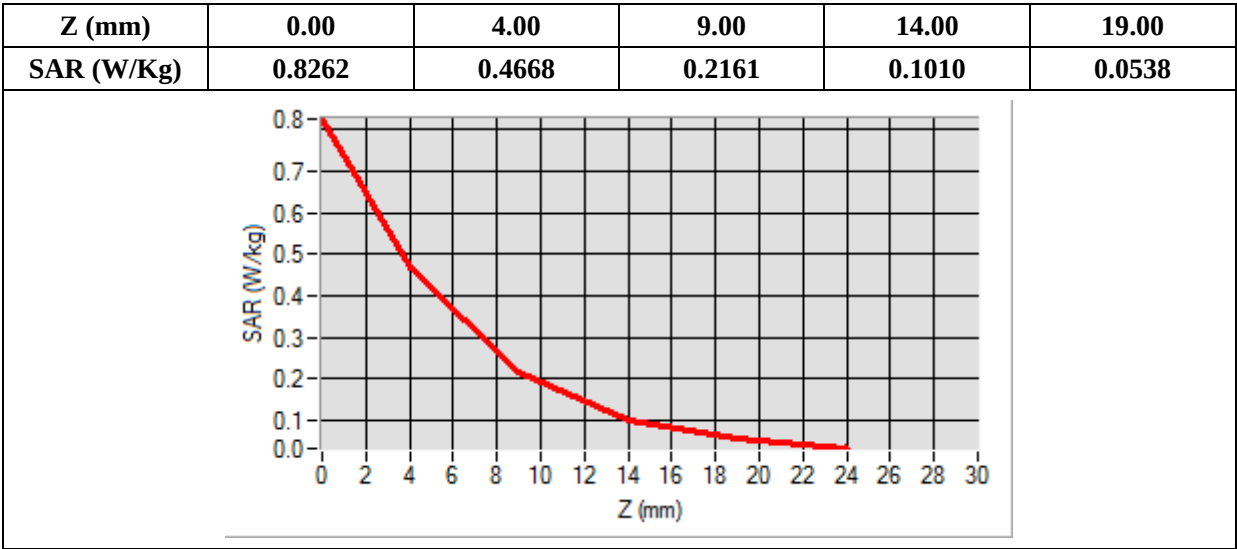

MEASUREMENT 17


Type: Phone measurement (Complete)
Date of measurement: 2020-08-12
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020/07/03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	WCDMA1900_RMC
Channels	High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1907.600000
Relative Permittivity (real part)	38.560124
Conductivity (S/m)	1.380369
Power Variation (%)	1.524540
Ambient Temperature	21.1
Liquid Temperature	21.3

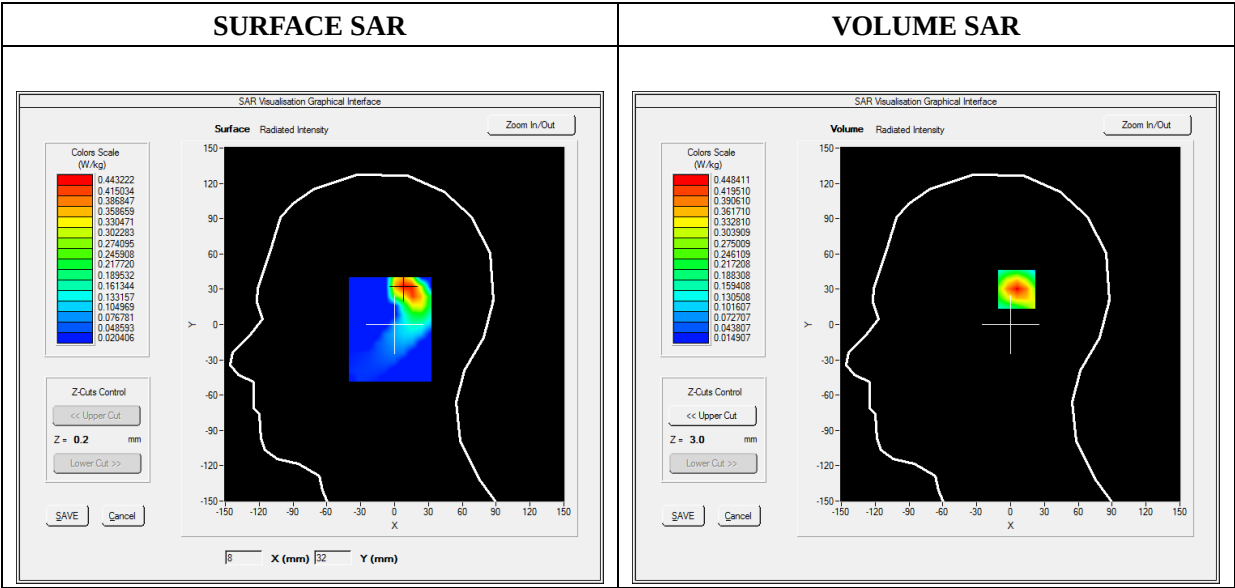




Maximum location: X=9.00, Y=32.00

SAR Peak: 0.77 W/kg

SAR 10g (W/Kg)	0.212232
SAR 1g (W/Kg)	0.417647

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.7676	0.4484	0.2187	0.1078	0.0588

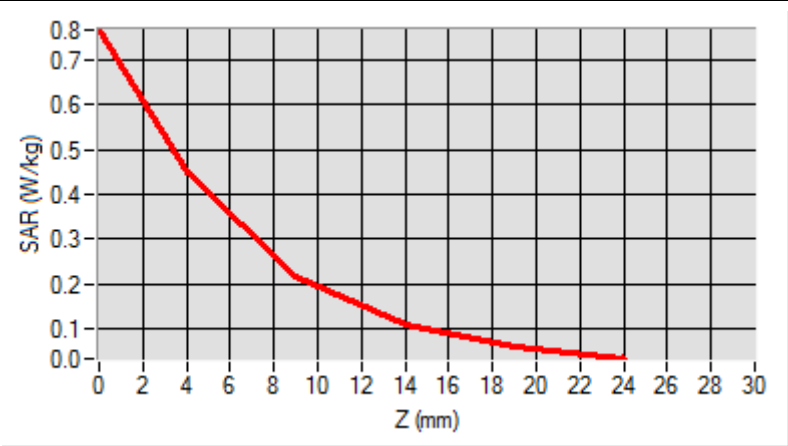

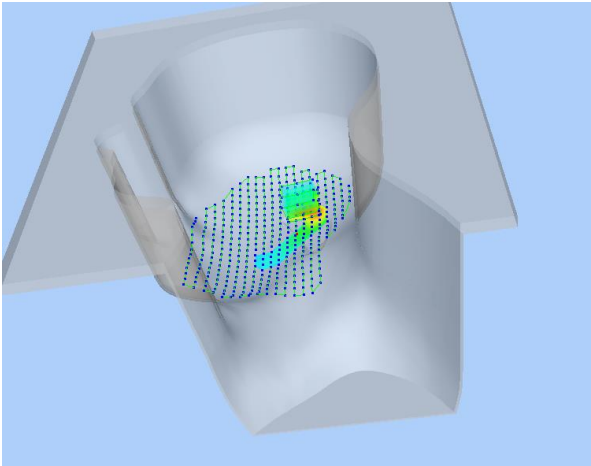3D screen shot	Hot spot position
	

MEASUREMENT 21

Type: Phone measurement (Complete)

Date of measurement: 2020-08-12

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.84; Calibrated: 2020/07/03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WCDMA1700_RMC
Channels	Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	1712.400000
Relative Permittivity (real part)	39.024890
Conductivity (S/m)	1.371250
Power Variation (%)	1.342427
Ambient Temperature	21.1
Liquid Temperature	21.3

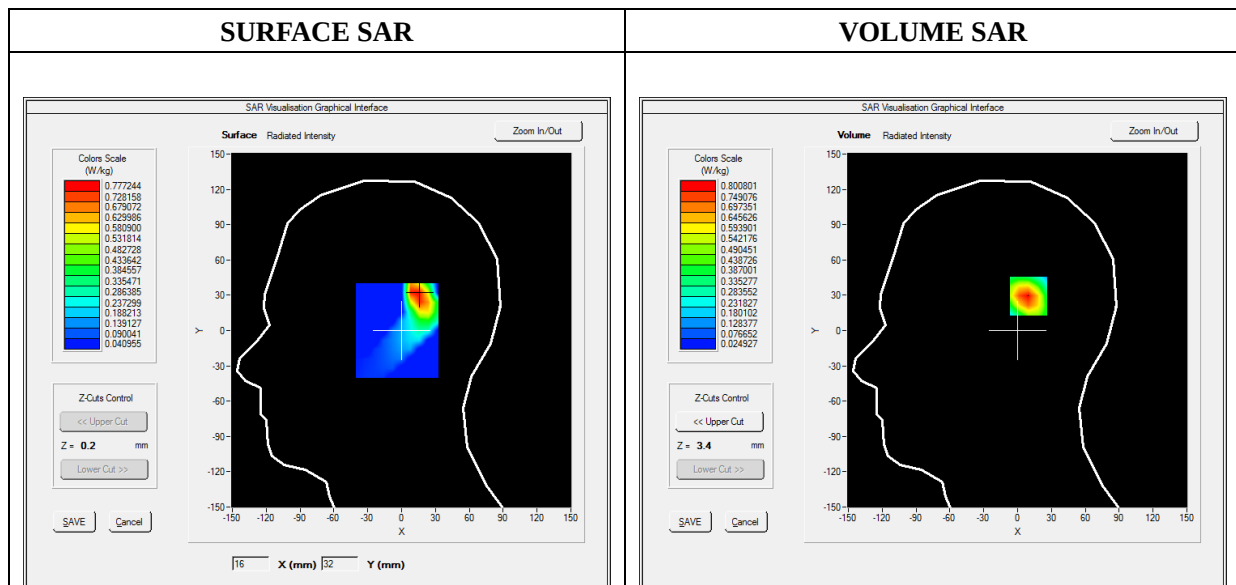

Maximum location: X=14.00, Y=31.00

SAR Peak: 1.38 W/kg

SAR 10g (W/Kg)	0.390677
SAR 1g (W/Kg)	0.756940

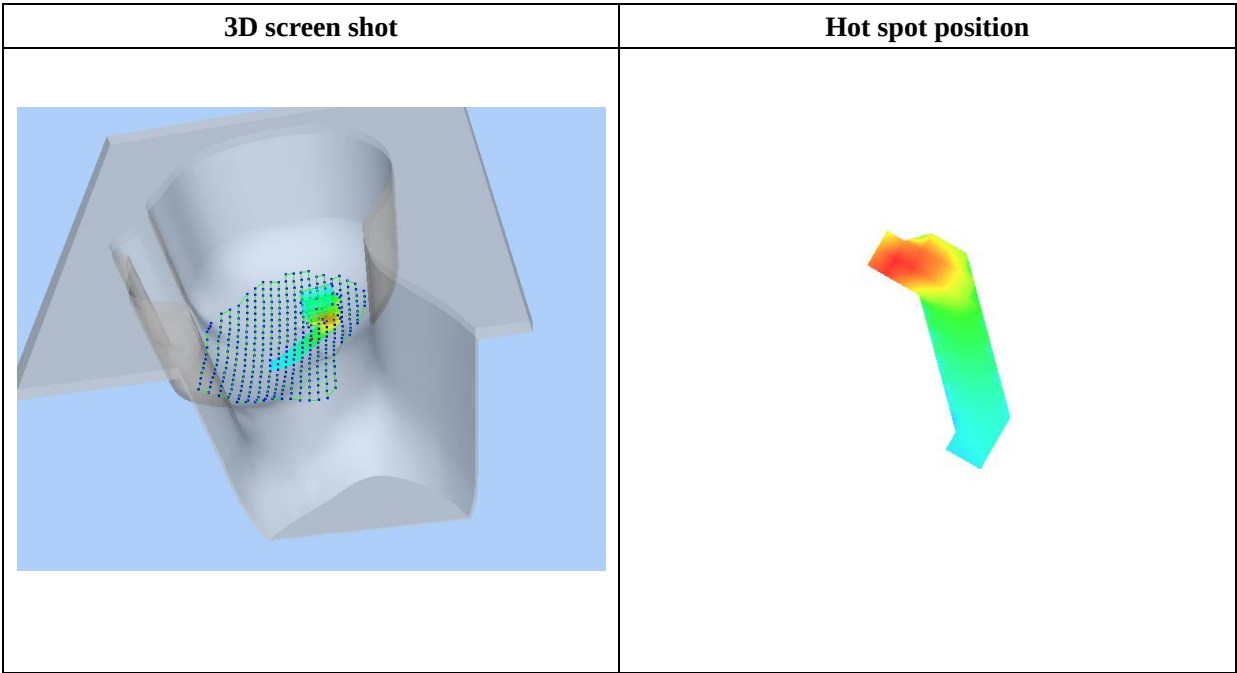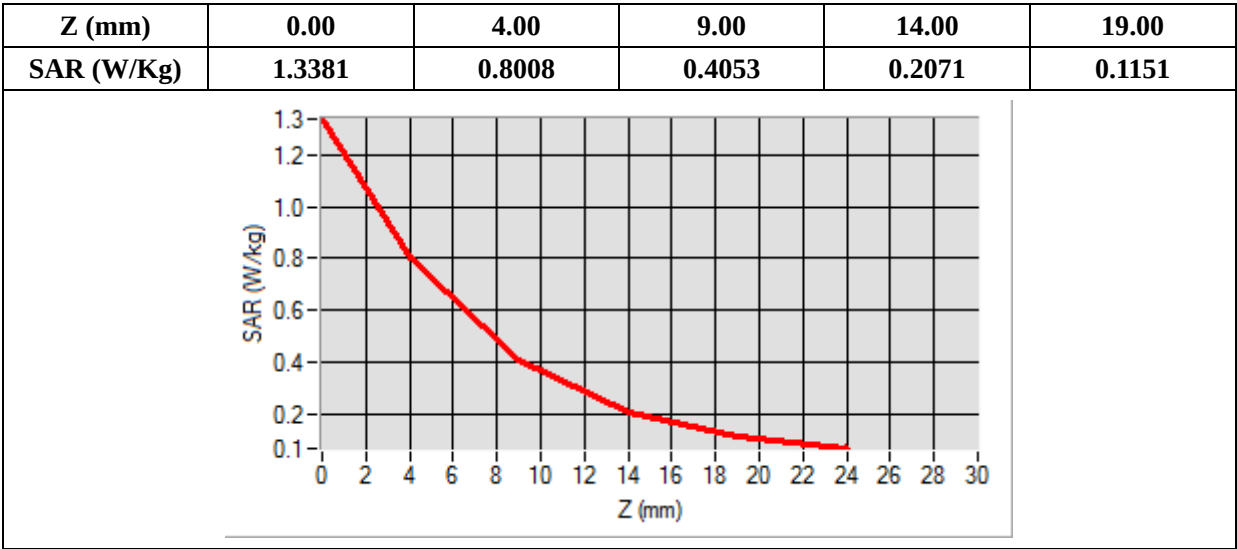

MEASUREMENT 25

Type: Phone measurement (Complete)

Date of measurement: 2020-08-11

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020/07/03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WCDMA850_RMC
Channels	Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative Permittivity (real part)	41.110245
Conductivity (S/m)	0.871245
Power Variation (%)	1.342427
Ambient Temperature	21.1
Liquid Temperature	21.3

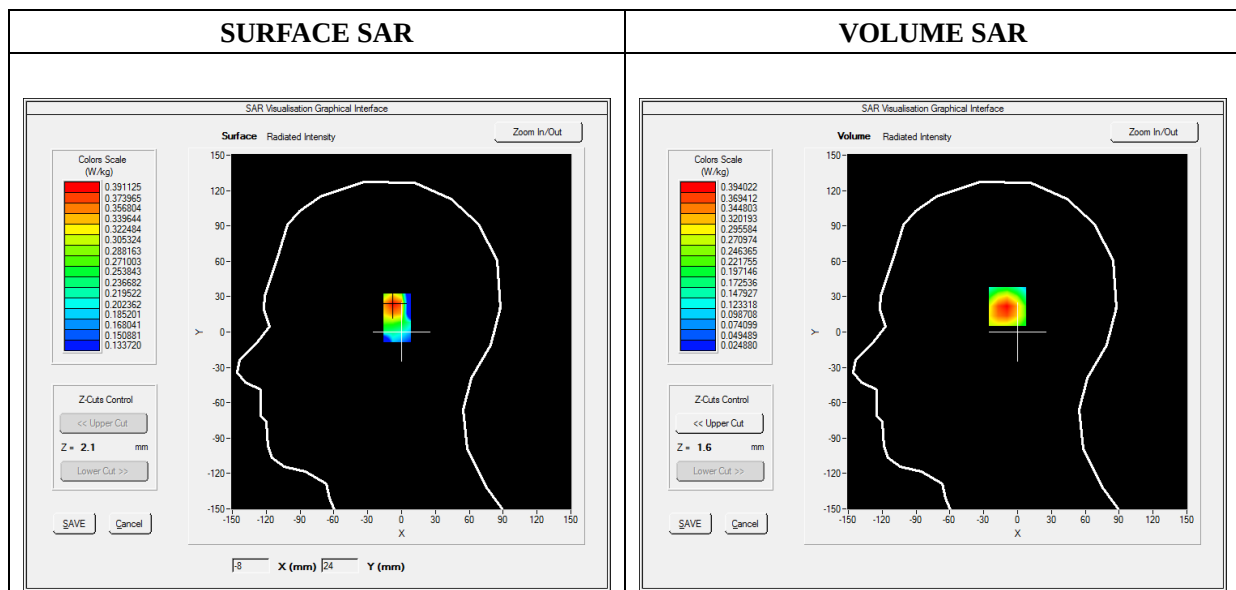


Maximum location: X=-7.00, Y=23.00



SAR Peak: 0.60 W/kg

SAR 10g (W/Kg)	0.228251
----------------	----------

SAR 1g (W/Kg)	0.375680
---------------	----------

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.5960	0.3940	0.2360	0.1504	0.1073

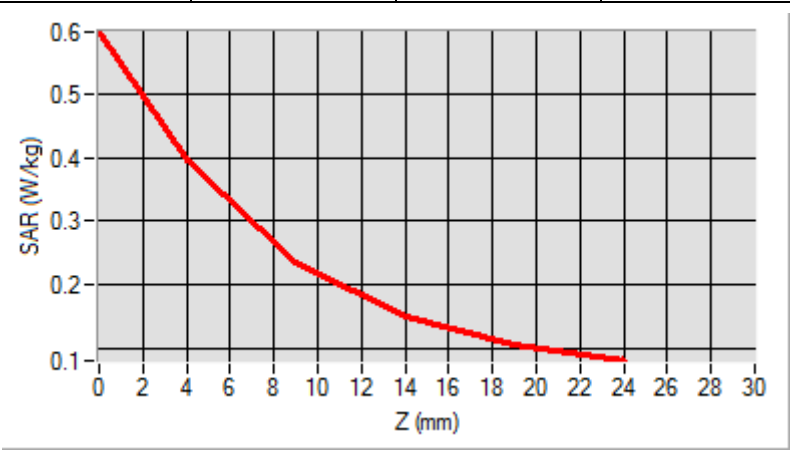

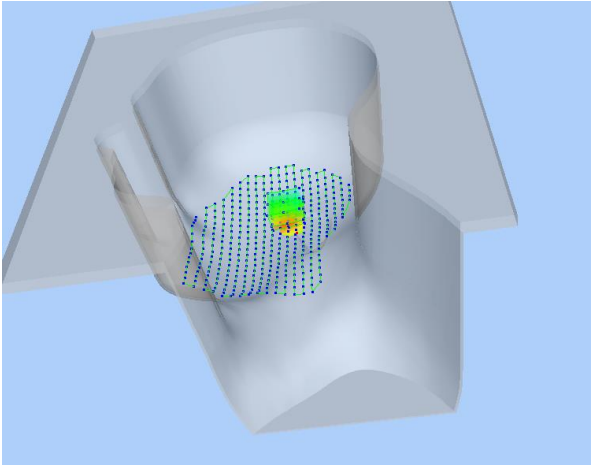3D screen shot	Hot spot position
	

MEASUREMENT 29


Type: Phone measurement (Complete)
Date of measurement: 2020-08-12
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.35; Calibrated: 2020/07/03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	LTE Band 2_RMC
Channels	QPSK, 20MHz, 1RB, Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	1860.000000
Relative Permittivity (real part)	38.560124
Conductivity (S/m)	1.380369
Power Variation (%)	1.743564
Ambient Temperature	21.1
Liquid Temperature	21.3

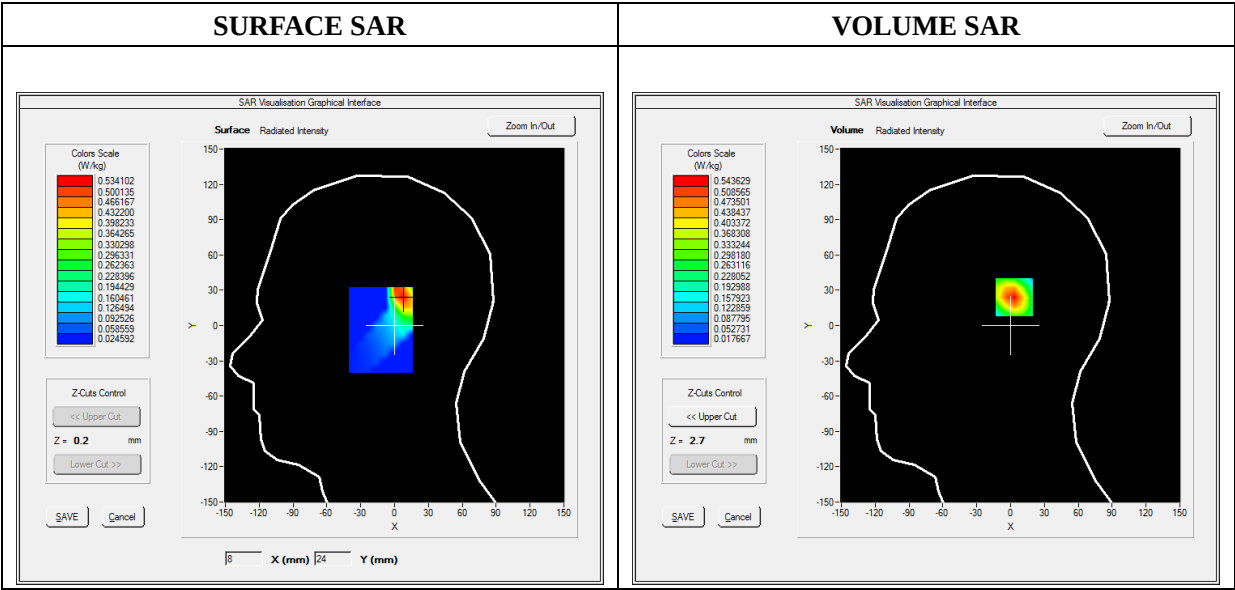

Maximum location: X=7.00, Y=25.00

SAR Peak: 0.95 W/kg

SAR 10g (W/Kg)	0.257653
SAR 1g (W/Kg)	0.512306

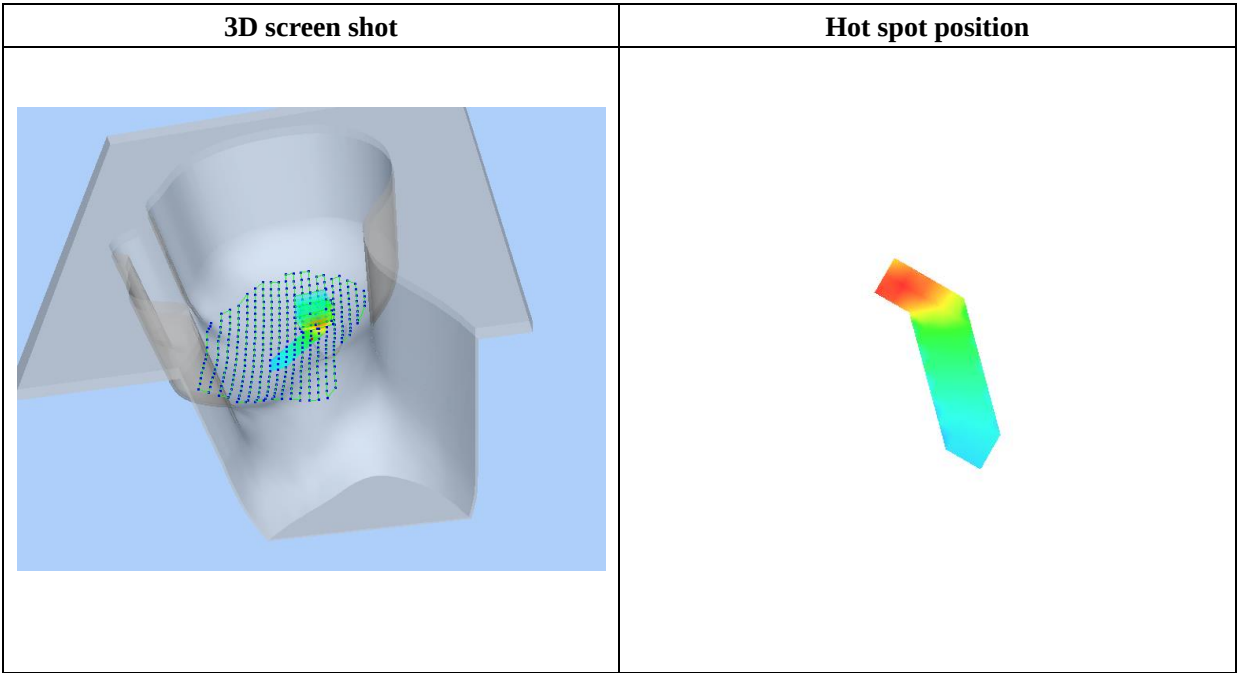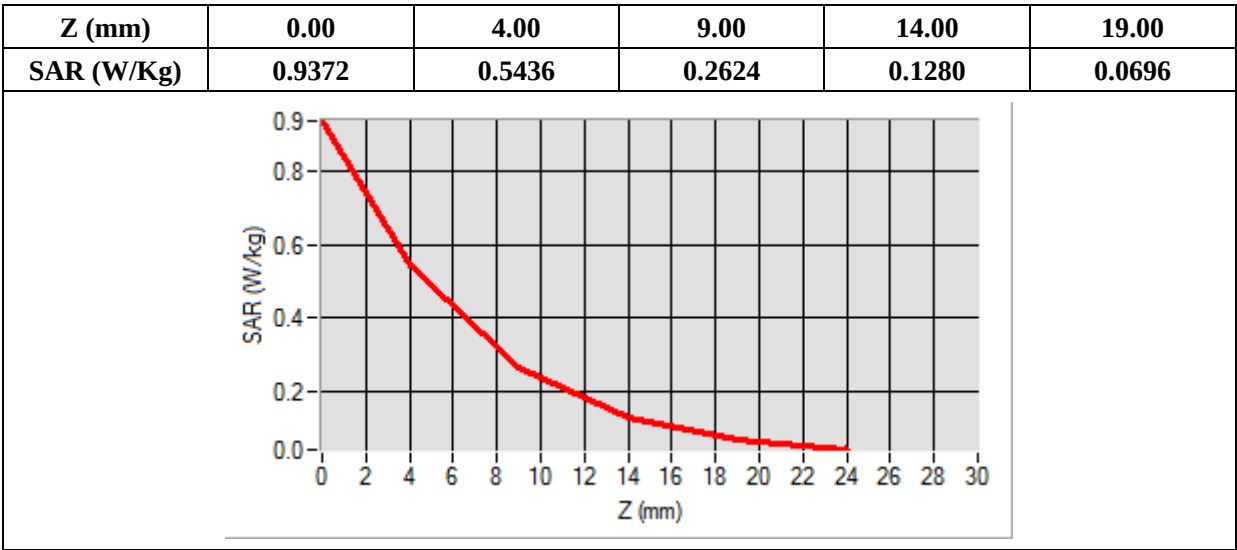

MEASUREMENT 37

Type: Phone measurement (Complete)

Date of measurement: 2020-08-12

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020/07/03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	LTE Band 4
Channels	QPSK, 20MHz, 1RB,High
Signal	Duty Cycle 1:1

B. SAR Measurement Results


Frequency (MHz)	1745.000000
Relative Permittivity (real part)	39.024890
Conductivity (S/m)	1.371250
Power Variation (%)	1.374628
Ambient Temperature	21.1
Liquid Temperature	21.2


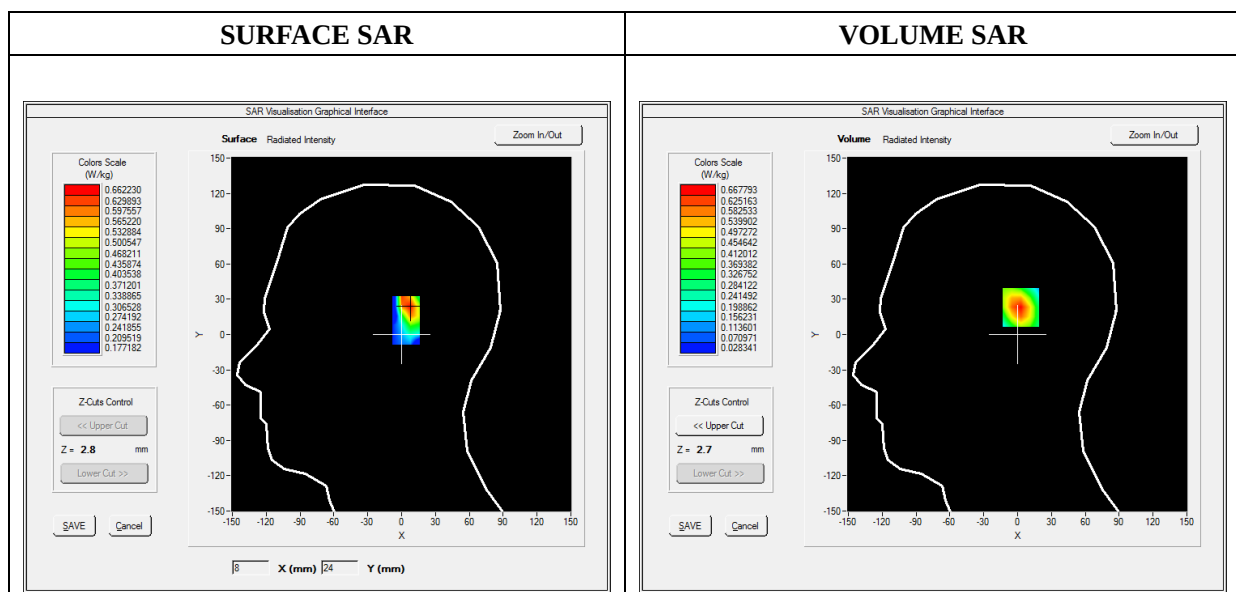


Maximum location: X=7.00, Y=24.00

SAR Peak: 1.11 W/kg

SAR 10g (W/Kg)	0.332008
SAR 1g (W/Kg)	0.628398

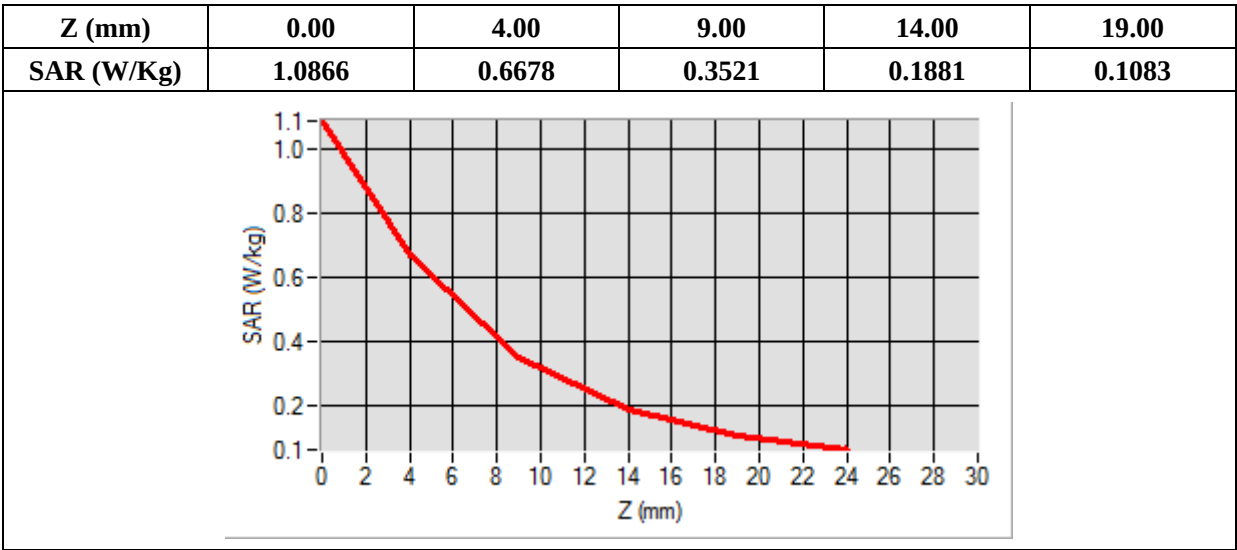

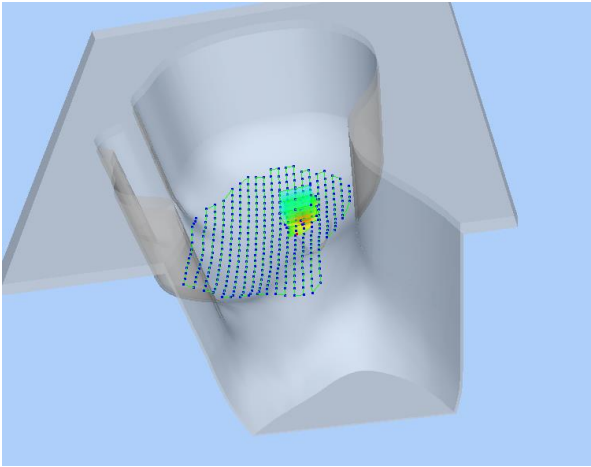3D screen shot	Hot spot position
	

MEASUREMENT 45

Type: Phone measurement (Complete)

Date of measurement: 2020-08-11

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020/07/03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	LTE Band 5
Channels	QPSK, 10MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	836.5000000
Relative Permittivity (real part)	41.110245
Conductivity (S/m)	0.871245
Power Variation (%)	0.924535
Ambient Temperature	21.1
Liquid Temperature	21.2

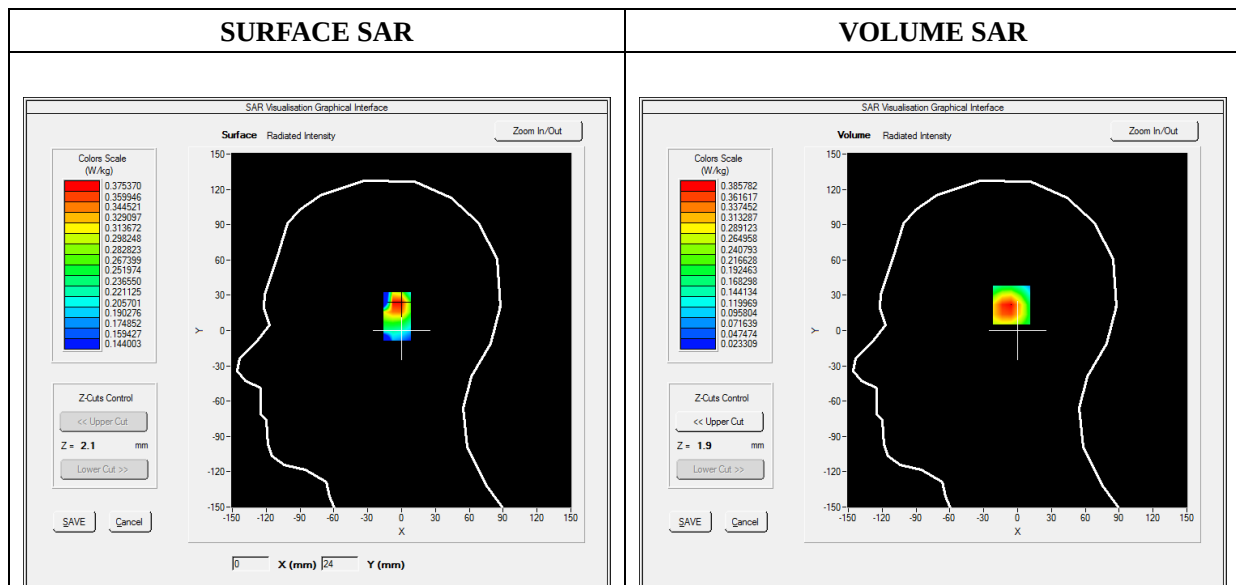

Maximum location: X=-3.00, Y=23.00

SAR Peak: 0.60 W/kg

SAR 10g (W/Kg)	0.223513
SAR 1g (W/Kg)	0.371569

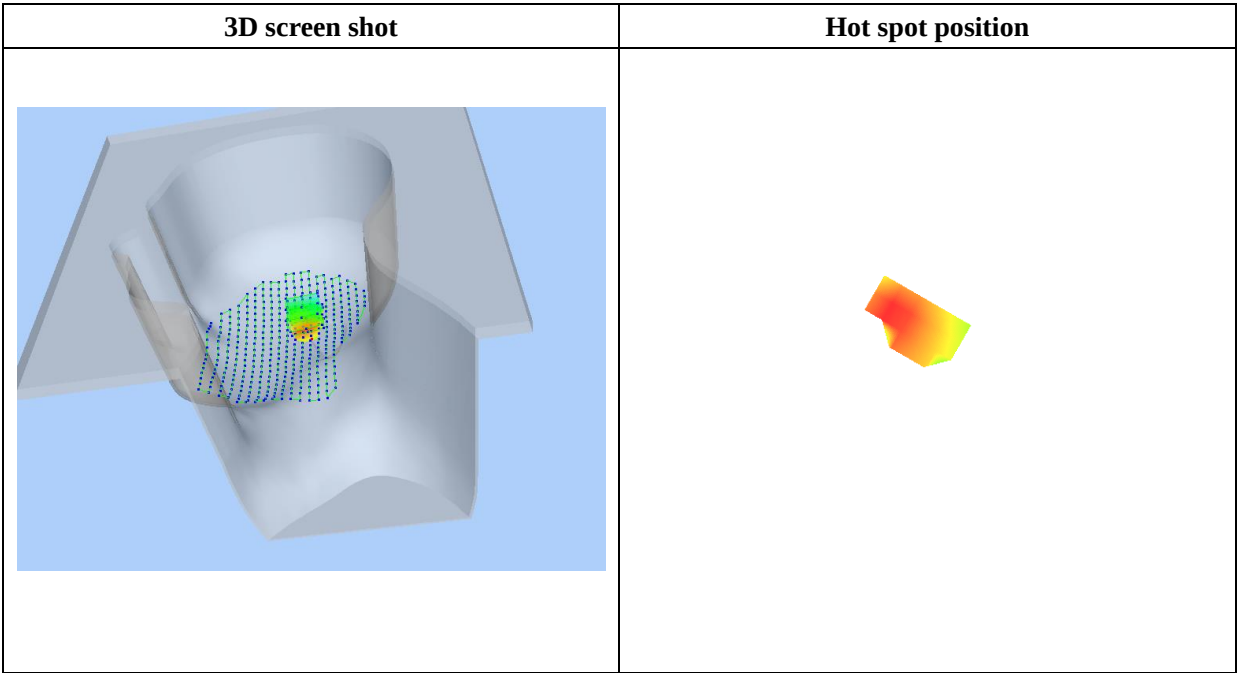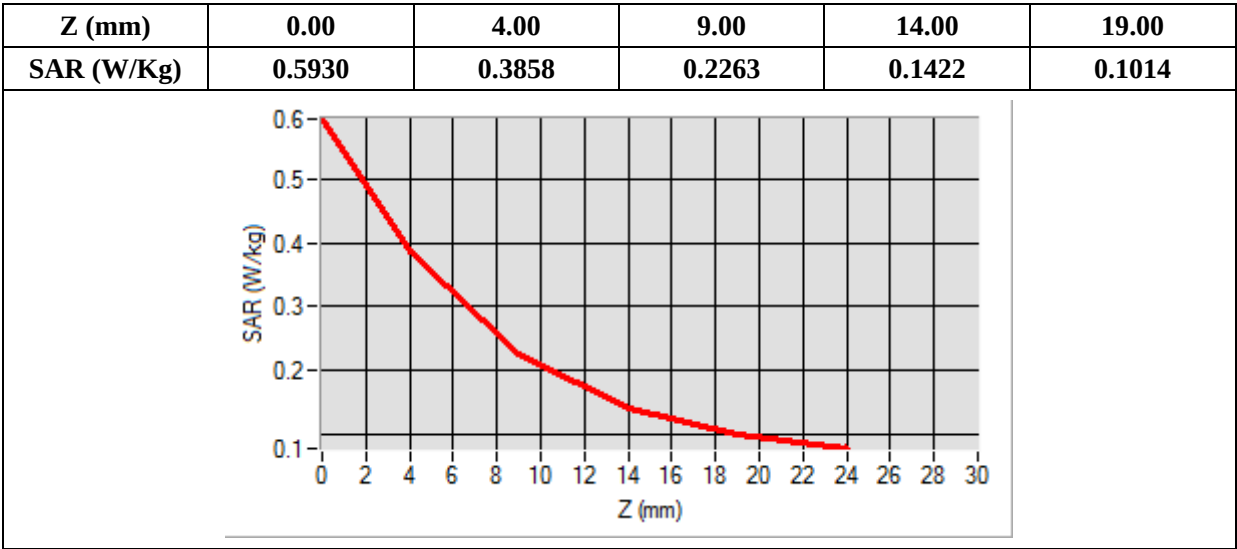

MEASUREMENT 53


Type: Phone measurement (Complete)
Date of measurement: 2020-08-13
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020/07/03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	LTE Band 7
Channels	QPSK, 20MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2535.000000
Relative Permittivity (real part)	38.631092
Conductivity (S/m)	1.930182
Power Variation (%)	0.924535
Ambient Temperature	21.1
Liquid Temperature	21.2

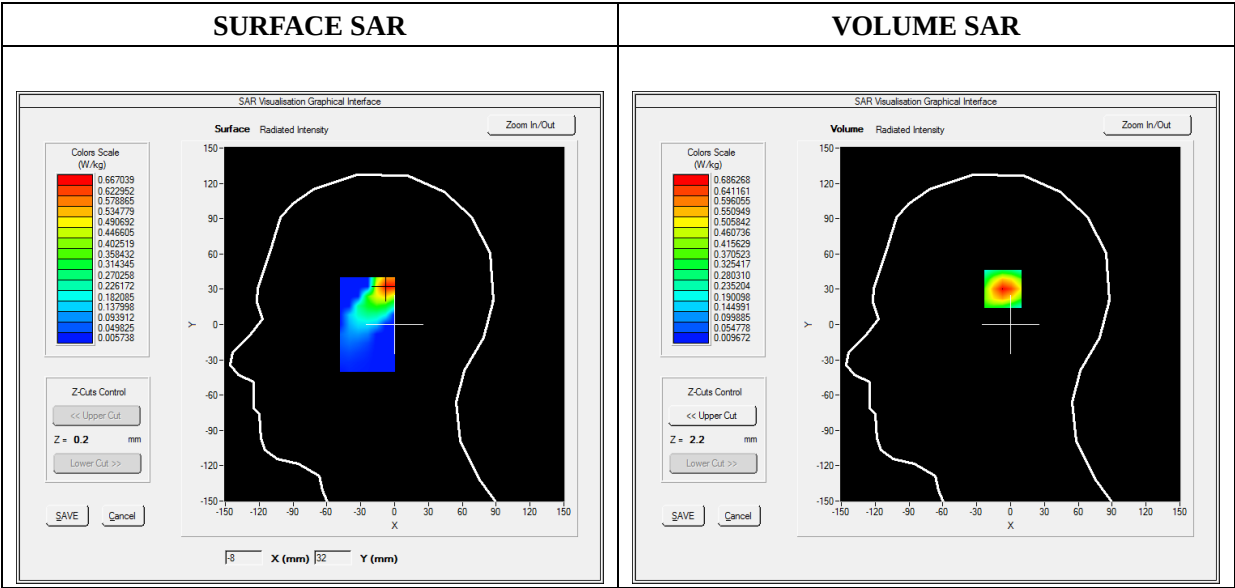




Maximum location: X=-5.00, Y=33.00

SAR Peak: 1.26 W/kg

SAR 10g (W/Kg)	0.309678
SAR 1g (W/Kg)	0.645717

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.2515	0.6863	0.3001	0.1286	0.0615

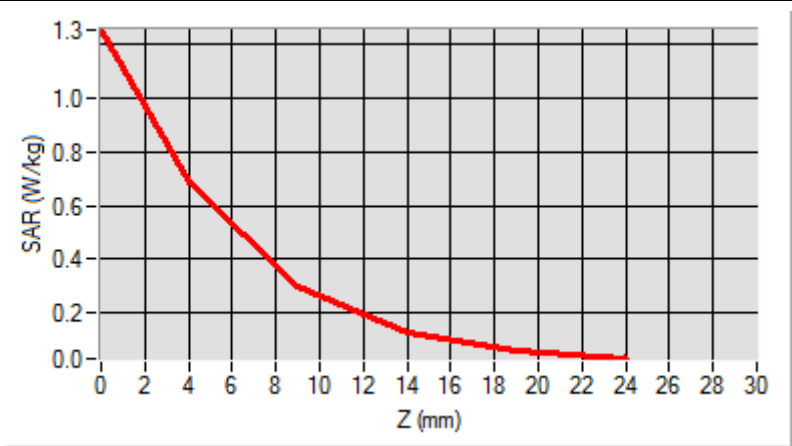

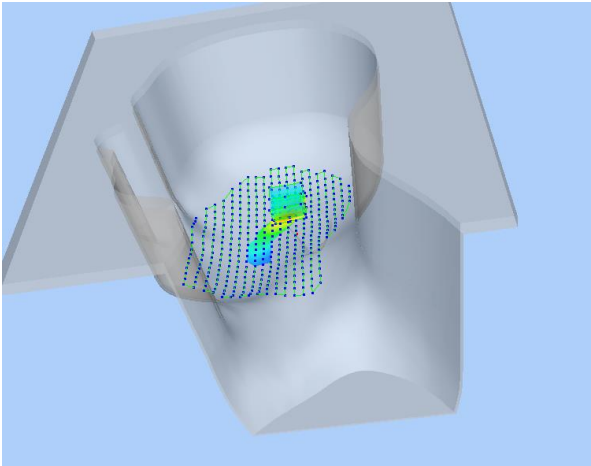3D screen shot	Hot spot position
	

MEASUREMENT 61


Type: Phone measurement (Complete)
Date of measurement: 2020-08-13
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.37; Calibrated: 2020/07/03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	LTE Band 38_RMC
Channels	QPSK, 20MHz, 1RB, Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results


Frequency (MHz)	2580.000000
Relative Permittivity (real part)	38.631092
Conductivity (S/m)	1.930182
Power Variation (%)	3.027673
Ambient Temperature	21.1
Liquid Temperature	21.2


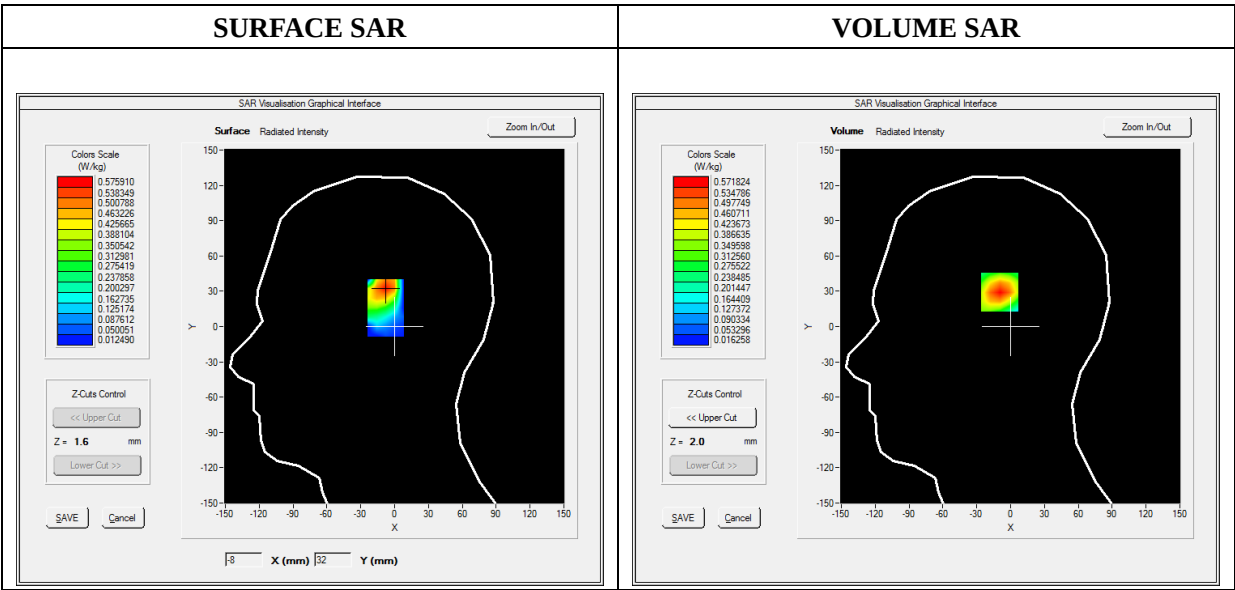


Maximum location: X=-8.00, Y=32.00

SAR Peak: 0.92 W/kg

SAR 10g (W/Kg)	0.293699
SAR 1g (W/Kg)	0.547603

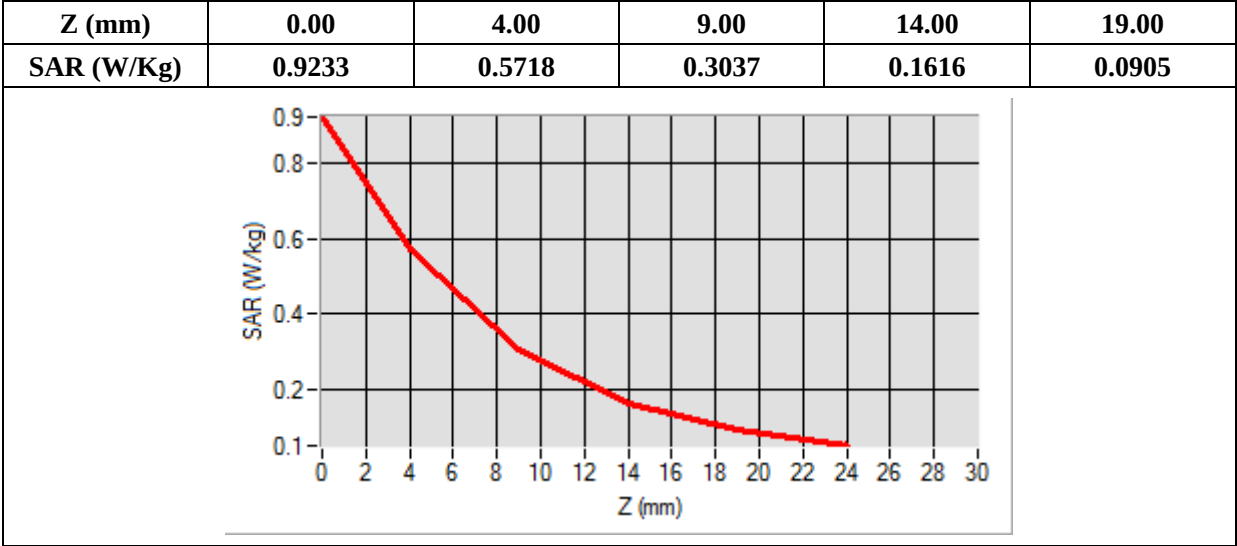

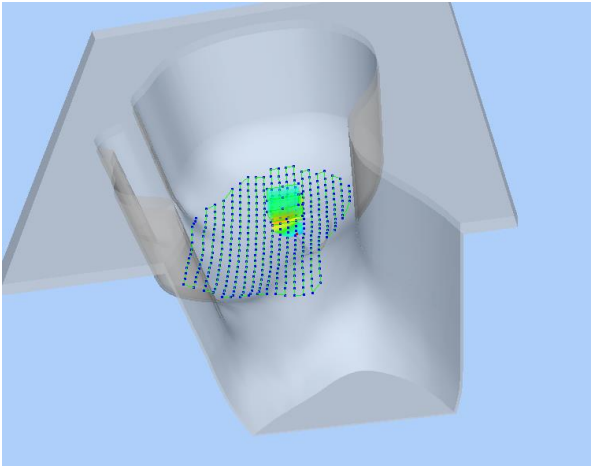3D screen shot	Hot spot position
	

MEASUREMENT 69

Type: Phone measurement (Complete)

Date of measurement: 2020-08-13

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.37; Calibrated: 2020/07/03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	LTE Band 41_RMC
Channels	QPSK, 20MHz, 1RB, Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	2506.000000
Relative Permittivity (real part)	38.631092
Conductivity (S/m)	1.930182
Power Variation (%)	3.027673
Ambient Temperature	21.1
Liquid Temperature	21.2

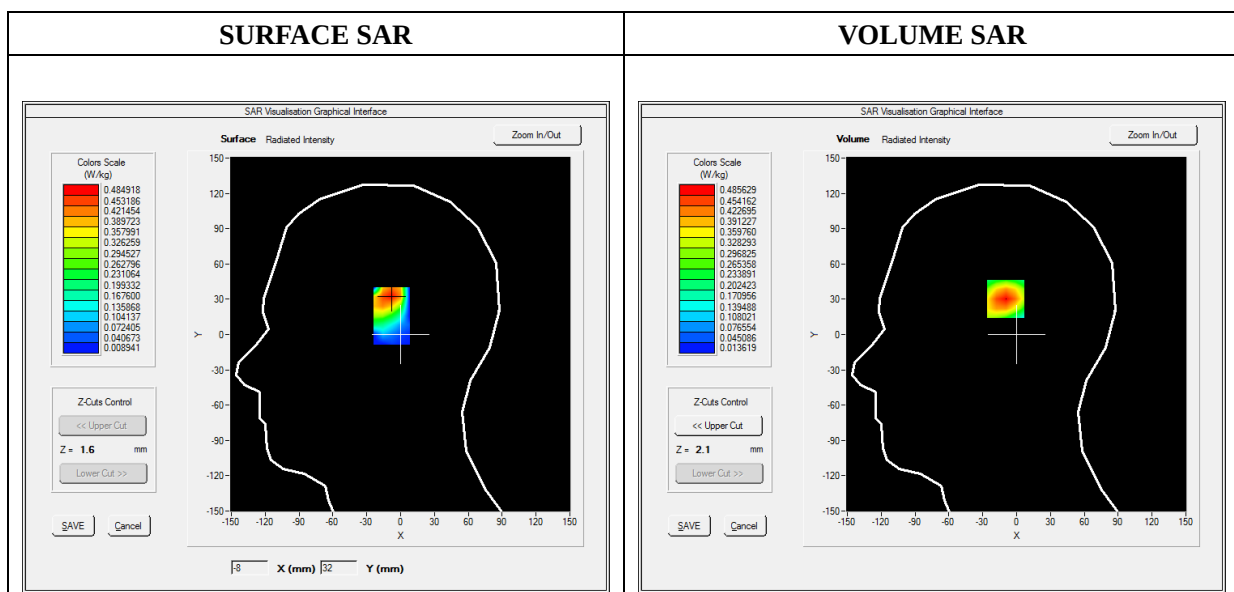

Maximum location: X=-8.00, Y=33.00

SAR Peak: 0.79 W/kg

SAR 10g (W/Kg)	0.248202
SAR 1g (W/Kg)	0.457056

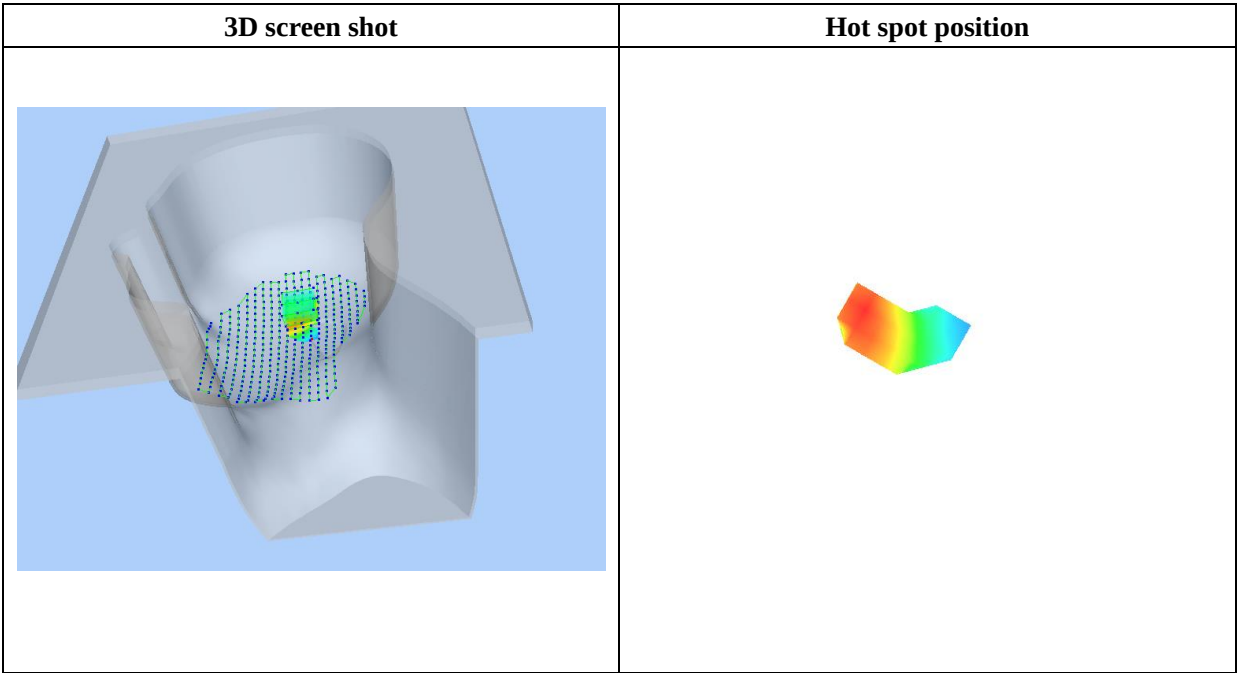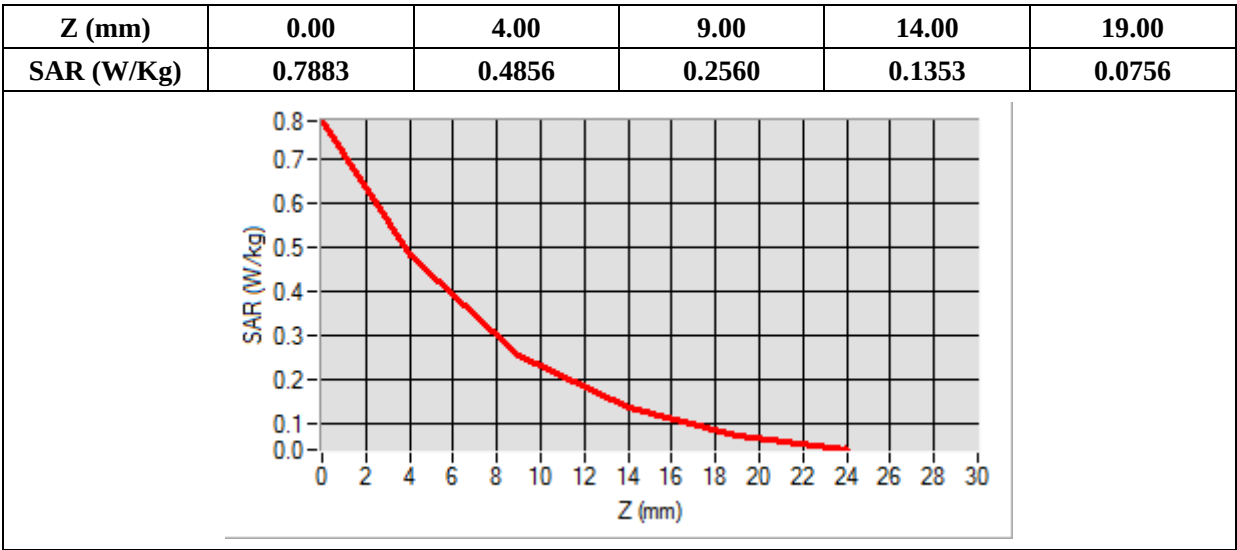

MEASUREMENT 79

Type: Phone measurement (Complete)

Date of measurement: 2020-08-13

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020/07/03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	WiFi_802.11b
Channels	Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	2437.000000
Relative Permittivity (real part)	38.153660
Conductivity (S/m)	1.740236
Power Variation (%)	3.234772
Ambient Temperature	21.1
Liquid Temperature	21.2

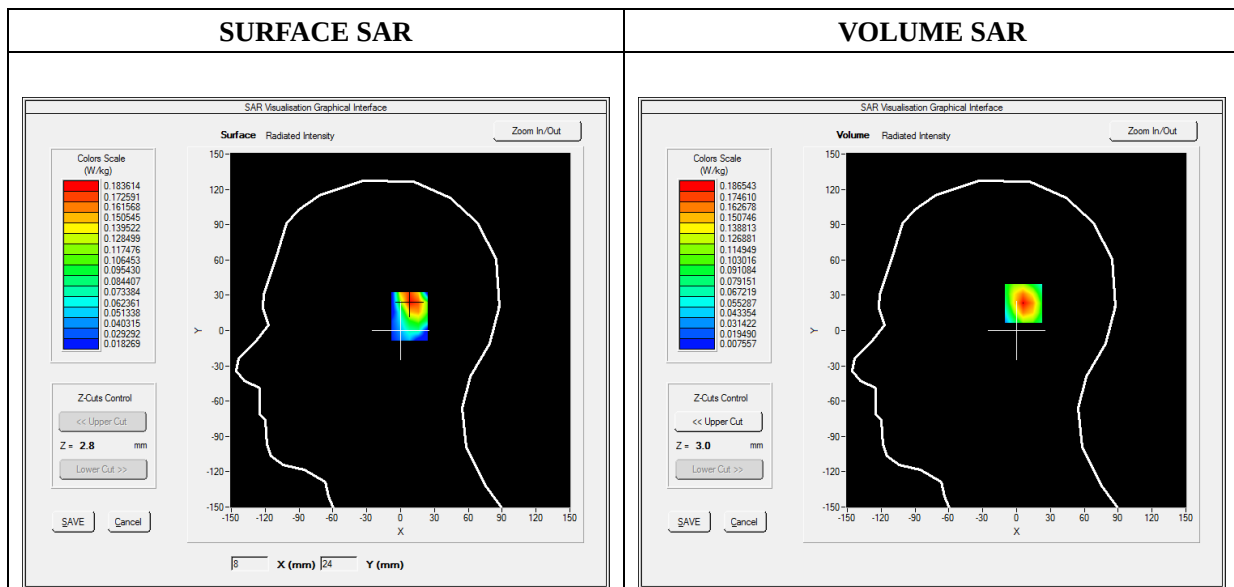

Maximum location: X=10.00, Y=24.00

SAR Peak: 0.31 W/kg

SAR 10g (W/Kg)	0.091520
SAR 1g (W/Kg)	0.174660

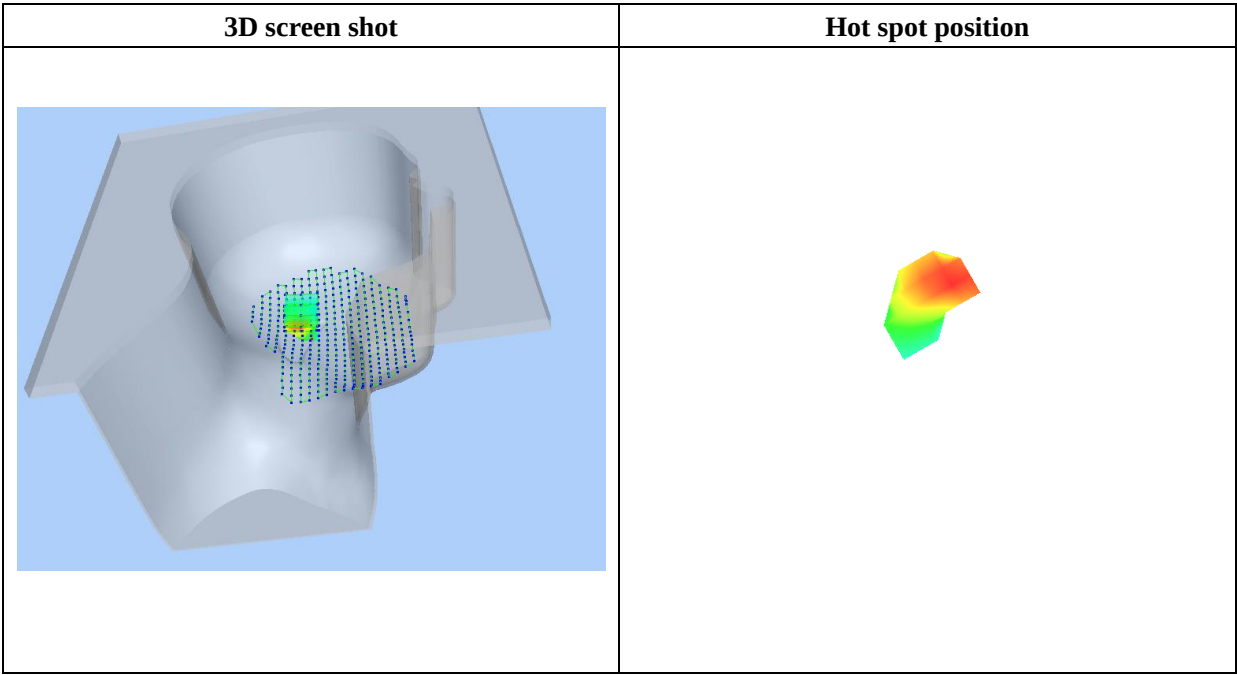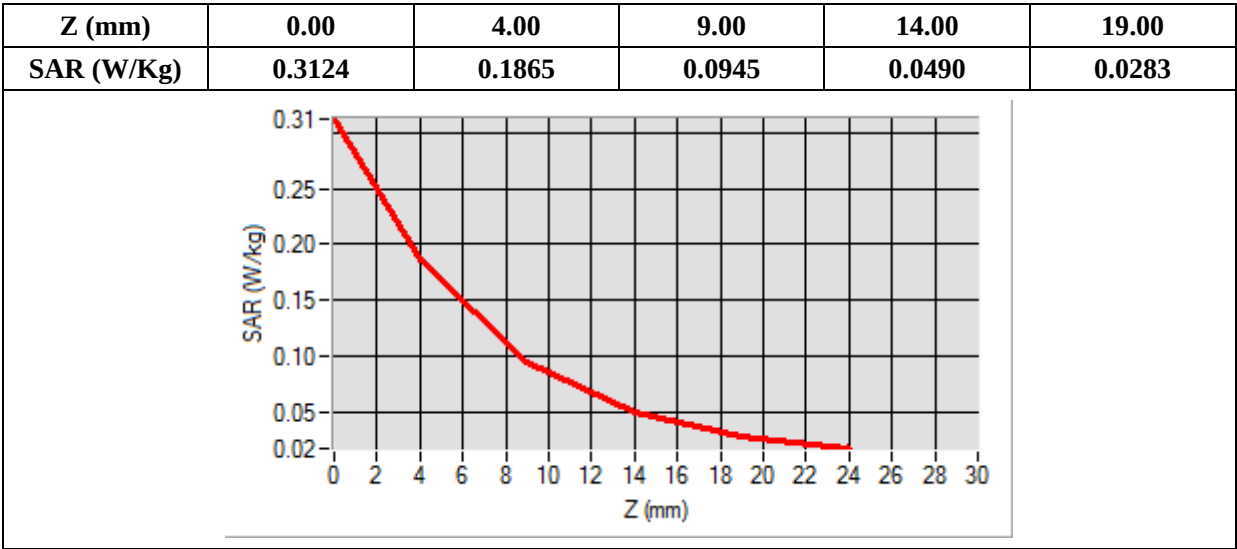

MEASUREMENT 89


Type: Phone measurement (Complete)
Date of measurement: 2020-08-11
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020/07/03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	GSM850
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

B. SAR Measurement Results


Frequency (MHz)	836.600000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	0.901472
Ambient Temperature	21.1
Liquid Temperature	21.3

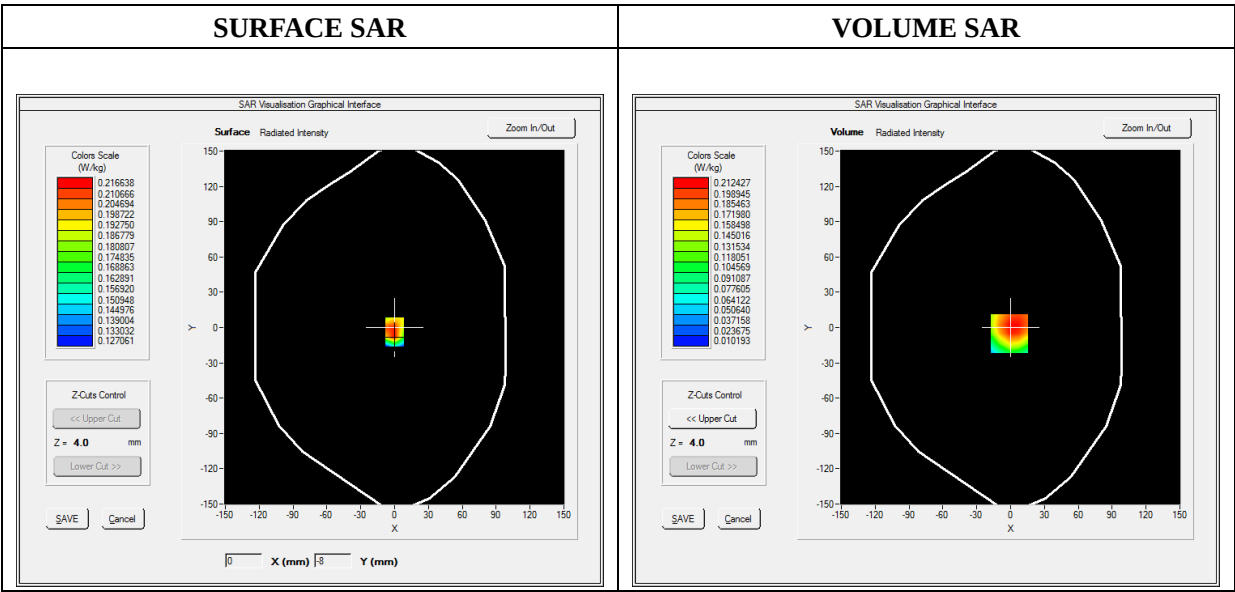


Maximum location: X=-1.00, Y=-5.00

SAR Peak: 0.30 W/kg

SAR 10g (W/Kg)	0.131289
SAR 1g (W/Kg)	0.205626

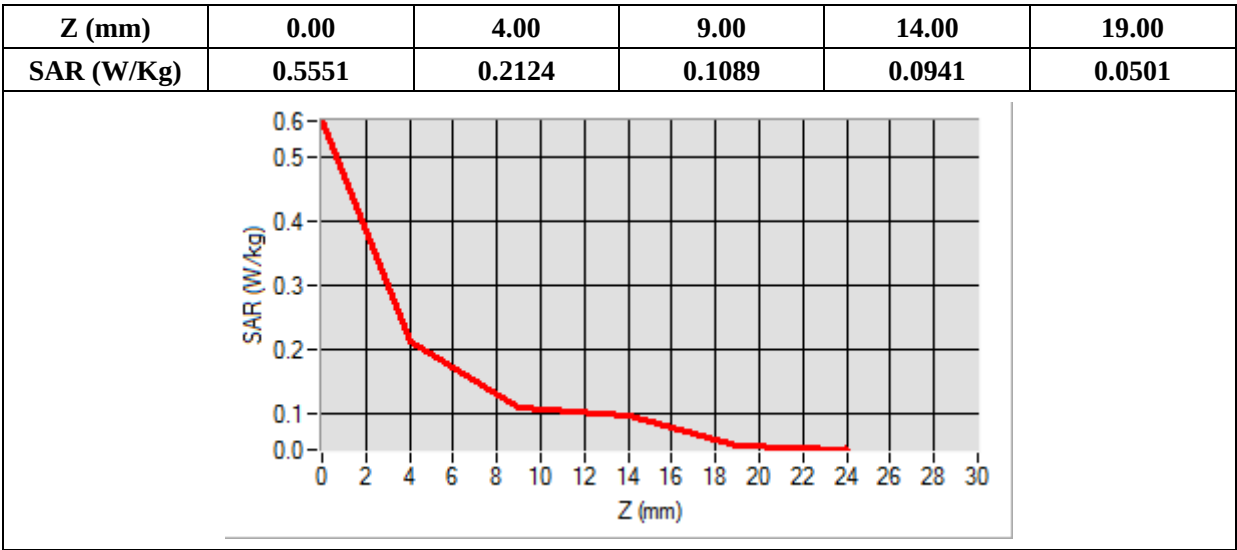

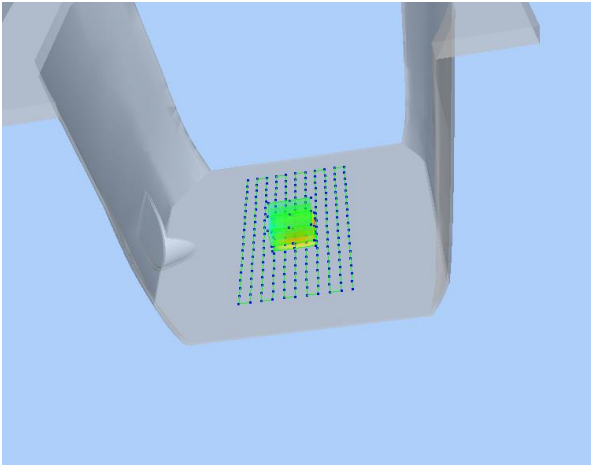3D screen shot	Hot spot position
	

MEASUREMENT 91


Type: Phone measurement (Complete)
Date of measurement: 2020-08-12
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020/07/03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	GSM1900
Channels	Low
Signal	TDMA (Crest factor: 8.0)

B. SAR Measurement Results



Frequency (MHz)	1850.200000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	1.474622
Ambient Temperature	21.1
Liquid Temperature	21.3

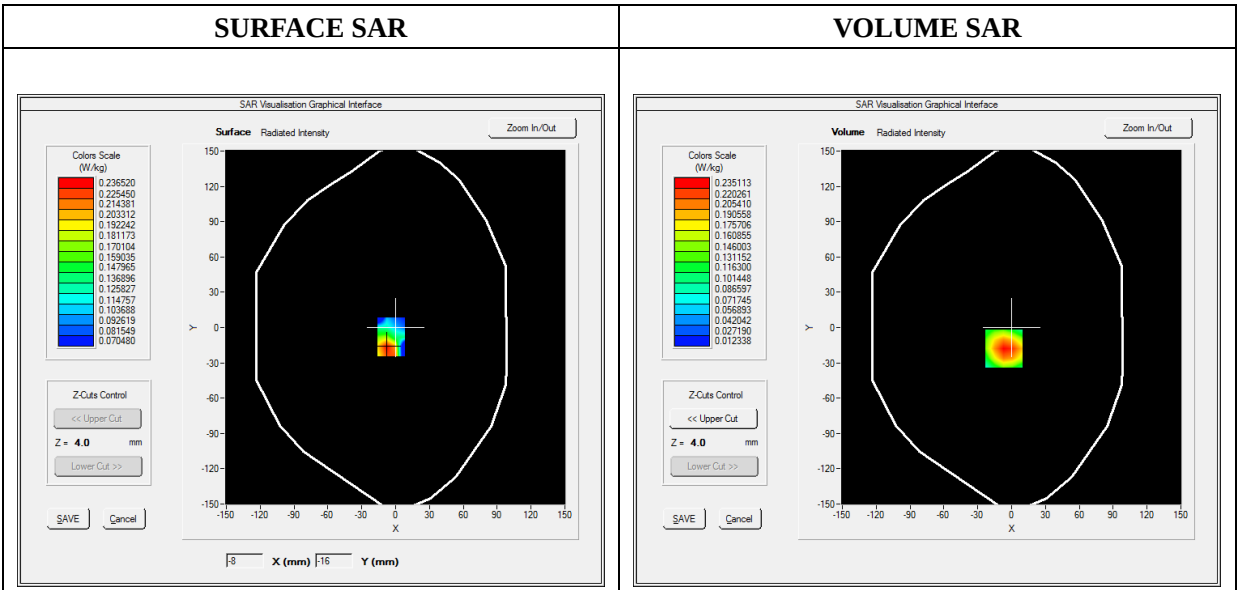

Maximum location: X=-7.00, Y=-18.00

SAR Peak: 0.37 W/kg

SAR 10g (W/Kg)	0.122086
SAR 1g (W/Kg)	0.222124

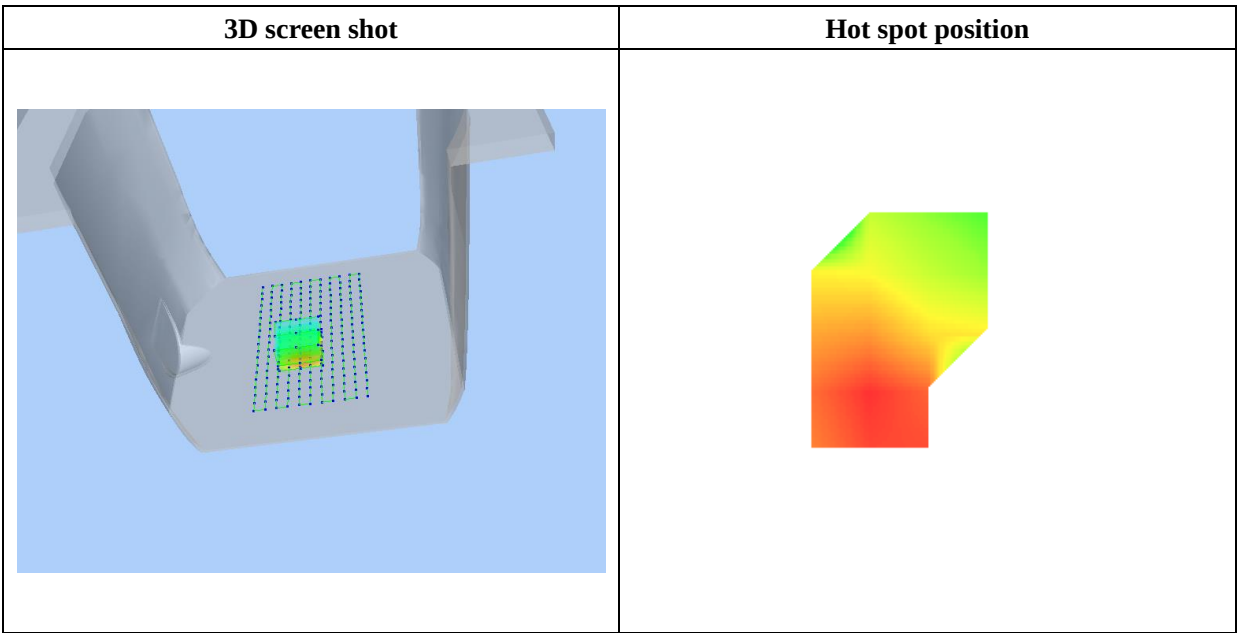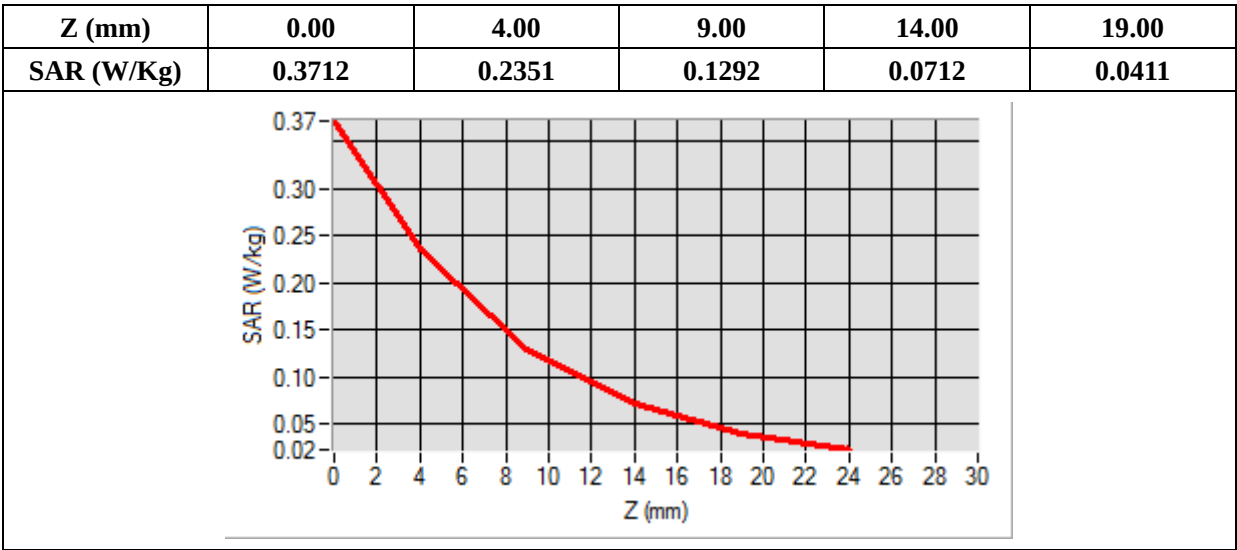

MEASUREMENT 129

Type: Phone measurement (Complete)

Date of measurement: 2020-08-11

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020/07/03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat plane
Device Position	Back
Band	GPRS850
Channels	High
Signal	Duty Cycle: 1:4

B. SAR Measurement Results


Frequency (MHz)	848.800000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	0.901472
Ambient Temperature	21.1
Liquid Temperature	21.3

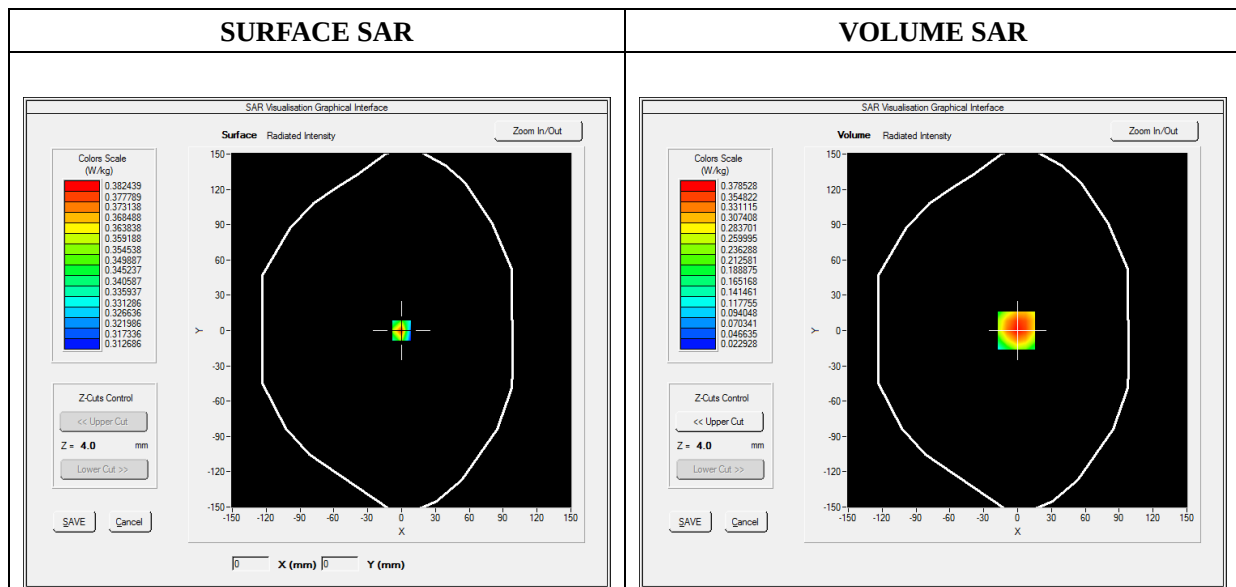


Maximum location: X=-1.00, Y=0.00

SAR Peak: 0.55 W/kg

SAR 10g (W/Kg)	0.219946
SAR 1g (W/Kg)	0.360720

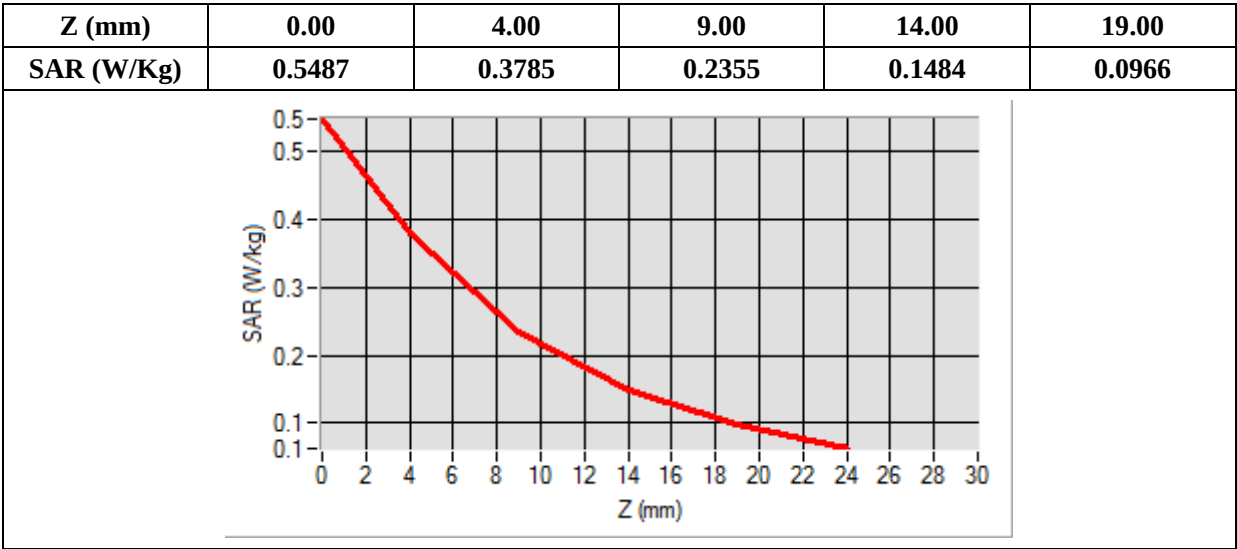

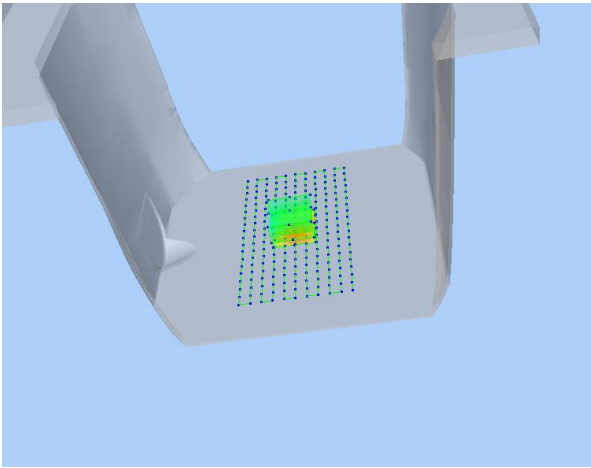3D screen shot	Hot spot position
	

MEASUREMENT 133


Type: Phone measurement (Complete)
Date of measurement: 2020-08-12
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020/07/03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat plane
Device Position	Back
Band	GPRS1900_2TX
Channels	Low
Signal	Duty Cycle: 1:4

B. SAR Measurement Results



Frequency (MHz)	1850.200000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	2.483762
Ambient Temperature	21.1
Liquid Temperature	21.3

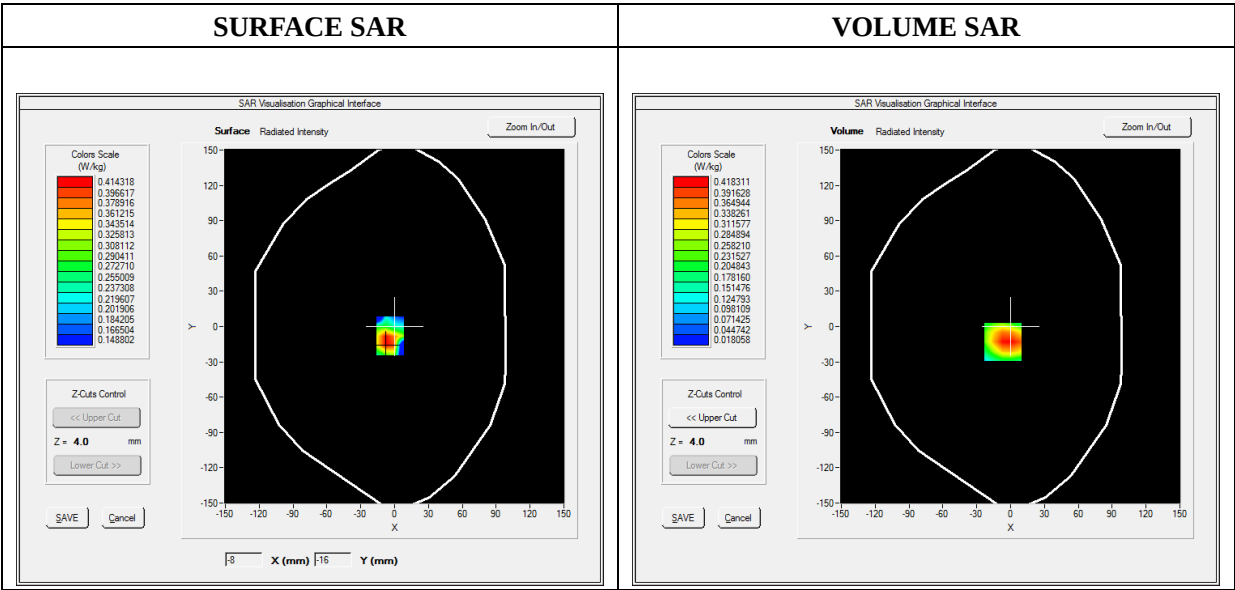

Maximum location: X=-7.00, Y=-13.00

SAR Peak: 0.67 W/kg

SAR 10g (W/Kg)	0.216562
SAR 1g (W/Kg)	0.398075

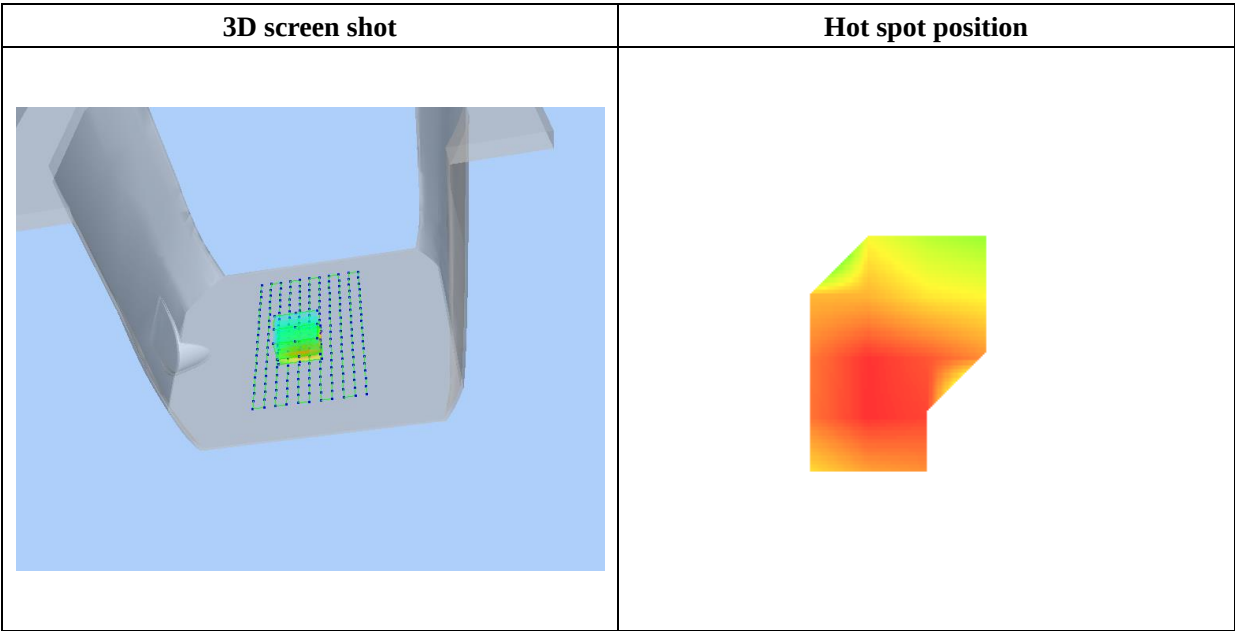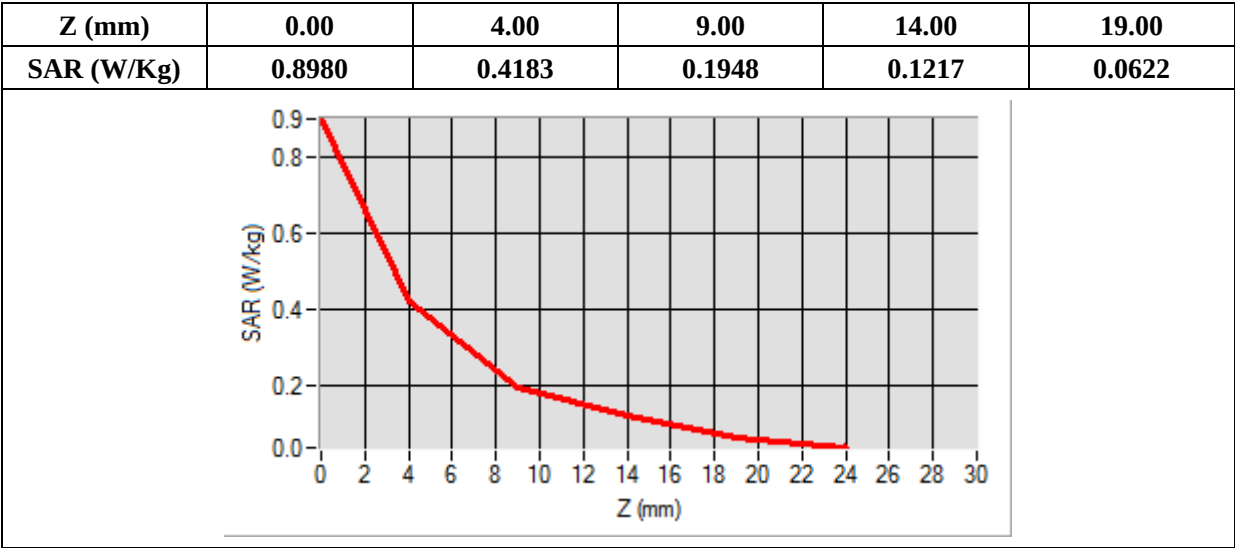

MEASUREMENT 140

Type: Phone measurement (Complete)

Date of measurement: 2020-08-12

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020/07/03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Top
Band	WCDMA1900_RMC
Channels	High
Signal	Duty Cycle 1:1

B. SAR Measurement Results


Frequency (MHz)	1907.600000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	1.163283
Ambient Temperature	21.1
Liquid Temperature	21.3

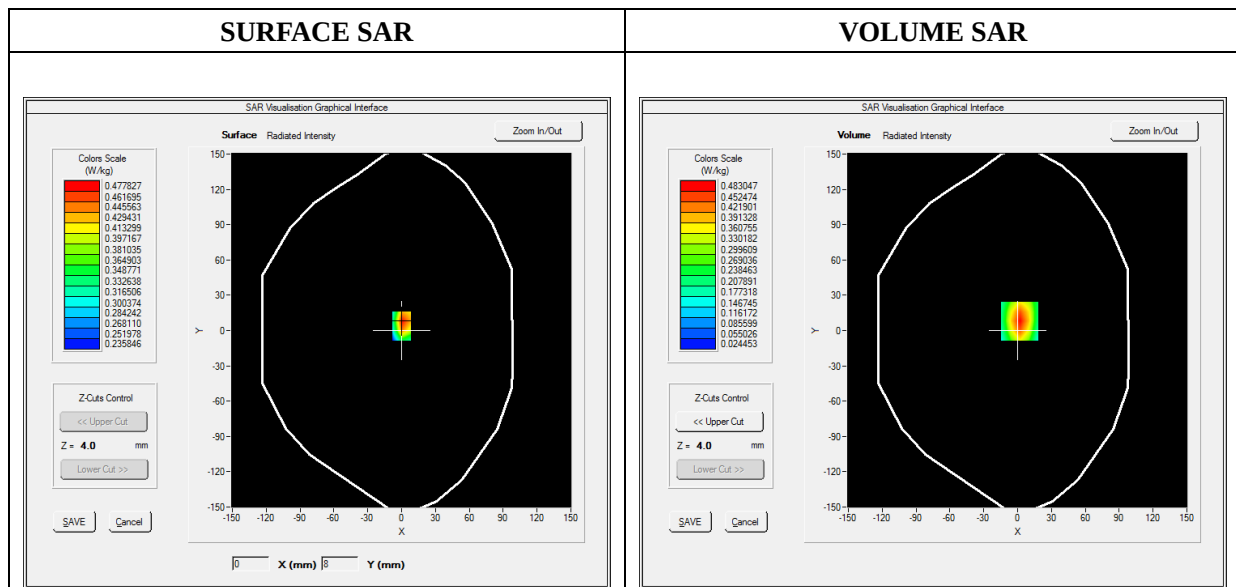


Maximum location: X=2.00, Y=8.00

SAR Peak: 0.77 W/kg

SAR 10g (W/Kg)	0.239428
SAR 1g (W/Kg)	0.450382

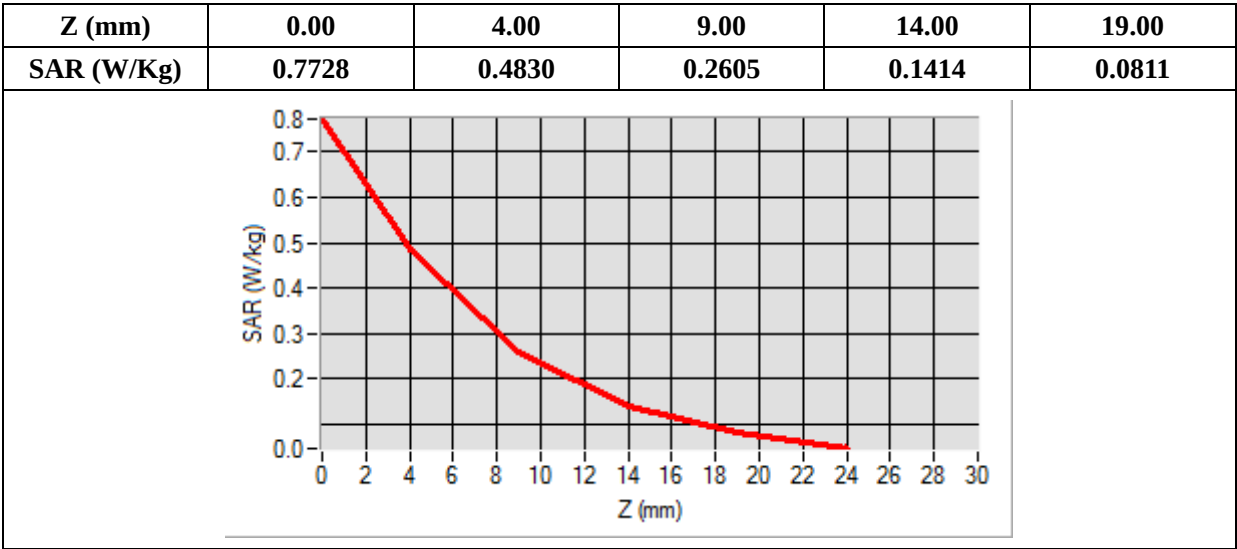

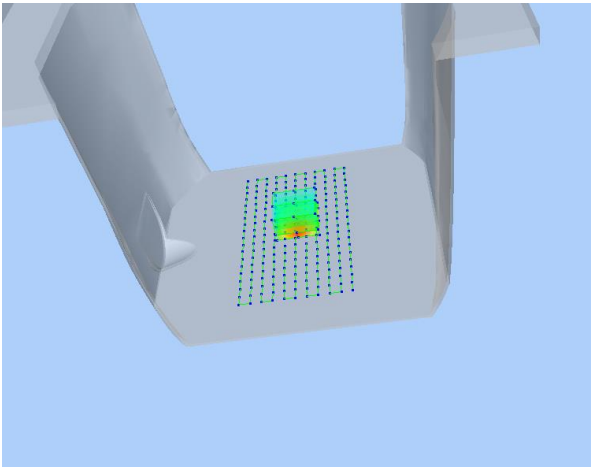3D screen shot	Hot spot position
	

MEASUREMENT 144


Type: Phone measurement (Complete)
Date of measurement: 2020-08-12
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020/07/03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Top
Band	WCDMA850_RMC
Channels	Low
Signal	Duty Cycle 1:1


B. SAR Measurement Results


Frequency (MHz)	1712.400000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	2.341234
Ambient Temperature	21.1
Liquid Temperature	21.3

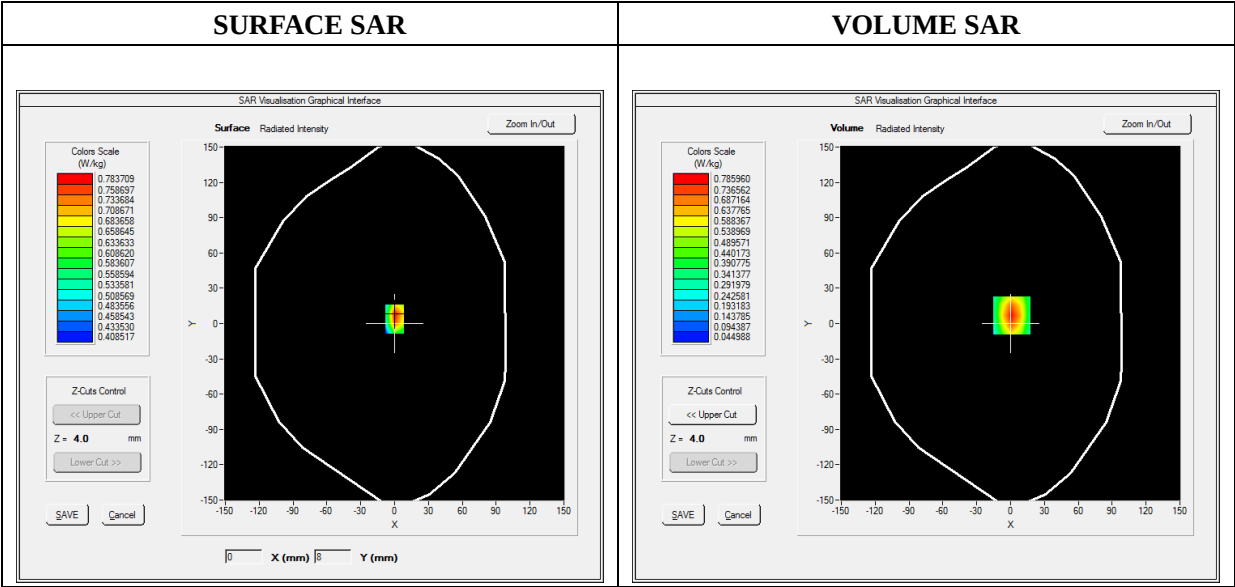

Maximum location: X=1.00, Y=7.00
SAR Peak: 1.24 W/kg

SAR 10g (W/Kg)	0.393658
SAR 1g (W/Kg)	0.732371

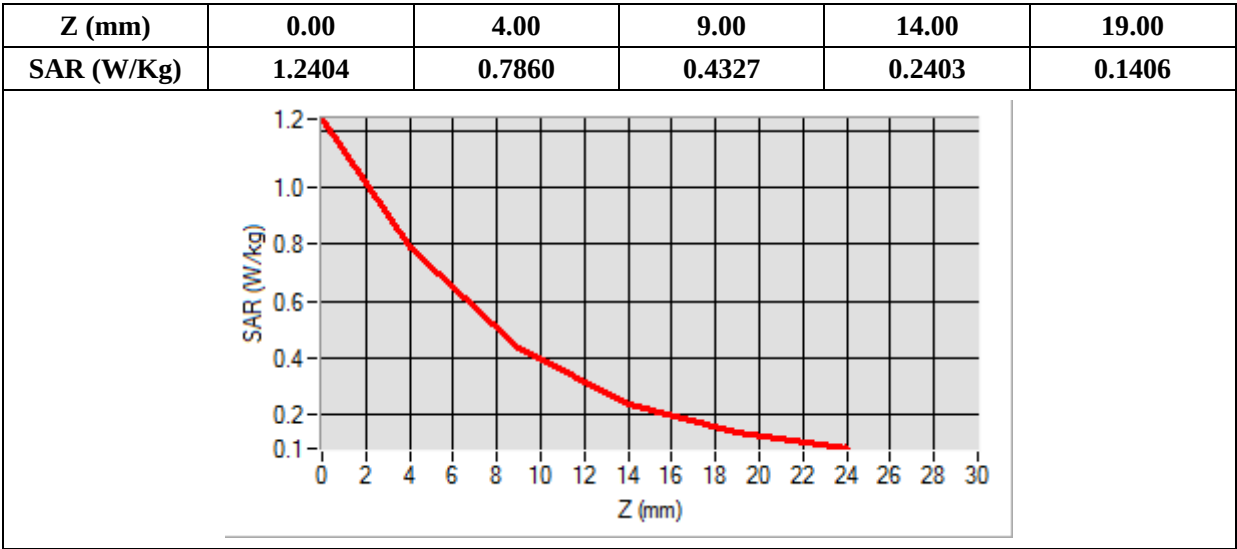

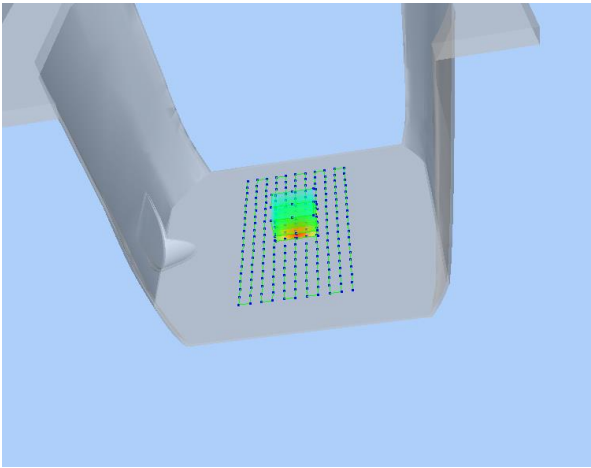3D screen shot	Hot spot position
	

MEASUREMENT 145

Type: Phone measurement (Complete)

Date of measurement: 2020-08-11

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020/07/03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WCDMA850_RMC
Channels	Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results


Frequency (MHz)	836.400000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	2.341234
Ambient Temperature	21.1
Liquid Temperature	21.3

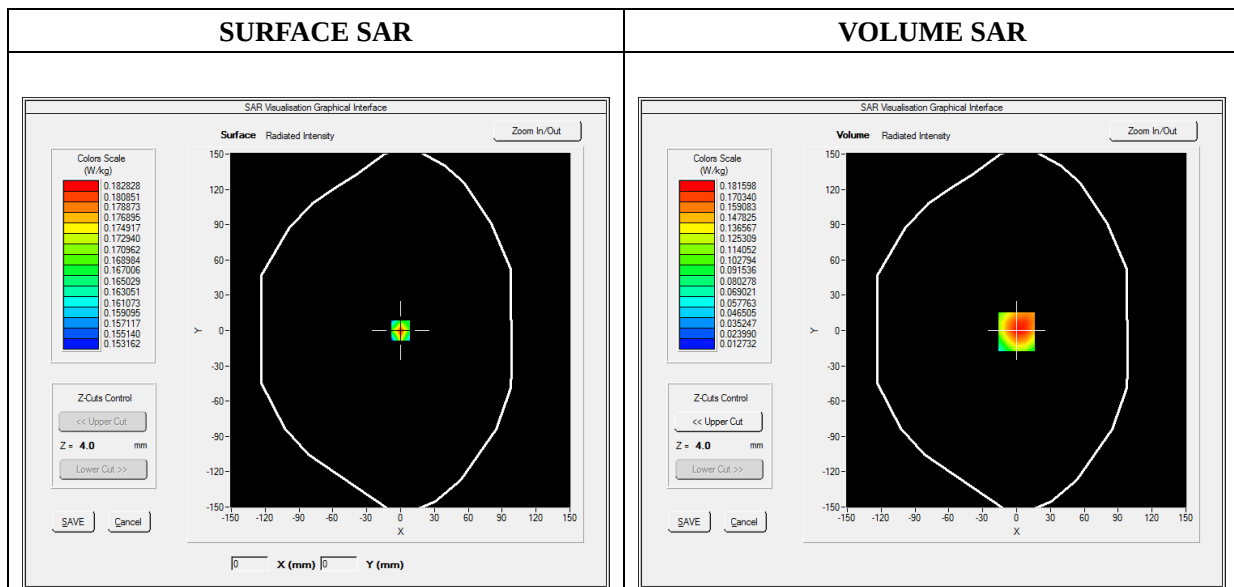


Maximum location: X=0.00, Y=-1.00

SAR Peak: 0.26 W/kg

SAR 10g (W/Kg)	0.111615
SAR 1g (W/Kg)	0.175500

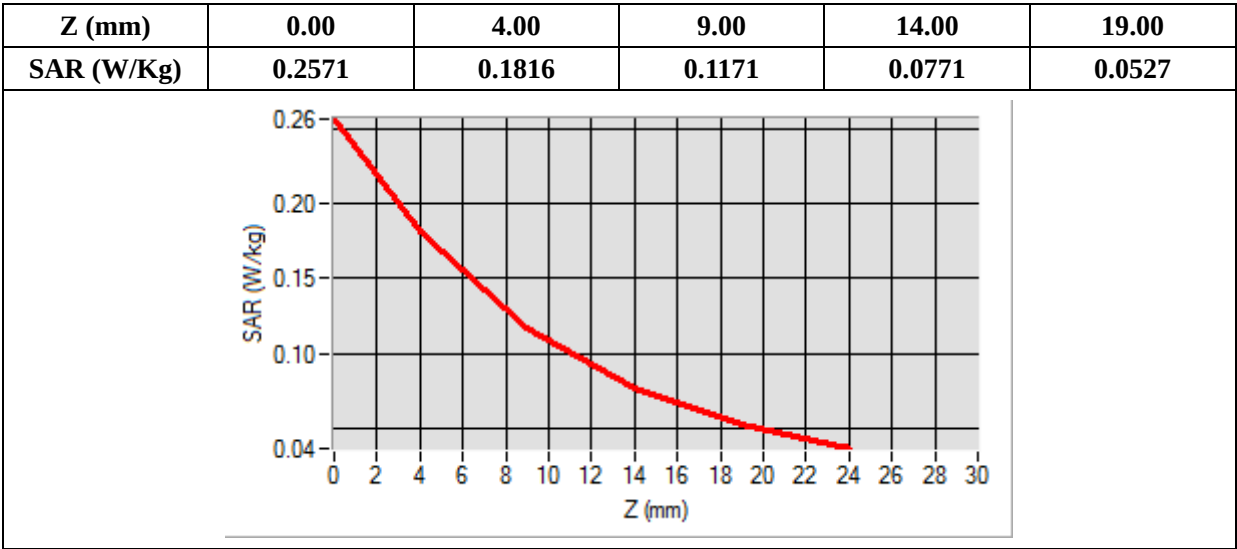

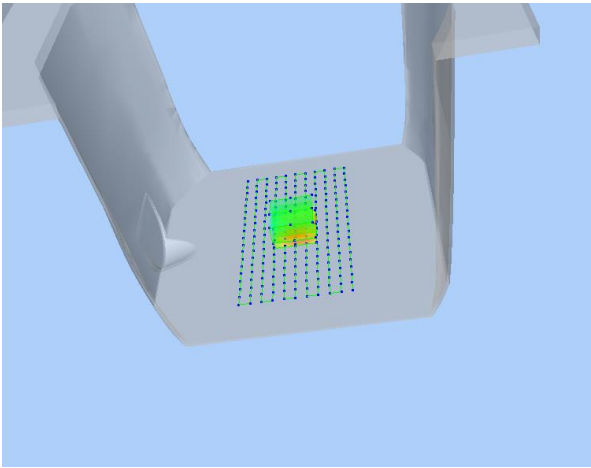3D screen shot	Hot spot position
	

MEASUREMENT 152


Type: Phone measurement (Complete)
Date of measurement: 2020-08-12
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 06/01/2018

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Top
Band	LTE Band 2_RMC
Channels	QPSK, 20MHz, 1RB, Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	1860.000000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	1.327810
Ambient Temperature	21.1
Liquid Temperature	21.3

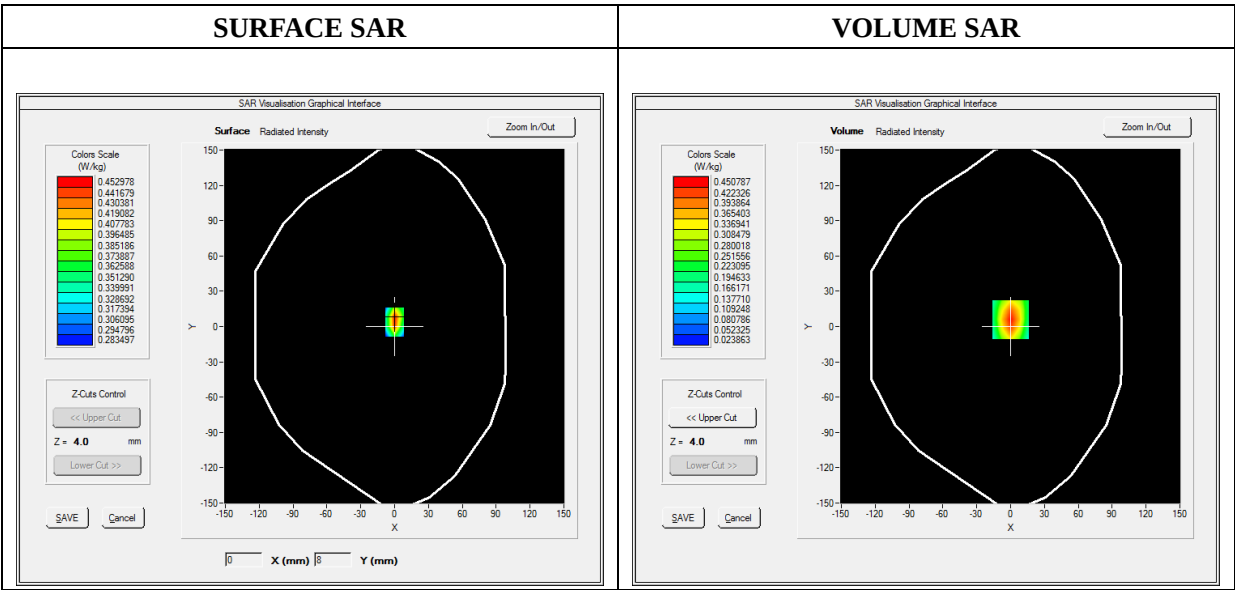

Maximum location: X=0.00, Y=6.00

SAR Peak: 0.71 W/kg

SAR 10g (W/Kg)	0.225094
SAR 1g (W/Kg)	0.420335

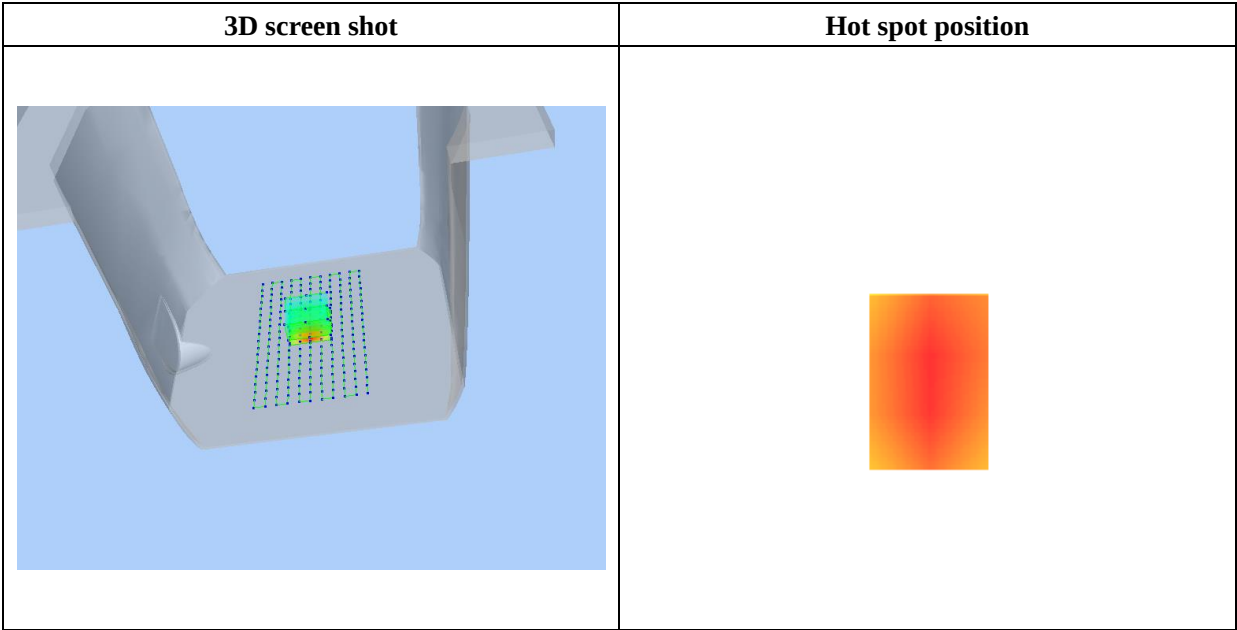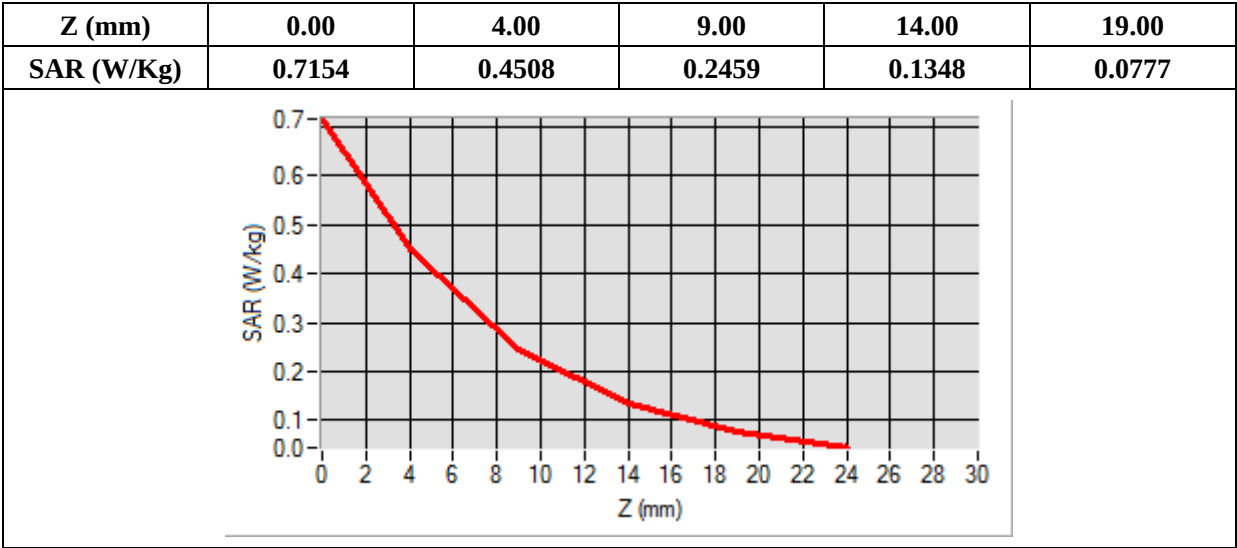

MEASUREMENT 157


Type: Phone measurement (Complete)
Date of measurement: 2020-08-12
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020/07/03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 4
Channels	QPSK, 20MHz, 1RB, High
Signal	Duty Cycle 1:1



B. SAR Measurement Results

Frequency (MHz)	1745.000000
Relative Permittivity (real part)	51.224510
Conductivity (S/m)	1.461261
Power Variation (%)	0.858383
Ambient Temperature	21.1
Liquid Temperature	21.2

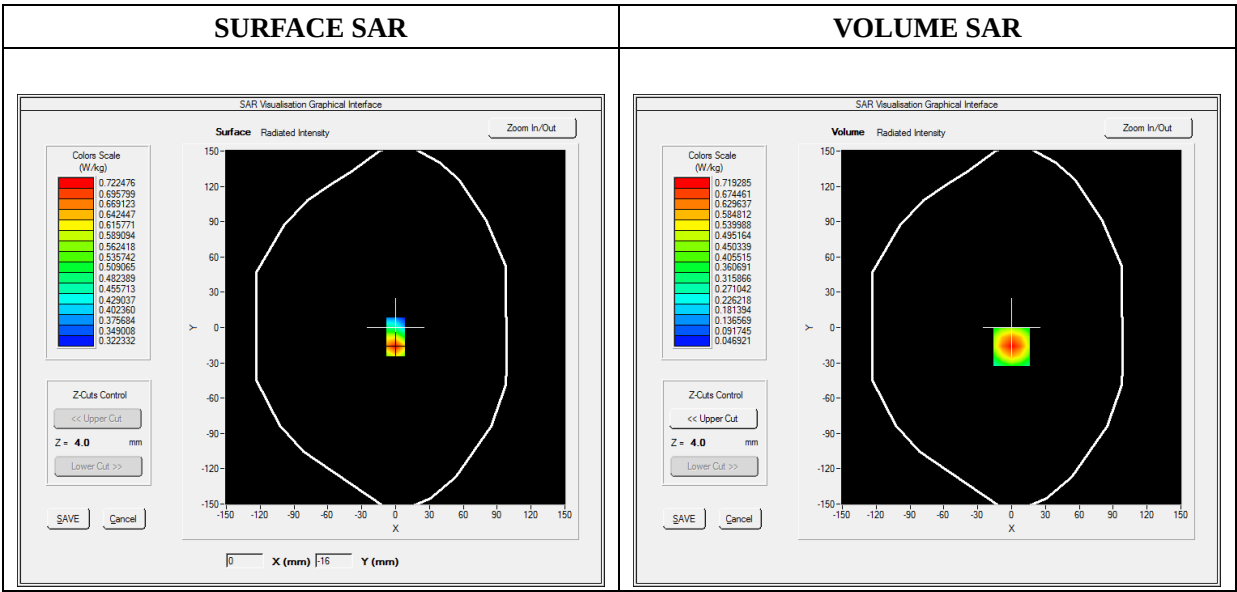

SAR Peak: 1.13 W/kg

SAR 10g (W/Kg)	0.373828
SAR 1g (W/Kg)	0.675441

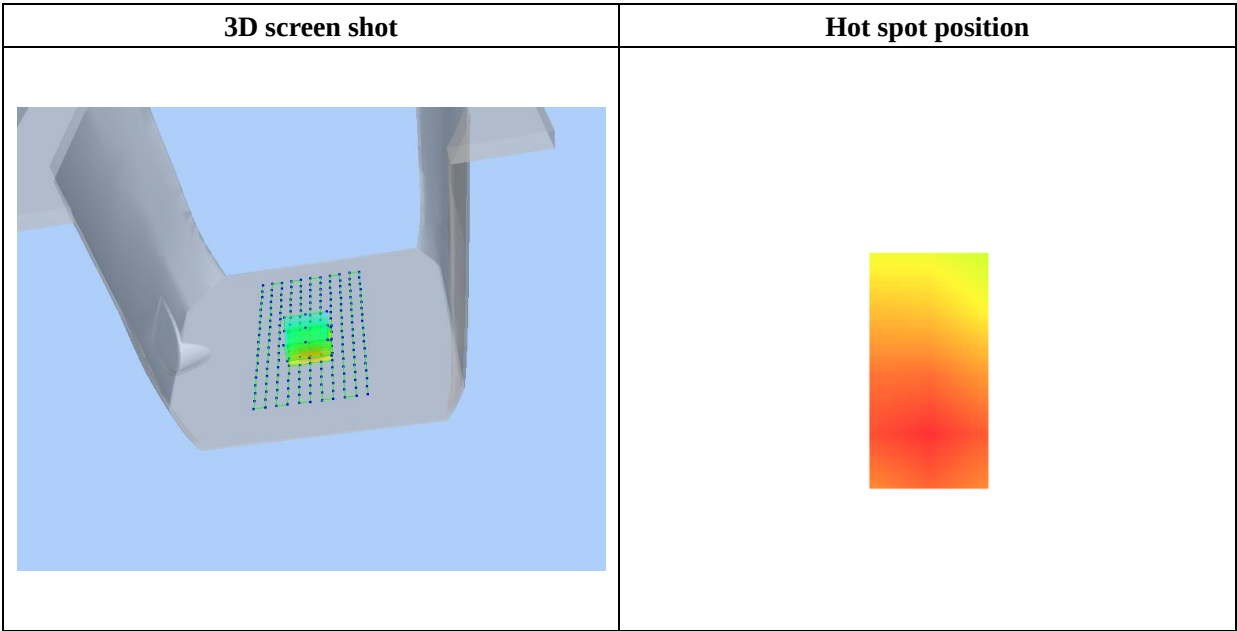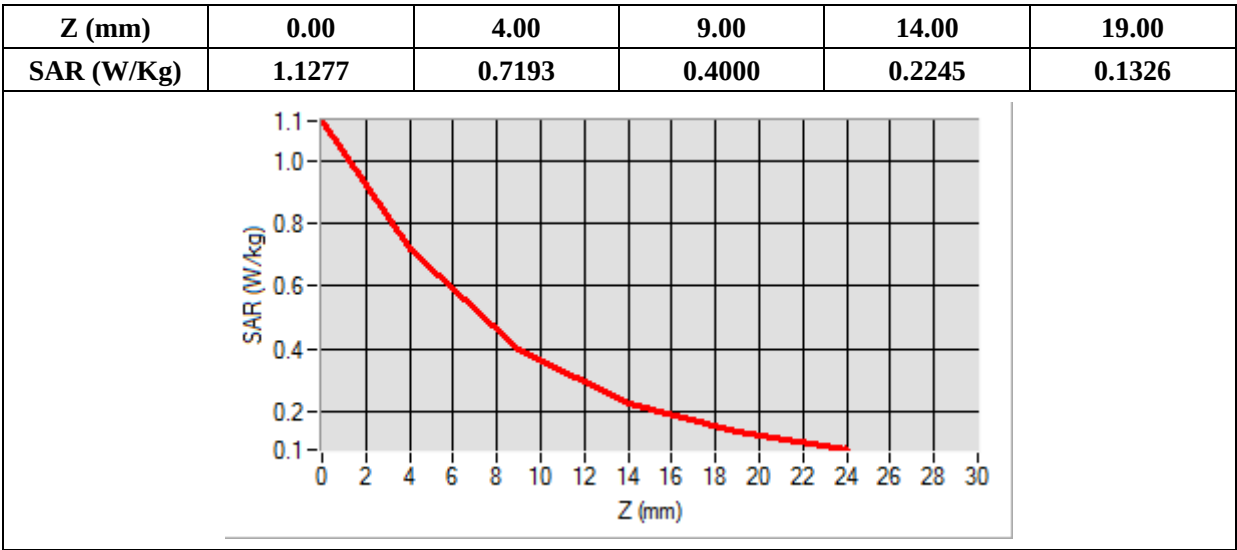

MEASUREMENT 165


Type: Phone measurement (Complete)
Date of measurement: 2020-08-11
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020/07/03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 5
Channels	QPSK, 10MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results


Frequency (MHz)	836.5000000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	1.210493
Ambient Temperature	21.1
Liquid Temperature	21.2

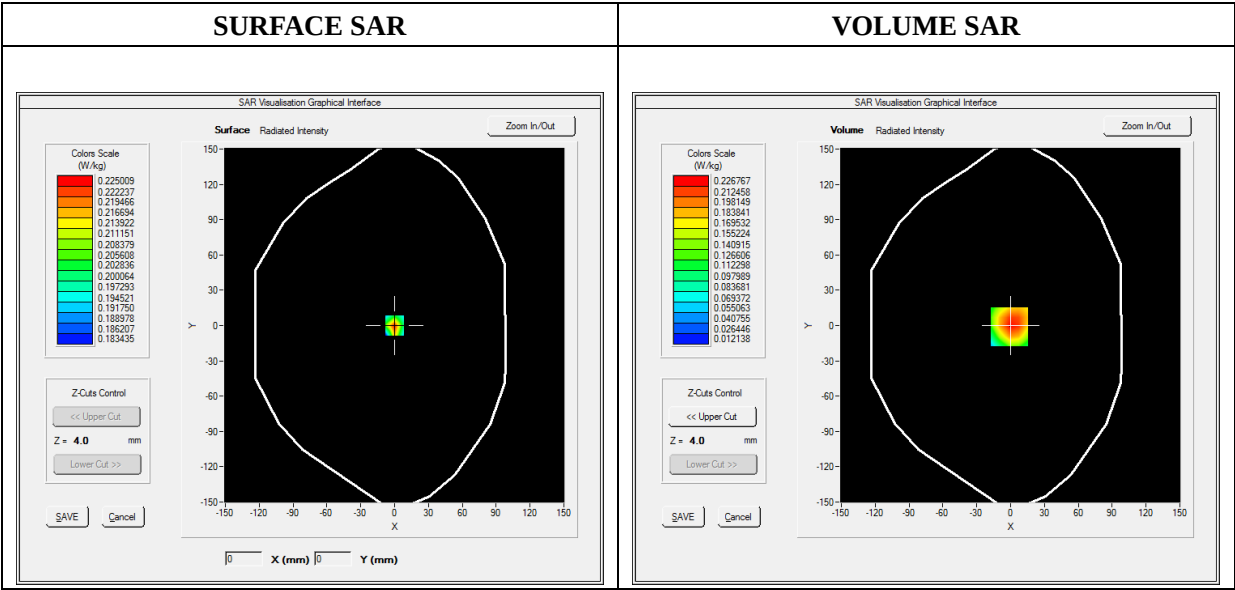


Maximum location: X=-1.00, Y=-1.00

SAR Peak: 0.33 W/kg

SAR 10g (W/Kg)	0.133484
SAR 1g (W/Kg)	0.216669

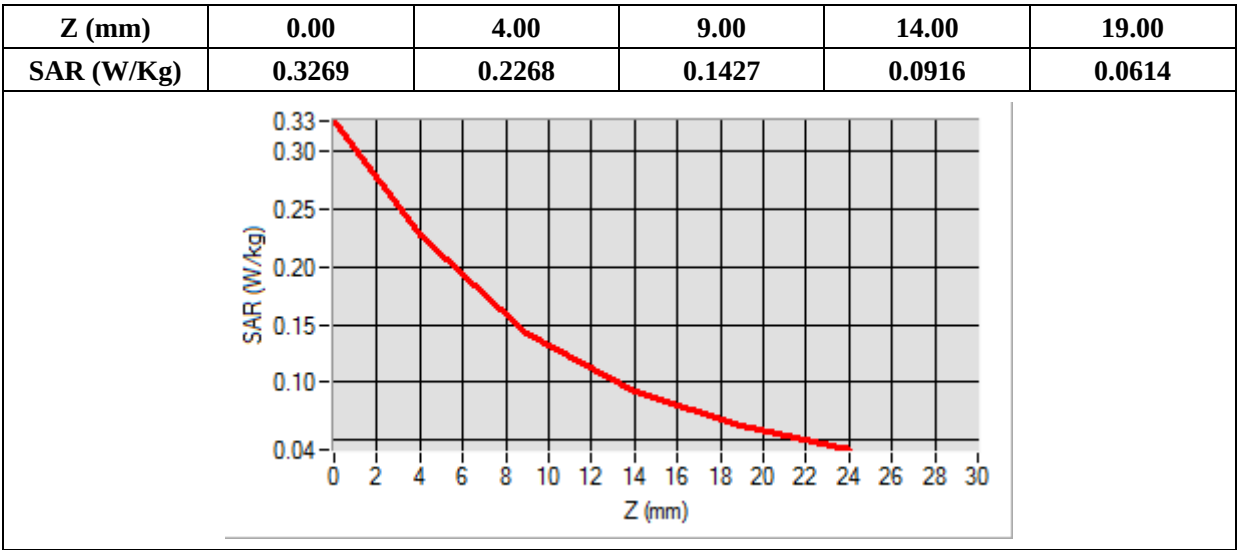

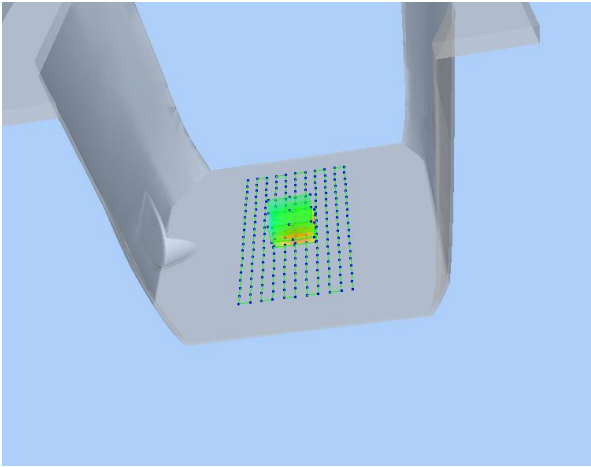3D screen shot	Hot spot position
	

MEASUREMENT 173


Type: Phone measurement (Complete)
Date of measurement: 2020-08-13
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020/07/03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 7
Channels	QPSK, 20MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2535.000000
Relative Permittivity (real part)	52.241202
Conductivity (S/m)	2.120943
Power Variation (%)	3.672346
Ambient Temperature	21.1
Liquid Temperature	21.2

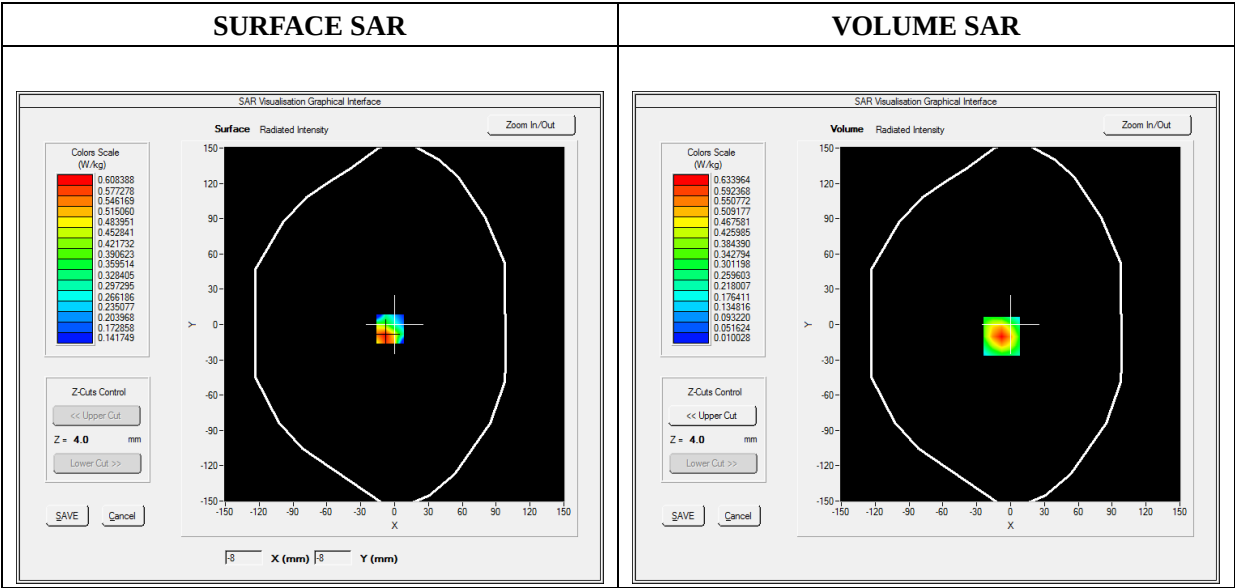




Maximum location: X=-8.00, Y=-10.00

SAR Peak: 1.12 W/kg

SAR 10g (W/Kg)	0.283793
SAR 1g (W/Kg)	0.590119

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.1218	0.6340	0.2911	0.1315	0.0645

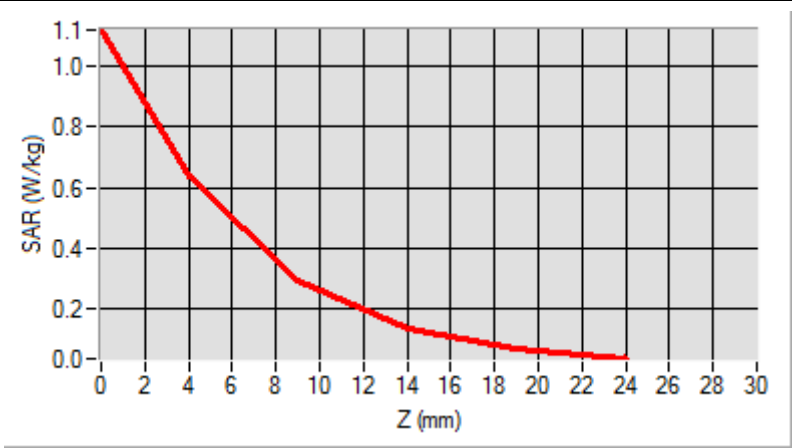

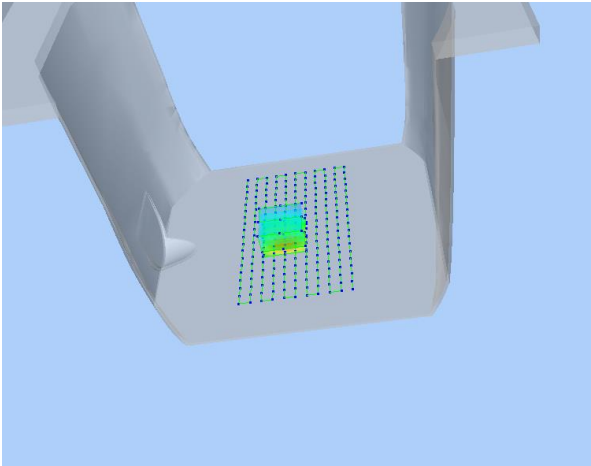3D screen shot	Hot spot position
	

MEASUREMENT 181


Type: Phone measurement (Complete)
Date of measurement: 2020-08-13
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.58; Calibrated: 06/01/2018

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 38_RMC
Channels	QPSK, 20MHz, 1RB, Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	2580.000000
Relative Permittivity (real part)	52.241202
Conductivity (S/m)	2.120943
Power Variation (%)	3.672346
Ambient Temperature	21.1
Liquid Temperature	21.2

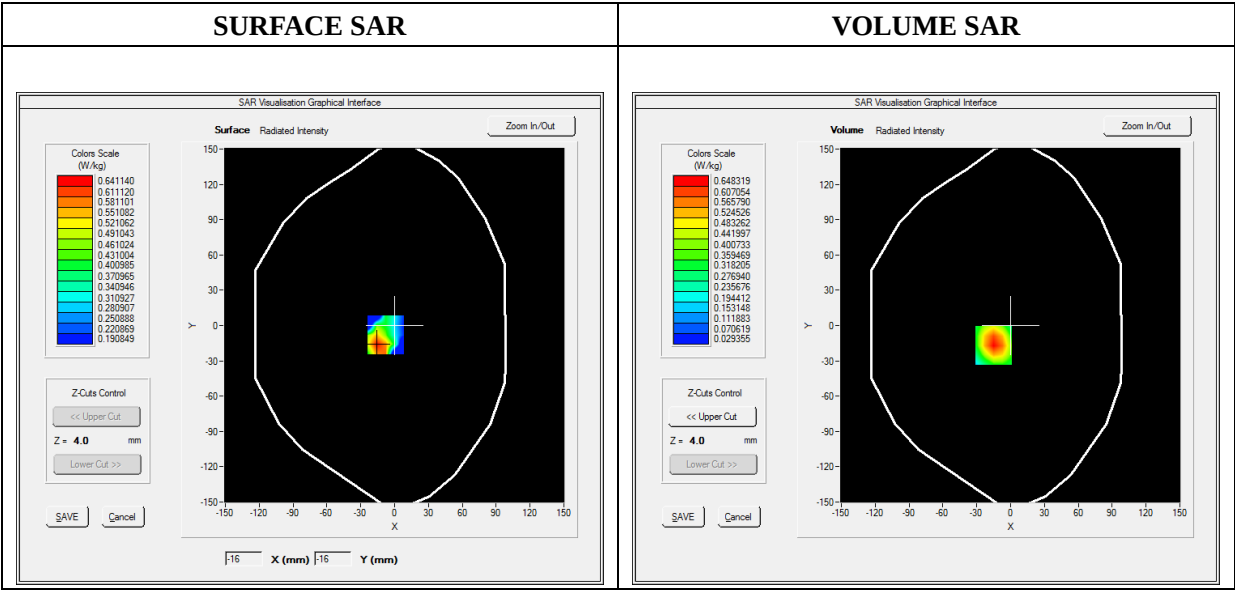

Maximum location: X=-15.00, Y=-17.00

SAR Peak: 1.04 W/kg

SAR 10g (W/Kg)	0.335601
SAR 1g (W/Kg)	0.622814

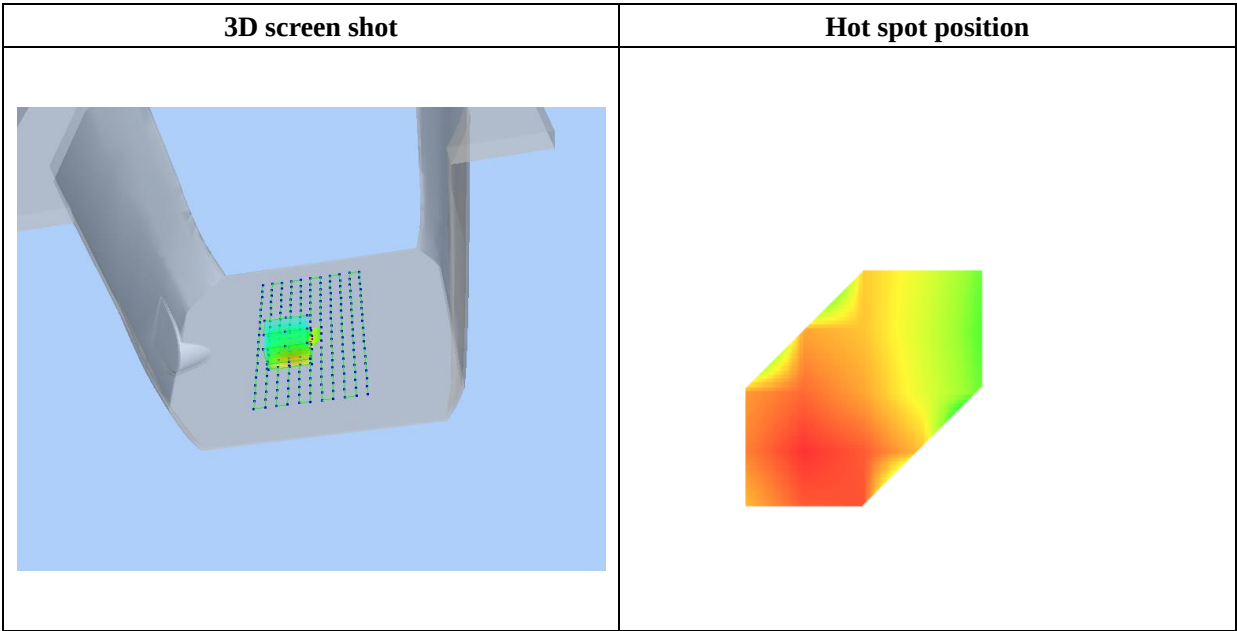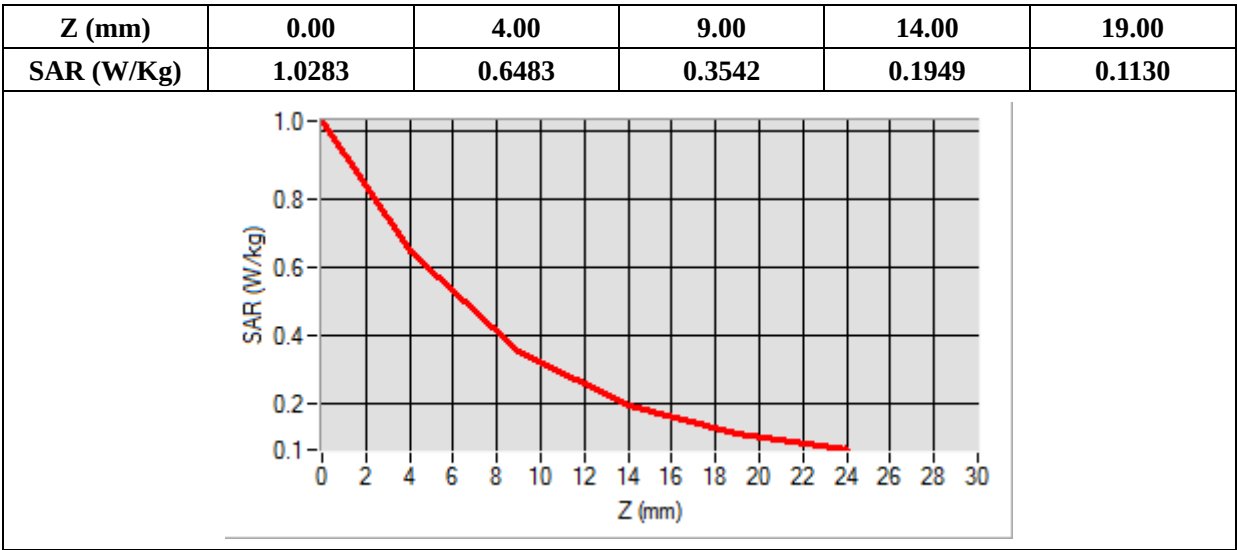

MEASUREMENT 189


Type: Phone measurement (Complete)
Date of measurement: 2020-08-13
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.58; Calibrated: 06/01/2018

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 41_RMC
Channels	QPSK, 20MHz, 1RB, Low
Signal	Duty Cycle 1:1



B. SAR Measurement Results

Frequency (MHz)	2506.000000
Relative Permittivity (real part)	52.241202
Conductivity (S/m)	2.120943
Power Variation (%)	3.672346
Ambient Temperature	21.1
Liquid Temperature	21.2

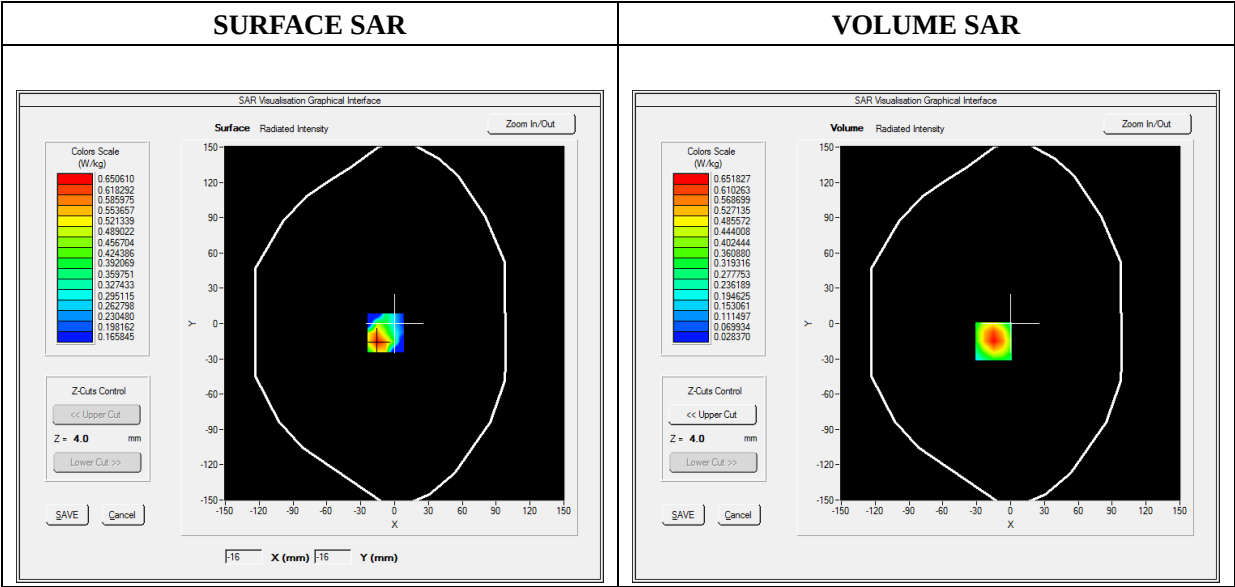

Maximum location: X=-15.00, Y=-15.00
SAR Peak: 1.06 W/kg

SAR 10g (W/Kg)	0.329189
SAR 1g (W/Kg)	0.613349

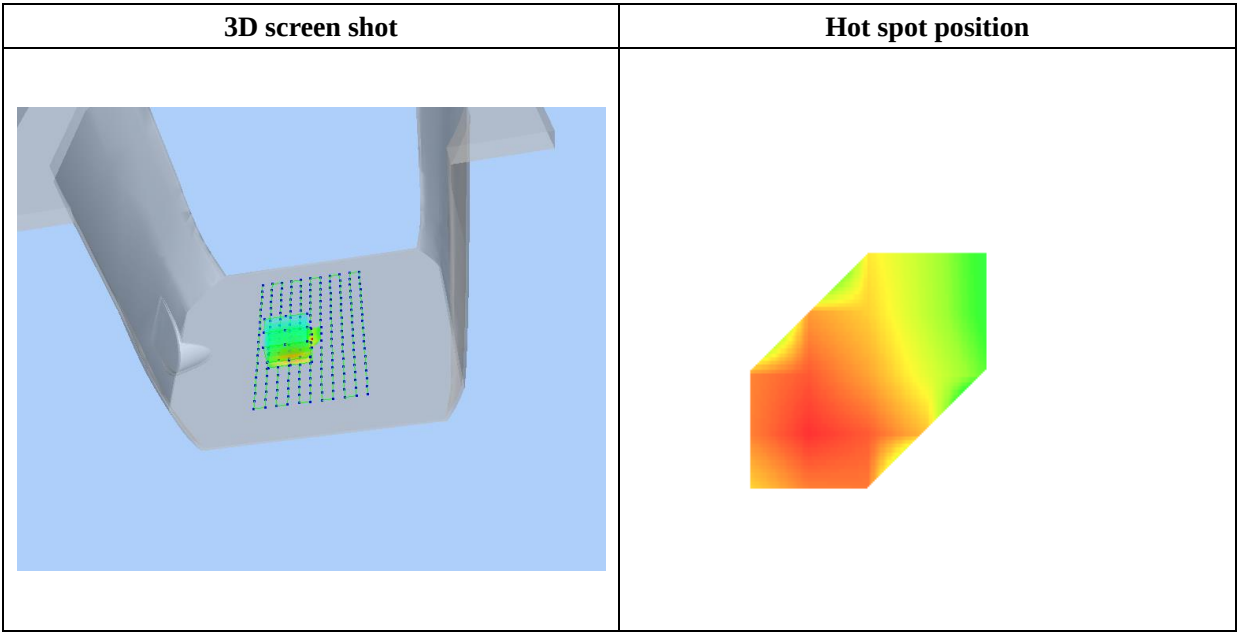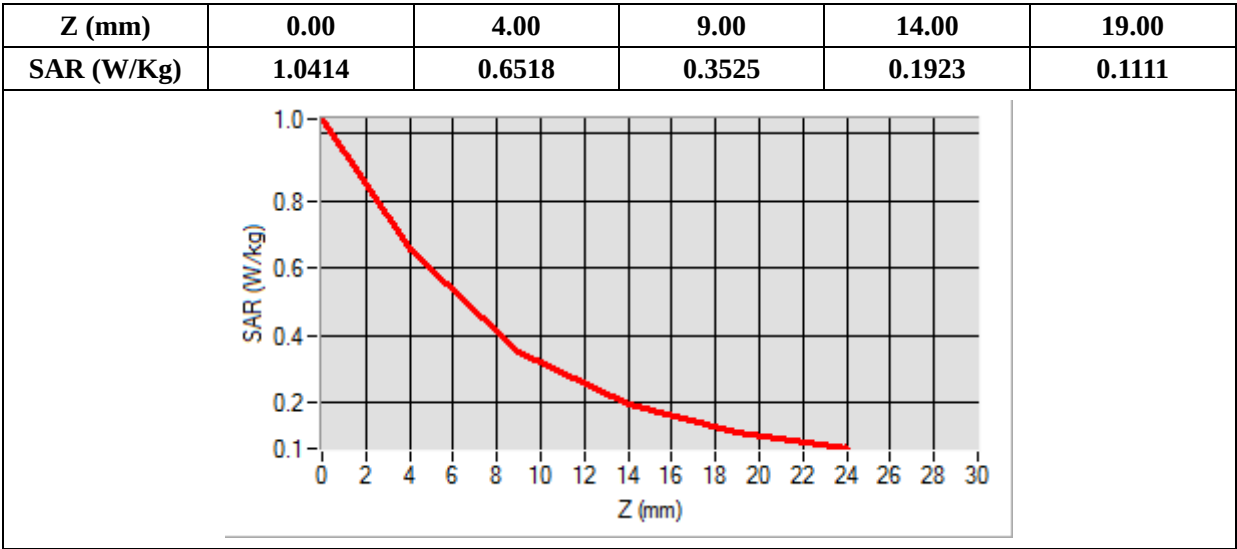

MEASUREMENT 197


Type: Phone measurement (Complete)
Date of measurement: 2020-08-13
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020/07/03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WiFi_802.11b
Channels	Middle
Signal	Duty Cycle 1:1



B. SAR Measurement Results

Frequency (MHz)	2437.000000
Relative Permittivity (real part)	52.010212
Conductivity (S/m)	1.910255
Power Variation (%)	2.492743
Ambient Temperature	21.1
Liquid Temperature	21.2

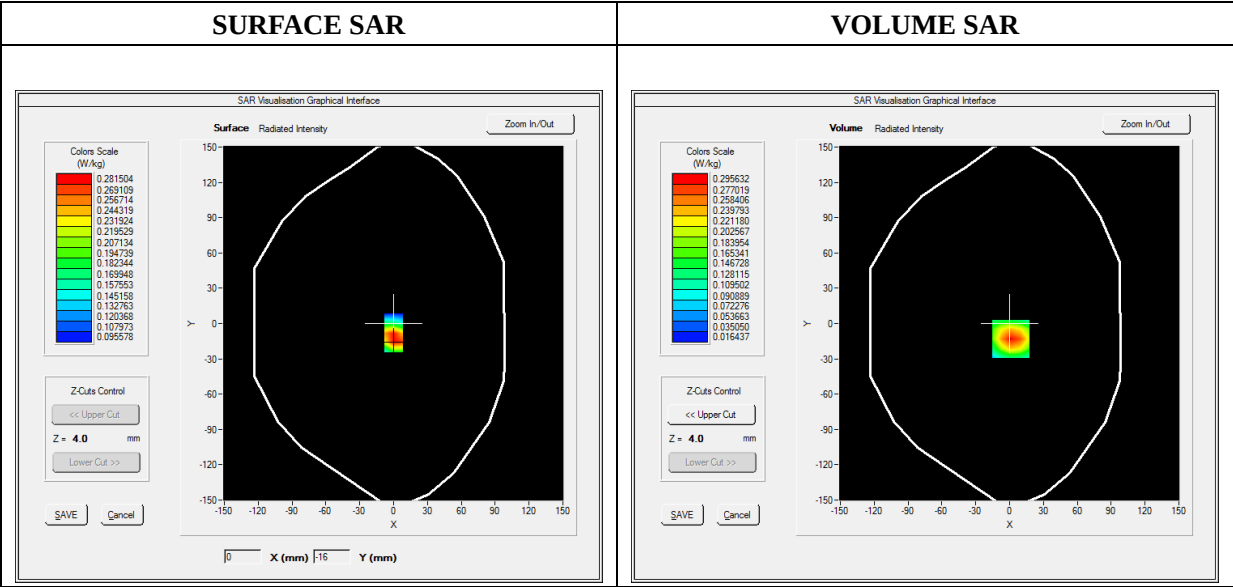

Maximum location: X=1.00, Y=-13.00
SAR Peak: 0.48 W/kg

SAR 10g (W/Kg)	0.146116
SAR 1g (W/Kg)	0.276148

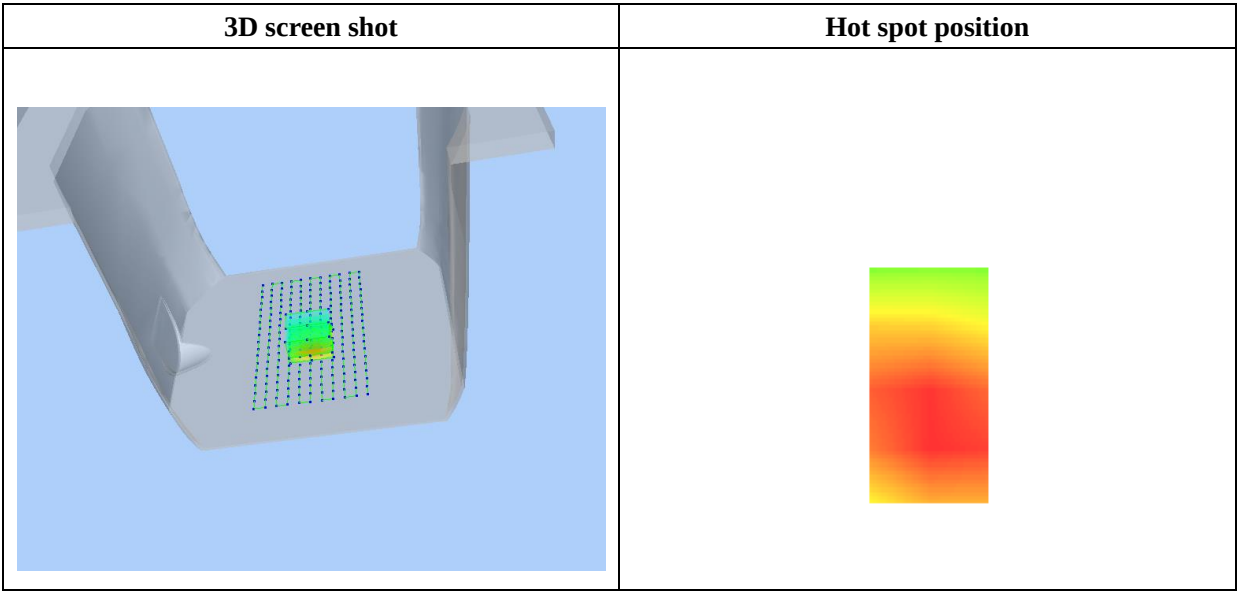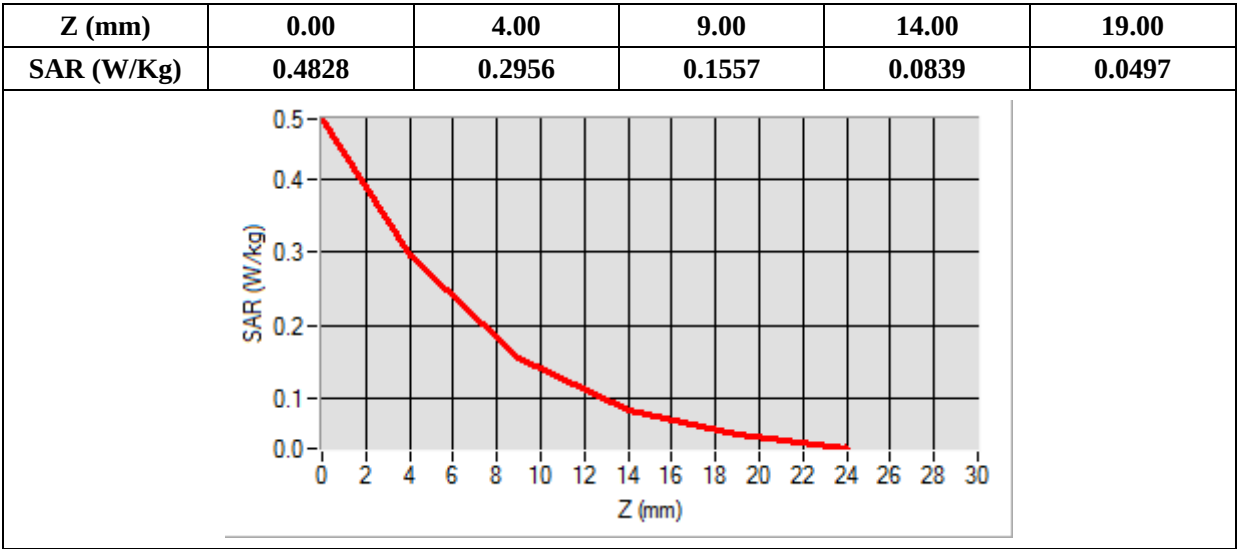

Annex C. EUT Photos

Please refer to the External Photos and Internal Photos

Annex D. Test Setup Photos

Please refer to the SAR Test Setup Photos

Annex E. Calibration Certificate

Please refer to the exhibit for the calibration certificate

******* END OF REPORT *******