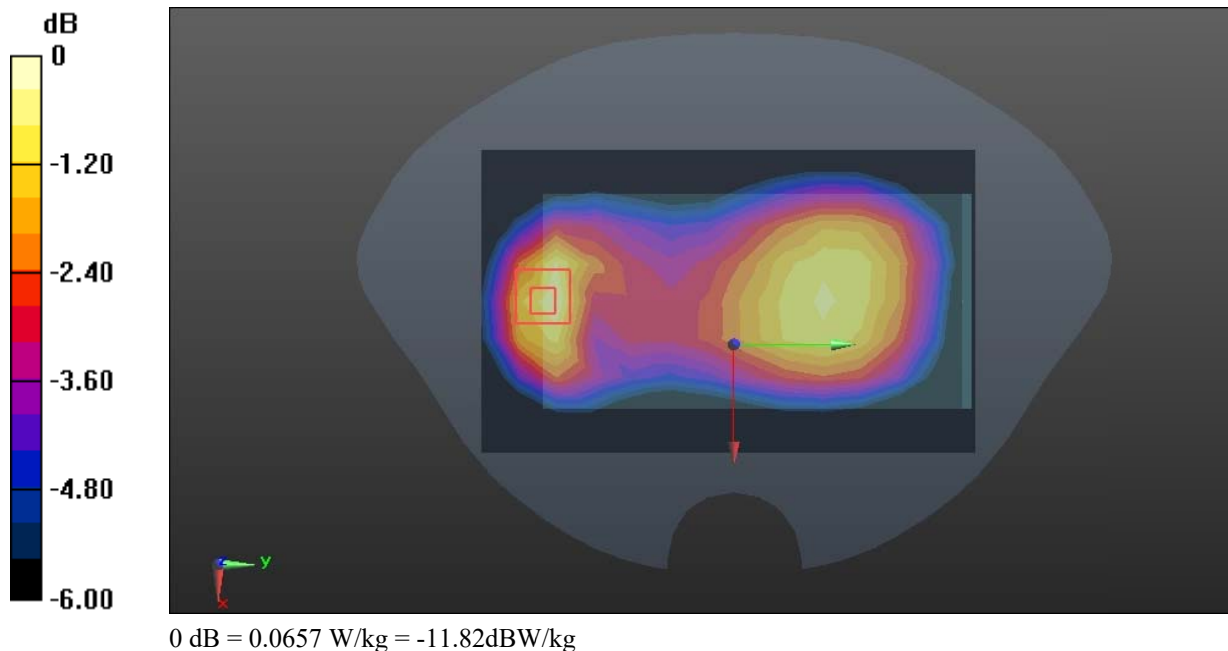


**Test Plot 1#: GSM 850 Mid ANT0 Head Cheek****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.941 \text{ S/m}$ ;  $\epsilon_r = 40.893$ ;  $\rho = 1000 \text{ kg/m}^3$ ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ Maximum value of SAR (measured) =  $0.0607 \text{ W/kg}$ **Zoom Scan (5x5x7) /Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ Reference Value =  $6.359 \text{ V/m}$ ; Power Drift =  $0.16\text{dB}$ Peak SAR (extrapolated) =  $0.0850 \text{ W/kg}$ **SAR(1 g) =  $0.056 \text{ W/kg}$ ; SAR(10 g) =  $0.037 \text{ W/kg}$** Maximum value of SAR (measured) =  $0.0657 \text{ W/kg}$ 

**Test Plot 2#: GSM 850 Mid ANT0 Body Bottom****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: Generic GPRS-3 slots (0); Frequency:836.6MHz; Duty Cycle: 1:2.66  
 Medium parameters used:  $f=836.6$  MHz;  $\sigma = 0.941$  S/m;  $\epsilon_r=40.893$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x9x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.177 W/kg


**Zoom Scan (5x5x7) /Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.35 V/m; Power Drift =0.04dB

Peak SAR (extrapolated) = 0.367 W/kg

**SAR(1 g) = 0.186 W/kg; SAR(10 g) = 0.099 W/kg**

Maximum value of SAR (measured) = 0.239 W/kg

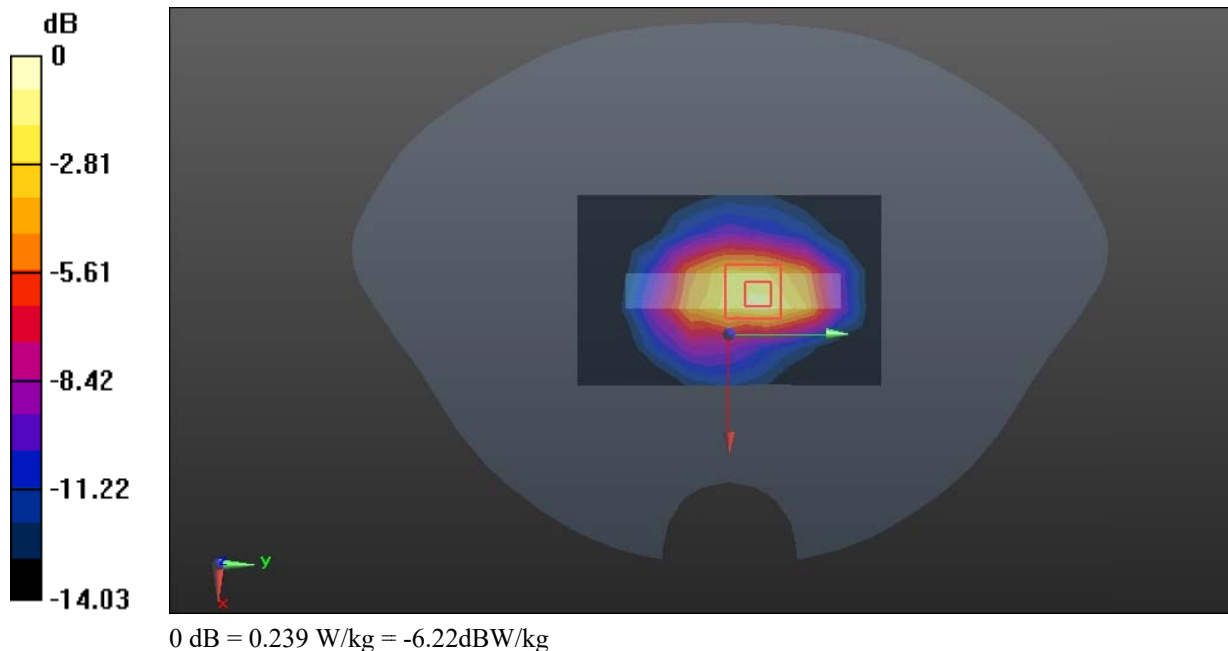

Test Plot 3#: GSM 850 Mid ANT1 Head Right Tilt

DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;

Communication System: Generic GSM (0); Frequency:836.6MHz; Duty Cycle: 1:8  
Medium parameters used:  $f=836.6\text{ MHz}$ ;  $\sigma=0.941\text{ S/m}$ ;  $\epsilon_r=40.893$ ;  $\rho=1000\text{ kg/m}^3$  ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x8x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.251 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.56 V/m; Power Drift =0.11dB

Peak SAR (extrapolated) = 0.669 W/kg

SAR(1 g) = 0.248 W/kg; SAR(10 g) = 0.085 W/kg

Maximum value of SAR (measured) = 0.446 W/kg

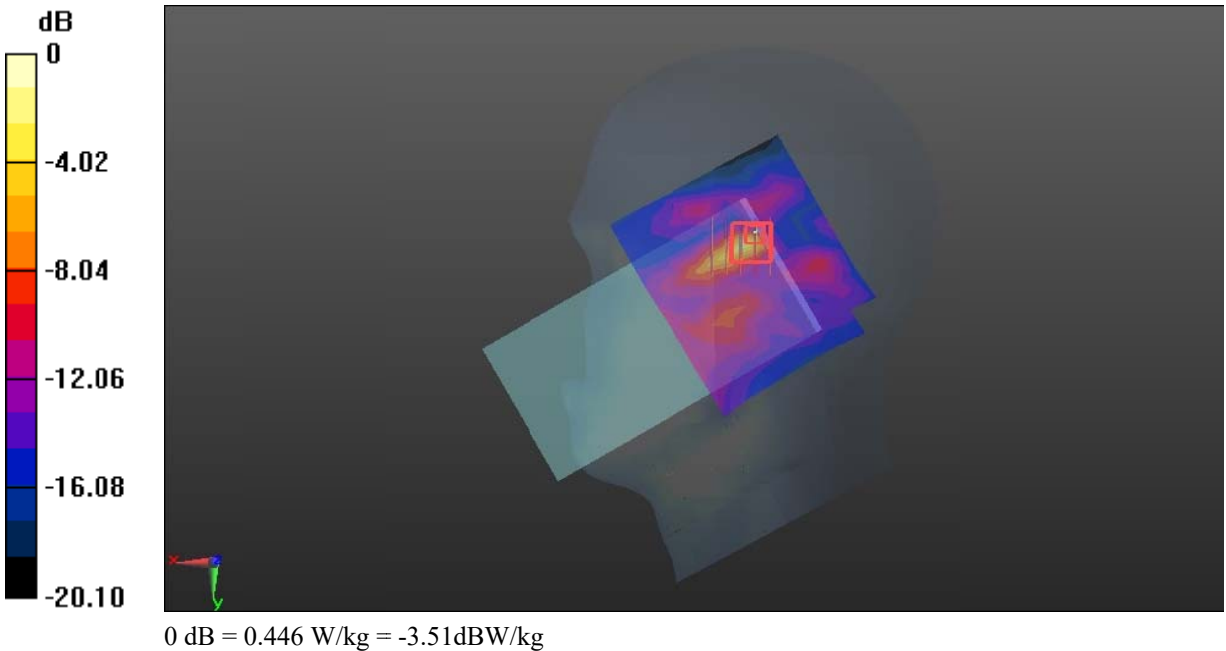

**Test Plot 4#: GSM 850 Mid ANT1 Body Top****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: Generic GPRS-3 slots (0); Frequency:836.6MHz; Duty Cycle: 1:2.66

Medium parameters used:  $f=836.6$  MHz;  $\sigma = 0.941$  S/m;  $\epsilon_r=40.893$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x9x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.200 W/kg


**Zoom Scan (5x5x7) /Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.92 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.372 W/kg

**SAR(1 g) = 0.205 W/kg; SAR(10 g) = 0.127 W/kg**

Maximum value of SAR (measured) = 0.255 W/kg

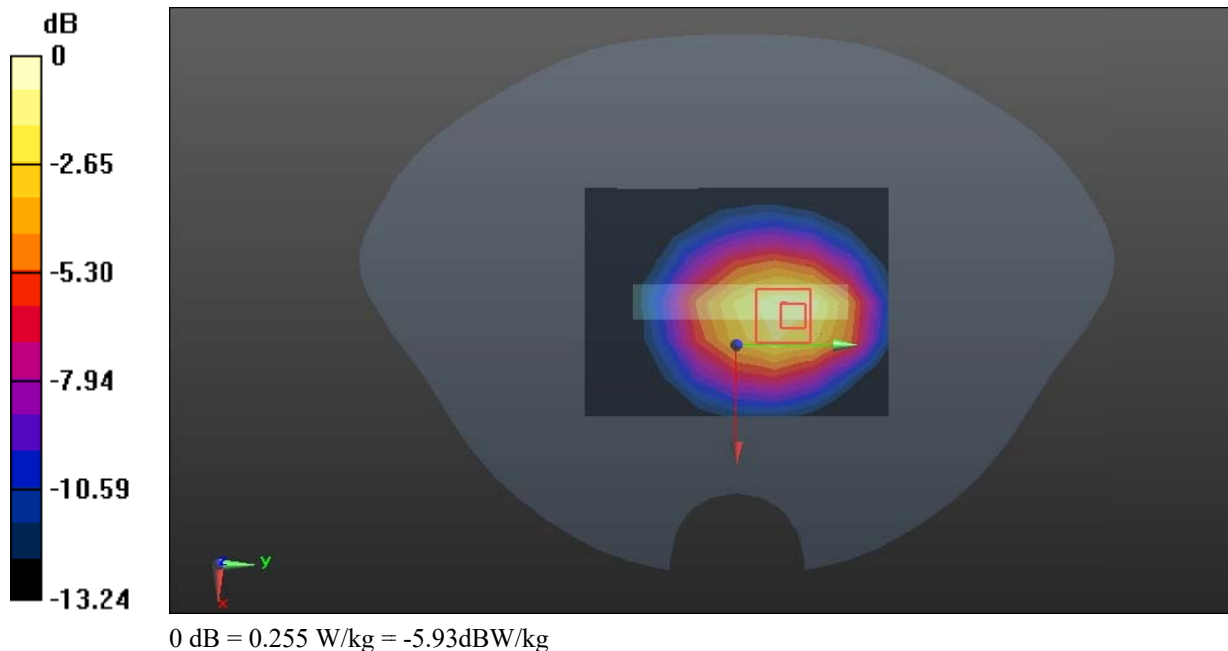

**Test Plot 5#: PCS 1900 Mid ANT0 Head Left Cheek****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: Generic GSM (0); Frequency:1880MHz; Duty Cycle: 1:8  
 Medium parameters used:  $f=1880$  MHz;  $\sigma = 1.419$  S/m;  $\epsilon_r=39.334$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1880 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x9x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.122 W/kg


**Zoom Scan (5x5x7) /Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.181 V/m; Power Drift =0.13dB

Peak SAR (extrapolated) = 0.148 W/kg

**SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.074 W/kg**

Maximum value of SAR (measured) = 0.120 W/kg

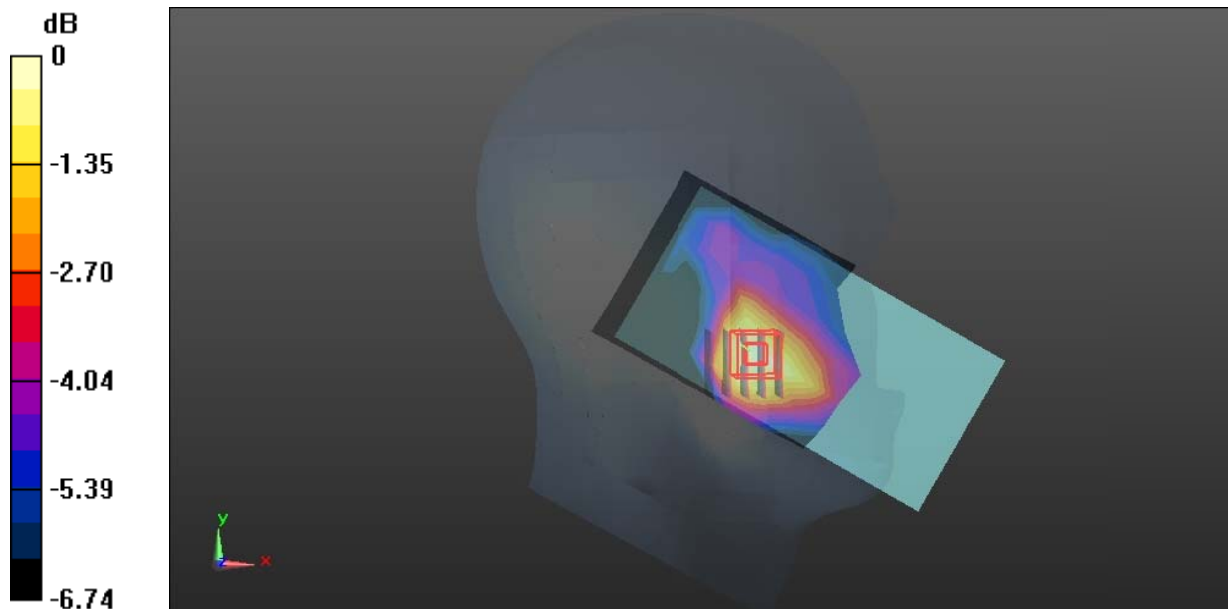

0 dB = 0.120 W/kg = -9.21dBW/kg

**Test Plot 6#: PCS 1900 Mid ANT0 Body Back****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: Generic GPRS-3 slots (0); Frequency:1880MHz; Duty Cycle: 1:2.66

Medium parameters used:  $f=1880$  MHz;  $\sigma = 1.419$  S/m;  $\epsilon_r=39.334$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1880 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x14x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.686 W/kg


**Zoom Scan (5x5x7) /Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.718 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.985 W/kg

**SAR(1 g) = 0.643 W/kg; SAR(10 g) = 0.402 W/kg**

Maximum value of SAR (measured) = 0.755 W/kg

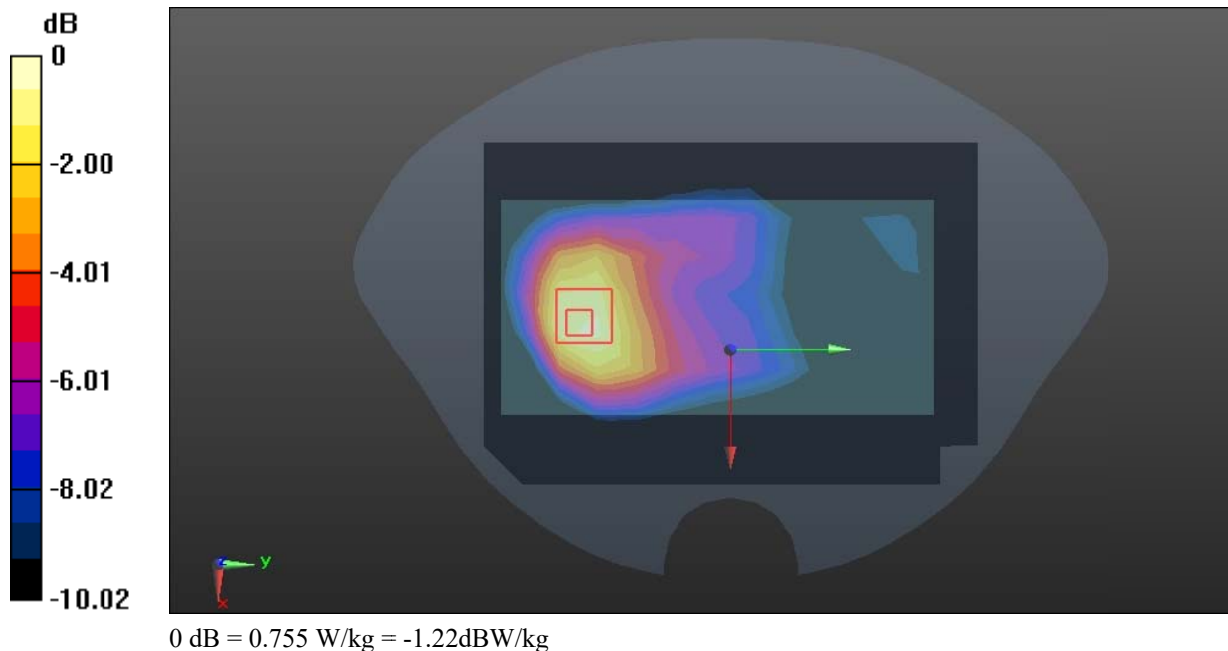

**Test Plot 7#: PCS 1900 Mid ANT1 Head Right Tilt****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: Generic GSM (0); Frequency:1880MHz; Duty Cycle: 1:8  
 Medium parameters used:  $f=1880$  MHz;  $\sigma = 1.419$  S/m;  $\epsilon_r=39.334$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1880 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x8x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.317 W/kg


**Zoom Scan (5x5x7) /Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.79 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.733 W/kg

**SAR(1 g) = 0.386 W/kg; SAR(10 g) = 0.196 W/kg**

Maximum value of SAR (measured) = 0.519 W/kg

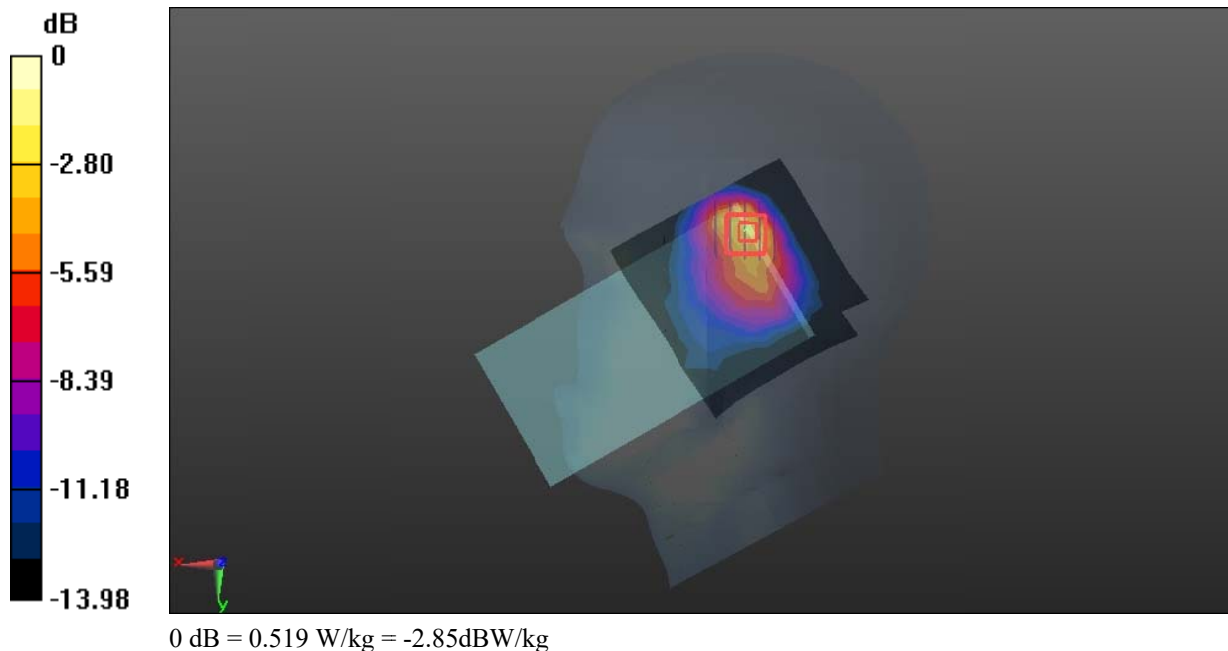

**Test Plot 8#: PCS 1900 Mid ANT1 Body Top****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: Generic GPRS-3 slots (0); Frequency:1880MHz; Duty Cycle: 1:2.66

Medium parameters used:  $f=1880$  MHz;  $\sigma = 1.419$  S/m;  $\epsilon_r=39.334$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1880 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x9x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.288 W/kg


**Zoom Scan (5x5x7) /Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.41 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.549 W/kg

**SAR(1 g) = 0.288 W/kg; SAR(10 g) = 0.144 W/kg**

Maximum value of SAR (measured) = 0.372 W/kg

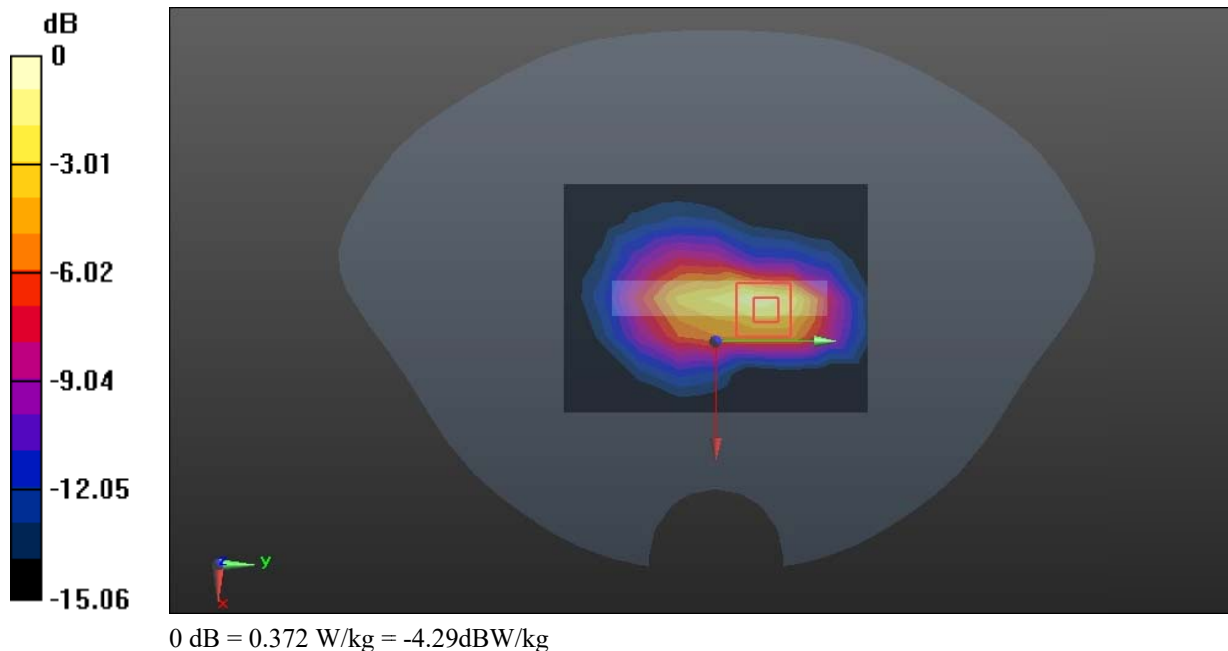

**Test Plot 9#: WCDMA Band 2 Mid ANT0 Head Left Cheek****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: WCDMA (0); Frequency: 1880MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.419 \text{ S/m}$ ;  $\epsilon_r = 39.334$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1880 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):**Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 

Maximum value of SAR (measured) = 0.342 W/kg


**Zoom Scan (5x5x7) /Cube 0:**Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 3.433 V/m; Power Drift =0.10dB

Peak SAR (extrapolated) = 0.414 W/kg

**SAR(1 g) = 0.288 W/kg; SAR(10 g) = 0.192 W/kg**

Maximum value of SAR (measured) = 0.332 W/kg

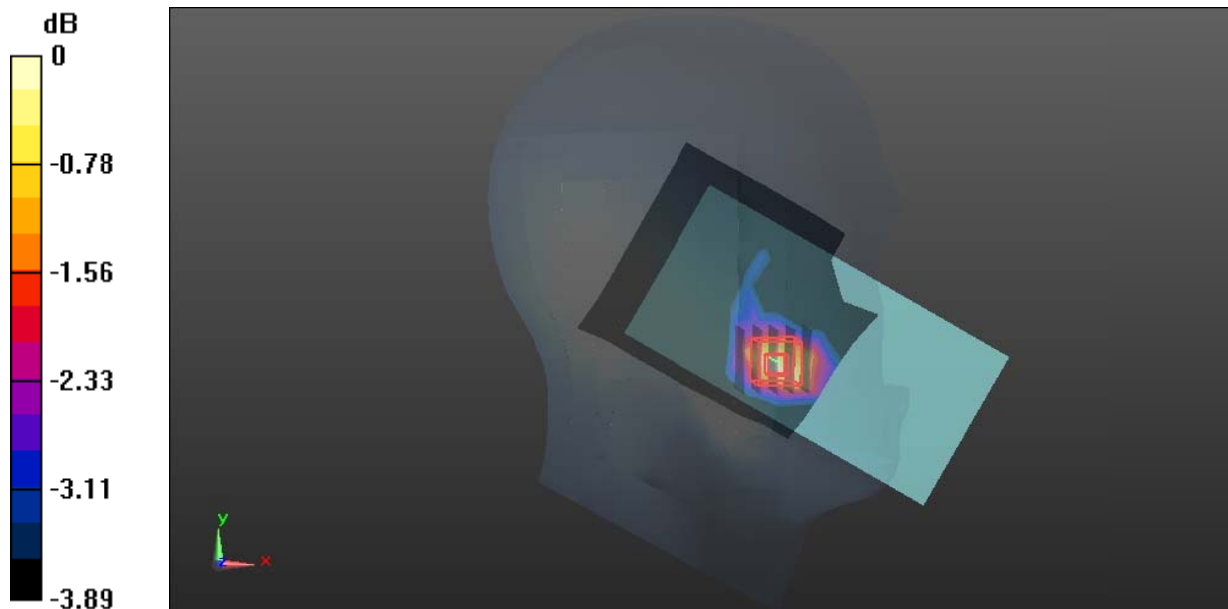

0 dB = 0.332 W/kg = -4.79dBW/kg

**Test Plot 10#: WCDMA Band 2 Mid ANT0 Body Bottom****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: WCDMA (0); Frequency:1880MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=1880$  MHz;  $\sigma = 1.419$  S/m;  $\epsilon_r=39.334$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1880 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x9x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.451 W/kg


**Zoom Scan (5x5x7) /Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.32 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.648 W/kg

**SAR(1 g) = 0.406 W/kg; SAR(10 g) = 0.243 W/kg**

Maximum value of SAR (measured) = 0.485 W/kg

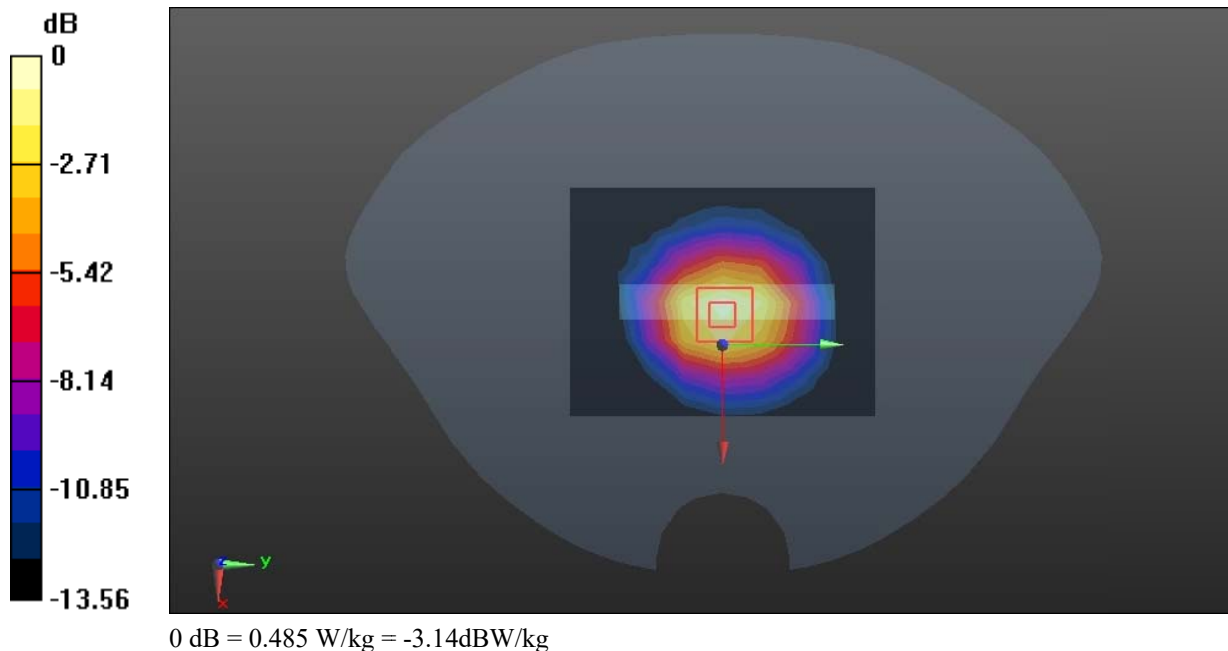

**Test Plot 11#: WCDMA Band 2 Mid ANT1 Head Right Tilt****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: WCDMA (0); Frequency:1880MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=1880$  MHz;  $\sigma = 1.419$  S/m;  $\epsilon_r=39.334$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1880 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x7x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.728 W/kg


**Zoom Scan (5x5x7) /Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.61 V/m; Power Drift =0.13dB

Peak SAR (extrapolated) = 1.08 W/kg

**SAR(1 g) = 0.561 W/kg; SAR(10 g) = 0.283 W/kg**

Maximum value of SAR (measured) = 0.748 W/kg

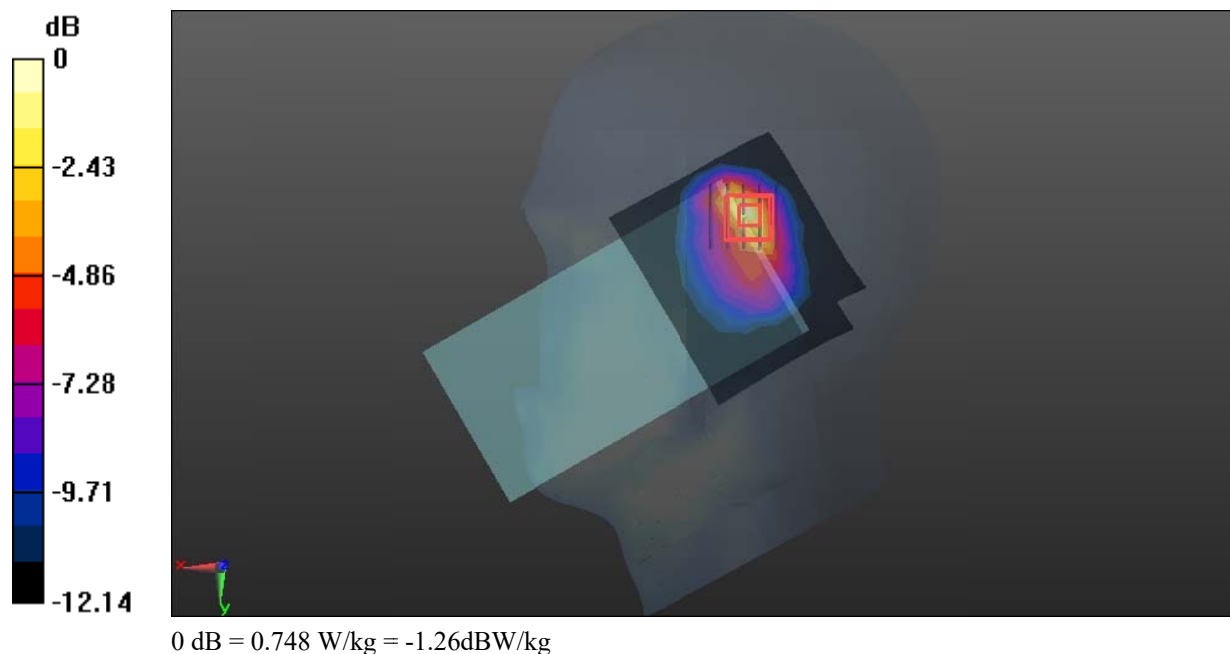

**Test Plot 12#: WCDMA Band 2 Mid ANT1 Body Back****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: WCDMA (0); Frequency: 1880MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.419 \text{ S/m}$ ;  $\epsilon_r = 39.334$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1880 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x15x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.266 W/kg


**Zoom Scan (5x5x7) /Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.695 V/m; Power Drift =0.16dB

Peak SAR (extrapolated) = 0.482 W/kg

**SAR(1 g) = 0.269 W/kg; SAR(10 g) = 0.147 W/kg**

Maximum value of SAR (measured) = 0.342 W/kg

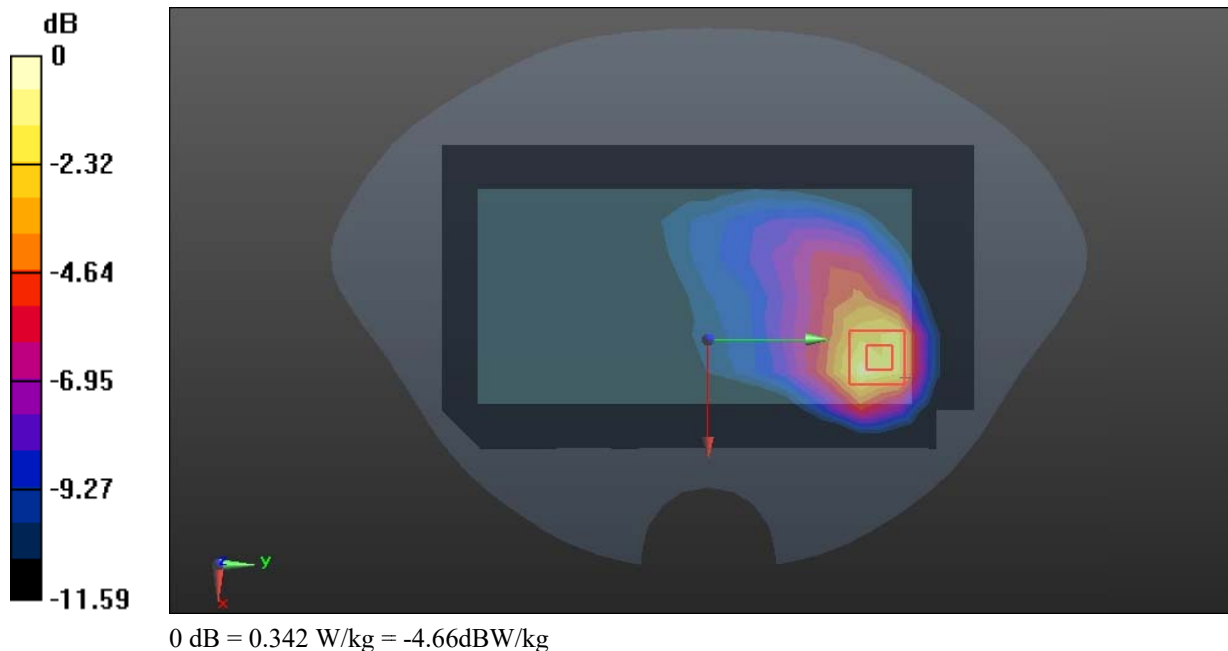

**Test Plot 13#: WCDMA Band 4 Mid ANT0 Head Right Cheek****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.352$  S/m;  $\epsilon_r = 39.413$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8.54, 7.65, 7.43) @ 1732.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0699 W/kg


**Zoom Scan (5x5x7) /Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.422 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0600 W/kg

**SAR(1 g) = 0.047 W/kg; SAR(10 g) = 0.038 W/kg**

Maximum value of SAR (measured) = 0.0498 W/kg

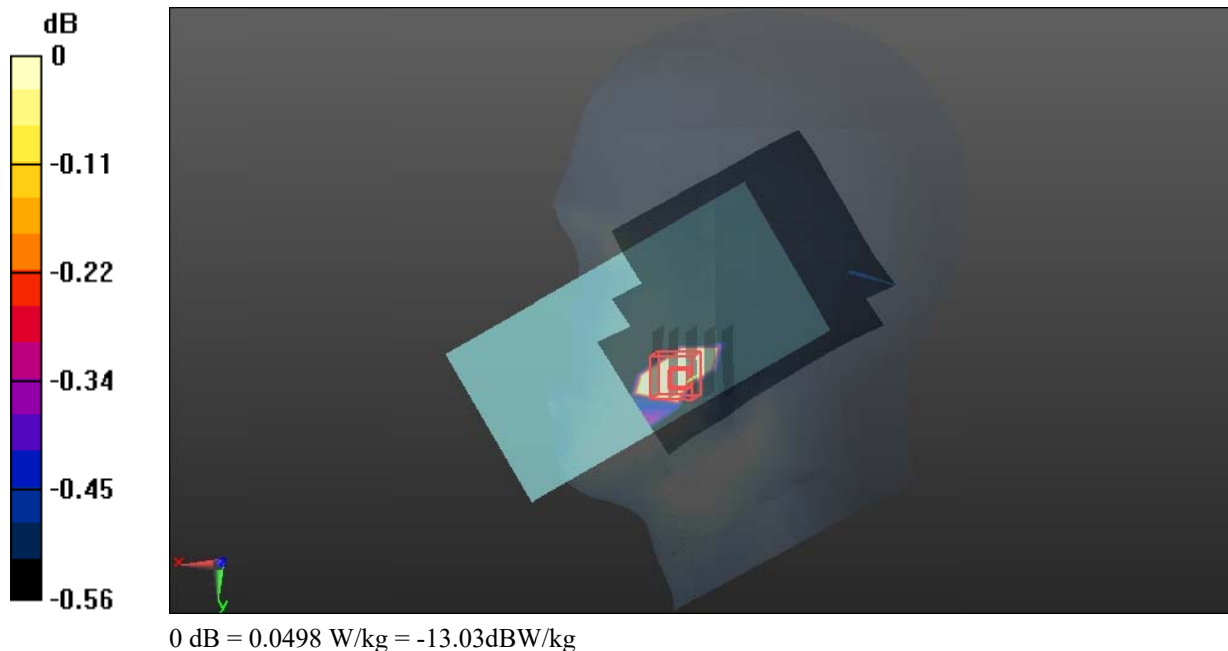

**Test Plot 14#: WCDMA Band 4 Mid ANT0 Body Bottom****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.352$  S/m;  $\epsilon_r = 39.413$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8.54, 7.65, 7.43) @ 1732.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.150 W/kg


**Zoom Scan (5x5x7) /Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.991 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.205 W/kg

**SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.083 W/kg**

Maximum value of SAR (measured) = 0.158 W/kg

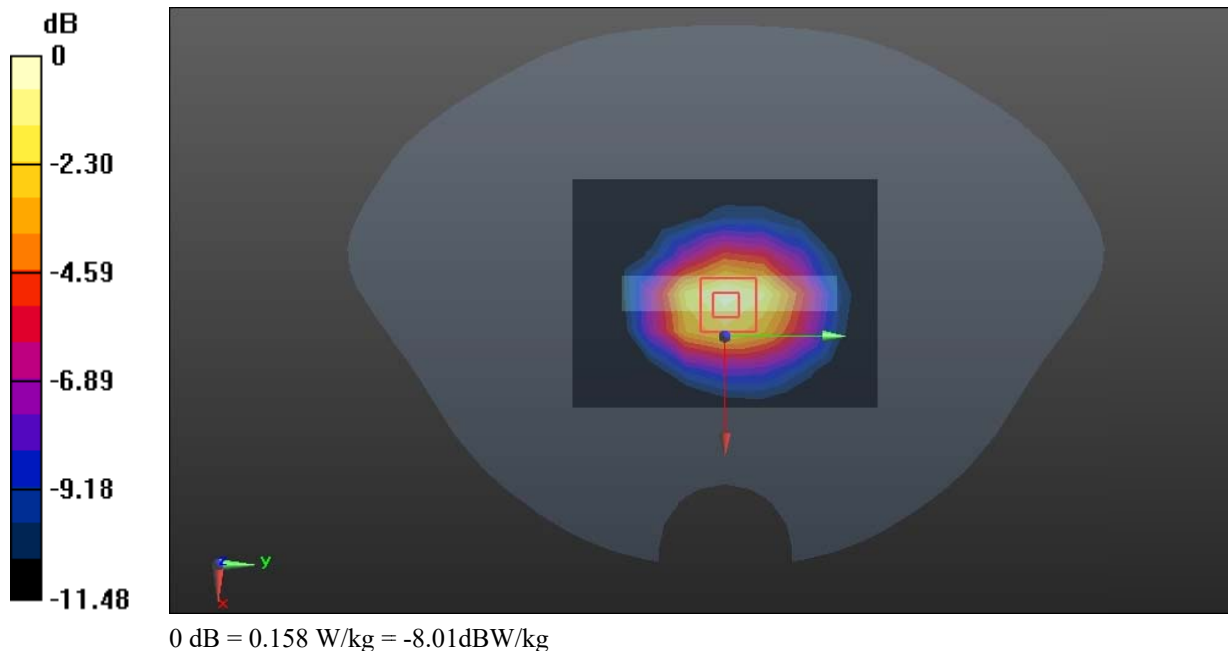

**Test Plot 15#: WCDMA Band 4 Mid ANT1 Head Right Cheek****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.352$  S/m;  $\epsilon_r = 39.413$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8.54, 7.65, 7.43) @ 1732.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.254 W/kg


**Zoom Scan (5x5x7) /Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.42 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.388 W/kg

**SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.141 W/kg**

Maximum value of SAR (measured) = 0.261 W/kg

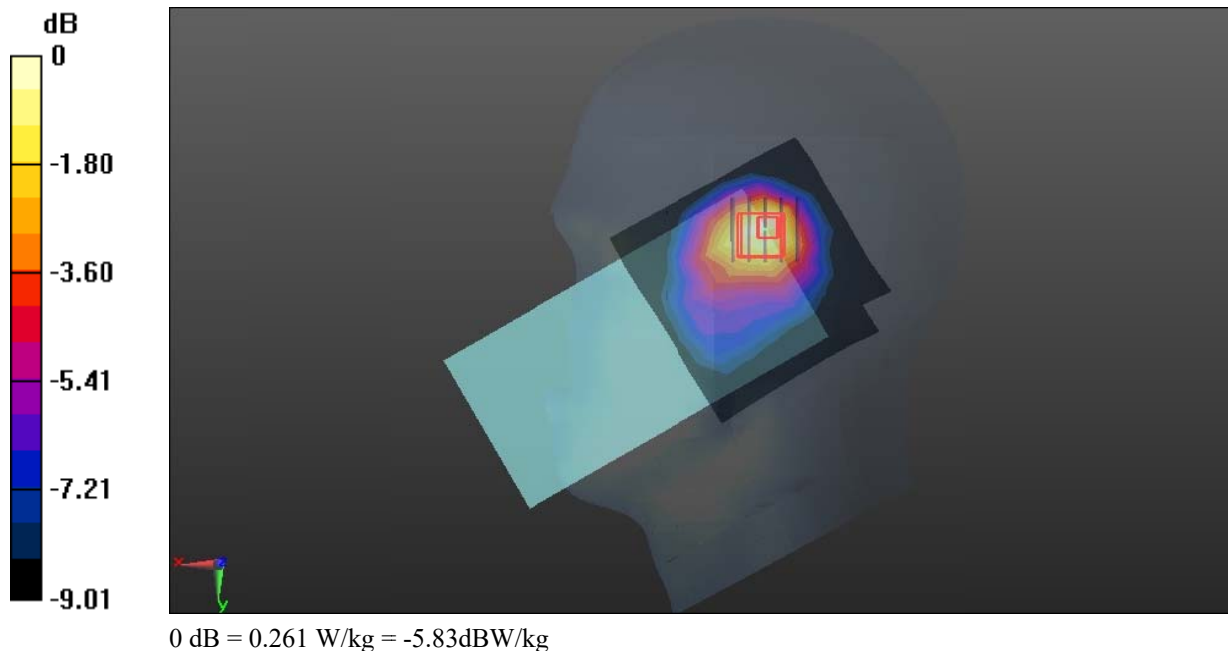

**Test Plot 16#: WCDMA Band 4 Mid ANT1 Body Back****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.352$  S/m;  $\epsilon_r = 39.413$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8.54, 7.65, 7.43) @ 1732.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.112 W/kg


**Zoom Scan (5x5x7) /Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.573 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.161 W/kg

**SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.064 W/kg**

Maximum value of SAR (measured) = 0.117 W/kg

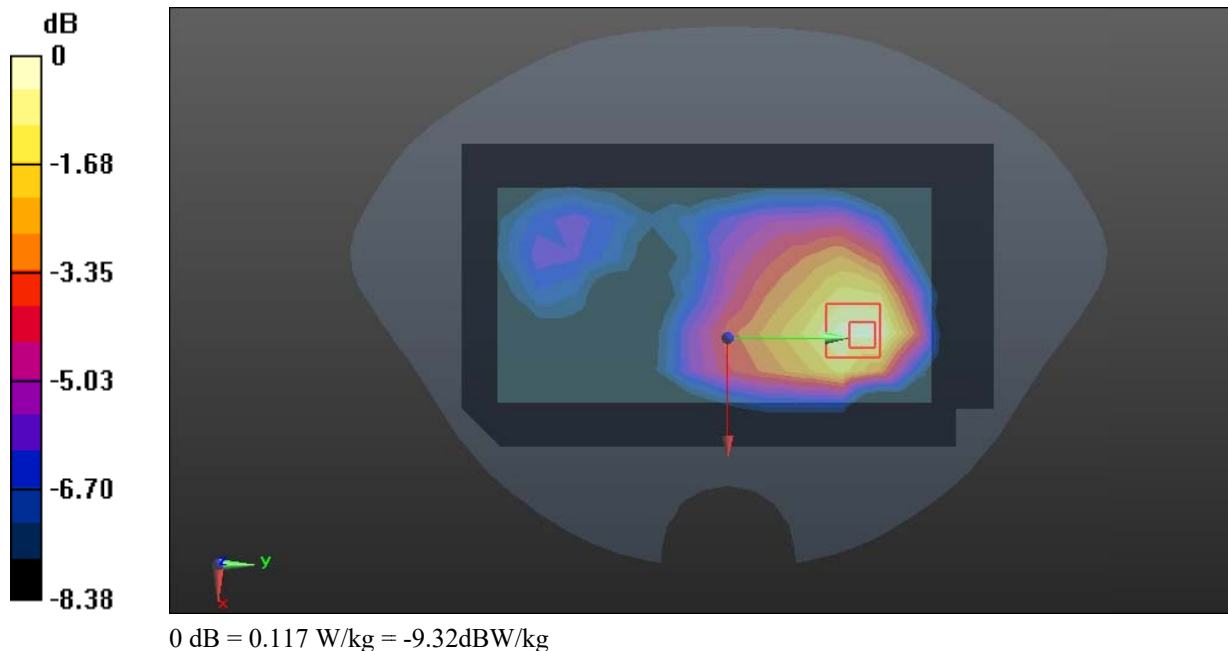

**Test Plot 17#: WCDMA Band 5 Mid ANT0 Head Right Cheek****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: WCDMA (0); Frequency:836.6MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.941 \text{ S/m}$ ;  $\epsilon_r = 40.893$ ;  $\rho = 1000 \text{ kg/m}^3$  ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):**Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 

Maximum value of SAR (measured) = 0.0280 W/kg


**Zoom Scan (5x5x7) /Cube 0:**Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 3.494 V/m; Power Drift =0.16dB

Peak SAR (extrapolated) = 0.0310 W/kg

**SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.024 W/kg**

Maximum value of SAR (measured) = 0.0289 W/kg

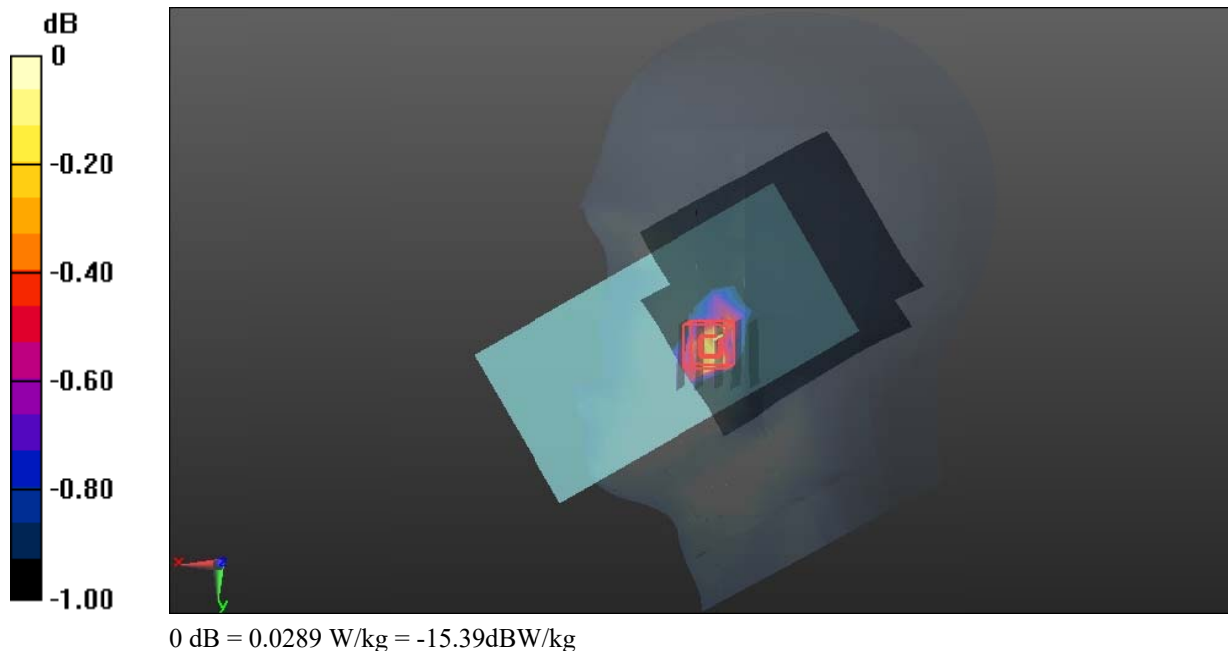

Test Plot 18#: WCDMA Band 5 Mid ANT0 Body Bottom

DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;

Communication System: WCDMA (0); Frequency:836.6MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=836.6\text{ MHz}$ ;  $\sigma=0.941\text{ S/m}$ ;  $\epsilon_r=40.893$ ;  $\rho=1000\text{ kg/m}^3$  ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.125 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.72 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.219 W/kg

SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.054 W/kg

Maximum value of SAR (measured) = 0.138 W/kg

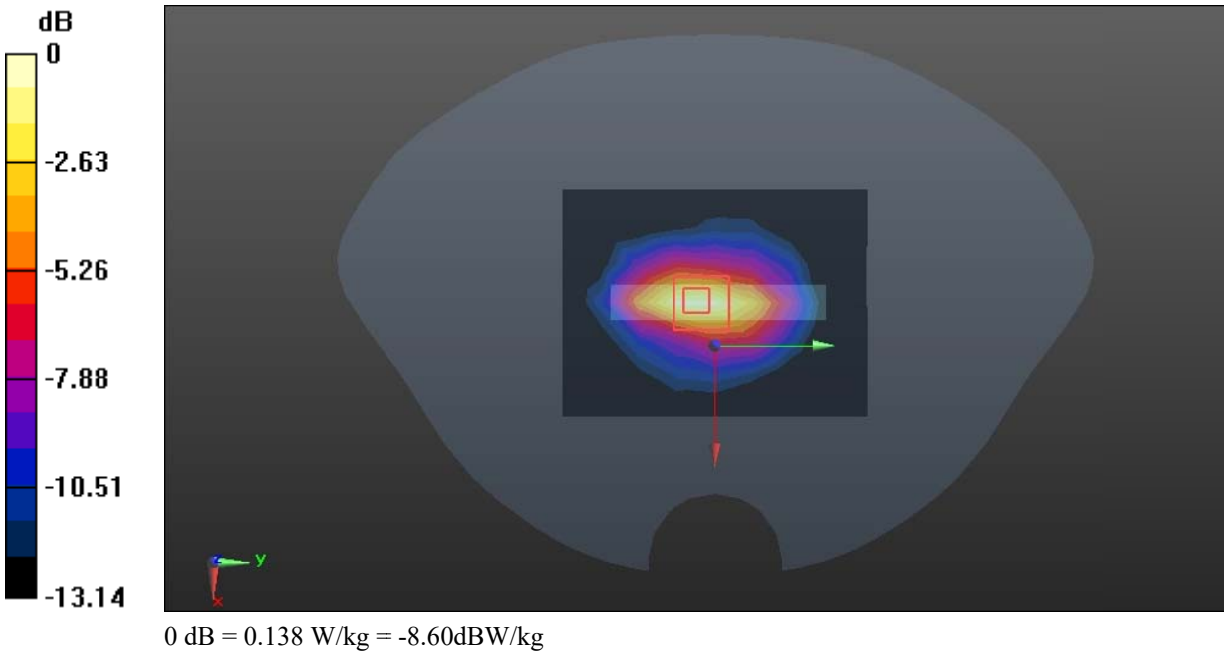

**Test Plot 19#: WCDMA Band 5 Mid ANT1 Head Right Tilt****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: WCDMA (0); Frequency:836.6MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.941$  S/m;  $\epsilon_r = 40.893$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x8x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.294 W/kg


**Zoom Scan (5x5x7) /Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.26 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.543 W/kg

**SAR(1 g) = 0.236 W/kg; SAR(10 g) = 0.136 W/kg**

Maximum value of SAR (measured) = 0.291 W/kg

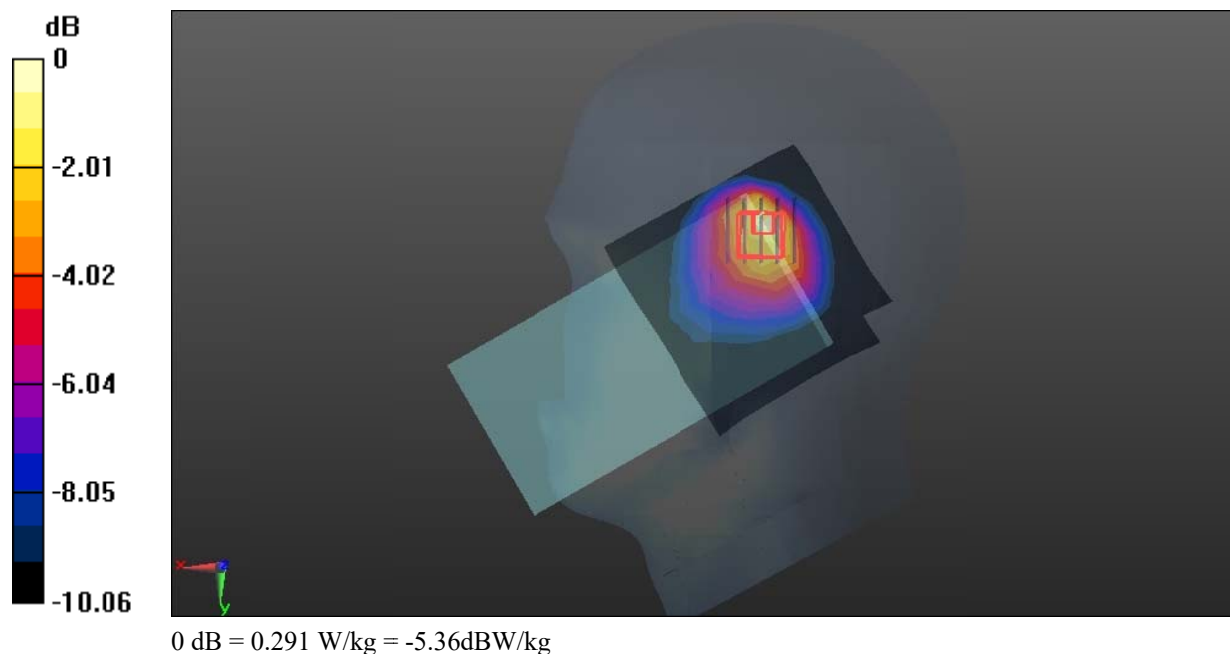

**Test Plot 20#: WCDMA Band 5 Mid ANT1 Body Top****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**


Communication System: WCDMA (0); Frequency:836.6MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.941 \text{ S/m}$ ;  $\epsilon_r = 40.893$ ;  $\rho = 1000 \text{ kg/m}^3$ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

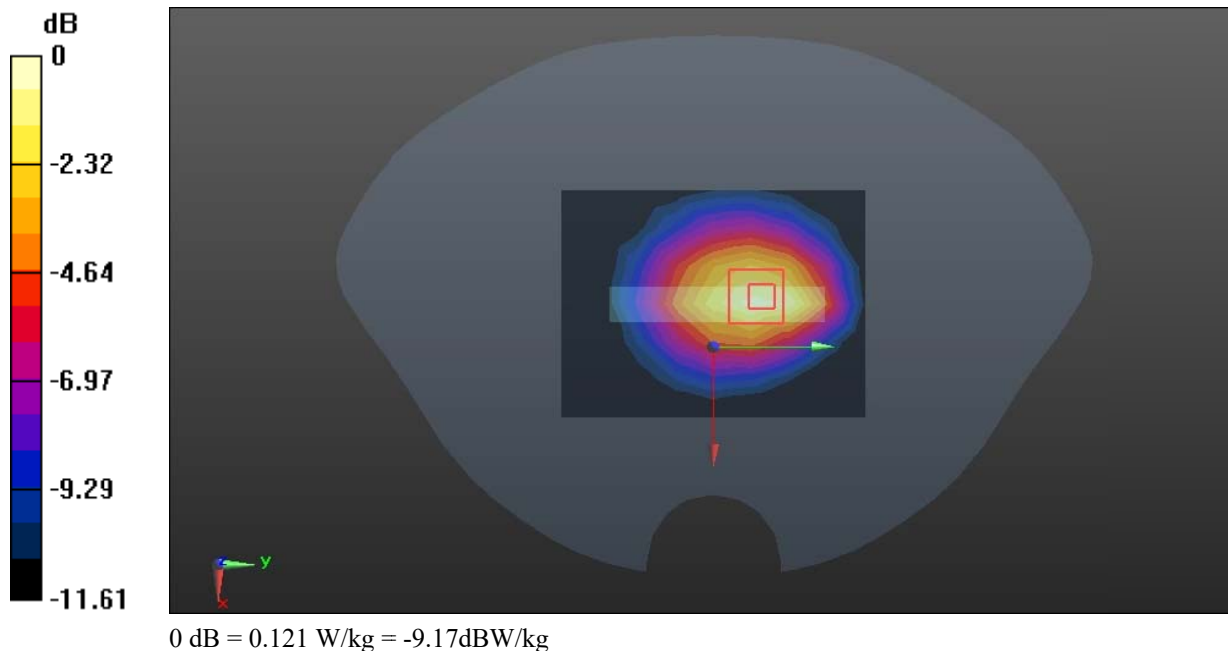**Area Scan (7x9x1):**Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ Maximum value of SAR (measured) =  $0.111 \text{ W/kg}$ **Zoom Scan (5x5x7) /Cube 0:**Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ Reference Value =  $8.857 \text{ V/m}$ ; Power Drift =  $0.07 \text{ dB}$ Peak SAR (extrapolated) =  $0.178 \text{ W/kg}$ **SAR(1 g) =  $0.099 \text{ W/kg}$ ; SAR(10 g) =  $0.061 \text{ W/kg}$** Maximum value of SAR (measured) =  $0.121 \text{ W/kg}$ 

**Test Plot 21#: LTE Band 2 1RB Mid ANT0 Head Left Cheek****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: Generic FDD-LTE (0); Frequency:1880MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=1880$  MHz;  $\sigma = 1.423$  S/m;  $\epsilon_r=39.219$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1880 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.321 W/kg


**Zoom Scan (5x5x7) /Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.439 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.411 W/kg

**SAR(1 g) = 0.285 W/kg; SAR(10 g) = 0.190 W/kg**

Maximum value of SAR (measured) = 0.325 W/kg

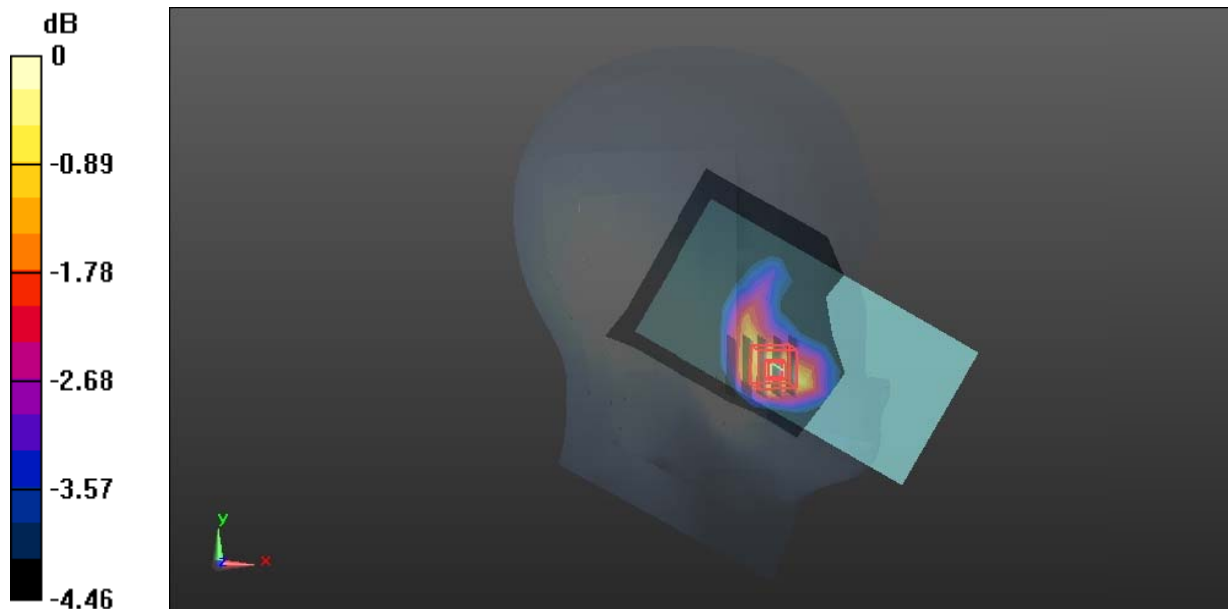

0 dB = 0.325 W/kg = -4.88dBW/kg

**Test Plot 22#: LTE Band 2 1RB Mid ANT0 Body Back****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: Generic FDD-LTE (0); Frequency:1880MHz; Duty Cycle: 1:1

Medium parameters used:  $f=1880$  MHz;  $\sigma = 1.423$  S/m;  $\epsilon_r=39.219$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1880 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x13x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.562 W/kg


**Zoom Scan (5x5x7) /Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.48 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.877 W/kg

**SAR(1 g) = 0.554 W/kg; SAR(10 g) = 0.297 W/kg**

Maximum value of SAR (measured) = 0.660 W/kg

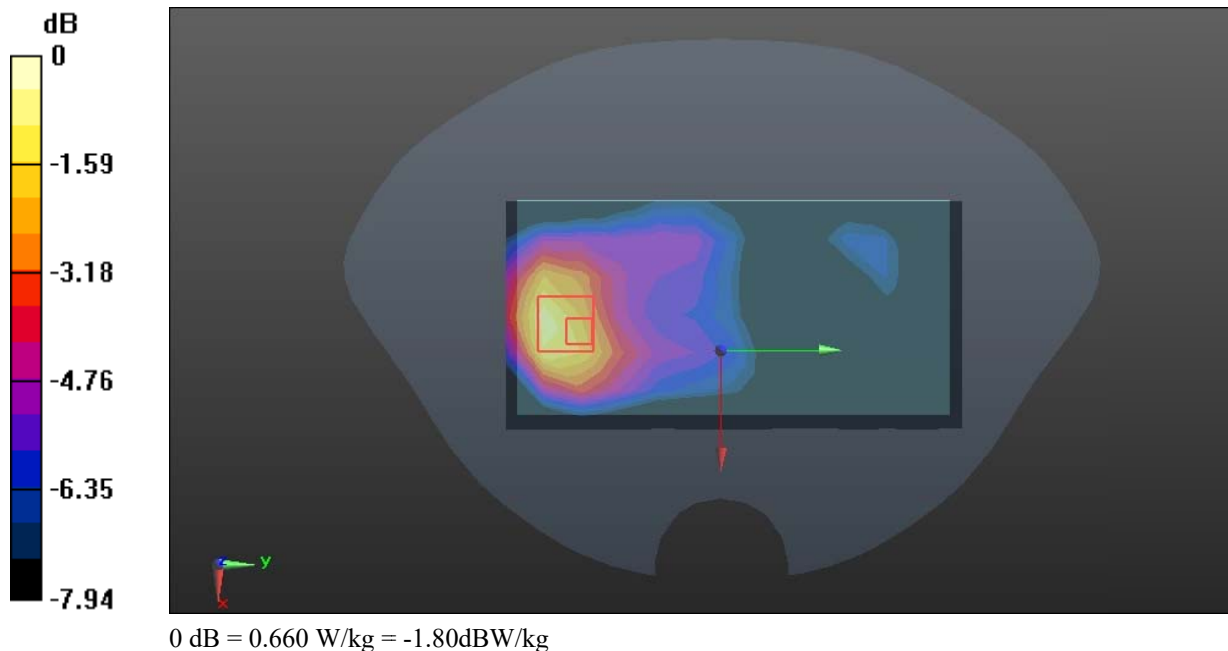

**Test Plot 23#: LTE Band 2 1RB Mid ANT1 Head Right Cheek****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: Generic FDD-LTE (0); Frequency:1880MHz; Duty Cycle: 1:1

Medium parameters used:  $f=1880$  MHz;  $\sigma = 1.423$  S/m;  $\epsilon_r=39.219$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1880 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x7x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.586 W/kg


**Zoom Scan (5x5x7) /Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.39 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.39 W/kg

**SAR(1 g) = 0.705 W/kg; SAR(10 g) = 0.345 W/kg**

Maximum value of SAR (measured) = 0.974 W/kg

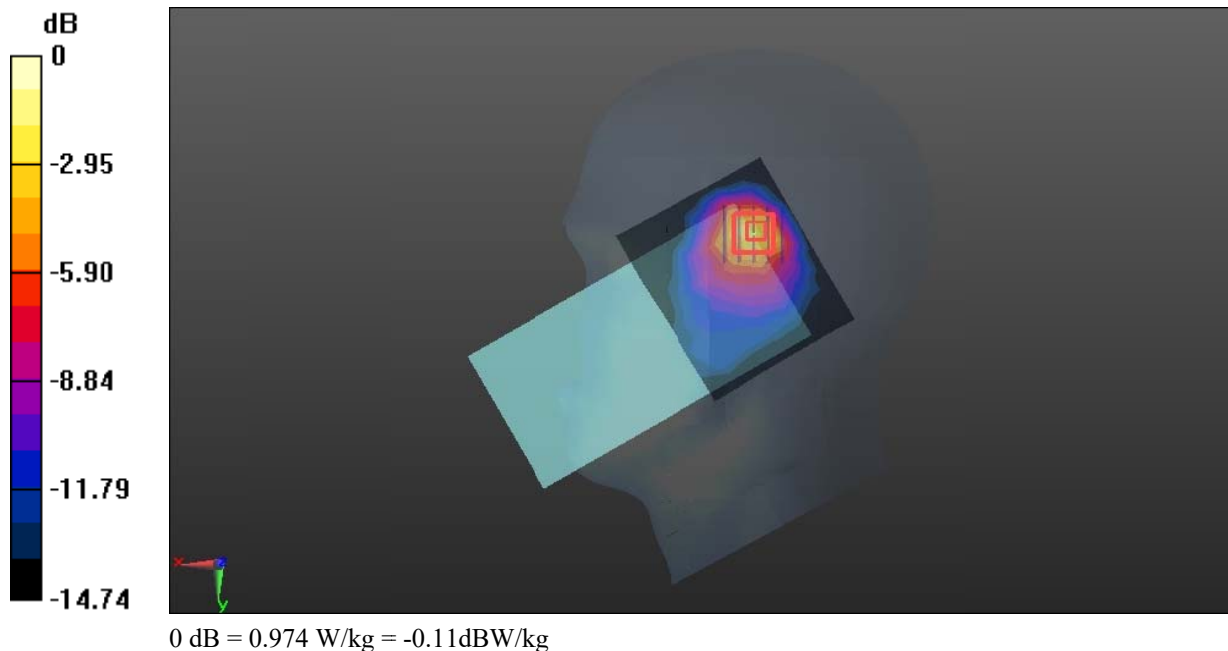

**Test Plot 24#: LTE Band 2 50%RB Mid ANT1 Body Back****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: Generic FDD-LTE (0); Frequency:1880MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=1880$  MHz;  $\sigma = 1.423$  S/m;  $\epsilon_r=39.219$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1880 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x10x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.290 W/kg


**Zoom Scan (5x5x7) /Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.212 V/m; Power Drift =0.06dB

Peak SAR (extrapolated) = 0.414 W/kg

**SAR(1 g) = 0.231 W/kg; SAR(10 g) = 0.123 W/kg**

Maximum value of SAR (measured) = 0.284 W/kg

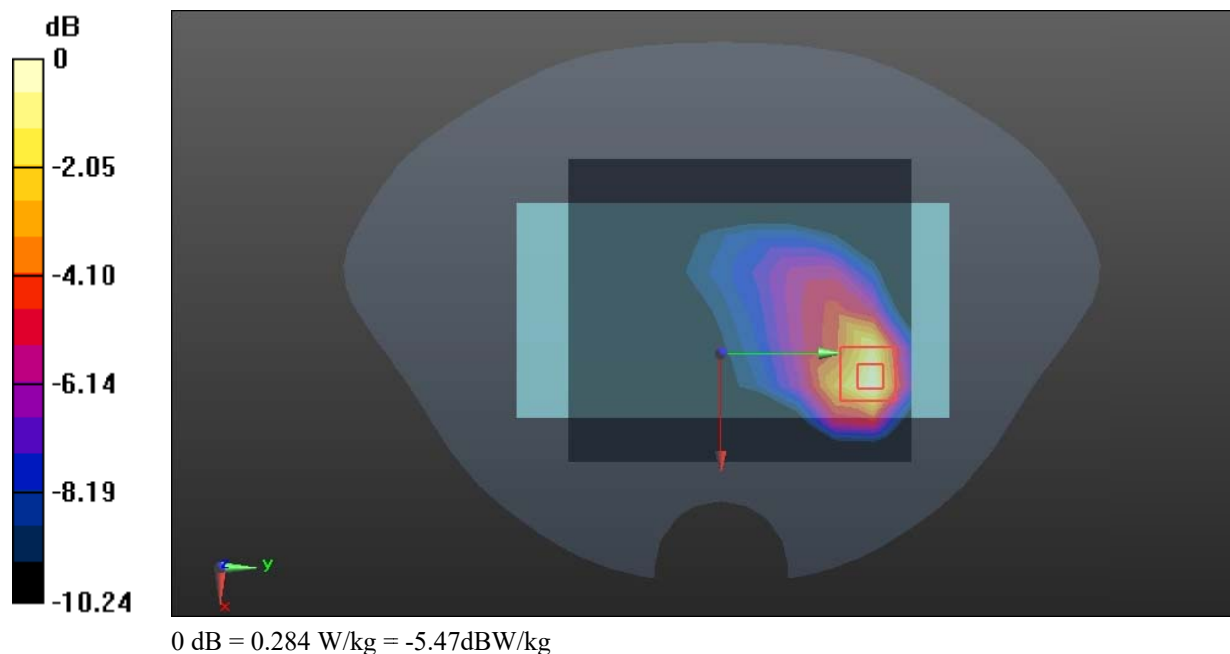

**Test Plot 25#: LTE Band 7 1RB Mid ANT0 Head Left Cheek****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: Generic FDD-LTE (0); Frequency:2535MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.958$  S/m;  $\epsilon_r = 40.311$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.61, 6.94, 6.73) @ 2535 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (11x11x1):**Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0915 W/kg


**Zoom Scan (7x7x7) /Cube 0:**Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.453 V/m; Power Drift =0.18dB

Peak SAR (extrapolated) = 0.123 W/kg

**SAR(1 g) = 0.075 W/kg; SAR(10 g) = 0.045 W/kg**

Maximum value of SAR (measured) = 0.0896 W/kg

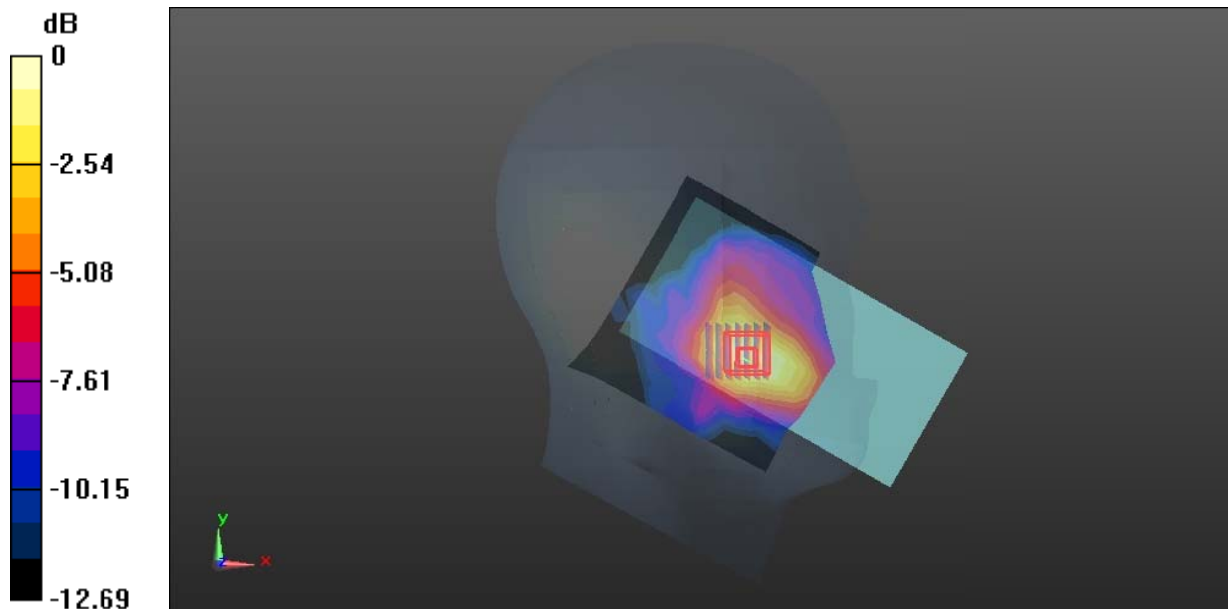

0 dB = 0.0896 W/kg = -10.48dBW/kg

**Test Plot 26#: LTE Band 7 1RB Mid ANT0 Body Back****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: Generic FDD-LTE (0); Frequency:2535MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=2535$  MHz;  $\sigma = 1.958$  S/m;  $\epsilon_r=40.311$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.61, 6.94, 6.73) @ 2535 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (11x18x1):**Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.148 W/kg


**Zoom Scan (7x7x7) /Cube 0:**Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.841 V/m; Power Drift =0.08dB

Peak SAR (extrapolated) = 0.282 W/kg

**SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.076 W/kg**

Maximum value of SAR (measured) = 0.179 W/kg

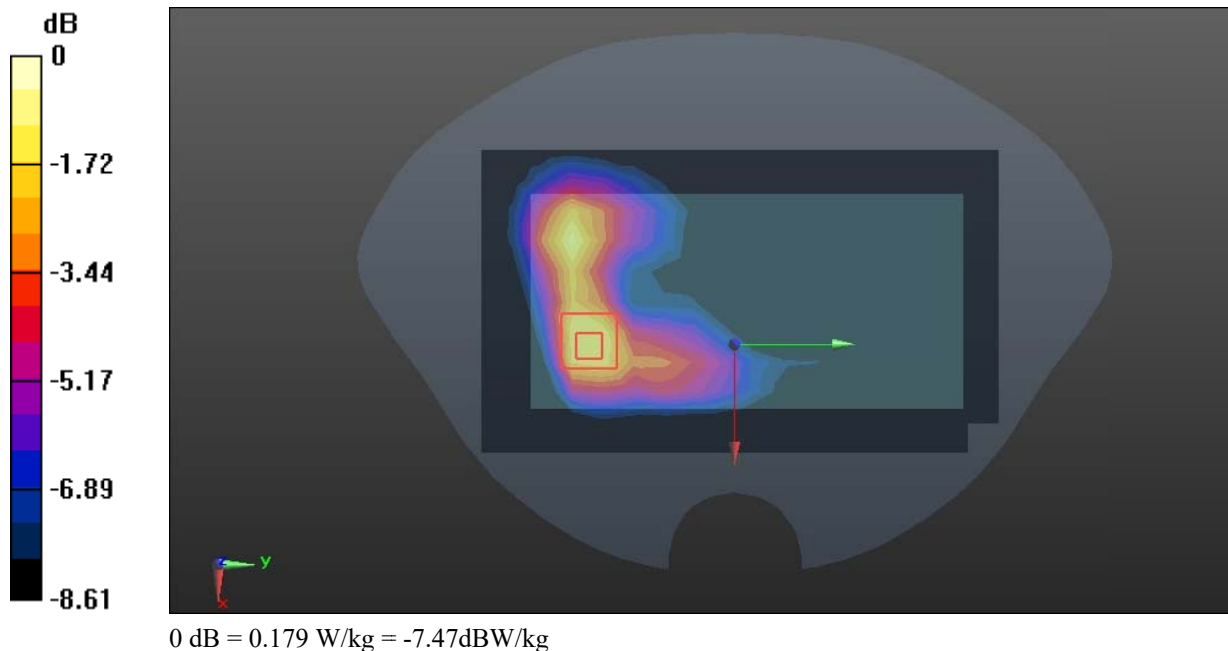

**Test Plot 27#: LTE Band 7 50%RB Mid ANT1 Head Right Tilt****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: Generic FDD-LTE (0); Frequency:2535MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.958$  S/m;  $\epsilon_r = 40.311$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.61, 6.94, 6.73) @ 2535 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x10x1):**Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.924 W/kg


**Zoom Scan (7x7x7) /Cube 0:**Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.178 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.59 W/kg

**SAR(1 g) = 0.701 W/kg; SAR(10 g) = 0.315 W/kg**

Maximum value of SAR (measured) = 0.942 W/kg

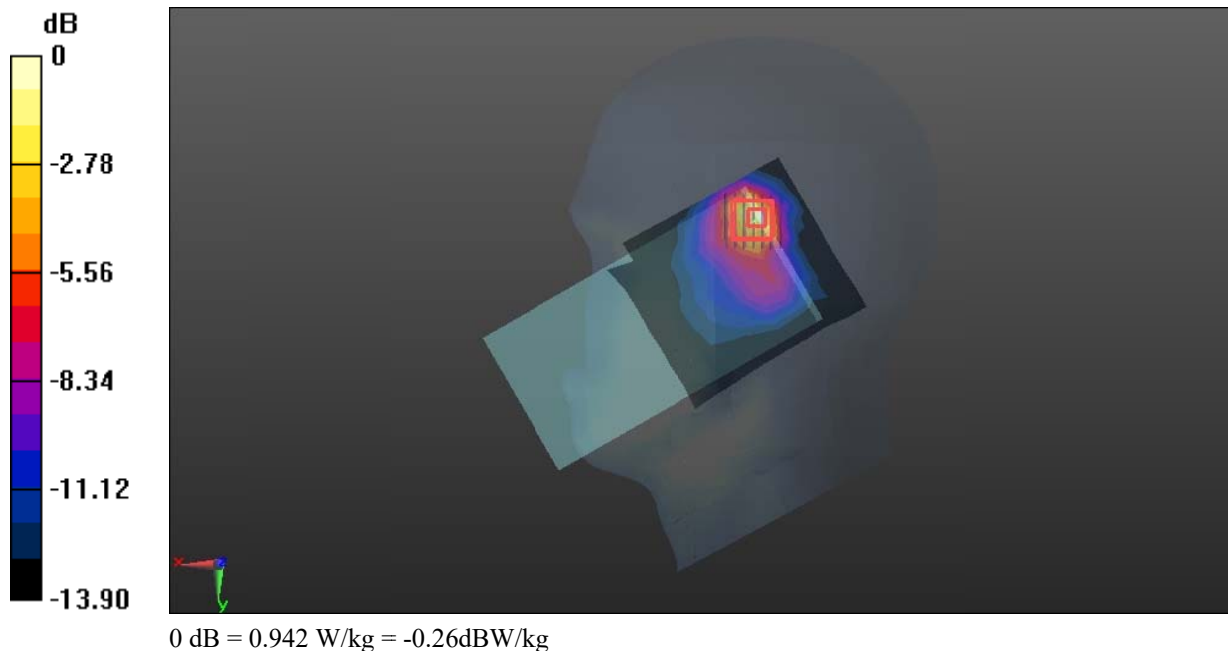

**Test Plot 28#: LTE Band 7 1RB Mid ANT1 Body Back****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: Generic FDD-LTE (0); Frequency:2535MHz; Duty Cycle: 1:1

Medium parameters used:  $f=2535$  MHz;  $\sigma = 1.958$  S/m;  $\epsilon_r=40.311$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.61, 6.94, 6.73) @ 2535 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x17x1):**Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.332 W/kg


**Zoom Scan (7x7x7) /Cube 0:**Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.003 V/m; Power Drift =0.01dB

Peak SAR (extrapolated) = 0.603 W/kg

**SAR(1 g) = 0.294 W/kg; SAR(10 g) = 0.138 W/kg**

Maximum value of SAR (measured) = 0.382 W/kg

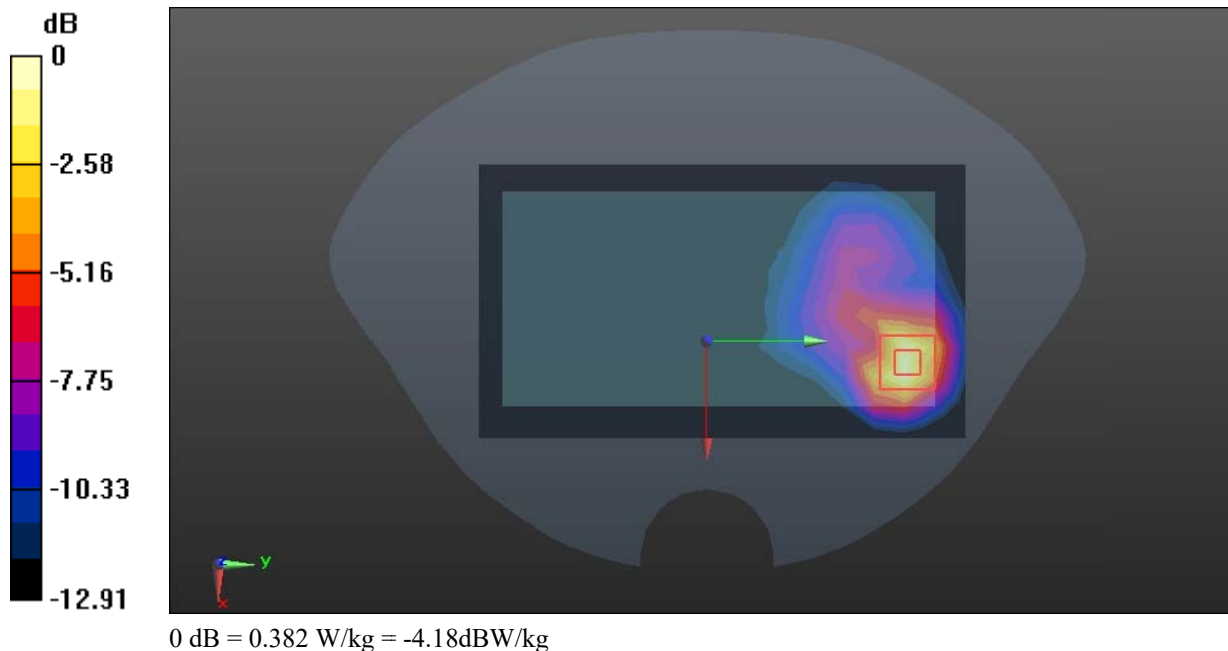

**Test Plot 29#: LTE Band 12 1RB Mid ANT0 Head Right Cheek****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.883$  S/m;  $\epsilon_r = 42.515$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.95, 8.96, 8.82) @ 707.5 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.163 W/kg


**Zoom Scan (5x5x7) /Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.155 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.179 W/kg

**SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.122 W/kg**

Maximum value of SAR (measured) = 0.158 W/kg

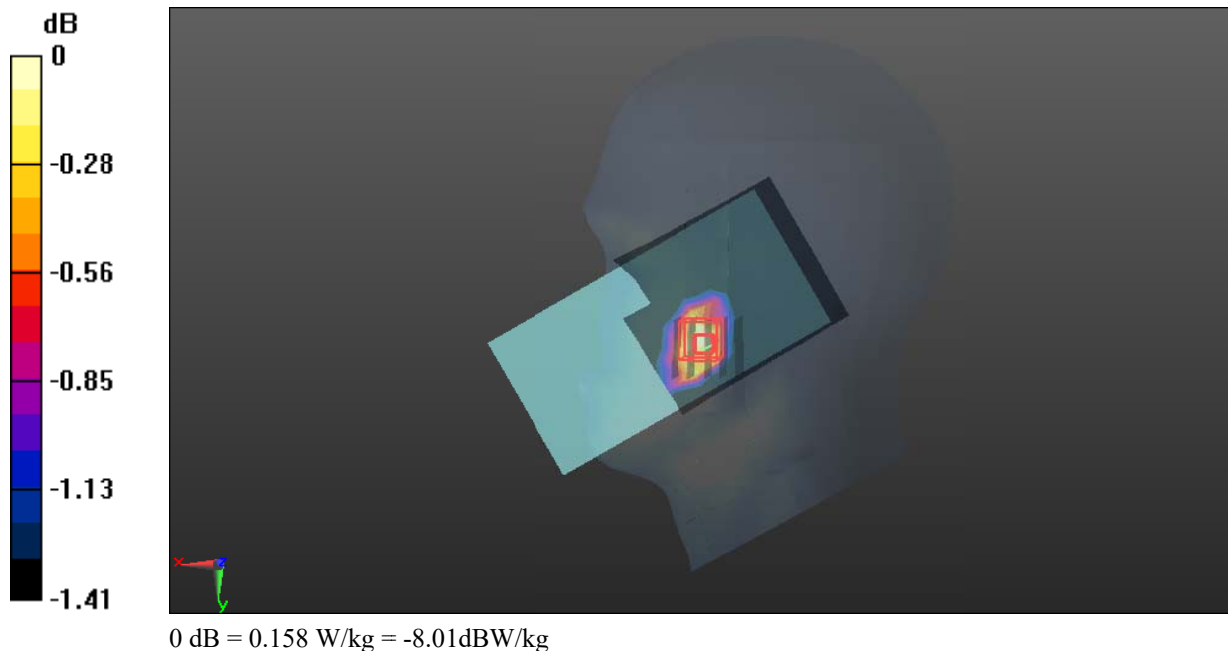

**Test Plot 30#: LTE Band 12 1RB Mid ANT0 Body Right****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.883$  S/m;  $\epsilon_r = 42.515$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.95, 8.96, 8.82) @ 707.5 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.230 W/kg


**Zoom Scan (5x5x7) /Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.30 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.295 W/kg

**SAR(1 g) = 0.219 W/kg; SAR(10 g) = 0.161 W/kg**

Maximum value of SAR (measured) = 0.246 W/kg

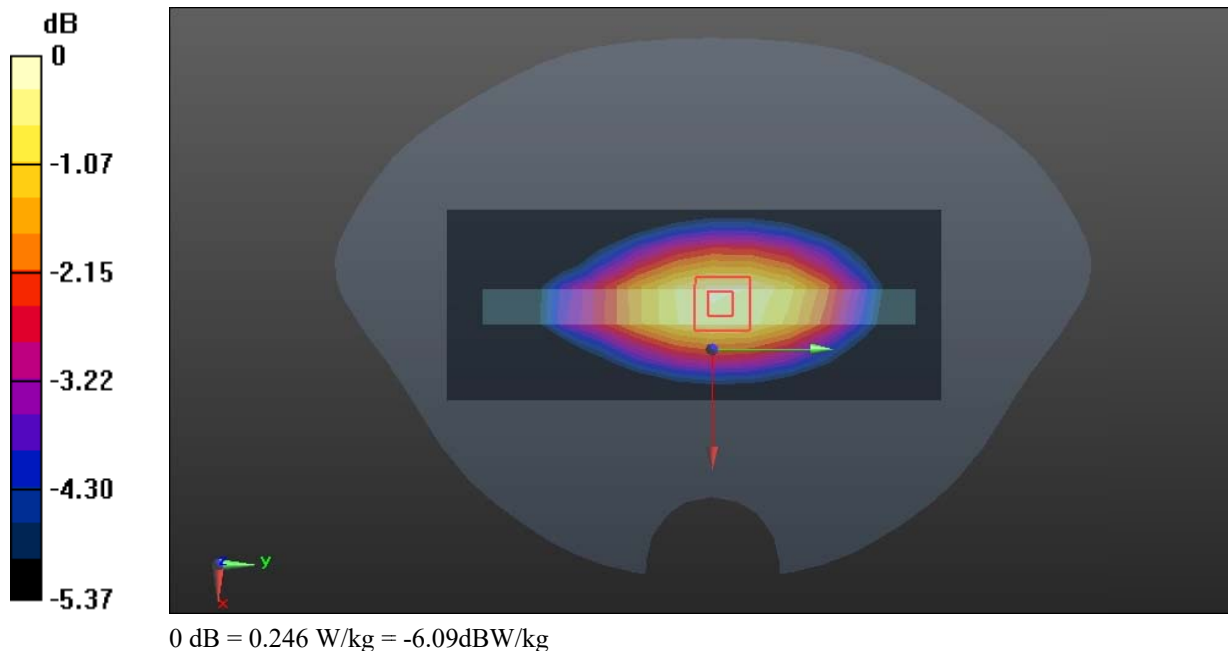

**Test Plot 31#: LTE Band 12 1RB Mid ANT1 Head Right Cheek****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.883$  S/m;  $\epsilon_r = 42.515$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.95, 8.96, 8.82) @ 707.5 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.150 W/kg


**Zoom Scan (5x5x7) /Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.374 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.279 W/kg

**SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.085 W/kg**

Maximum value of SAR (measured) = 0.168 W/kg

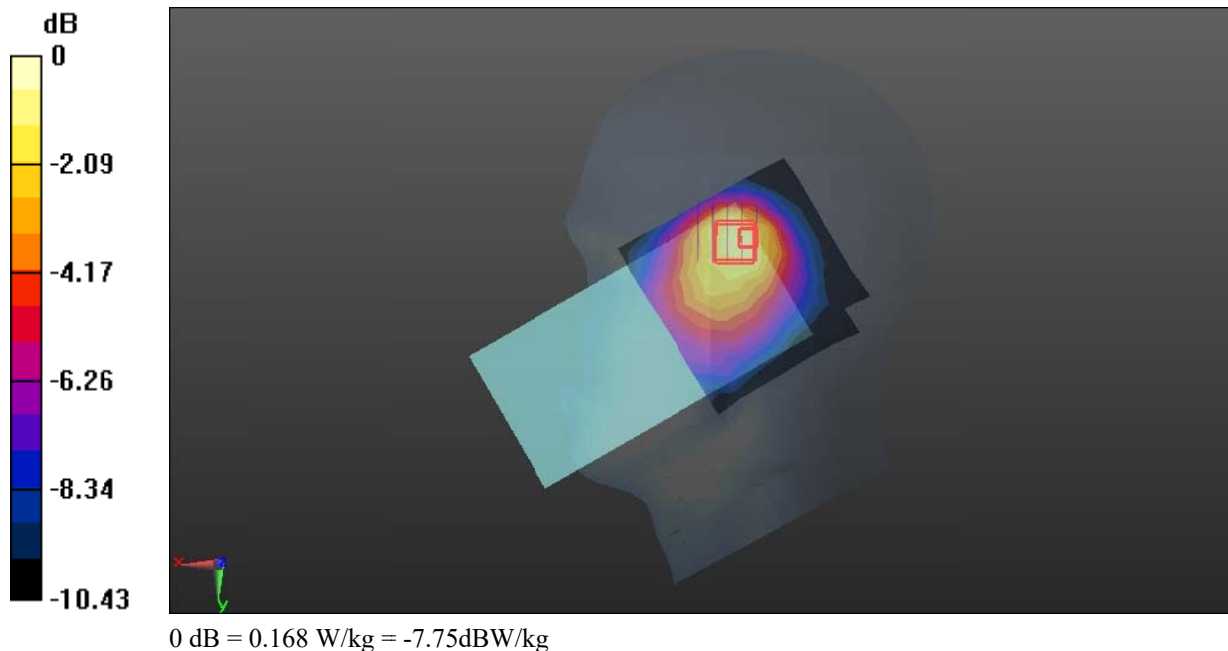

**Test Plot 32#: LTE Band 12 1RB Mid ANT1 Body Top****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.883$  S/m;  $\epsilon_r = 42.515$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.95, 8.96, 8.82) @ 707.5 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.123 W/kg


**Zoom Scan (5x5x7) /Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.29 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.197 W/kg

**SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.063 W/kg**

Maximum value of SAR (measured) = 0.139 W/kg

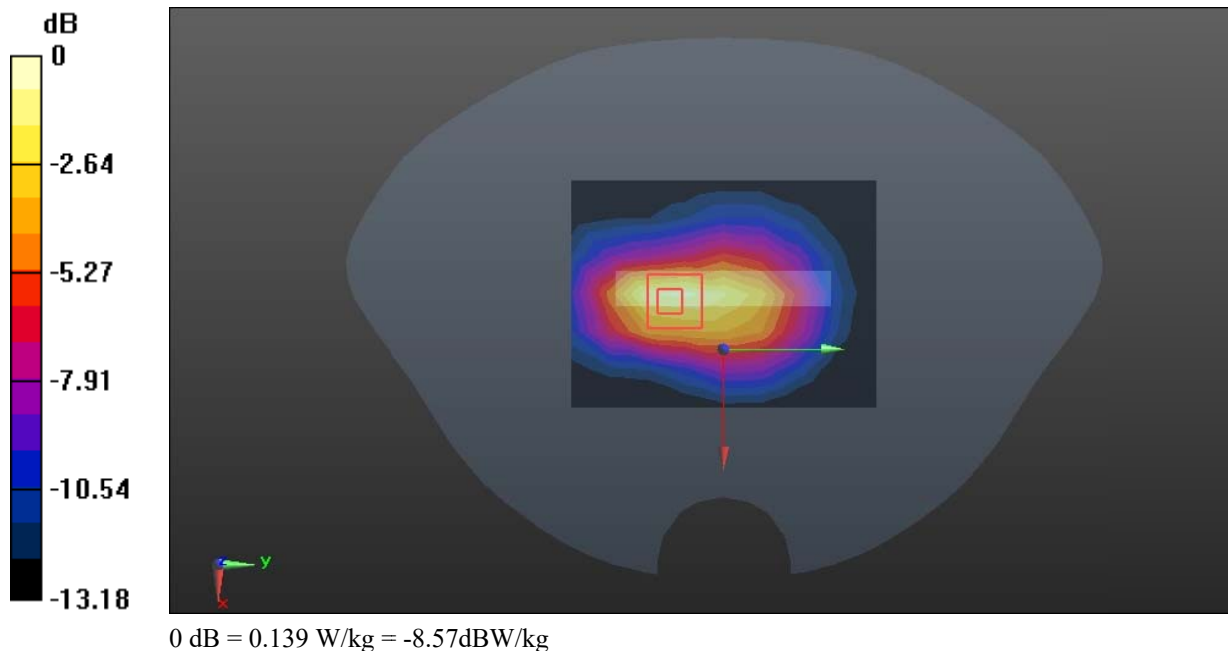

**Test Plot 33#: LTE Band 13 1RB Mid ANT0 Head Right Cheek****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**


Communication System: Generic FDD-LTE (0); Frequency: 782MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.925 \text{ S/m}$ ;  $\epsilon_r = 41.59$ ;  $\rho = 1000 \text{ kg/m}^3$ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.95, 8.96, 8.82) @ 782 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

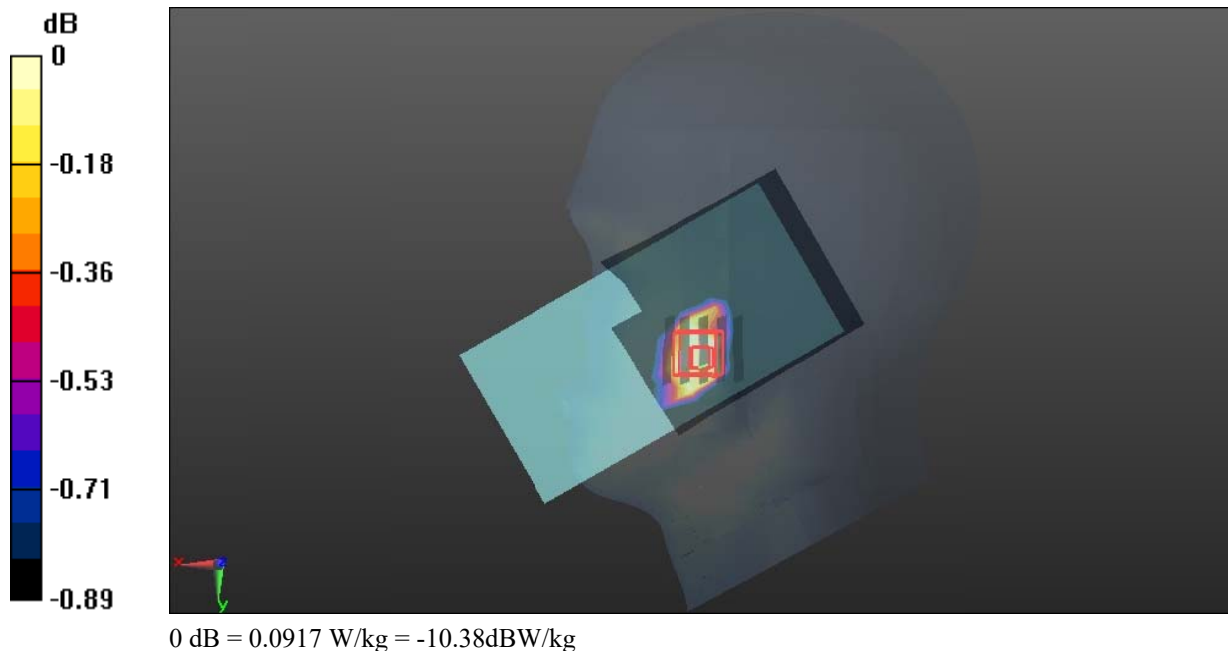**Area Scan (7x8x1):**Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ Maximum value of SAR (measured) =  $0.101 \text{ W/kg}$ **Zoom Scan (5x5x7) /Cube 0:**Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ Reference Value =  $5.093 \text{ V/m}$ ; Power Drift =  $0.06\text{dB}$ Peak SAR (extrapolated) =  $0.105 \text{ W/kg}$ **SAR(1 g) =  $0.086 \text{ W/kg}$ ; SAR(10 g) =  $0.071 \text{ W/kg}$** Maximum value of SAR (measured) =  $0.0917 \text{ W/kg}$ 

**Test Plot 34#: LTE Band 13 1RB Mid ANT0 Body Back****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: Generic FDD-LTE (0); Frequency: 782MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.925 \text{ S/m}$ ;  $\epsilon_r = 41.59$ ;  $\rho = 1000 \text{ kg/m}^3$ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.95, 8.96, 8.82) @ 782 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x15x1):**Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 

Maximum value of SAR (measured) = 1.04 W/kg


**Zoom Scan (5x5x7) /Cube 0:**Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 6.892 V/m; Power Drift = 0.04dB

Peak SAR (extrapolated) = 2.35 W/kg

**SAR(1 g) = 0.763 W/kg; SAR(10 g) = 0.364 W/kg**

Maximum value of SAR (measured) = 0.913 W/kg

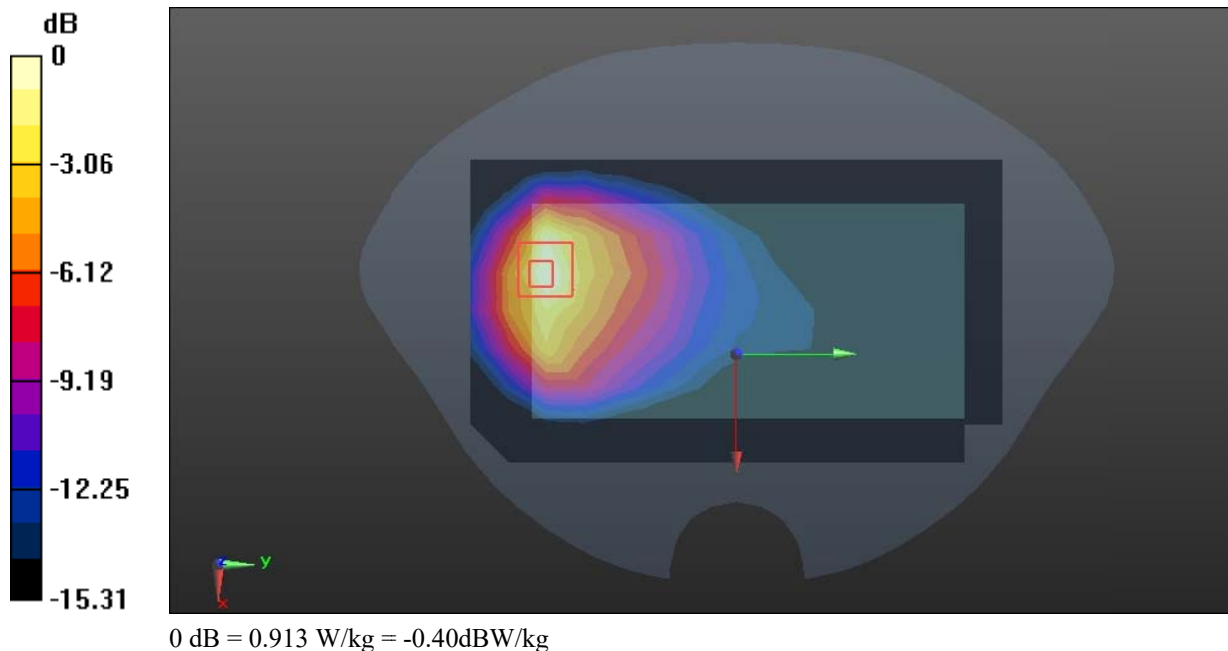

Test Plot 35#: LTE Band 13 1RB Mid ANT1 Head Right Cheek

DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;

Communication System: Generic FDD-LTE (0); Frequency:782MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=782\text{ MHz}$ ;  $\sigma=0.925\text{ S/m}$ ;  $\epsilon_r=41.59$ ;  $\rho=1000\text{ kg/m}^3$  ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.95, 8.96, 8.82) @ 782 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x7x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.263 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.48 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.488 W/kg

SAR(1 g) = 0.226 W/kg; SAR(10 g) = 0.143 W/kg

Maximum value of SAR (measured) = 0.280 W/kg

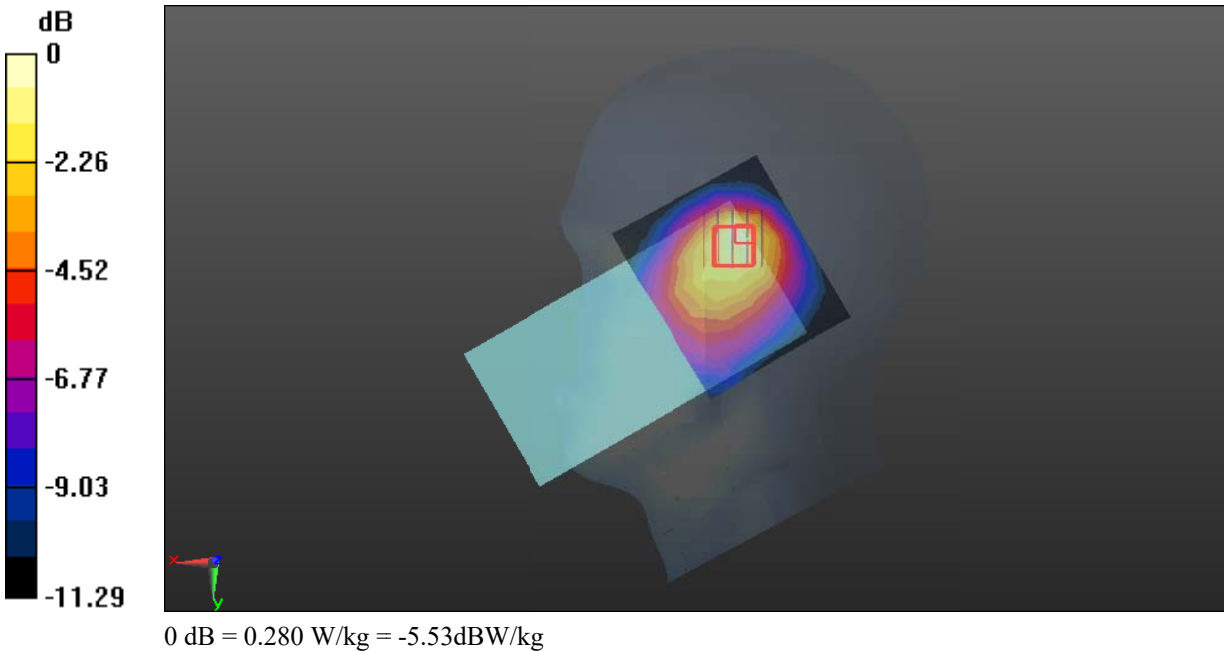

**Test Plot 36#: LTE Band 13 1RB Mid ANT1 Body Back****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: Generic FDD-LTE (0); Frequency: 782MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 782$  MHz;  $\sigma = 0.925$  S/m;  $\epsilon_r = 41.59$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.95, 8.96, 8.82) @ 782 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x15x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.114 W/kg


**Zoom Scan (5x5x7) /Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.234 V/m; Power Drift =0.11dB

Peak SAR (extrapolated) = 0.166 W/kg

**SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.063 W/kg**

Maximum value of SAR (measured) = 0.115 W/kg

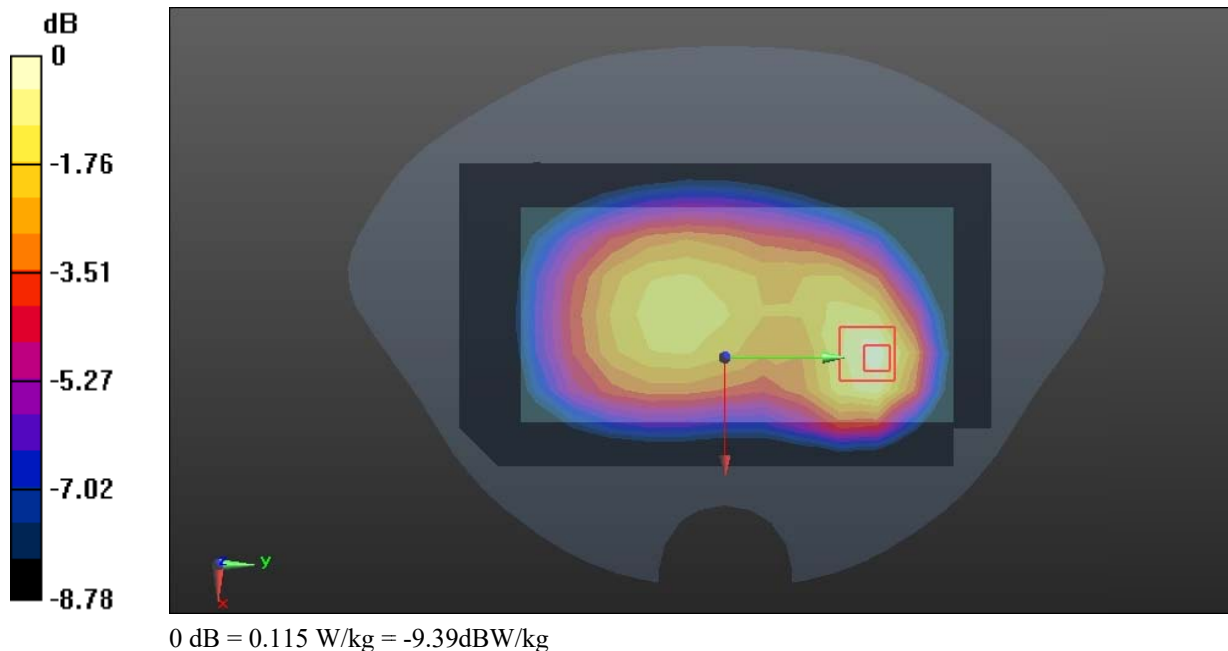

**Test Plot 37#: LTE Band 26 1RB Mid ANT0 Head Left Cheek****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 831.5$  MHz;  $\sigma = 0.944$  S/m;  $\epsilon_r = 40.961$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 831.5 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0899 W/kg


**Zoom Scan (5x5x7) /Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.868 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.121 W/kg

**SAR(1 g) = 0.089 W/kg; SAR(10 g) = 0.067 W/kg**

Maximum value of SAR (measured) = 0.0972 W/kg

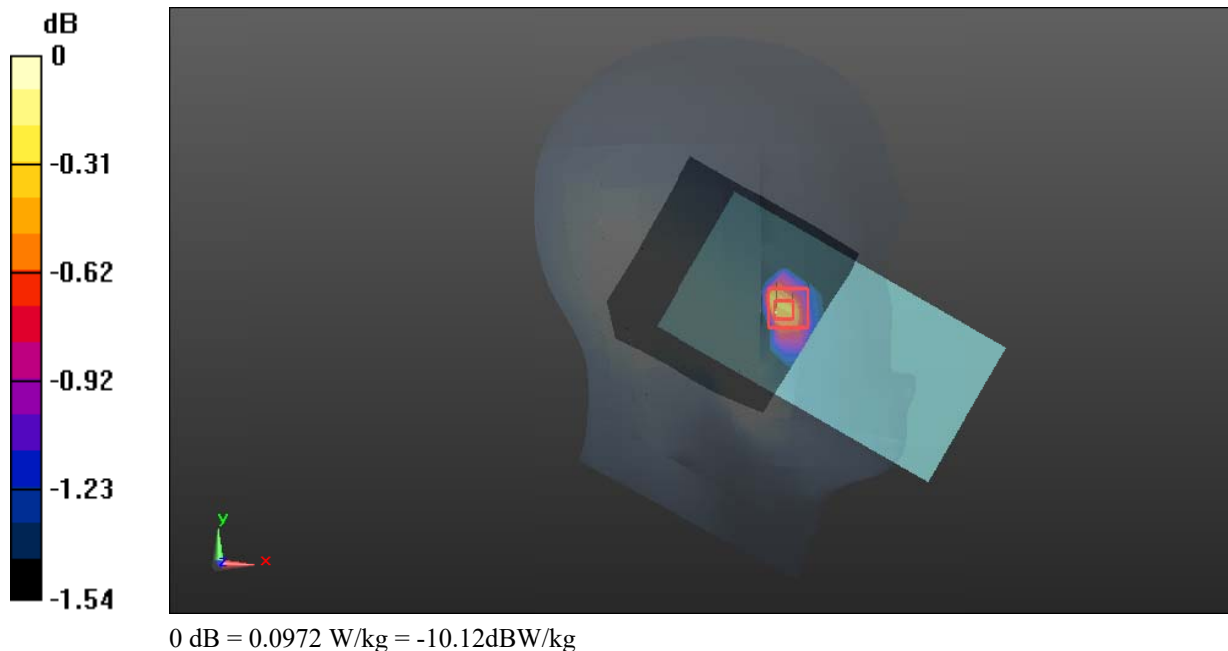

**Test Plot 38#: LTE Band 26 50%RB Mid ANT0 Body Right****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 831.5$  MHz;  $\sigma = 0.944$  S/m;  $\epsilon_r = 40.961$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 831.5 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x15x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0759 W/kg


**Zoom Scan (5x5x7) /Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.121 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0910 W/kg

**SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.050 W/kg**

Maximum value of SAR (measured) = 0.0764 W/kg

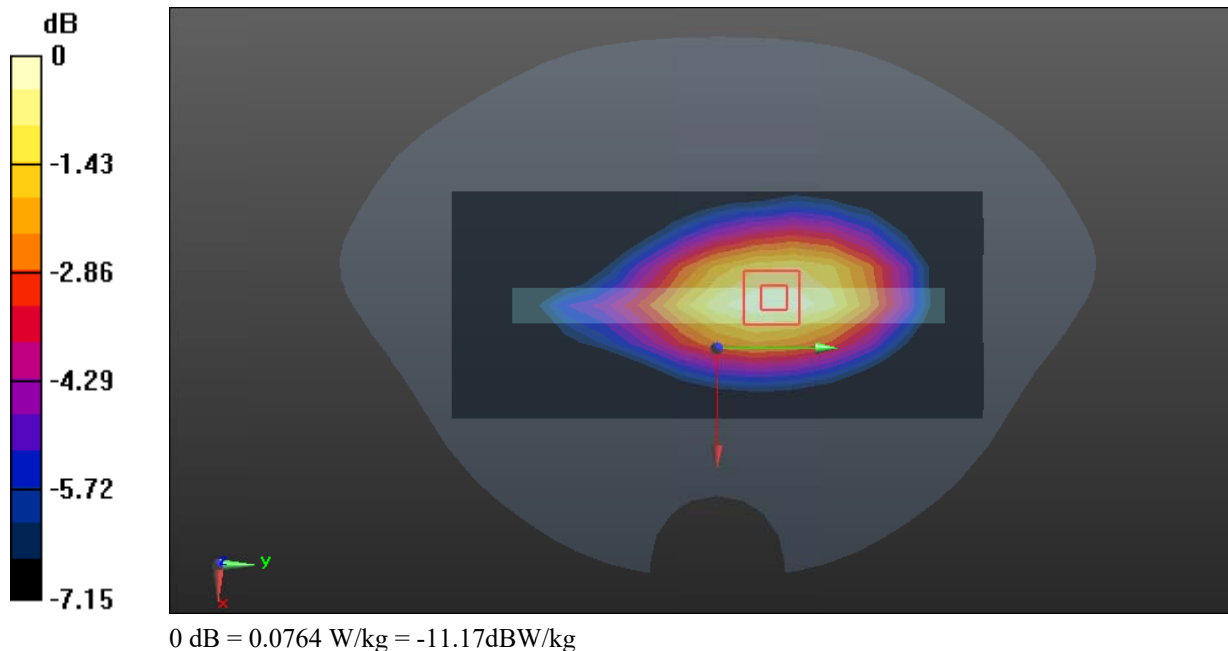

**Test Plot 39#: LTE Band 26 1RB Mid ANT1 Head Right Cheek****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 831.5$  MHz;  $\sigma = 0.944$  S/m;  $\epsilon_r = 40.961$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 831.5 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.445 W/kg


**Zoom Scan (5x5x7) /Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.71 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.733 W/kg

**SAR(1 g) = 0.343 W/kg; SAR(10 g) = 0.218 W/kg**

Maximum value of SAR (measured) = 0.385 W/kg

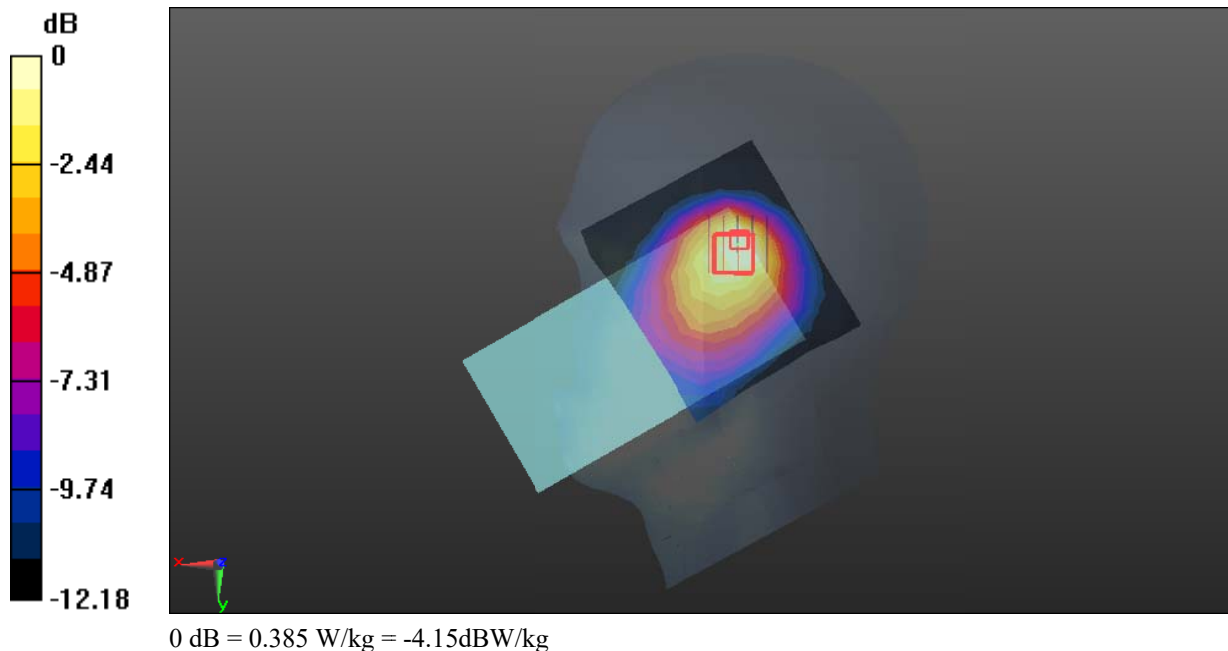

**Test Plot 40#: LTE Band 26 1RB Mid ANT1 Body Back****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 831.5$  MHz;  $\sigma = 0.944$  S/m;  $\epsilon_r = 40.961$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 831.5 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.157 W/kg


**Zoom Scan (5x5x7) /Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.273 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.224 W/kg

**SAR(1 g) = 0.141 W/kg; SAR(10 g) = 0.090 W/kg**

Maximum value of SAR (measured) = 0.166 W/kg

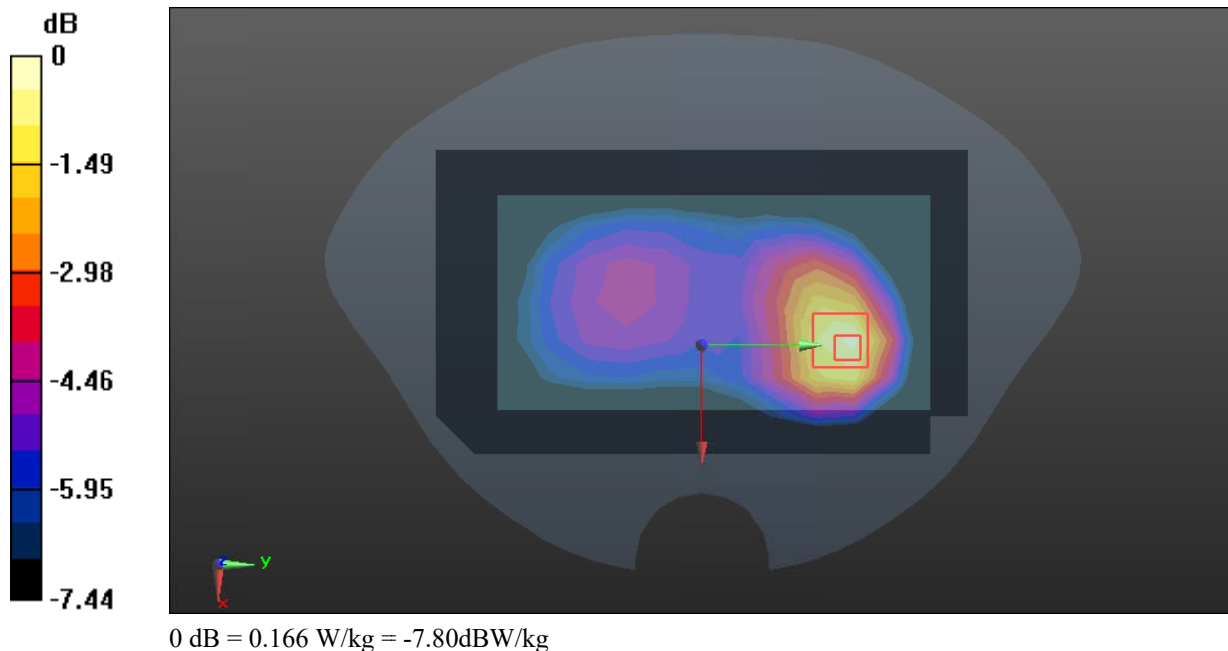

**Test Plot 41#: LTE Band 41 50%RB Mid ANT0 Head Right Tilt****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: Generic TDD-LTE (0); Frequency:2593MHz; Duty Cycle: 1:1.58

Medium parameters used:  $f = 2593$  MHz;  $\sigma = 2.025$  S/m;  $\epsilon_r = 40.124$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.61, 6.94, 6.73) @ 2593 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x10x1):**Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0430 W/kg


**Zoom Scan (7x7x7) /Cube 0:**Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.792 V/m; Power Drift =0.12dB

Peak SAR (extrapolated) = 0.0520 W/kg

**SAR(1 g) = 0.040 W/kg; SAR(10 g) = 0.034 W/kg**

Maximum value of SAR (measured) = 0.0433 W/kg

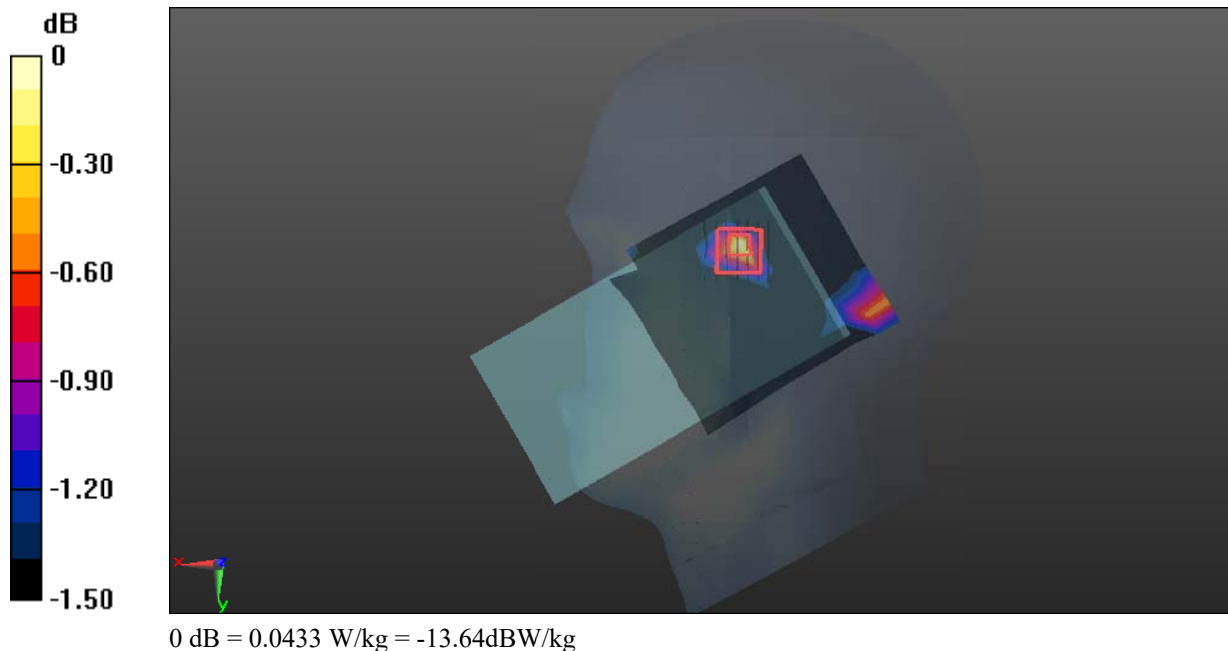

**Test Plot 42#: LTE Band 41 1RB Mid ANT0 Body Back****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: Generic TDD-LTE (0); Frequency:2593MHz; Duty Cycle: 1:1.58

Medium parameters used:  $f=2593$  MHz;  $\sigma = 2.025$  S/m;  $\epsilon_r=40.124$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.61, 6.94, 6.73) @ 2593 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (11x18x1):**Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0889 W/kg


**Zoom Scan (7x7x7) /Cube 0:**Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.476 V/m; Power Drift =0.05dB

Peak SAR (extrapolated) = 0.237 W/kg

**SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.049 W/kg**

Maximum value of SAR (measured) = 0.134 W/kg

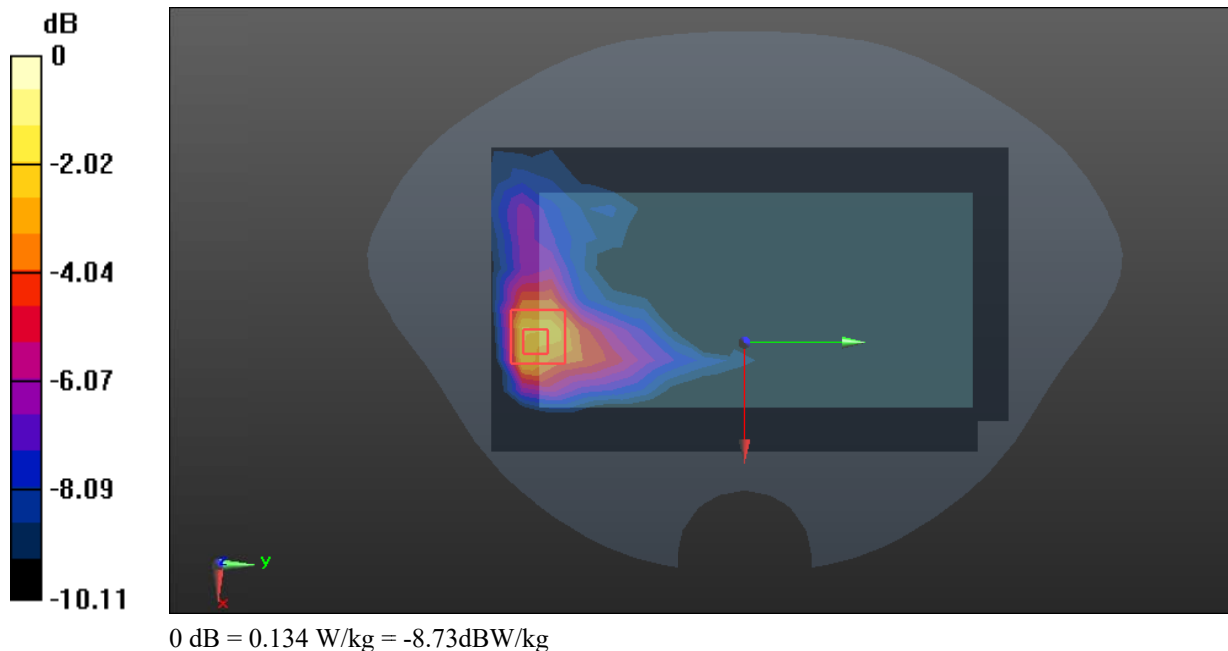

Test Plot 43#: LTE Band 41 1RB Mid ANT1 Head Right Tilt

DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;

Communication System: Generic TDD-LTE (0); Frequency:2593MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2593 \text{ MHz}$ ;  $\sigma = 2.025 \text{ S/m}$ ;  $\epsilon_r = 40.124$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.61, 6.94, 6.73) @ 2593 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x9x1):Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.270 W/kg


Zoom Scan (7x7x7) /Cube 0:Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 5.402 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.471 W/kg

SAR(1 g) = 0.220 W/kg; SAR(10 g) = 0.111 W/kg

Maximum value of SAR (measured) = 0.298 W/kg

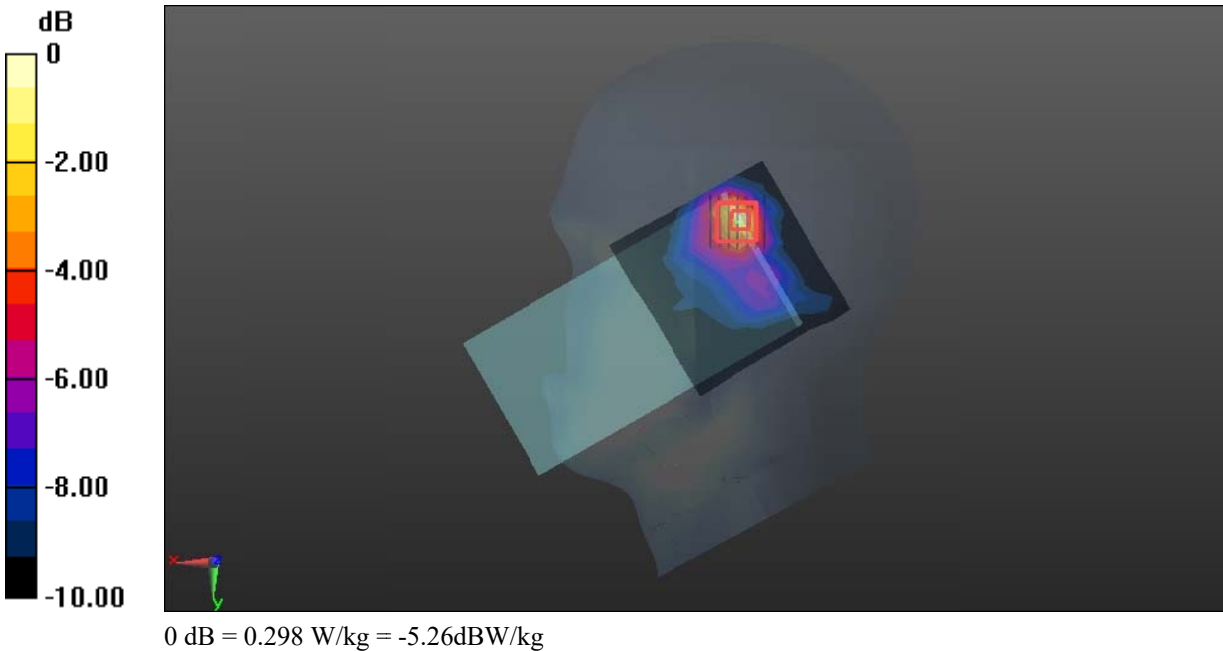

**Test Plot 44#: LTE Band 41 1RB Mid ANT1 Body Back****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: Generic TDD-LTE (0); Frequency:2593MHz; Duty Cycle: 1:1.58

Medium parameters used:  $f = 2593$  MHz;  $\sigma = 2.025$  S/m;  $\epsilon_r = 40.124$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.61, 6.94, 6.73) @ 2593 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (11x19x1):**Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.150 W/kg


**Zoom Scan (7x7x7) /Cube 0:**Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.224 V/m; Power Drift =0.11dB

Peak SAR (extrapolated) = 0.273 W/kg

**SAR(1 g) = 0.130 W/kg; SAR(10 g) = 0.061 W/kg**

Maximum value of SAR (measured) = 0.172 W/kg

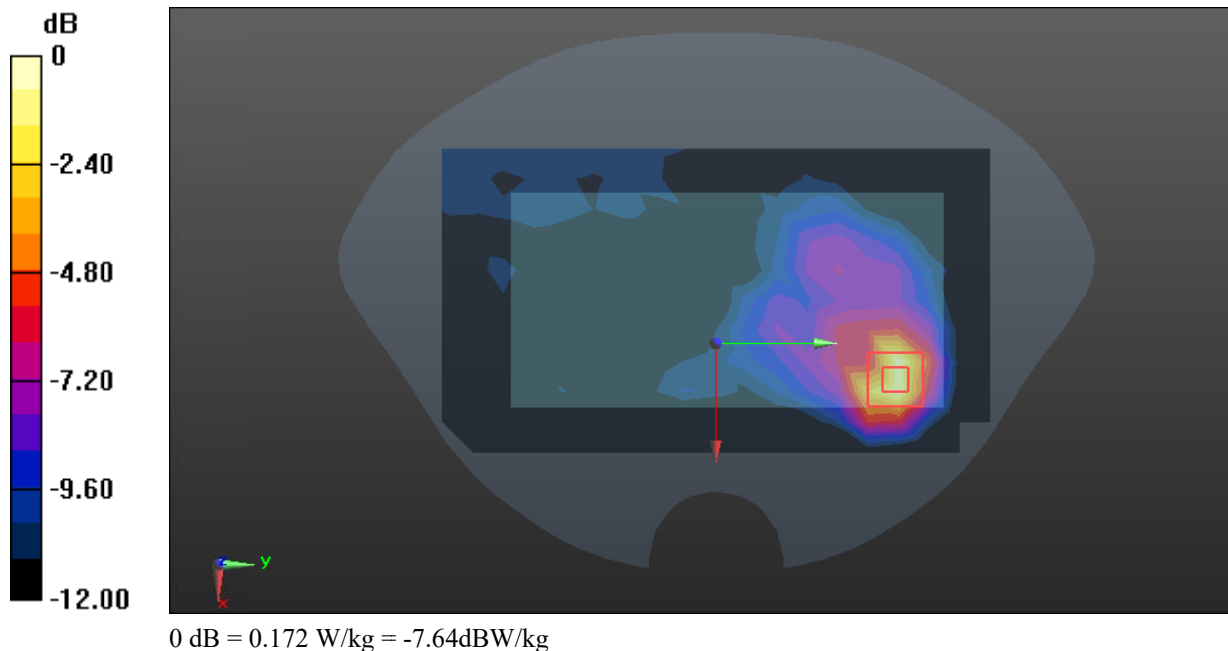

**Test Plot 45#: LTE Band 66 1RB Mid ANT0 Head Left Cheek****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: Generic FDD-LTE (0); Frequency:1745MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=1745$  MHz;  $\sigma = 1.364$  S/m;  $\epsilon_r=39.362$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8.54, 7.65, 7.43) @ 1745 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x9x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0644 W/kg


**Zoom Scan (5x5x7) /Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.815 V/m; Power Drift =0.17dB

Peak SAR (extrapolated) = 0.0790 W/kg

**SAR(1 g) = 0.061 W/kg; SAR(10 g) = 0.049 W/kg**

Maximum value of SAR (measured) = 0.0675 W/kg

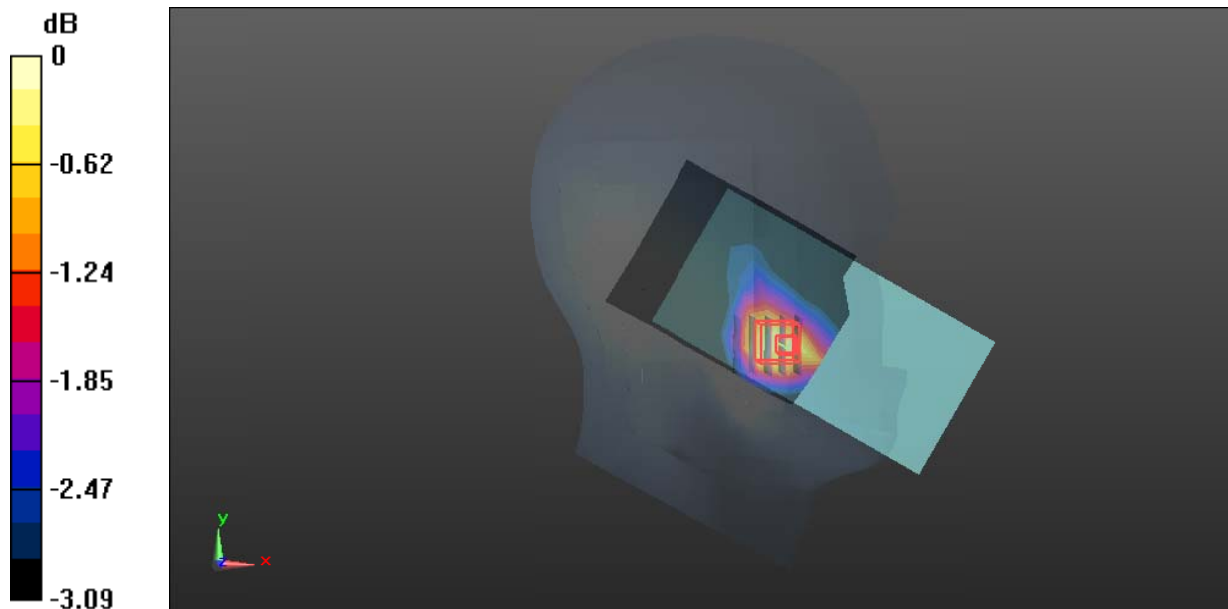

0 dB = 0.0675 W/kg = -11.71dBW/kg

**Test Plot 46#: LTE Band 66 1RB Mid ANT0 Body Back****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: Generic FDD-LTE (0); Frequency:1745MHz; Duty Cycle: 1:1

Medium parameters used:  $f=1745$  MHz;  $\sigma = 1.364$  S/m;  $\epsilon_r=39.362$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8.54, 7.65, 7.43) @ 1745 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x15x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.220 W/kg


**Zoom Scan (5x5x7) /Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.490 V/m; Power Drift =0.02dB

Peak SAR (extrapolated) = 0.272 W/kg

**SAR(1 g) = 0.181 W/kg; SAR(10 g) = 0.114 W/kg**

Maximum value of SAR (measured) = 0.216 W/kg

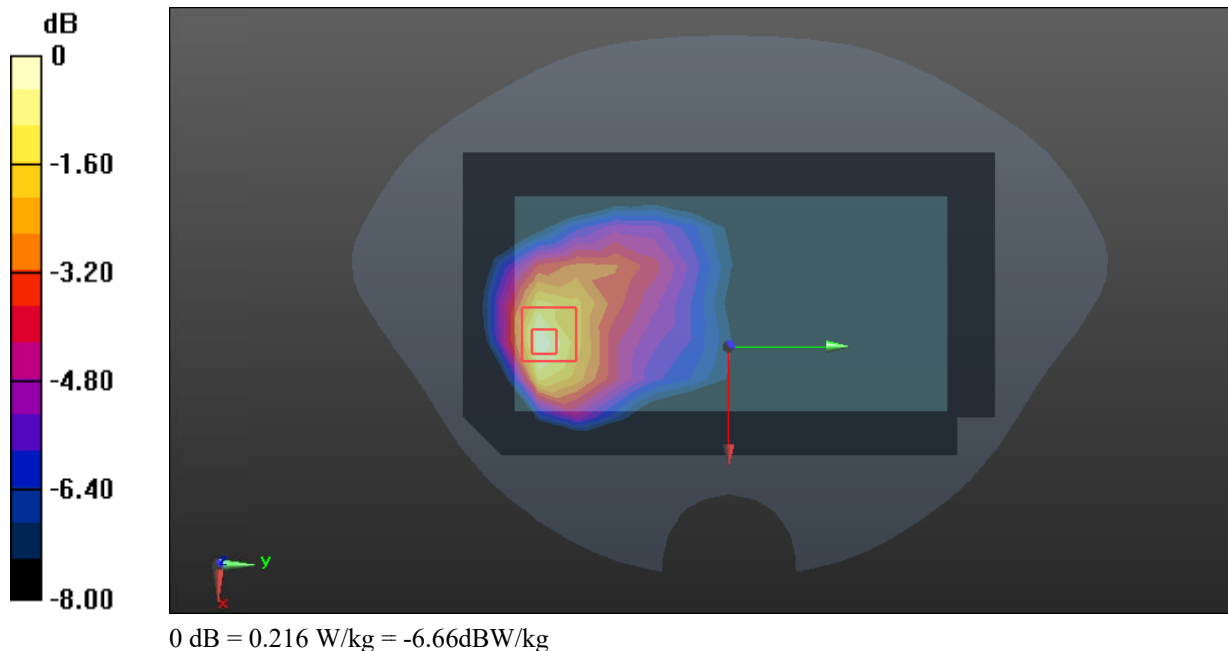

**Test Plot 47#: LTE Band 66 1RB Mid ANT1 Head Right Cheek****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: Generic FDD-LTE (0); Frequency:1745MHz; Duty Cycle: 1:1

Medium parameters used:  $f=1745$  MHz;  $\sigma = 1.364$  S/m;  $\epsilon_r=39.362$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8.54, 7.65, 7.43) @ 1745 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x7x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.368 W/kg


**Zoom Scan (5x5x7) /Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.55 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.553 W/kg

**SAR(1 g) = 0.326 W/kg; SAR(10 g) = 0.196 W/kg**

Maximum value of SAR (measured) = 0.380 W/kg

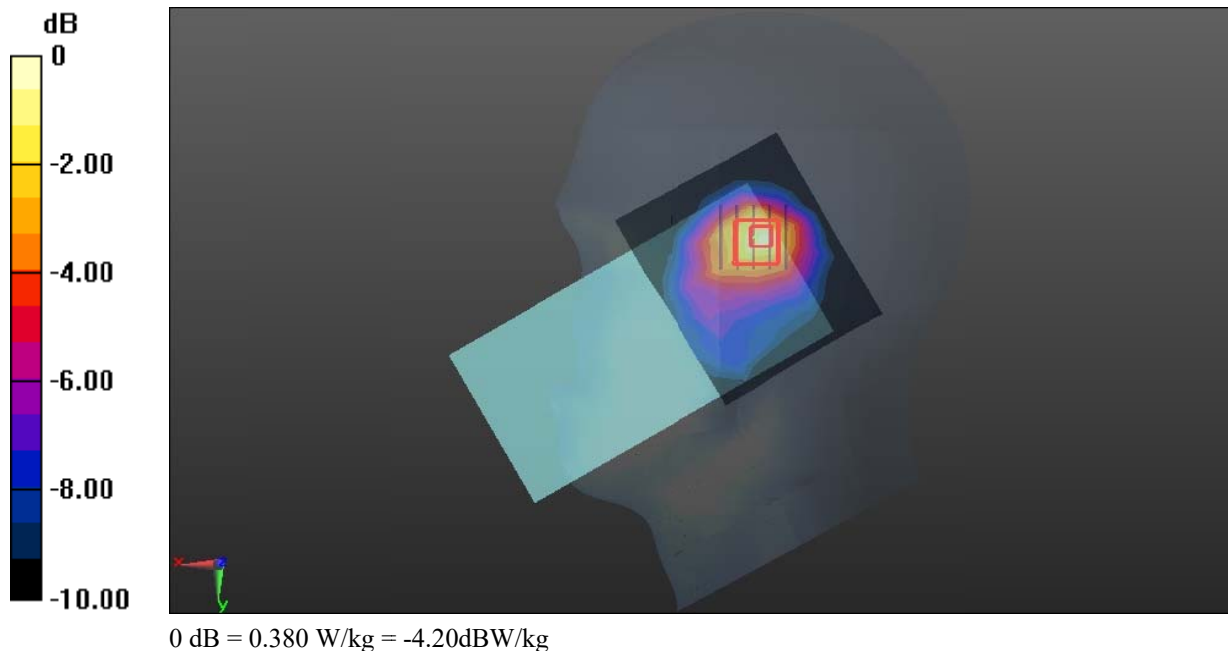

**Test Plot 48#: LTE Band 66 1RB Mid ANT1 Body Back****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.364$  S/m;  $\epsilon_r = 39.362$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8.54, 7.65, 7.43) @ 1745 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.210 W/kg


**Zoom Scan (5x5x7) /Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.101 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.295 W/kg

**SAR(1 g) = 0.173 W/kg; SAR(10 g) = 0.104 W/kg**

Maximum value of SAR (measured) = 0.209 W/kg

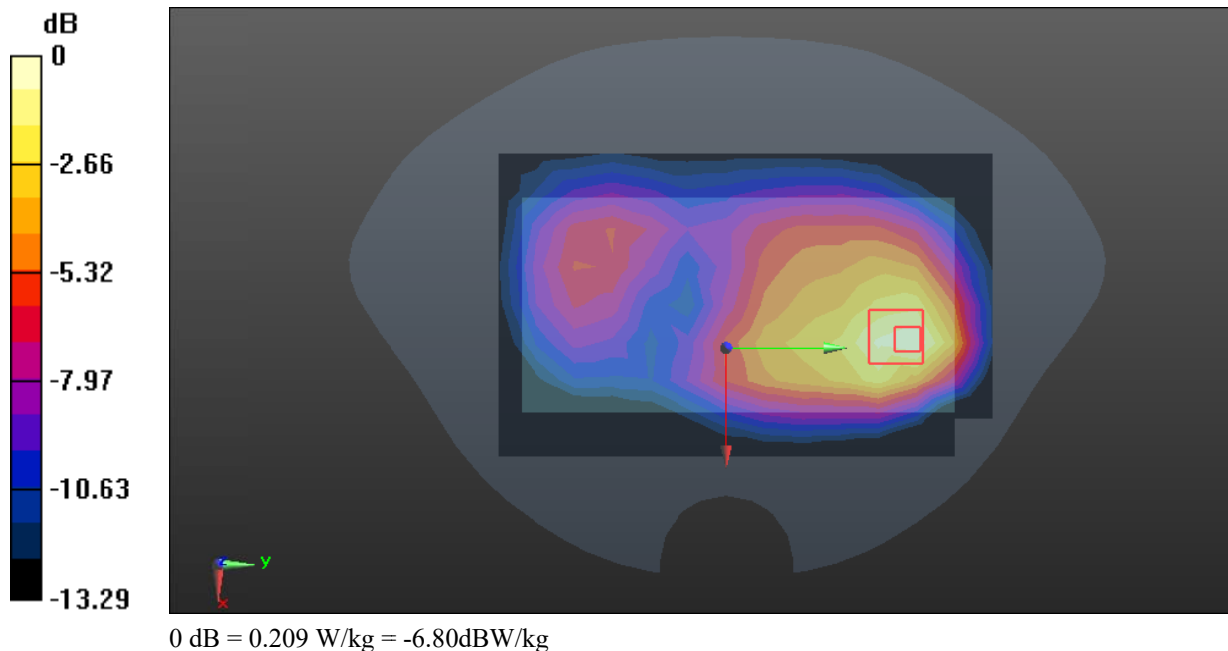

**Test Plot 49#: 2.4G WiFi Mid Head Left Tilt****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: 802.11b; Frequency: 2437MHz; Duty Cycle: 1:1.097

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.804$  S/m;  $\epsilon_r = 40.381$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.49, 6.81, 6.61) @ 2437 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x9x1):**Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.816 W/kg


**Zoom Scan (7x7x7) /Cube 0:**Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.817 V/m; Power Drift =0.02dB

Peak SAR (extrapolated) = 1.33 W/kg

**SAR(1 g) = 0.596 W/kg; SAR(10 g) = 0.263 W/kg**

Maximum value of SAR (measured) = 0.814 W/kg

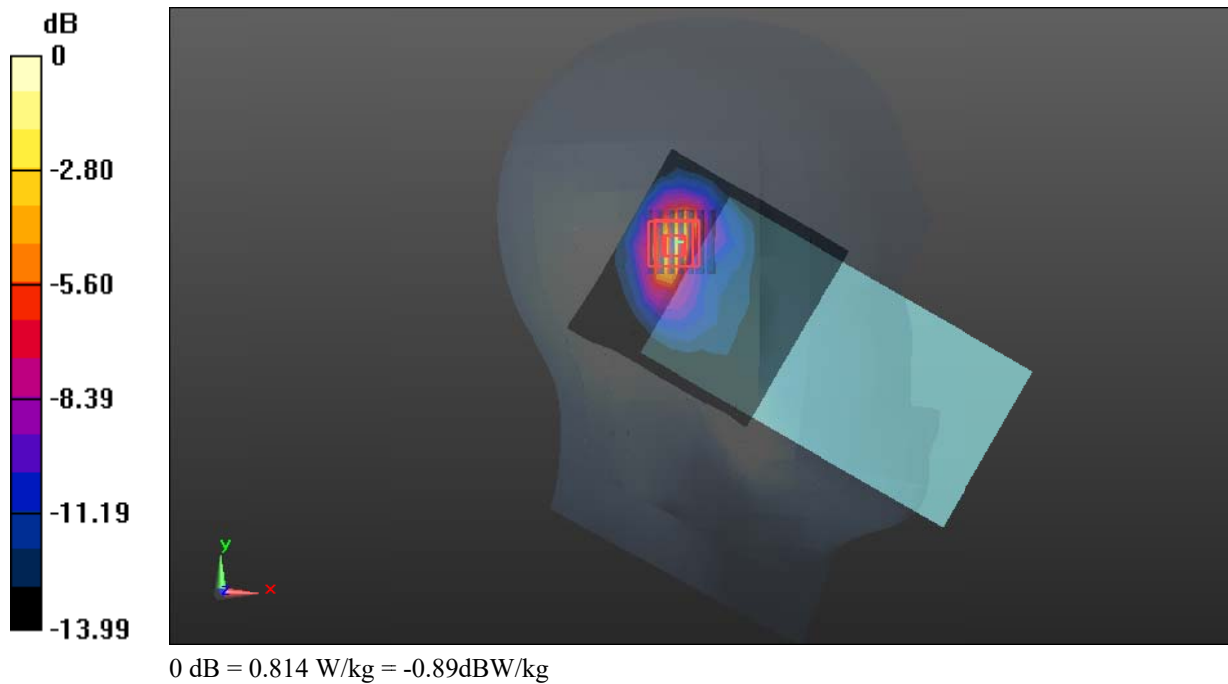

**Test Plot 50#: 2.4G WiFi Mid Body Top****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: 802.11b; Frequency: 2437MHz; Duty Cycle: 1:1.097

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.804$  S/m;  $\epsilon_r = 40.381$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.49, 6.81, 6.61) @ 2437 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x10x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.368 W/kg


**Zoom Scan (7x7x7) /Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.47 V/m; Power Drift = 0.07dB

Peak SAR (extrapolated) = 0.789 W/kg

**SAR(1 g) = 0.393 W/kg; SAR(10 g) = 0.182 W/kg**

Maximum value of SAR (measured) = 0.519 W/kg

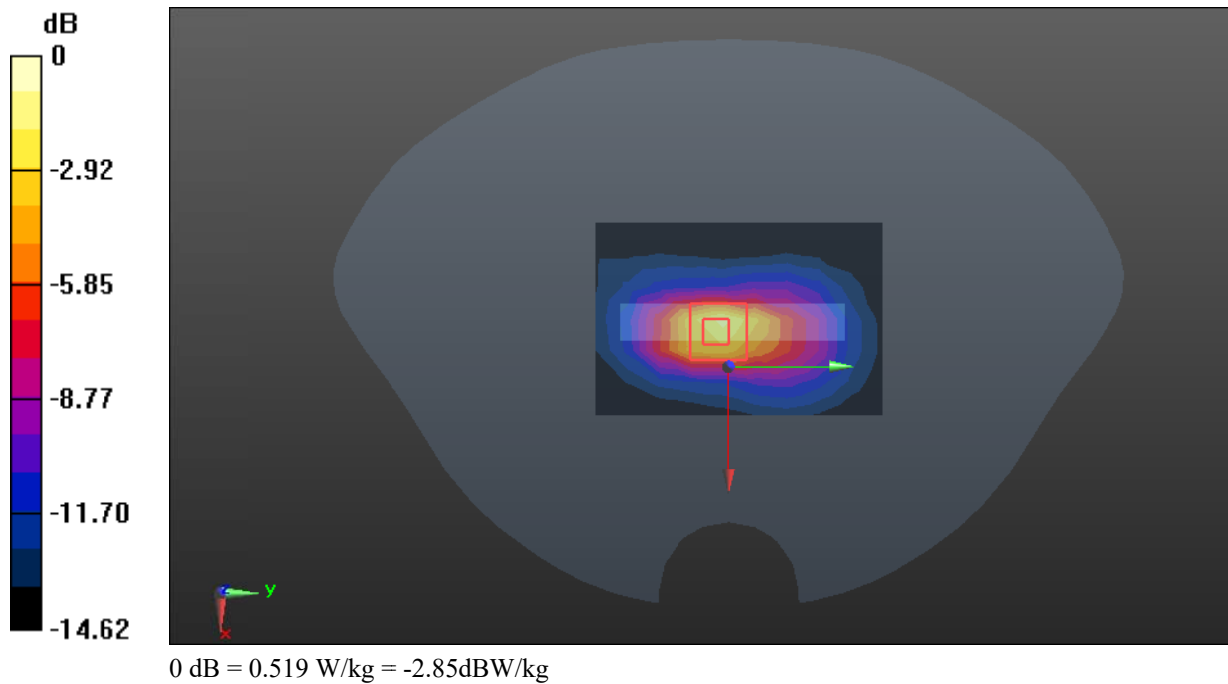

Test Plot 51#: 5.2G WiFi Mid Head Left Tilt

DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;

Communication System: 802.11a (0); Frequency:5200MHz; Duty Cycle: 1:1.105  
Medium parameters used:  $f=5200\text{ MHz}$ ;  $\sigma=4.503\text{ S/m}$ ;  $\epsilon_r=36.874$ ;  $\rho=1000\text{ kg/m}^3$  ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.62, 5.1, 4.97) @ 5200 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x13x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.30 W/kg


Zoom Scan (8x8x16) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.996 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 3.10 W/kg

SAR(1 g) = 0.667 W/kg; SAR(10 g) = 0.192 W/kg

Maximum value of SAR (measured) = 1.92 W/kg

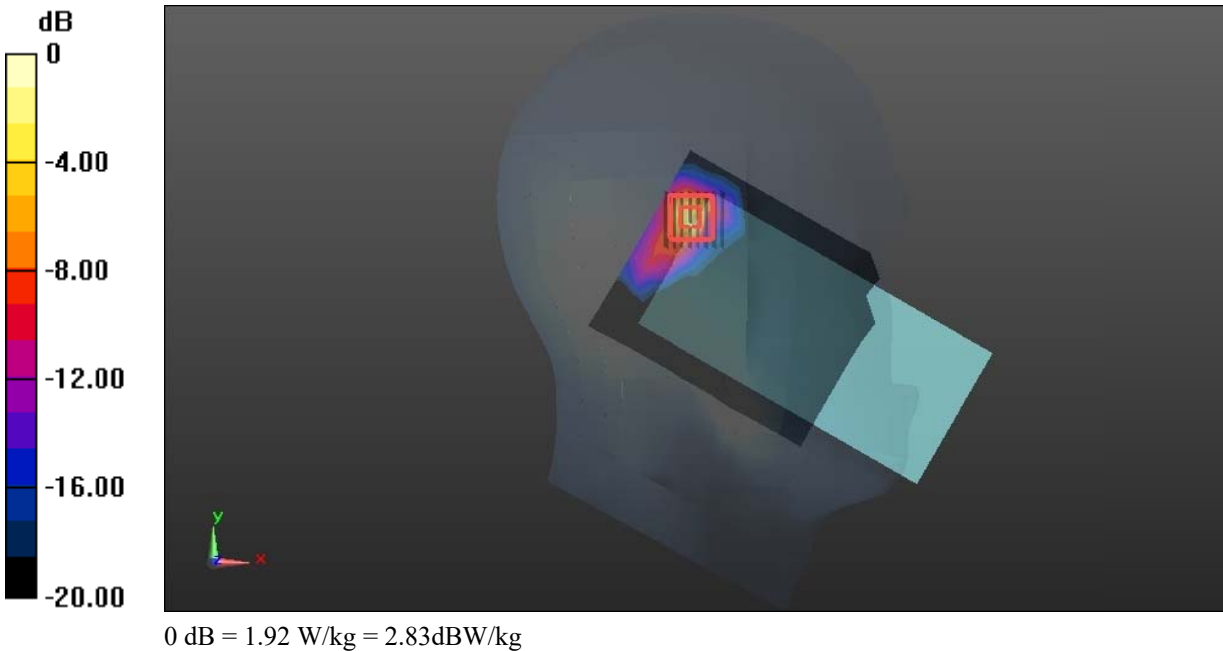

**Test Plot 52#: 5.2G WiFi Mid Body Top****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: 802.11a (0); Frequency: 5200MHz; Duty Cycle: 1:1.105  
 Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.503$  S/m;  $\epsilon_r = 36.874$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.62, 5.1, 4.97) @ 5200 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.04 W/kg


**Zoom Scan (8x8x16) /Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.238 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.70 W/kg

**SAR(1 g) = 0.466 W/kg; SAR(10 g) = 0.143 W/kg**

Maximum value of SAR (measured) = 1.05 W/kg

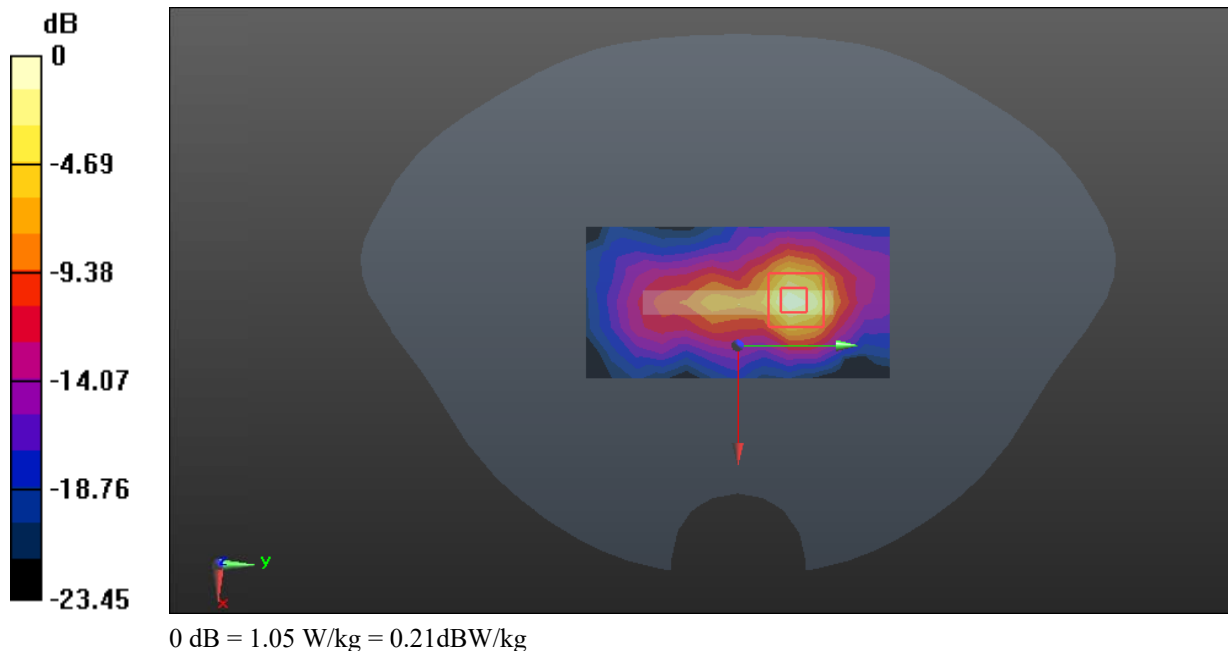

Test Plot 53#: 5.3G WiFi Mid Head Left Tilt

DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;

Communication System: 802.11n20 (0); Frequency:5280MHz; Duty Cycle: 1:1.132  
Medium parameters used:  $f=5280\text{ MHz}$ ;  $\sigma=4.572\text{ S/m}$ ;  $\epsilon_r=36.687$ ;  $\rho=1000\text{ kg/m}^3$  ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.62, 5.1, 4.97) @ 5280 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x13x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.74 W/kg


Zoom Scan (8x8x16) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 8.249 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 3.00 W/kg

SAR(1 g) = 0.618 W/kg; SAR(10 g) = 0.167 W/kg

Maximum value of SAR (measured) = 1.96 W/kg

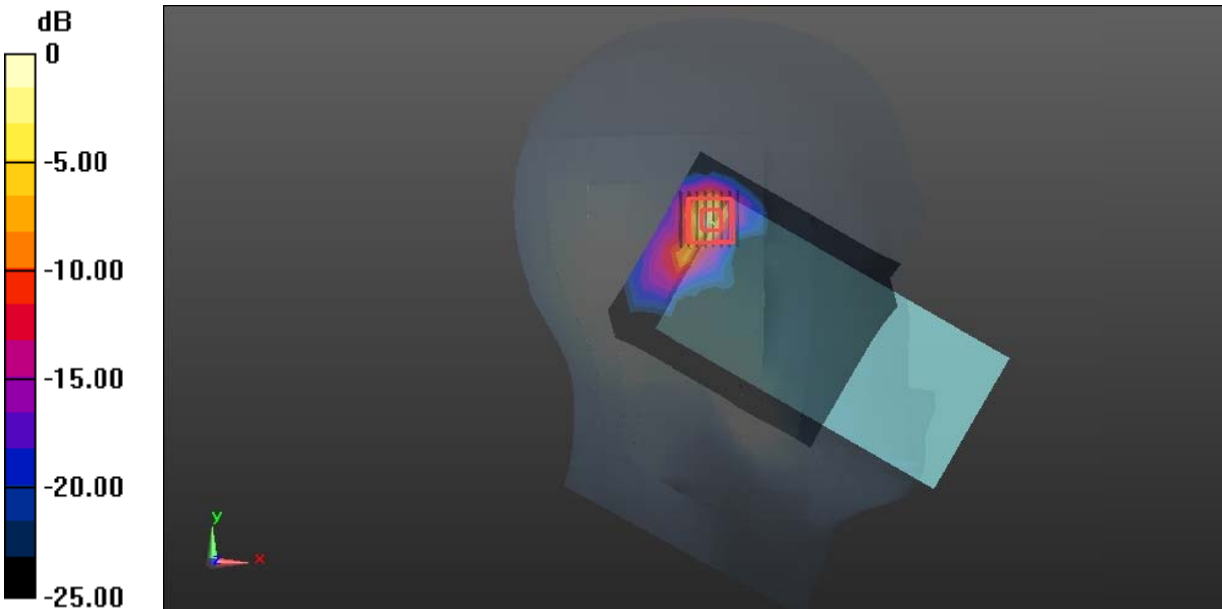

0 dB = 1.96 W/kg = 2.92dBW/kg

Test Plot 54#: 5.3G WiFi Mid Body Top

DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;

Communication System: 802.11n20 (0); Frequency:5280MHz; Duty Cycle: 1:1.132  
Medium parameters used:  $f=5280\text{ MHz}$ ;  $\sigma=4.572\text{ S/m}$ ;  $\epsilon_r=36.687$ ;  $\rho=1000\text{ kg/m}^3$  ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.62, 5.1, 4.97) @ 5280 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x13x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.06 W/kg


Zoom Scan (8x8x16) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.170 V/m; Power Drift =0.00dB

Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 0.494 W/kg; SAR(10 g) = 0.153 W/kg

Maximum value of SAR (measured) = 1.13 W/kg

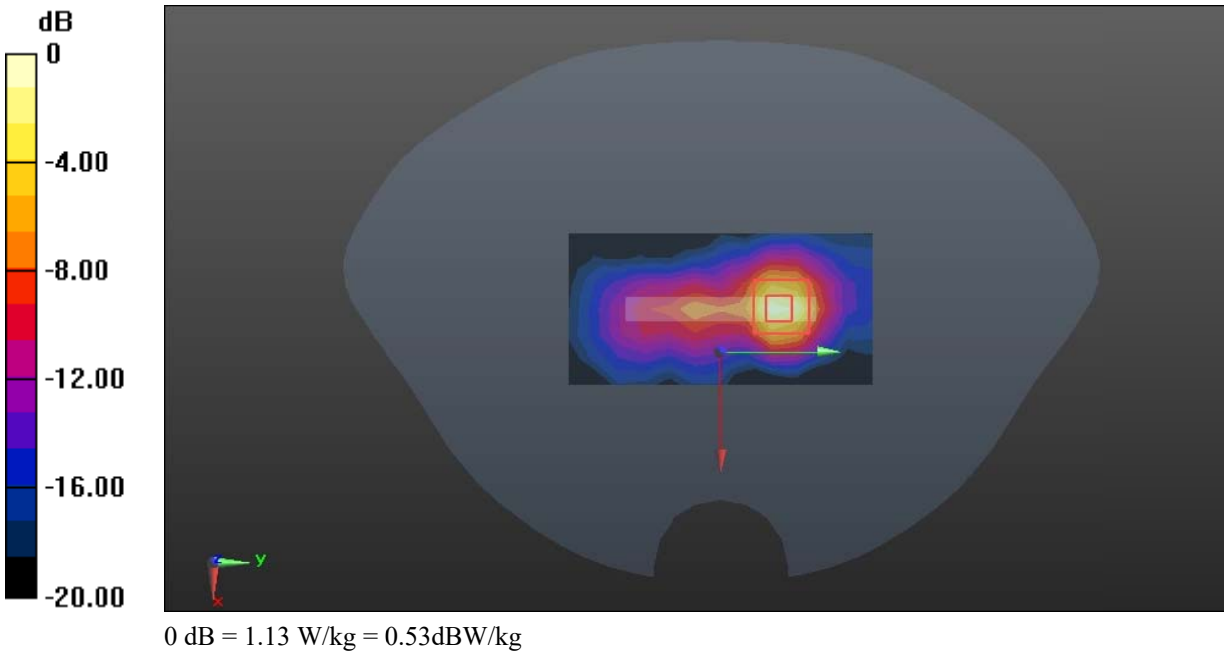

**Test Plot 55#: 5.6G WiFi Mid Head Left Tilt****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: 802.11n20 (0); Frequency:5580MHz; Duty Cycle: 1:1.132  
 Medium parameters used:  $f=5580$  MHz;  $\sigma = 5.047$  S/m;  $\epsilon_r=35.578$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(4.94, 4.48, 4.39) @ 5580 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (11x13x1):**Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.68 W/kg


**Zoom Scan (8x8x16) /Cube 0:**Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.922 V/m; Power Drift =0.17dB

Peak SAR (extrapolated) = 2.81 W/kg

**SAR(1 g) = 0.688 W/kg; SAR(10 g) = 0.171 W/kg**

Maximum value of SAR (measured) = 1.78 W/kg

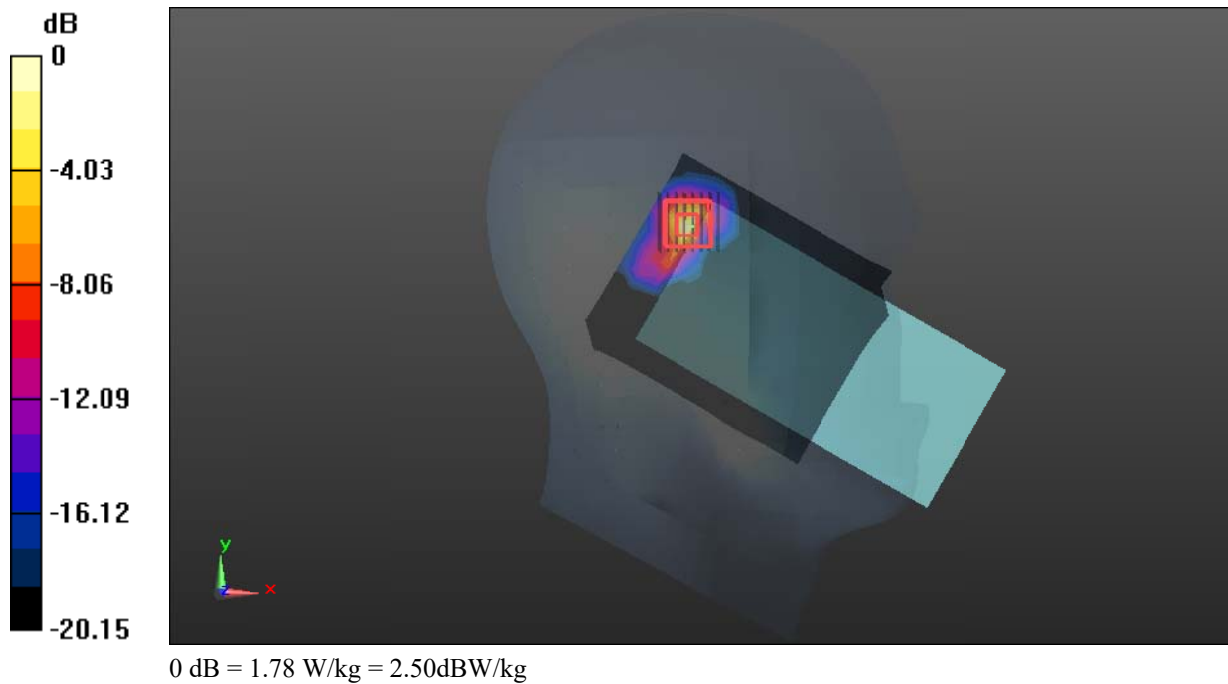

**Test Plot 56#: 5.6G WiFi Mid Body Back****DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;**

Communication System: 802.11n20 (0); Frequency:5580MHz; Duty Cycle: 1:1.132  
 Medium parameters used:  $f=5580$  MHz;  $\sigma = 5.047$  S/m;  $\epsilon_r=35.578$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(4.94, 4.48, 4.39) @ 5580 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (11x20x1):**Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.538 W/kg


**Zoom Scan (8x8x16) /Cube 0:**Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.109 V/m; Power Drift =0.08dB

Peak SAR (extrapolated) = 0.918 W/kg

**SAR(1 g) = 0.242 W/kg; SAR(10 g) = 0.080 W/kg**

Maximum value of SAR (measured) = 0.548 W/kg

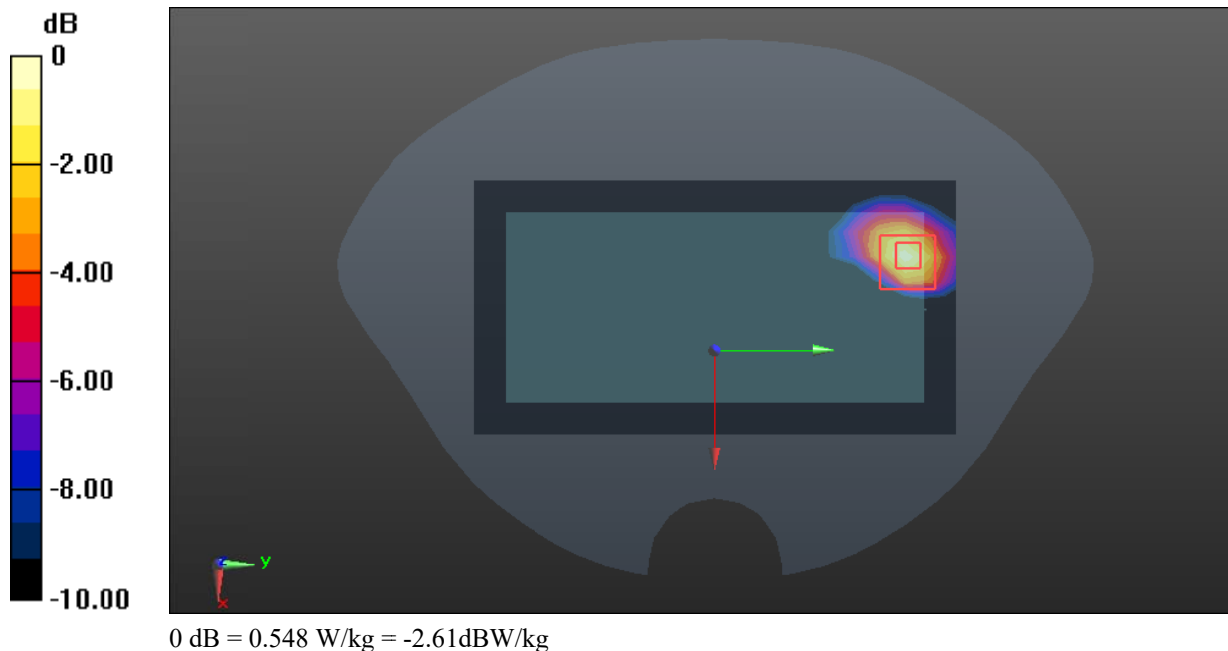

Test Plot 57#: 5.8G WiFi Mid Head Right Tilt

DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;

Communication System: 802.11n20 (0); Frequency:5785MHz; Duty Cycle: 1:1.132  
Medium parameters used:  $f=5785\text{ MHz}$ ;  $\sigma=5.257\text{ S/m}$ ;  $\epsilon_r=35.344$ ;  $\rho=1000\text{ kg/m}^3$  ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.04, 4.65, 4.62) @ 5785 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x13x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.22 W/kg


Zoom Scan (8x8x16) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.284 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.12 W/kg

SAR(1 g) = 0.673 W/kg; SAR(10 g) = 0.213 W/kg

Maximum value of SAR (measured) = 1.44 W/kg

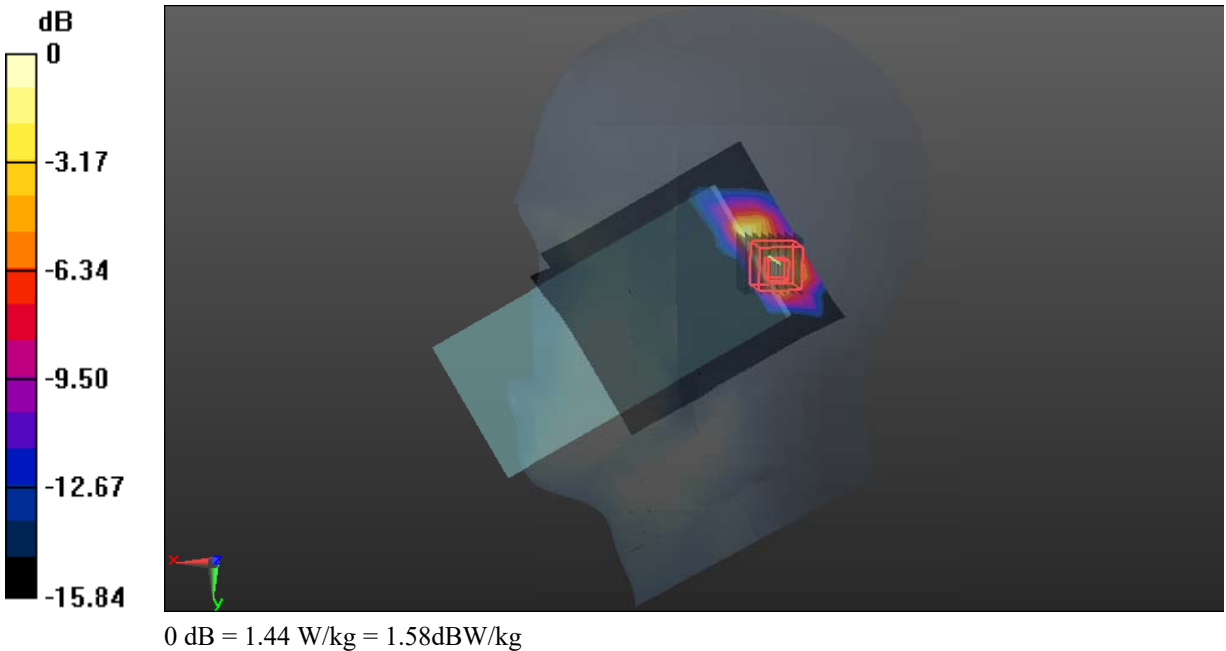

Test Plot 58#: 5.8G WiFi Mid Body Back

DUT: Mobile Phone; Type: KL4s; Serial: 2NI2-2;

Communication System: 802.11n20 (0); Frequency:5785MHz; Duty Cycle: 1:1.132  
Medium parameters used:  $f=5785$  MHz;  $\sigma=5.257$  S/m;  $\epsilon_r=35.344$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.04, 4.65, 4.62) @ 5785 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0\_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x20x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.14 W/kg

Zoom Scan (8x8x16) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.489 W/kg; SAR(10 g) = 0.157 W/kg

Maximum value of SAR (measured) = 1.16 W/kg

